



FCC Test report

Test report no.: EMC_440FCC-24_2003_GC79

FCC Part 24 / RSS 133

Model: GC79

FCC ID: PY7F1021011



TTI-P-G 081/94-A0

Accredited according to ISO/IEC 17025



Bluetooth Qualification
Test Facility
(BQTF)



FCC listed # 101450

IC recognized # 3925

CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: info@cetecomusa.com • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686
Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

Table of Contents

1	General information
1.1	Notes
1.2	Testing laboratory
1.3	Details of applicant
1.4	Application details
1.5	Test item
1.6	Test standards
2	Technical test
2.1	Summary of test results
2.2	Test report
1	General information
1.1	Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM Inc. does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc.

TEST REPORT PREPARED BY:
EMC Engineer: Harpreet Sidhu

1.2 Testing laboratory**CETECOM Inc.**

411 Dixon Landing Road, Milpitas, CA-95035, USA

Phone: +1 408 586 6200 Fax: +1 408 586 6299

E-mail: lothar.schmidt@cetecomusa.comInternet: www.cetecom.com

1.3 Details of applicant

Name : Sony Ericsson Mobile Communications
Street : Maplewood, Chineham Business Park
City / Zip Code : Basingstoke, Hampshire RG24 8YB
Country : United Kingdom
Contact : Jose Aurelio Rodrigo
Telephone : +44 1256774841
Tele-fax : +44 1256774280
e-mail : Jose-Aurelio.Rodrigo@sonyericsson.com

1.4 Application details

Date of receipt of application : 2003-02-25
Date of receipt test item : 2003-03-06
Date of test : 2003-03-6/07/12/18

1.5 Test item

Manufacturer : Applicant
Marketing Name : GC79
Model No. : GC79
Host Laptop Model : Sony Viao (S/No. 28305630 3208479)
Description : [GSM triband \(900/1800/1900\) & 802.11b PCMCIA card](#)
FCC-ID : PY7F1021011

Additional information

Frequency : 1850.2MHz – 1909.8MHz for PCS 1900
Type of modulation : GMSK
Number of channels : 299 for PCS 1900
Antenna : Tri-band
Power supply : Via host
*Output power : 31.4dBm (1.38W) maximum conducted peak power
measured for PCS 1900
Extreme vol. Limits : 3.0VDC to 3.6VDC
Extreme temp. Tolerance : -30°C to +50°C

*For EIRP please see page 8

1.6 Test standards

FCC Part 24 / RSS133 r1

2.2 Test report

TEST REPORT

**Test report no.: EMC_440FCC-24_2003_GC79
(FCC ID: PY7F1021011)**

TEST REPORT REFERENCE

PARAMETER TO BE MEASURED	PARAGRAPH	PAGE
POWER OUTPUT	§ 24.232(b)	7
FREQUENCY STABILITY	§ 2.1055 / § 24.235	9
OCCUPIED BANDWIDTH	§2.1049(h)(i)	11
EMISSION BANDWIDTH	§24.238(b)	15
EMISSIONS LIMITS	§24.238	19
BAND EDGE COMPLIANCE	§24.238(b)	33
RECEIVER RADIATED EMISSIONS	§ 15.209 / RSS-133	36
CONDUCTED SPURIOUS EMISSIONS		41
CONDUCTED EMISSIONS	§ 15.107/207	46
TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS		47
BLOCK DIAGRAMS		48

POWER OUTPUT**§ 24.232(b)****Summary:**

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure max. Power transmission and proper modulation.

This paragraph contains Burst peak conducted output power measurements and EIRP calculation for the EUT. In all cases, output power is within the specified limits.

Method of Measurements:

The EUT was set up for the max. Output power with pseudo random data modulation.

The power was measured with R&S Spectrum Analyzer ESIB 40 (peak)

These measurements were done at 3 frequencies, 1850.2 MHz, 1880.0 MHz and 1909.8 MHz (bottom, middle and top of operational frequency range)

Conducted:

Limits:

Power Step	Nominal Peak Output Power	Tolerance (dB)
0	≤30dBm (1W)*	± 2

*GSM Specification – ETSI EN 300 910 V8.5.0 (2000-07) Section 4.1 {GSM05.05 Version 8.5.0 Release 1999}

Power Measurements:

Frequency (MHz)	Peak Power during burst (dBm)
1850.2	30.5
1880.0	31.0
1909.8	31.4

***EIRP Calculation**

Limits:

Power Step	EIRP
0	≤33dBm (1W)

Frequency (MHz)	Power Step	EIRP during Burst (dBm)
Error! Reference source not found.	0	31.5
Error! Reference source not found.	0	32.0
Error! Reference source not found.	0	32.4

*EIRP is calculated based on conducted peak power plus max. Antenna gain of 1.0 dBi in GSM-1900 band.

FREQUENCY STABILITY**§ 2.1055 / § 24.235****Method of Measurement:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMD 55 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30 C.
3. With the EUT, powered via nominal voltage, connected to the CMD 55 and in a simulated call on channel 661 (centre channel), measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10 C increments from -30 C to +50 C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50 C.
7. With the EUT, powered via nominal voltage, connected to the CMD 55 and in a simulated call on channel 661 (centre channel), measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50 C to -30 C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

Measurement Limit:**For Hand carried battery powered equipment:**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.0VDC and 3.6VDC, with a nominal voltage of 3.3VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -9.09 % and +9.09 %. For the purposes of measuring frequency stability these voltage limits are to be used.

For equipment powered by primary supply voltage:

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

AFC FREQ ERROR vs. VOLTAGE

Voltage (VDC)	Frequency Error (Hz)	Frequency Error (ppm)
3.0	43	0.0229
3.1	48	0.0255
3.2	48	0.0255
3.3	41	0.0218
3.4	46	0.0245
3.5	45	0.0240
3.6	51	0.0271

AFC FREQ ERROR vs. TEMPERATURE

TEMPERATURE (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	44	0.0234
-20	51	0.0271
-10	61	0.0324
0	50	0.0266
+10	37	0.0197
+20	41	0.0218
+30	39	0.0207
+40	35	0.0186
+50	53	0.0282

OCCUPIED BANDWIDTH


§2.1049(h)(i)

Occupied Bandwidth Results


Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table below lists the measured 99% power (-20dBc BW). Spectrum analyzer plots are included on the following pages.

Frequency	Occupied Bandwidth (99% power or -20dBc BW)
1850.2 MHz	292.59
1880.0 MHz	284.57
1909.8 MHz	264.53

Channel 512
Occupied Bandwidth (-20dBc BW)

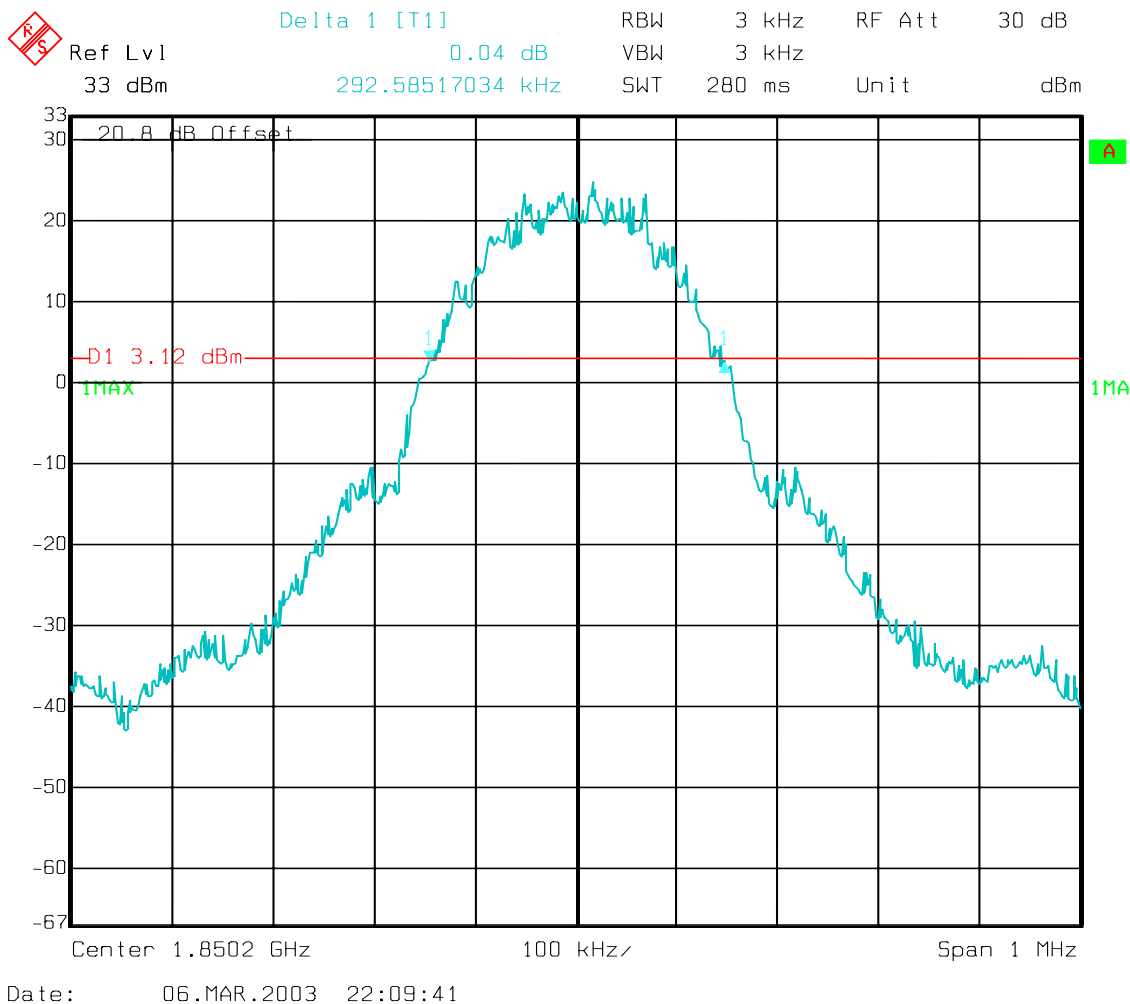


Channel 661
Occupied Bandwidth (-20dBc BW)

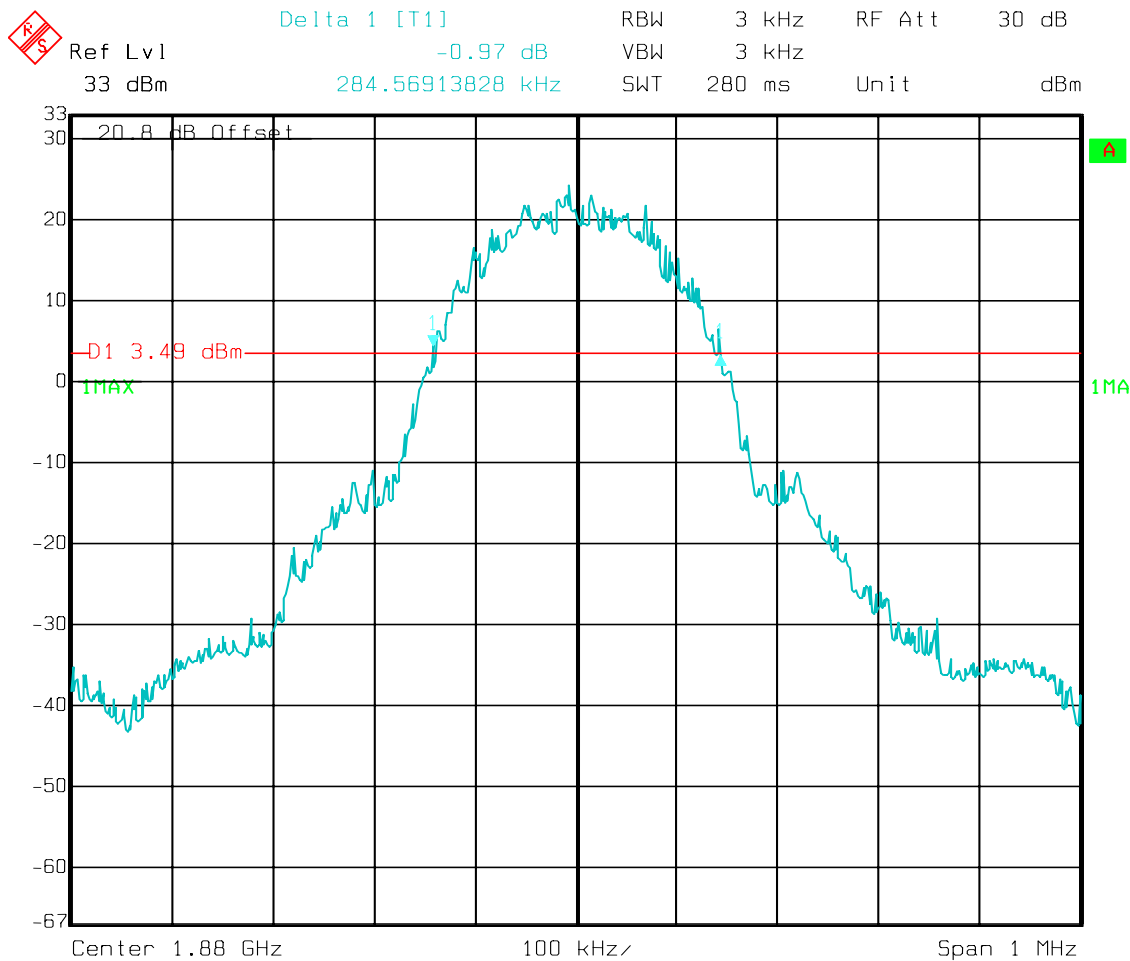

Date: 06.MAR.2003 22:13:05

Channel 810
Occupied Bandwidth (-20dBc BW)

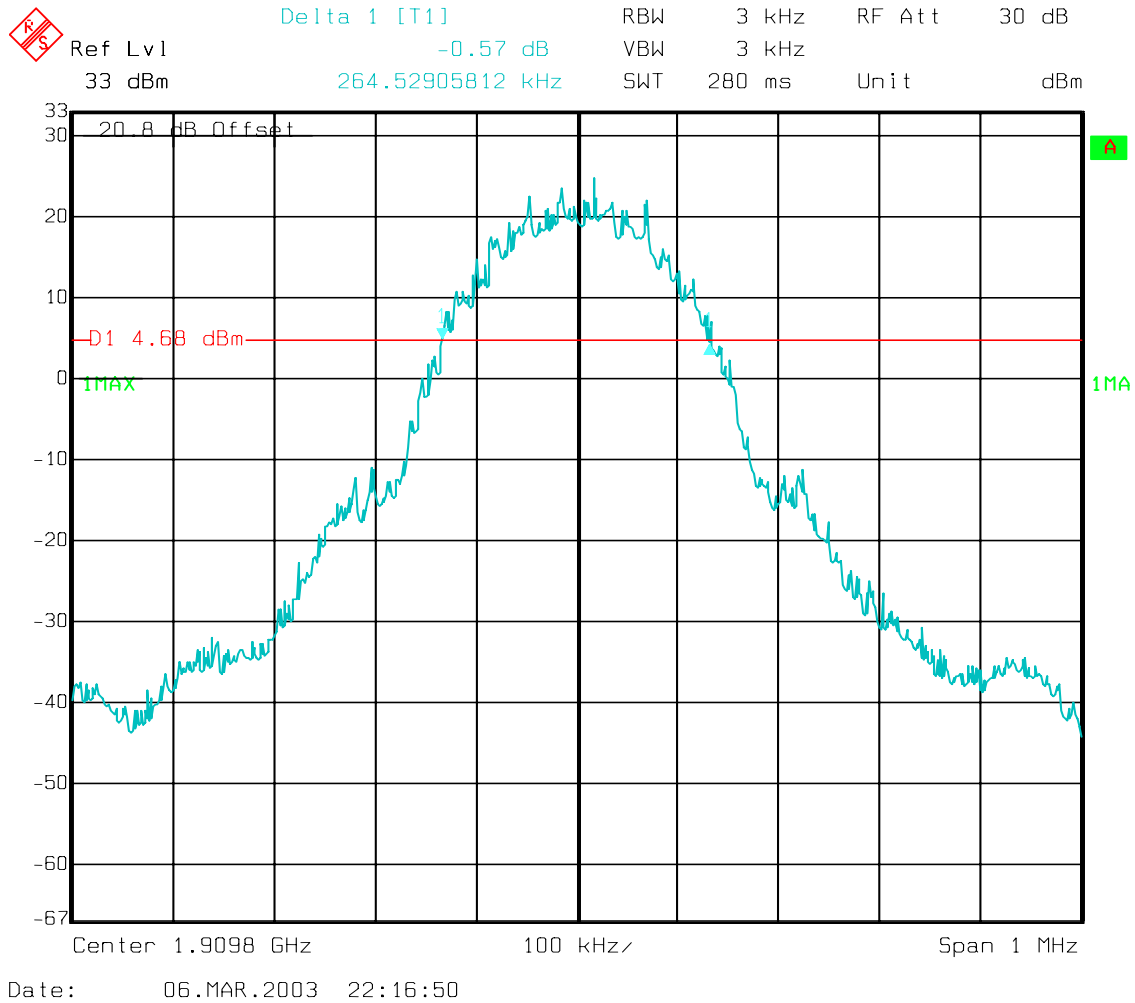


EMISSION BANDWIDTH**§24.238(b)****Emission Bandwidth Results**

Similar to conducted emissions; Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.


Frequency	Emission Bandwidth (-26dBc BW)
1850.2 MHz	316.63
1880.0 MHz	328.66
1909.8 MHz	318.64

Channel 512
Emission Bandwidth (-26dBc BW)

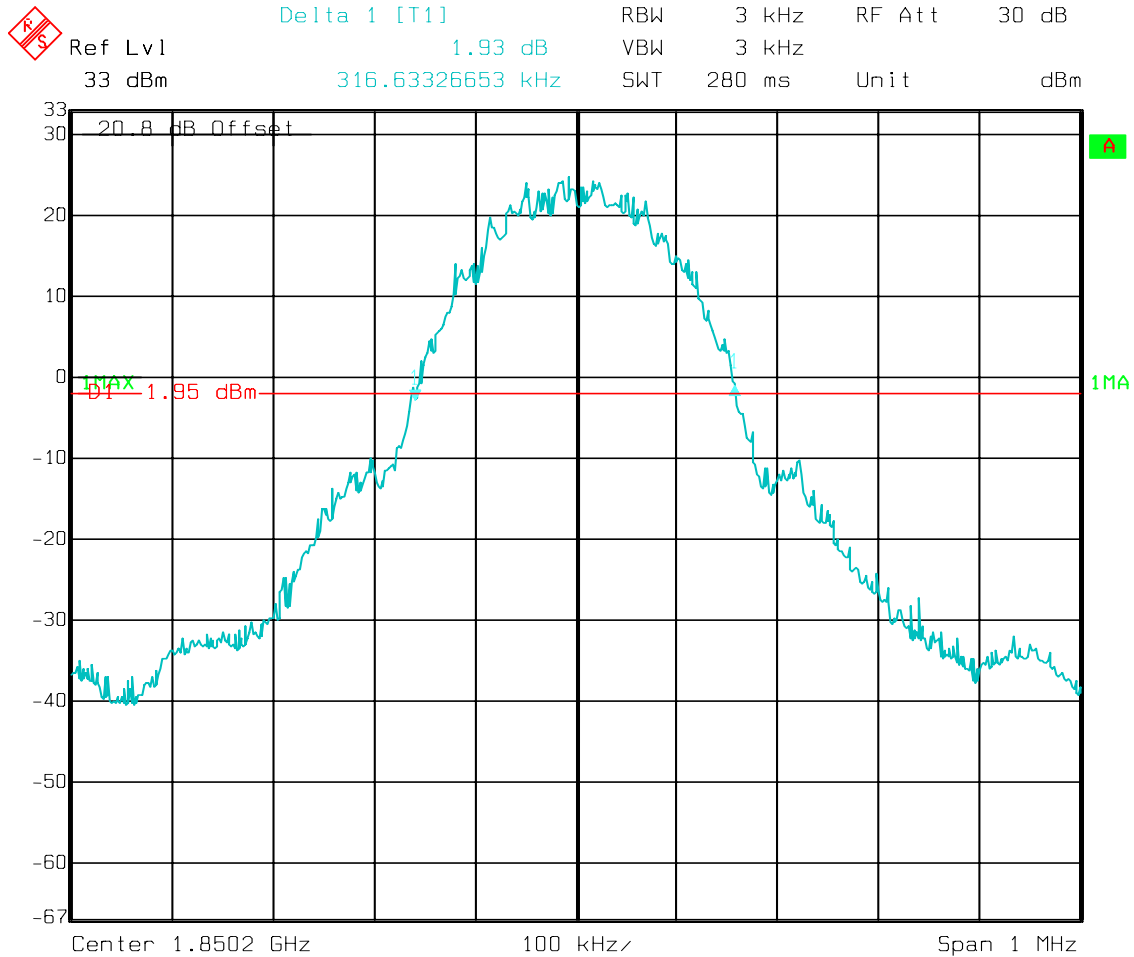


Date: 06.MAR.2003 22:08:10

Channel 661
Emission Bandwidth (-26dBc BW)

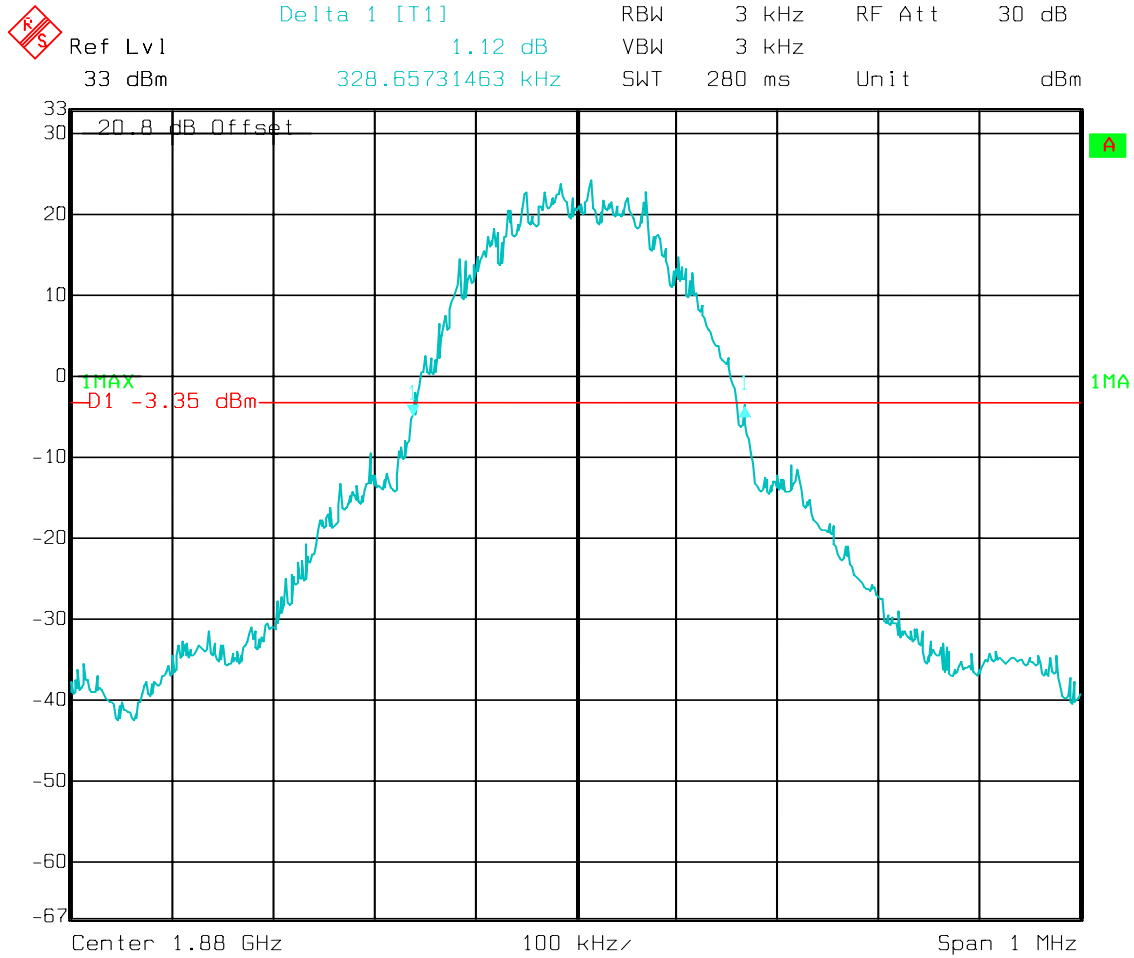

Date: 06.MAR.2003 22:11:37

Channel 810
Emission Bandwidth (-26dBc BW)

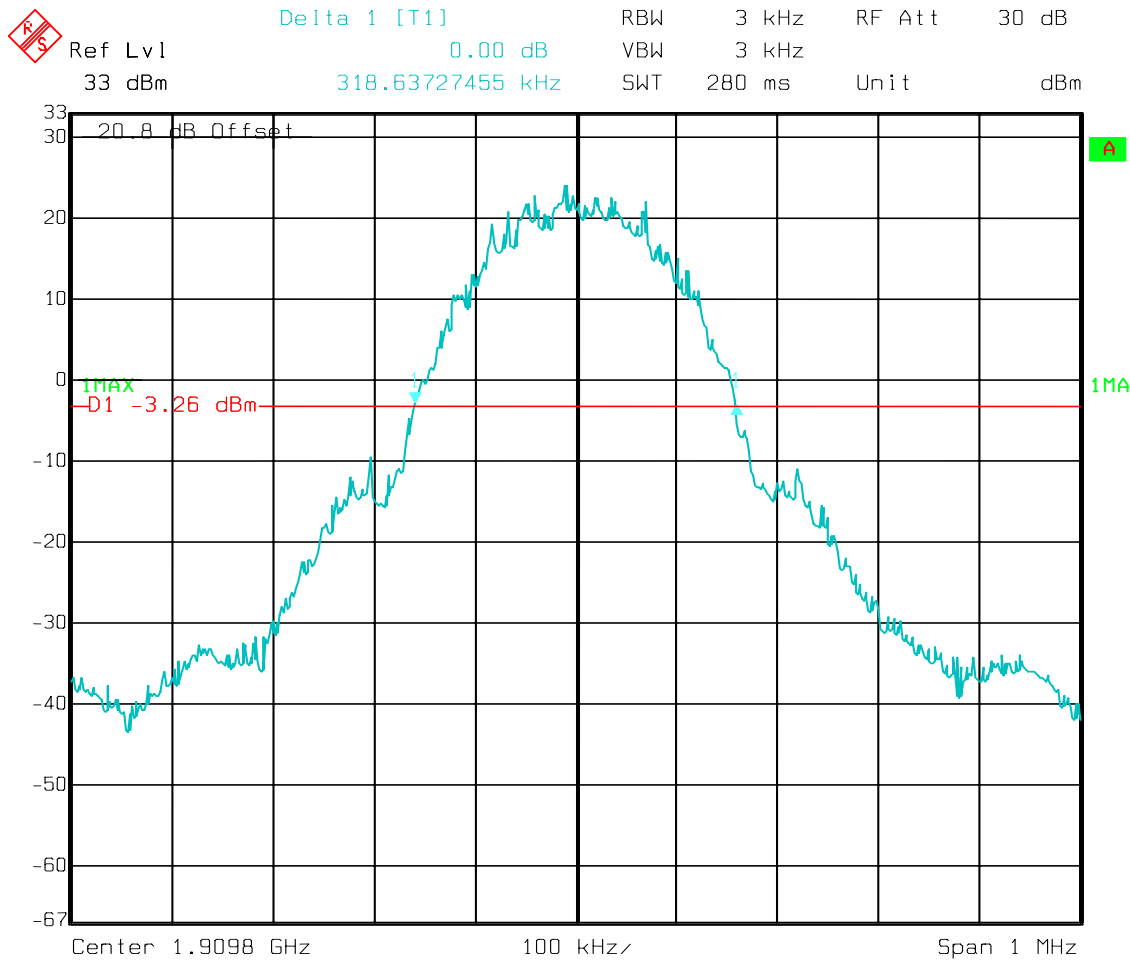

Date: 06.MAR.2003 22:15:27

EMISSIONS LIMITS**§24.238****Measurement Procedure:**

The following steps outline the procedure used to measure the radiated emissions from the EUT. The site is constructed in accordance with ANSI C63.4 – 1992 requirements and is recognised by the FCC. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

The final Radiated emission test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) A double-ridged wave-guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- c) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was determined by the substitution method described for EIRP measurements.

Measurement Limit:

Sec. 24.238 Emission Limits.

- (a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Measurement Results:

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the USPCS band (1850.2 MHz, 1880 MHz and 1909.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

NOTE: The spurious emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3GHz and 19.1 GHz very short cable connections to the antenna was used to minimize the noise level.

RESULTS OF RADIATED TESTS FOR FCC-24:

Harmonic	Tx ch. 512 Freq. (MHz)	Level (dBm)	Tx ch. 661 Freq. (MHz)	Level (dBm)	Tx ch. 810 Freq. (MHz)	Level (dBm)
2	3700.4	-45.70	3760	-44.22	3819.6	-42.83
3	5550.6	-35.07	5640	-35.57	5729.4	-33.85
4	7400.8	-31.23	7520	-31.61	7639.2	-31.89
5	9251	-27.29	9400	-25.70	9549	-27.36
6	11101.2	-26.41	11280	-25.45	11458.8	-28.19
7	12951.4	-27.25	13160	-28.16	13368.6	-26.85
8	14801.6	-25.94	15040	-27.95	15278.4	-27.64
9	16651.8	-23.01	16920	-22.30	17188.2	-20.08
10	18502	-24.64	18800	-25.27	19098	-25.01

RADIATED SPURIOUS EMISSIONS


Channel 512: 30MHz - 1GHz

Spurious emission limit -13dBm

Note: This plot is valid for all three (low, mid, high) channels (Worst-case plot)

SWEEP TABLE: "FCC 24 Spur 30M-1G"

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
30MHz	1GHz	Max Peak	Coupled	1 MHz

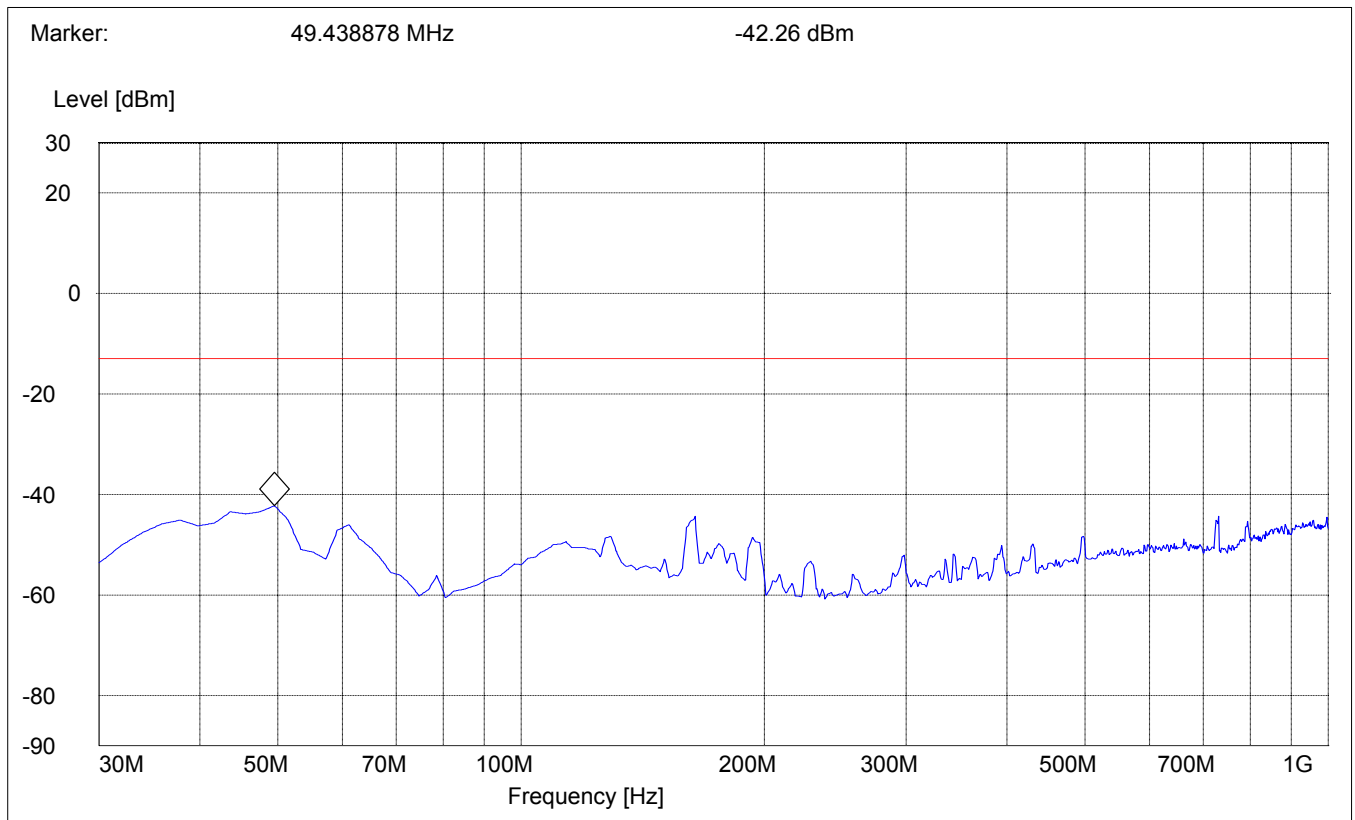

RADIATED SPURIOUS EMISSIONS


Channel 512: 1GHz – 3GHz

Spurious emission limit -13dBm

NOTE: peak above the limit line is the Carrier frequency.

SWEEP TABLE: "FCC Spuri 1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz

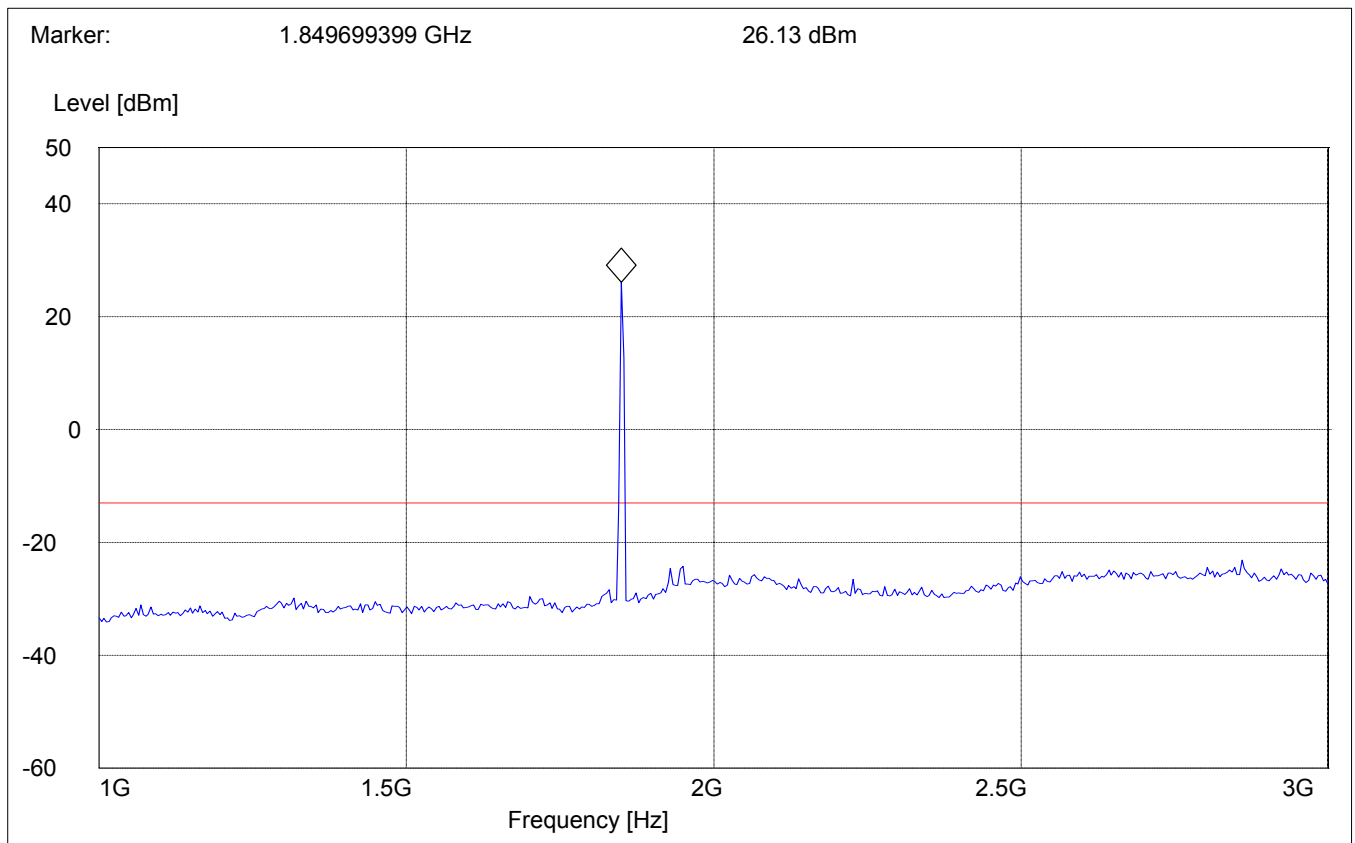


RADIATED SPURIOUS EMISSIONS

Channel 512: 3GHz – 18GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC Spuri 3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz

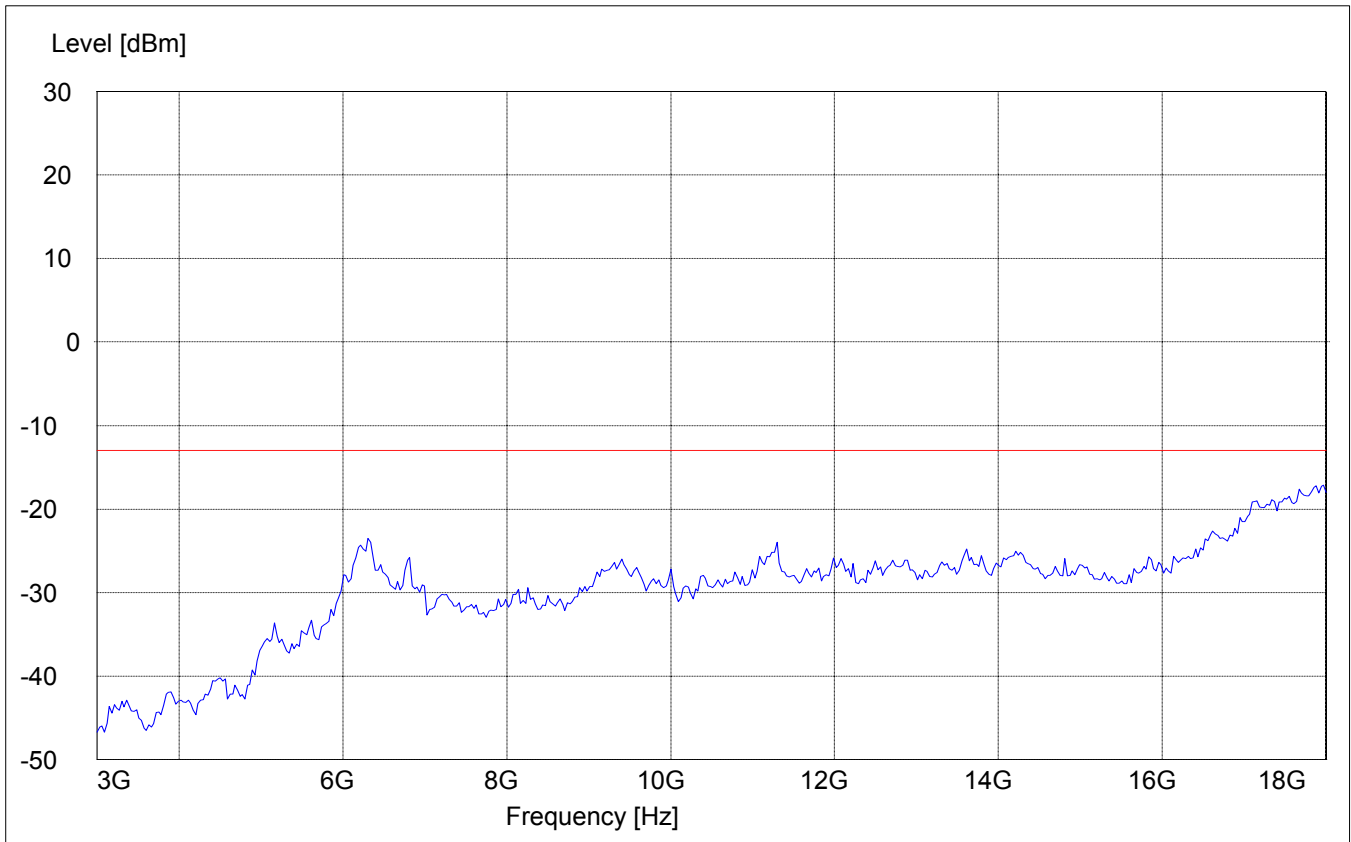

RADIATED SPURIOUS EMISSIONS


Channel 661: 1GHz – 3GHz

Spurious emission limit -13dBm

NOTE: peak above the limit line is the Carrier frequency.

SWEEP TABLE: "FCC Spuri 1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz

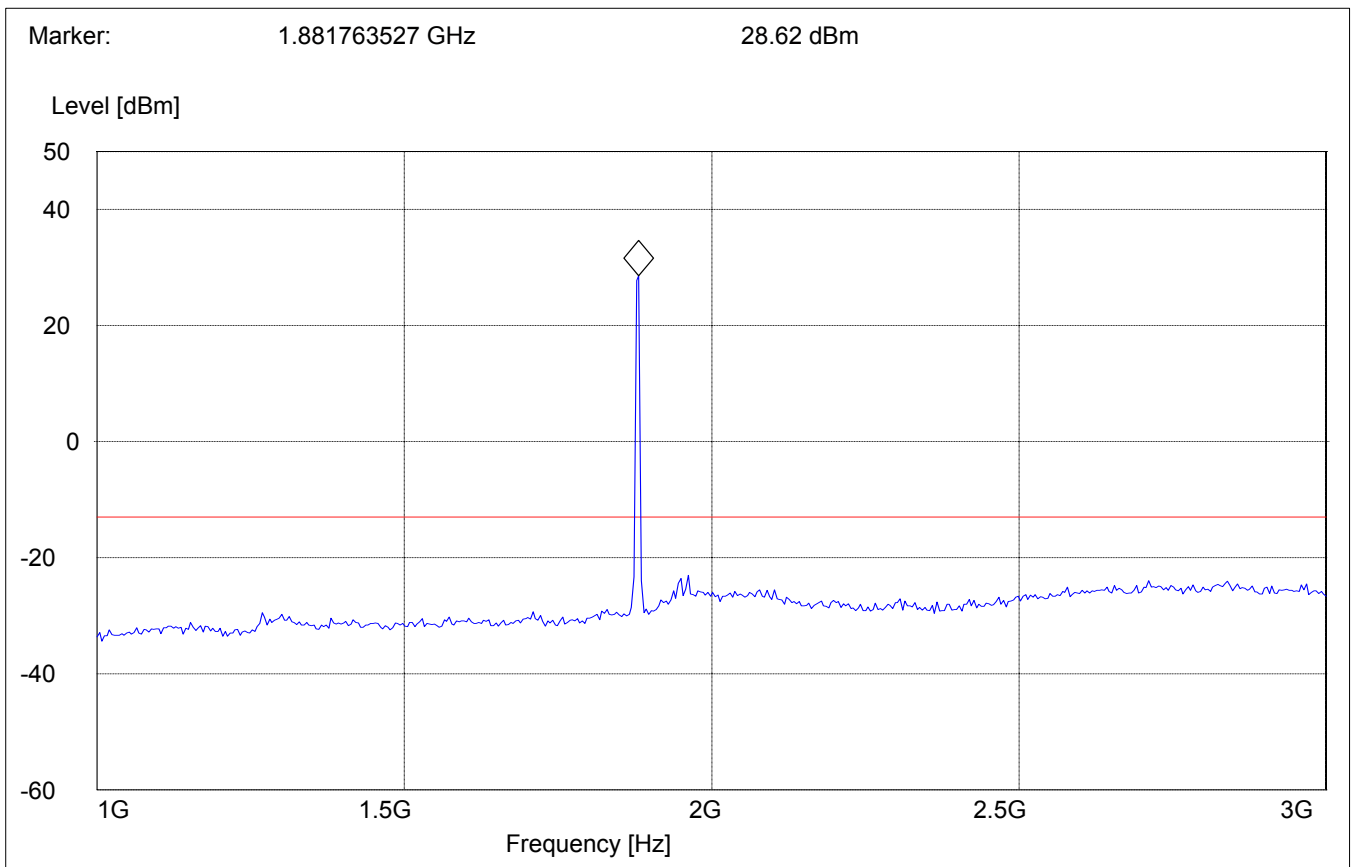


RADIATED SPURIOUS EMISSIONS

Channel 661: 3GHz – 18GHz

Spurious emission limit –13dBm

SWEEP TABLE: "FCC Spuri 3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz

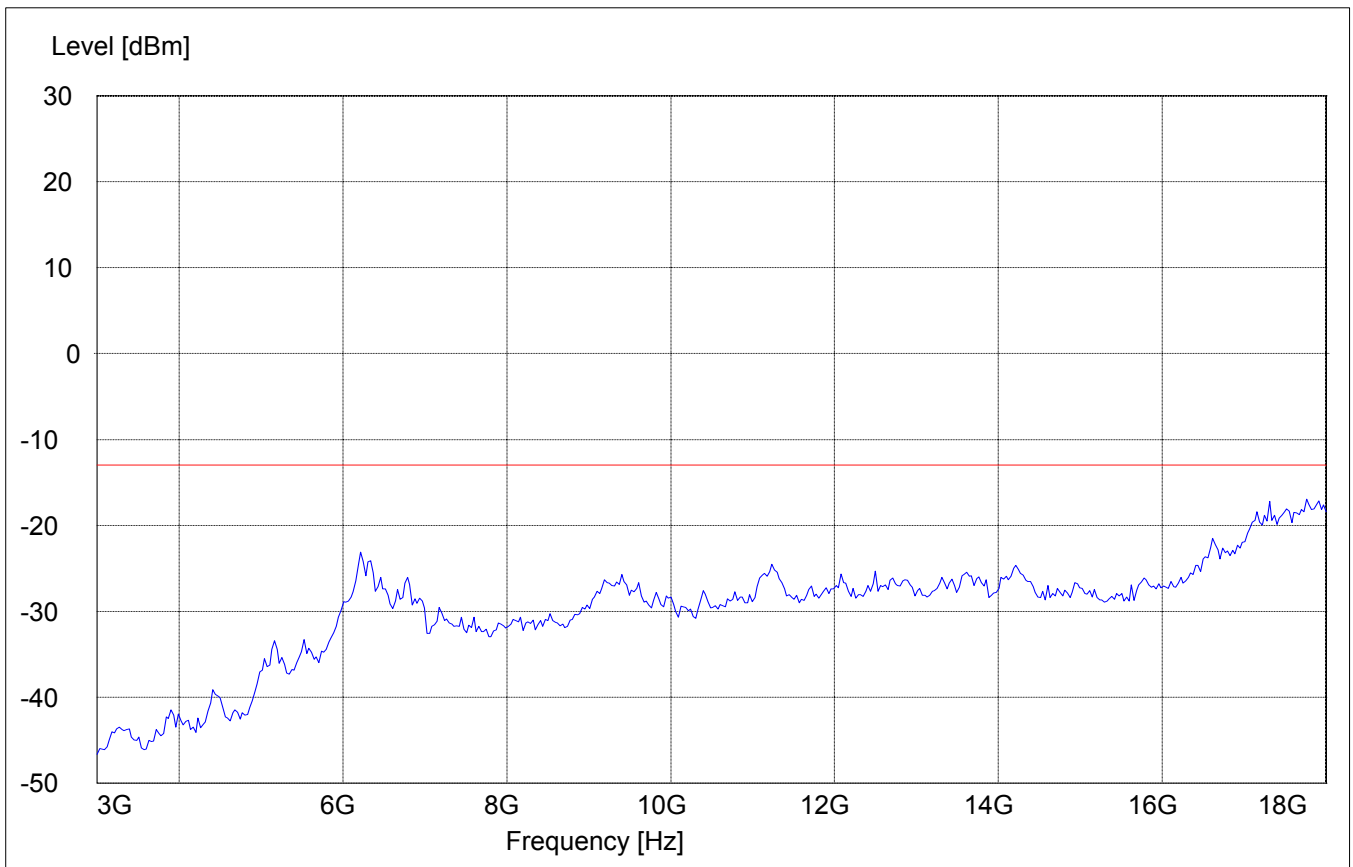

RADIATED SPURIOUS EMISSIONS


Channel 810: 1GHz – 3GHz

Spurious emission limit -13dBm

NOTE: peak above the limit line is the Carrier frequency.

SWEEP TABLE: "FCC Spuri 1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz

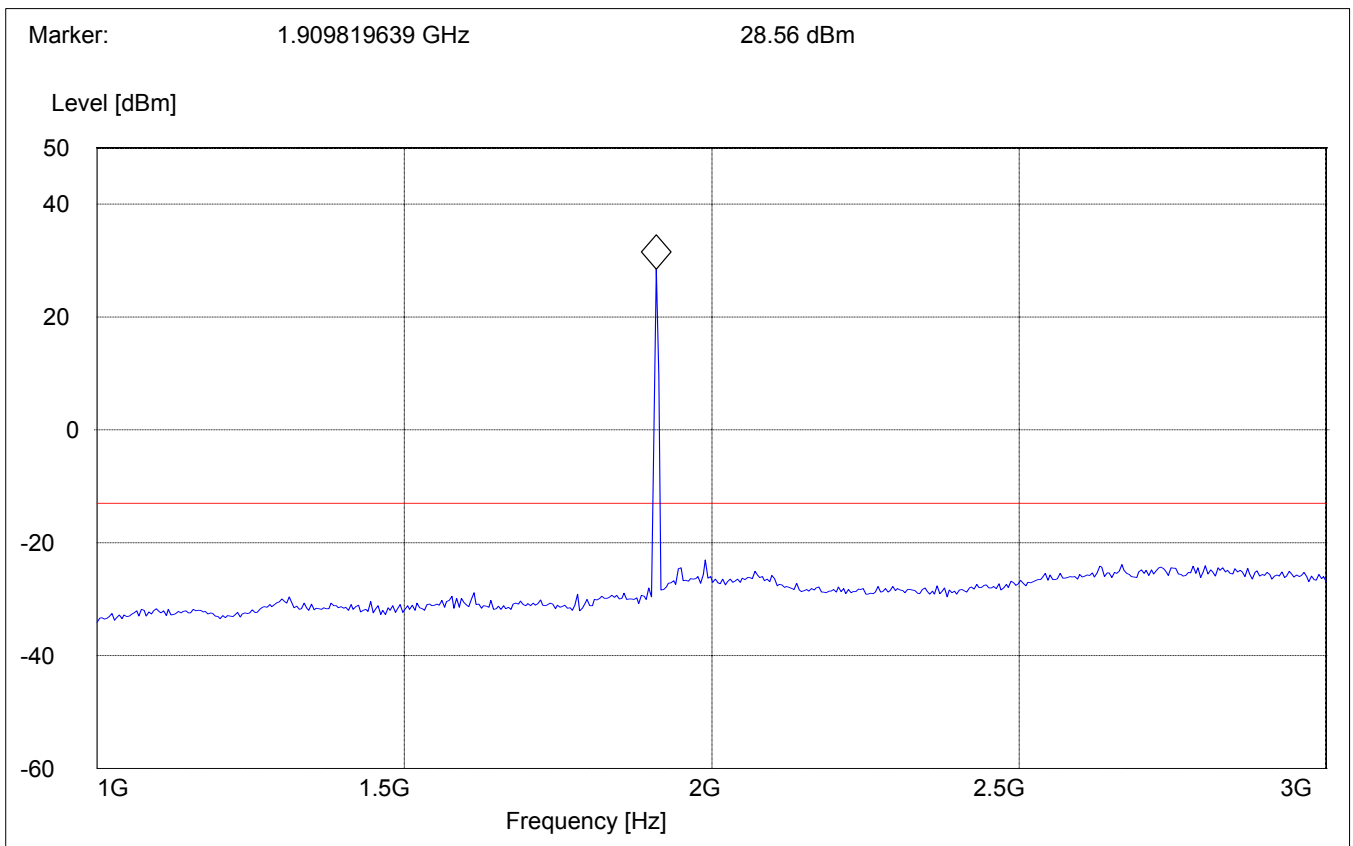


RADIATED SPURIOUS EMISSIONS

Channel 810: 3GHz – 18GHz

Spurious emission limit –13dBm

SWEEP TABLE: "FCC Spuri 3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz

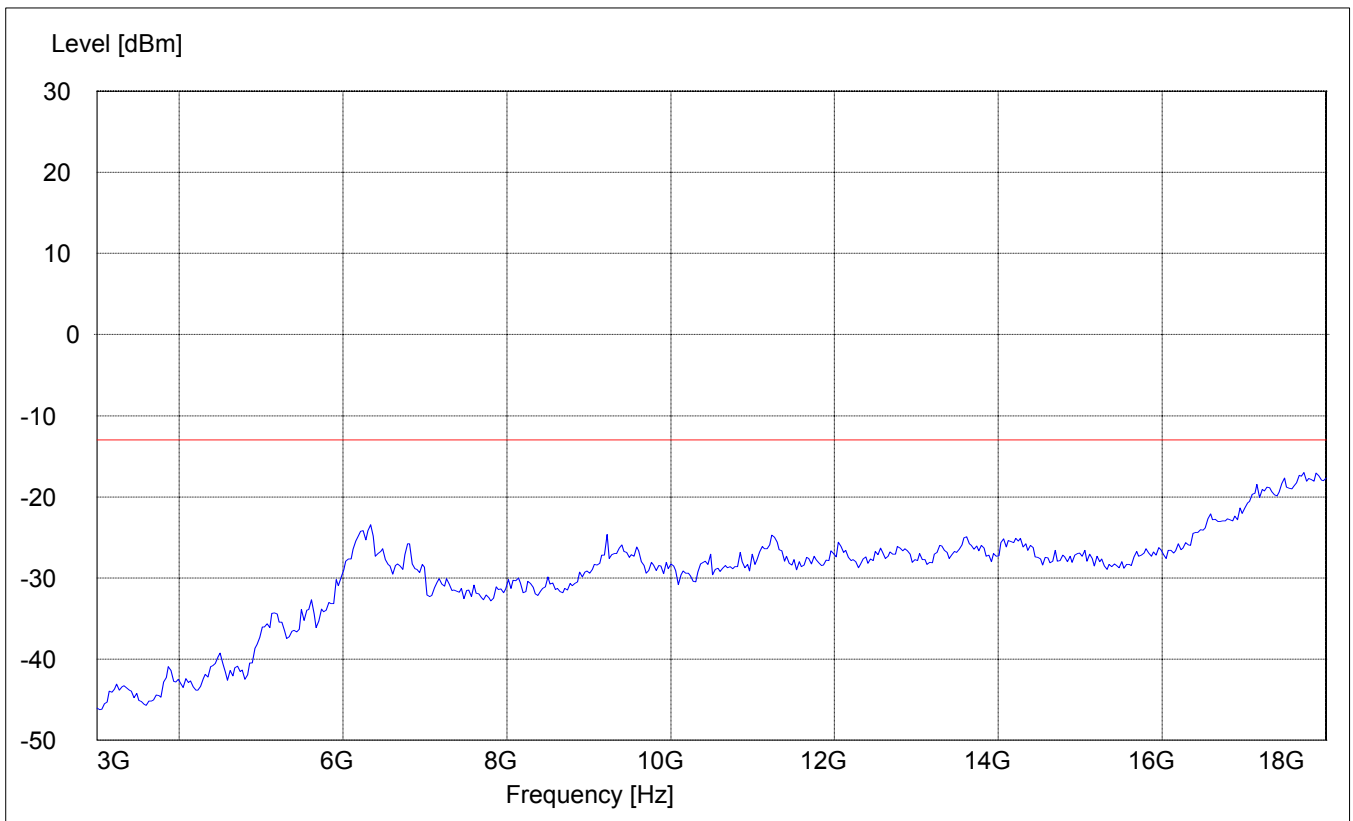

RADIATED SPURIOUS EMISSIONS

18GHz – 19.1GHz


Spurious emission limit –13dBm

Note: This plot is valid for all three (low, mid, high) channels.

(Worst-case plot)

SWEEP TABLE: "FCC 24 spuri 18-19.1G"

Start	Stop	Detector	Meas.	RBW/VBW
Frequency	Frequency		Time	
18GHz	19.1GHz	Max Peak	Coupled	1 MHz

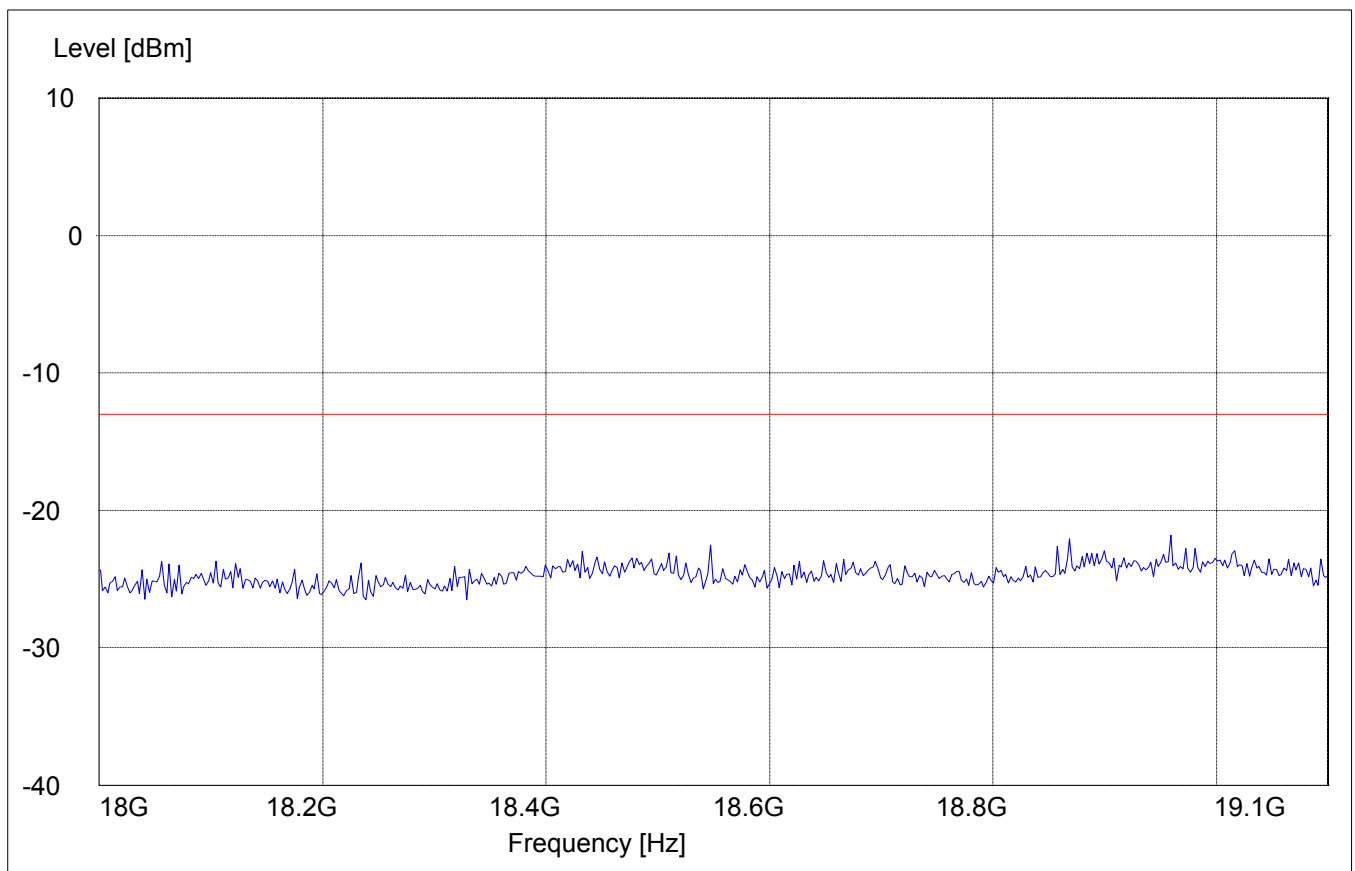


RADIATED SPURIOUS EMISSIONS

EUT in Idle Mode: 30MHz – 1GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC 24 Spur 30M-1G"

Start	Stop	Detector	Meas. Time	RBW/VBW
30MHz	1GHz	Max Peak	Coupled	1 MHz

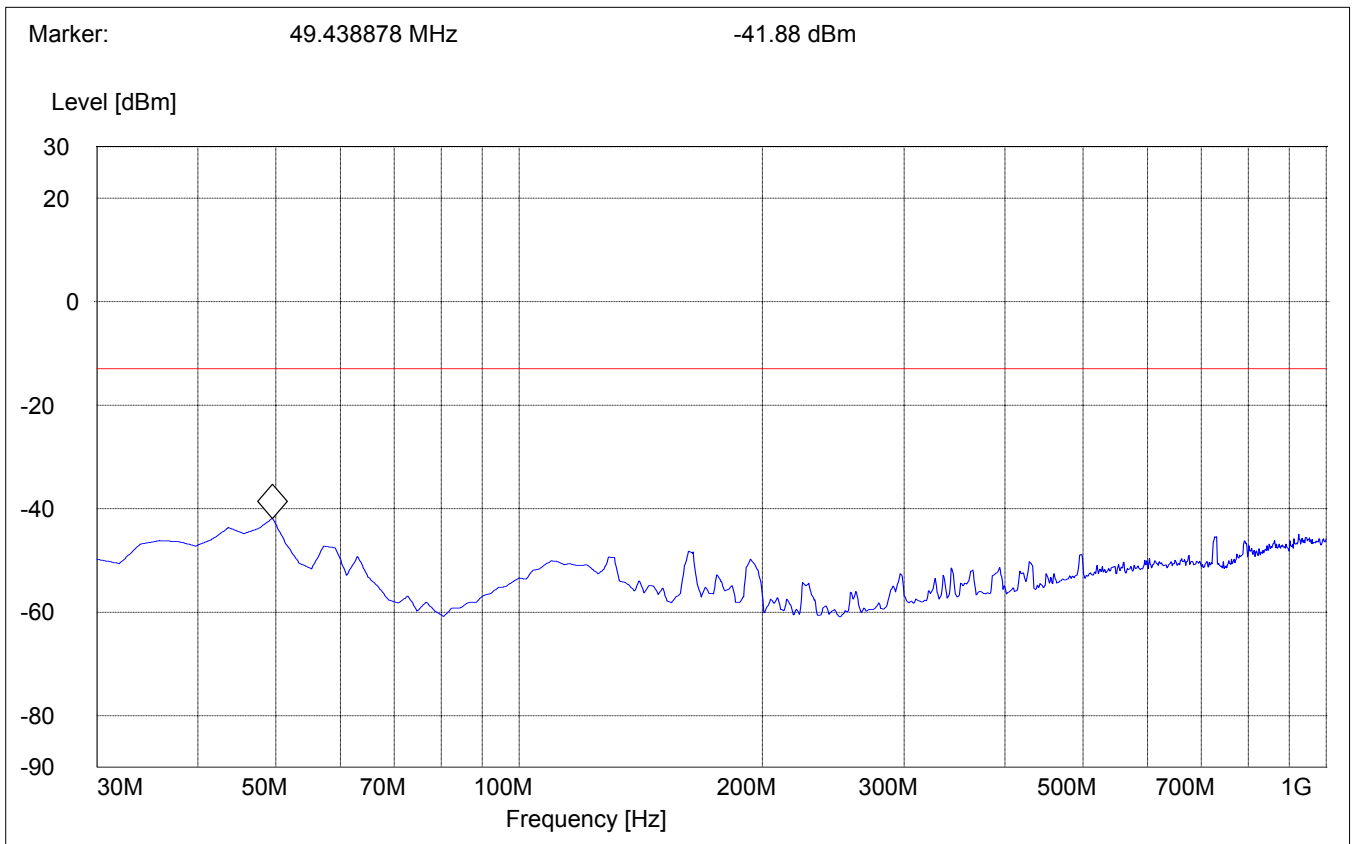


RADIATED SPURIOUS EMISSIONS

EUT in Idle Mode: 1GHz – 3GHz

Spurious emission limit –13dBm

SWEEP TABLE: "FCC Spuri 1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz

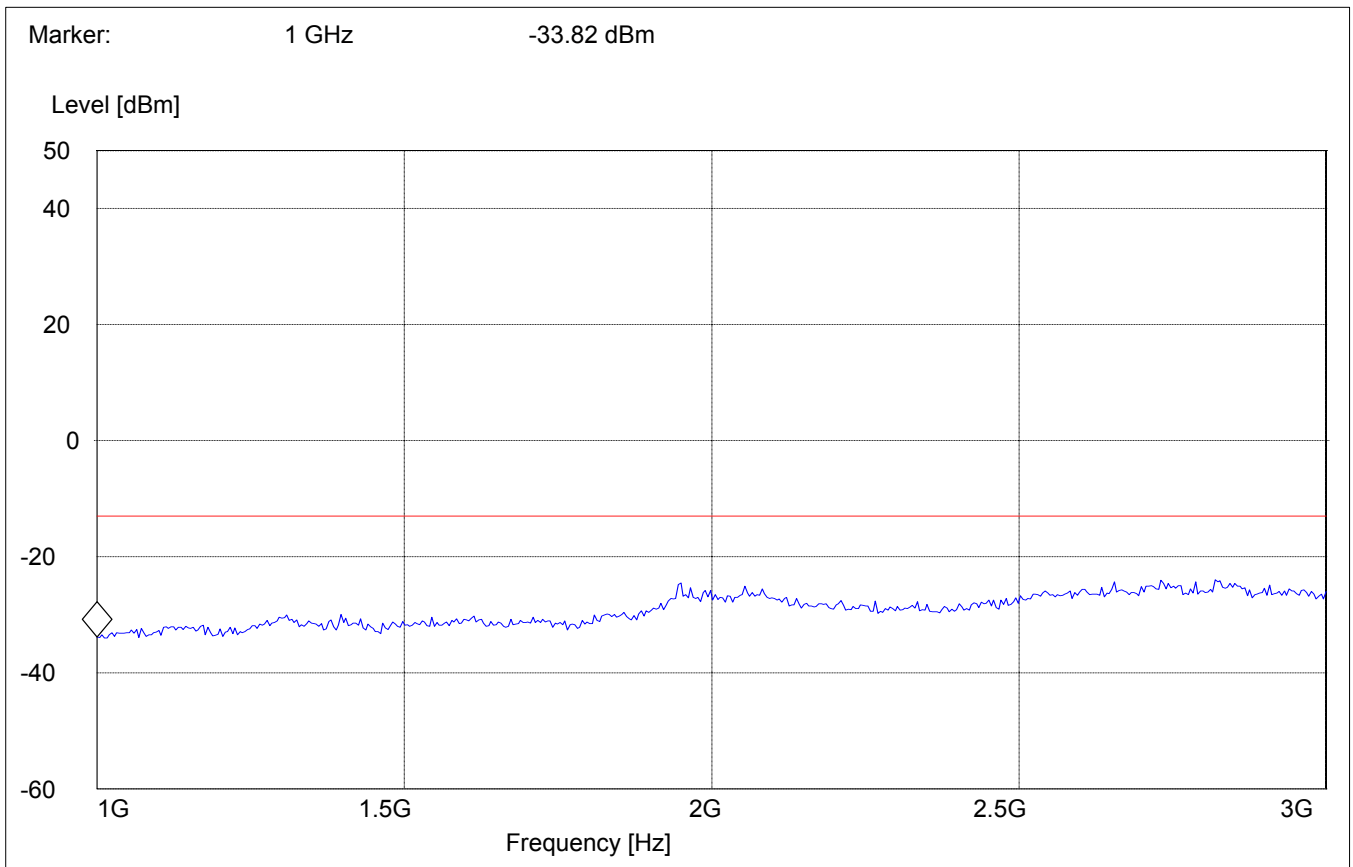


RADIATED SPURIOUS EMISSIONS

EUT in Idle Mode: 3GHz – 18GHz

Spurious emission limit -13dBm

SWEEP TABLE: "FCC 24 spuri 3-18G"

<i>Start</i>	<i>Stop</i>	<i>Detector</i>	<i>Meas.</i>	<i>RBW/VBW</i>
<i>Frequency</i>	<i>Frequency</i>		<i>Time</i>	
3GHz	18GHz	Max Peak	Coupled	1 MHz

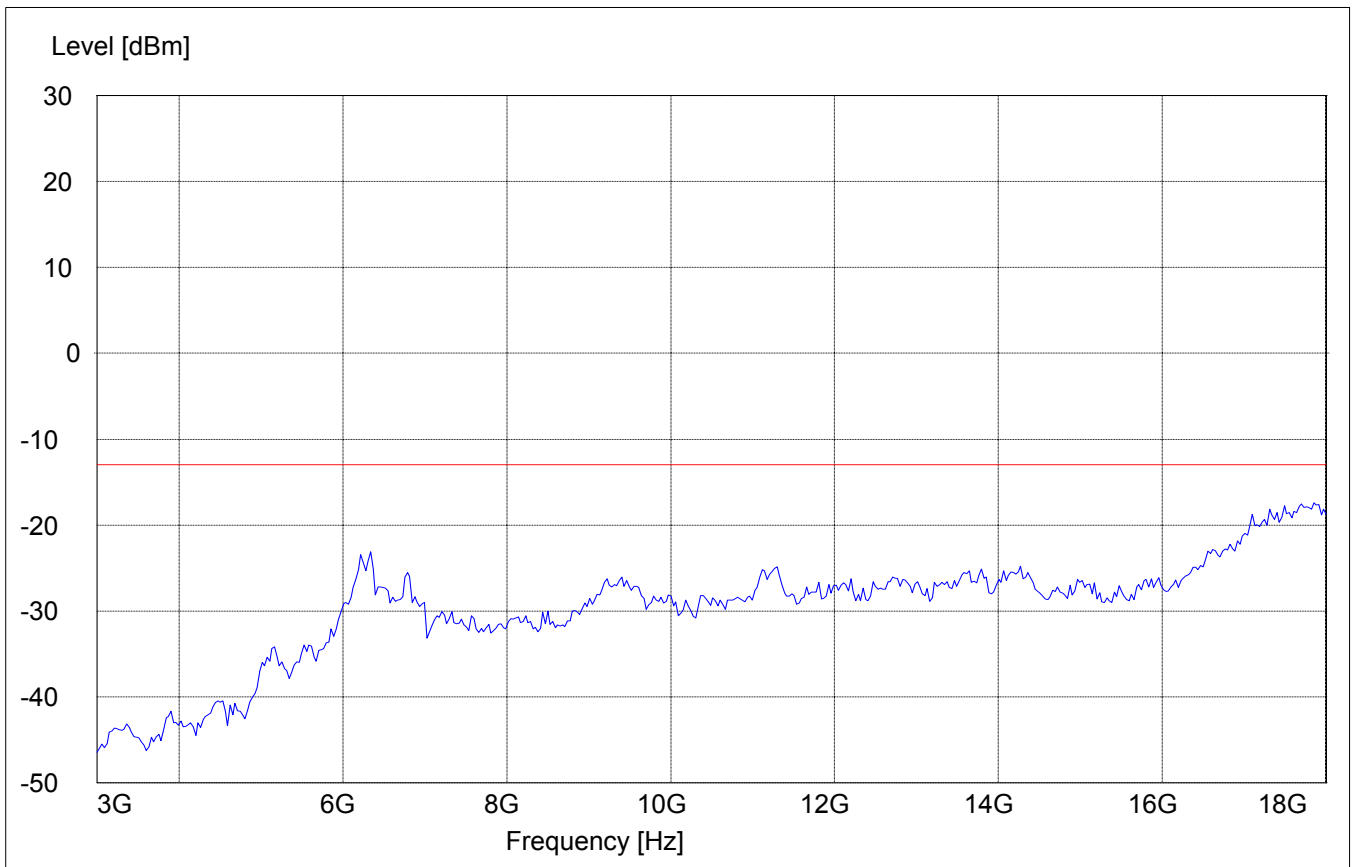


RADIATED SPURIOUS EMISSIONS

EUT in Idle Mode: 18GHz – 19.1GHz

Spurious emission limit –13dBm

SWEEP TABLE: "FCC 24 spuri 18-19.1G"

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
18GHz	19.1GHz	Max Peak	Coupled	1 MHz

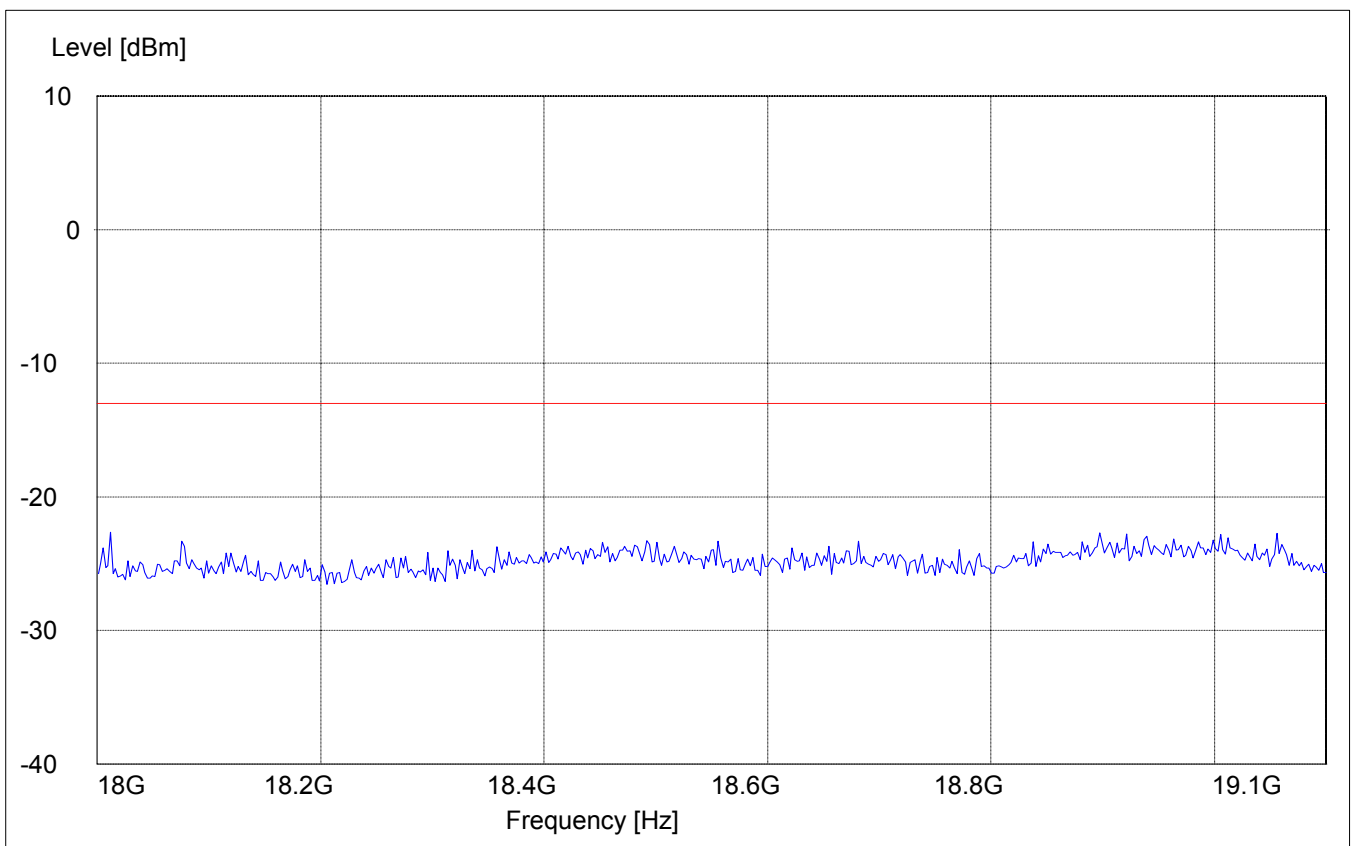


**BAND EDGE COMPLIANCE
(Conducted)**

§24.238(b)


As per part 24.238(b), "1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed"
For emission bandwidth of 314.62kHz, this equates to a resolution bandwidth of at least 3.5 kHz. For this testing, a resolution bandwidth 5.0 kHz was used.

**Lower Band Edge:
(Conducted)**

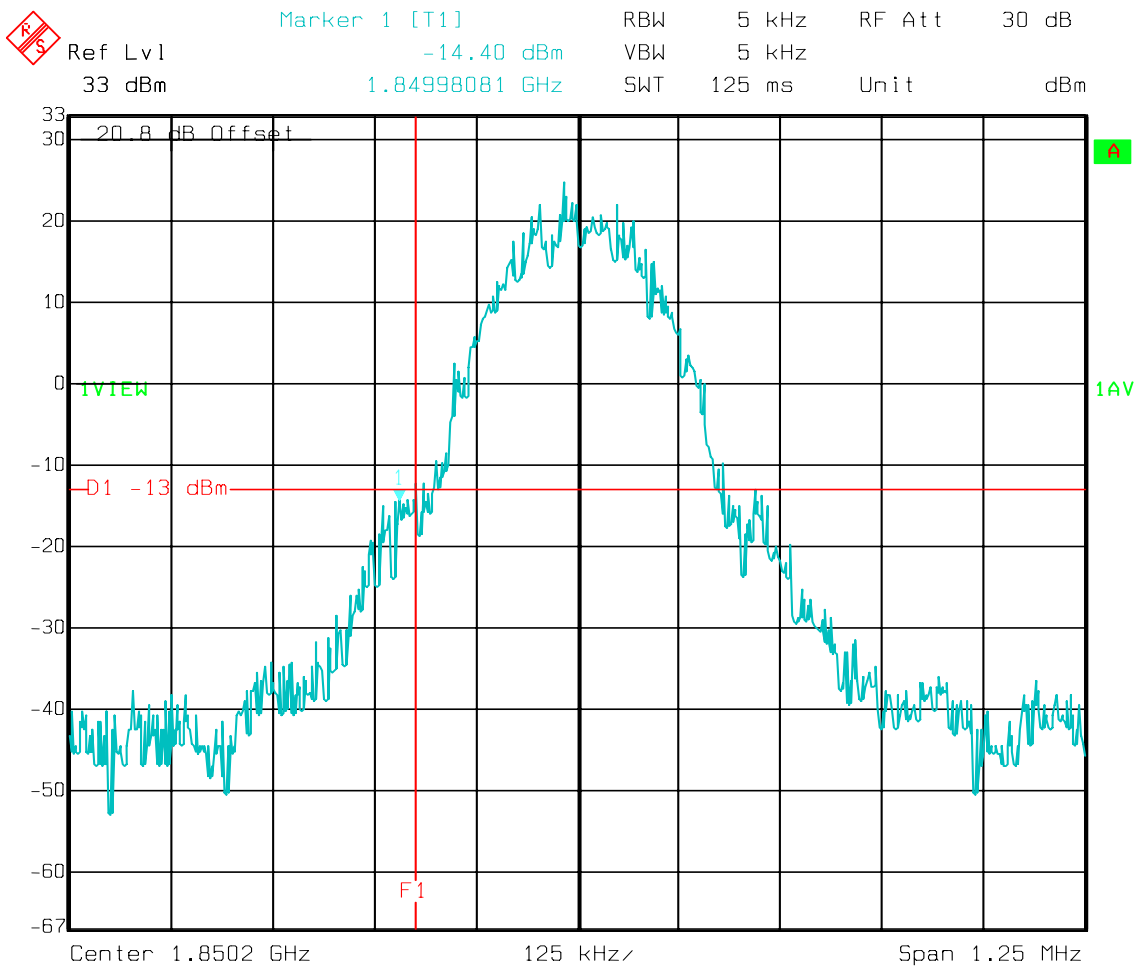


Date: 07.MAR.2003 10:13:15

Mid Band Edge:
(Conducted)

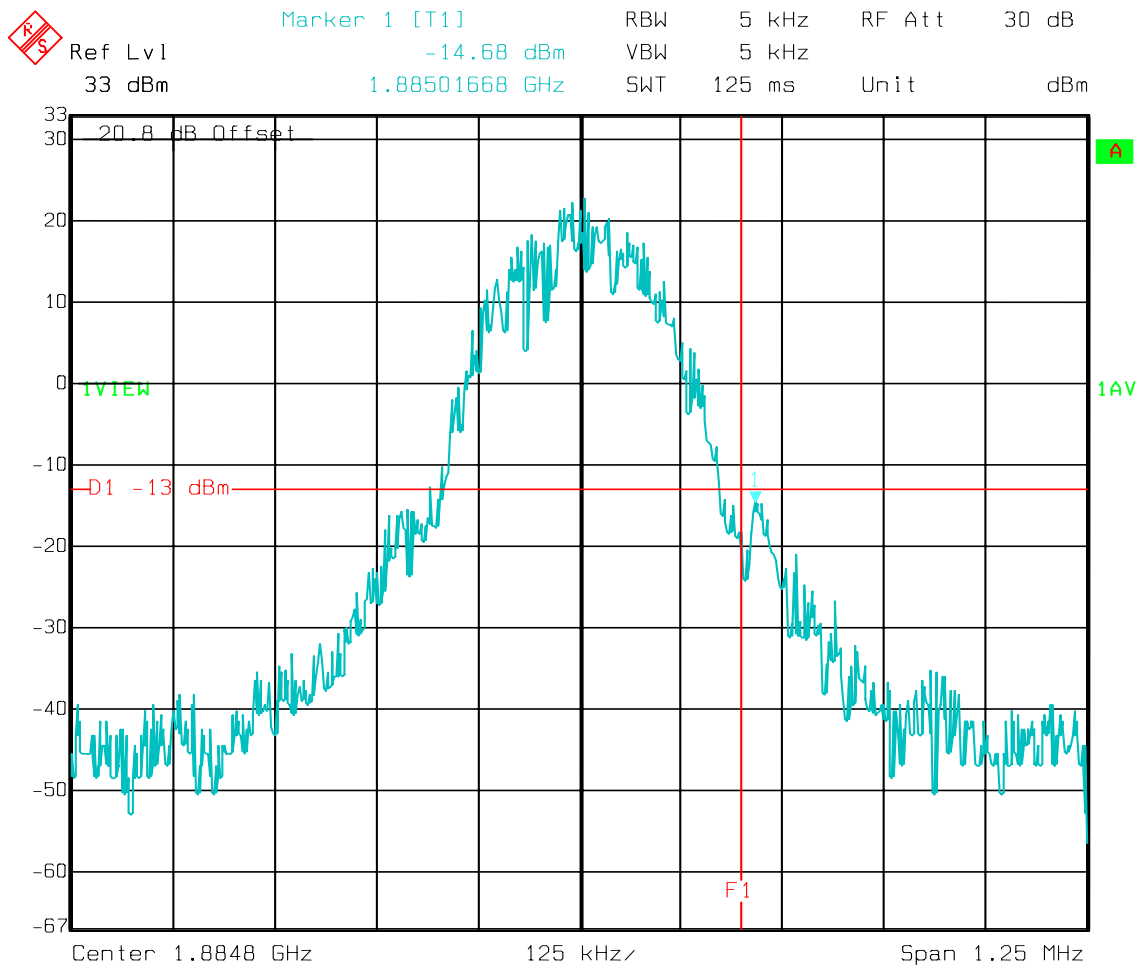

Date: 07.MAR.2003 10:17:38

Higher Band Edge:
(Conducted)

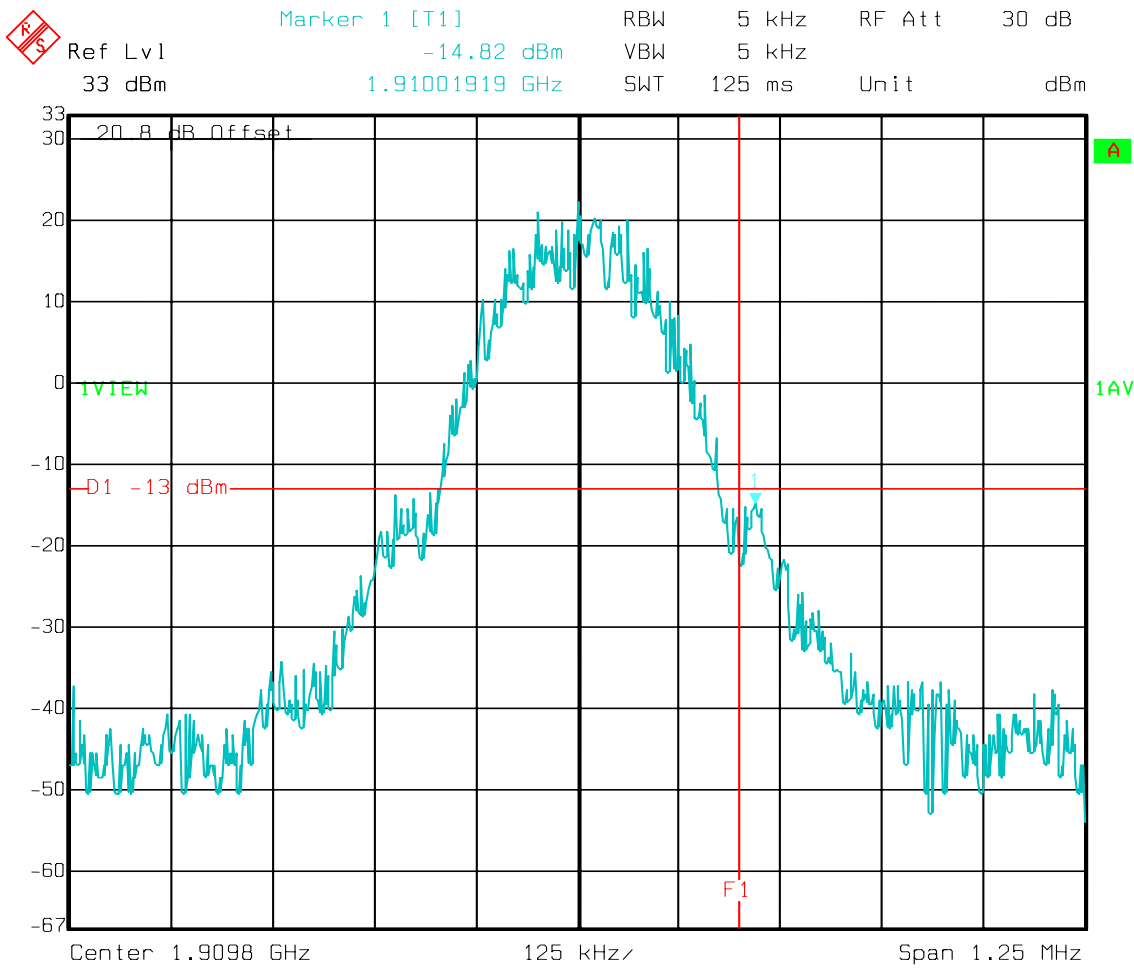

Date: 07.MAR.2003 10:20:41

RECEIVER RADIATED EMISSIONS**§ 15.209 / RSS-133****NOTE:**

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3GHz and 20GHz very short cable connections to the antenna was used to minimize the noise level.
2. All measurements were done in peak mode unless specified with the plots.


Limits**SUBCLAUSE § 15.209**

Frequency (MHz)	Field strength ($\mu\text{V}/\text{m}$)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

RECEIVER RADIATED EMISSIONS
EUT in Idle Mode: 30MHz – 1GHz

SWEEP TABLE: "FCC 24 Spur 30M-1G"


Start	Stop	Detector	Meas. Time	RBW/VBW
30MHz	1GHz	Max Peak	Coupled	100KHz

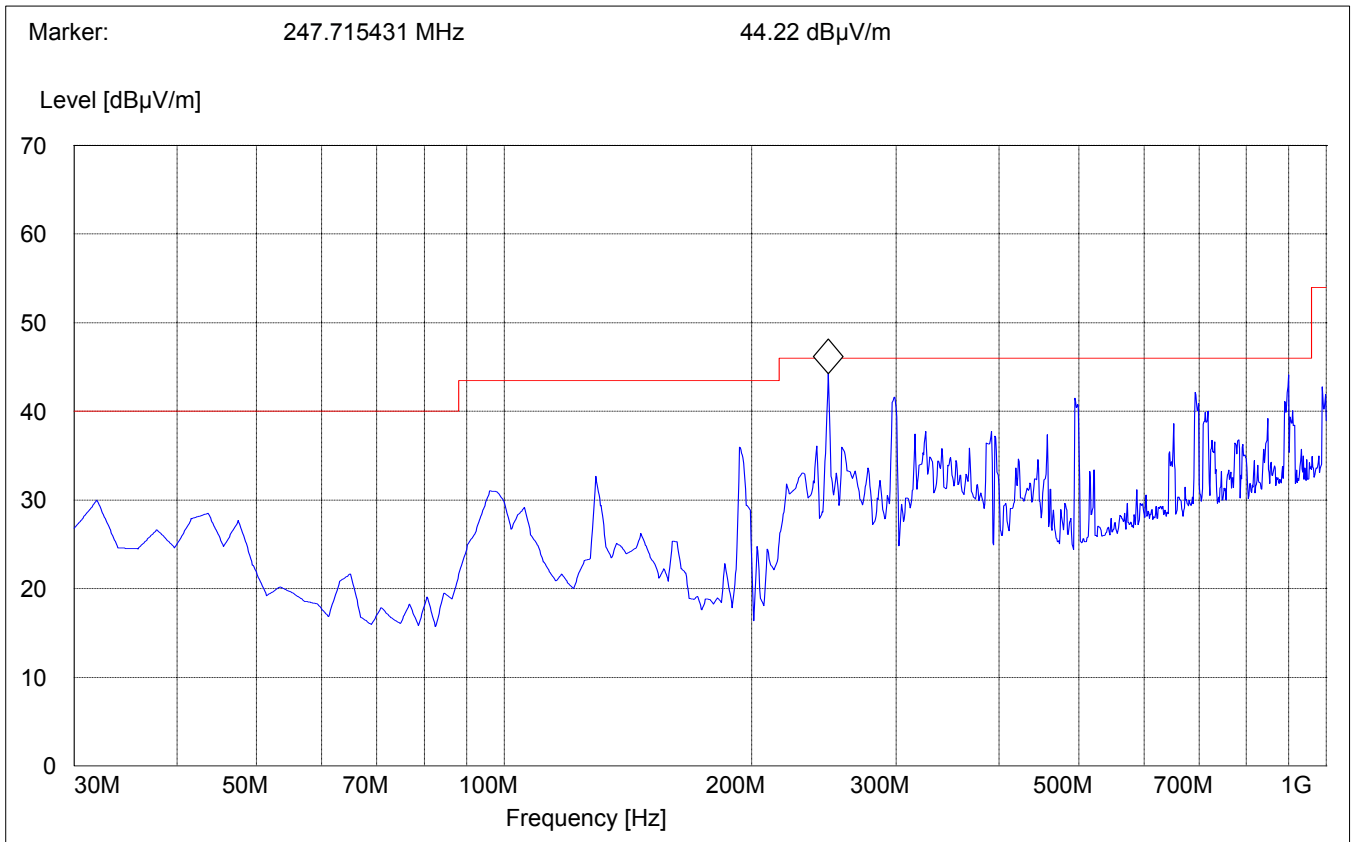

RECEIVER RADIATED EMISSIONS
EUT in Idle Mode: 1GHz – 3GHz

SWEEP TABLE: "FCC Spuri 1-3G"


<i>Start</i>	<i>Stop</i>	<i>Detector</i>	<i>Meas.</i>	<i>RBW/VBW</i>
<i>Frequency</i>	<i>Frequency</i>		<i>Time</i>	
1GHz	3GHz	Max Peak	Coupled	1 MHz

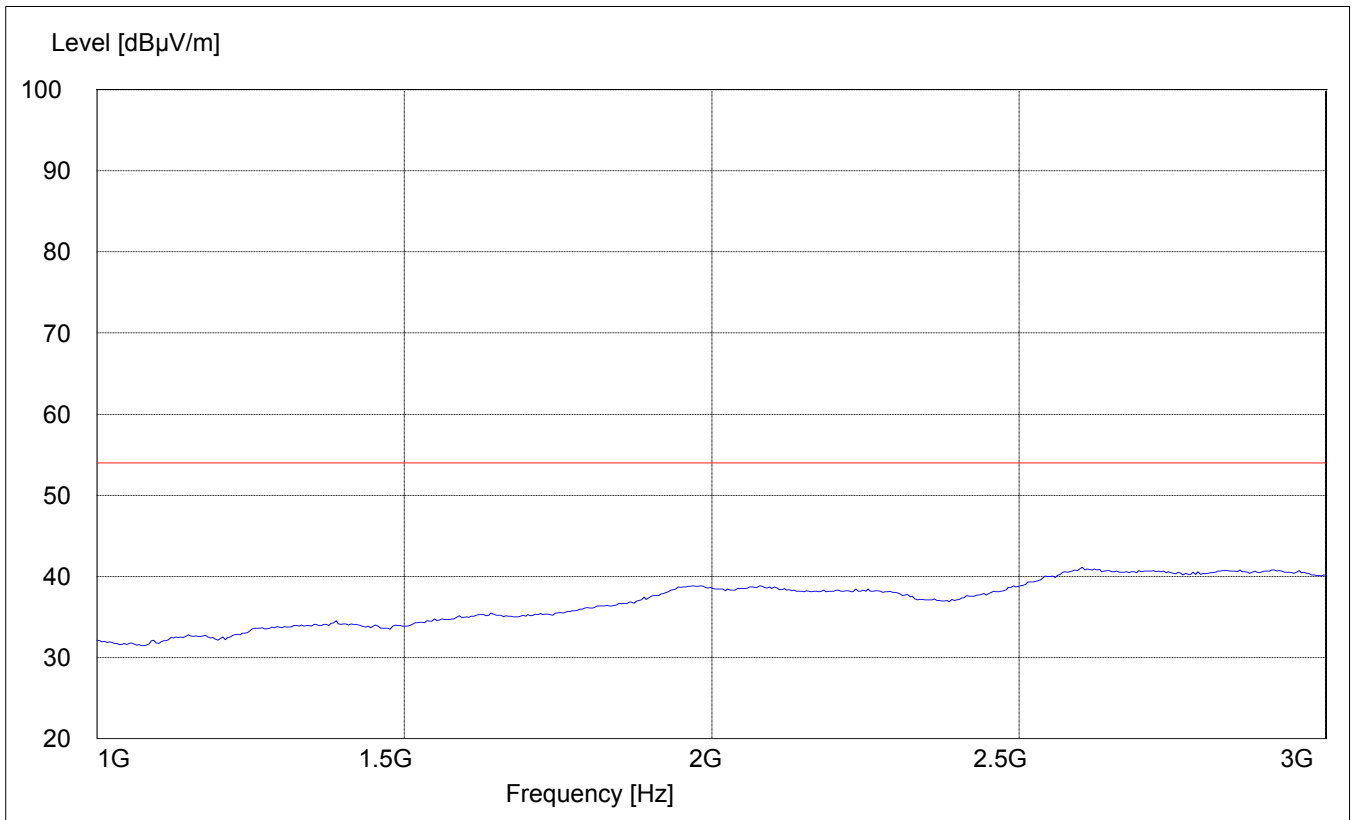

RECEIVER RADIATED EMISSIONS
EUT in Idle Mode: 3GHz – 18GHz

SWEEP TABLE: "FCC 24 spuri 3-18G"


<i>Start</i>	<i>Stop</i>	<i>Detector</i>	<i>Meas.</i>	<i>RBW/VBW</i>
<i>Frequency</i>	<i>Frequency</i>		<i>Time</i>	
3GHz	18GHz	Max Peak	Coupled	1 MHz

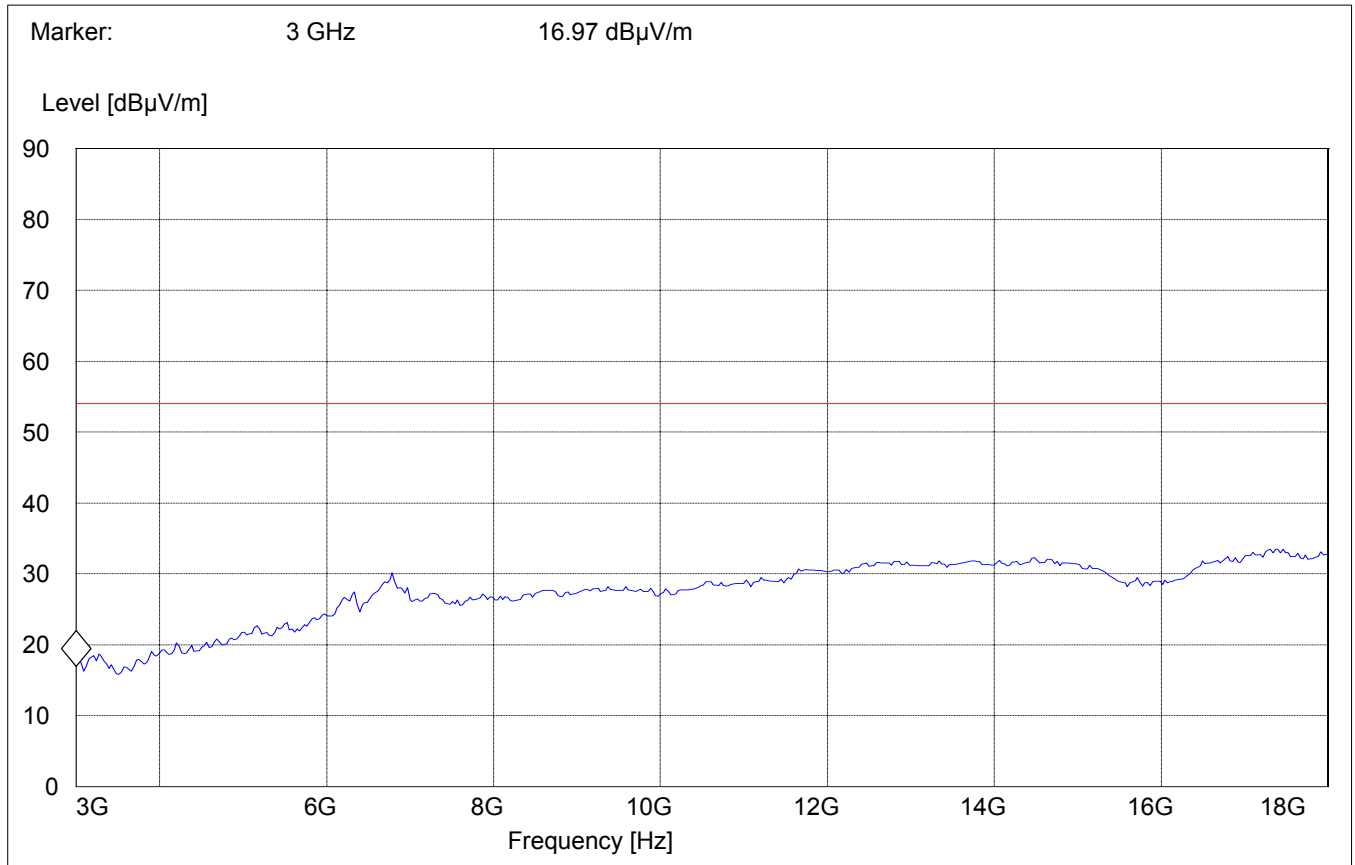

RECEIVER RADIATED EMISSIONS
EUT in Idle Mode: 18GHz – 20GHz

SWEEP TABLE: "FCC 24 spuri 18-20G"

<i>Start</i>	<i>Stop</i>	<i>Detector</i>	<i>Meas.</i>	<i>RBW/VBW</i>
<i>Frequency</i>	<i>Frequency</i>		<i>Time</i>	
18GHz	20GHz	Max Peak	Coupled	1 MHz

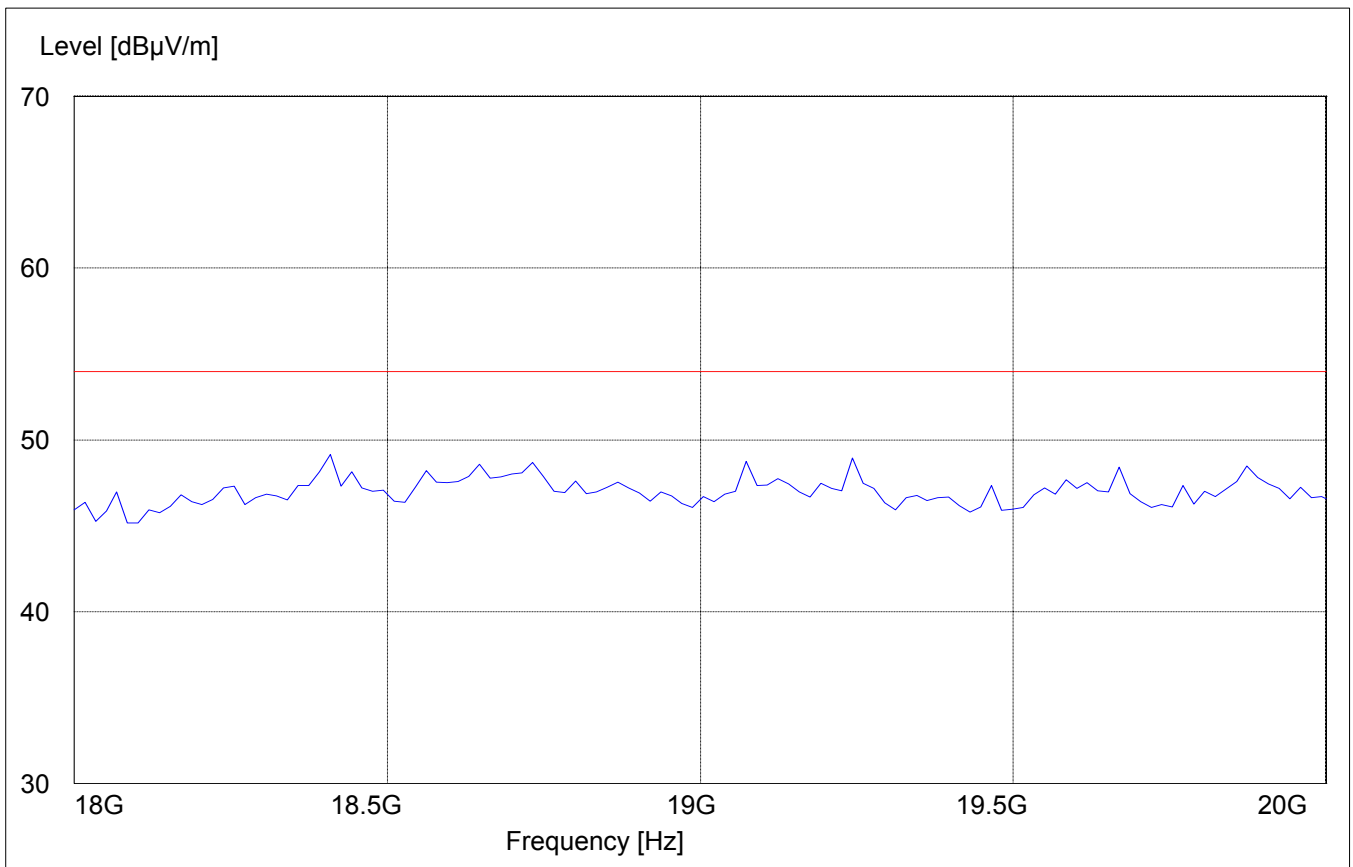

CONDUCTED SPURIOUS EMISSIONS

Measurement Procedure:

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment under test, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

USPCS Transmitter

Channel	Frequency
512	1850.2 MHz
661	1880.0 MHz
810	1909.8 MHz

Measurement Limit:

Sec. 24.238 Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\text{Log}(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.


Harmonic	Tx ch. 512 Freq. (MHz)	Level (dBm)	Tx ch. 661 Freq. (MHz)	Level (dBm)	Tx ch. 810 Freq. (MHz)	Level (dBm)
2	3700.4	nf	3760	nf	3819.6	nf
3	5550.6	nf	5640	nf	5729.4	nf
4	7400.8	nf	7520	nf	7639.2	nf
5	9251	nf	9400	nf	9549	nf
6	11101.2	nf	11280	nf	11458.8	nf
7	12951.4	nf	13160	nf	13368.6	nf
8	14801.6	nf	15040	nf	15278.4	nf
9	16651.8	nf	16920	nf	17188.2	nf
10	18502	nf	18800	nf	19098	nf
nf = noise floor						

CONDUCTED SPURIOUS EMISSIONS

Channel 512: 30MHz – 20GHz

Spurious emission limit –13dBm

NOTE: peak above the limit line is the carrier frequency.

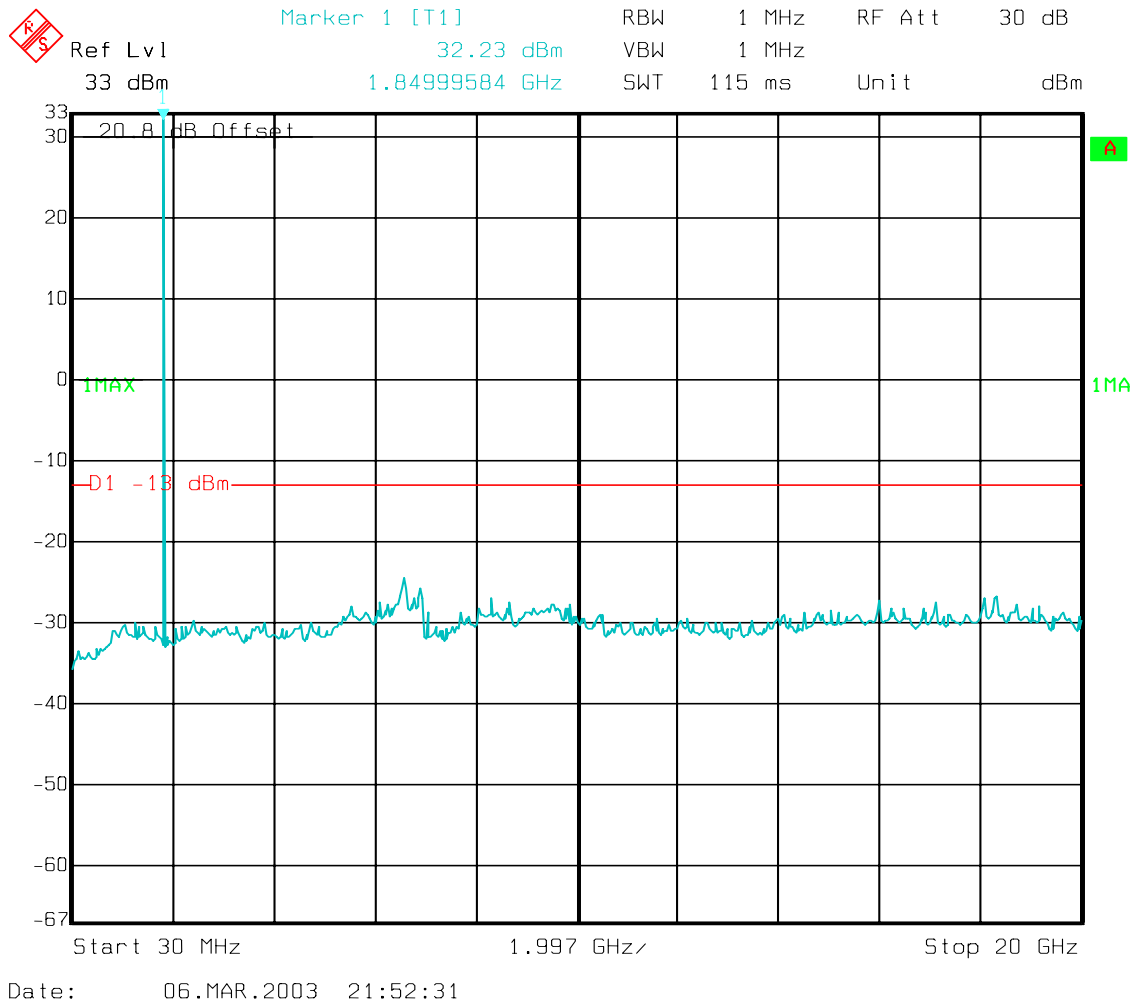


CONDUCTED SPURIOUS EMISSIONS

Channel 661: 30MHz – 20GHz

Spurious emission limit –13dBm

NOTE: peak above the limit line is the carrier frequency.

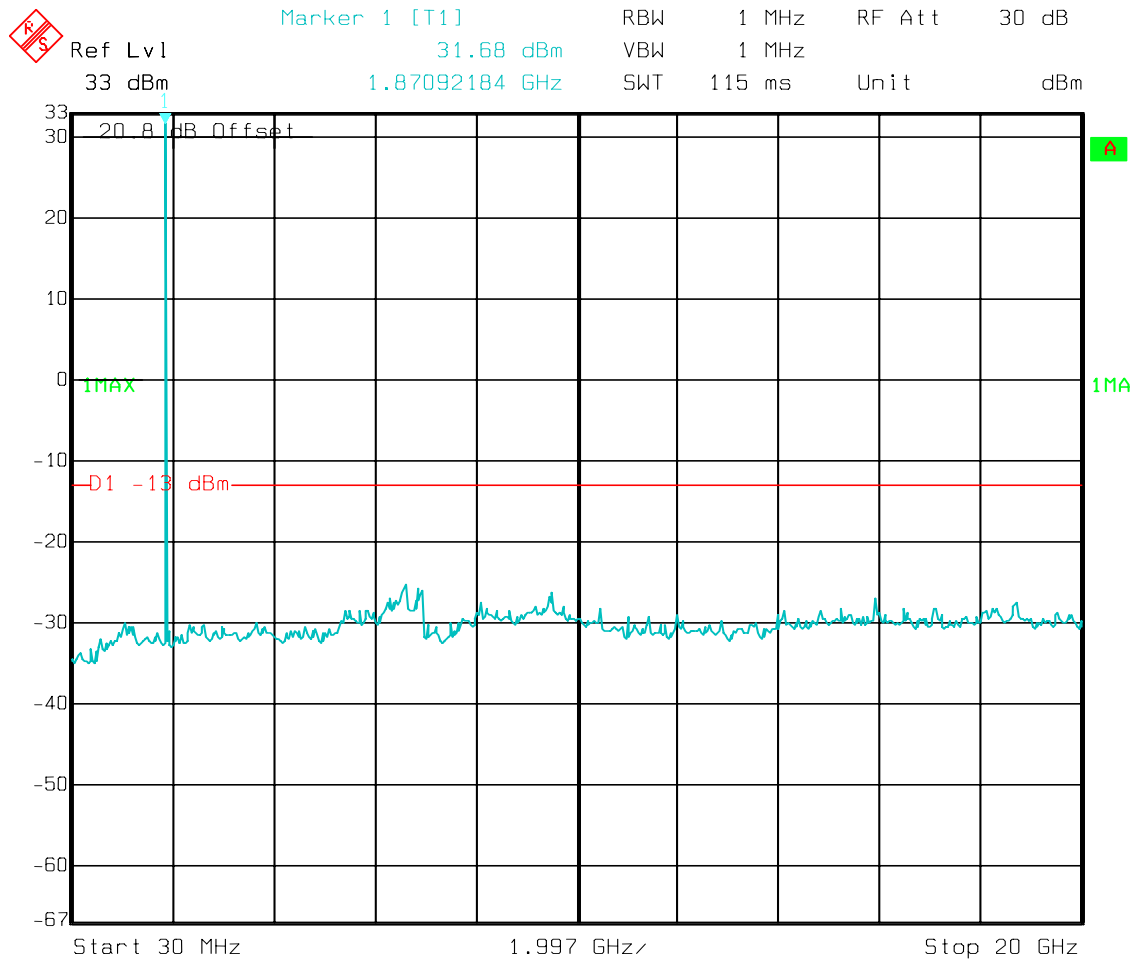


Date: 06.MAR.2003 21:53:28

CONDUCTED SPURIOUS EMISSIONS

Channel 810: 30MHz – 20GHz

Spurious emission limit -13dBm

NOTE: peak above the limit line is the carrier frequency.

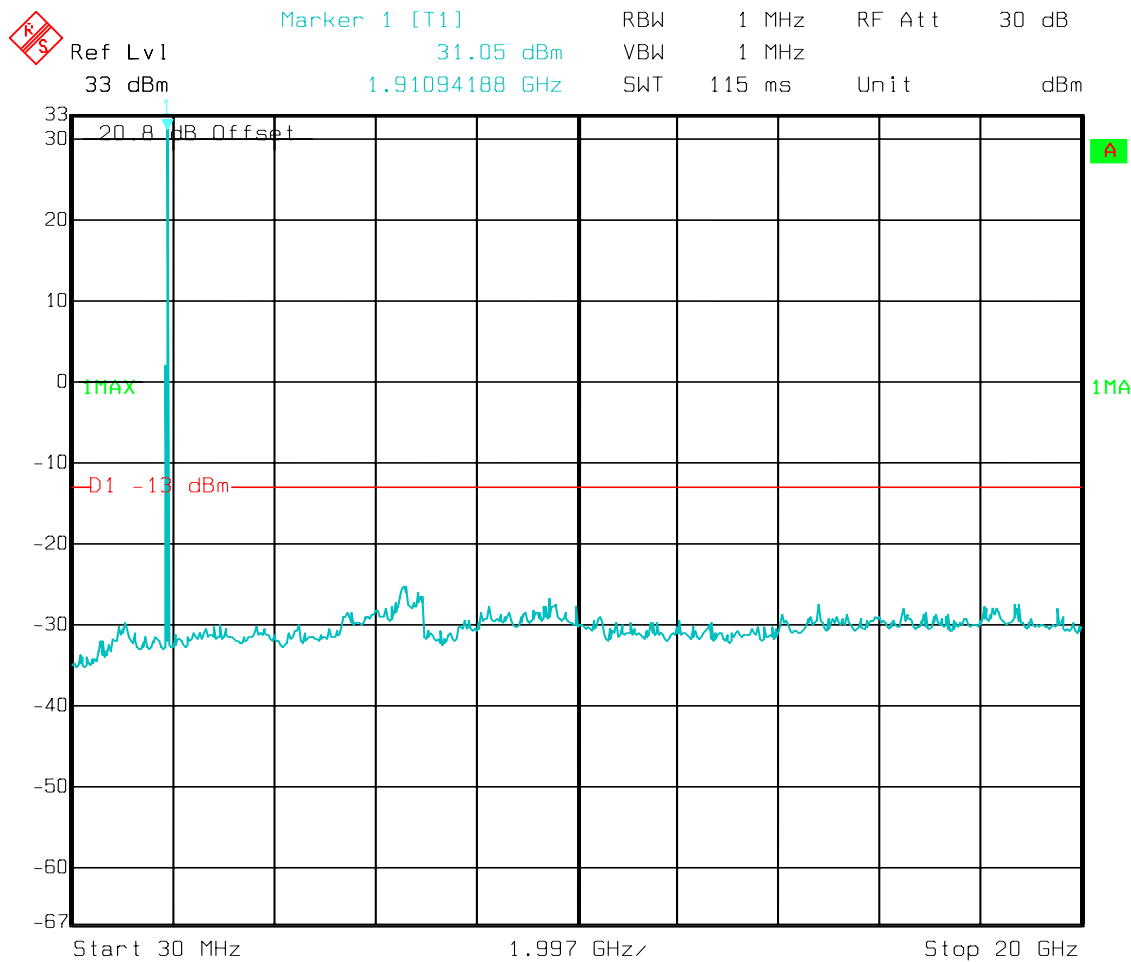


Date: 06.MAR.2003 21:54:26

CONDUCTED SPURIOUS EMISSIONS

Idle mode: 30MHz – 20GHz

Spurious emission limit -13dBm

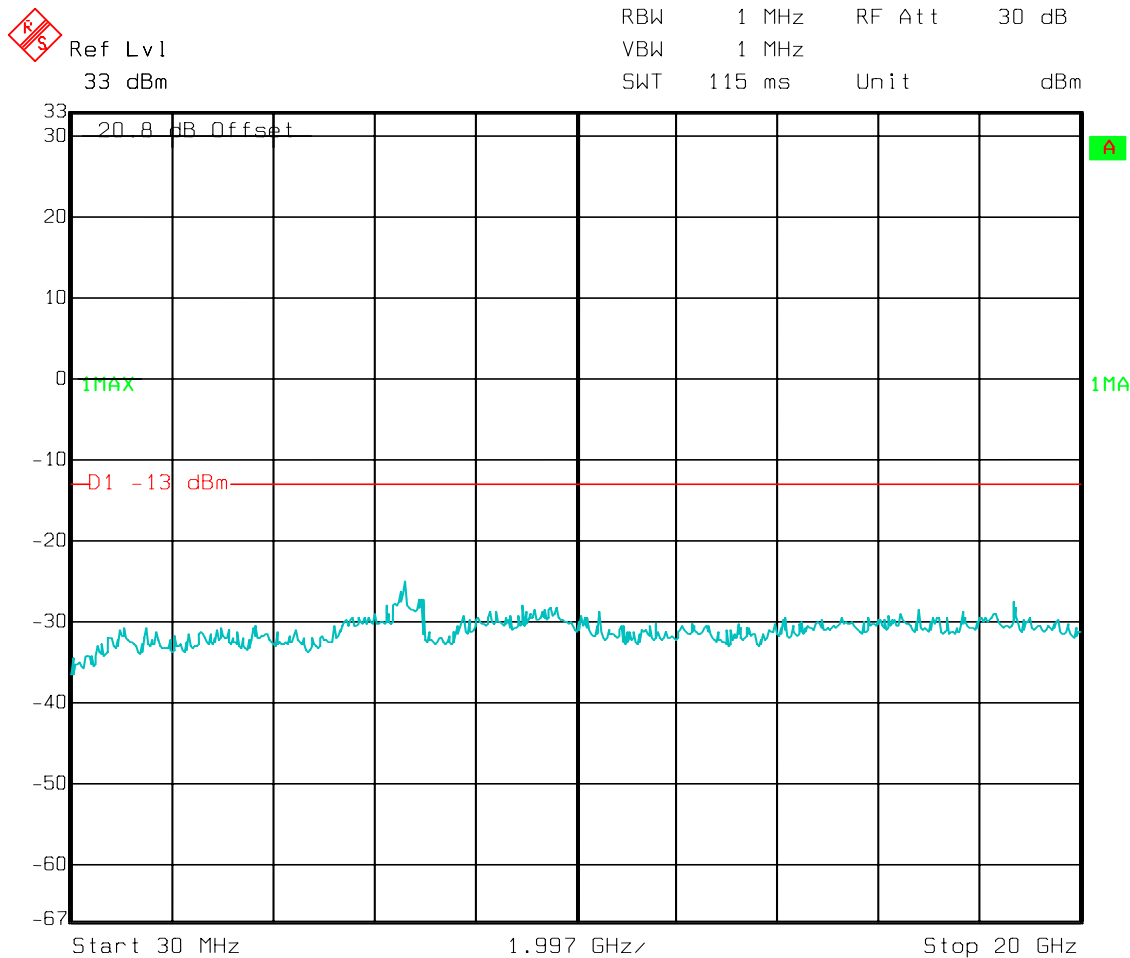

Date: 06.MAR.2003 21:55:33

CONDUCTED EMISSIONS

§ 15.107/207

Measured with AC/DC power adapter plugged in LISN

Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)

Limit

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50


* Decreases with logarithm of the frequency

ANALYZER SETTINGS: RBW = 10KHz

VBW = 10KHz

MEASUREMENT RESULT: "test_fin QP"


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.165000	46.80	0.0	65	18.4	N	GND

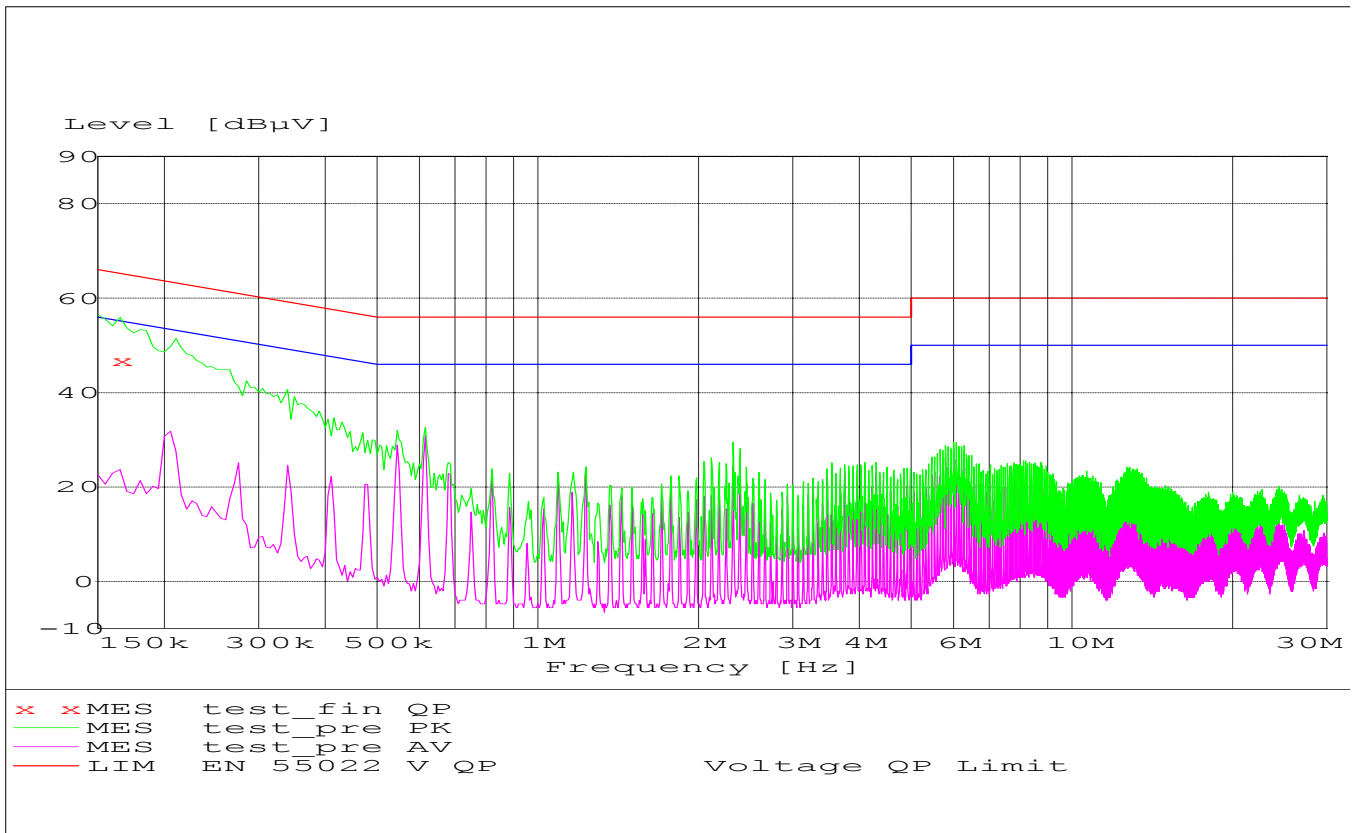

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	826880/010
03	Signal Generator	SMY02	Rohde & Schwarz	836878/011
04	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02
05	Biconilog Antenna	3141	EMCO	0005-1186
06	Horn Antenna (1-18GHz)	SAS-200/571	AH Systems	325
07	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240
08	Power Splitter	11667B	Hewlett Packard	645348
09	Climatic Chamber	VT4004	Voltsch	G1115
10	High Pass Filter	5HC2700	Trilithic Inc.	9926013
11	High Pass Filter	4HC1600	Trilithic Inc.	9922307
12	Pre-Amplifier	JS4-00102600	Miteq	00616
13	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807
14	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008
15	Universal Radio Comm. Tester	CMU 200	Rohde & Schwarz	832221/06

BLOCK DIAGRAMS
Conducted Testing

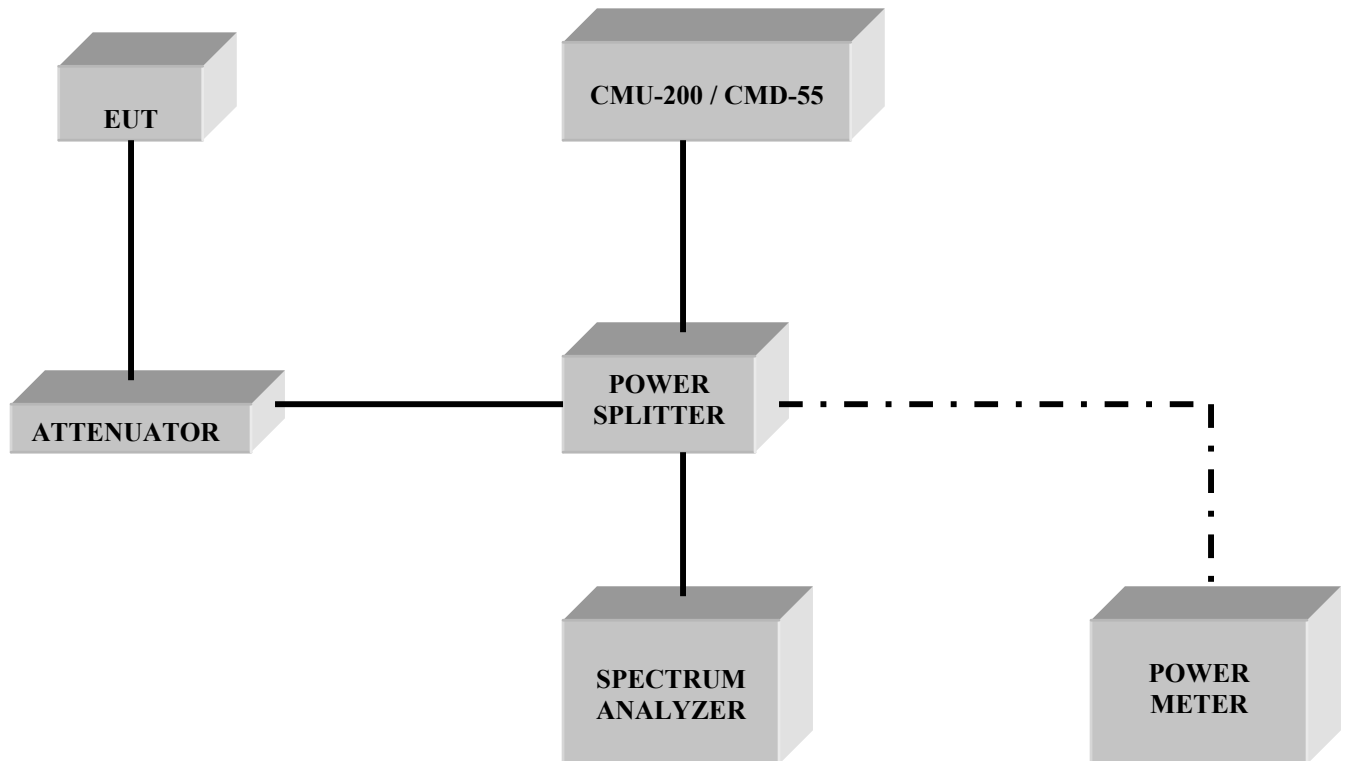

Radiated Testing

ANECHOIC CHAMBER

