



Prepared (also subject responsible if other)

SEM/GODD Marie Druvefors

Approved

SEM/GODD Marie Druvefors

Company Internal
MARKING DRAWING
No.

Checked

Date

2008-02-18

Rev

PA1

Reference

3

Mobile Phone label content, FAD-3022019-BV, Made in...

1 General information

Core Unit label part no	1206-6118
Bar code	<ul style="list-style-type: none"> Standard: according to Ericsson corporate standard 102 01–109 Uen Print quality: C, according to ANSI X3.182-1990 as stated in Ericsson corporate standard 102 01–1003 Uen Quiet zone: No bar codes are allowed to be closer to a label edge than 2 mm!
Text	If applicable, or nothing else specified, Zebra printer Scaleable Smooth Font CG Triumvirate Bold Condensed is imposed. When needed, the text is adjusted to fit the label.
Coordinates	“(x/y)” under each line number specifies the bottom / left alignment for text, graphics and bar codes, x is measured vertically, and y horizontally from the upper left corner of the label (landscape format), both in mm. When needed, the alignment is adjusted to fit the label.

MLCI= Main Label Content Information-document

2 Printing information

	Content	Format
Line 1 (2,5/19,0)	Sony Ericsson stylized name.	Graphics, height 1,5 mm. According to 1200-1925.
Line 2a (4,5/19,0)	Model Name “X000x”	Text, height 1,2 mm. <i>According to Chapter 1 in MLCI.</i>
Line 2b (4,5/26,5)	Production week (flash), “yy’W’ww” (yy = year, ww = week)	Text, height 1,2 mm.
Line 3 (6,5/19,0)	Product number without revision of the Sales Item in which the phone is packed, if applicable. “St: XXXX-XXXX”	Text, height 1,2 mm.
Line 4 (8,5/19,0)	Marking of origin: The line shall be printed as stated in chapter 3 in this document.	Text, height 1,2 mm.
Line 5a (10,5/1,0)	“TYPE: FAD-3022019-BV”	Text, height 1,2 mm. <i>According to Chapter 1 in MLCI.</i>
Line 5b (10,5/21,0)	PBA and R-state identification field, “G ₁ G ₂ G ₃ HY ₁ Y ₂ Y ₃ ”	Text, height 1,2 mm. According to Type-testing report in the Product Model’s Specifying Documents.
Line 5c (10,5/31,5)	Location code of where the phone is flashed, if applicable, “FFF”	Text, height 1,2 mm.
Line 6a (12,5/1,0)	“IC:4170B-F3022019”	Text, height 1,2 mm. <i>According to Chapter 1 in MLCI.</i>
Line 6b (12,5/17,5)	“FCC ID: PY7F3022019”	Text, height 1,2 mm. <i>According to Chapter 1 in MLCI.</i>
Line 7 (14,3/2,0)	Line 8a in bar code. As desired by supplier (e.g. only actual number).	Bar code, height 2,0 mm. As desired by supplier (e.g. Code 128 symbology).
Line 8a (16,3/1,0)	Supplier’s identification for trace-ability of the telephone, as desired by supplier (e.g. “S/N: nnn....” for serial number).	Text, height 1,2 mm. Defined by supplier.
Line 8b (16,3/20,0)	Actual electronic serial number (IMEI) of the Mobile Phone, “00000000-000000-0”	Text, height 1,2 mm. In the format TAC-SNR-CD. TAC and SNR derived from pos 500 in BOM. CD = check digit according to the Luhn formula (ISO/IEC 7812), GSM 02.16.

Prepared (also subject responsible if other)

SEM/GODD Marie Druvefors

Approved

SEM/GODD Marie Druvefors

Checked

 Company Internal
MARKING DRAWING
 No.

Date

2008-02-18

Rev

PA1

Reference

3

	Content	Format
Line 9a (18,2/2,0)	Line 8b in bar code (only actual number, without data identifier).	Bar code, height 2,0 mm. Code 128 symbology, code C subset. If uneven number of digits, code B subset shall be used for the last digit.
Line 9b (18,2/29,0)	Repair week, if applicable. "Ry'W'ww" (y = year, ww = week)	Text, height 1,2 mm.
Line 10a (29,0/1,0)	CE approval symbol	Graphics, height 5 mm. According to 1202-5482.
Line 10b (29,0/10,0)	The notified body number "0682", rotated 90° counter clockwise.	Text, height 1,2 mm.
Line 10c (29,0/10,0)	Alert symbol, if applicable, check MLCI	Graphics, height 5 mm <i>According to Chapter 1 in MLCI</i>
Line 10d (29,0/32,5)	SIM symbol	Graphics, height 5 mm. <i>According to Chapter 1 in MLCI.</i>

3 Marking of origin

3.1 Content

"Made in Xxxxx"


"Xxxxx"= actual country of production of the included telephone, in English.

4 Layout

The conceptual picture (for Zebra 90Xill printer, or equivalent) should not be considered as specifications, but as an additional help for setting up the label.

4.1 Conceptual picture

Scale 2:1

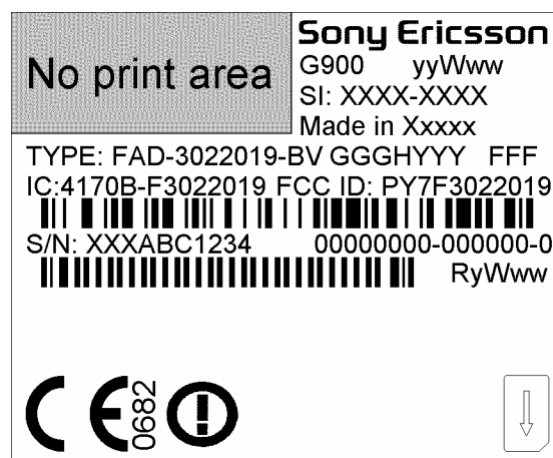

Position of label

The view below is taken from the back side of the mobile telephone. The label is located below the battery lid.

