

**TEST REPORT
FROM
RFI GLOBAL SERVICES LTD**

Test of: CDMA SOL21


To: OET Bulletin 65 Supplement C: (2001-01)

FCC ID: PY7PM-0050

**Test Report Serial No:
RFI-SAR-RP87207JD02A V3.0**

Version 3.0 Supersedes All Previous Versions

**This Test Report Is Issued Under The Authority
Of Chris Guy, Head of Global Approvals:**



(APPROVED SIGNATORY)

Checked By: Richelieu Quoi



(APPROVED SIGNATORY)

Issue Date:

12 September 2012

Test Dates:

23 July 2012 to 04 September 2012

This report is issued in portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields.

This report may not be reproduced other than in full, except with the prior written approval of RFI Global Services Ltd. The results in this report apply only to the sample(s) tested.

The Bluetooth® word mark and logos are owned by the *Bluetooth* SIG, Inc. and any use of such marks by RFI Global Services Ltd. is under license. Other trademarks and trade names are those of their respective owners.

RFI Global Services Ltd,

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG, UK

Tel. +44 (0) 1256 312000 Fax +44 (0) 1256 312001

web: www.rfi-global.com email: contactus@rfi-global.com

This page has been left intentionally blank.

TABLE OF CONTENTS

1. Customer Information.....	4
2. Equipment Under Test (EUT).....	5
3. Test Specification, Methods and Procedures	15
4. Deviations from the Test Specification	17
5. Operation and Configuration of the EUT during Testing	18
6. Summary of Test Results	21
7. Measurements, Examinations and Derived Results	25
8. Measurement Uncertainty	53
Appendix 1. Test Equipment Used	60
Appendix 2. Measurement Methods	64
Appendix 3. SAR Distribution Scans.....	66
Appendix 4. Photographs.....	187
Appendix 5. System Check	221
Appendix 6. Simulated Tissues.....	231
Appendix 7. DAS4 System Details.....	232

1. Customer Information

Company Name:	Sony Mobile Communications AB
Address:	Nya Vattentorget 22188 Lund Sweden

2. Equipment Under Test (EUT)

2.1. Identification of Equipment Under Test (EUT)

Description:	Mobile Handset
Brand Name:	Sony
Model Name or Number:	CDMA SOL21
Serial Number:	CB5A1K9RSP
IMEI Number:	00440245-036251-6
Hardware Version Number:	AP1
Software Version Number:	9.0.B.0.59
Hardware Revision of GSM Module:	None Specified
Software Revision of GSM Module:	None Specified
FCC ID Number:	PY7PM-0050
Country of Manufacture:	China
Date of Receipt:	18th July 2012

Note(s):

This sample was used to perform WWAN SAR testing on bands PCS1900, UMTS FDD 2 only. The sample supports simultaneous transmission with the WWAN and WLAN antenna > 5 cm apart. Wireless Personal Hotspot is also supported and was evaluated as per KDB 941225 D06 "Hot Spot SAR v01"

Description:	Mobile Handset
Brand Name:	Sony
Model Name or Number:	CDMA SOL21
Serial Number:	CB5A1K9RQ5
IMEI Number:	00440245-036265-6
Hardware Version Number:	AP1
Software Version Number:	9.0.B.0.59
Hardware Revision of GSM Module:	None Specified
Software Revision of GSM Module:	None Specified
FCC ID Number:	PY7PM-0050
Country of Manufacture:	China
Date of Receipt:	18th July 2012

Note(s):

This sample was used to perform WWAN SAR testing on bands GSM850, UMTS FDD 5 only. The sample supports simultaneous transmission with the WWAN and WLAN antenna > 5 cm apart. Wireless Personal Hotspot is also supported and was evaluated as per KDB 941225 D06 "Hot Spot SAR v01"

Identification of Equipment Under Test (EUT) (Continued):

Description:	Mobile Handset
Brand Name:	Sony
Model Name or Number:	CDMA SOL21
Serial Number:	CB5A1K9RTZ
IMEI Number:	00440245-036255-7
Hardware Version Number:	AP1
Software Version Number:	s_atp_tsubasa_1_0_8_0_e
Hardware Revision of GSM Module:	None Specified
Software Revision of GSM Module:	None Specified
FCC ID Number:	PY7PM-0050
Country of Manufacture:	China
Date of Receipt:	18th July 2012

Note(s):

This sample was used to perform WLAN SAR testing only. The sample supports simultaneous transmission with the WWAN and WLAN antenna > 5 cm apart. Wireless Personal Hotspot is also supported and was evaluated as per KDB 941225 D06 "Hot Spot SAR v01"

Description:	Mobile Handset
Brand Name:	Sony
Model Name or Number:	CDMA SOL21
Serial Number:	CB5A1KA6AS
IMEI Number:	00440245-037256-4
Hardware Version Number:	AP1
Software Version Number:	9.0.B.0.59
Hardware Revision of GSM Module:	None Specified
Software Revision of GSM Module:	None Specified
FCC ID Number:	PY7PM-0050
Country of Manufacture:	China
Date of Receipt:	18th July 2012

Note(s):

This sample was used to perform WWAN conducted power measurements only. The sample supports simultaneous transmission with the WWAN and WLAN antenna > 5 cm apart. Wireless Personal Hotspot is also supported and was evaluated as per KDB 941225 D06 "Hot Spot SAR v01"

Identification of Equipment Under Test (EUT) (Continued):

Description:	Mobile Handset
Brand Name:	Sony
Model Name or Number:	CDMA SOL21
Serial Number:	CB5A1K9RQP
IMEI Number:	00440245-036266-4
Hardware Version Number:	AP1
Software Version Number:	s_atp_tsubasa_1_0_8_0_e
Hardware Revision of GSM Module:	None Specified
Software Revision of GSM Module:	None Specified
FCC ID Number:	PY7PM-0050
Country of Manufacture:	China
Date of Receipt:	18th July 2012

Note(s):

This sample was used to perform WLAN conducted power measurements only. The sample supports simultaneous transmission with the WWAN and WLAN antenna > 5 cm apart. Wireless Personal Hotspot is also supported and was evaluated as per KDB 941225 D06 "Hot Spot SAR v01"

2.2. Description of EUT

The Equipment Under Test is a Smart Phone with GSM 2G Quad Band, 3G Tri band, LTE Dual Band, CDMA Dual Band and Wi-Fi bands. The EUT has GPRS Class 12 / EDGE Class 12, UMTS FDD 1, 2, 5 With HSPA, LTE Band 11, 18, CDMA JP BC0, CDMA JP BC6, WLAN 802.11 a/b/g/n, *Bluetooth Class 1*, Personal hotspot mode and RFID.

2.3. Modifications Incorporated in the EUT

EUT (IMEI: 00440245-036251-6) is used to perform PCS1900, UMTS FDD 2 SAR measurements only.

EUT (IMEI: 00440245-036265-6) is used to perform GSM850, UMTS FDD 5 SAR measurements only.

EUT (IMEI: 00440245-036255-7) is used to perform WLAN SAR measurements only.

EUT (IMEI: 00440245-037256-4) is used to perform WWAN conducted power measurements only.

EUT (IMEI: 00440245-036266-4) is used to perform WLAN conducted power measurements only.

2.4. Accessories

Description:	Personal Hands-Free Kit (PHF)
Brand Name:	Sony
Model Name or Number:	MH410c
Serial Number:	11371A1B000AC38
Cable Length and Type:	~1.2 m
Country of Manufacture:	None Stated
Connected to Port	3.5mm Audio jack and custom type

Description:	Memory Card
Brand Name:	None Stated (Generic)
Model Name or Number:	None Stated
Serial Number:	None Stated
Cable Length and Type:	Not Applicable
Country of Manufacture:	China
Connected to Port	Dedicated Micro SD Slot

Description:	Battery
Brand Name:	Sony
Model Name or Number:	BA800
Serial Number:	000683SWGNS
Cable Length and Type:	Not Applicable
Country of Manufacture:	China
Connected to Port	5-pin contact

2.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	Wireless Communication Test Set
Brand Name:	Agilent
Model Name or Number:	8960 Series 10
Serial Number:	GB46311280
Cable Length and Type:	~4.0m Utiflex Cable
Connected to Port:	RF (Input / Output) Air Link

Description:	Wireless Communication Test Set
Brand Name:	Agilent
Model Name or Number:	8960 Series 10
Serial Number:	GB462000666
Cable Length and Type:	~4.0m Utiflex Cable
Connected to Port:	RF (Input / Output) Air Link

Description:	Radio Communication Analyzer
Brand Name:	Anritsu
Model Name or Number:	MT8820C
Serial Number:	6200938937
Cable Length and Type:	~4.0m Utiflex Cable
Connected to Port:	RF (Input / Output) Air Link

2.6. Additional Information Related to Testing

Equipment Category	GSM/GPRS850, PCS/GPRS1900, UMTS FDD 2, 5, WiFi802.11 a/b/g/n	
Type of Unit	Portable Transceiver	
Intended Operating Environment:	Within GSM, UMTS and WiFi Coverage	
Transmitter Maximum Output Power Characteristics:	GSM850	Communication Test Set was configured to allow the EUT to transmit at a maximum power using Power Control Level (PCL) setting of 5.
	PCS1900	Communication Test Set was configured to allow the EUT to transmit at a maximum power using Power Control Level (PCL) setting of 0.
	UMTS Band 2	Communication Test Set configured to allow to EUT to transmit at a maximum power as per KDB 941225 D01.
	UMTS Band 5	Communication Test Set configured to allow to EUT to transmit at a maximum power as per KDB 941225 D01.
	WiFi802.11b/g/n	Test Software was used to configure the EUT to transmit at a maximum power of up to 13.8dBm.
	5.0 GHz Wi-Fi 802.11a/n (HT20 / HT40)	:= 7.2 dBm
	Bluetooth	:=8 dBm
	Transmitter Frequency Range:	GSM850
PCS1900		1850 to 1910 MHz
UMTS Band 2		1852 to 1908 MHz
UMTS Band 5		826 to 847 MHz
WiFi802.11b/g/n		2412 to 2462 MHz
5.0 GHz Wi-Fi 802.11a/n (HT20 / HT40)		5180 to 5825 MHz

Additional Information Related to Testing (Continued):

Transmitter Frequency Allocation of EUT When Under Test:	Channel Number	Channel Description	Frequency (MHz)
	128	Low	824.2
	190	Middle	836.6
	251	High	848.8
	512	Low	1850.2
	661	Middle	1880.0
	810	High	1909.8
	9262	Low	1852.4
	9400	Middle	1880.0
	9538	High	1907.6
	4132	Low	826.4
	4183	Middle	836.6
	4233	High	846.6
	1	Low	2412.0
	6	Middle	2437.0
	11	High	2462.0

Additional Information Related to Testing (Continued)

Transmitter Frequency Allocation of EUT When Under Test:	Channel Number	Frequency (MHz)
	36	5180.0
	38	5190.0
	40	5200.0
	44	5220.0
	46	5230.0
	48	5240.0
	52	5260.0
	54	5270.0
	56	5280.0
	60	5300.0
	62	5310.0
	64	5320.0
	100	5500.0
	102	5510.0
	104	5520.0
	108	5540.0
	110	5550.0
	112	5560.0
	116	5580.0
	118	5590.0
	120	5600.0
	124	5620.0
	126	5630.0
	128	5640.0
	132	5660.0
	134	5670.0
	136	5680.0
	140	5700.0
	149	5745.0
	151	5755.0
	153	5765.0
	157	5785.0
	159	5795.0
	161	5805.0
	165	5825.0

Additional Information Related to Testing (Continued):

Modulation(s):	GMSK (GSM/ GPRS): 217 Hz QPSK(UMTS / HSDPA/HSPA):0Hz DBPSK, CCK (Wi-Fi): 0 Hz
Modulation Scheme (Crest Factor):	GSMK (GSM): 8.3 GMSK (GPRS): 4 DBPSK, CCK (Wi-Fi): 1 QPSK(UMTS FDD / HSDPA): 1
Antenna Type:	Internal integral
Antenna Length:	Unknown
Number of Antenna Positions:	2 fixed (WWAN and WLAN/ <i>Bluetooth</i>)
Power Supply Requirement:	3.7V
Battery Type(s):	Li-ion

3. Test Specification, Methods and Procedures

3.1. Test Specification

Reference:	OET Bulletin 65 Supplement C: (2001-01)
Title:	Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields.
Purpose of Test:	To determine whether the equipment met the basic restrictions as defined in OET Bulletin 65 Supplement C: (2001-01) using the SAR averaging method as described in the test specification above.

3.2. Methods and Procedures Reference Documentation

The methods and procedures used were as detailed in:

Federal Communications Commission, "Evaluating compliance with FCC Guidelines for human exposure to radio frequency electromagnetic fields", OET Bulletin 65 Supplement C, FCC, Washington, D.C, 20554, 2001.

Thomas Schmid, Oliver Egger and Neils Kuster, "Automated E-field scanning system for dosimetric assessments", IEEE Transaction on microwave theory and techniques, Vol. 44, pp. 105-113, January 1996.

Neils Kuster, Ralph Kastle and Thomas Schmid, "Dosimetric evaluation of mobile communications equipment with know precision", IEICE Transactions of communications, Vol. E80-B, No.5, pp. 645-652, May 1997.

EN 62209-1: 2006

Title: Basic standard for the measurement of specific absorption rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz).

EN 62209-2:2010

Human exposure to radio frequency fields from handheld and body mounted wireless communication devices — Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz) (IEC 62209-2:2010)

KDB 248227 D01 "SAR measurements for 802.11a/b/g v01r02"

KDB 447498 D01 "Mobile Portable RF Exposure v04"

KDB 648474 D01 SAR Handsets Multi Xmitter and Ant v01r05"

KDB 648474 D02 SAR Polcy Handsts Multi Xmitter Ant v01r01

KDB 941225 D01 SAR test for 3G devices v02

KDB 941225 D03 " SAR Test Reduction GSM/GPRS/EDGE v01"

KDB 941225 D06 "Hot Spot SAR v01"

Methods and Procedures Reference Documentation (Continued)

The version of DASY system used by RFI for SAR measurements is v4.7.

The SAR probe for the DASY v4.4 and higher has a validity of +/- 100 MHz from the spot frequency at which the system is calibrated.

The system validation performed at 900 MHz is valid for 800 MHz to 1000 MHz which covers the 850 MHz band. The probe calibration for SN3814 was performed at the spot frequencies of 750 MHz and 900 MHz. The SAR software selects the conversion factor based on the following attributes; 1. The operating frequency 2. The measured permittivity imported to the software and 3. The measured conductivity imported to the software.

The 900 MHz system check is applicable for the 850 band as this is within 100 MHz of the of the 850 MHz spot frequency.

As per FCC KDB pub 450824 for SAR probe calibration; The following procedures are recommended for DUT measurements at 150 MHz to 3 GHz to minimize probe calibration and tissue dielectric parameter discrepancies. Measurements exceeding 50 % of these intervals, in this case +/- 50 MHz, EUT frequency greater than or equal to 300 MHz, shall apply method 1 of the steps.

1) When the actual tissue dielectric parameters used for probe calibration are available the differences for relative permittivity and conductivity between probe calibration and routine measurements should each be less than or equal to 5 % while also satisfying the required +/- 5 % tolerances in target dielectric parameters.

The simulation liquid used satisfies both 835 MHz and 900 MHz target values for all channels in the GSM850 band. The SAR probe coverage and conversion factor has been calibrated to ensure this condition is met and the appropriate conversion factor is used in the frequency range for up to +/- 100 MHz.

3.3. Definition of Measurement Equipment

The measurement equipment used complied with the requirements of the standards referenced in the methods & procedures section above. Appendix 1 contains a list of the test equipment used.

4. Deviations from the Test Specification

Test was performed as per KDB 648474 D01 "SAR Handsets Multi Xmitter and Ant v01r05", KDB 941225 D01/D03 " SAR Test Reduction GSM/GPRS/EDGE v01", KDB 941225 D01 "SAR test for 3G v02", KDB 248227 D01 "SAR measurements for 802.11a/b/g v01r02" and KDB 941225 D06 "Hot Spot SAR v01" according to the handset procedures in IEEE Std 1528-2003 and OET Bulletin 65 Supplement C 01-01. The assessment for Personal Wireless Hotspot was also evaluated as per the FCC KDB 941225 D06 "Hot Spot SAR v01".

For technologies bands supporting personal hotspot mode, SAR was evaluated on all the sides and surfaces within 25mm of the transmitting antenna (WWAN or WLAN) as per FCC KDB 941225 D06 "Hot Spot SAR v01".

SAR test was performed in the middle channels for WWAN and WLAN. The worst case configuration for both Head and Body test was evaluated in the low and high channels.

The measured maximum conducted power for WLAN 2.45GHz 802.11g/n is 13.8dBm (equivalent to 24 mW) and for WLAN 5GHz is 7.2dBm (equivalent to 5.3 mW).

As per FCC kdb pub. *SAR Handsets Multi Xmitter and Ant, v01r05*; when there is simultaneous transmission occurring, stand- alone SAR evaluation is not required when the output power measured is $\leq 2 \cdot \text{Pref}$ for the particular band and antenna separation is $\geq 5.0\text{cm}$ from other antenna.

Output power thresholds for Unlicensed Transmitters

Pref	2.45	5.15 – 5.35	5.47	GHz
	12	6	5	mW

As per table 1 above, since output power measured for;

5.15 to 5.35 GHz maximum output power = 4.68mW < 12mW (2*Pref)

5.47 to 5.85 GHz maximum output power = 5.25mW < 10mW (2*Pref)

Stand Alone SAR evaluation is not required for 5.0 GHz WLAN802.11a/n modes.

GPRS class12 / uplink setup of 1-uplink, 2-uplink, 3-uplink and 4-uplink were all evaluated to find the setting with the highest power reference point (unit v/m) as per the DASY4 system. 2-uplink was found to give the highest power reference point measurement on the DASY4 system (unit v/m). All settings were performed with the device in a fixed position Back facing phantom at 0mm separation to ensure there were no positioning errors. The following values were measured relative to the uplink settings:

GPRS Mode	GPRS850 Power (v/m)	GPRS1900 Power (v/m)
1 uplink	19.06	9.13
2 uplink	22.58	10.68
3 uplink	22.03	10.30
4 uplink	22.08	10.42

Note: Power reference point measurements are from the DASY4 system and used to check the device power drift although the units are v/m. For informational purpose to ensure the worst case uplink time slot is also verified by the DASY4 SAR system, this was use as per above comment at a fixed point.

5. Operation and Configuration of the EUT during Testing

5.1. Operating Modes

The EUT was tested in the following operating mode(s) unless otherwise stated:

- GSM850 – Voice allocated mode with Communication Test Set configured to allow the EUT to transmit at a maximum power using Power Control Level (PCL) setting of 5.
- GPRS850 – Data allocated mode with Communication Test Set configured to allow the EUT to transmit at a maximum power using Power Control Level (PCL) setting of 5. Tested using 2 Uplink time slots with CS1 for GPRS.
- PCS1900 – Voice allocated mode with Communication Test Set configured to allow the EUT to transmit at a maximum power using Power Control Level (PCL) setting of 0.
- GPRS1900 – Data allocated mode with Communication Test Set configured to allow the EUT to transmit at a maximum power using Power Control Level (PCL) setting of 0. Tested using 2 Uplink time slots with CS1 for GPRS.

GSM850 – Power Table Settings used for Test Set	
Power Control Level PCL	Nominal Power (dBm)
0 ... 2	39
3	37
4	35
5	33
6	31
7	29
8	27
9	25
10	23
11	21
12	19
13	17
14	15
15	13
16	11
17	9
18	7
19 ... 31	5

PCS1900 – Power Table Settings used for Test Set	
Power Control Level PCL	Nominal Power (dBm)
22 ... 29	Reserved
30	33
31	32
0	30
1	28
2	26
3	24
4	22
5	20
6	18
7	16
8	14
9	12
10	10
11	8
12	6
13	4
14	2
15	0
16 ... 21	Reserved

- UMTS FDD 2, 5 Call allocated mode with Communication Test Set configured to allow the EUT to transmit at a maximum as per KDB 941225 D01.
- UMTS FDD 2, 5 - RMC 12.2kbps + HSUPA With Test loop mode 1 and TPC bits configured to all "1"s", Sub-test 5, AG Index set to 21 and E-TFCI set to 81 with Communication Test Set configured to allow to EUT to transmit at a maximum power as per KDB 941225 D01.
- UMTS FDD 2, 5 - RMC 12.2kbps + HSDPA With Test loop mode 1 and TPC bits configured to all "1"s", Sub-test 1 with Communication Test Set configured to allow to EUT to transmit at a maximum power as per KDB 941225 D01.

Operating Modes (Continued)

- 2.4 GHz WiFi802.11b/g/n Data allocated mode using 'HyperTerminal' software to excise mode 'b', 'g' and 'n', with maximum power of up to 13.8 dBm for 'b' mode and *13.0 dBm for 'g' and 12.0 dBm for 'n' modes.
- 5.0 GHz WiFi802.11a/n Data allocated mode using 'HyperTerminal' software to excise mode 'a' and 'n', with maximum power of up to 6.7 dBm for 'a' mode and 7.2 dBm for 'n' modes

5.2. Configuration and Peripherals

The EUT was tested in the following configuration(s) unless otherwise stated:

- Standalone fully charged battery powered.
- Head and Body-worn configurations were evaluated.
- The applied FCC body-worn Personal Hotspot orientations where the corresponding edge(s) closest to the user with the most conservative exposure condition were all evaluated at 10 mm from the body. For configuration that did not overlap with Personal hotspot, SAR evaluation was performed at 15mm separation.
- GPRS class 12: setup for 1-uplink, 2-uplink, 3-uplink and 4-uplink were evaluated to find the setting with the highest power reference measurements. 2-uplink was found to give the highest power reference measurement on the DASY4 system. All settings were performed with the device in a fixed position 'Back facing phantom' at 0mm separation to ensure there were no positioning errors.
- GSM, GPRS and EDGE power measurement were all measured as per FCC pubs. 941225 D03 and 941225 D04. Although power reduction was allowed SAR test was performed on GPRS using GMSK. Test reduction was applied to EDGE using GMSK and 8PSK modulation scheme.

Head Configuration

- a) The EUT was placed in a normal operating position with the centre of the ear-piece aligned with the ear canal on the phantom.
- b) With the ear-piece touching the phantom the centre line of the EUT was aligned with an imaginary plane (X and Y axis) consisting of three lines connecting both ears and the mouth.
- c) For the cheek position the EUT was gradually moved towards the cheek until any point of the mouth-piece or keypad touched the cheek.
- d) For the tilted position the EUT was positioned as for the cheek position, and then the horizontal angle was increased by fifteen degrees (the phone keypad was moved away from the cheek by fifteen degrees).
- e) SAR measurements were evaluated at maximum power and the unit was operated for an appropriate period prior to the evaluation in order to minimise the drift.
- f) The device was keyed to operate continuously in the transmit mode for the duration of the test.
- g) The location of the maximum spatial SAR distribution (hot spot) was determined relative to the EUT and its antenna.
- h) The EUT was transmitting at full power throughout the duration of the test powered by a fully charged battery.

Body Configuration

- a) The EUT was placed in a normal operating position where the centre of EUT was aligned with the centre reference point on the flat section of the 'SAM' phantom.
- b) With the EUT touching the phantom at an imaginary centre line. The EUT was aligned with a marked plane (X and Y axis) consisting of two lines.
- c) For the touch-safe position the EUT was gradually moved towards the flat section of the 'SAM' phantom until any point of the EUT touched the phantom.
- d) For position(s) greater than 0mm separation the EUT was positioned as per the touch-safe position, and then the vertical height was decreased/adjusted as required.
- e) SAR measurements were evaluated at maximum power and the unit was operated for an appropriate period prior to the evaluation in order to minimise the drift.
- f) The device was keyed to operate continuously in the transmit mode for the duration of the test.
- g) The location of the maximum spatial SAR distribution (hot spot) was determined relative to the EUT and its antenna.
- h) The EUT was transmitting at full power throughout the duration of the test powered by a fully charged battery.

6. Summary of Test Results

Test Name	Specification Reference	Result
Specific Absorption Rate-GSM 850 Head Configuration 1g	OET Bulletin 65 Supplement C: (2001-01)	Complied
Specific Absorption Rate-GPRS 850 Hotspot Mode Configuration 1g	OET Bulletin 65 Supplement C: (2001-01)	Complied
Specific Absorption Rate-GSM 850 Body-Worn Configuration 1g	OET Bulletin 65 Supplement C: (2001-01)	Complied
Specific Absorption Rate-PCS 1900 Head Configuration 1g	OET Bulletin 65 Supplement C: (2001-01)	Complied
Specific Absorption Rate-GPRS 1900 Hotspot Mode Configuration 1g	OET Bulletin 65 Supplement C: (2001-01)	Complied
Specific Absorption Rate-PCS 1900 Body-Worn Configuration 1g	OET Bulletin 65 Supplement C: (2001-01)	Complied
Specific Absorption Rate-UMTS-FDD 2 Head Configuration 1g	OET Bulletin 65 Supplement C: (2001-01)	Complied
Specific Absorption Rate-UMTS-FDD 2 Hotspot Mode Configuration 1g	OET Bulletin 65 Supplement C: (2001-01)	Complied
Specific Absorption Rate-UMTS-FDD 2 Body-Worn Configuration 1g	OET Bulletin 65 Supplement C: (2001-01)	Complied
Specific Absorption Rate-UMTS-FDD 5 Head Configuration 1g	OET Bulletin 65 Supplement C: (2001-01)	Complied
Specific Absorption Rate-UMTS-FDD 5 Hotspot Mode Configuration 1g	OET Bulletin 65 Supplement C: (2001-01)	Complied
Specific Absorption Rate-UMTS-FDD 5 Body-Worn Configuration 1g	OET Bulletin 65 Supplement C: (2001-01)	Complied
Specific Absorption Rate-Wi-Fi 2450 Head Configuration 1g	OET Bulletin 65 Supplement C: (2001-01)	Complied
Specific Absorption Rate-Wi-Fi 2450 Hotspot Mode Configuration 1g	OET Bulletin 65 Supplement C: (2001-01)	Complied
Specific Absorption Rate-Wi-Fi 2450 Body-Worn Configuration 1g	OET Bulletin 65 Supplement C: (2001-01)	Complied

SAR Individual Transmitter Evaluation						
device, mode	Frequency, (MHz)	Phantom Configuration	P _x (mW)	P _{REF} (mW)	single SAR, W/kg	Remarks
WWAN, GSM	850	Back	347	60/f	1.050	Routine Evaluation
WWAN, GSM	1900	Back	178	60/f	0.704	Routine Evaluation
WWAN, UMTS	850	Right Hand Side	282	60/f	1.080	Routine Evaluation
WWAN, UMTS	1900	Bottom	204	60/f	1.050	Routine Evaluation
WLAN, WiFi802.11	2450	Touch Right	24	60/f	0.365	Routine Evaluation
WLAN, WiFi802.11g/n	2450	N/A	~20	12	:=0	{PBT ≤ 2PREF} {dWWAN, WLAN > 5cm}
WLAN, WiFi802.11a/n	5150 -5350	N/A	~5	6	:=0	{PBT ≤ 2PREF} {dWWAN, WLAN > 5cm}
WLAN, WiFi802.11a/n	5470 -5850	N/A	~4	5	:=0	{PBT ≤ 2PREF} {dWWAN, WLAN > 5cm}
BT, Bluetooth	2400	N/A	~ 6.31	12	:=0	{PBT ≤ 2PREF} {dWWAN, BT > 5cm}

Note(s):

1. Simultaneous transmission was not evaluated as the sum of the individual SAR for WWAN and WLAN was < 1.6 W/kg.
2. Bluetooth transmitter thresholds output power “P_{Ref} = 12 mW as listed in KDB 648474.
3. P_x: power level measured by RFI.
4. Single SAR value measured by RFI.
5. The “Antenna-to-Antenna distance and Antenna-to-User distance were provided by the customer.

SAR Simultaneous Transmitter Evaluation					
(x,y)	D(x,y) cm	L(x,y) cm	SPLSR _{xy}	Sim-Tx SAR	Remarks
(WWAN _{GSM} , BT)	>5	N/A	N/A	N/A	{no stand-alone SAR for BT}
(WWAN _{GSM} , Wi-Fi)	>5	N/A	N/A	N/A	{D(x,y) > 5 } & {Σ _{WWAN, WLAN} < 1.6 W/kg}

6.1. Location of Tests

All the measurements described in this report were performed at the premises of RFI Global Services Ltd, Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG United Kingdom

6.2. Simultaneous Transmission SAR Analysis

Head Configuration 1g – Worst cases measurements

EUT Position	Measured SAR 1g (W/Kg)					
	WWAN				WLAN	Sum of WWAN & WLAN
	GSM850	PCS1900	UMTS FDD 2	UMTS FDD 5	Wi-Fi	
Touch Left	0.662				0.167	0.829
Touch Right	0.774				0.365	1.139
Touch Left		0.551			0.167	0.718
Touch Right		0.404			0.365	0.769
Touch Left			0.914		0.167	1.081
Touch Right			0.921		0.365	1.286
Touch Left				0.740	0.167	0.907
Touch Right				0.927	0.365	1.292

Note(s):

1. Simultaneous transmission was not evaluated as the sum of the individual SAR for WWAN and WLAN was < 1.6 W/kg.

Simultaneous Transmission SAR Analysis (Continued)
Hotspot Mode Configuration 1g – Worst cases measurements

EUT Position	Measured SAR 1g (W/Kg)					Sum of WWAN & WLAN
	WWAN			WLAN	Wi-Fi	
	GSM850	PCS1900	UMTS FDD 2	UMTS FDD 5		
Front	1.010				0.080	1.090
Back	1.050				0.089	1.139
Left Hand Side	0.902				0.059	0.961
Right Hand Side	1.020				0.059	1.079
Bottom	0.284					0.284
Top					0.064	0.064
Front		0.499			0.080	0.579
Back		0.704			0.089	0.793
Left Hand Side		0.409			0.059	0.468
Right Hand Side		0.098			0.059	0.157
Bottom		0.580				0.580
Top					0.064	0.064
Front			0.702		0.080	0.782
Back			0.931		0.089	1.020
Left Hand Side			0.574		0.059	0.633
Right Hand Side			0.165		0.059	0.224
Bottom			1.050			1.050
Top					0.064	0.064
Front				0.854	0.080	0.934
Back				0.973	0.089	1.062
Left Hand Side				0.946	0.059	1.005
Right Hand Side				1.080	0.059	1.139
Bottom				0.309		0.309
Top					0.064	0.064

Note(s):

1. Simultaneous transmission was not evaluated as the sum of the individual SAR for WWAN and WLAN was < 1.6 W/kg.

7. Measurements, Examinations and Derived Results

7.1. General Comments

This section contains test results only.

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to section 8 for details of measurement uncertainties.

7.2. Test Results

For All SAR measurement in this report the SAR limit tested to is 1.6 W/kg

7.2.1. Specific Absorption Rate - GSM 850 Head Configuration 1g**Test Summary:**

Tissue Volume:	1g
Maximum Level (W/kg):	0.774

Environmental Conditions:

Temperature Variation in Lab (°C):	24.0 to 24.0
Temperature Variation in Liquid (°C):	23.5 to 23.5

Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Meas. Burst Avg. Power (dBm)	Power Back-off (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Touch	Left	190	24.4	N/A	0.662	1	GMSK
Tilt	Left	190	24.4	N/A	0.450	1	GMSK
Touch	Right	190	24.4	N/A	0.723	1	GMSK
Tilt	Right	190	24.4	N/A	0.412	1	GMSK
Touch	Right	128	24.6	N/A	0.774	1	GMSK
Touch	Right	251	24.4	N/A	0.664	1	GMSK

Note(s):

1. Voice Mode

**7.2.2. Specific Absorption Rate - GPRS 850 Hotspot Mode Configuration 1g
Test Summary:**

Tissue Volume: 1g

Maximum Level (W/kg): 1.050

Environmental Conditions:

Temperature Variation in Lab (°C): 24.0 to 24.0

Temperature Variation in Liquid (°C): 23.4 to 23.4

Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Meas. Burst Avg. Power (dBm)	Power Back-off (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Front of EUT Facing Phantom	Flat (SAM)	190	25.4	N/A	1.010	1, 2	GMSK
Front of EUT Facing Phantom	Flat (SAM)	128	25.4	N/A	1.000	1, 2	GMSK
Front of EUT Facing Phantom	Flat (SAM)	251	25.4	N/A	0.897	1, 2	GMSK
Back of EUT Facing Phantom	Flat (SAM)	190	25.4	N/A	0.992	1, 2	GMSK
Back of EUT Facing Phantom	Flat (SAM)	128	25.4	N/A	1.050	1, 2	GMSK
Back of EUT Facing Phantom	Flat (SAM)	251	25.4	N/A	0.948	1, 2	GMSK
Left Hand Side of EUT Facing Phantom	Flat (SAM)	190	25.4	N/A	0.802	1, 2	GMSK
Left Hand Side of EUT Facing Phantom	Flat (SAM)	128	25.4	N/A	0.902	1, 2	GMSK
Left Hand Side of EUT Facing Phantom	Flat (SAM)	251	25.4	N/A	0.632	1, 2	GMSK

Specific Absorption Rate - GPRS 850 Hotspot Mode Configuration 1g (Continued):

EUT Position	Phantom Configuration	Channel Number	Uplink Meas. Burst Avg. Power (dBm)	Power Back-off (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Right Hand Side of EUT Facing Phantom	Flat (SAM)	190	25.4	N/A	0.999	1, 2	GMSK
Right Hand Side of EUT Facing Phantom	Flat (SAM)	128	25.4	N/A	1.020	1, 2	GMSK
Right Hand Side of EUT Facing Phantom	Flat (SAM)	251	25.4	N/A	0.967	1, 2	GMSK
Bottom of EUT Facing Phantom	Flat (SAM)	190	25.4	N/A	0.284	1, 2	GMSK

Note(s):

1. Data - SAR measurements were performed using 2 uplink timeslots.
2. EUT supports Hotspot: As per FCC KDB procedure SAR measurements were performed with the EUT at a separation distance of 10mm from the 'SAM' phantom flat section.

*KDB 941225 - SAR is not required for EDGE technology when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding GPRS channels.

**7.2.3. Specific Absorption Rate - GSM 850 Body-Worn Configuration 1g
Test Summary:**

Tissue Volume:	1g
-----------------------	----

Maximum Level (W/kg):	0.711
------------------------------	-------

Environmental Conditions:

Temperature Variation in Lab (°C):	24.0 to 24.0
---	--------------

Temperature Variation in Liquid (°C):	22.6 to 22.6
--	--------------

Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Meas. Burst Avg. Power (dBm)	Power Back-off (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Back of EUT Facing Phantom	Flat (SAM)	190	24.4	N/A	0.691	1, 2	GMSK
Back of EUT Facing Phantom	Flat (SAM)	128	24.6	N/A	0.711	1, 2	GMSK
Back of EUT Facing Phantom	Flat (SAM)	251	24.4	N/A	0.624	1, 2	GMSK
Back of EUT Facing Phantom With PHF	Flat (SAM)	128	24.6	N/A	0.705	1, 2, 3	GMSK

Note(s):

1. Voice - Back of EUT is worst case and most conservative configuration of GPRS hotspot mode and is applied to GSM Body-worn.
2. SAR measurements were performed with the closest edge of the EUT at a separation distance of 15mm from the 'SAM' phantom flat section.
3. Personal Hands-Free Kit attached, using the worst-case configuration acquired.

7.2.4. Specific Absorption Rate - PCS 1900 Head Configuration 1g Test Summary:

Tissue Volume: 1g

Maximum Level (W/kg): 0.551

Environmental Conditions:

Temperature Variation in Lab (°C): 24.0 to 24.0

Temperature Variation in Liquid (°C): 22.5 to 22.5

Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Meas. Burst Avg. Power (dBm)	Power Back-off (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Touch	Left	661	21.4	N/A	0.512	1	GMSK
Tilt	Left	661	21.4	N/A	0.328	1	GMSK
Touch	Right	661	21.4	N/A	0.404	1	GMSK
Tilt	Right	661	21.4	N/A	0.149	1	GMSK
Touch	Left	512	21.5	N/A	0.471	1	GMSK
Touch	Left	810	21.3	N/A	0.551	1	GMSK

Note(s):

1. Voice

**7.2.5. Specific Absorption Rate - GPRS 1900 Hotspot Mode Configuration 1g
Test Summary:**

Tissue Volume:	1g
Maximum Level (W/kg):	0.704

Environmental Conditions:

Temperature Variation in Lab (°C):	24.0 to 24.0
Temperature Variation in Liquid (°C):	22.2 to 22.2

Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Meas. Burst Avg. Power (dBm)	Power Back-off (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Front of EUT Facing Phantom	Flat (SAM)	661	22.5	N/A	0.499	1, 2	GMSK
Back of EUT Facing Phantom	Flat (SAM)	661	22.5	N/A	0.644	1, 2	GMSK
Left Hand Side of EUT Facing Phantom	Flat (SAM)	661	22.5	N/A	0.409	1, 2	GMSK
Right Hand Side of EUT Facing Phantom	Flat (SAM)	661	22.5	N/A	0.098	1, 2	GMSK
Bottom of EUT Facing Phantom	Flat (SAM)	661	22.5	N/A	0.580	1, 2	GMSK
Back of EUT Facing Phantom	Flat (SAM)	512	22.4	N/A	0.648	1, 2	GMSK
Back of EUT Facing Phantom	Flat (SAM)	810	22.5	N/A	0.704	1, 2	GMSK

Note(s):

1. Data - SAR measurements were performed using 2 uplink timeslots.
2. EUT supports Hotspot: As per FCC KDB procedure SAR measurements were performed with the EUT at a separation distance of 10mm from the 'SAM' phantom flat section.

*KDB 941225 - SAR is not required for EDGE technology when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding GPRS channels.

7.2.6. Specific Absorption Rate - PCS 1900 Body-Worn Configuration 1g Test Summary:

Tissue Volume:	1g
Maximum Level (W/kg):	0.292
Environmental Conditions:	
Temperature Variation in Lab (°C):	24.0 to 24.0
Temperature Variation in Liquid (°C):	22.2 to 22.2

Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Meas. Burst Avg. Power (dBm)	Power Back-off (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Back of EUT Facing Phantom	Flat (SAM)	661	21.4	N/A	0.218	1, 2	GMSK
Back of EUT Facing Phantom	Flat (SAM)	512	21.5	N/A	0.267	1, 2	GMSK
Back of EUT Facing Phantom	Flat (SAM)	810	21.3	N/A	0.292	1, 2	GMSK
Back of EUT Facing Phantom With PHF	Flat (SAM)	810	21.3	N/A	0.289	1, 2, 3	GMSK

Note(s):

1. Voice - Back of EUT is worst case and most conservative configuration of GPRS hotspot mode and is applied to GSM Body-worn.
2. SAR measurements were performed with the closest edge of the EUT at a separation distance of 15mm from the 'SAM' phantom flat section.
3. Personal Hands-Free Kit attached, using the worst-case configuration acquired.

7.2.7. Specific Absorption Rate - UMTS-FDD 2 Head Configuration 1g**Test Summary:**

Tissue Volume:	1g
-----------------------	----

Maximum Level (W/kg):	0.921
------------------------------	-------

Environmental Conditions:

Temperature Variation in Lab (°C):	23.0 to 23.0
---	--------------

Temperature Variation in Liquid (°C):	21.8 to 21.8
--	--------------

Results:

EUT Position	Phantom Configuration	Channel Number	Meas. Avg. Power (dBm)	Power Back-off (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Touch	Left	9400	23.0	N/A	0.914	1	QPSK
Touch	Left	9262	23.1	N/A	0.843	1	QPSK
Touch	Left	9538	23.0	N/A	0.802	1	QPSK
Tilt	Left	9400	23.0	N/A	0.621	1	QPSK
Touch	Right	9400	23.0	N/A	0.921	1	QPSK
Touch	Right	9262	23.1	N/A	0.912	1	QPSK
Touch	Right	9538	23.0	N/A	0.760	1	QPSK
Tilt	Right	9400	23.0	N/A	0.363	1	QPSK

Note(s):

1. Circuit Switch (CS) - RMC 12.2kbps with Test loop mode 1 and TPC bits configured to All "1's"

*KDB 941225 - SAR is not required for RMC+HSPA (HSDPA/HSUPA) channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding RMC channels.

**7.2.8. Specific Absorption Rate - UMTS-FDD 2 Hotspot Mode Configuration 1g
Test Summary:**

Tissue Volume:	1g
Maximum Level (W/kg):	1.050

Environmental Conditions:

Temperature Variation in Lab (°C):	24.0 to 24.0
Temperature Variation in Liquid (°C):	22.2 to 22.2

Results:

EUT Position	Phantom Configuration	Channel Number	Meas. Avg. Power (dBm)	Power Back-off (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Front of EUT Facing Phantom	Flat (SAM)	9400	23.0	N/A	0.702	1, 2	QPSK
Back of EUT Facing Phantom	Flat (SAM)	9400	23.0	N/A	0.912	1, 2	QPSK
Back of EUT Facing Phantom	Flat (SAM)	9262	23.1	N/A	0.931	1, 2	QPSK
Back of EUT Facing Phantom	Flat (SAM)	9538	23.0	N/A	0.731	1, 2	QPSK
Left Hand Side of EUT Facing Phantom	Flat (SAM)	9400	23.0	N/A	0.574	1, 2	QPSK
Right Hand Side of EUT Facing Phantom	Flat (SAM)	9400	23.0	N/A	0.165	1, 2	QPSK
Bottom of EUT Facing Phantom	Flat (SAM)	9400	23.0	N/A	0.927	1, 2	QPSK
Bottom of EUT Facing Phantom	Flat (SAM)	9262	23.1	N/A	1.050	1, 2	QPSK
Bottom of EUT Facing Phantom	Flat (SAM)	9538	23.0	N/A	0.765	1, 2	QPSK

Note(s):

1. Packet Switch (PS) - RMC 12.2kbps with Test loop mode 1 and TPC bits configured to All "1"s"
2. SAR measurements were performed with the closest edge of the EUT at a separation distance of 10mm from the 'SAM' phantom flat section.

*KDB 941225 - SAR is not required for RMC+HSPA (HSDPA/HSUPA) channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding RMC channels.

7.2.9. Specific Absorption Rate - UMTS-FDD 2 Body-Worn Configuration 1g Test Summary:

Tissue Volume:	1g
Maximum Level (W/kg):	0.695
Environmental Conditions:	
Temperature Variation in Lab (°C):	24.0 to 24.0
Temperature Variation in Liquid (°C):	22.2 to 22.2

Results:

EUT Position	Phantom Configuration	Channel Number	Meas. Avg. Power (dBm)	Power Back-off (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Back of EUT Facing Phantom	Flat (SAM)	9400	23.0	N/A	0.473	1, 2, 3, 5	QPSK
Back of EUT Facing Phantom	Flat (SAM)	9262	23.1	N/A	0.522	1, 2, 3, 5	QPSK
Back of EUT Facing Phantom	Flat (SAM)	9538	23.0	N/A	0.376	1, 2, 3, 5	QPSK
Back of EUT Facing Phantom With PHF	Flat (SAM)	9262	23.1	N/A	0.695	1, 2, 3, 4	QPSK

Note(s):

1. Circuit Switch (CS) - RMC 12.2kbps with Test loop mode 1 and TPC bits configured to All "1's"
2. Back of EUT, is worst case and most conservative configuration from Hotspot mode and used for Body-worn Configuration.
3. SAR measurements were performed with the closest edge of the EUT at a separation distance of 15mm from the 'SAM' phantom flat section.
4. Personal Hands-Free Kit attached, using the worst-case configuration acquired.
5. Although the above configuration for body-worn overlapped in hotspot mode at the customer request, assessment was performed at 15mm for body-worn configuration. This result can be considered as extra information.

*KDB 941225 - SAR is not required for RMC+HSPA (HSDPA/HSUPA) channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding RMC channels.

7.2.10. Specific Absorption Rate - UMTS-FDD 5 Head Configuration 1g Test Summary:

Tissue Volume: 1g

Maximum Level (W/kg): 0.927

Environmental Conditions:

Temperature Variation in Lab (°C): 24.0 to 24.0

Temperature Variation in Liquid (°C): 23.0 to 23.0

Results:

EUT Position	Phantom Configuration	Channel Number	Meas. Avg. Power (dBm)	Power Back-off (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Touch	Left	4183	24.5	N/A	0.740	1	QPSK
Tilt	Left	4183	24.5	N/A	0.471	1	QPSK
Touch	Right	4183	24.5	N/A	0.804	1	QPSK
Tilt	Right	4183	24.5	N/A	0.392	1	QPSK
Touch	Right	4132	24.4	N/A	0.924	1	QPSK
Touch	Right	4233	24.5	N/A	0.927	1	QPSK

Note(s):

1. Circuit Switch (CS) - RMC 12.2kbps with Test loop mode 1 and TPC bits configured to All "1's"

*KDB 941225 - SAR is not required for RMC+HSPA (HSDPA/HSUPA) channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding RMC channels.

**7.2.11. Specific Absorption Rate - UMTS-FDD 5 Hotspot Mode Configuration 1g
Test Summary:**

Tissue Volume: 1g

Maximum Level (W/kg): 1.080

Environmental Conditions:

Temperature Variation in Lab (°C): 24.0 to 24.0

Temperature Variation in Liquid (°C): 23.0 to 23.0

Results:

EUT Position	Phantom Configuration	Channel Number	Meas. Avg. Power (dBm)	Power Back-off (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Front of EUT Facing Phantom	Flat (SAM)	4183	24.5	N/A	0.814	1, 2	QPSK
Front of EUT Facing Phantom	Flat (SAM)	4132	24.4	N/A	0.852	1, 2	QPSK
Front of EUT Facing Phantom	Flat (SAM)	4233	24.5	N/A	0.854	1, 2	QPSK
Back of EUT Facing Phantom	Flat (SAM)	4183	24.5	N/A	0.973	1, 2	QPSK
Back of EUT Facing Phantom	Flat (SAM)	4132	24.4	N/A	0.946	1, 2	QPSK
Back of EUT Facing Phantom	Flat (SAM)	4233	24.5	N/A	0.942	1, 2	QPSK
Left Hand Side of EUT Facing Phantom	Flat (SAM)	4183	24.5	N/A	0.849	1, 2	QPSK
Left Hand Side of EUT Facing Phantom	Flat (SAM)	4132	24.4	N/A	0.946	1, 2	QPSK
Left Hand Side of EUT Facing Phantom	Flat (SAM)	4233	24.5	N/A	0.884	1, 2	QPSK

Specific Absorption Rate - UMTS-FDD 5 Hotspot Mode Configuration 1g (Continued):

EUT Position	Phantom Configuration	Channel Number	Meas. Avg. Power (dBm)	Power Back-off (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Right Hand Side of EUT Facing Phantom	Flat (SAM)	4183	24.5	N/A	1.050	1, 2	QPSK
Right Hand Side of EUT Facing Phantom	Flat (SAM)	4132	24.4	N/A	0.952	1, 2	QPSK
Right Hand Side of EUT Facing Phantom	Flat (SAM)	4233	24.5	N/A	1.080	1, 2	QPSK
Bottom of EUT Facing Phantom	Flat (SAM)	4183	24.5	N/A	0.309	1, 2	QPSK

Note(s):

1. Packet Switch (PS) - RMC 12.2kbps with Test loop mode 1 and TPC bits configured to All "1"s"
2. SAR measurements were performed with the closest edge of the EUT at a separation distance of 10mm from the 'SAM' phantom flat section.

*KDB 941225 - SAR is not required for RMC+HSPA (HSDPA/HSUPA) channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding RMC channels.

7.2.12. Specific Absorption Rate - UMTS-FDD 5 Body-Worn Configuration 1g Test Summary:

Tissue Volume: 1g

Maximum Level (W/kg): 0.775

Environmental Conditions:

Temperature Variation in Lab (°C): 24.0 to 24.0

Temperature Variation in Liquid (°C): 23.0 to 23.0

Results:

EUT Position	Phantom Configuration	Channel Number	Meas. Avg. Power (dBm)	Power Back-off (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Back of EUT Facing Phantom	Flat (SAM)	4183	24.5	N/A	0.757	1, 2, 3, 5	QPSK
Back of EUT Facing Phantom	Flat (SAM)	4132	24.4	N/A	0.757	1, 2, 3, 5	QPSK
Back of EUT Facing Phantom	Flat (SAM)	4233	24.5	N/A	0.775	1, 2, 3, 5	QPSK
Back of EUT Facing Phantom With PHF	Flat (SAM)	4233	24.5	N/A	0.600	1, 2, 3, 4	QPSK

Note(s):

1. Circuit Switch (CS) - RMC 12.2kbps with Test loop mode 1 and TPC bits configured to All "1's"
2. Back of EUT, is worst case and most conservative configuration from Hotspot mode and used for Body-worn Configuration.
3. SAR measurements were performed with the closest edge of the EUT at a separation distance of 15mm from the 'SAM' phantom flat section.
4. Personal Hands-Free Kit attached, using the worst-case configuration acquired.
5. Although the above configuration for body-worn overlapped in hotspot mode at the customer request, assessment was performed at 15mm for body-worn configuration. This result can be considered as extra information.

*KDB 941225 - SAR is not required for RMC+HSPA (HSDPA/HSUPA) channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding RMC channels.

**7.2.13. Specific Absorption Rate - Wi-Fi 2450 Head Configuration 1g
Test Summary:**

Tissue Volume:	1g
Maximum Level (W/kg):	0.365

Environmental Conditions:

Temperature Variation in Lab (°C):	24.0 to 24.0
Temperature Variation in Liquid (°C):	24.0 to 24.0

Results:

EUT Position	Phantom Configuration	Channel Number	Meas. Avg. Power (dBm)	Power Back-off (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Touch	Left	6	13.8	N/A	0.167	1	DBPSK
Tilt	Left	6	13.8	N/A	0.144	1	DBPSK
Touch	Right	6	13.8	N/A	0.349	1	DBPSK
Tilt	Right	6	13.8	N/A	0.294	1	DBPSK
Touch	Right	1	13.8	N/A	0.365	1	DBPSK
Touch	Right	11	13.8	N/A	0.226	1	DBPSK

Note(s):

1. WLAN 802.11b 1Mbps

*KDB 248227 - SAR is not required for 802.11g/n channels when the maximum average output power is less than ¼ dB higher than that measured on the corresponding 802.11b channels.

As per FCC kdb pub. *SAR Handsets Multi Xmitter and Ant, v01r05*; when there is simultaneous transmission occurring, stand- alone SAR evaluation is not required when the output power measured is ≤ 2.Pref for the particular band and antenna separation is ≥5.0cm from other antenna.

Output power thresholds for Unlicensed Transmitters

Pref	2.45	5.15 – 5.35	5.47	GHz
	12	6	5	mW

As per table 1 above, since output power measured for;
 5.15 to 5.35 GHz maximum output power = 4.68mW < 12mW (2*Pref)
 5.47 to 5.85 GHz maximum output power = 5.25mW < 10mW (2*Pref)

Stand Alone SAR evaluation is not required for 5.0 GHz WLAN802.11a/n modes.

7.2.14. Specific Absorption Rate - Wi-Fi 2450 Hotspot Mode Configuration 1g

Test Summary:

Tissue Volume:	1g
Maximum Level (W/kg):	0.089

Environmental Conditions:

Temperature Variation in Lab (°C):	24.0 to 24.0
Temperature Variation in Liquid (°C):	24.0 to 24.0

Results:

EUT Position	Phantom Configuration	Channel Number	Meas. Avg. Power (dBm)	Power Back-off (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Front of EUT Facing Phantom	Flat (SAM)	6	13.8	N/A	0.080	1, 2	DBPSK
Back of EUT Facing Phantom	Flat (SAM)	6	13.8	N/A	0.089	1, 2	DBPSK
Left Hand Side of EUT Facing Phantom	Flat (SAM)	6	13.8	N/A	0.059	1, 2	DBPSK
Right Hand Side of EUT Facing Phantom	Flat (SAM)	6	13.8	N/A	0.059	1, 2	DBPSK
Top of EUT Facing Phantom	Flat (SAM)	6	13.8	N/A	0.064	1, 2	DBPSK
Back of EUT Facing Phantom	Flat (SAM)	1	13.8	N/A	0.079	1, 2	DBPSK
Back of EUT Facing Phantom	Flat (SAM)	11	13.8	N/A	0.053	1, 2	DBPSK

Note(s):

- WLAN 802.11b 1Mbps
- EUT Supports Hotspot; SAR measurements were performed with the closest edge of the EUT at a separation distance of 10mm from the 'SAM' phantom flat section.

*KDB 248227 - SAR is not required for 802.11g/n channels when the maximum average output power is less than ¼ dB higher than that measured on the corresponding 802.11b channels.

As per FCC kdb pub. *SAR Handsets Multi Xmitter and Ant, v01r05*; when there is simultaneous transmission occurring, stand- alone SAR evaluation is not required when the output power measured is ≤ 2.Pref for the particular band and antenna separation is ≥5.0cm from other antenna.

Output power thresholds for Unlicensed Transmitters

Pref	2.45	5.15 – 5.35	5.47	GHz
	12	6	5	mW

As per table 1 above, since output power measured for;
 5.15 to 5.35 GHz maximum output power = 4.68mW < 12mW (2*Pref)
 5.47 to 5.85 GHz maximum output power = 5.25mW < 10mW (2*Pref)
 Stand Alone SAR evaluation is not required for 5.0 GHz WLAN802.11a/n modes.

7.2.15. Specific Absorption Rate - Wi-Fi 2450 Body-Worn Configuration 1g Test Summary:

Tissue Volume:	1g
Maximum Level (W/kg):	0.044

Environmental Conditions:

Temperature Variation in Lab (°C):	24.0 to 24.0
Temperature Variation in Liquid (°C):	24.0 to 24.0

Results:

EUT Position	Phantom Configuration	Channel Number	Meas. Avg. Power (dBm)	Power Back-off (dB)	Meas. Level (W/Kg)	Note(s)	Mod.
Back of EUT Facing Phantom	Flat (SAM)	6	13.8	N/A	0.039	1, 2, 3, 5	DBPSK
Back of EUT Facing Phantom	Flat (SAM)	1	13.8	N/A	0.031	1, 2, 3, 5	DBPSK
Back of EUT Facing Phantom	Flat (SAM)	11	13.8	N/A	0.025	1, 2, 3, 5	DBPSK
Back of EUT Facing Phantom With PHF	Flat (SAM)	6	13.8	N/A	0.044	1, 2, 3, 4	DBPSK

Note(s):

1. The Worst case configuration of Wi-Fi Hotspot Mode is applied on Body-Worn configuration.
2. WLAN 802.11b 1Mbps
3. EUT Supports Hotspot; SAR measurements were performed with the closest edge of the EUT at a separation distance of 15mm from the 'SAM' phantom flat section.
4. Personal Hands-Free Kit attached, using the worst-case configuration acquired.
5. Although the above configuration for body-worn overlapped in hotspot mode at the customer request, assessment was performed at 15mm for body-worn configuration. This result can be considered as extra information.

*KDB 248227 - SAR is not required for 802.11g/n channels when the maximum average output power is less than ¼ dB higher than that measured on the corresponding 802.11b channels.

As per FCC kdb pub. *SAR Handsets Multi Xmitter and Ant, v01r05*; when there is simultaneous transmission occurring, stand- alone SAR evaluation is not required when the output power measured is ≤ 2.Pref for the particular band and antenna separation is ≥5.0cm from other antenna.

Output power thresholds for Unlicensed Transmitters

Pref	2.45	5.15 – 5.35	5.47	GHz
	12	6	5	mW

As per table 1 above, since output power measured for;
 5.15 to 5.35 GHz maximum output power = 4.68mW < 12mW (2*Pref)
 5.47 to 5.85 GHz maximum output power = 5.25mW < 10mW (2*Pref)

Stand Alone SAR evaluation is not required for 5.0 GHz WLAN802.11a/n modes.

7.2.16. Conducted Average Power Measurement 2G: GSM850

Channel Number	Frequency (MHZ)	Power (dBm)	Avg. Burst Power with consideration for uplink time slot (dBm)	Note
128	824.2	33.6	24.6	Conducted, GMSK
190	836.6	33.4	24.4	Conducted, GMSK
251	848.8	33.4	24.4	Conducted, GMSK

GPRS850 - Measured Average Power without consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power (dBm) 1Uplink	Power (dBm) 2Uplink	Power (dBm) 3Uplink	Power (dBm) 4Uplink	Note
128	824.2	33.5	31.4	29.5	28.4	Conducted, GMSK
190	836.6	33.4	31.4	29.5	28.4	Conducted, GMSK
251	848.8	33.4	31.4	29.3	28.4	Conducted, GMSK

GPRS850 - Calculated Value with consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power (dBm) 1Uplink	Power (dBm) 2Uplink	Power (dBm) 3Uplink	Power (dBm) 4Uplink	Note
128	824.2	24.5	25.4	25.2	25.4	Conducted, GMSK
190	836.6	24.4	25.4	25.2	25.4	Conducted, GMSK
251	848.8	24.4	25.4	25.0	25.4	Conducted, GMSK

EDGE850 - Measured Average Power without consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power (dBm) 1Uplink	Power (dBm) 2Uplink	Power (dBm) 3Uplink	Power (dBm) 4Uplink	Note
128	824.2	33.5	31.4	29.5	28.4	Conducted, GMSK
190	836.6	33.4	31.4	29.5	28.4	Conducted, GMSK
251	848.8	33.4	31.4	29.3	28.4	Conducted, GMSK

EDGE850 - Calculated Value with consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power (dBm) 1Uplink	Power (dBm) 2Uplink	Power (dBm) 3Uplink	Power (dBm) 4Uplink	Note
128	824.2	24.5	25.4	25.2	25.4	Conducted, GMSK
190	836.6	24.4	25.4	25.2	25.4	Conducted, GMSK
251	848.8	24.4	25.4	25.0	25.4	Conducted, GMSK

Note:**Scale factor for uplink time slot:**

- 1 Uplink: time slot ratio = 8:1 => $10 \cdot \log(8/1) = 9.03 \text{ dB}$
- 2 Uplink: time slot ratio = 8:2 => $10 \cdot \log(8/2) = 6.02 \text{ dB}$
- 3 Uplink: time slot ratio = 8:3 => $10 \cdot \log(8/3) = 4.26 \text{ dB}$
- 4 Uplink: time slot ratio = 8:4 => $10 \cdot \log(8/4) = 3.01 \text{ dB}$

EDGE (MCS9 ~ 8PSK)**EDGE850 - Measured Average Power without consideration for Uplink time slots:**

Channel Number	Frequency (MHZ)	Power (dBm) 1Uplink	Power (dBm) 2Uplink	Power (dBm) 3Uplink	Power (dBm) 4Uplink	Note
128	824.2	27.7	26.6	25.5	24.6	Conducted, 8PSK
190	836.6	27.7	26.4	25.6	24.5	Conducted, 8PSK
251	848.8	27.7	26.3	25.5	24.5	Conducted, 8PSK

EDGE850 - Calculated Value with consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power (dBm) 1Uplink	Power (dBm) 2Uplink	Power (dBm) 3Uplink	Power (dBm) 4Uplink	Note
128	824.2	18.7	20.6	21.2	21.6	Conducted, 8PSK
190	836.6	18.7	20.4	21.3	21.5	Conducted, 8PSK
251	848.8	18.7	20.3	21.2	21.5	Conducted, 8PSK

Note:**Scale factor for uplink time slot:**

1. 1 Uplink: time slot ratio = 8:1 => $10 \cdot \log(8/1) = 9.03 \text{ dB}$
2. 2 Uplink: time slot ratio = 8:2 => $10 \cdot \log(8/2) = 6.02 \text{ dB}$
3. 3 Uplink: time slot ratio = 8:3 => $10 \cdot \log(8/3) = 4.26 \text{ dB}$
4. 4 Uplink: time slot ratio = 8:4 => $10 \cdot \log(8/4) = 3.01 \text{ dB}$

7.2.17. Conducted Average Power Measurement 2G: PCS1900

Channel Number	Frequency (MHZ)	Power (dBm)	Avg. Burst Power with consideration for uplink time slot (dBm)	Note
512	1850.2	30.5	21.5	Conducted, GMSK
661	1880.0	30.4	21.4	Conducted, GMSK
810	1909.8	30.3	21.3	Conducted, GMSK

GPRS1900 - Measured Average Power without consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power (dBm) 1Uplink	Power (dBm) 2Uplink	Power (dBm) 3Uplink	Power (dBm) 4Uplink	Note
512	1850.2	30.5	28.4	26.6	25.4	Conducted, GMSK
661	1880.0	30.5	28.5	26.5	25.3	Conducted, GMSK
810	1909.8	30.5	28.5	26.7	25.5	Conducted, GMSK

GPRS1900 - Calculated Value with consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power (dBm) 1Uplink	Power (dBm) 2Uplink	Power (dBm) 3Uplink	Power (dBm) 4Uplink	Note
512	1850.2	21.5	22.4	22.3	22.4	Conducted, GMSK
661	1880.0	21.5	22.5	22.2	22.3	Conducted, GMSK
810	1909.8	21.5	22.5	22.4	22.5	Conducted, GMSK

EDGE ((MCS4 ~ GMSK):**EDGE1900 - Measured Average Power without consideration for Uplink time slots:**

Channel Number	Frequency (MHZ)	Power (dBm) 1Uplink	Power (dBm) 2Uplink	Power (dBm) 3Uplink	Power (dBm) 4Uplink	Note
512	1850.2	30.5	28.4	26.6	25.4	Conducted, GMSK
661	1880.0	30.5	28.5	26.5	25.3	Conducted, GMSK
810	1909.8	30.5	28.5	26.7	25.5	Conducted, GMSK

EDGE1900 - Calculated Value with consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power (dBm) 1Uplink	Power (dBm) 2Uplink	Power (dBm) 3Uplink	Power (dBm) 4Uplink	Note
512	1850.2	21.5	22.4	22.3	22.4	Conducted, GMSK
661	1880.0	21.5	22.5	22.2	22.3	Conducted, GMSK
810	1909.8	21.5	22.5	22.4	22.5	Conducted, GMSK

Note:**Scale factor for uplink time slot:**

- 1 Uplink: time slot ratio = 8:1 => $10 \cdot \log(8/1) = 9.03 \text{ dB}$
- 2 Uplink: time slot ratio = 8:2 => $10 \cdot \log(8/2) = 6.02 \text{ dB}$
- 3 Uplink: time slot ratio = 8:3 => $10 \cdot \log(8/3) = 4.26 \text{ dB}$
- 4 Uplink: time slot ratio = 8:4 => $10 \cdot \log(8/4) = 3.01 \text{ dB}$

EDGE (MCS9 ~ 8PSK):**EDGE1900 - Measured Average Power without consideration for Uplink time slots:**

Channel Number	Frequency (MHZ)	Power (dBm) 1Uplink	Power (dBm) 2Uplink	Power (dBm) 3Uplink	Power (dBm) 4Uplink	Note
512	1850.2	26.7	25.3	24.5	23.5	Conducted, 8PSK
661	1880.0	26.8	25.2	24.5	23.5	Conducted, 8PSK
810	1909.8	26.9	25.4	24.5	23.4	Conducted, 8PSK

EDGE1900 - Calculated Value with consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power (dBm) 1Uplink	Power (dBm) 2Uplink	Power (dBm) 3Uplink	Power (dBm) 4Uplink	Note
512	1850.2	17.7	19.3	20.2	20.5	Conducted, 8PSK
661	1880.0	17.8	19.2	20.2	20.5	Conducted, 8PSK
810	1909.8	17.9	19.4	20.2	20.4	Conducted, 8PSK

Note:**Scale factor for uplink time slot:**

1. 1 Uplink: time slot ratio = 8:1 => $10 \cdot \log(8/1) = 9.03 \text{ dB}$
2. 2 Uplink: time slot ratio = 8:2 => $10 \cdot \log(8/2) = 6.02 \text{ dB}$
3. 3 Uplink: time slot ratio = 8:3 => $10 \cdot \log(8/3) = 4.26 \text{ dB}$
4. 4 Uplink: time slot ratio = 8:4 => $10 \cdot \log(8/4) = 3.01 \text{ dB}$

7.2.18. Conducted Average Power Measurement 3G:

Modes		HSDPA				HSPA					WCDMA
Sets		1	2	3	4	1	2	3	4	5	Voice / RMC 12.2kbps
Band	Channel	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]
1900 (Band 2)	9262 9662	23.1	23.0	22.4	22.6	23.2	23.2	22.6	23.2	22.4	23.1
	9400 9800	23.0	22.8	22.4	22.4	23.0	23.1	22.6	23.1	22.5	23.0
	9538 9938	22.9	22.4	22.2	22.3	22.8	22.9	22.6	23.0	22.6	23.0
850 (Band 5)	4132 4357	24.3	23.9	23.3	23.3	23.9	24.1	23.5	24.4	23.4	24.4
	4183 4408	24.4	24.1	23.5	23.4	24.1	24.2	23.6	24.4	23.6	24.5
	4233 4458	24.4	23.8	23.3	23.2	24.0	24.2	23.5	24.4	23.4	24.5
Modes		HSDPA				HSPA					WCDMA
Sets		1	2	3	4	1	2	3	4	5	Voice / RMC 12.2kbps
βc		2	12	15	15	11	6	15	2	15	
βd		15	15	8	4	15	15	9	15	15	
ΔACK, ΔNACK, ΔCQI		8	8	8	8	8	8	8	8	8	
AGV		-	-	-	-	20	12	15	17	21	

The module power levels were measured in both HSPA and 3G RMC 12.2kbps modes and compared to ensure the correct mode of operation had been established.

The following tables taken from FCC 3G SAR procedures (KDB 941225 D01 SAR test for 3G devices v02) below were applied using an Agilent 8960 series 10 wireless communications test set which supports 3G / HSDPA release 5 / HSPA release 6.

Sub-test Setup for Release 5 HSDPA

Sub-test	β_c	β_d	B_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	SM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, B_{hs}/\beta_c = 24/15$

Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$

Sub-test Setup for Release 6 HSPA

Sub-test	β_c	β_d	B_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	B_{oc}	B_{od}	B_{od} (SF)	B_{od} (codes)	CM ⁽²⁾ (dB)	Power Back-off (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	31/15	B_{alt1} : 47/15 B_{alt2} : 47/15	4	1	2.0	1.0	15	92
4	2/15	15/15	64	2/15	2/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	24/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, B_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH AND E-DPCCH for the Power Back-off is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Tavle 5.1g.

Note 6: B_{od} can not be set directly; it is set by Absolute Grant Value.

7.2.19. Conducted Power Measurements Wi-Fi 802.11b/g/n 802.11b/g

Channel Number	Frequency (MHZ)	TX Power (dBm)	Note
1	2412.0	13.8	2.4GHz 802.11b (1Mbps)
6	2437.0	13.8	
11	2462.0	13.8	
1	2412.0	13.5	2.4GHz 802.11b (11Mbps)
6	2437.0	13.6	
11	2462.0	13.6	
1	2412.0	12.3	2.4GHz 802.11g (6Mbps)
6	2437.0	12.5	
11	2462.0	12.8	
1	2412.0	12.7	2.4GHz 802.11g (54Mbps)
6	2437.0	12.9	
11	2462.0	13.0	

802.11n

Channel Number	Frequency (MHZ)	TX Power (dBm)	Note
1	2412.0	11.1	2.4GHz 802.11n (MCS0 6.5Mbps)
6	2437.0	11.6	
11	2462.0	11.3	
1	2412.0	11.6	2.4GHz 802.11n (MCS7 65Mbps)
6	2437.0	12.0	
11	2462.0	11.8	

**7.2.20. Conducted Power Measurements Wi-Fi 802.11a/n (5.0 GHz)
802.11a (5.0 GHz)**

Channel Number	Frequency (MHZ)	TX Power (dBm) 6 Mbps	TX Power (dBm) 54 Mbps	Note
36*	5180.0	5.3	4.5	5.2 GHz
40	5200.0	4.9	5.8	
44	5220.0	5.6	5.2	
48*	5240.0	6.1	6.0	
52*	5260.0	6.7	6.1	5.3 GHz
56	5280.0	5.9	6.3	
60	5300.0	5.8	5.4	
64*	5320.0	5.9	5.7	
100	5500.0	5.3	5.9	5.6 GHz
104*	5520.0	6.1	5.0	
108	5540.0	6.0	5.0	
112	5560.0	5.1	4.9	
116*	5580.0	4.8	5.6	
120	5600.0	5.0	4.6	
124*	5620.0	5.0	4.5	
128	5640.0	4.8	4.4	
132	5660.0	5.5	4.9	
136*	5680.0	4.8	4.5	
140	5700.0	4.5	5.3	5.8 GHz
149*	5745.0	4.8	4.4	
153	5765.0	5.2	4.4	
157*	5785.0	4.5	4.3	
161	5805.0	6.1	4.8	
165*	5825.0	5.1	4.2	

*Default Test Channels

802.11n (5.0 GHz) (HT20)

Channel Number	Frequency (MHZ)	TX Power (dBm) 6.5 Mbps	TX Power (dBm) 65 Mbps	Note
36*	5180.0	5.8	4.6	5.2 GHz
40	5200.0	6.0	5.8	
44	5220.0	6.4	5.1	
48*	5240.0	5.3	5.9	
52*	5260.0	6.4	6.1	5.3 GHz
56	5280.0	6.5	5.5	
60	5300.0	5.6	5.3	
64*	5320.0	6.0	5.6	
100	5500.0	5.4	5.3	5.6 GHz
104*	5520.0	5.2	5.8	
108	5540.0	6.1	4.9	
112	5560.0	5.0	4.8	
116*	5580.0	5.9	4.7	
120	5600.0	5.7	5.6	
124*	5620.0	5.8	4.6	
128	5640.0	4.7	4.6	
132	5660.0	4.7	5.4	
136*	5680.0	5.7	4.6	
140	5700.0	4.8	4.5	5.8 GHz
149*	5745.0	5.4	4.5	
153	5765.0	4.6	5.2	
157*	5785.0	4.8	4.4	
161	5805.0	4.8	4.7	
165*	5825.0	6.2	4.9	

*Default Test Channels

802.11n (5.0 GHz) (HT40)

Channel Number	Frequency (MHZ)	TX Power (dBm) 13.5 Mbps	TX Power (dBm) 135 Mbps	Note
38	5190.0	6.0	2.0	5.2 GHz
46	5230.0	6.2	2.6	
54	5270.0	6.7	3.2	5.3 GHz
62	5310.0	7.2	3.3	
102	5510.0	6.5	3.6	5.6 GHz
110	5550.0	6.2	3.1	
118	5590.0	5.9	3.0	
126	5630.0	5.9	2.6	
134	5670.0	5.8	2.3	
151	5755.0	5.6	2.1	5.8 GHz
159	5795.0	6.1	2.3	

As per FCC kdb pub. *SAR Handsets Multi Xmitter and Ant, v01r05*; when there is simultaneous transmission occurring, stand- alone SAR evaluation is not required when the output power measured is $\leq 2 \cdot \text{Pref}$ for the particular band and antenna separation is $\geq 5.0\text{cm}$ from other antenna.

Output power thresholds for Unlicensed Transmitters

Pref	2.45	5.15 – 5.35	5.47	GHz
		12	6	5

As per table 1 above, since output power measured for;
 5.15 to 5.35 GHz maximum output power = $4.68\text{mW} < 12\text{mW} (2 \cdot \text{Pref})$
 5.47 to 5.85 GHz maximum output power = $5.25\text{mW} < 10\text{mW} (2 \cdot \text{Pref})$

Stand Alone SAR evaluation is not required for 5.0 GHz WLAN802.11a/n modes.

8. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently, the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor, such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Test Name	Confidence Level	Calculated Uncertainty
Specific Absorption Rate-GSM 850/ UMTS FDD 5 Head Configuration 1g	95%	19.94
Specific Absorption Rate-GSM / GPRS / EDGE 850 / UMTS FDD 5 Body Configurations 1g	95%	20.07
Specific Absorption Rate-PCS 1900 / UMTS FDD 2 Head Configuration 1g	95%	20.72
Specific Absorption Rate-GSM / GPRS / EDGE 1900 / UMTS FDD 2 Body Configuration 1g	95%	20.00
Specific Absorption Rate-Wi-Fi 2450 MHz Head Configuration 1g	95%	19.47
Specific Absorption Rate-Wi-Fi 2450 MHz Body Configuration 1g	95%	19.90

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty, the published guidance of the appropriate accreditation body is followed.

8.1. Specific Absorption Rate Uncertainty -GSM 850 / UMTS FDD 5 Head Configuration 1g

Type	Source of uncertainty	+ Value	- Value	Probability Distribution	Divisor	C _i (1g)	Standard Uncertainty		v _i or v _{eff}
							+ u (%)	- u (%)	
B	Probe calibration	6.000	6.000	normal (k=1)	1.0000	1.0000	6.000	6.000	∞
B	Axial Isotropy	0.250	0.250	normal (k=1)	1.0000	1.0000	0.250	0.250	∞
B	Hemispherical Isotropy	1.300	1.300	normal (k=1)	1.0000	1.0000	1.300	1.300	∞
B	Spatial Resolution	0.500	0.500	Rectangular	1.7321	1.0000	0.289	0.289	∞
B	Boundary Effect	0.769	0.769	Rectangular	1.7321	1.0000	0.444	0.444	∞
B	Linearity	0.600	0.600	Rectangular	1.7321	1.0000	0.346	0.346	∞
B	Detection Limits	0.200	0.200	Rectangular	1.7321	1.0000	0.115	0.115	∞
B	Readout Electronics	0.160	0.160	normal (k=1)	1.0000	1.0000	0.160	0.160	∞
B	Response Time	0.000	0.000	Rectangular	1.7321	1.0000	0.000	0.000	∞
B	Integration Time	1.730	1.730	Rectangular	1.7321	1.0000	0.999	0.999	∞
B	RF Ambient conditions	3.000	3.000	Rectangular	1.7321	1.0000	1.732	1.732	∞
B	Probe Positioner Mechanical Restrictions	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Probe Positioning with regard to Phantom Shell	2.850	2.850	Rectangular	1.7321	1.0000	1.645	1.645	∞
B	Extrapolation and integration / Maximum SAR evaluation	5.080	5.080	Rectangular	1.7321	1.0000	2.933	2.933	∞
A	Test Sample Positioning	2.400	2.400	normal (k=1)	1.0000	1.0000	2.400	2.400	10
A	Device Holder uncertainty	0.154	0.154	normal (k=1)	1.0000	1.0000	0.154	0.154	10
B	Phantom Uncertainty	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Drift of output power	5.000	5.000	Rectangular	1.7321	1.0000	2.887	2.887	∞
B	Liquid Conductivity (target value)	5.000	5.000	Rectangular	1.7321	0.6400	1.848	1.848	∞
A	Liquid Conductivity (measured value)	4.920	4.920	normal (k=1)	1.0000	0.6400	3.149	3.149	5
B	Liquid Permittivity (target value)	5.000	5.000	Rectangular	1.7321	0.6000	1.732	1.732	∞
A	Liquid Permittivity (measured value)	4.970	4.970	normal (k=1)	1.0000	0.6000	2.982	2.982	5
	Combined standard uncertainty			t-distribution			10.17	10.17	>250
	Expanded uncertainty			k = 1.96			19.94	19.94	>250

8.2. Specific Absorption Rate-GSM / GPRS / EDGE 850 / UMTS FDD 5 Body Configuration 1g

Type	Source of uncertainty	+ Value	- Value	Probability Distribution	Divisor	C _i (1g)	Standard Uncertainty		U _i or U _{eff}
							+ u (%)	- u (%)	
B	Probe calibration	6.000	6.000	normal (k=1)	1.0000	1.0000	6.000	6.000	∞
B	Axial Isotropy	0.250	0.250	normal (k=1)	1.0000	1.0000	0.250	0.250	∞
B	Hemispherical Isotropy	1.300	1.300	normal (k=1)	1.0000	1.0000	1.300	1.300	∞
B	Spatial Resolution	0.500	0.500	Rectangular	1.7321	1.0000	0.289	0.289	∞
B	Boundary Effect	0.769	0.769	Rectangular	1.7321	1.0000	0.444	0.444	∞
B	Linearity	0.600	0.600	Rectangular	1.7321	1.0000	0.346	0.346	∞
B	Detection Limits	0.200	0.200	Rectangular	1.7321	1.0000	0.115	0.115	∞
B	Readout Electronics	0.160	0.160	normal (k=1)	1.0000	1.0000	0.160	0.160	∞
B	Response Time	0.000	0.000	Rectangular	1.7321	1.0000	0.000	0.000	∞
B	Integration Time	1.730	1.730	Rectangular	1.7321	1.0000	0.999	0.999	∞
B	RF Ambient conditions	3.000	3.000	Rectangular	1.7321	1.0000	1.732	1.732	∞
B	Probe Positioner Mechanical Restrictions	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Probe Positioning with regard to Phantom Shell	2.850	2.850	Rectangular	1.7321	1.0000	1.645	1.645	∞
B	Extrapolation and integration /Maximum SAR evaluation	5.080	5.080	Rectangular	1.7321	1.0000	2.933	2.933	∞
A	Test Sample Positioning	2.900	2.900	normal (k=1)	1.0000	1.0000	2.900	2.900	10
A	Device Holder uncertainty	0.154	0.154	normal (k=1)	1.0000	1.0000	0.154	0.154	10
B	Phantom Uncertainty	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Drift of output power	5.000	5.000	Rectangular	1.7321	1.0000	2.887	2.887	∞
B	Liquid Conductivity (target value)	5.000	5.000	Rectangular	1.7321	0.6400	1.848	1.848	∞
A	Liquid Conductivity (measured value)	4.690	4.690	normal (k=1)	1.0000	0.6400	3.002	3.002	5
B	Liquid Permittivity (target value)	5.000	5.000	Rectangular	1.7321	0.6000	1.732	1.732	∞
A	Liquid Permittivity (measured value)	4.860	4.860	normal (k=1)	1.0000	0.6000	2.916	2.916	5
	Combined standard uncertainty			t-distribution			10.24	10.24	>250
	Expanded uncertainty			k = 1.96			20.07	20.07	>250

8.3. Specific Absorption Rate-PCS 1900 / UMTS FDD 2 Head Configuration 1g

Type	Source of uncertainty	+ Value	- Value	Probability Distribution	Divisor	C _i (1g)	Standard Uncertainty		U _i or U _{eff}
							+ u (%)	- u (%)	
B	Probe calibration	6.000	6.000	normal (k=1)	1.0000	1.0000	6.000	6.000	∞
B	Axial Isotropy	0.250	0.250	normal (k=1)	1.0000	1.0000	0.250	0.250	∞
B	Hemispherical Isotropy	1.300	1.300	normal (k=1)	1.0000	1.0000	1.300	1.300	∞
B	Spatial Resolution	0.500	0.500	Rectangular	1.7321	1.0000	0.289	0.289	∞
B	Boundary Effect	0.769	0.769	Rectangular	1.7321	1.0000	0.444	0.444	∞
B	Linearity	0.600	0.600	Rectangular	1.7321	1.0000	0.346	0.346	∞
B	Detection Limits	0.200	0.200	Rectangular	1.7321	1.0000	0.115	0.115	∞
B	Readout Electronics	0.160	0.160	normal (k=1)	1.0000	1.0000	0.160	0.160	∞
B	Response Time	0.000	0.000	Rectangular	1.7321	1.0000	0.000	0.000	∞
B	Integration Time	1.730	1.730	Rectangular	1.7321	1.0000	0.999	0.999	∞
B	RF Ambient conditions	3.000	3.000	Rectangular	1.7321	1.0000	1.732	1.732	∞
B	Probe Positioner Mechanical Restrictions	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Probe Positioning with Regard to Phantom Shell	2.850	2.850	Rectangular	1.7321	1.0000	1.645	1.645	∞
B	Extrapolation and integration / Maximum SAR evaluation	5.080	5.080	Rectangular	1.7321	1.0000	2.933	2.933	∞
A	Test Sample Positioning	3.800	3.800	normal (k=1)	1.0000	1.0000	3.800	3.800	10
A	Device Holder uncertainty	0.154	0.154	normal (k=1)	1.0000	1.0000	0.154	0.154	10
B	Phantom Uncertainty	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Drift of output power	5.000	5.000	Rectangular	1.7321	1.0000	2.887	2.887	∞
B	Liquid Conductivity (target value)	5.000	5.000	Rectangular	1.7321	0.6400	1.848	1.848	∞
A	Liquid Conductivity (measured value)	4.900	4.900	normal (k=1)	1.0000	0.6400	3.136	3.136	5
B	Liquid Permittivity (target value)	5.000	5.000	Rectangular	1.7321	0.6000	1.732	1.732	∞
A	Liquid Permittivity (measured value)	4.880	4.880	normal (k=1)	1.0000	0.6000	2.928	2.928	5
	Combined standard uncertainty			t-distribution			10.57	10.57	>200
	Expanded uncertainty			k = 1.96			20.72	20.72	>200

8.4. Specific Absorption Rate-PCS / GPRS / EDGE 1900 / UMTS FDD 2 Body Configuration 1g

Type	Source of uncertainty	+ Value	- Value	Probability Distribution	Divisor	C _i (1g)	Standard Uncertainty		U _i or U _{eff}
							+ u (%)	- u (%)	
B	Probe calibration	6.000	6.000	normal (k=1)	1.0000	1.0000	6.000	6.000	∞
B	Axial Isotropy	0.250	0.250	normal (k=1)	1.0000	1.0000	0.250	0.250	∞
B	Hemispherical Isotropy	1.300	1.300	normal (k=1)	1.0000	1.0000	1.300	1.300	∞
B	Spatial Resolution	0.500	0.500	Rectangular	1.7321	1.0000	0.289	0.289	∞
B	Boundary Effect	0.769	0.769	Rectangular	1.7321	1.0000	0.444	0.444	∞
B	Linearity	0.600	0.600	Rectangular	1.7321	1.0000	0.346	0.346	∞
B	Detection Limits	0.200	0.200	Rectangular	1.7321	1.0000	0.115	0.115	∞
B	Readout Electronics	0.160	0.160	normal (k=1)	1.0000	1.0000	0.160	0.160	∞
B	Response Time	0.000	0.000	Rectangular	1.7321	1.0000	0.000	0.000	∞
B	Integration Time	1.730	1.730	Rectangular	1.7321	1.0000	0.999	0.999	∞
B	RF Ambient conditions	3.000	3.000	Rectangular	1.7321	1.0000	1.732	1.732	∞
B	Probe Positioner Mechanical Restrictions	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Probe Positioning with regard to Phantom Shell	2.850	2.850	Rectangular	1.7321	1.0000	1.645	1.645	∞
B	Extrapolation and integration / Maximum SAR evaluation	5.080	5.080	Rectangular	1.7321	1.0000	2.933	2.933	∞
A	Test Sample Positioning	2.500	2.500	normal (k=1)	1.0000	1.0000	2.500	2.500	10
A	Device Holder uncertainty	0.154	0.154	normal (k=1)	1.0000	1.0000	0.154	0.154	10
B	Phantom Uncertainty	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Drift of output power	5.000	5.000	Rectangular	1.7321	1.0000	2.887	2.887	∞
B	Liquid Conductivity (target value)	5.000	5.000	Rectangular	1.7321	0.6400	1.848	1.848	∞
A	Liquid Conductivity (measured value)	4.940	4.940	normal (k=1)	1.0000	0.6400	3.162	3.162	5
B	Liquid Permittivity (target value)	5.000	5.000	Rectangular	1.7321	0.6000	1.732	1.732	∞
A	Liquid Permittivity (measured value)	4.980	4.980	normal (k=1)	1.0000	0.6000	2.988	2.988	5
	Combined standard uncertainty			t-distribution			10.20	10.20	>250
	Expanded uncertainty			k = 1.96			20.00	20.00	>250

8.5. Specific Absorption Rate-Wi-Fi 2450 MHz Head Configuration 1g

Type	Source of uncertainty	+ Value	- Value	Probability Distribution	Divisor	C _i (1g)	Standard Uncertainty		U _i or U _{eff}
							+ u (%)	- u (%)	
B	Probe calibration	6.000	6.000	normal (k=1)	1.0000	1.0000	6.000	6.000	∞
B	Axial Isotropy	0.250	0.250	normal (k=1)	1.0000	1.0000	0.250	0.250	∞
B	Hemispherical Isotropy	1.300	1.300	normal (k=1)	1.0000	1.0000	1.300	1.300	∞
B	Spatial Resolution	0.500	0.500	Rectangular	1.7321	1.0000	0.289	0.289	∞
B	Boundary Effect	0.769	0.769	Rectangular	1.7321	1.0000	0.444	0.444	∞
B	Linearity	0.600	0.600	Rectangular	1.7321	1.0000	0.346	0.346	∞
B	Detection Limits	0.200	0.200	Rectangular	1.7321	1.0000	0.115	0.115	∞
B	Readout Electronics	0.160	0.160	normal (k=1)	1.0000	1.0000	0.160	0.160	∞
B	Response Time	0.000	0.000	Rectangular	1.7321	1.0000	0.000	0.000	∞
B	Integration Time	0.000	0.000	Rectangular	1.7321	1.0000	0.000	0.000	∞
B	RF Ambient conditions	3.000	3.000	Rectangular	1.7321	1.0000	1.732	1.732	∞
B	Probe Positioner Mechanical Restrictions	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Probe Positioning with regard to Phantom Shell	2.850	2.850	Rectangular	1.7321	1.0000	1.645	1.645	∞
B	Extrapolation and integration / Maximum SAR evaluation	5.080	5.080	Rectangular	1.7321	1.0000	2.933	2.933	∞
A	Test Sample Positioning	2.000	2.000	normal (k=1)	1.0000	1.0000	2.000	2.000	10
A	Device Holder uncertainty	0.154	0.154	normal (k=1)	1.0000	1.0000	0.154	0.154	10
B	Phantom Uncertainty	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Drift of output power	5.000	5.000	Rectangular	1.7321	1.0000	2.887	2.887	∞
B	Liquid Conductivity (target value)	5.000	5.000	Rectangular	1.7321	0.6400	1.848	1.848	∞
A	Liquid Conductivity (measured value)	4.410	4.410	normal (k=1)	1.0000	0.6400	2.822	2.822	5
B	Liquid Permittivity (target value)	5.000	5.000	Rectangular	1.7321	0.6000	1.732	1.732	∞
A	Liquid Permittivity (measured value)	4.930	4.930	normal (k=1)	1.0000	0.6000	2.958	2.958	5
	Combined standard uncertainty			t-distribution			9.93	9.93	>300
	Expanded uncertainty			k = 1.96			19.47	19.47	>300

8.6. Specific Absorption Rate-Wi-Fi 2450 MHz Body Configuration 1g

Type	Source of uncertainty	+ Value	- Value	Probability Distribution	Divisor	C _i (1g)	Standard Uncertainty		U _i or U _{eff}
							+ u (%)	- u (%)	
B	Probe calibration	6.000	6.000	normal (k=1)	1.0000	1.0000	6.000	6.000	∞
B	Axial Isotropy	0.250	0.250	normal (k=1)	1.0000	1.0000	0.250	0.250	∞
B	Hemispherical Isotropy	1.300	1.300	normal (k=1)	1.0000	1.0000	1.300	1.300	∞
B	Spatial Resolution	0.500	0.500	Rectangular	1.7321	1.0000	0.289	0.289	∞
B	Boundary Effect	0.769	0.769	Rectangular	1.7321	1.0000	0.444	0.444	∞
B	Linearity	0.600	0.600	Rectangular	1.7321	1.0000	0.346	0.346	∞
B	Detection Limits	0.200	0.200	Rectangular	1.7321	1.0000	0.115	0.115	∞
B	Readout Electronics	0.160	0.160	normal (k=1)	1.0000	1.0000	0.160	0.160	∞
B	Response Time	0.000	0.000	Rectangular	1.7321	1.0000	0.000	0.000	∞
B	Integration Time	0.000	0.000	Rectangular	1.7321	1.0000	0.000	0.000	∞
B	RF Ambient conditions	3.000	3.000	Rectangular	1.7321	1.0000	1.732	1.732	∞
B	Probe Positioner Mechanical Restrictions	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Probe Positioning with regard to Phantom Shell	2.850	2.850	Rectangular	1.7321	1.0000	1.645	1.645	∞
B	Extrapolation and integration / Maximum SAR evaluation	5.080	5.080	Rectangular	1.7321	1.0000	2.933	2.933	∞
A	Test Sample Positioning	2.570	2.570	normal (k=1)	1.0000	1.0000	2.570	2.570	10
A	Device Holder uncertainty	0.154	0.154	normal (k=1)	1.0000	1.0000	0.154	0.154	10
B	Phantom Uncertainty	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Drift of output power	5.000	5.000	Rectangular	1.7321	1.0000	2.887	2.887	∞
B	Liquid Conductivity (target value)	5.000	5.000	Rectangular	1.7321	0.6400	1.848	1.848	∞
A	Liquid Conductivity (measured value)	4.900	4.900	normal (k=1)	1.0000	0.6400	3.136	3.136	5
B	Liquid Permittivity (target value)	5.000	5.000	Rectangular	1.7321	0.6000	1.732	1.732	∞
A	Liquid Permittivity (measured value)	4.920	4.920	normal (k=1)	1.0000	0.6000	2.952	2.952	5
	Combined standard uncertainty			t-distribution			10.15	10.15	>250
	Expanded uncertainty			k = 1.96			19.90	19.90	>250

Appendix 1. Test Equipment Used

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Last Calibrated	Cal. Interval (Months)
A034	Narda 20W Termination	Narda	374BNM	8706	Calibrated as part of system	-
A1097	SMA Directional Coupler	MiDISCO	MDC6223-30	None	Calibrated as part of system	-
A1137	3dB Attenuator	Narda	779	04690	Calibrated as part of system	-
A1174	Dielectric Probe Kit	Agilent Technologies	85070C	Us99360072	Calibrated before use	-
A1328	Handset Positioner	Schmid & Partner Engineering AG	Modification	SD 000 H01 DA	-	-
A1182	Handset Positioner	Schmid & Partner Engineering AG	V3.0	None	-	-
A1184	Data Acquisition Electronics	Schmid & Partner Engineering AG	DAE3	394	26 Jan 2012	12
A2111	Data Acquisition Electronics	Schmid & Partner Engineering AG	DAE3	432	02 May 2012	12
A2077	Probe	Schmid & Partner Engineering AG	EX3 DV4	3814	22 Sep 2011	12
A2113	Probe	Schmid & Partner Engineering AG	ET3 DV6	1587	11 May 2012	12
A1235	900 MHz Dipole Kit	Schmid & Partner Engineering AG	D900V2	124	09 Feb 2011	24
A1237	1900 MHz Dipole Kit	Schmid & Partner Engineering AG	D1900V2	540	08 Feb 2011	24
A1322	2450 MHz Dipole Kit	Schmid & Partner Engineering AG	D2450V2	725	08 Feb 2011	24
A1497	Amplifier	Mini-Circuits	zh1-42w (sma)	e020105	Calibrated as part of system	-
A1566	SAM Phantom	Schmid & Partner Engineering AG	SAM a (Site 56)	002	Calibrated before use	-
A1238	SAM Phantom	Schmid & Partner Engineering AG	SAM b (Site 56)	001	Calibrated before use	-
A2125	SAM Phantom	Schmid & Partner Engineering AG	SAM b (Site 57)	TP-1031	Calibrated before use	-
A2124	SAM Phantom	Schmid & Partner Engineering AG	SAM a (Site 57)	TP-1030	Calibrated before use	-

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Last Calibrated	Cal. Interval (Months)
A215	20 dB Attenuator	Narda	766-20	9402	Calibrated as part of system	-
A1531	Antenna	AARONIA AG	7025	02458	-	-
M1015	Network Analyser	Agilent Technologies	8753ES	US39172406	27 Sept 2011	12
C1145	Cable	Rosenberger MICRO-COAX	FA147A F003003030	41843-1	Calibrated as part of system	-
C1146	Cable	Rosenberger MICRO-COAX	FA147A F030003030	41752-1	Calibrated as part of system	-
G0528	Robot Power Supply	Schmid & Partner Engineering AG	DASY4	None	Calibrated before use	-
GO591	Robot Power Supply	Schmid & Partner Engineering AG	DASY4	None	Calibrated before use	-
G087	PSU	Thurlby Thandar	CPX200	100701	Calibrated before use	-
M1047	Robot Arm	Staubli	RX908 L	F00/SD8 9A1/A/01	Calibrated before use	-
M1653	Robot Arm	Staubli	RX908 L	F01/5J8 6A1/C/01	Calibrated before use	-
M1159	Signal Generator	Agilent Technologies	E8241A	US42110332	Internal Checked 14 Apr 2012/ 10 Aug 2012	4
M1071	Spectrum Analyzer	Agilent	HP8590E	3647U00514	(Monitoring use only)	-
M1270	Digital Thermometer	RS	N/A	N/A	Internal Checked 13 May 2012	12
M1023	Dual Channel Power Meter	R & S	NRVD	863715/030	18 July 2012	12
S256	SAR Lab	RFI	Site 56	N/A	Calibrated before use	-
S512	SAR Lab	RFI	Site 57	N/A	Calibrated before use	-

Note: All the assets were in calibration during the course of testing.

A.1.1. Calibration Certificates

This section contains the calibration certificates and data for the Probe(s) and Dipole(s) used, which are not included in the total number of pages for this report.

The following information is justification to why the listed dipoles calibration period has been extended. This address FCC KDB 450824 D02

Cal Date	Dipole Calibration History									
	Dipole SN: 124, Frequency 900 MHz									
	Head Parameters					Body Parameters				
	1g (W/Kg)	10g (W/Kg)	Return loss (dB)	Real (Ω)	Imaginary (Ω)	1g (W/Kg)	10g (W/Kg)	Return loss (dB)	Real (Ω)	Imaginary (Ω)
27-Jun-12	Lab Annual Check of dipole		-24.73	49.56	-7.40	Lab Annual Check of dipole		-21.92	48.18	-8.03
09-Feb-11	11.00	7.01	-21.60	48.90	-8.20	11.10	7.14	-20.20	46.10	-8.60
23-Aug-07	10.20	6.56	-21.20	48.60	-8.50	10.50	6.89	-20.20	45.40	-8.10
31-Aug-05	10.60	6.78	-24.70	49.10	-5.70	10.50	6.77	-18.90	44.90	-8.90
13-May-03	10.60	6.76	-24.00	50.30	-6.40	11.00	7.12	-20.60	46.20	-8.20
03-Aug-01	11.28	7.16	-25.40	50.80	-5.60	Dipole calibrated for Head only				
Standard Deviation	0.42	0.23	1.77	0.85	1.25	0.32	0.18	1.08	1.25	0.37
 Mean Value 	10.74	6.85	23.61			10.78	6.98	20.36		
Relative standard deviation %	3.87%	3.41%	7.49%			2.97%	2.58%	5.31%		

Calibration Certificates (Continued)

Cal Date	Dipole Calibration History									
	Dipole SN: 540, Frequency 1900 MHz									
	Head Parameters					Body Parameters				
	1g (W/Kg)	10g (W/Kg)	Return loss (dB)	Real (Ω)	Imaginary (Ω)	1g (W/Kg)	10g (W/Kg)	Return loss (dB)	Real (Ω)	Imaginary (Ω)
27-Jun-12	Lab Annual Check of dipole		-30.57	49.54	1.41	Lab Annual Check of dipole		-29.80	50.34	2.37
08-Feb-11	40.30	21.00	-27.60	50.50	4.20	40.70	21.60	-23.10	45.60	5.00
26-Jun-09	40.30	21.10	-30.00	48.50	2.70	40.90	21.50	-24.30	44.90	2.80
11-Jun-07	36.10	19.30	-25.40	51.90	5.10	38.00	20.70	-25.30	47.70	4.80
14-Jun-05	38.1	19.90	-25.40	51.90	5.20	39.10	20.70	-24.00	48.10	5.90
04-Jun-03	41.20	21.20	-28.50	50.30	3.80	Dipole calibrated for Head only				
Standard Deviation	2.08	0.85	2.21	1.33	1.46	1.38	0.49	2.64	2.16	1.52
 Mean Value 	39.20	20.50	27.91			39.68	21.13	25.30		
Relative standard deviation %	5.30%	4.15%	7.93%			3.47%	2.33%	10.42%		

Cal Date	Dipole Calibration History									
	Dipole SN: 725, Frequency 2450 MHz									
	Head Parameters					Body Parameters				
	1g (W/Kg)	10g (W/Kg)	Return loss (dB)	Real (Ω)	Imaginary (Ω)	1g (W/Kg)	10g (W/Kg)	Return loss (dB)	Real (Ω)	Imaginary (Ω)
02-July-12	Lab Annual Check of dipole		-20.37	47.27	8.65	Lab Annual Check of dipole		-21.04	48.52	8.72
08-Feb-11	52.90	24.70	-20.50	45.60	7.90	51.90	24.10	-20.20	49.50	9.70
08-Jan-09	52.10	24.30	-23.70	54.40	5.30	52.20	24.70	-23.40	49.00	6.70
17-Jan-07	53.30	24.80	-22.10	52.40	7.70	53.30	24.50	-21.80	47.80	7.70
04-Jan-05	54.5	24.70	-22.30	53.50	7.20	52.90	24.50	-22.20	48.50	7.50
17-Jan-03	54.70	24.50	-22.60	53.00	7.00	52.10	24.10	-21.70	49.00	8.10
Standard Deviation	1.10	0.20	1.28	3.66	1.14	0.59	0.27	1.08	0.58	1.04
 Mean Value 	53.50	24.60	21.93			52.48	24.38	21.72		
Relative standard deviation %	2.05%	0.81%	5.85%			1.13%	1.10%	4.97%		

Note:

- SAR lab has more than one dipole, the 900 MHz calibration gap is 24 months from 2007 and a second dipole was use after this period.
- The dipole history shows that the measured SAR relative standard deviation was all less than 10% for the calibration period. The return loss relative standard deviation was all less than 10 %. And the real and imaginary impedance standard deviation is within 5 (Ω).

Asset: A2077

27-SEPT-2011
Checked by R. [Signature]

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **RFI**

Certificate No: **EX3-3814_Sep11**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3814**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-12.v7, QA CAL-14.v3, QA CAL-23.v4,
QA CAL-25.v4
Calibration procedure for dosimetric E-field probes**

Calibration date **September 22, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	31-Mar-11 (No. 217-01372)	Apr-12
Power sensor E4412A	MY41498087	31-Mar-11 (No. 217-01372)	Apr-12
Reference 3 dB Attenuator	SN: S5054 (3c)	29-Mar-11 (No. 217-01369)	Apr-12
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Reference 30 dB Attenuator	SN: S5129 (30b)	29-Mar-11 (No. 217-01370)	Apr-12
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
DAE4	SN: 654	3-May-11 (No. DAE4-654_May11)	May-12
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by:	Name Katja Pokovic	Function Technical Manager	Signature
Approved by:	Name Fin Bornholt	Function R&D Director	Signature
			Issued: September 22, 2011
This calibration certificate shall not be reproduced except in full without written approval of the laboratory			



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}**: A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe EX3DV4

SN:3814

Manufactured: September 2, 2011
Calibrated: September 22, 2011

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3814

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.52	0.51	0.44	$\pm 10.1 \%$
DCP (mV) ^B	100.8	96.5	101.1	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc ^E (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	121.7	$\pm 2.7 \%$
			Y	0.00	0.00	1.00	115.0	
			Z	0.00	0.00	1.00	105.3	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter; uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3814

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
450	43.5	0.87	9.55	9.55	9.55	0.12	1.00	± 13.4 %
750	41.9	0.89	9.26	9.26	9.26	0.80	0.67	± 12.0 %
900	41.5	0.97	8.75	8.75	8.75	0.71	0.73	± 12.0 %
1750	40.1	1.37	8.13	8.13	8.13	0.80	0.62	± 12.0 %
1900	40.0	1.40	7.78	7.78	7.78	0.80	0.61	± 12.0 %
2450	39.2	1.80	7.02	7.02	7.02	0.80	0.60	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3814

Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
450	56.7	0.94	10.39	10.39	10.39	0.04	1.00	± 13.4 %
750	55.5	0.96	9.28	9.28	9.28	0.80	0.65	± 12.0 %
900	55.0	1.05	8.92	8.92	8.92	0.80	0.65	± 12.0 %
1750	53.4	1.49	7.58	7.58	7.58	0.80	0.67	± 12.0 %
1900	53.3	1.52	7.31	7.31	7.31	0.80	0.68	± 12.0 %
2150	53.1	1.66	7.38	7.38	7.38	0.80	0.65	± 12.0 %
2450	52.7	1.95	7.15	7.15	7.15	0.80	0.50	± 12.0 %
2600	52.5	2.16	7.02	7.02	7.02	0.80	0.50	± 12.0 %
3700	51.0	3.55	6.35	6.35	6.35	0.26	1.68	± 13.1 %
5200	49.0	5.30	4.19	4.19	4.19	0.60	1.95	± 13.1 %
5500	48.6	5.65	3.86	3.86	3.86	0.60	1.95	± 13.1 %
5800	48.2	6.00	3.94	3.94	3.94	0.60	1.95	± 13.1 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

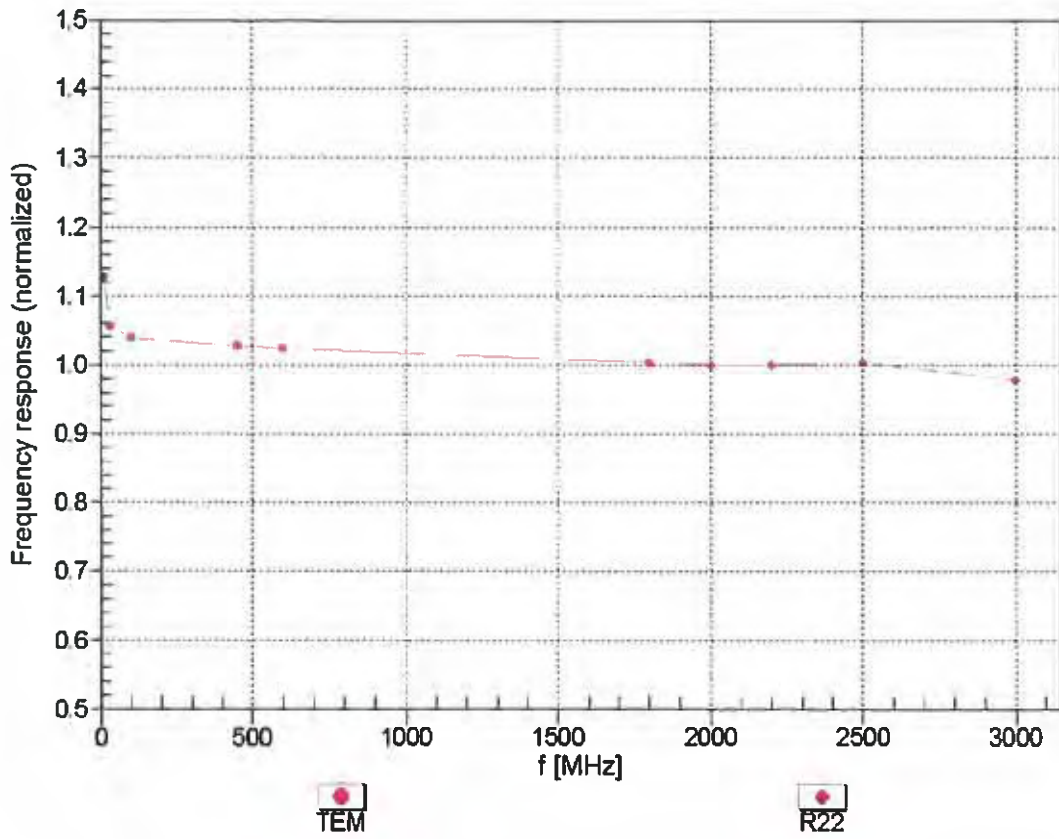


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

f=600 MHz,TEM



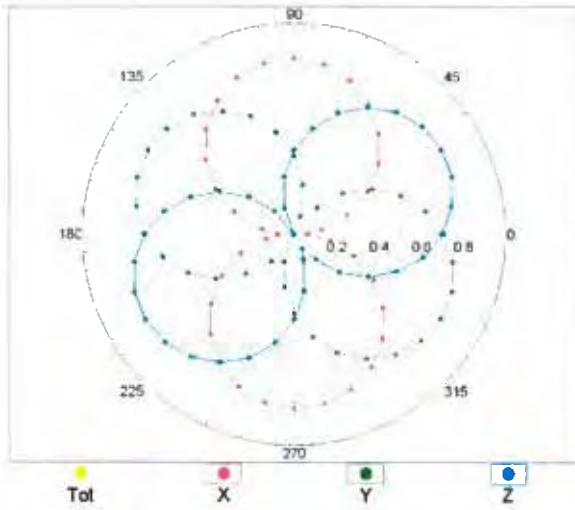


f=1800 MHz,R22

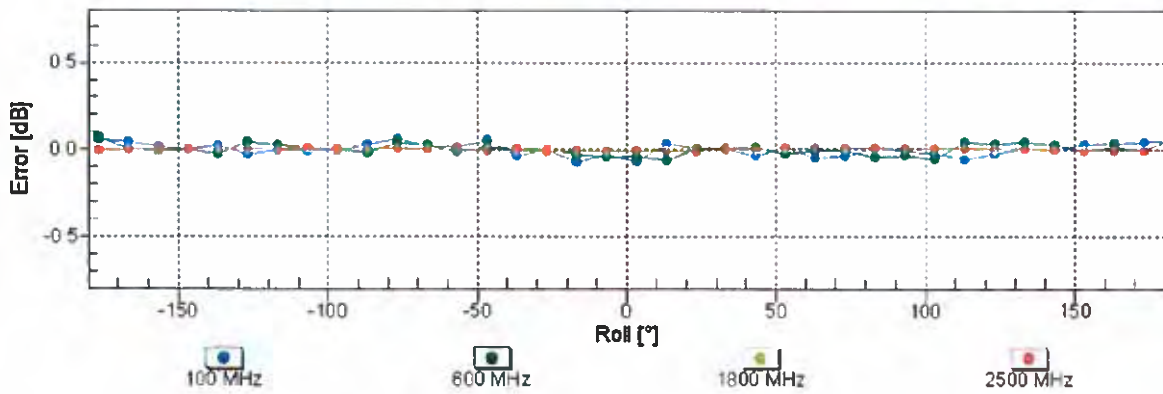


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

Dynamic Range f(SAR_{head}) (TEM cell , f = 900 MHz)

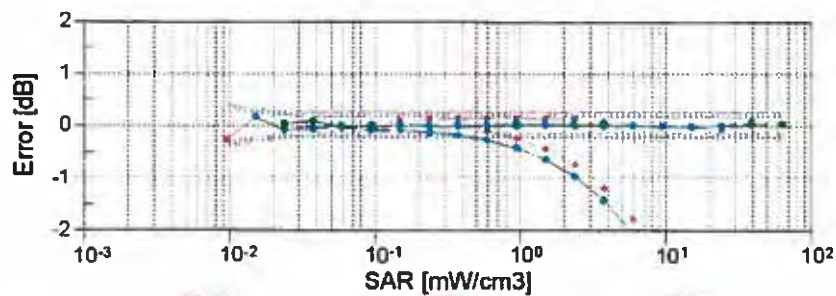
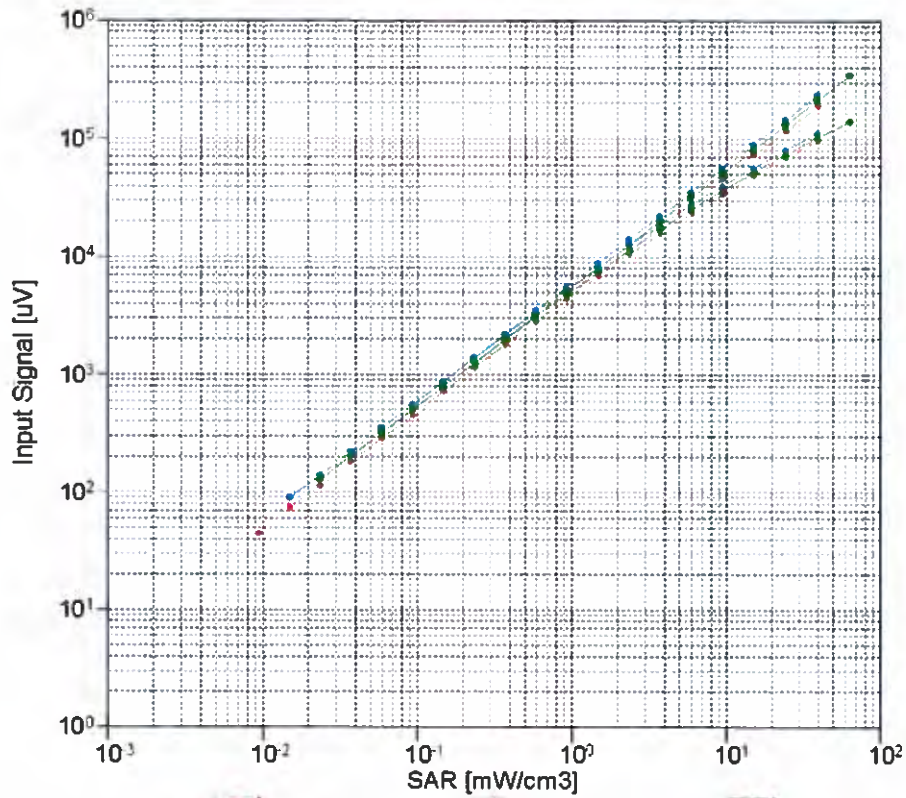


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Conversion Factor Assessment

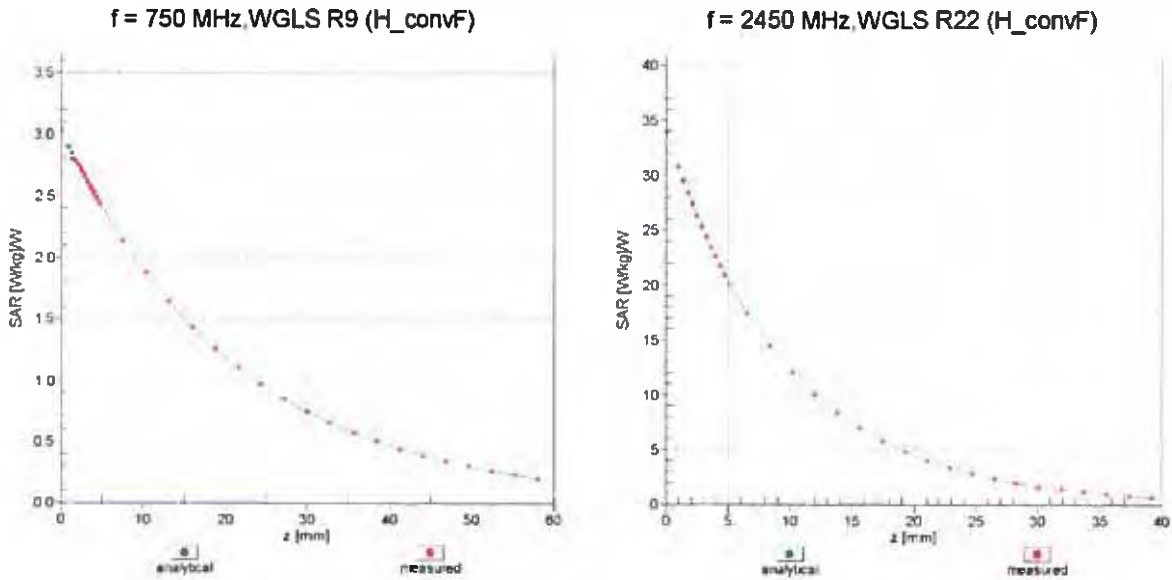

Deviation from Isotropy in Liquid Error (ϕ, ϑ), f = 900 MHz

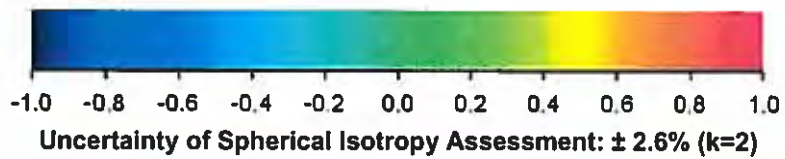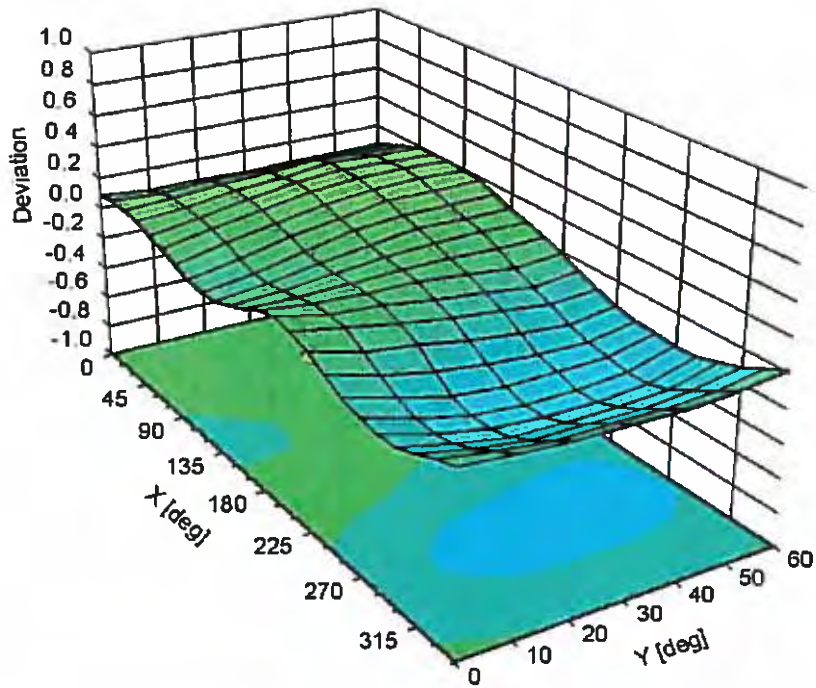

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3814

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	2 mm

Checked by *R.D.*

17-MAY-2012

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



SCS
Schweizerischer Kalibrierdienst
Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

ASSET A2113

Client **RFI**

Certificate No: **ET3-1587_May12**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1587**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-23.v4, QA CAL-25.v4
Calibration procedure for dosimetric E-field probes**

Calibration date **May 11, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-12 (No. 217-01508)	Apr-13
Power sensor E4412A	MY41498087	29-Mar-12 (No. 217-01508)	Apr-13
Reference 3 dB Attenuator	SN: S5054 (3c)	27-Mar-12 (No. 217-01531)	Apr-13
Reference 20 dB Attenuator	SN: S5086 (20b)	27-Mar-12 (No. 217-01529)	Apr-13
Reference 30 dB Attenuator	SN: S5129 (30b)	27-Mar-12 (No. 217-01532)	Apr-13
Reference Probe ES3DV2	SN: 3013	29-Dec-11 (No. ES3-3013_Dec11)	Dec-12
DAE4	SN: 660	10-Jan-12 (No. DAE4-660_Jan12)	Jan-13
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-11)	In house check: Apr-13
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

	Name	Function	Signature
Calibrated by:	Claudio Leubler	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: May 11, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}; A, B, C** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ET3DV6

SN:1587

Manufactured: May 7, 2001
Calibrated: May 11, 2012

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1587

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	2.14	1.92	1.79	$\pm 10.1\%$
DCP (mV) ^B	99.0	97.5	99.1	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc ^E (k=2)
0	CW	0.00	X	0.00	0.00	1.00	119.0	$\pm 2.7\%$
			Y	0.00	0.00	1.00	114.6	
			Z	0.00	0.00	1.00	111.6	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6)

^B Numerical linearization parameter; uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1587

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
835	41.5	0.90	6.33	6.33	6.33	0.24	3.00	± 12.0 %
900	41.5	0.97	6.18	6.18	6.18	0.28	3.00	± 12.0 %
1750	40.1	1.37	5.47	5.47	5.47	0.58	2.35	± 12.0 %
1900	40.0	1.40	5.18	5.18	5.18	0.80	1.68	± 12.0 %
2450	39.2	1.80	4.52	4.52	4.52	0.80	1.95	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1587

Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
835	55.2	0.97	6.28	6.28	6.28	0.30	3.00	± 12.0 %
900	55.0	1.05	6.26	6.26	6.26	0.37	2.56	± 12.0 %
1750	53.4	1.49	4.92	4.92	4.92	0.74	2.18	± 12.0 %
1900	53.3	1.52	4.69	4.69	4.69	0.77	2.38	± 12.0 %
2450	52.7	1.95	4.13	4.13	4.13	0.80	2.02	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

Frequency Response of E-Field

(TEM-Cell: ifi110 EXX, Waveguide: R22)


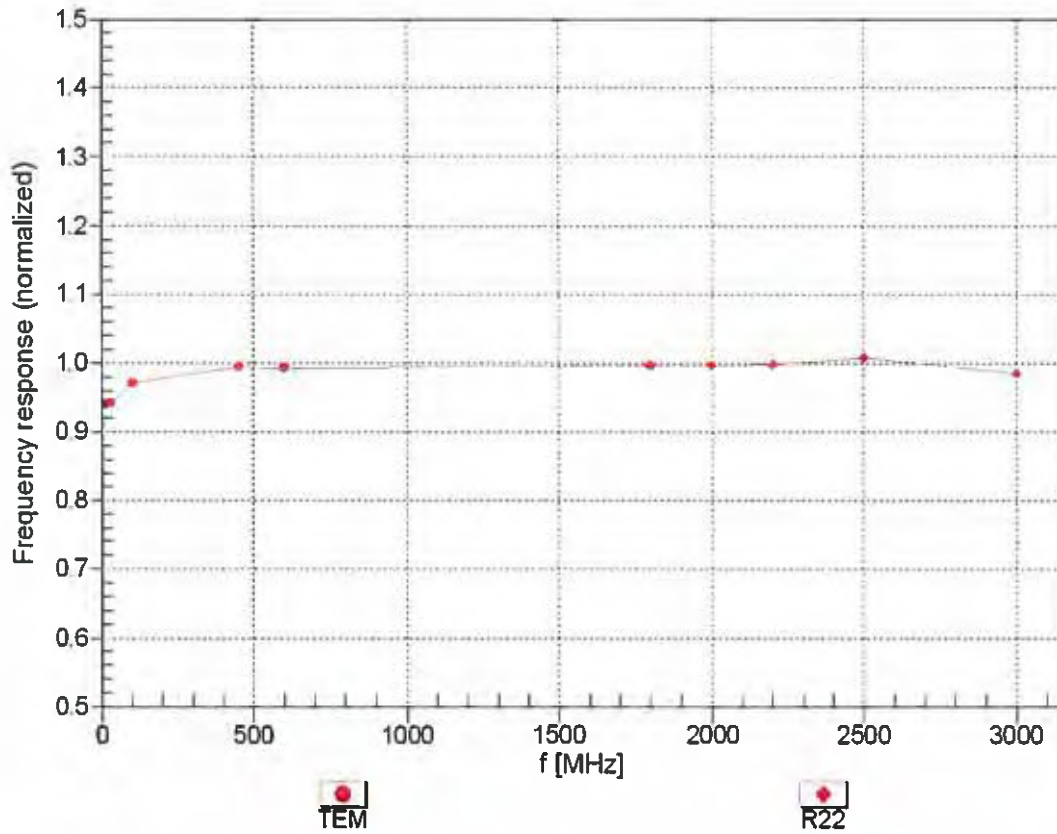


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$



f=600 MHz,TEM

f=1800 MHz,R22

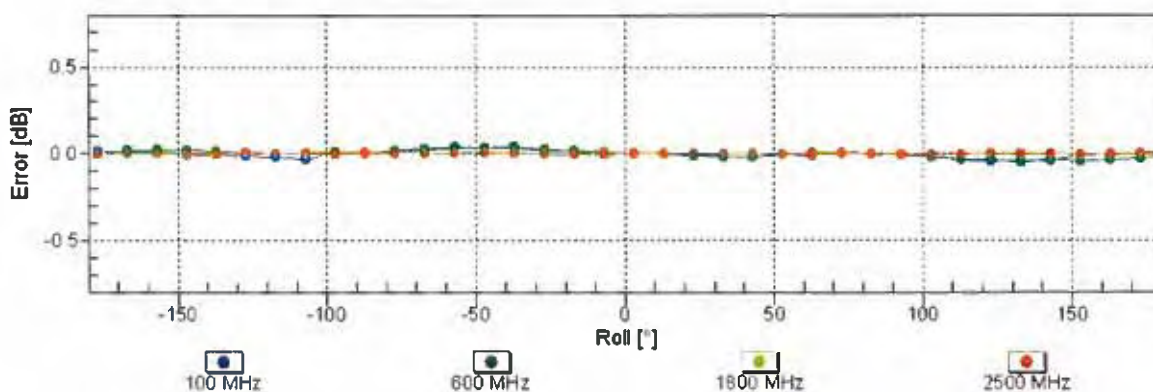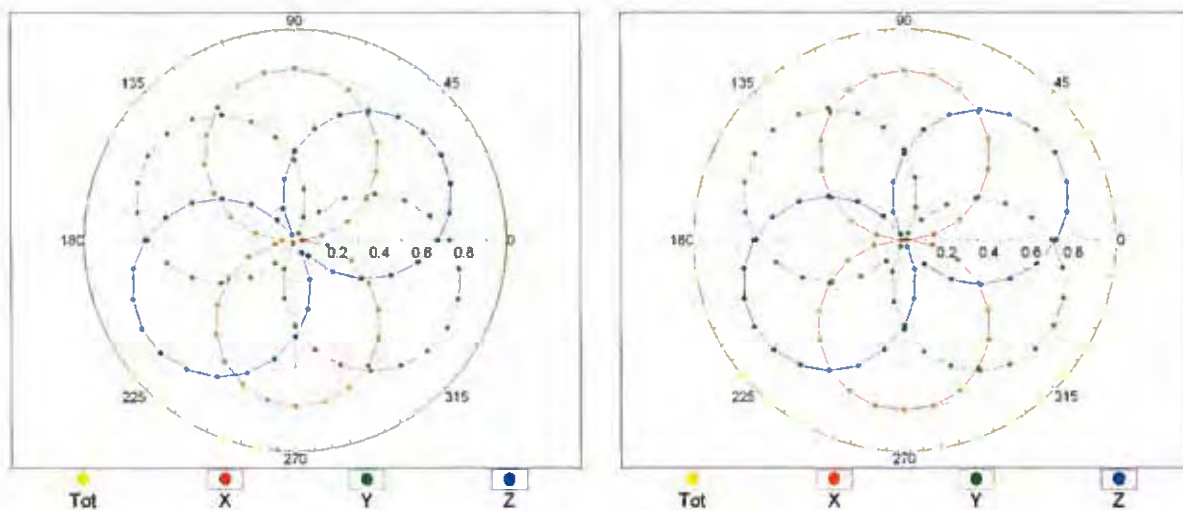


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f = 900 \text{ MHz}$)

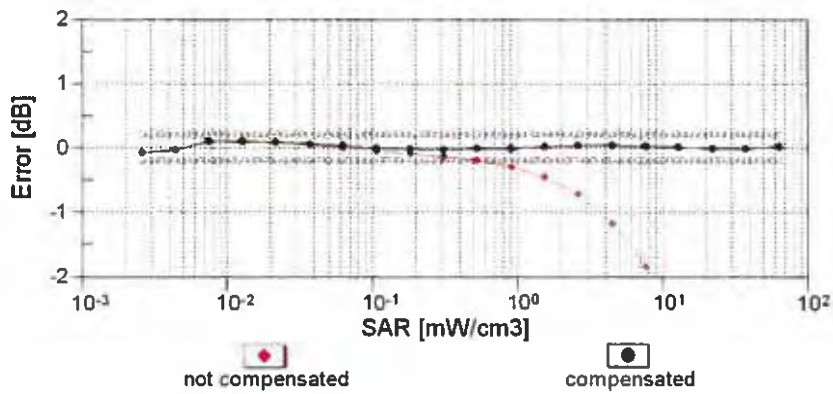
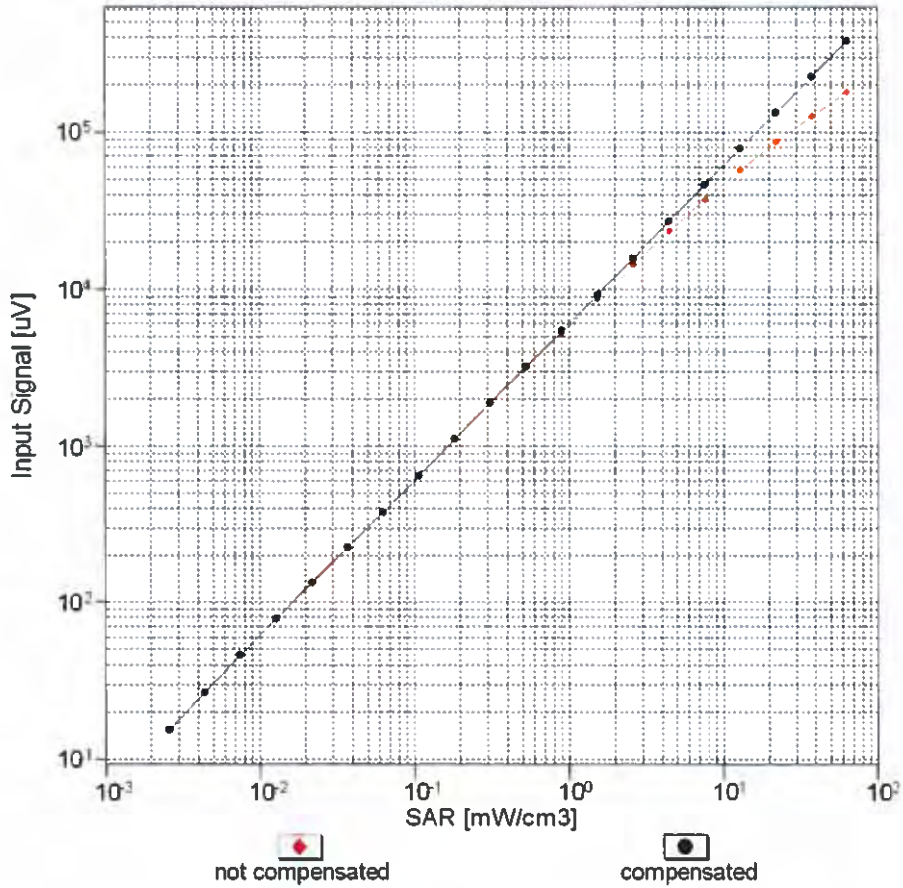


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

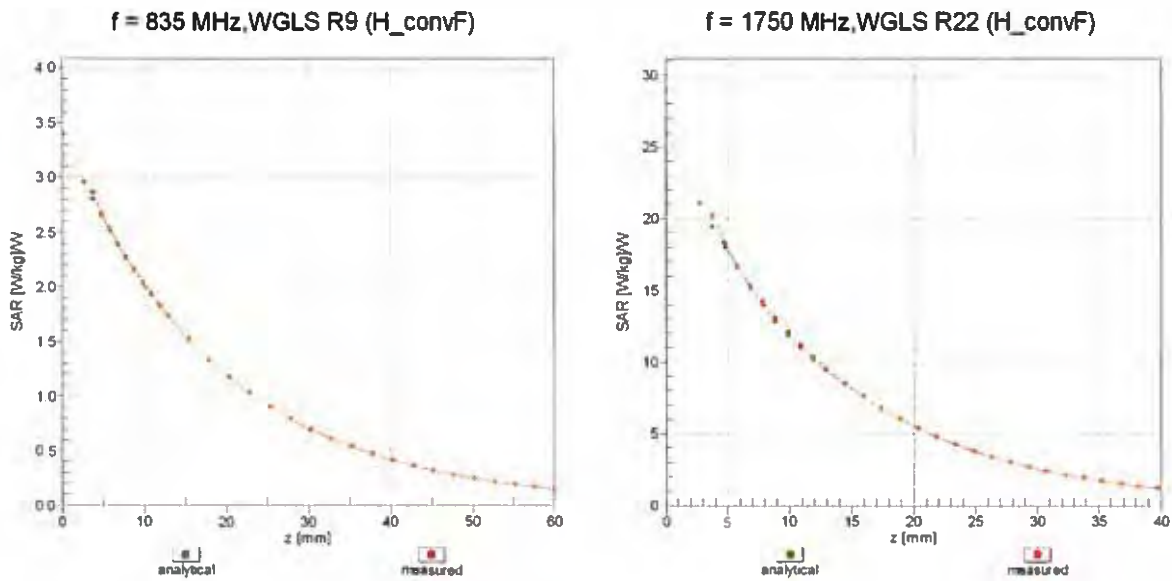

Deviation from Isotropy in Liquid Error (ϕ , θ), $f = 900$ MHz

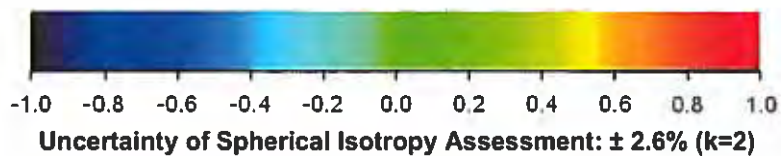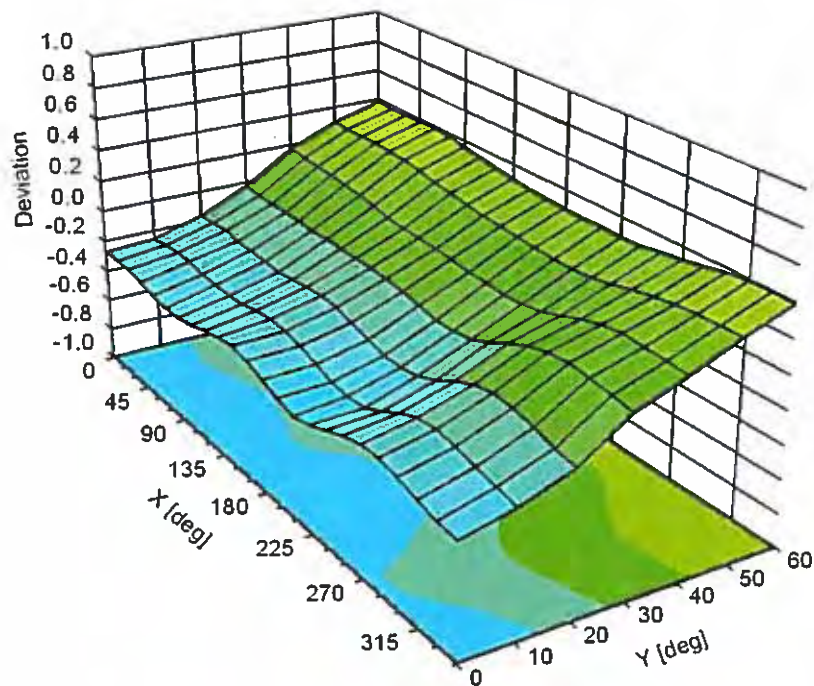

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1587**Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	72.9
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	enabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	6.8 mm
Probe Tip to Sensor X Calibration Point	2.7 mm
Probe Tip to Sensor Y Calibration Point	2.7 mm
Probe Tip to Sensor Z Calibration Point	2.7 mm
Recommended Measurement Distance from Surface	4 mm

ASSET A1235 Checked by *[Signature]*
21/02/2011

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **RFI**

Certificate No: **D900V2-124_Feb11**

CALIBRATION CERTIFICATE

Object **D900V2 - SN: 124**

Calibration procedure(s) **QA CAL-05.v8
Calibration procedure for dipole validation kits**

Calibration date: **February 09, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11
DAE4	SN: 601	10-Jun-10 (No. DAE4-601_Jun10)	Jun-11

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

	Name	Function	Signature
Calibrated by:	Dimce Iliev	Laboratory Technician	<i>[Signature]</i>
Approved by:	Katja Pokovic	Technical Manager	<i>[Signature]</i>

Issued: February 9, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V4.9	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	900 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.2 °C	41.5	0.97 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	40.3 \pm 6 %	0.95 mho/m \pm 6 %
Head TSL temperature during test	(21.5 \pm 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.72 mW / g
SAR normalized	normalized to 1W	10.9 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	11.0 mW / g \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.74 mW / g
SAR normalized	normalized to 1W	6.96 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	7.01 mW / g \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.0	1.05 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.6 ± 6 %	1.05 mho/m ± 6 %
Body TSL temperature during test	(21.8 ± 0.2) °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.79 mW / g
SAR normalized	normalized to 1W	11.2 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	11.1 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.79 mW / g
SAR normalized	normalized to 1W	7.16 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	7.14 mW / g ± 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	48.9 Ω - 8.2 j Ω
Return Loss	- 21.6 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.1 Ω - 8.6 j Ω
Return Loss	- 20.2 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.409 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 04, 2001

DASY5 Validation Report for Head TSL

Date/Time: 09.02.2011 11:44:15

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN:124

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: HSL900

Medium parameters used: $f = 900$ MHz; $\sigma = 0.95$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.88, 5.88, 5.88); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)


Pin=250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.560 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 4.135 W/kg

SAR(1 g) = 2.72 mW/g; SAR(10 g) = 1.74 mW/g

Maximum value of SAR (measured) = 3.183 mW/g

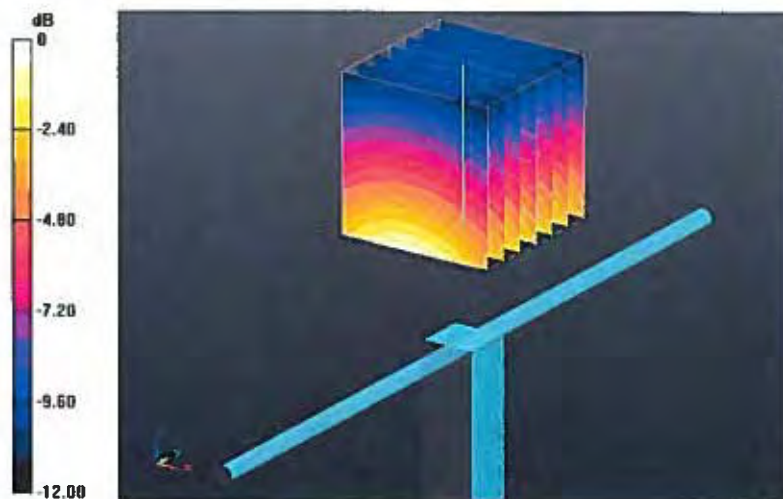


0 dB = 3.180mW/g

Impedance Measurement Plot for Head TSL

9 Feb 2011 10:21:37
CH1 S11 1 U FS 2: 48.854 Ω -8.1758 Ω 21.630 pF 900.000 000 MHz

*
De1
Cor

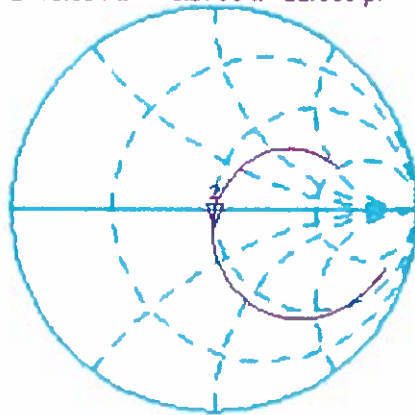


Avg
16
↑

CH2 S11 LOG 5 dB/REF -20 dB 21-21.595 dB 900.000 000 MHz

Cor

Avg
16

↑

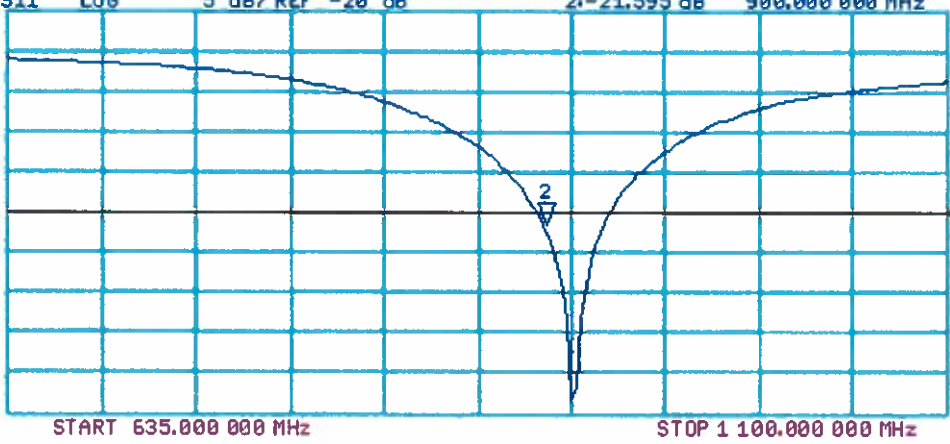

DASY5 Validation Report for Body TSL

Date/Time: 09.02.2011 14:54:48

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN:124

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: M900

Medium parameters used: $f = 900$ MHz; $\sigma = 1.05$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.81, 5.81, 5.81); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)


Pin=250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.520 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 4.203 W/kg

SAR(1 g) = 2.79 mW/g; SAR(10 g) = 1.79 mW/g

Maximum value of SAR (measured) = 3.271 mW/g

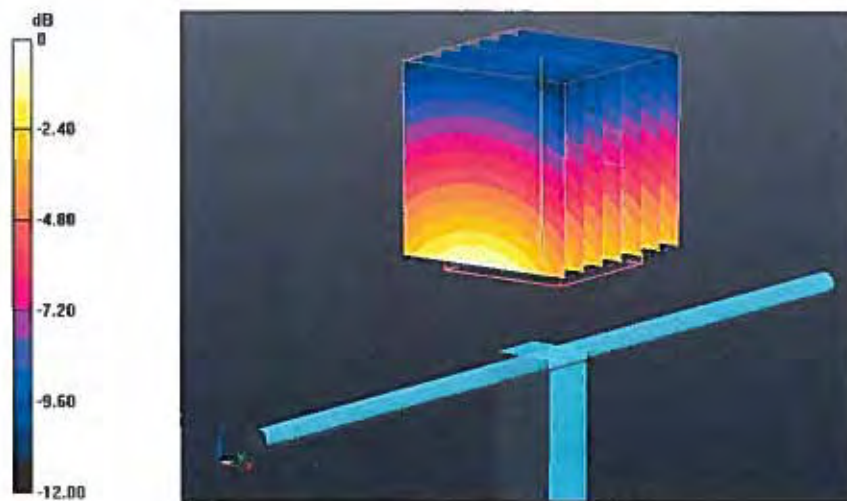

0 dB = 3.270mW/g

Impedance Measurement Plot for Body TSL


9 Feb 2011 14:24:47

CH1 S11 1 U FS

Z: 46.072 Ω -8.6230 Ω 20.508 pF

900.000 000 MHz

*
Del
Cor

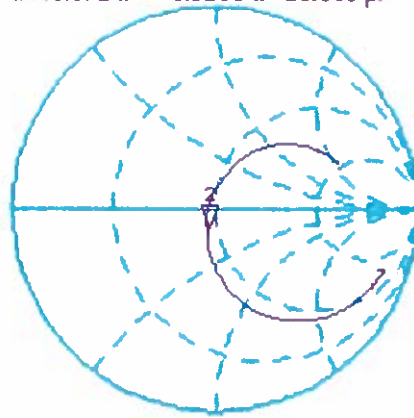

Avg
16


↑

CH2 S11 LOG 5 dB/ REF -20 dB 2: -20.156 dB 900.000 000 MHz

Cor

Avg
16

↑

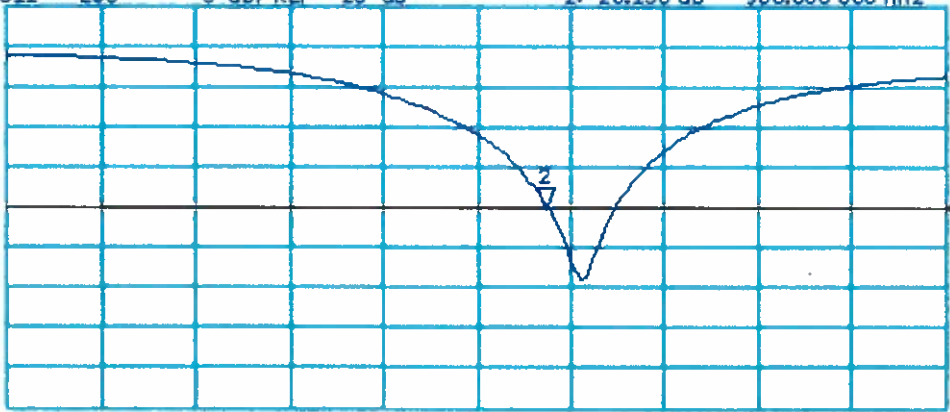

START 635.000 000 MHz

STOP 1 100.000 000 MHz

ASSET: A/237 - Checked by *KS*
21/02/2011

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **RFI**

Certificate No: **D1900V2-540_Feb11**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 540**

Calibration procedure(s) **QA CAL-05.v8
Calibration procedure for dipole validation kits**

Calibration date: **February 08, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11
DAE4	SN: 601	10-Jun-10 (No. DAE4-601_Jun10)	Jun-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by: **Dimce Iliev** **Function: Laboratory Technician** *Signature: D. Iliev*

Approved by: **Katja Pokovic** **Technical Manager** *Signature: Katja Pokovic*

Issued: February 8, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	39.8 ± 6 %	1.41 mho/m ± 6 %
Head TSL temperature during test	(21.0 ± 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	10.1 mW / g
SAR normalized	normalized to 1W	40.4 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	40.3 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.25 mW / g
SAR normalized	normalized to 1W	21.0 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	21.0 mW / g ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.8 ± 6 %	1.55 mho/m ± 6 %
Body TSL temperature during test	(21.2 ± 0.2) °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	10.3 mW / g
SAR normalized	normalized to 1W	41.2 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	40.7 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.43 mW / g
SAR normalized	normalized to 1W	21.7 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	21.6 mW / g ± 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.5 Ω + 4.2 j Ω
Return Loss	- 27.6 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	45.6 Ω + 5.0 j Ω
Return Loss	- 23.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.195 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 26, 2001

DASY5 Validation Report for Head TSL

Date/Time: 07.02.2011 15:18:47

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:540

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL U12 BB

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.09, 5.09, 5.09); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)


Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.936 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 18.544 W/kg

SAR(1 g) = 10.1 mW/g; SAR(10 g) = 5.25 mW/g

Maximum value of SAR (measured) = 12.384 mW/g

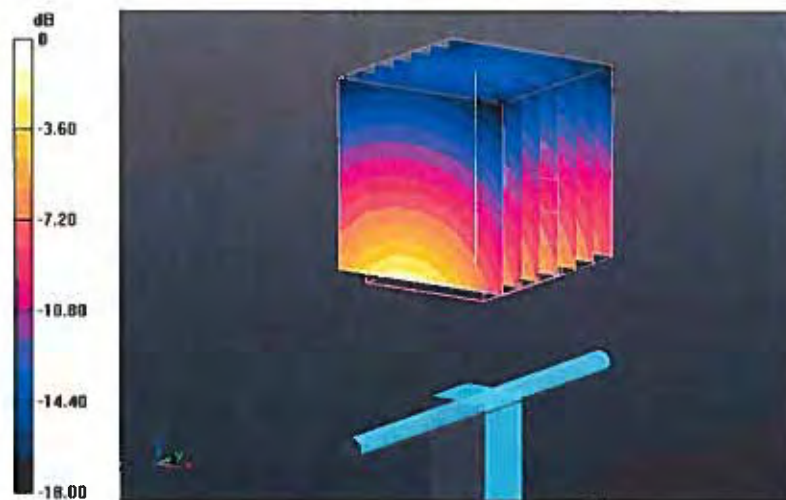


Impedance Measurement Plot for Head TSL

7 Feb 2011 16:45:39

CH1 S11 1 U FS 1: 50.525 Ω 4.1680 Ω 349.13 μ H 1 900.000 000 MHz


*
De 1
CA

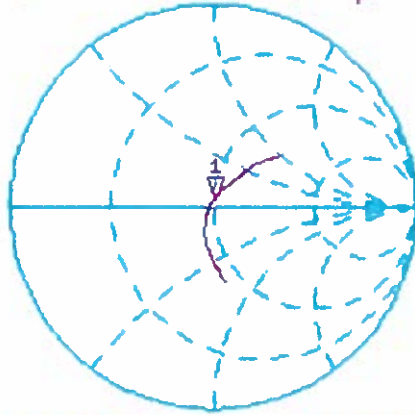

Avg
16
↑

CH2 S11 LOG 5 dB/ REF -20 dB 1: -27.575 dB 1 900.000 000 MHz

CA
Avg
16
↑

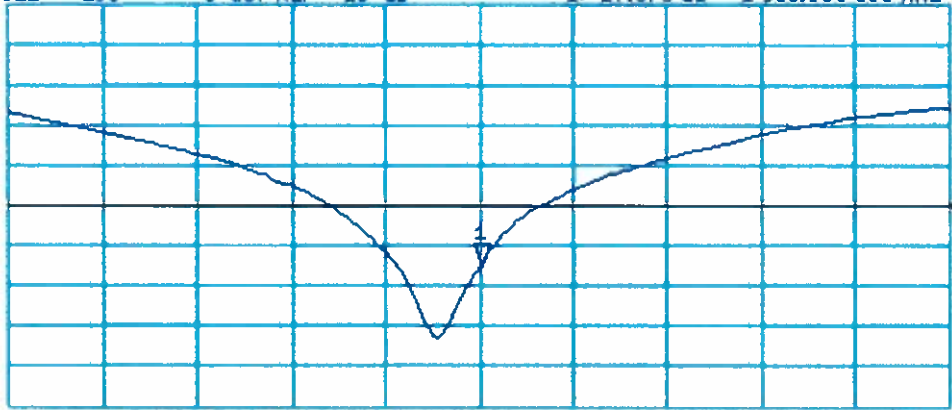

DASY5 Validation Report for Body TSL

Date/Time: 08.02.2011 12:04:35

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:540

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL U12 BB

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.59, 4.59, 4.59); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)

Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.899 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 17.597 W/kg

SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.43 mW/g

Maximum value of SAR (measured) = 13.038 mW/g




0 dB = 13.040mW/g

Impedance Measurement Plot for Body TSL

8 Feb 2011 10:45:02

CH1 S11 1 U FS 3: 45.568 Ω 5.0391 Ω 422.10 pF 1 900.000 000 MHz

*
De 1
CA

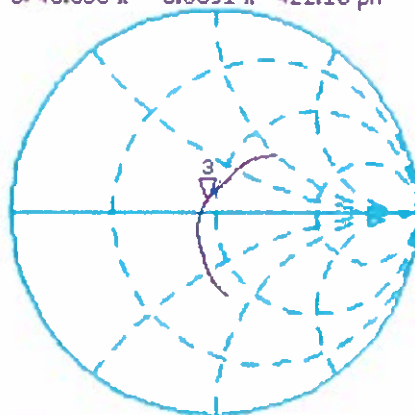


Avg
16

CH2 S11 LOG 5 dB/REF -20 dB 3: -23.090 dB 1 900.000 000 MHz

CA

Avg
16

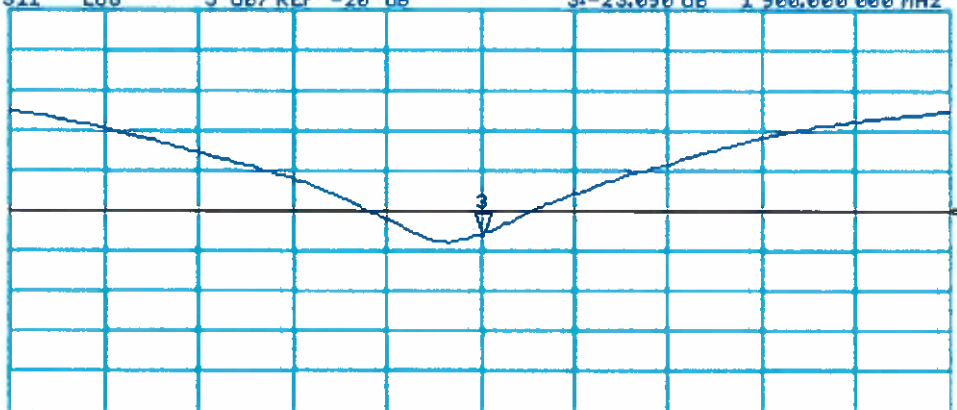

START 1 700.000 000 MHz

STOP 2 100.000 000 MHz

ASSET! A1322 - Checked by RRB

21/02/2011

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **RFI**

Certificate No: **D2450V2-725_Feb11**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 725**

Calibration procedure(s) **QA CAL-05.v8
Calibration procedure for dipole validation kits**

Calibration date: **February 08, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3) °C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11
DAE4	SN: 601	10-Jun-10 (No. DAE4-601_Jun10)	Jun-11

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by:	Name Dimce Iliev	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature

Issued: February 8, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	39.1 ± 6 %	1.73 mho/m ± 6 %
Head TSL temperature during test	(21.0 ± 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.0 mW / g
SAR normalized	normalized to 1W	52.0 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	52.9 mW /g ± 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.13 mW / g
SAR normalized	normalized to 1W	24.5 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	24.7 mW /g ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.2 ± 6 %	1.94 mho/m ± 6 %
Body TSL temperature during test	(21.0 ± 0.2) °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.0 mW / g
SAR normalized	normalized to 1W	52.0 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	51.9 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.04 mW / g
SAR normalized	normalized to 1W	24.2 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	24.1 mW / g ± 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	45.6 Ω + 7.9 j Ω
Return Loss	- 20.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	49.5 Ω + 9.7 j Ω
Return Loss	- 20.2 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.152 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	October 16, 2002

DASY5 Validation Report for Head TSL

Date/Time: 07.02.2011 14:34:55

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:725

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL U12 BB

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.74$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.53, 4.53, 4.53); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)


Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.3 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 26.701 W/kg

SAR(1 g) = 13 mW/g; SAR(10 g) = 6.13 mW/g

Maximum value of SAR (measured) = 16.608 mW/g

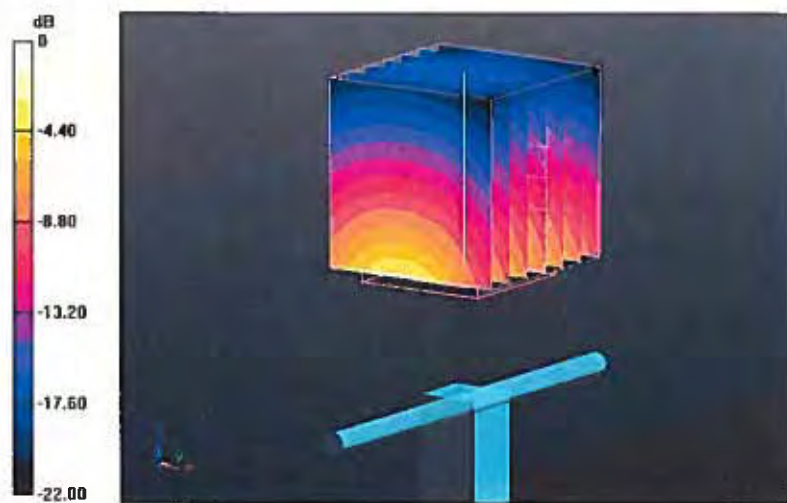

Impedance Measurement Plot for Head TSL


7 Feb 2011 16:48:44

CH1 S11 1 U FS 2: 45.582 Ω 7.8730 Ω 511.44 pF 2 450.000 000 MHz

De l
CA

Avg
16

↑

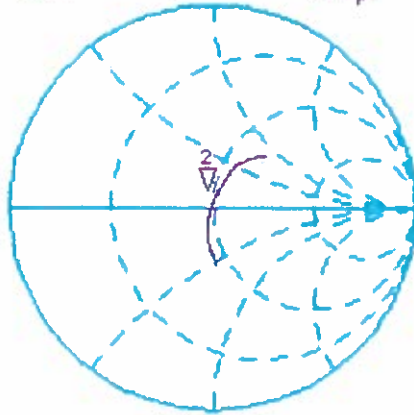


CH2 S11 LOG 5 dB/REF -20 dB 2: -20.528 dB 2 450.000 000 MHz

CA

Avg
16

↑

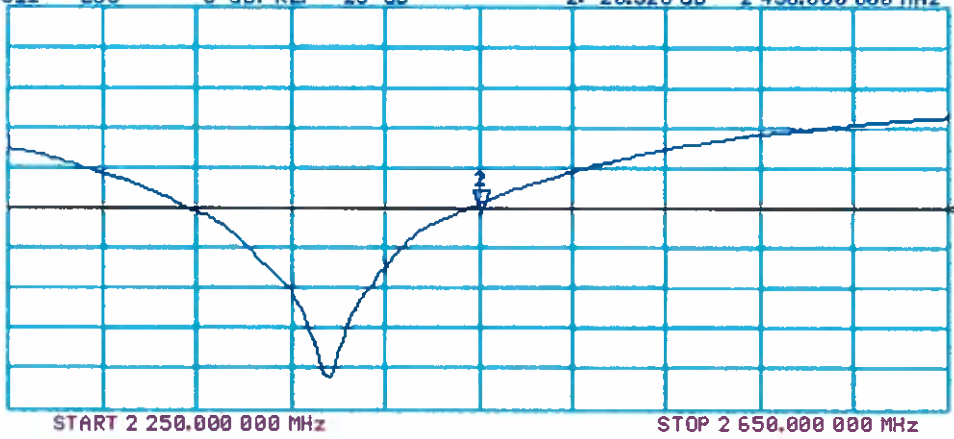

DASY5 Validation Report for Body TSL

Date/Time: 08.02.2011 12:48:13

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:725

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL U12 BB

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.95$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.31, 4.31, 4.31); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)


Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.406 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 27.401 W/kg

SAR(1 g) = 13 mW/g; SAR(10 g) = 6.04 mW/g


Maximum value of SAR (measured) = 17.121 mW/g

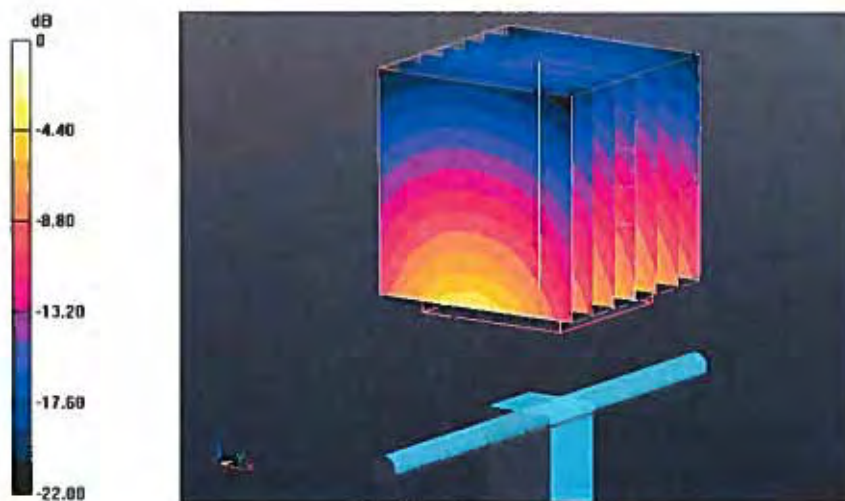

Impedance Measurement Plot for Body TSL

8 Feb 2011 10:56:06
CH1 S11 1 U FS S: 49.523 Ω 9.7422 Ω 632.86 ρH 2 450.000 000 MHz


*
De 1
Ca

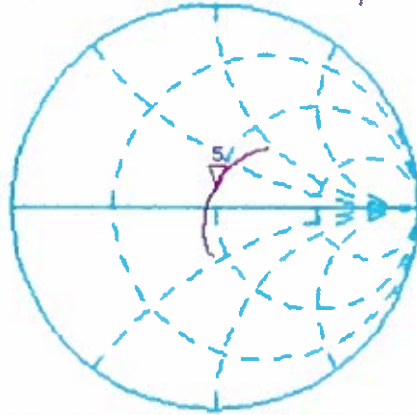

Avg
16
↑

CH2 S11 LOG 5 dB/ REF -20 dB S: -20.215 dB 2 450.000 000 MHz

Ca
Avg
16
↑

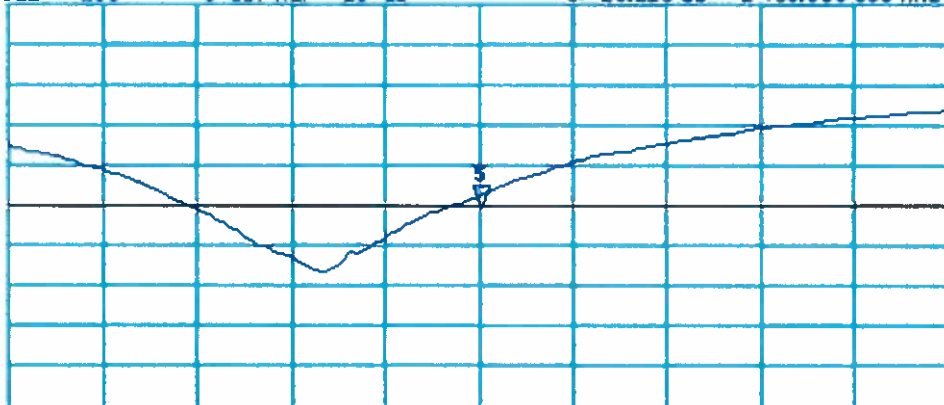

START 2 250.000 000 MHz STOP 2 650.000 000 MHz

Appendix 2. Measurement Methods

A.2.1. Evaluation Procedure

The Specific Absorption Rate (SAR) evaluation was performed in the following manner:

- a) (i) The evaluation was performed in an applicable area of the phantom depending on the type of device being tested. For devices worn about the ear during normal operation, both the left and right ear positions were evaluated at the centre frequency of the band at maximum power. The side, which produced the greatest SAR, determined which side of the phantom would be used for the entire evaluation. The positioning of the head worn device relative to the phantom was dictated by the test specification identified in section 3.1 of this report.

(ii) For body worn devices or devices which can be operated within 20 cm of the body, the flat section of the SAM phantom was used were the size of the device(s) is normal. for bigger devices and base station the 2mm Oval phantom is used for evaluation. The type of device being evaluated dictated the distance of the EUT to the outer surface of the phantom flat section.
- b) The SAR was determined by a pre-defined procedure within the DASY4 software. The exposed region of the phantom was scanned near the inner surface with a grid spacing of 20mm x 20mm or appropriate resolution.
- c) A 5x5x7 matrix for measurement < 4.5 GHz and 7x7x9 for > 4.5 GHz was performed around the greatest spatial SAR distribution found during the area scan of the applicable exposed region. SAR values were then calculated using a 3-D spline interpolation algorithm and averaged over spatial volumes of 1 and 10 grams.
- d) If the EUT had any appreciable drift over the course of the evaluation, then the EUT was re-evaluated. Any unusual anomalies over the course of the test also warranted a re-evaluation.

A.2.2. Specific Absorption Rate (SAR) Measurements to OET Bulletin 65 Supplement C: (2001-01)

Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields

SAR measurements were performed in accordance with Appendix D of the standard FCC OET Bulletin 65 Supplement C: 2001, IEEE 1528 and FCC KDB procedures, against appropriate limits for each measurement position in accordance with the standard. In some cases the FCC was contacted using a PBA or KDB process to ensure test is performed correctly.

The test was performed in a shielded enclosure with the temperature controlled to remain between +18.0°C and +25.0°C. The tissue equivalent material fluid temperature was controlled to give a maximum variation of $\pm 2.0^\circ\text{C}$

Prior to any SAR measurements on the EUT, system Check and material dielectric property measurements were conducted. In the absence of a detailed procedure within the specification, system Check and material dielectric property measurements were performed in accordance with Appendix C and Appendix D of FCC OET Bulletin 65 Supplement C: 2001 and FCC KDB publication 450824.

Following the successful system Check and material dielectric property measurements, a SAR versus time sweep shall be performed within 10 mm of the phantom inner surface. If the EUT power output is stable after three minutes then the measurement probe will perform a coarse surface level scan at each test position in order to ascertain the location of the maximum local SAR level. Once this area had been established, a 5x5x7 cube of 175 points below 4.5 GHz and above 4.5GHz 7x7x9 cube of 441 points (5 mm spacing in each axis $\approx 27\text{g}$) will be centred at the area of concern. Extrapolation and interpolation will then be carried out on the 27g of tissue and the highest averaged SAR over a 1g cube determined.

Once the maximum interpolated SAR measurement is complete; the coarse scan is visually assessed to check for secondary peaks within 50% of the maximum SAR level. If there are any further SAR measurements required, extra 5x5x7 or 7x7x9 cubes shall be centred on each of these extra local SAR maxima.

At the end of each position test case a second time sweep shall be performed to check whether the EUT has remained stable throughout the test.

Appendix 3. SAR Distribution Scans

This appendix contains SAR distribution scans which are not included in the total number of pages for this report.

Scan Reference Number	Title
SCN/87207JD02A/001	Touch Left GSM CH190
SCN/87207JD02A/002	Tilt Left GSM CH190
SCN/87207JD02A/003	Touch Right GSM CH190
SCN/87207JD02A/004	Tilt Right GSM CH190
SCN/87207JD02A/005	Touch Right GSM CH128
SCN/87207JD02A/006	Touch Right GSM CH251
SCN/87207JD02A/007	Front of EUT Facing Phantom GPRS CH190
SCN/87207JD02A/008	Front of EUT Facing Phantom GPRS CH128
SCN/87207JD02A/009	Front of EUT Facing Phantom GPRS CH251
SCN/87207JD02A/010	Back of EUT Facing Phantom GPRS CH190
SCN/87207JD02A/011	Back of EUT Facing Phantom GPRS CH128
SCN/87207JD02A/012	Back of EUT Facing Phantom GPRS CH251
SCN/87207JD02A/013	Left Hand Side of EUT Facing Phantom GPRS CH190
SCN/87207JD02A/014	Left Hand Side of EUT Facing Phantom GPRS CH128
SCN/87207JD02A/015	Left Hand Side of EUT Facing Phantom GPRS CH251
SCN/87207JD02A/016	Right Hand Side of EUT Facing Phantom GPRS CH190
SCN/87207JD02A/017	Right Hand Side of EUT Facing Phantom GPRS CH128
SCN/87207JD02A/018	Right Hand Side of EUT Facing Phantom GPRS CH251
SCN/87207JD02A/019	Bottom of EUT Facing Phantom GPRS CH190
SCN/87207JD02A/020	Back of EUT Facing Phantom GSM CH190
SCN/87207JD02A/021	Back of EUT Facing Phantom GSM CH128
SCN/87207JD02A/022	Back of EUT Facing Phantom GSM CH251
SCN/87207JD02A/023	Back of EUT Facing Phantom with PHF GSM CH128
SCN/87207JD02A/024	Touch Left PCS1900 CH661
SCN/87207JD02A/025	Tilt Left PCS1900 CH661
SCN/87207JD02A/026	Touch Right PCS1900 CH661
SCN/87207JD02A/027	Tilt Right PCS1900 CH661
SCN/87207JD02A/028	Touch Left PCS1900 CH512
SCN/87207JD02A/029	Touch Left PCS1900 CH810
SCN/87207JD02A/030	Front of EUT Facing Phantom GPRS CH661
SCN/87207JD02A/031	Back of EUT Facing Phantom GPRS CH661
SCN/87207JD02A/032	Left Hand Side of EUT Facing Phantom GPRS CH661
SCN/87207JD02A/033	Right Hand Side of EUT Facing Phantom GPRS CH661
SCN/87207JD02A/034	Bottom of EUT Facing Phantom GPRS CH661

SAR Distribution Scans (Continued):

SCN/87207JD02A/035	Back of EUT Facing Phantom GPRS CH512
SCN/87207JD02A/036	Back of EUT Facing Phantom GPRS CH810
SCN/87207JD02A/037	Back of EUT Facing Phantom PCS CH661
SCN/87207JD02A/038	Back of EUT Facing Phantom PCS CH512
SCN/87207JD02A/039	Back of EUT Facing Phantom PCS CH810
SCN/87207JD02A/040	Back of EUT Facing Phantom with PHF PCS CH810
SCN/87207JD02A/041	Touch Left UMTS FDD 2 CH9400
SCN/87207JD02A/042	Touch Left UMTS FDD 2 CH9262
SCN/87207JD02A/043	Touch Left UMTS FDD 2 CH9538
SCN/87207JD02A/044	Tilt Left UMTS FDD 2 CH9400
SCN/87207JD02A/045	Touch Right UMTS FDD 2 CH9400
SCN/87207JD02A/046	Touch Right UMTS FDD 2 CH9262
SCN/87207JD02A/047	Touch Right UMTS FDD 2 CH9538
SCN/87207JD02A/048	Tilt Right UMTS FDD 2 CH9400
SCN/87207JD02A/049	Front of EUT Facing Phantom UMTS FDD 2 CH9400
SCN/87207JD02A/050	Back of EUT Facing Phantom UMTS FDD 2 CH9400
SCN/87207JD02A/051	Back of EUT Facing Phantom UMTS FDD 2 CH9262
SCN/87207JD02A/052	Back of EUT Facing Phantom UMTS FDD 2 CH9538
SCN/87207JD02A/053	Left Hand Side of EUT Facing Phantom UMTS FDD 2 CH9400
SCN/87207JD02A/054	Right Hand Side of EUT Facing Phantom UMTS FDD 2 CH9400
SCN/87207JD02A/055	Bottom of EUT Facing Phantom UMTS FDD 2 CH9400
SCN/87207JD02A/056	Bottom of EUT Facing Phantom UMTS FDD 2 CH9262
SCN/87207JD02A/057	Bottom of EUT Facing Phantom UMTS FDD 2 CH9538
SCN/87207JD02A/058	Back of EUT Facing Phantom at 15mm UMTS FDD 2 CH9400
SCN/87207JD02A/059	Back of EUT Facing Phantom at 15mm UMTS FDD 2 CH9262
SCN/87207JD02A/060	Back of EUT Facing Phantom at 15mm UMTS FDD 2 CH9538
SCN/87207JD02A/061	Back of EUT Facing Phantom with PHF at 15mm UMTS FDD 2 CH9262
SCN/87207JD02A/062	Touch Left UMTS FDD 5 CH4183
SCN/87207JD02A/063	Tilt Left UMTS FDD 5 CH4183
SCN/87207JD02A/064	Touch Right UMTS FDD 5 CH4183
SCN/87207JD02A/065	Touch Right UMTS FDD 5 CH4132
SCN/87207JD02A/066	Touch Right UMTS FDD 5 CH4233
SCN/87207JD02A/067	Tilt Right UMTS FDD 5 CH4183
SCN/87207JD02A/068	Front of EUT Facing Phantom UMTS FDD 5 CH 4183
SCN/87207JD02A/069	Front of EUT Facing Phantom UMTS FDD 5 CH 4132
SCN/87207JD02A/070	Front of EUT Facing Phantom UMTS FDD 5 CH 4233
SCN/87207JD02A/071	Back of EUT Facing Phantom UMTS FDD 5 CH 4183
SCN/87207JD02A/072	Back of EUT Facing Phantom UMTS FDD 5 CH 4132

SAR Distribution Scans (Continued):

SCN/87207JD02A/073	Back of EUT Facing Phantom UMTS FDD 5 CH 4233
SCN/87207JD02A/074	Left Hand Side of EUT Facing Phantom UMTS FDD 5 CH4183
SCN/87207JD02A/075	Left Hand Side of EUT Facing Phantom UMTS FDD 5 CH4132
SCN/87207JD02A/076	Left Hand Side of EUT Facing Phantom UMTS FDD 5 CH4233
SCN/87207JD02A/077	Right Hand Side of EUT Facing Phantom UMTS FDD 5 CH4183
SCN/87207JD02A/078	Right Hand Side of EUT Facing Phantom UMTS FDD 5 CH4132
SCN/87207JD02A/079	Right Hand Side of EUT Facing Phantom UMTS FDD 5 CH4233
SCN/87207JD02A/080	Bottom of EUT Facing Phantom UMTS FDD 5 CH4183
SCN/87207JD02A/081	Back of EUT Facing Phantom at 15mm UMTS FDD 5 CH4183
SCN/87207JD02A/082	Back of EUT Facing Phantom at 15mm UMTS FDD 5 CH4132
SCN/87207JD02A/083	Back of EUT Facing Phantom at 15mm UMTS FDD 5 CH4233
SCN/87207JD02A/084	Back of EUT Facing Phantom at 15mm with PHF UMTS FDD 5 CH4233
SCN/87207JD02A/085	Touch Left WLAN802.11b 1Mbps CH6
SCN/87207JD02A/086	Tilt Left WLAN802.11b 1Mbps CH6
SCN/87207JD02A/087	Touch Right WLAN802.11b 1Mbps CH6
SCN/87207JD02A/088	Tilt Right WLAN802.11b 1Mbps CH6
SCN/87207JD02A/089	Touch Right WLAN802.11b 1Mbps CH1
SCN/87207JD02A/090	Touch Right WLAN802.11b 1Mbps CH11
SCN/87207JD02A/091	Front of EUT Facing Phantom WLAN802.11b 1Mbps CH6
SCN/87207JD02A/092	Back of EUT Facing Phantom WLAN802.11b 1Mbps CH6
SCN/87207JD02A/093	Left Hand Side of EUT Facing Phantom WLAN802.11b 1Mbps CH6
SCN/87207JD02A/094	Right Hand Side of EUT Facing Phantom WLAN802.11b 1Mbps CH6
SCN/87207JD02A/095	Top of EUT Facing Phantom WLAN802.11b 1Mbps CH6
SCN/87207JD02A/096	Back of EUT Facing Phantom WLAN802.11b 1Mbps CH1
SCN/87207JD02A/097	Back of EUT Facing Phantom WLAN802.11b 1Mbps CH11
SCN/87207JD02A/098	Back of EUT Facing Phantom at 15mm WLAN802.11b 1Mbps CH6
SCN/87207JD02A/099	Back of EUT Facing Phantom at 15mm WLAN802.11b 1Mbps CH1
SCN/87207JD02A/100	Back of EUT Facing Phantom at 15mm WLAN802.11b 1Mbps CH11
SCN/87207JD02A/101	Back of EUT Facing Phantom with PHF at 15mm WLAN802.11b 1Mbps CH6
SCN/87207JD02A/102	System Performance Check 900MHz Head 23 07 12
SCN/87207JD02A/103	System Performance Check 900MHz Head 09 08 12
SCN/87207JD02A/104	System Performance Check 900MHz Head 10 08 12
SCN/87207JD02A/105	System Performance Check 900MHz Body 23 07 12
SCN/87207JD02A/106	System Performance Check 900MHz Body 24 07 12
SCN/87207JD02A/107	System Performance Check 900MHz Body 25 07 12
SCN/87207JD02A/108	System Performance Check 900MHz Body 09 08 12


SAR Distribution Scans (Continued):

SCN/87207JD02A/109	System Performance Check 900MHz Body 10 08 12
SCN/87207JD02A/110	System Performance Check 900MHz Body 13 08 12
SCN/87207JD02A/111	System Performance Check 900MHz Body 14 08 12
SCN/87207JD02A/112	System Performance Check 1900MHz Head 20 07 12
SCN/87207JD02A/113	System Performance Check 1900MHz Head 09 08 12
SCN/87207JD02A/114	System Performance Check 1900MHz Body 23 07 12
SCN/87207JD02A/115	System Performance Check 1900MHz Body 10 08 12
SCN/87207JD02A/116	System Performance Check 2450MHz Head 31 08 12
SCN/87207JD02A/117	System Performance Check 2450MHz Body 03 09 12

SCN/87207JD02A/001: Touch Left GSM CH190

Date: 09/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

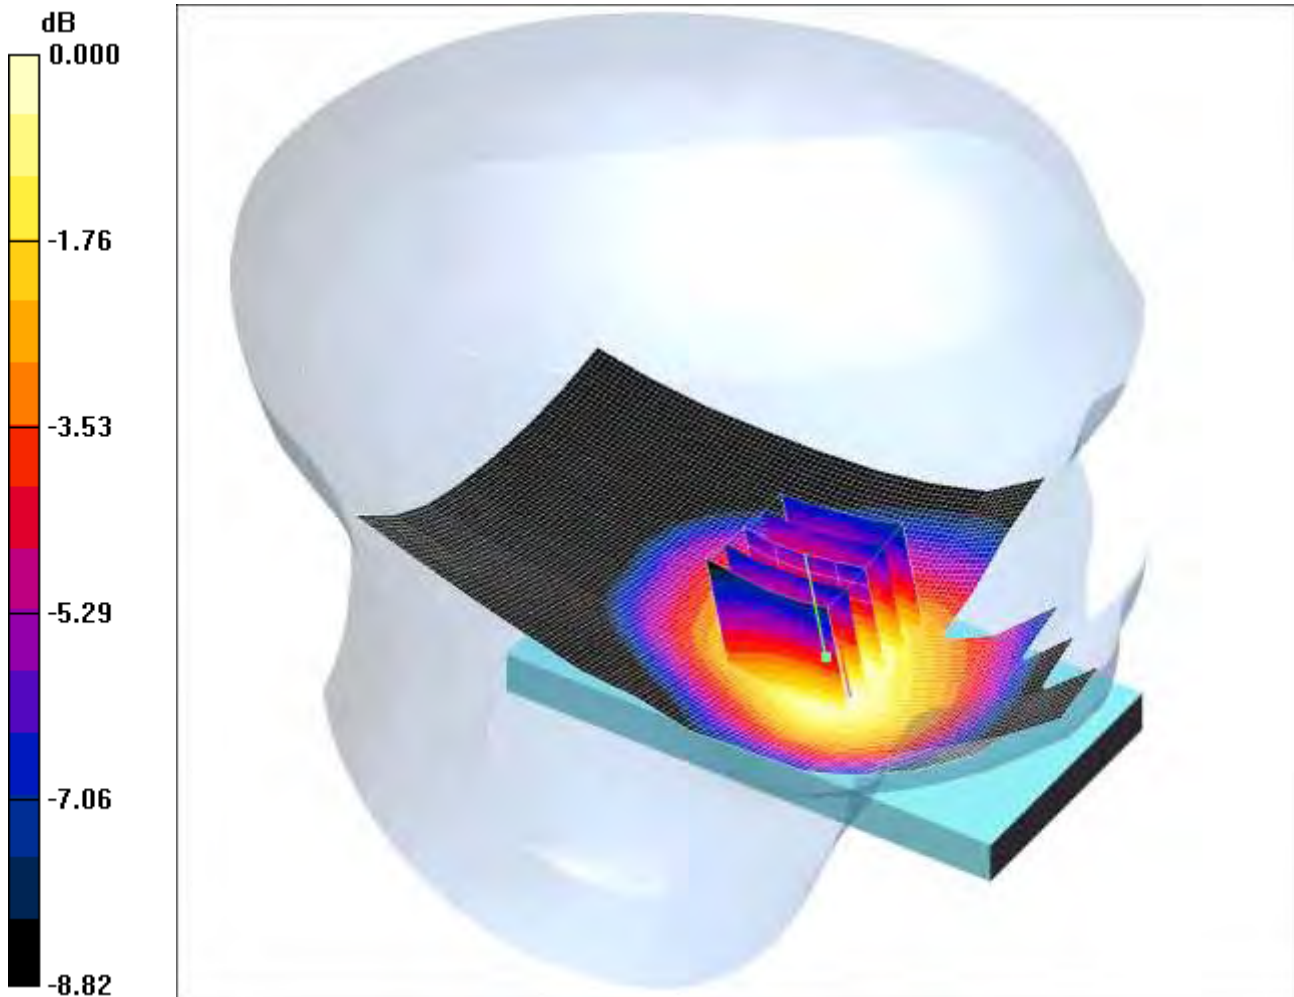

0 dB = 0.702mW/g

Communication System: GSM 850 MHz; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.933$ mho/m; $\epsilon_r = 41.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.75, 8.75, 8.75); Calibrated: 22/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Touch Left - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.683 mW/g

Touch Left - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.62 V/m; Power Drift = -0.050 dB

Peak SAR (extrapolated) = 0.813 W/kg


SAR(1 g) = 0.662 mW/g; SAR(10 g) = 0.501 mW/g

Maximum value of SAR (measured) = 0.702 mW/g

SCN/87207JD02A/002: Tilt Left GSM CH190

Date: 09/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

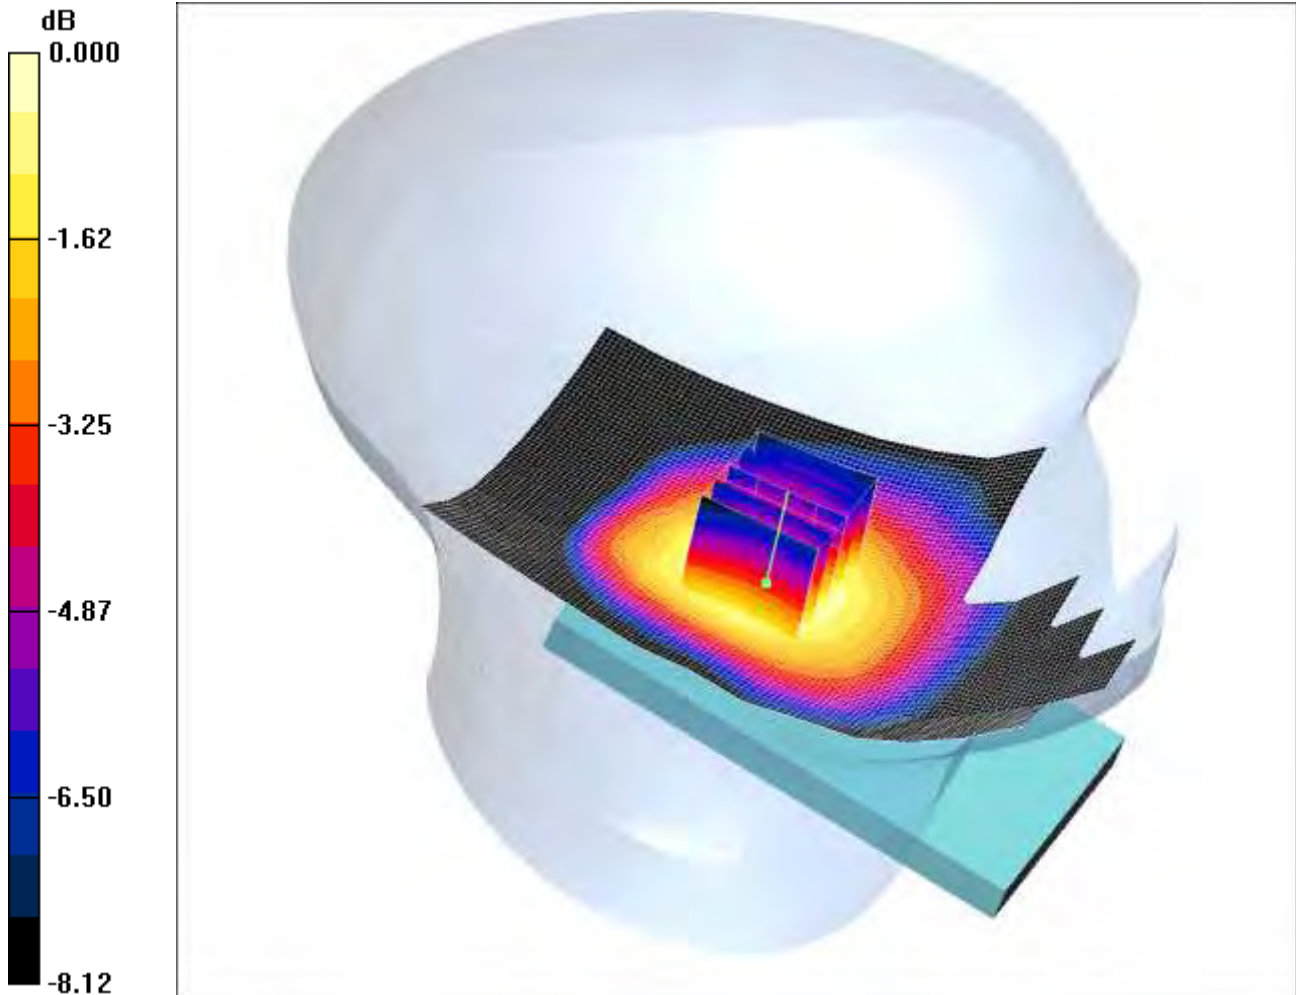

0 dB = 0.471mW/g

Communication System: GSM 850 MHz; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.933$ mho/m; $\epsilon_r = 41.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.75, 8.75, 8.75); Calibrated: 22/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Tilt Left - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.470 mW/g

Tilt Left - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.4 V/m; Power Drift = -0.047 dB

Peak SAR (extrapolated) = 0.557 W/kg


SAR(1 g) = 0.450 mW/g; SAR(10 g) = 0.343 mW/g

Maximum value of SAR (measured) = 0.471 mW/g

SCN/87207JD02A/003: Touch Right GSM CH190

Date: 10/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

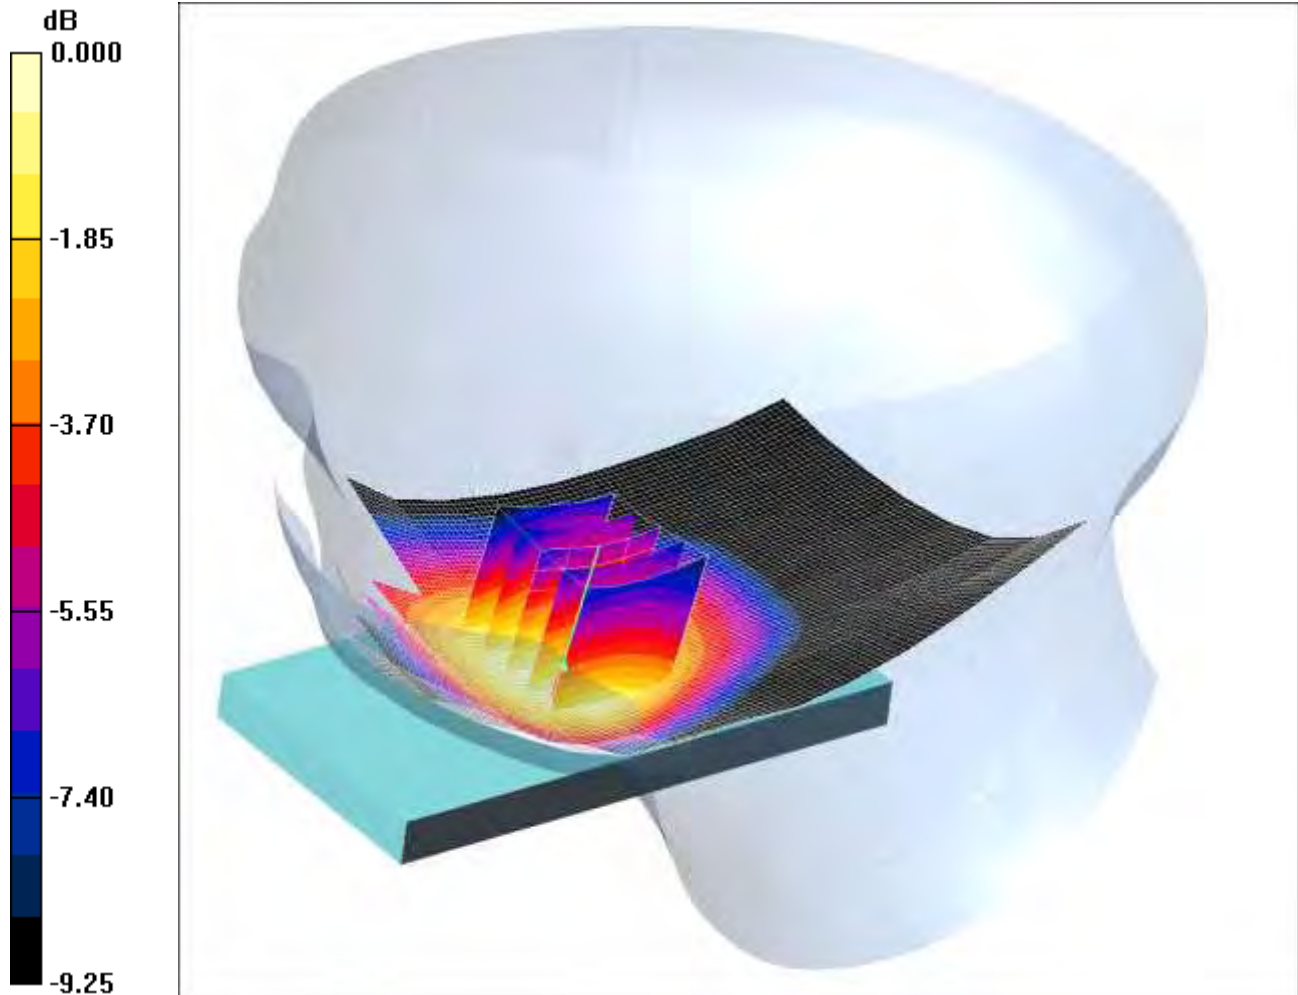

0 dB = 0.758mW/g

Communication System: GSM 850 MHz; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.904$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.75, 8.75, 8.75); Calibrated: 22/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Touch Left - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.748 mW/g

Touch Left - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.3 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 0.903 W/kg


SAR(1 g) = 0.723 mW/g; SAR(10 g) = 0.547 mW/g

Maximum value of SAR (measured) = 0.758 mW/g

SCN/87207JD02A/004: Tilt Right GSM CH190

Date: 10/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

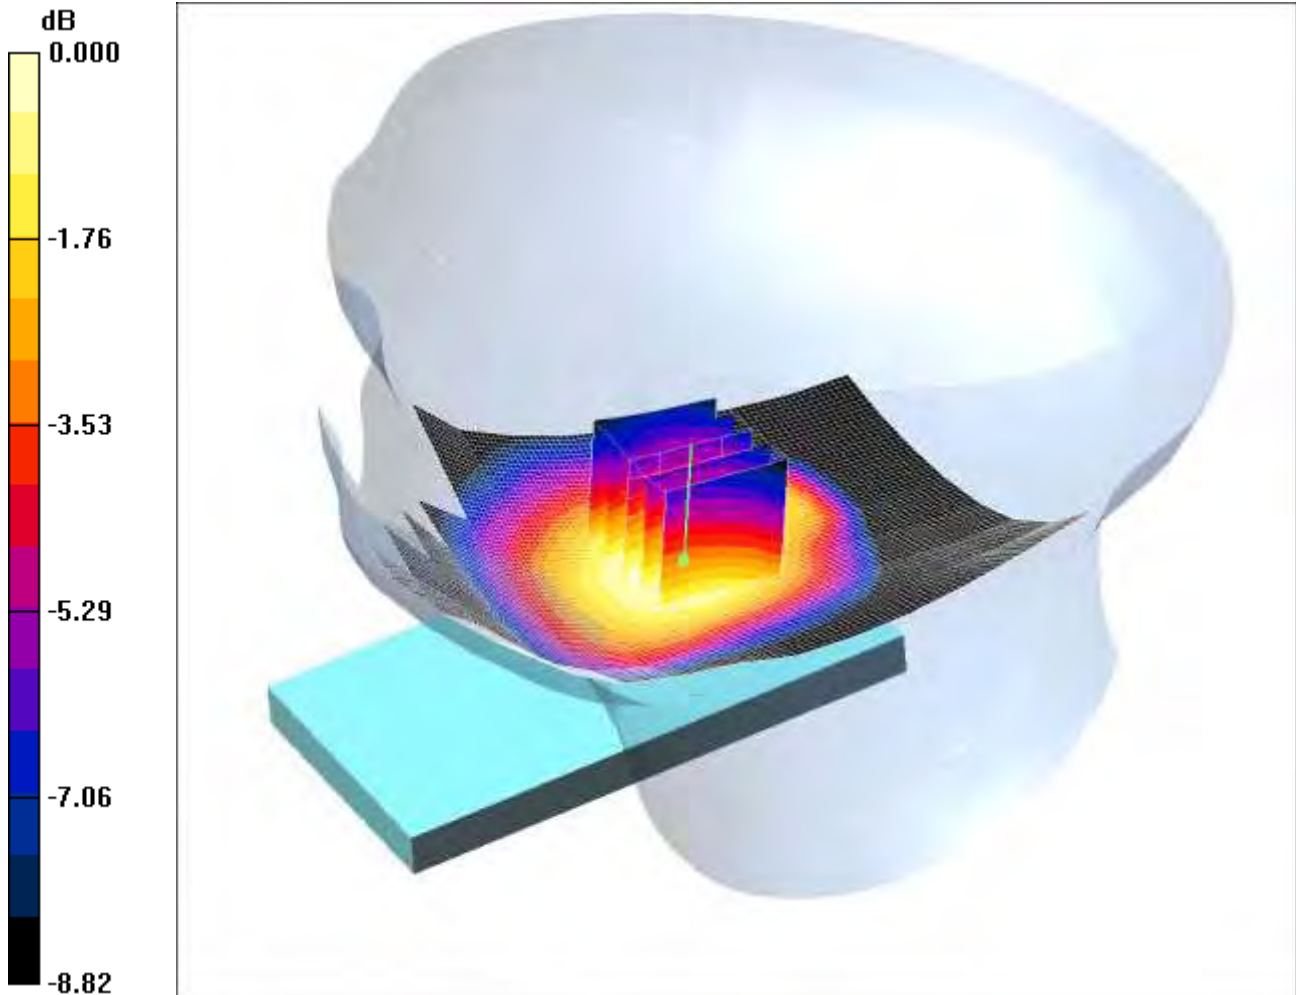

0 dB = 0.436mW/g

Communication System: GSM 850 MHz; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.904$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.75, 8.75, 8.75); Calibrated: 22/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Tilt Left - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.433 mW/g

Tilt Left - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.8 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 0.513 W/kg


SAR(1 g) = 0.412 mW/g; SAR(10 g) = 0.312 mW/g

Maximum value of SAR (measured) = 0.436 mW/g

SCN/87207JD02A/005: Touch Right GSM CH128

Date: 10/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

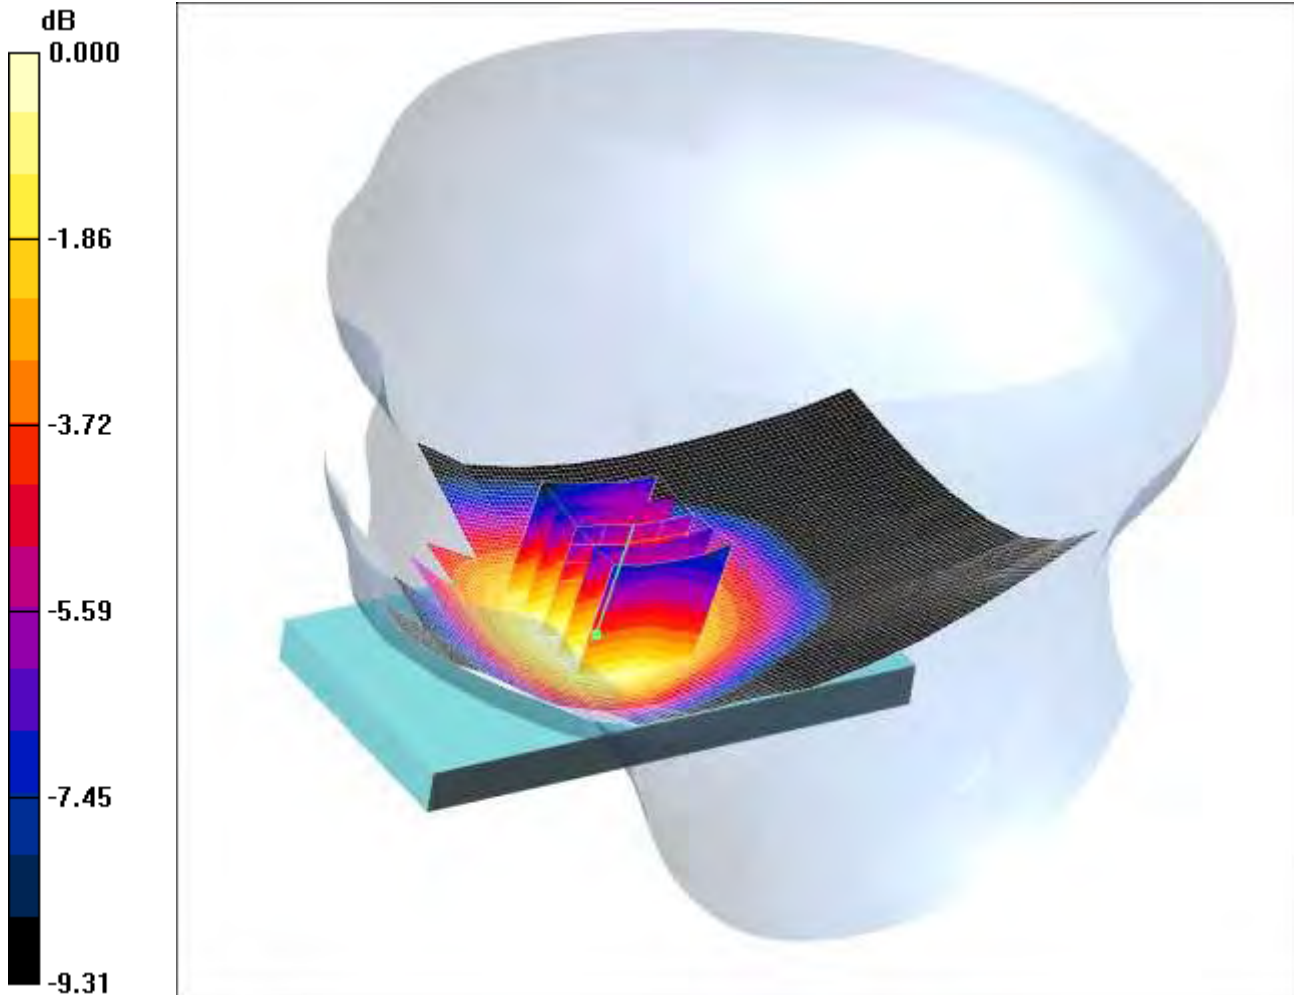

0 dB = 0.813mW/g

Communication System: GSM 850 MHz; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.896$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.75, 8.75, 8.75); Calibrated: 22/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Touch Left - Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.808 mW/g

Touch Left - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.6 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 0.962 W/kg


SAR(1 g) = 0.774 mW/g; SAR(10 g) = 0.587 mW/g

Maximum value of SAR (measured) = 0.813 mW/g

SCN/87207JD02A/006: Touch Right GSM CH251

Date: 10/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

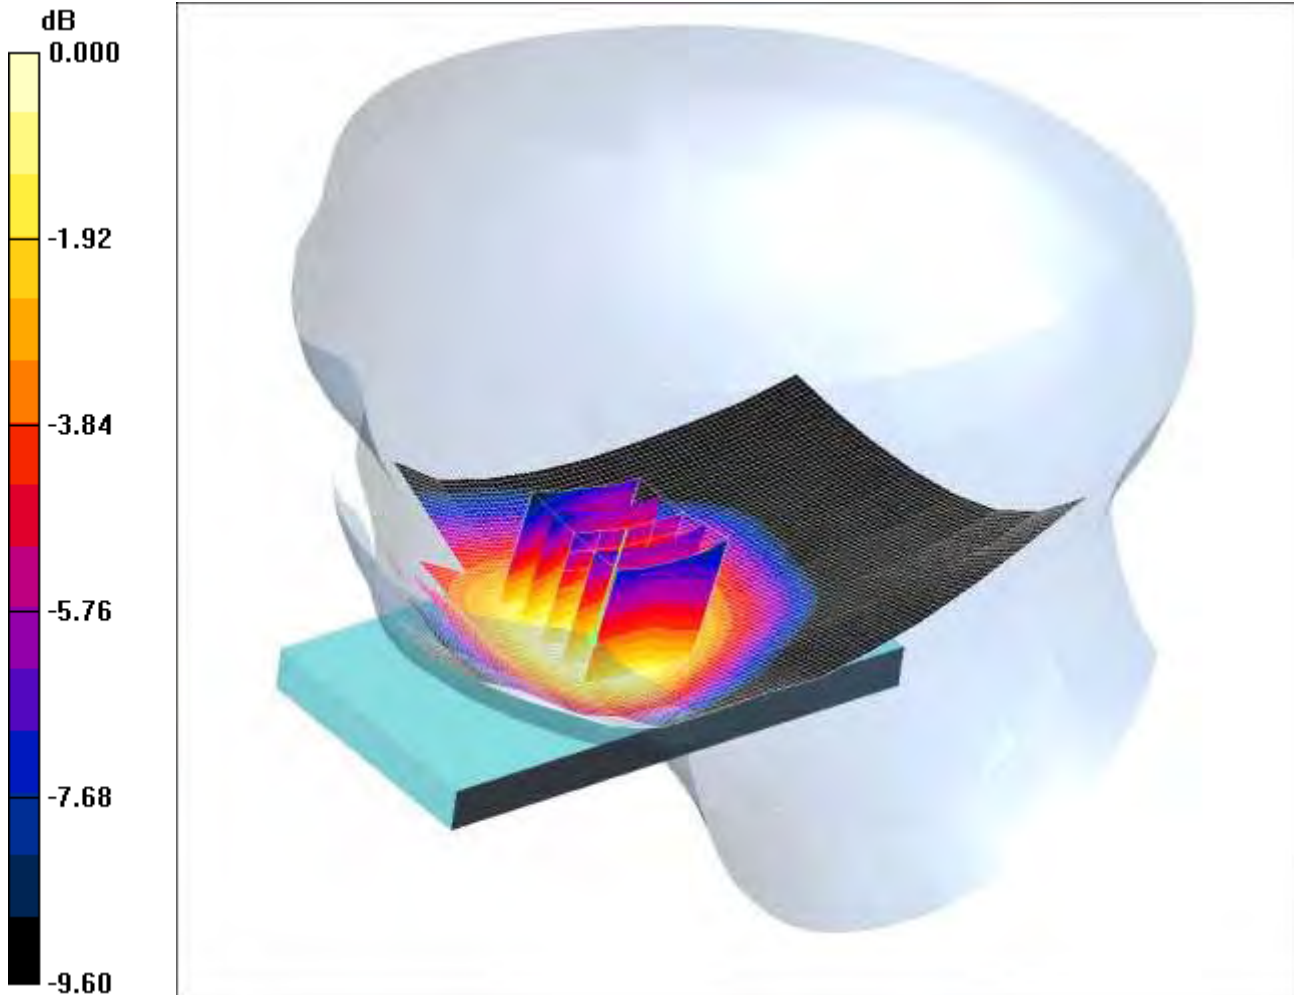

0 dB = 0.695mW/g

Communication System: GSM 850 MHz; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.913$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.75, 8.75, 8.75); Calibrated: 22/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Touch Left - High/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.692 mW/g

Touch Left - High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.71 V/m; Power Drift = 0.058 dB

Peak SAR (extrapolated) = 0.820 W/kg


SAR(1 g) = 0.664 mW/g; SAR(10 g) = 0.502 mW/g

Maximum value of SAR (measured) = 0.695 mW/g

SCN/87207JD02A/007: Front of EUT Facing Phantom GPRS CH190

Date: 09/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

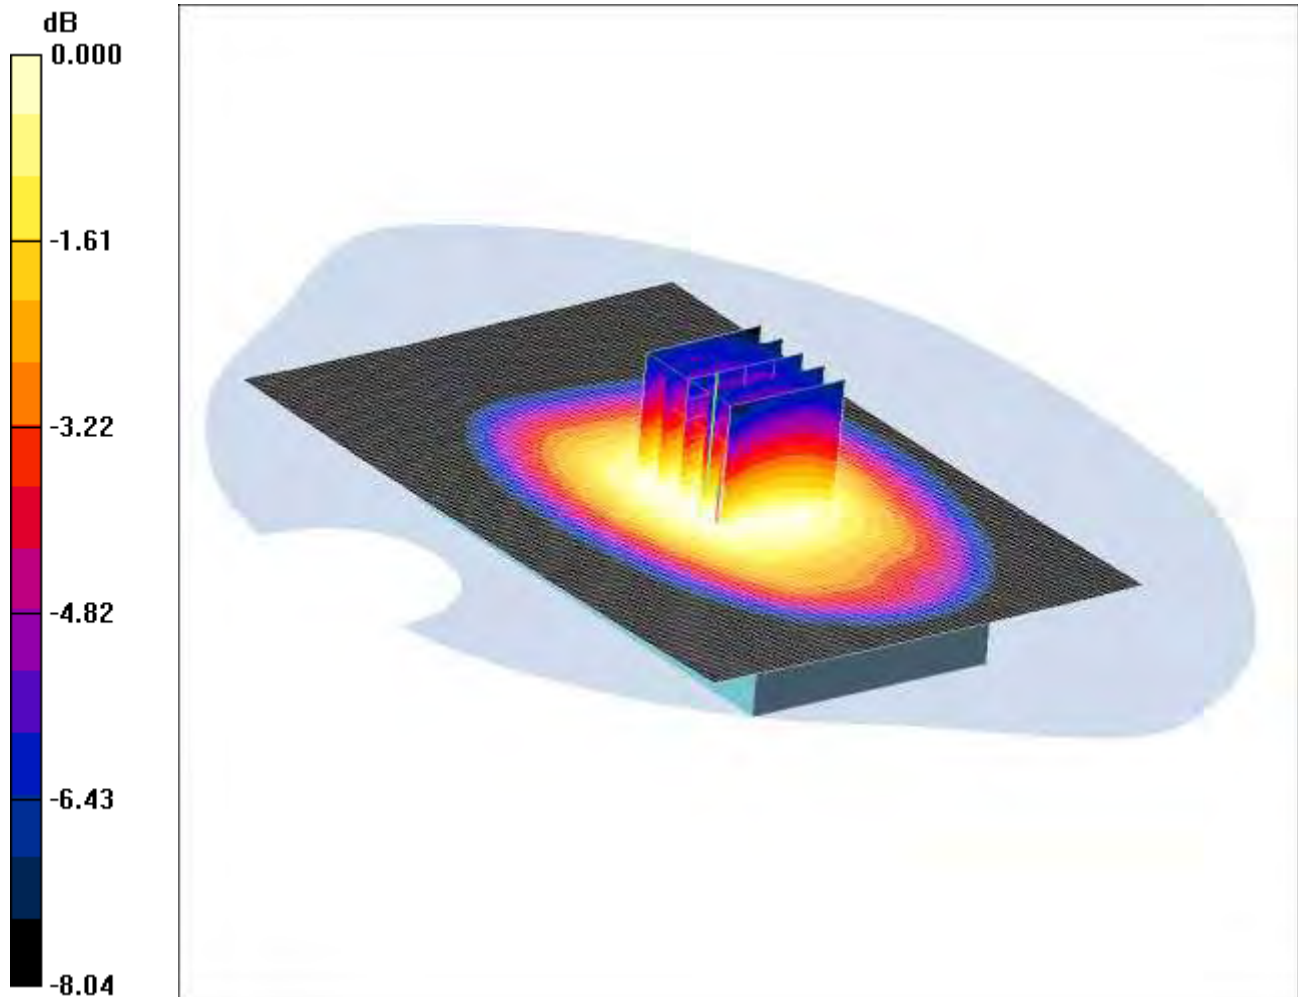

0 dB = 1.13mW/g

Communication System: GPRS 850 MHz 2TX; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12a; Type: SAM 4.0; Serial: TP:1193

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Front of EUT Facing Phantom - Middle/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.18 mW/g

Front of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.5 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 1.27 W/kg


SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.779 mW/g

Maximum value of SAR (measured) = 1.13 mW/g

SCN/87207JD02A/008: Front of EUT Facing Phantom GPRS CH128

Date: 09/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

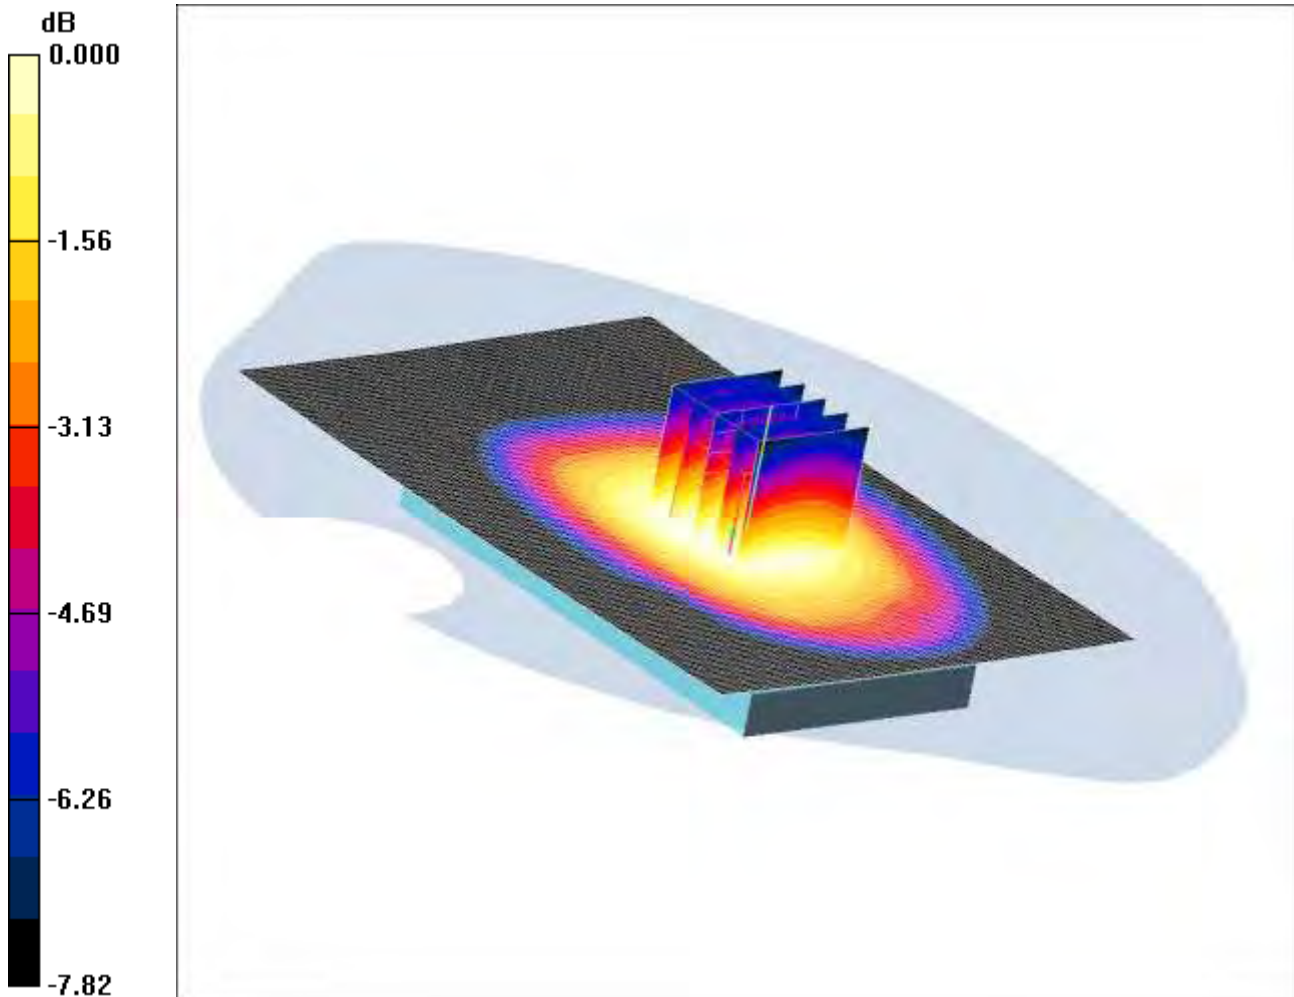

0 dB = 1.11mW/g

Communication System: GPRS 850 MHz 2TX; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.995$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12a; Type: SAM 4.0; Serial: TP:1193

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Front of EUT Facing Phantom - Low/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.14 mW/g

Front of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm,

dy=8mm, dz=5mm

Reference Value = 33.8 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 1.25 W/kg


SAR(1 g) = 1 mW/g; SAR(10 g) = 0.777 mW/g

Maximum value of SAR (measured) = 1.11 mW/g

SCN/87207JD02A/009: Front of EUT Facing Phantom GPRS CH251

Date: 09/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

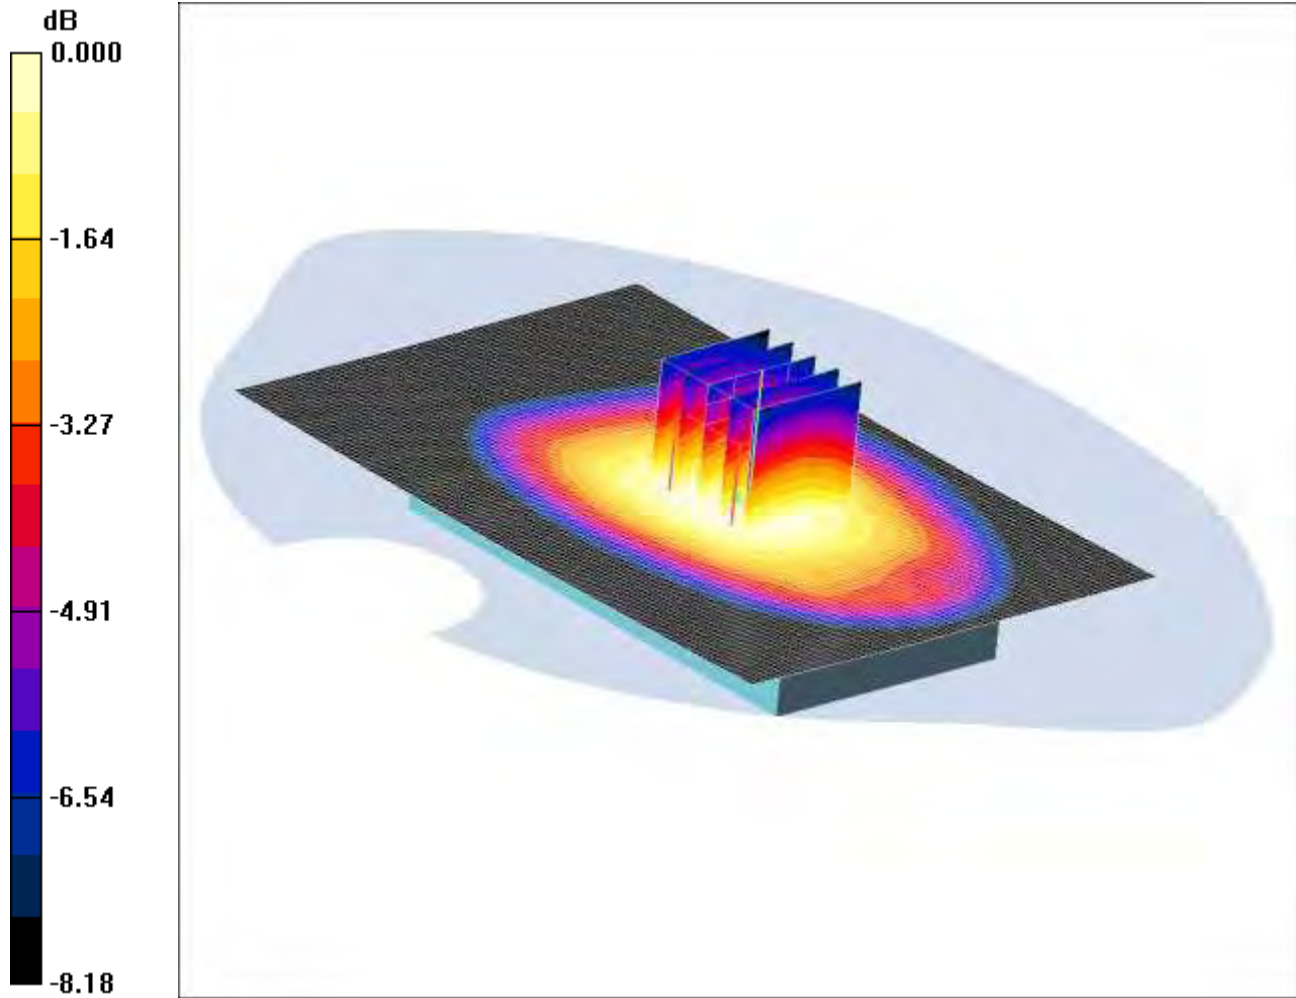

0 dB = 0.998mW/g

Communication System: GPRS 850 MHz 2TX; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12a; Type: SAM 4.0; Serial: TP:1193

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Front of EUT Facing Phantom - High/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.992 mW/g

Front of EUT Facing Phantom - High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.0 V/m; Power Drift = 0.052 dB

Peak SAR (extrapolated) = 1.11 W/kg


SAR(1 g) = 0.897 mW/g; SAR(10 g) = 0.692 mW/g

Maximum value of SAR (measured) = 0.998 mW/g

SCN/87207JD02A/010: Back of EUT Facing Phantom GPRS CH190

Date: 09/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

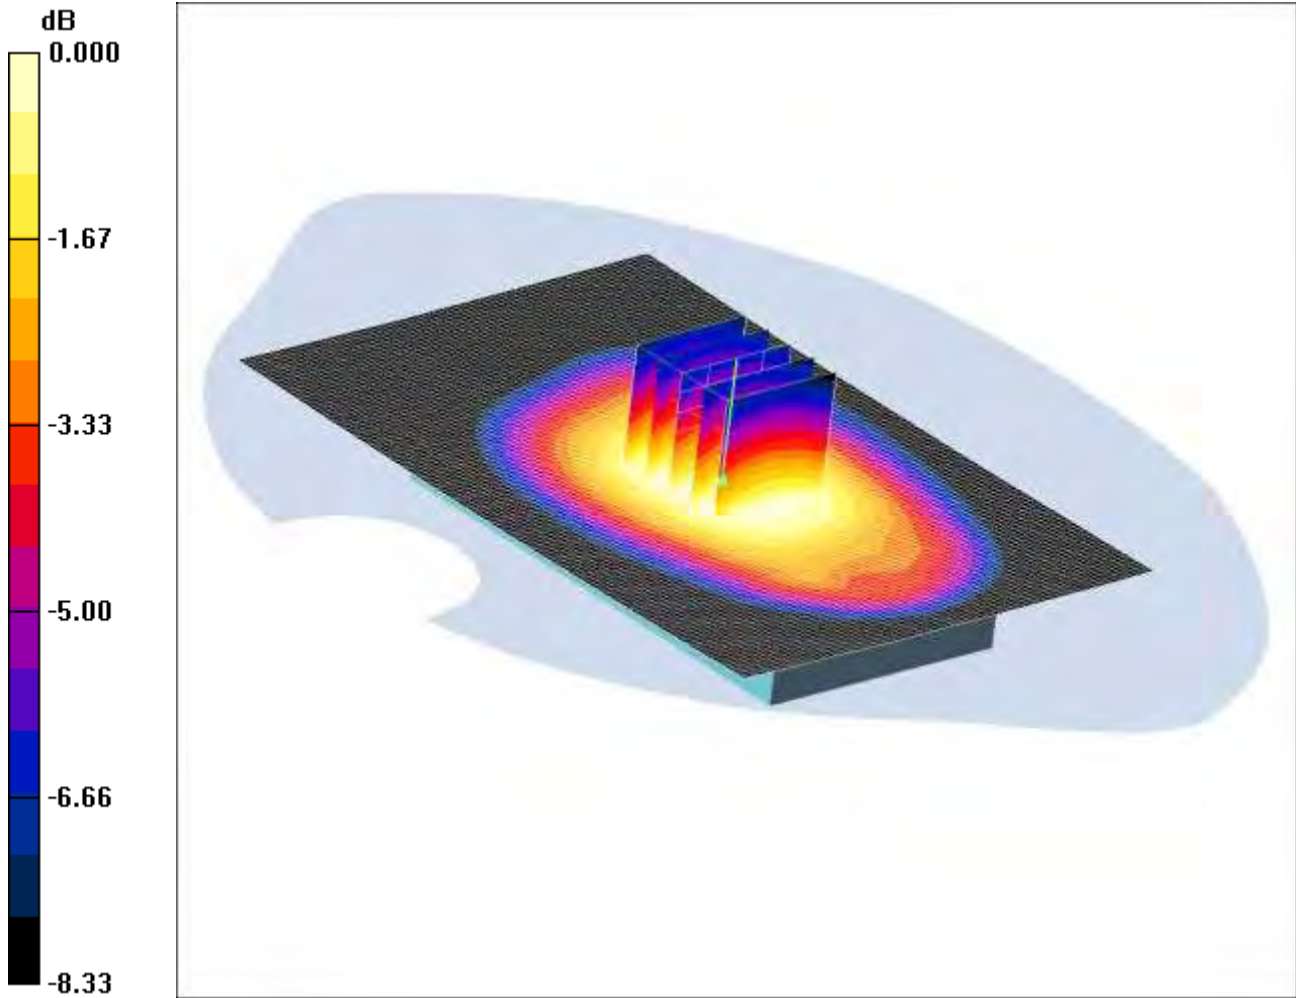

0 dB = 1.12mW/g

Communication System: GPRS 850 MHz 2TX; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12a; Type: SAM 4.0; Serial: TP:1193

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Back of EUT Facing Phantom - Middle/Area Scan 2 (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.11 mW/g

Back of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.2 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 1.26 W/kg


SAR(1 g) = 0.992 mW/g; SAR(10 g) = 0.753 mW/g

Maximum value of SAR (measured) = 1.12 mW/g

SCN/87207JD02A/011: Back of EUT Facing Phantom GPRS CH128

Date: 09/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

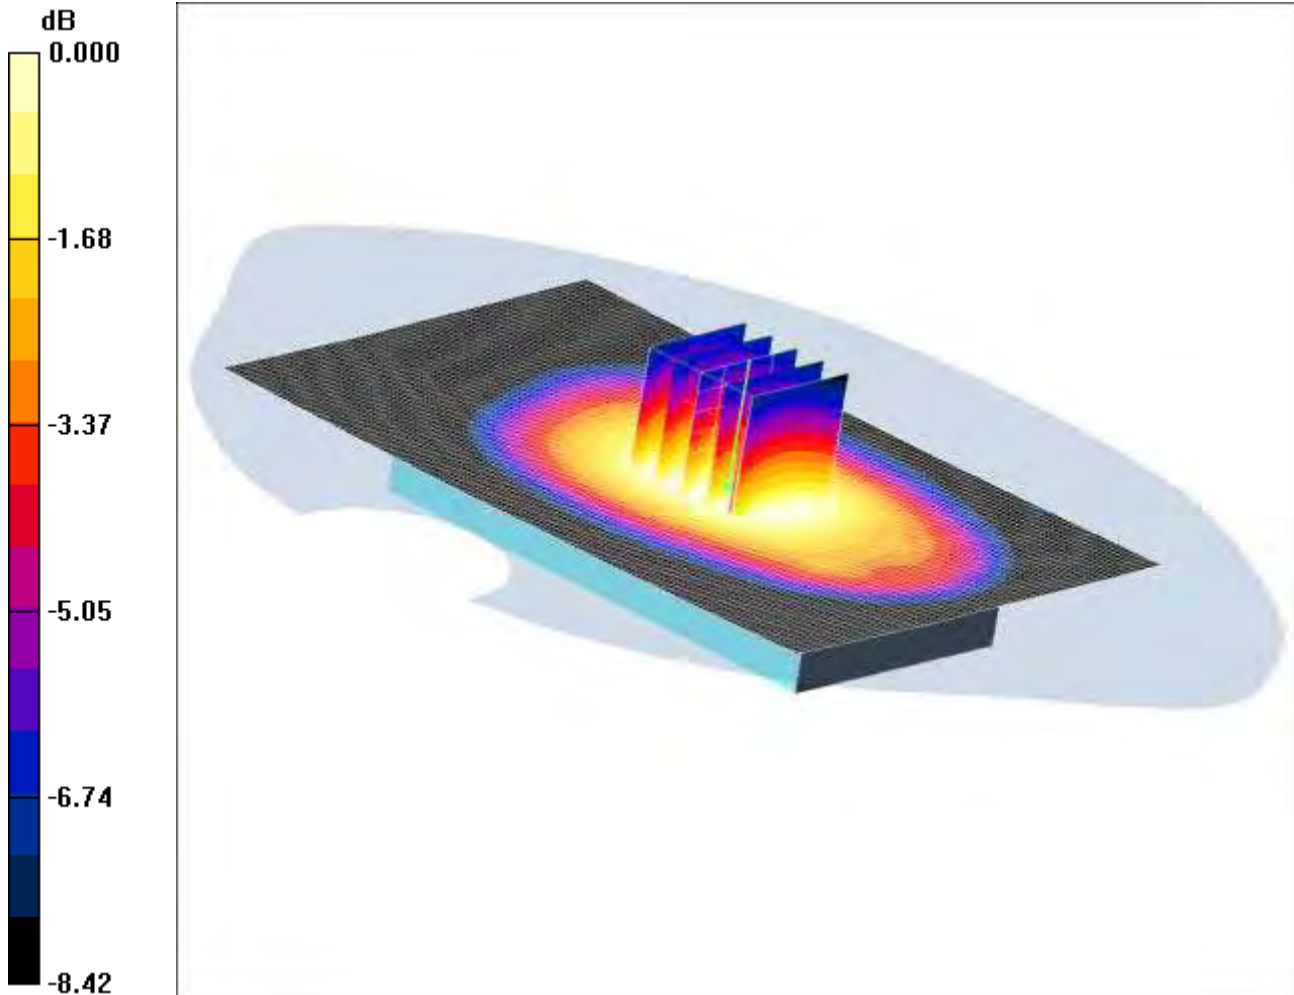

0 dB = 1.18mW/g

Communication System: GPRS 850 MHz 2TX; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.995$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12a; Type: SAM 4.0; Serial: TP:1193

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Back of EUT Facing Phantom - Low/Area Scan 2 (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.19 mW/g

Back of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.2 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 1.33 W/kg


SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.798 mW/g

Maximum value of SAR (measured) = 1.18 mW/g

SCN/87207JD02A/012: Back of EUT Facing Phantom GPRS CH251

Date: 09/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

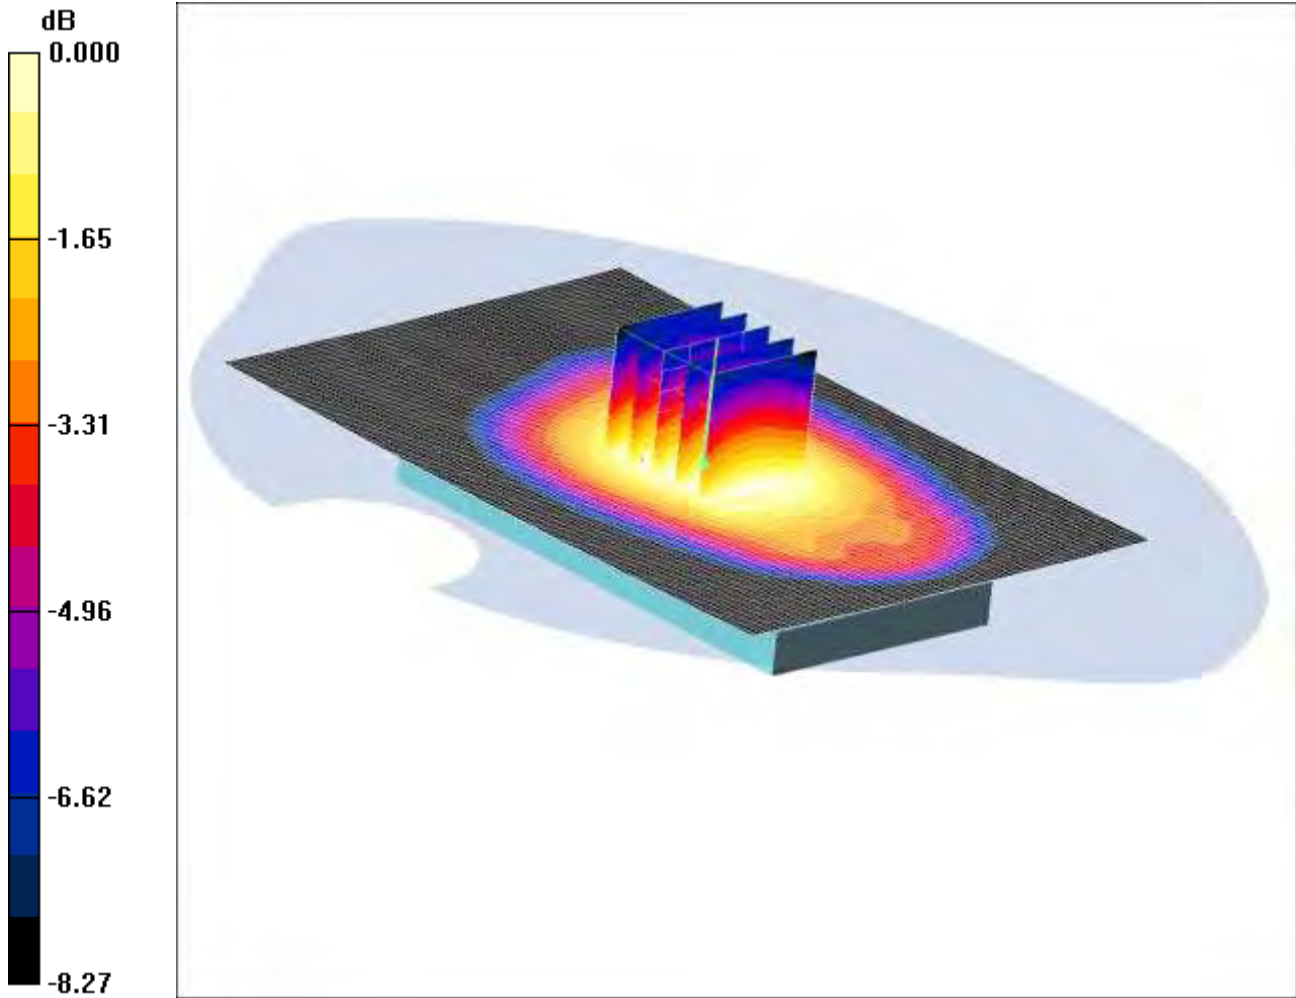

0 dB = 1.07mW/g

Communication System: GPRS 850 MHz 2TX; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12a; Type: SAM 4.0; Serial: TP:1193

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Back of EUT Facing Phantom - High/Area Scan 2 (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.04 mW/g

Back of EUT Facing Phantom - High/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.2 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 1.20 W/kg


SAR(1 g) = 0.948 mW/g; SAR(10 g) = 0.715 mW/g

Maximum value of SAR (measured) = 1.07 mW/g

SCN/87207JD02A/013: Left Hand Side of EUT Facing Phantom GPRS CH190

Date: 10/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

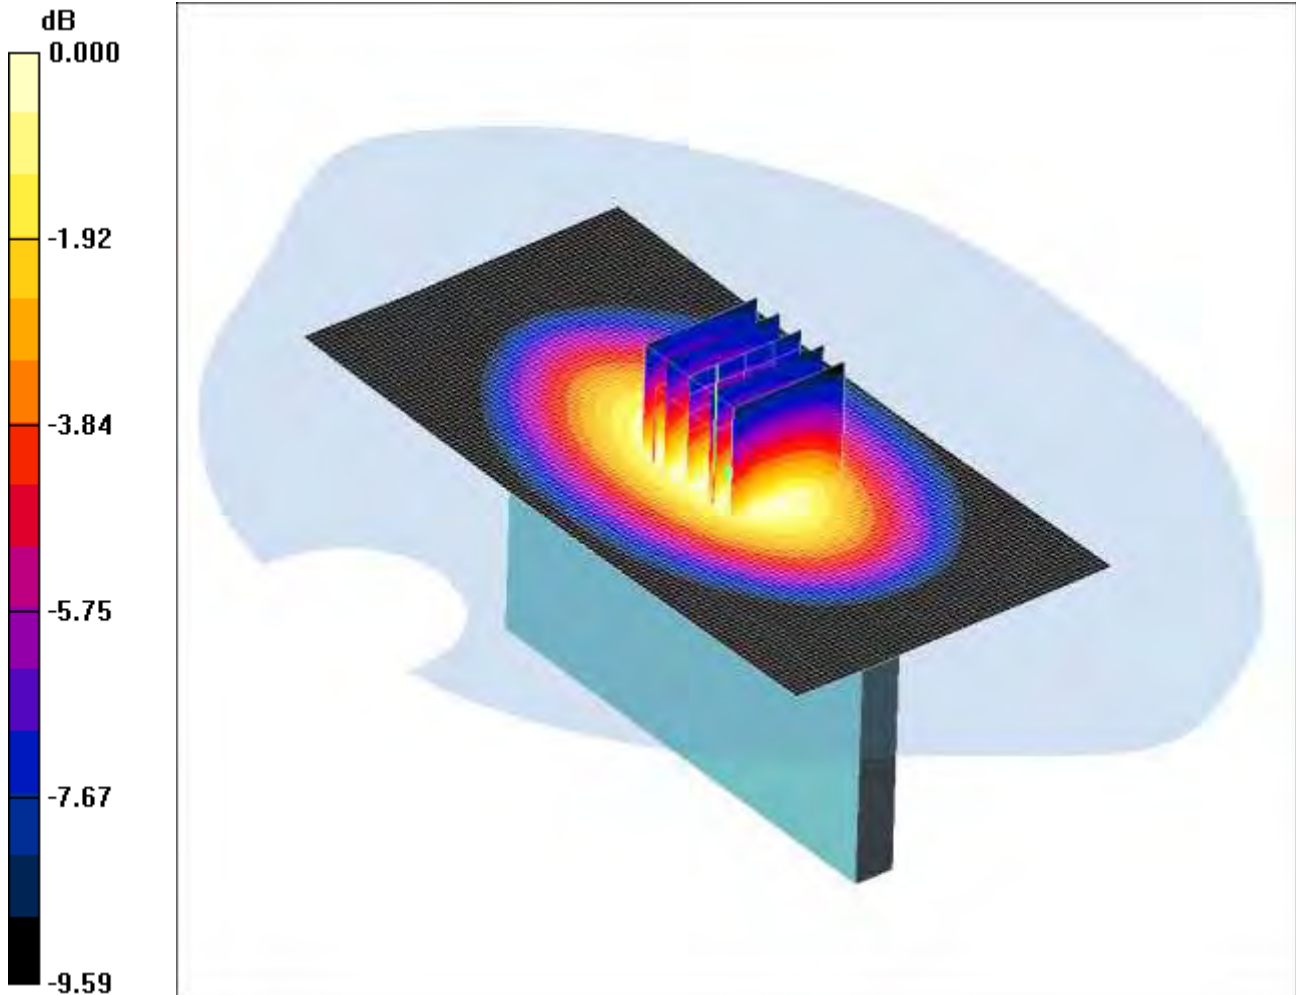

0 dB = 0.912mW/g

Communication System: GPRS 850 MHz 2TX; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12a; Type: SAM 4.0; Serial: TP:1193

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Hand Side of EUT Facing Phantom - Middle/Area Scan (61x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.940 mW/g

Left Hand Side of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.2 V/m; Power Drift = -0.074 dB

Peak SAR (extrapolated) = 1.12 W/kg


SAR(1 g) = 0.802 mW/g; SAR(10 g) = 0.557 mW/g

Maximum value of SAR (measured) = 0.912 mW/g

SCN/87207JD02A/014: Left Hand Side of EUT Facing Phantom GPRS CH128

Date: 10/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

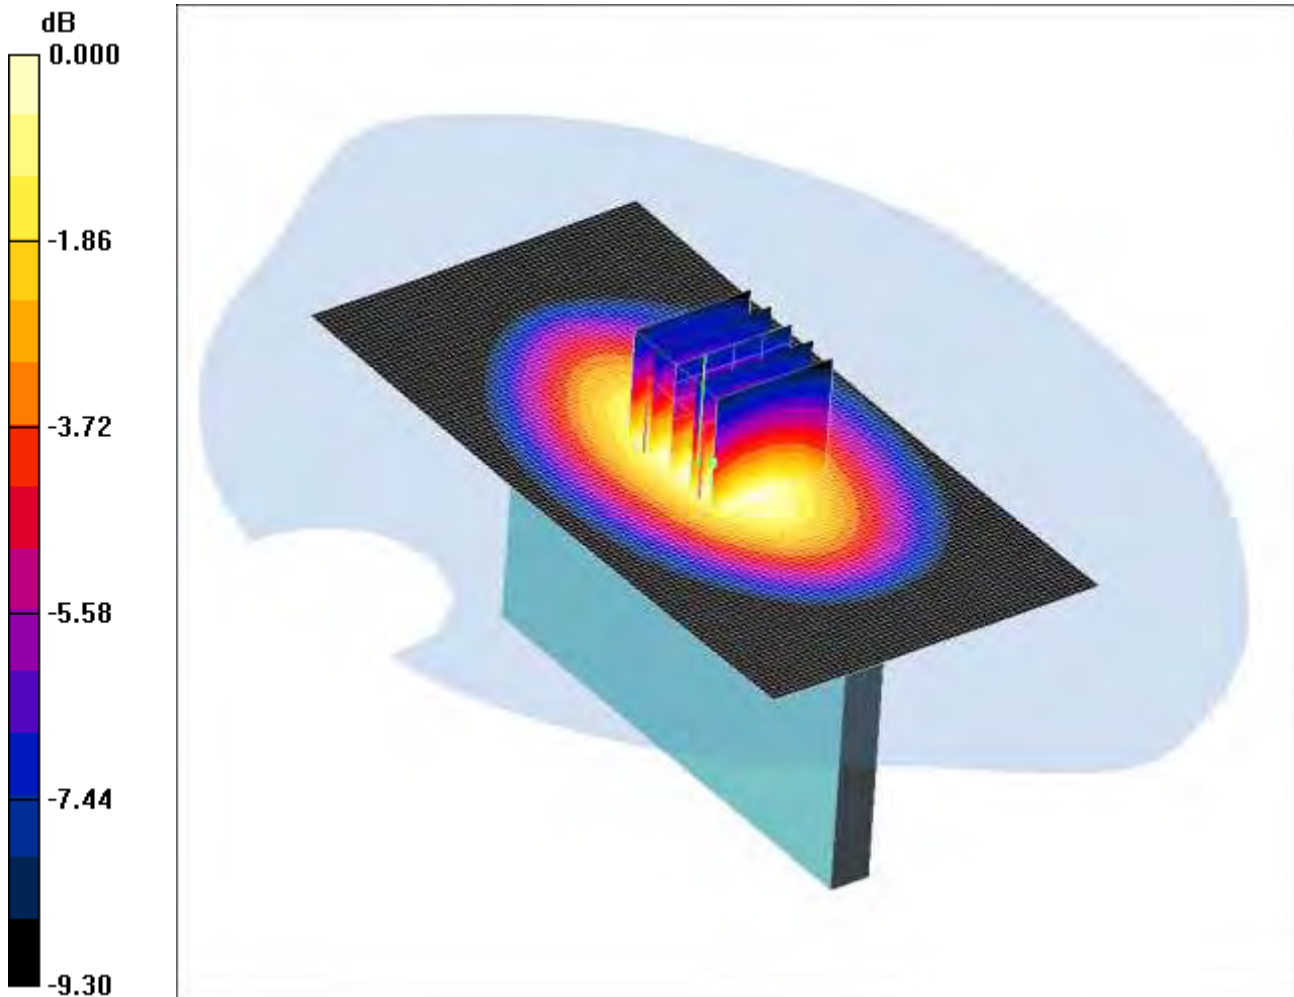

0 dB = 1.03mW/g

Communication System: GPRS 850 MHz 2TX; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12a; Type: SAM 4.0; Serial: TP:1193

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Hand Side of EUT Facing Phantom - Low/Area Scan (61x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.03 mW/g

Left Hand Side of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.7 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 1.26 W/kg


SAR(1 g) = 0.902 mW/g; SAR(10 g) = 0.630 mW/g

Maximum value of SAR (measured) = 1.03 mW/g

SCN/87207JD02A/015: Left Hand Side of EUT Facing Phantom GPRS CH251

Date: 10/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

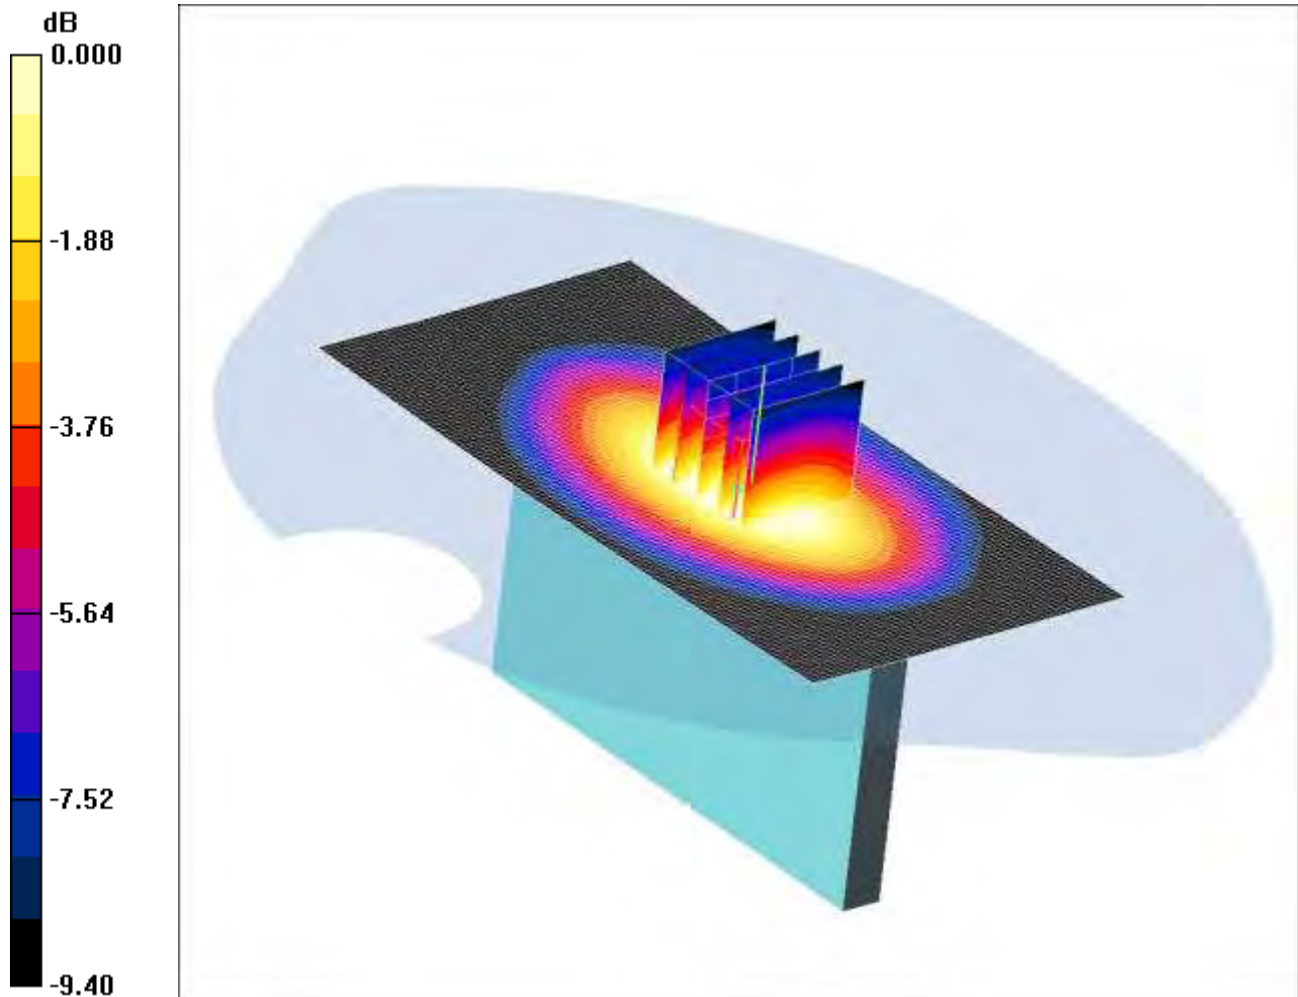

0 dB = 0.727mW/g

Communication System: GPRS 850 MHz 2TX; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.996$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12a; Type: SAM 4.0; Serial: TP:1193

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Hand Side of EUT Facing Phantom - High/Area Scan (61x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.796 mW/g

Left Hand Side of EUT Facing Phantom - High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.6 V/m; Power Drift = 0.102 dB

Peak SAR (extrapolated) = 0.887 W/kg


SAR(1 g) = 0.632 mW/g; SAR(10 g) = 0.440 mW/g

Maximum value of SAR (measured) = 0.727 mW/g

SCN/87207JD02A/016: Right Hand Side of EUT Facing Phantom GPRS CH190

Date: 13/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

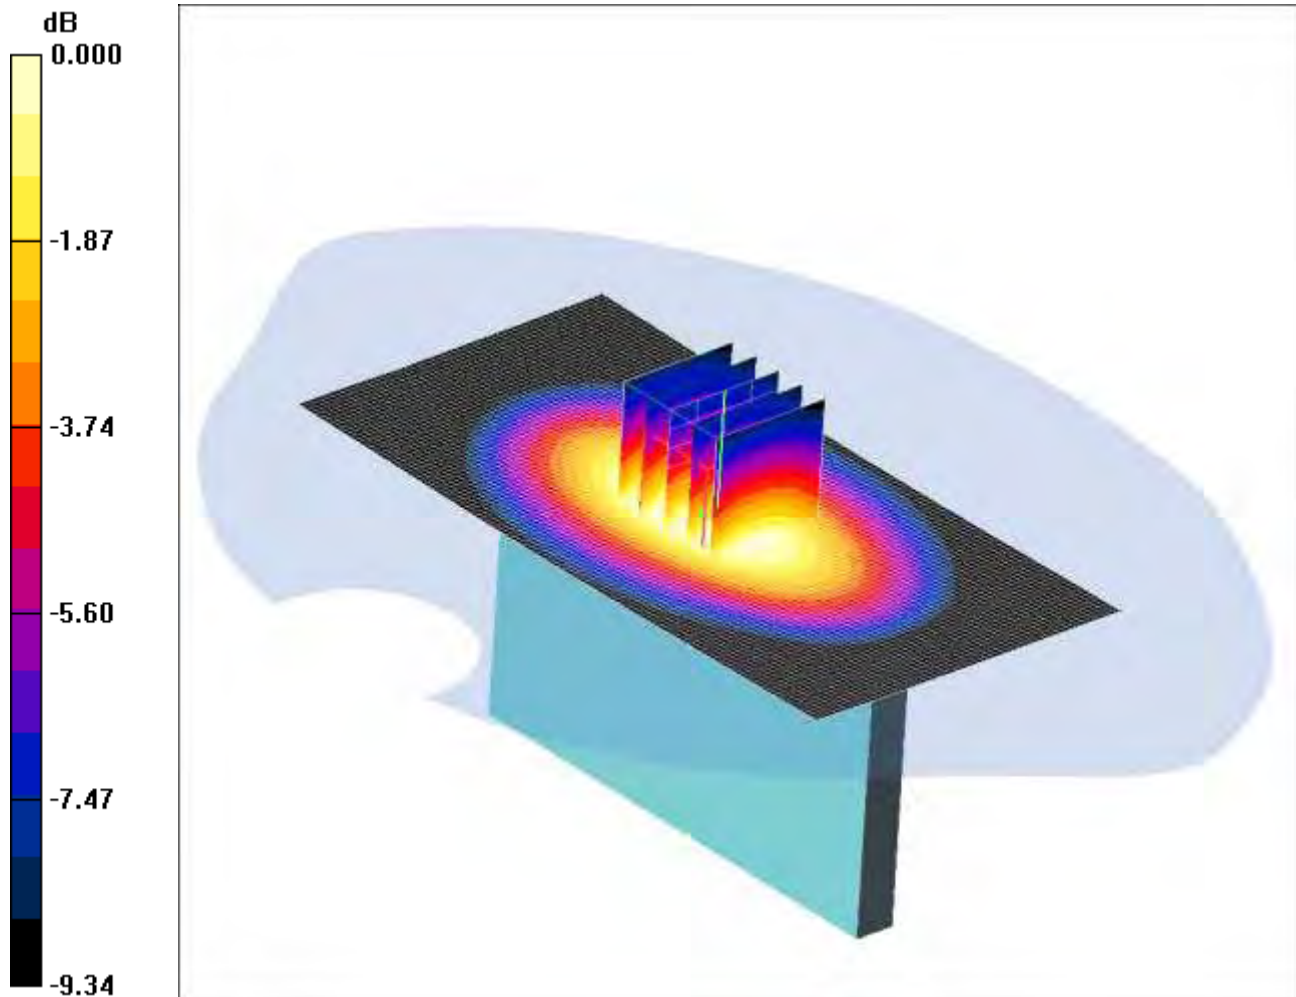

0 dB = 1.15mW/g

Communication System: GPRS 850 MHz 2TX; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.996$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12a; Type: SAM 4.0; Serial: TP:1193

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Hand Side of EUT Facing Phantom - Middle/Area Scan (61x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.20 mW/g

Right Hand Side of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.5 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 1.39 W/kg


SAR(1 g) = 0.999 mW/g; SAR(10 g) = 0.699 mW/g

Maximum value of SAR (measured) = 1.15 mW/g

SCN/87207JD02A/017: Right Hand Side of EUT Facing Phantom GPRS CH128

Date: 13/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

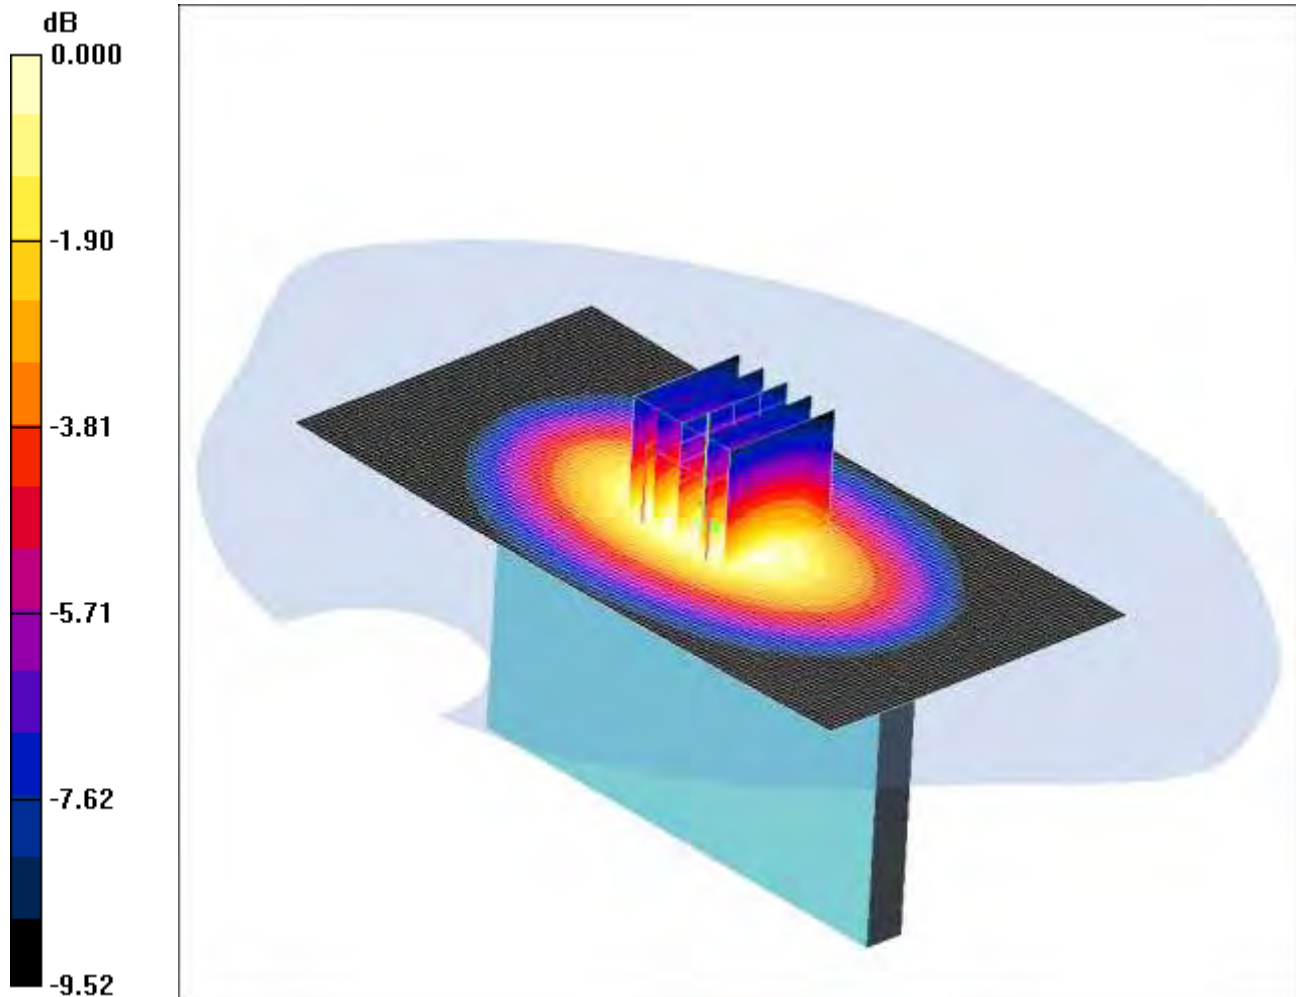

0 dB = 1.18mW/g

Communication System: GPRS 850 MHz 2TX; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12a; Type: SAM 4.0; Serial: TP:1193

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Hand Side of EUT Facing Phantom - Low/Area Scan (61x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.21 mW/g

Right Hand Side of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.7 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 1.42 W/kg


SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.719 mW/g

Maximum value of SAR (measured) = 1.18 mW/g

SCN/87207JD02A/018: Right Hand Side of EUT Facing Phantom GPRS CH251

Date: 13/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

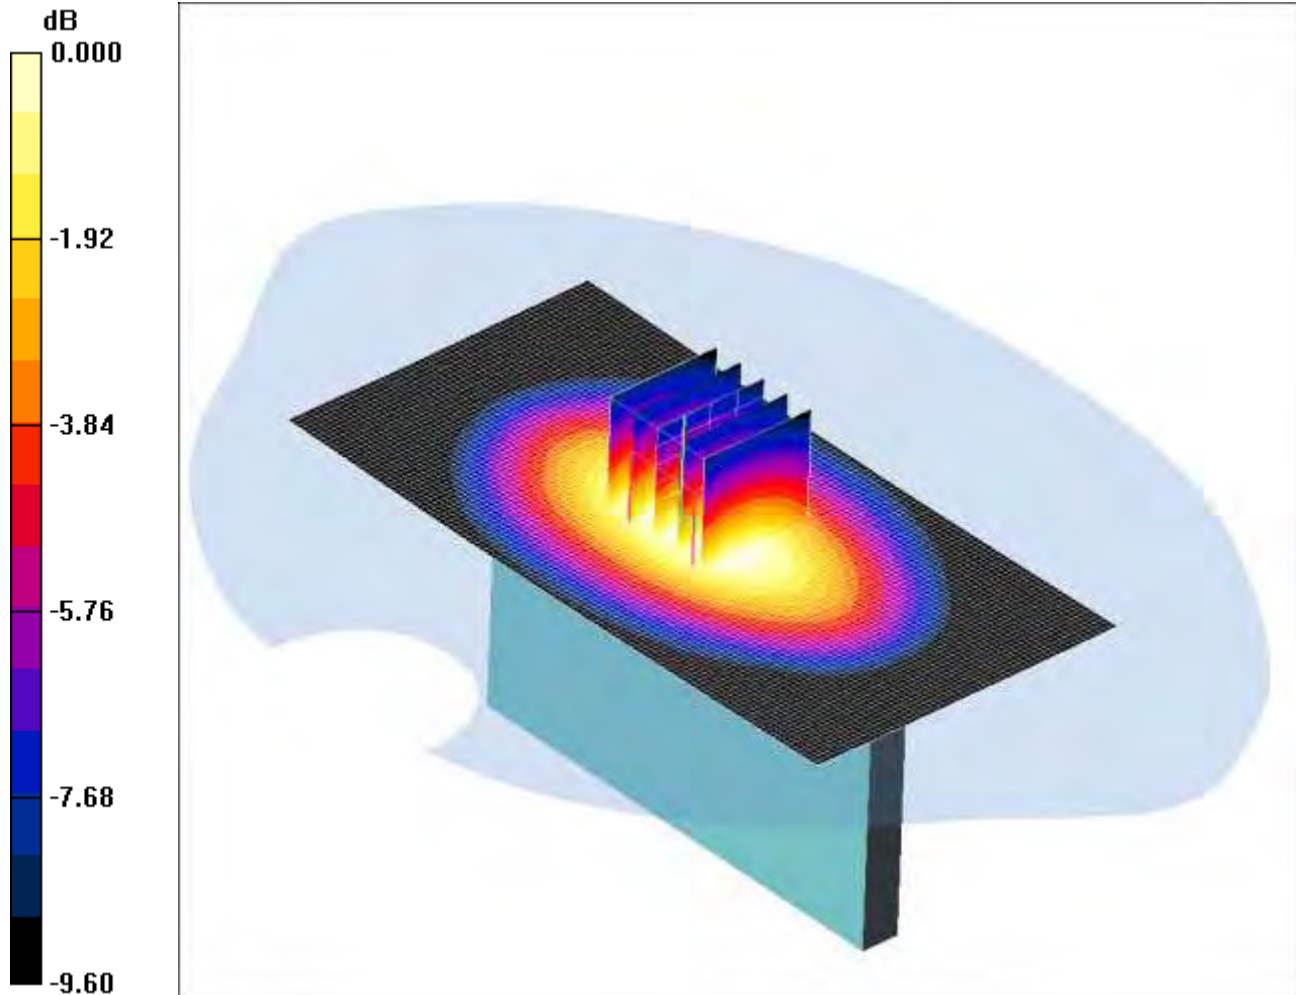

0 dB = 1.12mW/g

Communication System: GPRS 850 MHz 2TX; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12a; Type: SAM 4.0; Serial: TP:1193

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Hand Side of EUT Facing Phantom - High/Area Scan (61x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.14 mW/g

Right Hand Side of EUT Facing Phantom - High/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.6 V/m; Power Drift = 0.016 dB

Peak SAR (extrapolated) = 1.35 W/kg


SAR(1 g) = 0.967 mW/g; SAR(10 g) = 0.677 mW/g

Maximum value of SAR (measured) = 1.12 mW/g

SCN/87207JD02A/019: Bottom of EUT Facing Phantom GPRS CH190

Date: 14/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

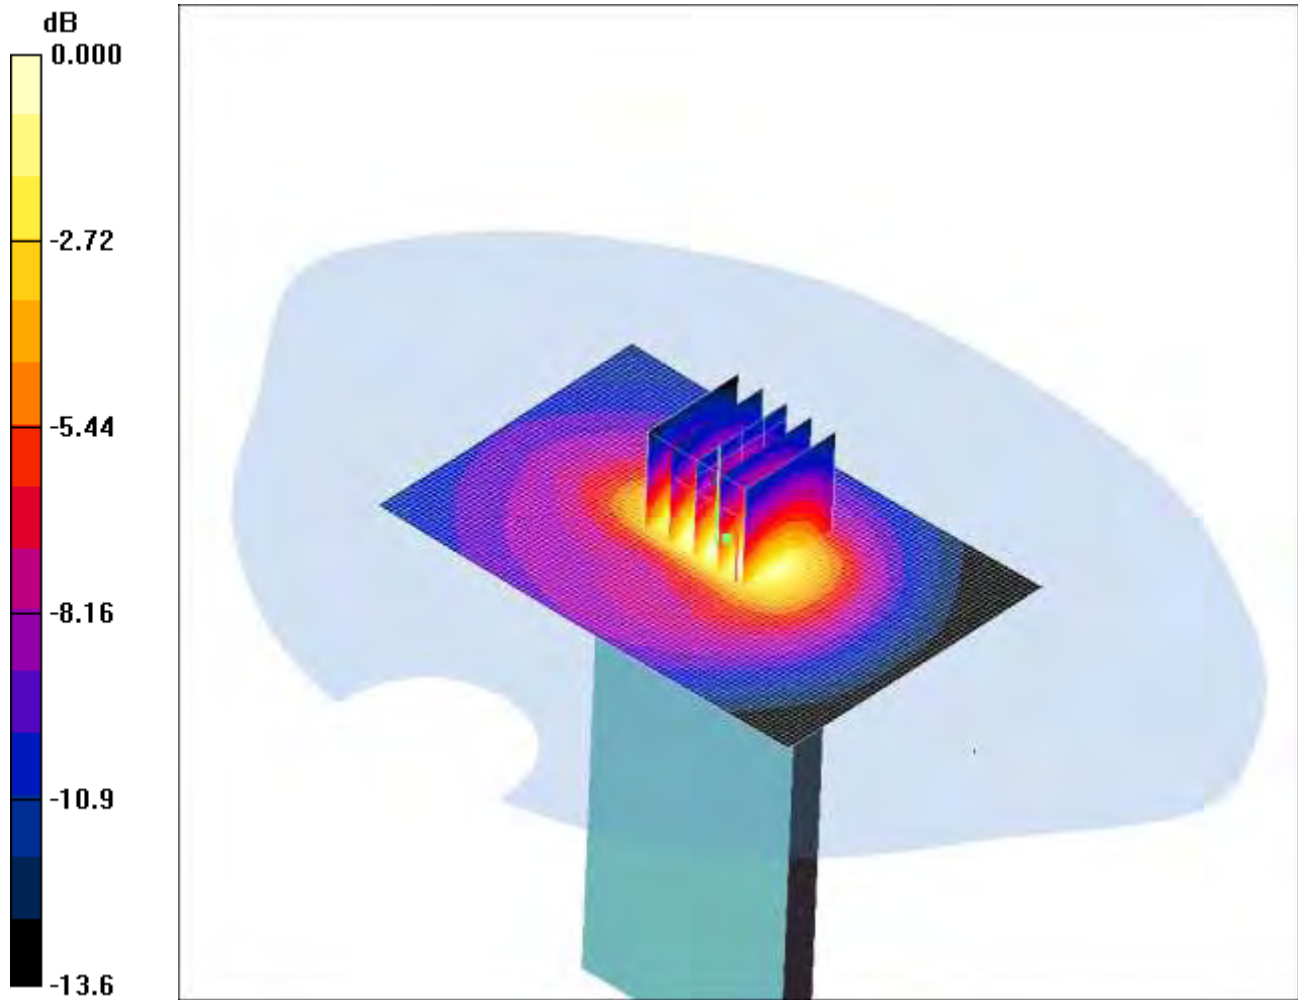

0 dB = 0.344mW/g

Communication System: GPRS 850 MHz 2TX; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.996$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12a; Type: SAM 4.0; Serial: TP:1193

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Bottom of EUT Facing Phantom - Middle/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.367 mW/g

Bottom of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.6 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 0.500 W/kg


SAR(1 g) = 0.284 mW/g; SAR(10 g) = 0.162 mW/g

Maximum value of SAR (measured) = 0.344 mW/g

SCN/87207JD02A/020: Back of EUT Facing Phantom GSM CH190

Date: 14/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

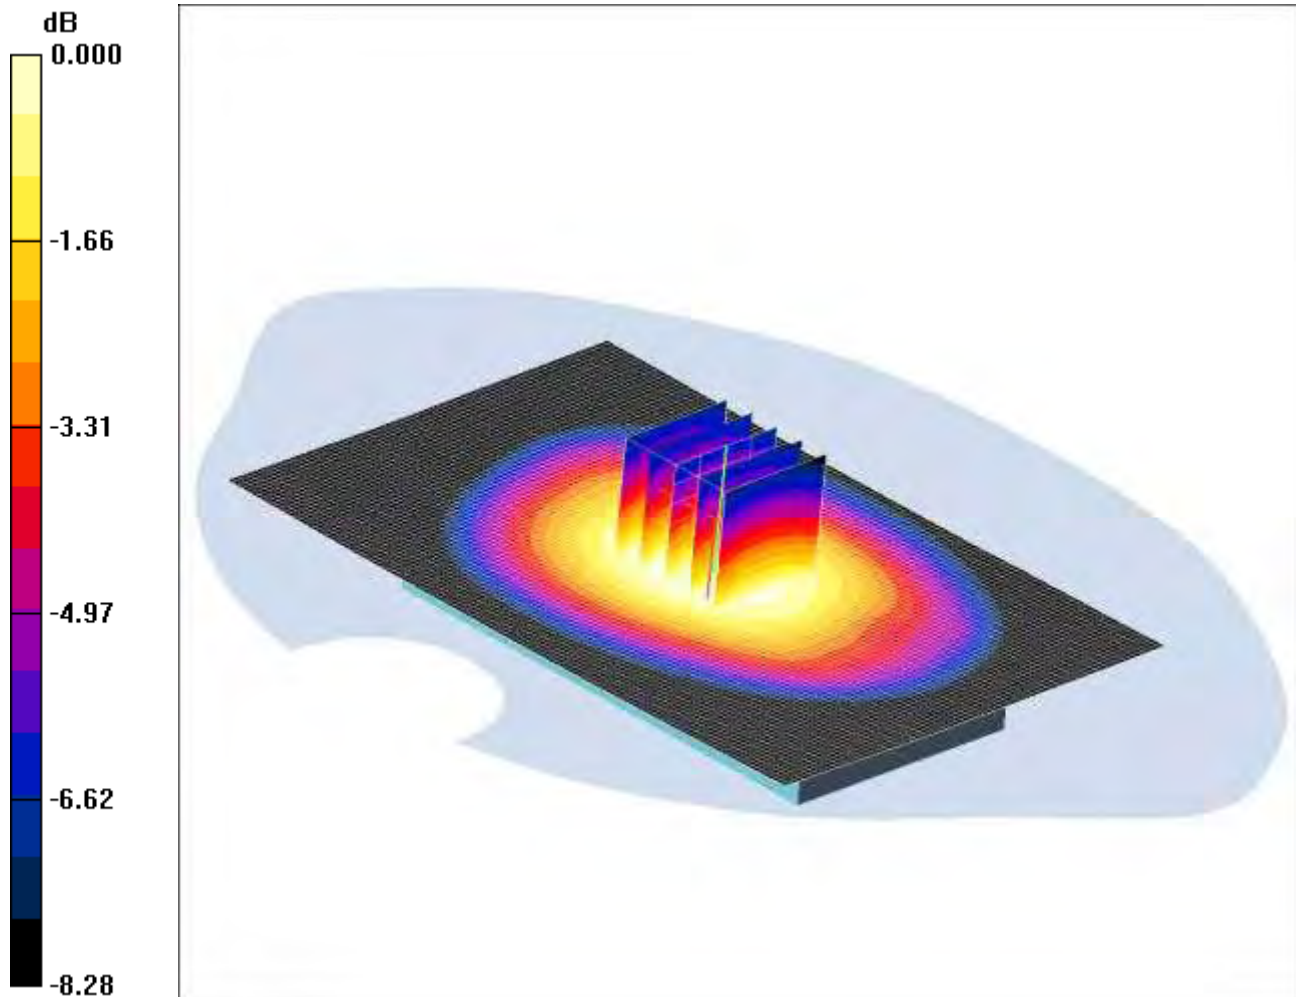

0 dB = 0.780mW/g

Communication System: GSM 850 MHz; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.996$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12a; Type: SAM 4.0; Serial: TP:1193

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Back of EUT Facing Phantom - Middle/Area Scan 2 (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.794 mW/g

Back of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.1 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 0.883 W/kg


SAR(1 g) = 0.691 mW/g; SAR(10 g) = 0.524 mW/g

Maximum value of SAR (measured) = 0.780 mW/g

SCN/87207JD02A/021: Back of EUT Facing Phantom GSM CH128

Date: 14/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

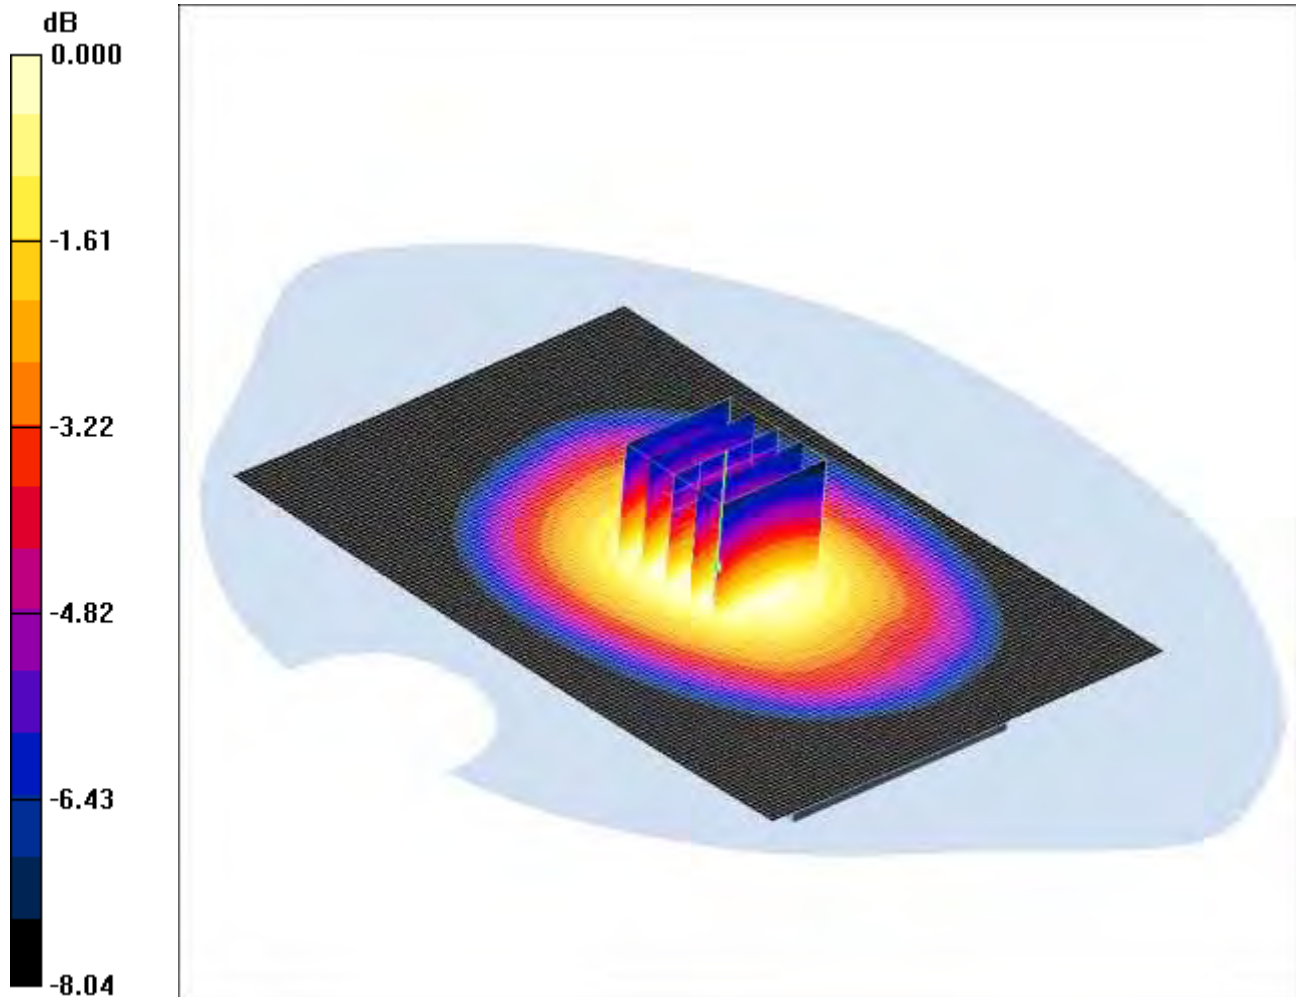

0 dB = 0.801mW/g

Communication System: GSM 850 MHz; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12a; Type: SAM 4.0; Serial: TP:1193

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Back of EUT Facing Phantom - Low/Area Scan 2 (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.813 mW/g

Back of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.7 V/m; Power Drift = 0.002 dB

Peak SAR (extrapolated) = 0.903 W/kg


SAR(1 g) = 0.711 mW/g; SAR(10 g) = 0.540 mW/g

Maximum value of SAR (measured) = 0.801 mW/g

SCN/87207JD02A/022: Back of EUT Facing Phantom GSM CH251

Date: 14/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

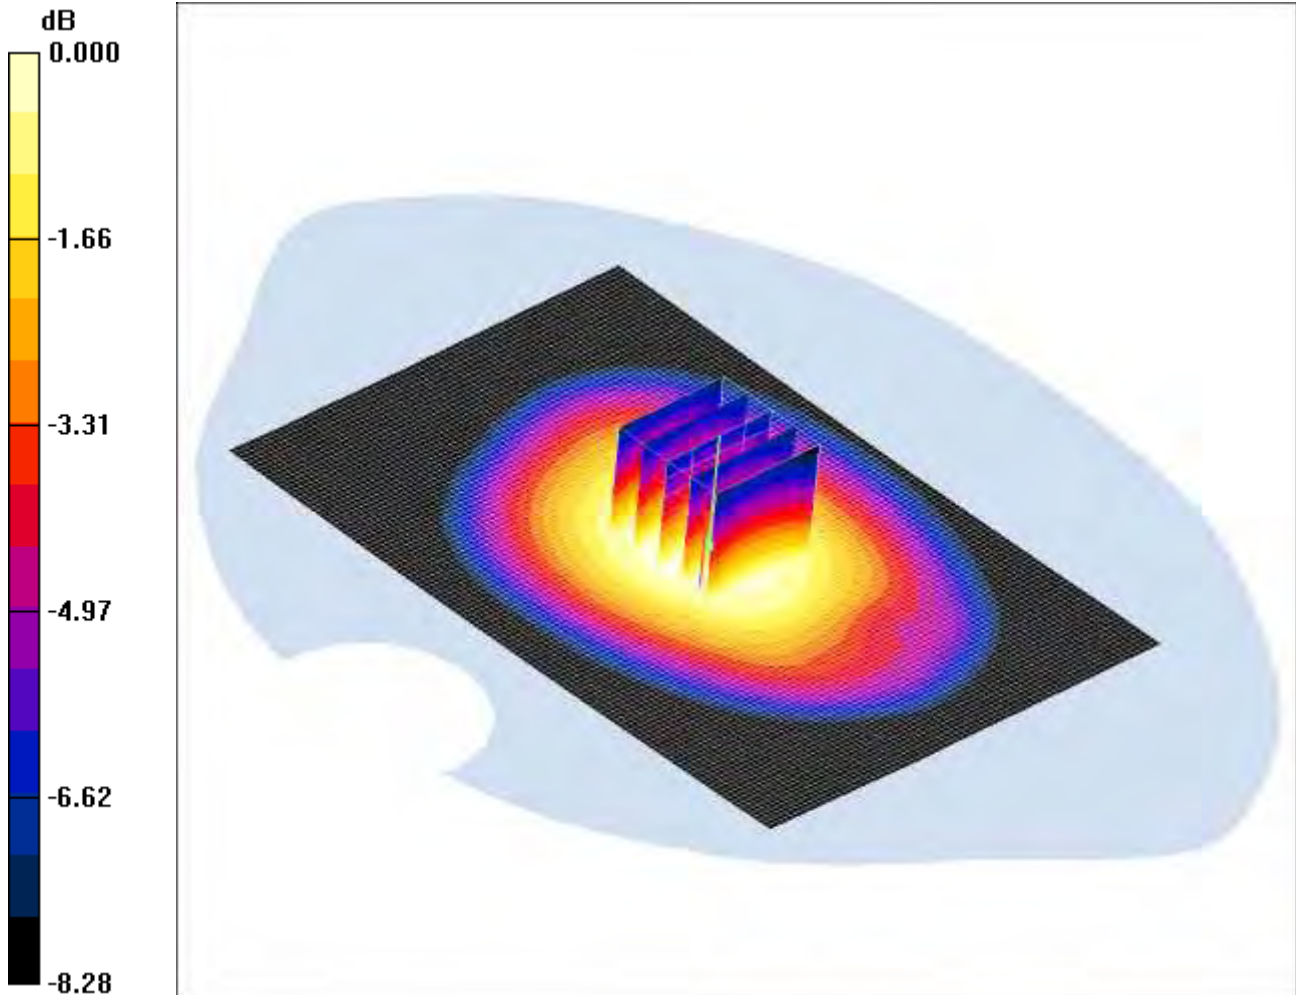

0 dB = 0.706mW/g

Communication System: GSM 850 MHz; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12a; Type: SAM 4.0; Serial: TP:1193

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Back of EUT Facing Phantom - High/Area Scan 2 (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.707 mW/g

Back of EUT Facing Phantom - High/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.7 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.800 W/kg


SAR(1 g) = 0.624 mW/g; SAR(10 g) = 0.475 mW/g

Maximum value of SAR (measured) = 0.706 mW/g

SCN/87207JD02A/023: Back of EUT Facing Phantom with PHF GSM CH128

Date: 14/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

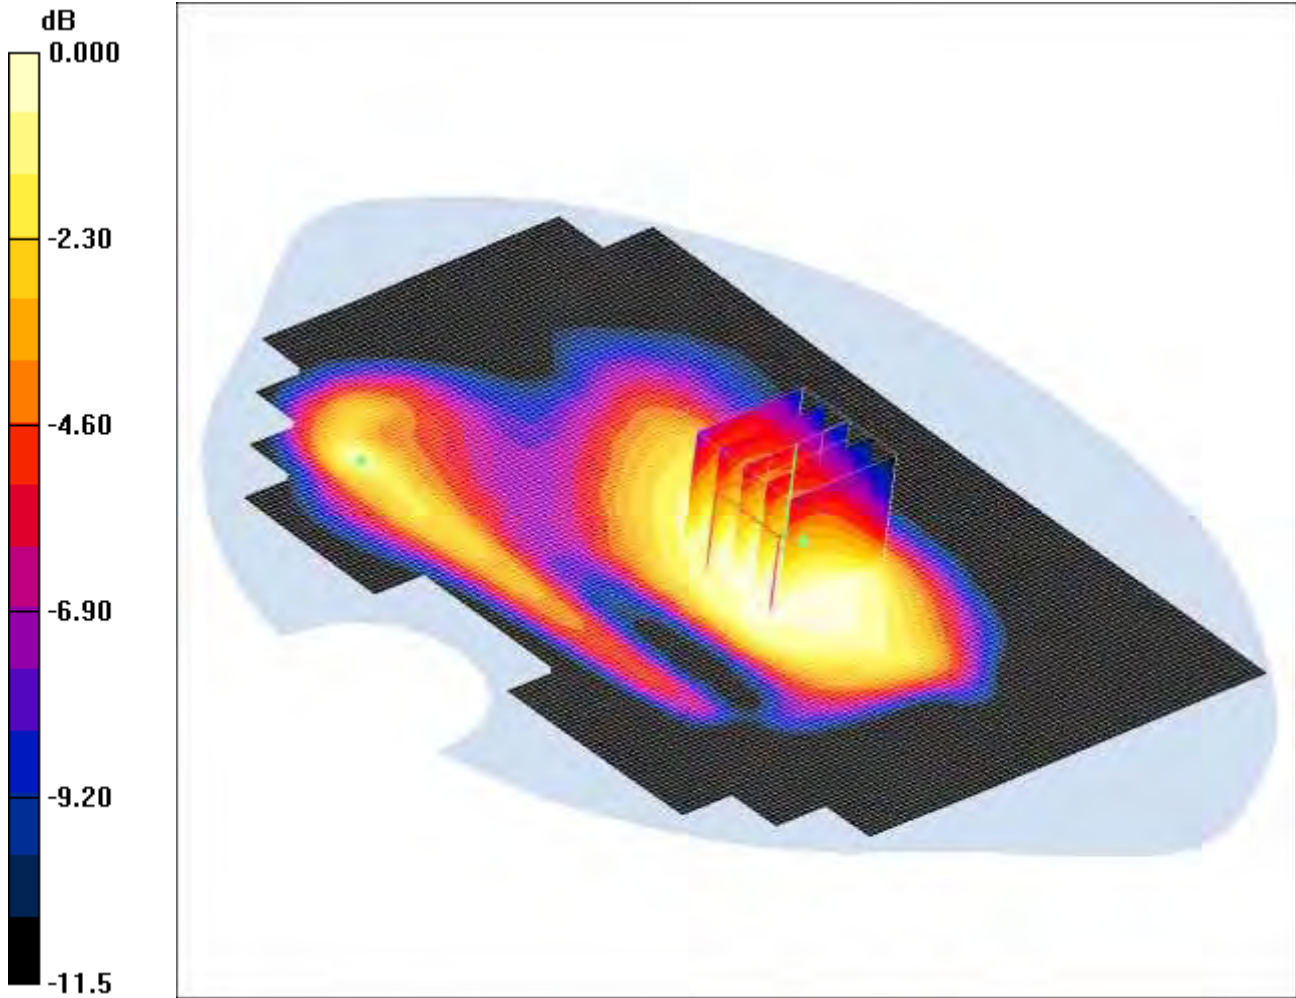

0 dB = 0.780mW/g

Communication System: GSM 850 MHz; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12a; Type: SAM 4.0; Serial: TP:1193

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Back of EUT Facing Phantom with PHF - Low/Area Scan 2 (101x151x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.801 mW/g

Back of EUT Facing Phantom with PHF - Low/Zoom Scan (5x5x7) 2 2 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.0 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 0.867 W/kg


SAR(1 g) = 0.705 mW/g; SAR(10 g) = 0.549 mW/g

Maximum value of SAR (measured) = 0.780 mW/g

SCN/87207JD02A/024: Touch Left PCS1900 CH661

Date: 09/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

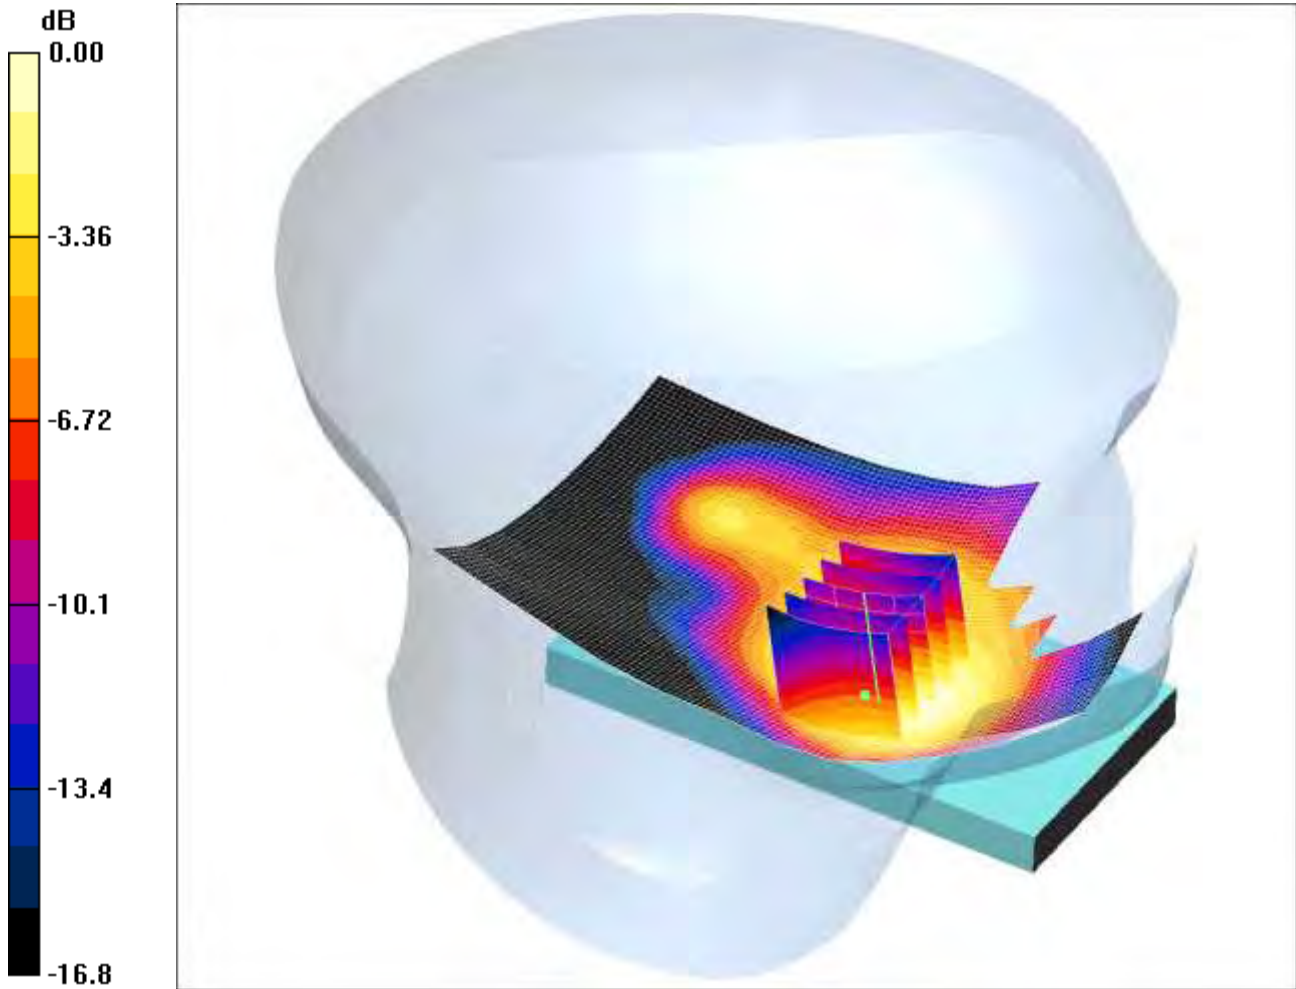

0 dB = 0.537mW/g

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 MHz HSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.92, 4.92, 4.92); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12a (Site 57); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Touch Left - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.554 mW/g

Touch Left - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.72 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 0.741 W/kg


SAR(1 g) = 0.512 mW/g; SAR(10 g) = 0.322 mW/g

Maximum value of SAR (measured) = 0.537 mW/g

SCN/87207JD02A/025: Tilt Left PCS1900 CH661

Date: 09/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

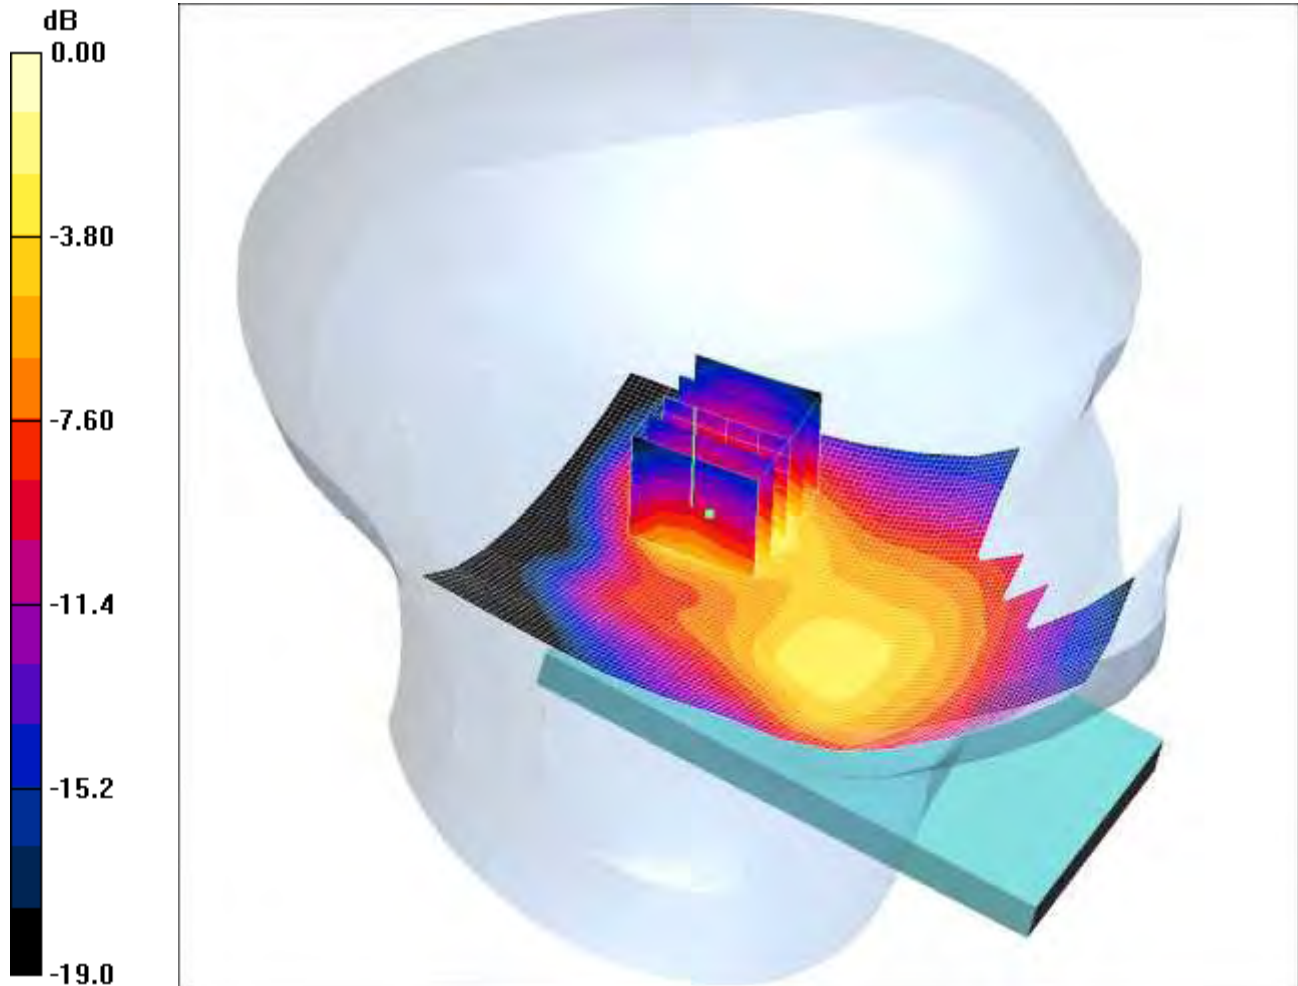

0 dB = 0.363mW/g

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 MHz HSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.92, 4.92, 4.92); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12a (Site 57); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Tilt Left - Middle 2/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.428 mW/g

Tilt Left - Middle 2/Zoom Scan (5x5x7) 2 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.16 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 0.530 W/kg


SAR(1 g) = 0.328 mW/g; SAR(10 g) = 0.176 mW/g

Maximum value of SAR (measured) = 0.363 mW/g

SCN/87207JD02A/026: Touch Right PCS1900 CH661

Date: 09/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

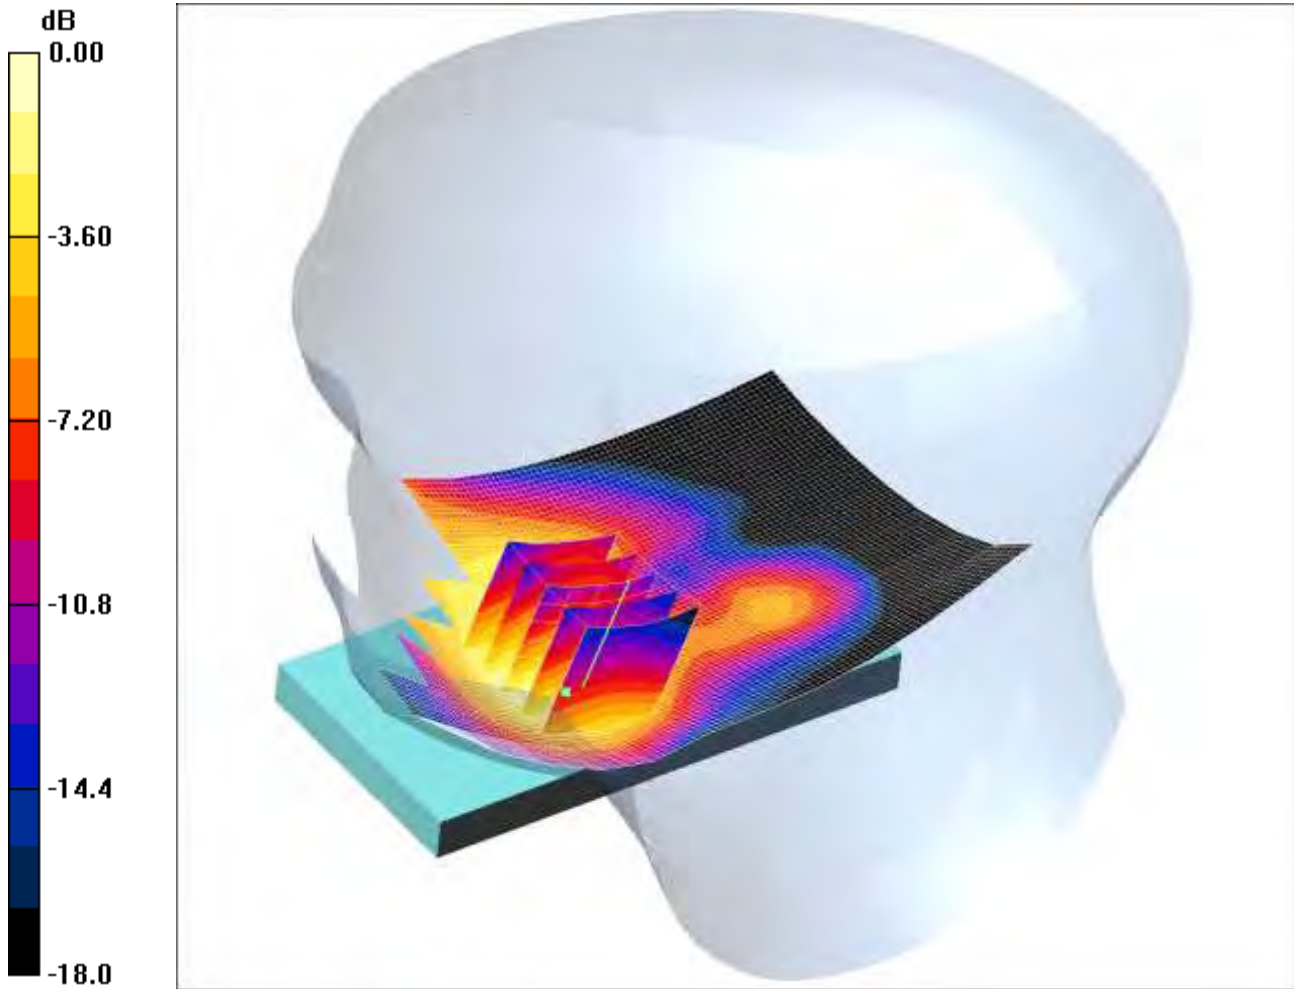

0 dB = 0.435mW/g

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 MHz HSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.92, 4.92, 4.92); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12a (Site 57); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Touch Right - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.454 mW/g

Touch Right - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.74 V/m; Power Drift = 0.094 dB

Peak SAR (extrapolated) = 0.534 W/kg


SAR(1 g) = 0.404 mW/g; SAR(10 g) = 0.260 mW/g

Maximum value of SAR (measured) = 0.435 mW/g

SCN/87207JD02A/027: Tilt Right PCS1900 CH661

Date: 09/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

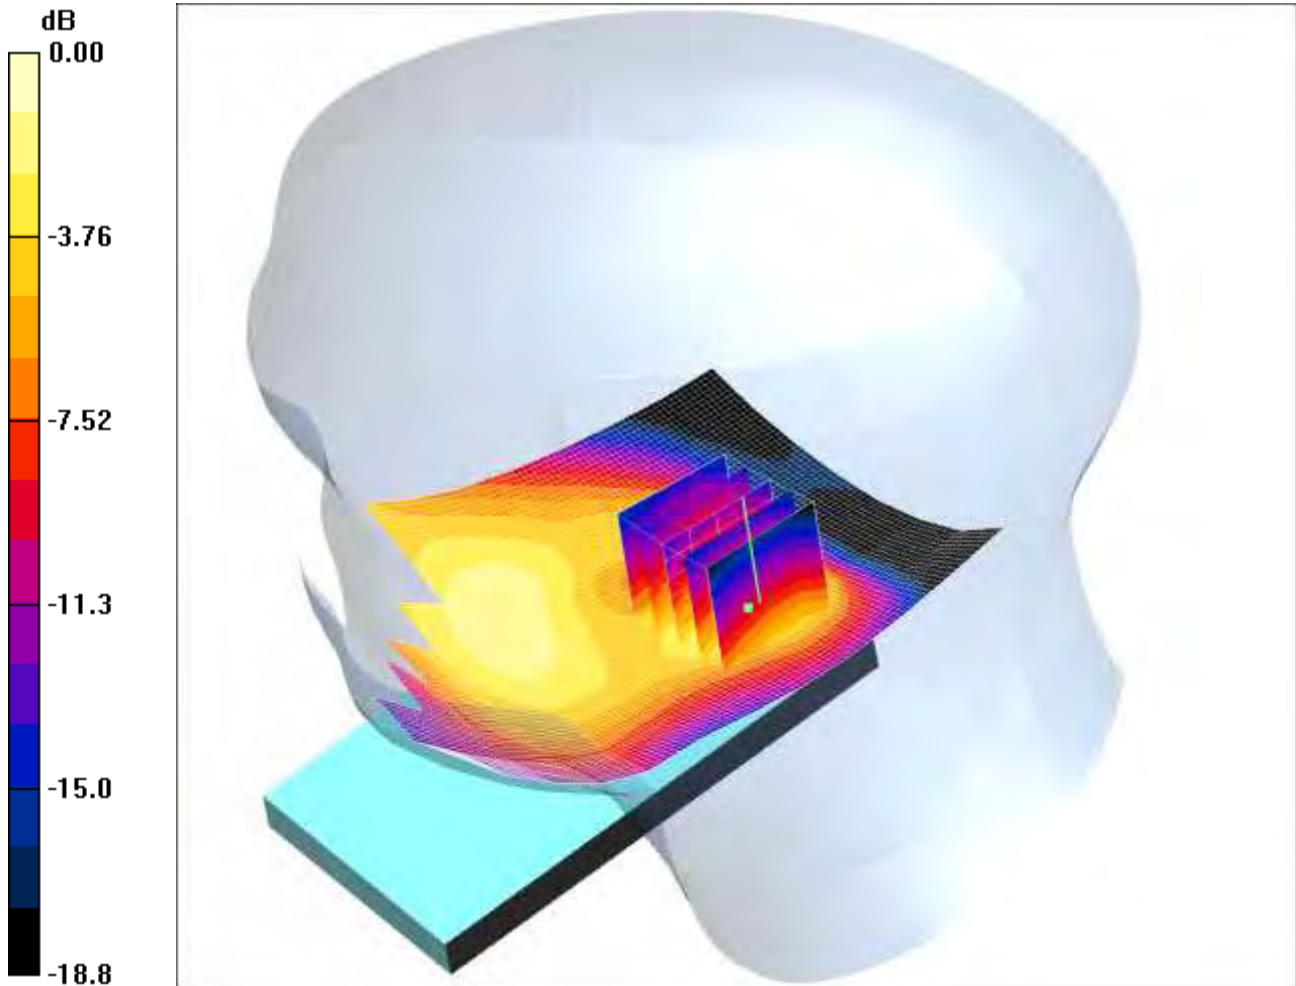

0 dB = 0.165mW/g

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 MHz HSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.92, 4.92, 4.92); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12a (Site 57); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Tilt Right - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.177 mW/g

Tilt Right - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.40 V/m; Power Drift = -0.065 dB

Peak SAR (extrapolated) = 0.237 W/kg


SAR(1 g) = 0.149 mW/g; SAR(10 g) = 0.083 mW/g

Maximum value of SAR (measured) = 0.165 mW/g

SCN/87207JD02A/028: Touch Left PCS1900 CH512

Date: 09/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

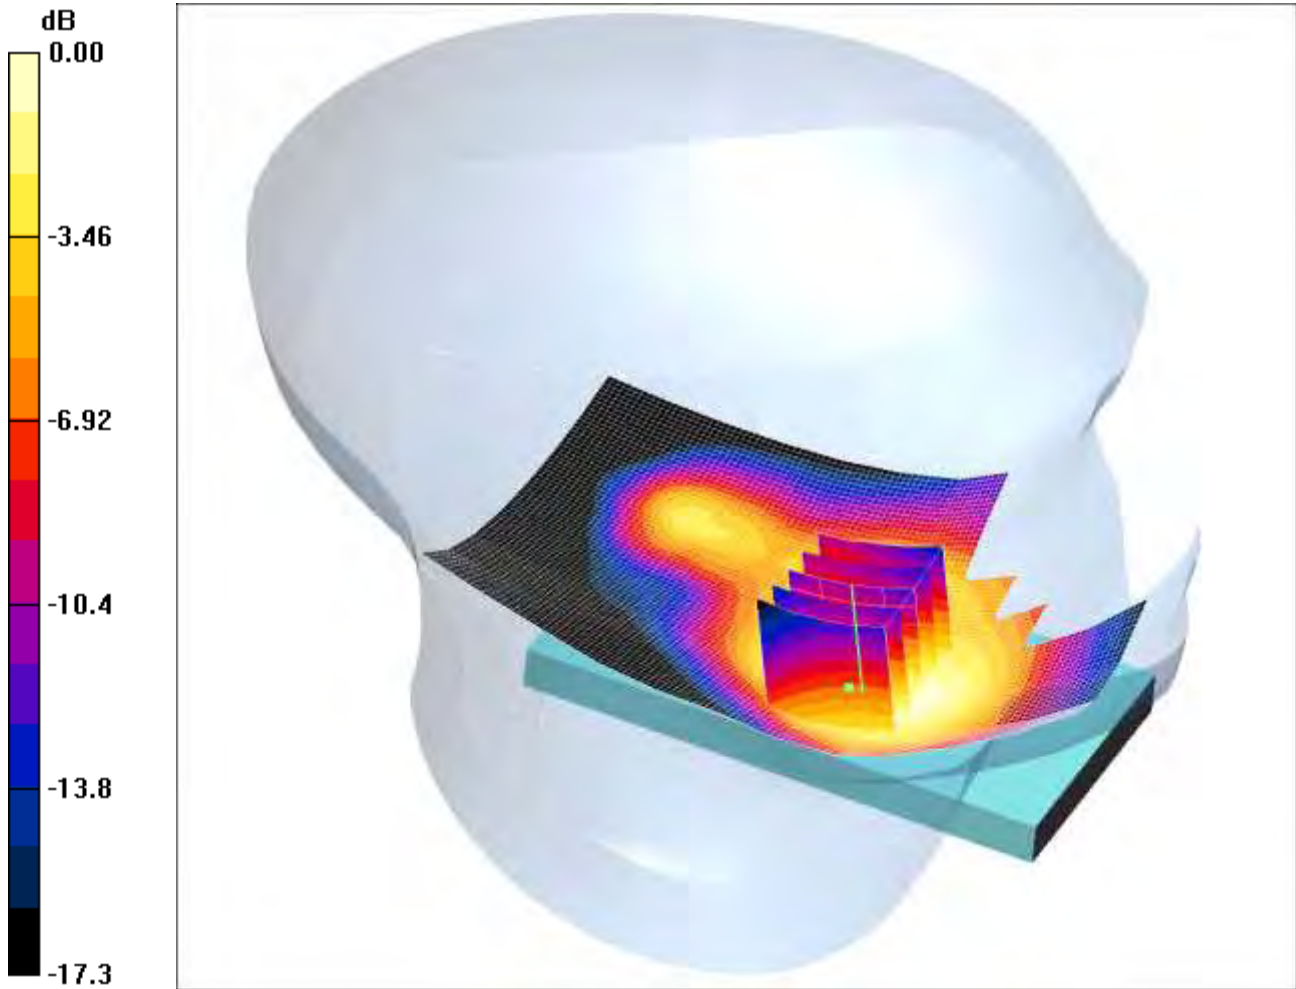

0 dB = 0.498mW/g

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: 1900 MHz HSL Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 38.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.92, 4.92, 4.92); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12a (Site 57); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Touch Left - Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.524 mW/g

Touch Left - Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.71 V/m; Power Drift = -0.075 dB

Peak SAR (extrapolated) = 0.673 W/kg


SAR(1 g) = 0.471 mW/g; SAR(10 g) = 0.298 mW/g

Maximum value of SAR (measured) = 0.498 mW/g

SCN/87207JD02A/029: Touch Left PCS1900 CH810

Date: 09/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

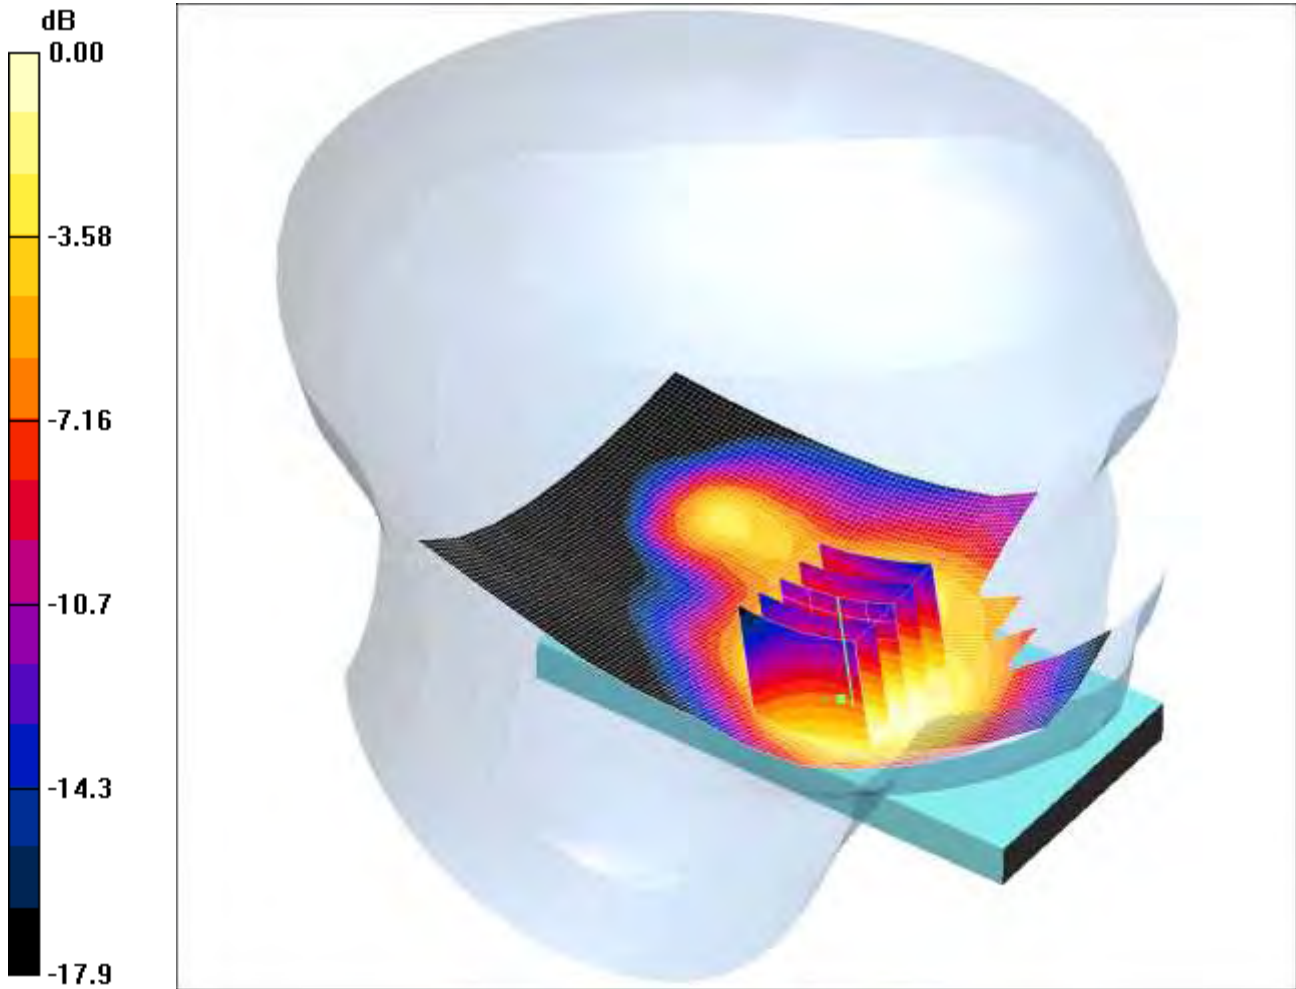

0 dB = 0.575mW/g

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: 1900 MHz HSL Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.92, 4.92, 4.92); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12a (Site 57); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Touch Left - High/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.596 mW/g

Touch Left - High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.98 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 0.814 W/kg


SAR(1 g) = 0.551 mW/g; SAR(10 g) = 0.340 mW/g

Maximum value of SAR (measured) = 0.575 mW/g

SCN/87207JD02A/030: Front of EUT Facing Phantom GPRS CH661

Date: 10/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

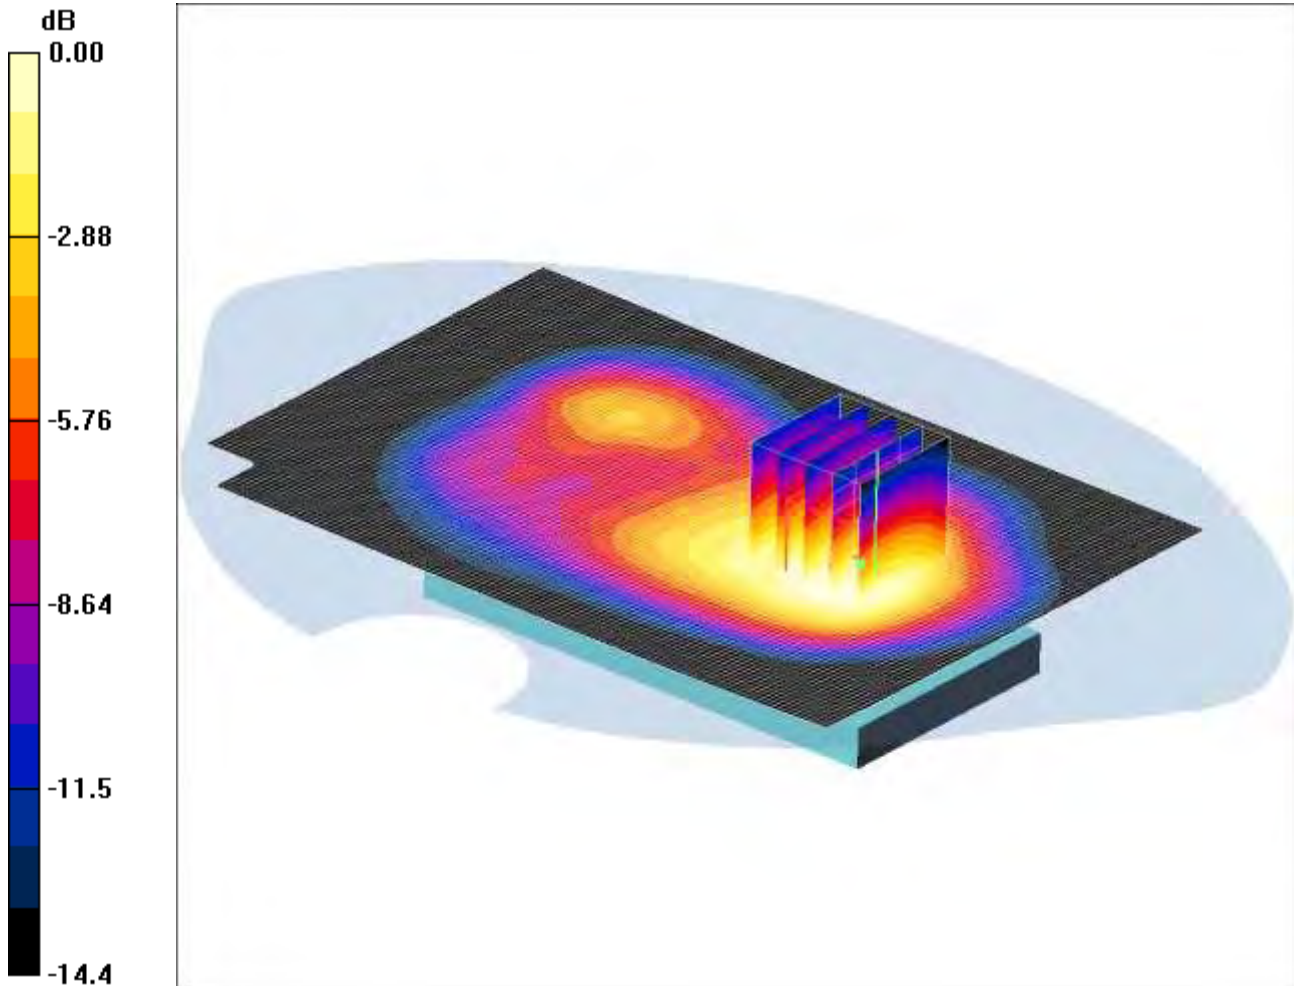

0 dB = 0.539mW/g

Communication System: GPRS 1900 2Tx; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Front of EUT Facing Phantom - Middle 2/Area Scan 2 (91x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.580 mW/g

Front of EUT Facing Phantom - Middle 2/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.6 V/m; Power Drift = -0.077 dB

Peak SAR (extrapolated) = 0.730 W/kg


SAR(1 g) = 0.499 mW/g; SAR(10 g) = 0.323 mW/g

Maximum value of SAR (measured) = 0.539 mW/g

SCN/87207JD02A/031: Back of EUT Facing Phantom GPRS CH661

Date: 10/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

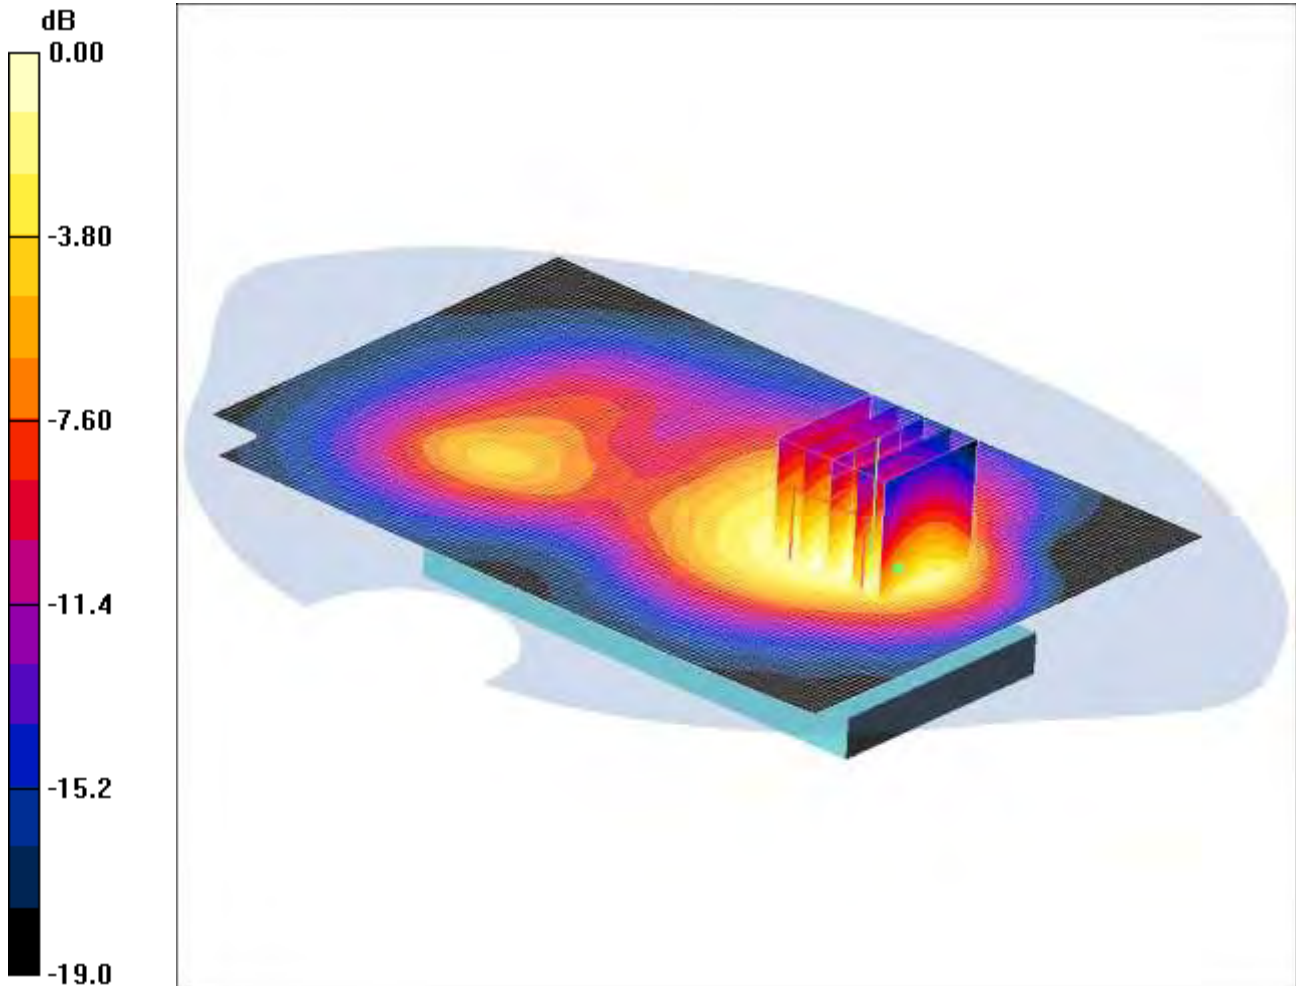

0 dB = 0.710mW/g

Communication System: GPRS 1900 2Tx; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Back of EUT Facing Phantom - Middle 2/Area Scan 2 (91x131x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.718 mW/g

Back of EUT Facing Phantom - Middle 2/Zoom Scan (5x5x7) 2 2 2 2 (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.3 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.02 W/kg


SAR(1 g) = 0.644 mW/g; SAR(10 g) = 0.388 mW/g

Maximum value of SAR (measured) = 0.710 mW/g

SCN/87207JD02A/032: Left Hand Side of EUT Facing Phantom GPRS CH661

Date: 10/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

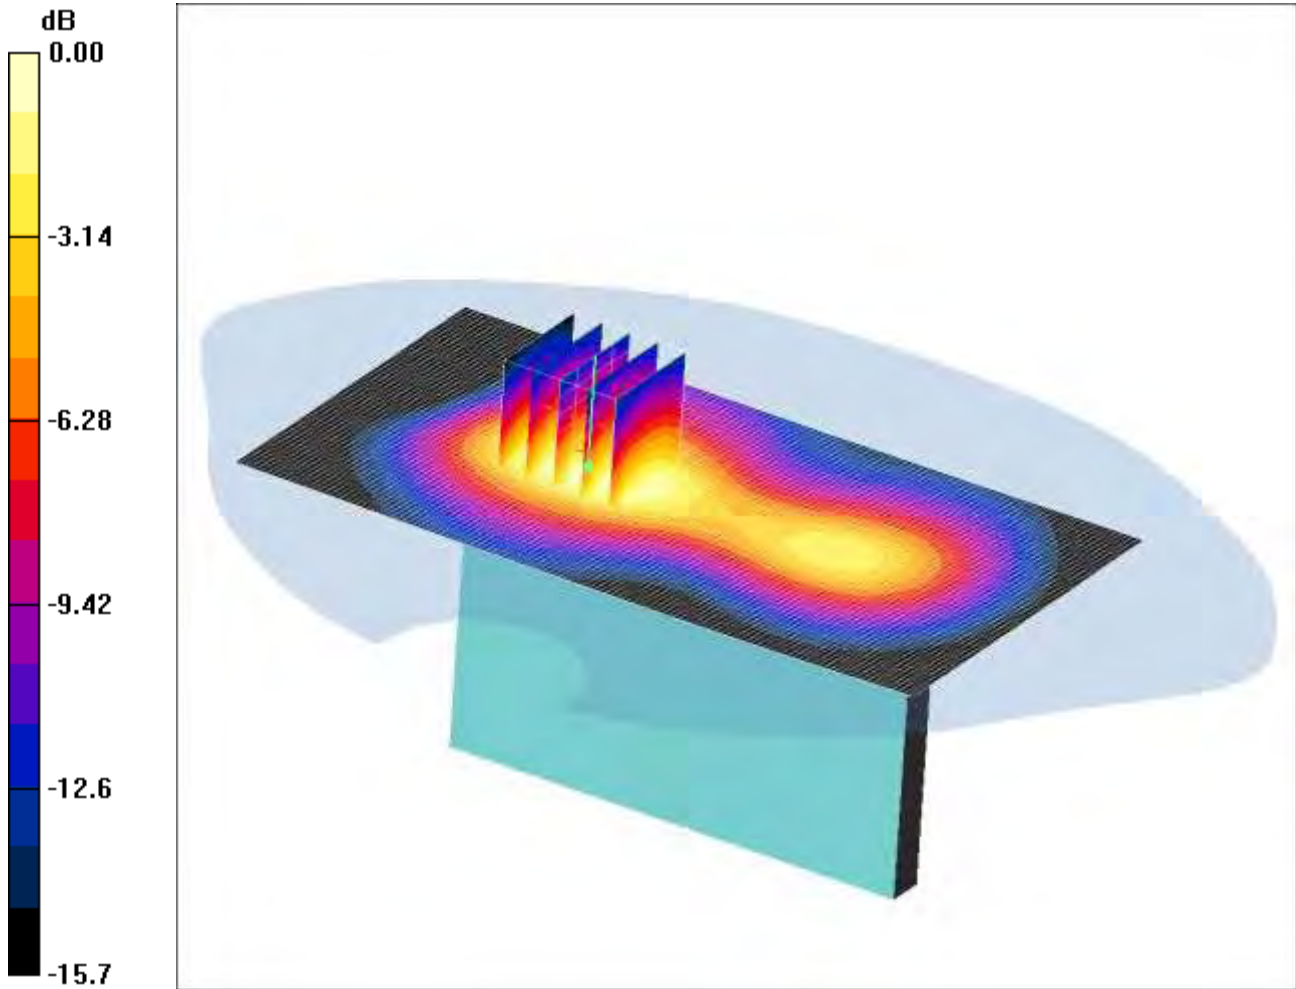

0 dB = 0.451mW/g

Communication System: GPRS 1900 2Tx; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880 \text{ MHz}$; $\sigma = 1.53 \text{ mho/m}$; $\epsilon_r = 51.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Left Hand Side of EUT Facing Phantom - Middle 2/Area Scan 2 (71x131x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.437 mW/g

Left Hand Side of EUT Facing Phantom - Middle 2/Zoom Scan (5x5x7) 2 2 2 2 (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.6 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 0.639 W/kg


SAR(1 g) = 0.409 mW/g; SAR(10 g) = 0.249 mW/g

Maximum value of SAR (measured) = 0.451 mW/g

SCN/87207JD02A/033: Right Hand Side of EUT Facing Phantom GPRS CH661

Date: 10/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

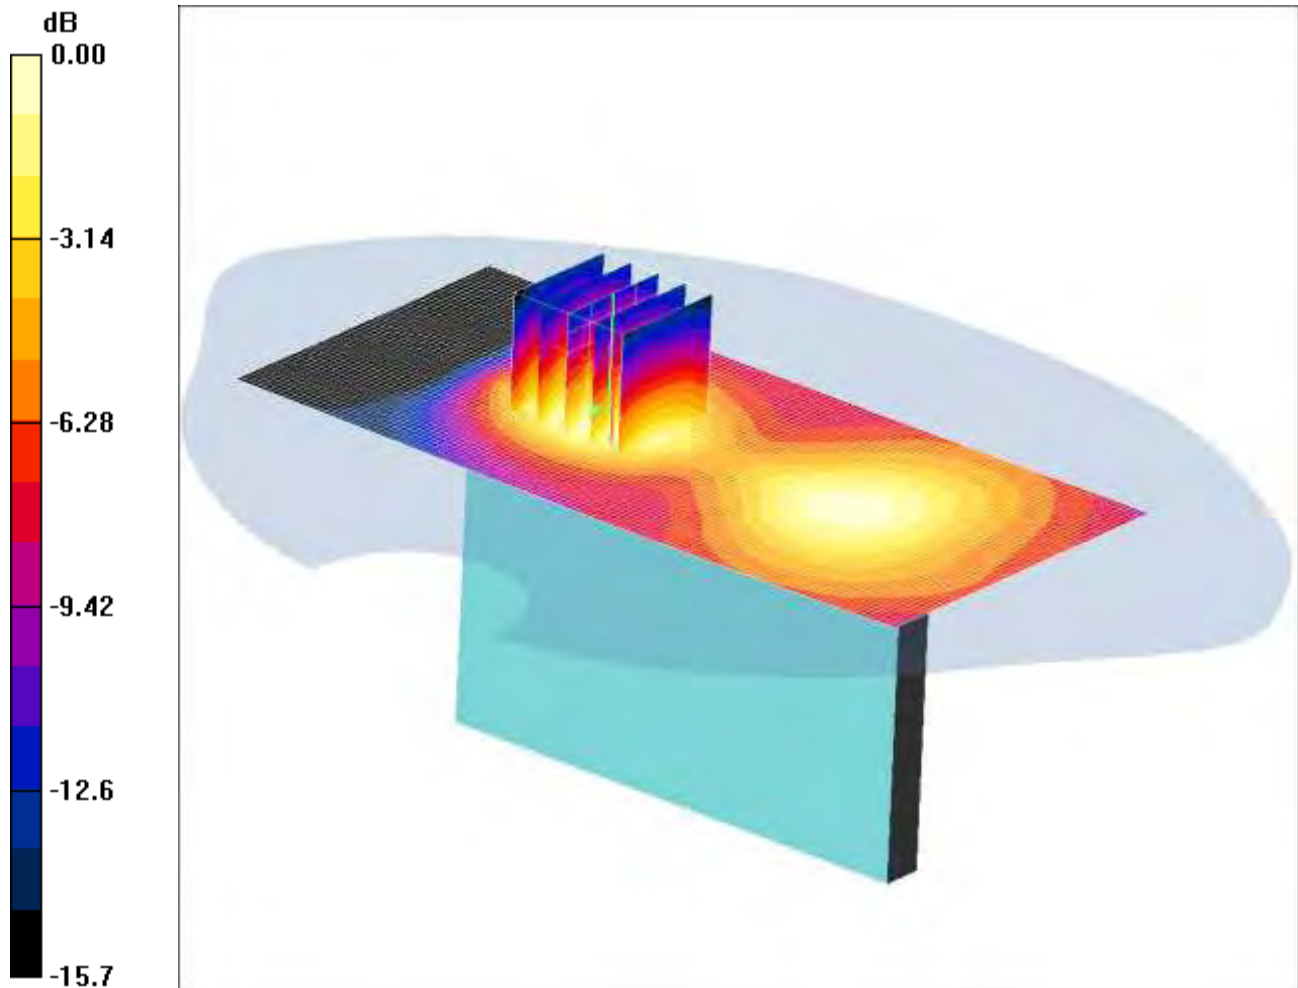

0 dB = 0.106mW/g

Communication System: GPRS 1900 2Tx; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Right Hand Side of EUT Facing Phantom - Middle 2 2/Area Scan 2 (61x131x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.111 mW/g

Right Hand Side of EUT Facing Phantom - Middle 2 2/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement

grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.63 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 0.150 W/kg


SAR(1 g) = 0.098 mW/g; SAR(10 g) = 0.060 mW/g

Maximum value of SAR (measured) = 0.106 mW/g

SCN/87207JD02A/034: Bottom of EUT Facing Phantom GPRS CH661

Date: 10/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

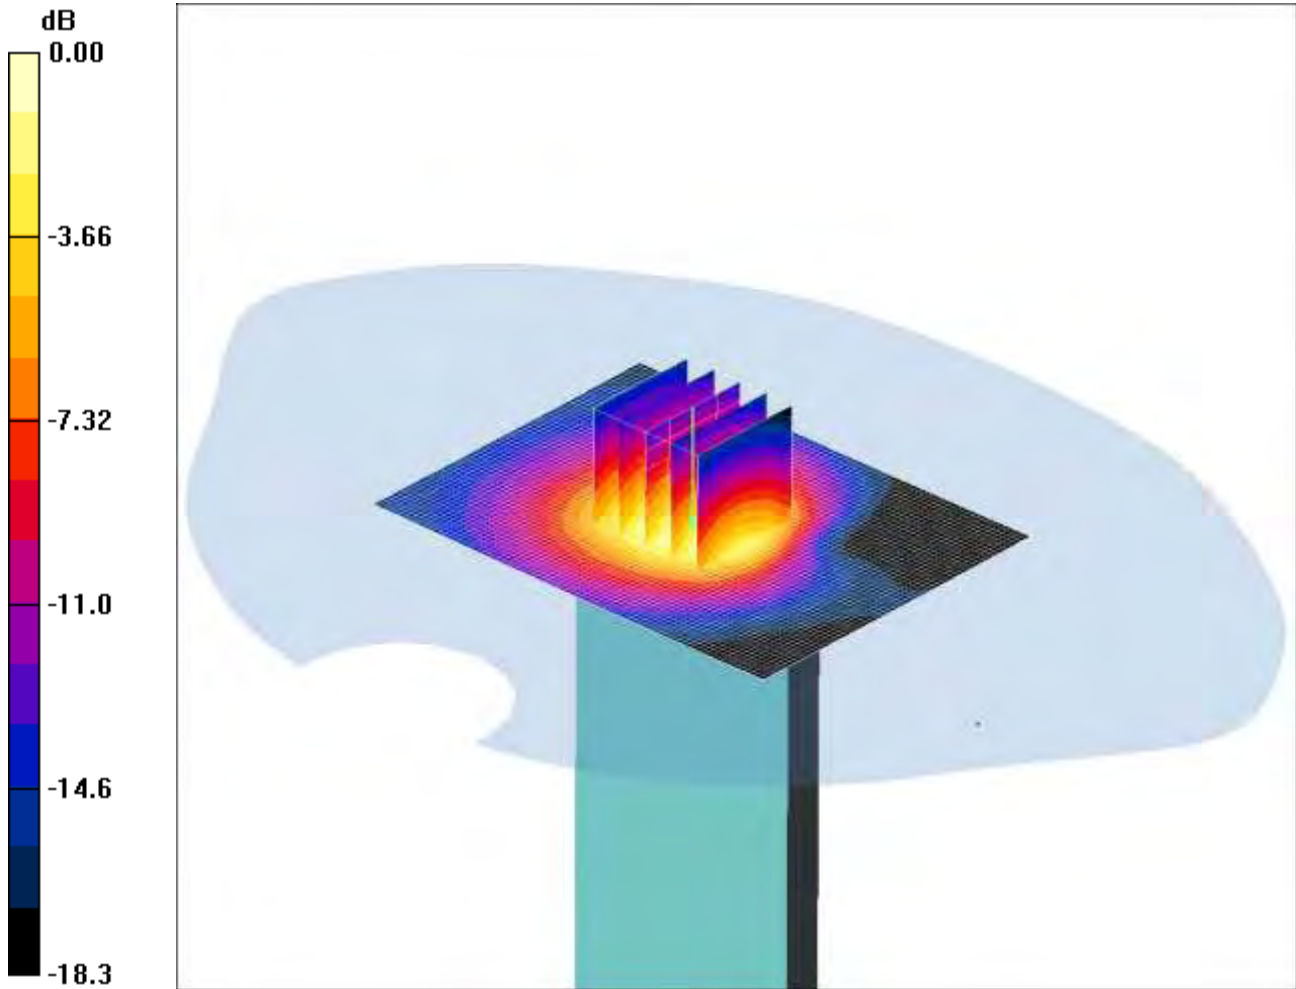

0 dB = 0.627mW/g

Communication System: GPRS 1900 2Tx; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Bottom of EUT Facing Phantom - Middle/Area Scan 2 (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.636 mW/g

Bottom of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.8 V/m; Power Drift = 0.077 dB

Peak SAR (extrapolated) = 0.955 W/kg


SAR(1 g) = 0.580 mW/g; SAR(10 g) = 0.328 mW/g

Maximum value of SAR (measured) = 0.627 mW/g

SCN/87207JD02A/035: Back of EUT Facing Phantom GPRS CH512

Date: 10/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

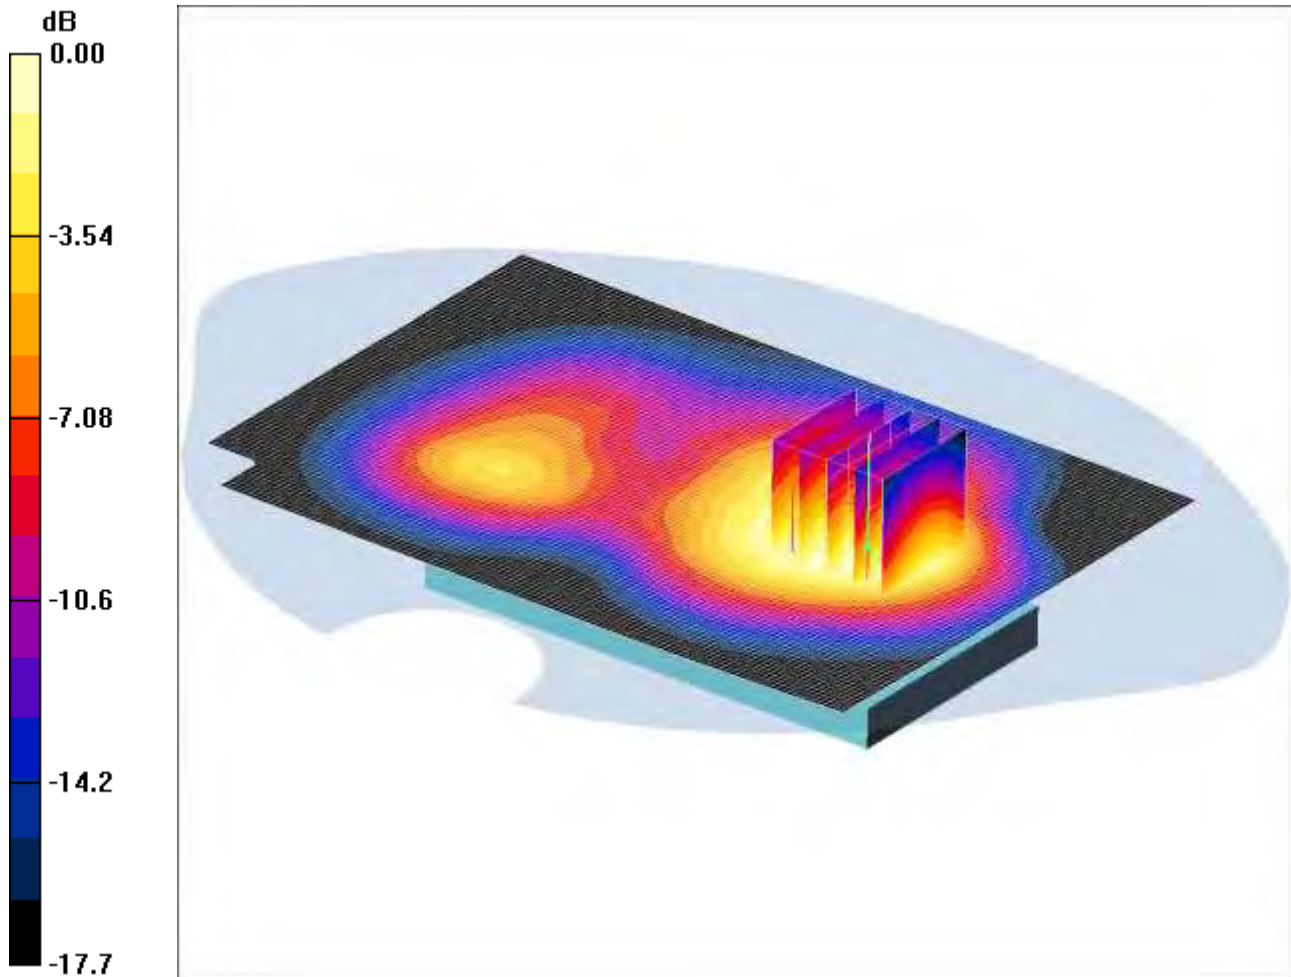

0 dB = 0.694mW/g

Communication System: GPRS 1900 2Tx; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Back of EUT Facing Phantom - Low/Area Scan 2 (91x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.727 mW/g

Back of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.5 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 0.990 W/kg


SAR(1 g) = 0.648 mW/g; SAR(10 g) = 0.403 mW/g

Maximum value of SAR (measured) = 0.694 mW/g

SCN/87207JD02A/036: Back of EUT Facing Phantom GPRS CH810

Date: 10/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

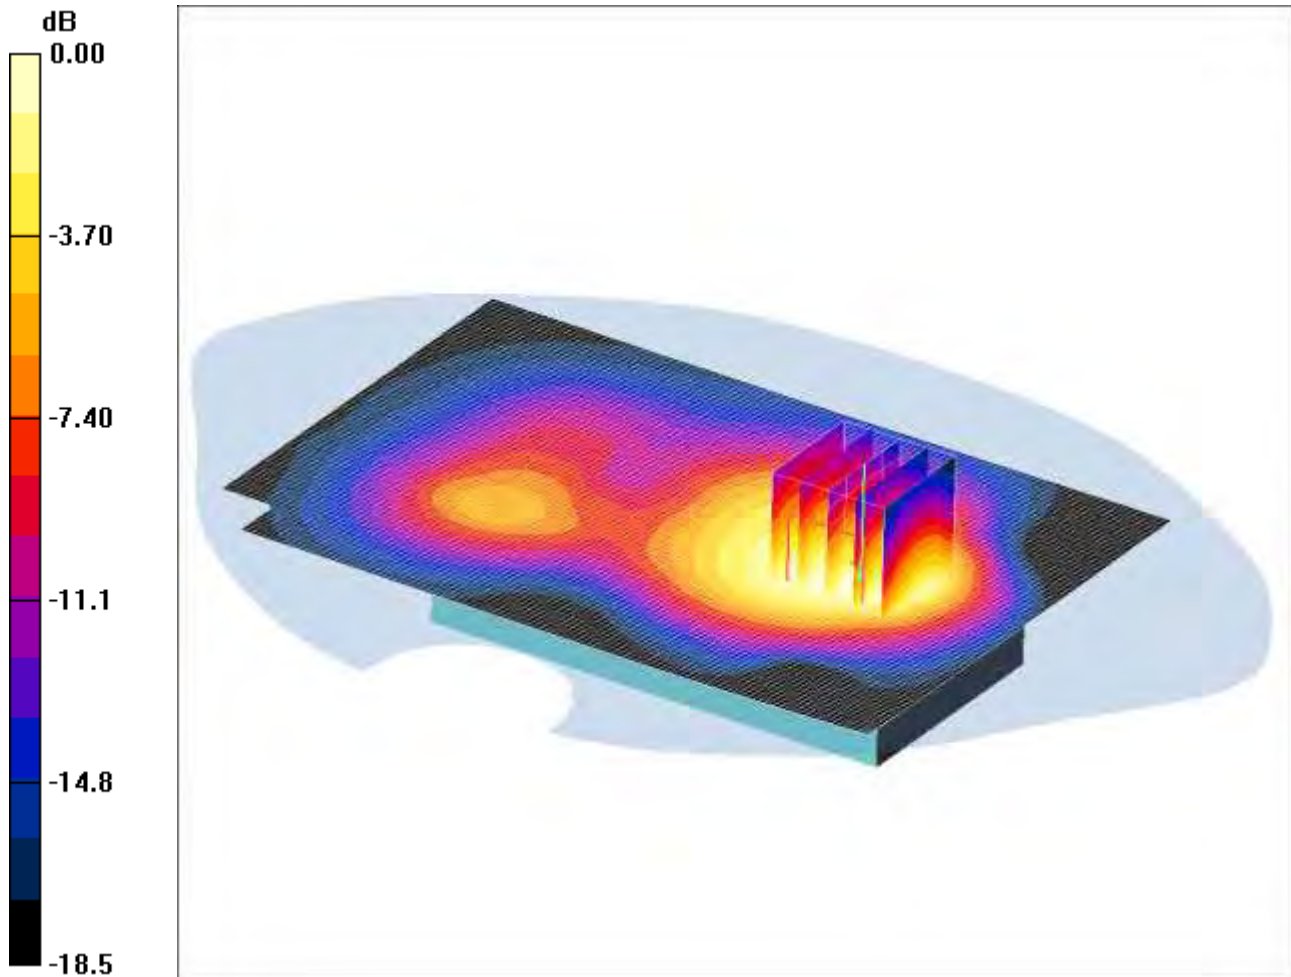

0 dB = 0.757mW/g

Communication System: GPRS 1900 2Tx; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Back of EUT Facing Phantom - High/Area Scan 2 (91x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.783 mW/g

Back of EUT Facing Phantom - High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.2 V/m; Power Drift = -0.065 dB

Peak SAR (extrapolated) = 1.11 W/kg


SAR(1 g) = 0.704 mW/g; SAR(10 g) = 0.440 mW/g

Maximum value of SAR (measured) = 0.757 mW/g

SCN/87207JD02A/037: Back of EUT Facing Phantom PCS CH661

Date: 10/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

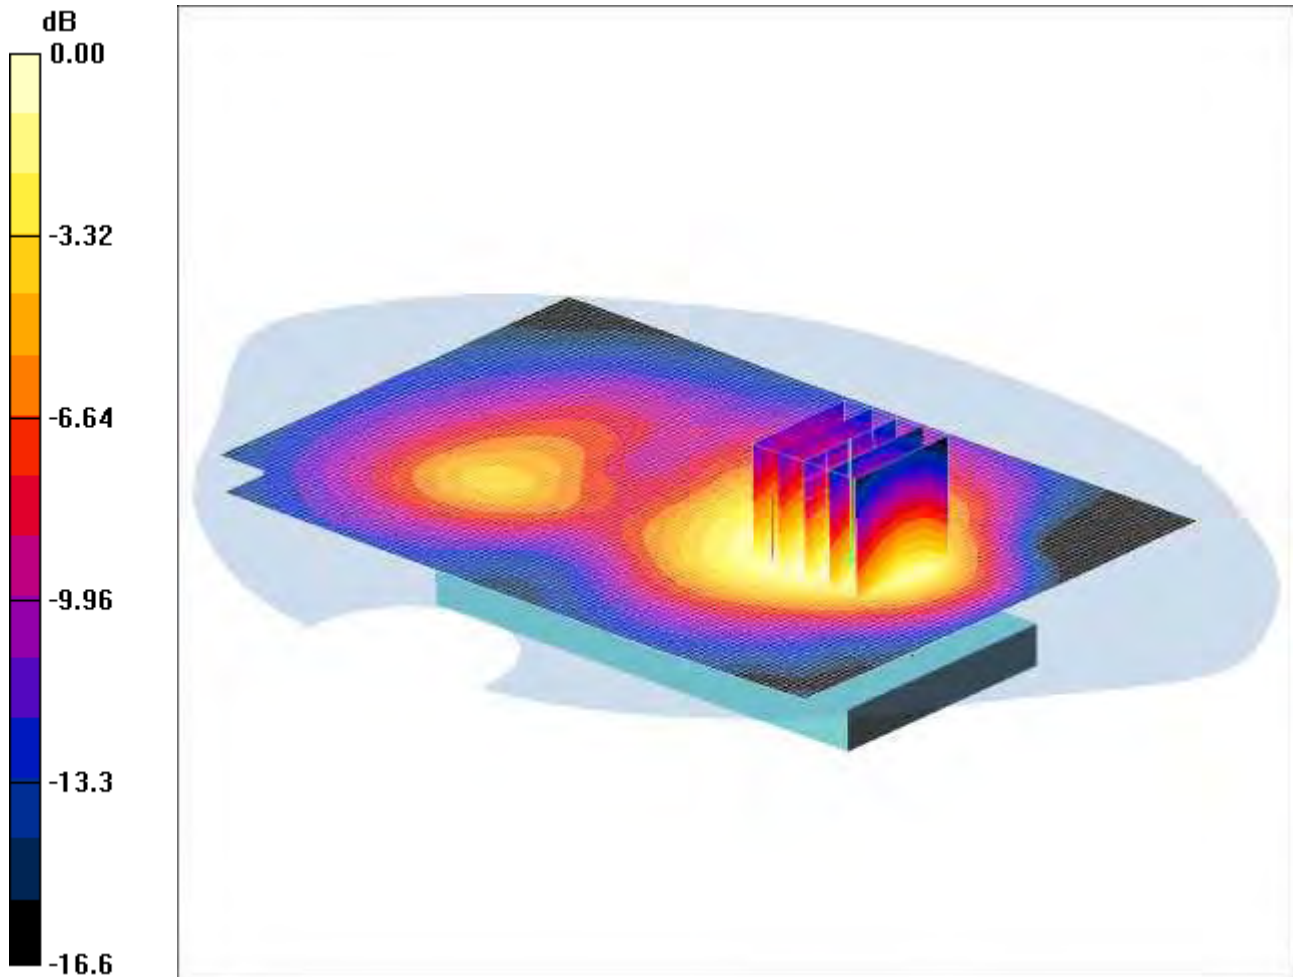

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Back of EUT Facing Phantom - Middle/Area Scan 2 (91x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.307 mW/g

Back of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.37 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 0.435 W/kg


SAR(1 g) = 0.281 mW/g; SAR(10 g) = 0.179 mW/g

Maximum value of SAR (measured) = 0.303 mW/g

SCN/87207JD02A/038: Back of EUT Facing Phantom PCS CH512

Date: 10/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

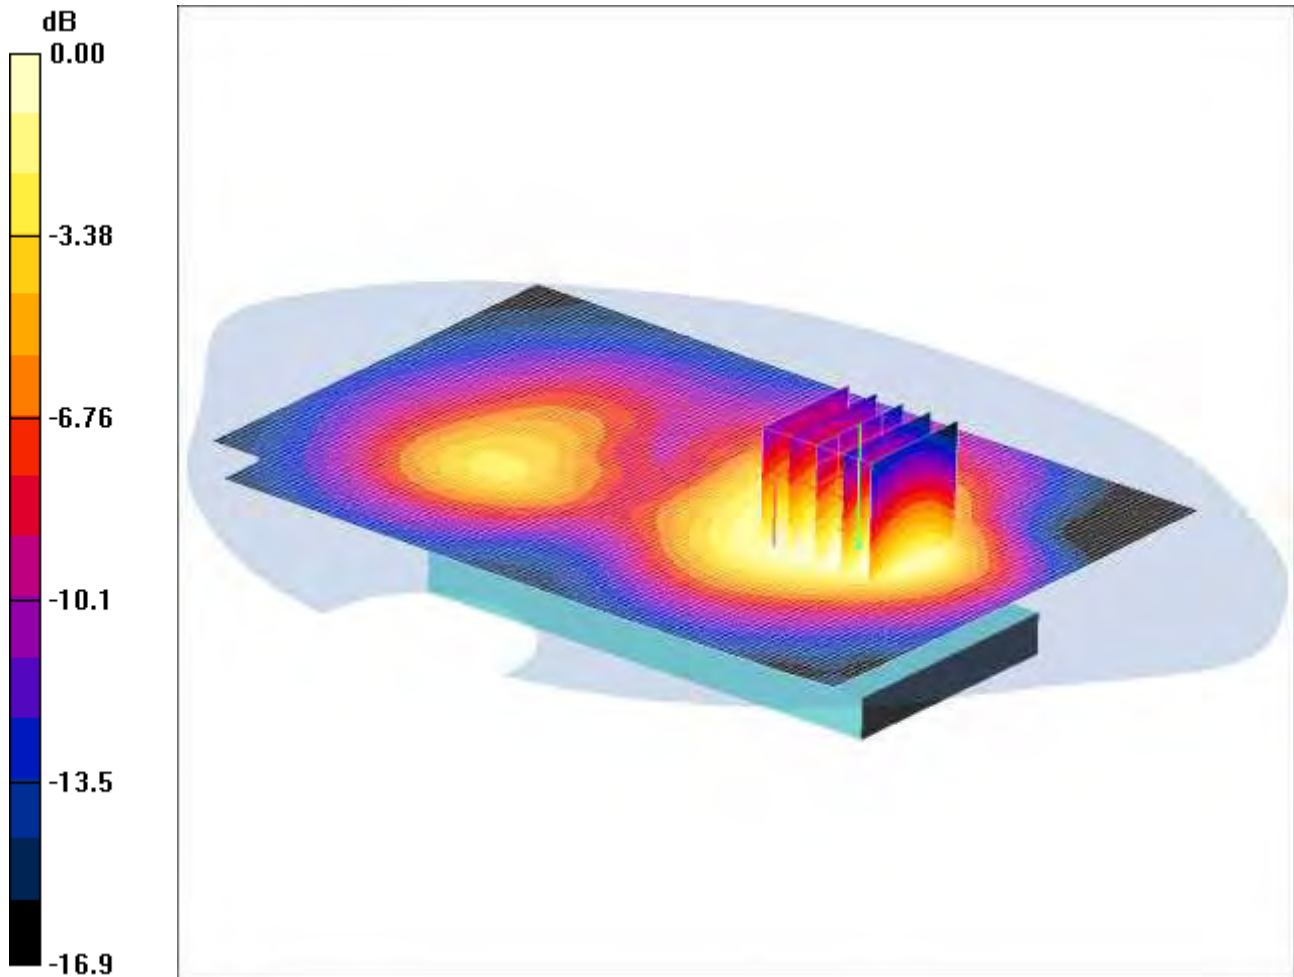

0 dB = 0.284mW/g

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Back of EUT Facing Phantom - Low/Area Scan 2 (91x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.292 mW/g

Back of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm,

dy=8mm, dz=5mm

Reference Value = 7.70 V/m; Power Drift = 0.103 dB

Peak SAR (extrapolated) = 0.397 W/kg


SAR(1 g) = 0.267 mW/g; SAR(10 g) = 0.175 mW/g

Maximum value of SAR (measured) = 0.284 mW/g

SCN/87207JD02A/039: Back of EUT Facing Phantom PCS CH810

Date: 10/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

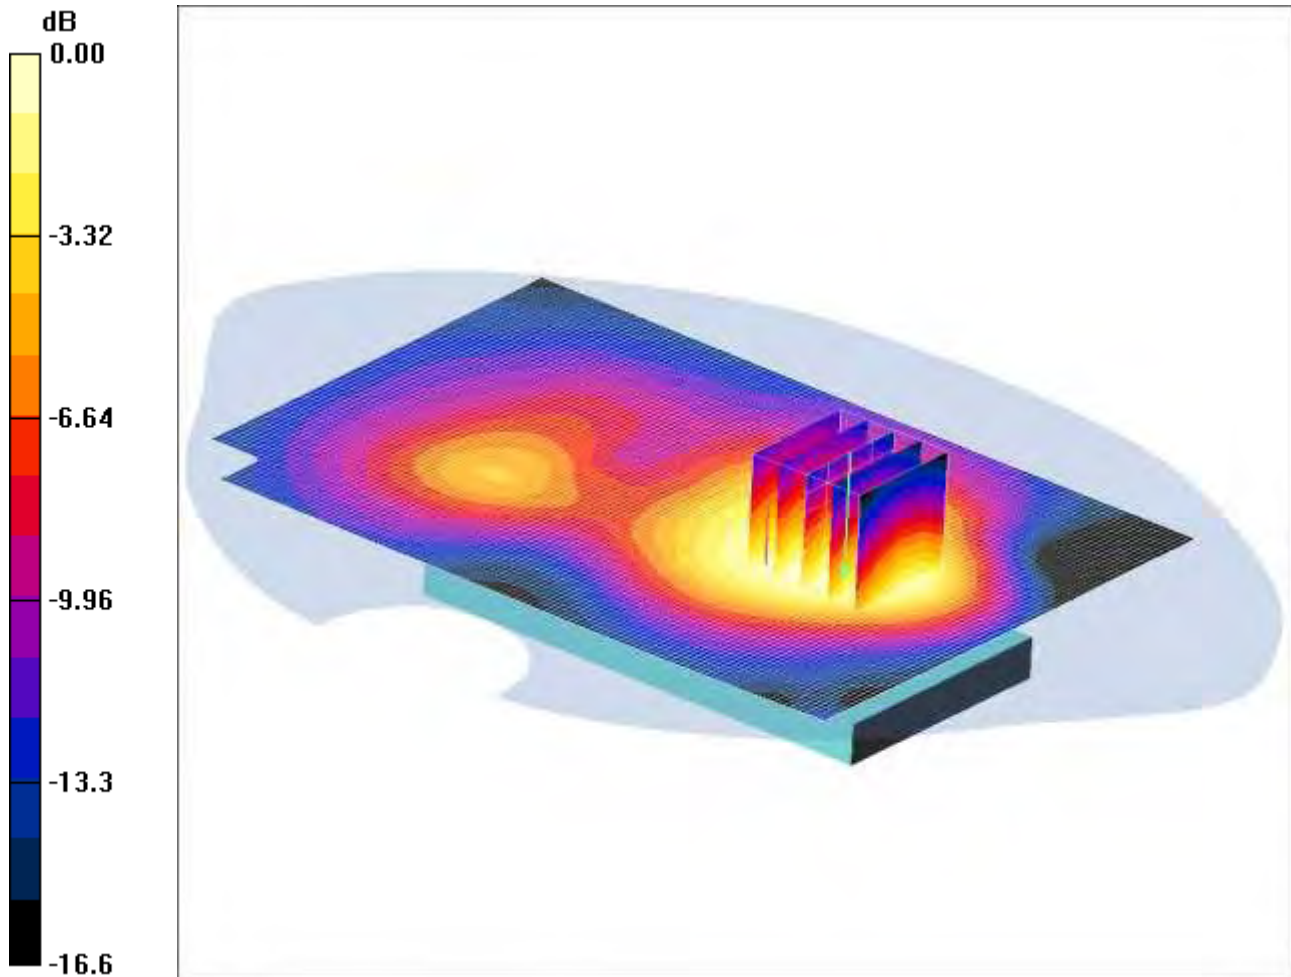

0 dB = 0.314mW/g

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Back of EUT Facing Phantom - High/Area Scan 2 (91x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.318 mW/g

Back of EUT Facing Phantom - High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm,

dy=8mm, dz=5mm

Reference Value = 9.00 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 0.447 W/kg


SAR(1 g) = 0.292 mW/g; SAR(10 g) = 0.188 mW/g

Maximum value of SAR (measured) = 0.314 mW/g

SCN/87207JD02A/040: Back of EUT Facing Phantom with PHF PCS CH810

Date: 10/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

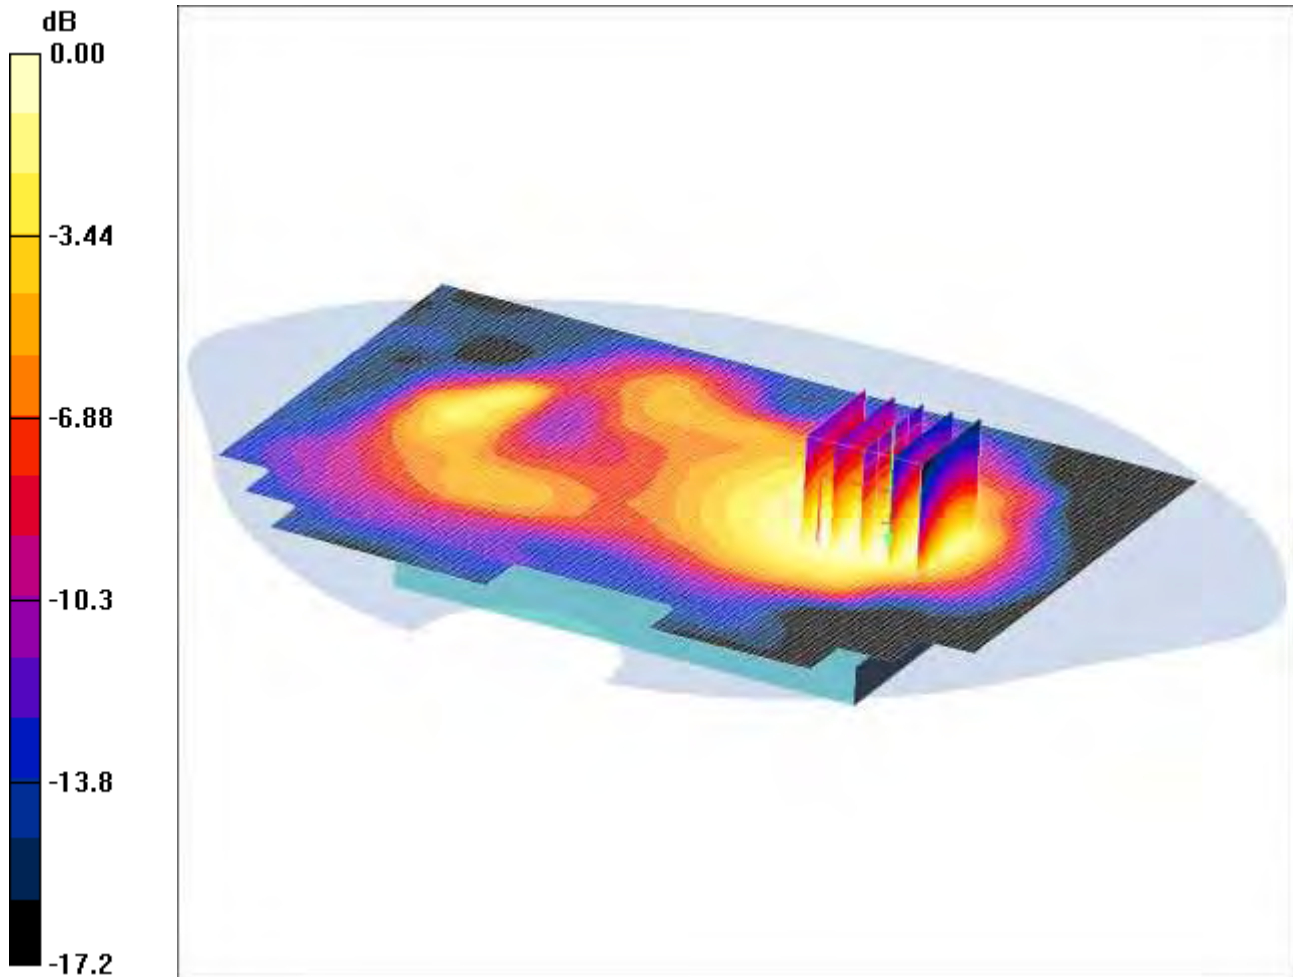

0 dB = 0.311mW/g

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Back of EUT Facing Phantom with PHF - High/Area Scan (101x141x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.331 mW/g

Back of EUT Facing Phantom with PHF - High/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.14 V/m; Power Drift = -0.107 dB

Peak SAR (extrapolated) = 0.441 W/kg


SAR(1 g) = 0.289 mW/g; SAR(10 g) = 0.185 mW/g

Maximum value of SAR (measured) = 0.311 mW/g

SCN/87207JD02A/041: Touch Left UMTS FDD 2 CH9400

Date: 20/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

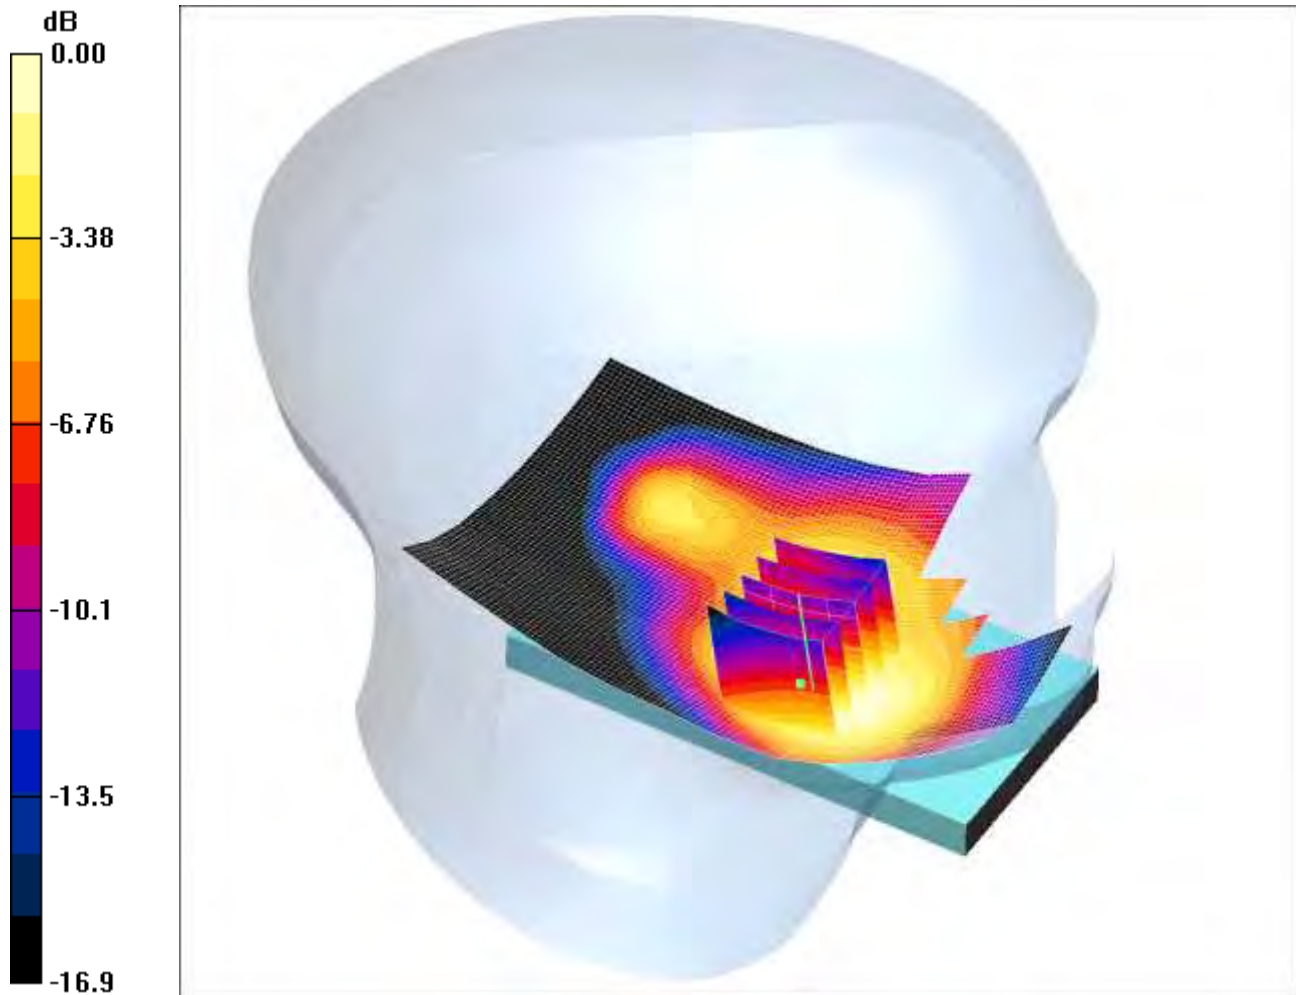

0 dB = 0.942mW/g

Communication System: UMTS-FDD 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz HSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1587; ConvF(5.18, 5.18, 5.18); Calibrated: 11/05/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12a (Site 57); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Touch Left Antenna- Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.997 mW/g

Touch Left Antenna- Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.83 V/m; Power Drift = 0.096 dB

Peak SAR (extrapolated) = 1.41 W/kg


SAR(1 g) = 0.914 mW/g; SAR(10 g) = 0.563 mW/g

Maximum value of SAR (measured) = 0.942 mW/g

SCN/87207JD02A/042: Touch Left UMTS FDD 2 CH9262

Date: 20/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

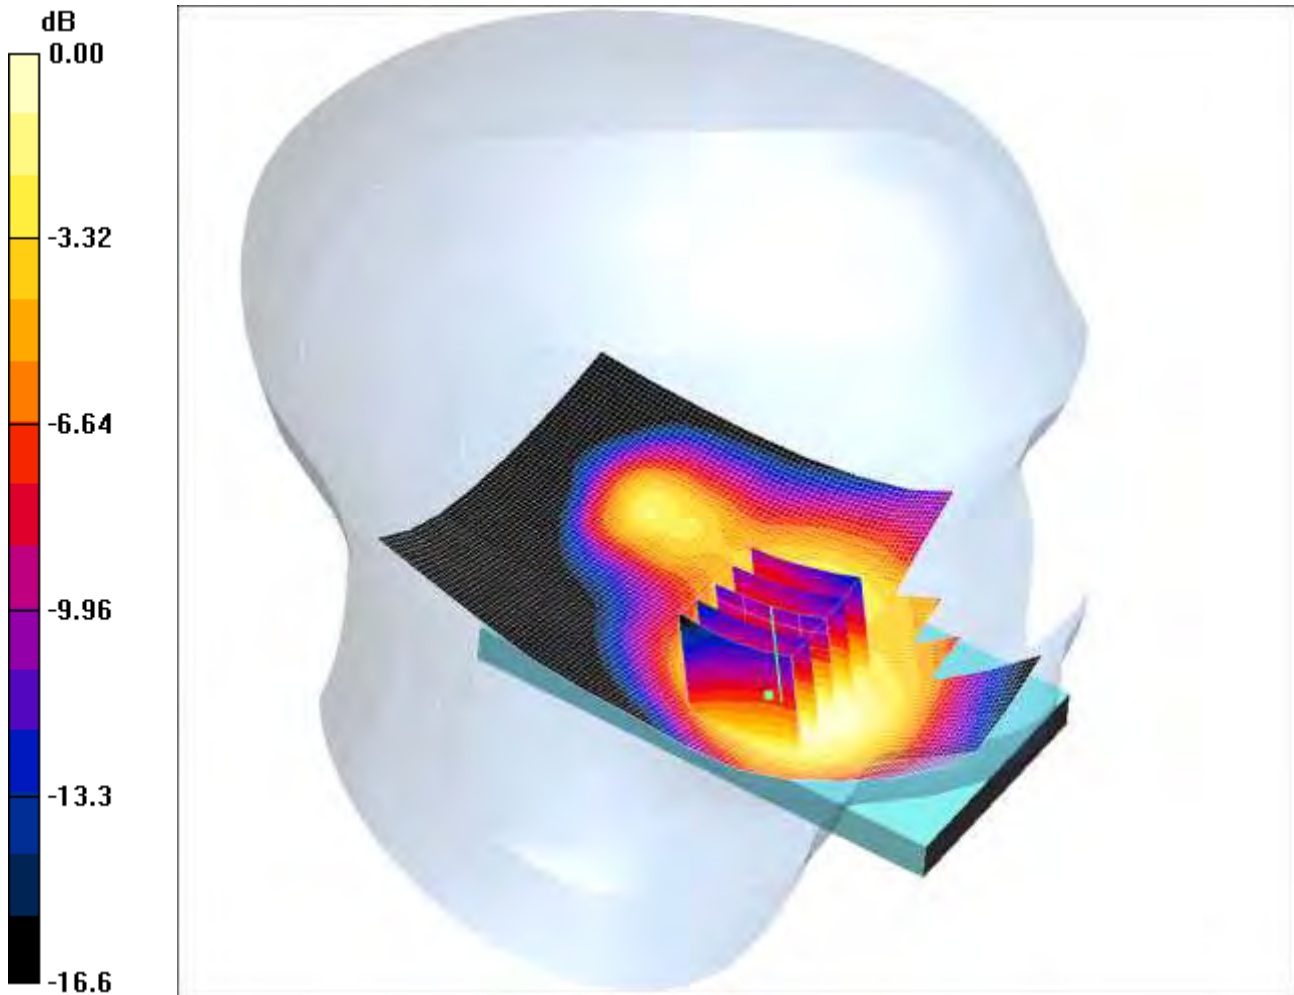

0 dB = 0.877mW/g

Communication System: UMTS-FDD 2; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: 1900 MHz HSL Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 38.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1587; ConvF(5.18, 5.18, 5.18); Calibrated: 11/05/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12a (Site 57); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Touch Left Antenna- Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.929 mW/g

Touch Left Antenna- Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.29 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 1.30 W/kg


SAR(1 g) = 0.843 mW/g; SAR(10 g) = 0.524 mW/g

Maximum value of SAR (measured) = 0.877 mW/g

SCN/87207JD02A/043: Touch Left UMTS FDD 2 CH9538

Date: 20/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

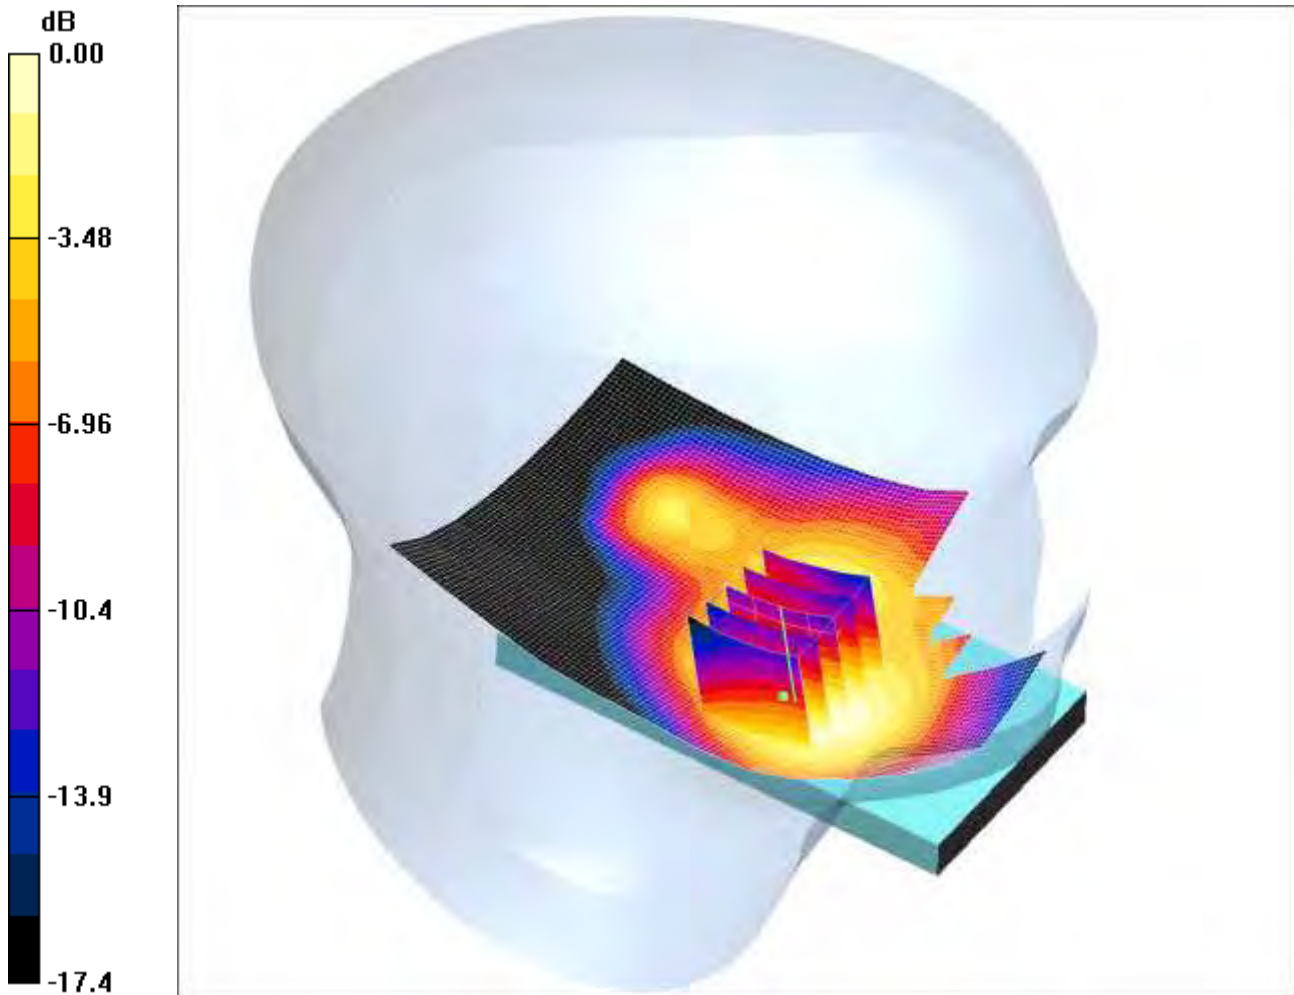

0 dB = 0.826mW/g

Communication System: UMTS-FDD 2; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: 1900 MHz HSL Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1587; ConvF(5.18, 5.18, 5.18); Calibrated: 11/05/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12a (Site 57); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Touch Left Antenna- High/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.872 mW/g

Touch Left Antenna- High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.58 V/m; Power Drift = 0.182 dB

Peak SAR (extrapolated) = 1.25 W/kg


SAR(1 g) = 0.802 mW/g; SAR(10 g) = 0.489 mW/g

Maximum value of SAR (measured) = 0.826 mW/g

SCN/87207JD02A/044: Tilt Left UMTS FDD 2 CH9400

Date: 20/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

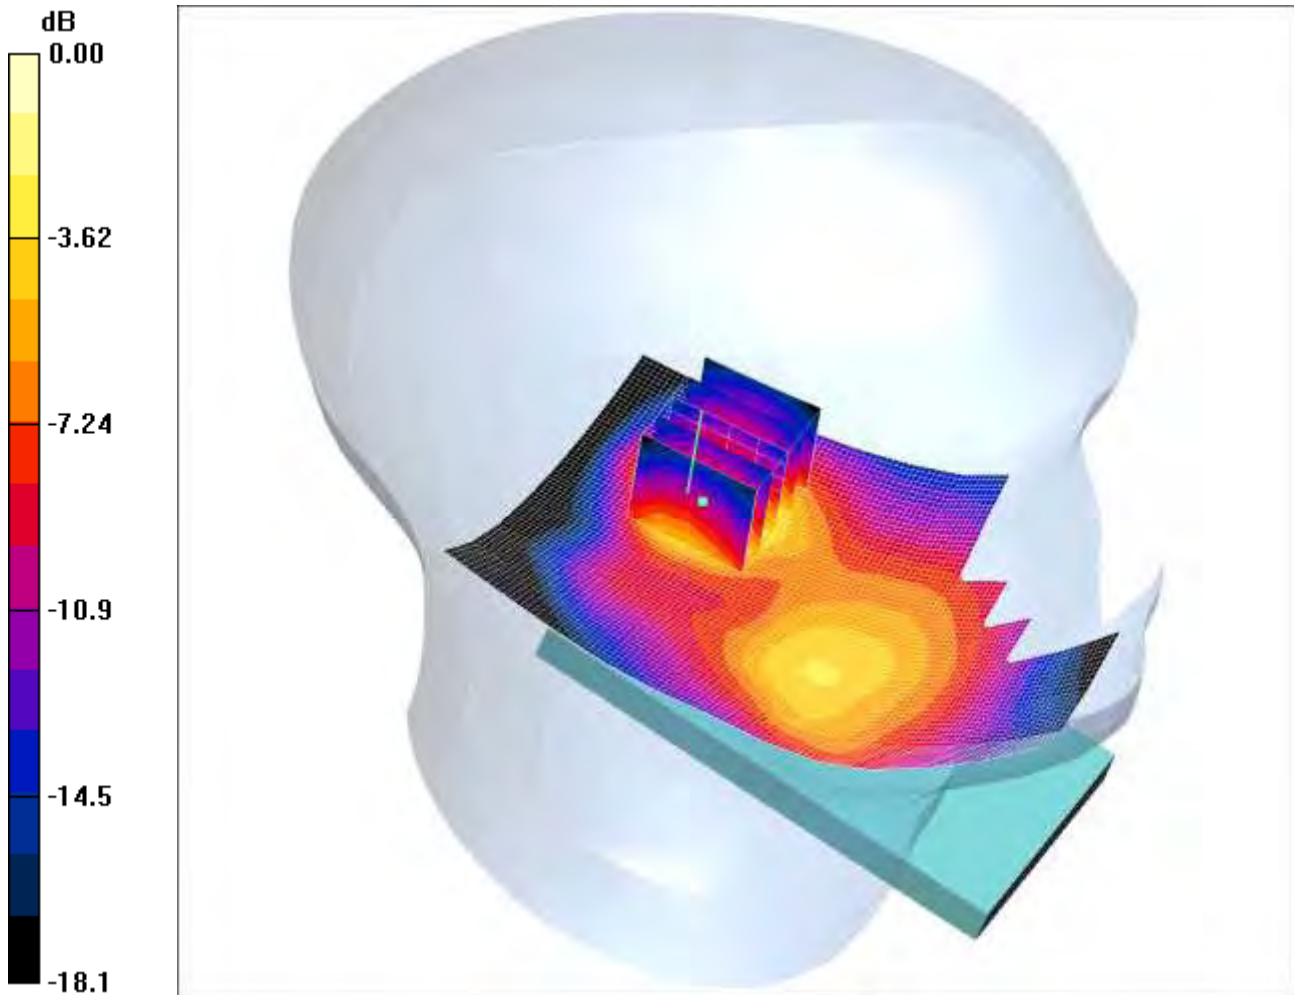

0 dB = 0.665mW/g

Communication System: UMTS-FDD 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz HSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1587; ConvF(5.18, 5.18, 5.18); Calibrated: 11/05/2012
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn394; Calibrated: 26/01/2012
- Phantom: SAM 12a (Site 57); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Tilt Left- Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.825 mW/g

Tilt Left- Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.6 V/m; Power Drift = -0.069 dB

Peak SAR (extrapolated) = 1.12 W/kg


SAR(1 g) = 0.621 mW/g; SAR(10 g) = 0.328 mW/g

Maximum value of SAR (measured) = 0.665 mW/g

SCN/87207JD02A/045: Touch Right UMTS FDD 2 CH9400

Date: 20/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

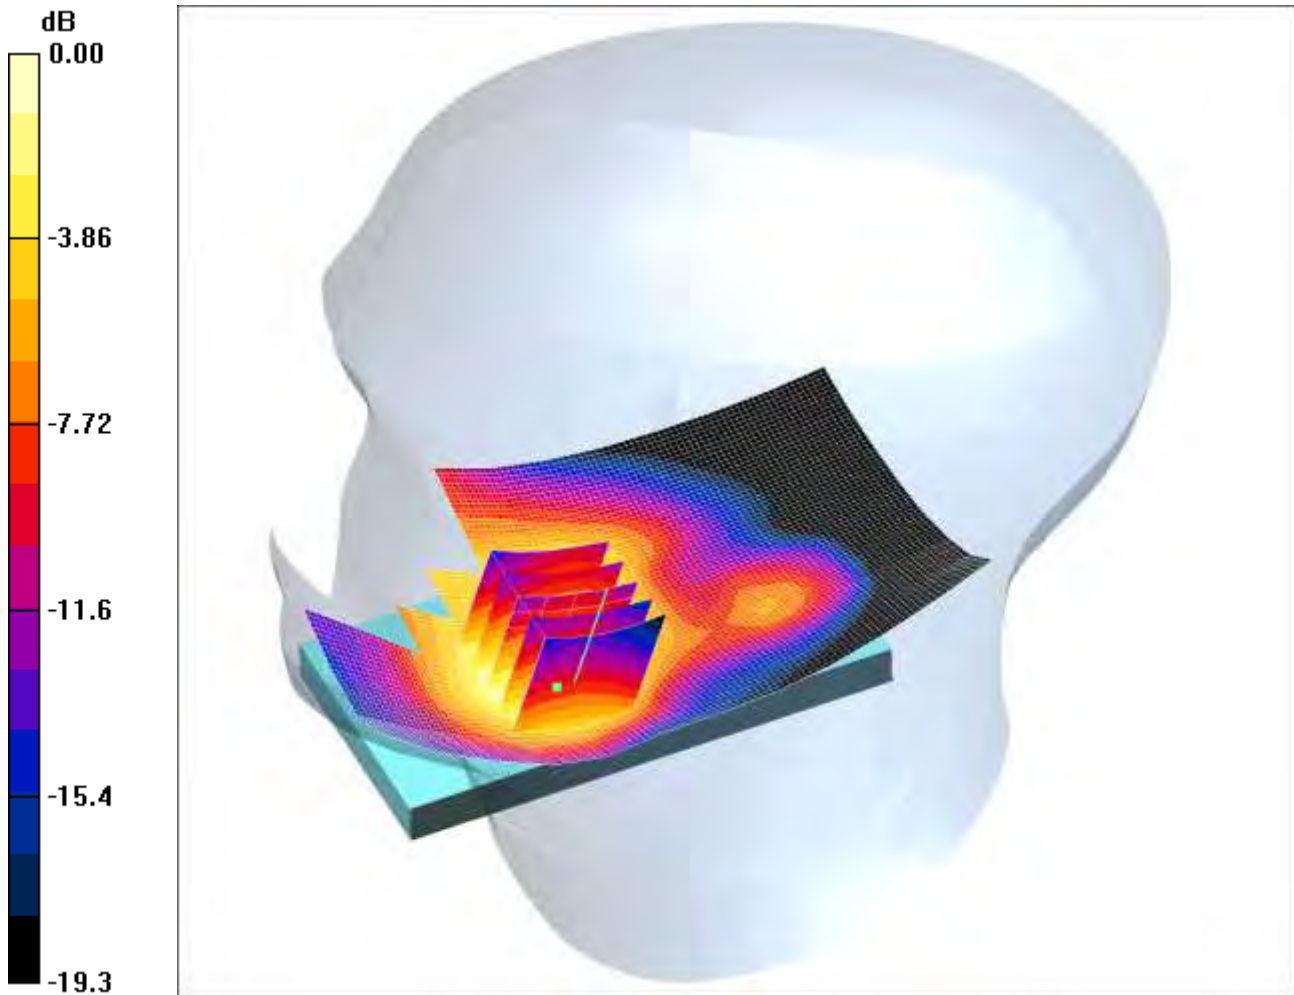

0 dB = 0.980mW/g

Communication System: UMTS-FDD 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz HSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1587; ConvF(5.18, 5.18, 5.18); Calibrated: 11/05/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12a (Site 57); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Touch Right- Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.08 mW/g

Touch Right- Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.87 V/m; Power Drift = -0.064 dB

Peak SAR (extrapolated) = 1.37 W/kg


SAR(1 g) = 0.921 mW/g; SAR(10 g) = 0.574 mW/g

Maximum value of SAR (measured) = 0.980 mW/g

SCN/87207JD02A/046: Touch Right UMTS FDD 2 CH9262

Date: 20/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

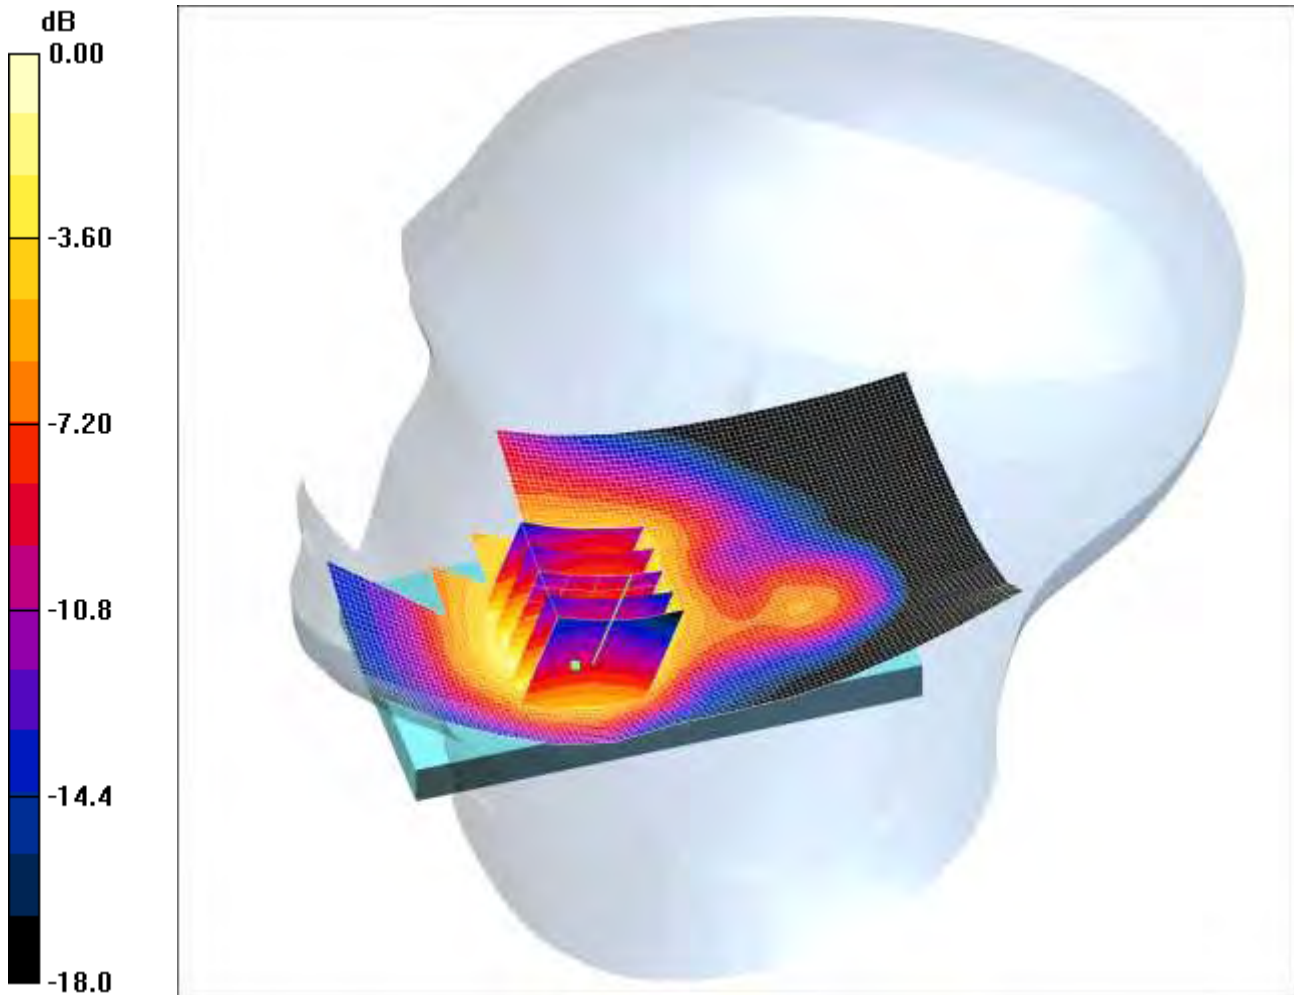

0 dB = 0.970mW/g

Communication System: UMTS-FDD 2; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: 1900 MHz HSL Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 38.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1587; ConvF(5.18, 5.18, 5.18); Calibrated: 11/05/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12a (Site 57); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Touch Right- Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.04 mW/g

Touch Right- Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.60 V/m; Power Drift = 0.048 dB

Peak SAR (extrapolated) = 1.34 W/kg


SAR(1 g) = 0.912 mW/g; SAR(10 g) = 0.574 mW/g

Maximum value of SAR (measured) = 0.970 mW/g

SCN/87207JD02A/047: Touch Right UMTS FDD 2 CH9538

Date: 20/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

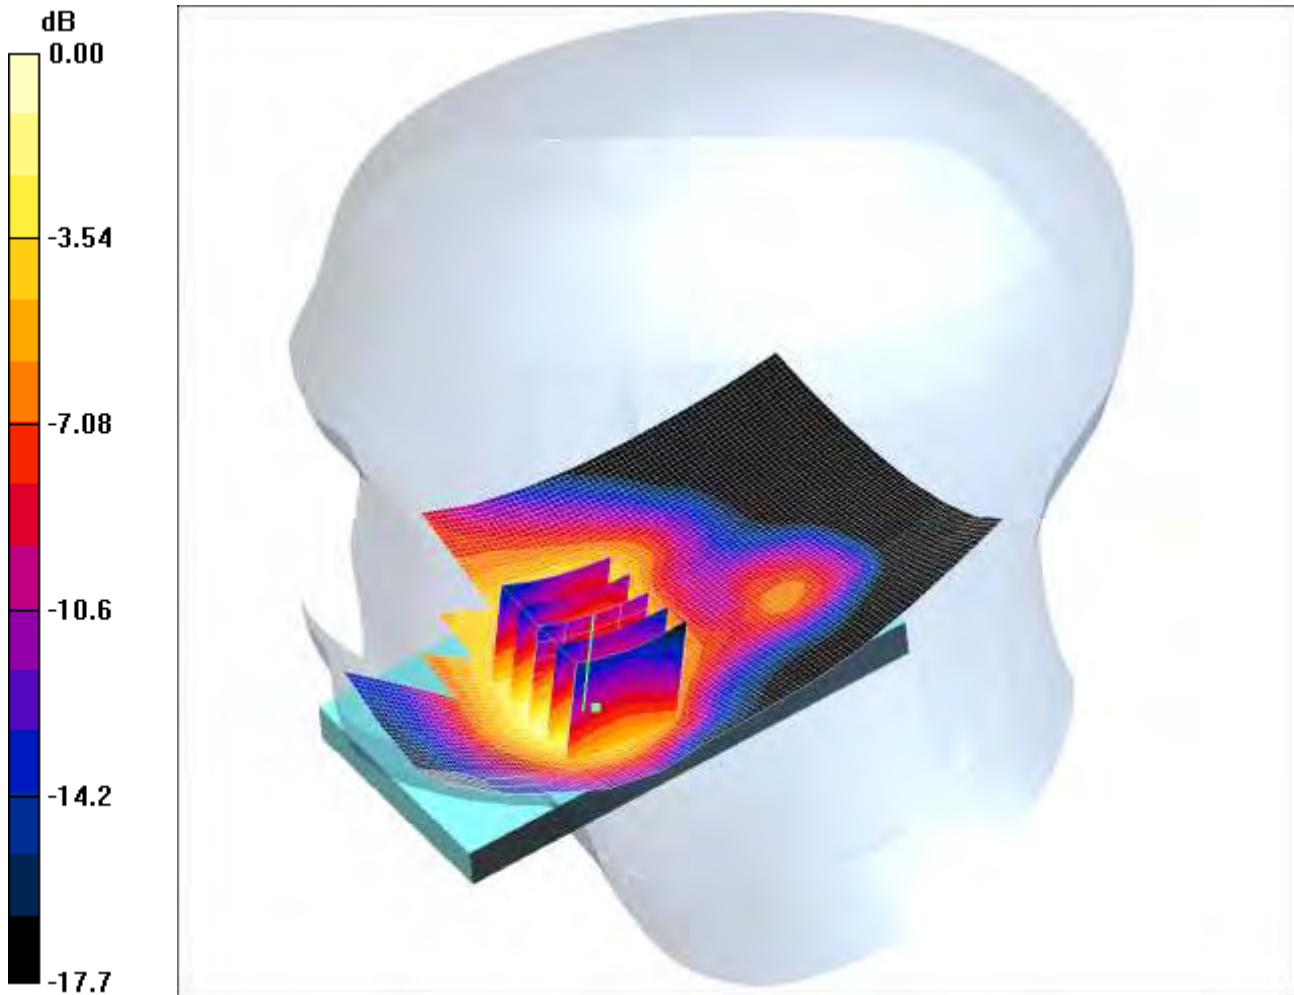

0 dB = 0.818mW/g

Communication System: UMTS-FDD 2; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: 1900 MHz HSL Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1587; ConvF(5.18, 5.18, 5.18); Calibrated: 11/05/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12a (Site 57); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Touch Right- High/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.904 mW/g

Touch Right- High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.51 V/m; Power Drift = 0.152 dB

Peak SAR (extrapolated) = 1.14 W/kg


SAR(1 g) = 0.760 mW/g; SAR(10 g) = 0.470 mW/g

Maximum value of SAR (measured) = 0.818 mW/g

SCN/87207JD02A/048: Tilt Right UMTS FDD 2 CH9400

Date: 20/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

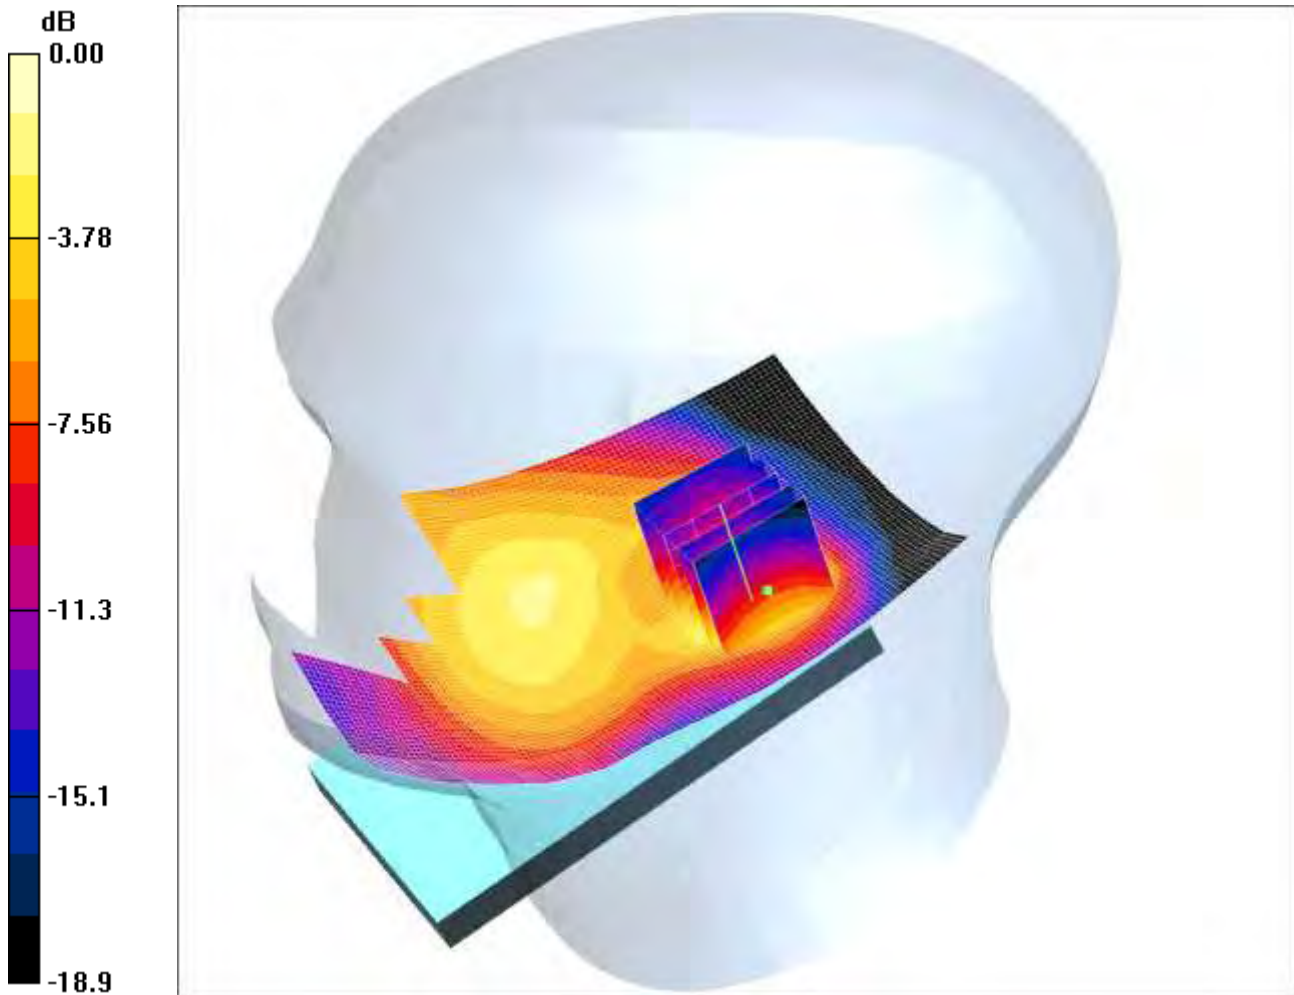

0 dB = 0.401mW/g

Communication System: UMTS-FDD 2; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: 1900 MHz HSL Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1587; ConvF(5.18, 5.18, 5.18); Calibrated: 11/05/2012
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn394; Calibrated: 26/01/2012
- Phantom: SAM 12a (Site 57); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Tilt Right- Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.414 mW/g

Tilt Right- Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.71 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.623 W/kg


SAR(1 g) = 0.363 mW/g; SAR(10 g) = 0.195 mW/g

Maximum value of SAR (measured) = 0.401 mW/g

SCN/87207JD02A/049: Front of EUT Facing Phantom UMTS FDD 2 CH9400

Date: 23/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

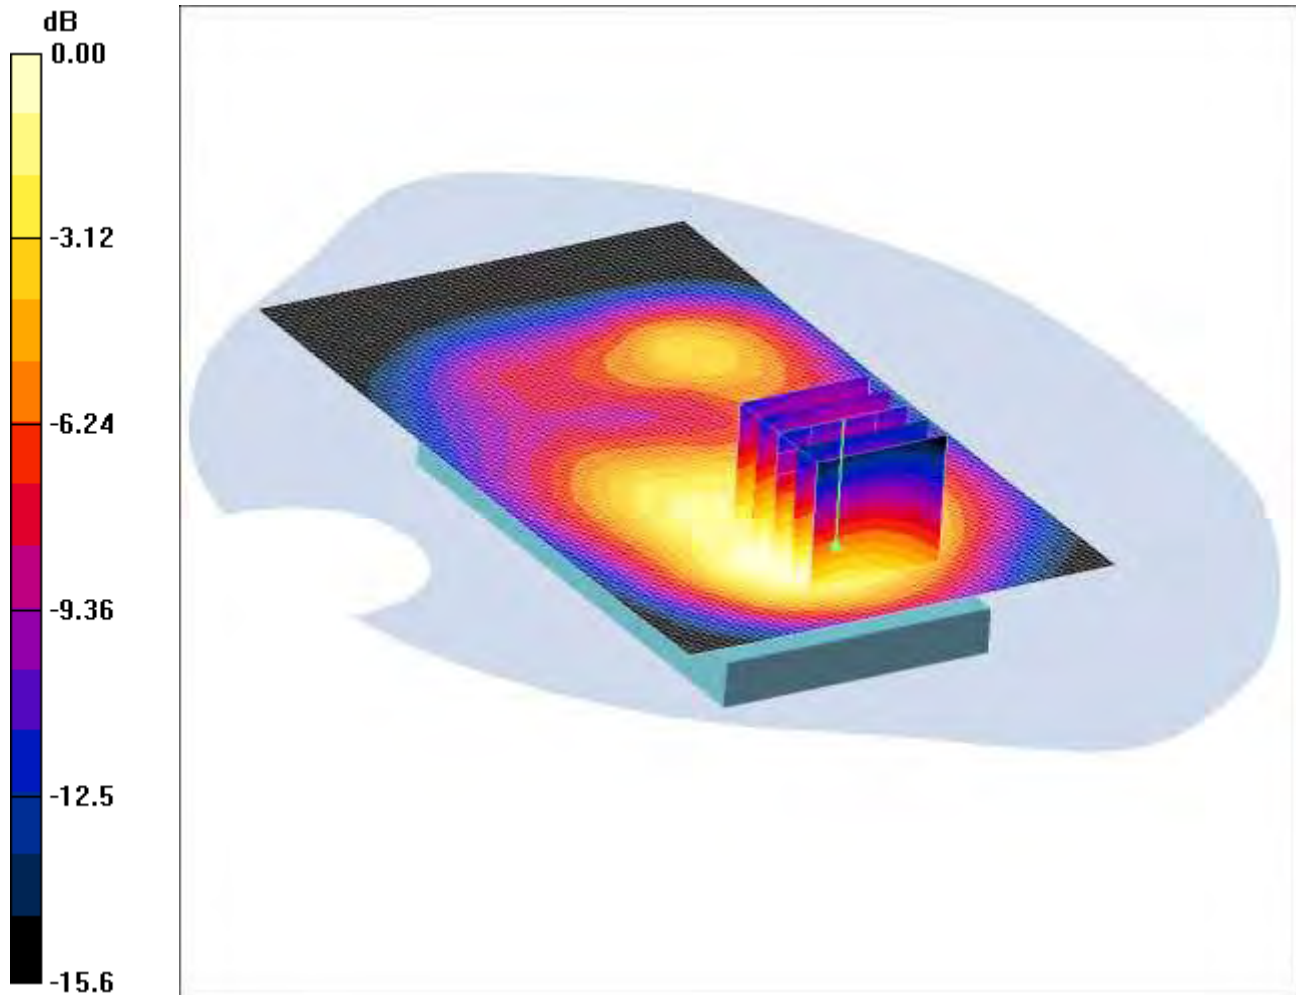

0 dB = 0.761mW/g

Communication System: UMTS-FDD 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1587; ConvF(4.69, 4.69, 4.69); Calibrated: 11/05/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Front of EUT Facing Phantom - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.787 mW/g

Front of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.7 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 0.992 W/kg


SAR(1 g) = 0.702 mW/g; SAR(10 g) = 0.461 mW/g

Maximum value of SAR (measured) = 0.761 mW/g

SCN/87207JD02A/050: Back of EUT Facing Phantom UMTS FDD 2 CH9400

Date: 23/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

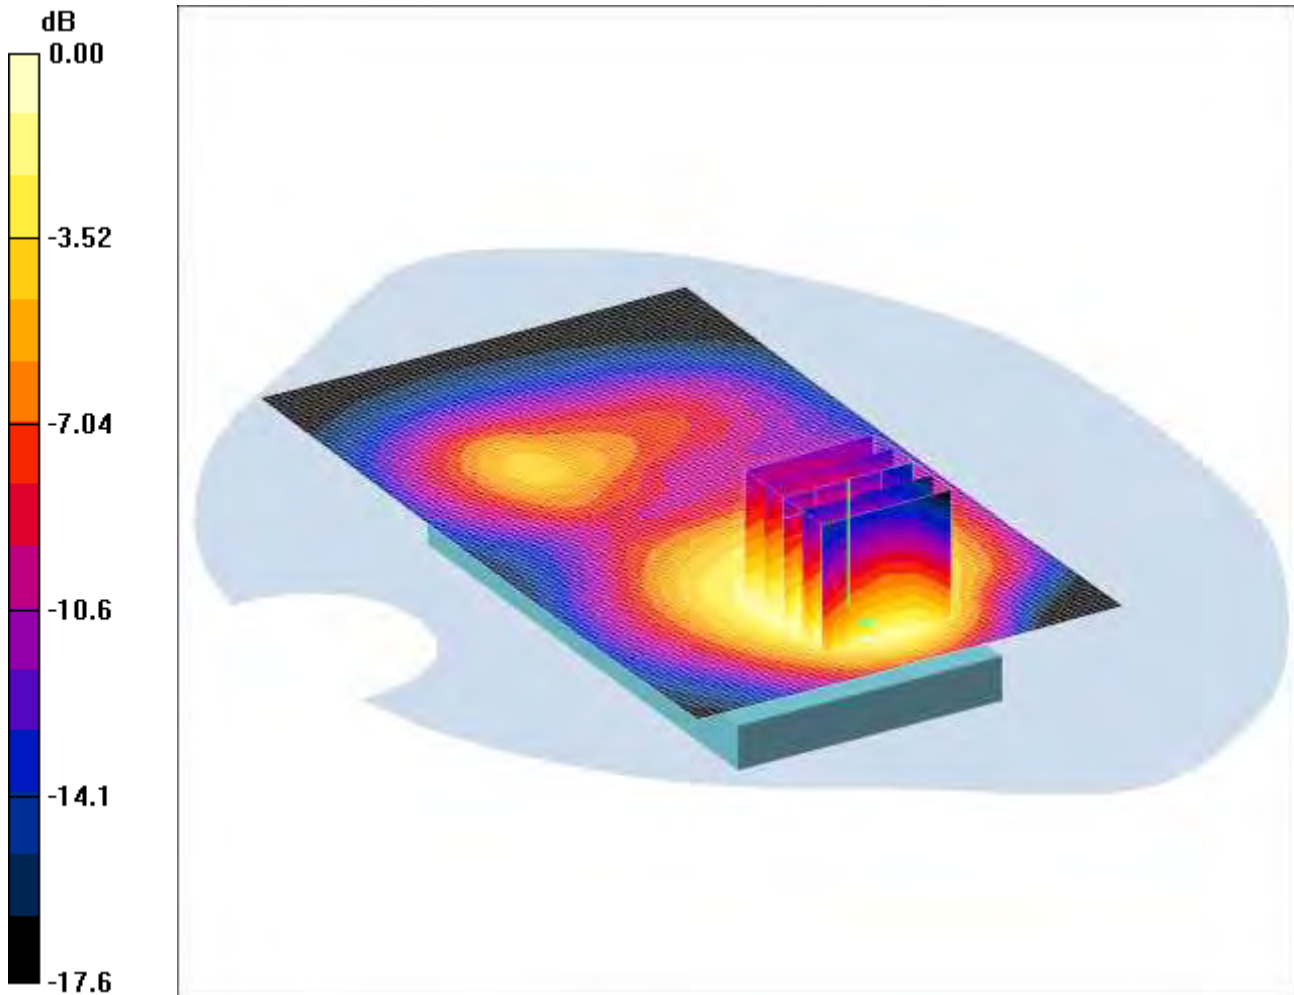

0 dB = 0.988mW/g

Communication System: UMTS-FDD 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1587; ConvF(4.69, 4.69, 4.69); Calibrated: 11/05/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Back of EUT Facing Phantom - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.991 mW/g

Back of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.41 W/kg


SAR(1 g) = 0.912 mW/g; SAR(10 g) = 0.578 mW/g

Maximum value of SAR (measured) = 0.988 mW/g

SCN/87207JD02A/051: Back of EUT Facing Phantom UMTS FDD 2 CH9262

Date: 23/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

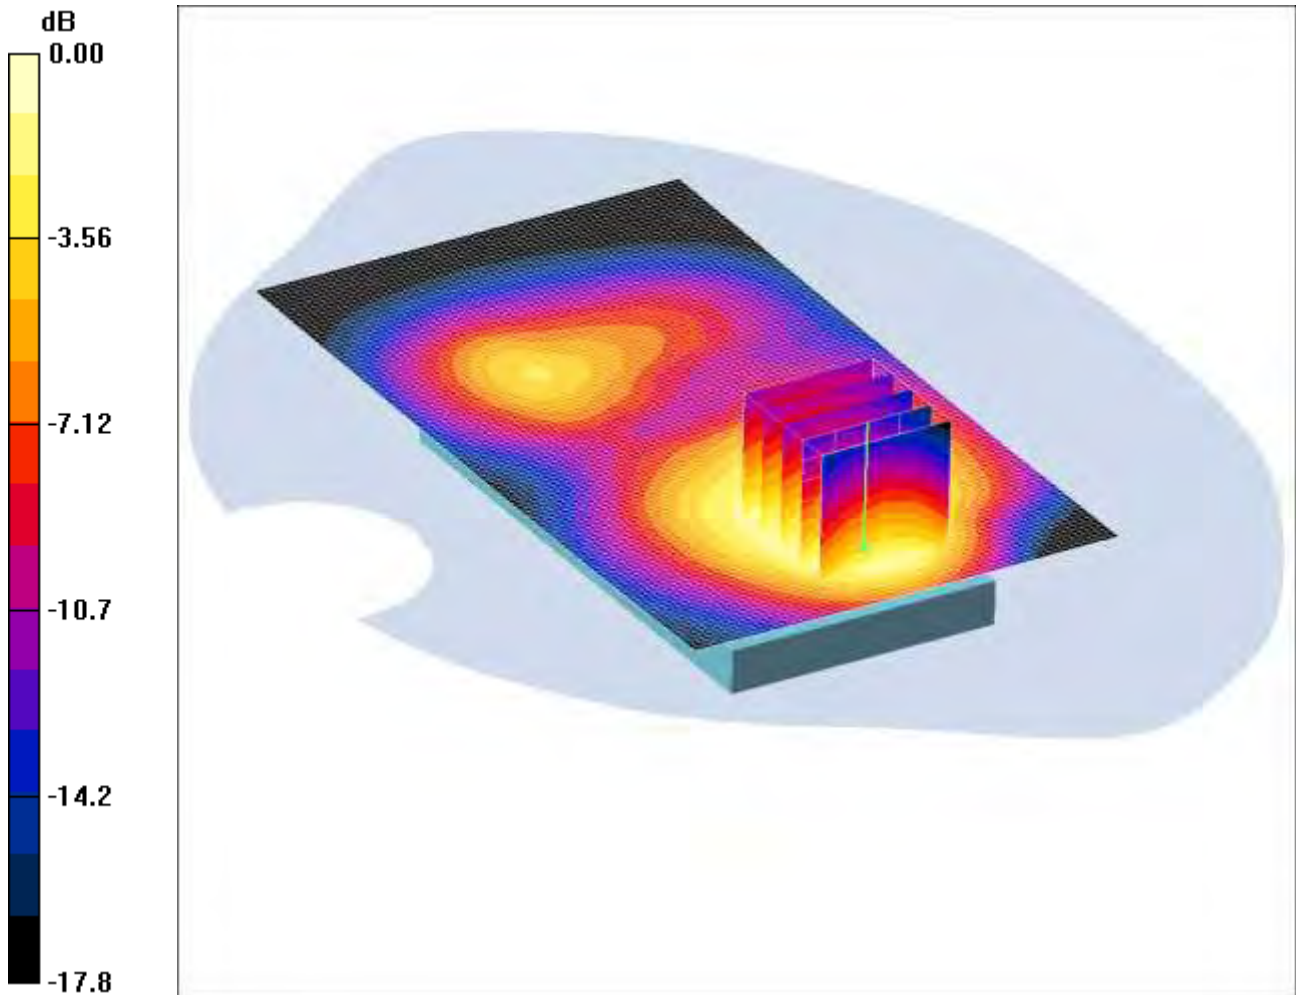

0 dB = 1.01mW/g

Communication System: UMTS-FDD 2; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1587; ConvF(4.69, 4.69, 4.69); Calibrated: 11/05/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Back of EUT Facing Phantom - Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.02 mW/g

Back of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.3 V/m; Power Drift = 0.065 dB

Peak SAR (extrapolated) = 1.45 W/kg


SAR(1 g) = 0.931 mW/g; SAR(10 g) = 0.588 mW/g

Maximum value of SAR (measured) = 1.01 mW/g

SCN/87207JD02A/052: Back of EUT Facing Phantom UMTS FDD 2 CH9538

Date: 23/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

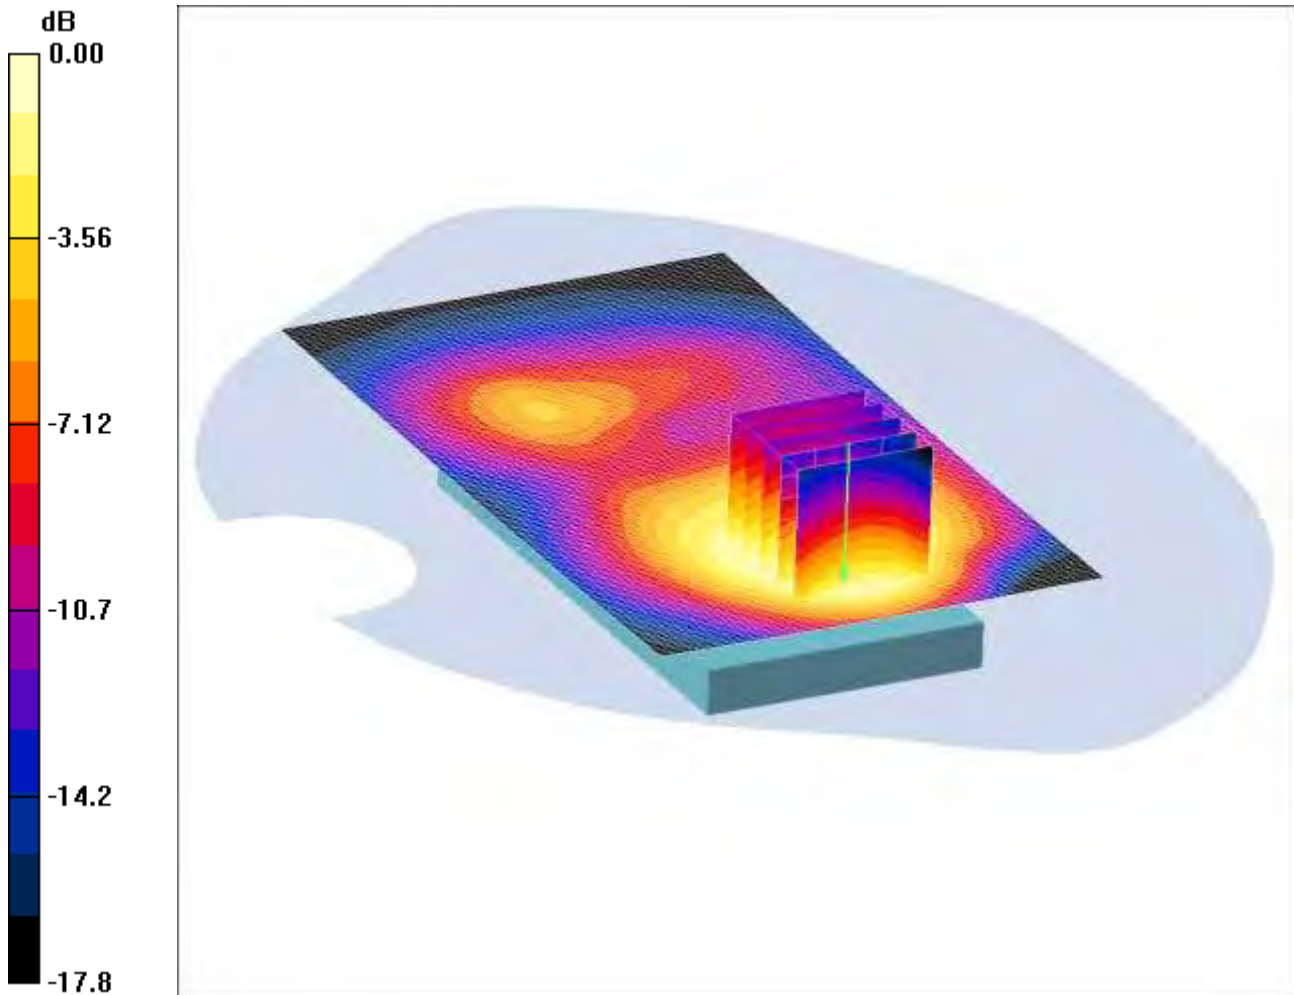

0 dB = 0.784mW/g

Communication System: UMTS-FDD 2; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1587; ConvF(4.69, 4.69, 4.69); Calibrated: 11/05/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Back of EUT Facing Phantom - High/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.800 mW/g

Back of EUT Facing Phantom - High/Zoom Scan (5x5x7) 2 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.1 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 1.13 W/kg


SAR(1 g) = 0.731 mW/g; SAR(10 g) = 0.459 mW/g

Maximum value of SAR (measured) = 0.784 mW/g

SCN/87207JD02A/053: Left Hand Side of EUT Facing Phantom UMTS FDD 2 CH9400

Date: 23/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

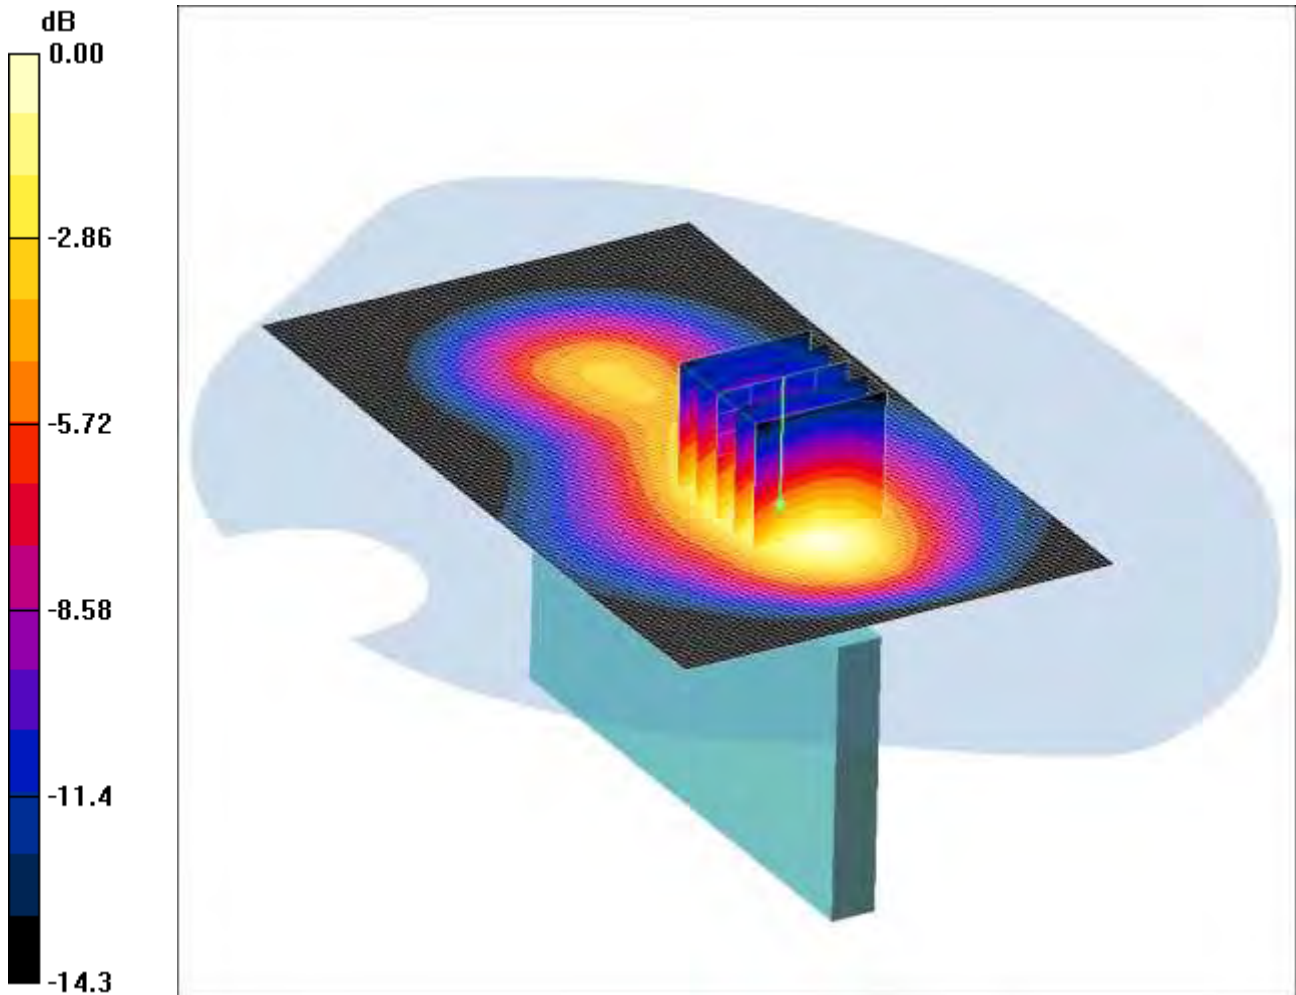

0 dB = 0.635mW/g

Communication System: UMTS-FDD 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880 \text{ MHz}$; $\sigma = 1.51 \text{ mho/m}$; $\epsilon_r = 52.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1587; ConvF(4.69, 4.69, 4.69); Calibrated: 11/05/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Left Hand Side of EUT Facing Phantom - Middle/Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.632 mW/g

Left Hand Side of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 2 2 (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.9 V/m; Power Drift = 0.162 dB

Peak SAR (extrapolated) = 0.869 W/kg


SAR(1 g) = 0.574 mW/g; SAR(10 g) = 0.354 mW/g

Maximum value of SAR (measured) = 0.635 mW/g

SCN/87207JD02A/054: Right Hand Side of EUT Facing Phantom UMTS FDD 2 CH9400

Date: 23/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

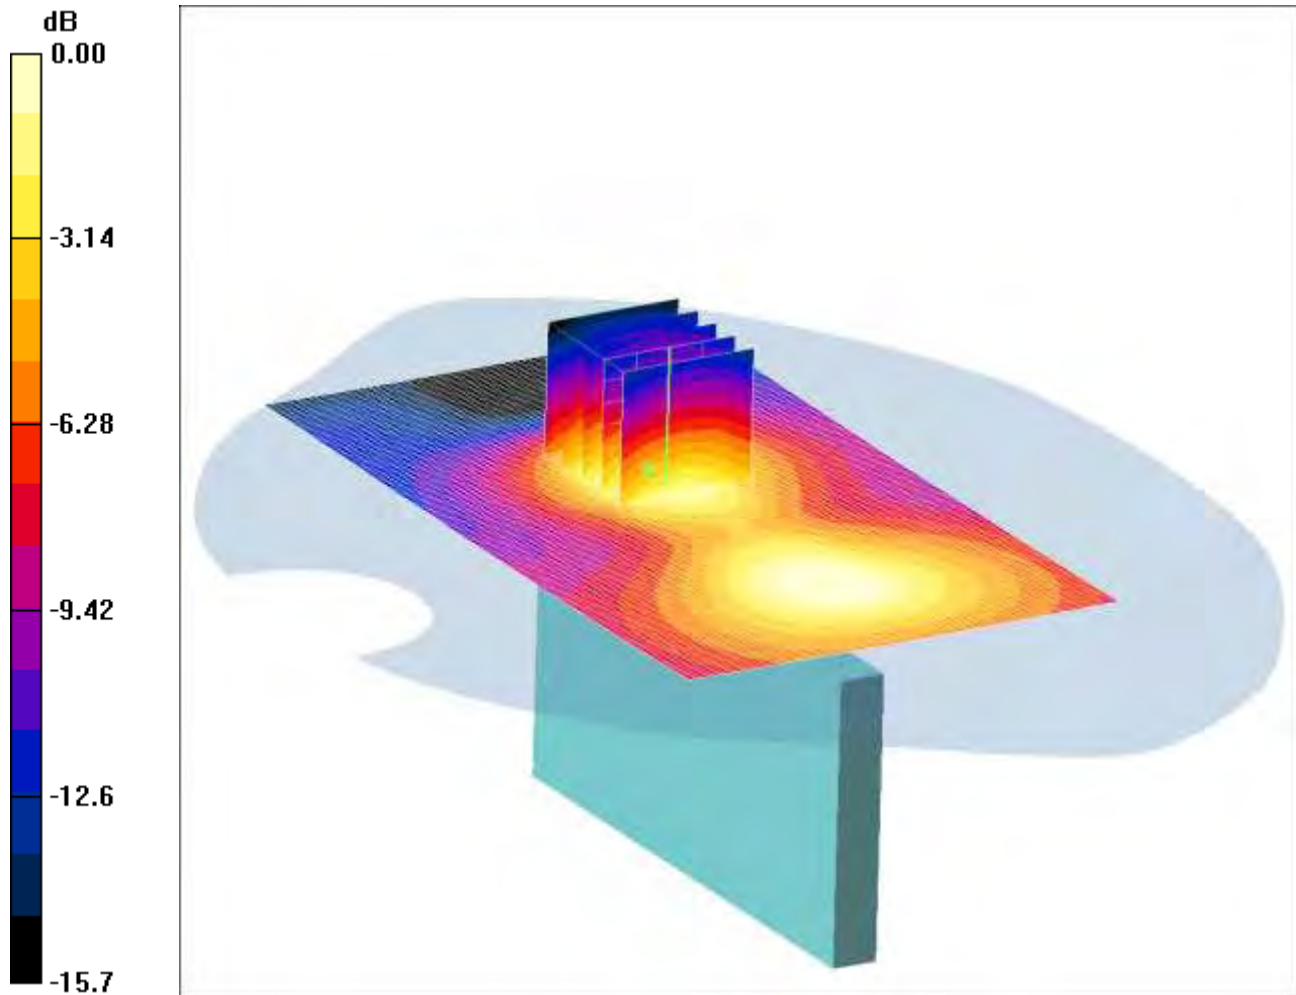

0 dB = 0.186mW/g

Communication System: UMTS-FDD 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1587; ConvF(4.69, 4.69, 4.69); Calibrated: 11/05/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Right Hand Side of EUT Facing Phantom - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.185 mW/g

Right Hand Side of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.80 V/m; Power Drift = 0.038 dB

Peak SAR (extrapolated) = 0.231 W/kg


SAR(1 g) = 0.165 mW/g; SAR(10 g) = 0.101 mW/g

Maximum value of SAR (measured) = 0.186 mW/g

SCN/87207JD02A/055: Bottom of EUT Facing Phantom UMTS FDD 2 CH9400

Date: 23/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

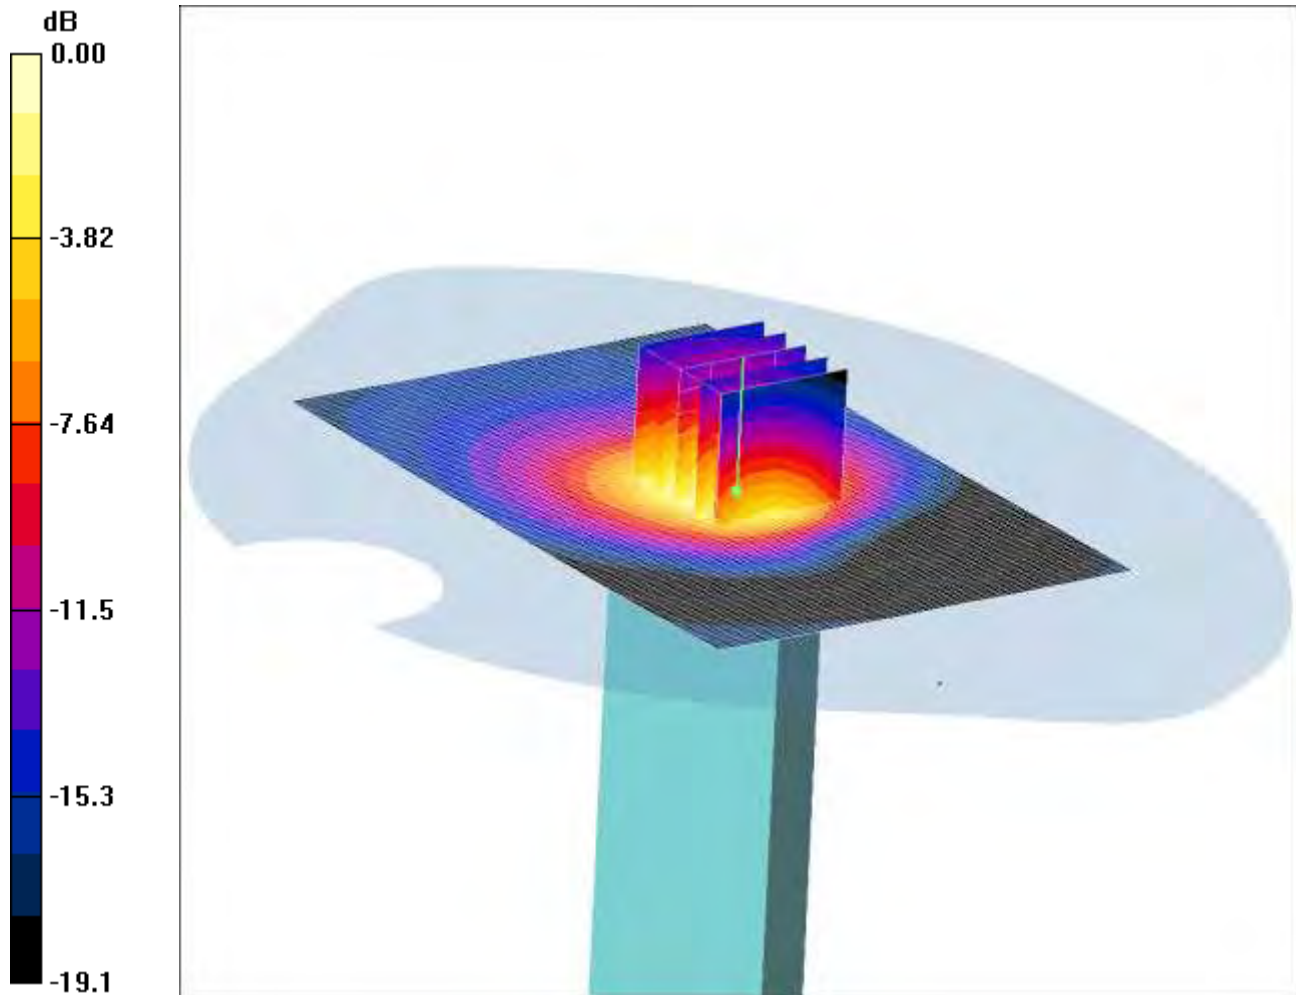

0 dB = 1.02mW/g

Communication System: UMTS-FDD 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1587; ConvF(4.69, 4.69, 4.69); Calibrated: 11/05/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Bottom of EUT Facing Phantom - Middle/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.10 mW/g

Bottom of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.5 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.51 W/kg


SAR(1 g) = 0.927 mW/g; SAR(10 g) = 0.522 mW/g

Maximum value of SAR (measured) = 1.02 mW/g

SCN/87207JD02A/056: Bottom of EUT Facing Phantom UMTS FDD 2 CH9262

Date: 23/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

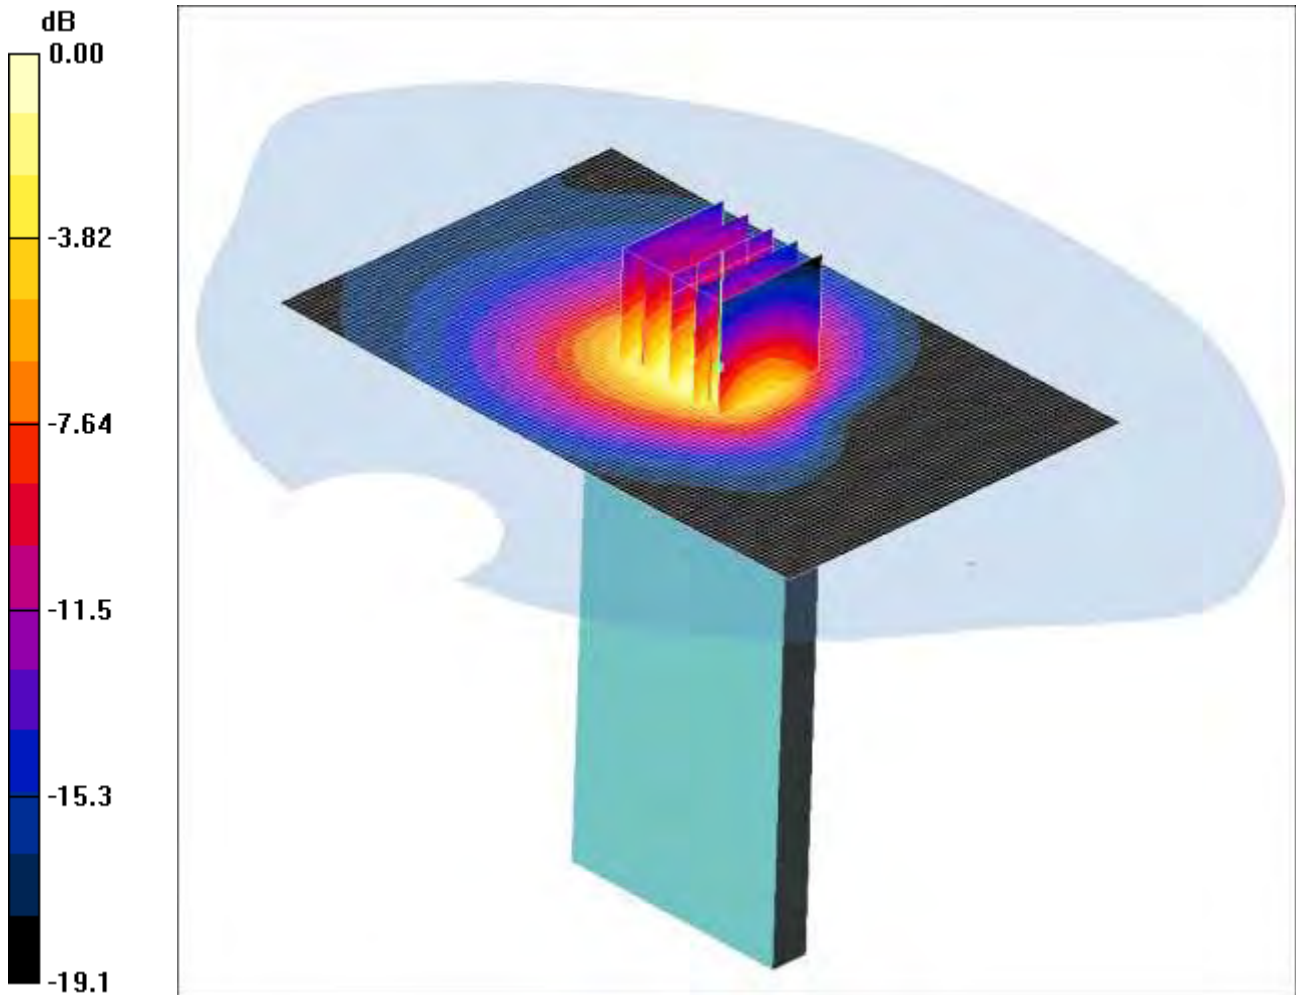

0 dB = 1.16mW/g

Communication System: UMTS-FDD 2; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1587; ConvF(4.69, 4.69, 4.69); Calibrated: 11/05/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Bottom of EUT Facing Phantom - Low/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.24 mW/g

Bottom of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.8 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 1.67 W/kg


SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.598 mW/g

Maximum value of SAR (measured) = 1.16 mW/g

SCN/87207JD02A/057: Bottom of EUT Facing Phantom UMTS FDD 2 CH9538

Date: 23/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

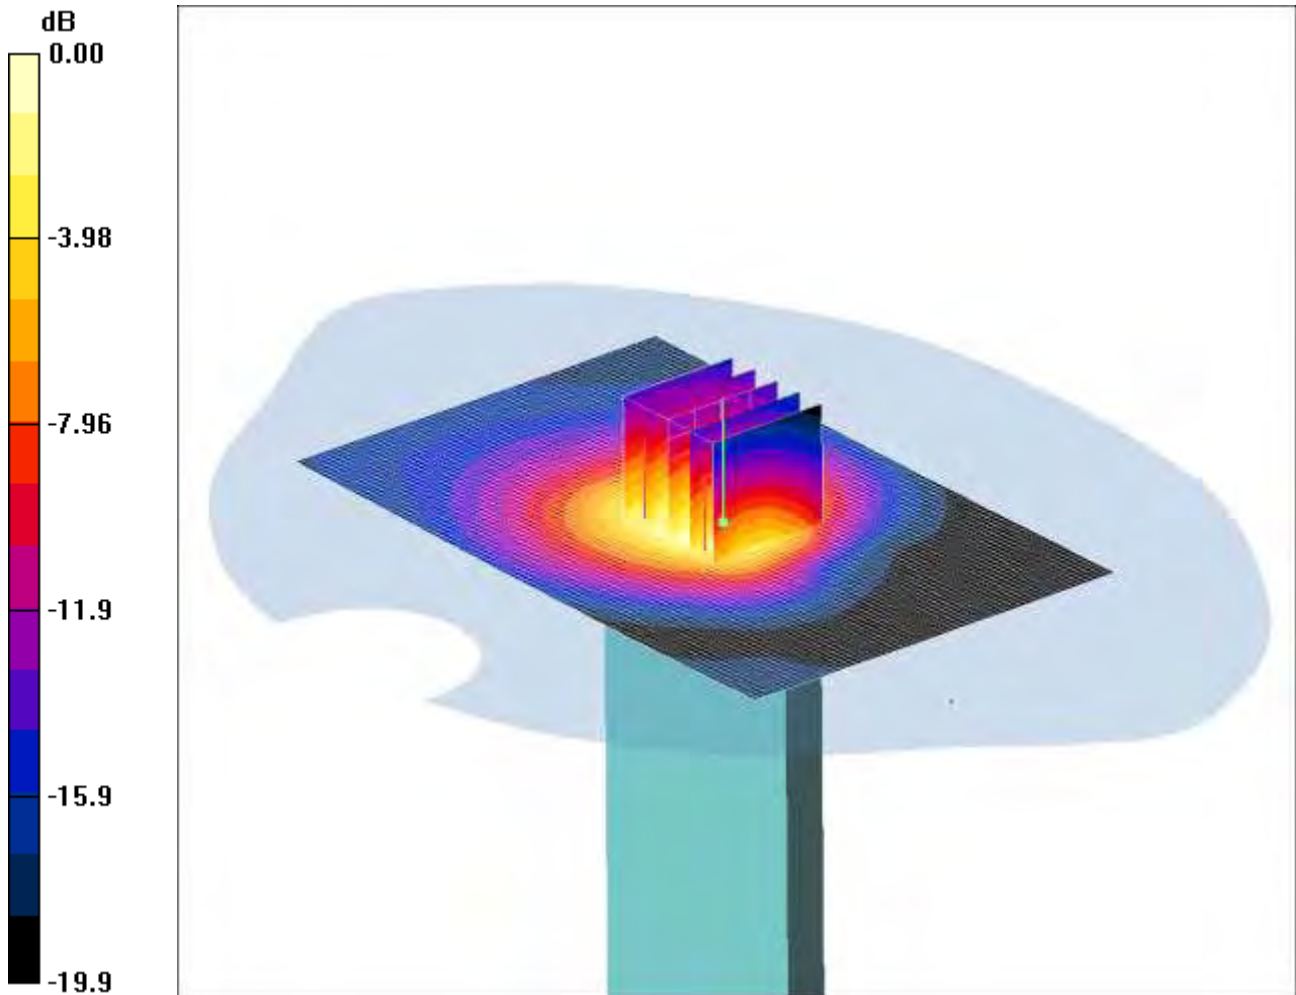

0 dB = 0.840mW/g

Communication System: UMTS-FDD 2; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1587; ConvF(4.69, 4.69, 4.69); Calibrated: 11/05/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Bottom of EUT Facing Phantom - High/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.921 mW/g

Bottom of EUT Facing Phantom - High/Zoom Scan (5x5x7) 2 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.2 V/m; Power Drift = -0.067 dB

Peak SAR (extrapolated) = 1.28 W/kg


SAR(1 g) = 0.765 mW/g; SAR(10 g) = 0.433 mW/g

Maximum value of SAR (measured) = 0.840 mW/g

SCN/87207JD02A/058: Back of EUT Facing Phantom at 15mm UMTS FDD 2 CH9400

Date: 23/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

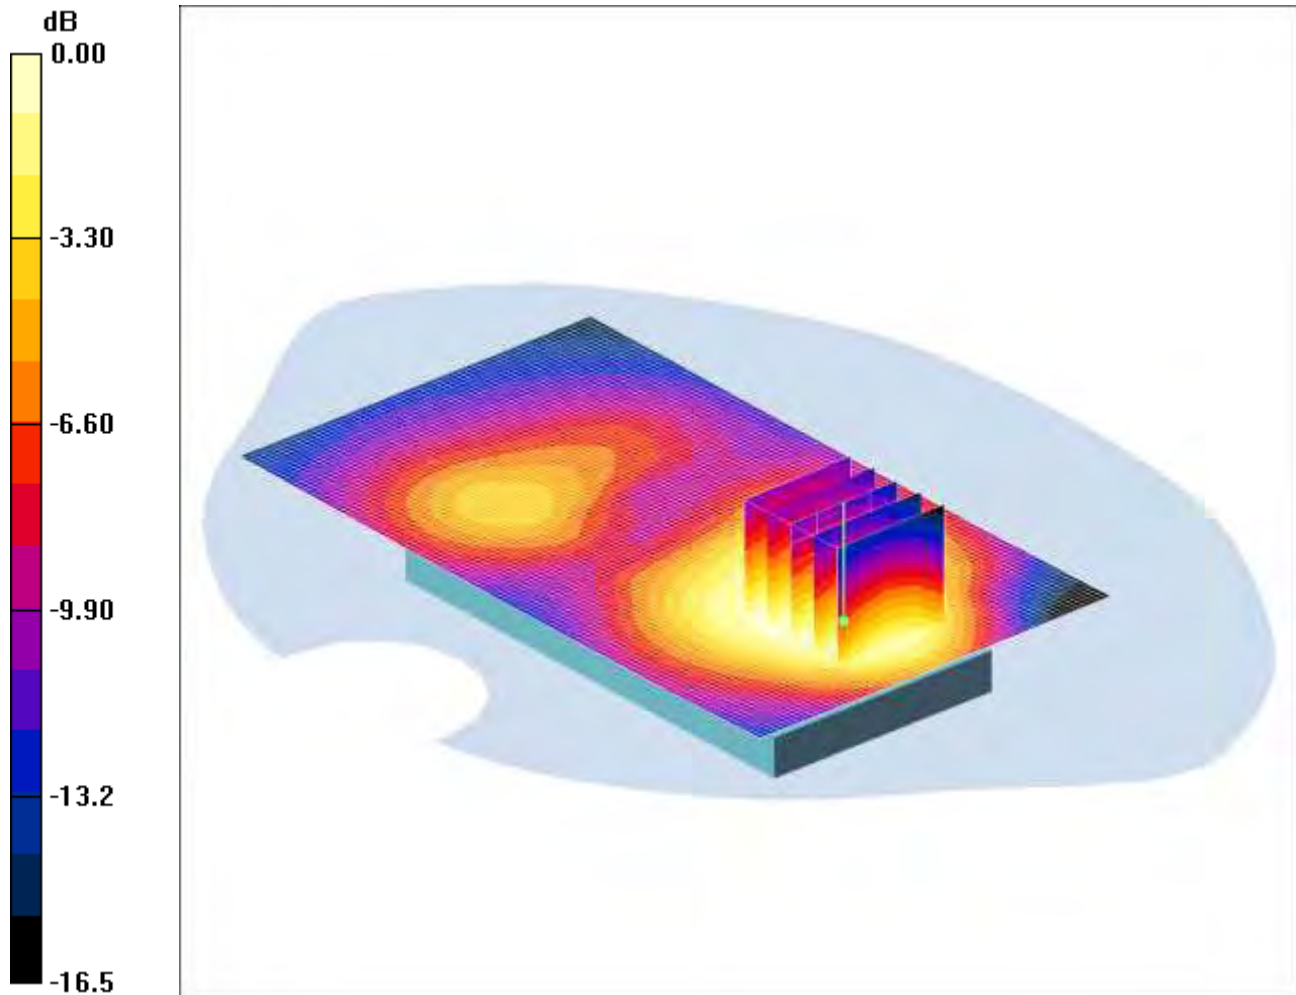

0 dB = 0.502mW/g

Communication System: UMTS-FDD 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1587; ConvF(4.69, 4.69, 4.69); Calibrated: 11/05/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Back of EUT Facing Phantom at 15mm - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.526 mW/g

Back of EUT Facing Phantom at 15mm - Middle/Zoom Scan (5x5x7) 2 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.5 V/m; Power Drift = -0.114 dB

Peak SAR (extrapolated) = 0.710 W/kg


SAR(1 g) = 0.473 mW/g; SAR(10 g) = 0.316 mW/g

Maximum value of SAR (measured) = 0.502 mW/g

SCN/87207JD02A/059: Back of EUT Facing Phantom at 15mm UMTS FDD 2 CH9262

Date: 23/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

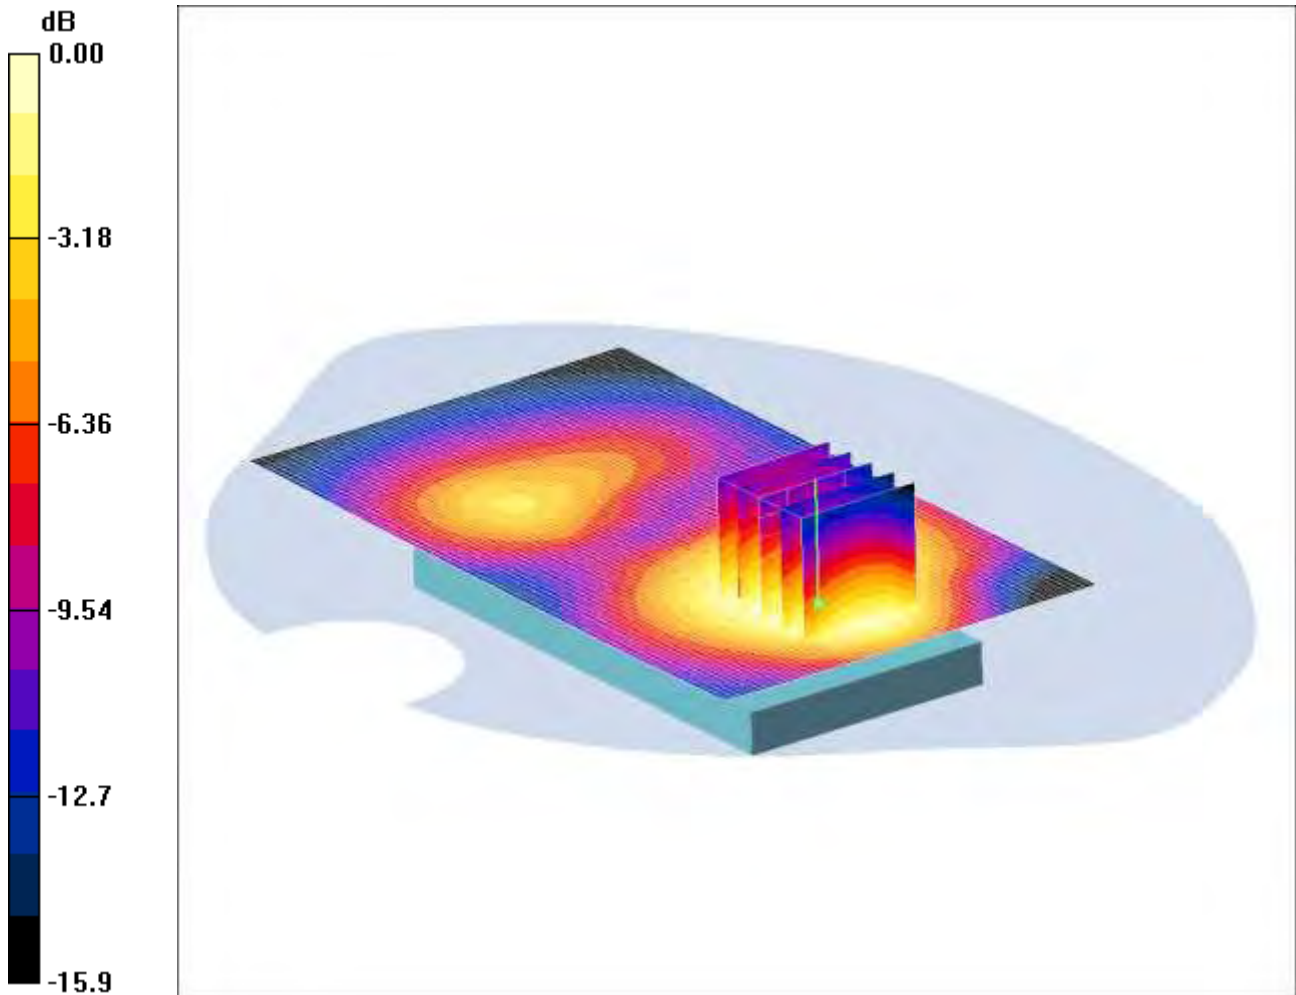

0 dB = 0.561mW/g

Communication System: UMTS-FDD 2; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1587; ConvF(4.69, 4.69, 4.69); Calibrated: 11/05/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Back of EUT Facing Phantom at 15mm - Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.560 mW/g

Back of EUT Facing Phantom at 15mm - Low/Zoom Scan (5x5x7) 2 2 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.0 V/m; Power Drift = -0.042 dB

Peak SAR (extrapolated) = 0.764 W/kg


SAR(1 g) = 0.522 mW/g; SAR(10 g) = 0.346 mW/g

Maximum value of SAR (measured) = 0.561 mW/g

SCN/87207JD02A/060: Back of EUT Facing Phantom at 15mm UMTS FDD 2 CH9538

Date: 23/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

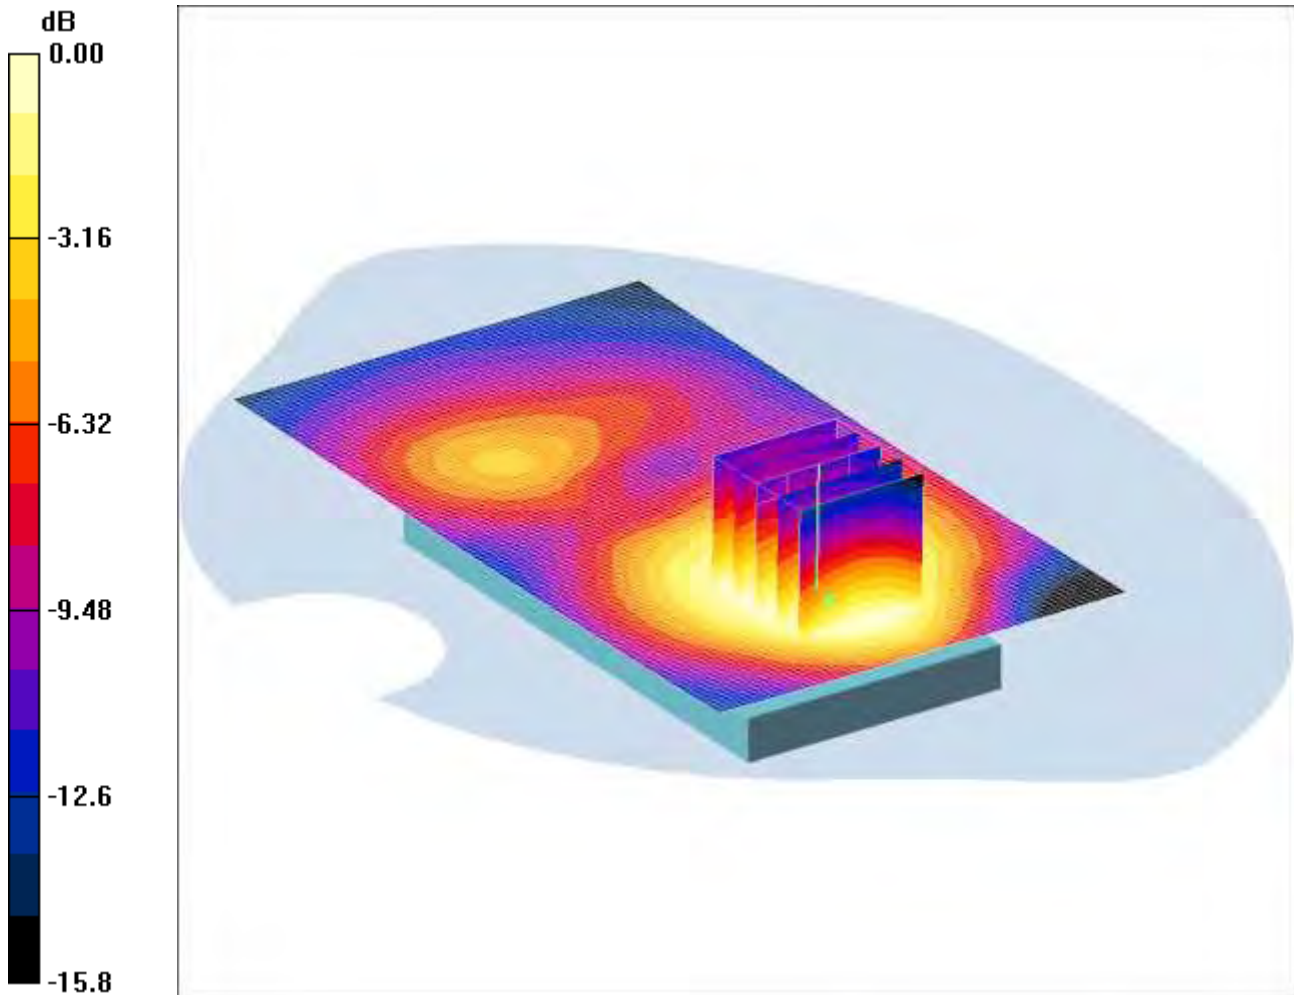

0 dB = 0.398mW/g

Communication System: UMTS-FDD 2; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1587; ConvF(4.69, 4.69, 4.69); Calibrated: 11/05/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Back of EUT Facing Phantom at 15mm - High/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.422 mW/g

Back of EUT Facing Phantom at 15mm - High/Zoom Scan (5x5x7) 2 2 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.9 V/m; Power Drift = -0.117 dB

Peak SAR (extrapolated) = 0.564 W/kg


SAR(1 g) = 0.376 mW/g; SAR(10 g) = 0.250 mW/g

Maximum value of SAR (measured) = 0.398 mW/g

SCN/87207JD02A/061: Back of EUT Facing Phantom with PHF at 15mm UMTS FDD 2 CH9262

Date: 23/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

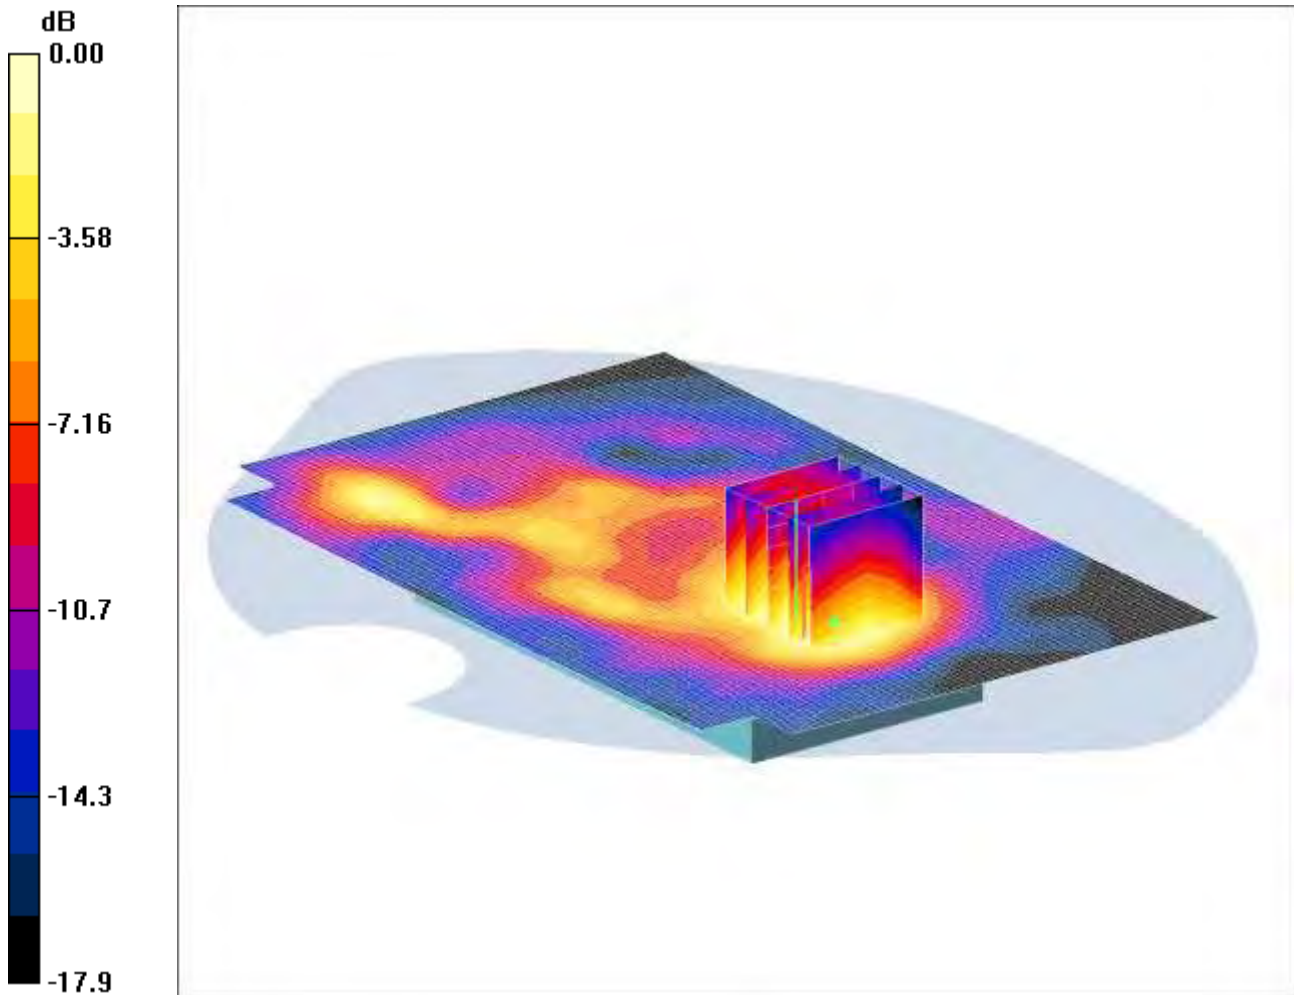

0 dB = 0.725mW/g

Communication System: UMTS-FDD 2; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1587; ConvF(4.69, 4.69, 4.69); Calibrated: 11/05/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Back of EUT Facing Phantom with PHF at 15mm - Low/Area Scan (91x141x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.794 mW/g

Back of EUT Facing Phantom with PHF at 15mm - Low/Zoom Scan (5x5x7) 2 2 2 2 (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.2 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 0.978 W/kg


SAR(1 g) = 0.695 mW/g; SAR(10 g) = 0.447 mW/g

Maximum value of SAR (measured) = 0.725 mW/g

SCN/87207JD02A/062: Touch Left UMTS FDD 5 CH4183

Date/Time: 23/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

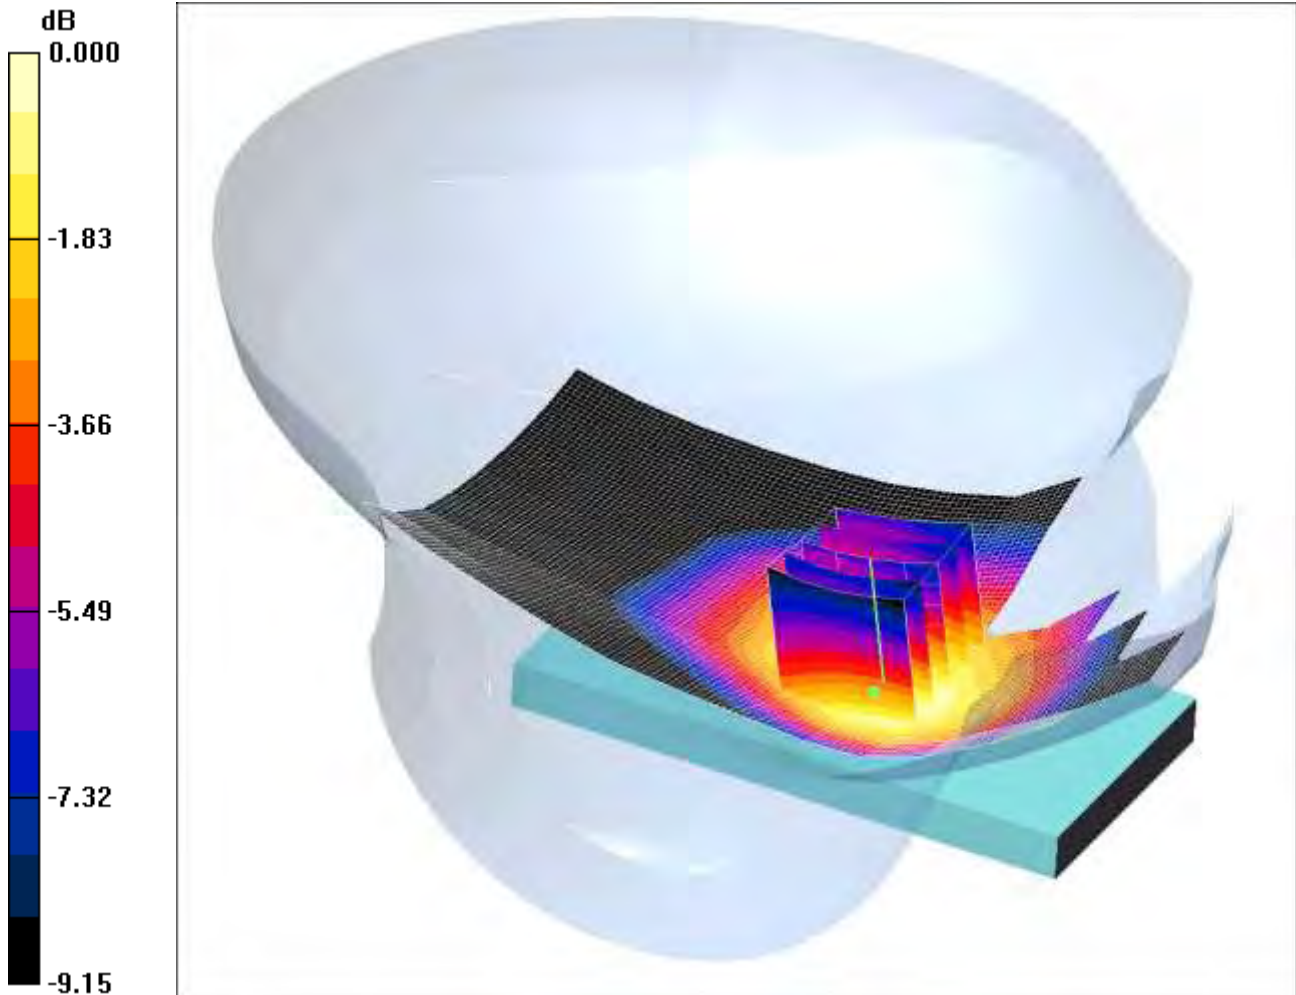

0 dB = 0.782mW/g

Communication System: UMTS-FDD 5; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.946$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.75, 8.75, 8.75); Calibrated: 22/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Touch Left - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.783 mW/g

Touch Left - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.84 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 0.938 W/kg


SAR(1 g) = 0.740 mW/g; SAR(10 g) = 0.556 mW/g

Maximum value of SAR (measured) = 0.782 mW/g

SCN/87207JD02A/063: Tilt Left UMTS FDD 5 CH4183

Date: 23/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

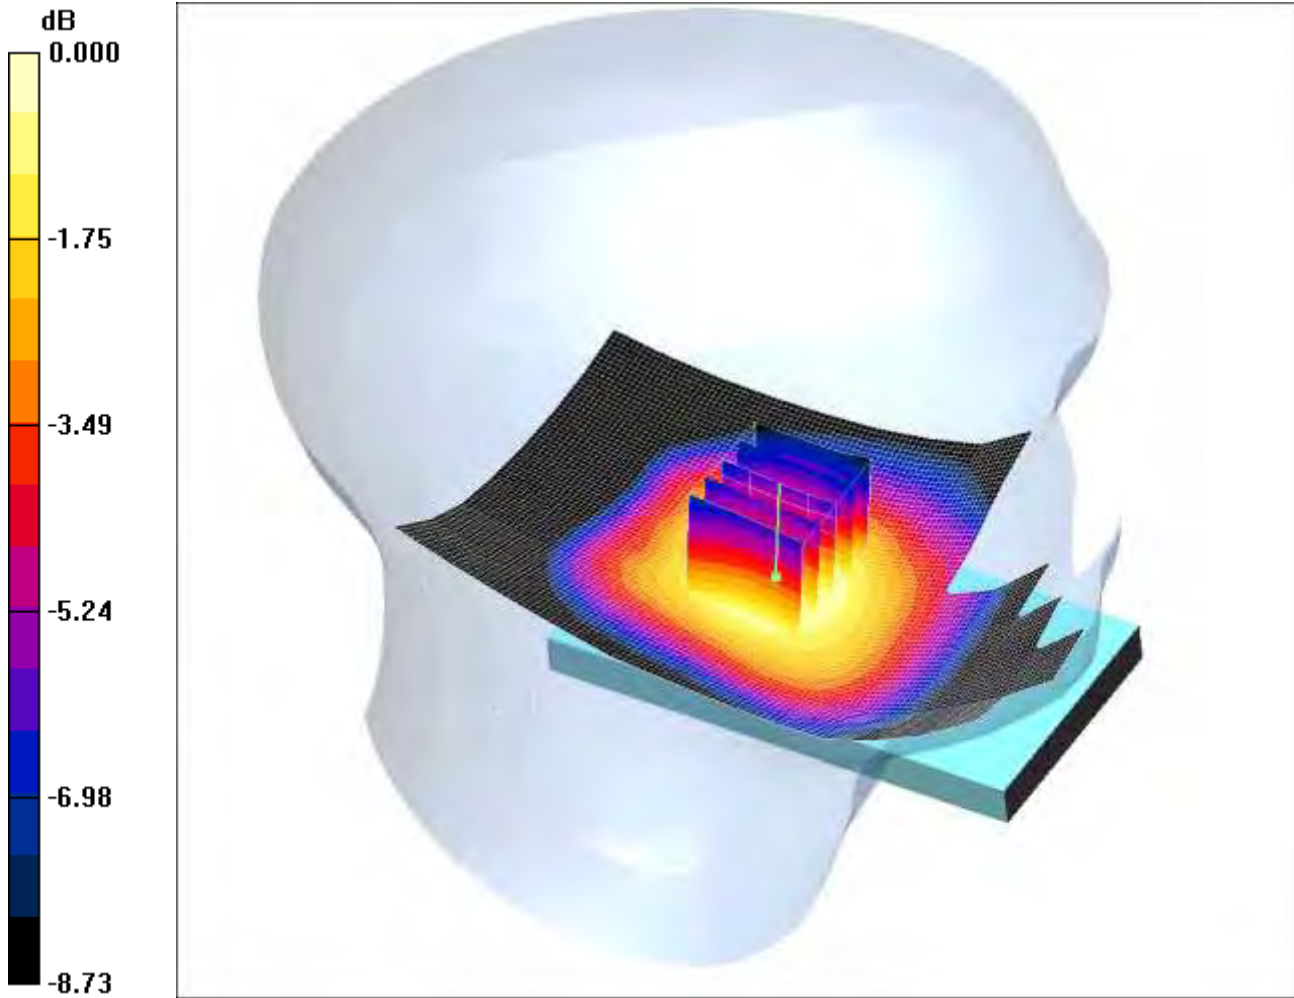

0 dB = 0.496mW/g

Communication System: UMTS-FDD 5; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.946$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.75, 8.75, 8.75); Calibrated: 22/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Tilt Left - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.491 mW/g

Tilt Left - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.4 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 0.588 W/kg


SAR(1 g) = 0.471 mW/g; SAR(10 g) = 0.357 mW/g

Maximum value of SAR (measured) = 0.496 mW/g

SCN/87207JD02A/064: Touch Right UMTS FDD 5 CH4183

Date: 23/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

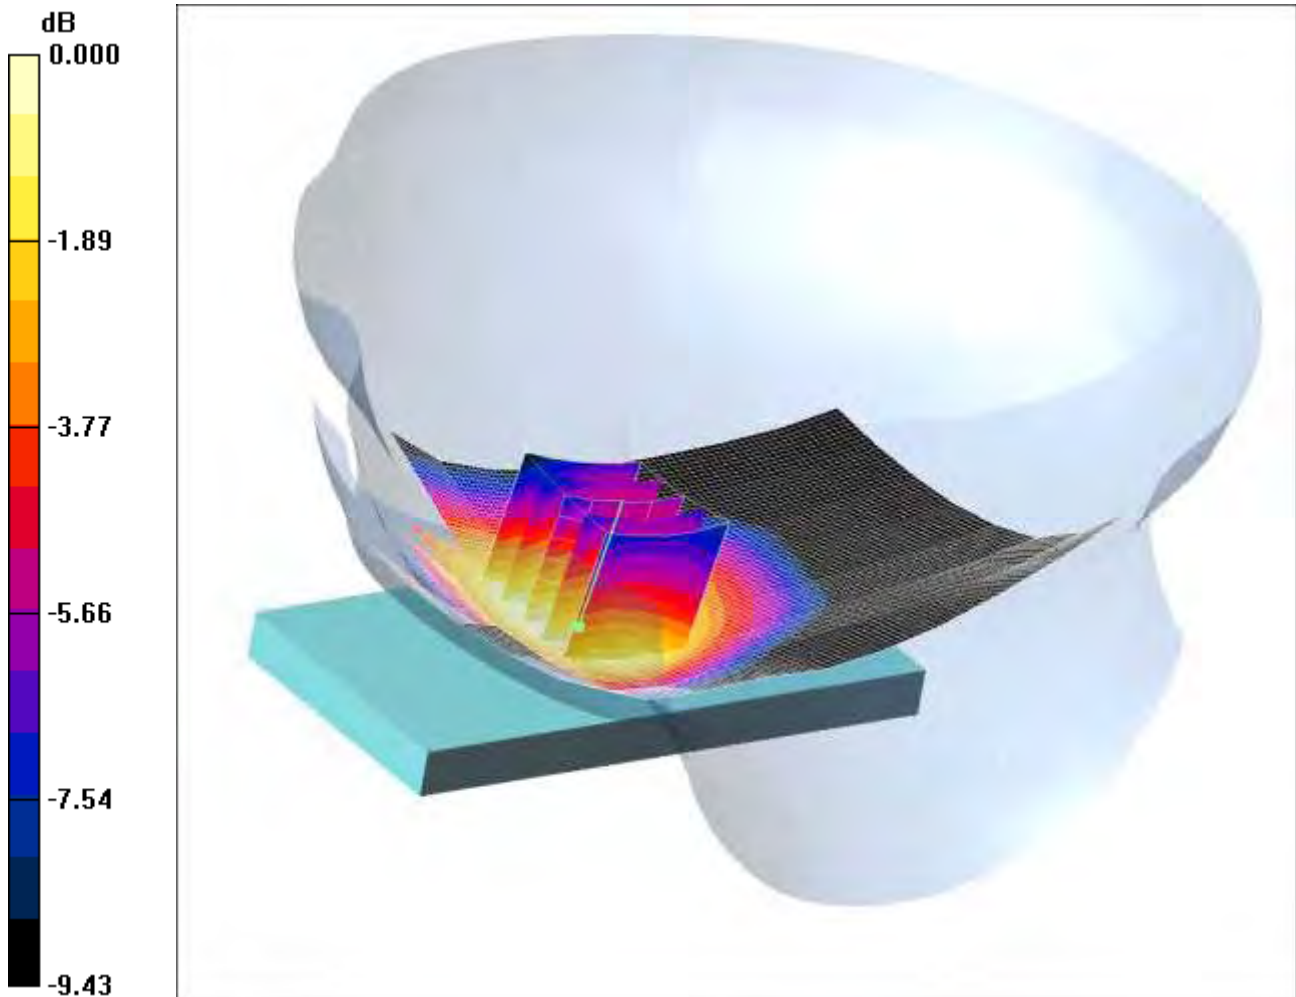

0 dB = 0.835mW/g

Communication System: UMTS-FDD 5; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.946$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.75, 8.75, 8.75); Calibrated: 22/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Touch Right - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.881 mW/g

Touch Right - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.96 V/m; Power Drift = 0.115 dB

Peak SAR (extrapolated) = 0.994 W/kg


SAR(1 g) = 0.804 mW/g; SAR(10 g) = 0.615 mW/g

Maximum value of SAR (measured) = 0.835 mW/g

SCN/87207JD02A/065: Touch Right UMTS FDD 5 CH4132

Date: 23/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

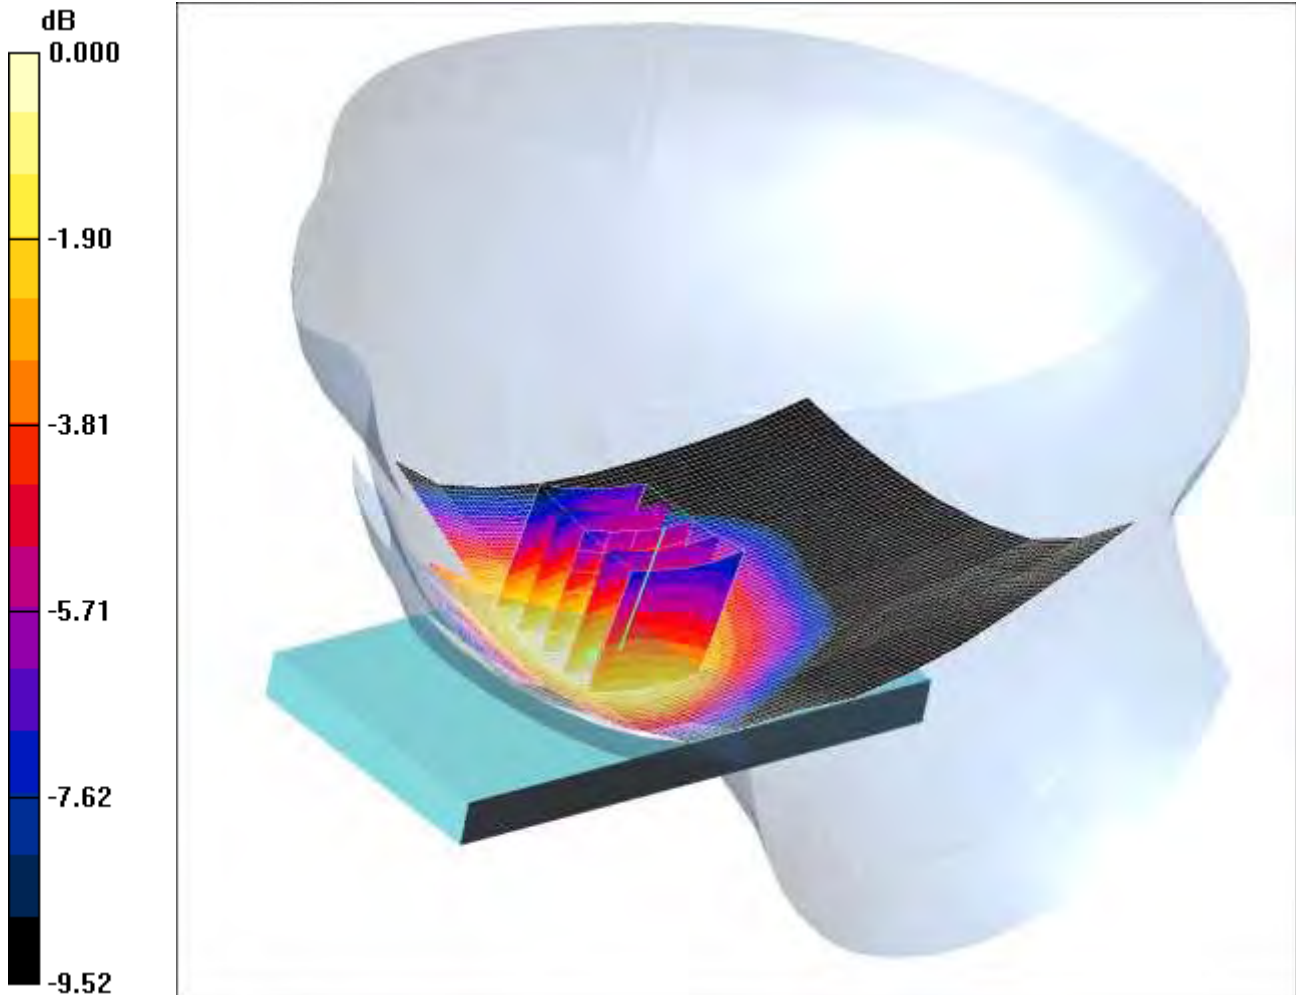

0 dB = 0.972mW/g

Communication System: UMTS-FDD 5; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.938$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.75, 8.75, 8.75); Calibrated: 22/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Touch Right - Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.995 mW/g

Touch Right - Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.2 V/m; Power Drift = 0.049 dB

Peak SAR (extrapolated) = 1.17 W/kg


SAR(1 g) = 0.924 mW/g; SAR(10 g) = 0.701 mW/g

Maximum value of SAR (measured) = 0.972 mW/g

SCN/87207JD02A/066: Touch Right UMTS FDD 5 CH4233

Date: 23/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

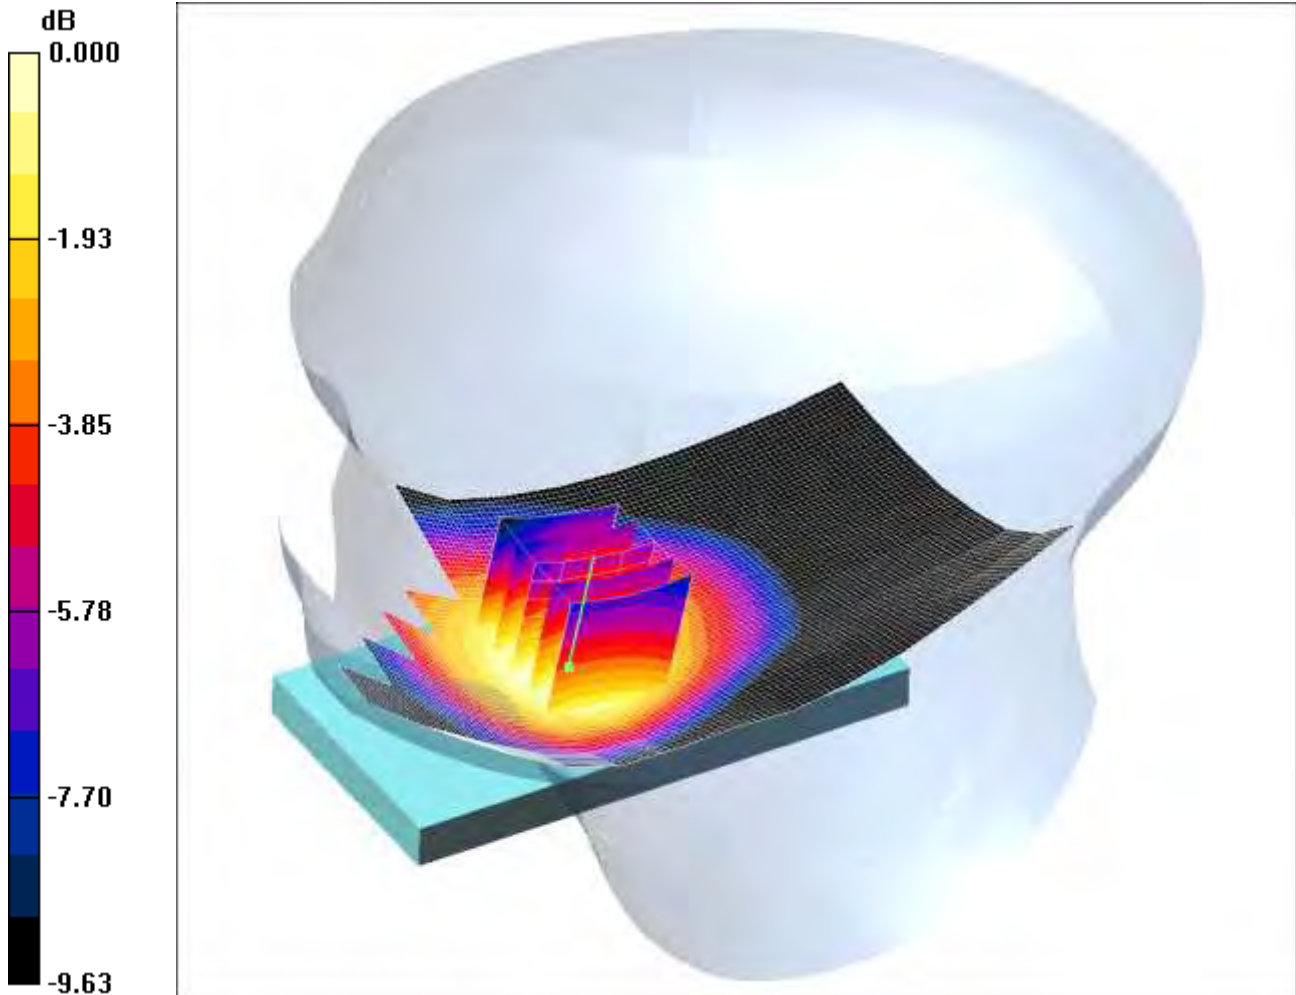

0 dB = 0.967mW/g

Communication System: UMTS-FDD 5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.954$ mho/m; $\epsilon_r = 42.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.75, 8.75, 8.75); Calibrated: 22/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Touch Right - High/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.000 mW/g

Touch Right - High/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.41 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 1.15 W/kg


SAR(1 g) = 0.927 mW/g; SAR(10 g) = 0.707 mW/g

Maximum value of SAR (measured) = 0.967 mW/g

SCN/87207JD02A/067: Tilt Right UMTS FDD 5 CH4183

Date: 23/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

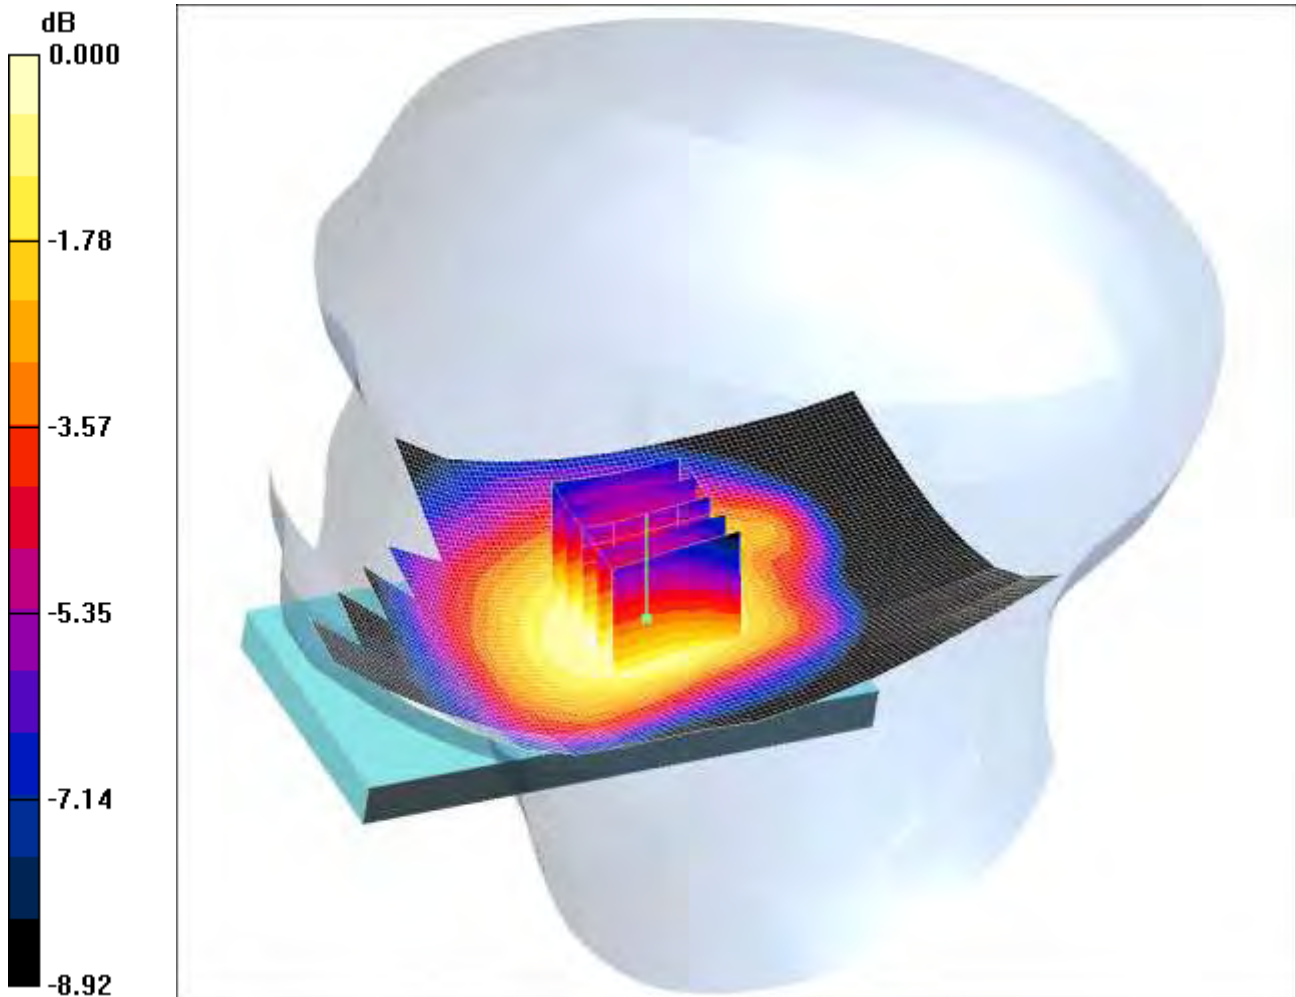

0 dB = 0.410mW/g

Communication System: UMTS-FDD 5; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.946$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.75, 8.75, 8.75); Calibrated: 22/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Tilt Right - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.413 mW/g

Tilt Right - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.3 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 0.483 W/kg


SAR(1 g) = 0.392 mW/g; SAR(10 g) = 0.302 mW/g

Maximum value of SAR (measured) = 0.410 mW/g

SCN/87207JD02A/068: Front of EUT Facing Phantom UMTS FDD 5 CH 4183

Date: 23/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

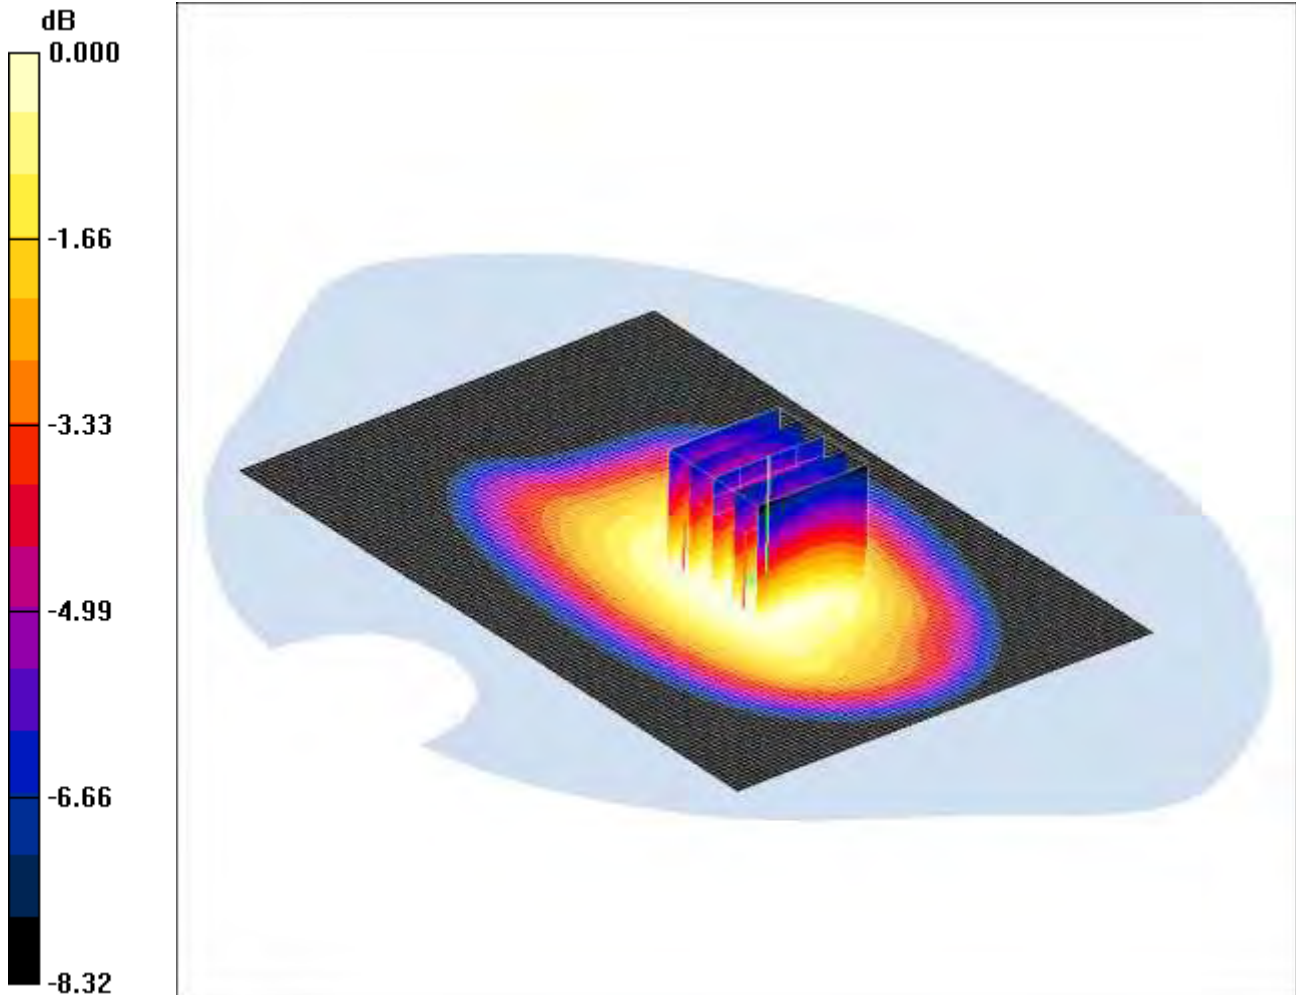

0 dB = 0.903mW/g

Communication System: UMTS-FDD 5; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Front of EUT Facing Phantom - Middle/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.926 mW/g

Front of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.0 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 1.01 W/kg


SAR(1 g) = 0.814 mW/g; SAR(10 g) = 0.626 mW/g

Maximum value of SAR (measured) = 0.903 mW/g

SCN/87207JD02A/069: Front of EUT Facing Phantom UMTS FDD 5 CH 4132

Date: 23/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

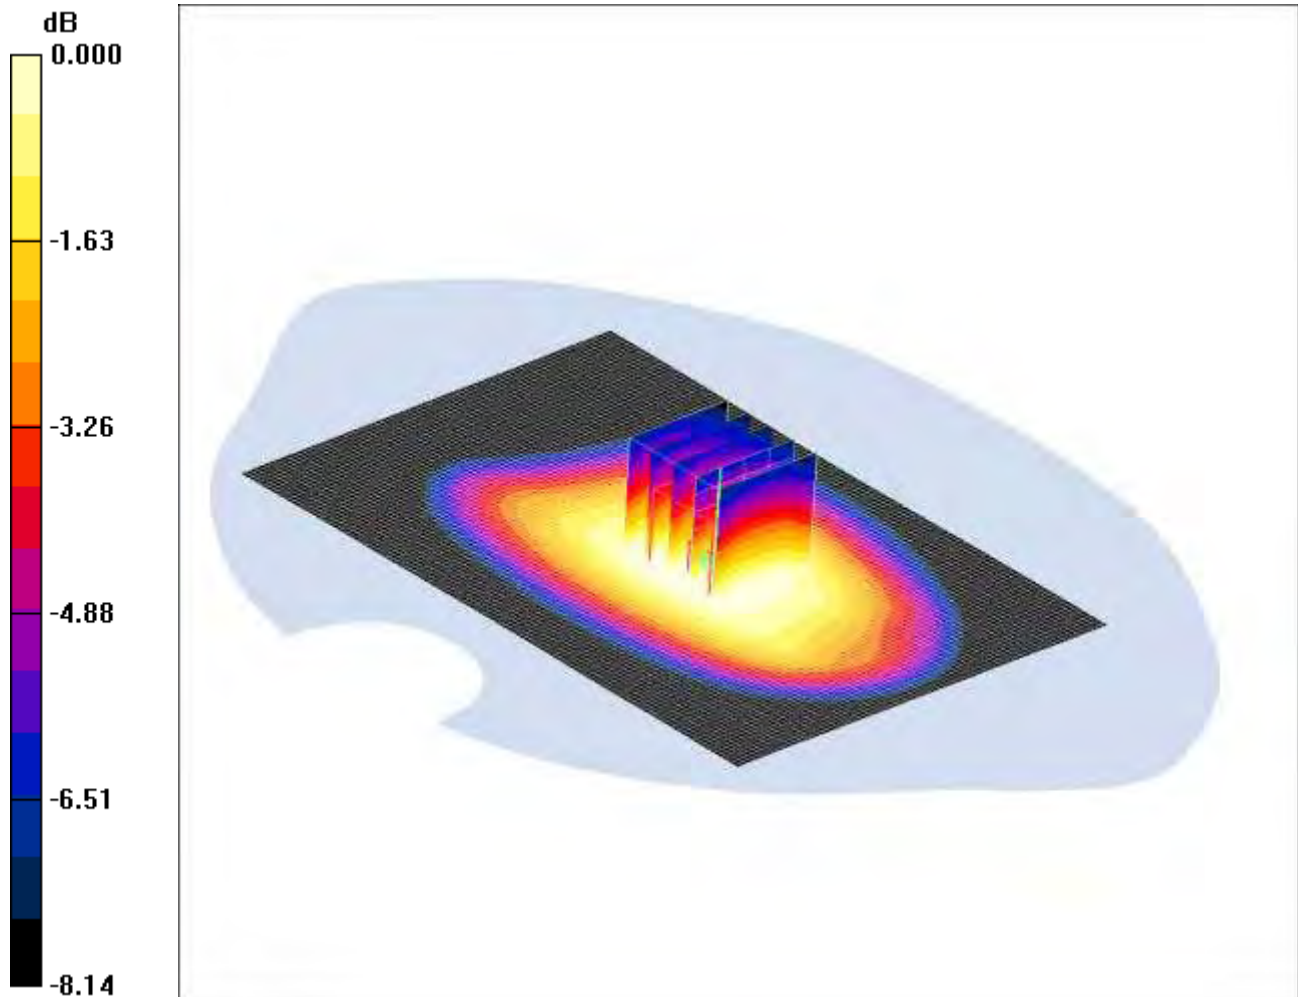

0 dB = 0.954mW/g

Communication System: UMTS-FDD 5; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Front of EUT Facing Phantom - Low/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.952 mW/g

Front of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.1 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 1.06 W/kg


SAR(1 g) = 0.852 mW/g; SAR(10 g) = 0.659 mW/g

Maximum value of SAR (measured) = 0.954 mW/g

SCN/87207JD02A/070: Front of EUT Facing Phantom UMTS FDD 5 CH 4233

Date: 23/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

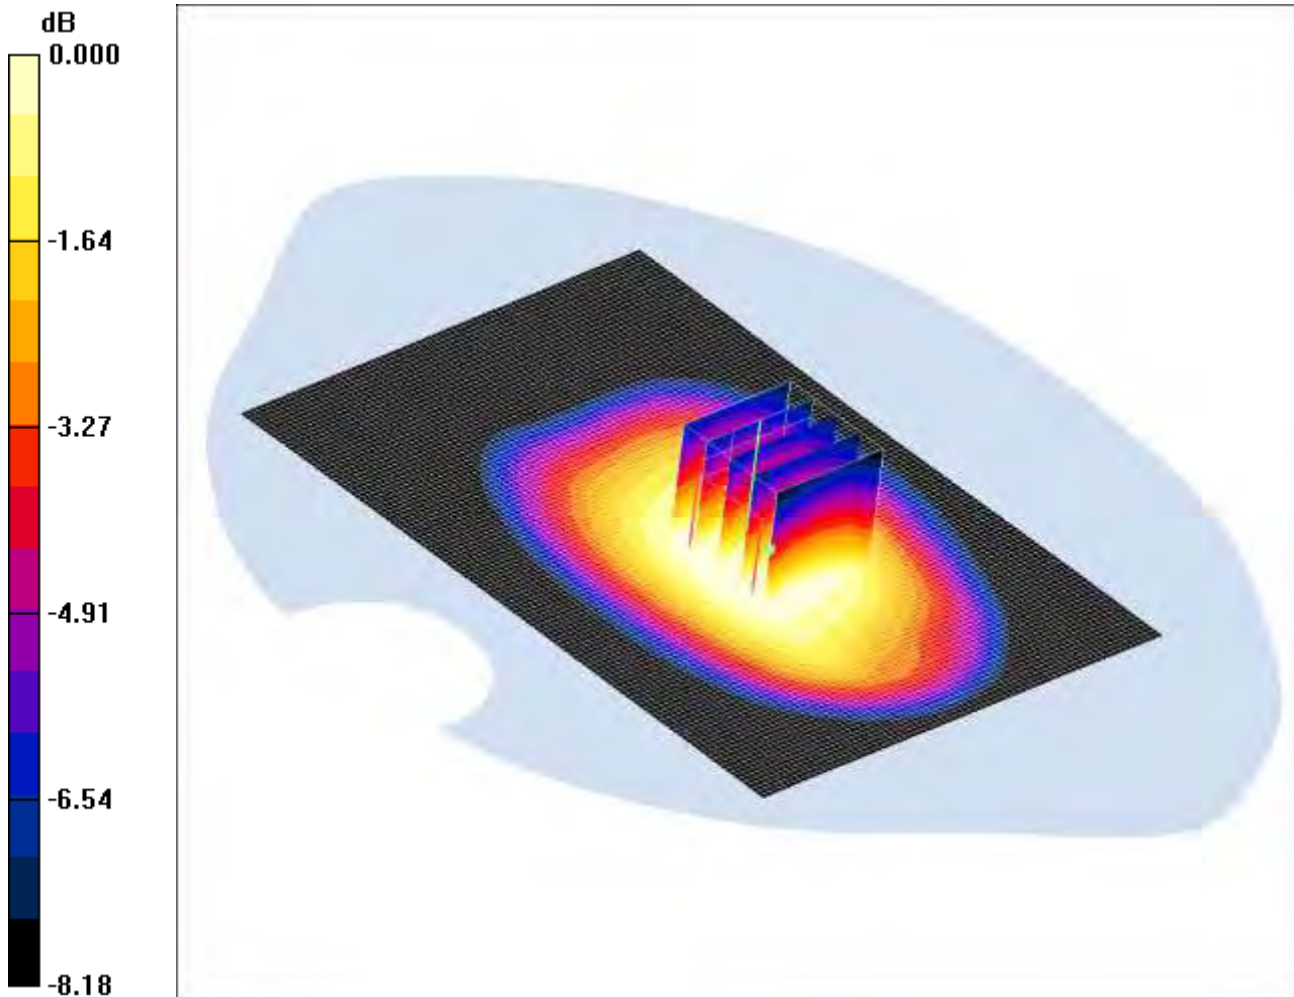

0 dB = 0.960mW/g

Communication System: UMTS-FDD 5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.995$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Front of EUT Facing Phantom - High/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.986 mW/g

Front of EUT Facing Phantom - High/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.0 V/m; Power Drift = 0.004 dB

Peak SAR (extrapolated) = 1.08 W/kg


SAR(1 g) = 0.854 mW/g; SAR(10 g) = 0.661 mW/g

Maximum value of SAR (measured) = 0.960 mW/g

SCN/87207JD02A/071: Back of EUT Facing Phantom UMTS FDD 5 CH 4183

Date: 23/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

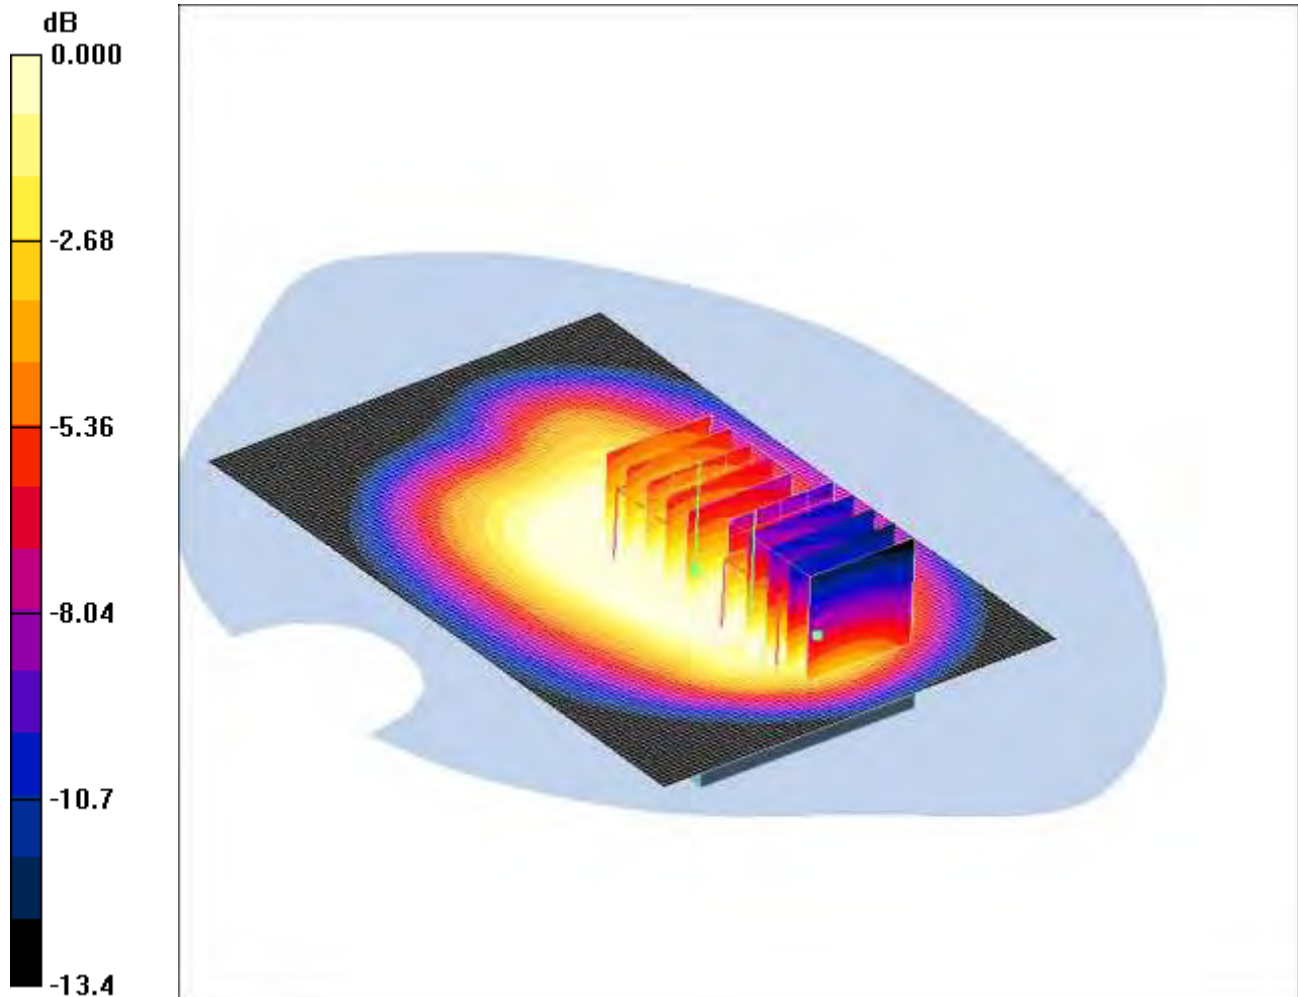

0 dB = 0.840mW/g

Communication System: UMTS-FDD 5; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Back of EUT Facing Phantom - Middle/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.10 mW/g

Back of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.0 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.973 mW/g; SAR(10 g) = 0.737 mW/g

Maximum value of SAR (measured) = 1.10 mW/g

Back of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.0 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.643 mW/g; SAR(10 g) = 0.425 mW/g


Maximum value of SAR (measured) = 0.840 mW/g

Note: DASY system is configured to measure any secondary maxima that are within 2dB of the measured SAR level.

SCN/87207JD02A/072: Back of EUT Facing Phantom UMTS FDD 5 CH 4132

Date: 23/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

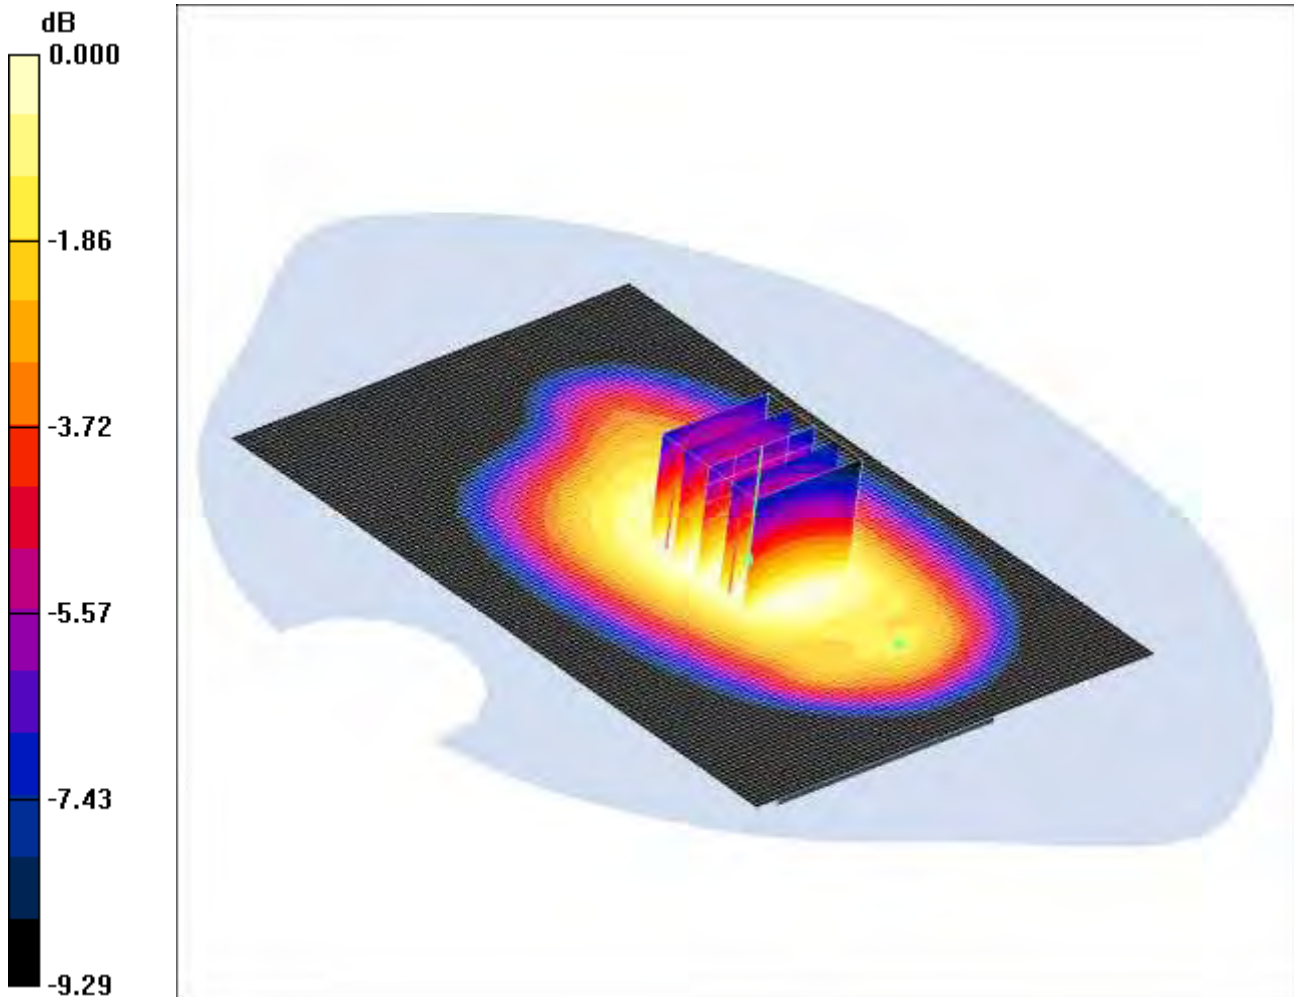

0 dB = 1.06mW/g

Communication System: UMTS-FDD 5; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Back of EUT Facing Phantom - Low/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.08 mW/g

Back of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.8 V/m; Power Drift = 0.053 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.946 mW/g; SAR(10 g) = 0.719 mW/g

Maximum value of SAR (measured) = 1.06 mW/g

Back of EUT Facing Phantom - Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.8 V/m; Power Drift = 0.053 dB


Peak SAR (extrapolated) = 0.975 W/kg

SAR(1 g) = 0.600 mW/g; SAR(10 g) = 0.400 mW/g

SCN/87207JD02A/073: Back of EUT Facing Phantom UMTS FDD 5 CH 4233

Date 24/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

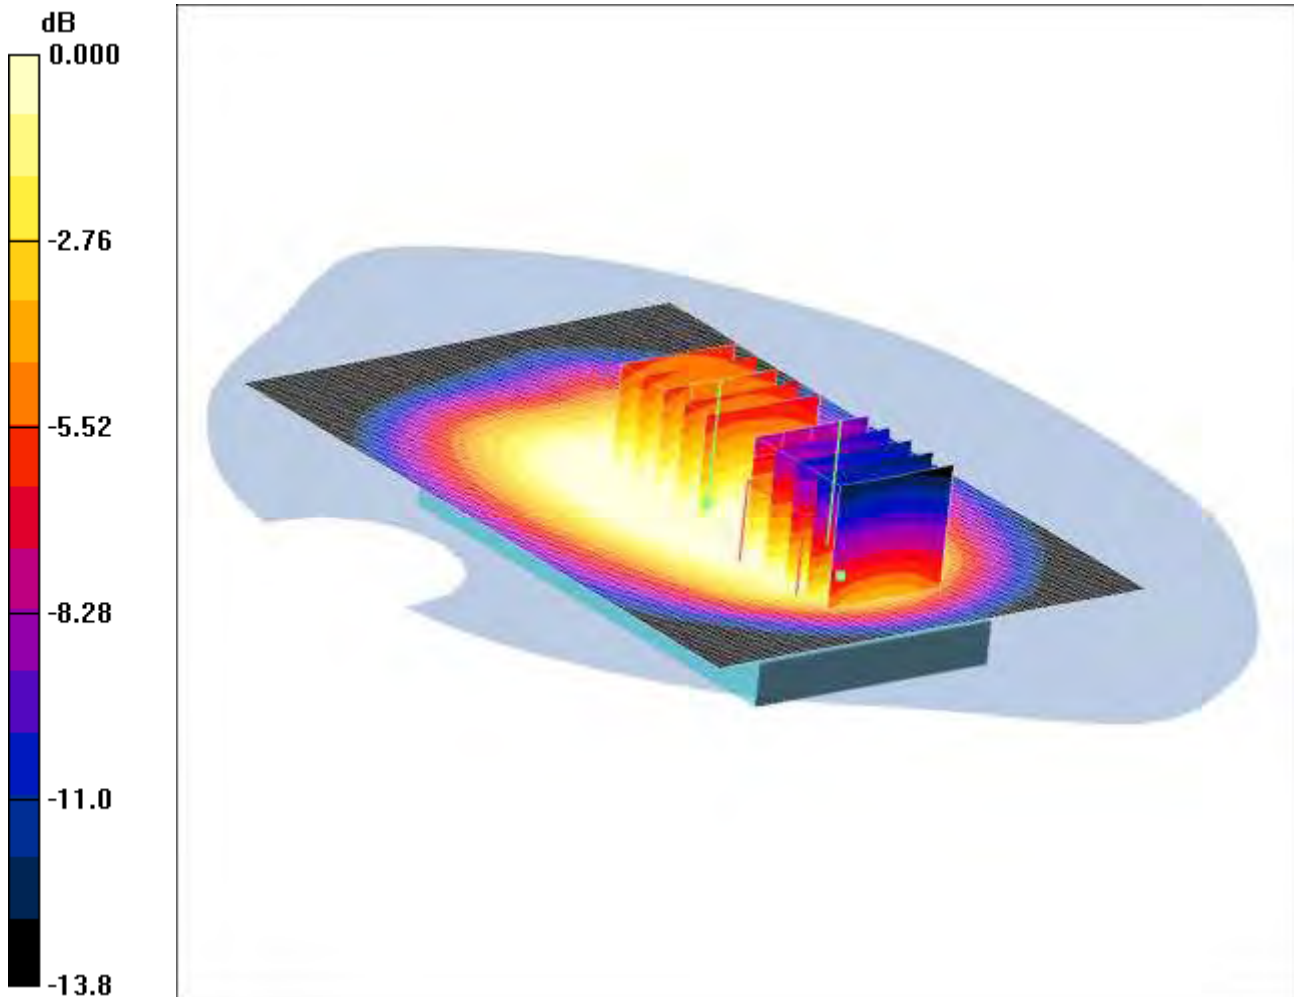

0 dB = 0.781mW/g

Communication System: UMTS-FDD 5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.995$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Back of EUT Facing Phantom - High/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.06 mW/g

Back of EUT Facing Phantom - High/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.8 V/m; Power Drift = -0.020 dB; Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.942 mW/g; SAR(10 g) = 0.711 mW/g

Maximum value of SAR (measured) = 1.06 mW/g

Back of EUT Facing Phantom - High/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.8 V/m; Power Drift = -0.020 dB; Peak SAR (extrapolated) = 0.956 W/kg

SAR(1 g) = 0.581 mW/g; SAR(10 g) = 0.382 mW/g


Maximum value of SAR (measured) = 0.781 mW/g

Note: DASY system is configured to measure any secondary maxima that are within 2dB of the measured SAR level.

SCN/87207JD02A/074: Left Hand Side of EUT Facing Phantom UMTS FDD 5 CH4183

Date: 24/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

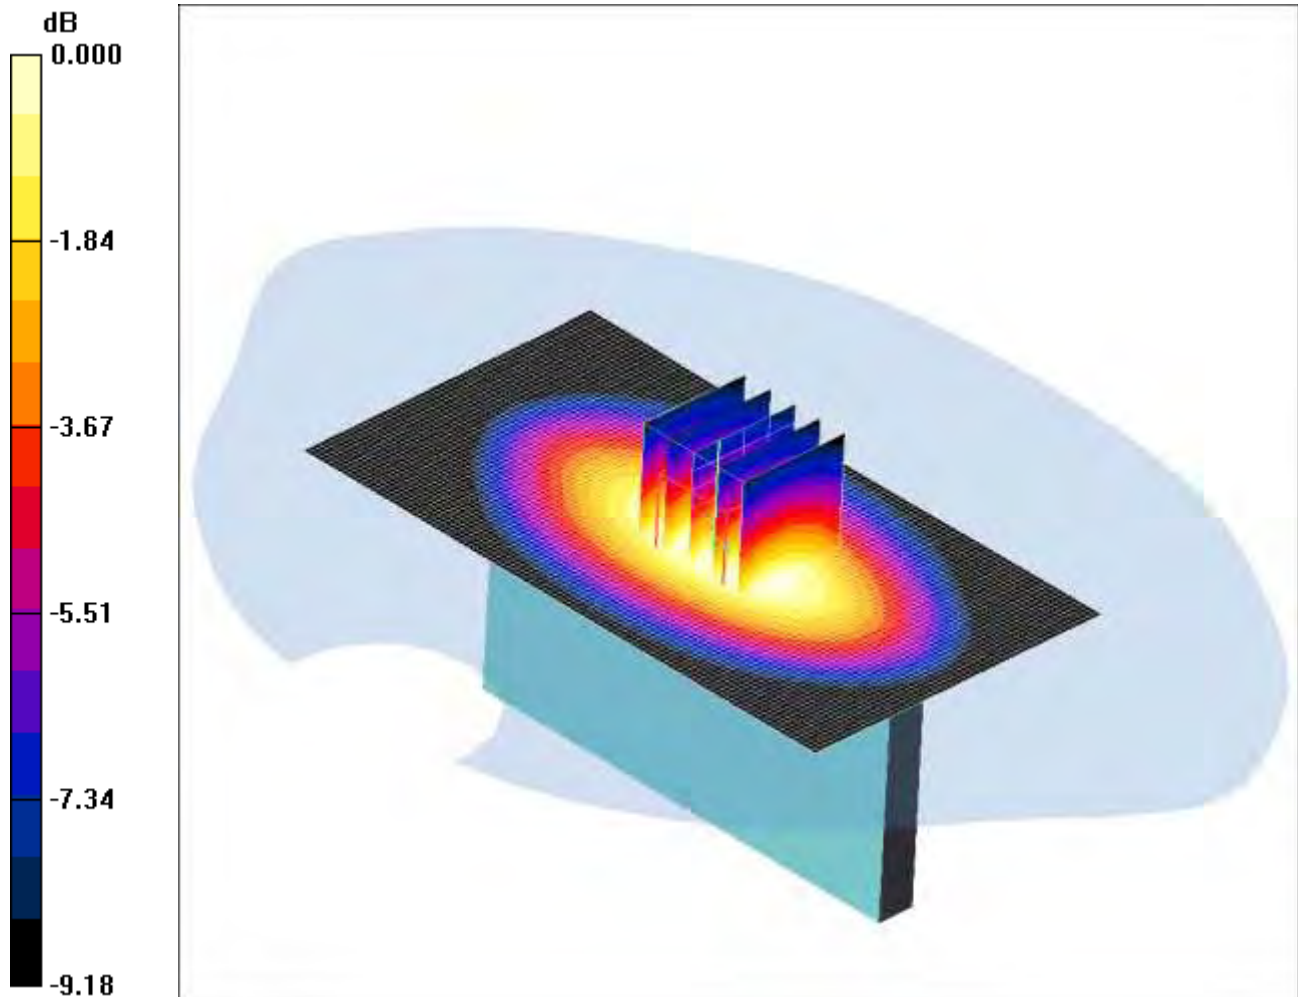

0 dB = 0.977mW/g

Communication System: UMTS-FDD 5; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Hand Side of EUT Facing Phantom - Middle/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.992 mW/g

Left Hand Side of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.3 V/m; Power Drift = -0.104 dB

Peak SAR (extrapolated) = 1.18 W/kg


SAR(1 g) = 0.849 mW/g; SAR(10 g) = 0.596 mW/g

Maximum value of SAR (measured) = 0.977 mW/g

SCN/87207JD02A/075: Left Hand Side of EUT Facing Phantom UMTS FDD 5 CH4132

Date: 24/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

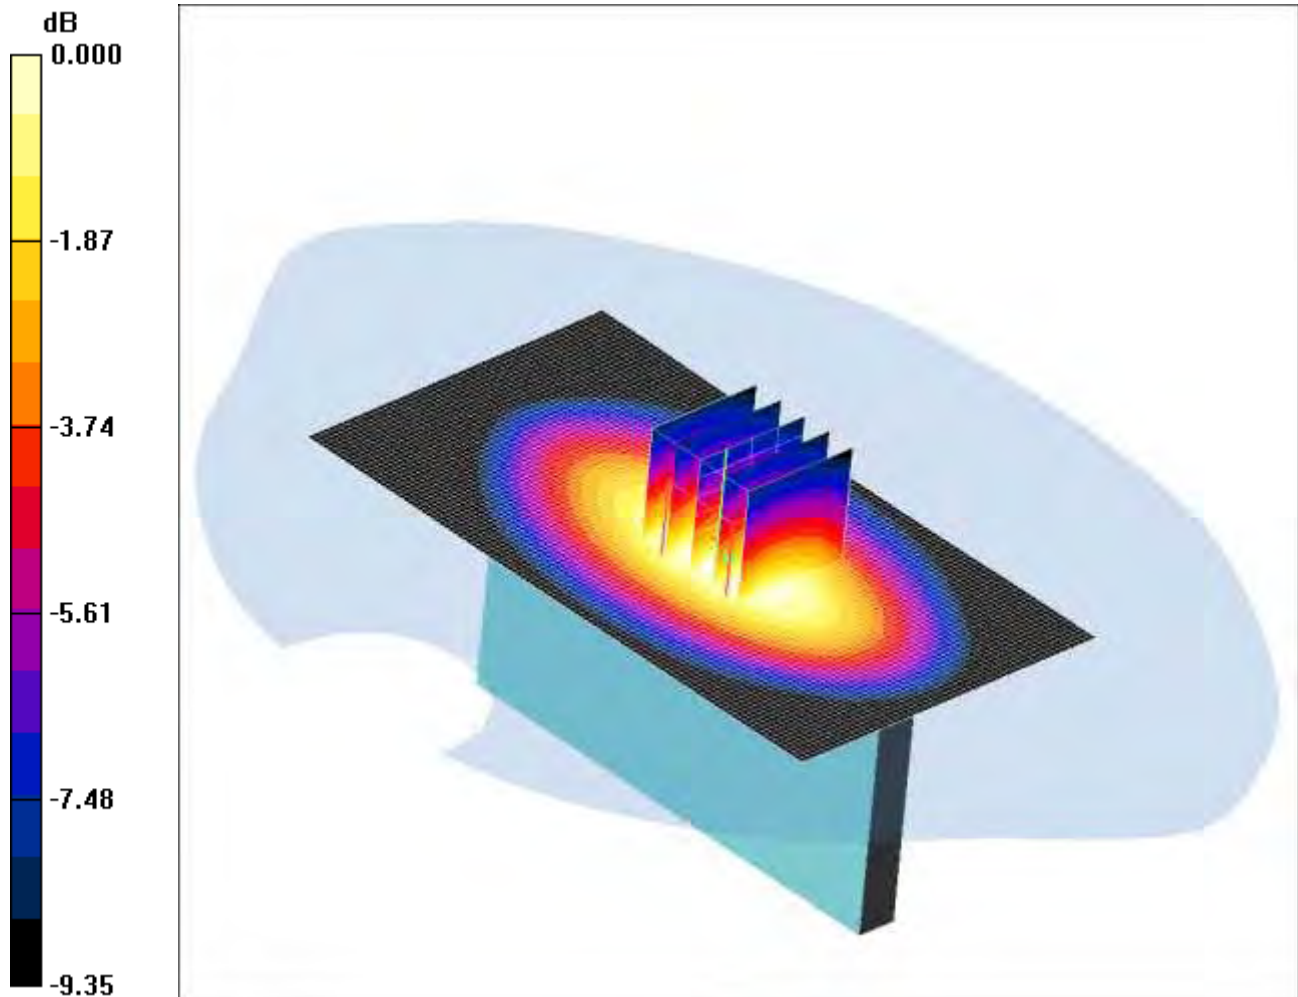

0 dB = 1.10mW/g

Communication System: UMTS-FDD 5; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Hand Side of EUT Facing Phantom - Low/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.12 mW/g

Left Hand Side of EUT Facing Phantom - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.9 V/m; Power Drift = -0.180 dB

Peak SAR (extrapolated) = 1.32 W/kg


SAR(1 g) = 0.946 mW/g; SAR(10 g) = 0.662 mW/g

Maximum value of SAR (measured) = 1.10 mW/g

SCN/87207JD02A/076: Left Hand Side of EUT Facing Phantom UMTS FDD 5 CH4233

Date: 24/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

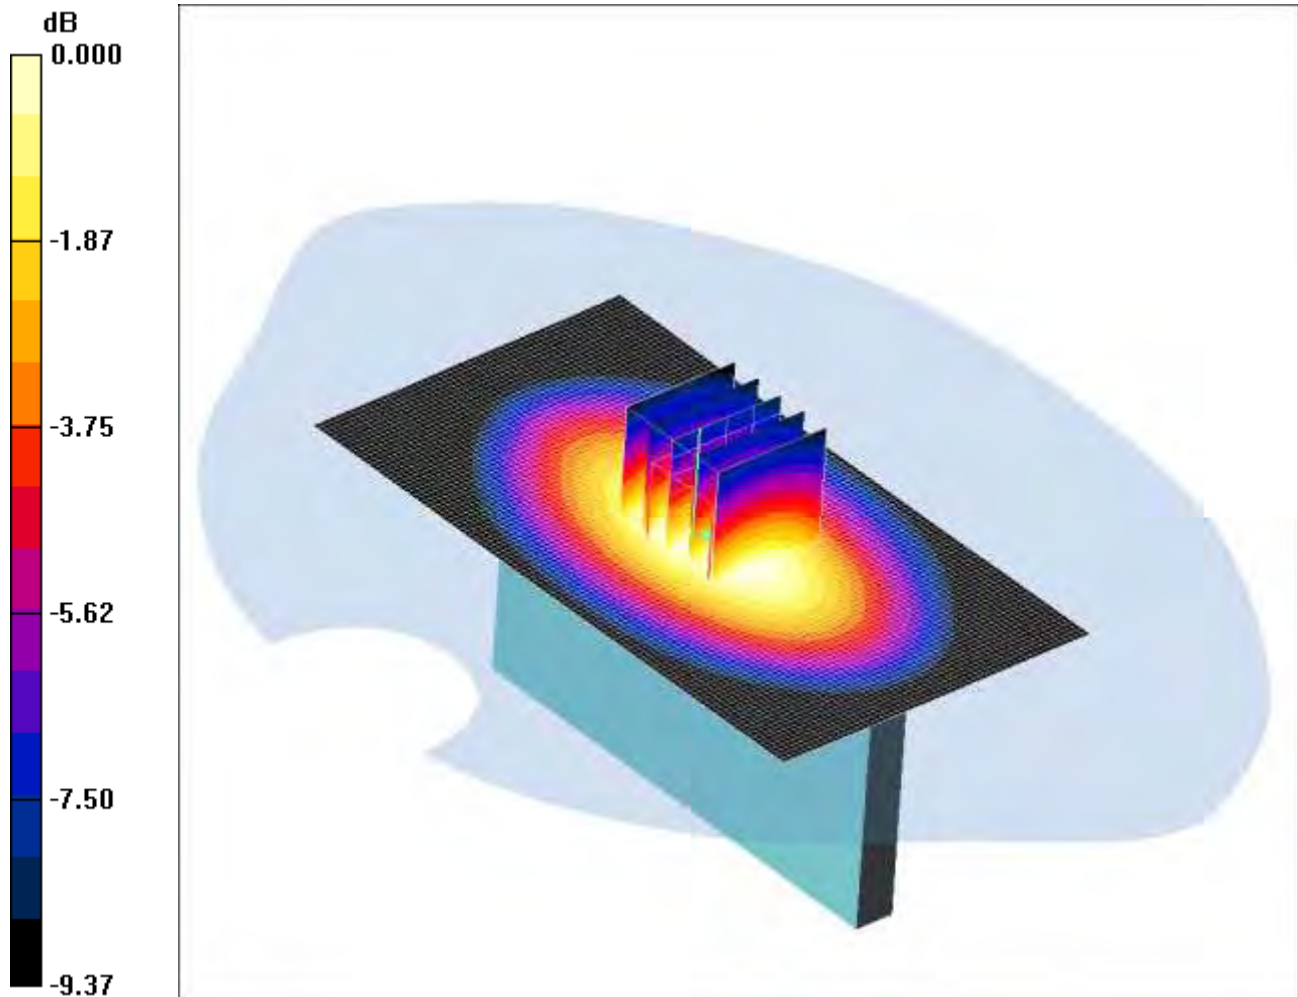

0 dB = 1.02mW/g

Communication System: UMTS-FDD 5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.995$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Hand Side of EUT Facing Phantom - High/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.04 mW/g

Left Hand Side of EUT Facing Phantom - High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.1 V/m; Power Drift = -0.176 dB

Peak SAR (extrapolated) = 1.23 W/kg


SAR(1 g) = 0.884 mW/g; SAR(10 g) = 0.618 mW/g

Maximum value of SAR (measured) = 1.02 mW/g

SCN/87207JD02A/077: Right Hand Side of EUT Facing Phantom UMTS FDD 5 CH4183

Date: 25/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

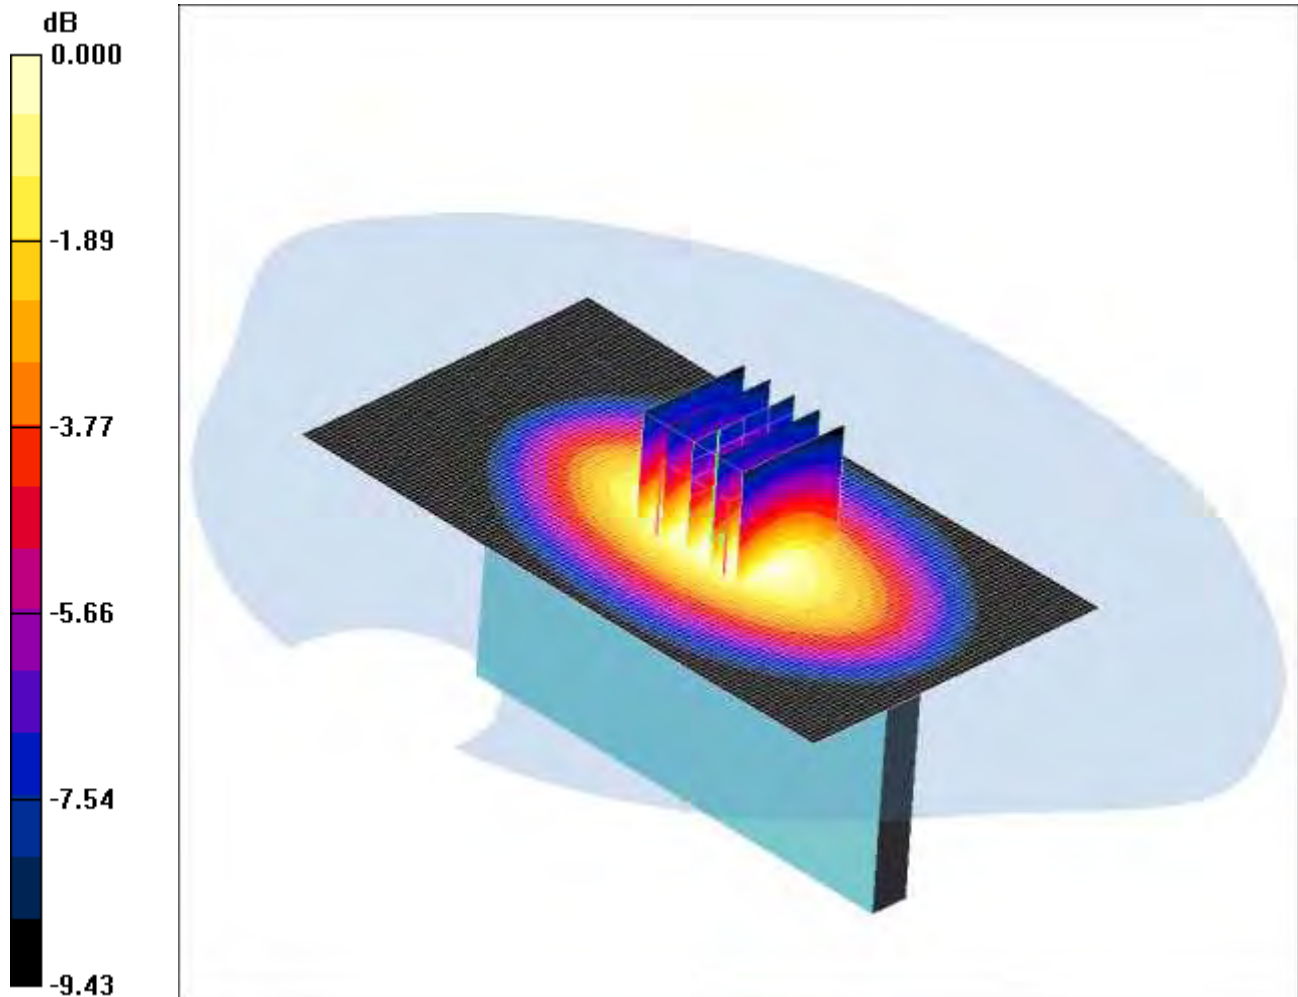

0 dB = 1.20mW/g

Communication System: UMTS-FDD 5; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.993$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Hand Side of EUT Facing Phantom - Middle 2/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.23 mW/g

Right Hand Side of EUT Facing Phantom - Middle 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.3 V/m; Power Drift = 0.007 dB

Peak SAR (extrapolated) = 1.48 W/kg


SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.727 mW/g

Maximum value of SAR (measured) = 1.20 mW/g

SCN/87207JD02A/078: Right Hand Side of EUT Facing Phantom UMTS FDD 5 CH4132

Date: 25/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

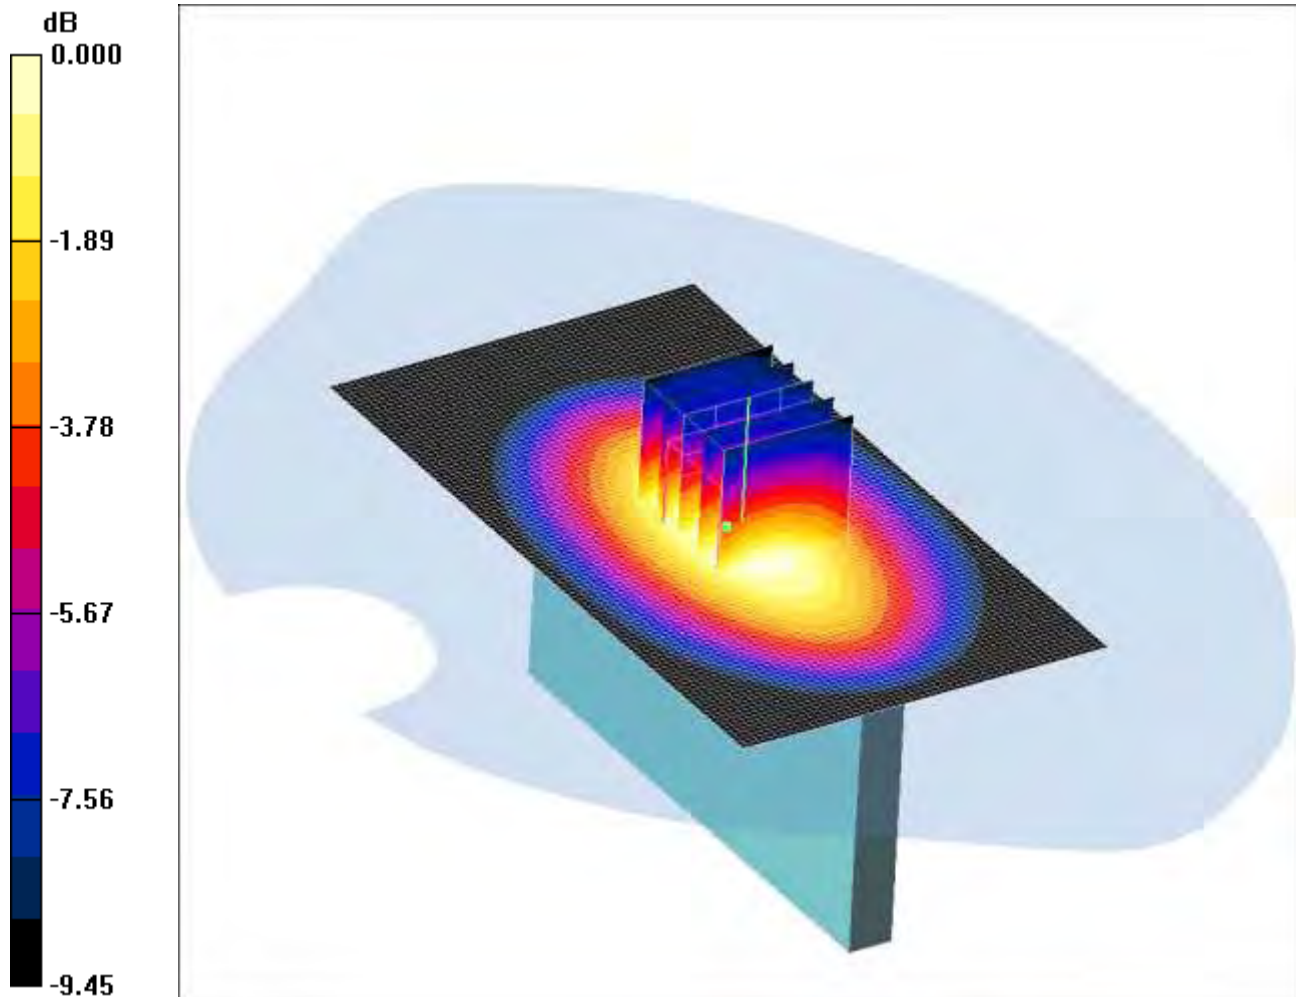

0 dB = 1.09mW/g

Communication System: UMTS-FDD 5; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.986$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Hand Side of EUT Facing Phantom - Low/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.11 mW/g

Right Hand Side of EUT Facing Phantom - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.2 V/m; Power Drift = -0.071 dB

Peak SAR (extrapolated) = 1.35 W/kg


SAR(1 g) = 0.952 mW/g; SAR(10 g) = 0.659 mW/g

Maximum value of SAR (measured) = 1.09 mW/g

SCN/87207JD02A/079: Right Hand Side of EUT Facing Phantom UMTS FDD 5 CH4233

Date: 25/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

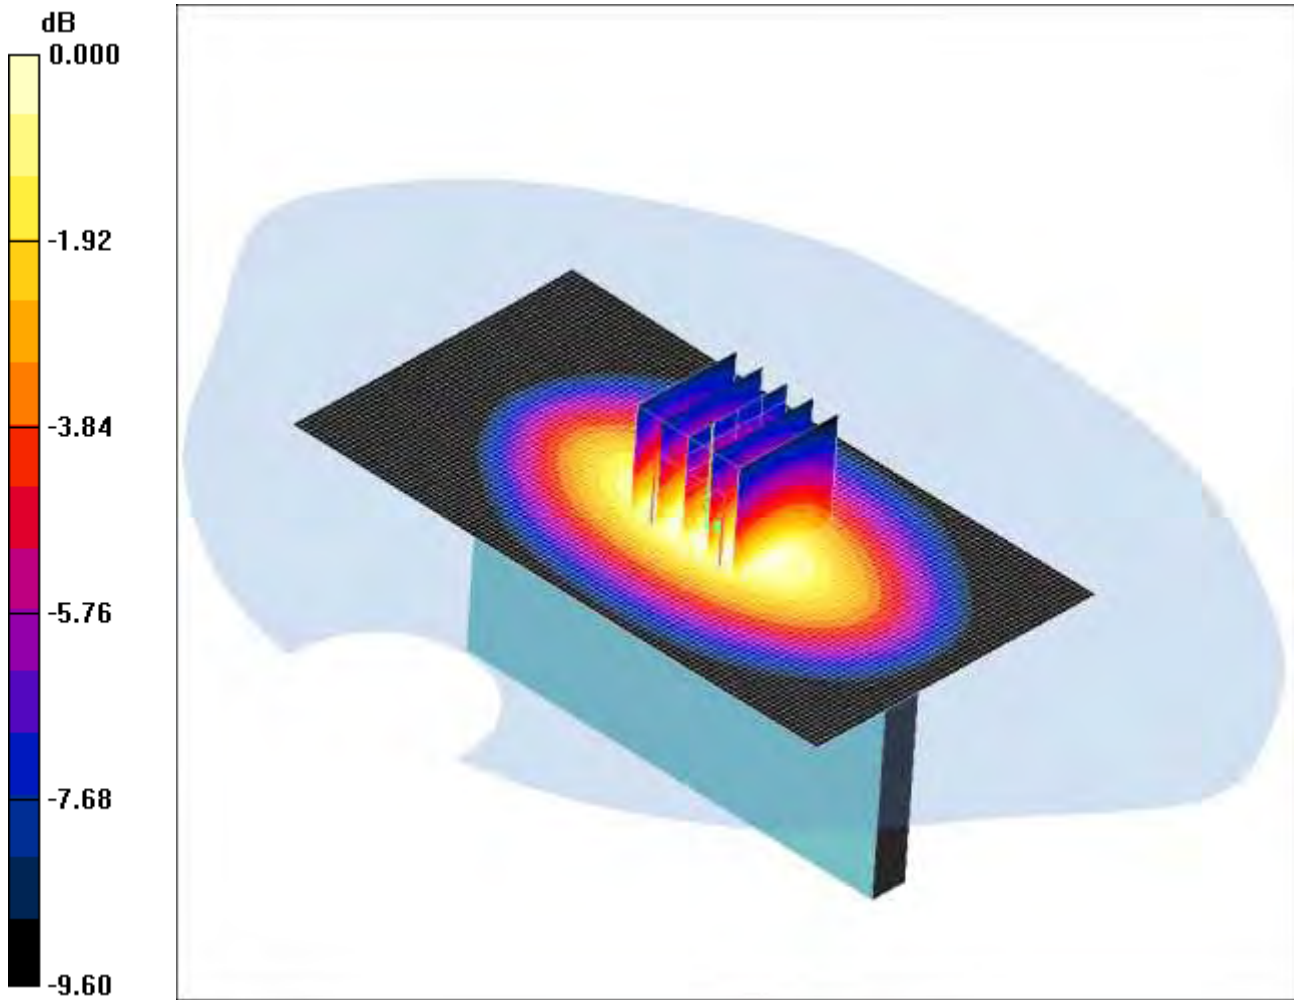

0 dB = 1.24mW/g

Communication System: UMTS-FDD 5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.998$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Hand Side of EUT Facing Phantom - High/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.27 mW/g

Right Hand Side of EUT Facing Phantom - High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.2 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 1.51 W/kg


SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.751 mW/g

Maximum value of SAR (measured) = 1.24 mW/g

SCN/87207JD02A/080: Bottom of EUT Facing Phantom UMTS FDD 5 CH4183

Date: 25/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

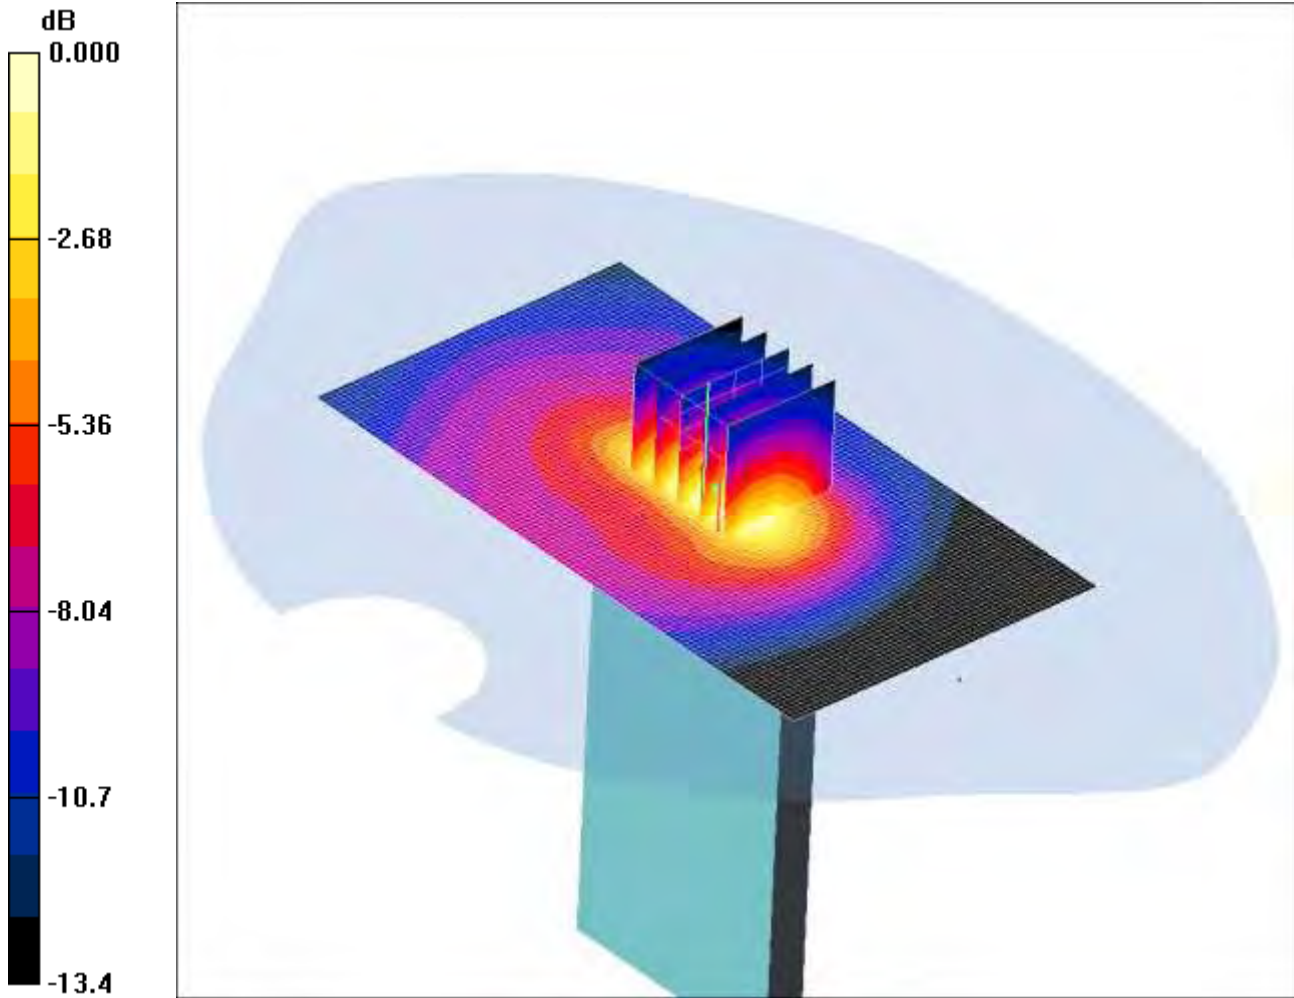

0 dB = 0.384mW/g

Communication System: UMTS-FDD 5; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.993$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Bottom of EUT Facing Phantom - Middle/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.399 mW/g

Bottom of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.3 V/m; Power Drift = 0.071 dB

Peak SAR (extrapolated) = 0.549 W/kg


SAR(1 g) = 0.309 mW/g; SAR(10 g) = 0.175 mW/g

Maximum value of SAR (measured) = 0.384 mW/g

SCN/87207JD02A/081: Back of EUT Facing Phantom at 15mm UMTS FDD 5 CH4183

Date: 25/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

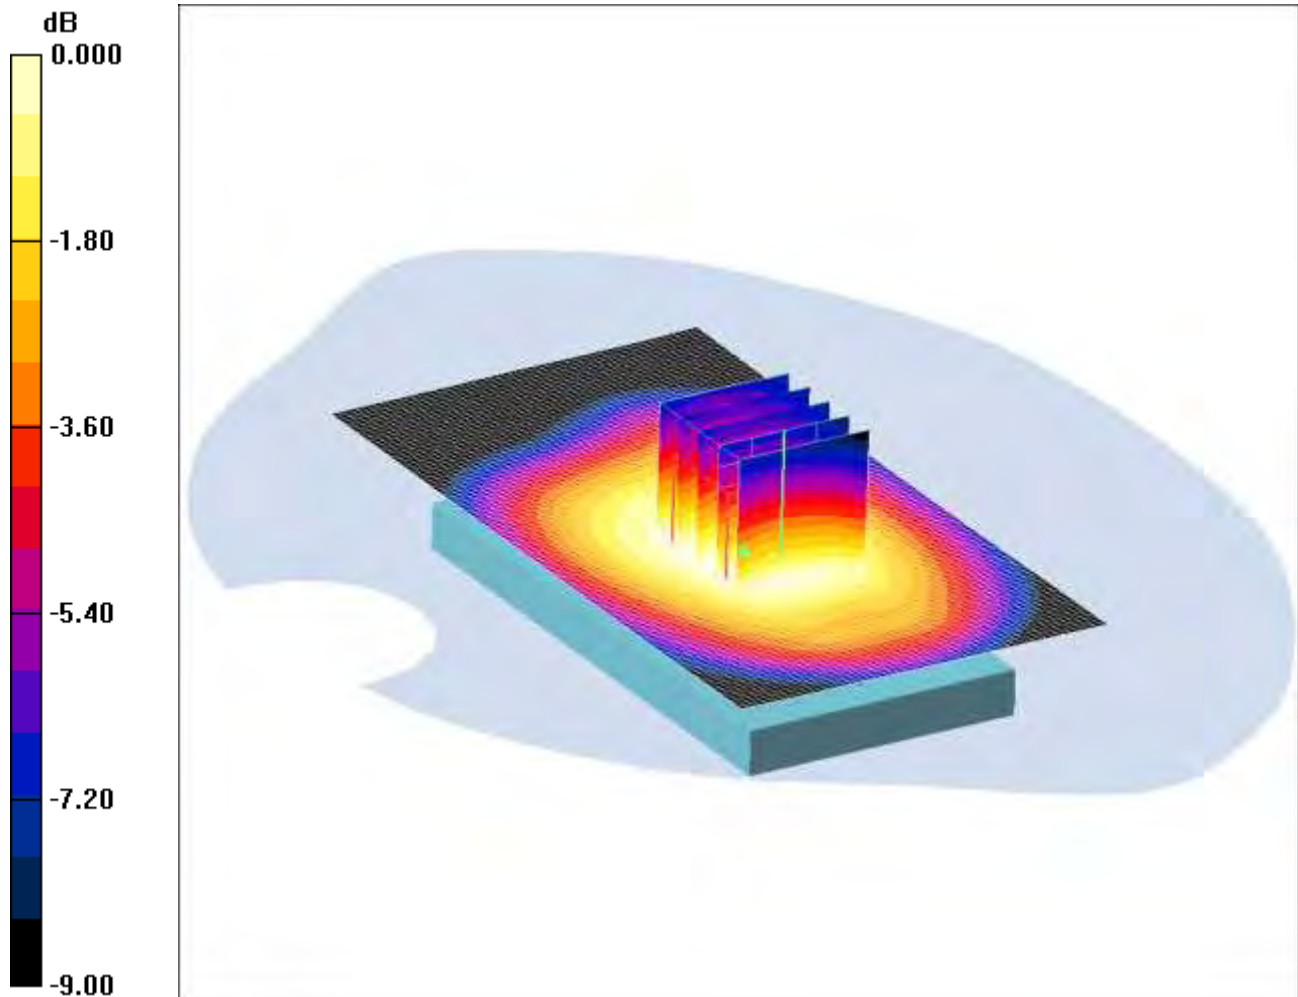

0 dB = 0.850mW/g

Communication System: UMTS-FDD 5; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.993$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Back of EUT Facing Phantom at 15mm - Middle/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.865 mW/g

Back of EUT Facing Phantom at 15mm - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.3 V/m; Power Drift = -0.013 dB

Peak SAR (extrapolated) = 0.979 W/kg


SAR(1 g) = 0.757 mW/g; SAR(10 g) = 0.574 mW/g

Maximum value of SAR (measured) = 0.850 mW/g

SCN/87207JD02A/08: Back of EUT Facing Phantom at 15mm UMTS FDD 5 CH4132

Date 25/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

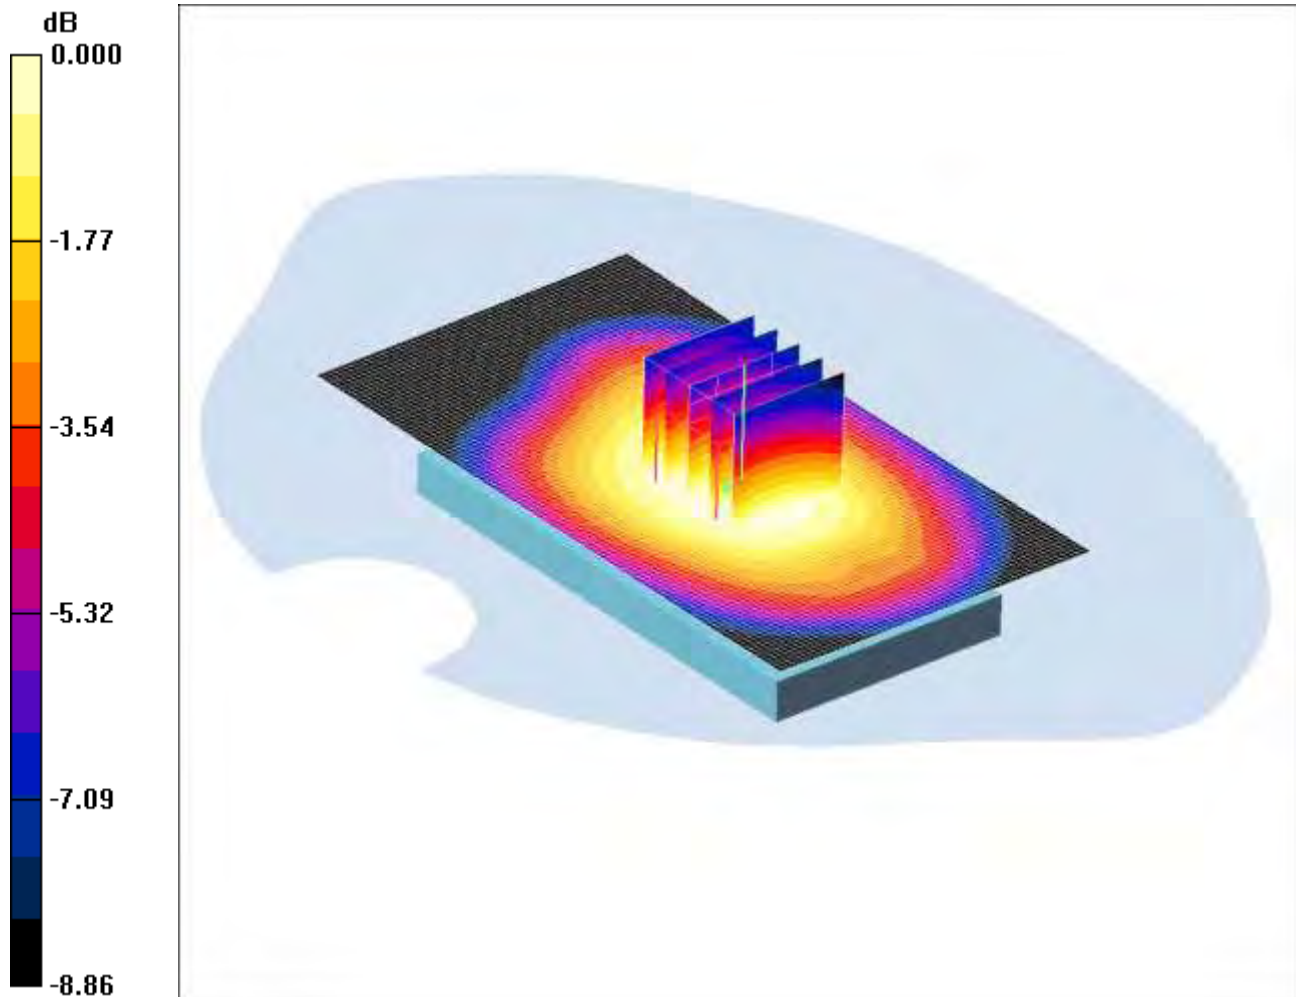

0 dB = 0.849mW/g

Communication System: UMTS-FDD 5; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.986$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Back of EUT Facing Phantom at 15mm - Low/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.850 mW/g

Back of EUT Facing Phantom at 15mm - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.4 V/m; Power Drift = 0.031 dB

Peak SAR (extrapolated) = 0.968 W/kg


SAR(1 g) = 0.757 mW/g; SAR(10 g) = 0.575 mW/g

Maximum value of SAR (measured) = 0.849 mW/g

SCN/87207JD02A/083: Back of EUT Facing Phantom at 15mm UMTS FDD 5 CH4233

Date: 25/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

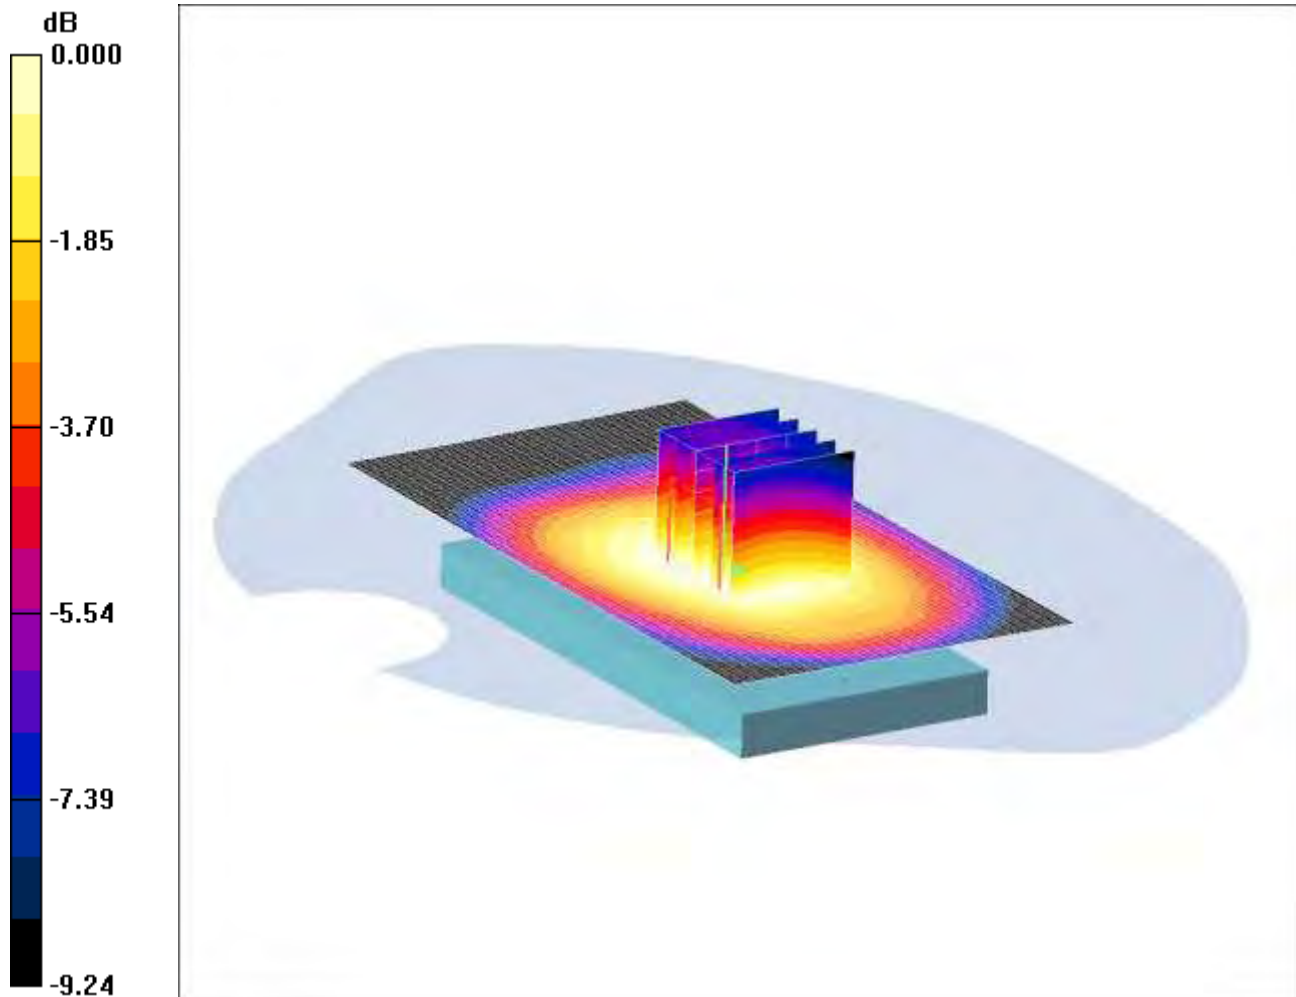

0 dB = 0.876mW/g

Communication System: UMTS-FDD 5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.998$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Back of EUT Facing Phantom at 15mm - High/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.922 mW/g

Back of EUT Facing Phantom at 15mm - High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.1 V/m; Power Drift = -0.089 dB

Peak SAR (extrapolated) = 1.01 W/kg


SAR(1 g) = 0.775 mW/g; SAR(10 g) = 0.586 mW/g

Maximum value of SAR (measured) = 0.876 mW/g

SCN/87207JD02A/084: Back of EUT Facing Phantom at 15mm with PHF UMTS FDD 5 CH4233

Date: 25/07/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RSP

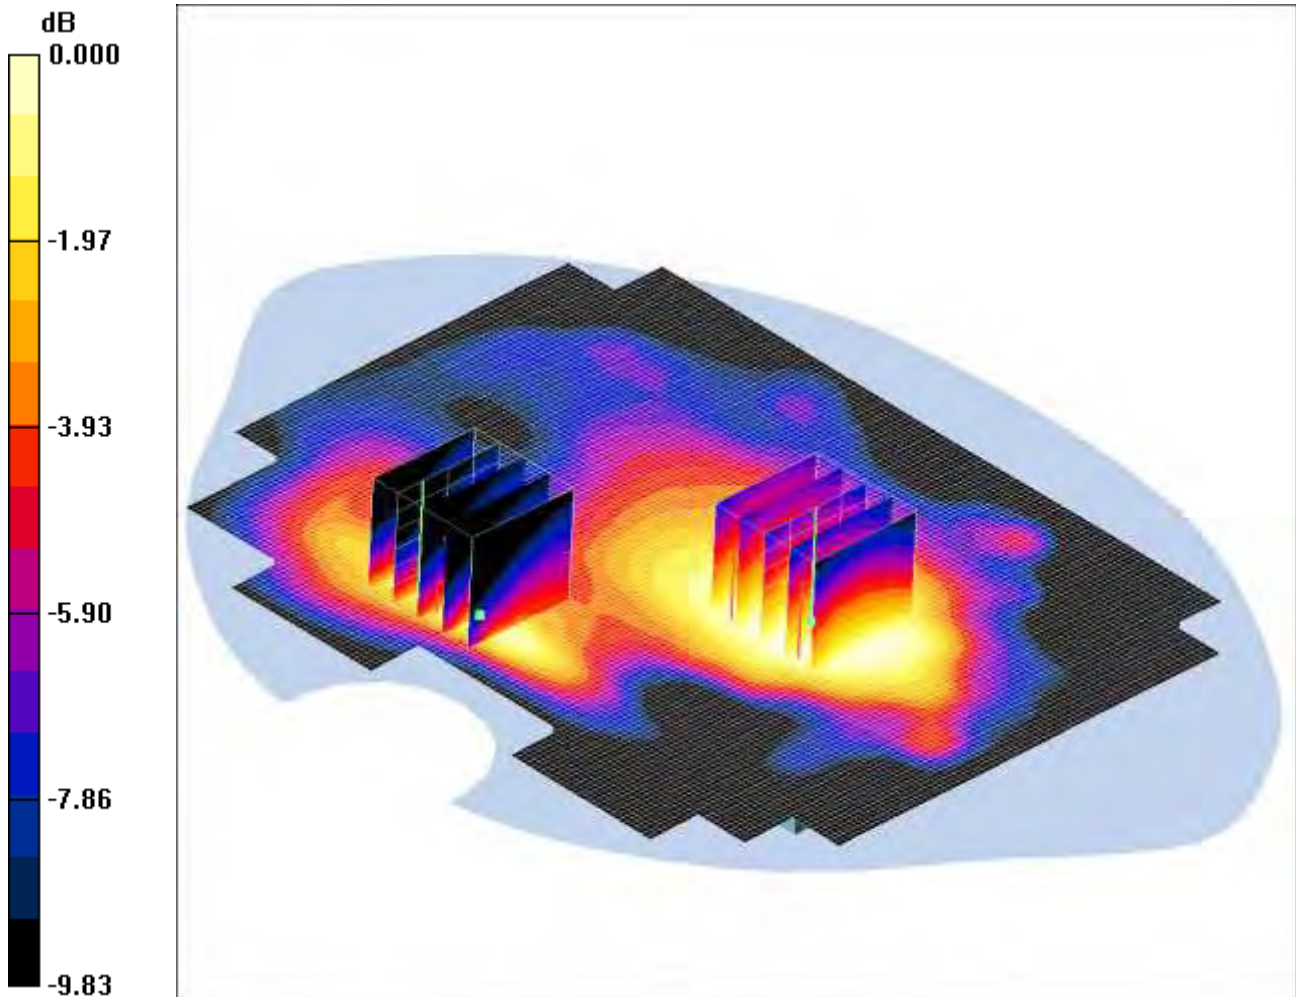

0 dB = 0.677mW/g

Communication System: UMTS-FDD 5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.998$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Back of EUT Facing Phantom at 15mm with PHF- High 2 2/Area Scan (111x141x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.666 mW/g

Back of EUT Facing Phantom at 15mm with PHF- High 2 2/Zoom Scan (5x5x7) 2 2 2 (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 22.5 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 0.521 W/kg

SAR(1 g) = 0.314 mW/g; SAR(10 g) = 0.220 mW/g

Maximum value of SAR (measured) = 0.389 mW/g

Back of EUT Facing Phantom at 15mm with PHF- High 2 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 22.5 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 0.776 W/kg

SAR(1 g) = 0.600 mW/g; SAR(10 g) = 0.452 mW/g


Maximum value of SAR (measured) = 0.677 mW/g

Note: DASY system is configured to measure any secondary maxima that are within 2dB of the measured SAR level.

SCN/87207JD02A/085: Touch Left WLAN802.11b 1Mbps CH6

Date: 31/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RTZ

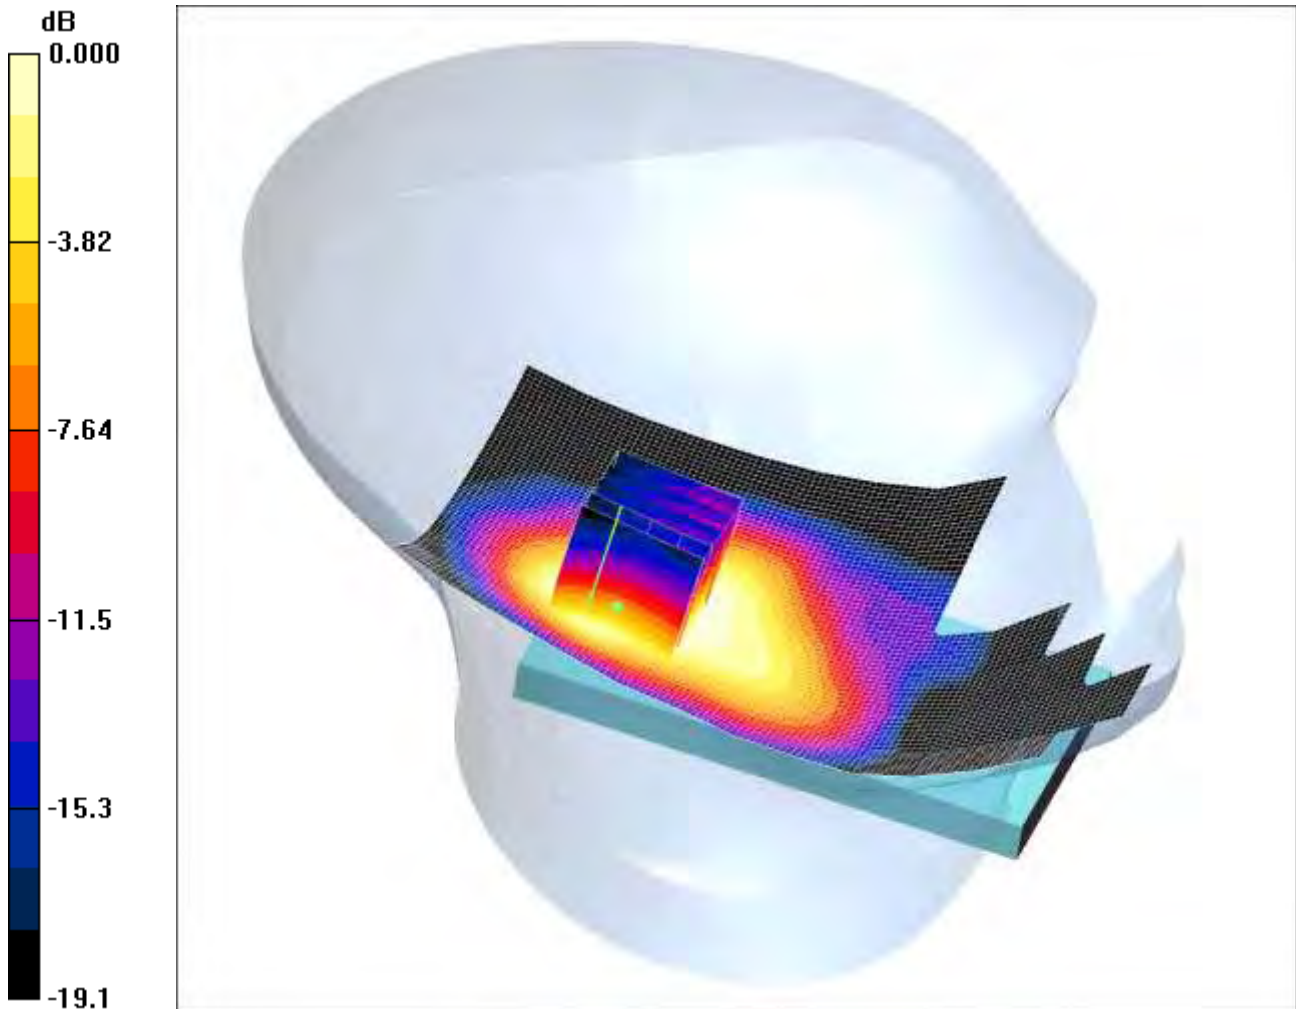

0 dB = 0.212mW/g

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 MHz HSL Medium parameters used (interpolated): $f = 2437 \text{ MHz}$; $\sigma = 1.79 \text{ mho/m}$; $\epsilon_r = 38.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(7.02, 7.02, 7.02); Calibrated: 22/09/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 02/05/2012
- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Touch Left - Middle/Area Scan (71x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.239 mW/g

Touch Left - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.71 V/m; Power Drift = 0.187 dB

Peak SAR (extrapolated) = 0.321 W/kg


SAR(1 g) = 0.167 mW/g; SAR(10 g) = 0.097 mW/g

Maximum value of SAR (measured) = 0.212 mW/g

SCN/87207JD02A/086: Tilt Left WLAN802.11b 1Mbps CH6

Date: 31/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RTZ

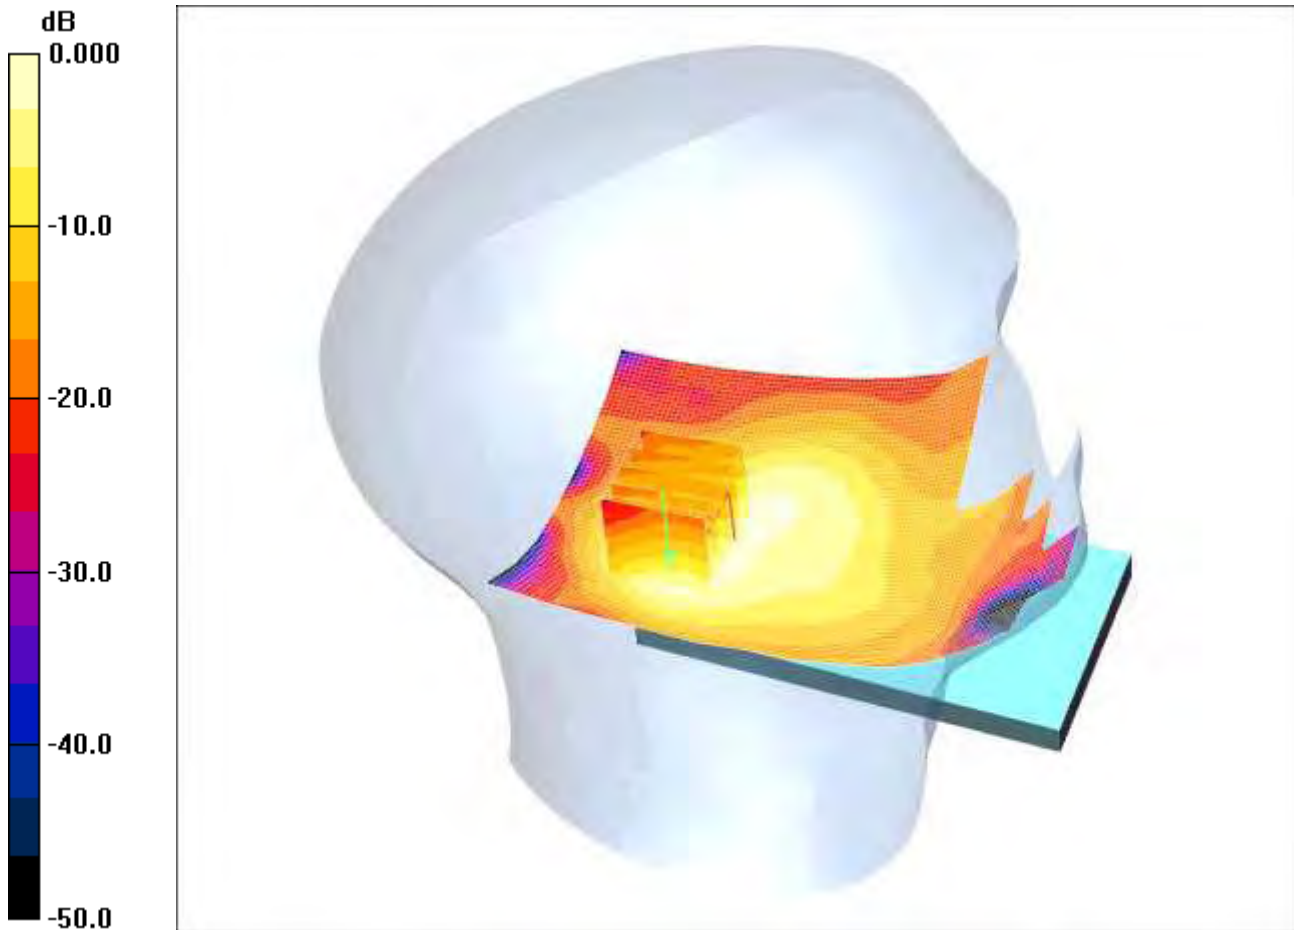

0 dB = 0.204mW/g

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 MHz HSL Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(7.02, 7.02, 7.02); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Tilt Left - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.24 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 0.298 W/kg

SAR(1 g) = 0.144 mW/g; SAR(10 g) = 0.074 mW/g

Maximum value of SAR (measured) = 0.192 mW/g


Tilt Left - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.204 mW/g

SCN/87207JD02A/087: Touch Right WLAN802.11b 1Mbps CH6

Date: 31/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RTZ

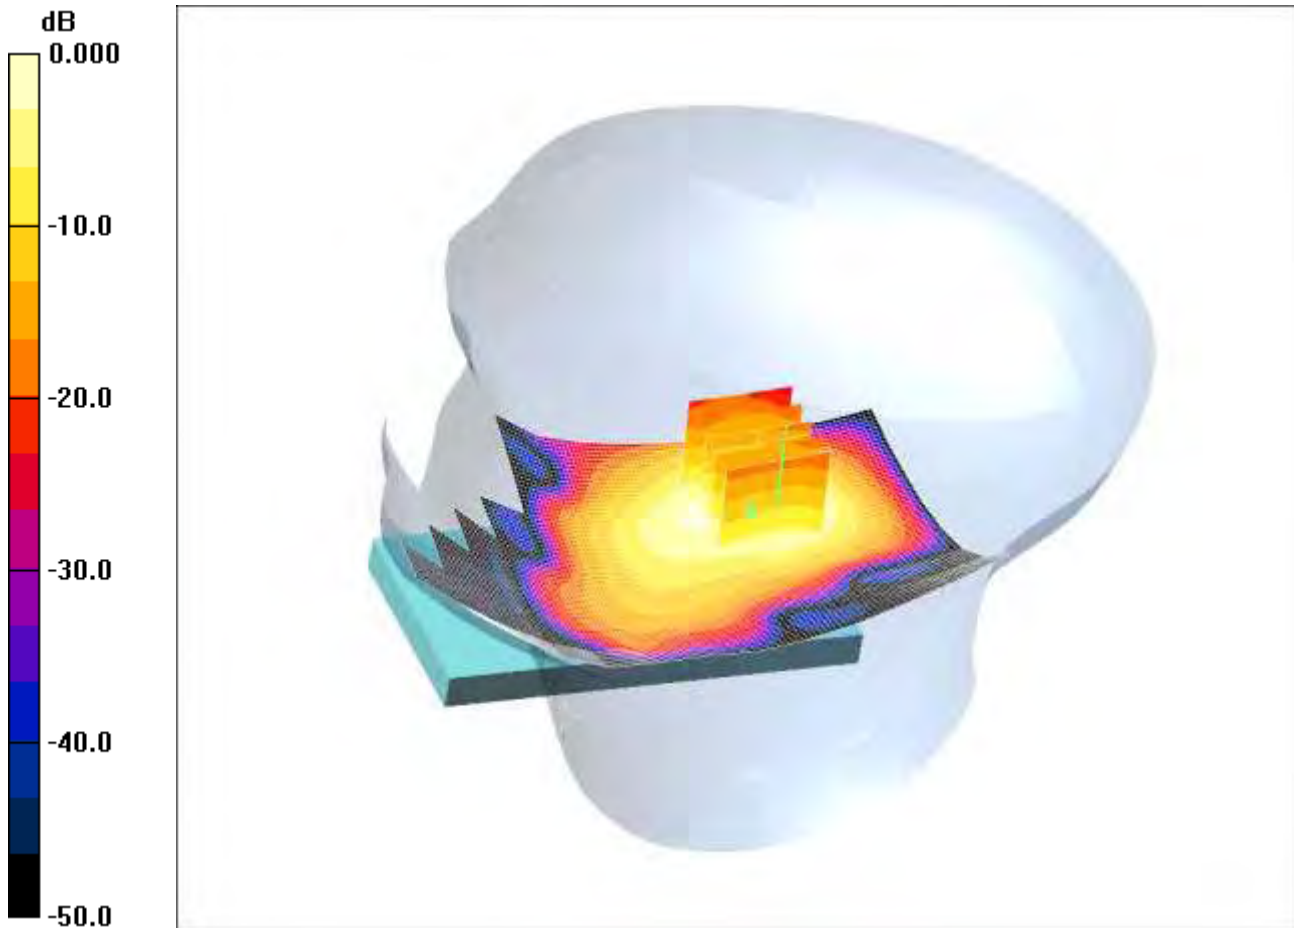

0 dB = 0.472mW/g

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 MHz HSL Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(7.02, 7.02, 7.02); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Touch Right - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.02 V/m; Power Drift = 0.059 dB

Peak SAR (extrapolated) = 0.686 W/kg

SAR(1 g) = 0.349 mW/g; SAR(10 g) = 0.176 mW/g

Maximum value of SAR (measured) = 0.460 mW/g


Touch Right - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.472 mW/g

SCN/87207JD02A/088: Tilt Right WLAN802.11b 1Mbps CH6

Date: 31/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RTZ

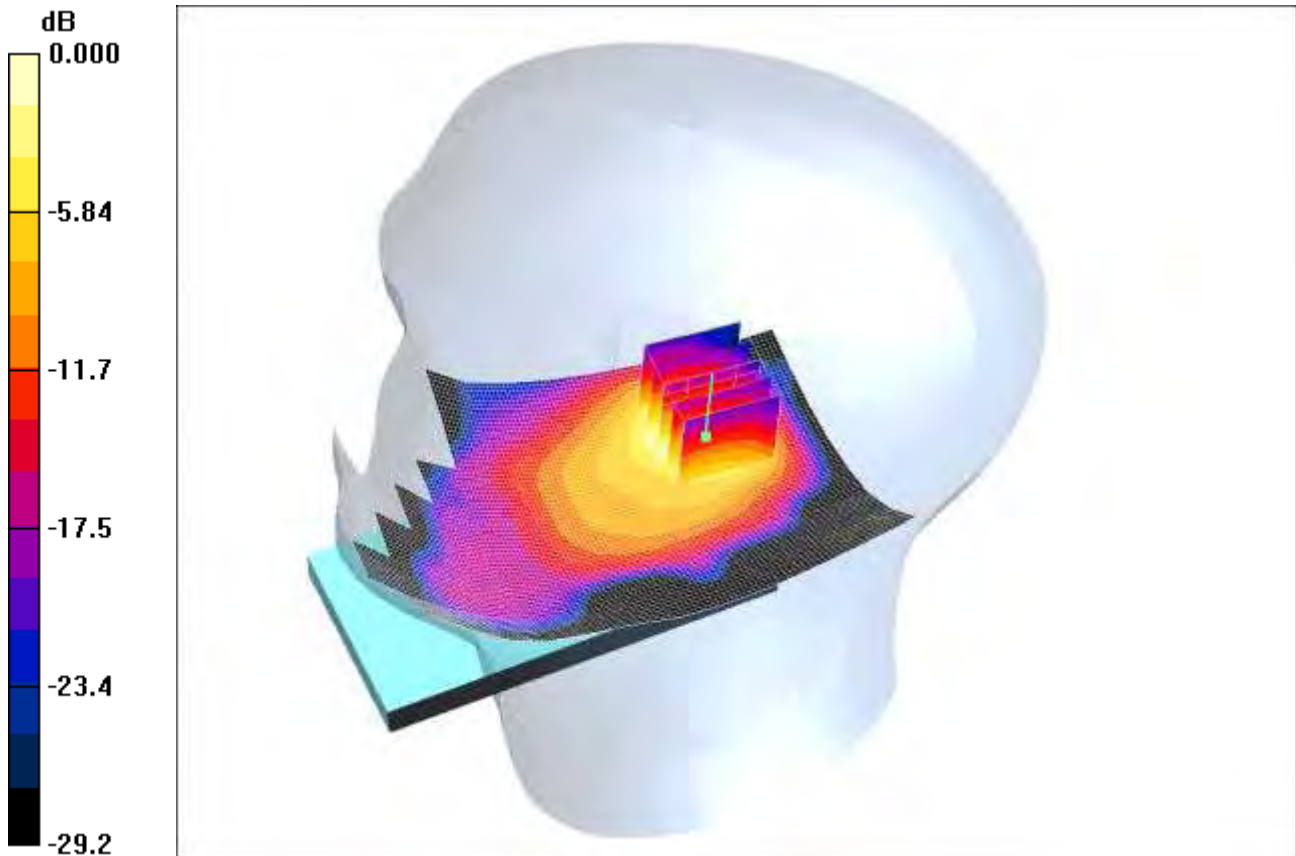

0 dB = 0.397mW/g

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 MHz HSL Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(7.02, 7.02, 7.02); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Tilt Right - Middle/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.484 mW/g

Tilt Right - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.21 V/m; Power Drift = 0.051 dB

Peak SAR (extrapolated) = 0.641 W/kg


SAR(1 g) = 0.294 mW/g; SAR(10 g) = 0.135 mW/g

Maximum value of SAR (measured) = 0.397 mW/g

SCN/87207JD02A/089: Touch Right WLAN802.11b 1Mbps CH1

Date: 31/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RTZ

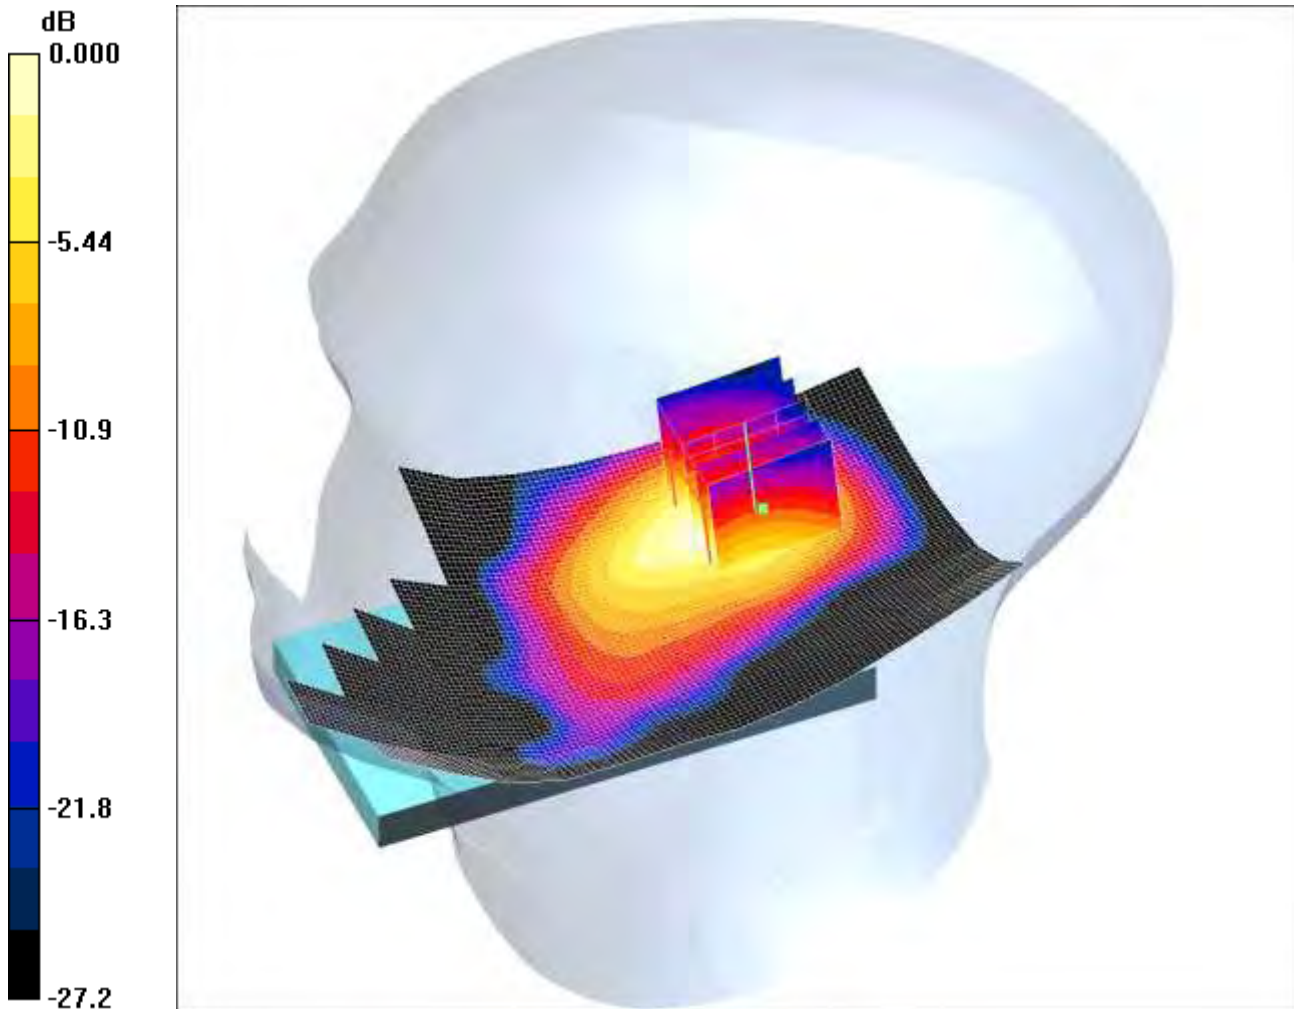

0 dB = 0.484mW/g

Communication System: WLAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: 2450 MHz HSL Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.76$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(7.02, 7.02, 7.02); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Touch Right - Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.486 mW/g

Touch Right - Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.86 V/m; Power Drift = 0.055 dB

Peak SAR (extrapolated) = 0.736 W/kg


SAR(1 g) = 0.365 mW/g; SAR(10 g) = 0.184 mW/g

Maximum value of SAR (measured) = 0.484 mW/g

SCN/87207JD02A/090: Touch Right WLAN802.11b 1Mbps CH11

Date: 31/08/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RTZ

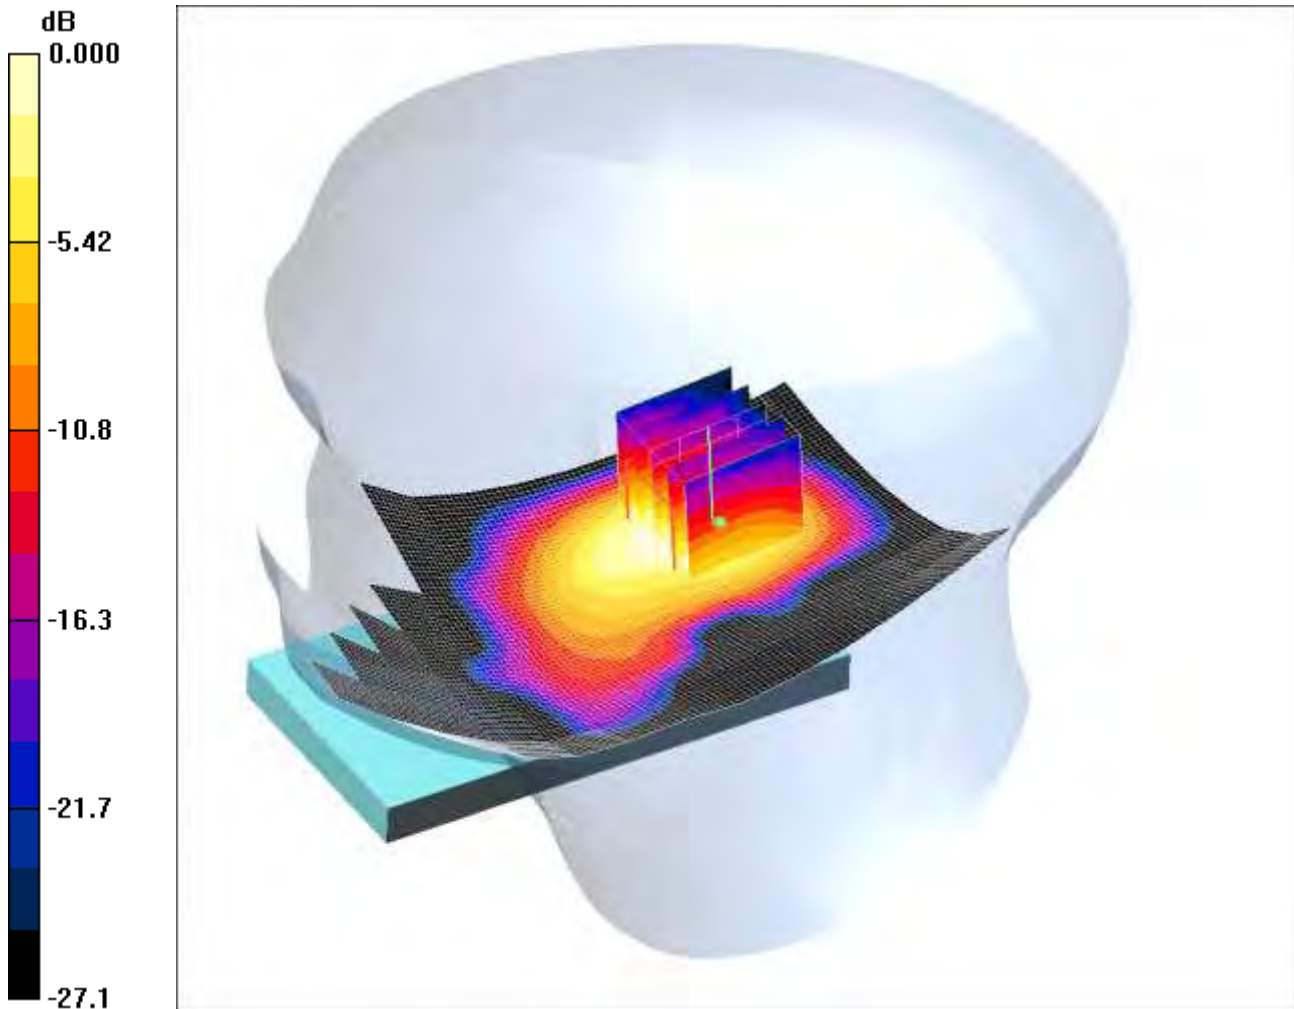

0 dB = 0.301mW/g

Communication System: WLAN; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: 2450 MHz HSL Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.82$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(7.02, 7.02, 7.02); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Touch Right - Low/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.368 mW/g

Touch Right - Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.27 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 0.462 W/kg


SAR(1 g) = 0.226 mW/g; SAR(10 g) = 0.113 mW/g

Maximum value of SAR (measured) = 0.301 mW/g

SCN/87207JD02A/091: Front of EUT Facing Phantom WLAN802.11b 1Mbps CH6

Date: 03/09/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RTZ

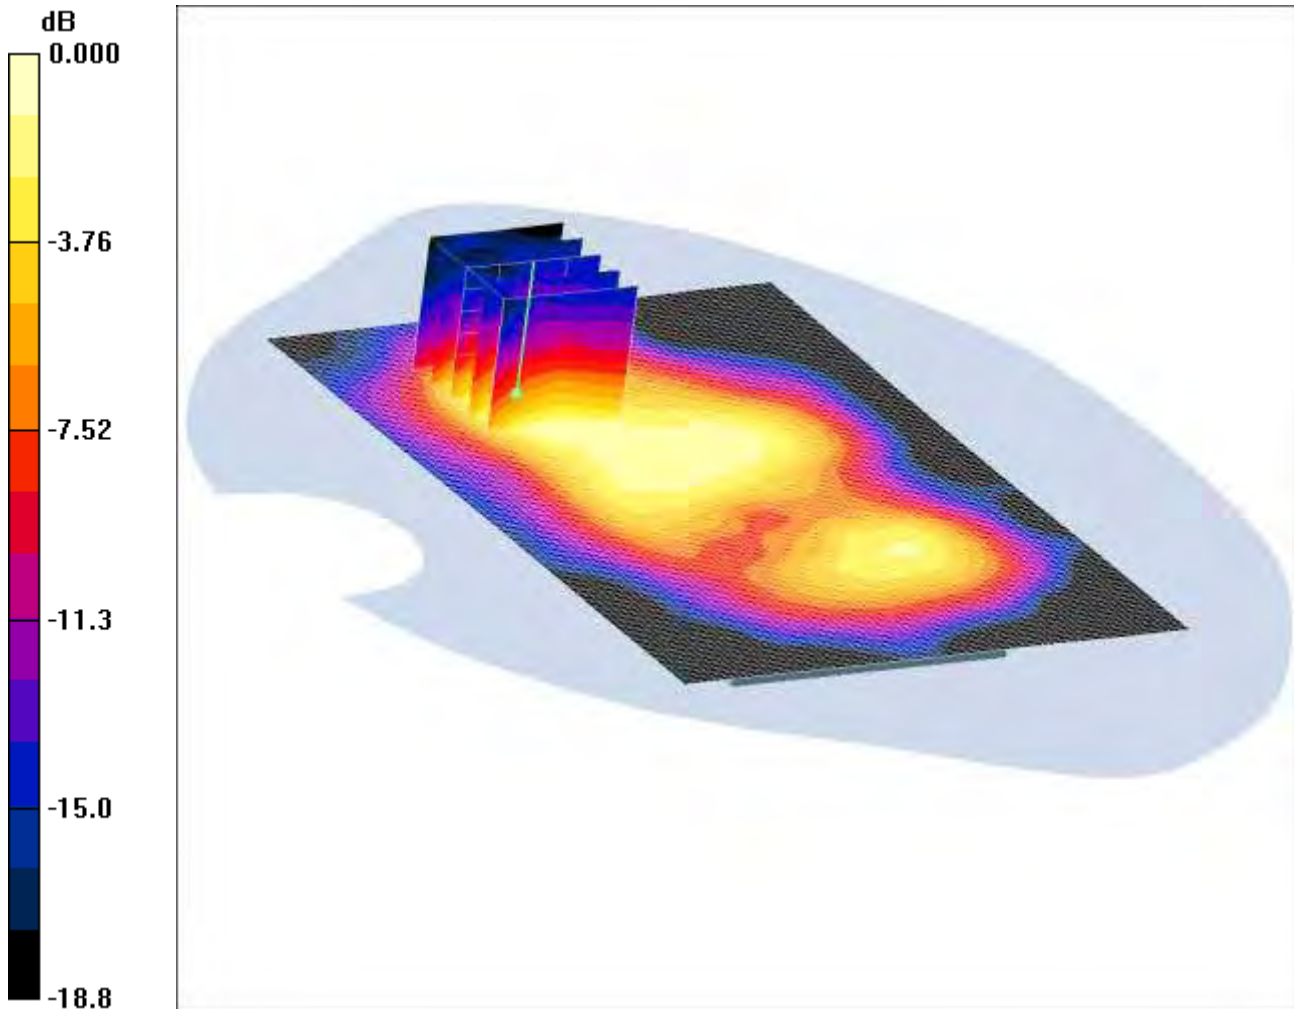

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(7.15, 7.15, 7.15); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Front of EUT Facing Phantom - Middle/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.112 mW/g

Front of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.09 V/m; Power Drift = 0.090 dB

Peak SAR (extrapolated) = 0.155 W/kg


SAR(1 g) = 0.080 mW/g; SAR(10 g) = 0.042 mW/g

Maximum value of SAR (measured) = 0.107 mW/g

SCN/87207JD02A/092: Back of EUT Facing Phantom WLAN802.11b 1Mbps CH6

Date: 03/09/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RTZ

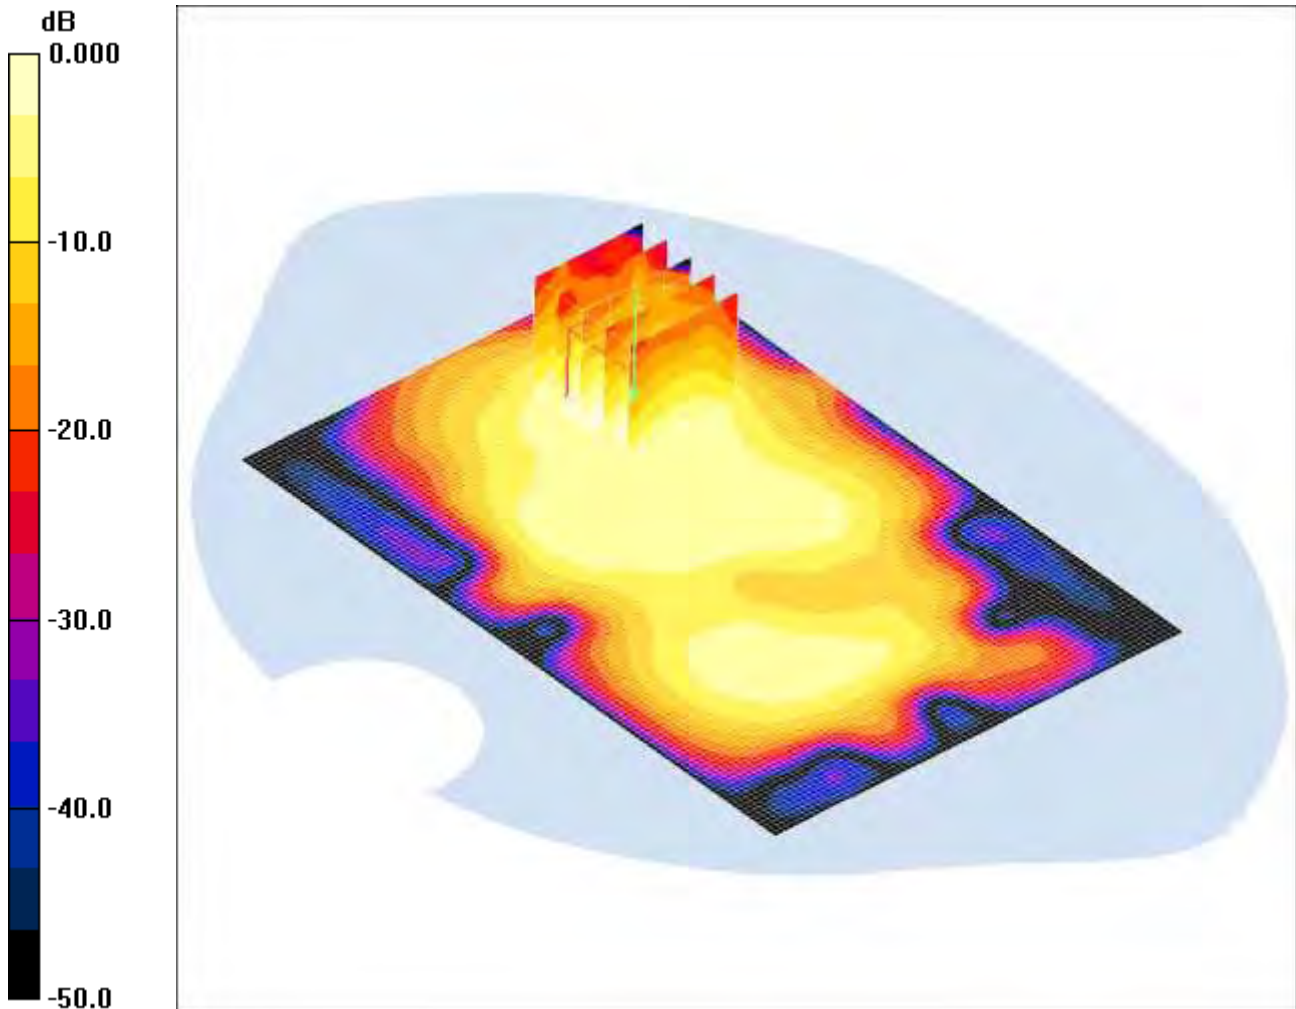

0 dB = 0.119mW/g

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(7.15, 7.15, 7.15); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Back of EUT Facing Phantom - Middle/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.144 mW/g

Back of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.53 V/m; Power Drift = -0.037 dB

Peak SAR (extrapolated) = 0.174 W/kg


SAR(1 g) = 0.085 mW/g; SAR(10 g) = 0.041 mW/g

Maximum value of SAR (measured) = 0.119 mW/g

SCN/87207JD02A/093: Left Hand Side of EUT Facing Phantom WLAN802.11b 1Mbps CH6

Date: 03/09/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RTZ

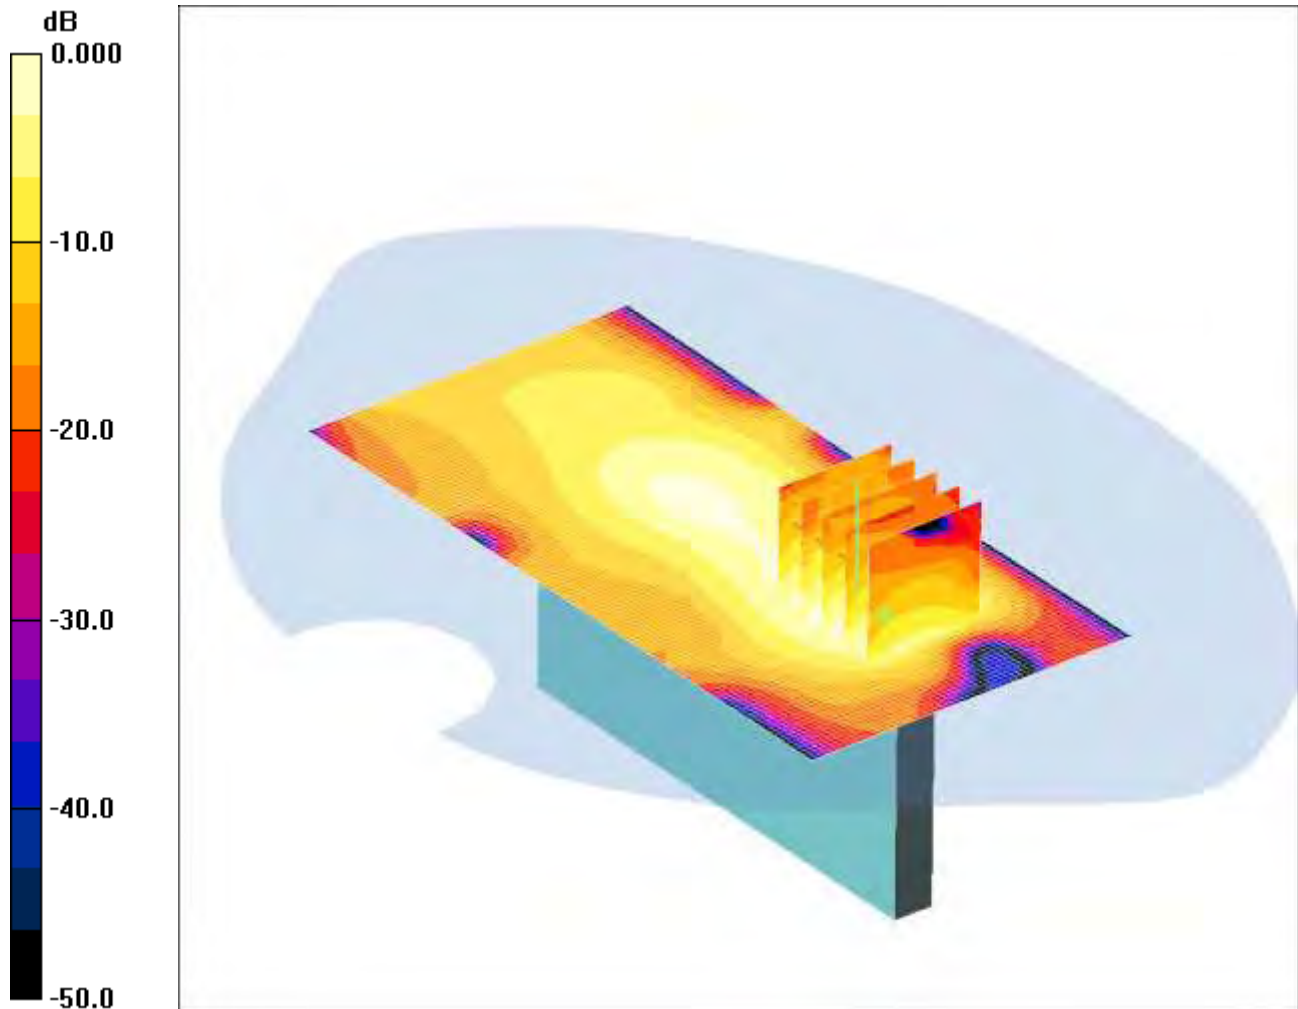

0 dB = 0.078mW/g

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(7.15, 7.15, 7.15); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Left Hand Side of EUT Facing Phantom - Middle/Area Scan (61x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.082 mW/g

Left Hand Side of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.45 V/m; Power Drift = 0.173 dB

Peak SAR (extrapolated) = 0.114 W/kg


SAR(1 g) = 0.059 mW/g; SAR(10 g) = 0.031 mW/g

Maximum value of SAR (measured) = 0.078 mW/g

SCN/87207JD02A/094: Right Hand Side of EUT Facing Phantom WLAN802.11b 1Mbps CH6

Date: 03/09/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RTZ

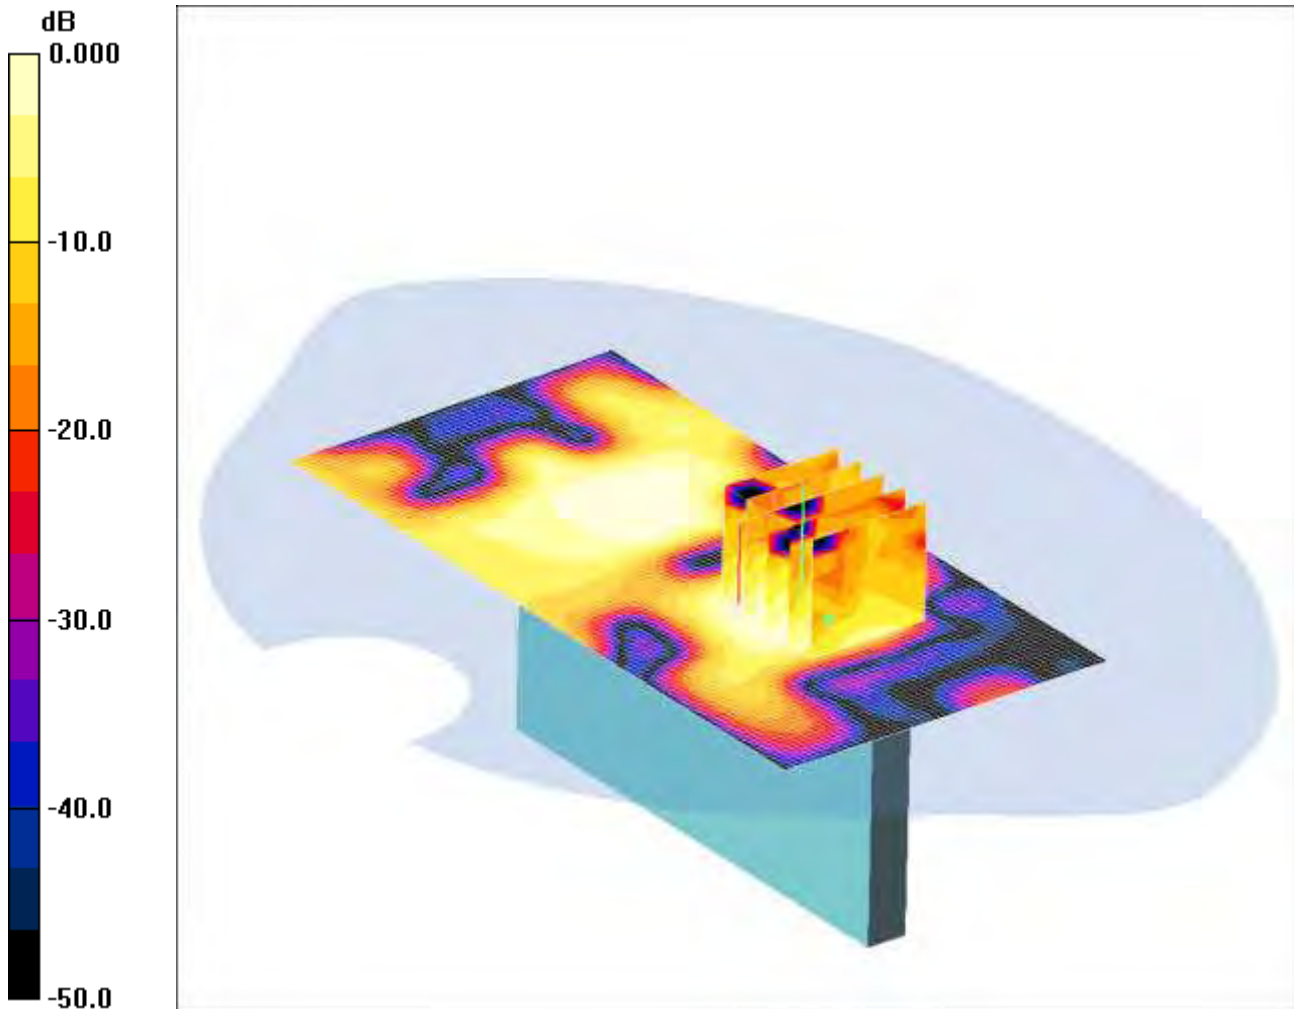

0 dB = 0.022mW/g

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(7.15, 7.15, 7.15); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Right Hand Side of EUT Facing Phantom - Middle/Area Scan (61x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.032 mW/g

Right Hand Side of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.89 V/m; Power Drift = 0.188 dB

Peak SAR (extrapolated) = 0.030 W/kg


SAR(1 g) = 0.016 mW/g; SAR(10 g) = 0.00827 mW/g

Maximum value of SAR (measured) = 0.022 mW/g

SCN/87207JD02A/095: Top of EUT Facing Phantom WLAN802.11b 1Mbps CH6

Date: 03/09/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RTZ

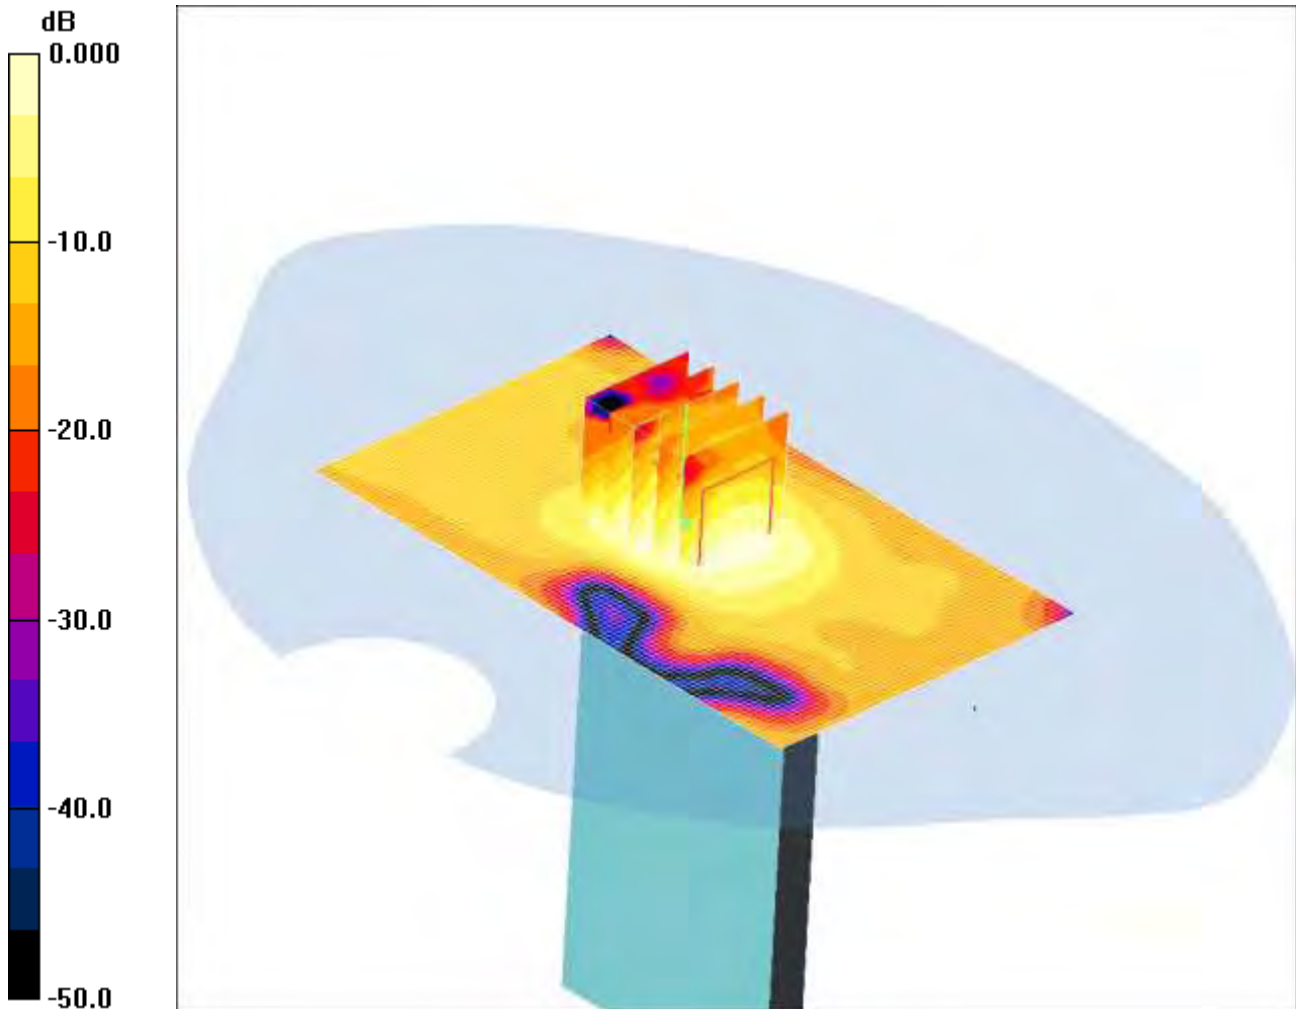

0 dB = 0.084mW/g

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(7.15, 7.15, 7.15); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Top of EUT Facing Phantom - Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.090 mW/g

Top of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.34 V/m; Power Drift = -0.002 dB

Peak SAR (extrapolated) = 0.119 W/kg


SAR(1 g) = 0.064 mW/g; SAR(10 g) = 0.032 mW/g

Maximum value of SAR (measured) = 0.084 mW/g

SCN/87207JD02A/096: Back of EUT Facing Phantom WLAN802.11b 1Mbps CH1

Date: 03/09/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RTZ

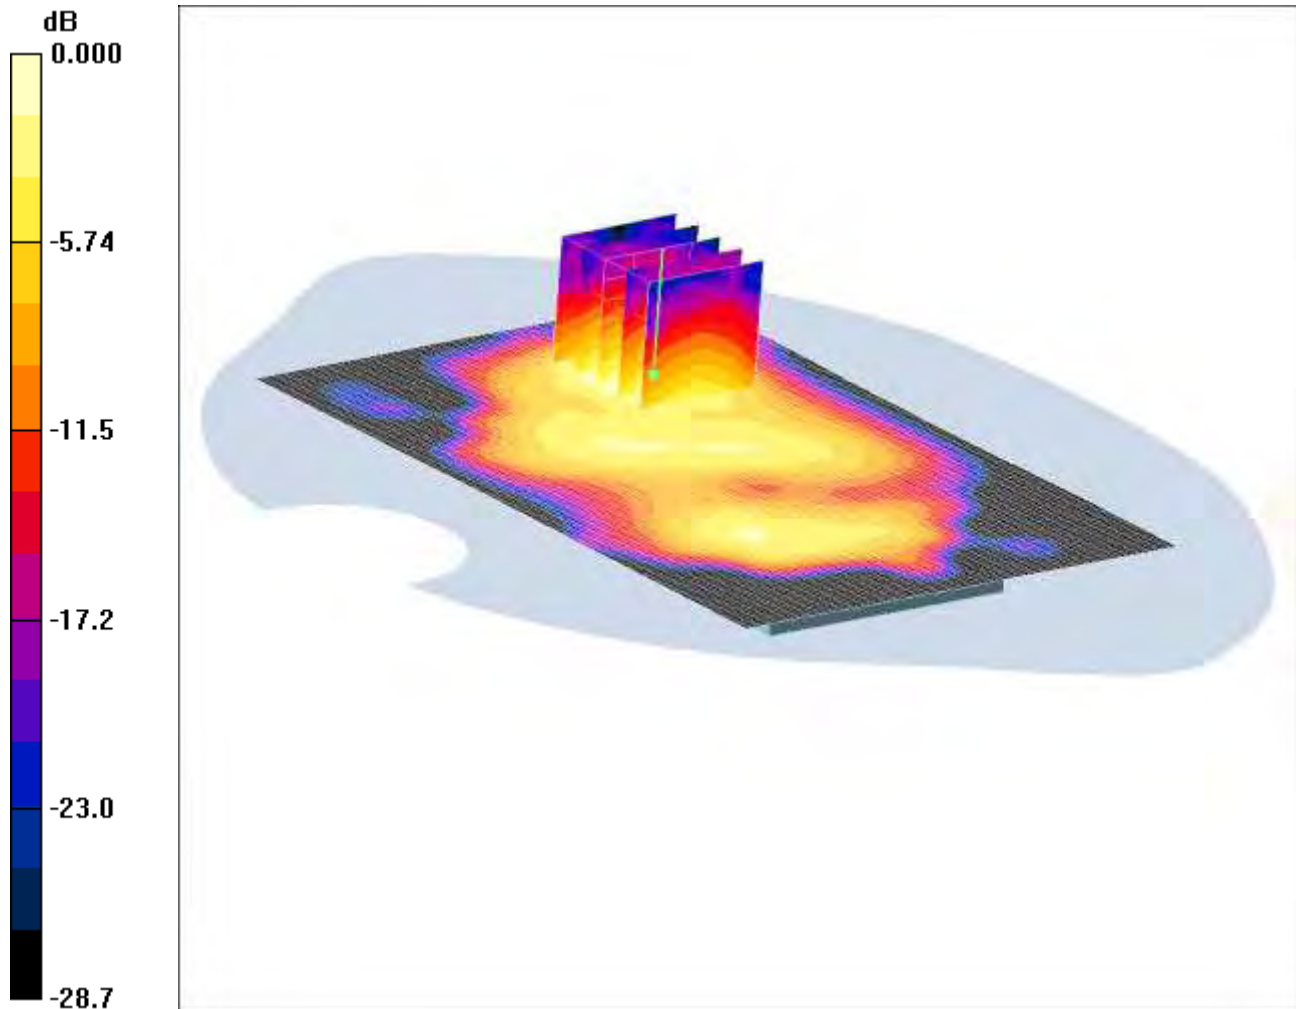

0 dB = 0.112mW/g

Communication System: WLAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(7.15, 7.15, 7.15); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Back of EUT Facing Phantom - Middle/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.126 mW/g

Back of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.01 V/m; Power Drift = 0.005 dB

Peak SAR (extrapolated) = 0.163 W/kg


SAR(1 g) = 0.079 mW/g; SAR(10 g) = 0.037 mW/g

Maximum value of SAR (measured) = 0.112 mW/g

SCN/87207JD02A/097: Back of EUT Facing Phantom WLAN802.11b 1Mbps CH11

Date: 03/09/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RTZ

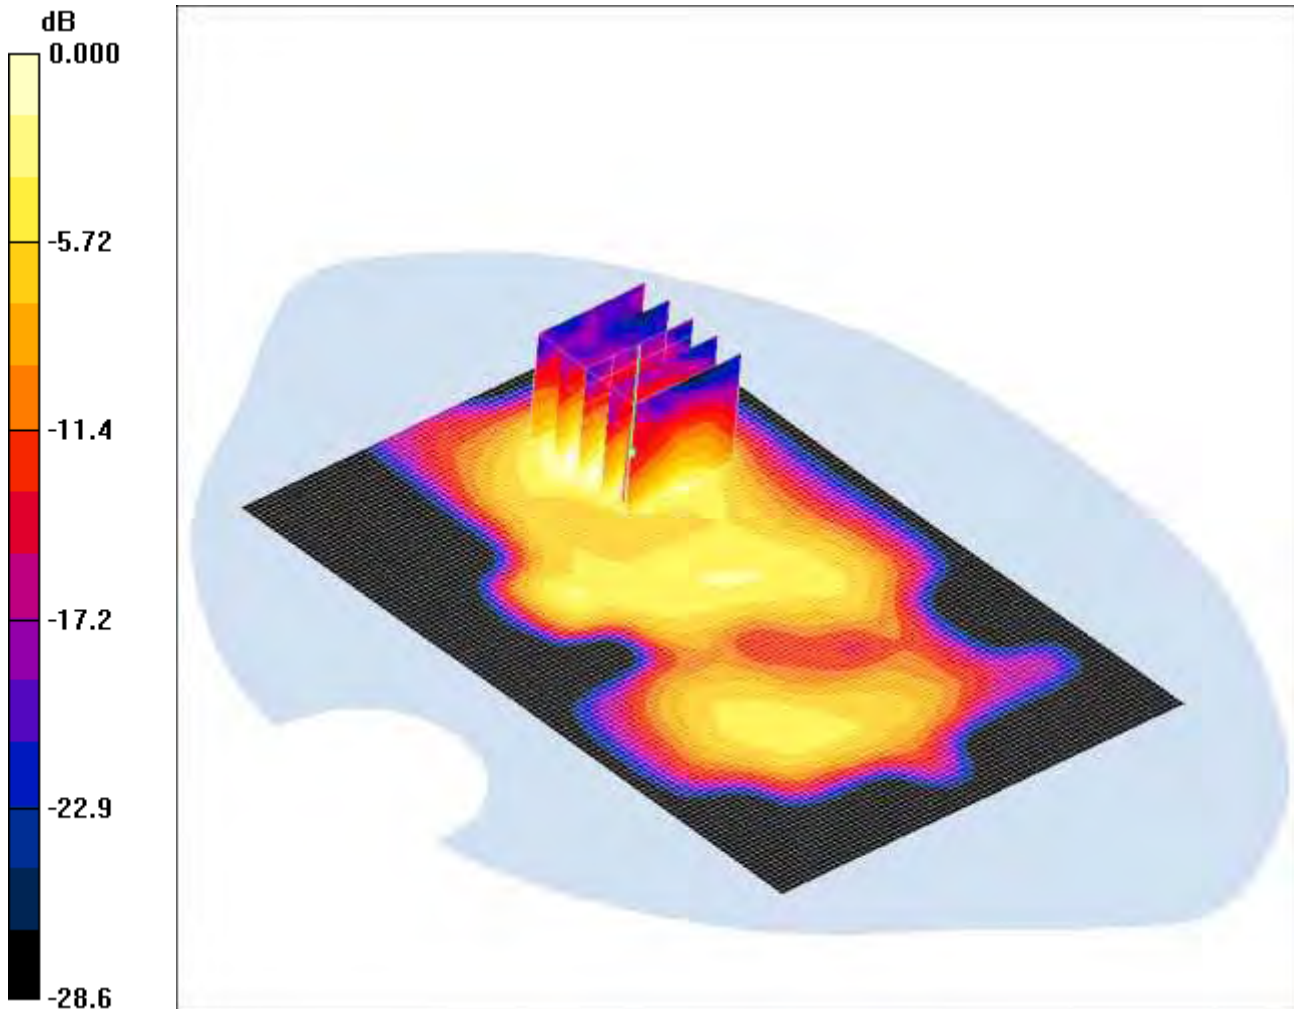

0 dB = 0.074mW/g

Communication System: WLAN; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(7.15, 7.15, 7.15); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Back of EUT Facing Phantom - High/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.092 mW/g

Back of EUT Facing Phantom - High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.24 V/m; Power Drift = 0.036 dB

Peak SAR (extrapolated) = 0.105 W/kg


SAR(1 g) = 0.052 mW/g; SAR(10 g) = 0.025 mW/g

Maximum value of SAR (measured) = 0.074 mW/g

SCN/87207JD02A/098: Back of EUT Facing Phantom at 15mm WLAN802.11b 1Mbps CH6

Date: 03/09/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RTZ

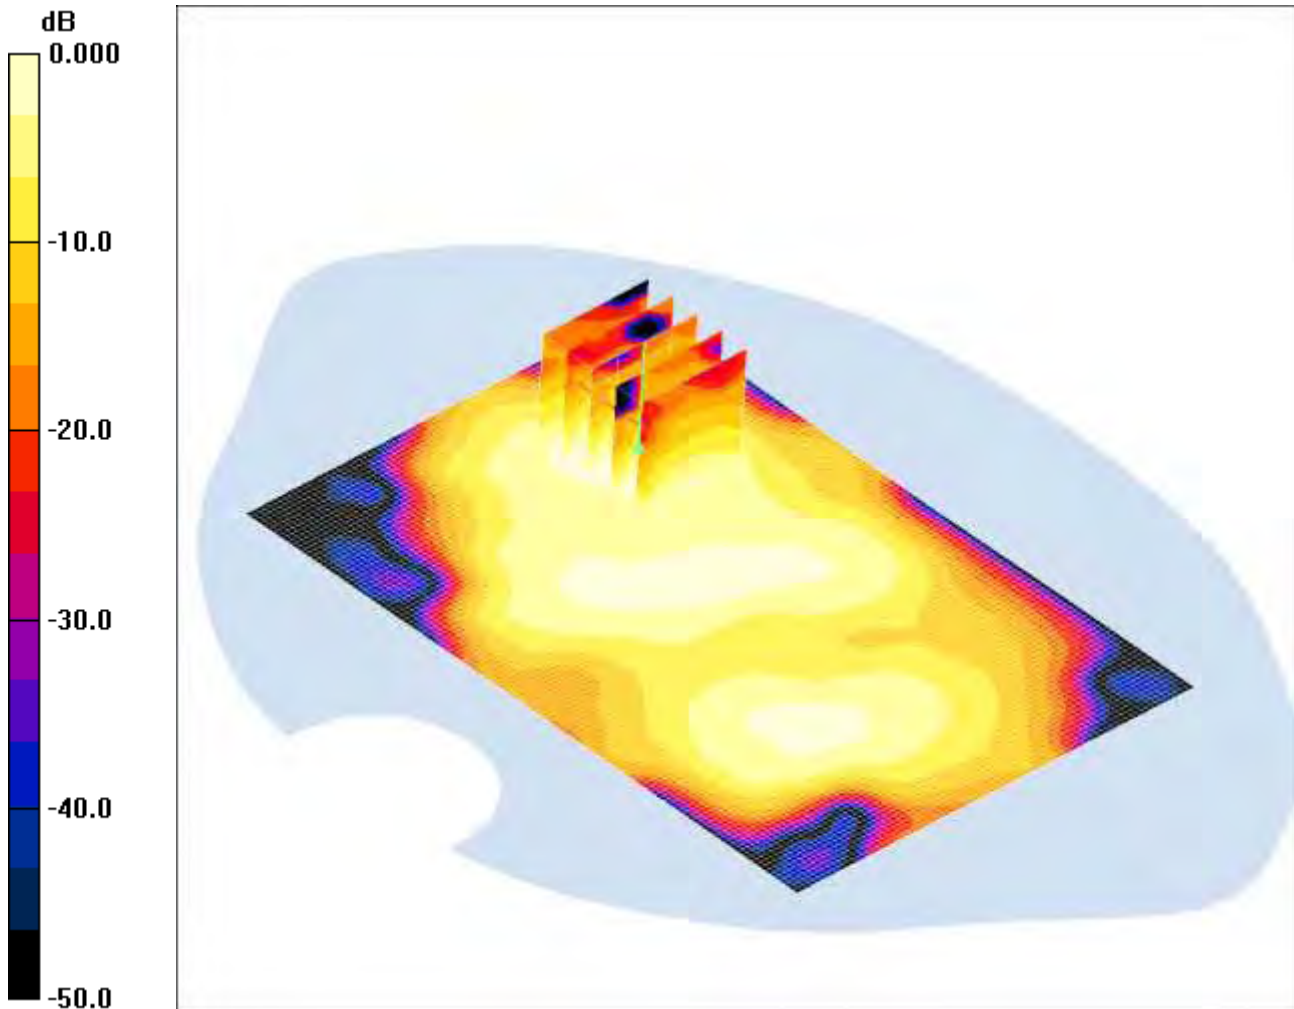

0 dB = 0.054mW/g

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(7.15, 7.15, 7.15); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Back of EUT Facing Phantom at 15mm - Middle/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.057 mW/g

Back of EUT Facing Phantom at 15mm - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.48 V/m; Power Drift = 0.116 dB

Peak SAR (extrapolated) = 0.076 W/kg


SAR(1 g) = 0.039 mW/g; SAR(10 g) = 0.020 mW/g

Maximum value of SAR (measured) = 0.054 mW/g

SCN/87207JD02A/099: Back of EUT Facing Phantom at 15mm WLAN802.11b 1Mbps CH1

Date: 03/09/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RTZ

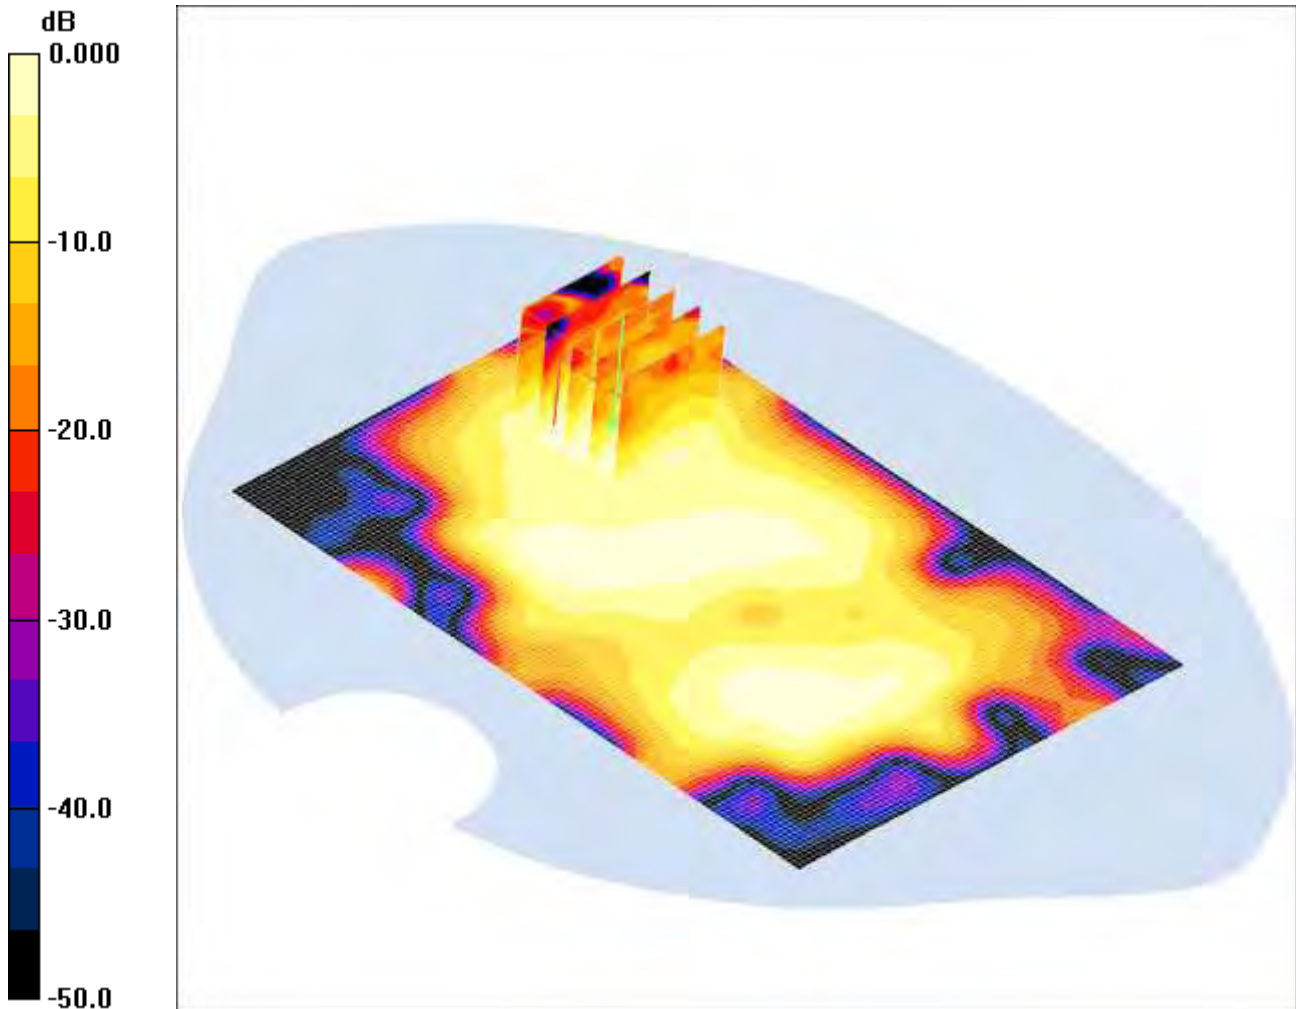

0 dB = 0.044mW/g

Communication System: WLAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(7.15, 7.15, 7.15); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Back of EUT Facing Phantom at 15mm - Low/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.046 mW/g

Back of EUT Facing Phantom at 15mm - Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.19 V/m; Power Drift = -0.049 dB

Peak SAR (extrapolated) = 0.059 W/kg


SAR(1 g) = 0.031 mW/g; SAR(10 g) = 0.015 mW/g

Maximum value of SAR (measured) = 0.044 mW/g

SCN/87207JD02A/100: Back of EUT Facing Phantom at 15mm WLAN802.11b 1Mbps CH11

Date: 03/09/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RTZ

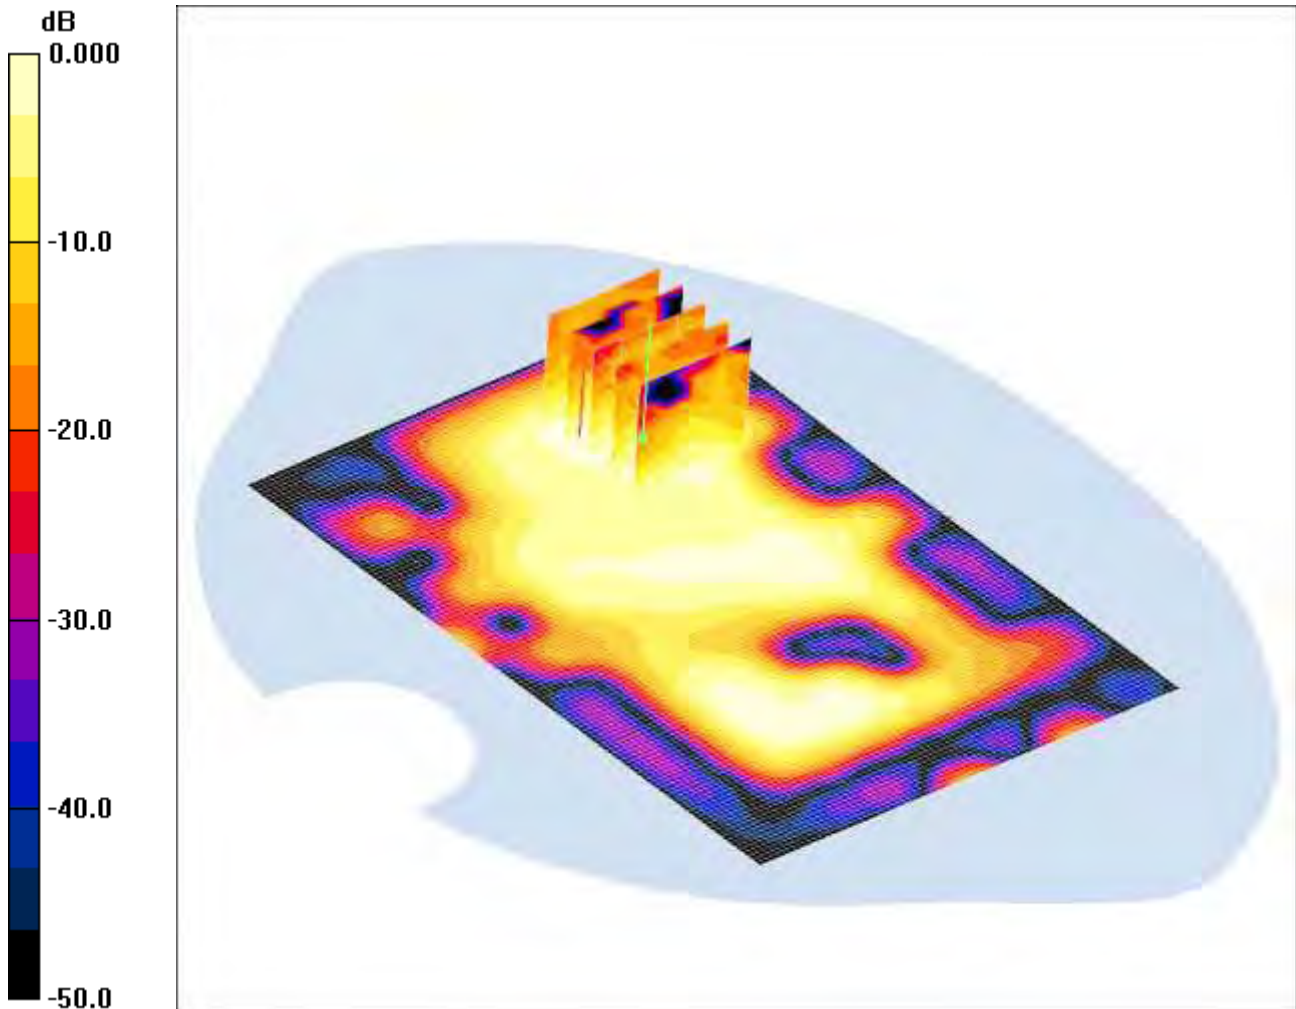

0 dB = 0.034mW/g

Communication System: WLAN; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 2.03$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(7.15, 7.15, 7.15); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Back of EUT Facing Phantom at 15mm - High/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.051 mW/g

Back of EUT Facing Phantom at 15mm - High/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.66 V/m; Power Drift = -0.083 dB


Peak SAR (extrapolated) = 0.048 W/kg

SAR(1 g) = 0.025 mW/g; SAR(10 g) = 0.012 mW/g

Maximum value of SAR (measured) = 0.034 mW/g

SCN/87207JD02A/101: Back of EUT Facing Phantom with PHF at 15mm WLAN802.11b 1Mbps CH6
Date: 03/09/2012

DUT: Sony Tsubasa Anna; Type: Tsubasa Anna; Serial: CB5A1K9RTZ

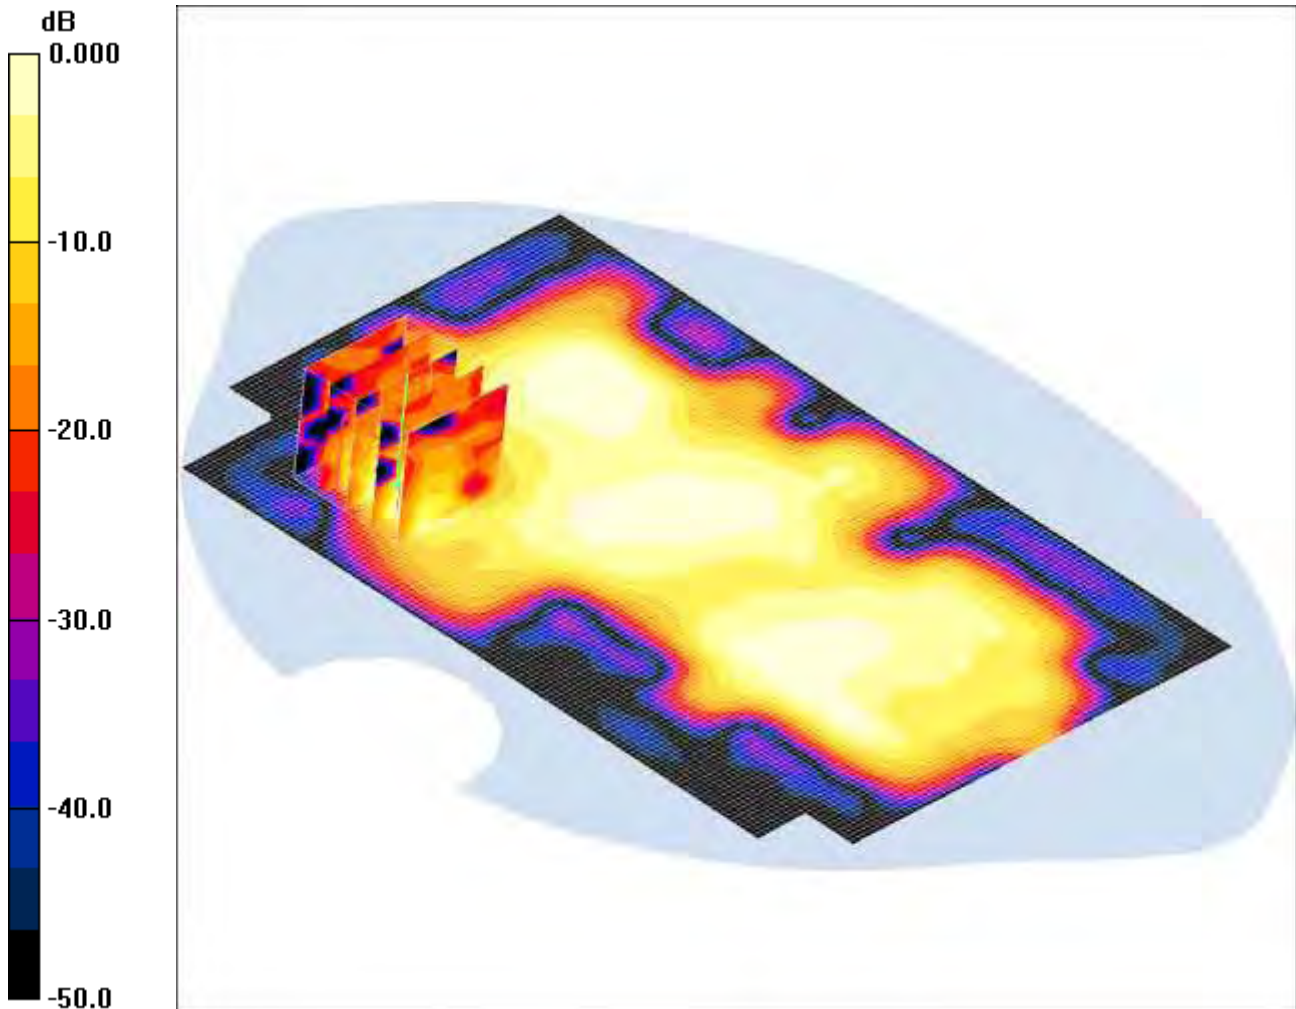

0 dB = 0.058mW/g

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(7.15, 7.15, 7.15); Calibrated: 22/09/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Back of EUT Facing Phantom with PHF at 15mm - Middle/Area Scan (91x141x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.075 mW/g

Back of EUT Facing Phantom with PHF at 15mm - Middle/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.13 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 0.123 W/kg


SAR(1 g) = 0.044 mW/g; SAR(10 g) = 0.013 mW/g

Maximum value of SAR (measured) = 0.058 mW/g

SCN/87207JD02A/102: System Performance Check 900MHz Head 23 07 12

Date: 23/07/2012

DUT: Dipole 900 MHz; SN: 124; Type: D900V2; Serial: SN124

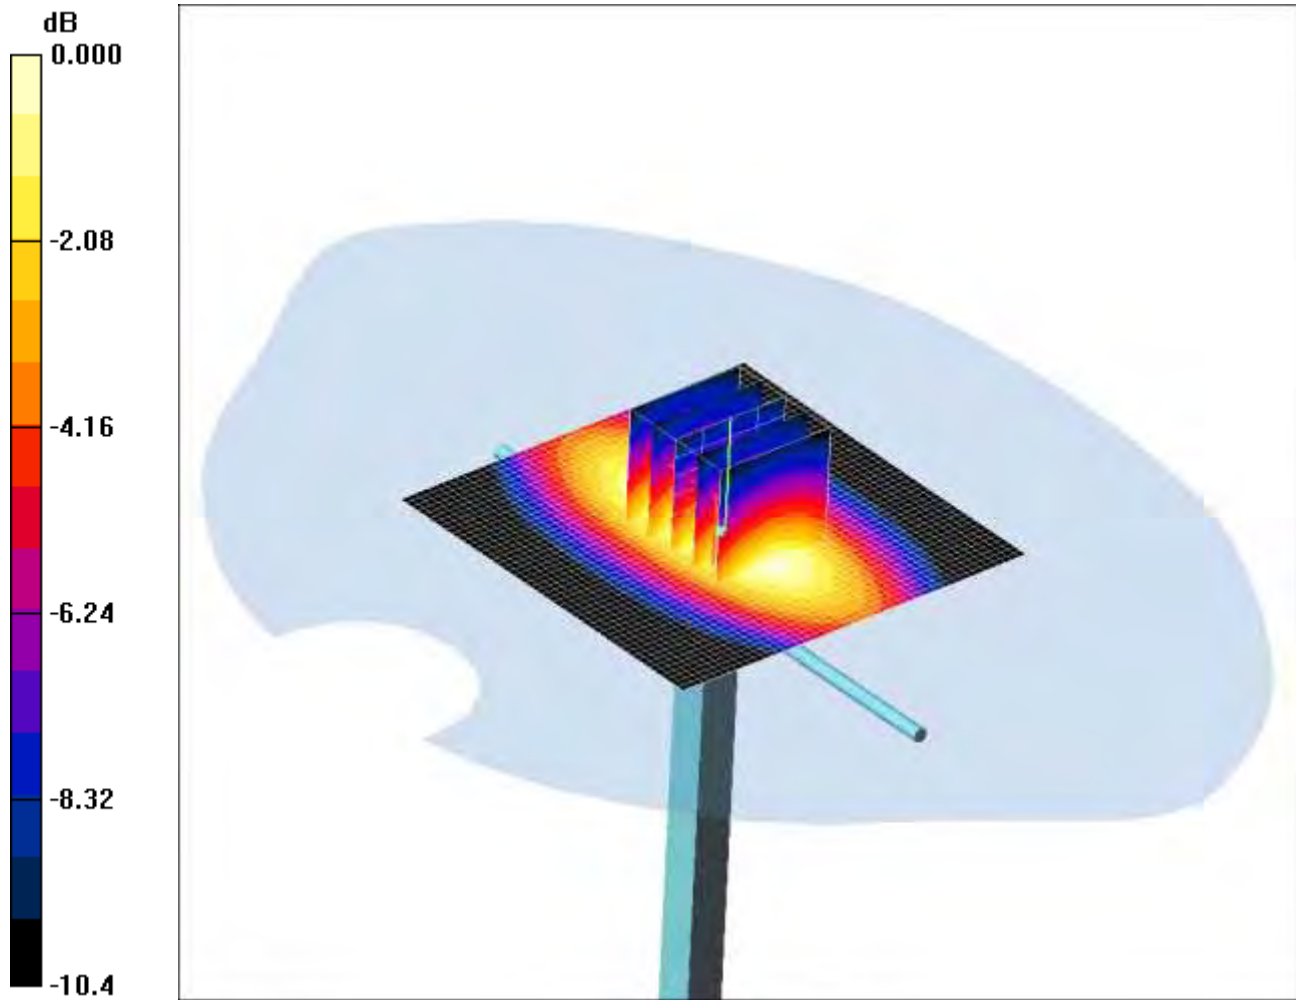

0 dB = 2.99mW/g

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.985 \text{ mho/m}$; $\epsilon_r = 42.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.75, 8.75, 8.75); Calibrated: 22/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

d=15mm, Pin=250mW 2/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 3.02 mW/g

d=15mm, Pin=250mW 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 55.1 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 4.01 W/kg


SAR(1 g) = 2.77 mW/g; SAR(10 g) = 1.82 mW/g

Maximum value of SAR (measured) = 2.99 mW/g

SCN/87207JD02A/103: System Performance Check 900MHz Head 09 08 12

Date: 09/08/2012

DUT: Dipole 900 MHz; SN: 124; Type: D900V2; Serial: SN124

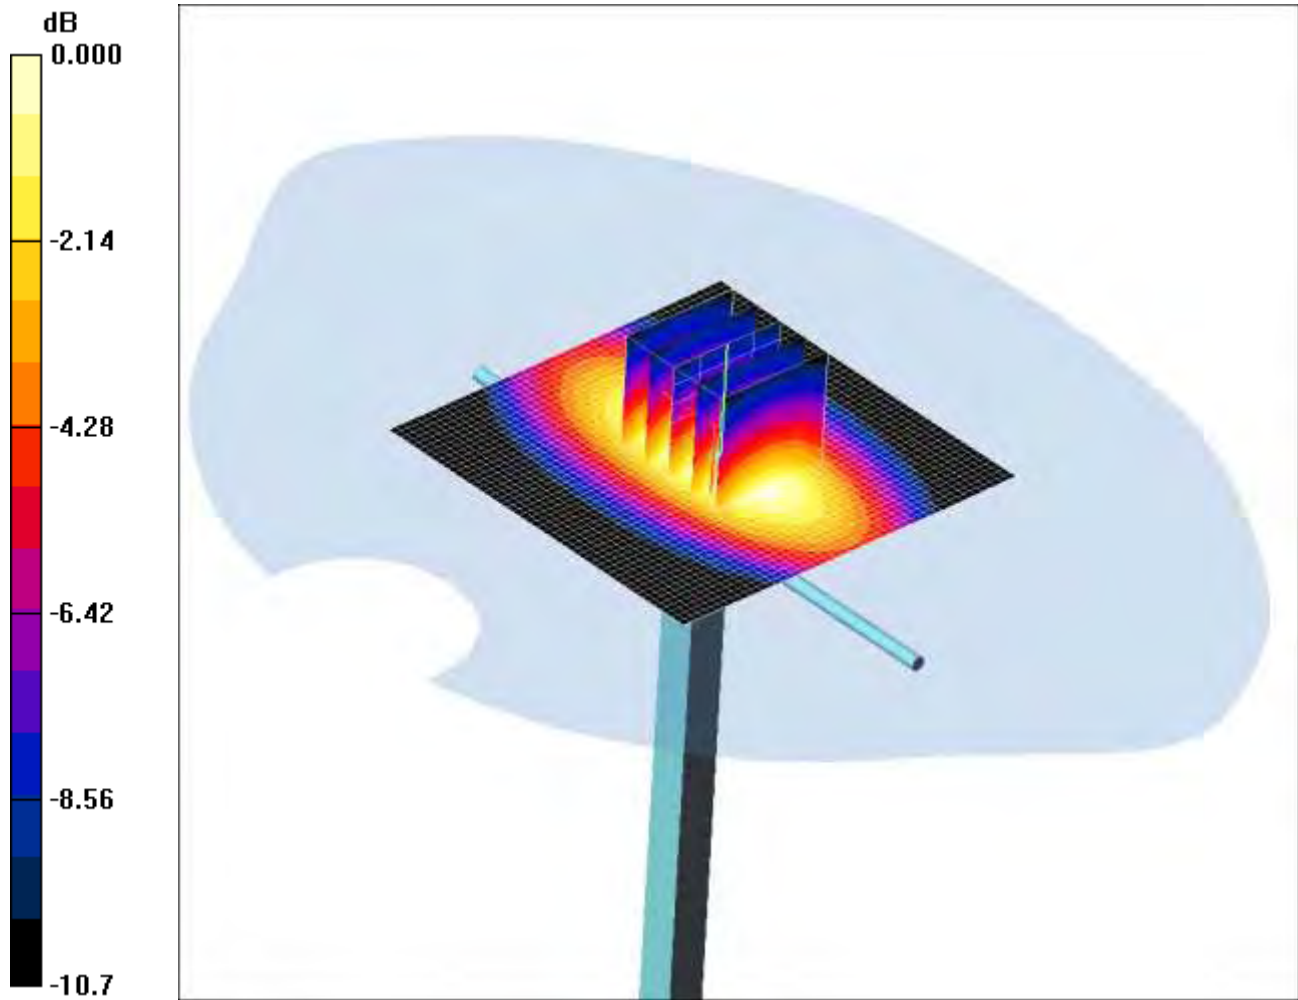

0 dB = 3.02mW/g

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.976 \text{ mho/m}$; $\epsilon_r = 41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.75, 8.75, 8.75); Calibrated: 22/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

d=15mm, Pin=250mW 2/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 3.05 mW/g

d=15mm, Pin=250mW 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 55.1 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 4.18 W/kg


SAR(1 g) = 2.8 mW/g; SAR(10 g) = 1.83 mW/g

Maximum value of SAR (measured) = 3.02 mW/g

SCN/87207JD02A/104: System Performance Check 900MHz Head 10 08 12

Date: 10/08/2012

DUT: Dipole 900 MHz; SN: 124; Type: D900V2; Serial: SN124

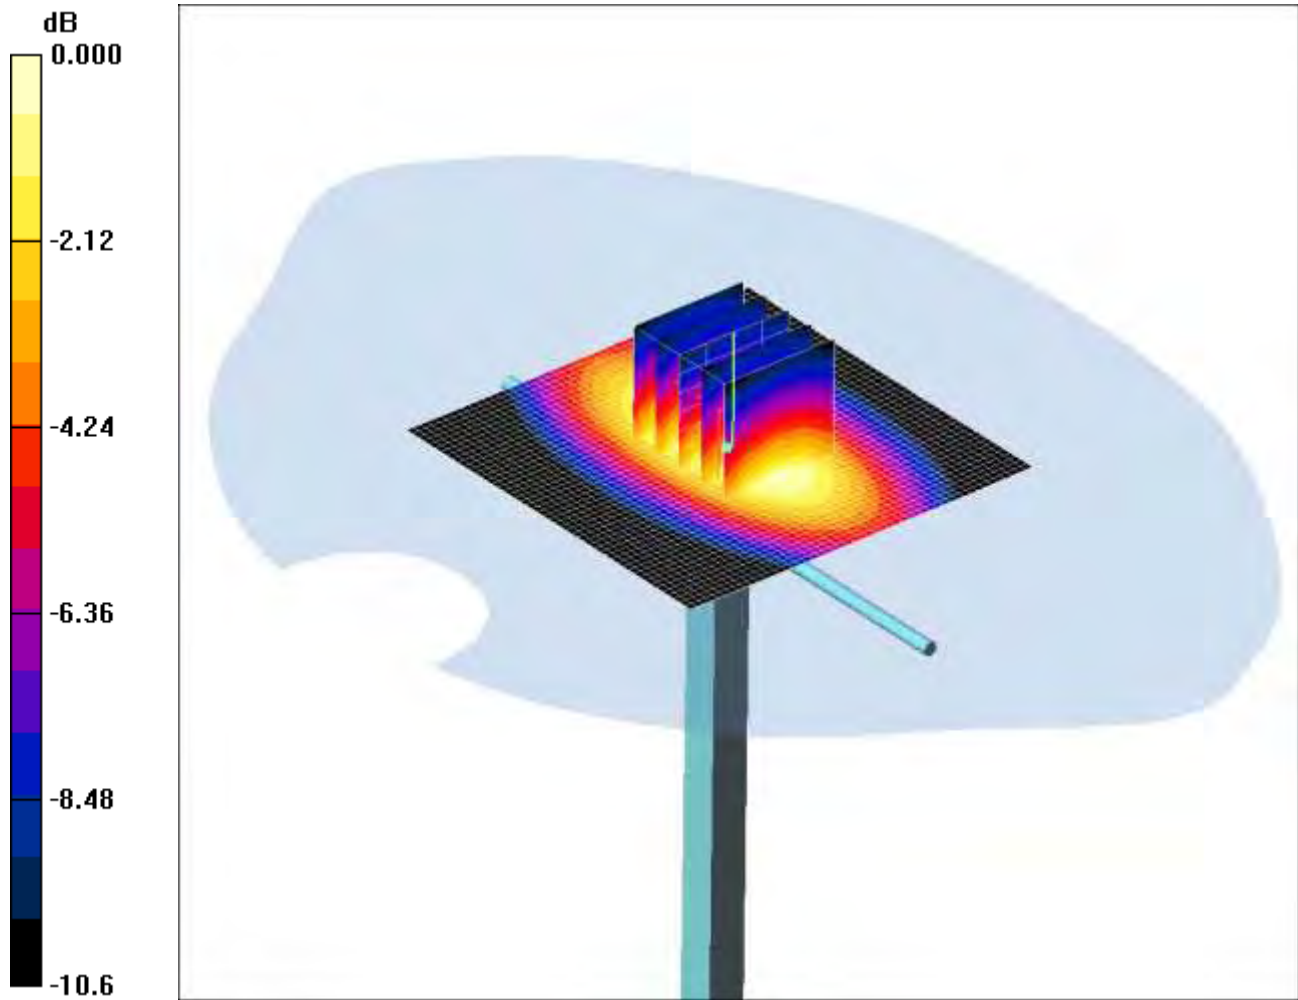

0 dB = 3.01mW/g

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.946 \text{ mho/m}$; $\epsilon_r = 41.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.75, 8.75, 8.75); Calibrated: 22/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

d=15mm, Pin=250mW 2/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 3.05 mW/g

d=15mm, Pin=250mW 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 55.6 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 4.15 W/kg


SAR(1 g) = 2.8 mW/g; SAR(10 g) = 1.83 mW/g

Maximum value of SAR (measured) = 3.01 mW/g

SCN/87207JD02A/105: System Performance Check 900MHz Body 23 07 12

Date: 23/07/2012

DUT: Dipole 900 MHz; SN: 124; Type: D900V2; Serial: SN124

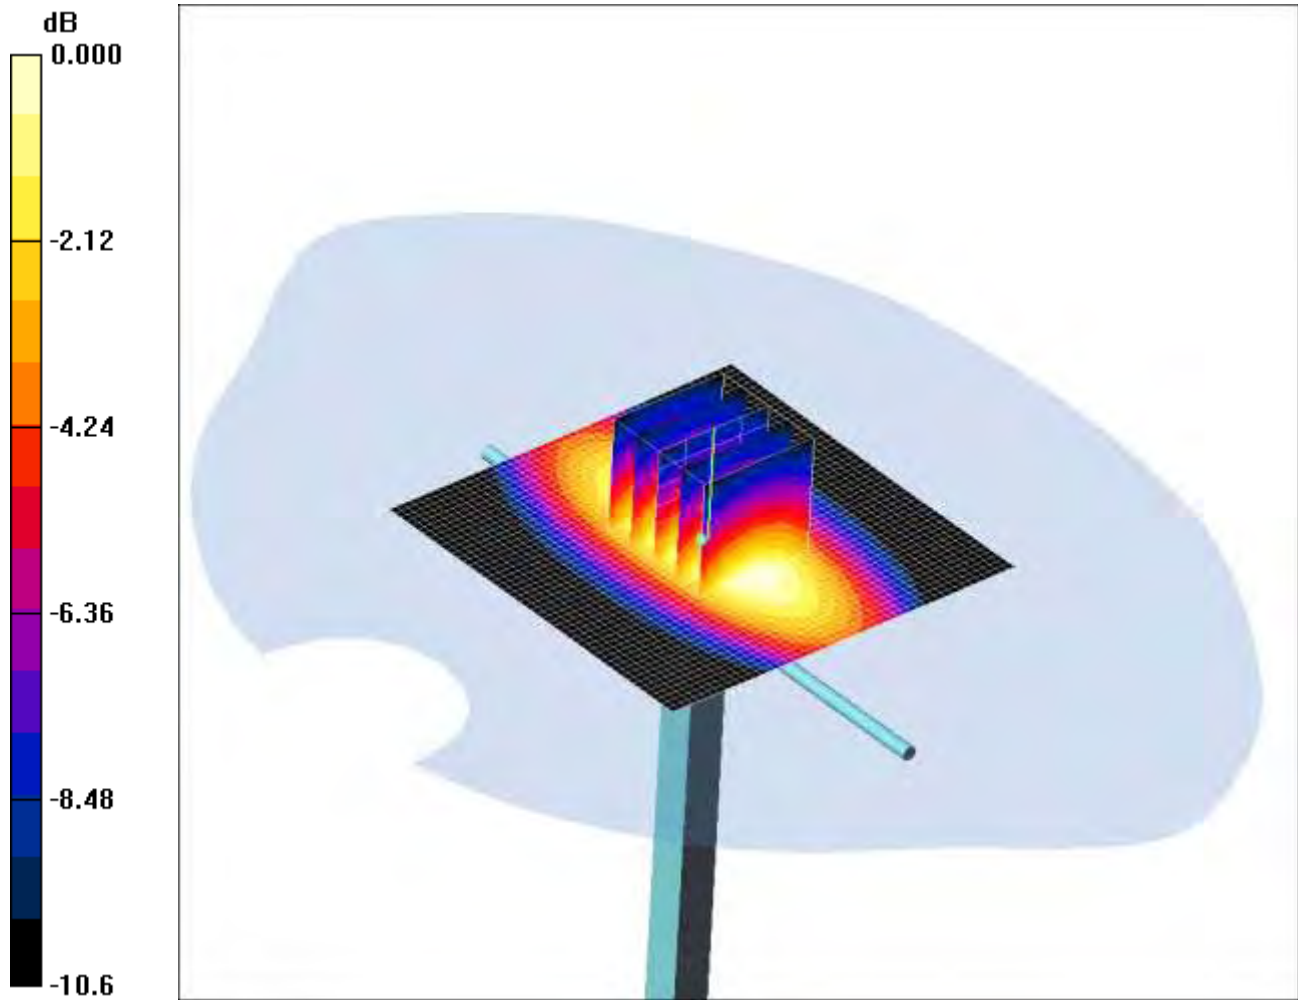

0 dB = 2.92mW/g

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 1.03 \text{ mho/m}$; $\epsilon_r = 52.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

d=15mm, Pin=250mW/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 3.03 mW/g

d=15mm, Pin=250mW/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 53.2 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 3.99 W/kg


SAR(1 g) = 2.71 mW/g; SAR(10 g) = 1.77 mW/g

Maximum value of SAR (measured) = 2.92 mW/g

SCN/87207JD02A/106: System Performance Check 900MHz Body 24 07 12

Date: 24/07/2012

DUT: Dipole 900 MHz; SN: 124; Type: D900V2; Serial: SN124

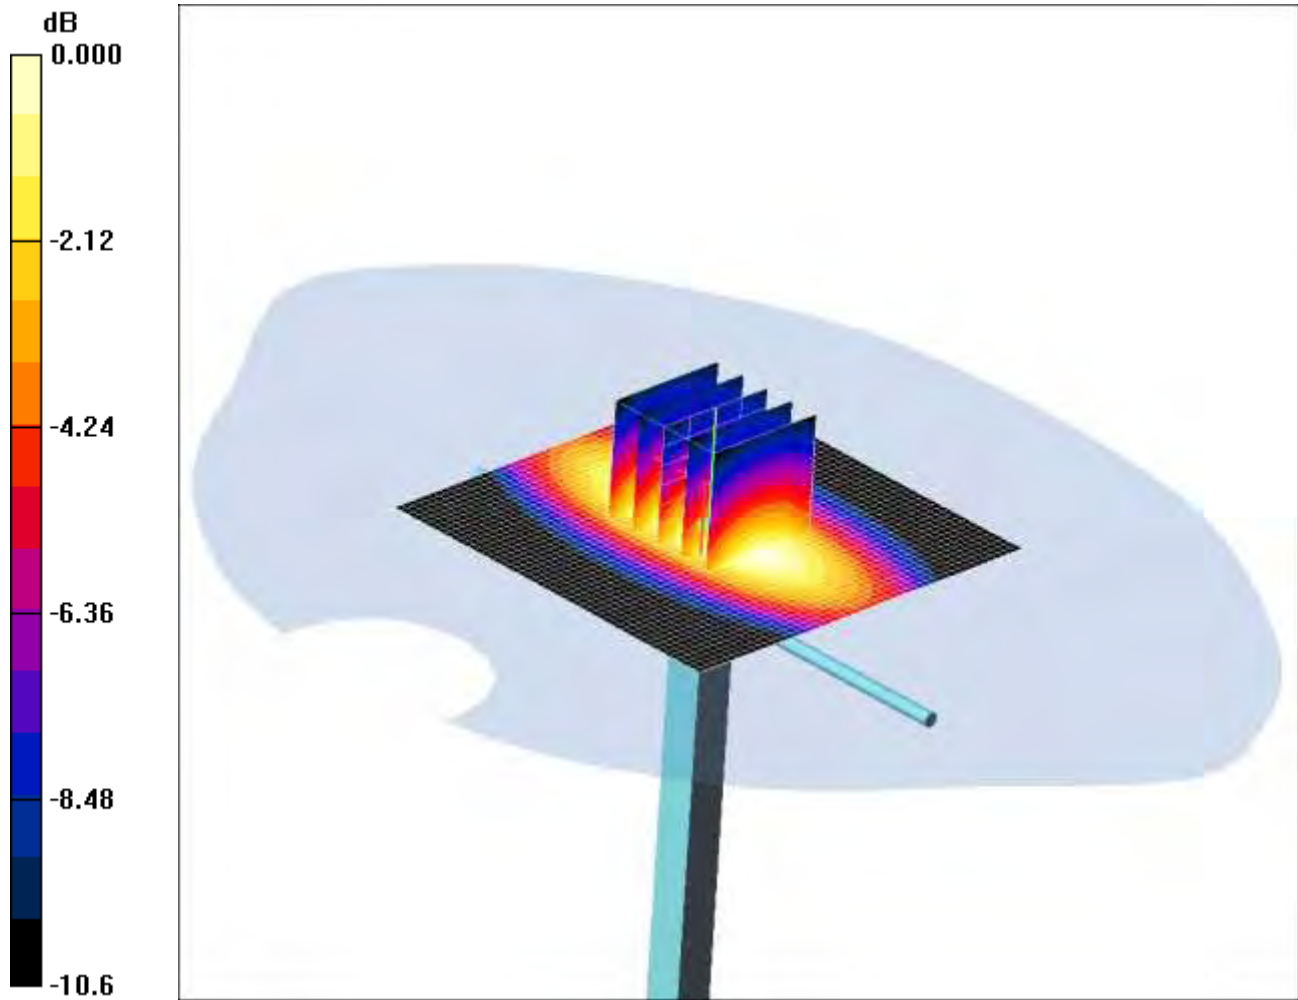

0 dB = 2.92mW/g

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used: $f = 900$ MHz; $\sigma = 1.03$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

d=15mm, Pin=250mW/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 3.01 mW/g

d=15mm, Pin=250mW/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 53.0 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 4.01 W/kg


SAR(1 g) = 2.71 mW/g; SAR(10 g) = 1.77 mW/g

Maximum value of SAR (measured) = 2.92 mW/g

SCN/87207JD02A/107: System Performance Check 900MHz Body 25 07 12

Date: 25/07/2012

DUT: Dipole 900 MHz; SN: 124; Type: D900V2; Serial: SN124

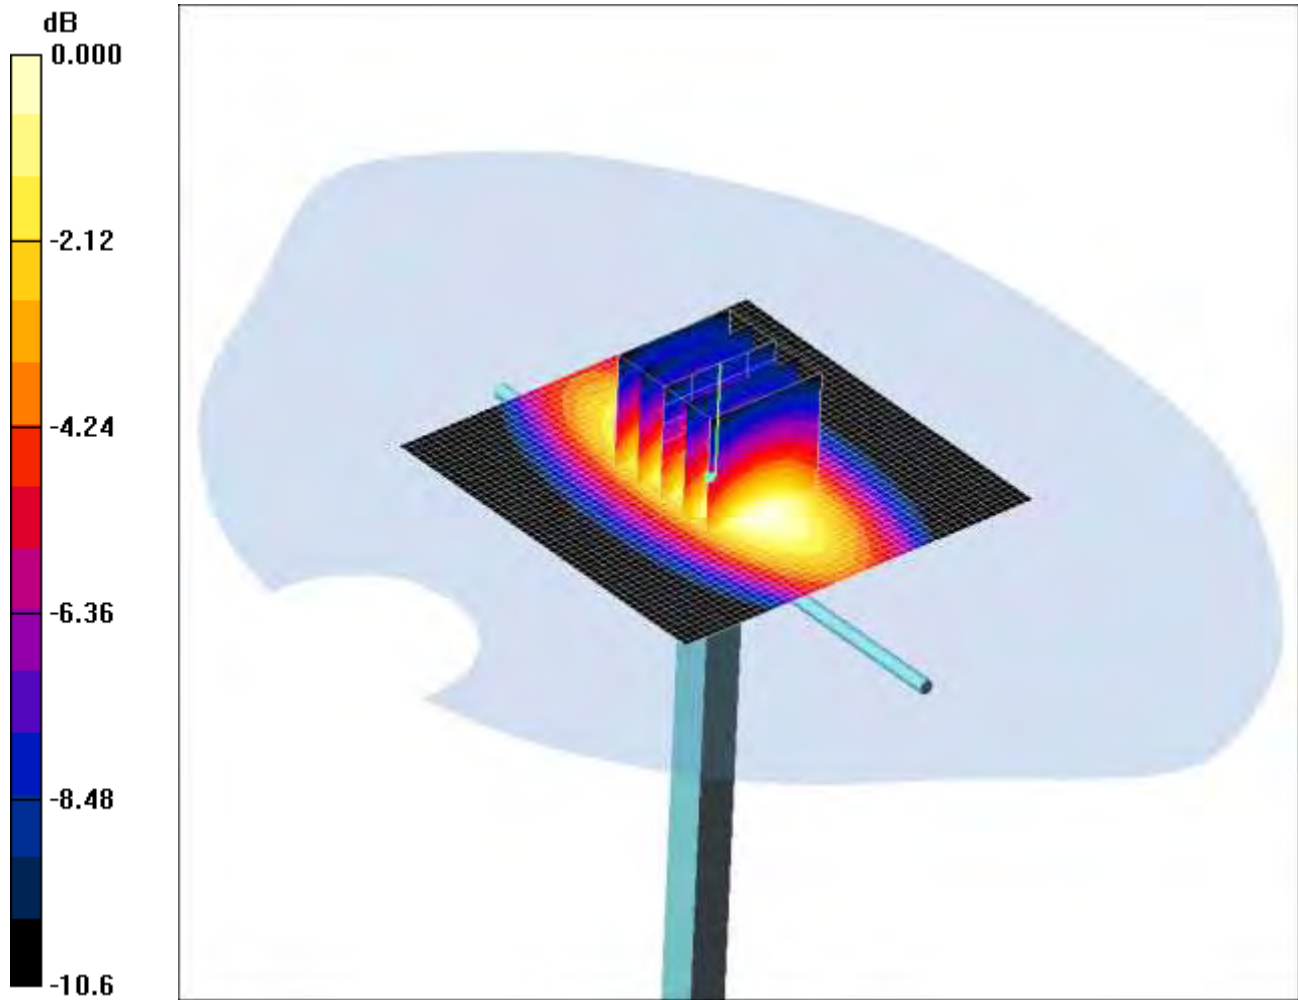

0 dB = 3.02mW/g

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 1.03 \text{ mho/m}$; $\epsilon_r = 53$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

d=15mm, Pin=250mW/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 3.15 mW/g

d=15mm, Pin=250mW/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 54.0 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 4.17 W/kg


SAR(1 g) = 2.8 mW/g; SAR(10 g) = 1.83 mW/g

Maximum value of SAR (measured) = 3.02 mW/g

SCN/87207JD02A/108: System Performance Check 900MHz Body 09 08 12

Date: 09/08/2012

DUT: Dipole 900 MHz; SN: 124; Type: D900V2; Serial: SN124

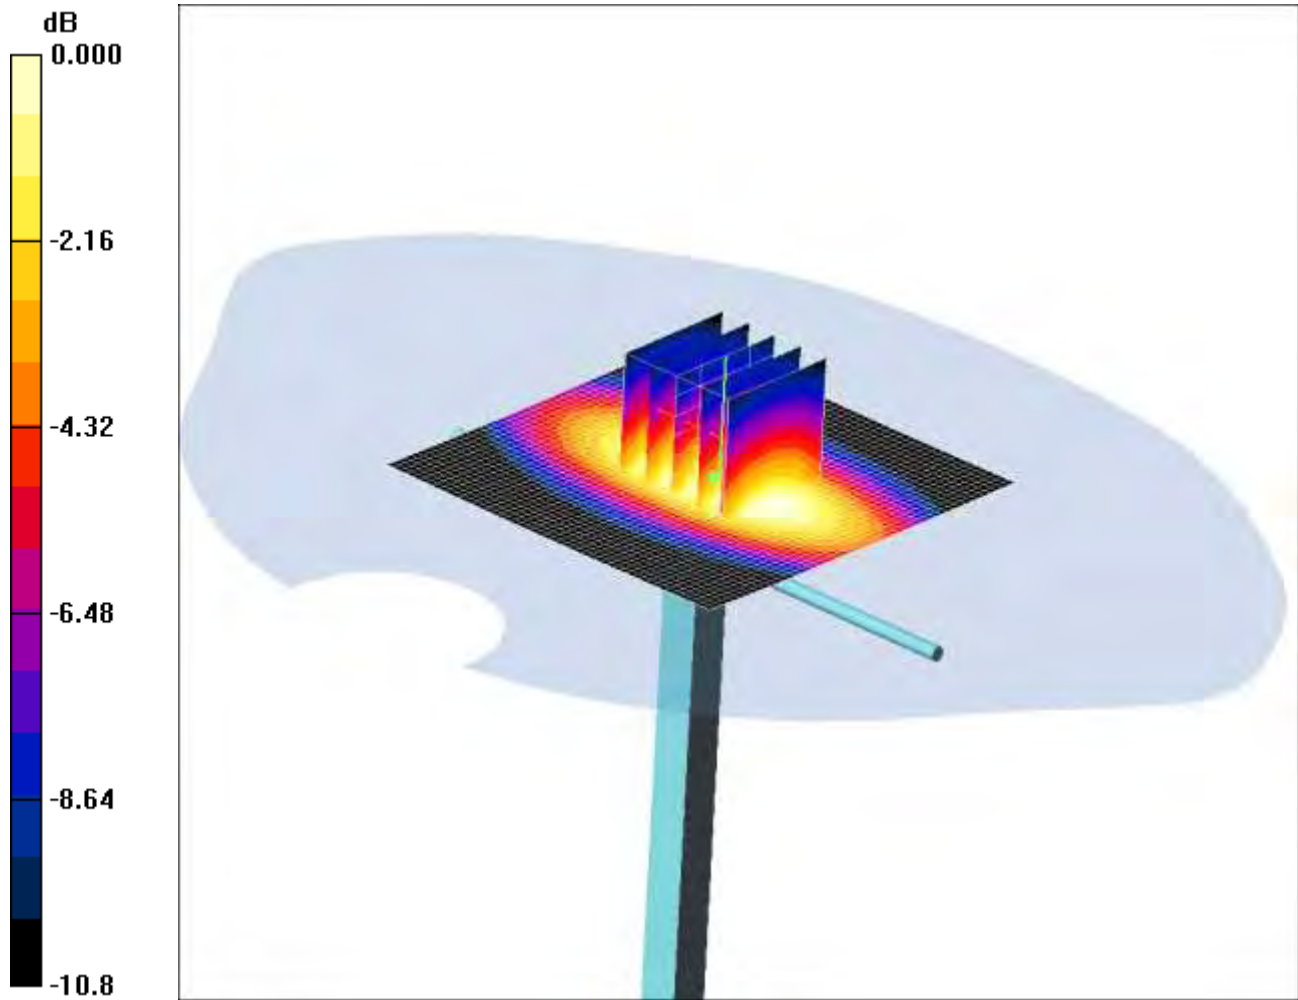

0 dB = 3.00mW/g

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used: $f = 900$ MHz; $\sigma = 1.04$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12a; Type: SAM 4.0; Serial: TP:1193

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

d=15mm, Pin=250mW/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 3.23 mW/g

d=15mm, Pin=250mW/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 53.7 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 4.16 W/kg


SAR(1 g) = 2.8 mW/g; SAR(10 g) = 1.83 mW/g

Maximum value of SAR (measured) = 3.00 mW/g

SCN/87207JD02A/109: System Performance Check 900MHz Body 10 08 12

Date: 10/08/2012

DUT: Dipole 900 MHz; SN: 124; Type: D900V2; Serial: SN124

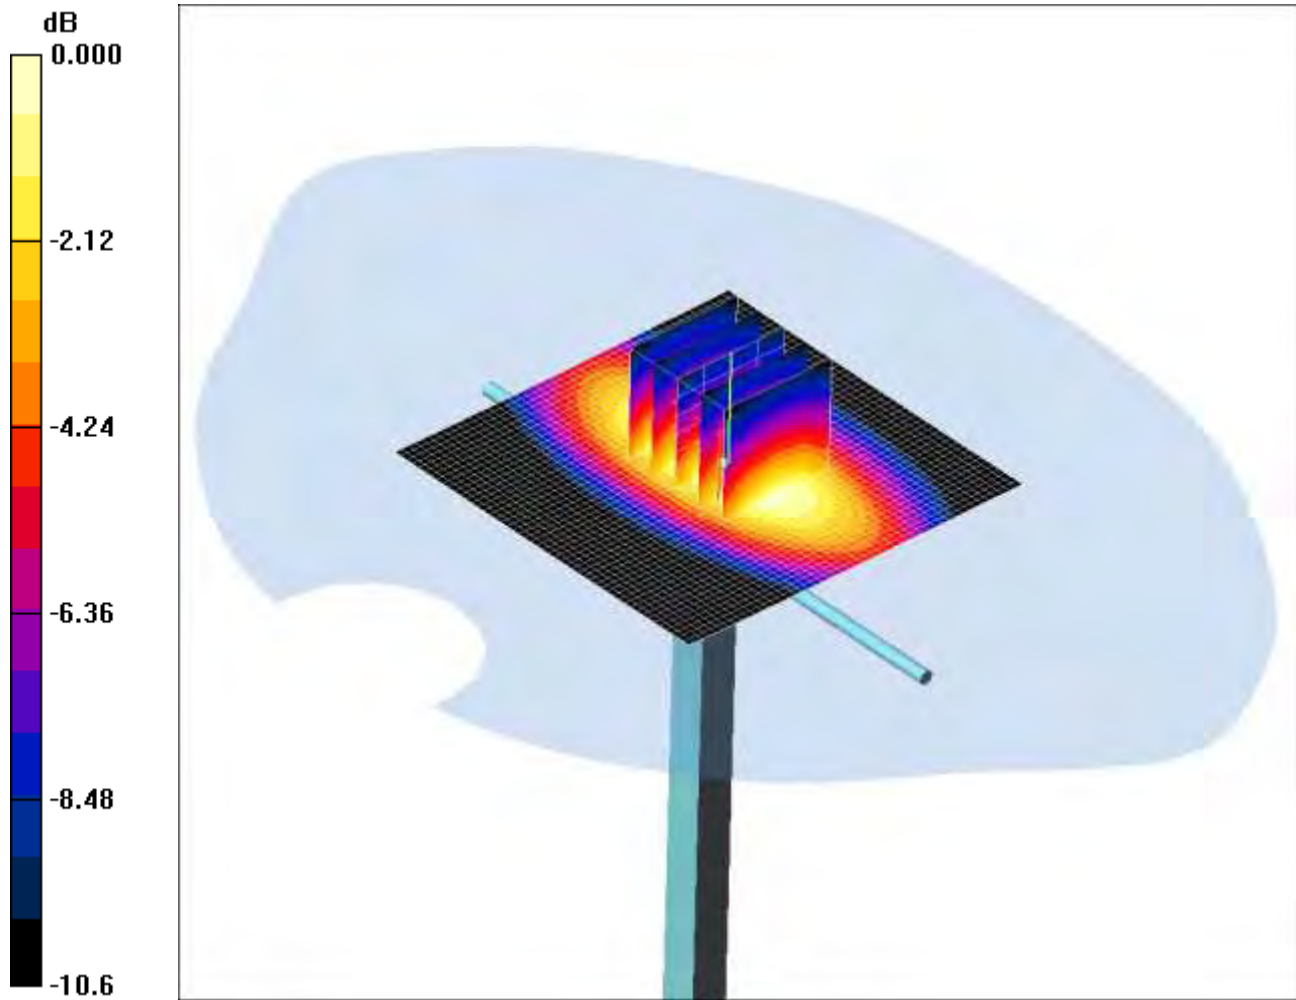

0 dB = 2.97mW/g

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 1.02 \text{ mho/m}$; $\epsilon_r = 53.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12a; Type: SAM 4.0; Serial: TP:1193

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

d=15mm, Pin=250mW/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 3.08 mW/g

d=15mm, Pin=250mW/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 51.2 V/m; Power Drift = 0.134 dB

Peak SAR (extrapolated) = 4.07 W/kg


SAR(1 g) = 2.74 mW/g; SAR(10 g) = 1.79 mW/g

Maximum value of SAR (measured) = 2.97 mW/g

SCN/87207JD02A/110: System Performance Check 900MHz Body 13 08 12

Date: 13/08/2012

DUT: Dipole 900 MHz; SN: 124; Type: D900V2; Serial: SN124

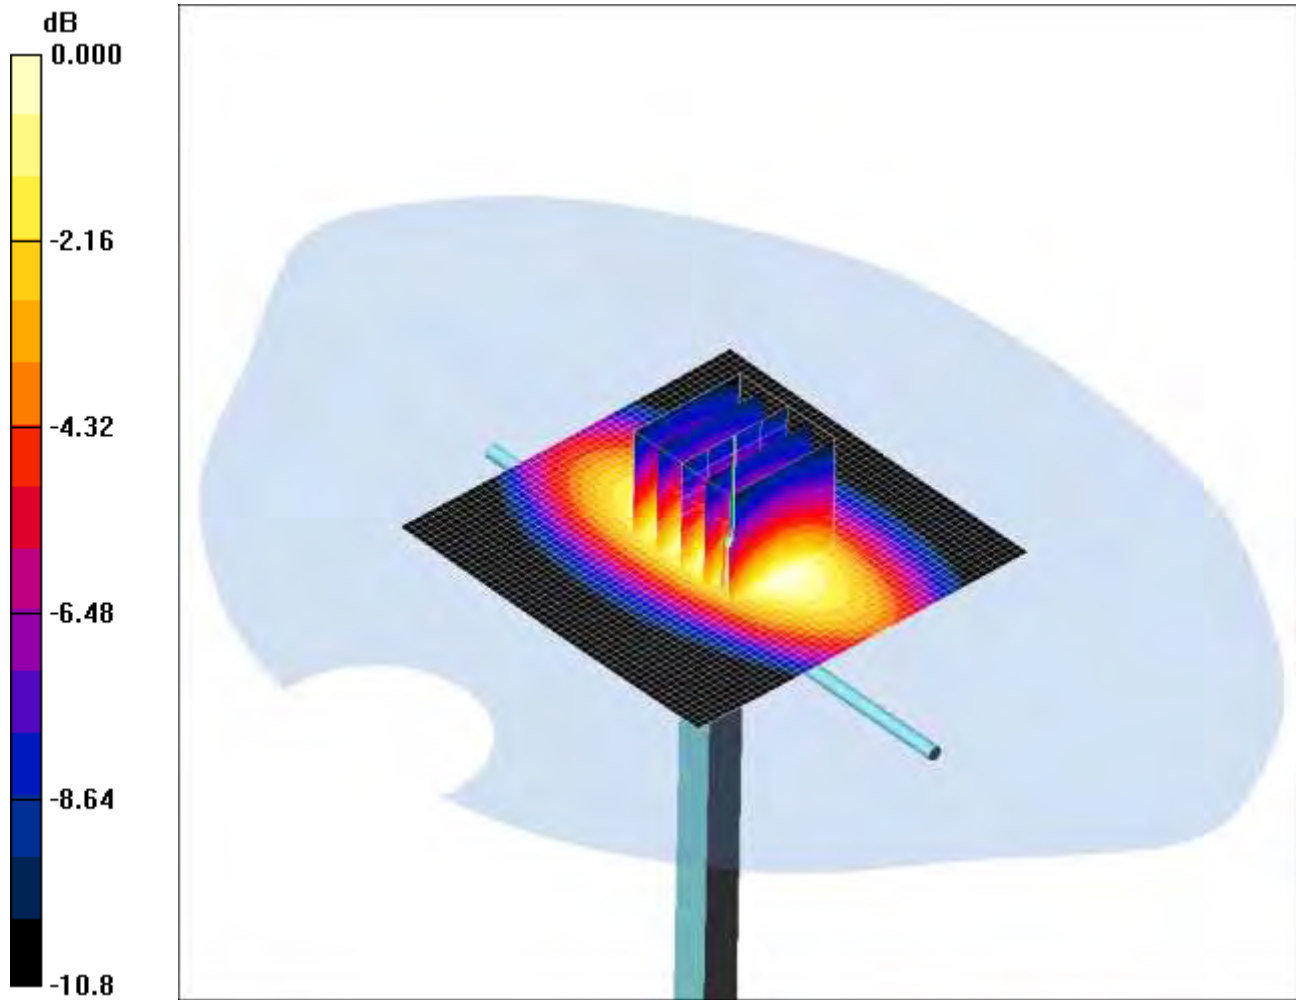

0 dB = 2.99mW/g

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 1.04 \text{ mho/m}$; $\epsilon_r = 53.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12a; Type: SAM 4.0; Serial: TP:1193

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

d=15mm, Pin=250mW/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 3.18 mW/g

d=15mm, Pin=250mW/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 53.5 V/m; Power Drift = -0.046 dB

Peak SAR (extrapolated) = 4.13 W/kg


SAR(1 g) = 2.78 mW/g; SAR(10 g) = 1.81 mW/g

Maximum value of SAR (measured) = 2.99 mW/g

SCN/87207JD02A/111: System Performance Check 900MHz Body 14 08 12

Date: 13/08/2012

DUT: Dipole 900 MHz; SN: 124; Type: D900V2; Serial: SN124

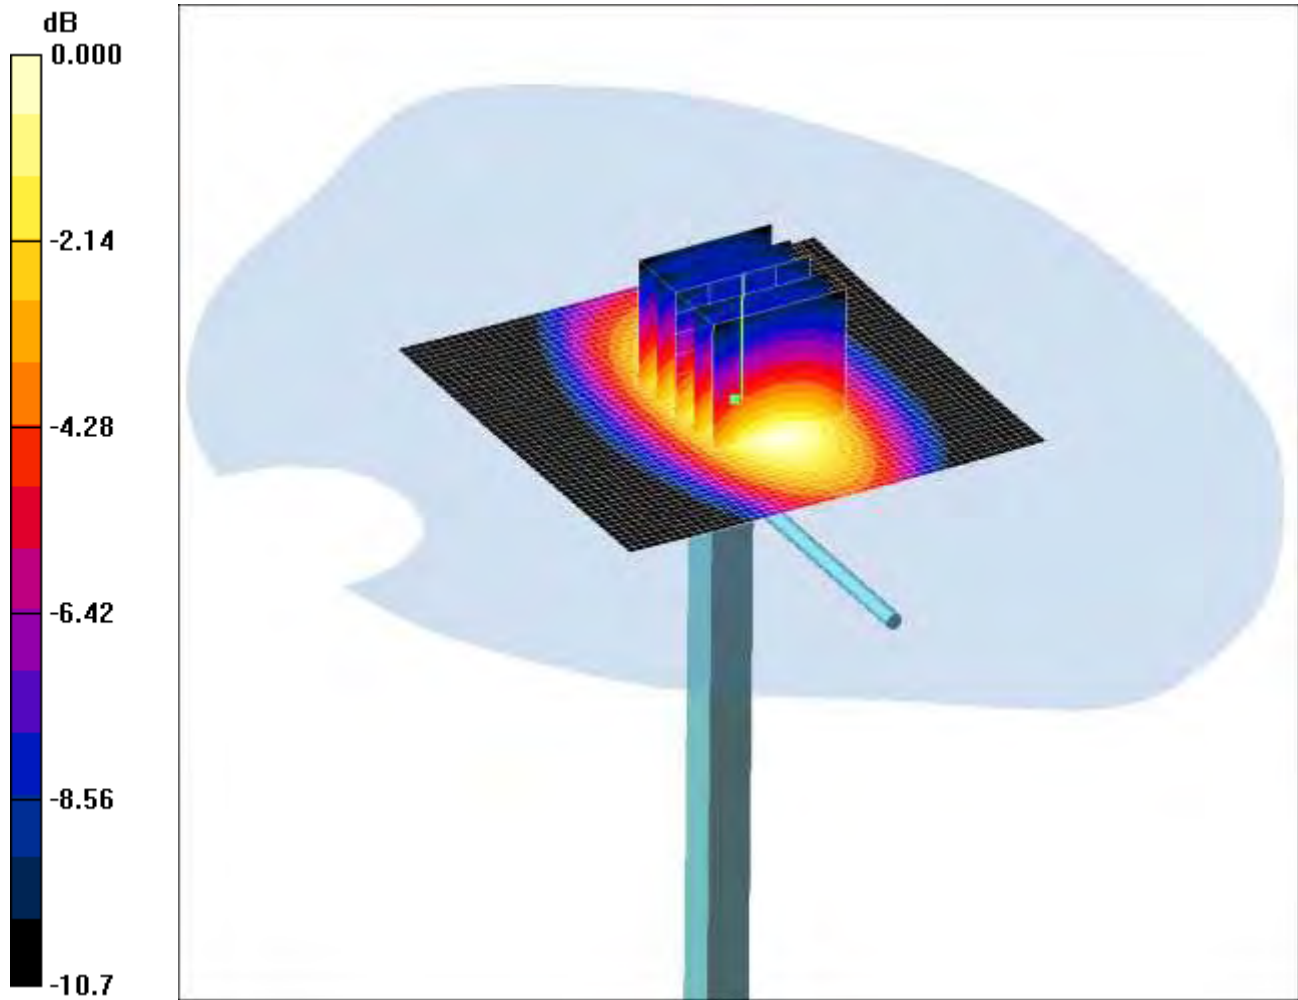

0 dB = 3.01mW/g

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 1.04 \text{ mho/m}$; $\epsilon_r = 53.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(8.92, 8.92, 8.92); Calibrated: 22/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12a; Type: SAM 4.0; Serial: TP:1193

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

d=15mm, Pin=250mW/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 3.15 mW/g

d=15mm, Pin=250mW/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 52.8 V/m; Power Drift = 0.053 dB

Peak SAR (extrapolated) = 4.15 W/kg


SAR(1 g) = 2.78 mW/g; SAR(10 g) = 1.81 mW/g

Maximum value of SAR (measured) = 3.01 mW/g

SCN/87207JD02A/112: System Performance Check 1900MHz Head 20 07 12

Date: 20/07/2012

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: SN540

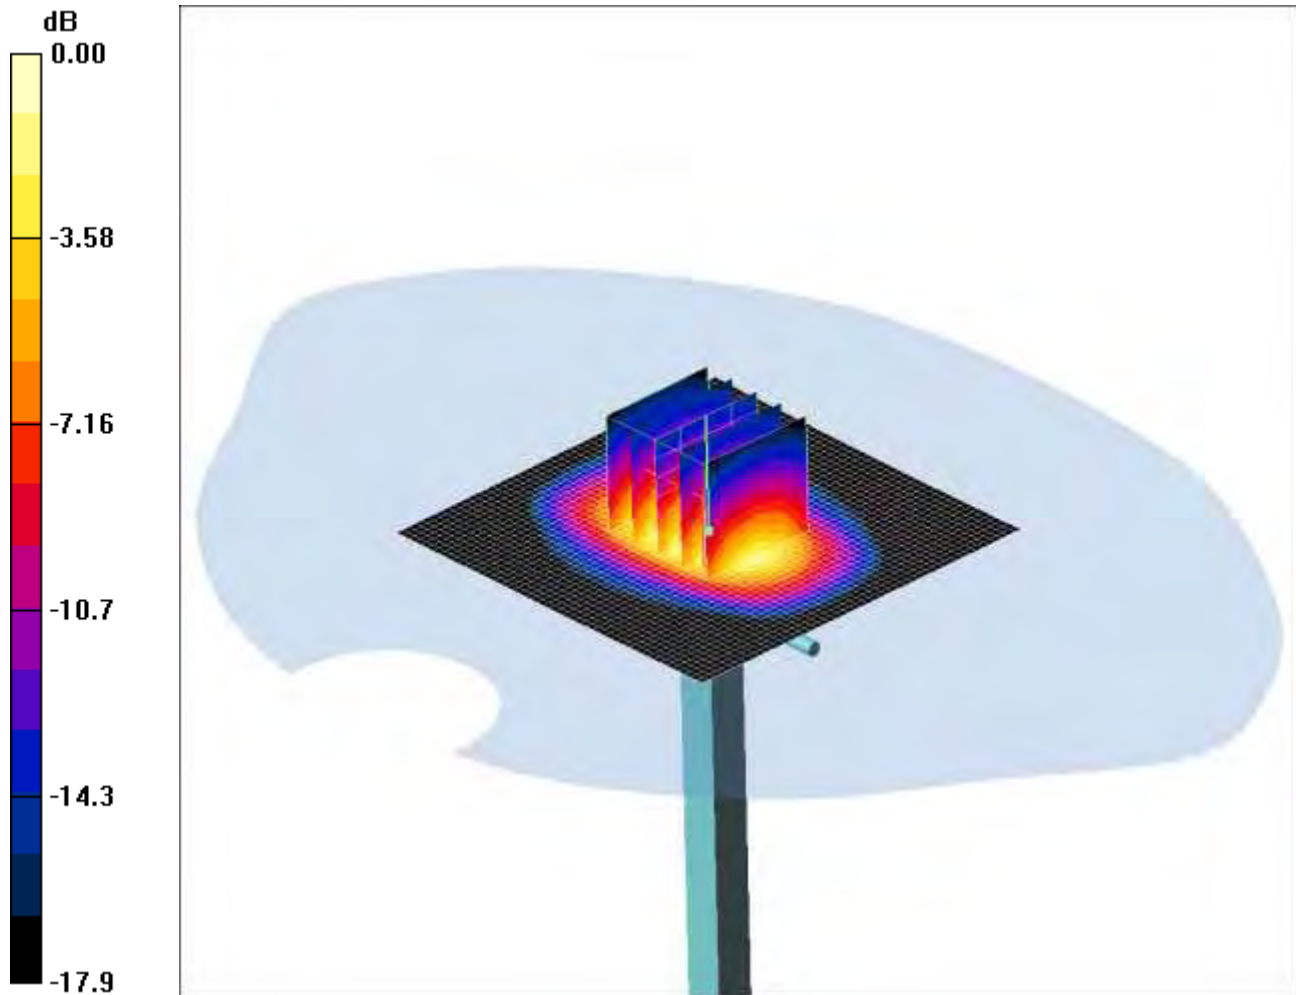

0 dB = 11.6mW/g

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 MHz HSL Medium parameters used: $f = 1900$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1587; ConvF(5.18, 5.18, 5.18); Calibrated: 11/05/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12a (Site 57); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

d=10mm, Pin=250mW/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 15.9 mW/g

d=10mm, Pin=250mW/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 93.2 V/m; Power Drift = -0.037 dB

Peak SAR (extrapolated) = 19.1 W/kg


SAR(1 g) = 10.4 mW/g; SAR(10 g) = 5.41 mW/g

Maximum value of SAR (measured) = 11.6 mW/g

SCN/87207JD02A/113: System Performance Check 1900MHz Head 09 08 12

Date: 09/08/2012

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: SN540

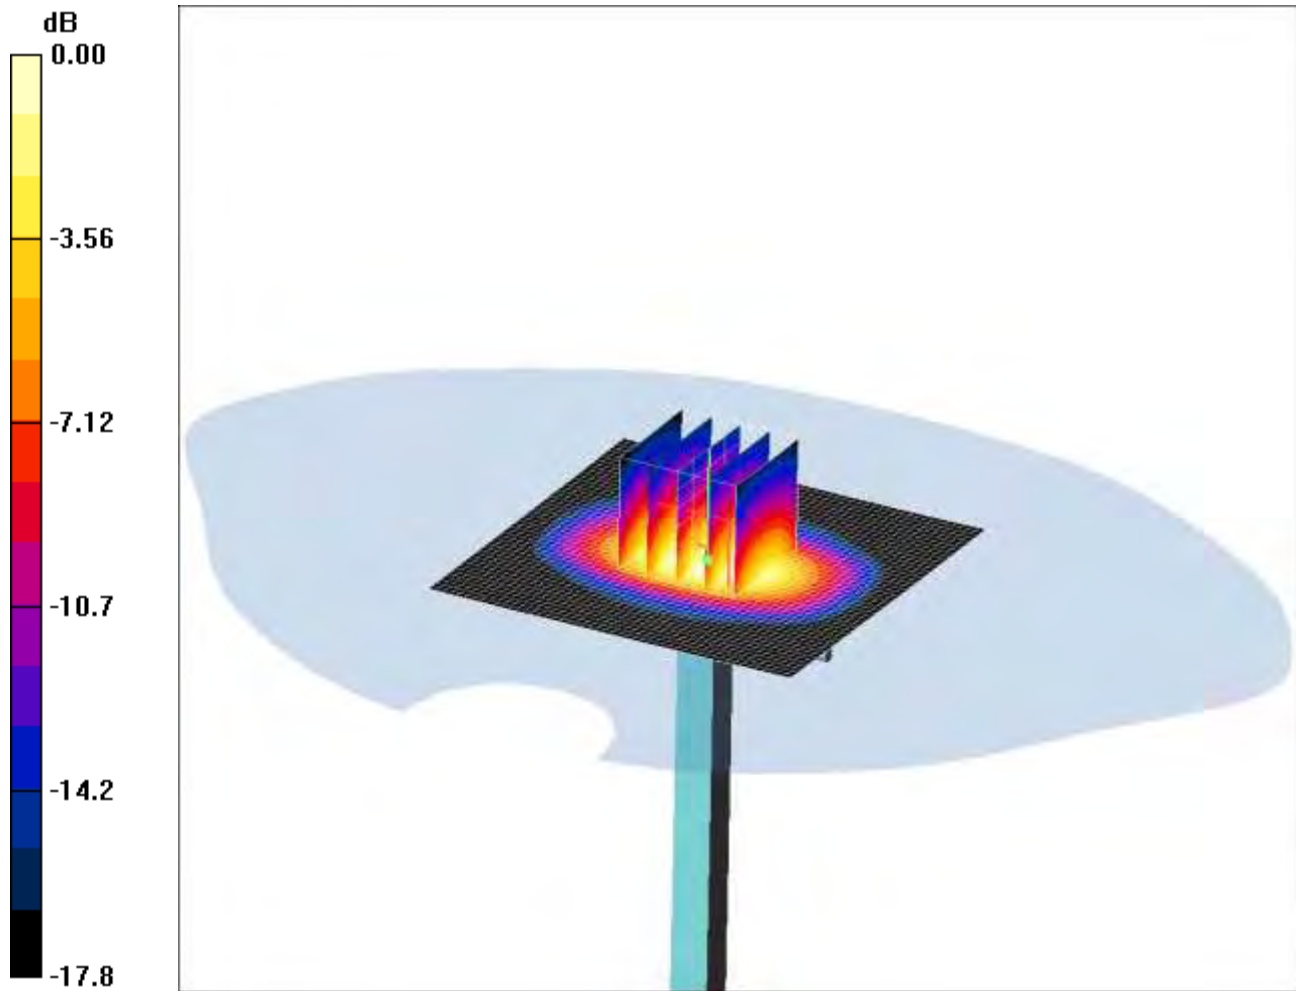

0 dB = 11.1mW/g

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 MHz HSL Medium parameters used: $f = 1900$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.92, 4.92, 4.92); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12a (Site 57); Type: SAM 4.0; Serial: TP:1020

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

d=10mm, Pin=250mW/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 14.8 mW/g

d=10mm, Pin=250mW/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 91.5 V/m; Power Drift = 0.117 dB

Peak SAR (extrapolated) = 16.9 W/kg


SAR(1 g) = 9.79 mW/g; SAR(10 g) = 5.15 mW/g

Maximum value of SAR (measured) = 11.1 mW/g

SCN/87207JD02A/114: System Performance Check 1900MHz Body 23 07 12

Date: 23/07/2012

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: SN540

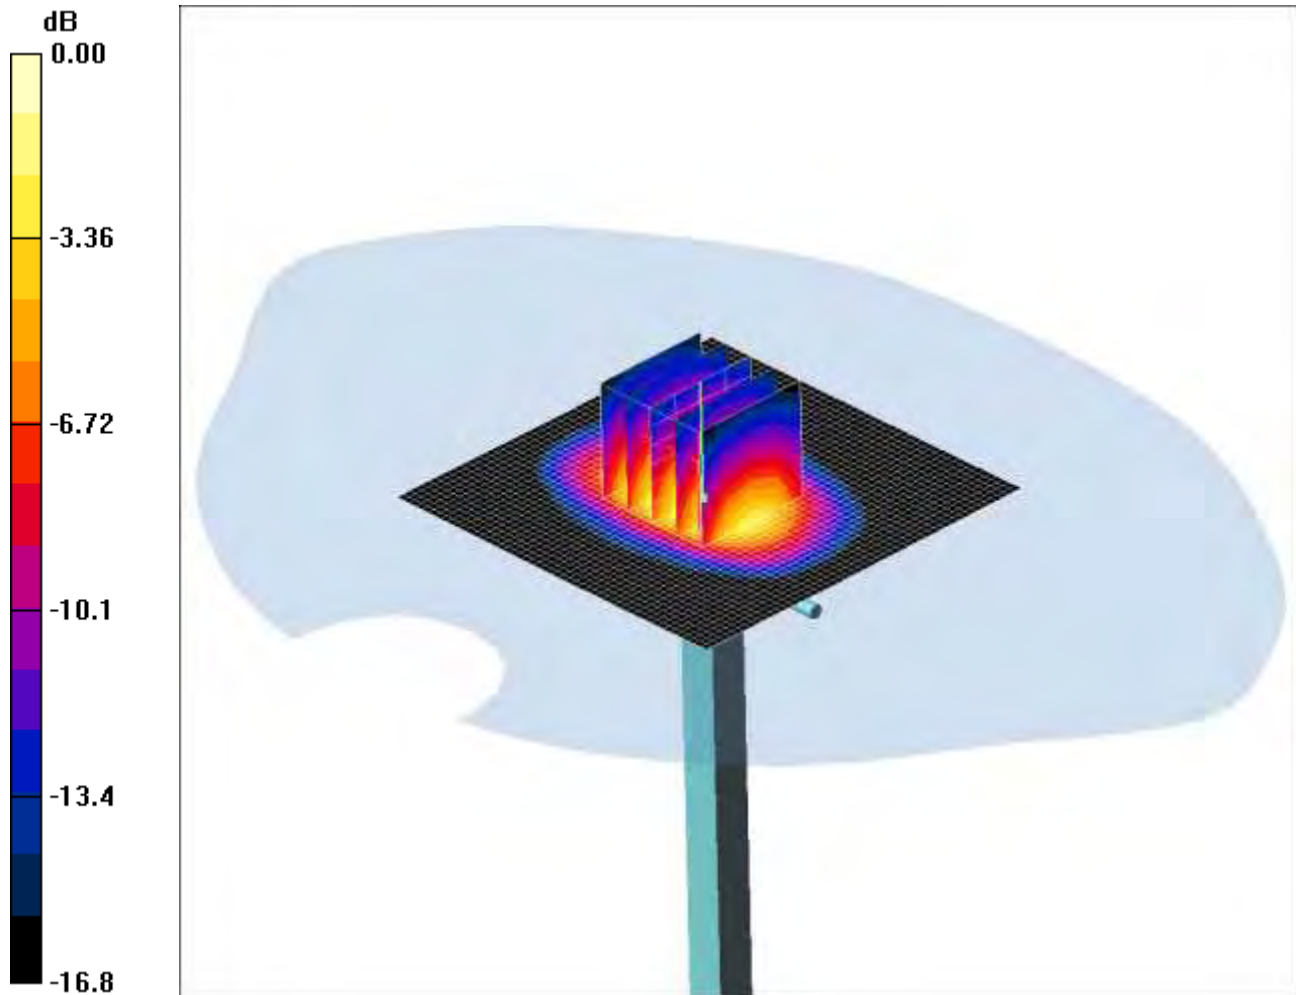

0 dB = 11.2mW/g

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used: $f = 1900$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1587; ConvF(4.69, 4.69, 4.69); Calibrated: 11/05/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

d=10mm, Pin=250mW/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 14.5 mW/g

d=10mm, Pin=250mW/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 91.8 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 16.1 W/kg


SAR(1 g) = 9.94 mW/g; SAR(10 g) = 5.37 mW/g

Maximum value of SAR (measured) = 11.2 mW/g

SCN/87207JD02A/115: System Performance Check 1900MHz Body 10 08 12

Date: 10/08/2012

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: SN540

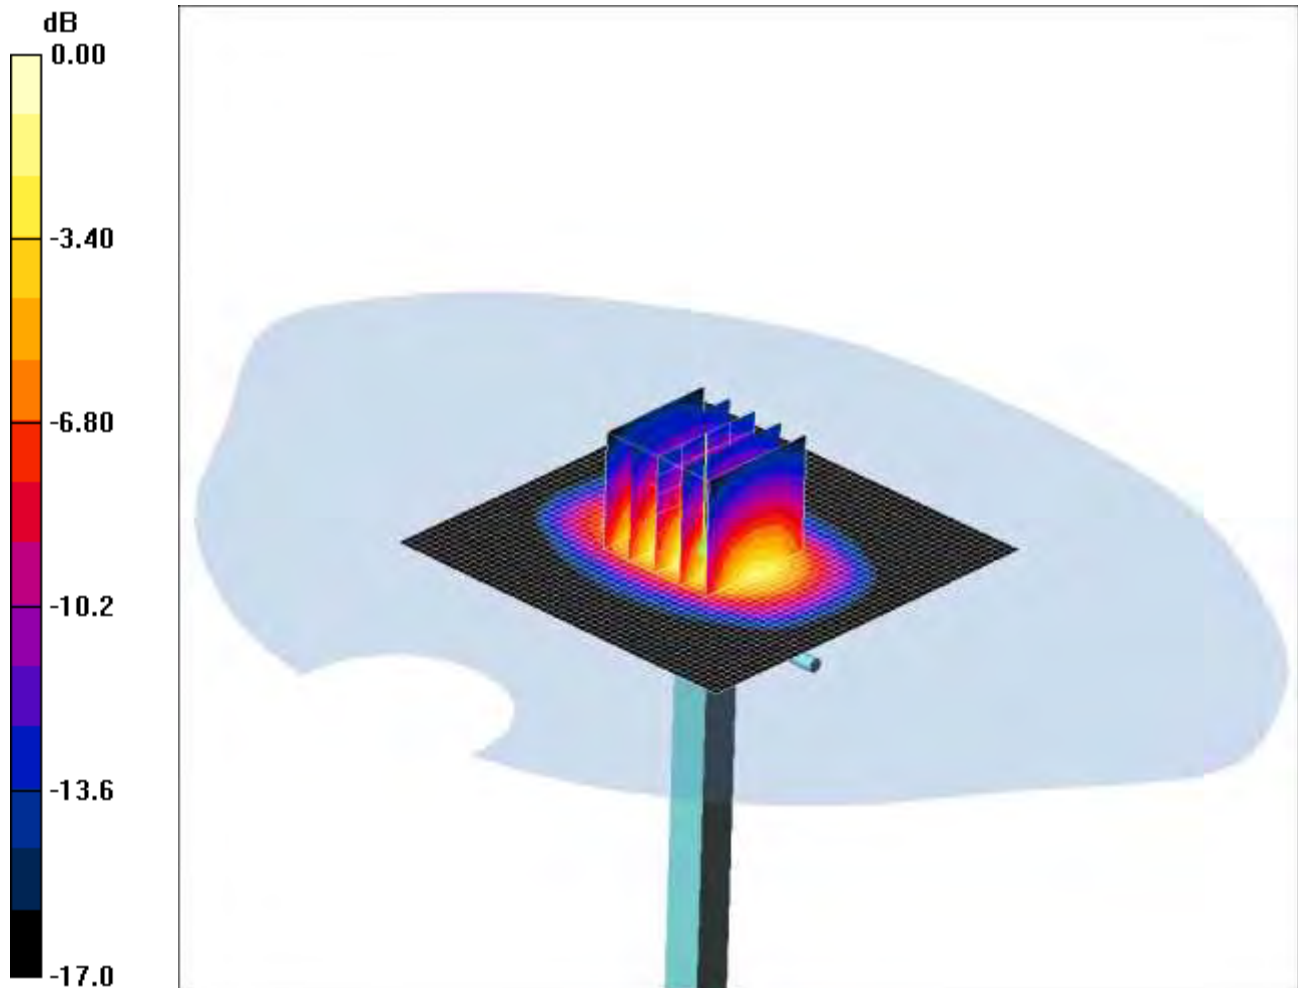

0 dB = 11.4mW/g

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.55 \text{ mho/m}$; $\epsilon_r = 51.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1528; ConvF(4.42, 4.42, 4.42); Calibrated: 26/07/2012

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn394; Calibrated: 26/01/2012

- Phantom: SAM 12b (Site 57); Type: SAM 4.0; Serial: TP:1031

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

d=10mm, Pin=250mW/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 14.4 mW/g

d=10mm, Pin=250mW/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 92.2 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 16.5 W/kg


SAR(1 g) = 10.1 mW/g; SAR(10 g) = 5.4 mW/g

Maximum value of SAR (measured) = 11.4 mW/g

SCN/87207JD02A/116: System Performance Check 2450MHz Head 31 08 12

Date: 31/08/2012

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:725

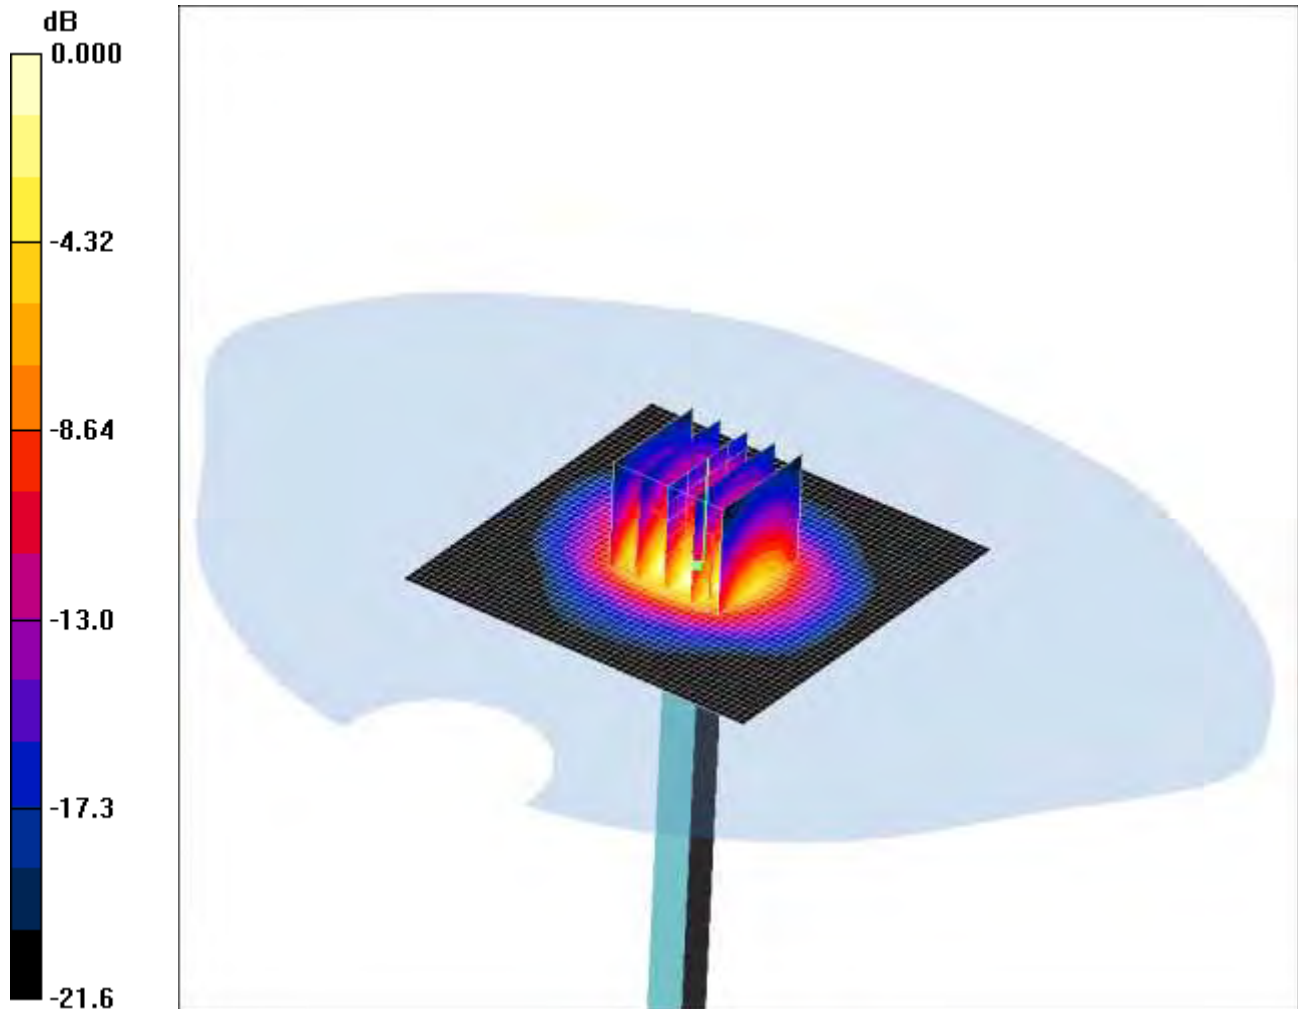

0 dB = 15.3mW/g

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 MHz HSL Medium parameters used: $f = 2450$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(7.02, 7.02, 7.02); Calibrated: 22/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

d=10mm, Pin=250mW 2/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 22.6 mW/g

d=10mm, Pin=250mW 2/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 92.0 V/m; Power Drift = -0.066 dB

Peak SAR (extrapolated) = 27.4 W/kg


SAR(1 g) = 13.4 mW/g; SAR(10 g) = 6.26 mW/g

Maximum value of SAR (measured) = 15.3 mW/g

SCN/87207JD02A/117: System Performance Check 2450MHz Body 03 09 12

Date: 03/09/2012

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:725

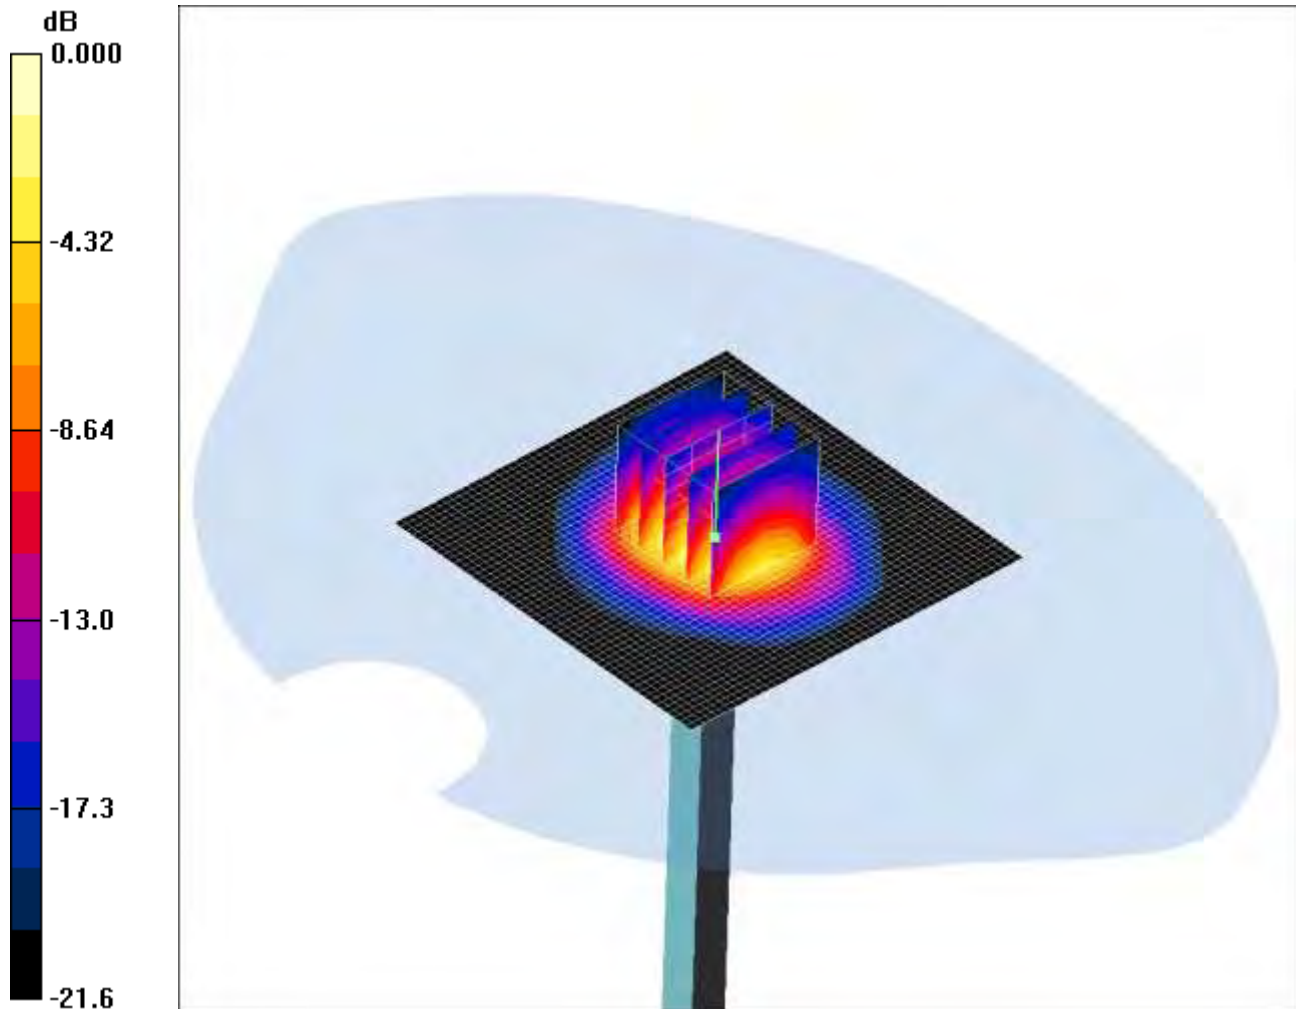

0 dB = 14.5mW/g

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 MHz MSL Medium parameters used: $f = 2450$ MHz; $\sigma = 2.02$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(7.15, 7.15, 7.15); Calibrated: 22/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn432; Calibrated: 02/05/2012

- Phantom: SAM 12b; Type: SAM 4.0; Serial: TP:1207

- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

d=10mm, Pin=250mW 2/Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 18.9 mW/g

d=10mm, Pin=250mW 2/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 84.7 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 25.4 W/kg

SAR(1 g) = 12.8 mW/g; SAR(10 g) = 5.94 mW/g

Maximum value of SAR (measured) = 14.5 mW/g

Appendix 5. System Check

Prior to the assessment, the system was verified in the flat region of the phantom, 900 MHz, 1900 MHz and 2450 MHz dipoles were used. A forward power of 250 mW was applied to the dipole and the system was verified to a tolerance of $\pm 5\%$ for the 900MHz, 1900MHz and 2450MHz dipoles.

The applicable verification normalised to 1 Watt.

System Check 850/900 Head

Date: 23/07/2012

Validation Dipole and Serial Number: D900V2; SN: 124 D900V2; SN: 124

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Head	900	24.0°C	23.0°C	ϵ_r	41.50	42.17	1.62	5.00
				σ	0.97	0.98	1.41	5.00
				1g SAR	11.00	11.08	0.73	5.00
				10g SAR	7.01	7.28	3.85	5.00

Dielectrics for Frequencies Tested

Channel Number	Channel Description	Frequency (MHz)	Parameters	
4132	Low	826.4	ϵ_r	42.60
			σ	0.94
4183	Middle	836.6	ϵ_r	42.60
			σ	0.95
4233	High	846.6	ϵ_r	42.50
			σ	0.95

Date: 09/08/2012

Validation Dipole and Serial Number: D900V2; SN: 124

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Head	900	24.0°C	24.0°C	ϵ_r	41.50	40.98	-1.24	5.00
				σ	0.97	0.97	0.45	5.00
				1g SAR	11.00	11.20	1.82	5.00
				10g SAR	7.01	7.32	4.42	5.00

Dielectrics for Frequencies Tested

Channel Number	Channel Description	Frequency (MHz)	Parameters	
128	Low	824.2	ϵ_r	41.40
			σ	0.93
190	Middle	836.6	ϵ_r	41.40
			σ	0.93
251	High	848.8	ϵ_r	41.30
			σ	0.94

System Check 850/900 Head (Continued):

Date: 10/08/2012

Validation Dipole and Serial Number: D900V2; SN: 124

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Head	900	24.0°C	23.1°C	ϵ_r	41.50	41.36	-0.35	5.00
				σ	0.97	0.94	-2.60	5.00
				1g SAR	11.00	11.16	1.45	5.00
				10g SAR	7.01	7.32	4.42	5.00

Dielectrics for Frequencies Tested

Channel Number	Channel Description	Frequency (MHz)	Parameters	
128	Low	824.2	ϵ_r	41.90
			σ	0.90
190	Middle	836.6	ϵ_r	41.80
			σ	0.90
251	High	848.8	ϵ_r	41.70
			σ	0.91

System Check 850/900 Body

Date: 23/07/2012

Validation Dipole and Serial Number: D900V2; SN: 124

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Body	900	24.0°C	22.4°C	ϵ_r	55.00	52.85	-3.91	5.00
				σ	1.05	1.03	-2.23	5.00
				1g SAR	11.10	10.84	-2.34	5.00
				10g SAR	7.14	7.08	-0.84	5.00

Dielectrics for Frequencies Tested

Channel Number	Channel Description	Frequency (MHz)	Parameters	
4132	Low	826.4	ϵ_r	53.20
			σ	0.98
4183	Middle	836.6	ϵ_r	53.20
			σ	0.99
4233	High	846.6	ϵ_r	53.10
			σ	1.00

Date: 24/07/2012

Validation Dipole and Serial Number: D900V2; SN: 124

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Body	900	24.0°C	22.4°C	ϵ_r	55.00	52.85	-3.91	5.00
				σ	1.05	1.03	-2.23	5.00
				1g SAR	11.10	10.84	-2.34	5.00
				10g SAR	7.14	7.08	-0.84	5.00

Dielectrics for Frequencies Tested

Channel Number	Channel Description	Frequency (MHz)	Parameters	
4132	Low	826.4	ϵ_r	53.20
			σ	0.98
4183	Middle	836.6	ϵ_r	53.20
			σ	0.99
4233	High	846.6	ϵ_r	53.10
			σ	1.00

System Check 850/900 Body (Continued):

Date: 25/07/2012

Validation Dipole and Serial Number: D900V2; SN: 124

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Body	900	24.0°C	22.4°C	ϵ_r	55.00	53.00	-3.64	5.00
				σ	1.05	1.03	-1.85	5.00
				1g SAR	11.10	11.20	0.90	5.00
				10g SAR	7.14	7.32	2.52	5.00

Dielectrics for Frequencies Tested

Channel Number	Channel Description	Frequency (MHz)	Parameters	
4132	Low	826.4	ϵ_r	53.30
			σ	0.99
4183	Middle	836.6	ϵ_r	53.30
			σ	0.99
4233	High	846.6	ϵ_r	53.20
			σ	1.00

Date: 09/08/2012

Validation Dipole and Serial Number: D900V2; SN: 124

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Body	900	24.0°C	23.4°C	ϵ_r	55.00	53.16	-3.34	5.00
				σ	1.05	1.04	-1.05	5.00
				1g SAR	11.10	11.20	0.90	5.00
				10g SAR	7.14	7.32	2.52	5.00

Dielectrics for Frequencies Tested

Channel Number	Channel Description	Frequency (MHz)	Parameters	
128	Low	824.2	ϵ_r	53.50
			σ	1.00
190	Middle	836.6	ϵ_r	53.40
			σ	1.00
251	High	848.8	ϵ_r	53.30
			σ	1.01

System Check 850/900 Body (Continued):

Date: 10/08/2012

Validation Dipole and Serial Number: D900V2; SN: 124

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Body	900	24.0°C	22.9°C	ϵ_r	55.00	53.08	-3.49	5.00
				σ	1.05	1.02	-2.54	5.00
				1g SAR	11.10	10.96	-1.26	5.00
				10g SAR	7.14	7.16	0.28	5.00

Dielectrics for Frequencies Tested

Channel Number	Channel Description	Frequency (MHz)	Parameters	
128	Low	824.2	ϵ_r	53.40
			σ	0.98
190	Middle	836.6	ϵ_r	53.30
			σ	0.99
251	High	848.8	ϵ_r	53.30
			σ	1.00

Date: 13/08/2012

Validation Dipole and Serial Number: D900V2; SN: 124

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Body	900	24.0°C	22.6°C	ϵ_r	55.00	53.47	-2.78	5.00
				σ	1.05	1.04	-1.41	5.00
				1g SAR	11.10	11.12	0.18	5.00
				10g SAR	7.14	7.24	1.40	5.00

Dielectrics for Frequencies Tested

Channel Number	Channel Description	Frequency (MHz)	Parameters	
128	Low	824.2	ϵ_r	53.80
			σ	0.99
190	Middle	836.6	ϵ_r	53.70
			σ	1.00
251	High	848.8	ϵ_r	53.70
			σ	1.00

System Check 850/900 Body (Continued):

Date: 14/08/2012

Validation Dipole and Serial Number: D900V2; SN: 124

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Body	900	24.0°C	22.6°C	ϵ_r	55.00	53.47	-2.78	5.00
				σ	1.05	1.04	-1.41	5.00
				1g SAR	11.10	11.12	0.18	5.00
				10g SAR	7.14	7.24	1.40	5.00

Dielectrics for Frequencies Tested

Channel Number	Channel Description	Frequency (MHz)	Parameters	
128	Low	824.2	ϵ_r	53.80
			σ	0.99
190	Middle	836.6	ϵ_r	53.70
			σ	1.00
251	High	848.8	ϵ_r	53.70
			σ	1.00

System Check 1900 Head

Date: 20/07/2012

Validation Dipole and Serial Number: D1900V2; SN: 540

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Head	1900	24.0°C	22.0°C	ϵ_r	40.00	38.50	-3.74	5.00
				σ	1.40	1.45	3.35	5.00
				1g SAR	40.30	41.60	3.23	5.00
				10g SAR	21.00	21.64	3.05	5.00

Dielectrics for Frequencies Tested

Channel Number	Channel Description	Frequency (MHz)	Parameters	
9262	Low	1852.4	ϵ_r	38.70
			σ	1.40
9400	Middle	1880.0	ϵ_r	38.60
			σ	1.43
9538	High	1907.6	ϵ_r	38.50
			σ	1.46

Date: 09/08/2012

Validation Dipole and Serial Number: D1900V2; SN: 540

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Head	1900	24.0°C	22.5°C	ϵ_r	40.00	38.59	-3.53	5.00
				σ	1.40	1.44	2.88	5.00
				1g SAR	40.30	39.16	-2.83	5.00
				10g SAR	21.00	20.60	-1.90	5.00

Dielectrics for Frequencies Tested

Channel Number	Channel Description	Frequency (MHz)	Parameters	
512	Low	1850.2	ϵ_r	38.70
			σ	1.39
661	Middle	1880	ϵ_r	38.60
			σ	1.42
810	High	1909.8	ϵ_r	38.50
			σ	1.45

System Check 1900 Body

Date: 23/07/2012

Validation Dipole and Serial Number: D1900V2; SN: 540

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Body	1900	24.0°C	22.2°C	ϵ_r	53.30	52.17	-2.12	5.00
				σ	1.52	1.53	0.85	5.00
				1g SAR	40.70	39.76	-2.31	5.00
				10g SAR	21.60	21.48	-0.56	5.00

Dielectrics for Frequencies Tested

Channel Number	Channel Description	Frequency (MHz)	Parameters	
9262	Low	1852.4	ϵ_r	52.30
			σ	1.49
9400	Middle	1880.0	ϵ_r	52.20
			σ	1.51
9538	High	1907.6	ϵ_r	52.10
			σ	1.54

Date: 10/08/2012

Validation Dipole and Serial Number: D1900V2; SN: 540

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Body	1900	24.0°C	22.2°C	ϵ_r	53.30	51.88	-2.66	5.00
				σ	1.52	1.55	1.89	5.00
				1g SAR	40.70	40.40	-0.74	5.00
				10g SAR	21.60	21.60	0.00	5.00

Dielectrics for Frequencies Tested

Channel Number	Channel Description	Frequency (MHz)	Parameters	
512	Low	1850.2	ϵ_r	52.00
			σ	1.50
661	Middle	1880	ϵ_r	51.90
			σ	1.53
810	High	1909.8	ϵ_r	51.80
			σ	1.56

System Check 2450 Head

Date: 31/08/2012

Validation Dipole and Serial Number: D2450V2; SN: 725

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Head	2450	24.0°C	24.0°C	ϵ_r	39.20	38.22	-2.49	5.00
				σ	1.80	1.80	0.27	5.00
				1g SAR	52.90	53.60	1.32	5.00
				10g SAR	24.70	25.04	1.38	5.00

Dielectrics for Frequencies Tested

Channel Number	Channel Description	Frequency (MHz)	Parameters	
1	Low	2412	ϵ_r	38.30
			σ	1.76
6	Middle	2437	ϵ_r	38.30
			σ	1.79
11	High	2463	ϵ_r	38.20
			σ	1.82

System Check 2450 Body

Date: 03/09/2012
Validation Dipole and Serial Number: D2450V2; SN: 725

Simulant	Frequency (MHz)	Room Temp	Liquid Temp	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)
Body	2450	24.0°C	24.0°C	ϵ_r	52.70	51.32	-2.62	5.00
				σ	1.95	2.02	3.37	5.00
				1g SAR	51.90	51.20	-1.35	5.00
				10g SAR	24.10	23.76	-1.41	5.00

Dielectrics for Frequencies Tested

Channel Number	Channel Description	Frequency (MHz)	Parameters	
1	Low	2412	ϵ_r	51.40
			σ	1.97
6	Middle	2437	ϵ_r	51.40
			σ	2.00
11	High	2463	ϵ_r	51.30
			σ	2.03

Appendix 6. Simulated Tissues

The body mixture consists of water, Polysorbate and salt. Visual inspection is made to ensure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the tissue.

ingredient	Frequency
	835/850/900 MHz Head
De-Ionized Water	52.87
Polysorbate 20 (Tween 20)	46.10
Salt	1.03

Ingredient	Frequency
	835/850/900 MHz Body
De-Ionized Water	71.30
Polysorbate 20 (Tween 20)	28.00
Salt	0.70

Ingredient	Frequency
	1800/1900 MHz Head
De-Ionized Water	55.40
Polysorbate 20 (Tween 20)	44.22
Salt	0.38

Ingredient	Frequency
	1800/1900 MHz Body
De-Ionized Water	71.50
Polysorbate 20 (Tween 20)	28.00
Salt	0.50

Ingredient	Frequency
	2450 MHz Head
De-Ionized Water	55.75
Polysorbate 20 (Tween 20)	45.25

Ingredient	Frequency
	2450 MHz Body
De-Ionized Water	71.70
Polysorbate 20 (Tween 20)	28.00
Salt	0.30

Appendix 7. DASY4 System Details

A.7.1. DASY4 SAR Measurement System

RFI Global Services Ltd, SAR measurement facility utilises the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 system is coPower Back offised of the robot controller, computer, near-field probe, probe alignment sensor, and the SAM phantom containing brain or muscle equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller; teach pendant (Joystick), and remote control. This is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. The data acquisition electronics (DAE) performs signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection etc. The DAE is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card. The DAE3 utilises a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching mulitplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

A.7.2. DASY4 SAR System Specifications

Robot System

Positioner:	Stäubli Unimation Corp. Robot Model: RX90L
Repeatability:	0.025 mm
No. of Axis:	6
Serial Number:	F00/SD89A1/A/01
Reach:	1185 mm
Payload:	3.5 kg
Control Unit:	CS7
Programming Language:	V+

Robot System

Positioner:	Stäubli Unimation Corp. Robot Model: RX90L
Repeatability:	0.025 mm
No. of Axis:	6
Serial Number:	F01/5J86A1/A/01
Reach:	1185 mm
Payload:	3.5 kg
Control Unit:	CS7
Programming Language:	V+

Data Acquisition Electronic (DAE) System

Serial Number:	DAE3 SN:394
Serial Number:	DAE3 SN:432

PC Controller

PC:	Dell Precision 340
Operating System:	Windows 2000
Data Card:	DASY4 Measurement Server
Serial Number:	1080

Data Converter

Features:	Signal Amplifier, multiplexer, A/D converted and control logic.
Software:	DASY4 Software
Connecting Lines:	Optical downlink for data and status info. Optical uplink for commands and clock.

PC Interface Card

Function:	24 bit (64 MHz) DSP for real time processing Link to DAE3 16 nit A/D converter for surface detection system serial link to robot direct emergency stop output for robot.
-----------	--

DASY4 SAR System Specifications (Continued)

E-Field Probe

Model:	EX3DV4
Serial No:	3814
Construction:	Triangular core
Frequency:	10 MHz to >6 GHz
Linearity:	±0.2 dB (30 MHz to 6 GHz)
Probe Length (mm):	330
Probe Diameter (mm):	12
Tip Length (mm):	20
Tip Diameter (mm):	2.5
Sensor X Offset (mm):	1
Sensor Y Offset (mm):	1
Sensor Z Offset (mm):	1

E-Field Probe

Model:	ET3DV6
Serial No:	1587
Construction:	Triangular core
Frequency:	10 MHz to 2.55GHz
Linearity:	±0.2 dB (30 MHz to 2.55GHz)
Probe Length (mm):	337
Probe Diameter (mm):	10
Tip Length (mm):	10
Tip Diameter (mm):	6.8
Sensor X Offset (mm):	2.7
Sensor Y Offset (mm):	2.7
Sensor Z Offset (mm):	2.7

Phantom

Phantom:	SAM Phantom
Shell Material:	Fibreglass
Thickness:	2.0 ±0.1 mm