

Prepared (also subject responsible if other)

Flora Kang (28848956)

Approved

Flora Kang (28848956)

Checked

Company Internal
MARKING DRAWING

No.

1262-4340

Date

2012-06-06

Rev

2

Reference

4

Label Content Specification ST27i, Mobile Phone Label, Made in

1 General information

Mobile Phone label part no	<ul style="list-style-type: none"> 1255-6377
Bar code	<ul style="list-style-type: none"> Standard: according to Ericsson corporate standard 102 01–109 Uen Print quality: C, according to ANSI X3.182-1990 as stated in Ericsson corporate standard 102 01–1003 Uen Quiet zone: No bar codes are allowed to be closer to a label edge than 2 mm!
Text	If applicable, or nothing else specified, Zebra printer Scaleable Smooth Font CG Triumvirate Bold Condensed is imposed. When needed, the text is adjusted to fit the label.
Coordinates	“(x/y)” under each line number specifies the bottom / left alignment for text, graphics and bar codes, x is measured vertically, and y horizontally from the upper left corner of the label (landscape format), both in mm. When needed, the alignment is adjusted to fit the label.

2 Printing information

	Content	Format
Line 1a (2,7/1,5)	SONY stylized name.	Graphics, height 1,9 mm, width 10,4mm. According to 1263-9535.
Line 1b (2,7/18,0)	Model name, “ST27i”	Text, height 1,2 mm.
Line 2a (4,5/1,5)	Type number of the phone, “TYPE: PM-0090-BV”.	Text, height 1,2 mm.
Line 2b (4,5/18,0)	HW & SW identification field, if applicable; “FFGG”	Text, height 1,2 mm. <i>According to Type-testing report under Product Model Specifying Document</i>
Line 3a (6,5/1,5)	“FCC ID: PY7PM-0090”	Text, height 1,2 mm.
Line 3b (6,5/18,0)	Location code of where the phone is flashed, if applicable, “XXX”	Text, height 1,2 mm.
Line 4a (8,5/1,5)	Reserved for IC ID (not applicable)	Text, height 1,2 mm.
Line 4b (8,5/18,0)	Production week (flash), “yy’W’ww” (yy = year, ww = week)	Text, height 1,2 mm.
Line 5a (10,5/1,5)	Product number without revision of the Sales Item in which the phone is packed, if applicable. “SI XXXX-XXXX”	Text, height 1,2 mm.
Line 5b (10,5/18,0)	Repair week, if applicable. “Ry’W’ww” (y = year, ww = week)	Text, height 1,2 mm.
Line 6 (13,5/2,0)	Line 7a in bar code. As desired by supplier (e.g. only actual number).	Bar code, height 2,0 mm. As desired by supplier (e.g. Code 128 symbology).
Line 7a (15,5/1,5)	Supplier’s identification for trace-ability of the telephone, as desired by supplier (e.g. “S/N: nnn....” for serial number).	Text, height 1,2 mm. Defined by supplier.

Prepared (also subject responsible if other)

Flora Kang (28848956)

Approved

Flora Kang (28848956)

Checked

Company Internal
MARKING DRAWING

No.

1262-4340

Date

2012-06-06

Rev

2

Reference


4

Line 7b (15,5/15,0)	Actual electronic serial number (IMEI) of the mobile phone, "00000000-000000-0"	Text, height 1,2 mm. In the format TAC-SNR-CD. TAC and SNR derived from pos 500 in BOM. CD = check digit according to the Luhn formula (ISO/IEC 7812), GSM 02.16.
Line 8 (18,0/2,0)	Line 7b in bar code (only actual number, without data identifier).	Bar code, height 2,0 mm. Code 128 symbology, code C subset. If uneven number of digits, code B subset shall be used for the last digit.
Line 9a (23,5/1,5)	CE approval symbol	Graphics, height 5 mm. According to 1210-0131.
Line 9b (23,5/9,0)	The notified body number "0682"	Text, height 5,0 mm.
Line 9c (23,5/20,0)	"Alert Symbol"	Graphics, height 5,0 mm According to 1001-5859
Line 10a (31,5/2,0)	Marking of origin; "Made in Xxx" "Xxx" = actual country of production of the included telephone, in English	Text, height 1,2 mm.
Line 10b (31,5/20,5)	WEE trashcan without bar symbol	Graphics, height 5,0 mm, According to 1202-5537.

3 Layout

The conceptual picture (for Zebra 90Xill printer, or equivalent) should not be considered as specifications, but as an additional help for setting up the label.

3.1 Conceptual picture

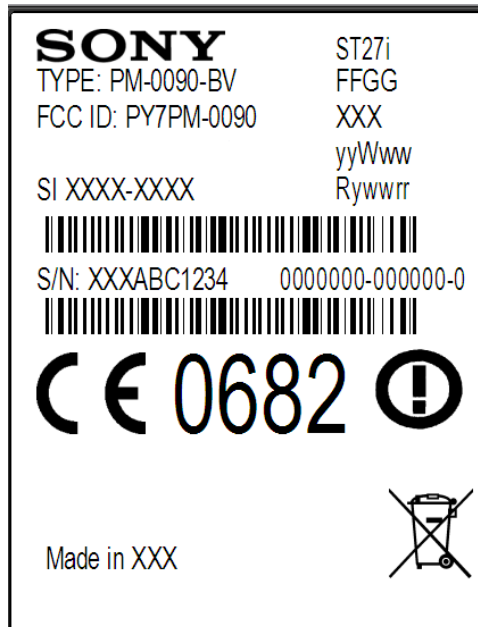

double underlined = major changes since last revision.