



TEST REPORT

No. 2013TAR315

for

Sony Mobile Communications AB

GSM/WCDMA/CDMA2000/LTE FDD mobile phone

Type: PM-0400-BV

FCC ID: PY7PM-0400

with

Hardware Version: A

Software Version: 10.2.F.1.33

Issued Date: Apr. 15th, 2013

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

DAkks accreditation (DIN EN ISO/IEC 17025): No. D-PL-12123-01-01

FCC 2.948 Listed: No.733176

IC O.A.T.S listed: No.6629B-1

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0) 10-62304633-2561, Fax:+86(0)10-62304633-2504 Email:welcome@emcite.com. www.emcite.com

CONTENTS

1. TEST LABORATORY	3
1.1. TESTING LOCATION	3
1.2. TESTING ENVIRONMENT	3
1.3. PROJECT DATA	3
1.4. SIGNATURE	3
2. CLIENT INFORMATION	4
2.1. APPLICANT INFORMATION	4
2.2. MANUFACTURER INFORMATION	4
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	5
3.1. ABOUT EUT	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	5
3.4. GENERAL DESCRIPTION	6
4. REFERENCE DOCUMENTS	7
4.1. REFERENCE DOCUMENTS FOR TESTING	7
5. LABORATORY ENVIRONMENT	8
6. SUMMARY OF TEST RESULTS	9
6.1. SUMMARY OF TEST RESULTS	9
6.2. STATEMENTS	9
7. TEST EQUIPMENTS UTILIZED	10
ANNEX A: EUT PHOTOGRAPH	11
ANNEX B: MEASUREMENT RESULTS	22
ANNEX C: TEST LAYOUT	27

1. Test Laboratory

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: No 52, Huayuan Bei Road, Haidian District, Beijing, P.R. China
Postal Code: 100191
Telephone: +86-10-62304633-2561
Fax: +86-10-62304633-2504

1.2. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%
Air pressure: 980 - 1040 hPa

The climatic requirements above are general exclude the special requirements for dedicated test environments listed in section 5 and some specific test cases in other parts of this report.


1.3. Project data

Receipt of Sample: Mar. 15th, 2013
Testing Start Date: Mar. 22nd, 2013
Testing End Date: Mar. 29th, 2013

1.4. Signature



Qu Pengfei
(Prepared this test report)



Sun Xiangqian
(Reviewed this test report)



Song Chongwen
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: Sony Mobile Communications (China) Co. Ltd
Address /Post: Sony Mobile R&D Center, No. 16, Guangshun South Street,
Chaoyang District
City: Beijing
Postal Code: 100102
Country: China
Contact Person: Ma, Gang
Telephone: +86-10-58656312
Fax: +86-10-58659049

2.2. Manufacturer Information

Company Name: Sony Mobile Communications AB
Address /Post: Nya Vattentornet, 22188 Lund, Sweden
City: Lund
Postal Code: 22188
Country: Sweden
Contact Person: Nordlof, Anders
Telephone: +46-10-802 3919
Fax: +46-10-800 2441

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	GSM 850/900/1800/1900, GPRS, EDGE, WCDMA FDD Band 1/2/5, HSDPA, HSUPA, LTE FDD Band 1/11/18, CDMA2000 Band Class0/6 Bluetooth EDR & BLE, WLAN (802.11 a/b/g/n), FM, NFC, GPS receiver mobile phone
Type	PM-0400-BV
FCC ID	PY7PM-0400
GSM Frequency Band	GSM 850/900/1800/1900
UMTS Frequency Band	FDD Band 1 / FDD Band 2 / FDD Band 5
LTE Frequency Band	FDD Band 1 / FDD Band 11 / FDD Band 18
CDMA2000 Band	Band Class 0/6
Antenna	Internal
Power supply	Battery or charger (travel adapter / vehicle charger)
Extreme vol. Limits	3.5VDC to 4.1VDC (nominal: 4.1VDC)
Extreme temp. Tolerance	-30°C to +50°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN	IMEI	HW Version	SW Version
#23860	CB5123RQBV	004402450924323	A	10.2.F.1.33

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Revision
#23812	USB Cable	123107D1000A4AE	1
AE5	Battery	000132	1C
#23812			
	Commercial name	EC801	
	Type	AI-0401	
	Manufacturer	Sony Mobile	
	Length of cable	96.5cm	
AE5			
	Model	AB-0300	
	Manufacturer	Sony Mobile	
	Capacitance	2300mAh	
	Nominal Voltage	3.7V	

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment Under Test (EUT) is a model of GSM/WCDMA/CDMA2000/LTE FDD mobile phone with integrated antenna.

The EUT supports GSM 850/900/1800/1900MHz bands, WCDMA FDD bands 1/2/5, LTE FDD bands 1/11/18 and CDMA2000 band class 0/6. It also supports GPRS service with multi-slots class 12 and EGPRS service with multi-slots class 12 too. The HSDPA and HSUPA features are also supported.

It has MP3, camera, FM radio, USB memory, GPS receiver, NFC, Mobile High-Definition Link (MHL), Bluetooth (EDR and Bluetooth 4.0), WLAN (802.11 a/b/g/n) and Wi-Fi hotspot functions.

It includes normal option: travel charger, Portable Hands-Free and USB cable.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices	10-1-11 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-2 (10 meters×6.7meters×6.1meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 1Ω
Normalised site attenuation (NSA)	< ±3.5 dB, 3m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Fully-anechoic chamber FAC-3 (9 meters×6.5 meters×4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 1 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz

Control room/ conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω

6. SUMMARY OF TEST RESULTS

6.1. Summary of test results

Abbreviations used in this clause:

P	Pass
NA	Not applicable
F	Fail

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Radiated Emission	15.109(a)	B.1	P
2	Conducted Emission	15.107(a)	B.2	P

6.2. Statements

The test cases listed in section 6.1 of this report for the EUT specified in section 3 were performed by TMC according to the standards or reference documents in section 4.1

The EUT met all applicable requirements of the standards or reference documents in section 4.1.

This report only deals with the USB memory function among the features described in section 3.

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE
1	Test Receiver	ESU26	100376	R&S	2013-11-07
2	EMI Antenna	VULB 9163	514	Schwarzbeck	2014-11-10
3	EMI Antenna	3117	00139065	ETS-Lindgren	2014-07-31
4	LISN	ESH2-Z5	829991/012	R&S	2013-04-16
5	Test Receiver	ESCI	100344	R&S	2014-03-28
6	PC	OPTIPLEX 755	3908243625	DELL	N/A
7	Monitor	E178FPc	CN-OWR979-641 80-7AJ-D2MS	DELL	N/A
8	Printer	DeskJet D2368	TH72E12G7Q	HP	N/A
9	Keyboard	L100	CN0RH65965890 7ATOI40	DELL	N/A
10	Mouse	M-BZ96C	810-000207	Logitech	N/A
11	Mouse	M-UAE119	LZ935220ZRC	Lenovo	N/A

ANNEX B: MEASUREMENT RESULTS

B.1 Radiated Emission

Reference

FCC: CFR Part 15.109(a)

B.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and/or charging mode of MS) at a distance of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 8.3.

B.1.2 EUT Operating Mode:

EUT Setup: #23860+ #23812

The MS is operating under the USB mode. During the test MS is connected to a PC via a USB cable in the case of USB mode. The model of the PC is OPTIPLEX 755, and the serial number of the PC is 3908243625. A software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

B.1.3 Test layout: see Pic.1 in ANNEX C.

B.1.4 Measurement Limit

Limit from CFR Part 15.109(a)

Frequency of emission (MHz)	Field strength (microvolts/meter)
30-88	100
88-216	150
216-960	200
Above 960	500

B.1.5 Measurement Results
USB Mode

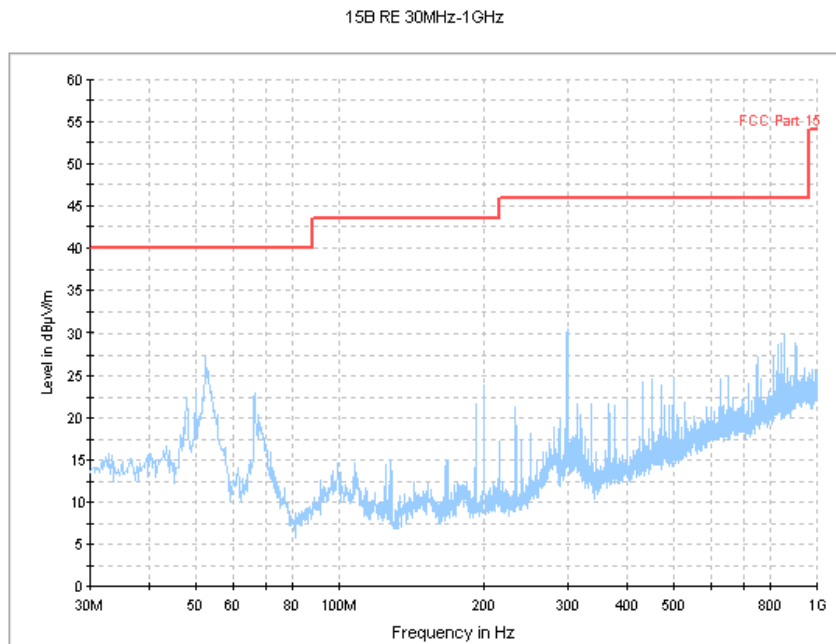


Figure B.1 Radiated Emission from 30MHz to 1GHz

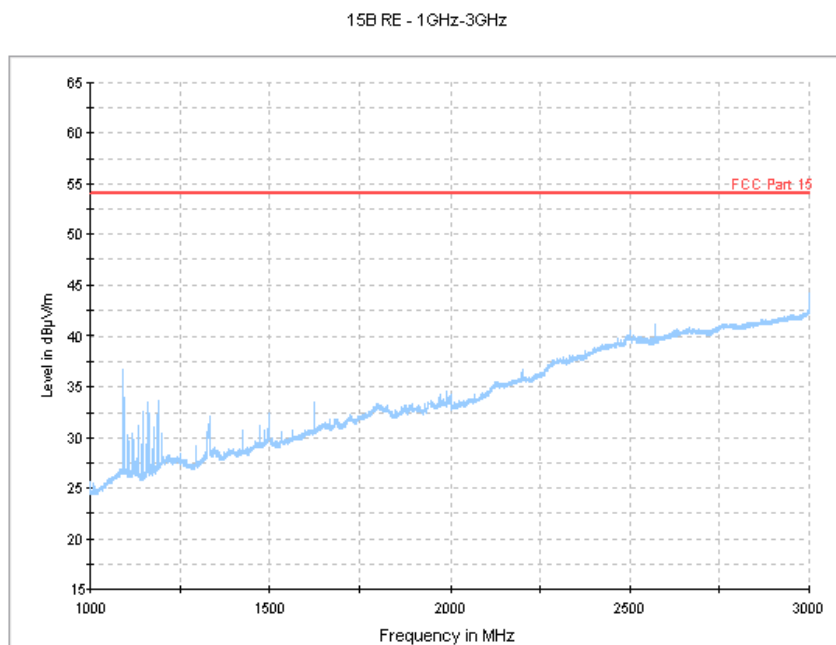


Figure B.2 Radiated Emission from 1GHz to 3GHz

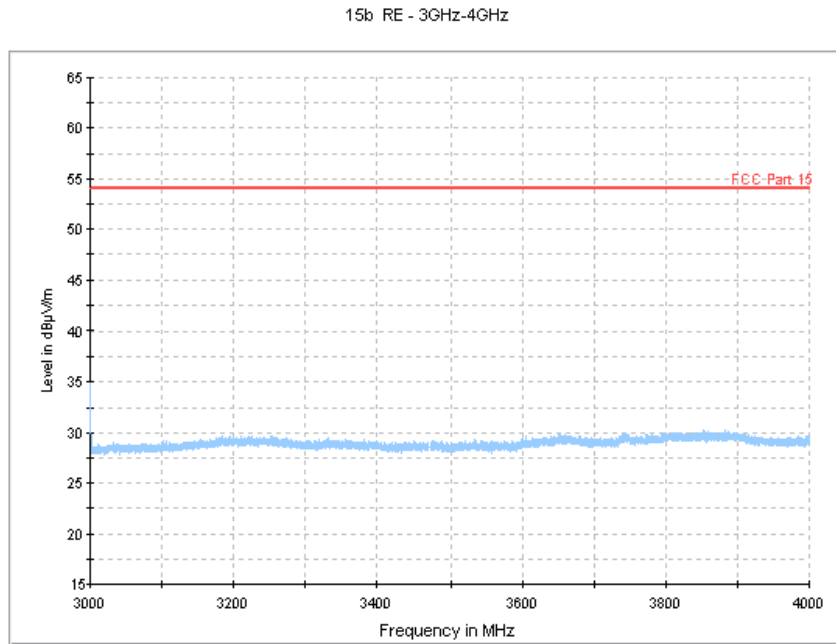


Figure B.3 Radiated Emission from 3GHz to 4GHz

B.2 Conducted Emission

Reference

FCC: CFR Part 15.107(a)

B.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30MHz shall not exceed the limits. Test is performed in accordance with the procedures of ANSI C63.4-2003, section 7.2.

B.2.2 EUT Operating Mode:

EUT Setup: #23860+ #23812

The MS is operating in the USB mode. During the test MS is connected to a PC via a USB cable in the case of USB mode. The model of the PC is OPTIPLEX 755, and the serial number of the PC is 3908243625. A software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.


B.2.3 Test layout: see Pic.2 in ANNEX C.

B.2.4 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

B.2.5 Measurement Results
USB Mode

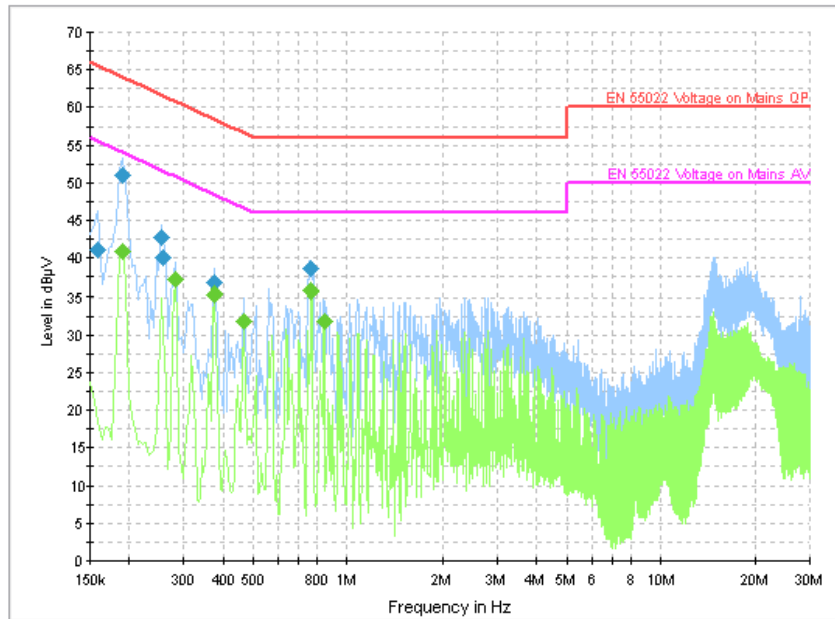

IF bandwidth 9 kHz

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Fig B.4 Conducted Continuous Emission from 150 kHz to 30 MHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.159000	41.0	GND	N	10.0	24.5	65.5
0.190500	51.0	GND	L1	10.0	13.0	64.0
0.253500	42.7	GND	N	10.0	18.9	61.6
0.258000	40.0	GND	L1	10.0	21.5	61.5
0.375000	36.7	GND	N	10.0	21.7	58.4
0.766500	38.5	GND	L1	10.0	17.5	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.190500	40.8	GND	L1	10.0	13.2	54.0
0.280500	37.2	GND	L1	10.0	13.6	50.8
0.375000	35.4	GND	N	10.0	13.0	48.4
0.469500	31.8	GND	N	10.0	14.7	46.5
0.766500	35.7	GND	L1	10.0	10.3	46.0
0.843000	31.8	GND	N	10.0	14.2	46.0