

## MEASUREMENT REPORT

### FCC Part 22, 24, 27 / IC RSS-132, RSS-133, RSS-139 LTE

**Applicant Name:**  
Sony Mobile Communications  
Nya Vattentorget  
SE-221-88 Lund  
Sweden

**Date of Testing:**  
6/18 – 7/16/2013  
**Test Site/Location:**  
PCTEST Lab., Columbia, MD, USA  
**Test Report Serial No.:**  
0Y1307231386.PY7

<b>FCC ID :</b>	<b>PY7PM-0620</b>
<b>APPLICANT:</b>	<b>SONY MOBILE COMMUNICATIONS</b>



**FCC Classification:** PCS Licensed Transmitter Held to Ear (PCE)  
**FCC Rule Part(s):** §2; §22; §24; §27  
**EUT Type:** Portable Handset  
**Type Number:** PM-0620-BV  
**Test Device Serial No.:** identical prototype [S/N: 9236]

Mode	Tx Frequency (MHz)	Emission Designator	Modulation	ERP/EIRP		Mode	Tx Frequency (MHz)	Emission Designator	Modulation	ERP/EIRP	
				Max. Power (W)	Max. Power (dBm)					Max. Power (W)	Max. Power (dBm)
LTE Band 5	824.7 - 848.3	1M11G7D	QPSK	0.136	21.32	LTE Band 2	1850.7 - 1909.3	1M09G7D	QPSK	0.111	20.44
LTE Band 5	824.7 - 848.3	1M09W7D	16QAM	0.103	20.14	LTE Band 2	1850.7 - 1909.3	1M09W7D	16QAM	0.090	19.56
LTE Band 5	825.5 - 847.5	2M70G7D	QPSK	0.137	21.36	LTE Band 2	1851.5 - 1908.5	2M71G7D	QPSK	0.119	20.74
LTE Band 5	825.5 - 847.5	2M69W7D	16QAM	0.108	20.33	LTE Band 2	1851.5 - 1908.5	2M69W7D	16QAM	0.085	19.30
LTE Band 5	826.5 - 846.5	4M49G7D	QPSK	0.144	21.57	LTE Band 2	1852.5 - 1907.5	4M50G7D	QPSK	0.123	20.89
LTE Band 5	826.5 - 846.5	4M50W7D	16QAM	0.129	21.09	LTE Band 2	1852.5 - 1907.5	4M51W7D	16QAM	0.099	19.94
LTE Band 5	829 - 844	8M97G7D	QPSK	0.143	21.56	LTE Band 2	1855 - 1905	8M99G7D	QPSK	0.117	20.67
LTE Band 5	829 - 844	8M96W7D	16QAM	0.120	20.80	LTE Band 2	1855 - 1905	8M97W7D	16QAM	0.089	19.49
LTE Band 4	1710.7 - 1754.3	1M10G7D	QPSK	0.249	23.96	LTE Band 2	1857.5 - 1902.5	13M4G7D	QPSK	0.112	20.50
LTE Band 4	1710.7 - 1754.3	1M10W7D	16QAM	0.187	22.73	LTE Band 2	1857.5 - 1902.5	13M4W7D	16QAM	0.088	19.44
LTE Band 4	1711.5 - 1753.5	2M70G7D	QPSK	0.240	23.80	LTE Band 2	1860 - 1900	17M9G7D	QPSK	0.114	20.59
LTE Band 4	1711.5 - 1753.5	2M70W7D	16QAM	0.190	22.78	LTE Band 2	1860 - 1900	17M9W7D	16QAM	0.091	19.57
LTE Band 4	1712.5 - 1752.5	4M50G7D	QPSK	0.256	24.07	LTE Band 7	2502.5 - 2565.5	4M52G7D	QPSK	0.104	20.16
LTE Band 4	1712.5 - 1752.5	4M51W7D	16QAM	0.188	22.74	LTE Band 7	2502.5 - 2565.6	4M53W7D	16QAM	0.076	18.83
LTE Band 4	1715 - 1750	8M98G7D	QPSK	0.253	24.04	LTE Band 7	2505 - 2565	9M03G7D	QPSK	0.103	20.14
LTE Band 4	1715 - 1750	9M00W7D	16QAM	0.224	23.49	LTE Band 7	2506 - 2565	9M01W7D	16QAM	0.075	18.73
LTE Band 4	1717.5 - 1747.5	13M4G7D	QPSK	0.263	24.19	LTE Band 7	2507.5 - 2562.5	13M5G7D	QPSK	0.104	20.18
LTE Band 4	1717.5 - 1747.5	13M4W7D	16QAM	0.200	23.00	LTE Band 7	2507.5 - 2562.6	13M5W7D	16QAM	0.078	18.92
LTE Band 4	1720 - 1745	18M0G7D	QPSK	0.245	23.89	LTE Band 7	2510 - 2560	18M1G7D	QPSK	0.101	20.06
LTE Band 4	1720 - 1745	17M9W7D	16QAM	0.187	22.71	LTE Band 7	2510 - 2560	18M0W7D	16QAM	0.075	18.76

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested. I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


  
Randy Ortanez  
President




FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 1 of 138

# T A B L E O F C O N T E N T S

FCC PART 22, 24, 27 MEASUREMENT REPORT .....		3
1.0 INTRODUCTION .....		4
1.1 SCOPE .....		4
1.2 TESTING FACILITY .....		4
2.0 PRODUCT INFORMATION .....		5
2.1 EQUIPMENT DESCRIPTION .....		5
2.2 DEVICE CAPABILITIES .....		5
2.3 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS .....		5
2.4 LABELING REQUIREMENTS .....		5
3.0 DESCRIPTION OF TESTS .....		6
3.1 MEASUREMENT PROCEDURE .....		6
3.2 CELLULAR - BASE FREQUENCY BLOCKS .....		6
3.3 CELLULAR - MOBILE FREQUENCY BLOCKS .....		6
3.4 PCS - BASE FREQUENCY BLOCKS .....		6
3.5 PCS - MOBILE FREQUENCY BLOCKS .....		7
3.6 AWS - BASE FREQUENCY BLOCKS .....		7
3.7 AWS - MOBILE FREQUENCY BLOCKS .....		7
3.8 OCCUPIED BANDWIDTH .....		7
3.9 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....		8
3.10 PEAK-AVERAGE RATIO .....		8
3.11 RADIATED POWER AND RADIATED SPURIOUS EMISSIONS .....		9
3.12 FREQUENCY STABILITY / TEMPERATURE VARIATION .....		10
4.0 TEST EQUIPMENT CALIBRATION DATA .....		11
5.0 SAMPLE CALCULATIONS .....		12
6.0 TEST RESULTS .....		13
6.1 SUMMARY .....		13
6.2 EFFECTIVE RADIATED POWER (ERP) .....		14
6.3 EQUIVALENT ISOTROPIC RADIATED POWER (EIRP) .....		15
6.4 BAND 5 RADIATED SPURIOUS EMISSIONS .....		18
6.5 BAND 4 RADIATED SPURIOUS EMISSIONS .....		21
6.6 BAND 2 RADIATED SPURIOUS EMISSIONS .....		24
6.7 BAND 7 RADIATED SPURIOUS EMISSIONS .....		27
6.8 BAND 5 FREQUENCY STABILITY MEASUREMENTS .....		30
6.9 BAND 4 FREQUENCY STABILITY MEASUREMENTS .....		32
6.10 BAND 2 FREQUENCY STABILITY MEASUREMENTS .....		34
6.11 BAND 7 FREQUENCY STABILITY MEASUREMENTS .....		36
7.0 BAND 5 PLOTS OF EMISSIONS .....		38
8.0 BAND 4 PLOTS OF EMISSIONS .....		57
9.0 BAND 2 PLOTS OF EMISSIONS .....		84
10.0 BAND 7 PLOTS OF EMISSIONS .....		111
11.0 CONCLUSION .....		138

FCC ID: PY7PM-0620		<b>FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1307231386.PY7	<b>Test Dates:</b> 6/18 – 7/16/2013	<b>EUT Type:</b> Portable Handset	Page 2 of 138	



# MEASUREMENT REPORT

## FCC Part 22, 24, 27




### §2.1033 General Information

**APPLICANT:** Sony Mobile Communications  
**APPLICANT ADDRESS:** Nya Vattentornet  
 SE-221 88 Lund, Sweden  
**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.  
**TEST SITE ADDRESS:** 7185 Oakland Mills Road, Columbia, MD 21045 USA  
**FCC RULE PART(S):** §2; §22; §24; §27  
**TYPE NUMBER:** PM-0620-BV  
**FCC ID:** PY7PM-0620  
**FCC CLASSIFICATION:** PCS Licensed Transmitter Held to Ear (PCE)  
**FREQUENCY TOLERANCE:** ±0.00025 % (2.5 ppm)  
**Test Device Serial No.:** 9236       Production     Pre-Production     Engineering  
**DATE(S) OF TEST:** 6/18 – 7/16/2013  
**TEST REPORT S/N:** 0Y1307231386.PY7

### Test Facility / Accreditations

Measurements were performed at **PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.**

- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset	Page 3 of 138	

# 1.0 INTRODUCTION


## 1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.


## 1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on February 15, 2012.

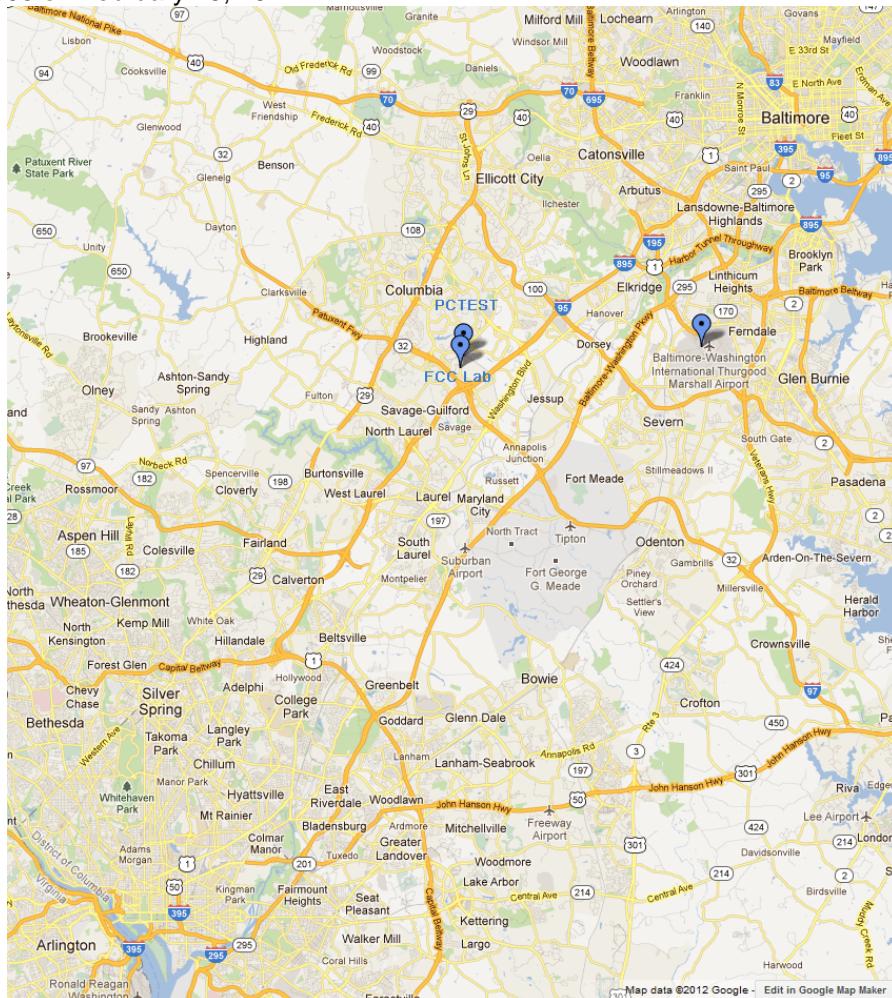

**Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area**

FCC ID: PY7PM-0620		<b>FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset	Page 4 of 138	

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Sony Portable Handset FCC ID: PY7PM-0620**. The test data contained in this report pertains only to the emissions due to the EUT's LTE function.

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Band 2, 4, 5, 7 LTE, 802.11a/b/g/n/ac WLAN (DTS/NII), Bluetooth (1x, EDR, LE), ANT+, NFC


### 2.3 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

### 2.4 Labeling Requirements

Per 2.925

The FCC identifier shall be permanently affixed to the equipment and shall be readily visible to the purchaser at the time of purchase.

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 5 of 138




## 3.0 DESCRIPTION OF TESTS

### 3.1 Measurement Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-C-2004) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168) were used in the measurement of the **Sony Portable Handset FCC ID: PY7PM-0620**.

### 3.2 Cellular - Base Frequency Blocks

§24.905

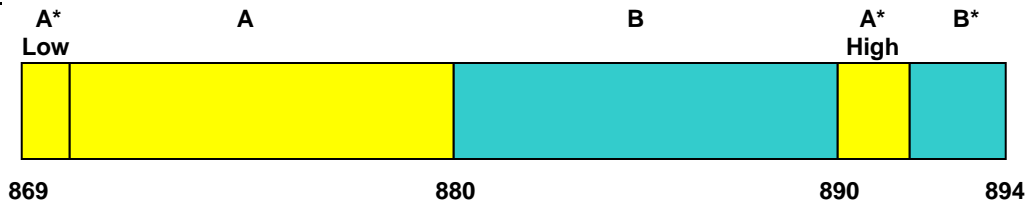

**BLOCK 1:** 869 – 880 MHz (A\* Low + A)


**BLOCK 2:** 880 – 890 MHz (B)

**BLOCK 3:** 890 – 891.5 MHz (A\* High)

**BLOCK 4:** 891.5 – 894 MHz (B\*)

### 3.3 Cellular - Mobile Frequency Blocks

§24.905

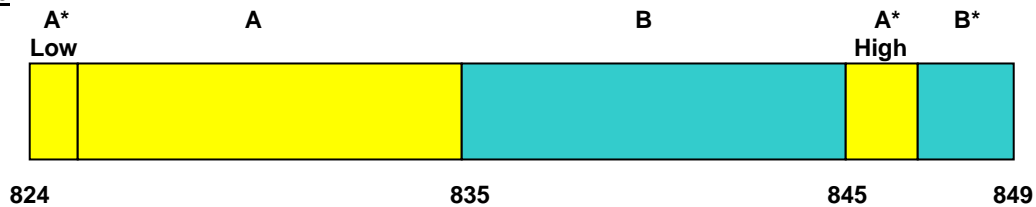

**BLOCK 1:** 824 – 835 MHz (A\* Low + A)


**BLOCK 2:** 835 – 845 MHz (B)

**BLOCK 3:** 845 – 846.5 MHz (A\* High)

**BLOCK 4:** 846.5 – 849 MHz (B\*)

### 3.4 PCS - Base Frequency Blocks

§24.229

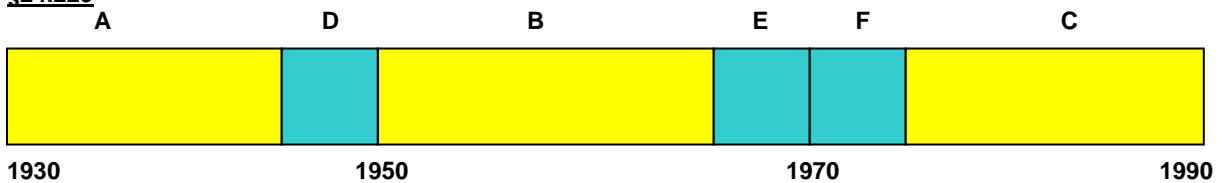

**BLOCK 1:** 1930 – 1945 MHz (A)

**BLOCK 2:** 1945 – 1950 MHz (D)

**BLOCK 3:** 1950 – 1965 MHz (B)

**BLOCK 4:** 1965 – 1970 MHz (E)


**BLOCK 5:** 1970 – 1975 MHz (F)

**BLOCK 6:** 1975 – 1990 MHz (C)

FCC ID: PY7PM-0620		<b>FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 6 of 138


### 3.5 PCS - Mobile Frequency Blocks

§24.229

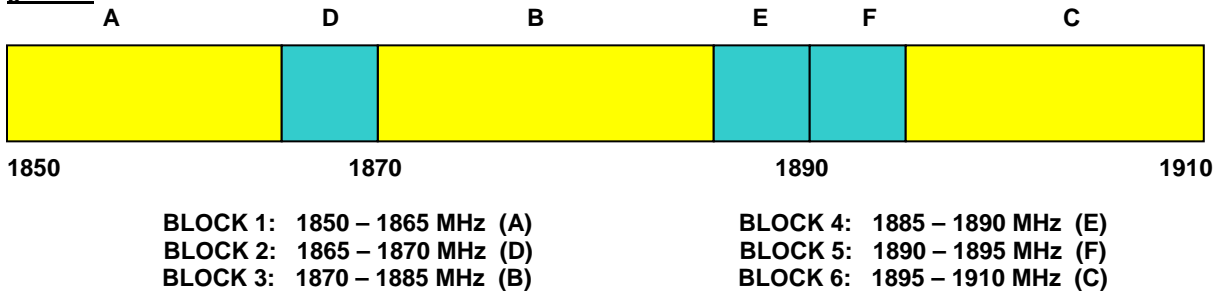


### 3.6 AWS - Base Frequency Blocks

§27.5(h)

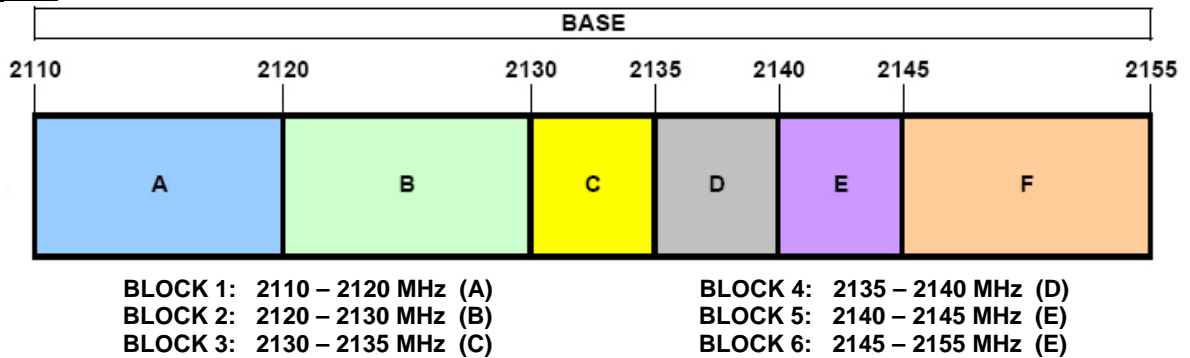

### 3.7 AWS - Mobile Frequency Blocks

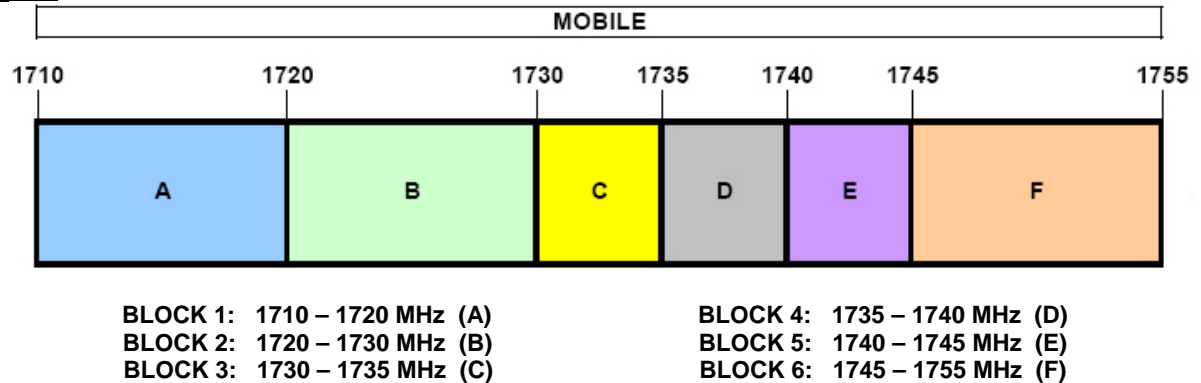

§27.5(h)



### 3.8 Occupied Bandwidth

§2.1049 RSS-Gen(4.6.1) RSS-133(2.3) RSS-139(2.3)

The implementation of this test is performed by the spectrum analyzer's occupied bandwidth function. The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.



FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 7 of 138

**3.9 Spurious and Harmonic Emissions at Antenna Terminal**  
§2.1051 §22.917(a)(b) §24.238(a)(b) §27.53(h) §27.53(m) RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for Cell band, or 1 MHz or greater for PCS band, AWS band, BRS and EBS stations. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed for PCS band, AWS band, BRS and EBS stations. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

**3.10 Peak-Average Ratio**  
§24.232(d) §27.50(d.5) RSS-132(5.4) RSS-133(6.4) RSS-139(6.4)

A peak to average ratio measurement is performed at the conducted port of the EUT. For LTE signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

FCC ID: PY7PM-0620	 <b>FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>			Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 8 of 138



### 3.11 Radiated Power and Radiated Spurious Emissions

§2.1053 §22.913(a.2) §22.917(a) §24.232(c) §24.238(a) §27.50(d.4) §27.53(h) RSS-132(4.4) RSS-132(4.5.1) RSS-133(6.4) RSS-133(6.5.1) RSS-139(6.5.1)

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A ¾" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168.

Per the guidance of ANSI/TIA-603-C-2004, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [dBm] = P_g [dBm] - \text{cable loss} [dB] + \text{antenna gain} [dBd/dBi]$$

Where,  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g [dBm] - \text{cable loss} [dB]$ .

The calculated  $P_d$  levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of  $43 + 10\log_{10}(\text{Power} [Watts])$  specified in 22.917(a) and 24.238(a).

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset	Page 9 of 138	

### 3.12 Frequency Stability / Temperature Variation

§2.1055 §22.863 §22.905 §24.229 §24.235 §27.5(h) §27.5(i) §27.54 RSS-132(4.3) RSS-133(6.3) RSS-139(6.3)


The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

*Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block for Part 24 and 27. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency for Part 22.*

**Time Period and Procedure:**

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A sufficient stabilization period at each temperature shall be used prior to each frequency requirement.

FCC ID: PY7PM-0620	 <b>FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>			Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 10 of 138

## 4.0 TEST EQUIPMENT CALIBRATION DATA



Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8447D	Broadband Amplifier	5/31/2013	Annual	5/31/2014	2443A01900
Agilent	N9020A	MXA Signal Analyzer	10/9/2012	Annual	10/9/2013	US46470561
Espec	ESX-2CA	Environmental Chamber	4/16/2013	Annual	4/16/2014	17620
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	11/14/2011	Biennial	11/14/2013	9105-2404
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Tx	11/14/2011	Biennial	11/14/2013	9105-2403
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/26/2012	Biennial	1/26/2014	A051107
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	N/A	Biennial	N/A	103962
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	7/22/2011	Biennial	7/22/2013	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	5/30/2012	Biennial	5/30/2014	135427
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	5/31/2013	Annual	5/31/2014	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/31/2013	Annual	5/31/2014	100040
-	LTx1	Licensed Transmitter Cable Set	1/17/2013	Annual	1/17/2014	N/A
Rohde & Schwarz	ESU26	EMI Test Receiver	2/25/2013	Annual	2/25/2014	100342
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	3/29/2013	Annual	3/29/2014	N/A
Mini-Circuits	VHF-1200+	High Pass Filter	1/17/2013	Annual	1/17/2014	30923
Mini-Circuits	VHF-3100+	High Pass Filter	1/17/2013	Annual	1/17/2014	30841
Seekonk	NC-100	Torque Wrench (8" lb)	3/5/2012	Triennial	3/5/2015	N/A
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	11/7/2012	Biennial	11/7/2014	128338
Agilent	N5183A	MXG Analog Signal Generator	1/6/2013	Annual	1/6/2014	MY50141900
Agilent	N9030A	PXA Signal Analyzer (44GHz)	1/11/2013	Annual	1/11/2014	MY52350166
Mini-Circuits	PWR-SENS-4RMS	USB Power Sensor	4/17/2013	Annual	4/17/2014	11210140001
Agilent	87405C	Pre-amplifier (0.1 - 18 GHz)	3/11/2013	Annual	3/11/2014	MY53010007

**Table 4-1. Test Equipment**

**Notes:**

Equipment used for signaling with a calibration date of "N/A" shown in this list was only used for maintaining a link between the piece of equipment and the EUT. This equipment was not used to make direct calibrated measurements.

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 - 7/16/2013	EUT Type: Portable Handset	Page 11 of 138	

## 5.0 SAMPLE CALCULATIONS

### Emission Designator

#### QPSK Modulation

**Emission Designator = 8M62G7D**

LTE BW = 8.62 MHz  
 G = Phase Modulation  
 7 = Quantized/Digital Info  
 D = Amplitude/Angle Modulated

#### 16QAM Modulation


**Emission Designator = 8M45W7D**

LTE BW = 8.45 MHz  
 W = Amplitude/Angle Modulated  
 7 = Quantized/Digital Info  
 D = Combination (Audio/Data)

### Spurious Radiated Emission – LTE Band

#### **Example: Middle Channel LTE Mode 2<sup>nd</sup> Harmonic (1564 MHz)**

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-81.0$  dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0$  dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of  $-30.9$  dBm yielding  $-24.80$  dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – ( $-24.80$ ).

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset	Page 12 of 138	

## 6.0 TEST RESULTS

### 6.1 Summary


Company Name: Sony Mobile Communications  
 FCC ID: PY7PM-0620  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 Mode(s): LTE

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Result	Reference
<b>TRANSMITTER MODE (TX)</b>						
2.1049	RSS-Gen (4.6.1) RSS-133(2.3) RSS-139(2.3)	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section, 7.0, 8.0, 9.0, 10.0
2.1051 22.917(a) 24.238(a) 27.53(h) 27.53(m)	RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)	Band Edge / Conducted Spurious Emissions	> 43 + 10log <sub>10</sub> (P[Watts]) at Band Edge and for all out-of-band emissions		PASS	Section, 7.0, 8.0, 9.0
2.1051 27.53(m)	RSS-139(6.5.1)	Band Edge / Conducted Spurious Emissions	> 55 + 10log <sub>10</sub> (P[Watts]) for all out-of-band emissions more than 5.5MHz from the channel edge		PASS	Section 10.0
24.232(d) 27.50(d.5)	RSS-132(5.4) RSS-133(6.4) RSS-139(6.4)	Peak-Average Ratio	< 13 dB		PASS	Section 8.0, 9.0
2.1046	RSS-132(4.4) RSS-133(4.1) RSS-139(4.1)	Transmitter Conducted Output Power	N/A		PASS	See RF Exposure Report
22.913(a.2)	RSS-132(4.4) [SRSP-503(5.1.3)]	Effective Radiated Power (Band 5)	< 7 Watts max. ERP	RADIATED	PASS	Section 6.2
24.232(c) 27.50(h.2)	RSS-133(6.4) [SRSP-510(5.1.2)]	Equivalent Isotropic Radiated Power (Band 2 EBS)	< 2 Watts max. EIRP		PASS	Section 6.3
27.50(d.4)	RSS-139(6.4)	Equivalent Isotropic Radiated Power (Band 4)	< 1 Watts max. EIRP		PASS	Section 6.3
2.1053 22.917(a) 24.238(a) 27.53(h) 27.53(m)	RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)	Undesirable Emissions	> 43 + 10log <sub>10</sub> (P[Watts]) for all out-of-band emissions		PASS	Section, 6.4, 6.5, 6.6
27.53(m)	RSS-139(6.5.1)	Undesirable Emissions	> 55 + 10log <sub>10</sub> (P[Watts]) for all out-of-band emissions more than 5.5MHz from the channel edge		PASS	Section 6.7
2.1055. 22.355 24.23527.5(i) 27.54	RSS-132(4.3) RSS-133(6.3) RSS-139(6.3)	Frequency Stability	< 2.5 ppm (Part 22) and fundamental emissions stay within authorized frequency block (Part 24, 27)		PASS	Section, 6.8, 6.9, 6.10, 6.11

**Table 6-1. Summary of Test Results**

**Notes:**

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 7.0 8.0 9.0 10.0 were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset	Page 13 of 138	

## 6.2 Effective Radiated Power (ERP)



### §22.913(a.2) RSS-132(4.4)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]	Margin [dB]
824.70	1.4	QPSK	Standard	1 / 0	16.57	4.68	H2	21.25	0.133	-17.20
836.50	1.4	QPSK	Standard	1 / 0	16.50	4.82	H2	21.32	0.136	-17.13
848.30	1.4	QPSK	Standard	1 / 0	16.18	4.96	H2	21.14	0.130	-17.31
824.70	1.4	16-QAM	Standard	1 / 0	15.37	4.68	H2	20.05	0.101	-18.40
836.50	1.4	16-QAM	Standard	1 / 0	15.26	4.82	H2	20.08	0.102	-18.37
848.30	1.4	16-QAM	Standard	1 / 0	15.18	4.96	H2	20.14	0.103	-18.31
825.50	3	QPSK	Standard	1 / 0	16.45	4.68	H2	21.13	0.130	-17.32
836.50	3	QPSK	Standard	1 / 0	16.54	4.82	H2	21.36	0.137	-17.09
847.50	3	QPSK	Standard	1 / 0	16.29	4.96	H2	21.25	0.133	-17.20
825.50	3	16-QAM	Standard	1 / 0	15.46	4.68	H2	20.14	0.103	-18.31
836.50	3	16-QAM	Standard	1 / 0	15.51	4.82	H2	20.33	0.108	-18.12
847.50	3	16-QAM	Standard	1 / 0	15.15	4.96	H2	20.11	0.103	-18.34
826.50	5	QPSK	Standard	1 / 24	16.89	4.68	H2	21.57	0.144	-16.88
836.50	5	QPSK	Standard	1 / 12	16.62	4.82	H2	21.44	0.139	-17.01
846.50	5	QPSK	Standard	1 / 0	15.43	4.96	H2	20.39	0.109	-18.06
826.50	5	16-QAM	Standard	1 / 24	15.96	4.68	H2	20.64	0.116	-17.81
836.50	5	16-QAM	Standard	1 / 12	16.27	4.82	H2	21.09	0.129	-17.36
846.50	5	16-QAM	Standard	1 / 0	14.43	4.96	H2	19.39	0.087	-19.06
829.00	10	QPSK	Standard	1 / 25	16.88	4.68	H2	21.56	0.143	-16.89
836.50	10	QPSK	Standard	1 / 25	16.40	4.82	H2	21.22	0.133	-17.23
844.00	10	QPSK	Standard	1 / 0	16.05	4.96	H2	21.01	0.126	-17.44
829.00	10	16-QAM	Standard	1 / 25	15.94	4.68	H2	20.62	0.115	-17.83
836.50	10	16-QAM	Standard	1 / 25	15.98	4.82	H2	20.80	0.120	-17.65
844.00	10	16-QAM	Standard	1 / 0	15.25	4.96	H2	20.21	0.105	-18.24

**Table 6-2. ERP Data (Band 5)**

#### **NOTES:**

1. This device was tested under all bandwidths, and RB configurations, and modulations.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case configuration was found in the H2 position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset	Page 14 of 138	




### 6.3 Equivalent Isotropic Radiated Power (EIRP)

§24.232(c) §27.50(d.4) §27.50(h.2) RSS-133(6.4) RSS-139(6.4)



Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	Margin [dB]
1710.70	1.4	QPSK	Standard	1 / 0	13.49	9.89	V	23.38	0.218	-6.62
1732.50	1.4	QPSK	Standard	1 / 0	14.11	9.85	V	23.96	0.249	-6.04
1754.30	1.4	QPSK	Standard	1 / 0	14.02	9.80	V	23.82	0.241	-6.18
1710.70	1.4	16-QAM	Standard	1 / 0	12.53	9.89	V	22.42	0.175	-7.58
1732.50	1.4	16-QAM	Standard	1 / 0	12.88	9.85	V	22.73	0.187	-7.27
1754.30	1.4	16-QAM	Standard	1 / 0	12.77	9.80	V	22.57	0.181	-7.43
1711.50	3	QPSK	Standard	1 / 0	13.51	9.89	V	23.40	0.219	-6.60
1732.50	3	QPSK	Standard	1 / 6	13.95	9.85	V	23.80	0.240	-6.20
1753.50	3	QPSK	Standard	1 / 6	13.99	9.80	V	23.79	0.240	-6.21
1711.50	3	16-QAM	Standard	1 / 0	12.48	9.89	V	22.37	0.173	-7.63
1732.50	3	16-QAM	Standard	1 / 6	12.93	9.85	V	22.78	0.190	-7.22
1753.50	3	16-QAM	Standard	1 / 6	12.79	9.80	V	22.59	0.182	-7.41
1712.50	5	QPSK	Standard	1 / 12	13.52	9.89	V	23.41	0.219	-6.59
1732.50	5	QPSK	Standard	1 / 12	14.22	9.85	V	24.07	0.255	-5.93
1752.50	5	QPSK	Standard	1 / 24	14.27	9.80	V	24.07	0.256	-5.93
1712.50	5	16-QAM	Standard	1 / 12	12.54	9.89	V	22.43	0.175	-7.57
1732.50	5	16-QAM	Standard	1 / 12	12.89	9.85	V	22.74	0.188	-7.26
1752.50	5	16-QAM	Standard	1 / 24	12.88	9.80	V	22.68	0.186	-7.32
1715.00	10	QPSK	Standard	1 / 25	13.48	9.89	V	23.37	0.217	-6.63
1732.50	10	QPSK	Standard	1 / 25	14.19	9.85	V	24.04	0.253	-5.96
1750.00	10	QPSK	Standard	1 / 25	14.23	9.80	V	24.03	0.253	-5.97
1715.00	10	16-QAM	Standard	1 / 25	12.39	9.89	V	22.28	0.169	-7.72
1732.50	10	16-QAM	Standard	1 / 25	13.26	9.85	V	23.11	0.205	-6.89
1750.00	10	16-QAM	Standard	1 / 25	13.69	9.80	V	23.49	0.224	-6.51
1717.50	15	QPSK	Standard	1 / 36	14.05	9.89	V	23.94	0.248	-6.06
1732.50	15	QPSK	Standard	1 / 36	14.29	9.85	V	24.14	0.259	-5.86
1747.50	15	QPSK	Standard	1 / 36	14.39	9.80	V	24.19	0.263	-5.81
1717.50	15	16-QAM	Standard	1 / 36	12.99	9.89	V	22.88	0.194	-7.12
1732.50	15	16-QAM	Standard	1 / 36	13.08	9.85	V	22.93	0.196	-7.07
1747.50	15	16-QAM	Standard	1 / 36	13.20	9.80	V	23.00	0.200	-7.00
1720.00	20	QPSK	Standard	1 / 50	13.77	9.89	V	23.66	0.232	-6.34
1732.50	20	QPSK	Standard	1 / 50	14.04	9.85	V	23.89	0.245	-6.11
1745.00	20	QPSK	Standard	1 / 50	14.00	9.80	V	23.80	0.240	-6.20
1720.00	20	16-QAM	Standard	1 / 50	12.74	9.89	V	22.63	0.183	-7.37
1732.50	20	16-QAM	Standard	1 / 50	12.86	9.85	V	22.71	0.187	-7.29
1745.00	20	16-QAM	Standard	1 / 50	12.76	9.80	V	22.56	0.180	-7.44

Table 6-3. EIRP Data (Band 4)

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset	Page 15 of 138	

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	Margin [dB]
1850.70	1.4	QPSK	Standard	1 / 0	10.85	9.59	V	20.44	0.111	-12.57
1880.00	1.4	QPSK	Standard	1 / 0	9.28	9.53	V	18.81	0.076	-14.20
1909.30	1.4	QPSK	Standard	1 / 0	7.55	9.48	V	17.03	0.050	-15.98
1850.70	1.4	16-QAM	Standard	1 / 0	9.97	9.59	V	19.56	0.090	-13.45
1880.00	1.4	16-QAM	Standard	1 / 0	8.16	9.53	V	17.69	0.059	-15.32
1909.30	1.4	16-QAM	Standard	1 / 0	6.68	9.48	V	16.16	0.041	-16.85
1851.50	3	QPSK	Standard	1 / 0	11.15	9.59	V	20.74	0.119	-12.27
1880.00	3	QPSK	Standard	1 / 0	9.51	9.53	V	19.04	0.080	-13.97
1908.50	3	QPSK	Standard	1 / 0	7.74	9.48	V	17.22	0.053	-15.79
1851.50	3	16-QAM	Standard	1 / 0	9.71	9.59	V	19.30	0.085	-13.71
1880.00	3	16-QAM	Standard	1 / 0	8.53	9.53	V	18.06	0.064	-14.95
1908.50	3	16-QAM	Standard	1 / 0	7.42	9.48	V	16.90	0.049	-16.11
1852.50	5	QPSK	Standard	1 / 0	11.30	9.59	V	20.89	0.123	-12.12
1880.00	5	QPSK	Standard	1 / 0	9.68	9.53	V	19.21	0.083	-13.80
1907.50	5	QPSK	Standard	1 / 0	7.82	9.48	V	17.30	0.054	-15.71
1852.50	5	16-QAM	Standard	1 / 0	10.35	9.59	V	19.94	0.099	-13.07
1880.00	5	16-QAM	Standard	1 / 0	8.35	9.53	V	17.88	0.061	-15.13
1907.50	5	16-QAM	Standard	1 / 0	6.84	9.48	V	16.32	0.043	-16.69
1855.00	10	QPSK	Standard	1 / 0	11.08	9.59	V	20.67	0.117	-12.34
1880.00	10	QPSK	Standard	1 / 0	9.10	9.53	V	18.63	0.073	-14.38
1905.00	10	QPSK	Standard	1 / 0	8.04	9.48	V	17.52	0.056	-15.49
1855.00	10	16-QAM	Standard	1 / 0	9.90	9.59	V	19.49	0.089	-13.52
1880.00	10	16-QAM	Standard	1 / 0	8.18	9.53	V	17.71	0.059	-15.30
1905.00	10	16-QAM	Standard	1 / 0	6.95	9.48	V	16.43	0.044	-16.58
1857.50	15	QPSK	Standard	1 / 0	10.91	9.59	V	20.50	0.112	-12.51
1880.00	15	QPSK	Standard	1 / 36	9.52	9.53	V	19.05	0.080	-13.96
1902.50	15	QPSK	Standard	1 / 0	8.39	9.48	V	17.87	0.061	-15.14
1857.50	15	16-QAM	Standard	1 / 0	9.85	9.59	V	19.44	0.088	-13.57
1880.00	15	16-QAM	Standard	1 / 36	8.58	9.53	V	18.11	0.065	-14.90
1902.50	15	16-QAM	Standard	1 / 0	7.32	9.48	V	16.80	0.048	-16.21
1860.00	20	QPSK	Standard	1 / 0	11.00	9.59	V	20.59	0.114	-12.42
1880.00	20	QPSK	Standard	1 / 50	9.75	9.53	V	19.28	0.085	-13.73
1900.00	20	QPSK	Standard	1 / 0	8.55	9.48	V	18.03	0.064	-14.98
1860.00	20	16-QAM	Standard	1 / 0	9.98	9.59	V	19.57	0.091	-13.44
1880.00	20	16-QAM	Standard	1 / 50	8.53	9.53	V	18.06	0.064	-14.95
1900.00	20	16-QAM	Standard	1 / 0	7.65	9.48	V	17.13	0.052	-15.88

**Table 6-4. EIRP Data (Band 2)**



FCC ID: PY7PM-0620	 <b>FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>			Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset	Page 16 of 138	

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]
2502.50	5	QPSK	Standard	1 / 24	10.02	8.66	H2	18.68	0.074
2535.00	5	QPSK	Standard	1 / 0	11.48	8.68	H2	20.16	0.104
2567.50	5	QPSK	Standard	1 / 0	10.51	8.70	H2	19.21	0.083
2502.50	5	16-QAM	Standard	1 / 24	9.03	8.66	H2	17.69	0.059
2535.00	5	16-QAM	Standard	1 / 0	10.15	8.68	H2	18.83	0.076
2567.50	5	16-QAM	Standard	1 / 0	9.43	8.70	H2	18.13	0.065
2505.00	10	QPSK	Standard	1 / 49	9.83	8.66	H2	18.49	0.071
2535.00	10	QPSK	Standard	1 / 0	11.46	8.68	H2	20.14	0.103
2565.00	10	QPSK	Standard	1 / 0	10.41	8.70	H2	19.11	0.081
2505.00	10	16-QAM	Standard	1 / 49	9.00	8.66	H2	17.66	0.058
2535.00	10	16-QAM	Standard	1 / 0	10.05	8.68	H2	18.73	0.075
2565.00	10	16-QAM	Standard	1 / 0	9.28	8.70	H2	17.98	0.063
2507.50	15	QPSK	Standard	1 / 36	10.03	8.66	H2	18.69	0.074
2535.00	15	QPSK	Standard	1 / 36	11.50	8.68	H2	20.18	0.104
2562.50	15	QPSK	Standard	1 / 0	10.47	8.70	H2	19.17	0.083
2507.50	15	16-QAM	Standard	1 / 36	8.95	8.66	H2	17.61	0.058
2535.00	15	16-QAM	Standard	1 / 36	10.24	8.68	H2	18.92	0.078
2562.50	15	16-QAM	Standard	1 / 0	9.11	8.70	H2	17.81	0.060
2510.00	20	QPSK	Standard	1 / 50	10.02	8.66	H2	18.68	0.074
2535.00	20	QPSK	Standard	1 / 0	11.38	8.68	H2	20.06	0.101
2560.00	20	QPSK	Standard	1 / 50	10.26	8.70	H2	18.96	0.079
2510.00	20	16-QAM	Standard	1 / 50	8.86	8.66	H2	17.52	0.056
2535.00	20	16-QAM	Standard	1 / 0	10.08	8.68	H2	18.76	0.075
2560.00	20	16-QAM	Standard	1 / 50	8.95	8.70	H2	17.65	0.058

**Table 6-5. EIRP Data (Band 7)**

**NOTES:**

1. This device was tested under all bandwidths, and RB configurations, and modulations.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case configuration was found in the V position for LTE Band 4 and 2, and in the H2 position for Band 7. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0620	 <b>FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>			Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset	Page 17 of 138	

## 6.4 Band 5 Radiated Spurious Emissions

### §2.1053 §22.917(a) RSS-132(4.5.1)

#### Field Strength of SPURIOUS Radiation


OPERATING FREQUENCY: 826.50 MHz  
 MEASURED OUTPUT POWER: 21.57 dBm = 0.144 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  34.57 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1653.00	-49.79	2.50	-47.30	H	68.87
2479.50	-49.74	2.82	-46.93	H	68.50
3306.00	-79.72	5.52	-74.19	H	95.76
4132.50	-79.41	7.08	-72.33	H	93.90
4959.00	-78.88	7.91	-70.97	H	92.54
5785.50	-76.96	8.51	-68.45	H	90.02

**Table 6-6. Radiated Spurious Data**

#### **NOTES:**

1. This device was tested under all bandwidths, and RB configurations, and modulations.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 18 of 138

**Band 5 Radiated Spurious Measurements (continued)**  
**§2.1053 §22.917(a) RSS-132(4.5.1)**

**Field Strength of SPURIOUS Radiation**


OPERATING FREQUENCY: 836.50 MHz  
 MEASURED OUTPUT POWER: 21.44 dBm = 0.139 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  34.44 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1673.00	-51.91	2.34	-49.58	H	71.02
2509.50	-51.08	2.84	-48.24	H	69.68
3346.00	-79.83	5.64	-74.18	H	95.62
4182.50	-79.50	7.14	-72.36	H	93.80
5019.00	-78.86	7.97	-70.89	H	92.33
5855.50	-76.66	8.46	-68.20	H	89.64

**Table 6-7. Radiated Spurious Data**

**NOTES:**

1. This device was tested under all bandwidths, and RB configurations, and modulations.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset	Page 19 of 138	

**Band 5 Radiated Spurious Measurements (continued)**  
**§2.1053 §22.917(a) RSS-132(4.5.1)**

**Field Strength of SPURIOUS Radiation**


OPERATING FREQUENCY: 846.50 MHz  
 MEASURED OUTPUT POWER: 20.39 dBm = 0.109 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  33.39 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1693.00	-51.23	2.18	-49.05	H	69.44
2539.50	-51.73	3.04	-48.69	H	69.08
3386.00	-79.94	5.76	-74.17	H	94.56
4232.50	-79.59	7.20	-72.39	H	92.78
5079.00	-78.72	8.00	-70.72	H	91.11
5925.50	-76.37	8.42	-67.95	H	88.34

**Table 6-8. Radiated Spurious Data**

**NOTES:**

1. This device was tested under all bandwidths, and RB configurations, and modulations.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 20 of 138



## 6.5 Band 4 Radiated Spurious Emissions

### §2.1053 §27.53(h) RSS-139(6.5.1)

### Field Strength of SPURIOUS Radiation


OPERATING FREQUENCY: 1712.50 MHz  
 MEASURED OUTPUT POWER: 23.41 dBm = 0.219 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  36.41 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3425.00	-54.34	8.09	-46.24	H	69.65
5137.50	-82.00	10.21	-71.79	H	95.20
6850.00	-80.49	11.31	-69.18	H	92.59
8562.50	-79.97	13.02	-66.95	H	90.36
10275.00	-76.86	13.01	-63.85	H	87.26
11987.50	-74.26	13.21	-61.05	H	84.46

**Table 6-9. Radiated Spurious Data**

#### **NOTES:**

1. This device was tested under all bandwidths, and RB configurations, and modulations.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 21 of 138

**Band 4 Radiated Spurious Measurements (continued)**  
**§2.1053 §27.53(h) RSS-139(6.5.1)**

**Field Strength of SPURIOUS Radiation**



OPERATING FREQUENCY: 1732.50 MHz  
 MEASURED OUTPUT POWER: 24.07 dBm = 0.255 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  37.07 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3465.00	-54.71	8.26	-46.44	H	70.51
5197.50	-81.92	10.26	-71.66	H	95.73
6930.00	-80.31	11.42	-68.89	H	92.96
8662.50	-79.92	13.07	-66.86	H	90.93
10395.00	-77.08	13.12	-63.96	H	88.03
12127.50	-74.05	13.25	-60.80	H	84.87

**Table 6-10. Radiated Spurious Data**

**NOTES:**

1. This device was tested under all bandwidths, and RB configurations, and modulations.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 22 of 138

**Band 4 Radiated Spurious Measurements (continued)**  
**§2.1053 §27.53(h) RSS-139(6.5.1)**

**Field Strength of SPURIOUS Radiation**



OPERATING FREQUENCY: 1752.50 MHz  
 MEASURED OUTPUT POWER: 24.07 dBm = 0.255 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  37.07 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3505.00	-54.91	8.40	-46.51	H	70.58
5257.50	-81.86	10.32	-71.55	H	95.62
7010.00	-80.17	11.51	-68.66	H	92.73
8762.50	-79.86	13.11	-66.75	H	90.82
10515.00	-77.08	13.20	-63.88	H	87.95
12267.50	-73.90	13.31	-60.58	H	84.65

**Table 6-11. Radiated Spurious Data**

**NOTES:**

1. This device was tested under all bandwidths, and RB configurations, and modulations.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 23 of 138

## 6.6 Band 2 Radiated Spurious Emissions

### §2.1053 §24.238(a) RSS-133(6.5.1)

#### Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1852.50 MHz  
 MEASURED OUTPUT POWER: 20.89 dBm = 0.123 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  33.89 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3705.00	-54.22	8.40	-45.82	H	66.71
5557.50	-53.78	10.63	-43.15	H	64.04
7410.00	-80.00	11.84	-68.16	H	89.05
9262.50	-79.36	13.29	-66.07	H	86.96
11115.00	-75.99	13.50	-62.49	H	83.38
12967.50	-72.44	13.68	-58.76	H	79.65

**Table 6-12. Radiated Spurious Data**

#### NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 24 of 138

**Band 2 Radiated Spurious Measurements (continued)**  
**§2.1053 §24.238(a) RSS-133(6.5.1)**

**Field Strength of SPURIOUS Radiation**



OPERATING FREQUENCY: 1880.00 MHz  
 MEASURED OUTPUT POWER: 19.21 dBm = 0.083 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  32.21 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-53.56	8.42	-45.13	H	64.34
5640.00	-58.69	10.66	-48.03	H	67.24
7520.00	-79.89	11.92	-67.96	H	87.18
9400.00	-79.01	13.24	-65.77	H	84.98
11280.00	-75.76	13.49	-62.28	H	81.49
13160.00	-72.08	13.83	-58.25	H	77.46

**Table 6-13. Radiated Spurious Data**

**NOTES:**

1. This device was tested under all bandwidths, and RB configurations, and modulations.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 25 of 138

**Band 2 Radiated Spurious Measurements (continued)**  
**§2.1053 §24.238(a) RSS-133(6.5.1)**

**Field Strength of SPURIOUS Radiation**


OPERATING FREQUENCY: 1907.50 MHz  
 MEASURED OUTPUT POWER: 17.30 dBm = 0.054 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  30.30 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3815.00	-54.20	8.55	-45.66	H	62.96
5722.50	-58.76	10.69	-48.07	H	65.37
7630.00	-79.89	12.05	-67.85	H	85.15
9537.50	-78.71	13.20	-65.51	H	82.81
11445.00	-75.71	13.43	-62.28	H	79.58
13352.50	-72.37	14.00	-58.36	H	75.66

**Table 6-14. Radiated Spurious Data**

**NOTES:**

1. This device was tested under all bandwidths, and RB configurations, and modulations.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset	Page 26 of 138	



## 6.7 Band 7 Radiated Spurious Emissions

### §2.1053 §27.53(m)

### Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 2502.50 MHz  
 MEASURED OUTPUT POWER: 21.30 dBm = 0.135 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $55 + 10 \log_{10} (W) =$  46.30 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
5005.00	-54.86	10.10	-44.76	H	66.06
7507.50	-79.89	11.91	-67.98	H	89.28
10010.00	-77.22	13.19	-64.03	H	85.33
12512.50	-73.66	13.39	-60.27	H	81.57
15015.00	-70.43	14.08	-56.35	H	77.64
17517.50	-66.36	13.99	-52.36	H	73.66

**Table 6-15. Radiated Spurious Data**

### NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 27 of 138

**Band 7 Radiated Spurious Measurements (continued)**  
**§2.1053 §27.53(m)**

**Field Strength of SPURIOUS Radiation**



OPERATING FREQUENCY: 2535.00 MHz  
 MEASURED OUTPUT POWER: 21.86 dBm = 0.153 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $55 + 10 \log_{10}(W) =$  46.86 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
5070.00	-54.28	10.16	-44.12	H	65.98
7605.00	-79.89	12.03	-67.86	H	89.72
10140.00	-77.01	13.09	-63.92	H	85.78
12675.00	-73.50	13.33	-60.17	H	82.02
15210.00	-69.65	13.85	-55.81	H	77.66
17745.00	-65.95	13.90	-52.04	H	73.90

**Table 6-16. Radiated Spurious Data**

**NOTES:**

1. This device was tested under all bandwidths, and RB configurations, and modulations.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 28 of 138

**Band 7 Radiated Spurious Measurements (continued)**  
**§2.1053 §27.53(m)**

**Field Strength of SPURIOUS Radiation**


OPERATING FREQUENCY: 2567.50 MHz  
 MEASURED OUTPUT POWER: 20.57 dBm = 0.114 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $55 + 10 \log_{10} (W) =$  45.57 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
5135.00	-56.03	10.21	-45.82	H	66.39
7702.50	-79.89	12.14	-67.75	H	88.32
10270.00	-76.87	13.02	-63.85	H	84.42
12837.50	-73.05	13.44	-59.61	H	80.18
15405.00	-67.97	13.86	-54.10	H	74.67
17972.50	-66.19	14.26	-51.93	H	72.50

**Table 6-17. Radiated Spurious Data**

**NOTES:**

1. This device was tested under all bandwidths, and RB configurations, and modulations.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset	Page 29 of 138	

## 6.8 Band 5 Frequency Stability Measurements

§2.1055 §22.355 RSS-132(4.3)



OPERATING FREQUENCY: 836,500,000 Hz  
 CHANNEL: 20525  
 REFERENCE VOLTAGE: 3.8 VDC  
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (° C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	836,499,993	-7	-0.0000008
100 %		- 30	836,500,002	2	0.0000002
100 %		- 20	836,499,999	-1	-0.0000001
100 %		- 10	836,500,002	2	0.0000002
100 %		0	836,500,002	2	0.0000002
100 %		+ 10	836,499,995	-5	-0.0000006
100 %		+ 20	836,499,990	-10	-0.0000012
100 %		+ 30	836,500,001	1	0.0000001
100 %		+ 40	836,499,998	-2	-0.0000002
100 %		+ 50	836,499,997	-3	-0.0000004
115 %		4.37	+ 20	836,499,996	-4
BATT. ENDPOINT	3.20	+ 20	836,499,992	-8	-0.0000010


**Table 6-18. Frequency Stability Data (Band 5)**

**Note:**



Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 30 of 138

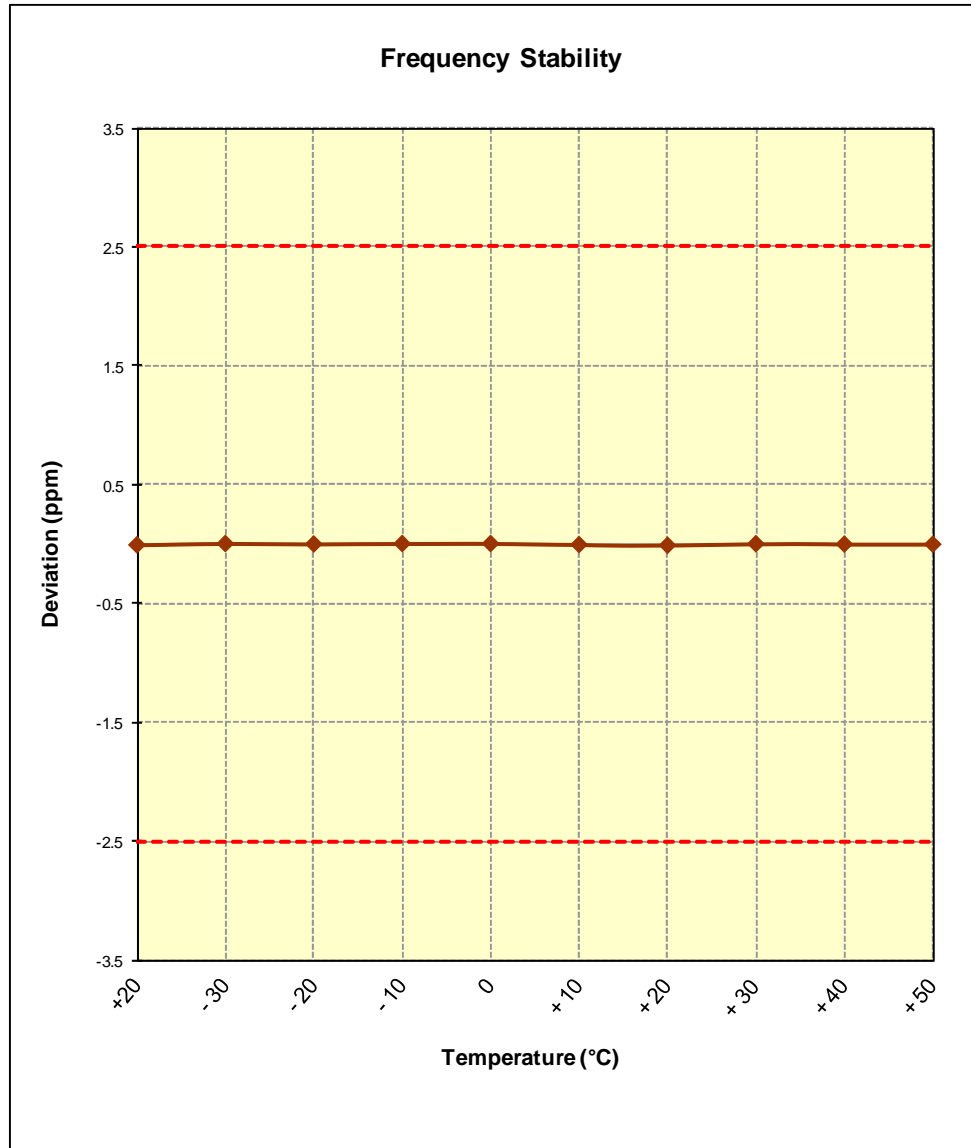**Band 5 Frequency Stability Measurements (Cont'd)**  
**§2.1055 §22.355 RSS-132(4.3)**



**Figure 6-1. Frequency Stability Graph (Band 5)**

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset	Page 31 of 138	

## 6.9 Band 4 Frequency Stability Measurements

§2.1055 §27.54 RSS-139(6.3)


OPERATING FREQUENCY: 1,732,500,000 Hz  
 CHANNEL: 20175  
 REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (° C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,732,500,002	2	0.0000001
100 %		- 30	1,732,499,981	-19	-0.0000011
100 %		- 20	1,732,499,984	-16	-0.0000009
100 %		- 10	1,732,500,002	2	0.0000001
100 %		0	1,732,499,988	-12	-0.0000007
100 %		+ 10	1,732,499,992	-8	-0.0000005
100 %		+ 20	1,732,499,992	-8	-0.0000005
100 %		+ 30	1,732,499,998	-2	-0.0000001
100 %		+ 40	1,732,500,002	2	0.0000001
100 %		+ 50	1,732,499,987	-13	-0.0000008
115 %	4.37	+ 20	1,732,499,990	-10	-0.0000006
BATT. ENDPOINT	3.20	+ 20	1,732,499,985	-15	-0.0000009


Table 6-19. Frequency Stability Data (Band 4)

**Note:**



Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset	Page 32 of 138	

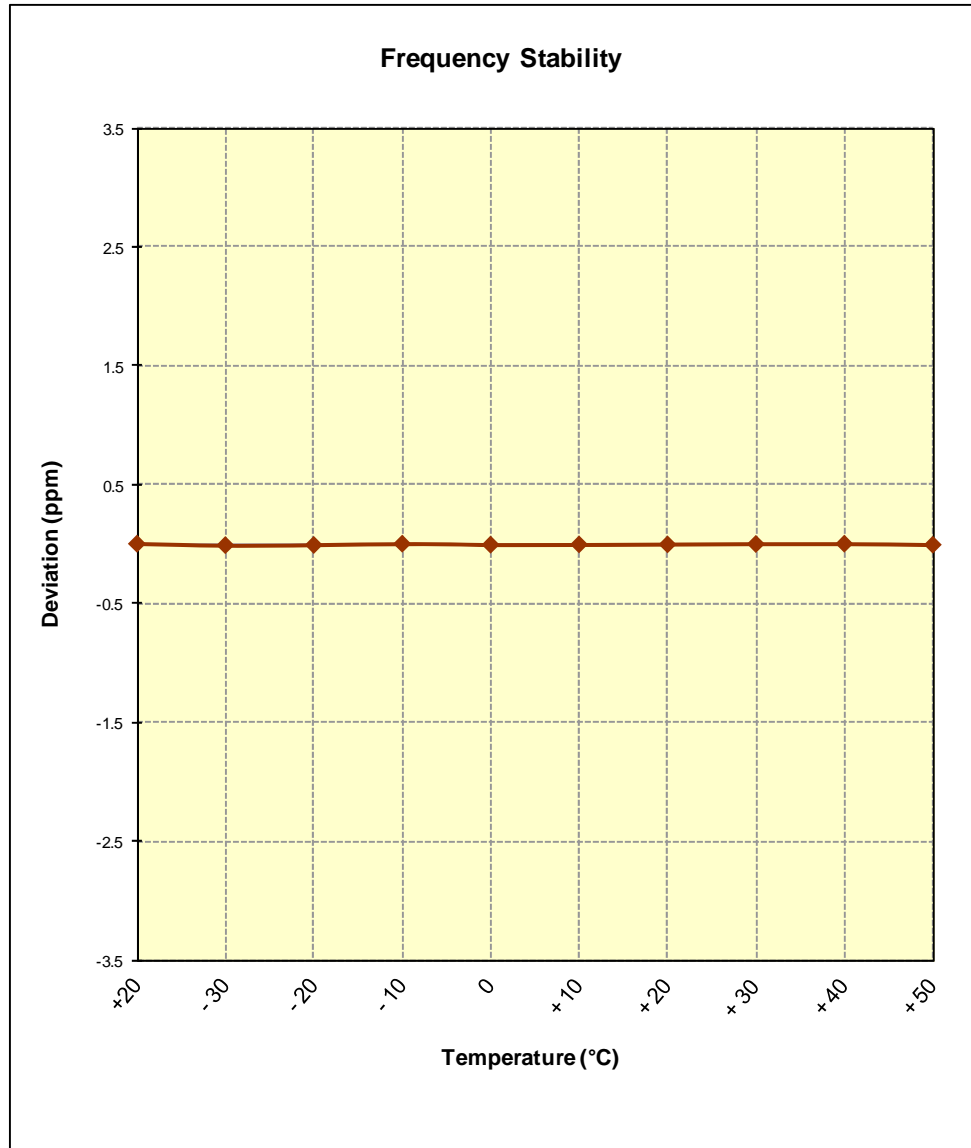**Band 4 Frequency Stability Measurements (Cont'd)**  
**§2.1055 §§27.54 RSS-139(6.3)**



**Figure 6-2. Frequency Stability Graph (Band 4)**

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset	Page 33 of 138	

**6.10 Band 2 Frequency Stability Measurements**  
§2.1055 §24.235 RSS-133(6.3)

OPERATING FREQUENCY: 1,880,000,000 Hz  
 CHANNEL: 18900  
 REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (° C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,880,000,004	4	0.0000002
100 %		- 30	1,879,999,988	-12	-0.0000006
100 %		- 20	1,879,999,994	-6	-0.0000003
100 %		- 10	1,879,999,984	-16	-0.0000009
100 %		0	1,880,000,002	2	0.0000001
100 %		+ 10	1,880,000,003	3	0.0000002
100 %		+ 20	1,879,999,984	-16	-0.0000009
100 %		+ 30	1,880,000,001	1	0.0000001
100 %		+ 40	1,879,999,997	-3	-0.0000002
100 %		+ 50	1,879,999,997	-3	-0.0000002
115 %		4.37	+ 20	1,879,999,996	-4
BATT. ENDPOINT	3.20	+ 20	1,880,000,005	5	0.0000003

**Table 6-20. Frequency Stability Data (Band 2)**


**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset	Page 34 of 138	

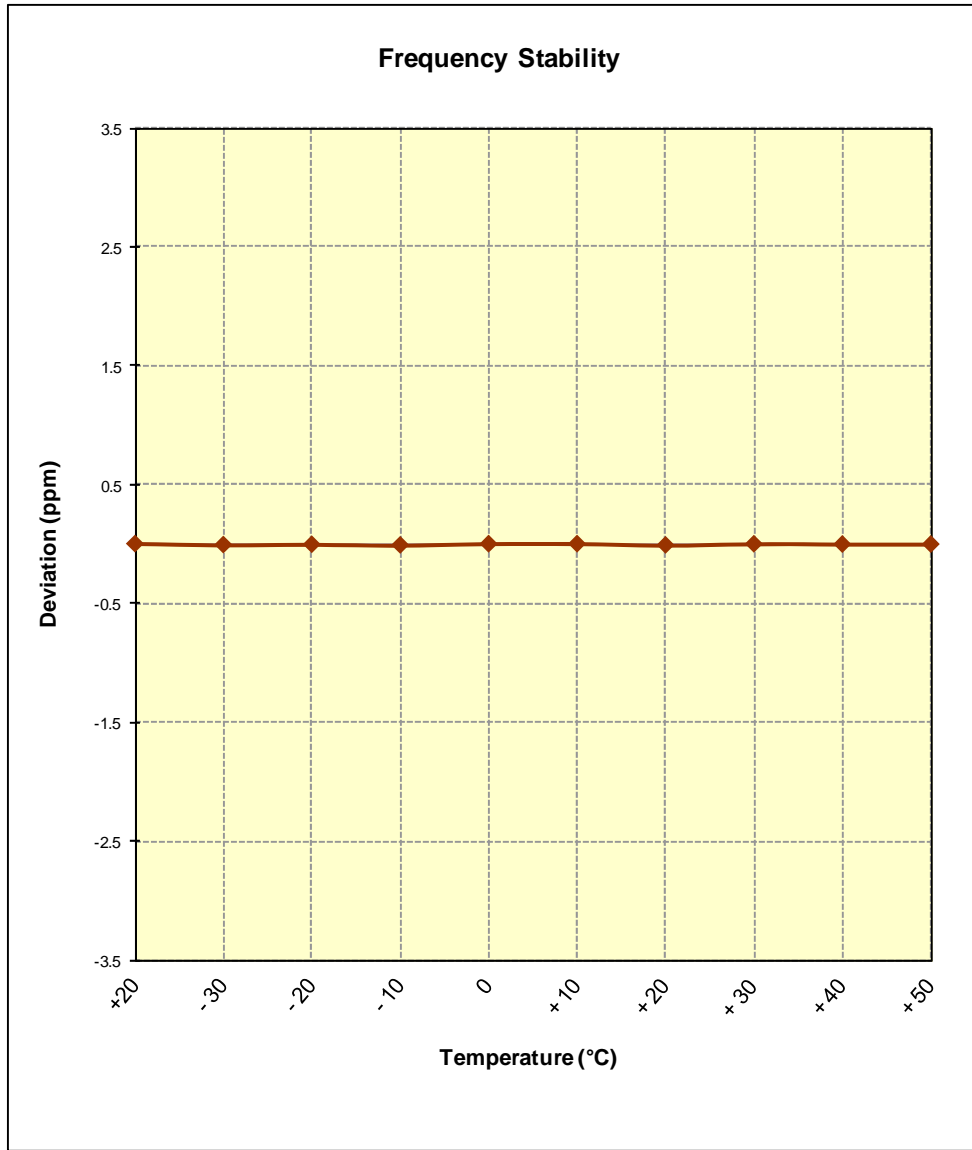

**Band 2 Frequency Stability Measurements (Cont'd)**  
**§2.1055 §24.235 RSS-133(6.3)**



**Figure 6-3. Frequency Stability Graph (Band 2)**

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset	Page 35 of 138	

## 6.11 Band 7 Frequency Stability Measurements

§2.1055 §27.5(i) §27.54

OPERATING FREQUENCY: 2,535,000,000 Hz

CHANNEL: 2655



REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (° C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	2,534,999,980	-20	-0.0000008
100 %		- 30	2,534,999,980	-20	-0.0000008
100 %		- 20	2,534,999,997	-3	-0.0000001
100 %		- 10	2,534,999,982	-18	-0.0000007
100 %		0	2,534,999,976	-24	-0.0000009
100 %		+ 10	2,535,000,003	3	0.0000001
100 %		+ 20	2,534,999,995	-5	-0.0000002
100 %		+ 30	2,535,000,003	3	0.0000001
100 %		+ 40	2,534,999,989	-11	-0.0000004
100 %		+ 50	2,534,999,984	-16	-0.0000006
115 %		4.37	+ 20	2,534,999,982	-18
BATT. ENDPOINT	3.20	+ 20	2,534,999,997	-3	-0.0000001


**Table 6-21. Frequency Stability Data (Band 7)**

**Note:**



Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset	Page 36 of 138	

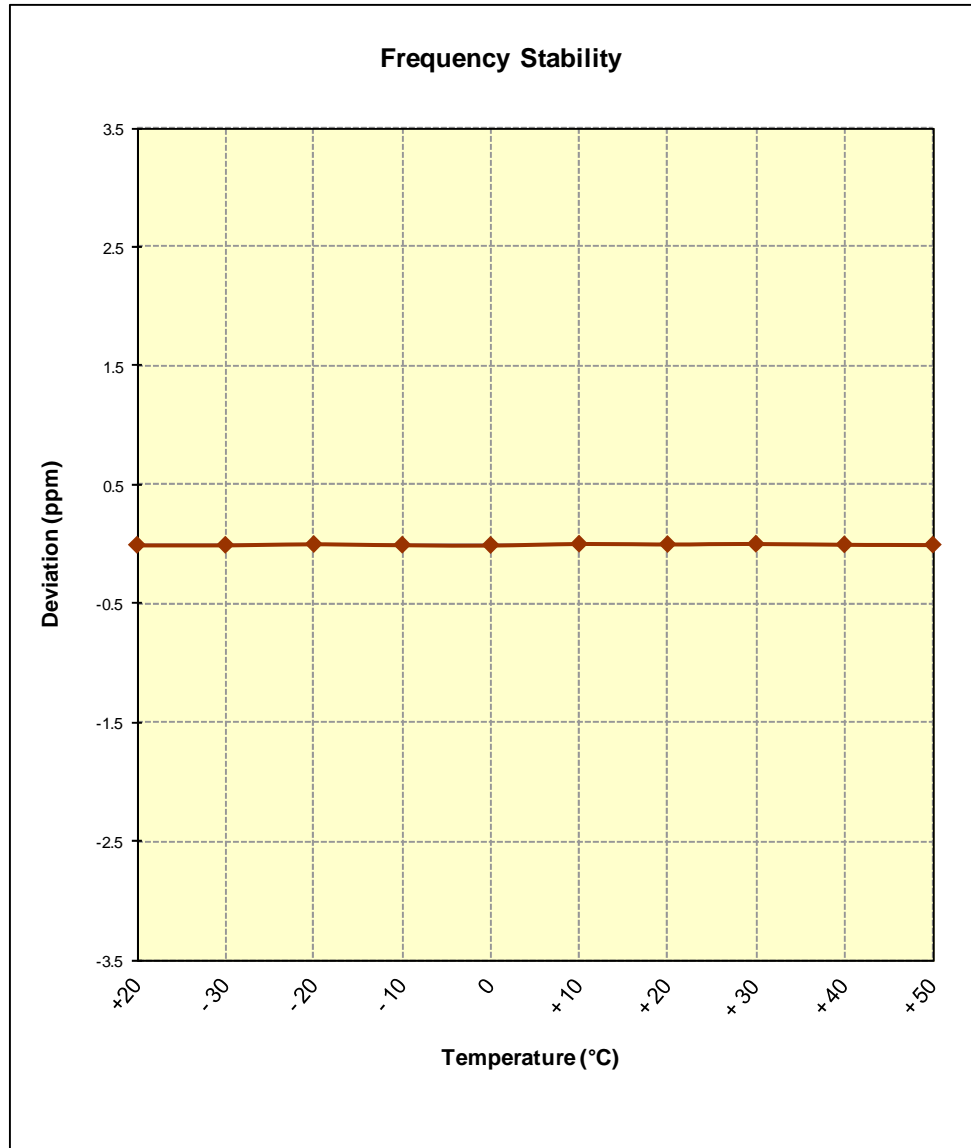**Band 7 Frequency Stability Measurements (Cont'd)**  
§2.1055 §27.5(i) §27.54




**Figure 6-4. Frequency Stability Graph (Band 7)**

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset	Page 37 of 138	

## 7.0 BAND 5 PLOTS OF EMISSIONS

**Note:** All bandwidths, RB configurations, and modulations were investigated. The worst case test results are reported below.

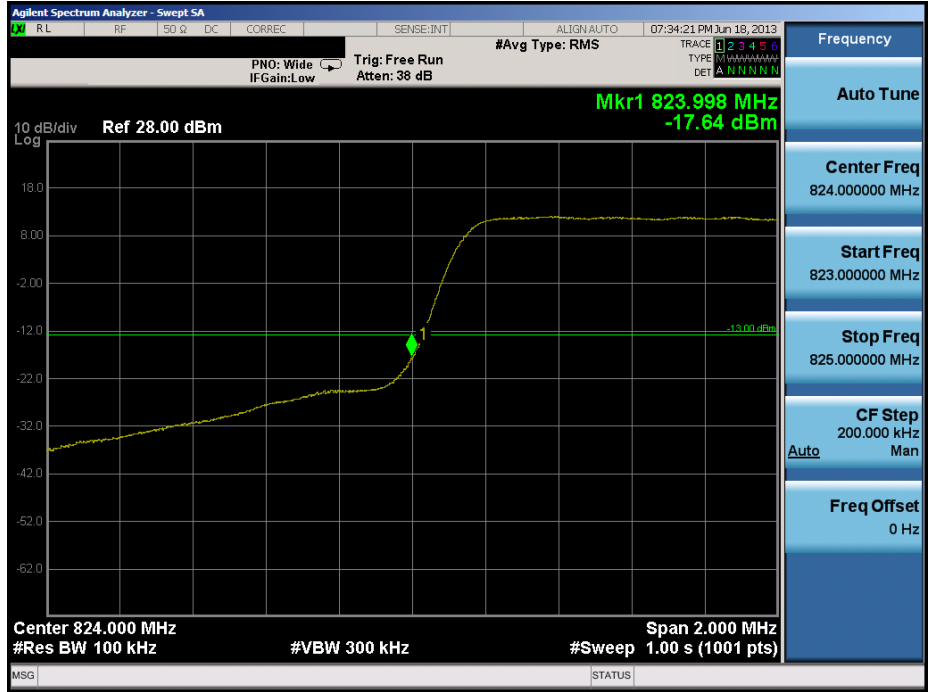


**Plot 7-1. Lower Band Edge Plot (1.4MHz QPSK – RB Size 6)**




**Plot 7-2. Lower Extended Band Edge Plot (1.4MHz QPSK – RB Size 6)**

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 38 of 138

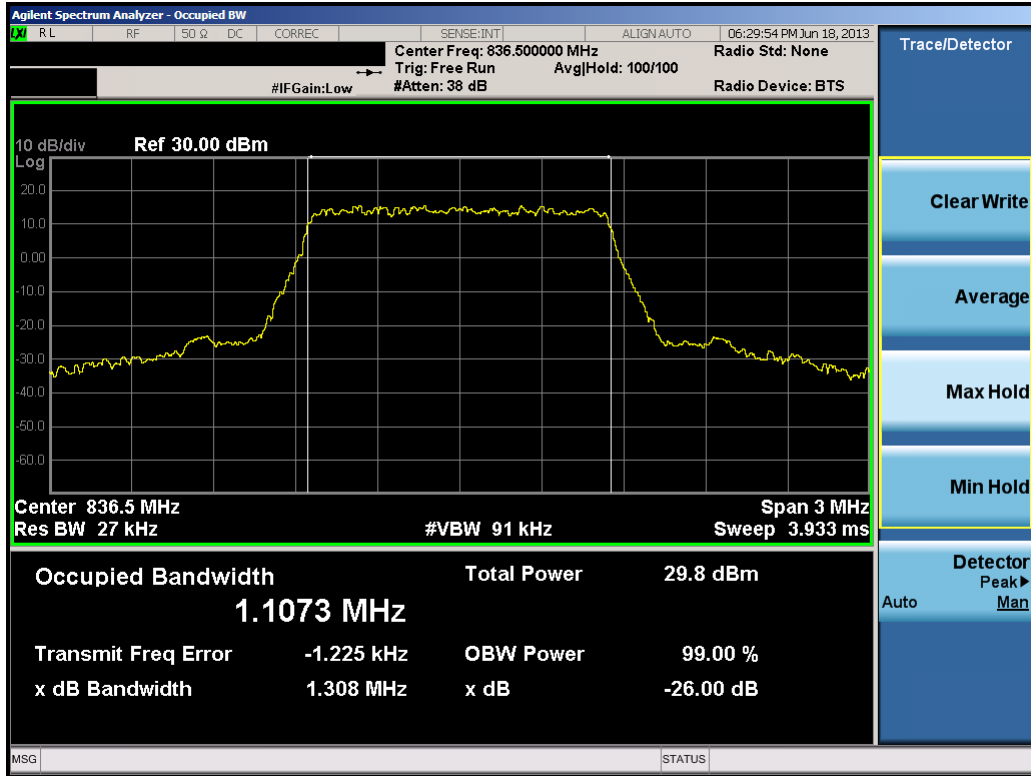


Plot 7-3. Occupied Bandwidth Plot (1.4MHz QPSK – RB Size 6)

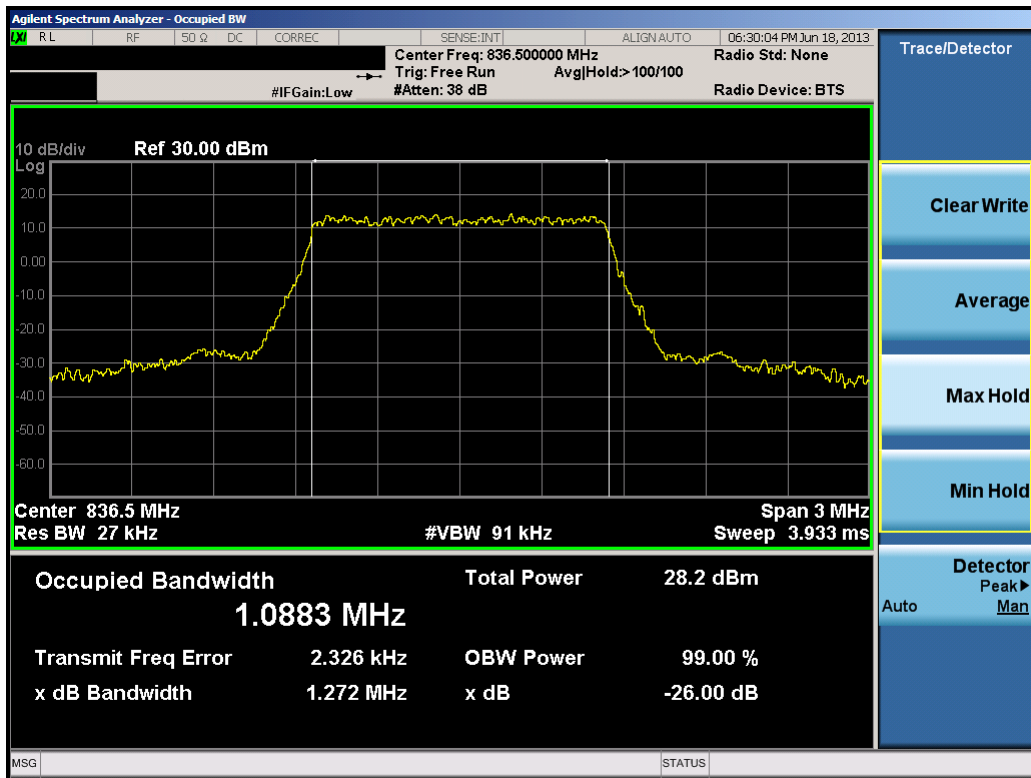


Plot 7-4. Occupied Bandwidth Plot (1.4MHz 16-QAM – RB Size 6)

FCC ID: PY7PM-0620	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b> make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 39 of 138

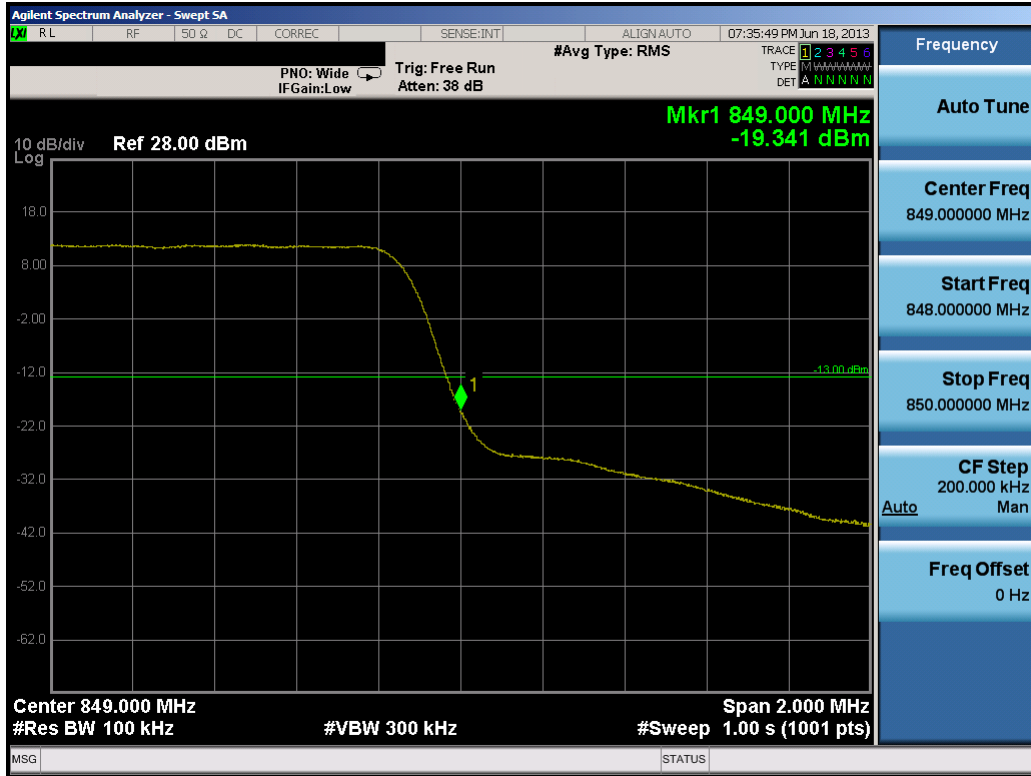


Plot 7-5. Upper Band Edge Plot (1.4MHz QPSK – RB Size 6)

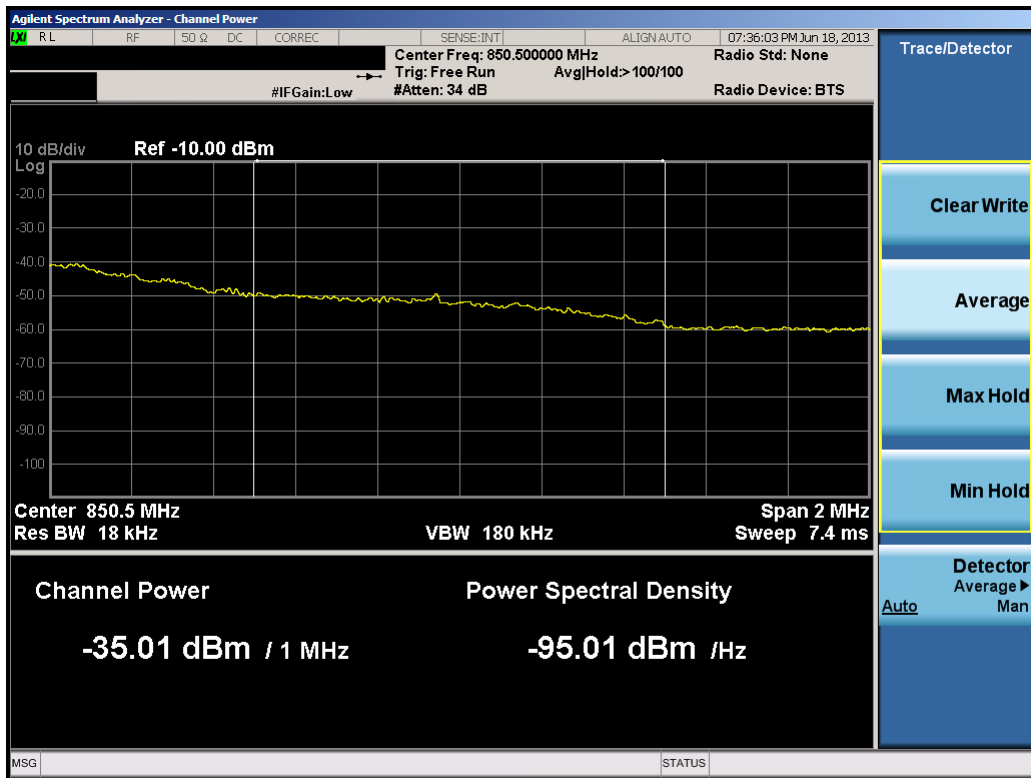


Plot 7-6. Upper Extended Band Edge Plot (1.4MHz QPSK – RB Size 6)

FCC ID: PY7PM-0620	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 40 of 138

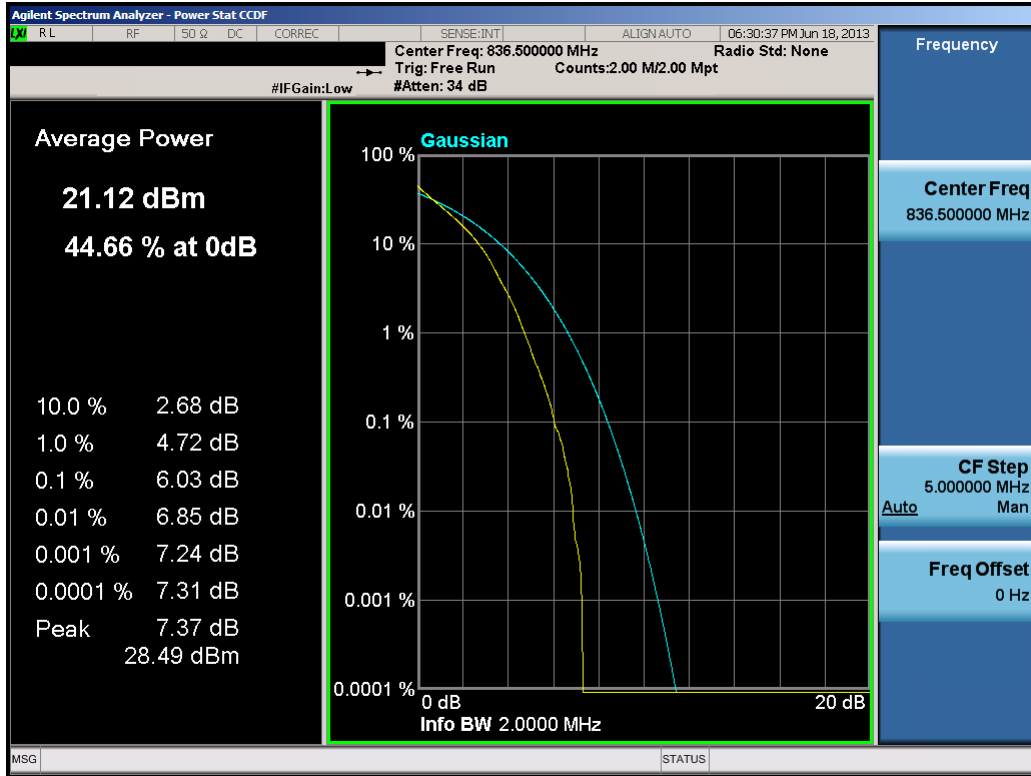

Plot 7-7. PAR Plot (1.4MHz QPSK – RB Size 6)

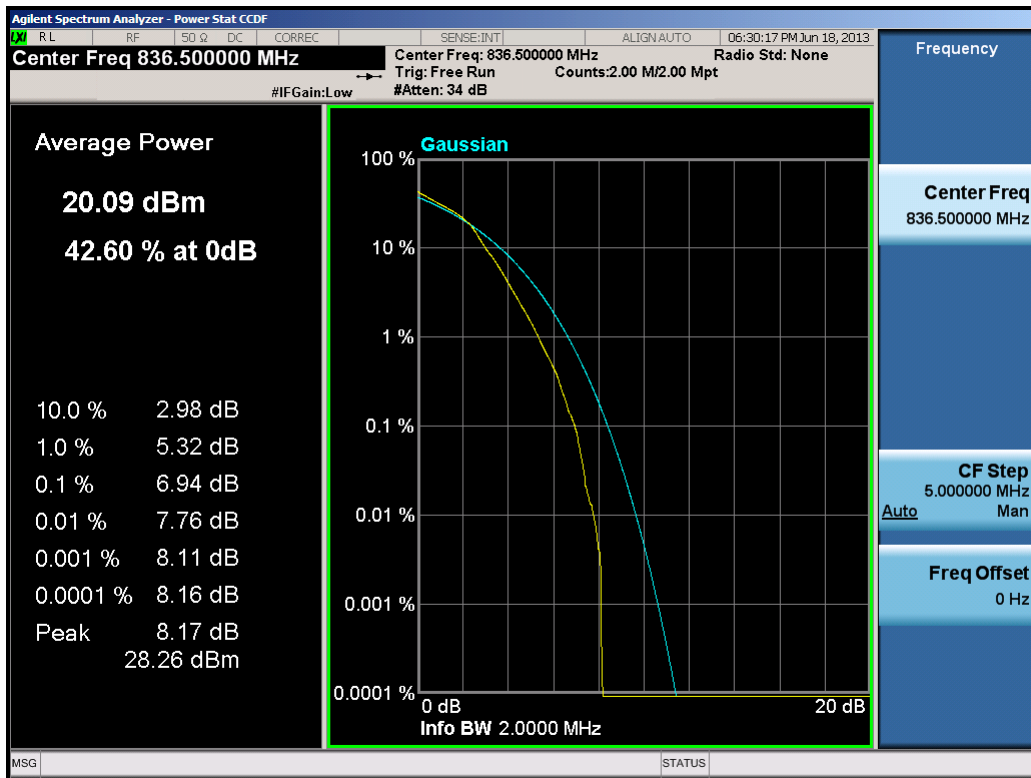


Plot 7-8. PAR Plot (1.4MHz 16-QAM – RB Size 6)


FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 41 of 138





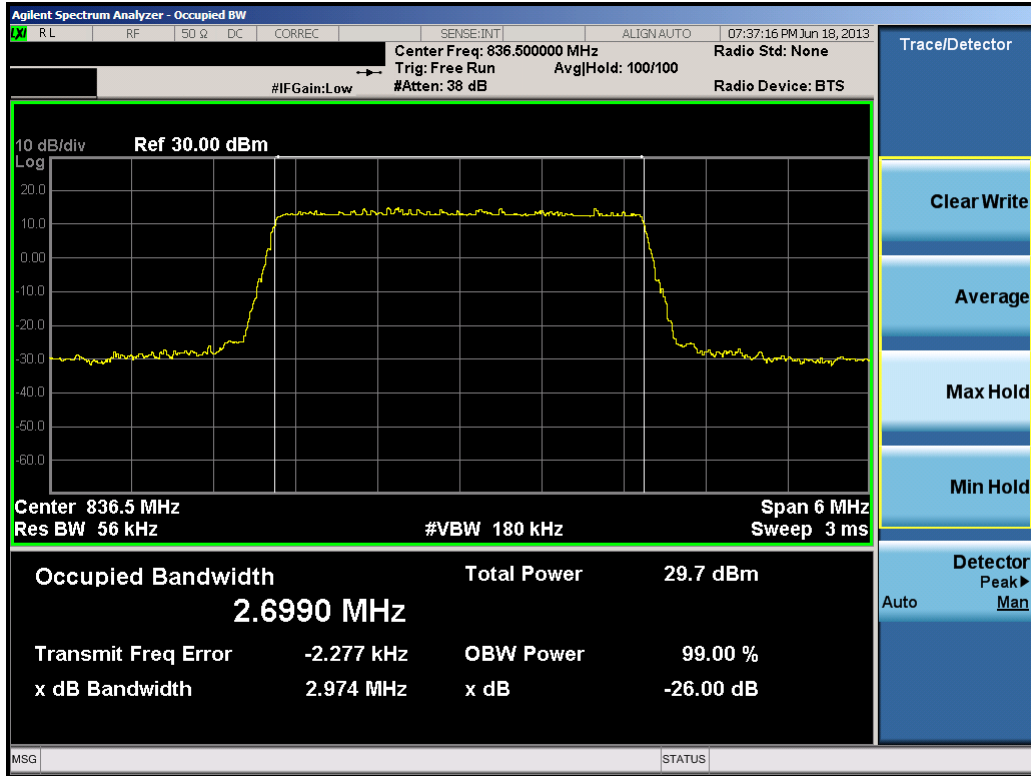


Plot 7-11. Occupied Bandwidth Plot (3.0MHz QPSK – RB Size 15)

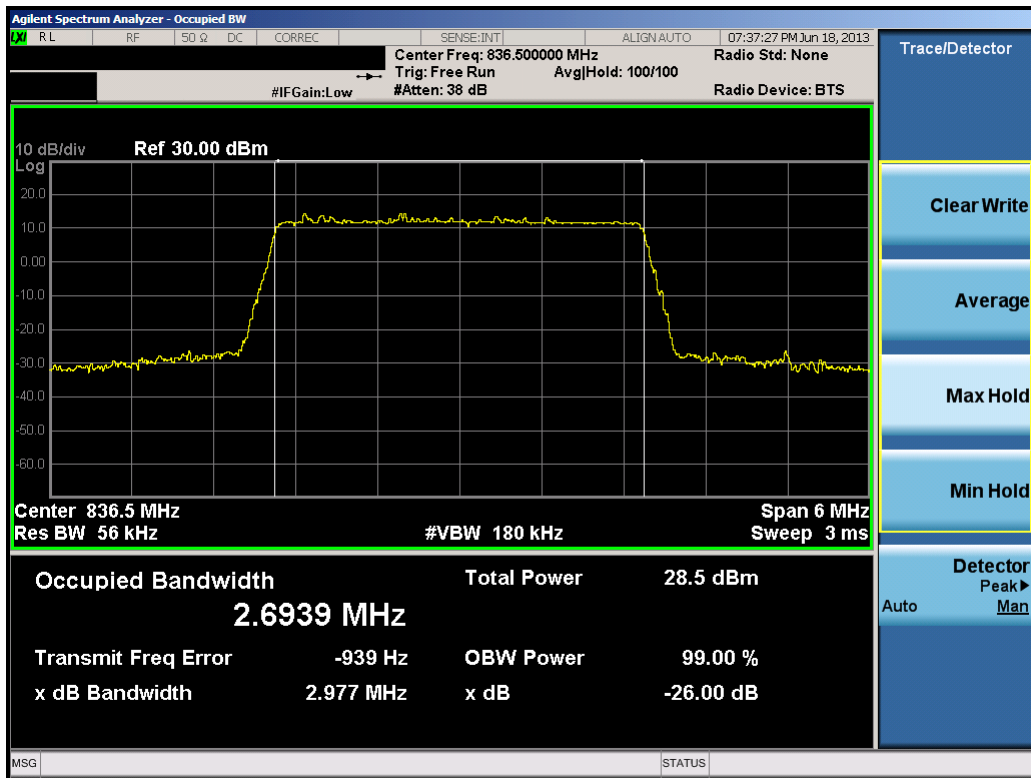


Plot 7-12. Occupied Bandwidth Plot (3.0MHz 16-QAM – RB Size 15)

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 43 of 138

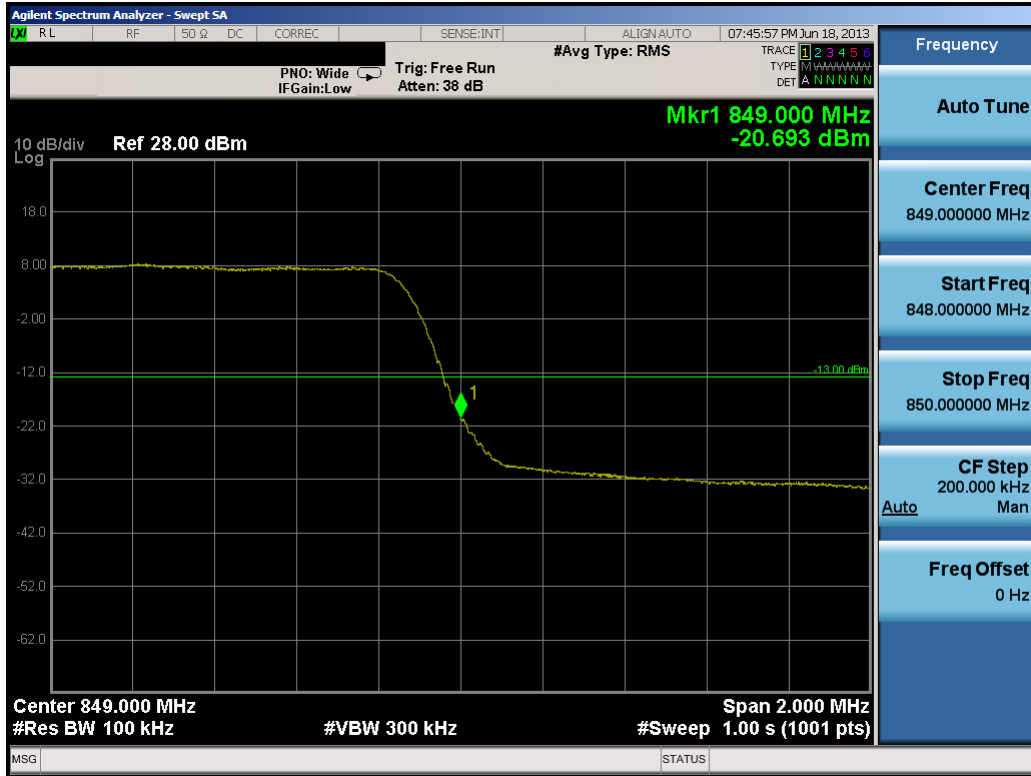


Plot 7-13. Upper Band Edge Plot (3.0MHz QPSK – RB Size 15)

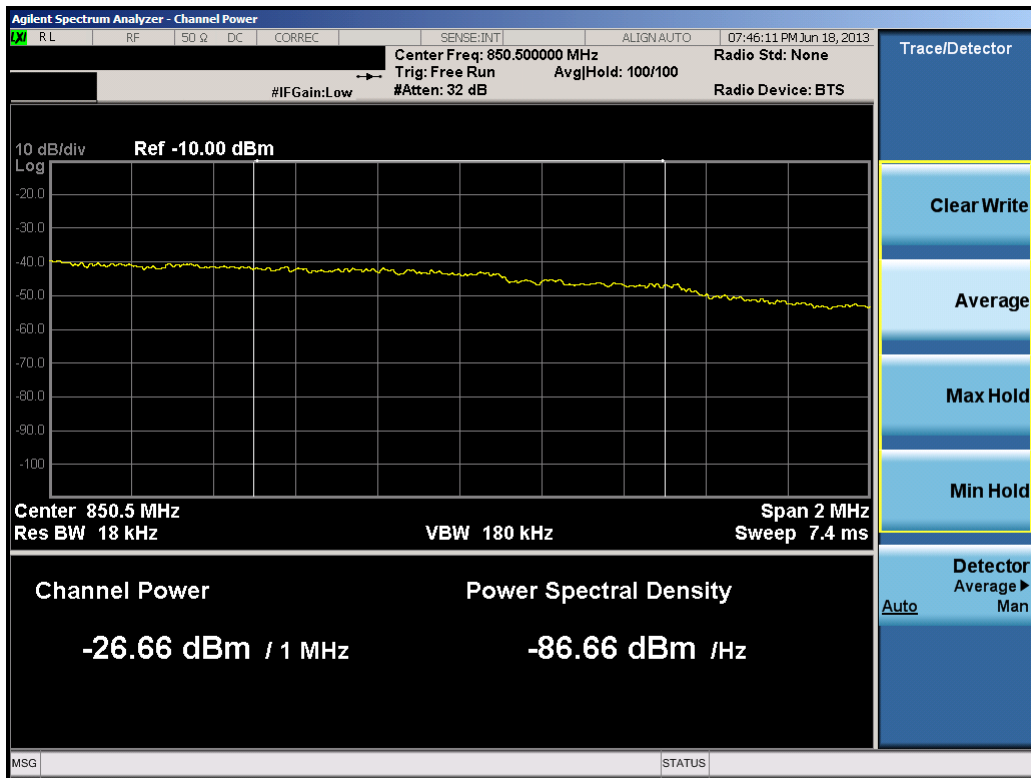


Plot 7-14. Upper Extended Band Edge Plot (3.0MHz QPSK – RB Size 15)

FCC ID: PY7PM-0620	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b> make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 44 of 138

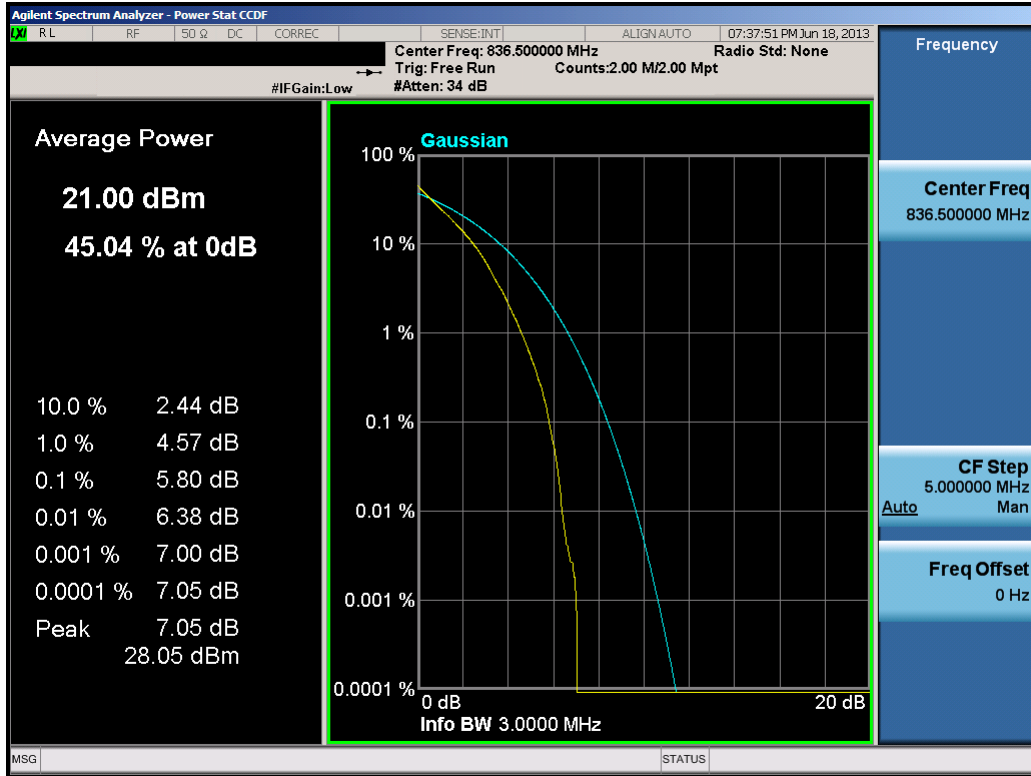


**Plot 7-15. PAR Plot (3.0MHz QPSK – RB Size 15)**

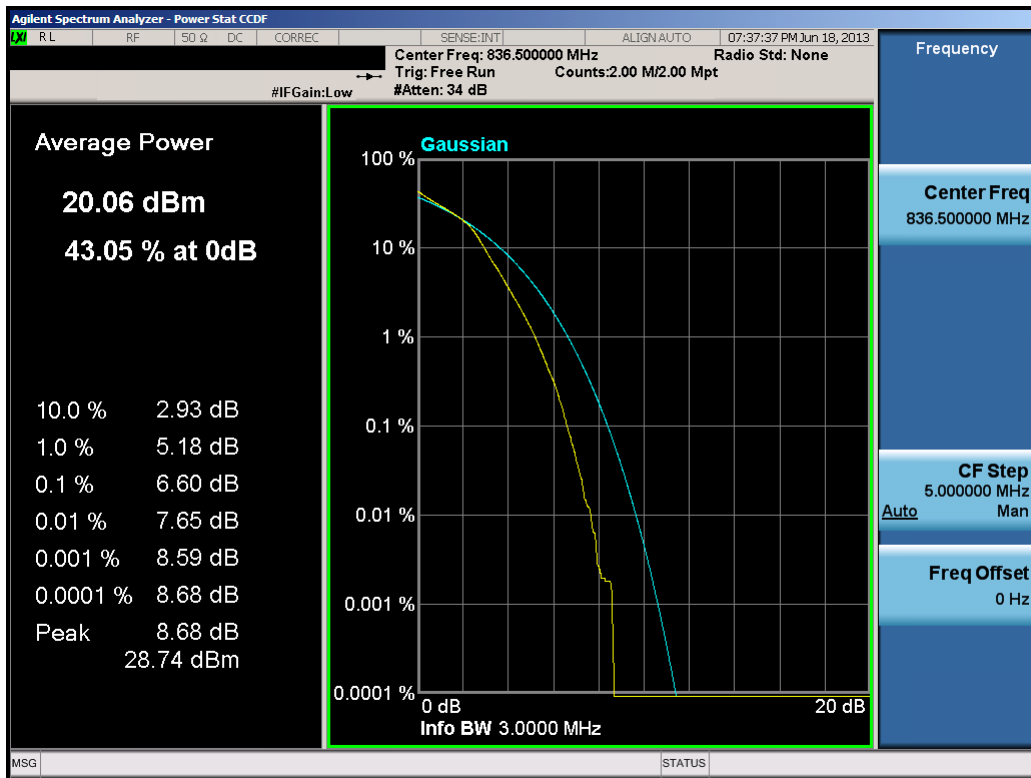


**Plot 7-16. PAR Plot (3.0MHz 16-QAM – RB Size 15)**

FCC ID: PY7PM-0620	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b> make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 45 of 138

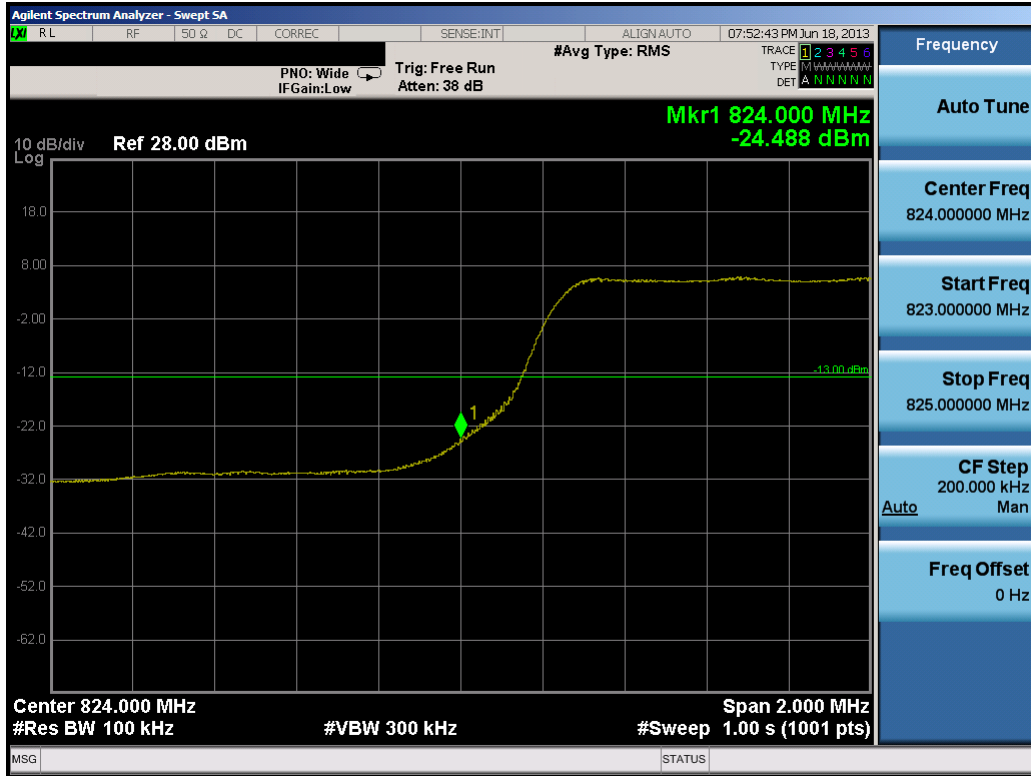


Plot 7-17. Lower Band Edge Plot (5.0MHz QPSK – RB Size 25)

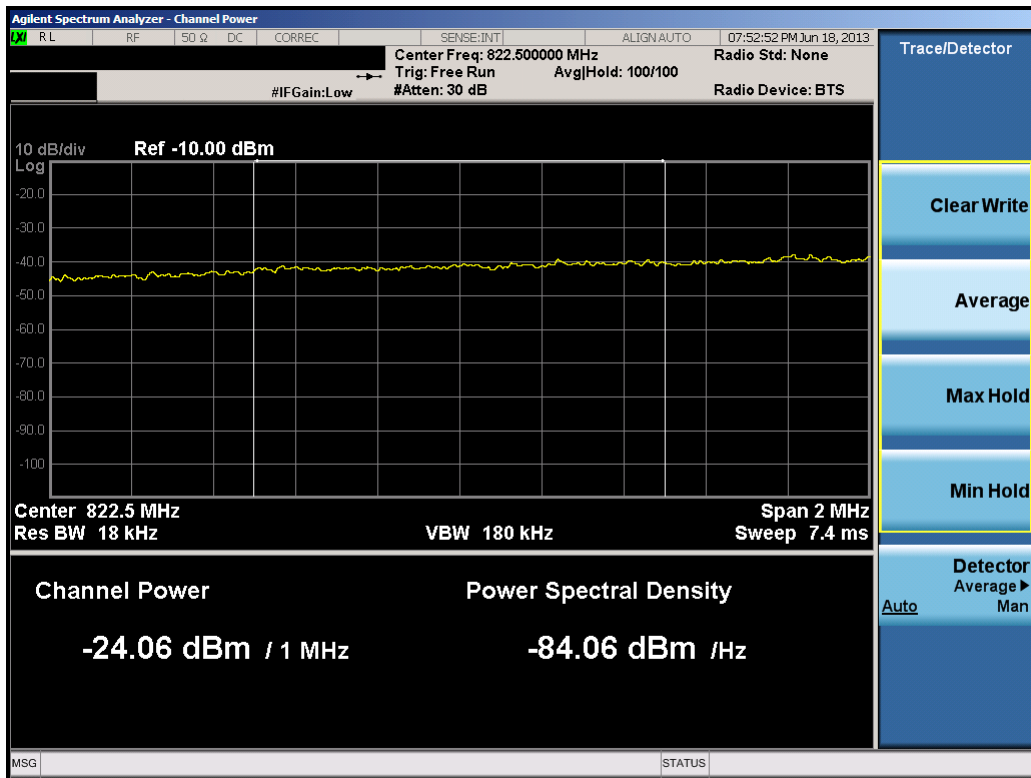


Plot 7-18. Lower Extended Band Edge Plot (5.0MHz QPSK – RB Size 25)

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 46 of 138

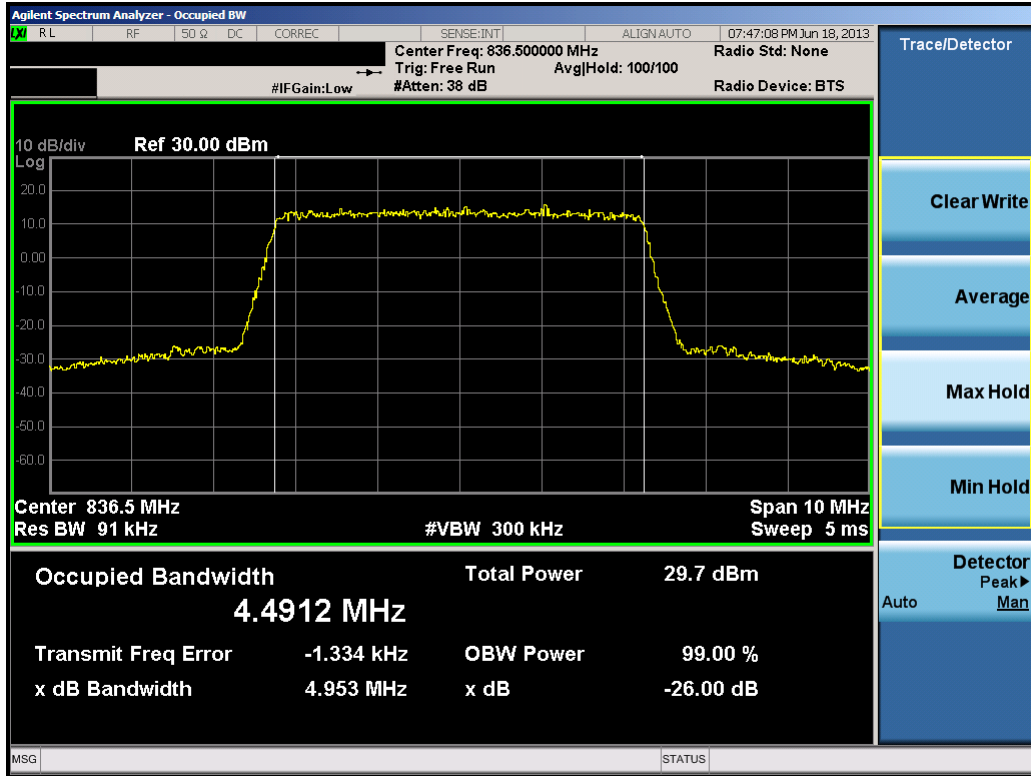


Plot 7-19. Occupied Bandwidth Plot (5.0MHz QPSK – RB Size 25)

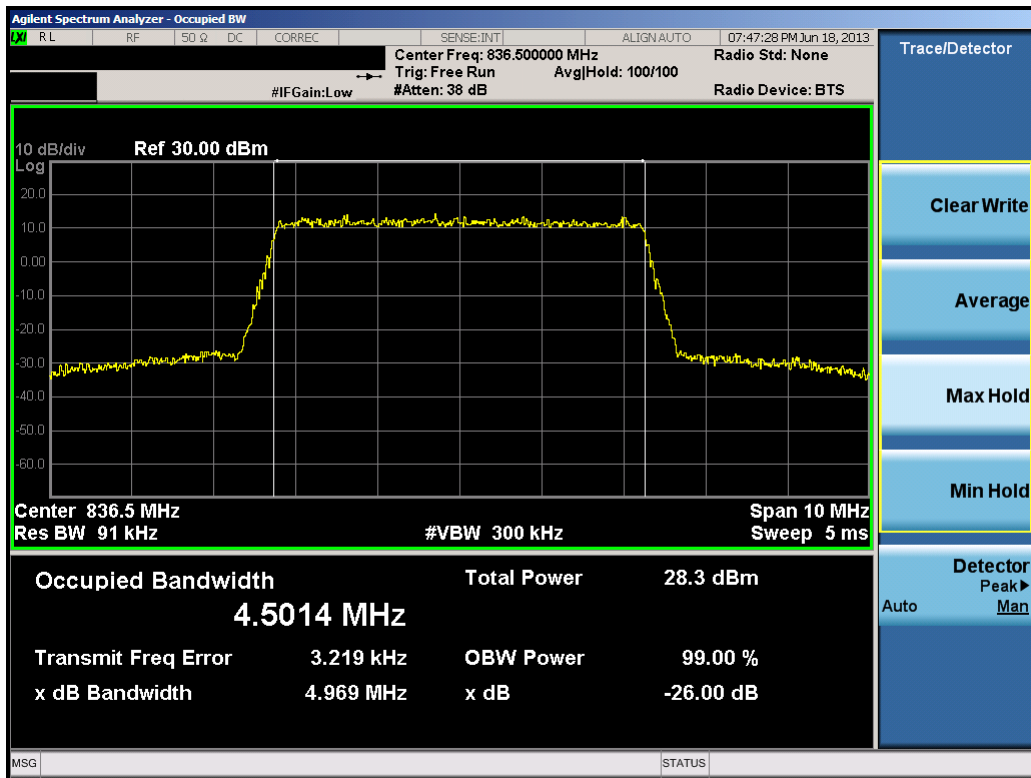


Plot 7-20. Occupied Bandwidth Plot (5.0MHz 16-QAM – RB Size 25)

FCC ID: PY7PM-0620	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b> make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 47 of 138

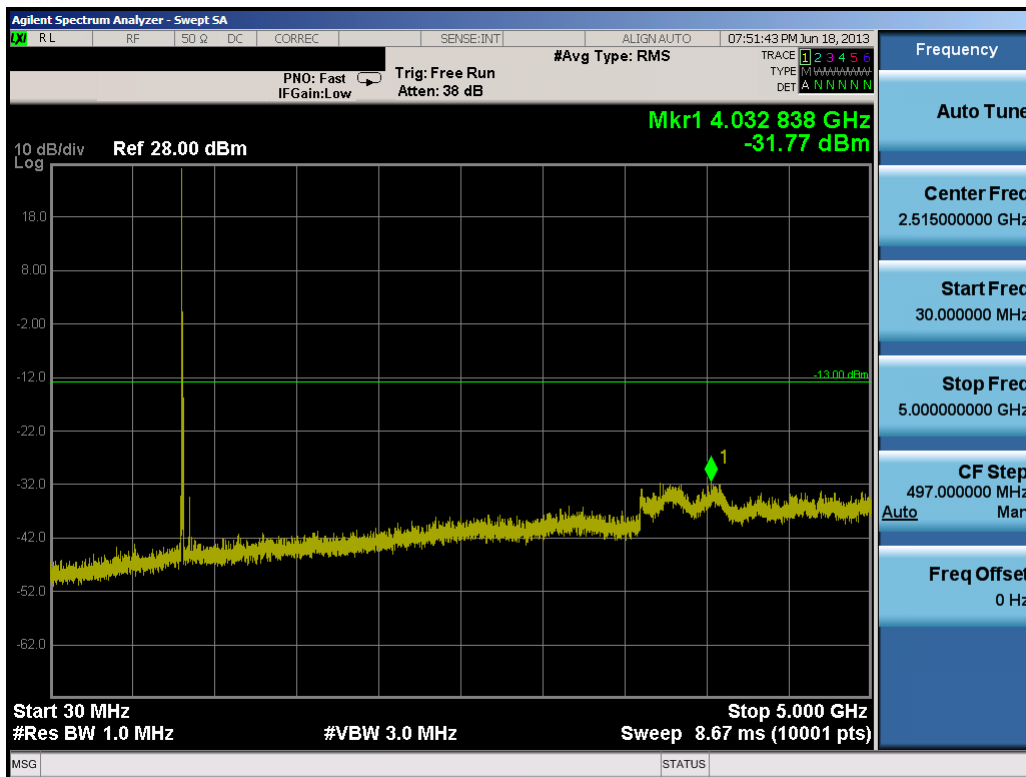


Plot 7-21. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

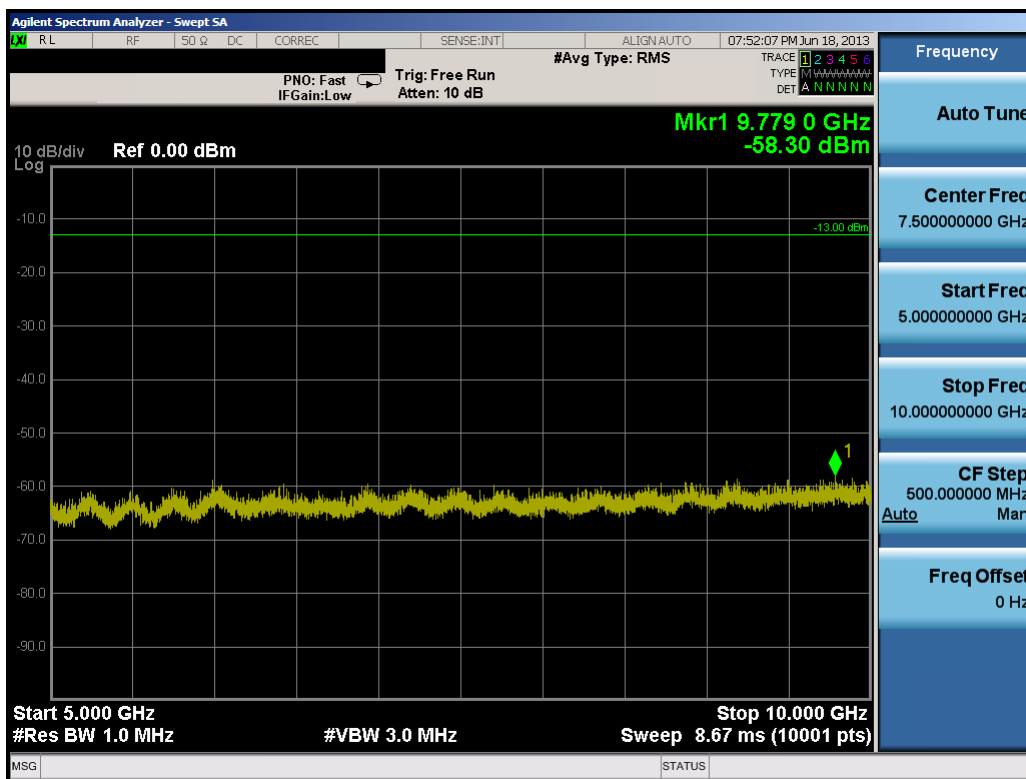


Plot 7-22. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: PY7PM-0620	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 48 of 138

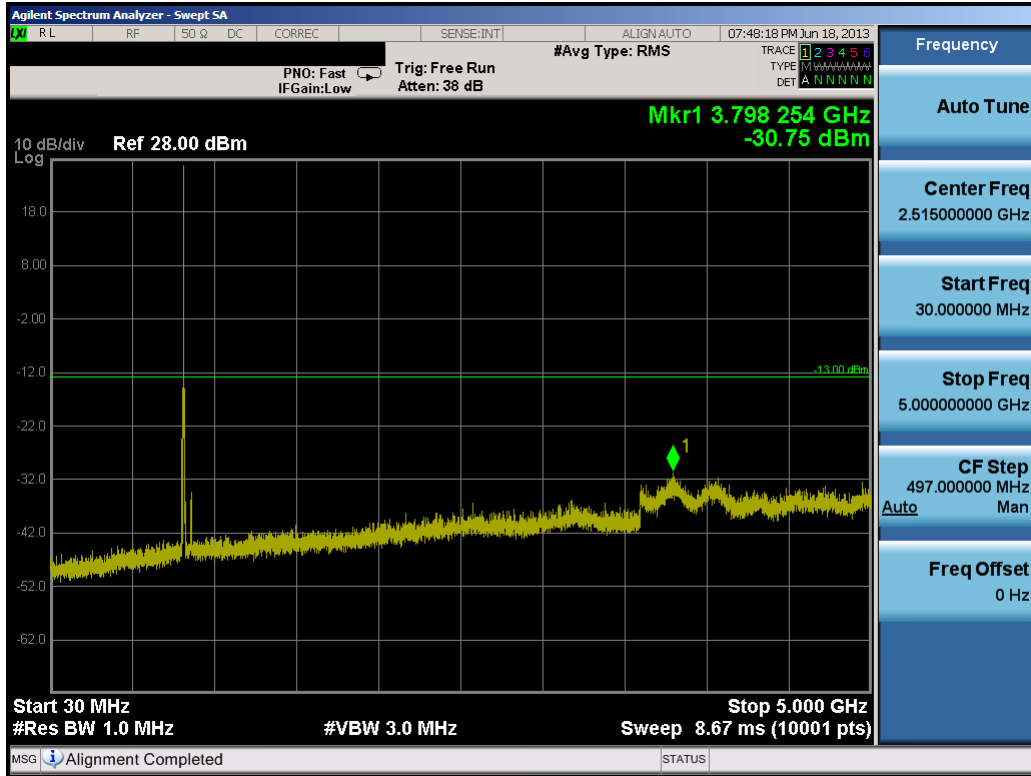


Plot 7-23. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

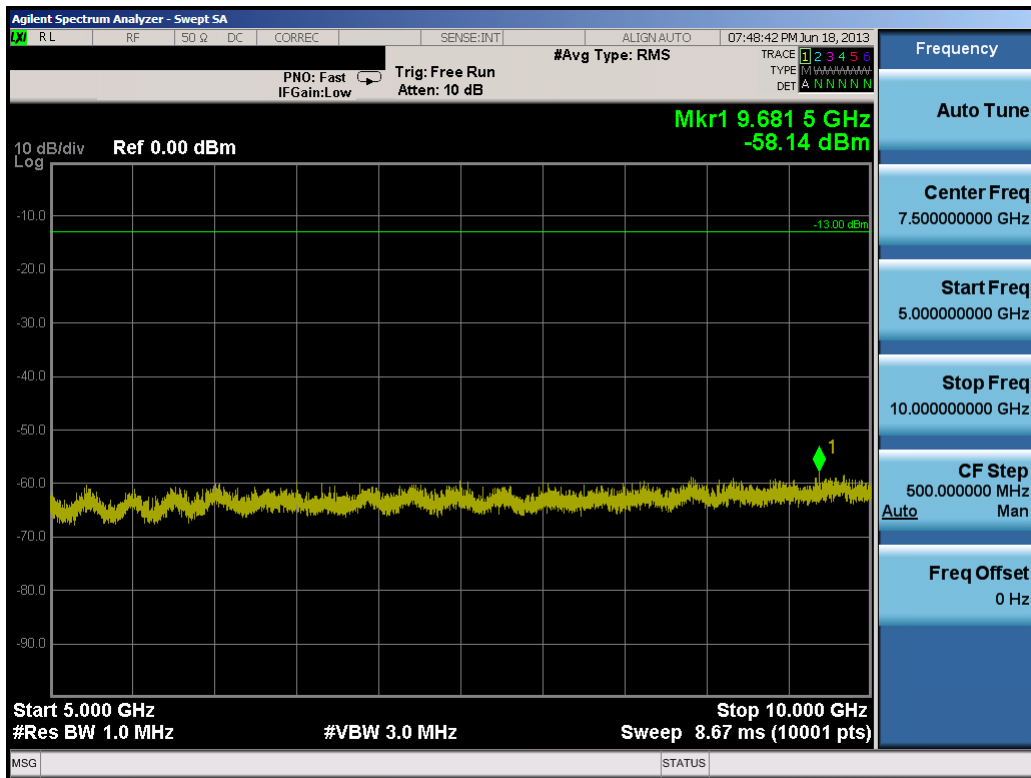


Plot 7-24. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: PY7PM-0620	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 49 of 138

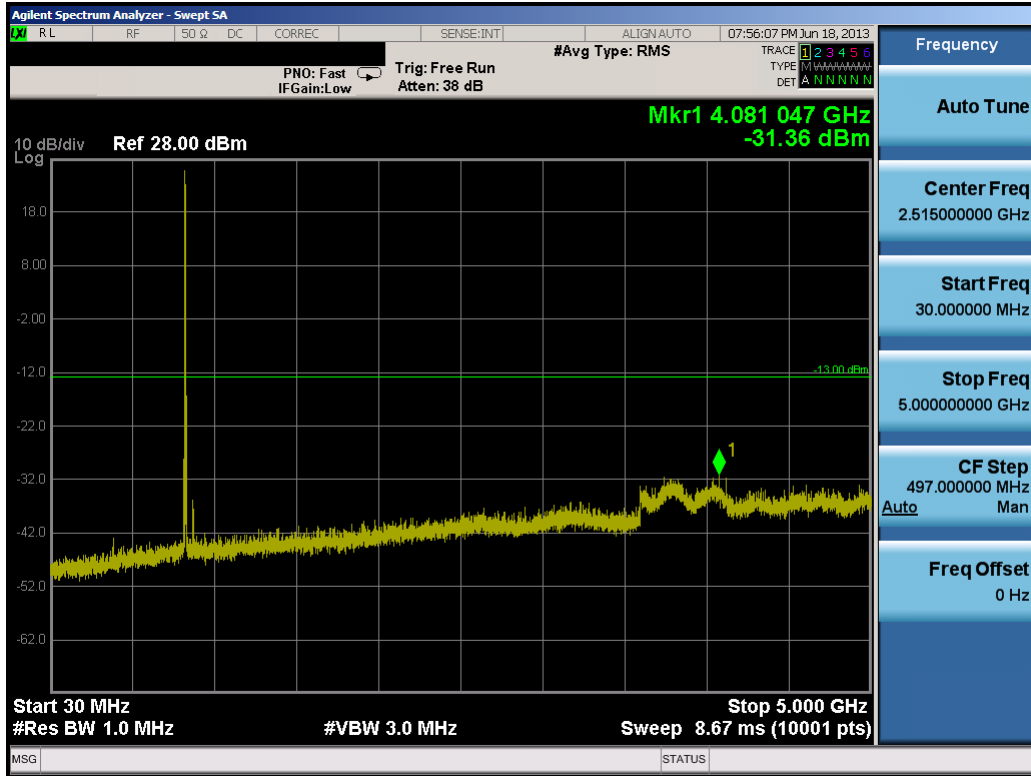

Plot 7-25. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

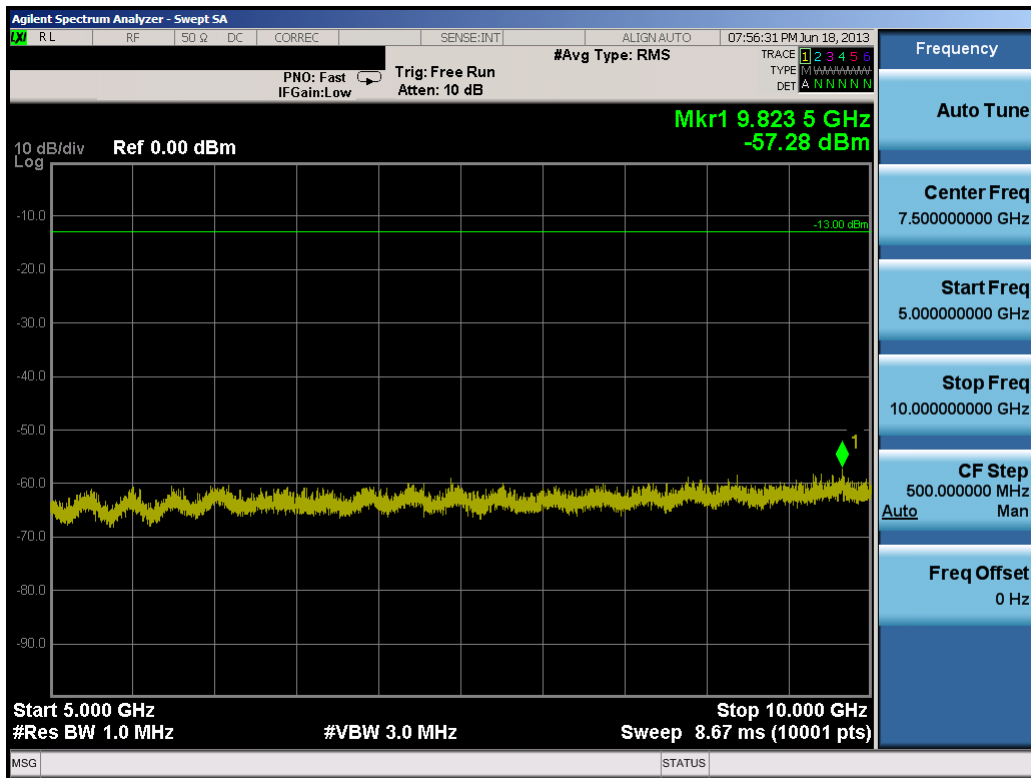


Plot 7-26. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: PY7PM-0620	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 50 of 138






Plot 7-27. Upper Band Edge Plot (5.0MHz QPSK – RB Size 25)

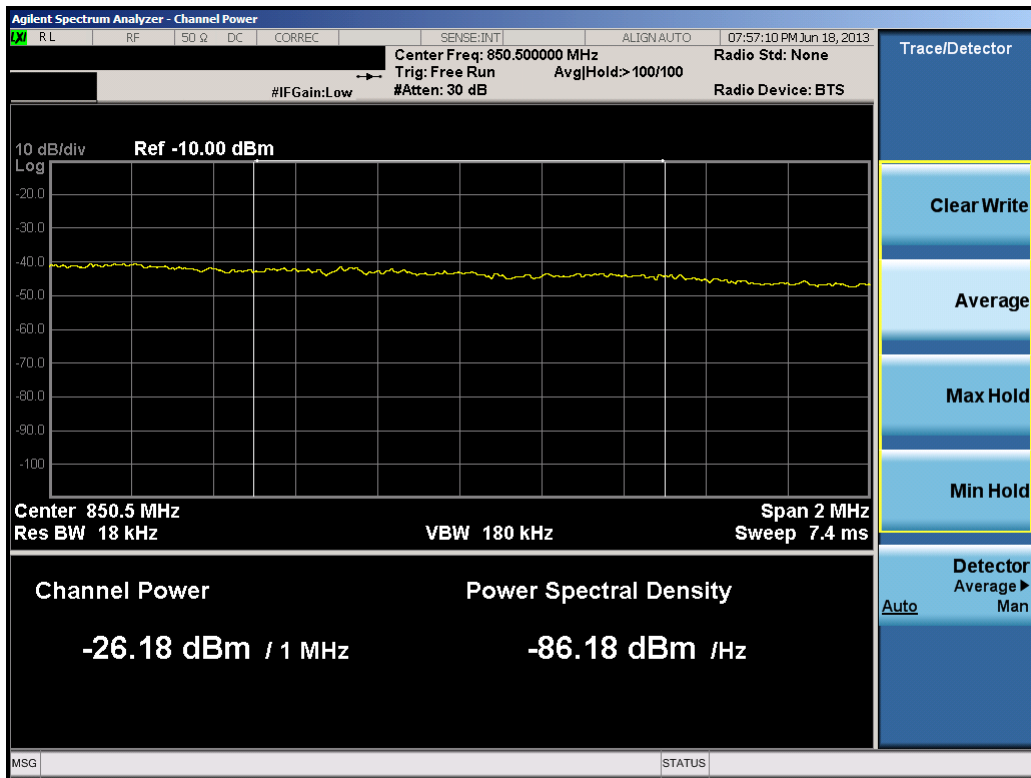


Plot 7-28. Upper Extended Band Edge Plot (5.0MHz QPSK – RB Size 25)

FCC ID: PY7PM-0620	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 51 of 138

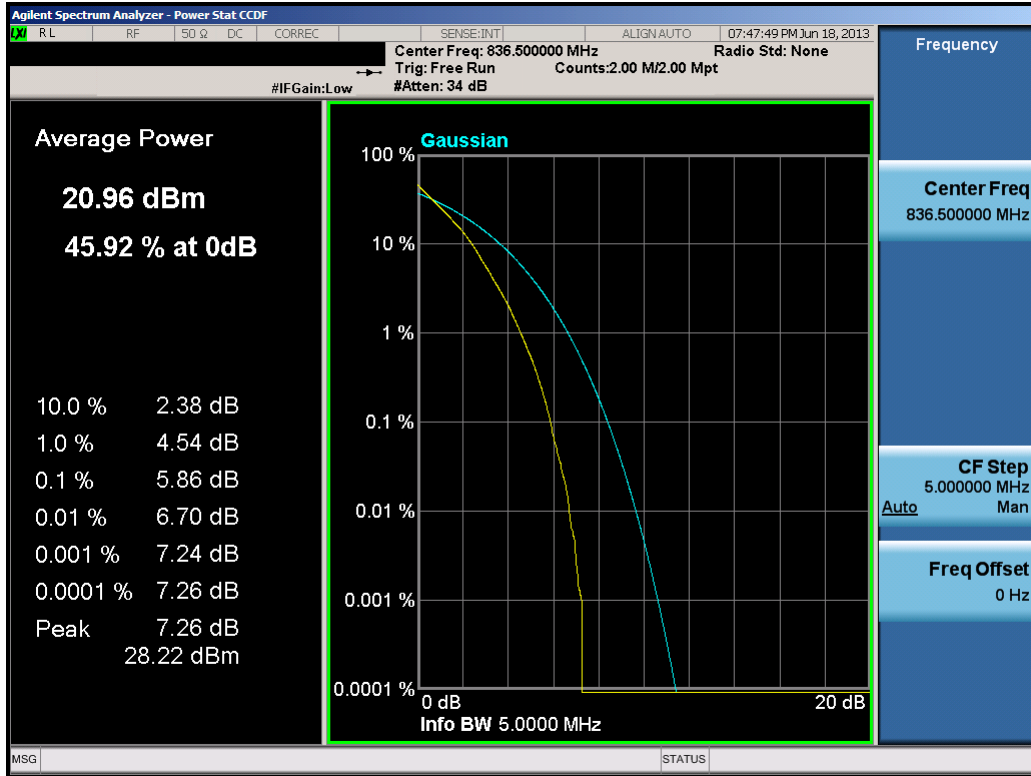

**Plot 7-29. PAR Plot (5.0MHz QPSK – RB Size 25)**

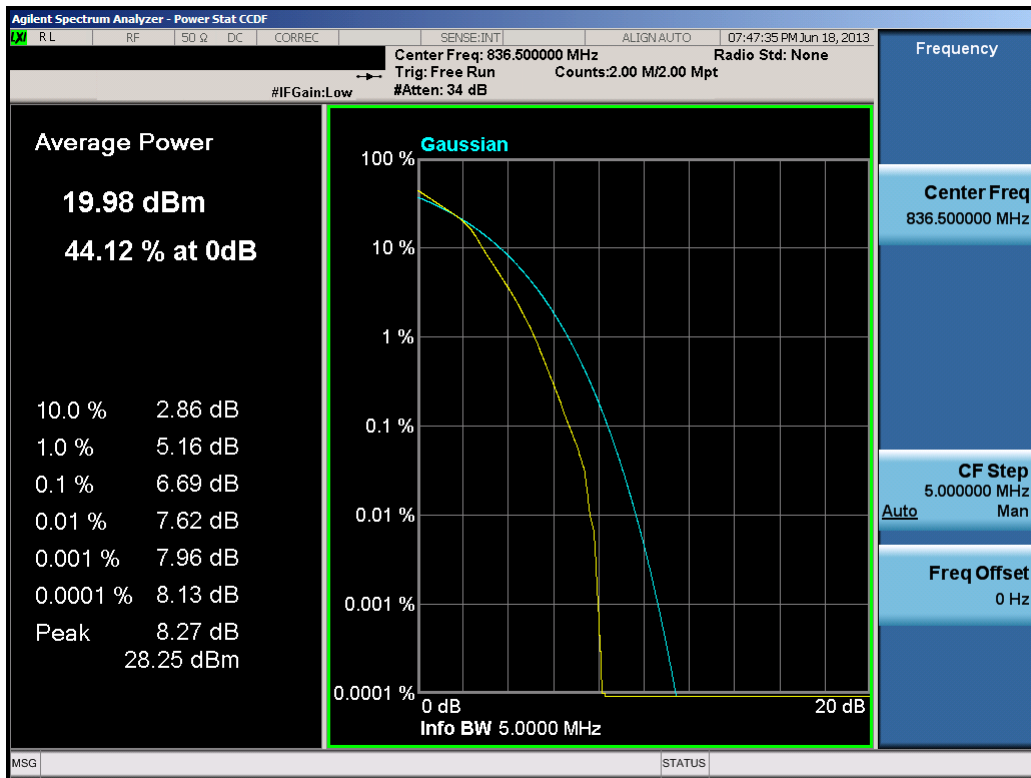


**Plot 7-30. PAR Plot (5.0MHz 16-QAM – RB Size 25)**

FCC ID: PY7PM-0620	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b> make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 52 of 138




Plot 7-31. Lower Band Edge Plot (10.0MHz QPSK – RB Size 50)

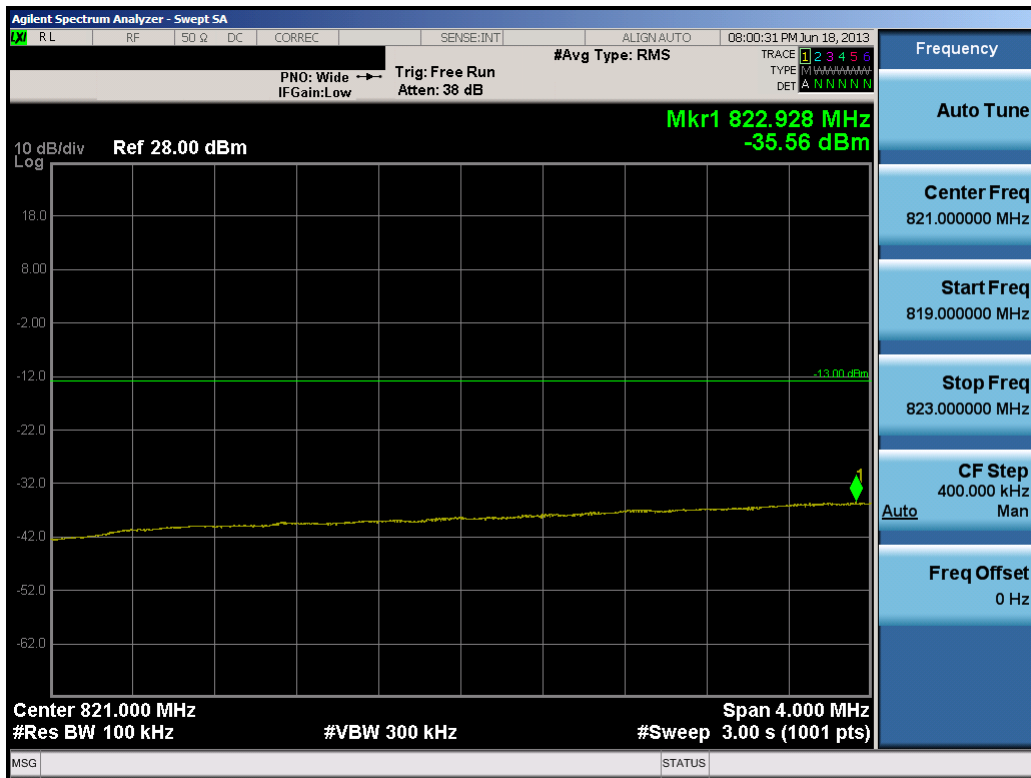


Plot 7-32. Lower Extended Band Edge Plot (10.0MHz QPSK – RB Size 50)

FCC ID: PY7PM-0620	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 53 of 138

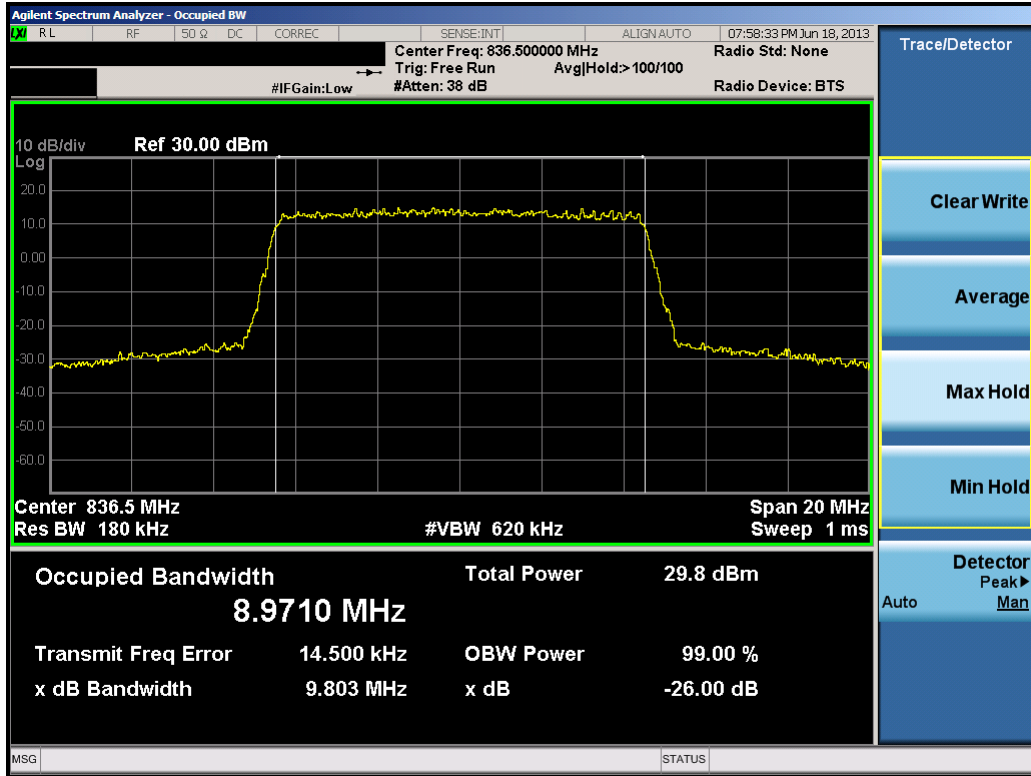

Plot 7-33. Occupied Bandwidth Plot (10.0MHz QPSK – RB Size 50)

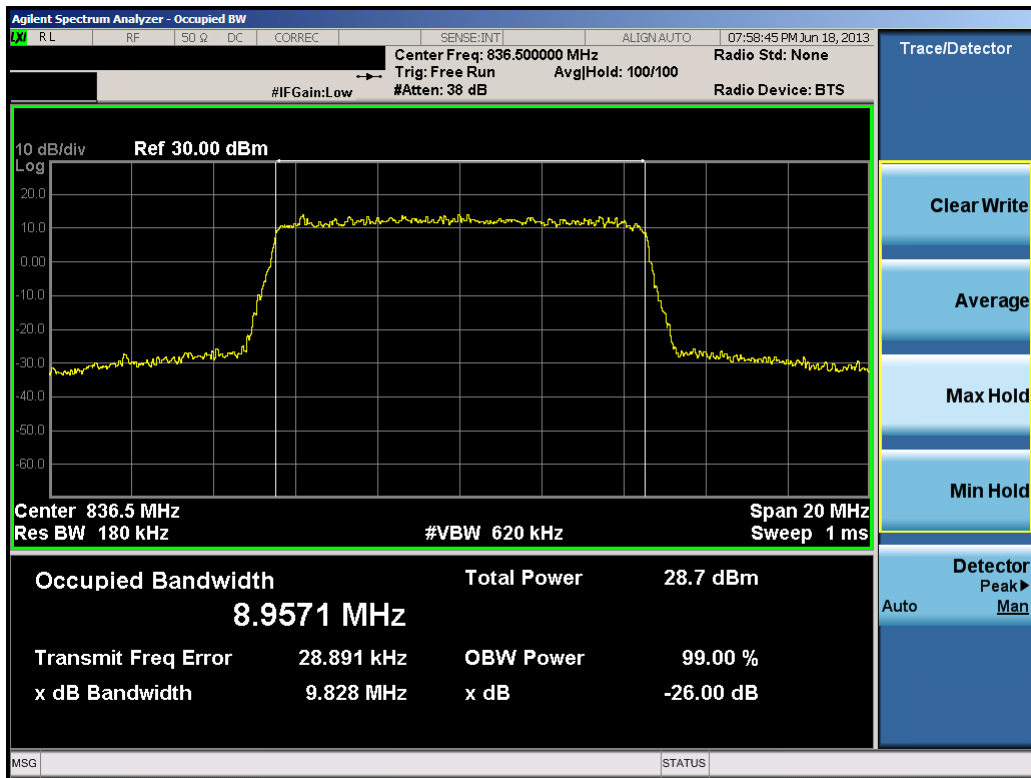


Plot 7-34. Occupied Bandwidth Plot (10.0MHz 16-QAM – RB Size 50)

FCC ID: PY7PM-0620	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b> make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 54 of 138




Plot 7-35. Upper Band Edge Plot (10.0MHz QPSK – RB Size 50)

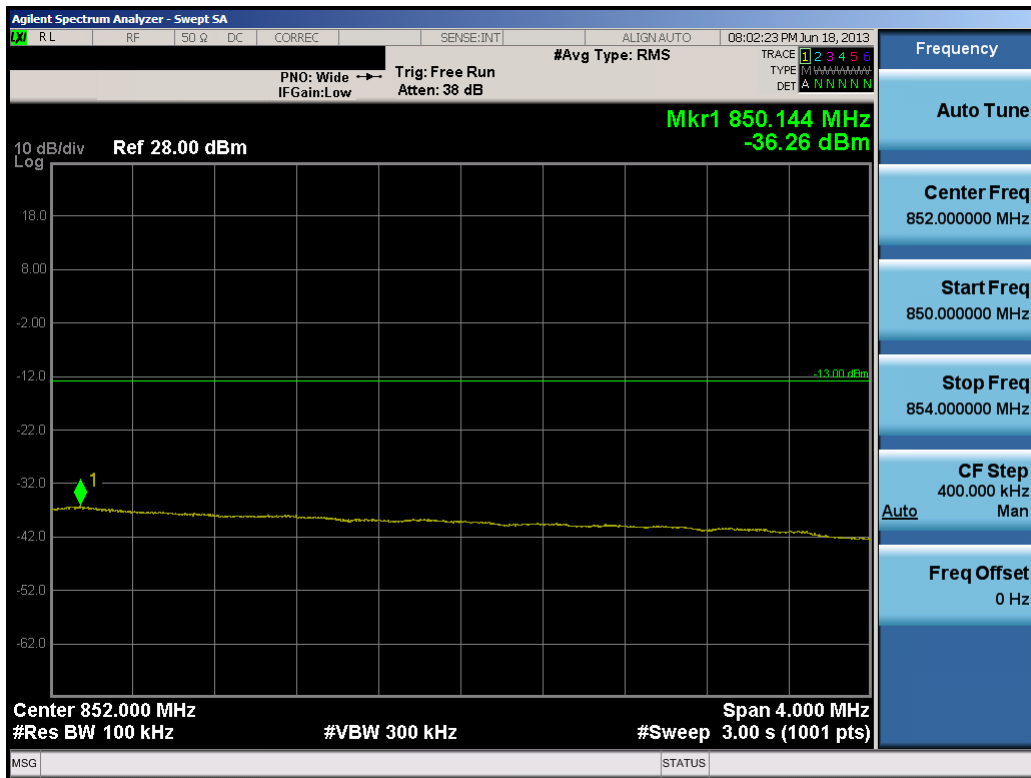


Plot 7-36. Upper Extended Band Edge Plot (10.0MHz QPSK – RB Size 50)

FCC ID: PY7PM-0620	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 55 of 138

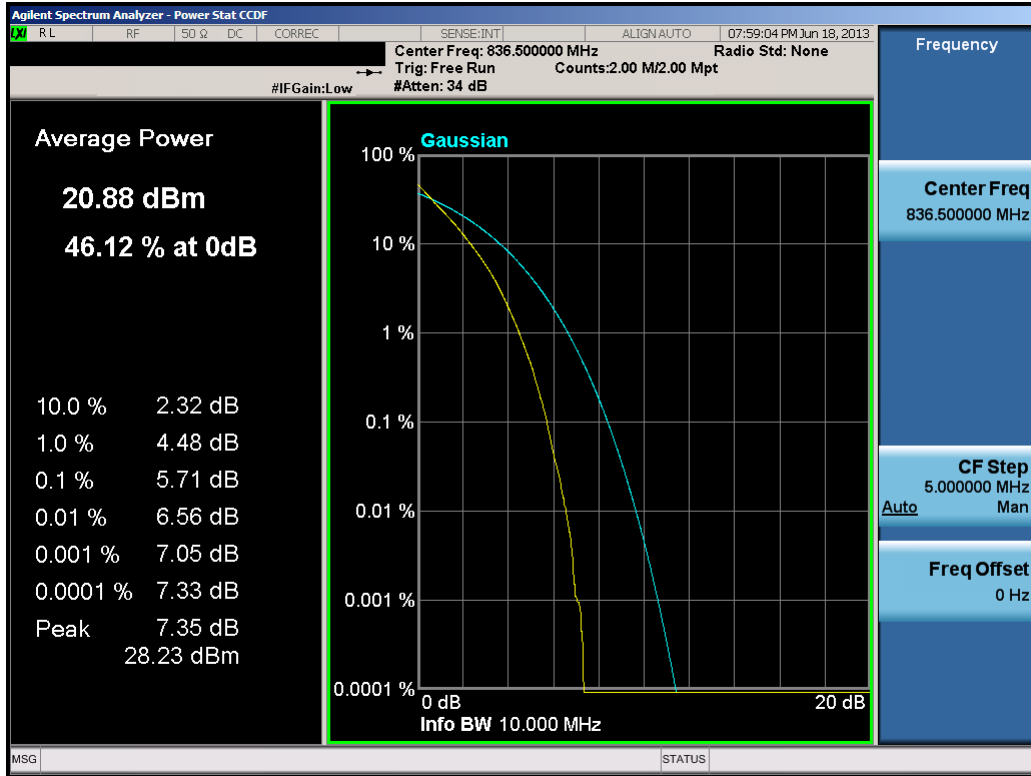

**Plot 7-37. PAR Plot (10.0MHz QPSK – RB Size 50)**

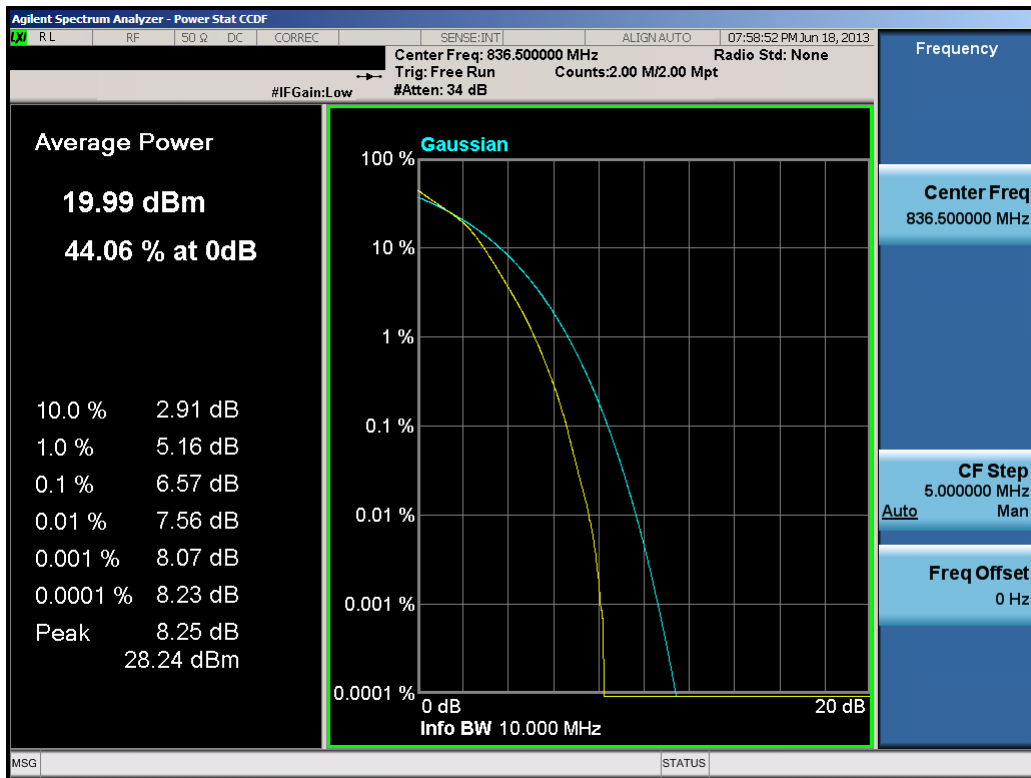


**Plot 7-38. PAR Plot (10.0MHz 16-QAM – RB Size 50)**


FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 56 of 138

## 8.0 BAND 4 PLOTS OF EMISSIONS

**Note:** All bandwidths, RB configurations, and modulations were investigated. The worst case test results are reported below.

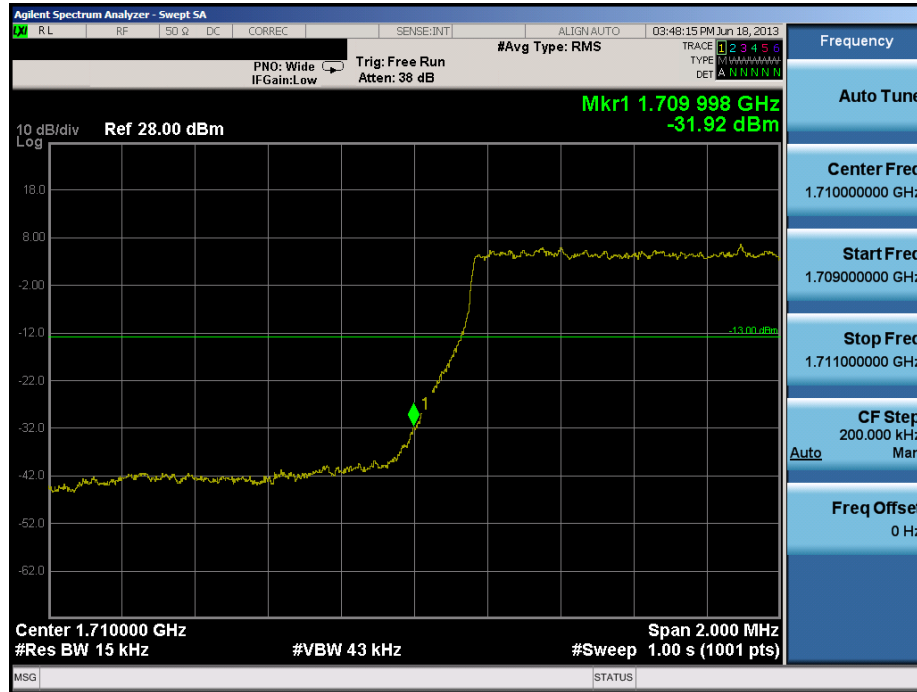


**Plot 8-1. Lower Band Edge Plot (1.4MHz QPSK – RB Size 6)**

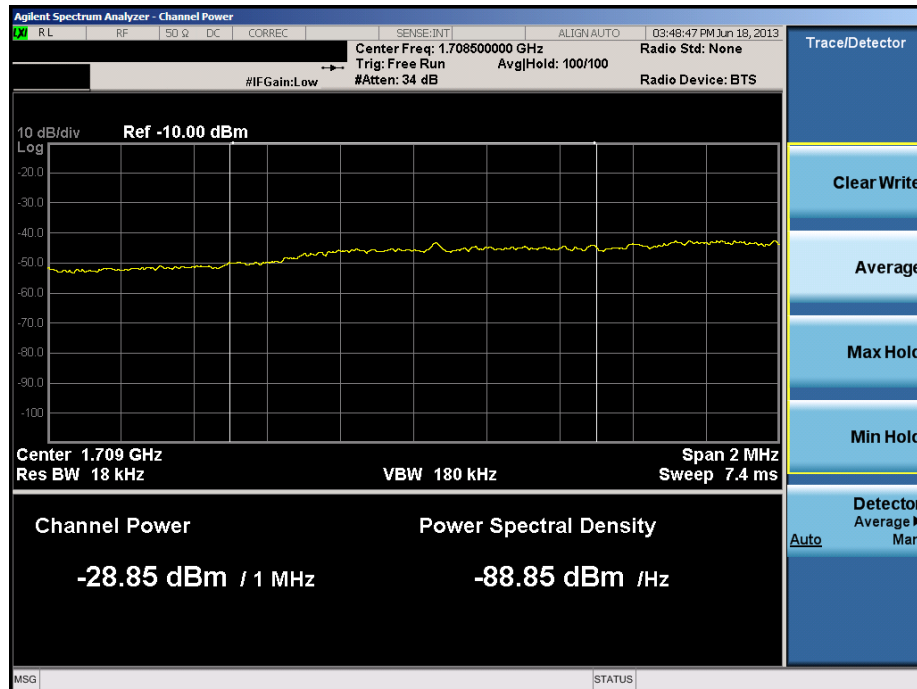


**Plot 8-2. Lower Extended Band Edge Plot (1.4MHz QPSK – RB Size 6)**

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 57 of 138

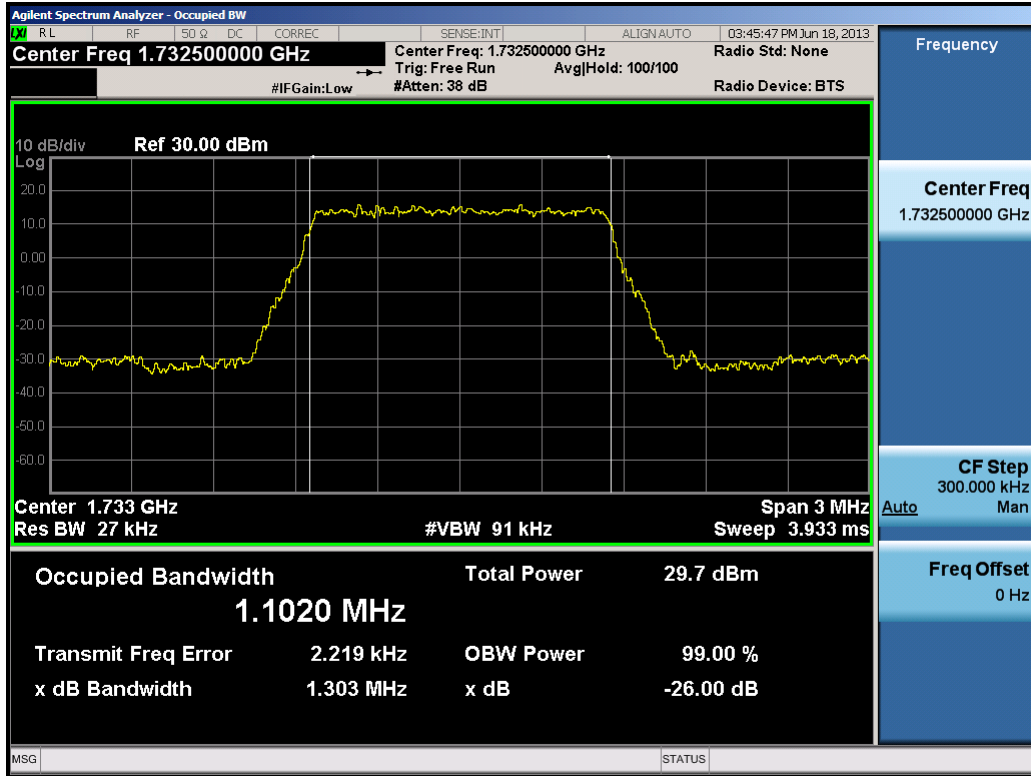


Plot 8-3. Occupied Bandwidth Plot (1.4MHz QPSK – RB Size 6)

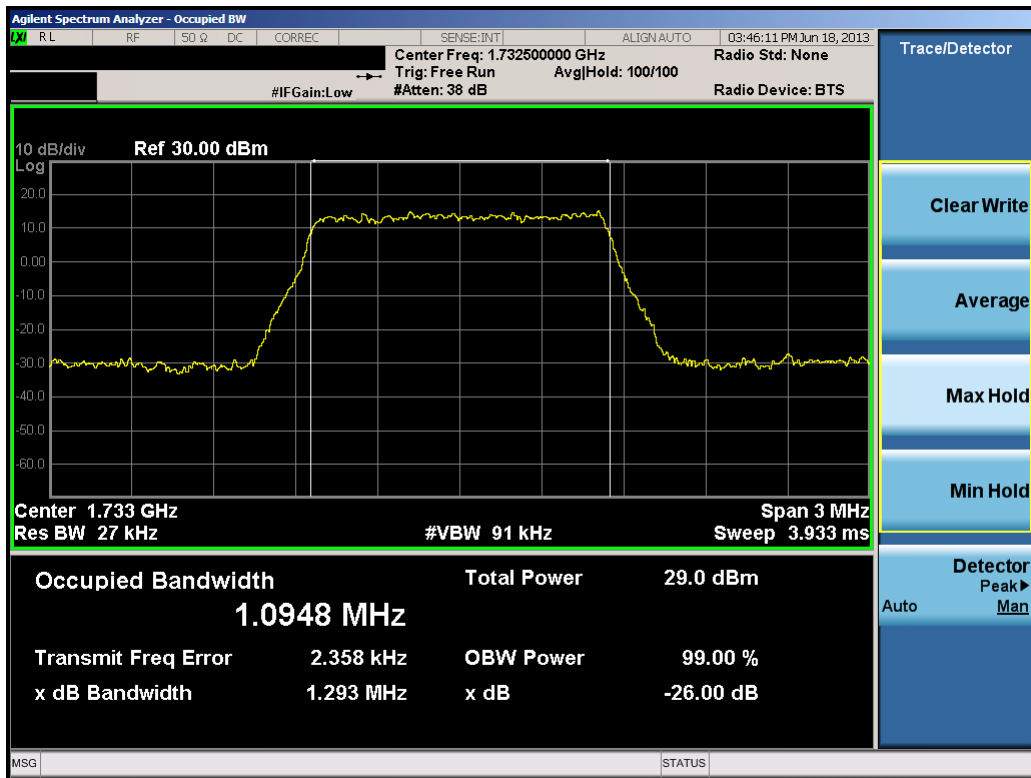


Plot 8-4. Occupied Bandwidth Plot (1.4MHz 16-QAM – RB Size 6)

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 58 of 138



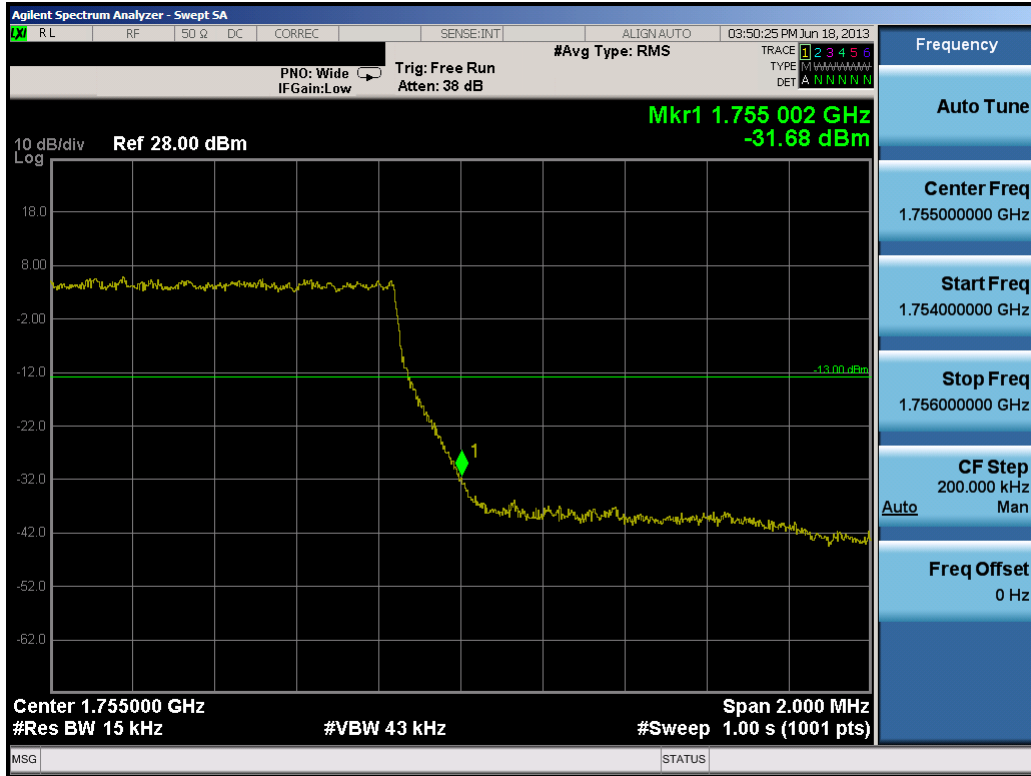


Plot 8-5. Upper Band Edge Plot (1.4MHz QPSK – RB Size 6)

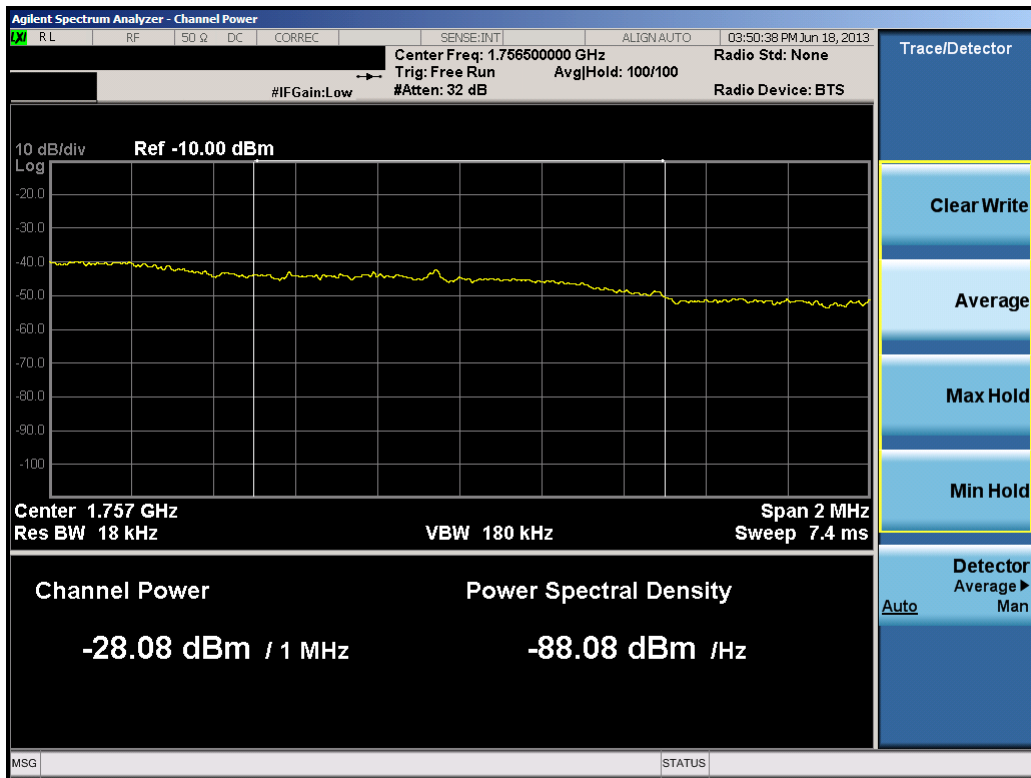


Plot 8-6. Upper Extended Band Edge Plot (1.4MHz QPSK – RB Size 6)

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 59 of 138

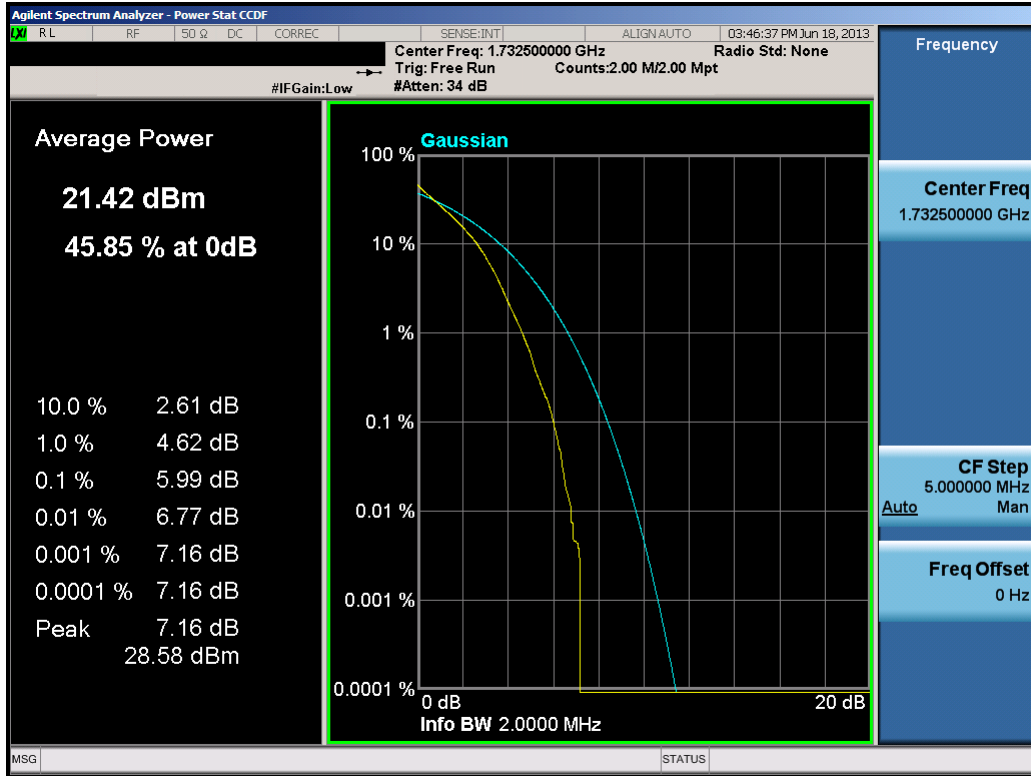


Plot 8-7. PAR Plot (1.4MHz QPSK – RB Size 6)

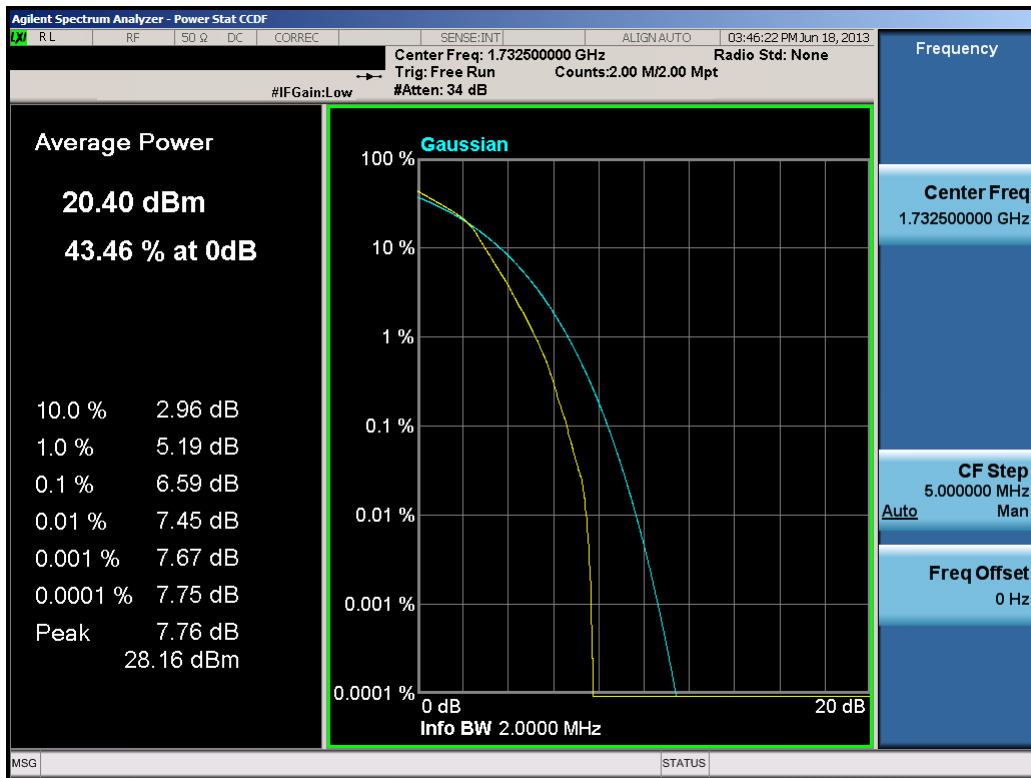


Plot 8-8. PAR Plot (1.4MHz 16-QAM – RB Size 6)

FCC ID: PY7PM-0620	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b> make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 60 of 138

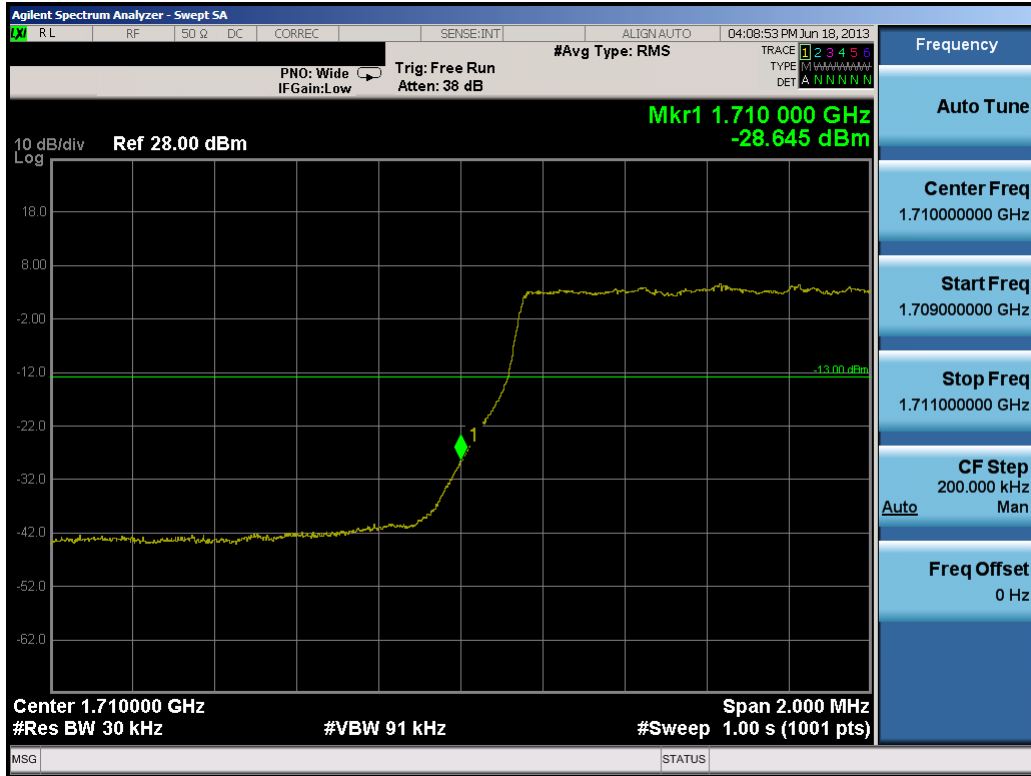


Plot 8-9. Lower Band Edge Plot (3.0MHz QPSK – RB Size 15)

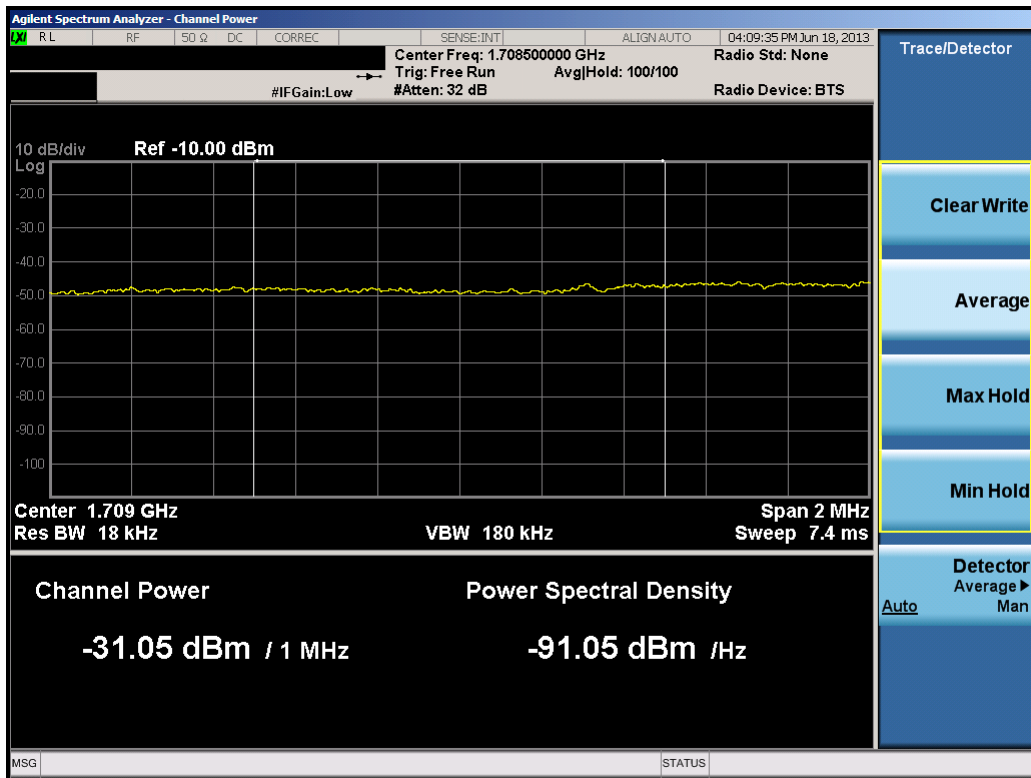


Plot 8-10. Lower Extended Band Edge Plot (3.0MHz QPSK – RB Size 15)

FCC ID: PY7PM-0620	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset	Page 61 of 138	

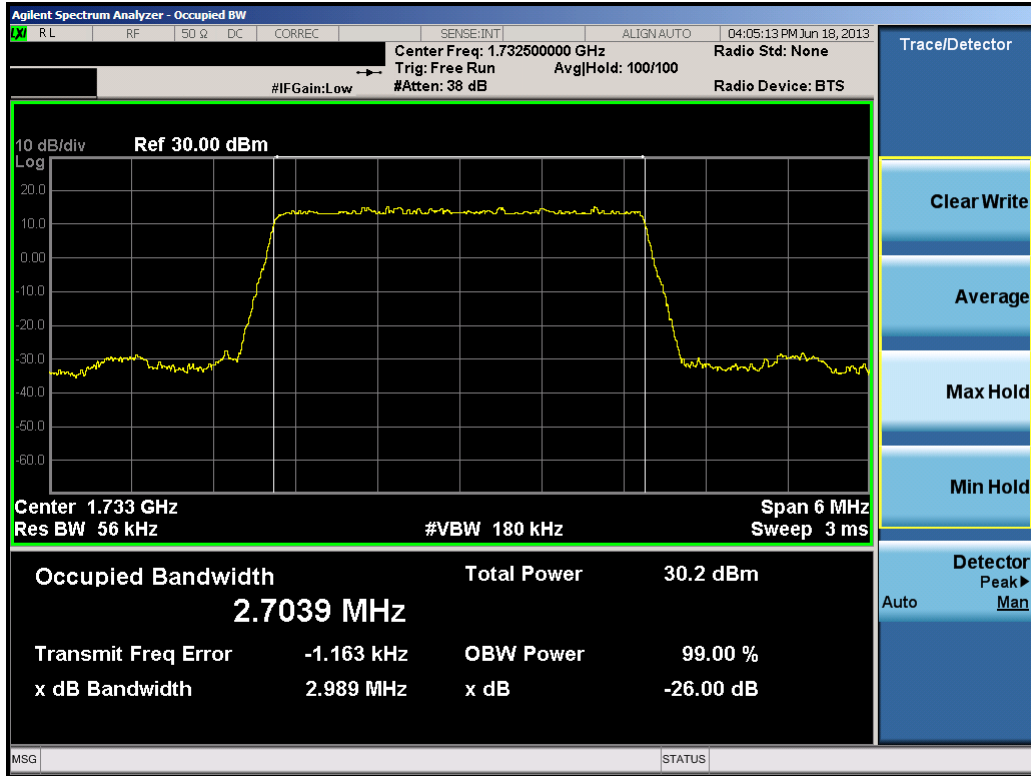

Plot 8-11. Occupied Bandwidth Plot (3.0MHz QPSK – RB Size 15)

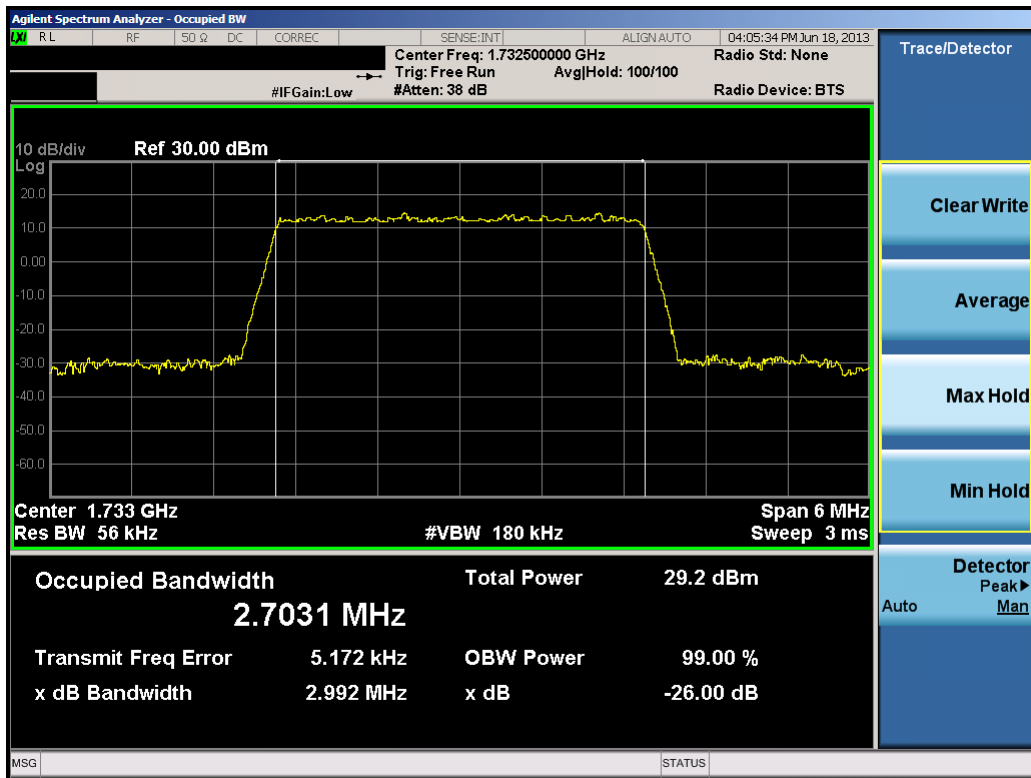


Plot 8-12. Occupied Bandwidth Plot (3.0MHz 16-QAM – RB Size 15)

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 62 of 138




Plot 8-13. Upper Band Edge Plot (3.0MHz QPSK – RB Size 15)

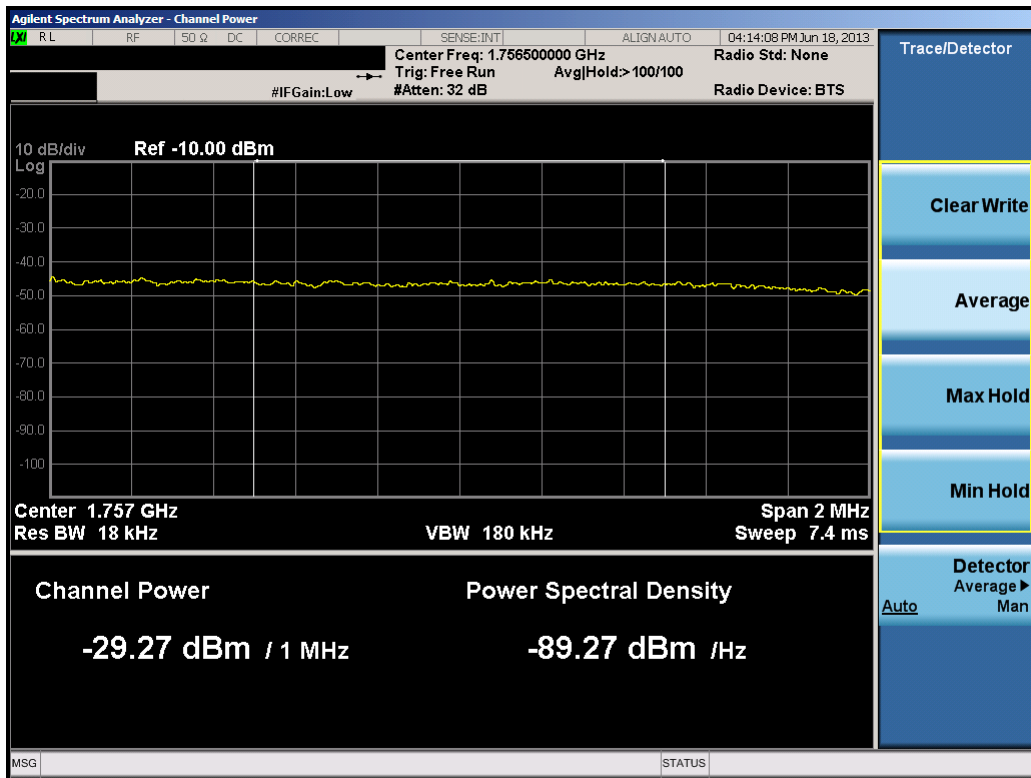


Plot 8-14. Upper Extended Band Edge Plot (3.0MHz QPSK – RB Size 15)

FCC ID: PY7PM-0620	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 63 of 138

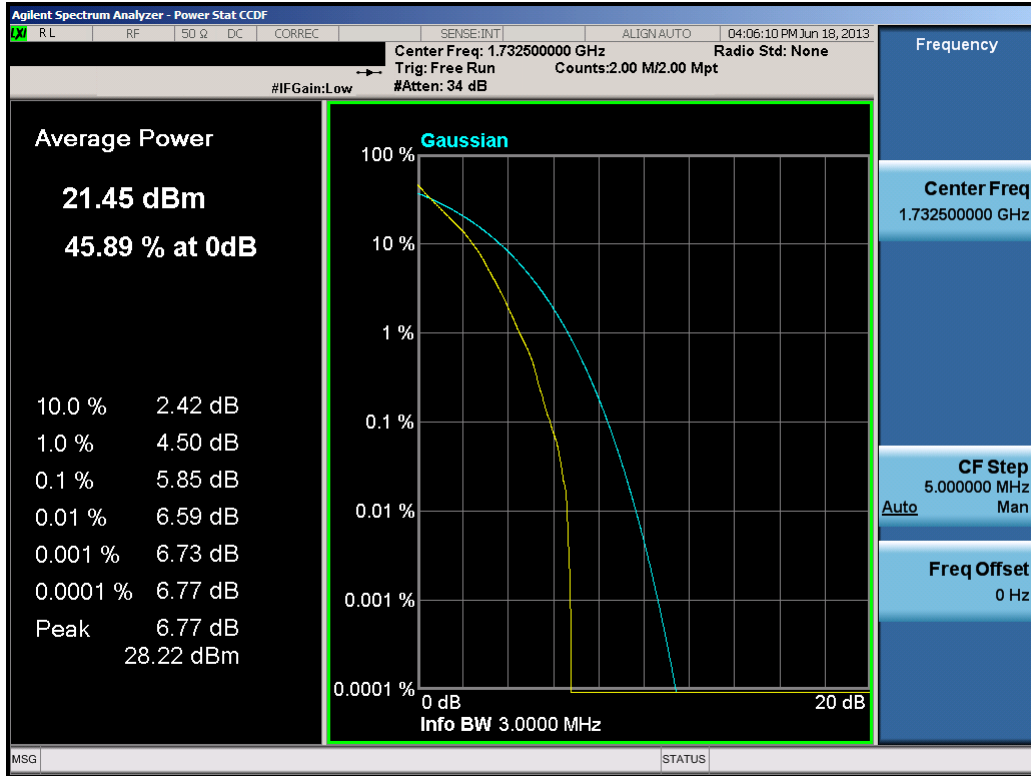

**Plot 8-15. PAR Plot (3.0MHz QPSK – RB Size 15)**

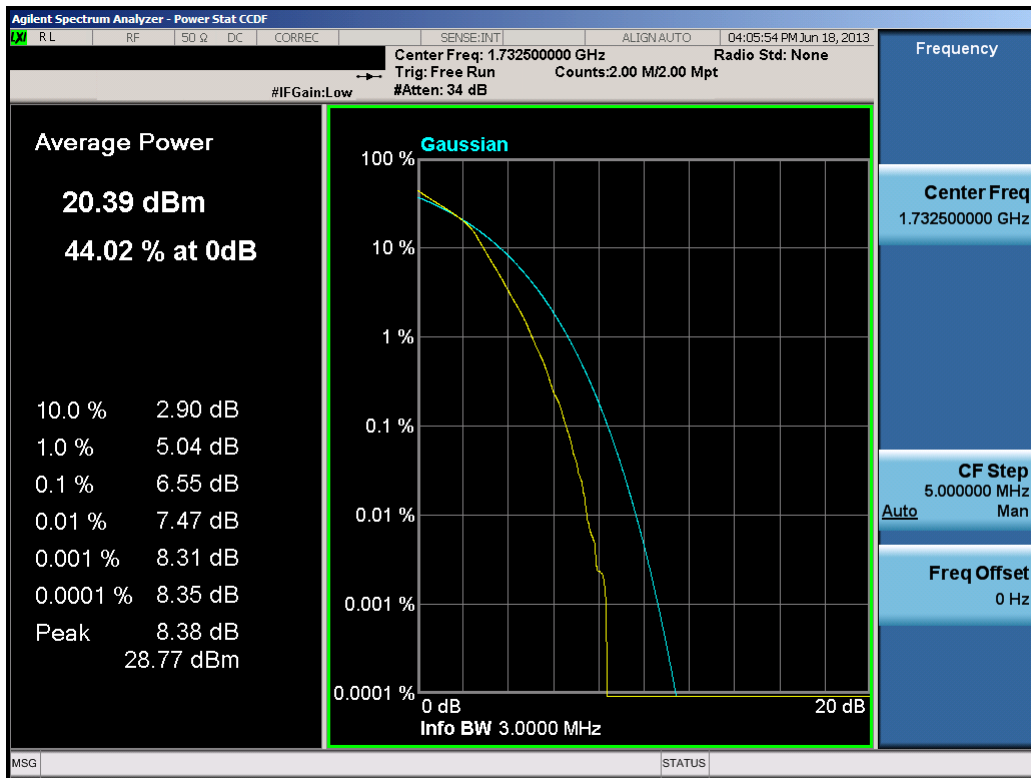


**Plot 8-16. PAR Plot (3.0MHz 16-QAM – RB Size 15)**

FCC ID: PY7PM-0620	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b> make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 64 of 138




Plot 8-17. Lower Band Edge Plot (5.0MHz QPSK – RB Size 25)

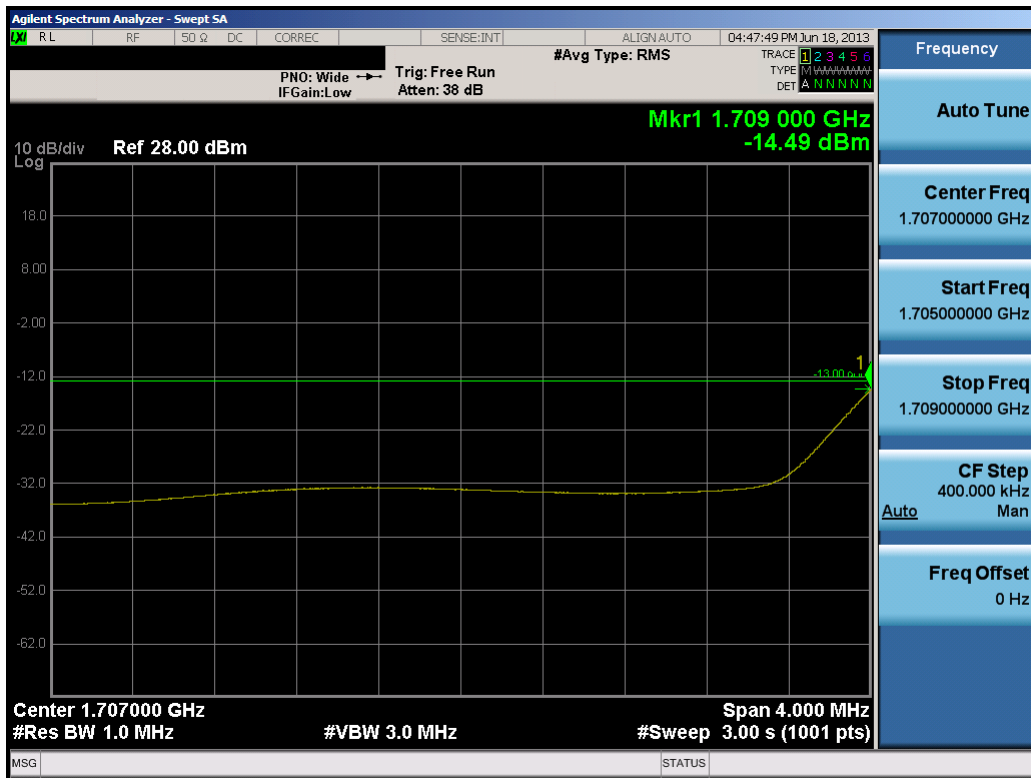


Plot 8-18. Lower Extended Band Edge Plot (5.0MHz QPSK – RB Size 25)

FCC ID: PY7PM-0620	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 65 of 138

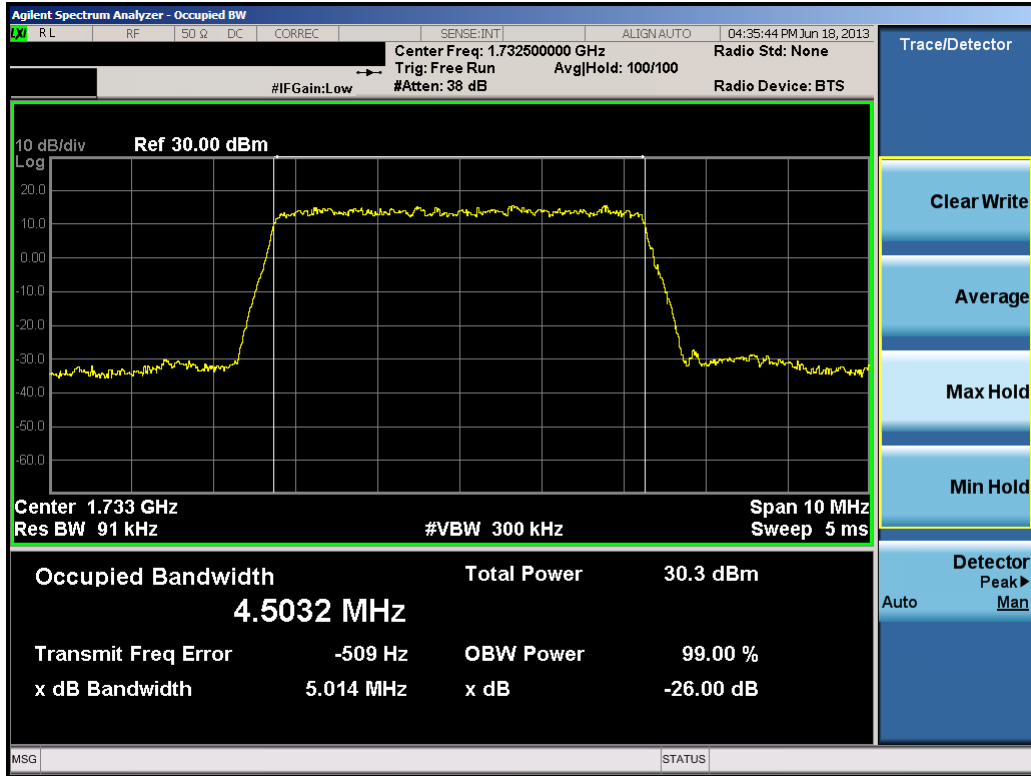


Plot 8-19. Occupied Bandwidth Plot (5.0MHz QPSK – RB Size 25)

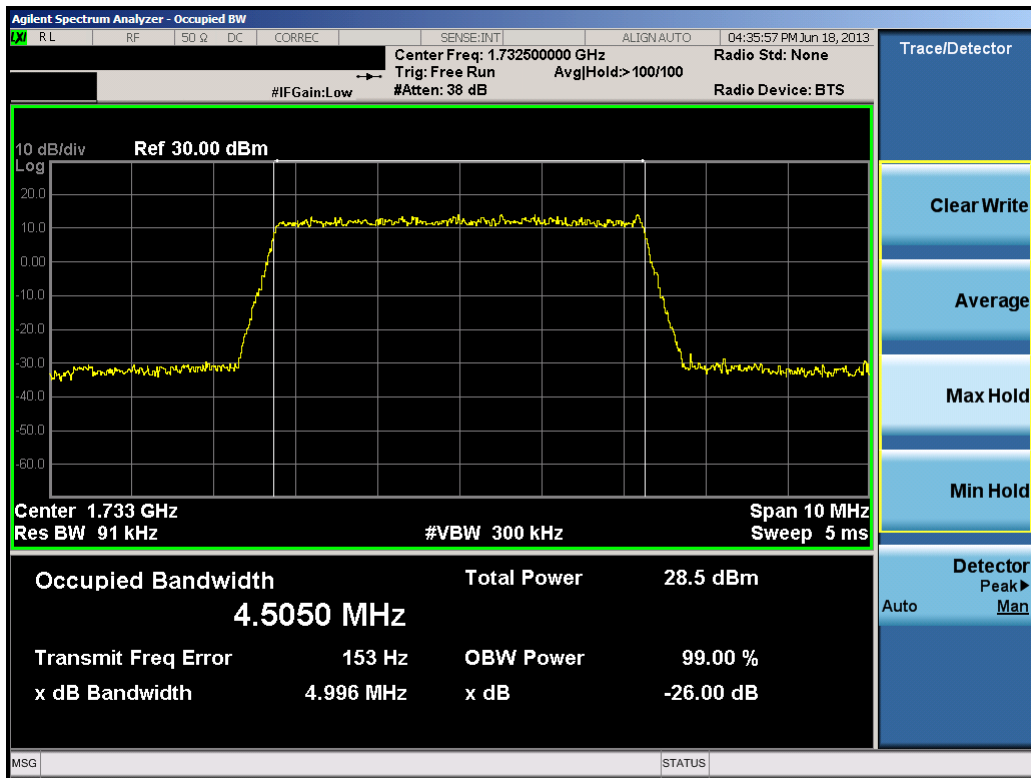


Plot 8-20. Occupied Bandwidth Plot (5.0MHz 16-QAM – RB Size 25)

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 66 of 138



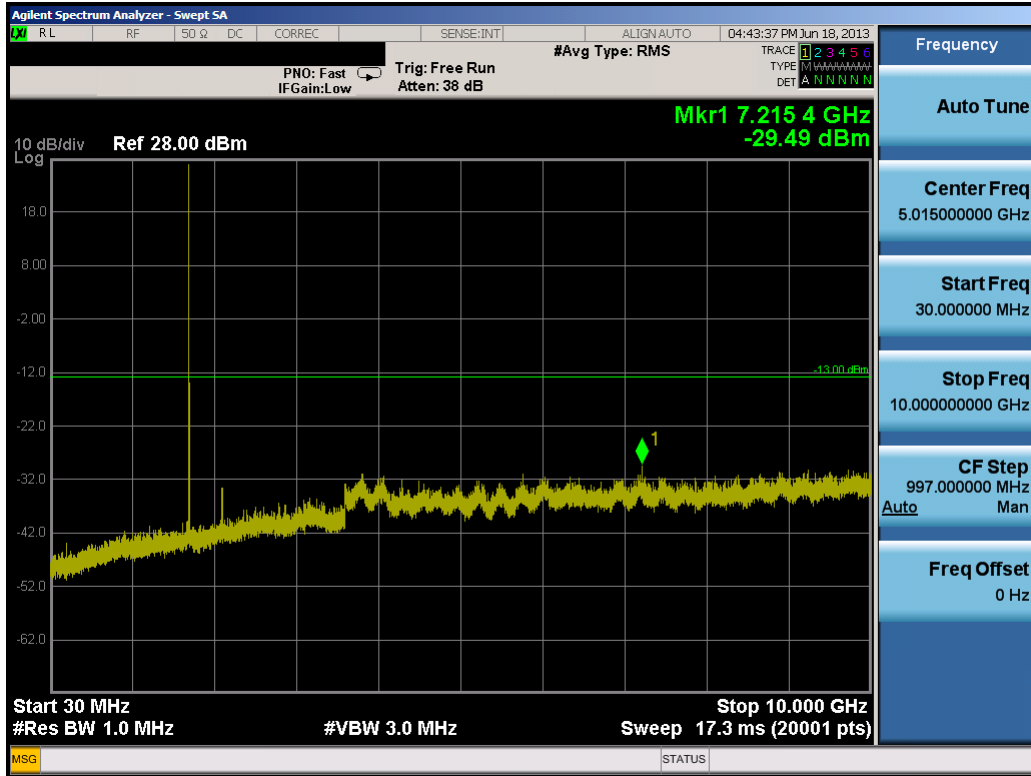


Plot 8-21. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

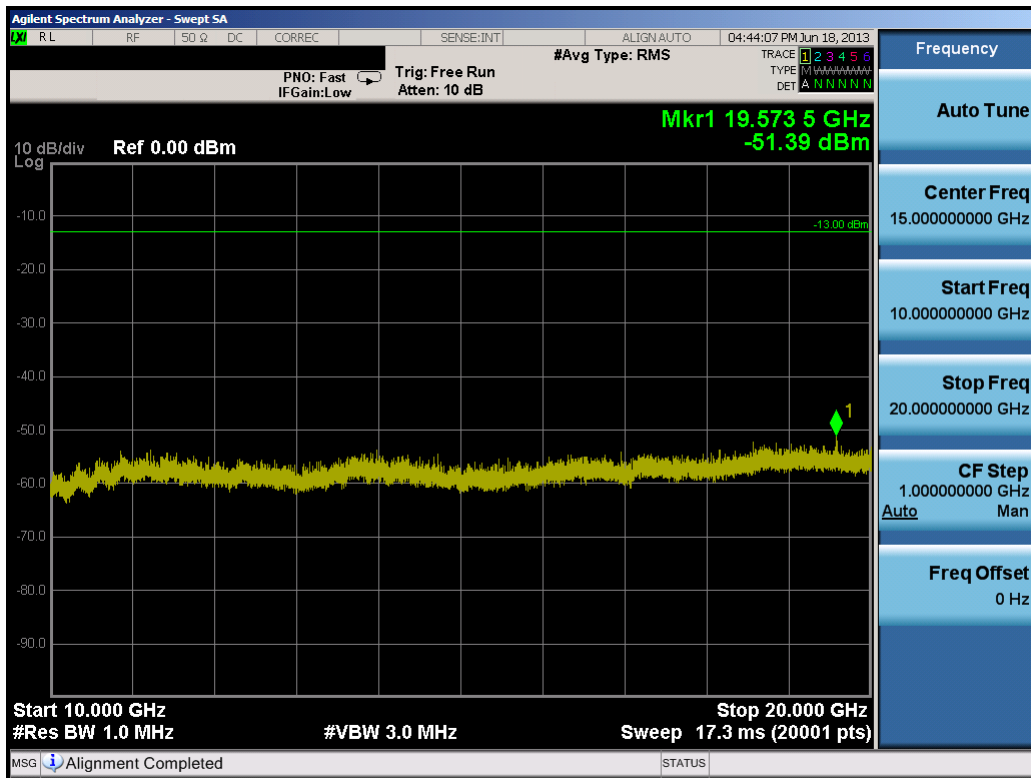


Plot 8-22. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: PY7PM-0620	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 67 of 138

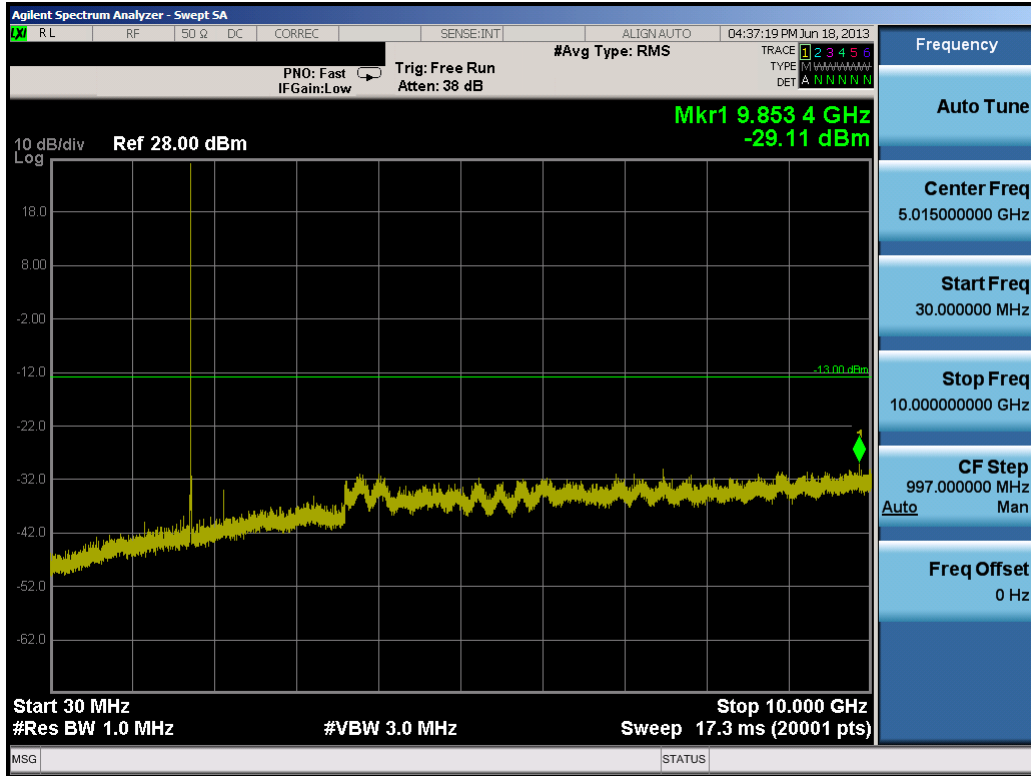


Plot 8-23. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

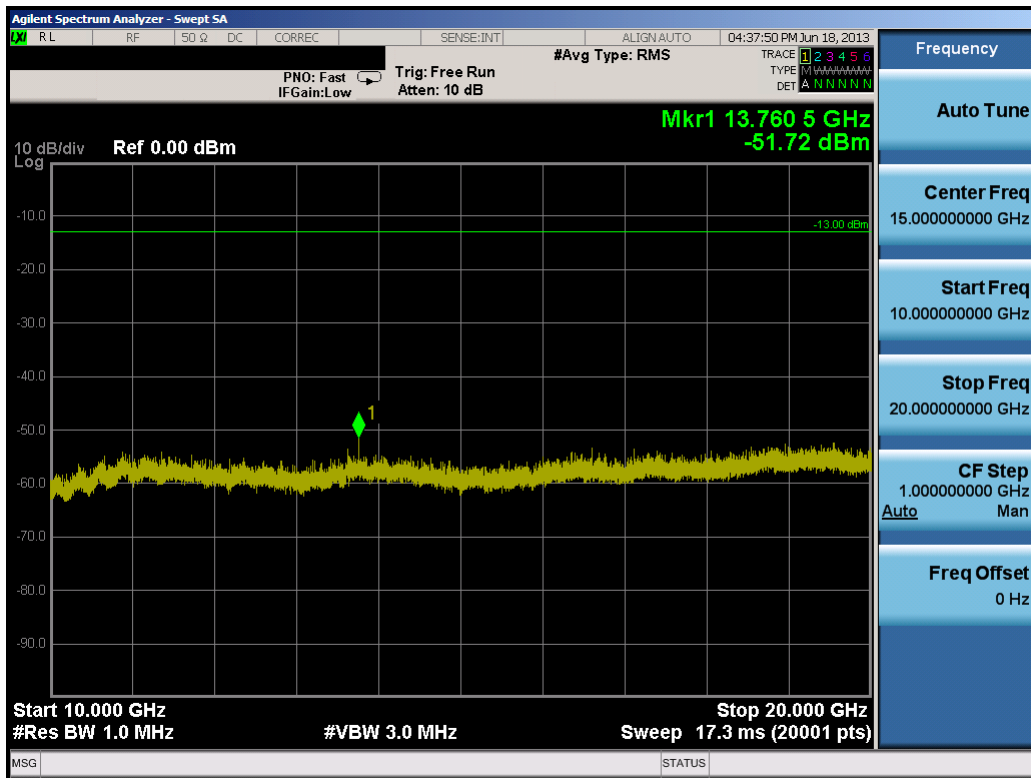


Plot 8-24. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: PY7PM-0620	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 68 of 138

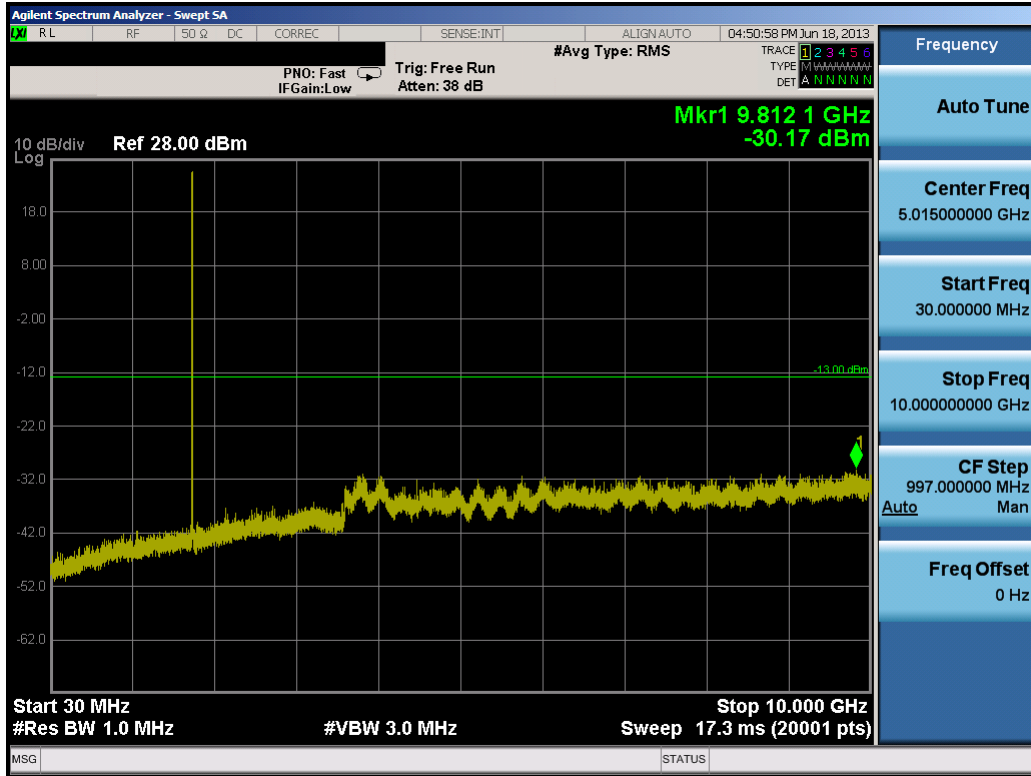

Plot 8-25. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

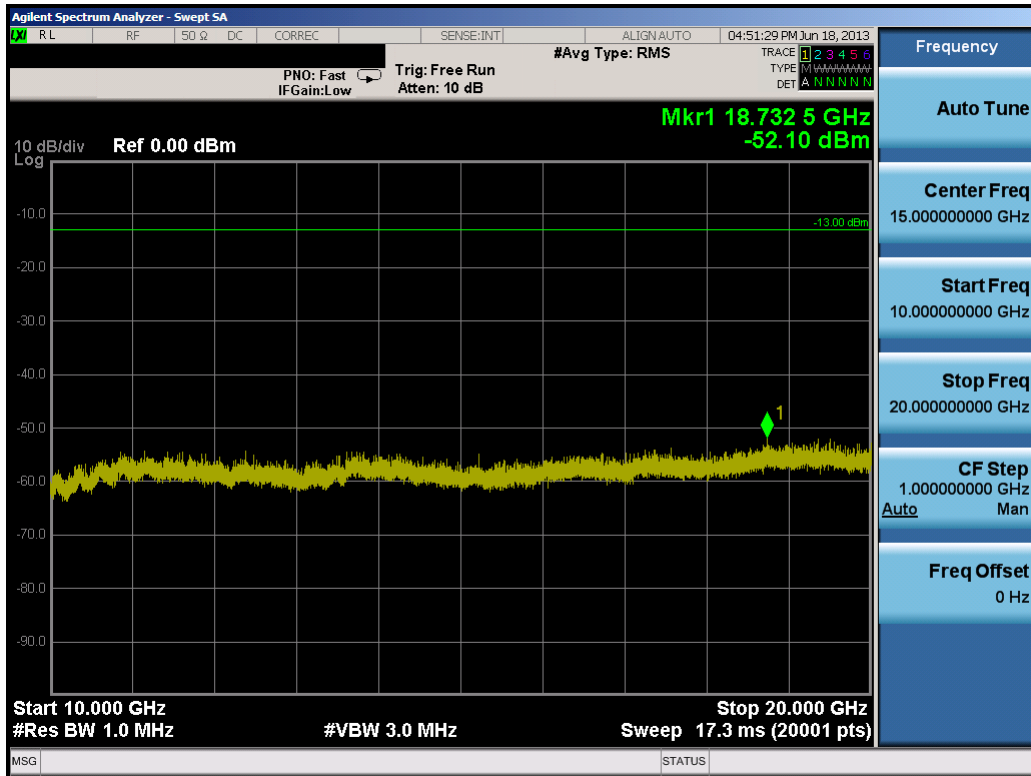


Plot 8-26. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: PY7PM-0620	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 69 of 138




**Plot 8-27. Upper Band Edge Plot (5.0MHz QPSK – RB Size 25)**

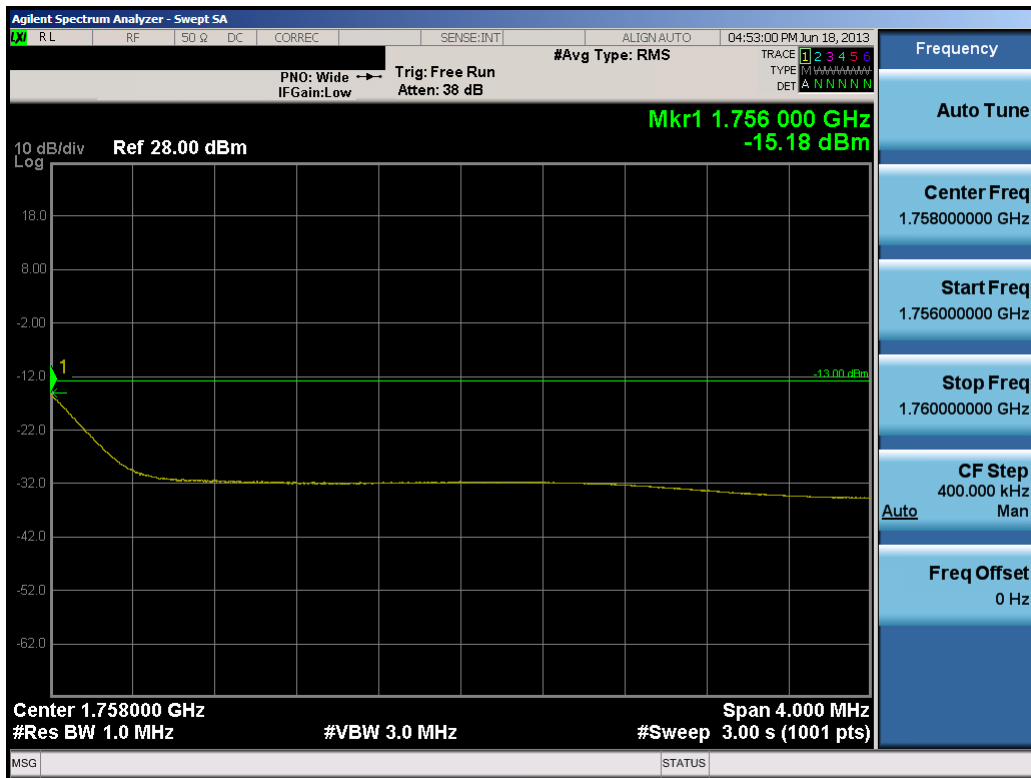


**Plot 8-28. Upper Extended Band Edge Plot (5.0MHz QPSK – RB Size 25)**

FCC ID: PY7PM-0620	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 70 of 138

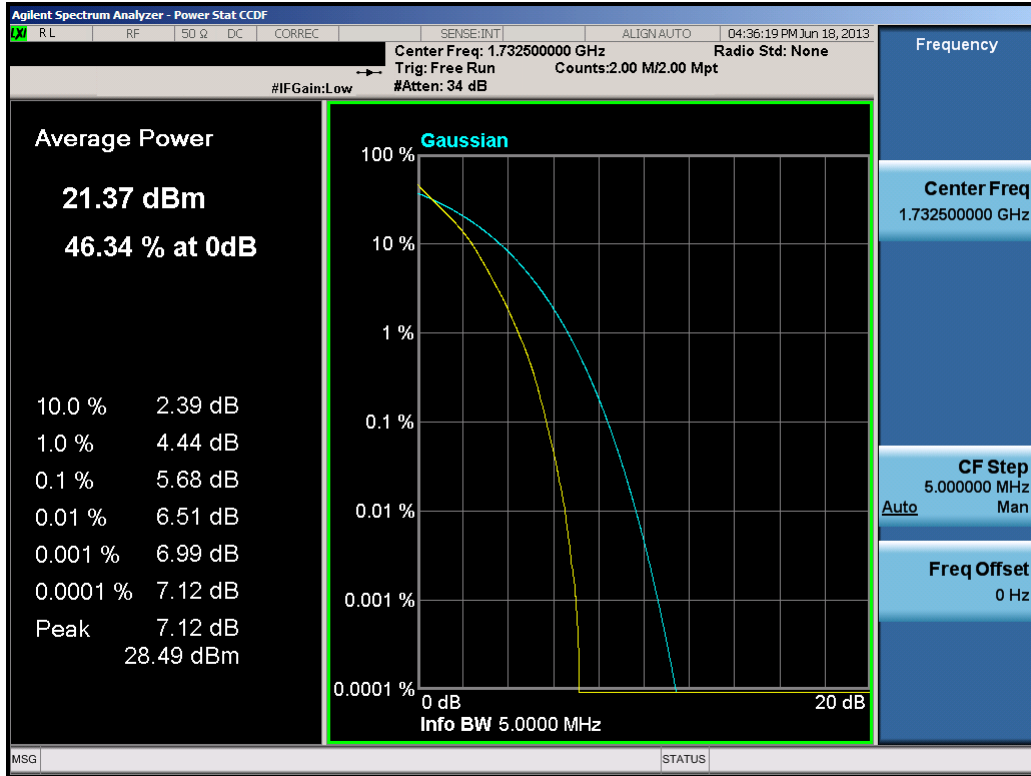


Plot 8-29. PAR Plot (5.0MHz QPSK – RB Size 25)

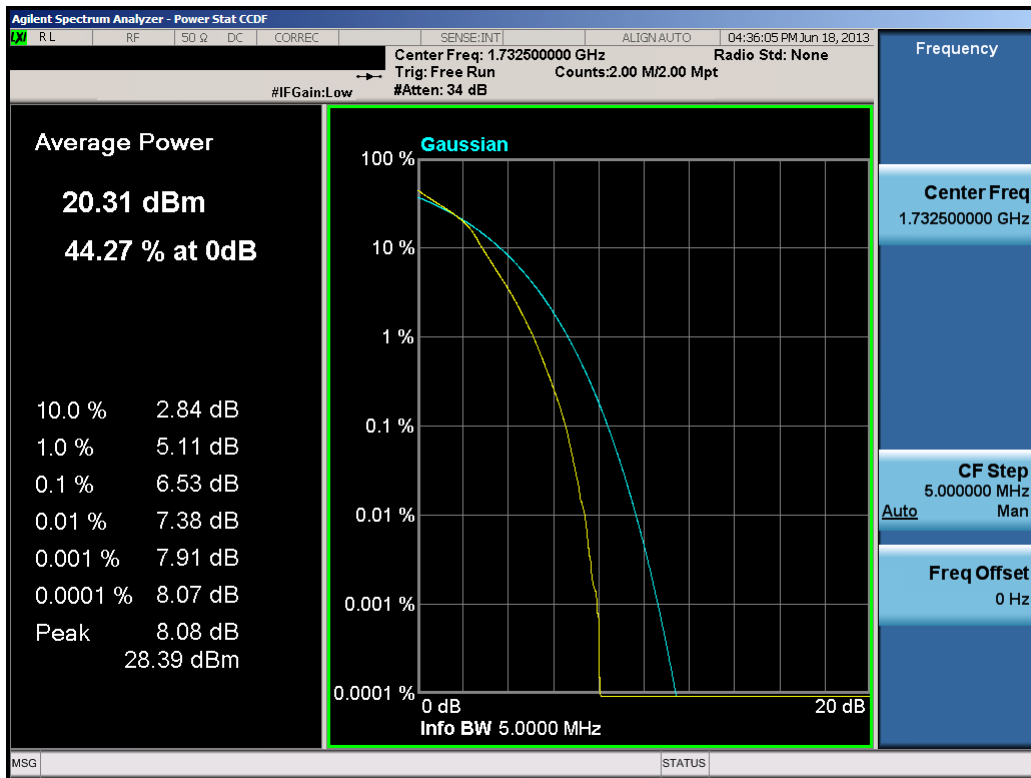


Plot 8-30. PAR Plot (5.0MHz 16-QAM – RB Size 25)

FCC ID: PY7PM-0620	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 71 of 138

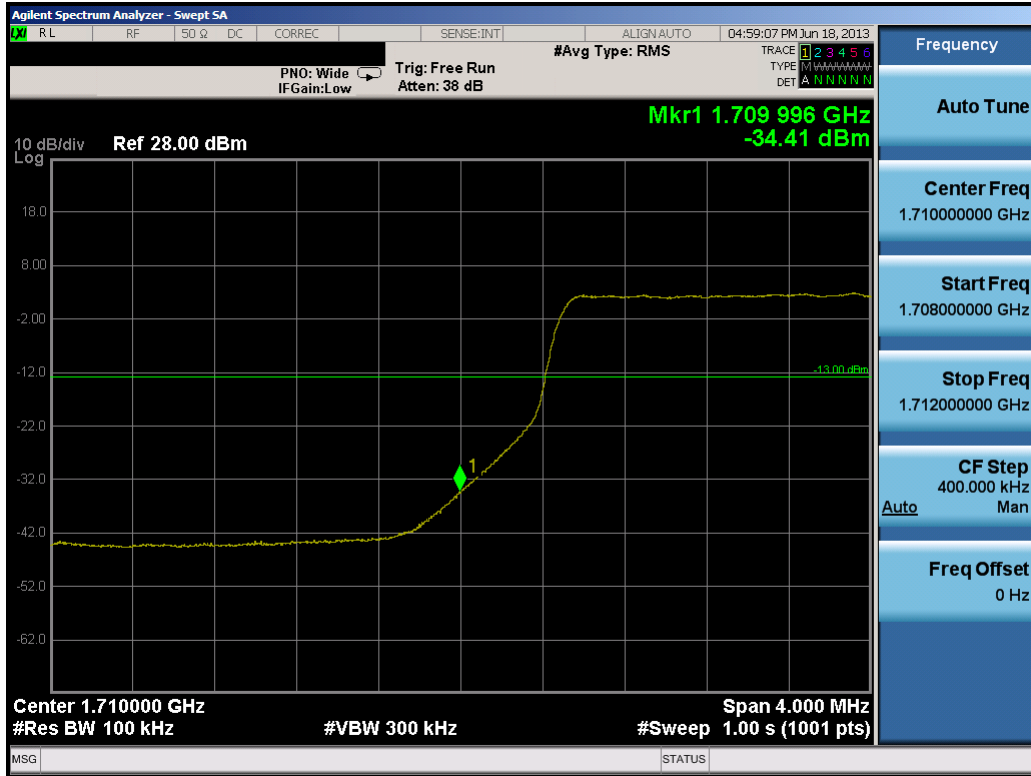


Plot 8-31. Lower Band Edge Plot (10.0MHz QPSK – RB Size 50)

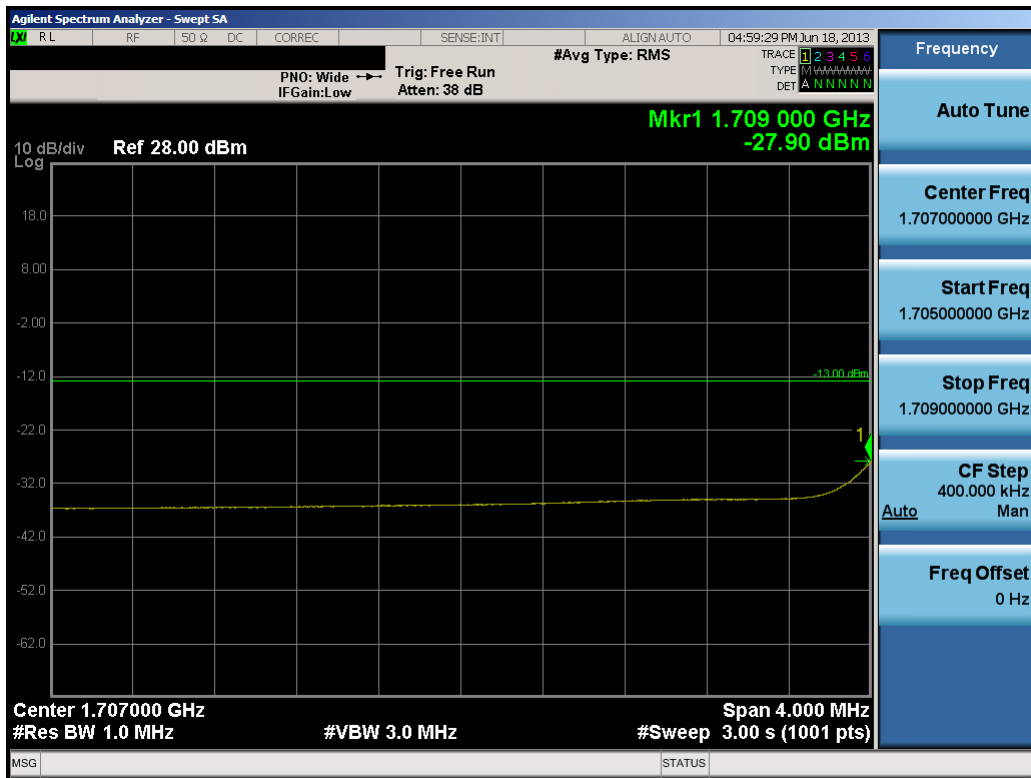


Plot 8-32. Lower Extended Band Edge Plot (10.0MHz QPSK – RB Size 50)

FCC ID: PY7PM-0620	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 72 of 138

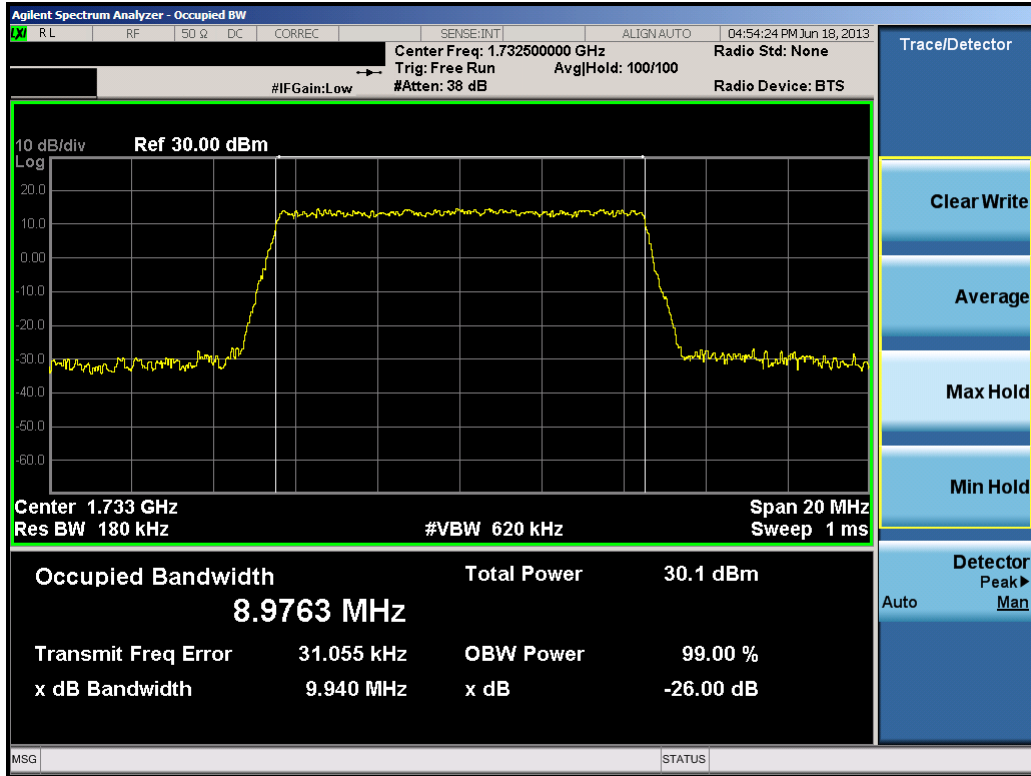


Plot 8-33. Occupied Bandwidth Plot (10.0MHz QPSK – RB Size 50)

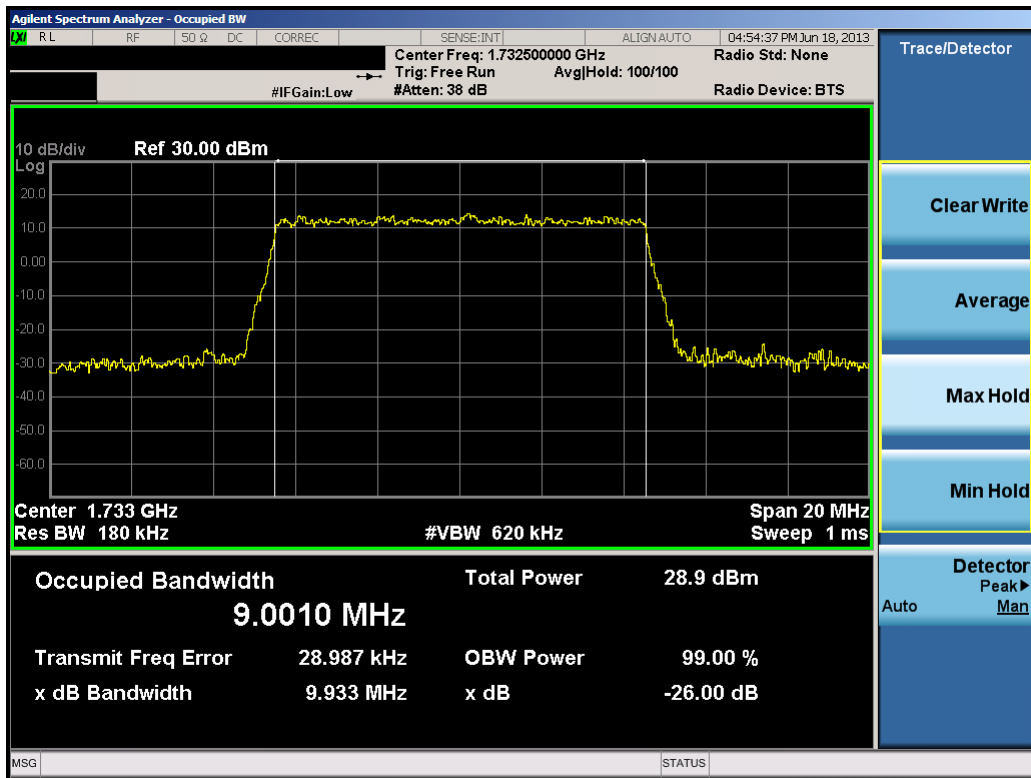


Plot 8-34. Occupied Bandwidth Plot (10.0MHz 16-QAM – RB Size 50)

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 73 of 138

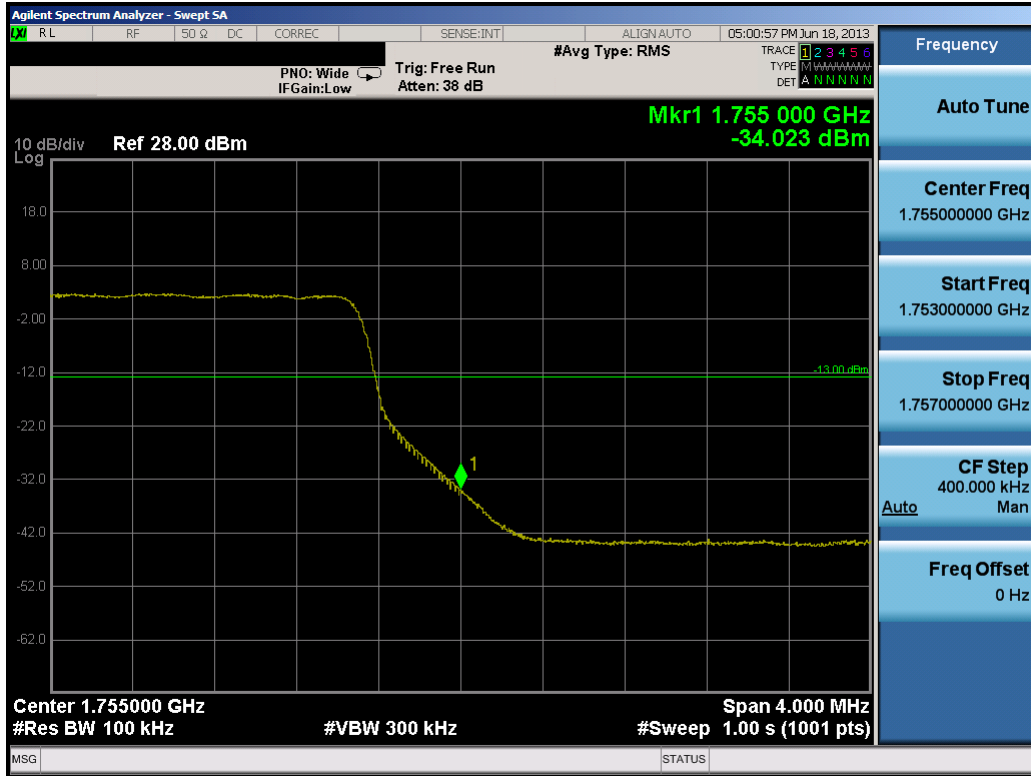


Plot 8-35. Upper Band Edge Plot (10.0MHz QPSK – RB Size 50)

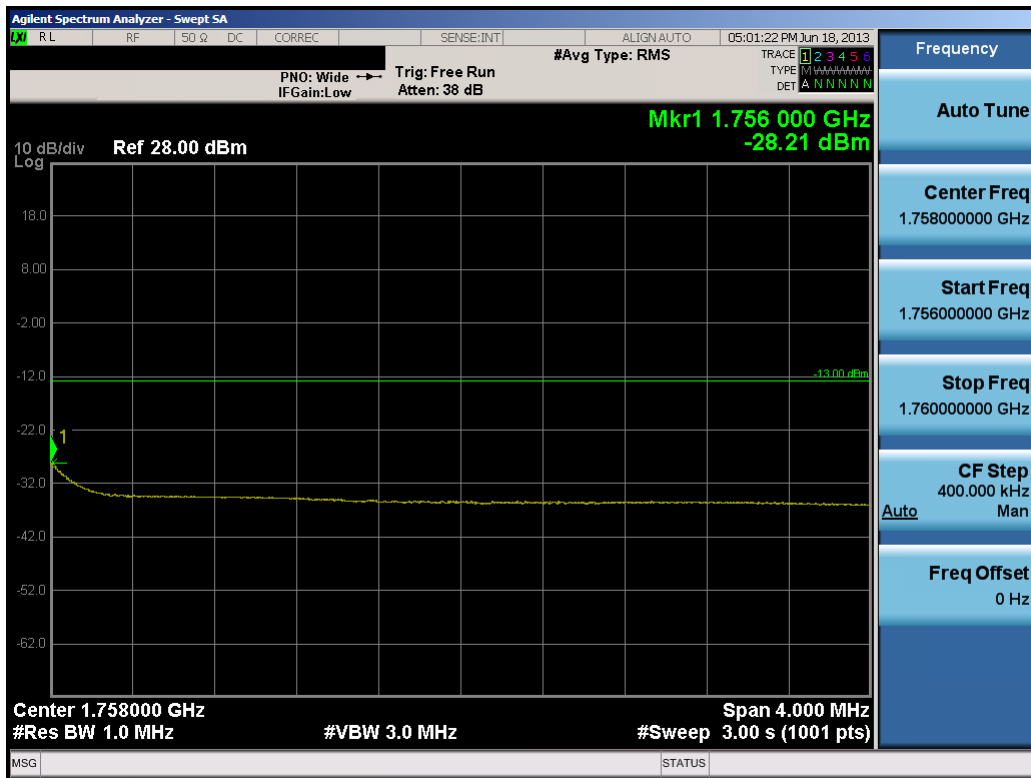


Plot 8-36. Upper Extended Band Edge Plot (10.0MHz QPSK – RB Size 50)

FCC ID: PY7PM-0620	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 74 of 138



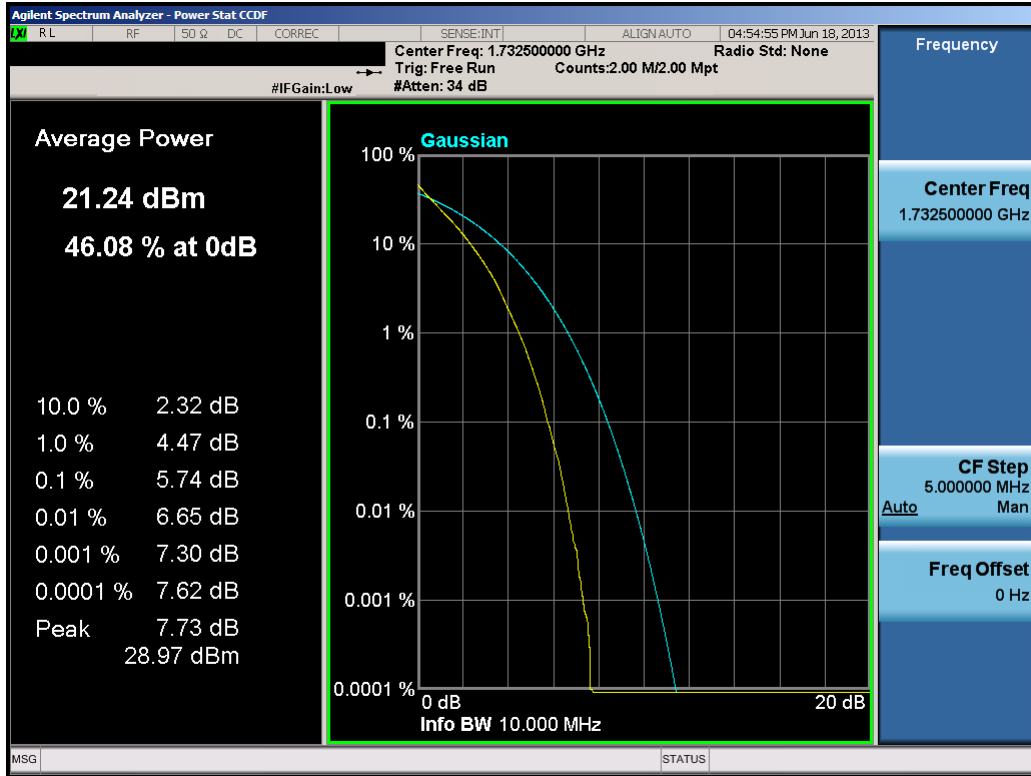

**Plot 8-37. PAR Plot (10.0MHz QPSK – RB Size 50)**

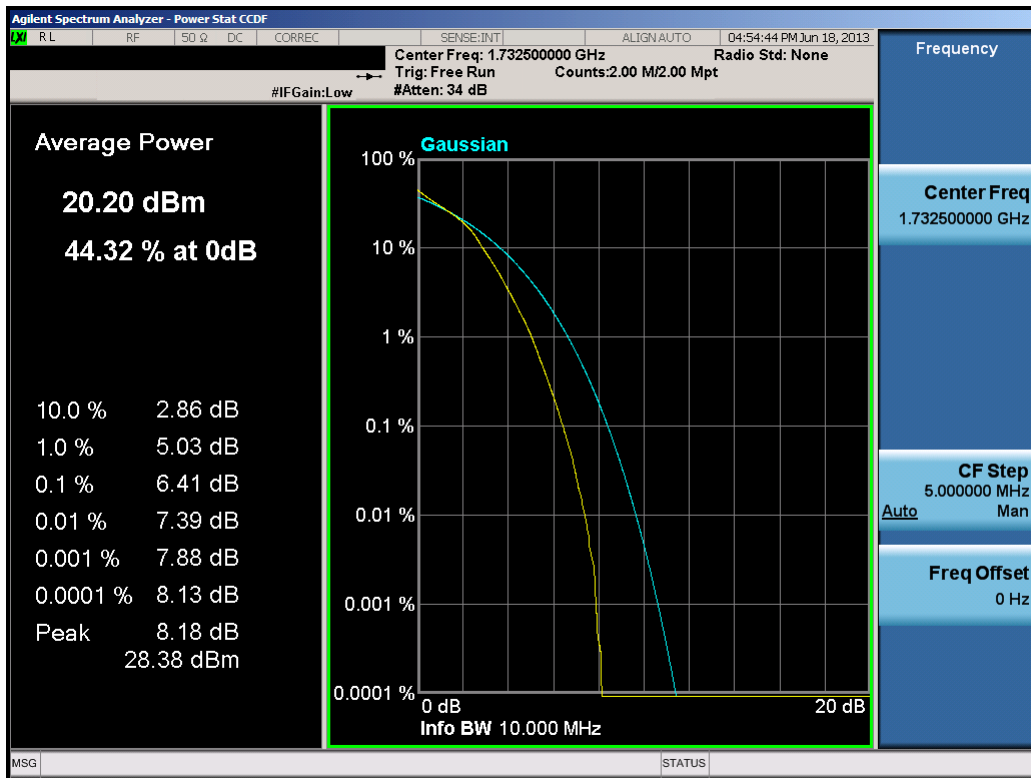


**Plot 8-38. PAR Plot (10.0MHz 16-QAM – RB Size 50)**

FCC ID: PY7PM-0620	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b> make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 75 of 138




Plot 8-39. Lower Band Edge Plot (15.0MHz QPSK – RB Size 75)

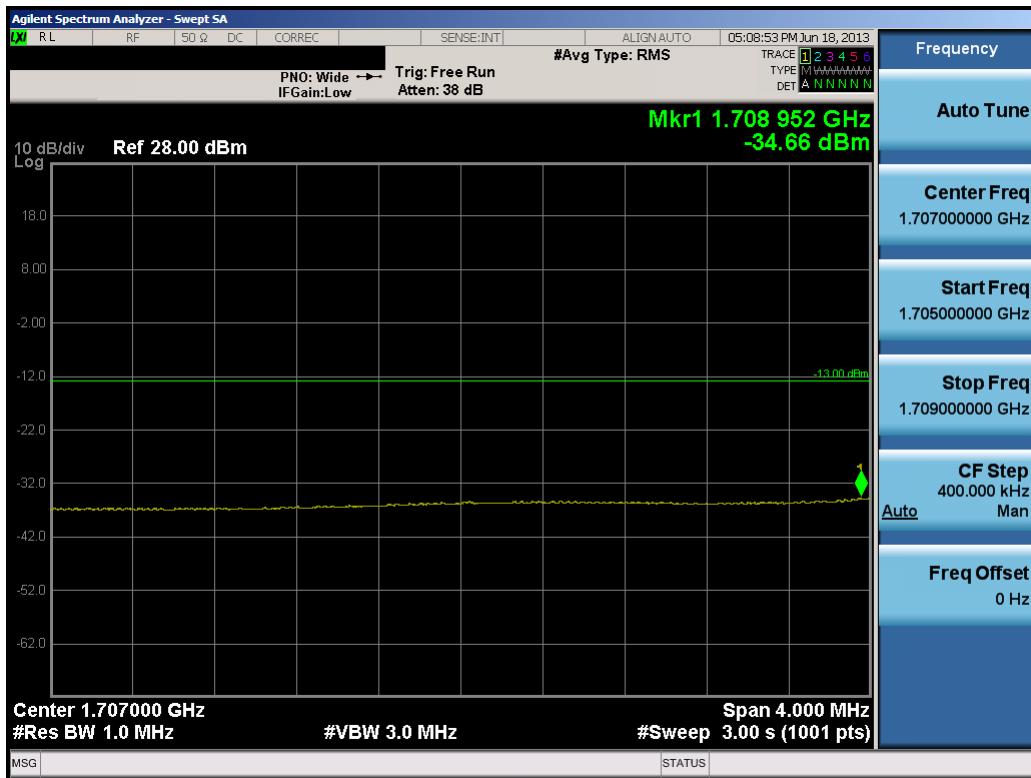


Plot 8-40. Lower Extended Band Edge Plot (15.0MHz QPSK – RB Size 75)

FCC ID: PY7PM-0620	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 76 of 138

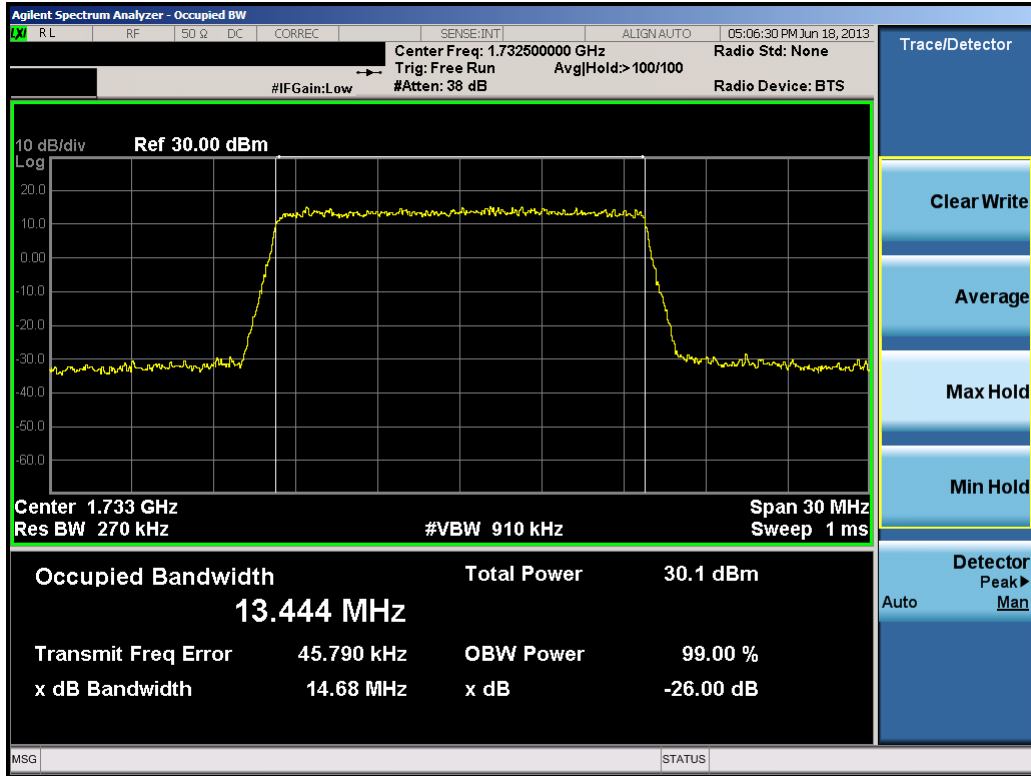

Plot 8-41. Occupied Bandwidth Plot (15.0MHz QPSK – RB Size 75)

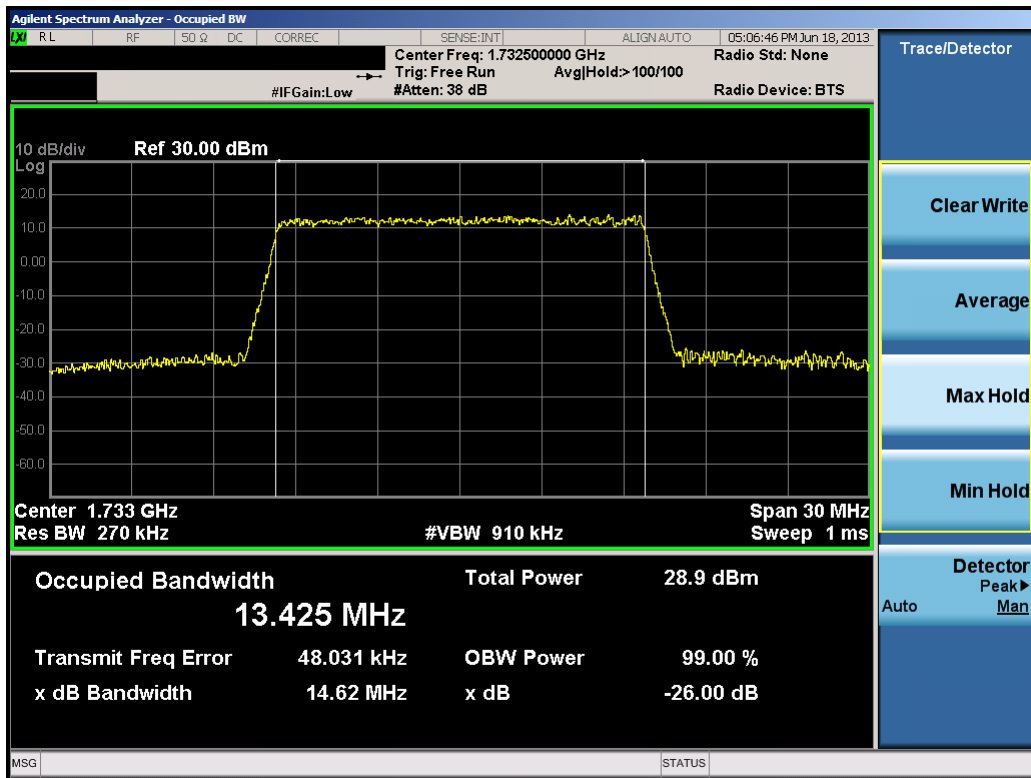


Plot 8-42. Occupied Bandwidth Plot (15.0MHz 16-QAM – RB Size 75)

FCC ID: PY7PM-0620		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 77 of 138




Plot 8-43. Upper Band Edge Plot (15.0MHz QPSK – RB Size 75)

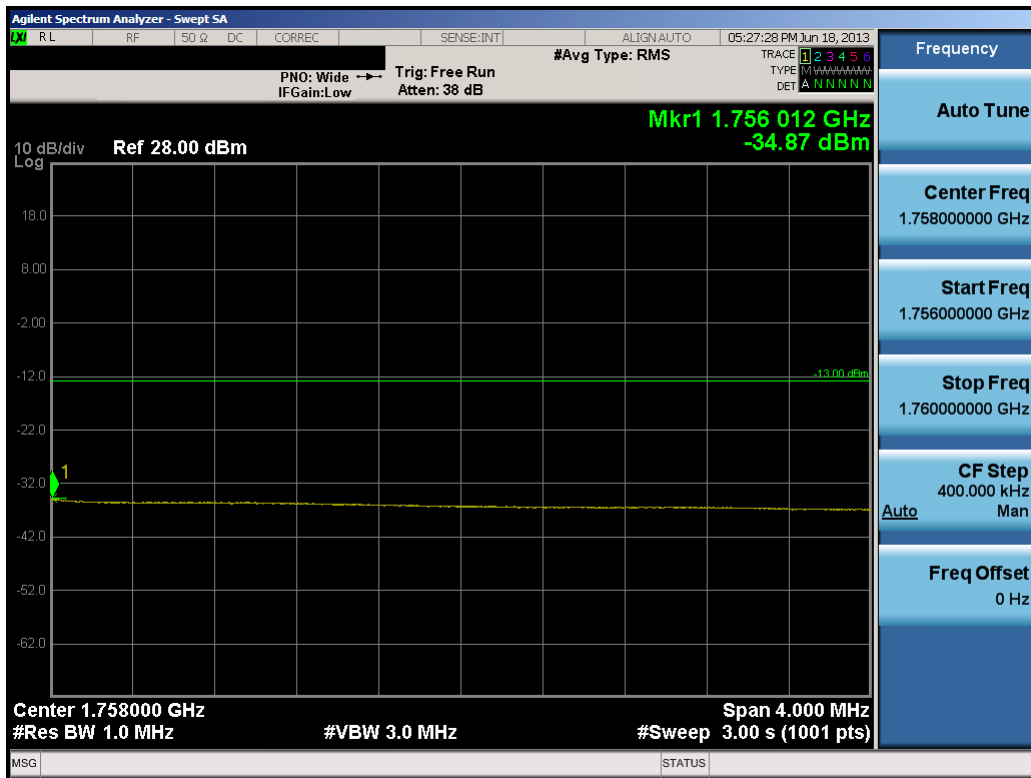


Plot 8-44. Upper Extended Band Edge Plot (15.0MHz QPSK – RB Size 75)

FCC ID: PY7PM-0620	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 78 of 138

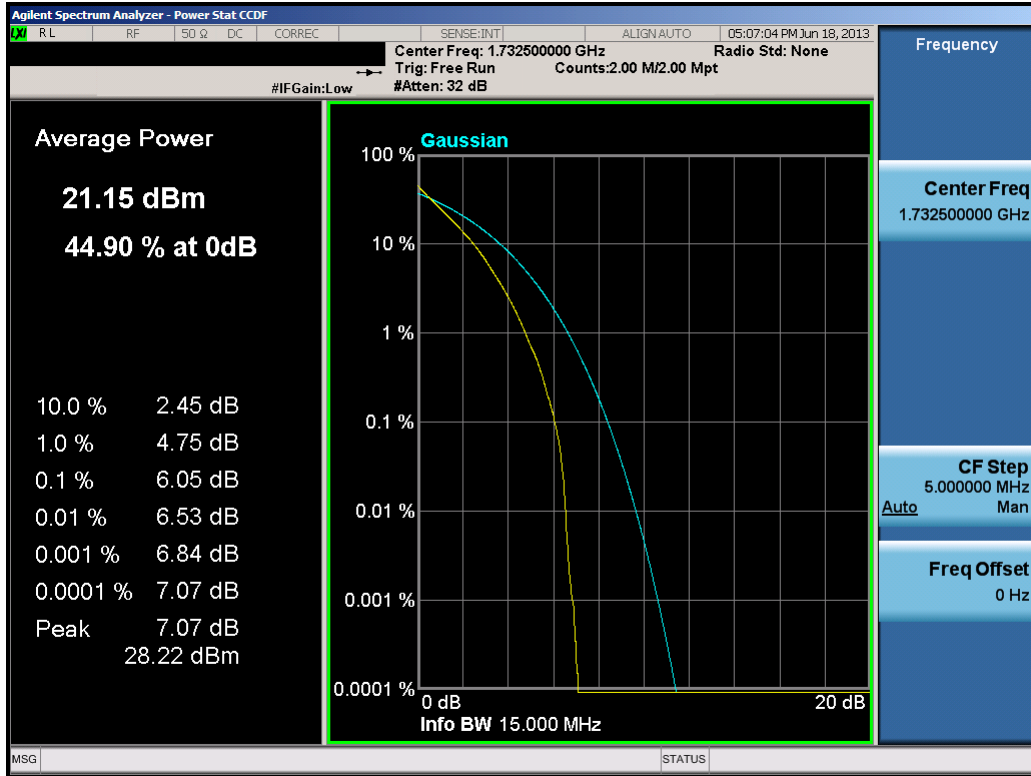


**Plot 8-45. PAR Plot (15.0MHz QPSK – RB Size 75)**

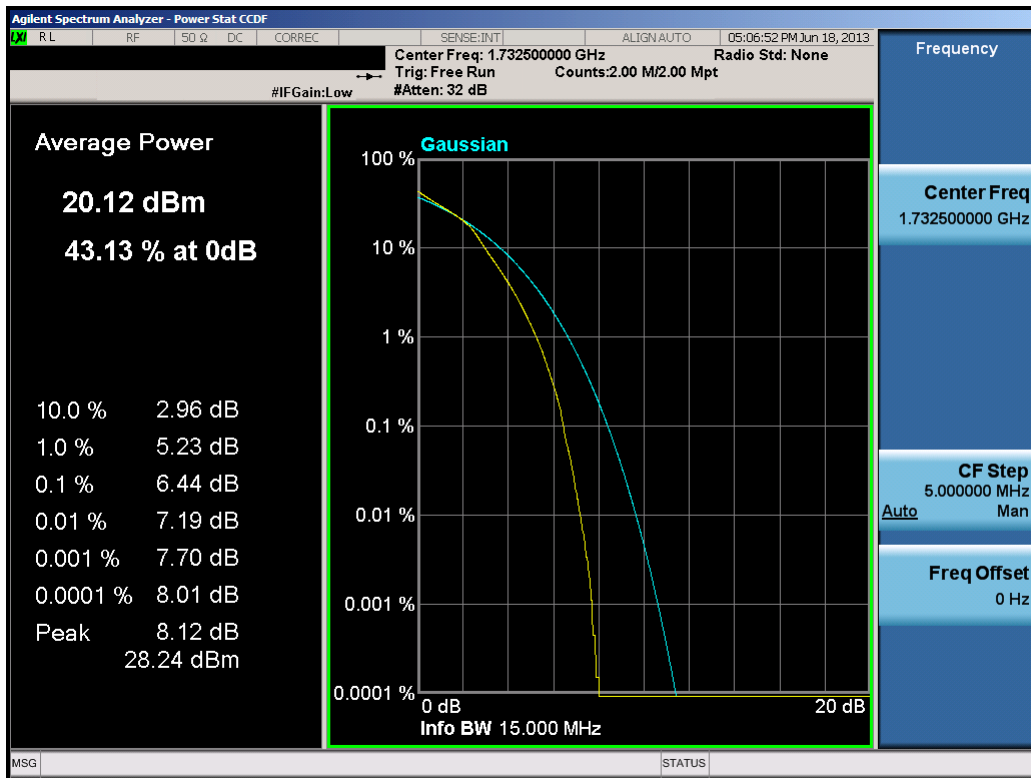


**Plot 8-46. PAR Plot (15.0MHz 16-QAM – RB Size 75)**

FCC ID: PY7PM-0620	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b> make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 79 of 138

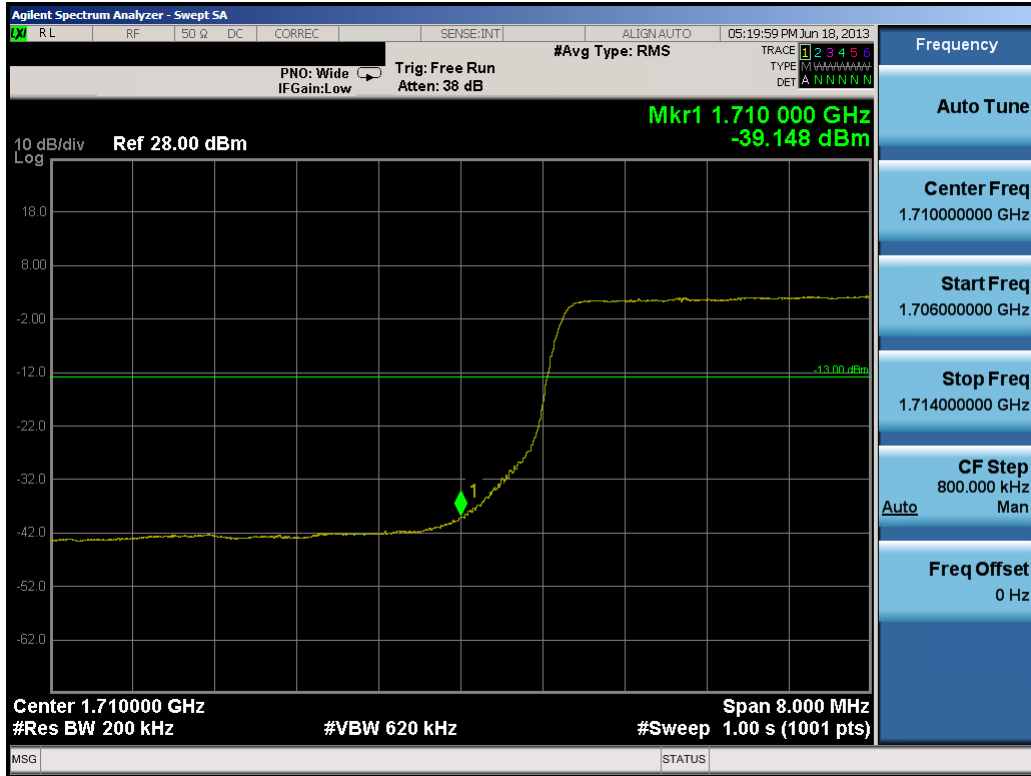


Plot 8-47. Lower Band Edge Plot (20.0MHz QPSK – RB Size 100)

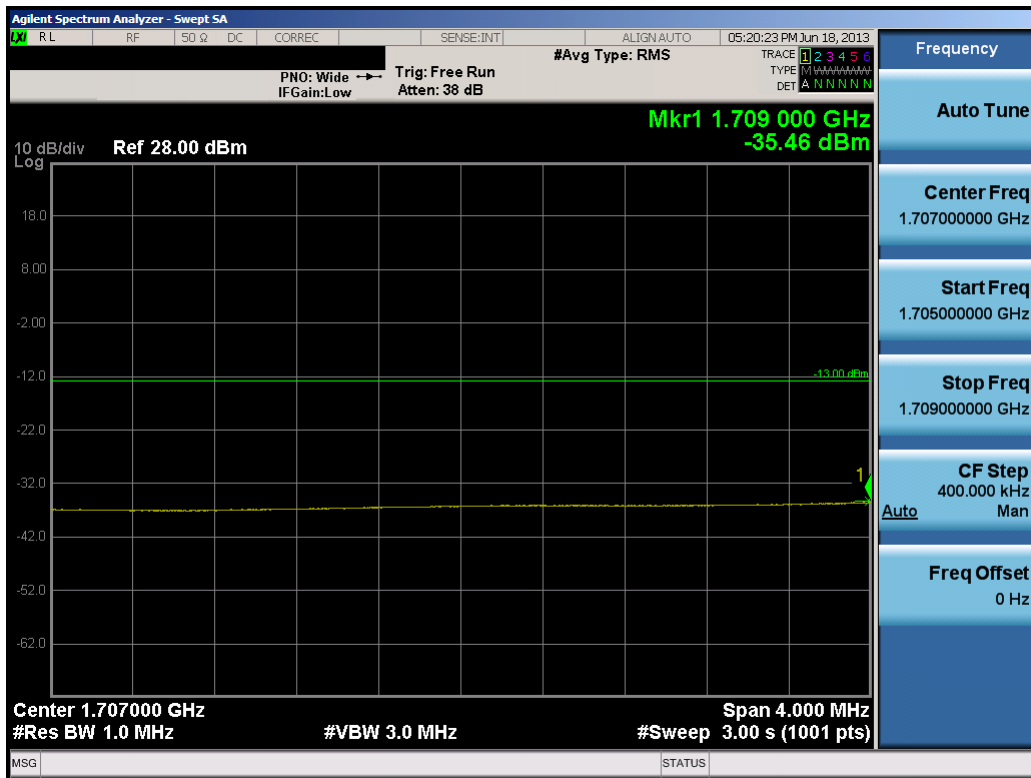


Plot 8-48. Lower Extended Band Edge Plot (20.0MHz QPSK – RB Size 100)

FCC ID: PY7PM-0620	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 80 of 138

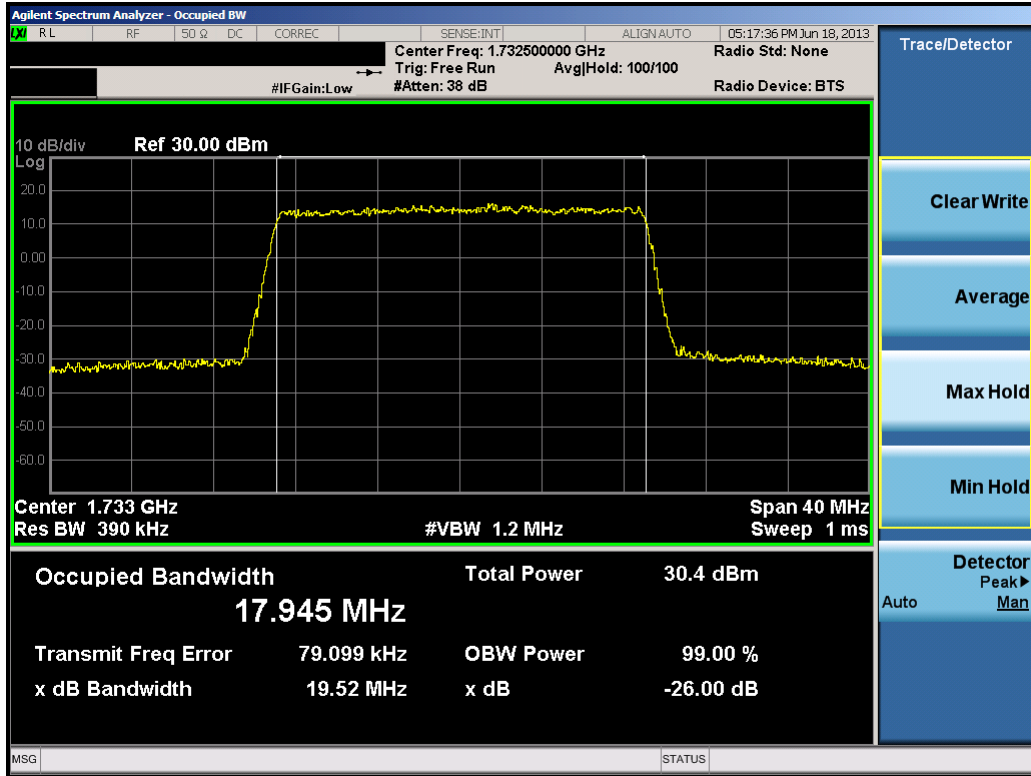

Plot 8-49. Occupied Bandwidth Plot (20.0MHz QPSK – RB Size 100)

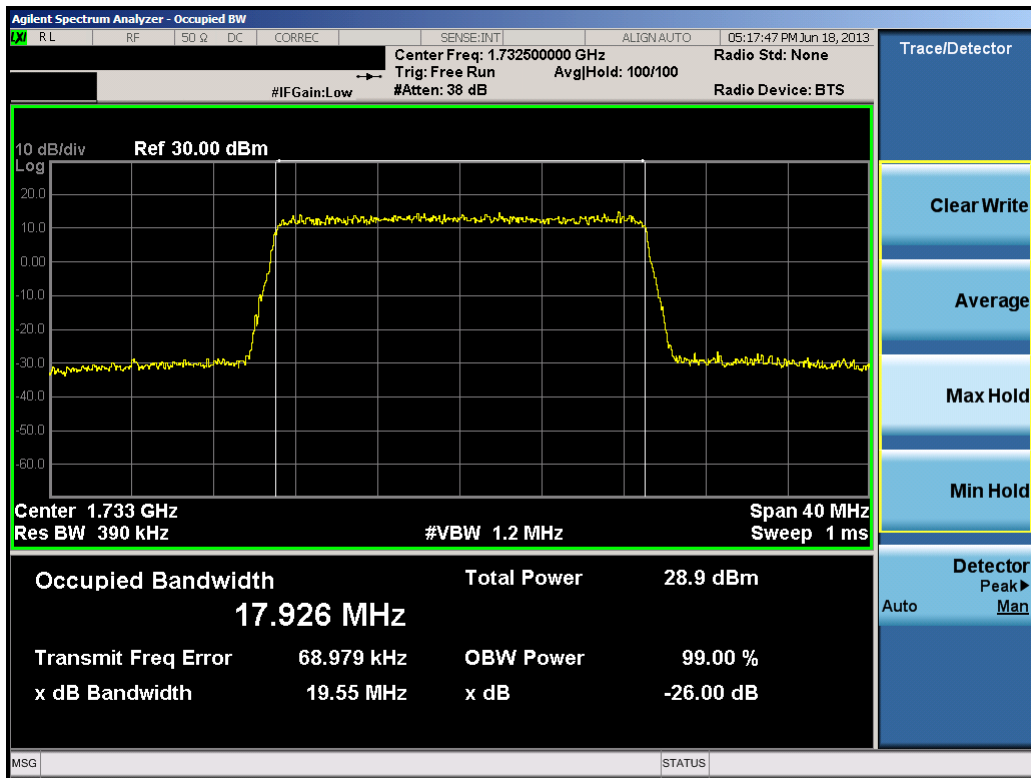


Plot 8-50. Occupied Bandwidth Plot (20.0MHz 16-QAM – RB Size 100)

FCC ID: PY7PM-0620	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b> make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 81 of 138




Plot 8-51. Upper Band Edge Plot (20.0MHz QPSK – RB Size 100)

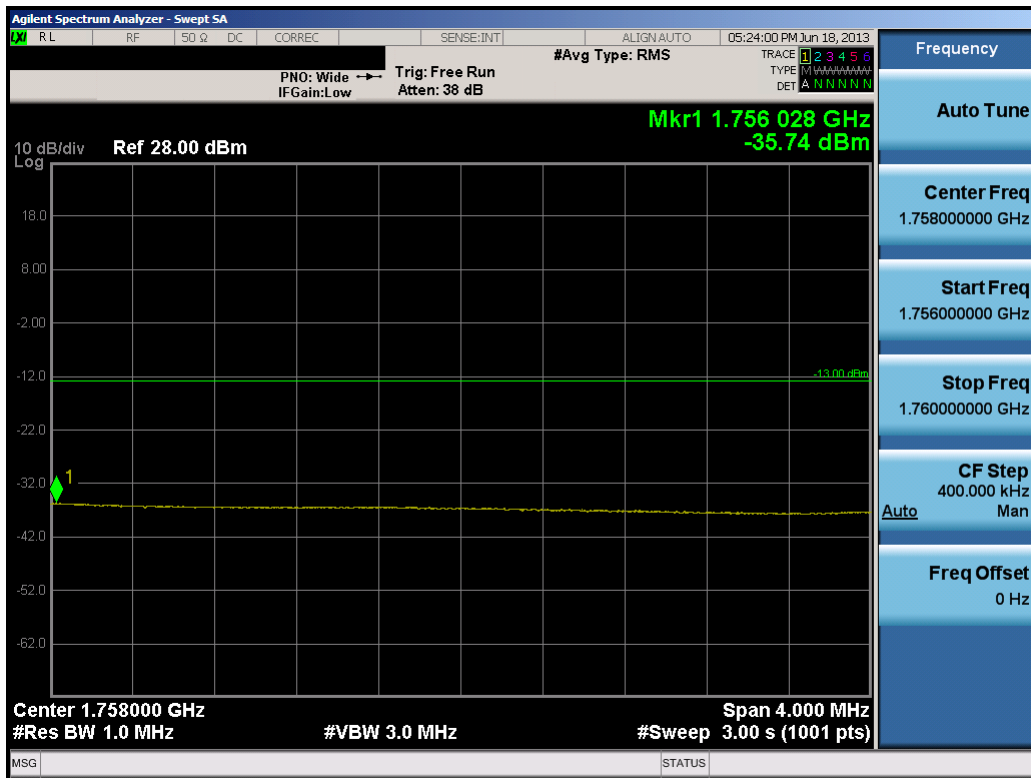


Plot 8-52. Upper Extended Band Edge Plot (20.0MHz QPSK – RB Size 100)

FCC ID: PY7PM-0620	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset	Page 82 of 138	



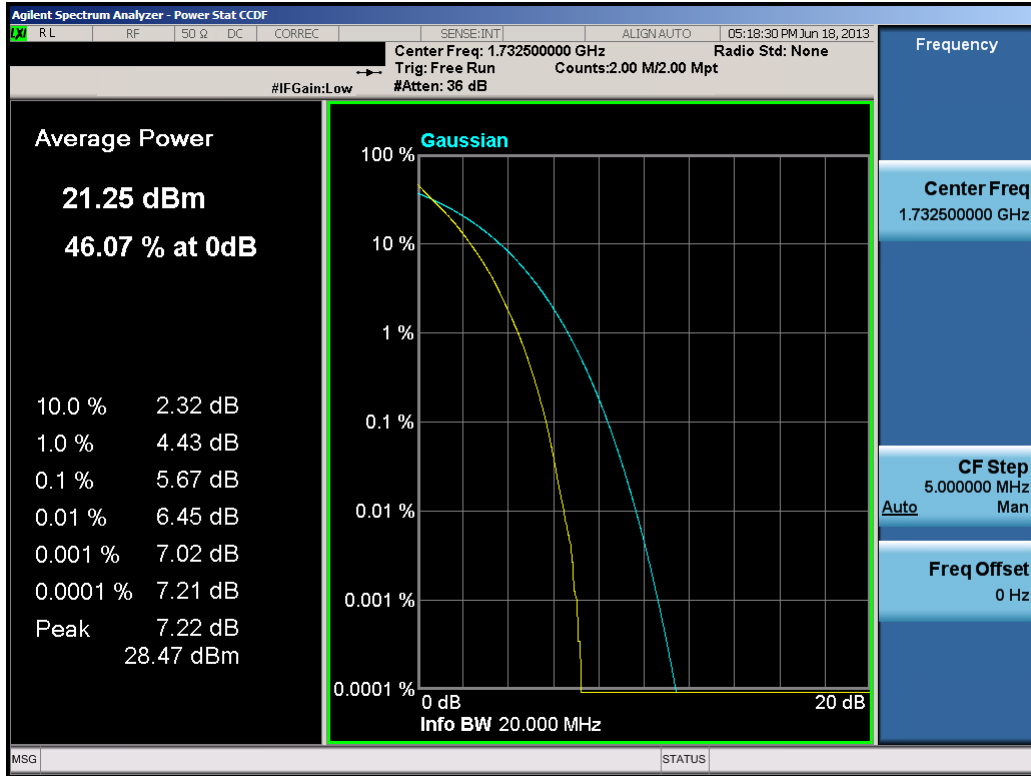

Plot 8-53. PAR Plot (20.0MHz QPSK – RB Size 100)

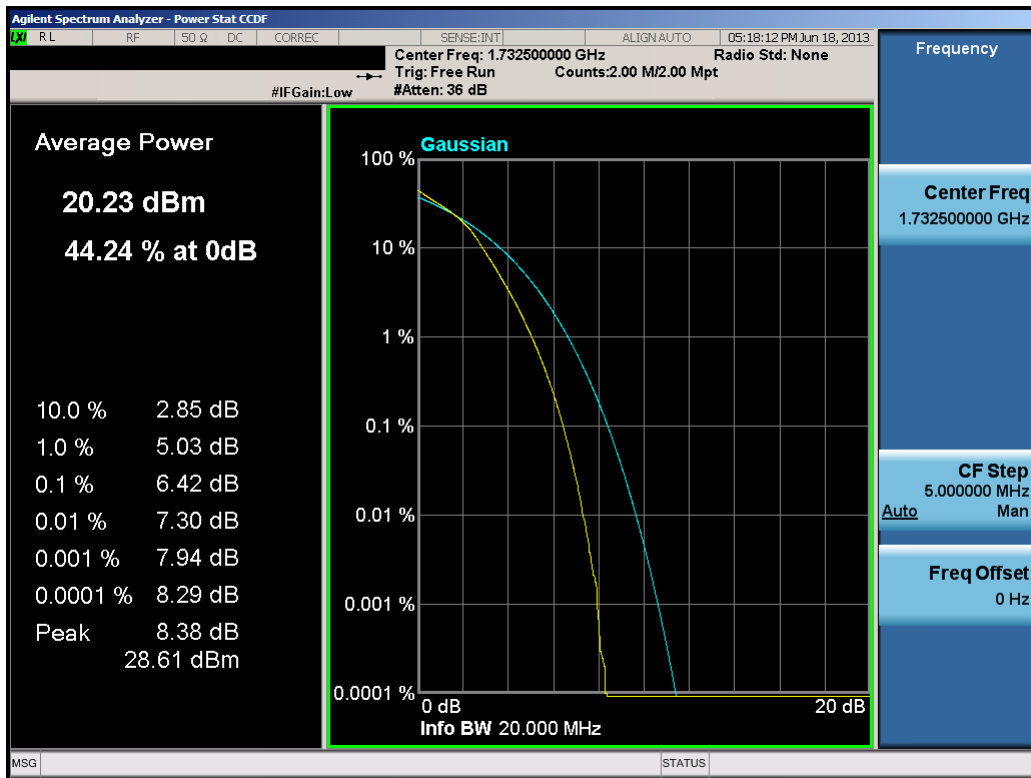

Plot 8-54. PAR Plot (20.0MHz 16-QAM – RB Size 100)

FCC ID: PY7PM-0620	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1307231386.PY7	Test Dates: 6/18 – 7/16/2013	EUT Type: Portable Handset		Page 83 of 138