



# FCC Test Report

FOR

**Manufacturer: Sony**  
**Type Number: PM-0745-BV**  
**FCC ID: PY7PM-0745**

**47 CFR Part 15. 407**

**TEST REPORT #: EMC\_CETEC\_063\_13001\_WLAN5G\_15.407**  
**DATE: 2014-01-22**



FCC :  
Accredited

IC recognized #  
3462B-1

**CETECOM Inc.**

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: [info@cetecomusa.com](mailto:info@cetecomusa.com) ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2905571



**TABLE OF CONTENTS**

**1 Assessment** \_\_\_\_\_ **4**

**2 Administrative Data** \_\_\_\_\_ **5**

**2.1 Identification of the Testing Laboratory Issuing the Test Report** \_\_\_\_\_ **5**

**2.2 Identification of the Client** \_\_\_\_\_ **5**

**2.3 Identification of the Manufacturer** \_\_\_\_\_ **5**

**3 Equipment under Test (EUT)** \_\_\_\_\_ **6**

**3.1 Specification of the Equipment under Test** \_\_\_\_\_ **6**

**3.2 Identification of the Equipment Under Test (EUT)** \_\_\_\_\_ **7**

**3.3 Identification of Accessory Equipment** \_\_\_\_\_ **7**

**3.4 Environmental conditions during Test:** \_\_\_\_\_ **7**

**3.5 Dates of Testing:** \_\_\_\_\_ **7**

**3.6 Other Testing Notes:** \_\_\_\_\_ **8**

        3.6.1 Other Testing Notes: \_\_\_\_\_ **8**

**4 Subject of Investigation** \_\_\_\_\_ **9**

**5 Summary of Measurement Results** \_\_\_\_\_ **10**

**6 Measurements** \_\_\_\_\_ **11**

**6.1 Measurement Method:** \_\_\_\_\_ **11**

        6.1.1 ANSI C63.4 (2009) Section 8.3.1.1: Exploratory radiated emission measurements \_\_\_\_\_ **11**

        6.1.2 ANSI C63.4 (2009) Section 8.3.1.2: Final radiated emission measurements \_\_\_\_\_ **12**

        6.1.3 Sample Calculations for Radiated Measurements \_\_\_\_\_ **13**

        6.1.4 Test Setup Diagrams \_\_\_\_\_ **14**

**6.2 Gain** \_\_\_\_\_ **15**

        6.2.1 Limits: \_\_\_\_\_ **15**

        6.2.2 Result: \_\_\_\_\_ **15**

**6.3 Band Edge Compliance – Radiated (Restricted band limits applied)** \_\_\_\_\_ **16**

        6.3.1 Limits: \_\_\_\_\_ **16**

        6.3.2 Test Conditions: \_\_\_\_\_ **17**

        6.3.3 Test Procedure: \_\_\_\_\_ **17**

        6.3.4 Measurement Result \_\_\_\_\_ **17**

        6.3.5 Test Data/plots: \_\_\_\_\_ **18**

**6.4 Unwanted TX Emissions into Restricted and Non-restricted bands** \_\_\_\_\_ **50**

        6.4.1 Requirements / Limits \_\_\_\_\_ **50**

        6.4.2 Limits: §15.209 \_\_\_\_\_ **51**

        6.4.3 Test Conditions: \_\_\_\_\_ **51**

        6.4.4 Test Result: \_\_\_\_\_ **52**

        6.4.5 Testing Notes: \_\_\_\_\_ **52**

        6.4.6 Test data/ plots: \_\_\_\_\_ **53**



<b>6.5</b>	<b>Unwanted RX Emissions into restricted and non-restricted bands</b>	<b>165</b>
6.5.1	Limits: §15.109	165
6.5.2	Test Conditions	165
6.5.3	Measurement parameter	165
6.5.4	Result	165
6.5.5	Verdict	166
6.5.6	Plots	166
<b>6.6</b>	<b>AC Power Line Conducted Emissions</b>	<b>170</b>
6.6.1	References:	170
6.6.2	Limits:	170
6.6.3	Test Conditions:	170
6.6.4	Test Plots:	171
<b>7</b>	<b>Setup Pictures</b>	<b>175</b>
<b>8</b>	<b>Test Equipment and ancillaries used for tests</b>	<b>175</b>



1 Assessment

The following equipment (and as identified in Ch.3 of this test report) was evaluated against the applicable criteria specified in FCC CFR47 Part 15.247, 15.207, 15.209.

Company	Description	Type #
Sony	Phablet	PM-0745-BV

**Responsible for Testing Laboratory:**

2014-01-22	Compliance	Franz Engert (Manager Compliance)	
Date	Section	Name	Signature

**Responsible for the Report:**

2014-01-22	Compliance	Josie Sabado (Lab Manager SAR)	
Date	Section	Name	Signature

The test results of this test report relate exclusively to the test item specified in Section3. CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.



**2 Administrative Data**

**2.1 Identification of the Testing Laboratory Issuing the Test Report**

<b>Company Name:</b>	CETECOM Inc.
<b>Department:</b>	Compliance
<b>Address:</b>	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
<b>Telephone:</b>	+1 (408) 586 6200
<b>Fax:</b>	+1 (408) 586 6299
<b>Test Lab Manager:</b>	Franz Engert
<b>Responsible Project Leader:</b>	Franz Engert

**2.2 Identification of the Client**

<b>Applicant's Name:</b>	Nya Vattentornet
<b>Street Address:</b>	22188 Lund / SWEDEN
<b>City/Zip Code</b>	----
<b>Country</b>	SWEDEN
<b>Contact Person:</b>	Mikael Nilson
<b>Phone No.</b>	+46 7 03 22 75 03
<b>Fax:</b>	---
<b>e-mail:</b>	Micke.nilsson@sonymobile.com

**2.3 Identification of the Manufacturer**

Same as above client.



### 3 Equipment under Test (EUT)

#### 3.1 Specification of the Equipment under Test

<b>Product Type:</b>	Portable
<b>Prototype/Production:</b>	Pre-Production
<b>RF Exposure Environment:</b>	General / Uncontrolled
<b>Dimensions:</b>	73.3 x 146.8 x 8.2 mm
<b>Exposure Conditions:</b>	Held next to the ear Body worn Personal Wireless Router
<b>Type No:</b>	PM-0745-BV
<b>FCC ID:</b>	PY7PM-0745
<b>Antenna Type:</b>	Cellular: Internal 1 Tx/Rx antenna 1 Rx only antenna WLAN/BT: Internal
<b>Operating Voltage Range:</b>	Power Supply: 3.7 V DC by embedded battery
<b>Operating Temperature Range:</b>	Temperature range: -30°C to +60°C
<b>Supported Radios:</b>	GSM/GPRS/EGPRS MS Class 12, DTM MS Class 11, Power Class 4/1, Mobile Class A WCDMA/HSDPA/DC-HSDPA/HSUPA/HSPA+, Power Class 3, DL cat 24, UL cat 6 (5.7 Mbps uplink and QPSK) LTE Bluetooth v2.1 + EDR, Bluetooth 4.0 ANT+ 802.11 b/g/n (HT20)/ac (VHT-20) SISO 802.11 a/n (HT20, HT40)/ac (VHT-20, VHT-40, VHT-80) SISO GPS receiver at 1.575 MHz NFC
<b>Power Back-Off Modes:</b>	None



**3.2 Identification of the Equipment Under Test (EUT)**

EUT #	Serial Number	HW Version	SW Version	Comment
	<b><u>CB5A1W5TQV</u></b>	AP1.1	ETS SW	ETS SW

**3.3 Identification of Accessory Equipment**

AE #	Type	Manufacturer	Type	Serial Number
1	AC Power Adapter	SONY	PM-0745-BV	CB5A1

**3.4 Environmental conditions during Test:**

The following environmental conditions were maintained during the course of testing:

Ambient Temperature: 20-25°C

Relative humidity: 40-60%

**3.5 Dates of Testing:**

January 7<sup>th</sup>, 2014 – January 11<sup>th</sup>, 2014



**3.6 Other Testing Notes:**

The device was configured with a manufacturer provided ETS test SW, capable of setting the unit in different supported modulation schemes, data rates and channels of operation.

The Device was set to continuous framed Tx (burst) mode per test SW and could thus be operated with 100% duty cycle during testing.

The EUT was tested on low, mid and high channels in 802.11a, 802.11n (HT20), 802.11n (HT40) and 802.11ac (HT80).

The below listed worst case test modes of operation have been established from the output power measurement and evaluation of long term test data available to the lab for the different data rates and modulations which are supported by the equipment.

Mode		Data rate (Mbps)	Modulation scheme
5 GHz	802.11a	6.0	BPSK
	802.11n(HT20)	6.5	BPSK
	802.11n(HT40)	13.5	BPSK
	802.11ac(HT80)	29.3	BPSK

**3.6.1 Other Testing Notes:**



#### **4 Subject of Investigation**

The objective of the measurements applied by CETECOM Inc. was to establish compliance of the EUT as described under Ch. 3 of this Test Report, with the applicable criteria specified in

- FCC CFR47 Parts 15.407

This test report is to support a request for new equipment authorization under the  
FCC ID: PY7PM-0745



**5 Summary of Measurement Results**

Test Specification	Test Case	Temperature and Voltage Conditions	Mode	Pass	Fail	NA	NP	Result
§15.205 (a)(c)	Restricted Band Edge-Radiated	Nominal	802.11a/n/ac	■	□	□	□	Complies
§15.407 (b)(1)(2)(3)	TX Spurious emissions-Radiated	Nominal	802.11a/n/ac	■	□	□	□	Complies
§15.209(a)	TX Spurious Emissions Radiated<30MHz	Nominal	802.11a/n/ac	■	□	□	□	Complies
§15.207(a)	AC Line Conducted Emissions<30MHz	Nominal	802.11 a/n/ac	■	□	□	□	Complies
§15.109	RX Spurious emissions-Radiated	Nominal	RX	■	□	□	□	Complies

Note: NA= Not Applicable; NP= Not Performed.

## 6 Measurements

### 6.1 Measurement Method:

In addition to the related rules in FCC 15.407 and RSS-210 Annex 9 the measurement guidelines in FCC publication KDB789033 D01 General UNII Test Procedures v01r03: Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E, April 2013 has been applied.

#### 6.1.1 ANSI C63.4 (2009) Section 8.3.1.1: Exploratory radiated emission measurements

Exploratory radiated measurements shall be performed at the measurement distance or at a closer distance than that specified for compliance to determine the emission characteristics of the EUT. At near distances, for EUTs of comparably small size, it is relatively easy to determine the spectrum signature of the EUT and, if applicable, the EUT configuration that produces the maximum level of emissions. A shielded room may be used for exploratory testing, but may have anomalies that can lead to significant errors in amplitude measurements.

Broadband antennas and a spectrum analyzer or a radio-noise meter with a panoramic display are often useful in this type of testing. It is recommended that either a headset or loudspeaker be connected as an aid in detecting ambient signals and finding frequencies of significant emission from the EUT when the exploratory and final testing is performed in an OATS with strong ambient signals. Caution should be taken if either antenna height between 1 and 4 meters or EUT azimuth is not fully explored. Not fully exploring these parameters during exploratory testing may require complete testing at the OATS or semi-anechoic chamber when the final full spectrum testing is conducted.

The EUT should be set up in its typical configuration and arrangement, and operated in its various modes. For tabletop systems, cables or wires should be manipulated within the range of likely arrangements. For floor-standing equipment, the cables or wires should be located in the same manner as the user would install them and no further manipulation is made. For combination EUTs, the tabletop and floor-standing portions of the EUT shall follow the procedures for their respective setups and cable manipulation. If the manner of cable installation is not known, or if it changes with each installation, cables or wires for floor-standing equipment shall be manipulated to the extent possible to produce the maximum level of emissions.

For each mode of operation required to be tested, the frequency spectrum shall be monitored. Variations in antenna height between 1 and 4 m, antenna polarization, EUT azimuth, and cable or wire placement (each variable within bounds specified elsewhere) shall be explored to produce the emission that has the highest amplitude relative to the limit. A step-by-step technique for determining this emission can be found in Annex C.

When measuring emissions above 1 GHz, the frequencies of maximum emission shall be determined by manually positioning the antenna close to the EUT and by moving the antenna over all sides of the EUT while observing a spectral display. It will be advantageous to have prior knowledge of the frequencies of emissions above 1 GHz. If the EUT is a device with dimensions approximately equal to that of the measurement antenna beam width, the measurement antenna shall be aligned with the EUT.

### 6.1.2 ANSI C63.4 (2009) Section 8.3.1.2: Final radiated emission measurements

Based on the measurement results in 8.3.1.1, the one EUT, cable and wire arrangement, and mode of operation that produces the emission that has the highest amplitude relative to the limit is selected for the final measurement. The final measurement is then performed on a site meeting the requirements of 5.3, 5.4, or 5.5 as appropriate without variation of the EUT arrangement or EUT mode of operation. If the EUT is relocated from an exploratory test site to a final test site, the highest emission shall be re-maximized at the final test location before final radiated emissions measurements are performed. However, antenna height and polarity and EUT azimuth are to be varied. In addition, the full frequency spectrum (for the range to be checked for meeting compliance) shall be investigated.

This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. During the full frequency spectrum investigation, particular focus should be made on those frequencies found in exploratory testing that were used to find the final test configuration, mode of operation, and arrangement (associated with achieving the least margin with respect to the limit). This full spectrum test constitutes the compliance measurement.

For measurements above 1 GHz, use the cable, EUT arrangement, and mode of operation determined in the exploratory testing to produce the emission that has the highest amplitude relative to the limit. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the antenna in the “cone of radiation” from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response. The antenna may have to be higher or lower than the EUT, depending on the EUT’s size and mounting height, but the antenna should be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. If the transmission line for the measurement antenna restricts its range of height and polarization, the steps needed to ensure the correct measurement of the maximum emissions, shall be described in detail in the report of measurements. Data collected shall satisfy the report requirements of Clause 10.

#### NOTES

- 1— Where limits are specified by agencies for both average and peak (or quasi-peak) detection, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.
- 2—Use of waveguide and flexible waveguide may be necessary at frequencies above 10 GHz to achieve usable signal-to noise ratios at required measurement distances. If so, it may be necessary to restrict the height search of the antenna, and special care should be taken to ensure that maximum emissions are correctly measured.
- 3—All presently known devices causing emissions above 10 GHz are physically small compared with the beam-widths of typical horn antennas used for EMC measurements. For such EUTs and frequencies, it may be preferable to vary the height and polarization of the EUT instead of the receiving antenna to maximize the measured emissions.

Measurement Uncertainty:  $\pm 3\text{dB}$



### 6.1.3 Sample Calculations for Radiated Measurements

#### 6.1.3.1 Field Strength Measurements:

Measurements from the Spectrum Analyzer/ Receiver are used to calculate the Field Strength, taking into account the following parameters:

1. Measured reading in dBμV
2. Cable Loss between the receiving antenna and SA in dB and
3. Antenna Factor in dB/m

$$FS \text{ (dB}\mu\text{V/m)} = \text{Measured Value on SA (dB}\mu\text{V)} + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$$

Eg:

Frequency (MHz)	Measured SA (dBμV)	Cable Loss (dB)	Antenna Factor Correction (dB)	Field Strength Result (dBμV/m)
1000	80.5	3.5	14	98.0

All radiated measurement plots in this report are taken from a test SW that calculates the Field Strength based on the above equation.

#### 6.1.3.2 Power Measurements using Substitution Procedure:



The measurement on the Spectrum Analyzer is used as a basis for the Substitution procedure. The EUT is replaced with a Signal Generator and an antenna. The setting on the Signal Generator is varied until the Spectrum Analyzer displays the original reading. EIRP is calculated as-

$$EIRP \text{ (dBm)} = \text{Signal Generator setting (dBm)} - \text{Cable Loss (dB)} + \text{Antenna Gain (dBi)}$$

Eg:

Frequency (MHz)	Measured SA (dBμV)	Signal Generator setting (dBm)	Antenna Gain (dBi)	Dipole Gain (dBd)	Cable Loss (dB)	EIRP (dBm)
1000	95.5	24.5	6.5	0	3.5	27.5

### 6.1.4 Test Setup Diagrams

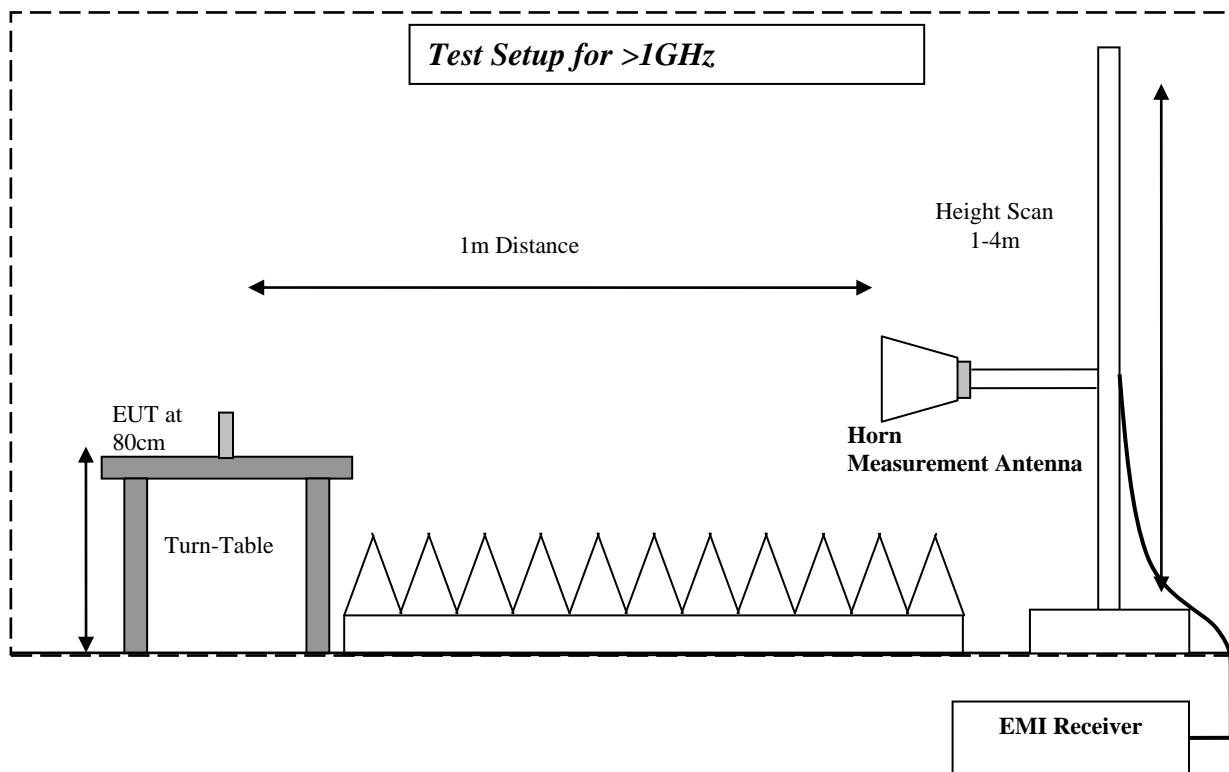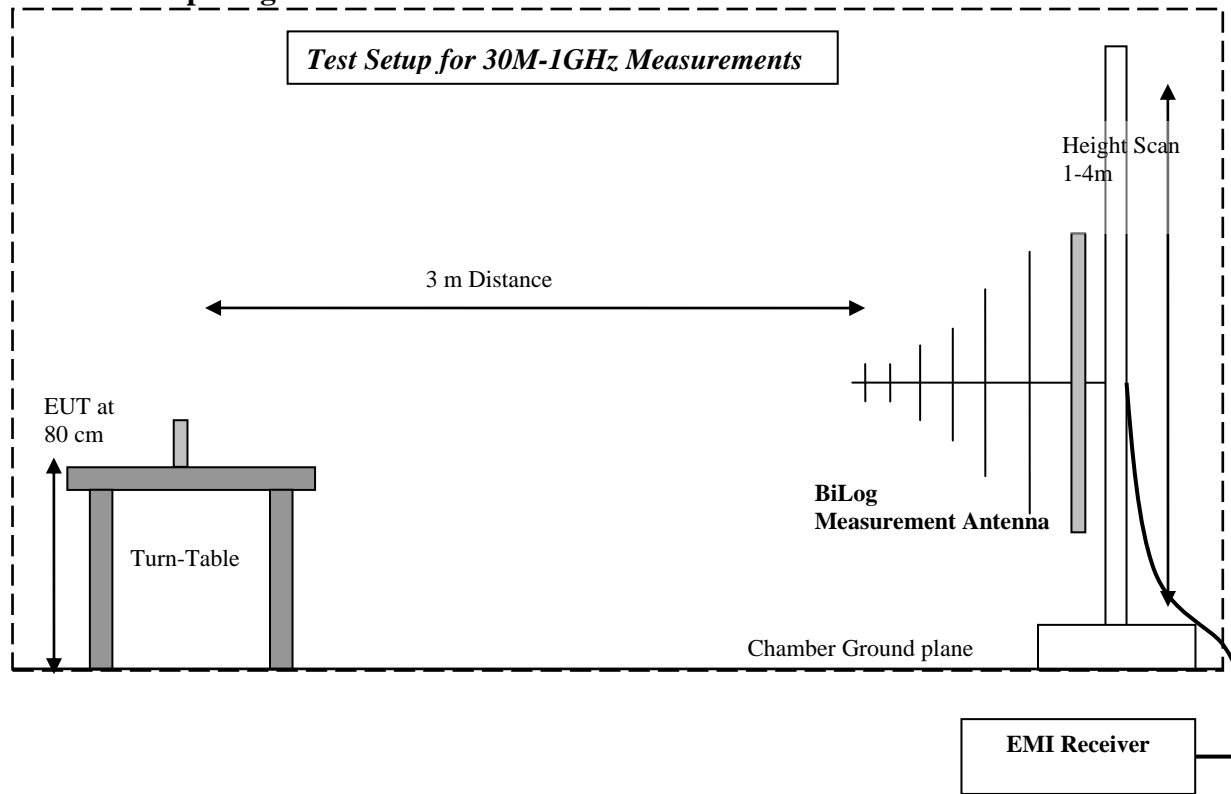



## 6.2 Gain

### 6.2.1 Limits:

Antenna Gain	
Maximum 6 dBi	

### 6.2.2 Result:

OFDM Band 5150 MHz to 5250 MHz	Gain		
Channel	Lowest 5180 MHz	-/-	Highest 5240 MHz
Gain Declared by the manufacturer	2.1	-/-	1.3
Measurement uncertainty	± 3 dB		

OFDM Band 5250 MHz to 5350 MHz	Gain		
Channel	Lowest 5260 MHz	-/-	Highest 5320 MHz
Gain Declared by the manufacturer	0.9	-/-	0.6
Measurement uncertainty	± 3 dB		

OFDM Band 5470 MHz to 5725 MHz	Gain		
Channel	Lowest 5500 MHz	Middle 5600 MHz	Highest 5700 MHz
Gain Declared by the manufacturer	3.0	1.7	2.0
Measurement uncertainty	± 3 dB		

**Result:** Passed



**6.3 Band Edge Compliance – Radiated (Restricted band limits applied)**

**6.3.1 Limits:**

§15.407/15.205/15.209

15.205 (a) Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

15.209 (a) Emission Limits:

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (m)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30 (29.5 dBμV/m)	30
30–88	100 (40dBμV/m)	3
88–216	150 (43.5 dBμV/m)	3
216–960	200 (46 dBμV/m)	3
Above 960	500 (54 dBμV/m)	3



### 6.3.2 Test Conditions:

Tnom: 20°C; Vnom: 3.8 VDC

### 6.3.3 Test Procedure:

Peak measurements are made using a peak detector and RBW=1MHz.

\*PEAK LIMIT= 74dB $\mu$ V/m

Average measurements performed using a peak detector and according to video averaging procedure with RBW=1MHz and VBW=10Hz.


\*AVG. LIMIT= 54dB $\mu$ V/m

Measurement Uncertainty:  $\pm$ 3.0dB

### 6.3.4 Measurement Result


Pass.

### 6.3.5 Test Data/plots: 802.11a Channel 36 Low Band Edge Peak measurement

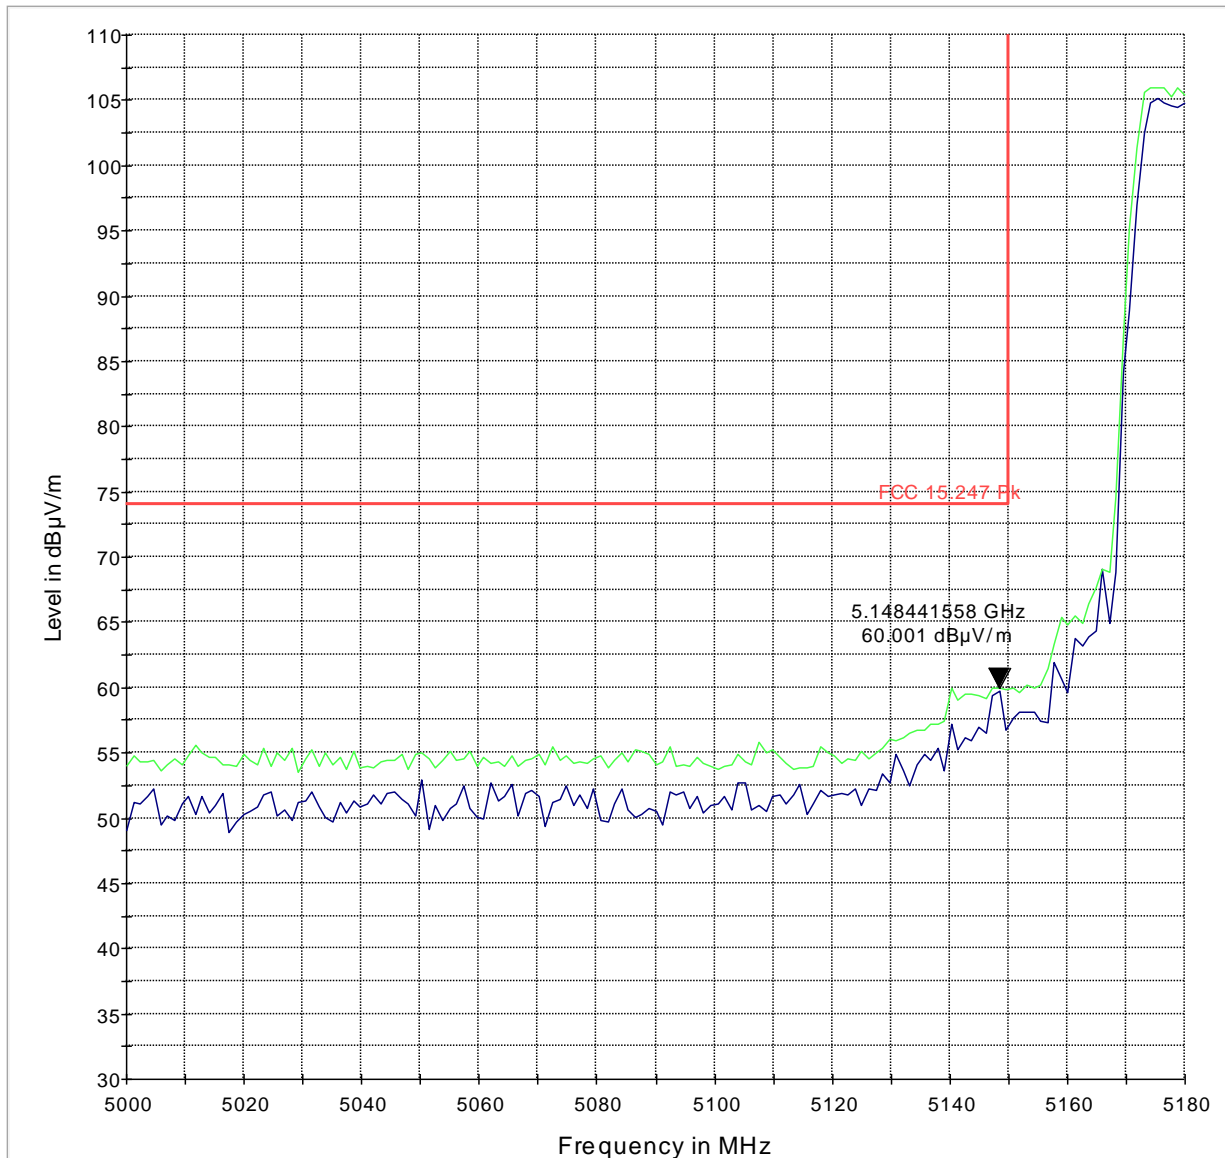

— MaxPeak-ClearWrite-PK+    — MaxPeak-MaxHold-PK+    — FCC 15.247 Pk


### 802.11a Channel 36 Low Band Edge Average measurement

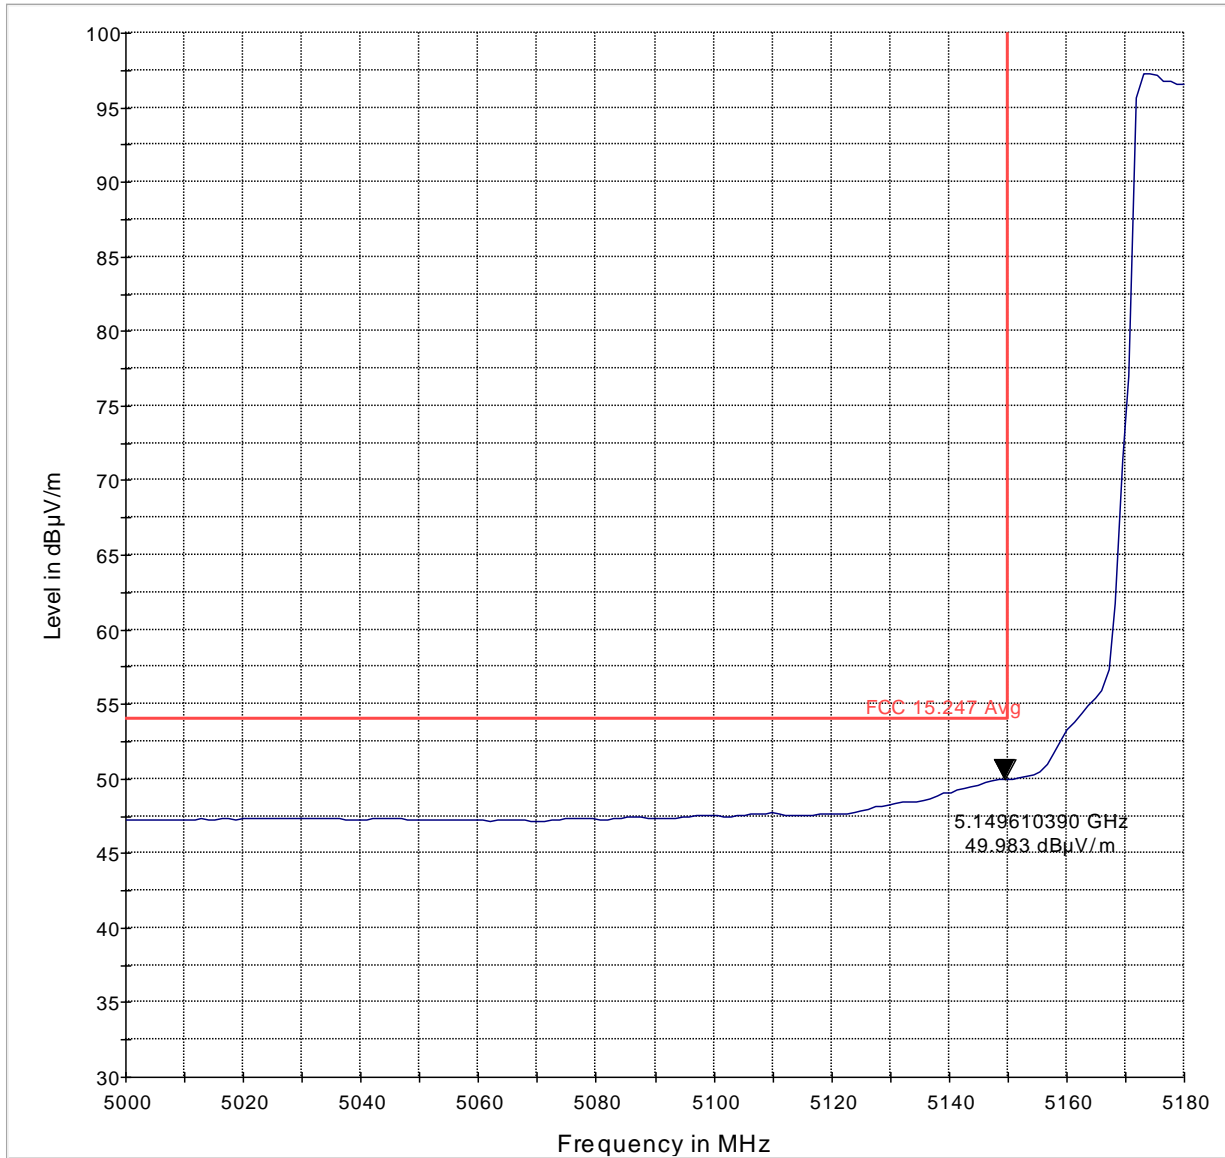

— MaxPeak-MaxHold-PK+    — FCC 15.247 Avg




### 802.11a Channel 64 High Band Edge Peak measurement

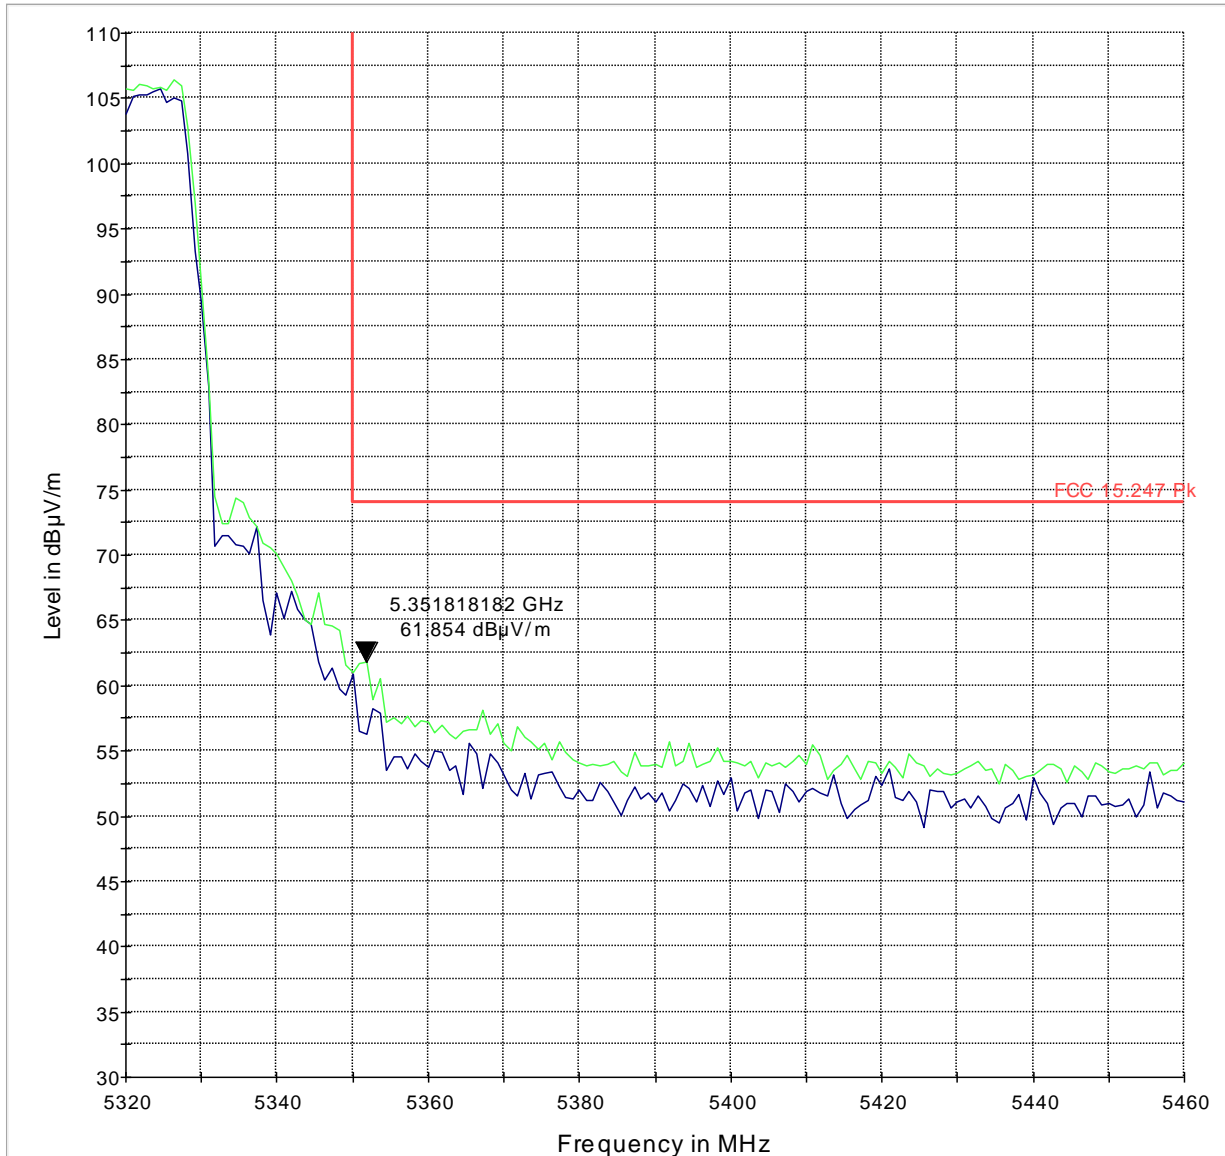

— MaxPeak-ClearWrite-PK+    — MaxPeak-MaxHold-PK+    — FCC 15.247 Pk




### 802.11a Channel 64 High Band Edge Average measurement

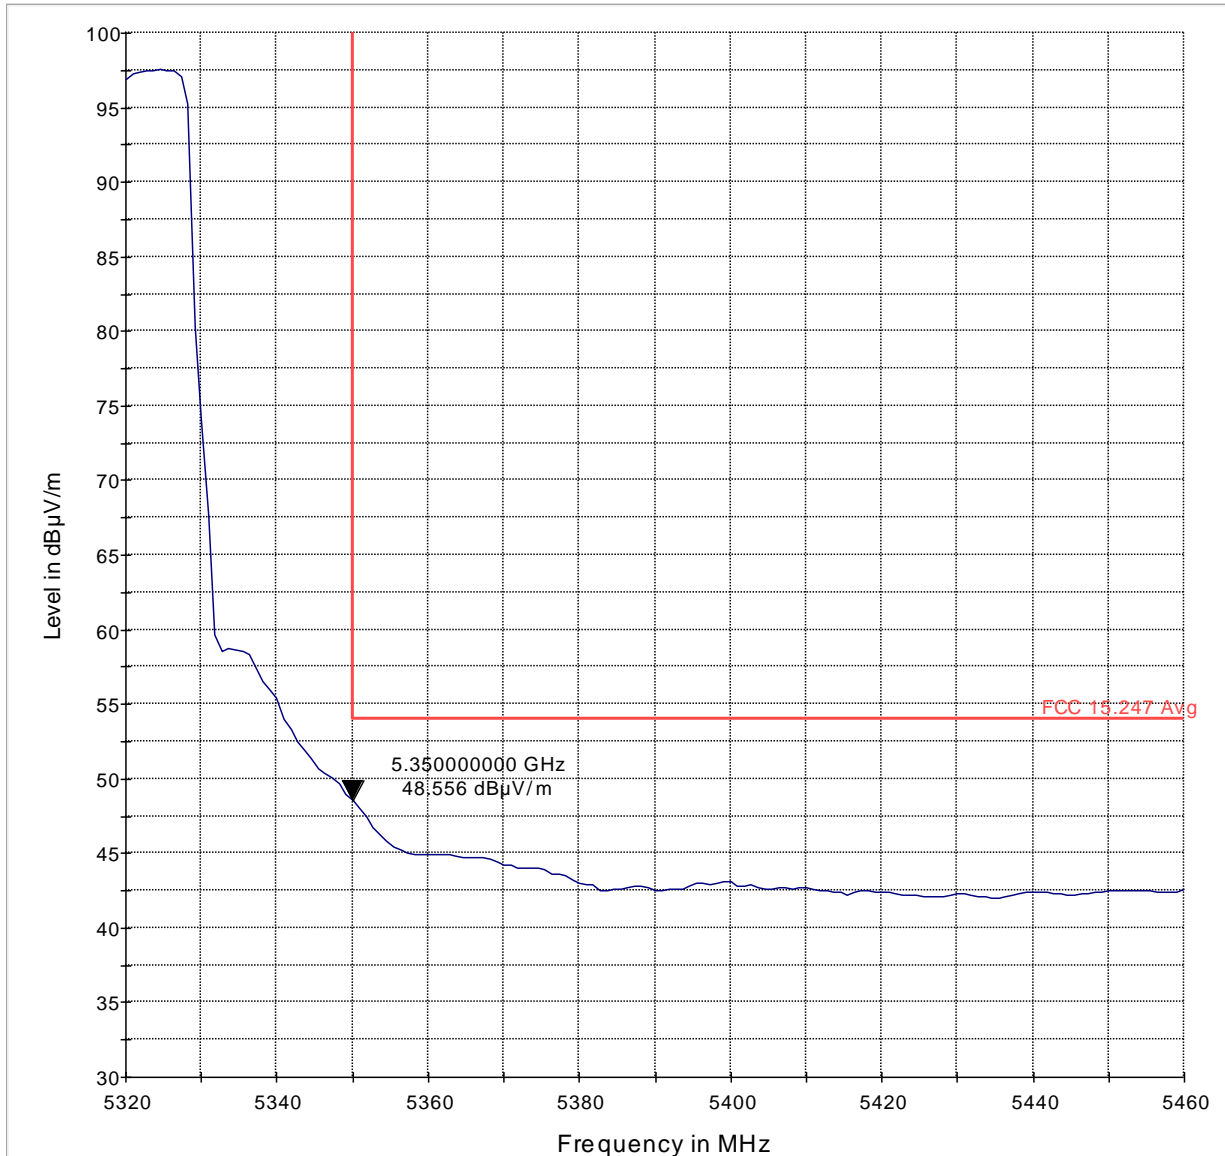


— MaxPeak-MaxHold-PK+    — FCC 15.247 Avg

### 802.11a Channel 100 Low Band Edge Peak measurement

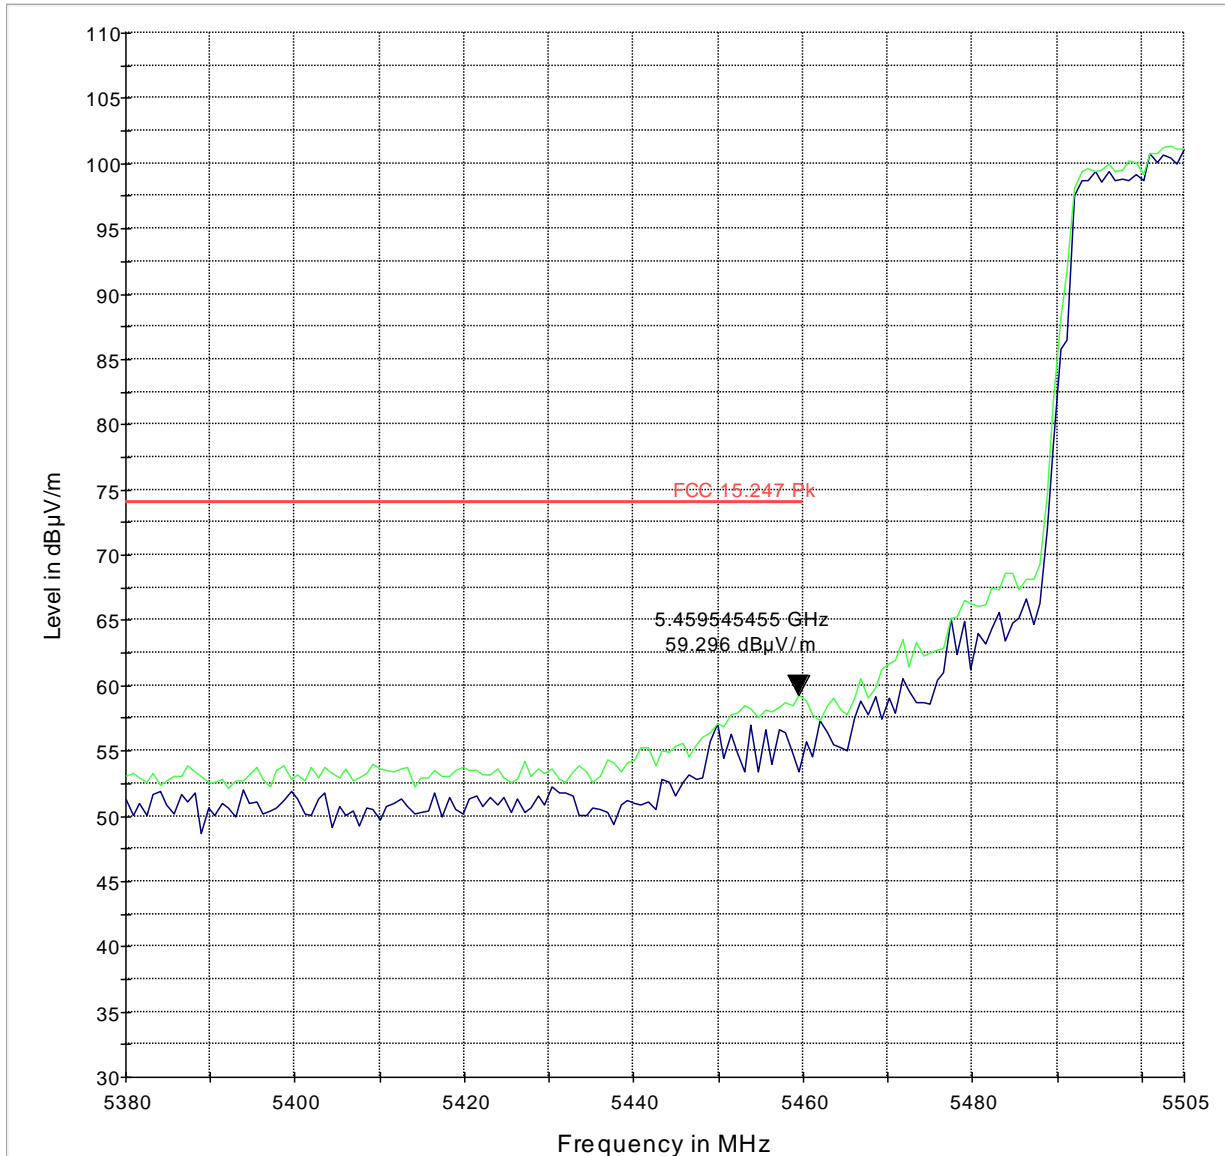


— MaxPeak-ClearW rite-PK+    — MaxPeak-MaxHold-PK+    — FCC 15.247 Pk

### 802.11a Channel 100 Low Band Edge Average measurement

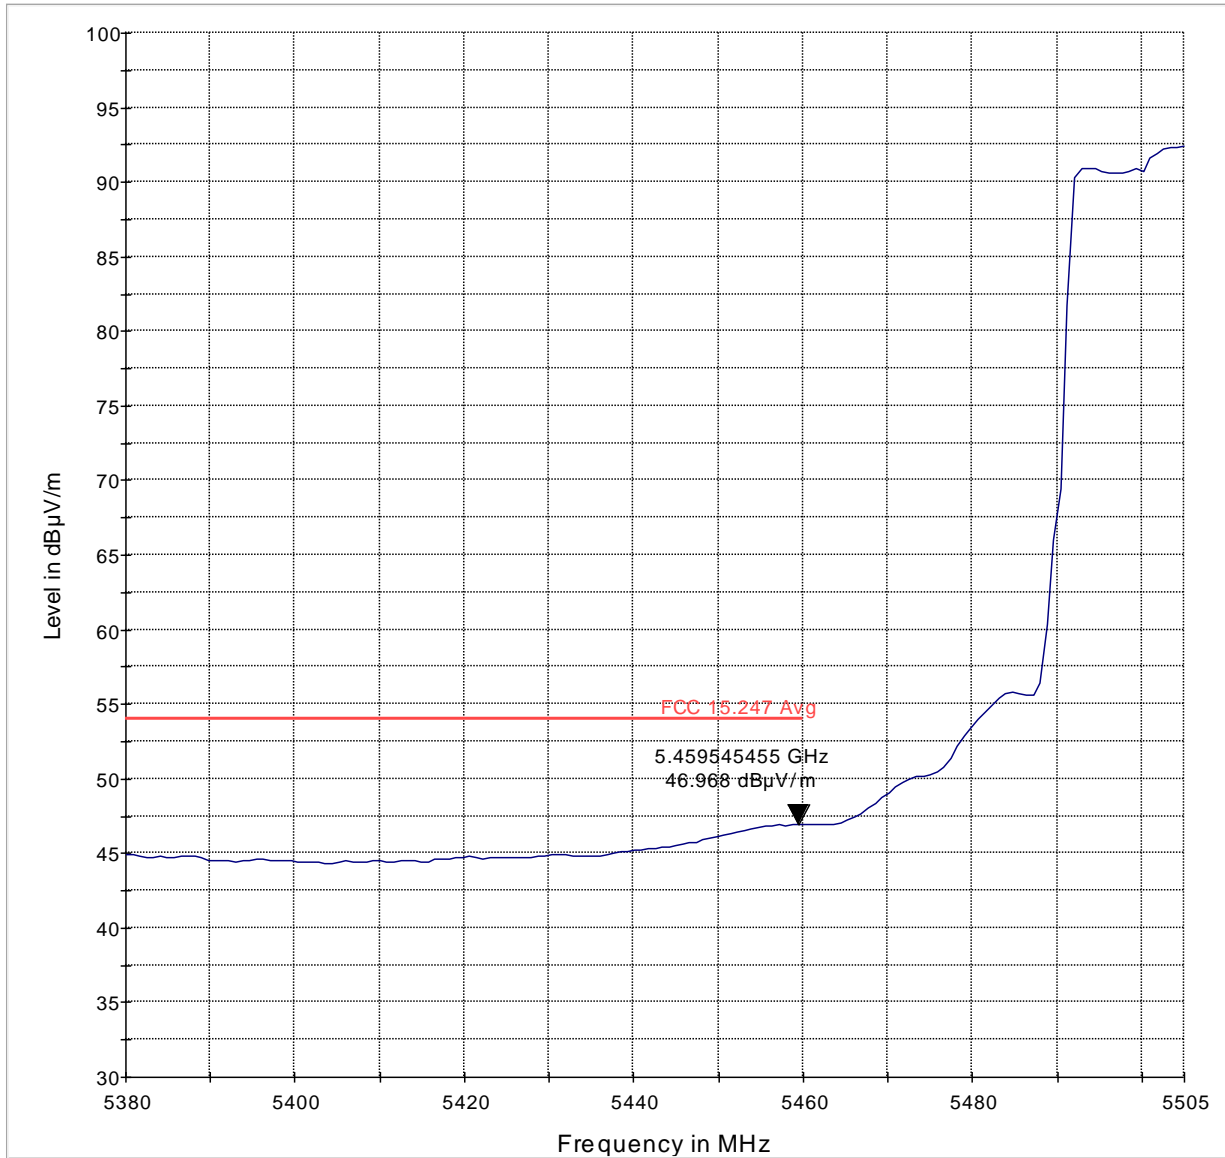

— MaxPeak-MaxHold-PK+    — FCC 15.247 Avg


802.11a Channel 140 High Band Edge Peak measurement (Channel 144 not supported)

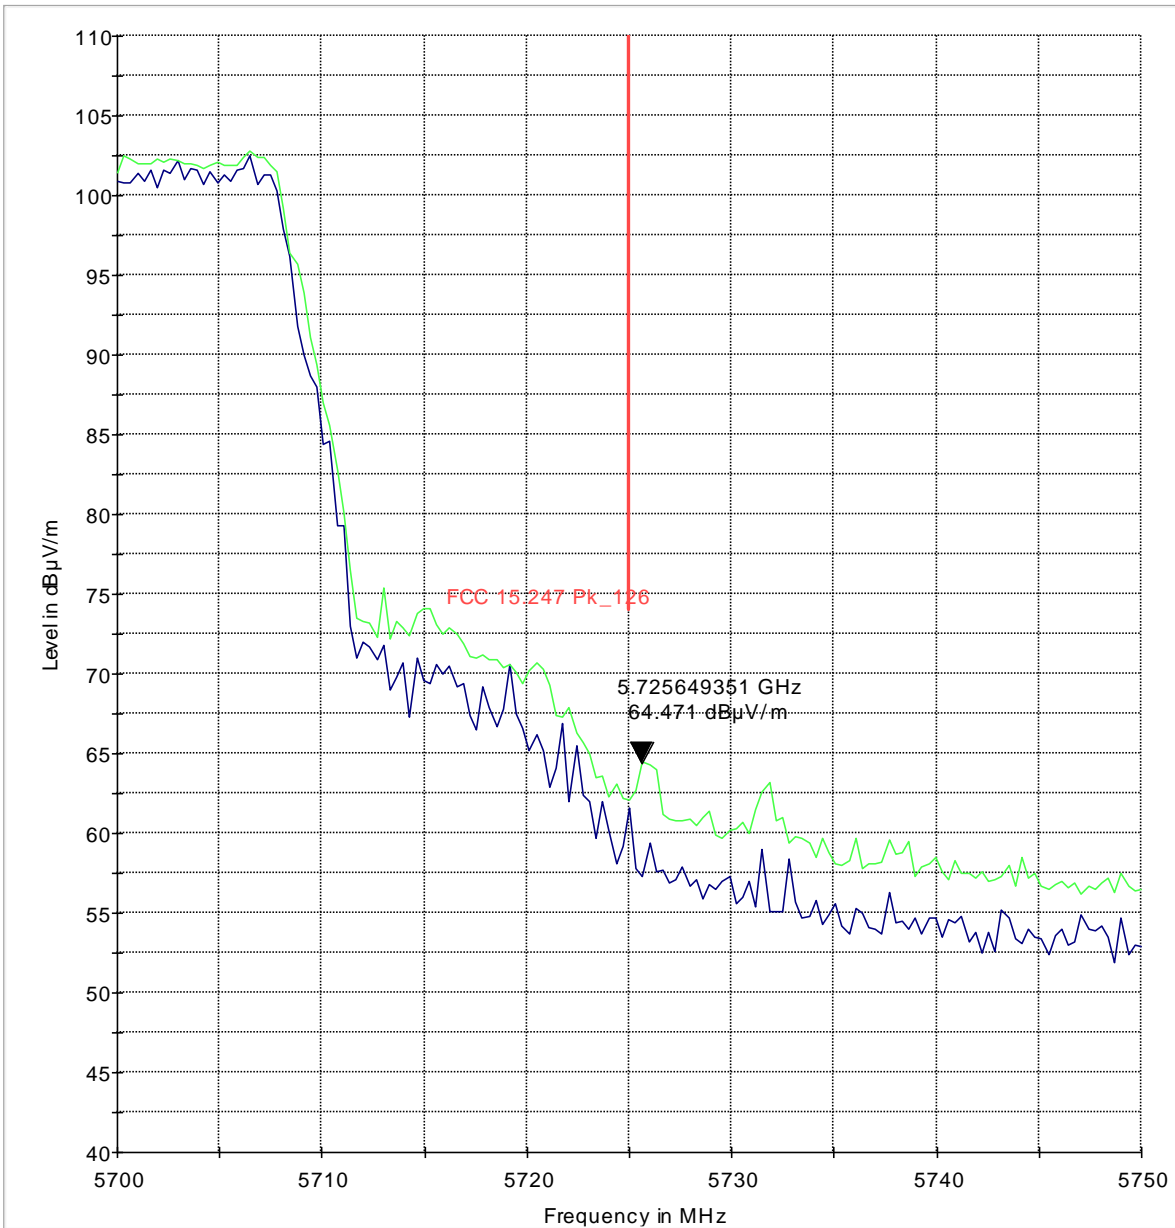

— MaxPeak-ClearWrite-PK+    — MaxPeak-MaxHold-PK+    — FCC 15.247 Pk\_126




### 802.11a Channel 140 High Band Edge Average measurement (Channel 144 not supported)

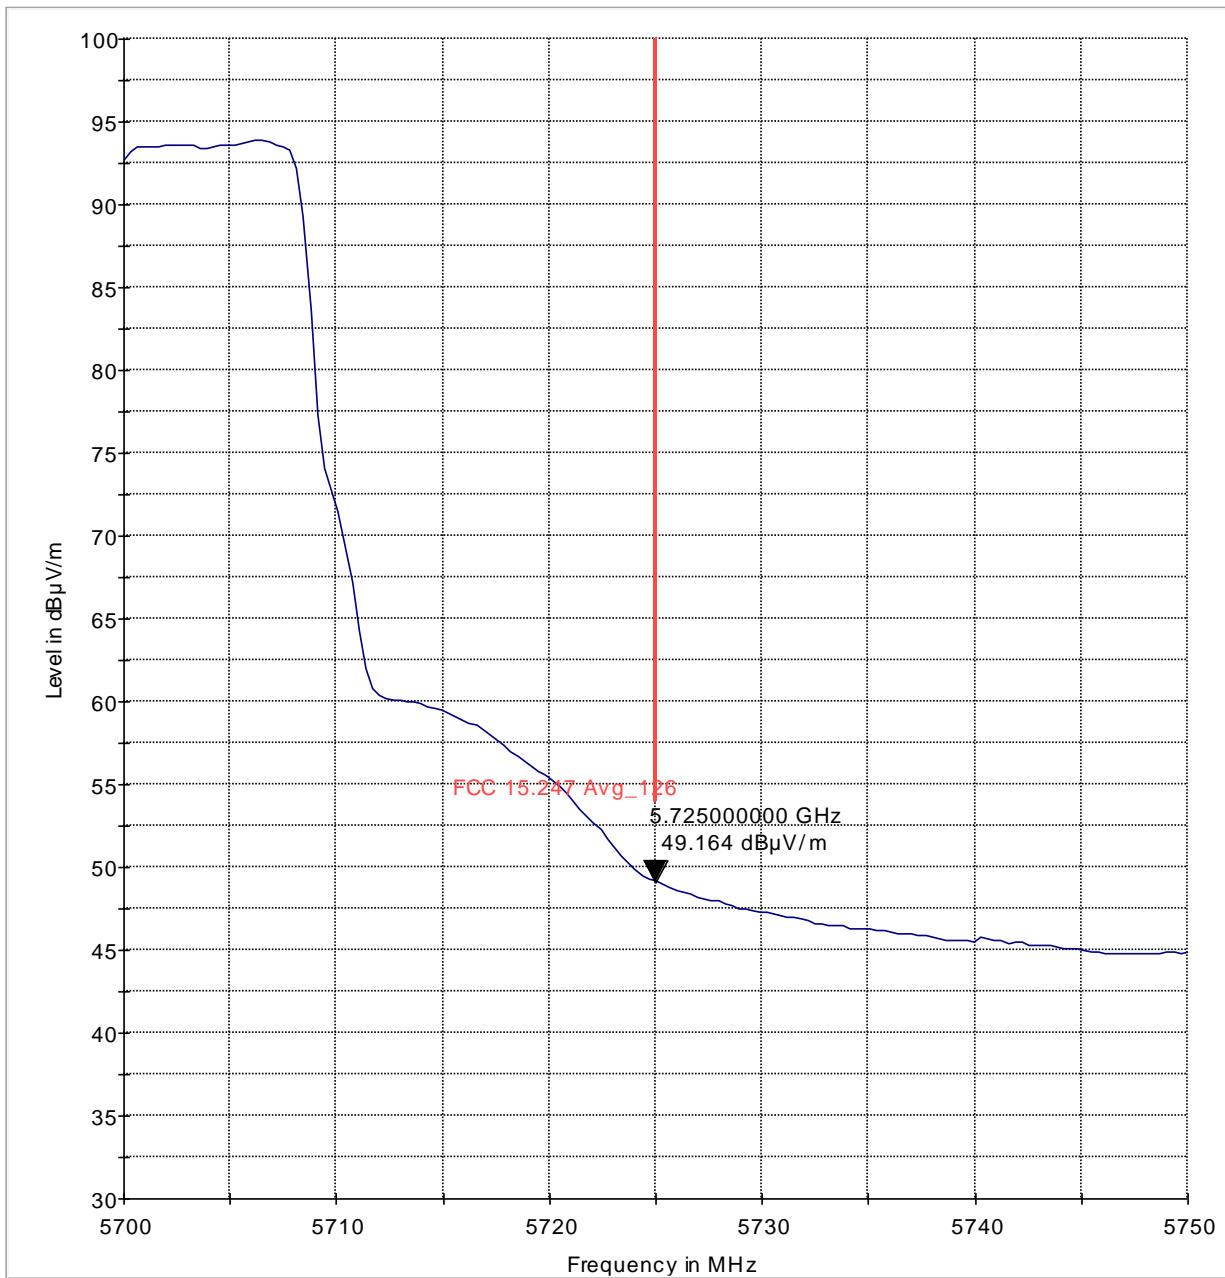


— MaxPeak-MaxHold-PK+      — FCC 15.247 Avg\_126

### 802.11n [HT20] Channel 36 Low Band Edge Peak measurement

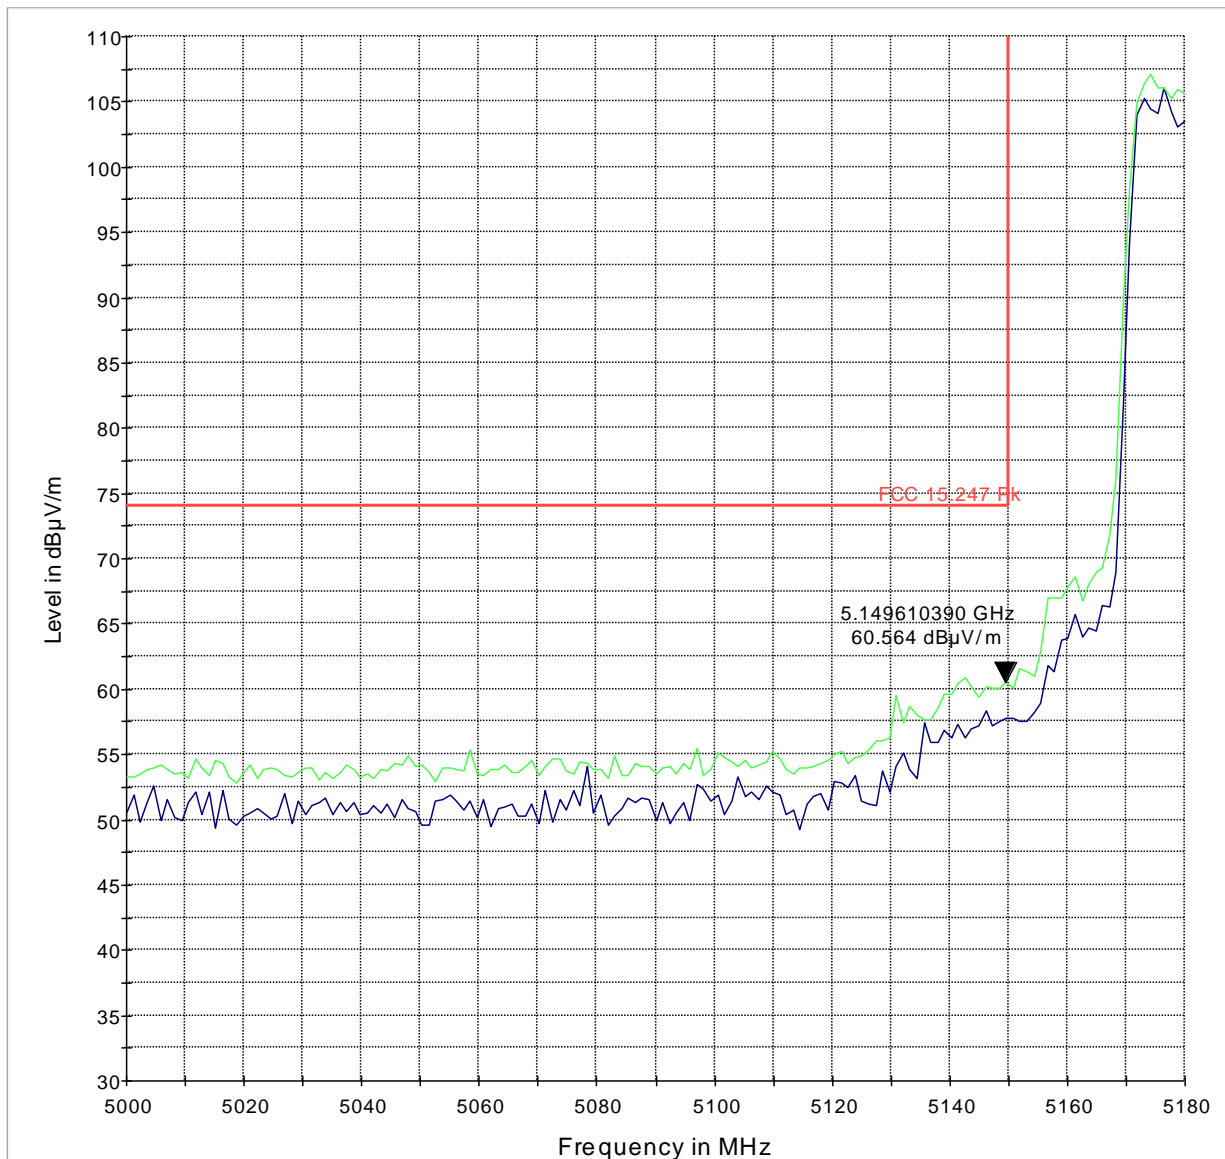


— MaxPeak-ClearWrite-PK+    — MaxPeak-MaxHold-PK+    — FCC 15.247 Pk

### 802.11n [HT20] Channel 36 Low Band Edge Average measurement

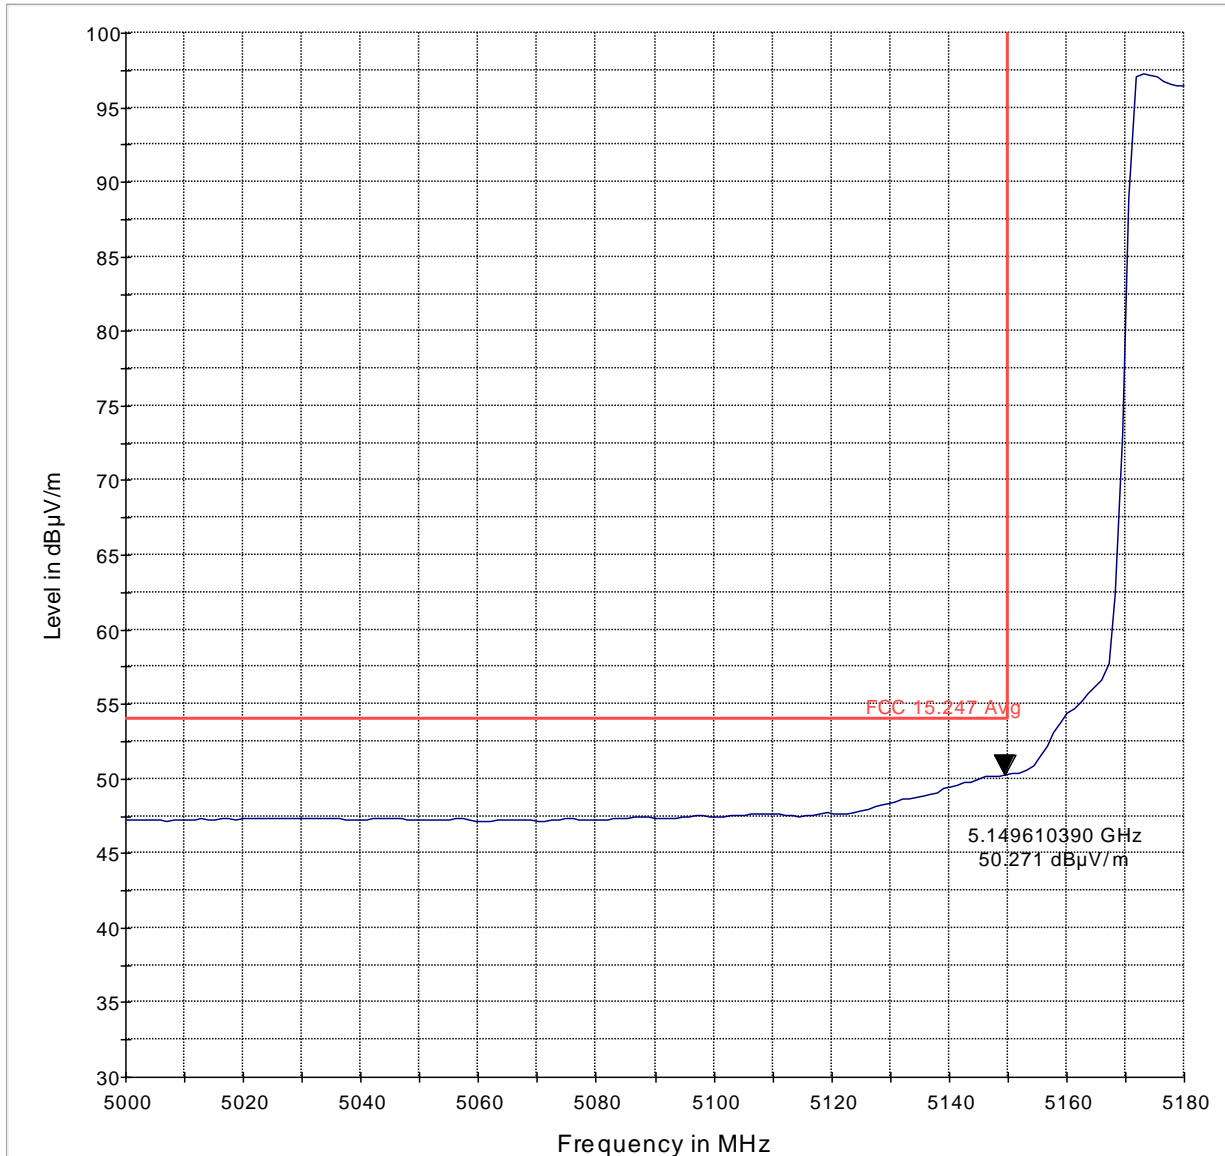


— MaxPeak-MaxHold-PK+    — FCC 15.247 Avg

### 802.11n [HT20] Channel 64 High Band Edge Peak measurement

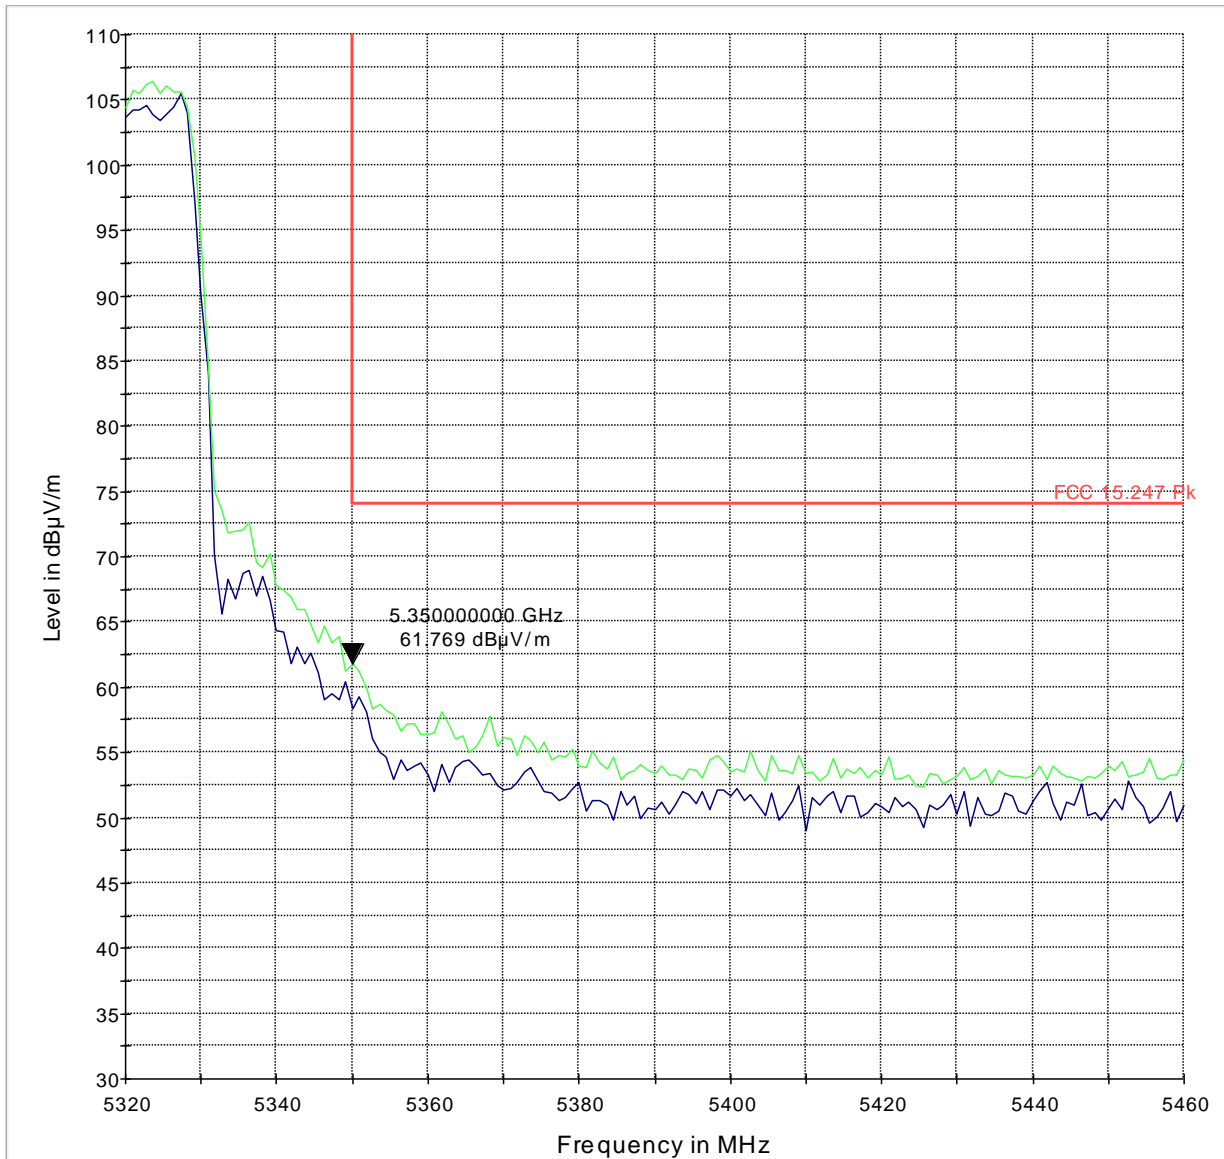


— MaxPeak-ClearW rite-PK+    — MaxPeak-MaxHold-PK+    — FCC 15.247 Pk

### 802.11n [HT20] Channel 64 High Band Edge Average measurement

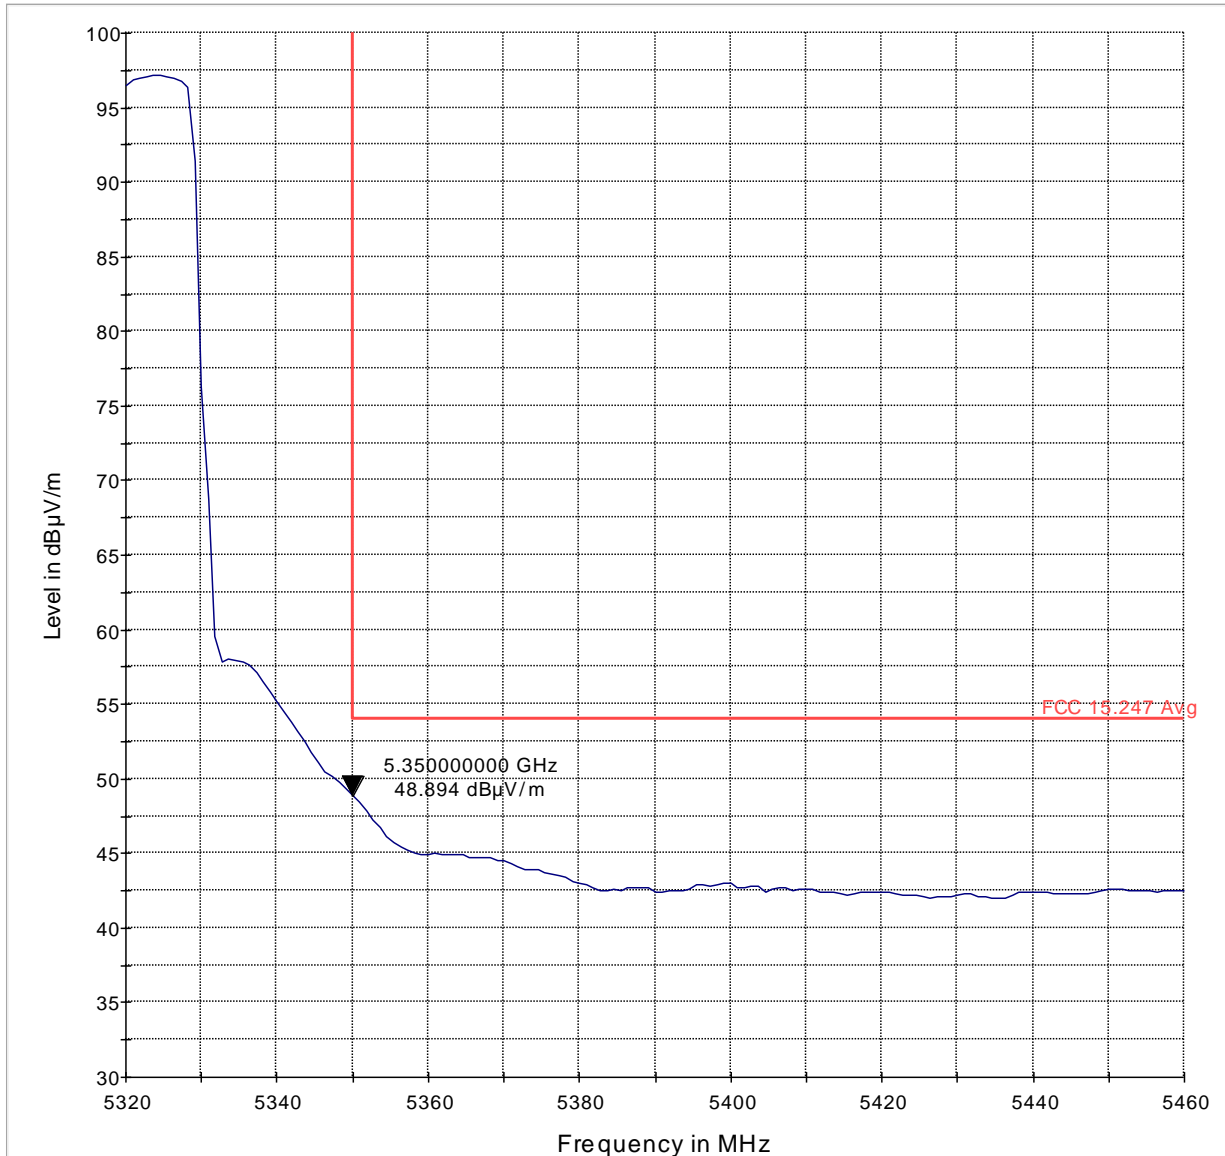


— MaxPeak-MaxHold-PK+    — FCC 15.247 Avg

### 802.11n [HT20] Channel 100 Low Band Edge Peak measurement

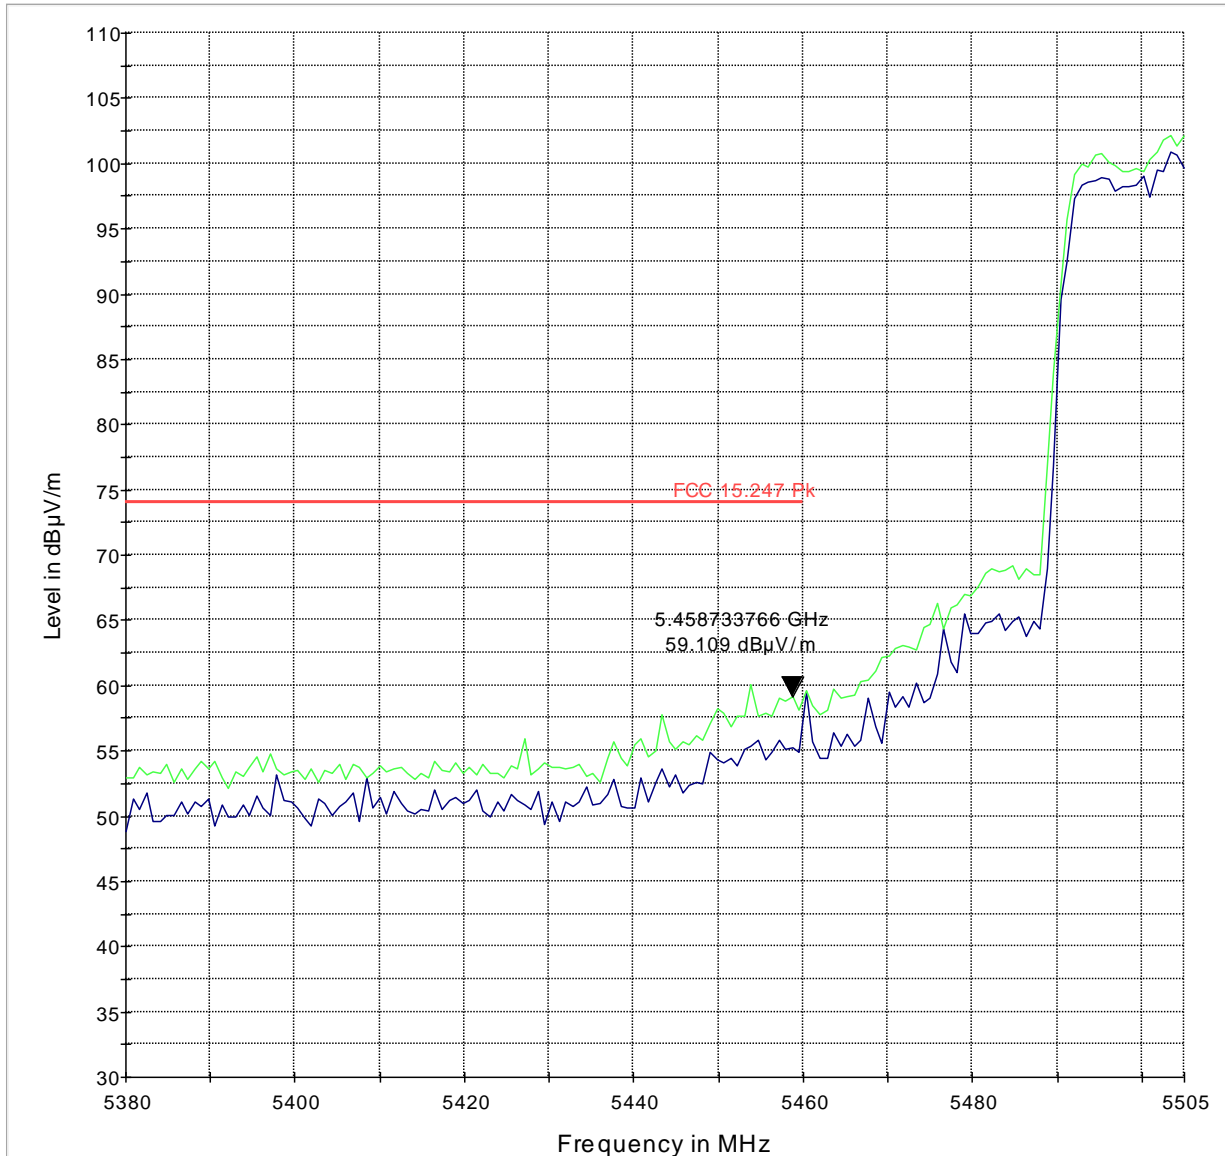


— MaxPeak-ClearW rite-PK+    — MaxPeak-MaxHold-PK+    — FCC 15.247 Pk

### 802.11n [HT20] Channel 100 Low Band Edge Average measurement

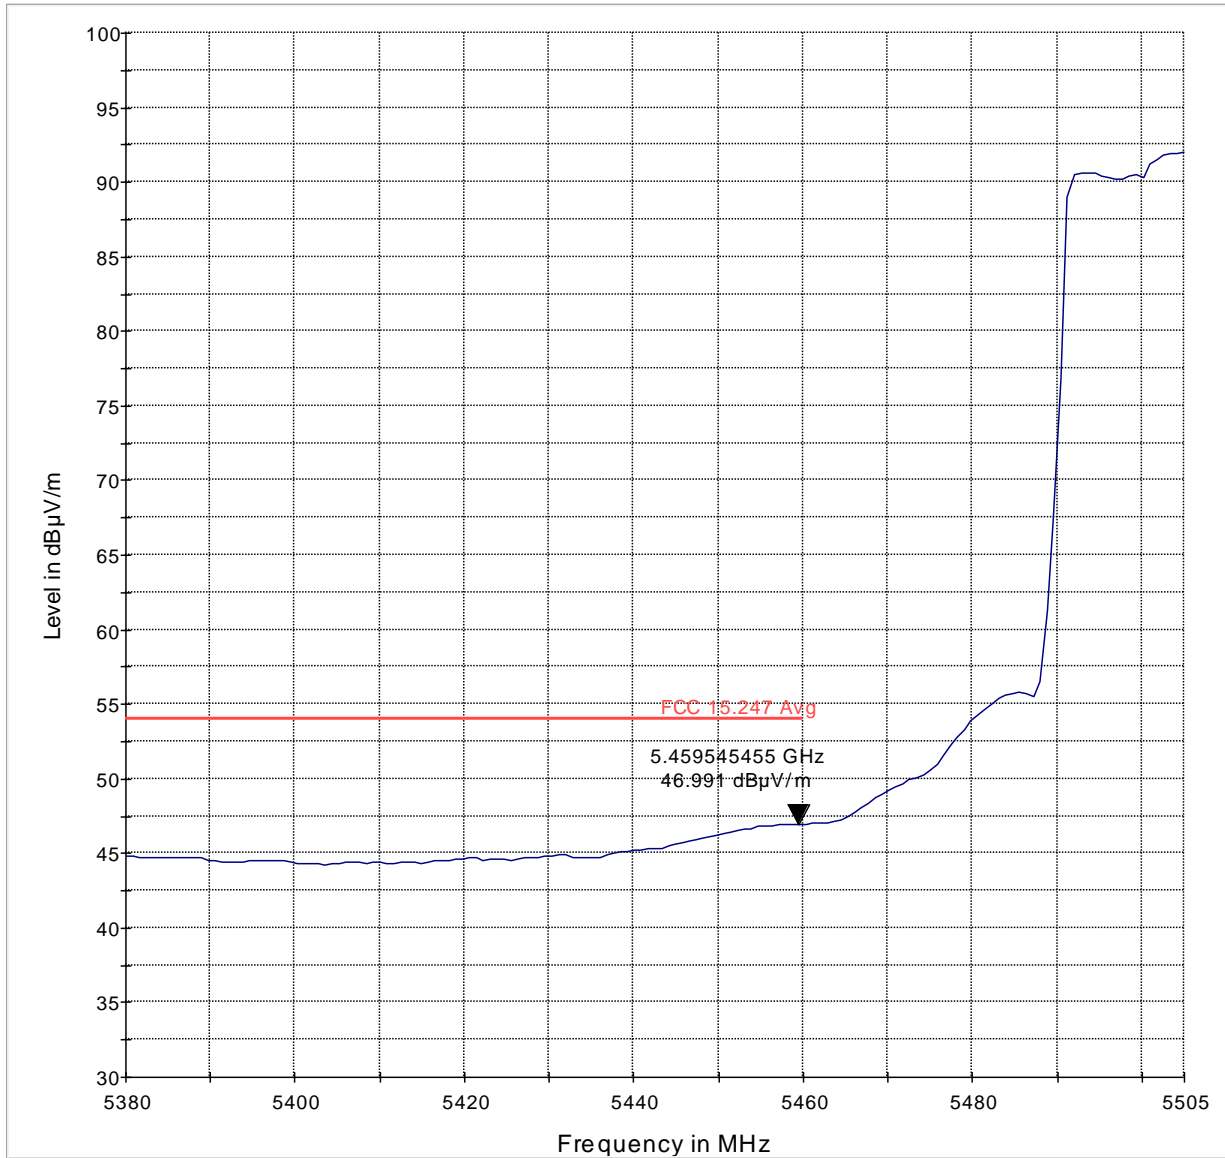

— MaxPeak-MaxHold-PK+    — FCC 15.247 Avg


802.11n [HT20] Channel 140 High Band Edge Peak measurement (Channel 144 not supported)

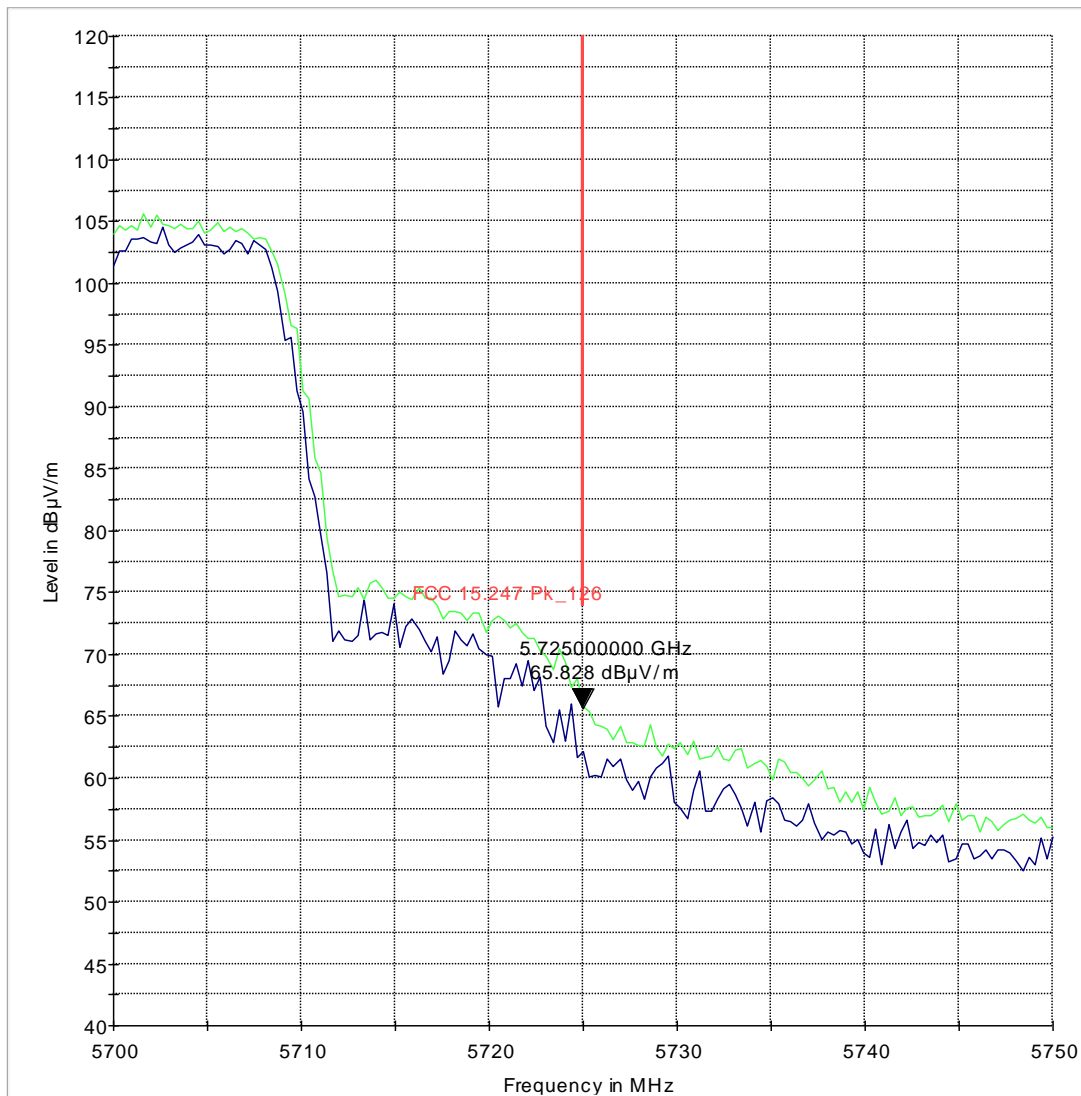

— MaxPeak-ClearWrite-PK+    — MaxPeak-MaxHold-PK+    — FCC 15.247 Pk\_126




802.11n [HT20] Channel 140 High Band Edge Average measurement (Channel 144 not supported)

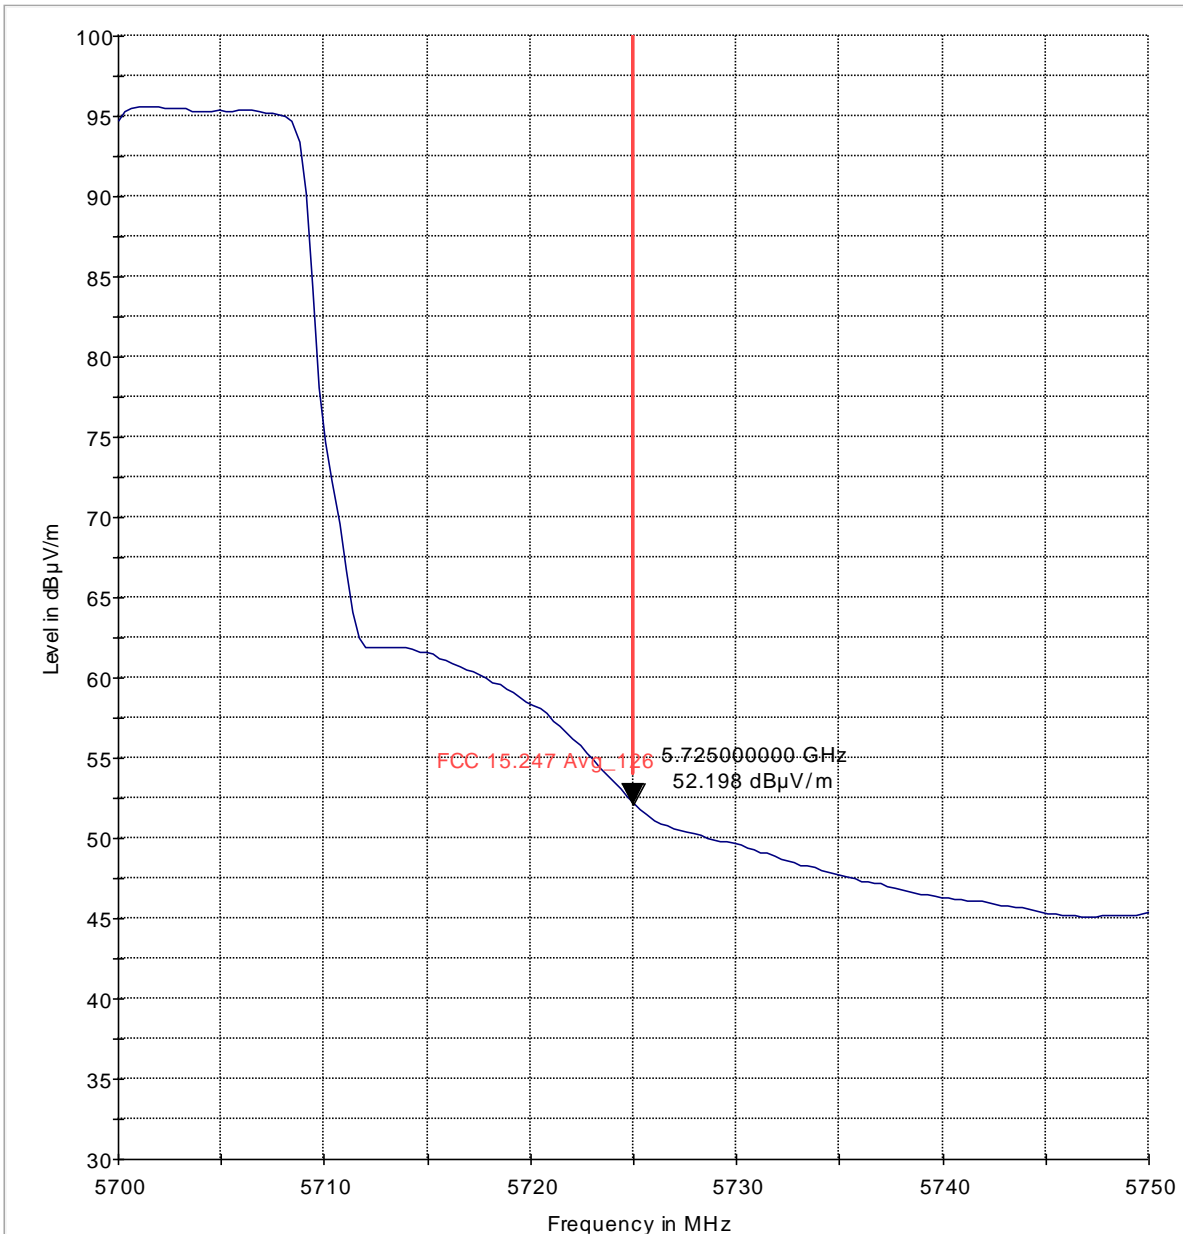

— MaxPeak-MaxHold-PK+      — FCC 15.247 Avg\_126




### 802.11n [HT40] Channel 38 Low Band Edge Peak measurement

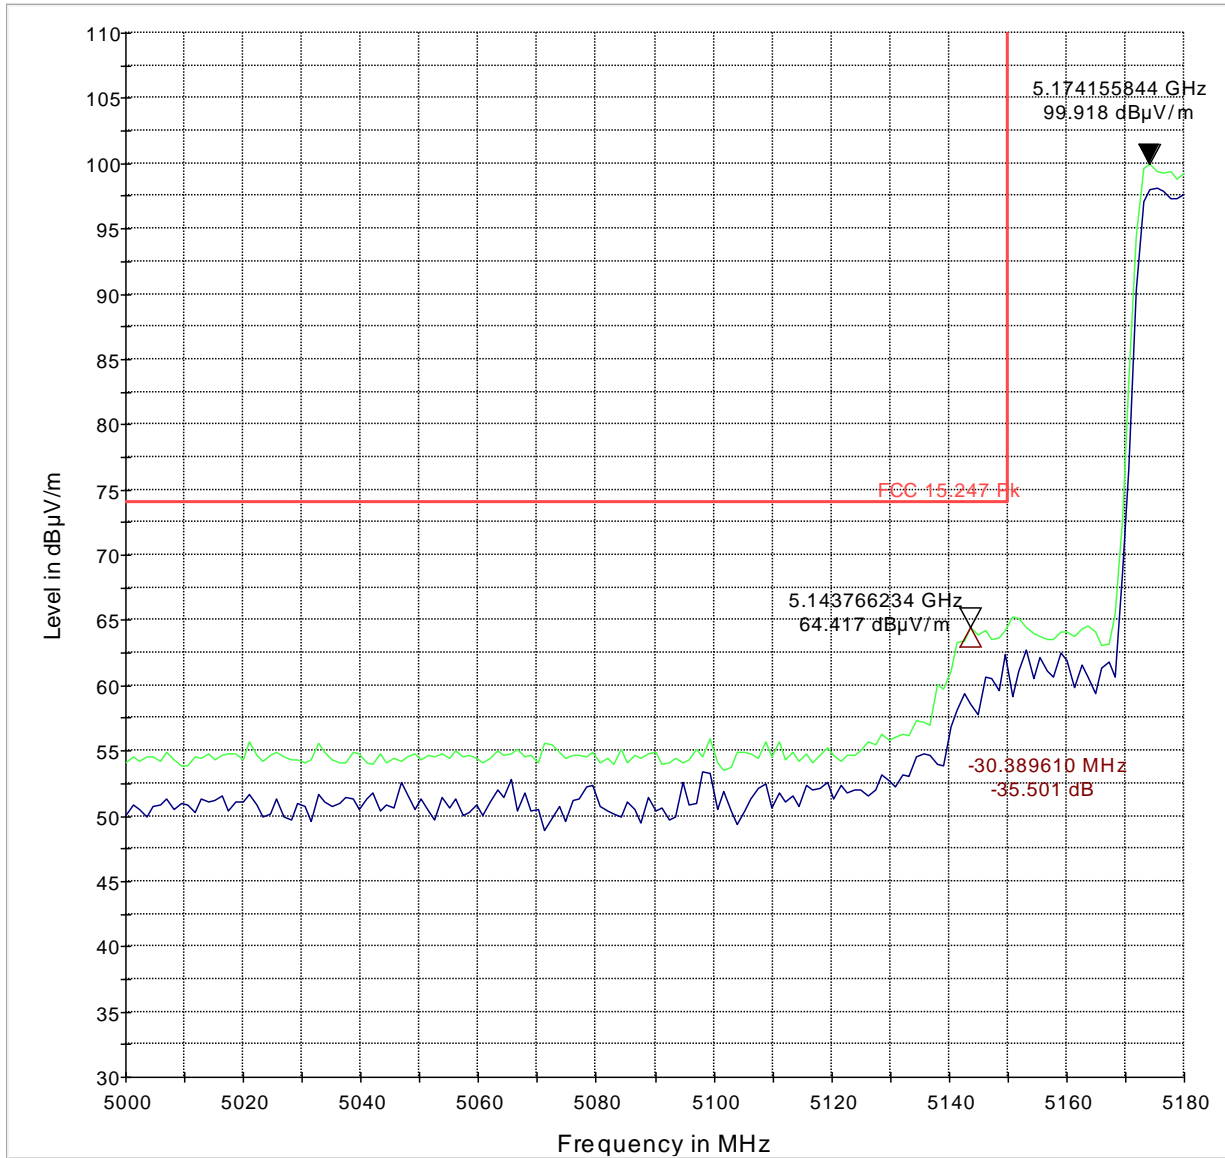

— MaxPeak-ClearWrite-PK+    — MaxPeak-MaxHold-PK+    — FCC 15.247 Pk




### 802.11n [HT40] Channel 38 Low Band Edge Average measurement

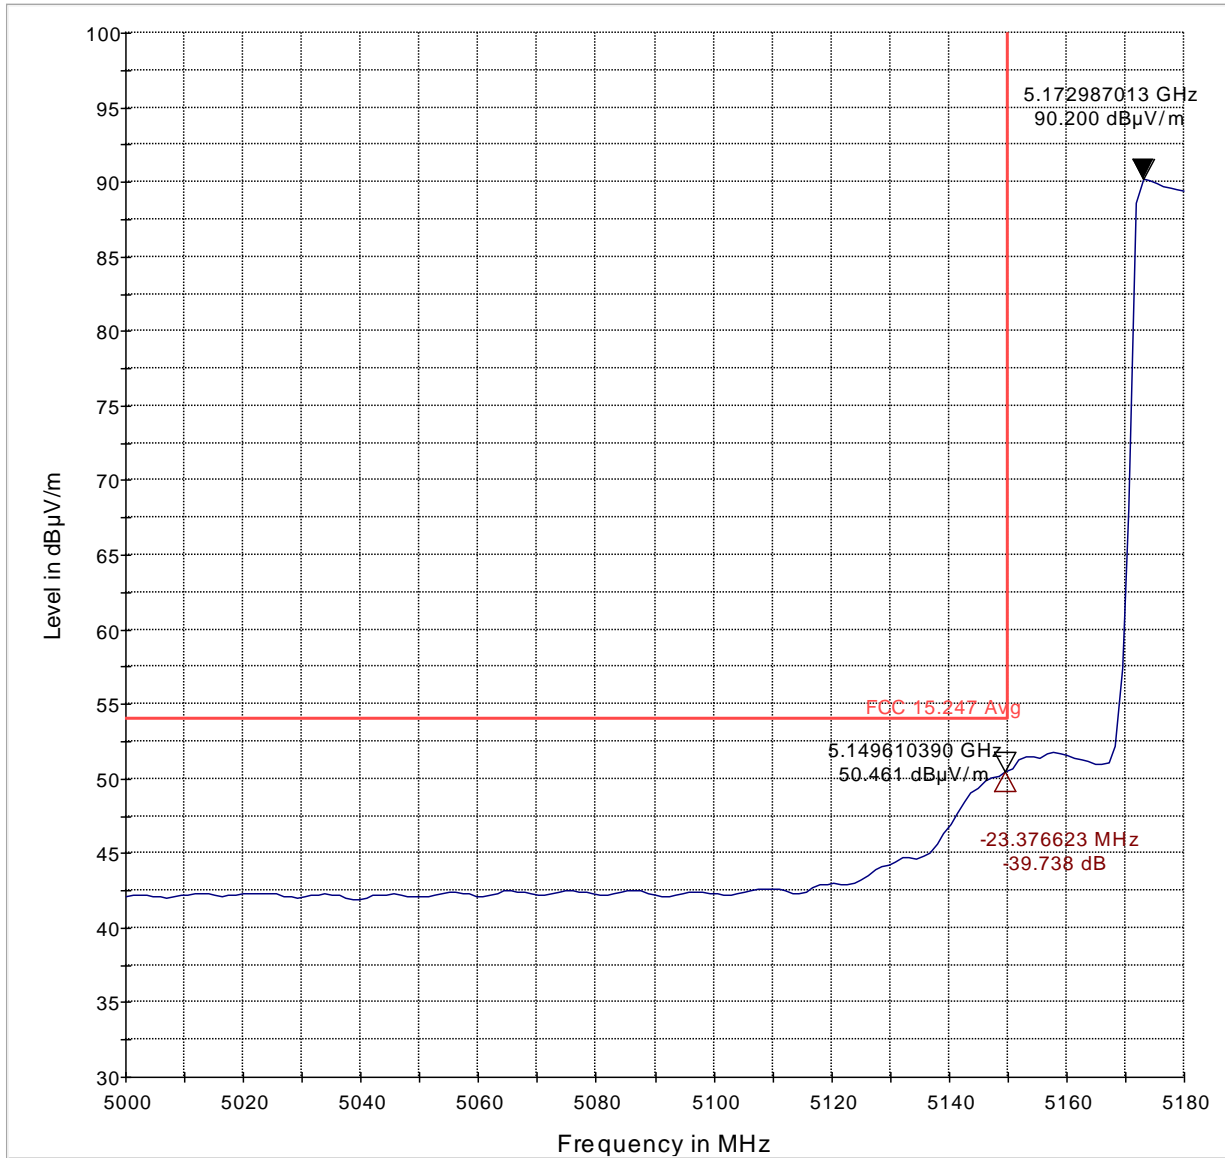

— MaxPeak-MaxHold-PK+    — FCC 15.247 Avg


### 802.11n [HT40] Channel 62 High Band Edge Peak measurement

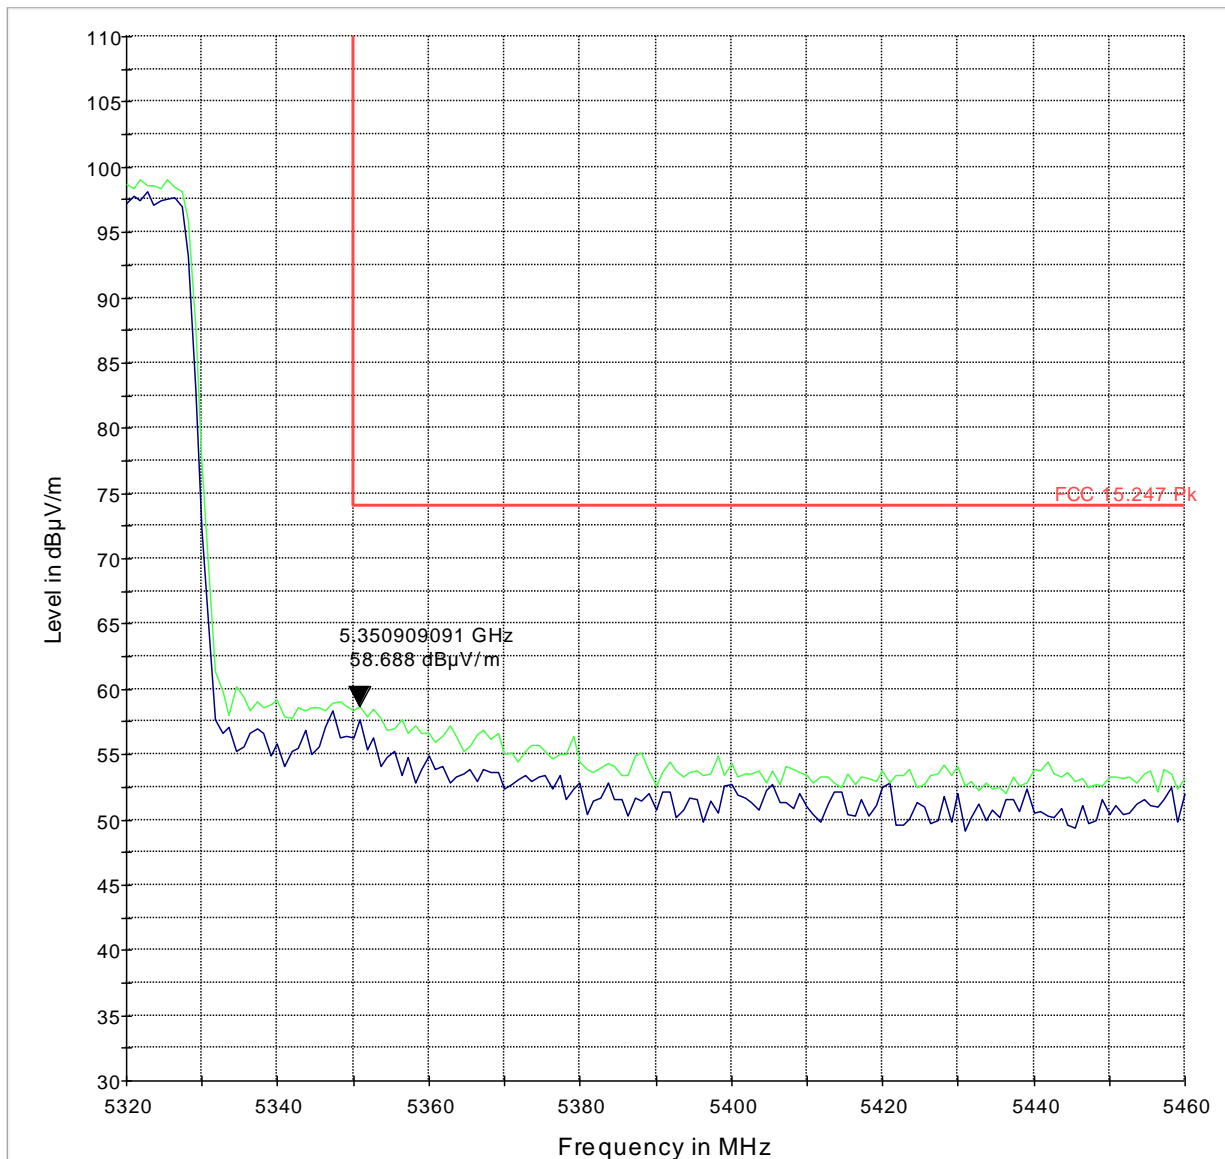

— MaxPeak-ClearW rite-PK+    — MaxPeak-MaxHold-PK+    — FCC 15.247 Pk




### 802.11n [HT40] Channel 62 High Band Edge Average measurement

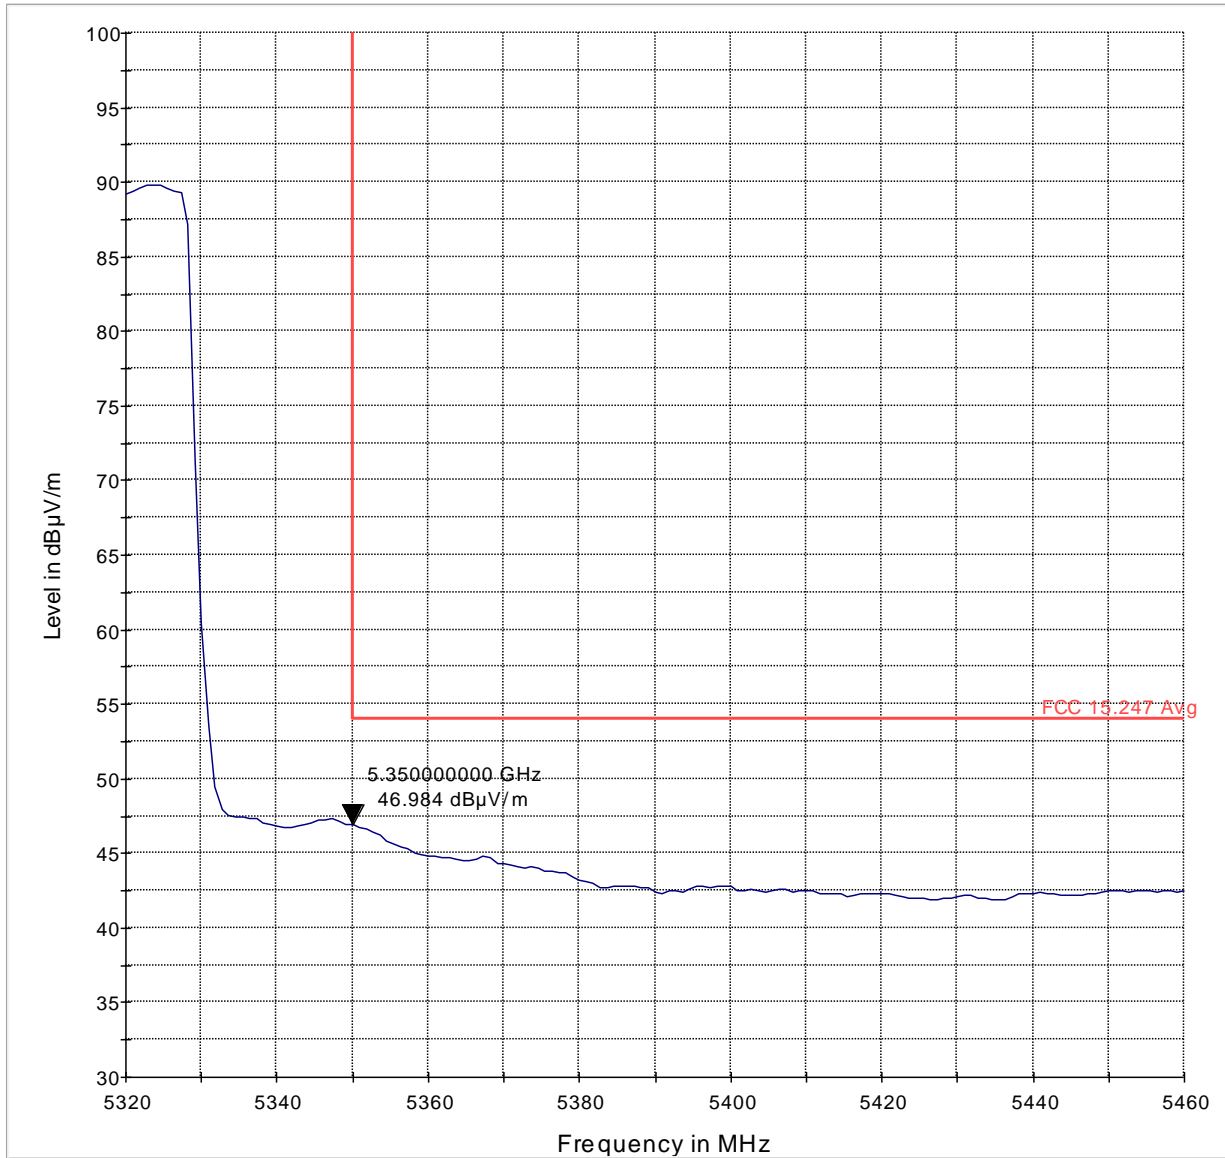


— MaxPeak-MaxHold-PK+    — FCC 15.247 Avg

### 802.11n [HT40] Channel 102 Low Band Edge Peak measurement

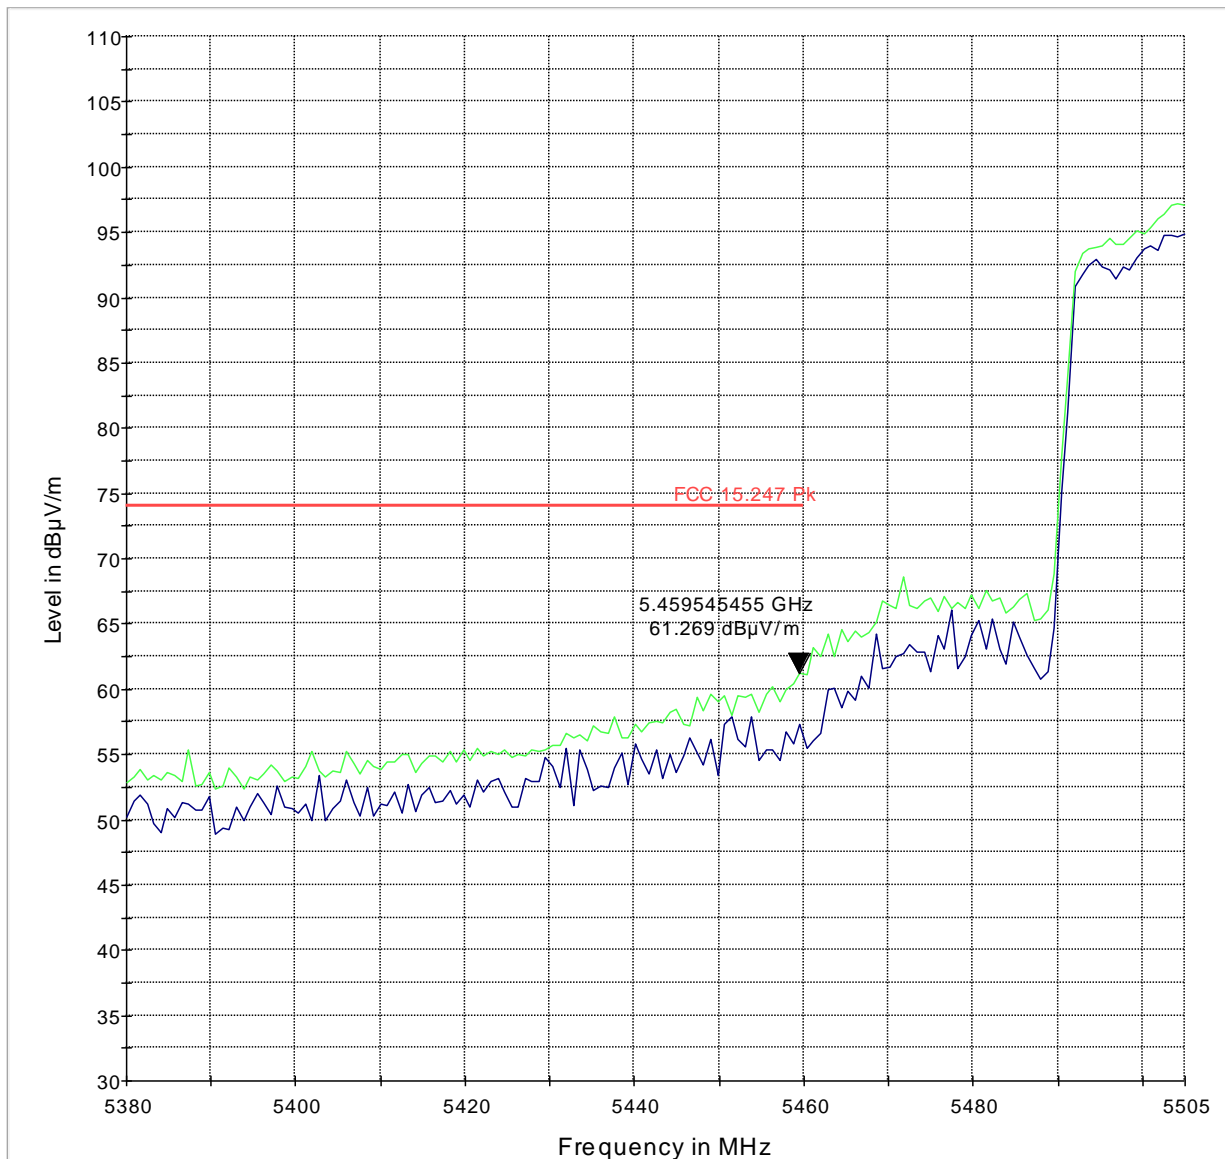


— MaxPeak-ClearW rite-PK+    — MaxPeak-MaxHold-PK+    — FCC 15.247 Pk

### 802.11n [HT40] Channel 102 Low Band Edge Average measurement

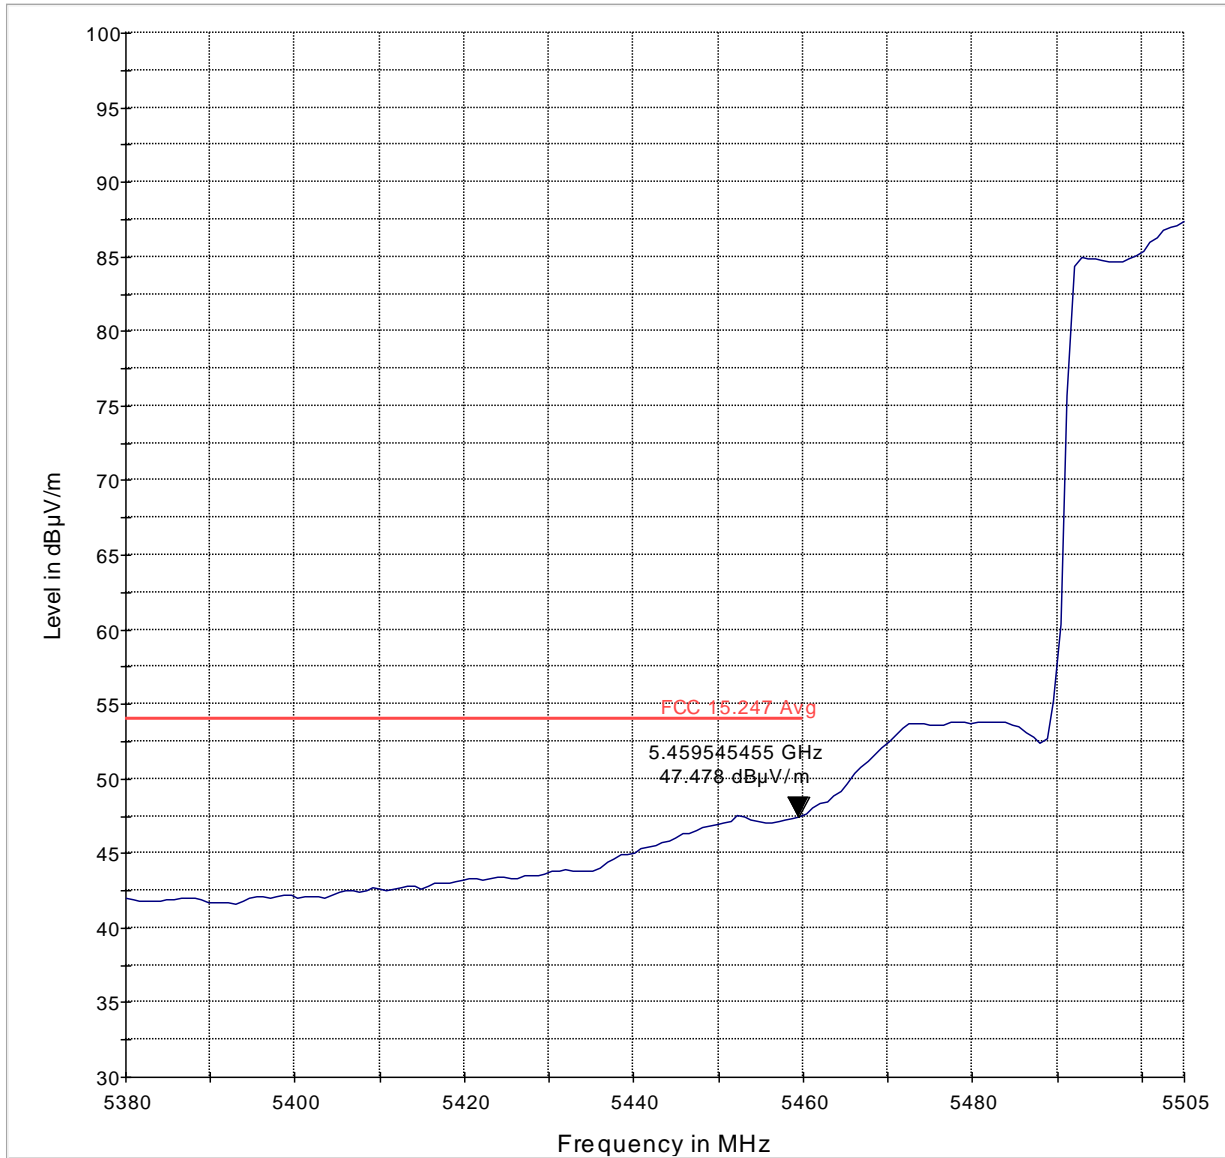

— MaxPeak-MaxHold-PK+    — FCC 15.247 Avg


802.11n [HT40] Channel 134 High Band Edge Peak measurement (Channel 142 not supported)

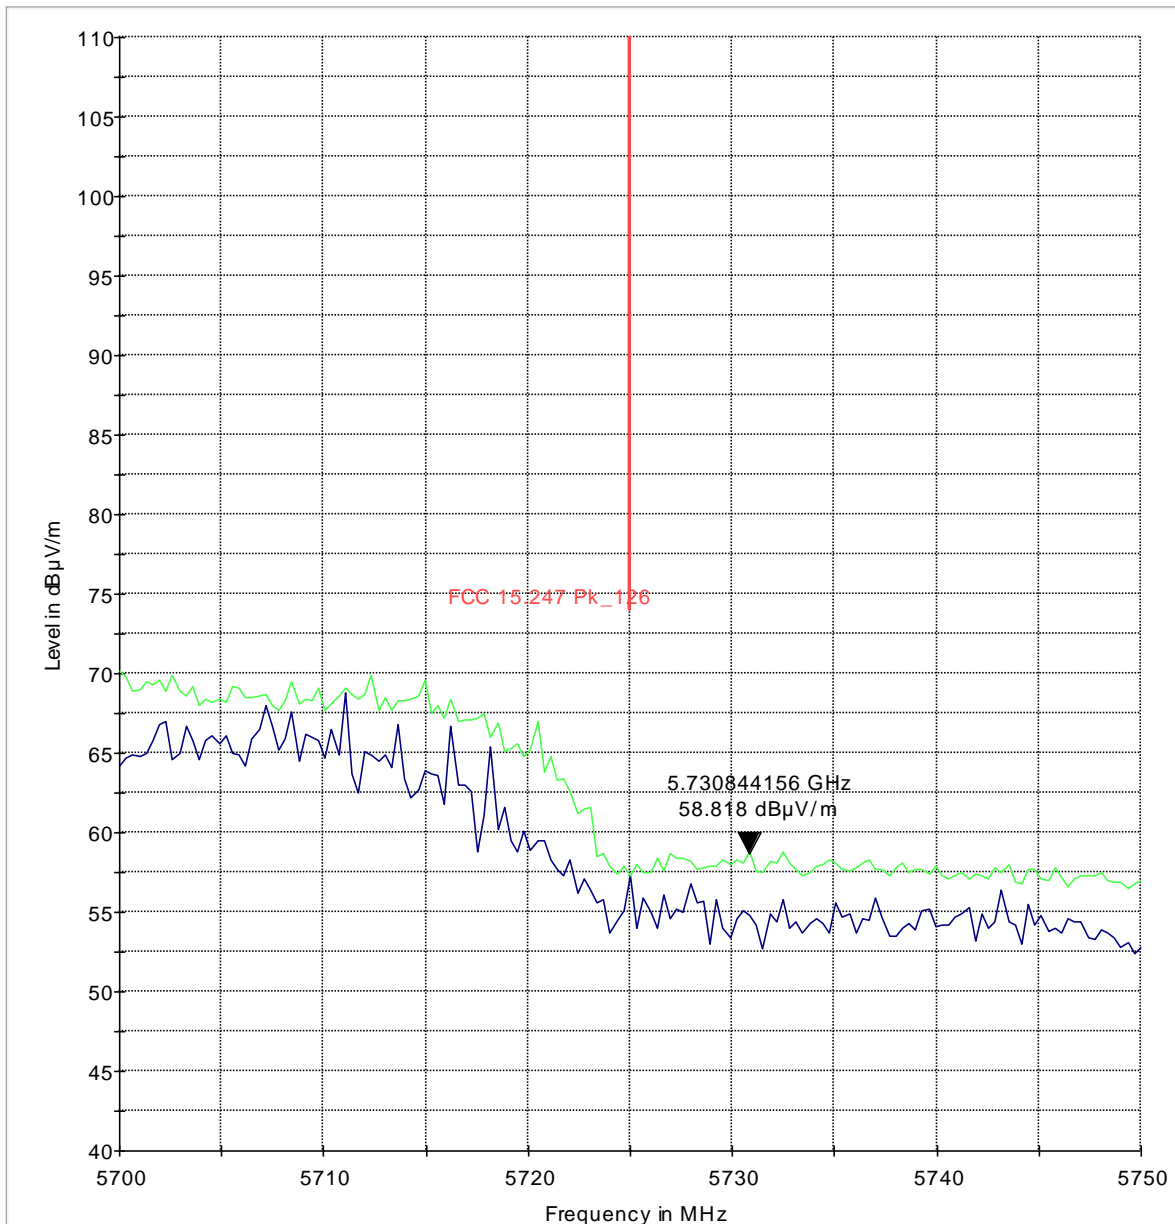

— MaxPeak-ClearWrite-PK+    — MaxPeak-MaxHold-PK+    — FCC 15.247 Pk\_126




802.11n [HT40] Channel 134 High Band Edge Average measurement (Channel 142 not supported)

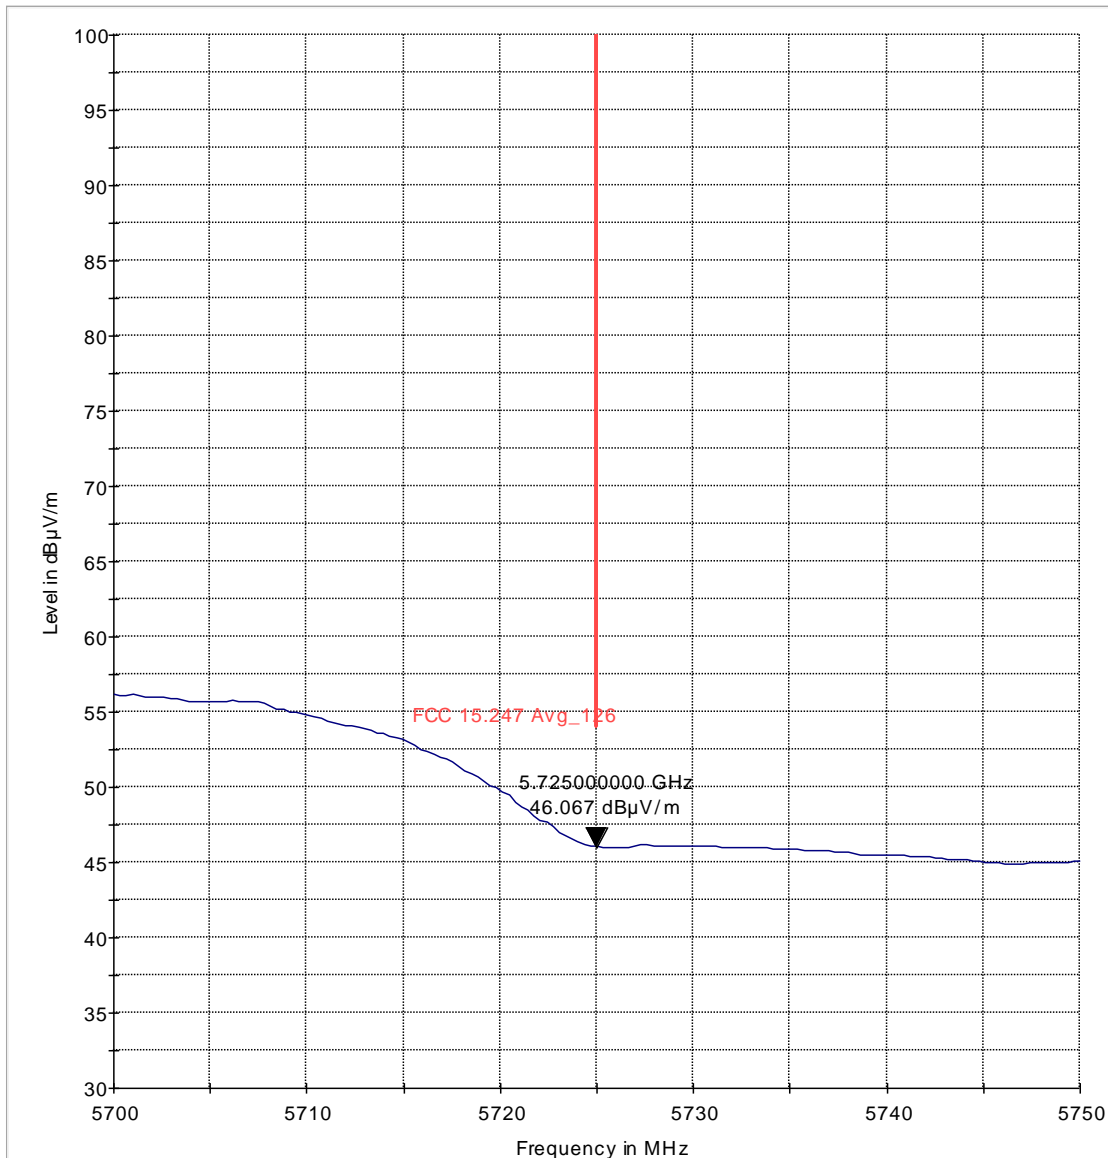

— MaxPeak-MaxHold-PK+    — FCC 15.247 Avg\_126


### 802.11ac [HT80] Channel 42 Low Band Edge Peak measurement

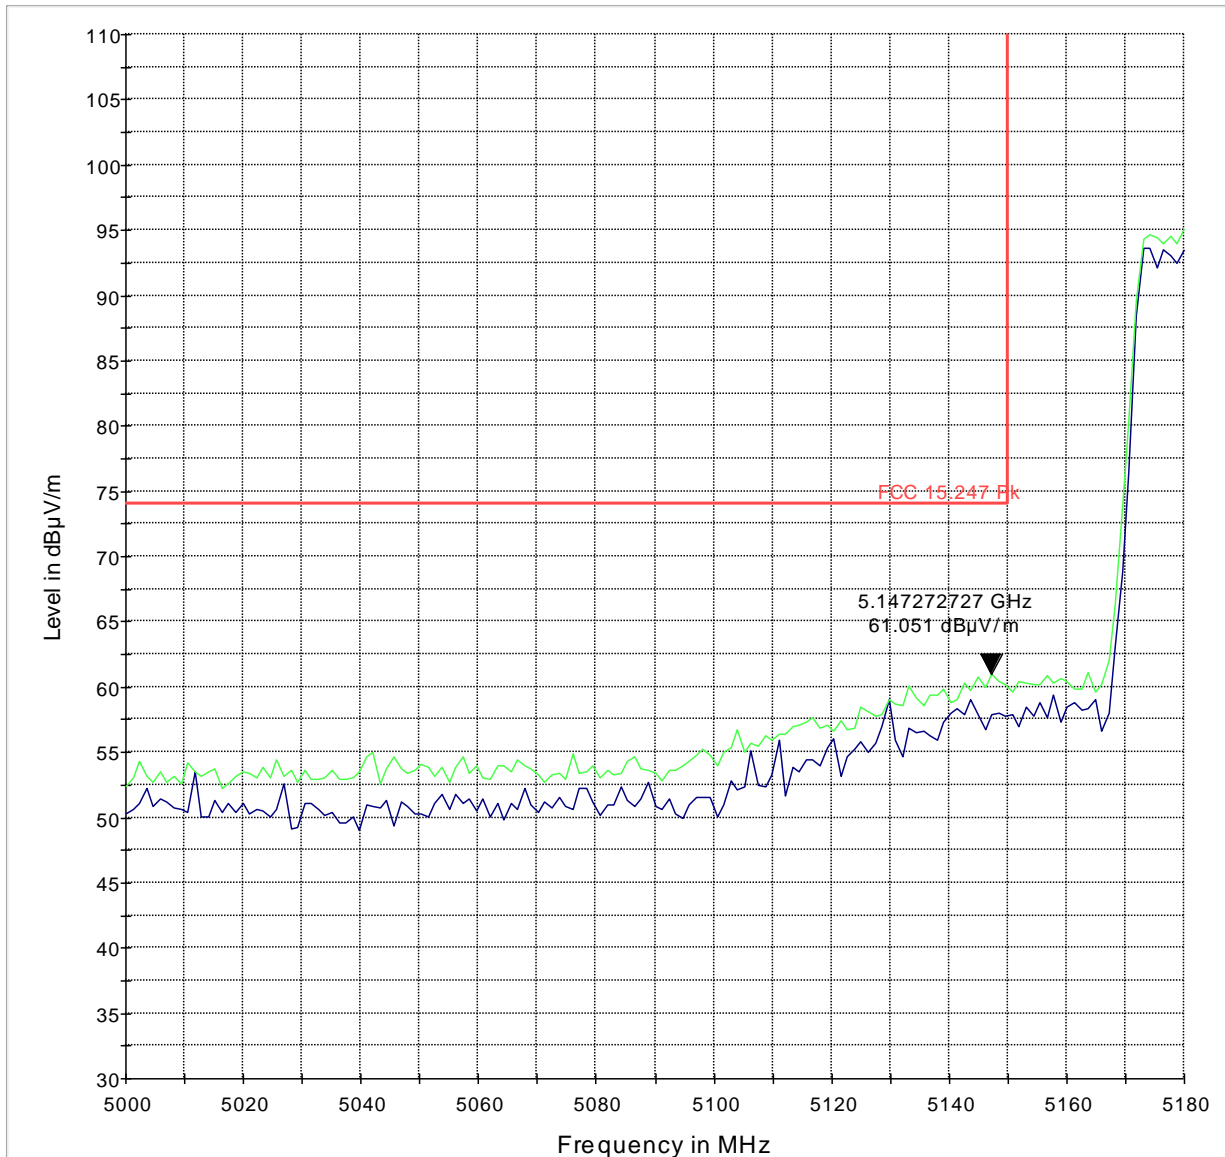

— MaxPeak-ClearWrite-PK+    — MaxPeak-MaxHold-PK+    — FCC 15.247 Pk




### 802.11ac [HT80] Channel 42 Low Band Edge Average measurement

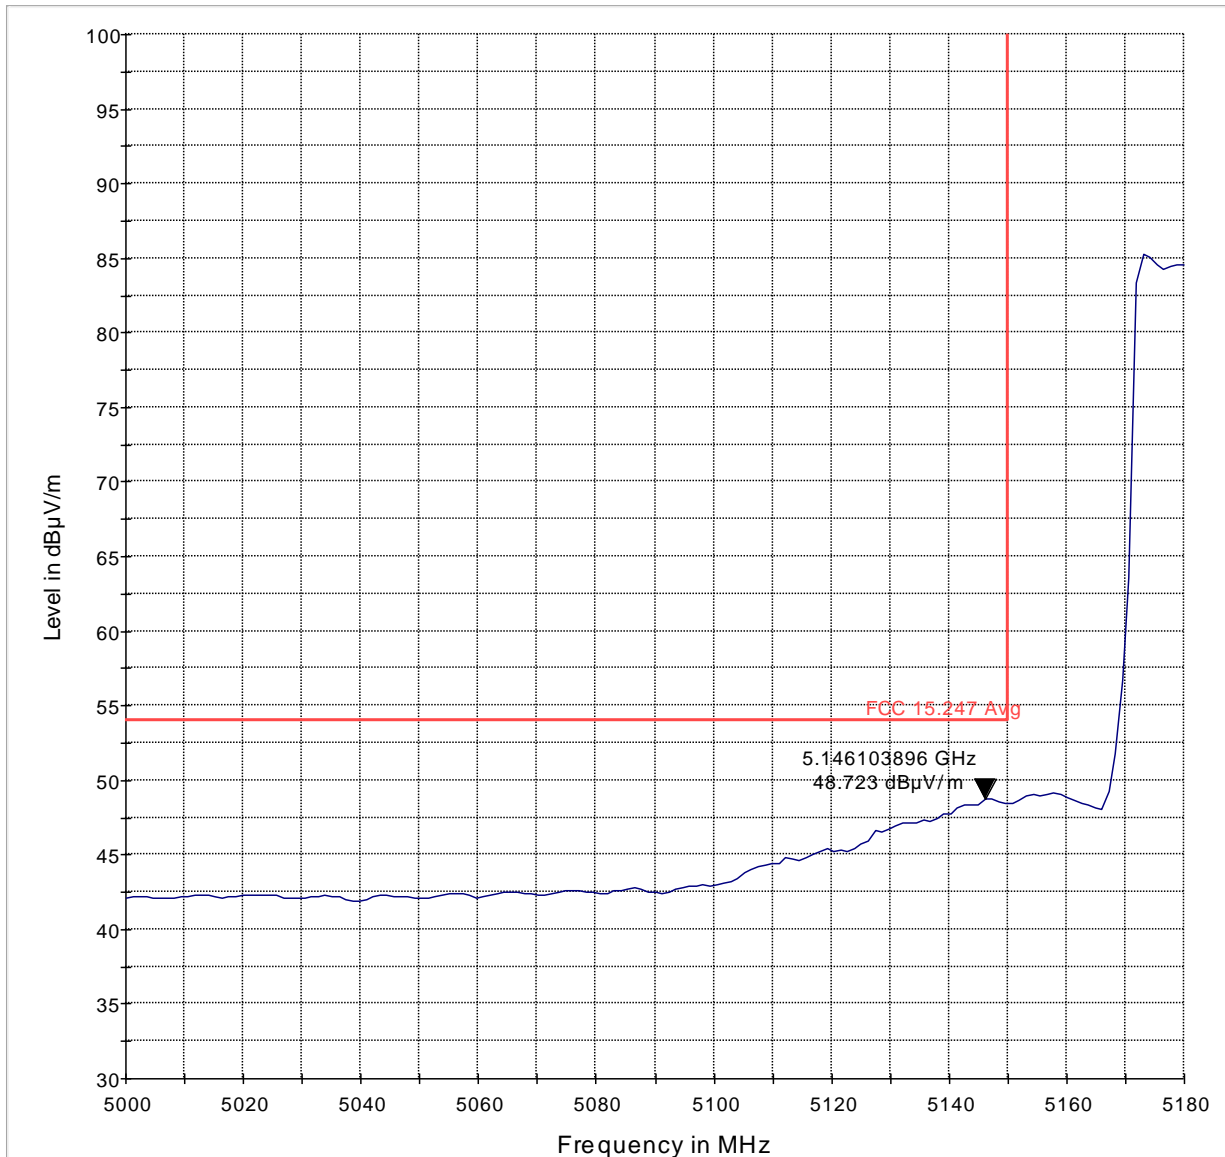

— MaxPeak-MaxHold-PK+    — FCC 15.247 Avg




### 802.11ac [HT80] Channel 58 Mid Band Edge Peak measurement

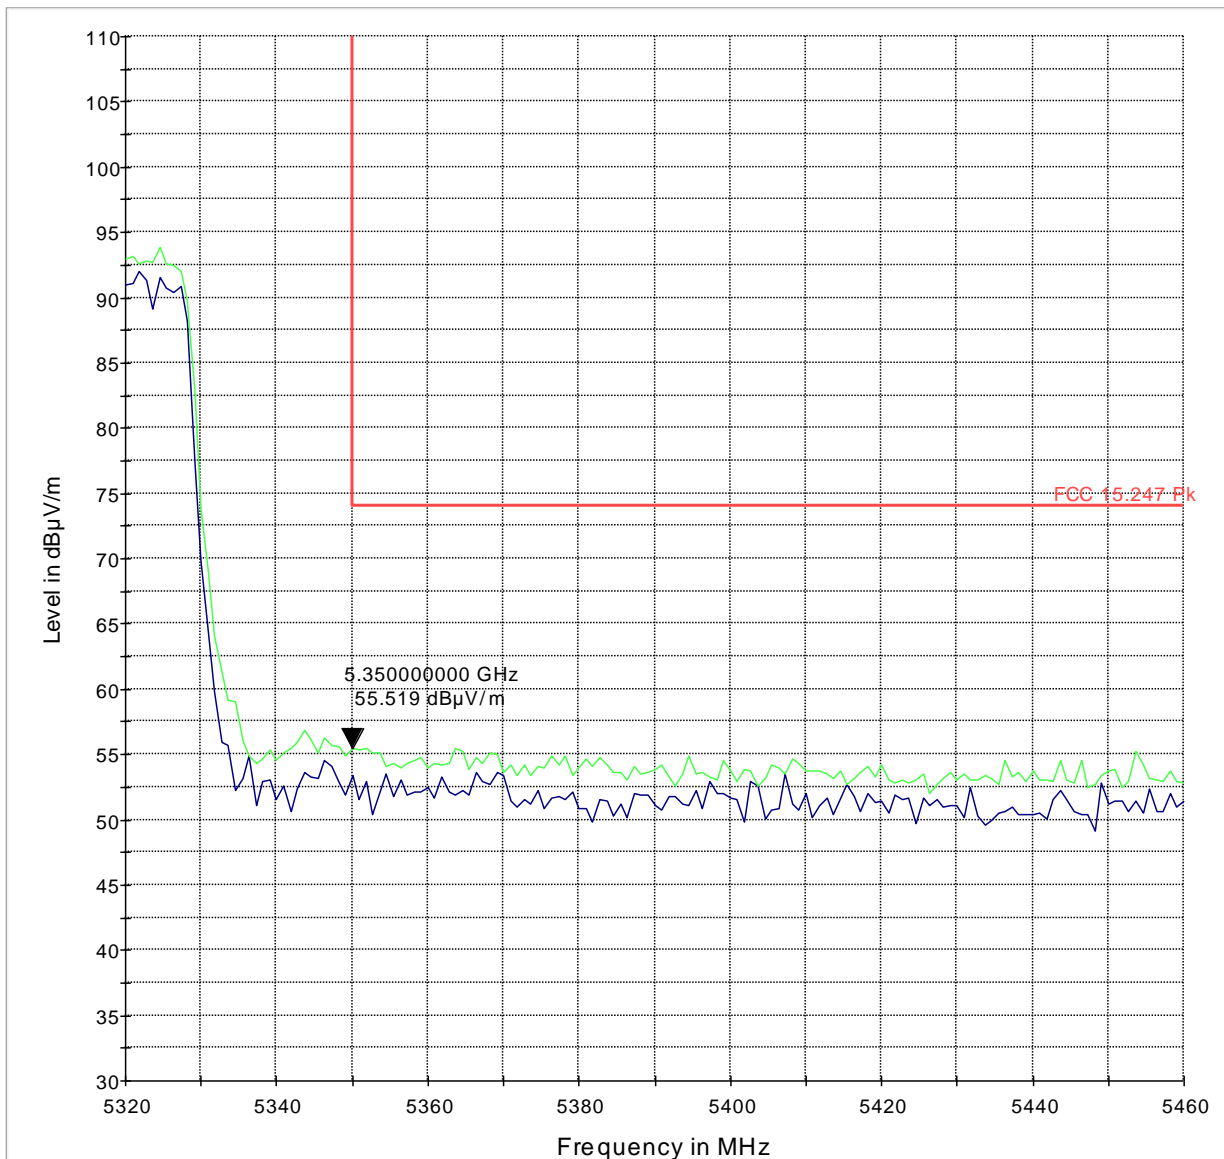


— MaxPeak-ClearW rite-PK+    — MaxPeak-MaxHold-PK+    — FCC 15.247 Pk

### 802.11ac [HT80] Channel 58 Mid Band Edge Average measurement

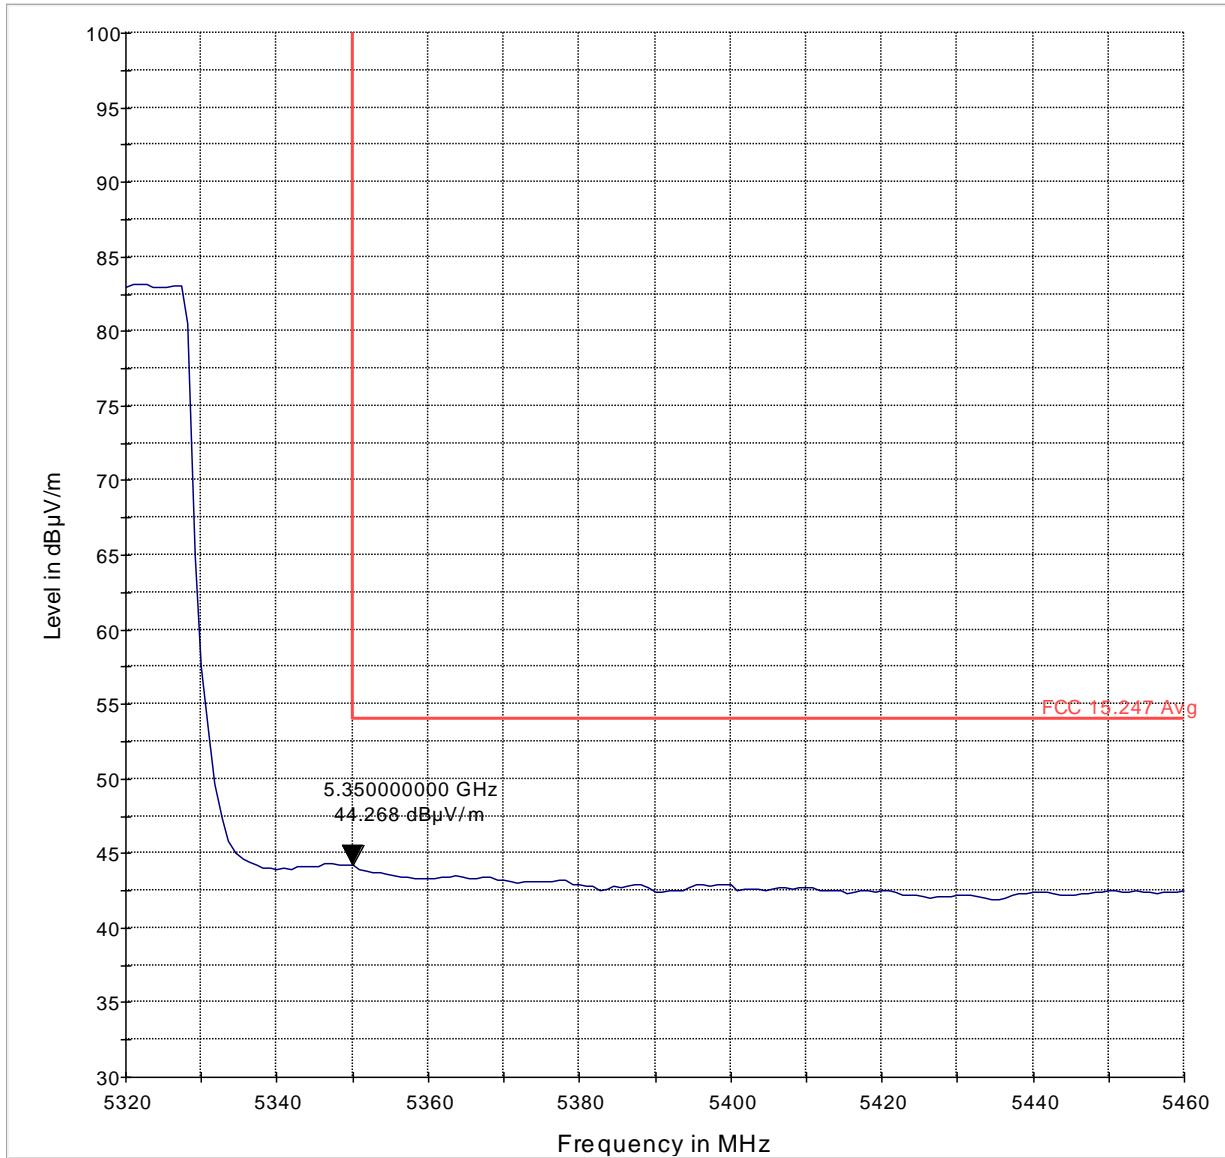


— MaxPeak-MaxHold-PK+    — FCC 15.247 Avg

### 802.11ac [HT80] Channel 106 Low Band Edge Peak measurement

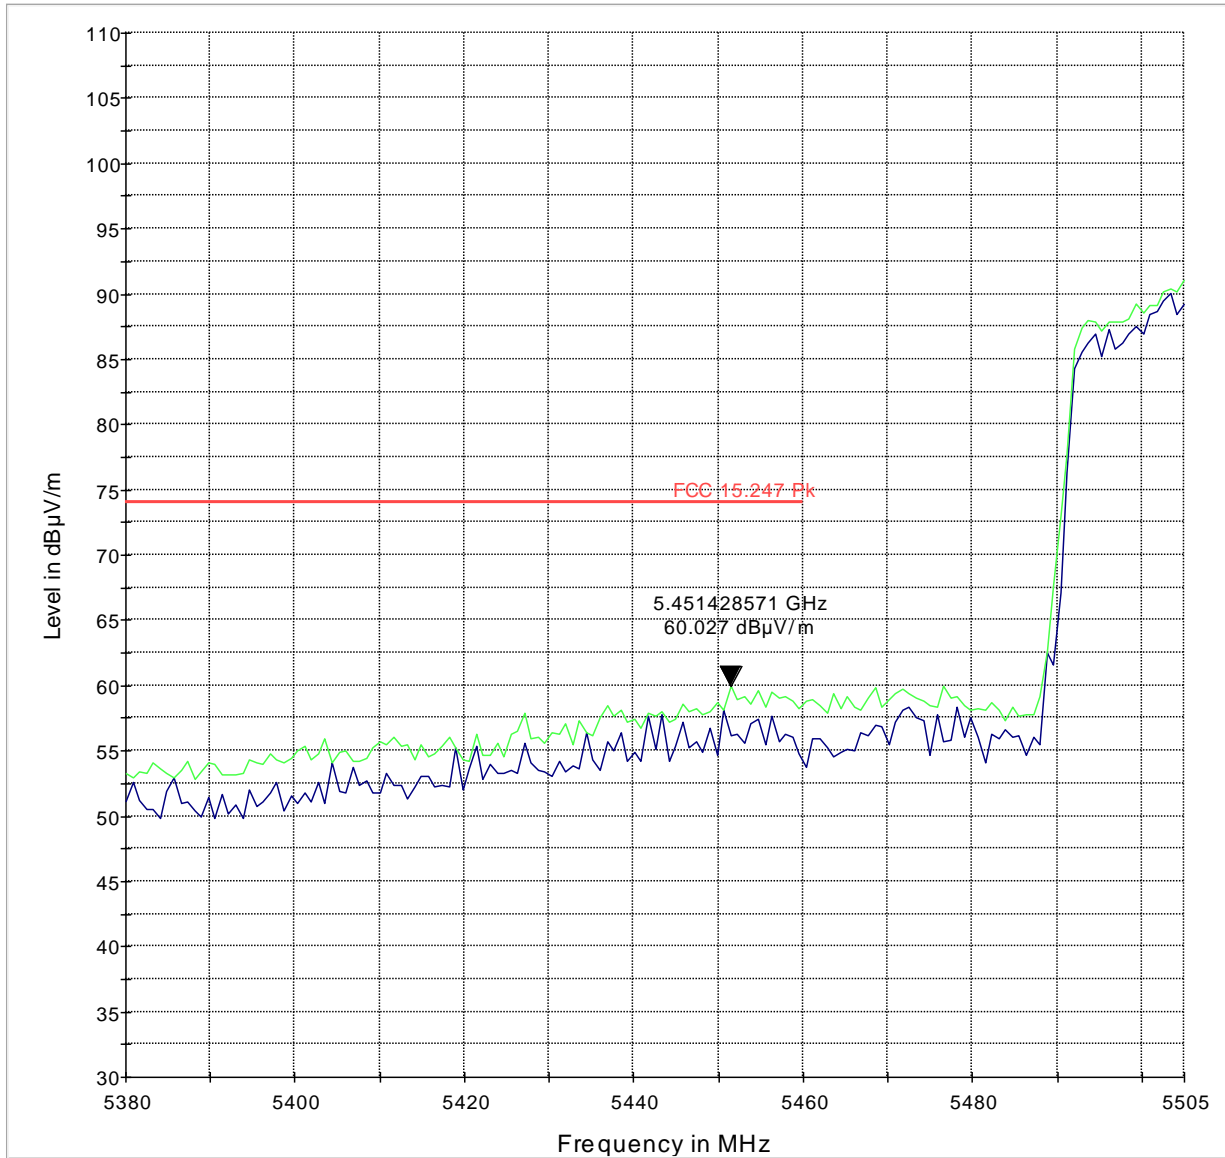


— MaxPeak-ClearW rite-PK+    — MaxPeak-MaxHold-PK+    — FCC 15.247 Pk

### 802.11ac [HT80] Channel 106 Low Band Edge Average measurement

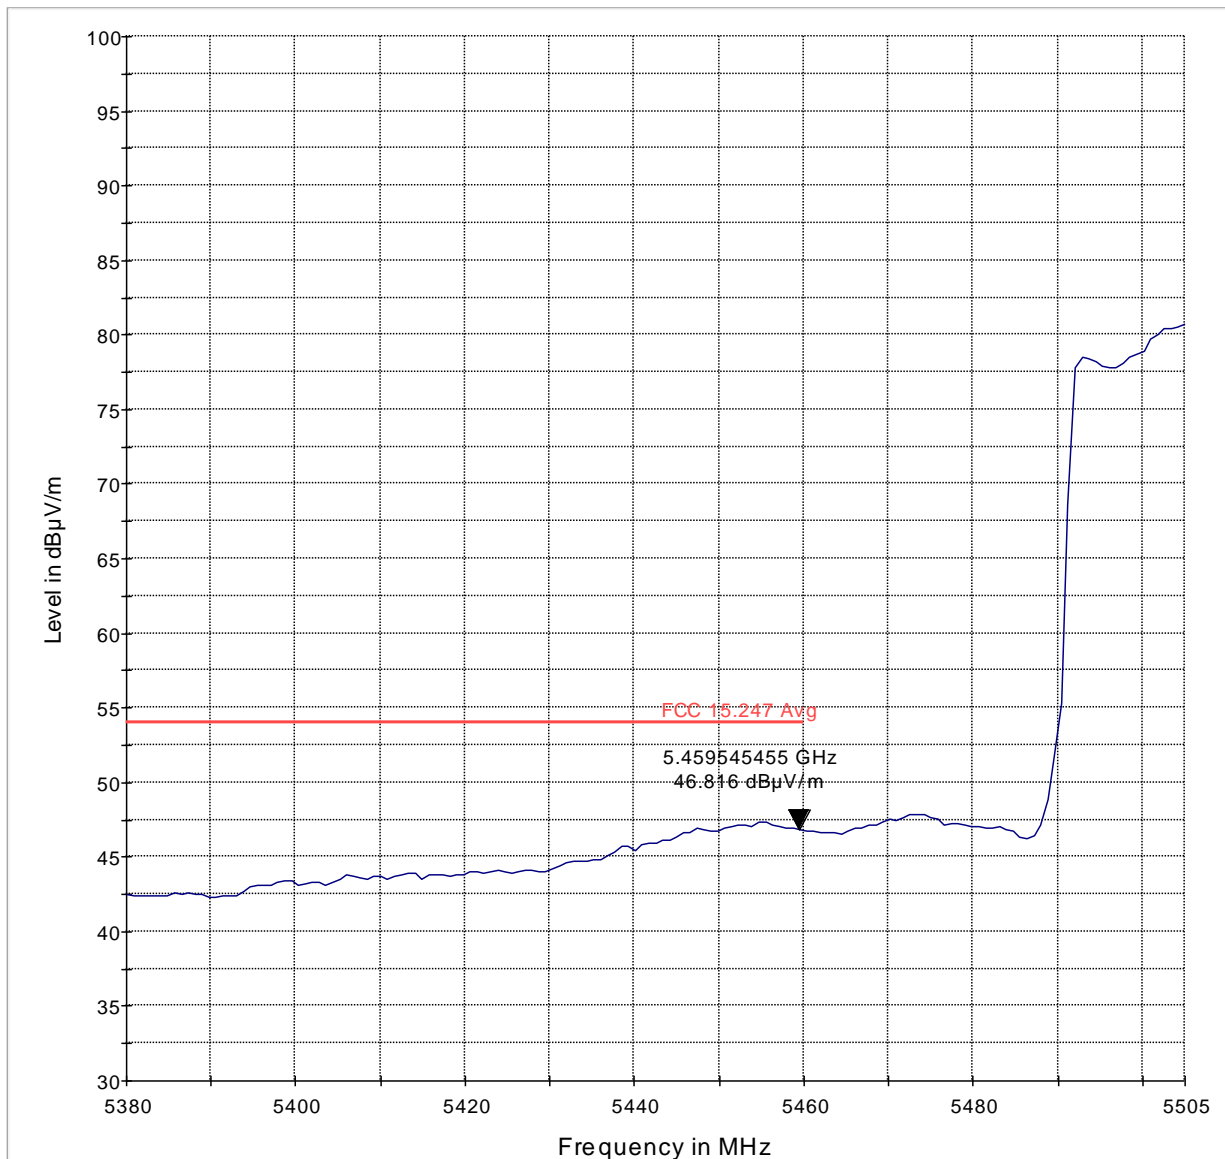

— MaxPeak-MaxHold-PK+    — FCC 15.247 Avg

802.11ac [HT80] Channel 122 High Band Edge Peak measurement (Channel 138 not supported)

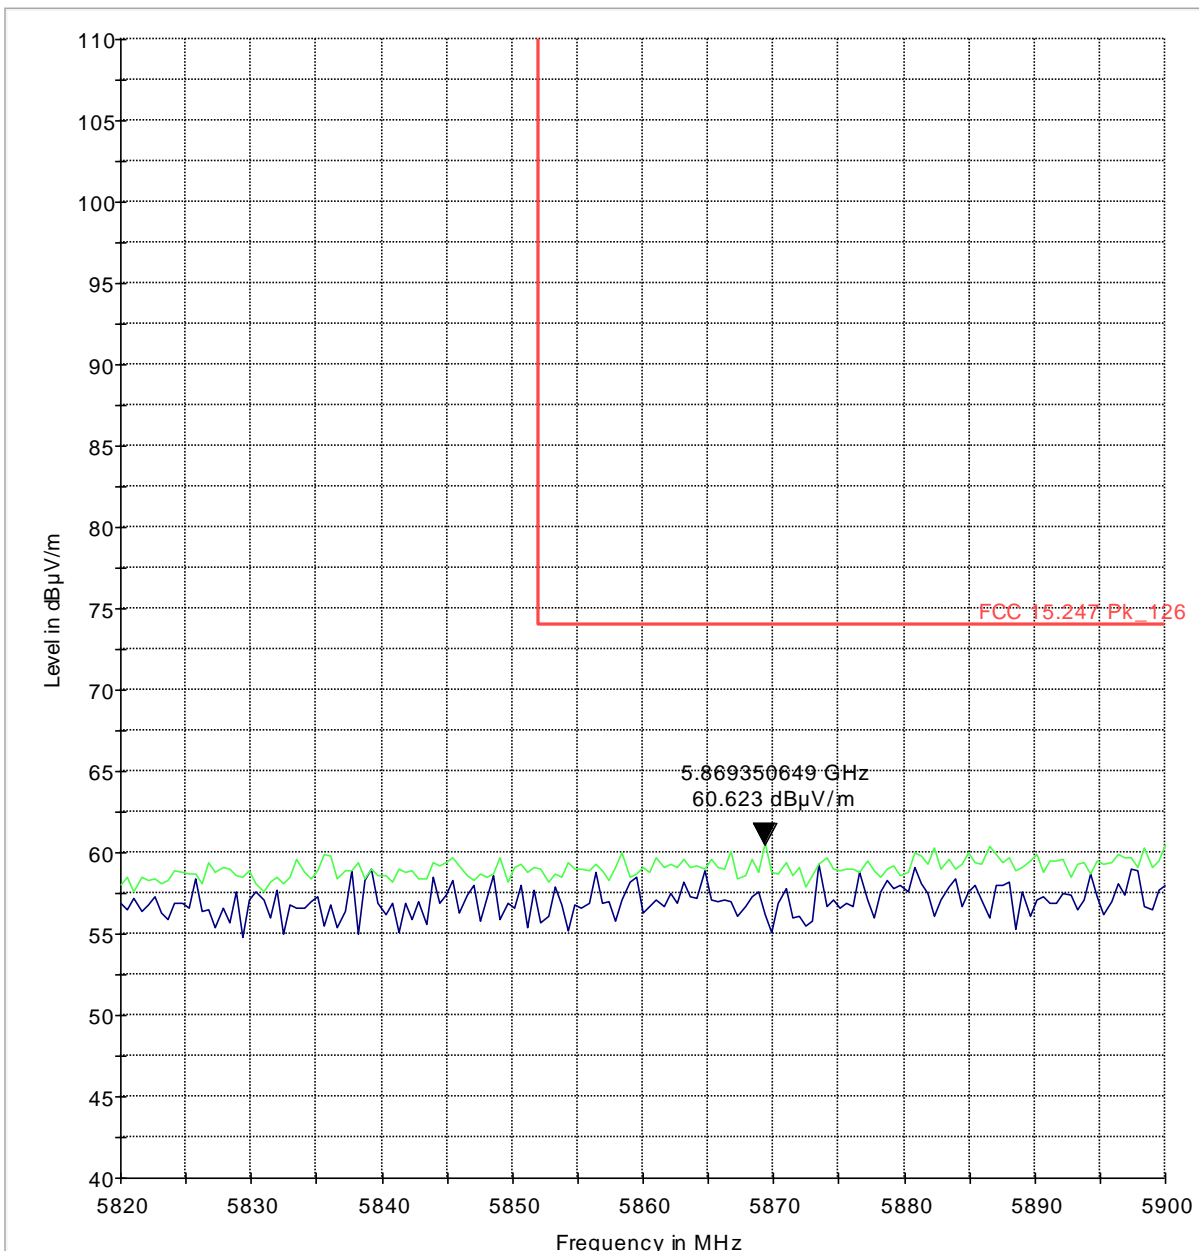


MaxPeak-ClearWrite-PK+    MaxPeak-MaxHold-PK+    FCC 15.247 Pk\_126





802.11ac [HT80] Channel 122 High Band Edge Average measurement (Channel 138 not supported)

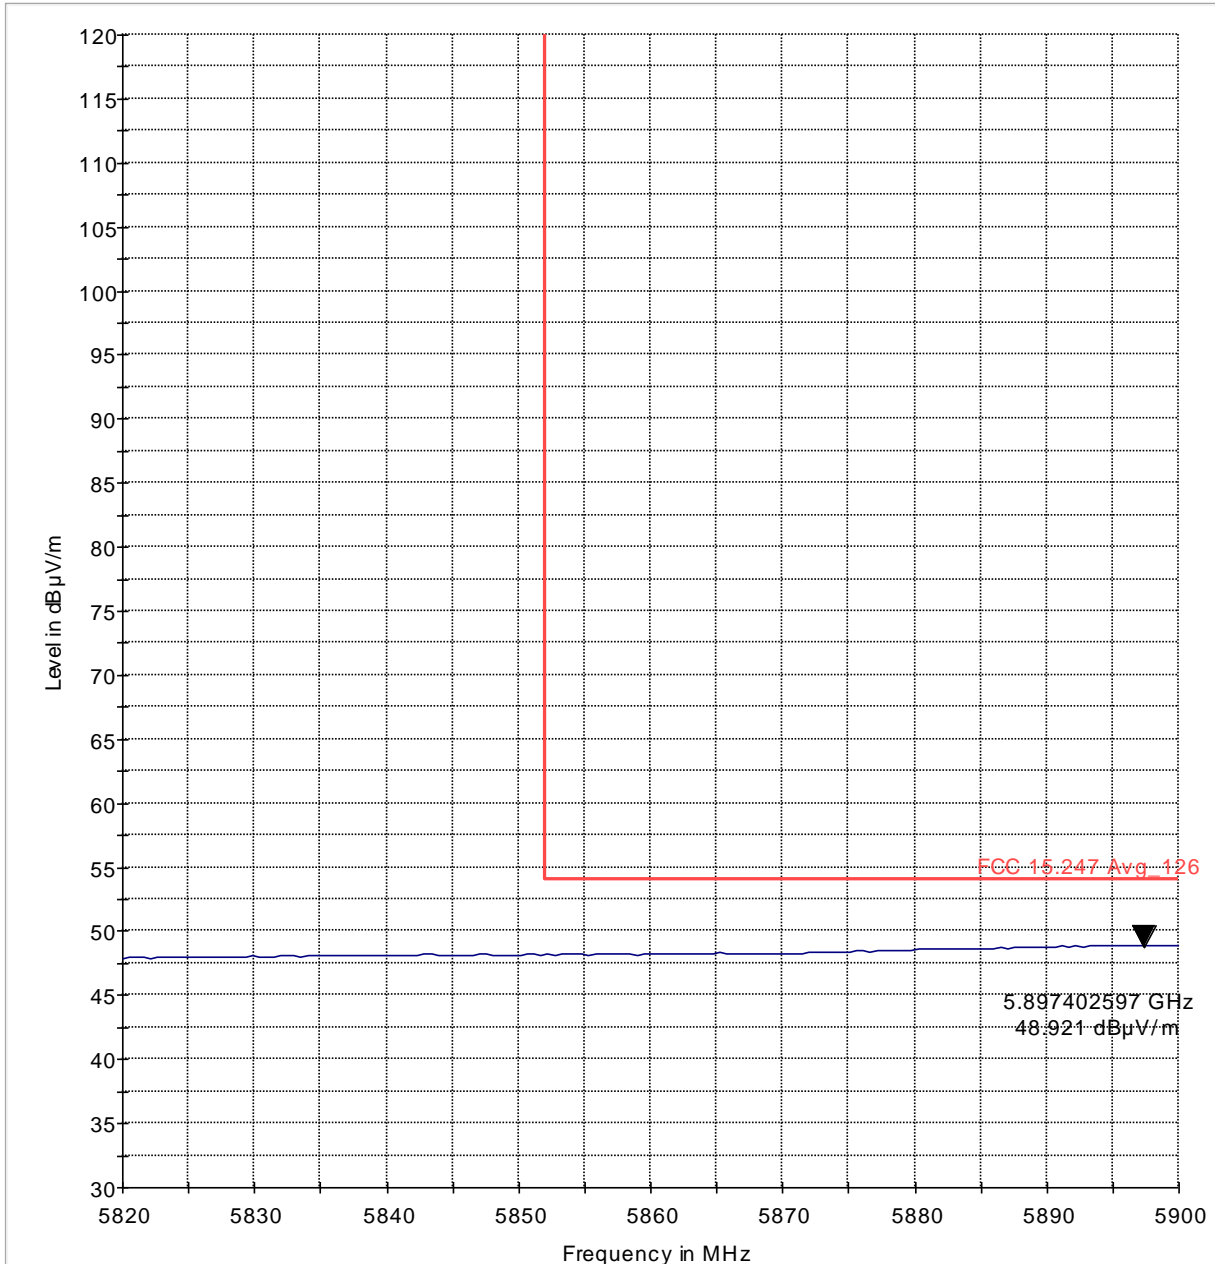

— MaxPeak-MaxHold-PK+    — FCC 15.247 Avg\_126

## 6.4 Unwanted TX Emissions into Restricted and Non-restricted bands

### 6.4.1 Requirements / Limits

§15.407/15.205/15.209

RSS-GEN, ch. 7.7

(b) Undesirable emission limits: Except as shown in paragraph (b)(6) of this section, the peak emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of  $-27$  dBm/MHz.
- (2) For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of  $-27$  dBm/MHz. Devices operating in the 5.25–5.35 GHz band that generate emissions in the 5.15–5.25 GHz band must meet all applicable technical requirements for operation in the 5.15–5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of  $-27$  dBm/MHz in the 5.15–5.25 GHz band.
- (3) For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of  $-27$  dBm/MHz.
- (4) For transmitters operating in the 5.725–5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of  $-17$  dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of  $-27$  dBm/MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.
- (7) The provisions of § 15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency block edges as the design of the equipment permits.

**6.4.2 Limits: §15.209**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (m)
0.009–0.490	2400/F(kHz)	300 <sup>1</sup>
0.490–1.705	24000/F(kHz)	30 <sup>1</sup>
1.705–30.0	30 (29.5 dBμV/m)	30 <sup>1</sup>
30–88	100 (40dBμV/m)	3
88–216	150 (43.5 dBμV/m)	3
216–960	200 (46 dBμV/m)	3
Above 960	500 (54 dBμV/m)	3

**NOTE:** The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels.

1. Measurements made with antenna factors and limits scaled to 3m measurement distance.

**6.4.3 Test Conditions:**

Tnom: 20°C; Vnom: 3.8 VDC

Measurement distance: 3m.

#### 6.4.4 Test Result:

Plots reported here represent the worst case emissions for horizontal and vertical antenna polarizations and for three orientations of the EUT.

Unless mentioned otherwise, the emissions outside the limit lines in the plots are from the transmit signal.

Low/Mid/High channels in each sub-band of operation were tested and results reported for both 802.11a and n modes of operation.

Only worst case mid channel test results reported for 9k-1GHz and >18 GHz ranges of test.

Measurement Uncertainty:  $\pm 3.0\text{dB}$

#### 6.4.5 Testing Notes:

For the measurement range up to 30 MHz in the following plots the field strength results from 3m distance measurement are extrapolated to 300m and 30m distance respectively, by 40dB/decade, according to part 15.31(f)(2), per antenna factor scaling. The red limit line shows the 300 m limit up to 490 kHz, the 30m limit up to 30 MHz and 3m limit above 30MHz.


##### 6.4.5.1 Measurement Verdict

Pass.

6.4.6 Test data/ plots:

<30MHz


Mode: 802.11a-Ch36 (Sub-Band 1)

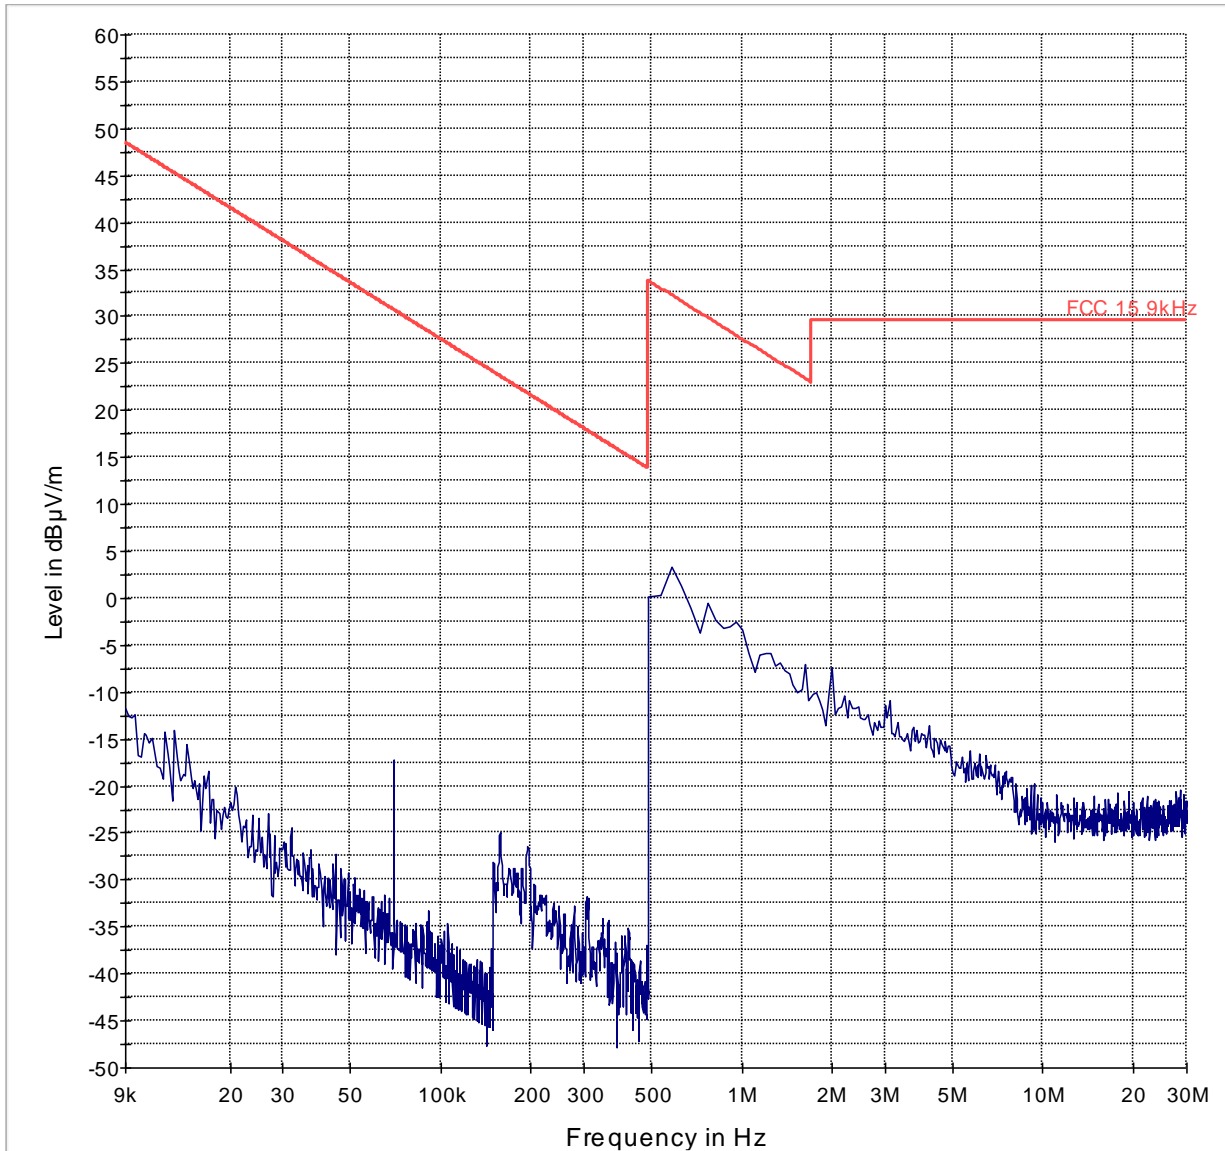

— FCC 15.9kHz — Preview Result 1-PK+

30MHz – 1GHz


Mode: 802.11a-Ch36 (Sub-Band 1)

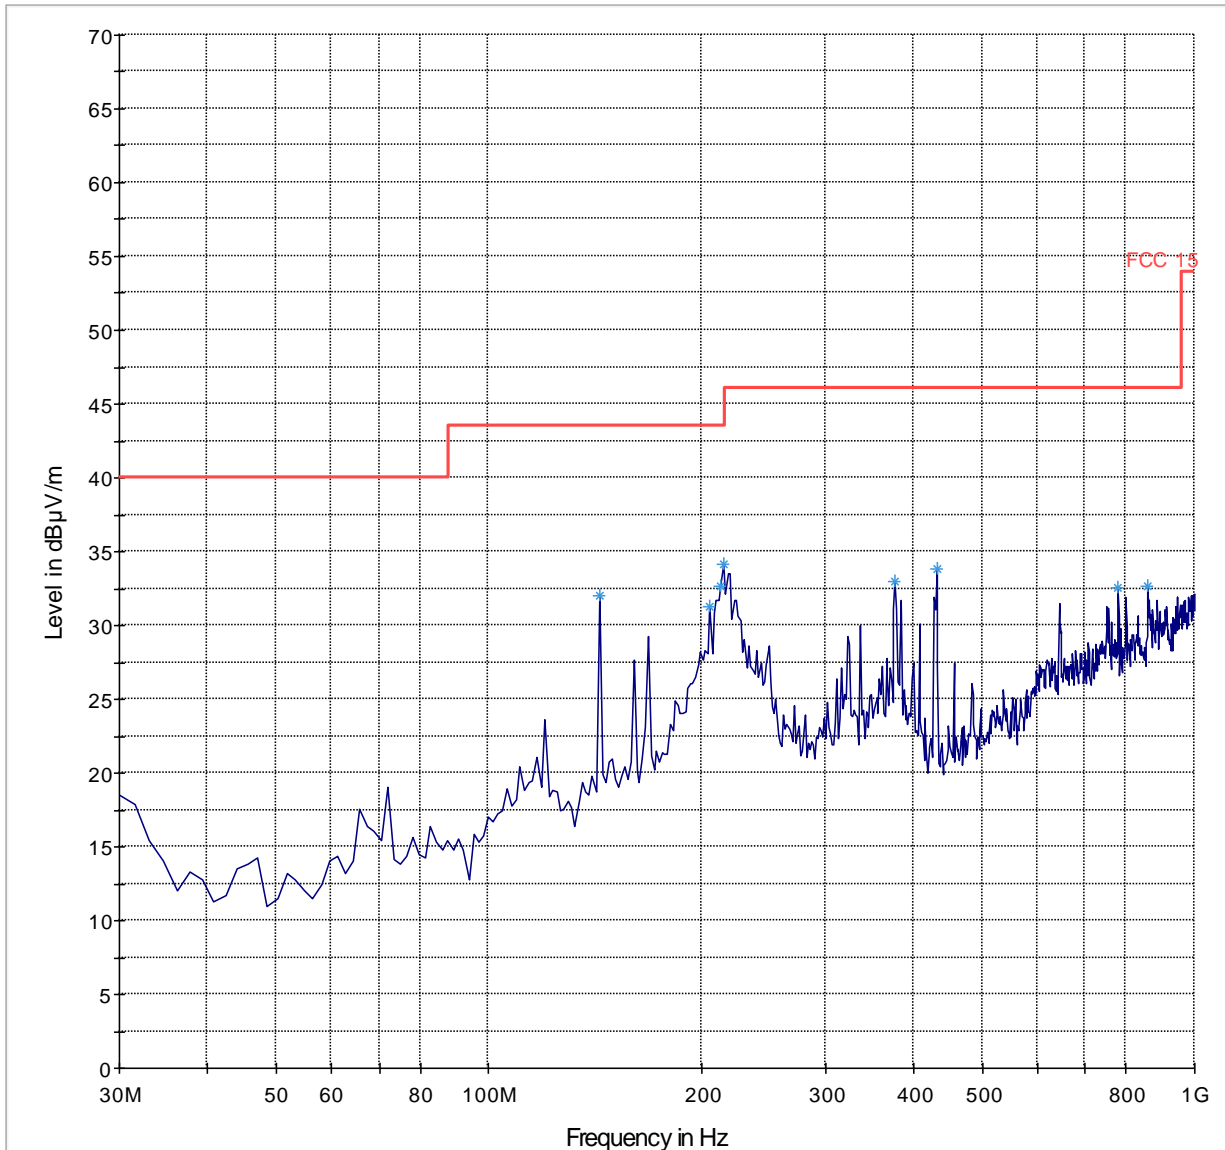

— FCC 15      — Preview Result 1-PK+      \* Data Reduction Result 1 [3]-PK+

1GHz – 18GHz


Mode: 802.11a-Ch36 (Sub-Band 1)

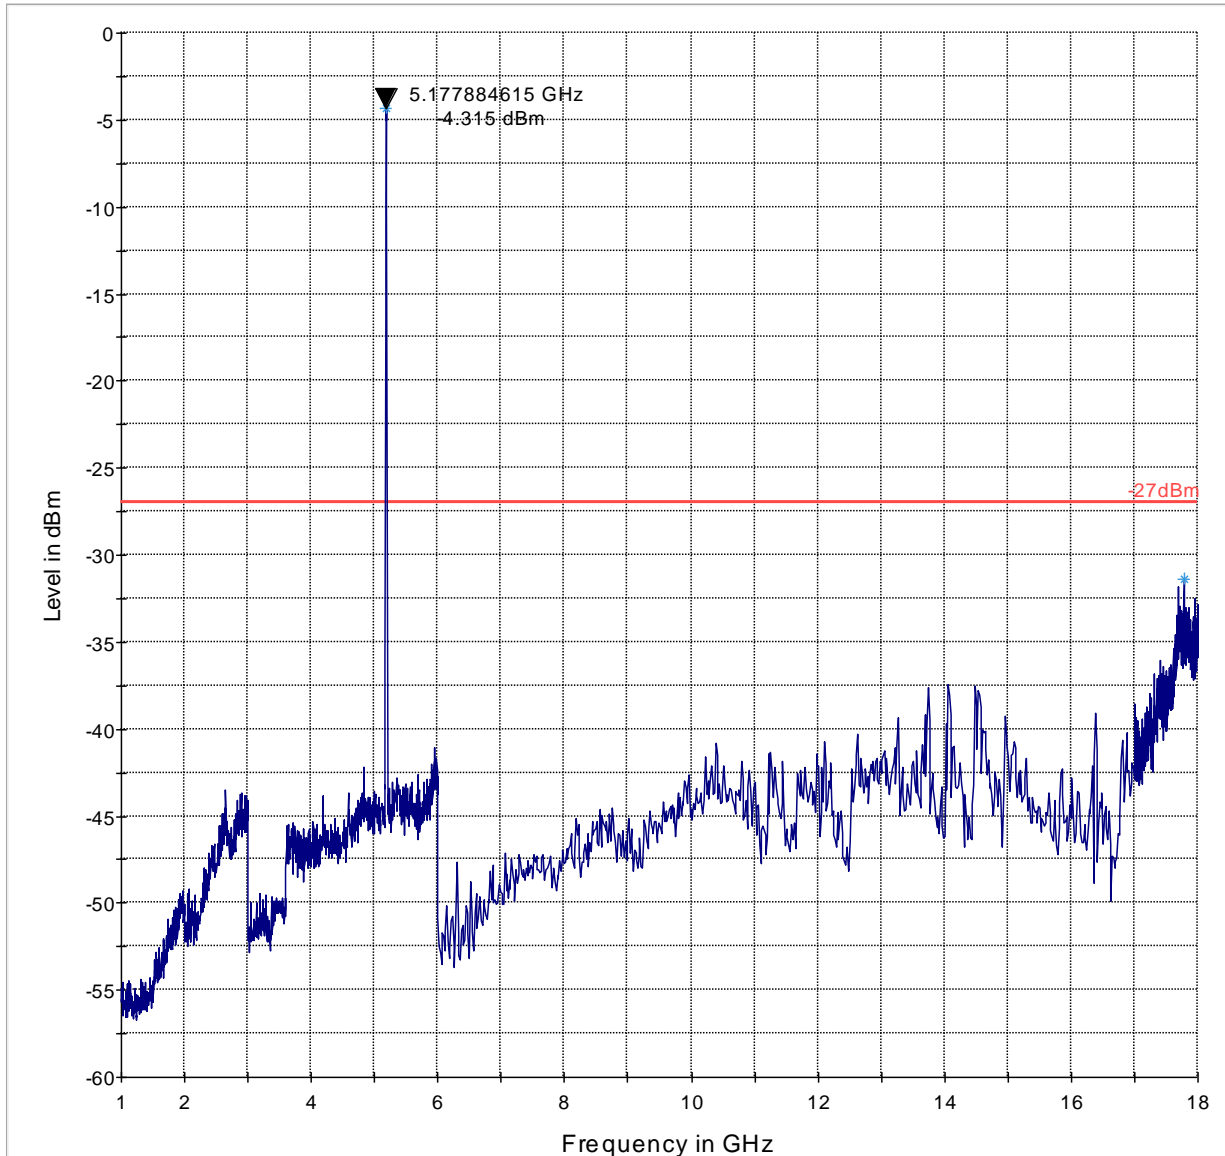

— -27dBm    — Preview Result 1-PK+    \* Data Reduction Result 1 [2]-PK+

18GHz – 40GHz

Mode: 802.11a-Ch36 (Sub-Band 1)

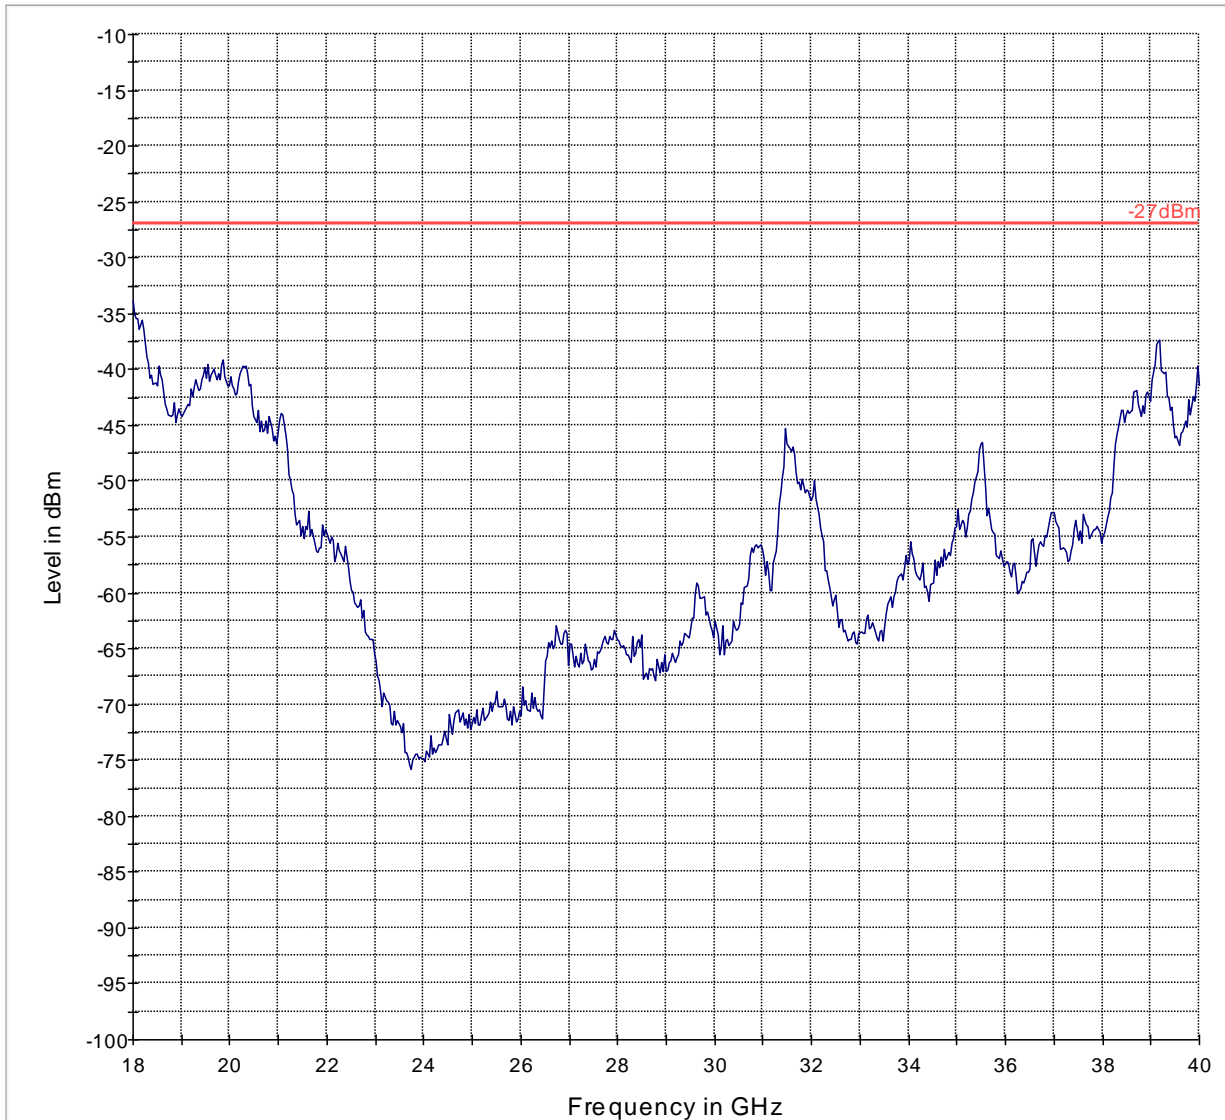


— -27dBm      — Preview Result 1-PK+



<30MHz


Mode: 802.11a-Ch40 (Sub-Band 1)

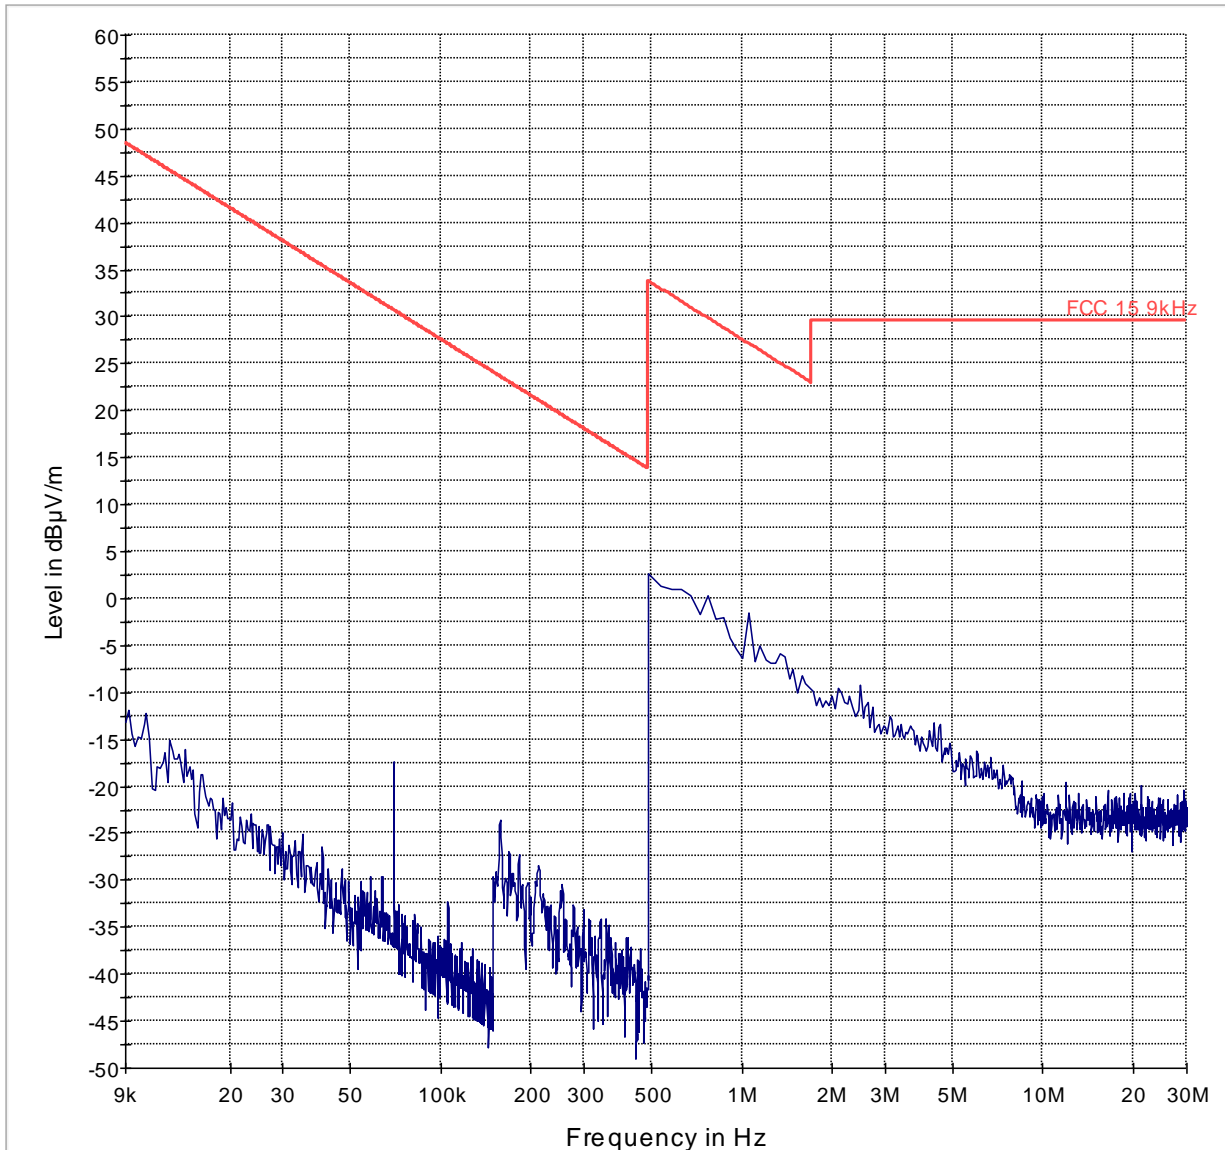

— FCC 15.9kHz — Preview Result 1-PK+

30MHz – 1GHz


Mode: 802.11a-Ch40 (Sub-Band 1)

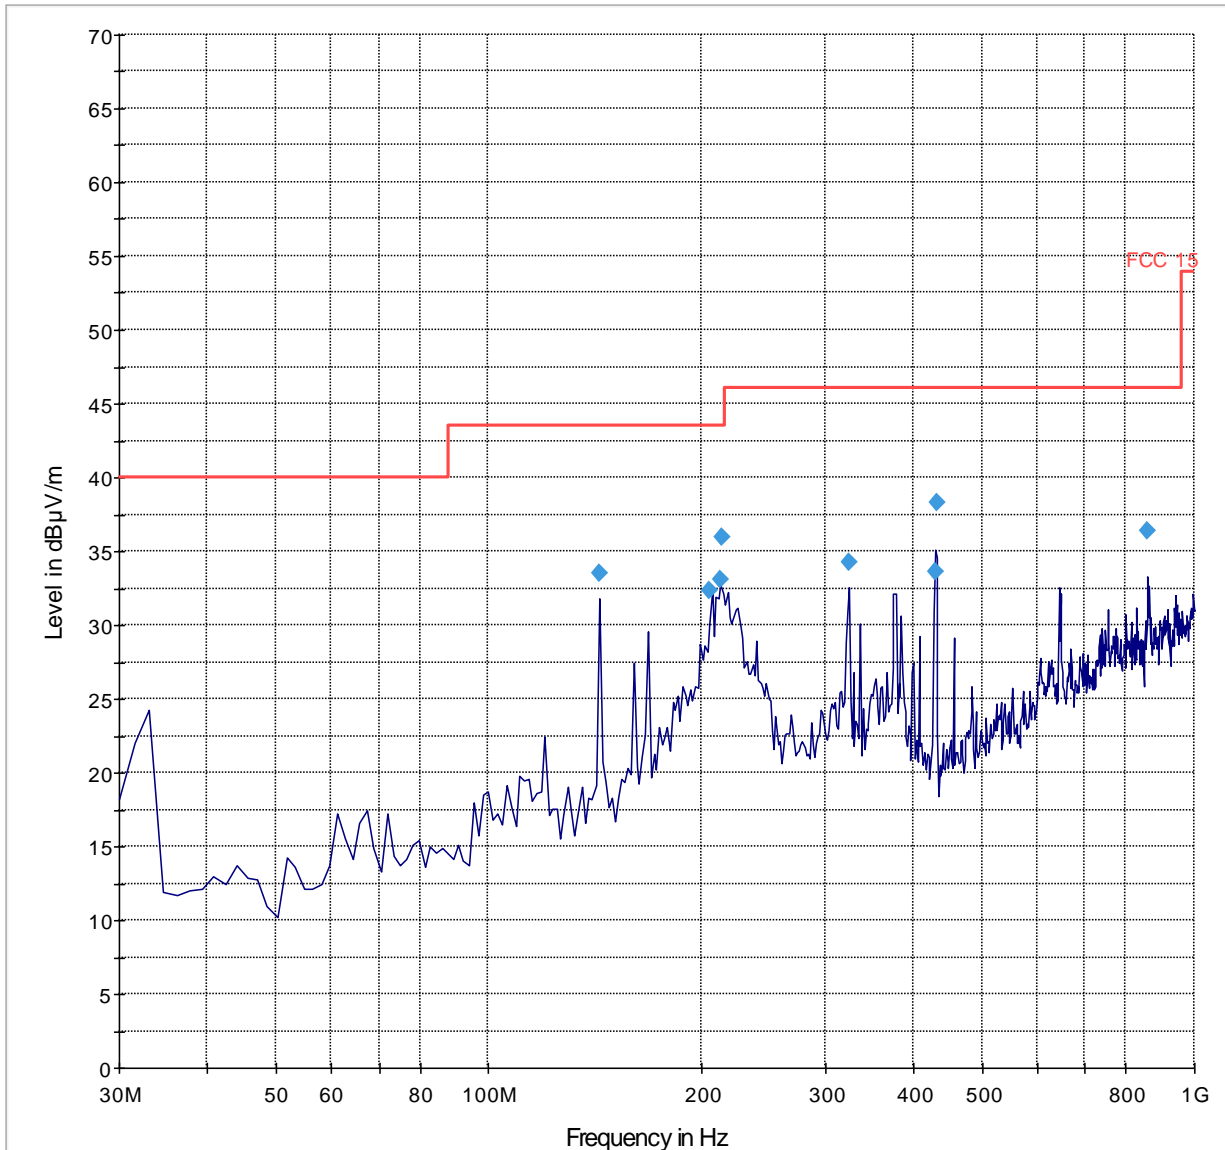

— FCC 15    — Preview Result 1-PK+    ◆ Final Result 1-PK+

1GHz – 18GHz


Mode: 802.11a-Ch40 (Sub-Band 1)

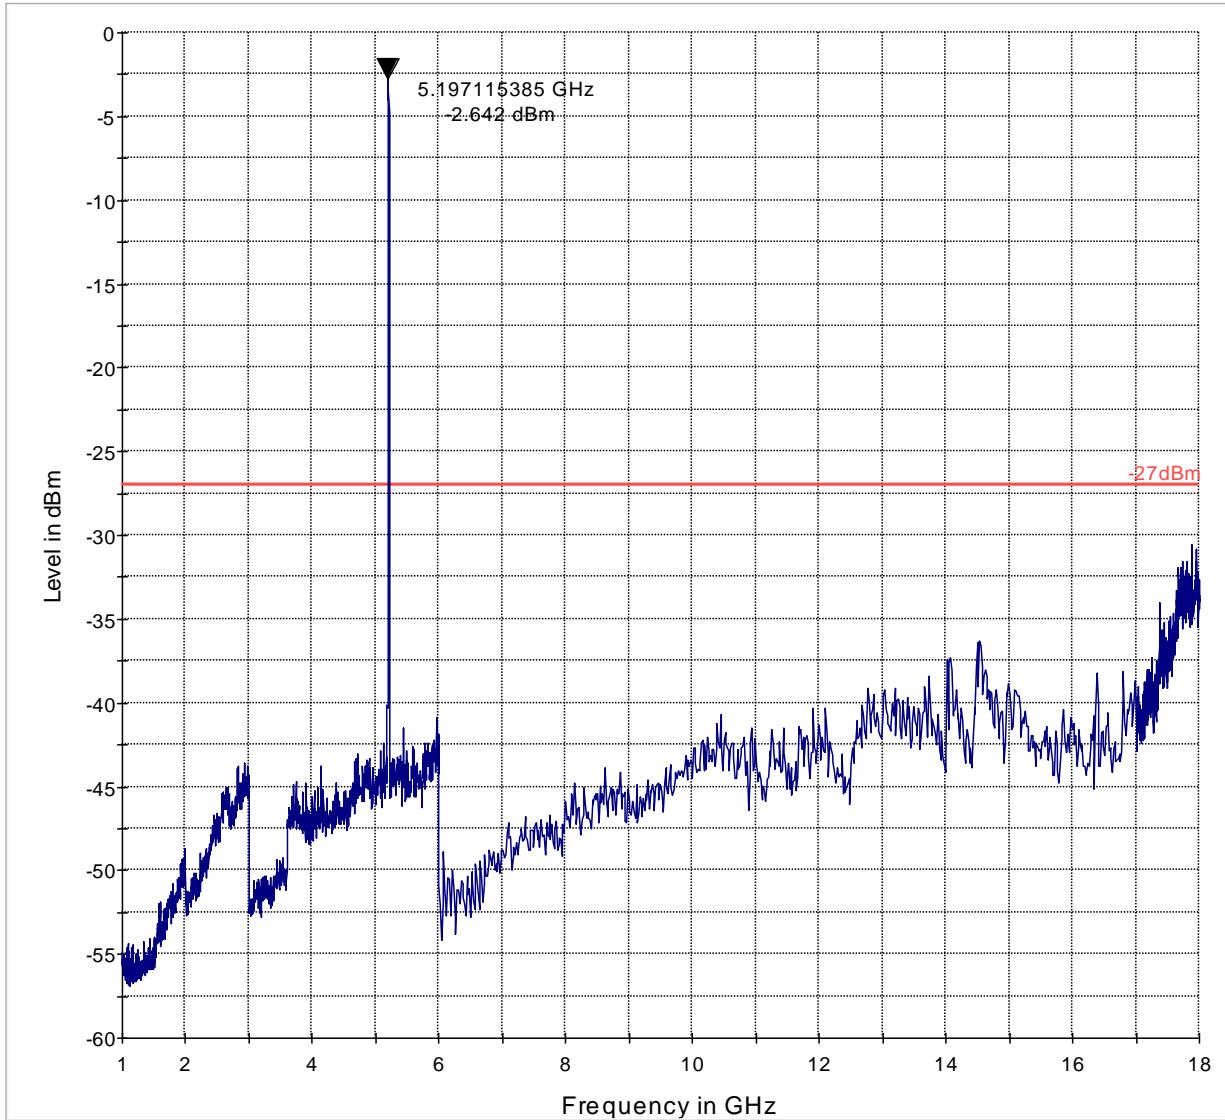

— -27dBm      — Preview Result 1-PK+

18GHz – 40GHz


Mode: 802.11a-Ch40 (Sub-Band 1)

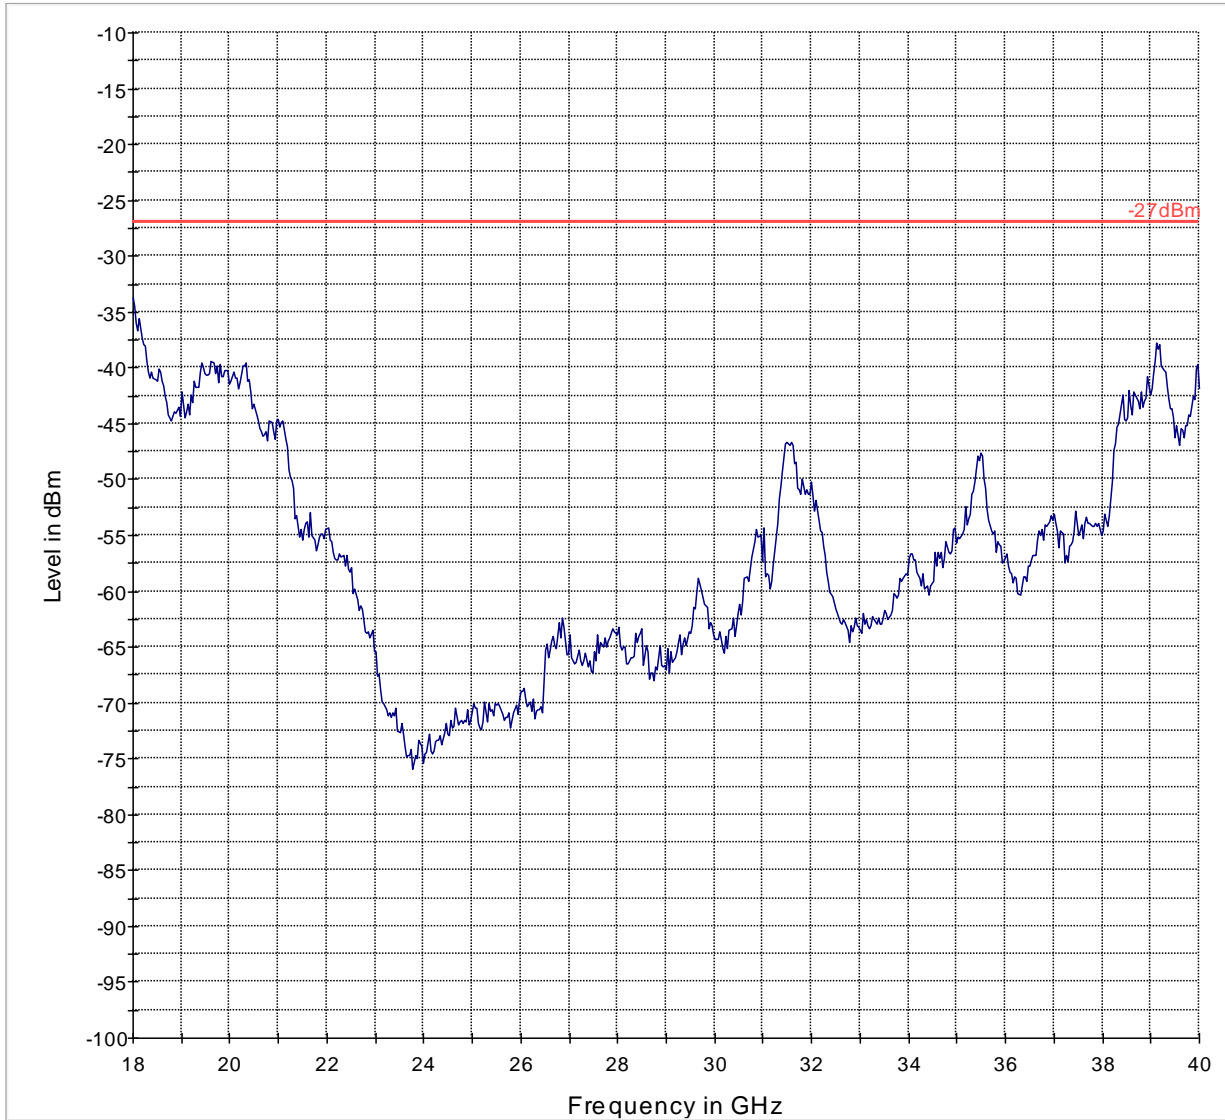

— -27dBm      — Preview Result 1-PK+

<30MHz


Mode: 802.11a-Ch48 (Sub-Band 1)

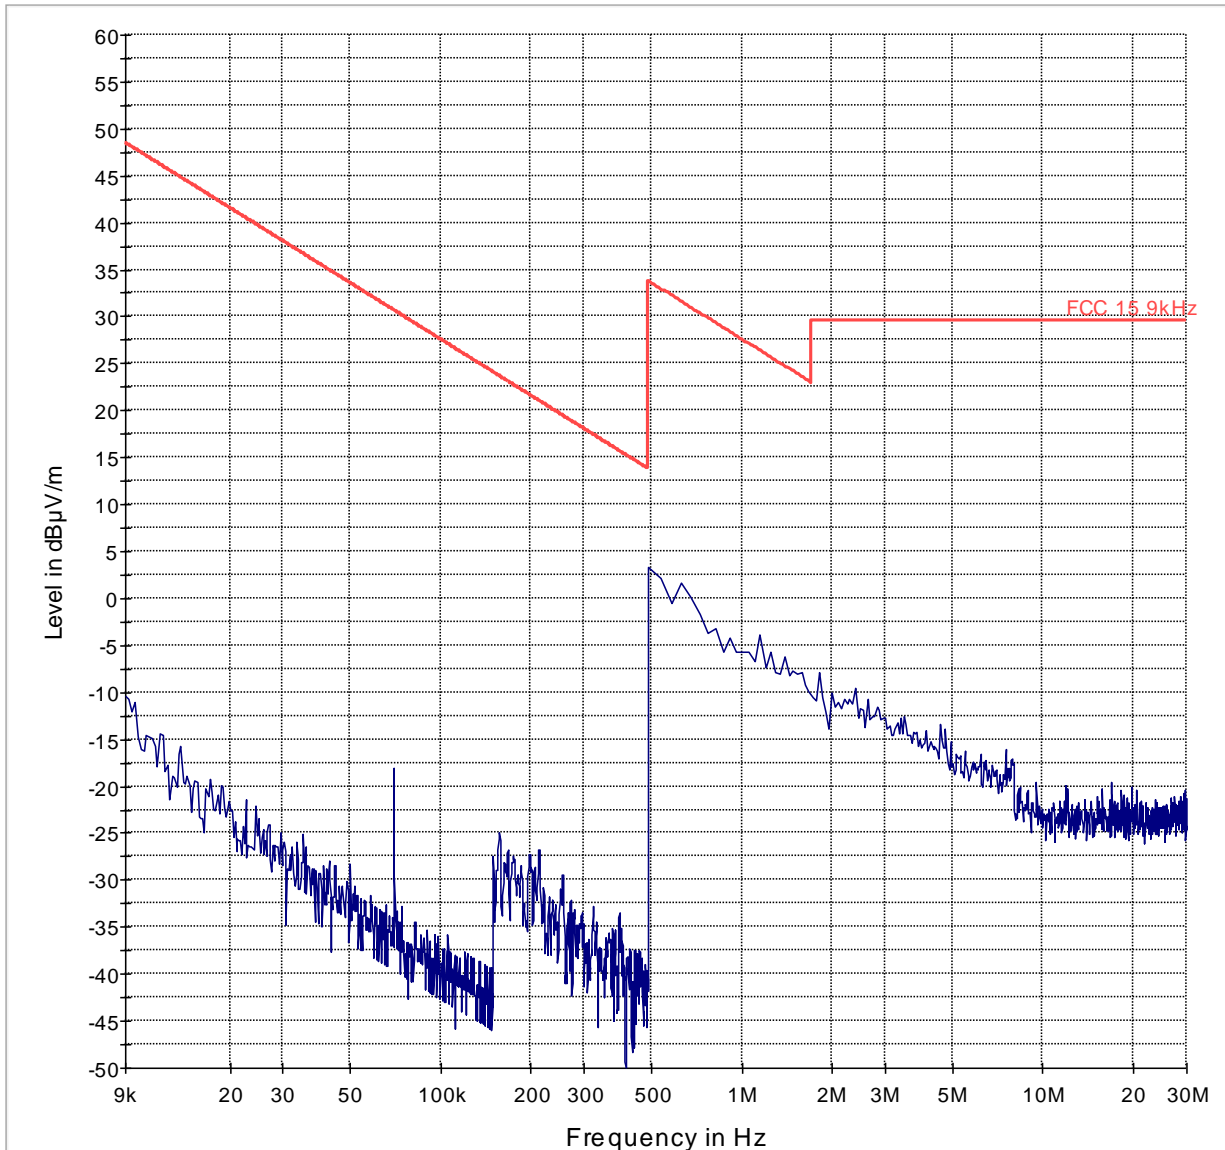

— FCC 15.9kHz — Preview Result 1-PK+

30MHz – 1GHz


Mode: 802.11a-Ch48 (Sub-Band 1)

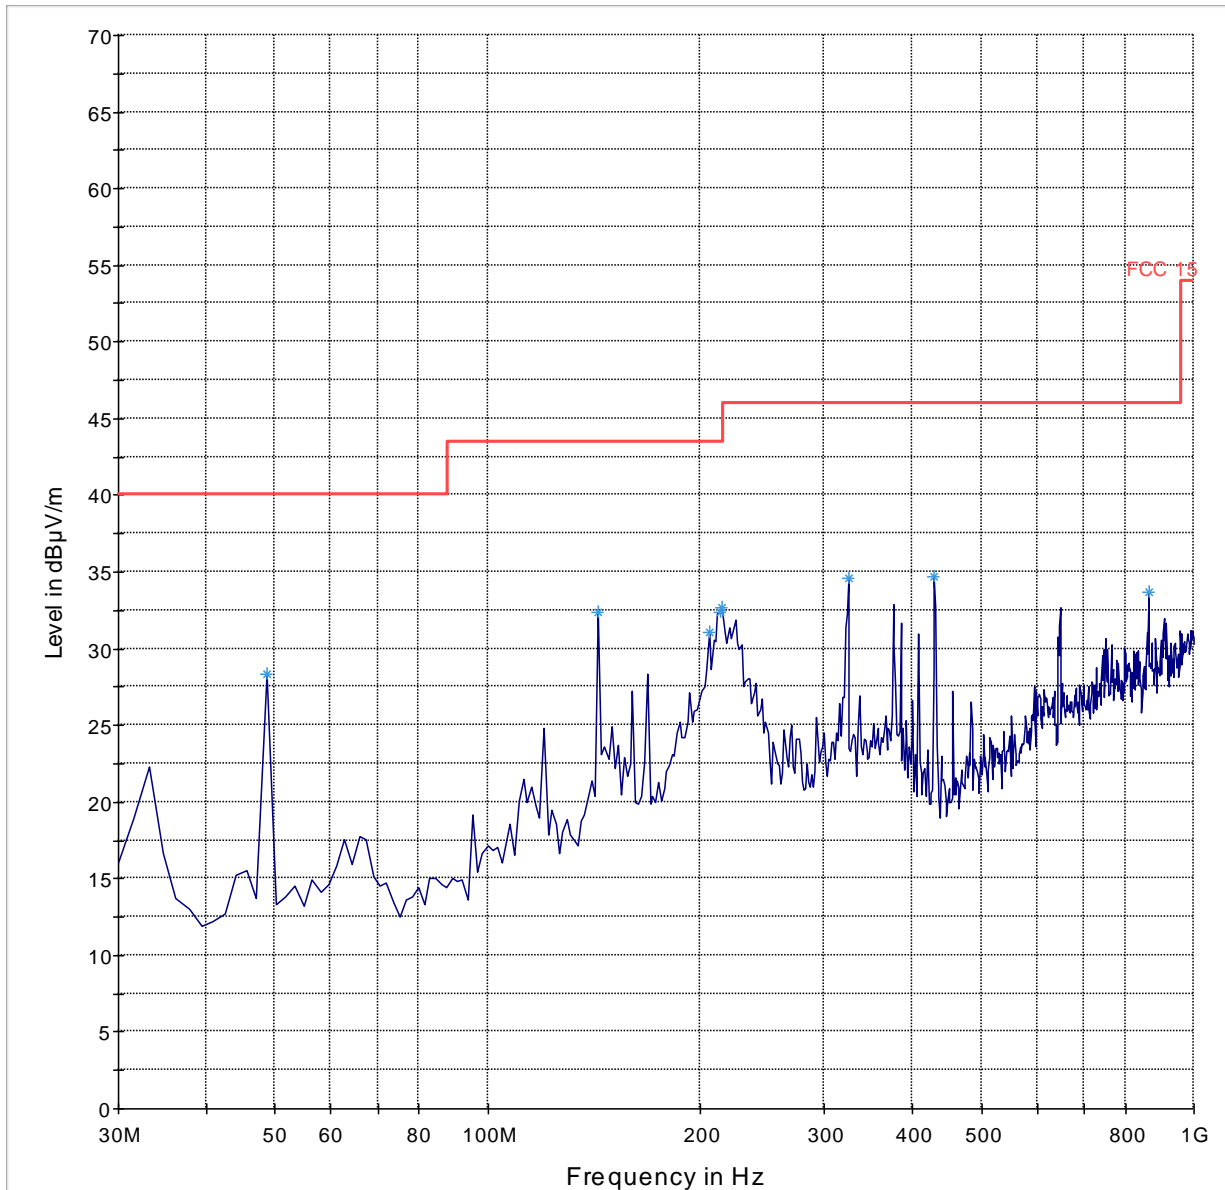

— FCC 15    — Preview Result 1-PK+    \* Data Reduction Result 1 [3]-PK+

1GHz – 18GHz


Mode: 802.11a-Ch48 (Sub-Band 1)

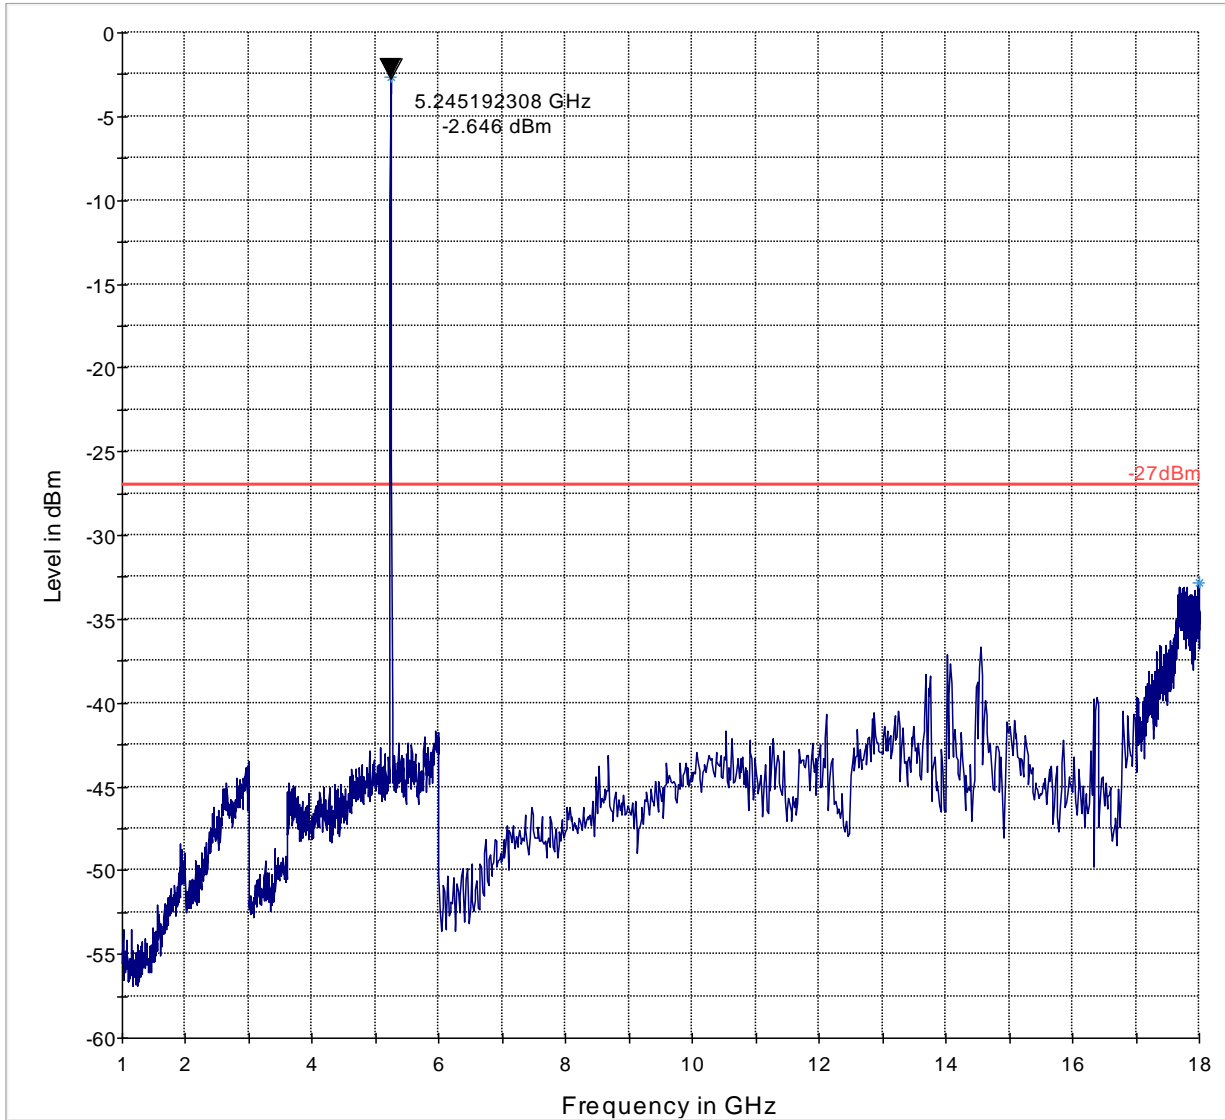

— -27dBm    — Preview Result 1-PK+    \* Data Reduction Result 1 [2]-PK+

18GHz – 40GHz

Mode: 802.11a-Ch48 (Sub-Band 1)

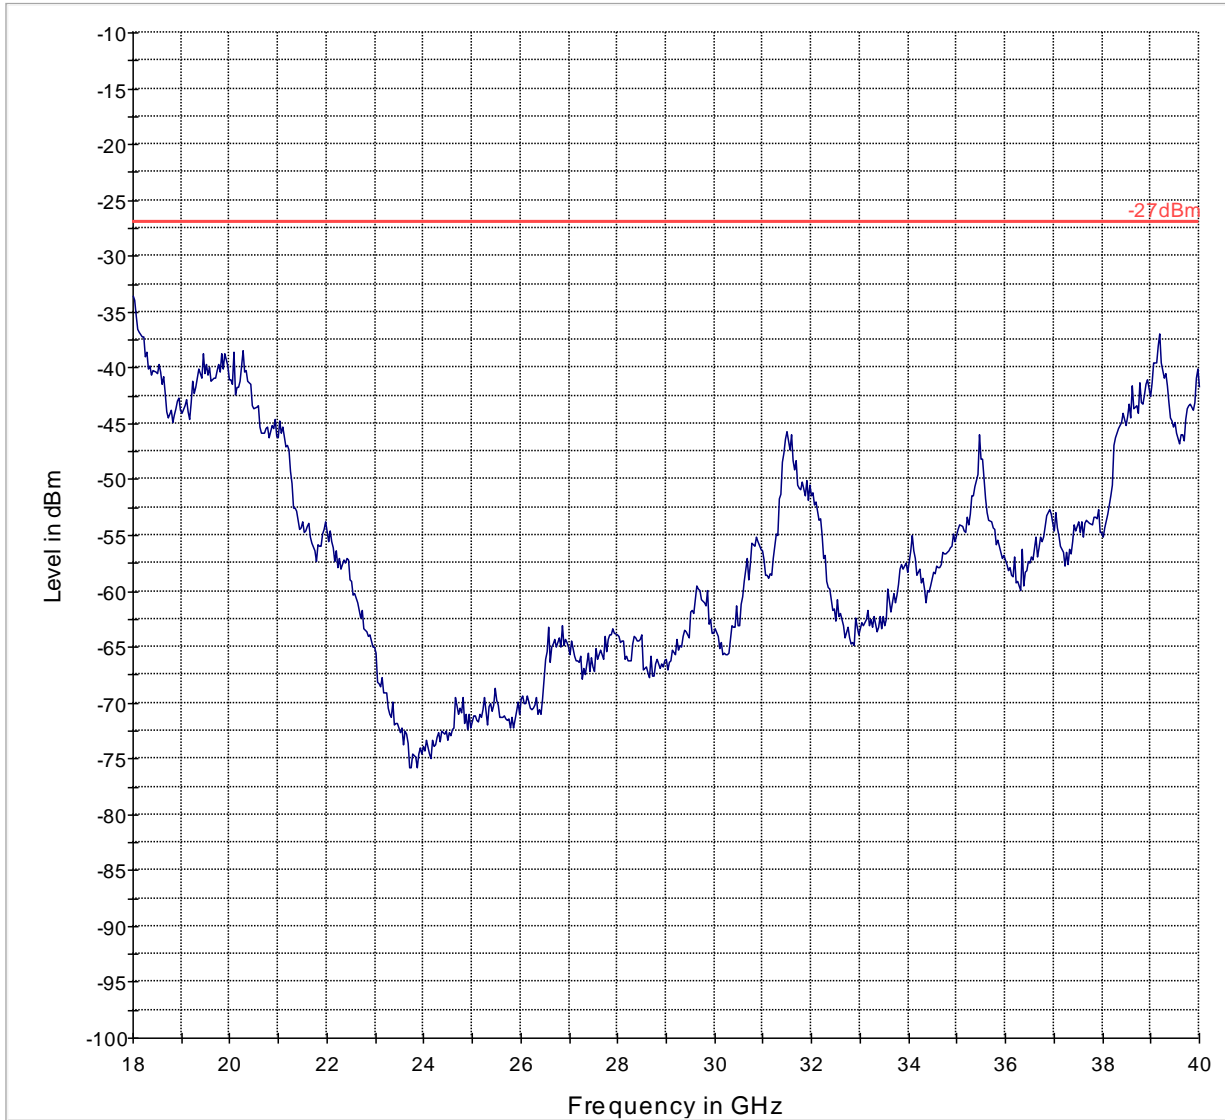


— -27dBm      — Preview Result 1-PK+



<30MHz


Mode: 802.11a-Ch52 (Sub-Band 2)

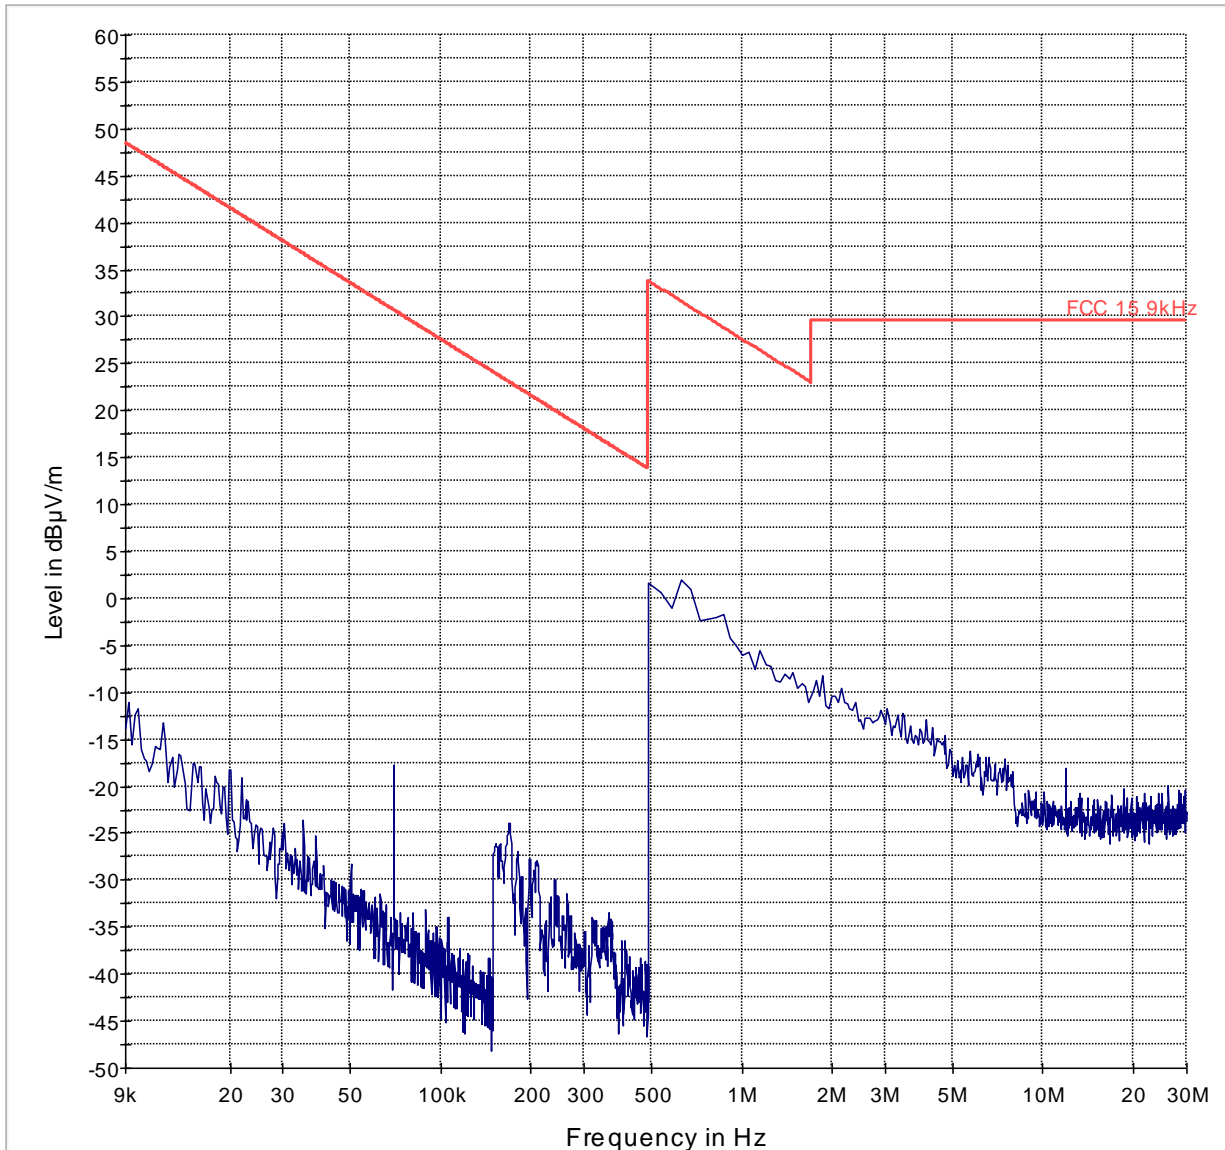

— FCC 15.9kHz — Preview Result 1-PK+

30MHz – 1GHz


Mode: 802.11a-Ch52 (Sub-Band 2)

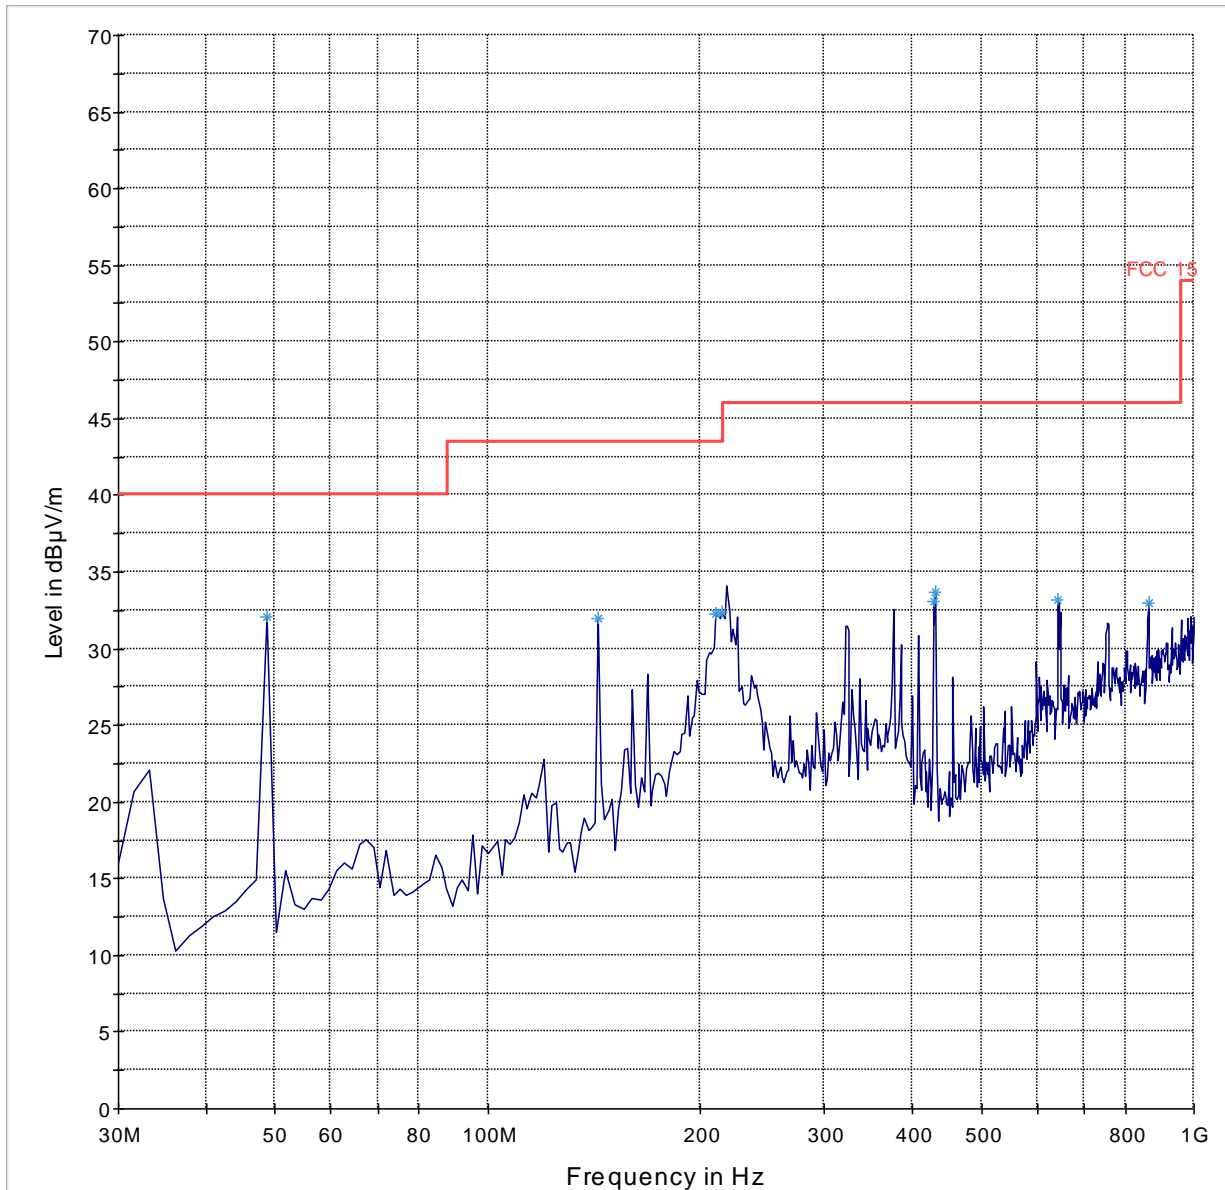

— FCC 15    — Preview Result 1-PK+    \* Data Reduction Result 1 [3]-PK+

1GHz – 18GHz


Mode: 802.11a-Ch52 (Sub-Band 2)

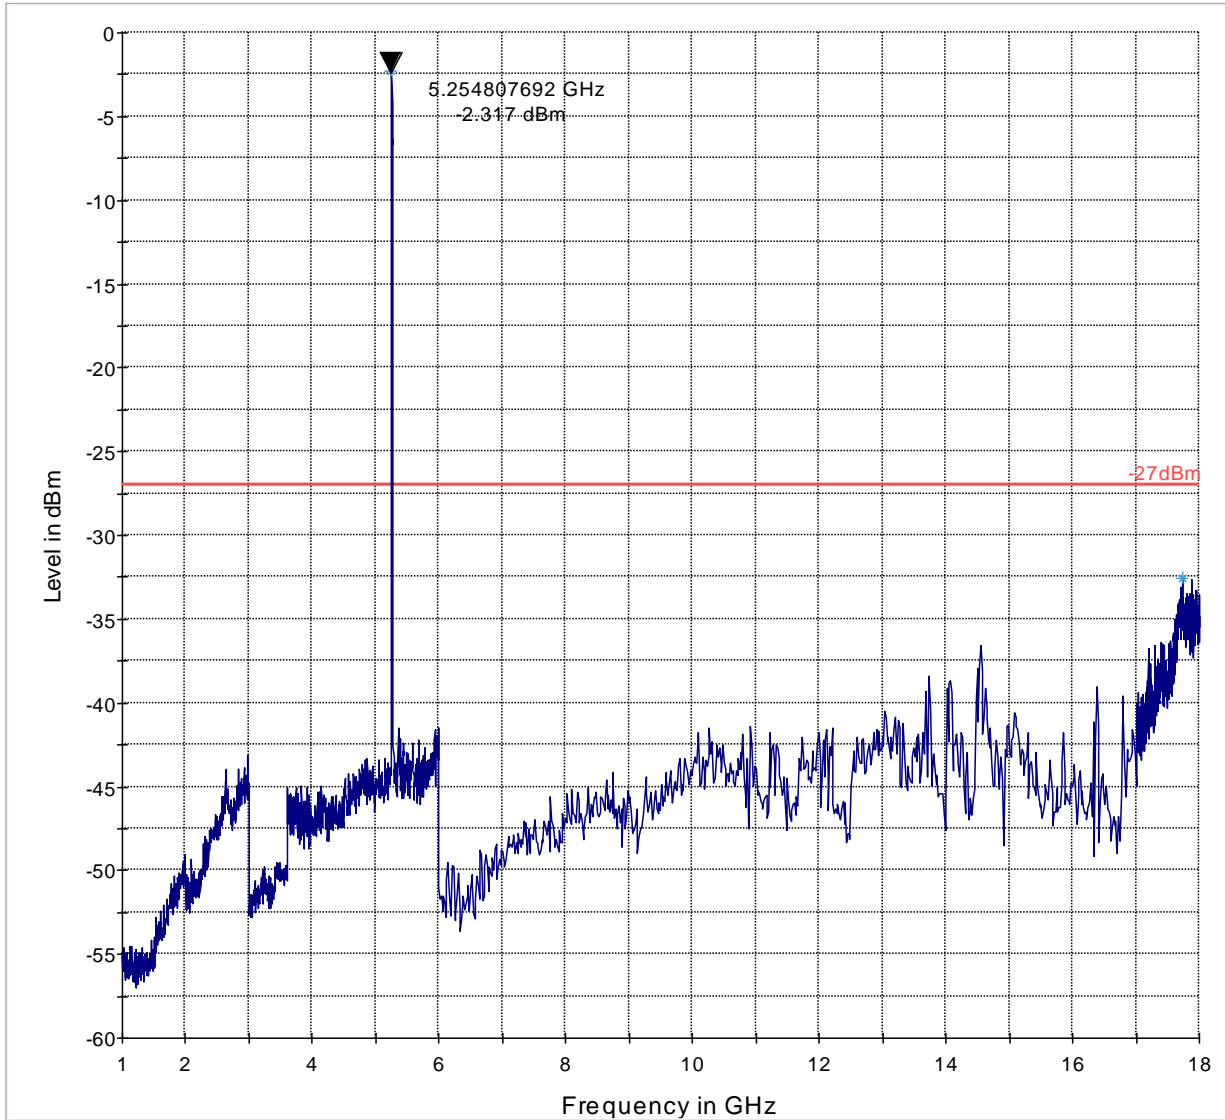

— -27dBm      — Preview Result 1-PK+      \* Data Reduction Result 1 [2]-PK+

18GHz – 40GHz


Mode: 802.11a-Ch52 (Sub-Band 2)

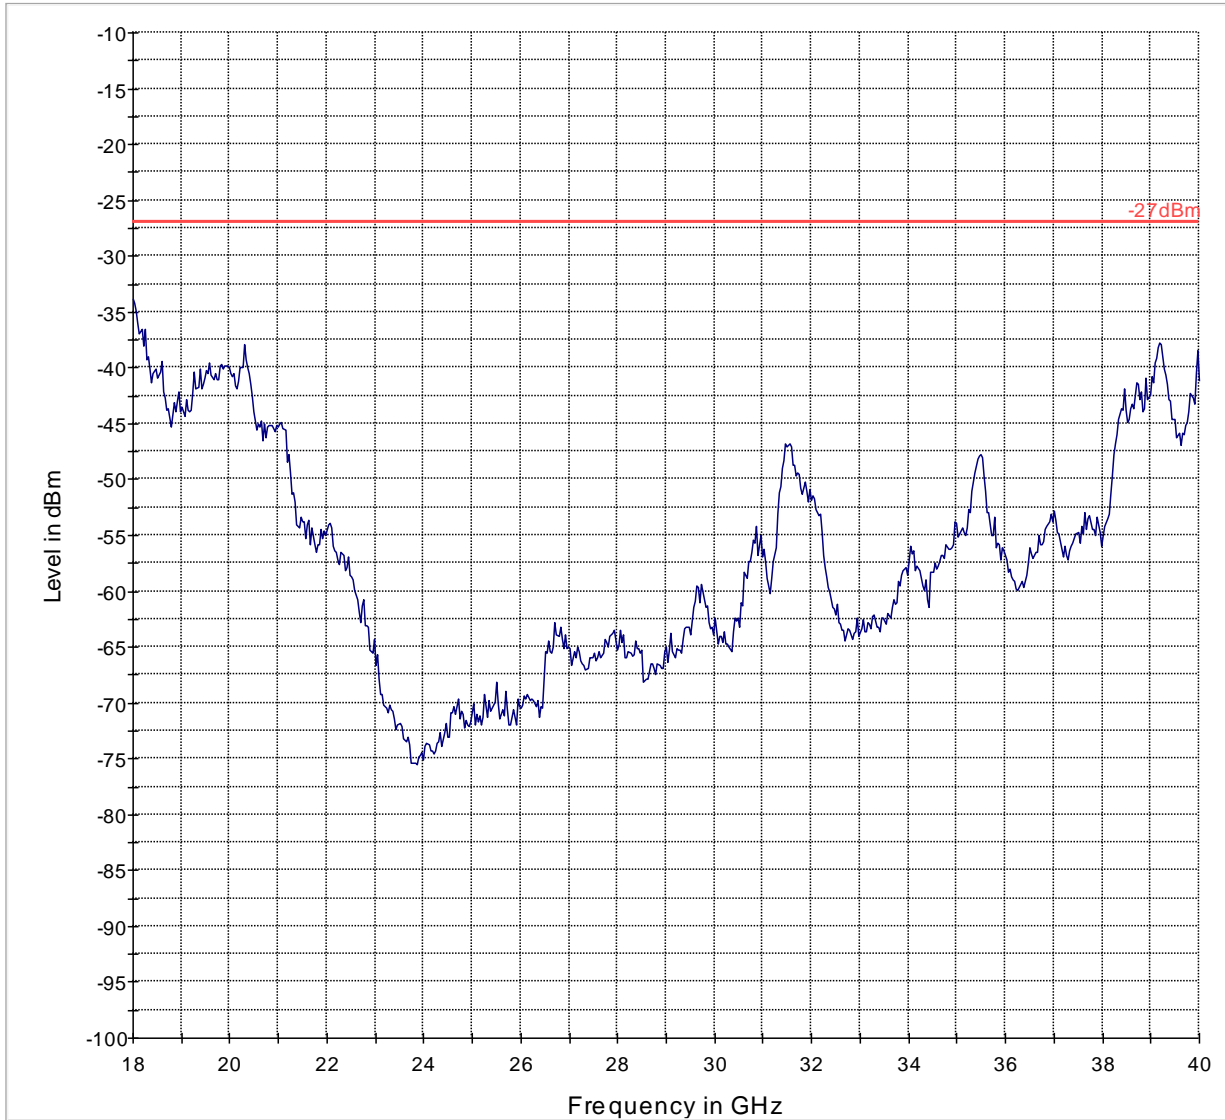

— -27dBm      — Preview Result 1-PK+

<30MHz


Mode: 802.11a-Ch60 (Sub-Band 2)

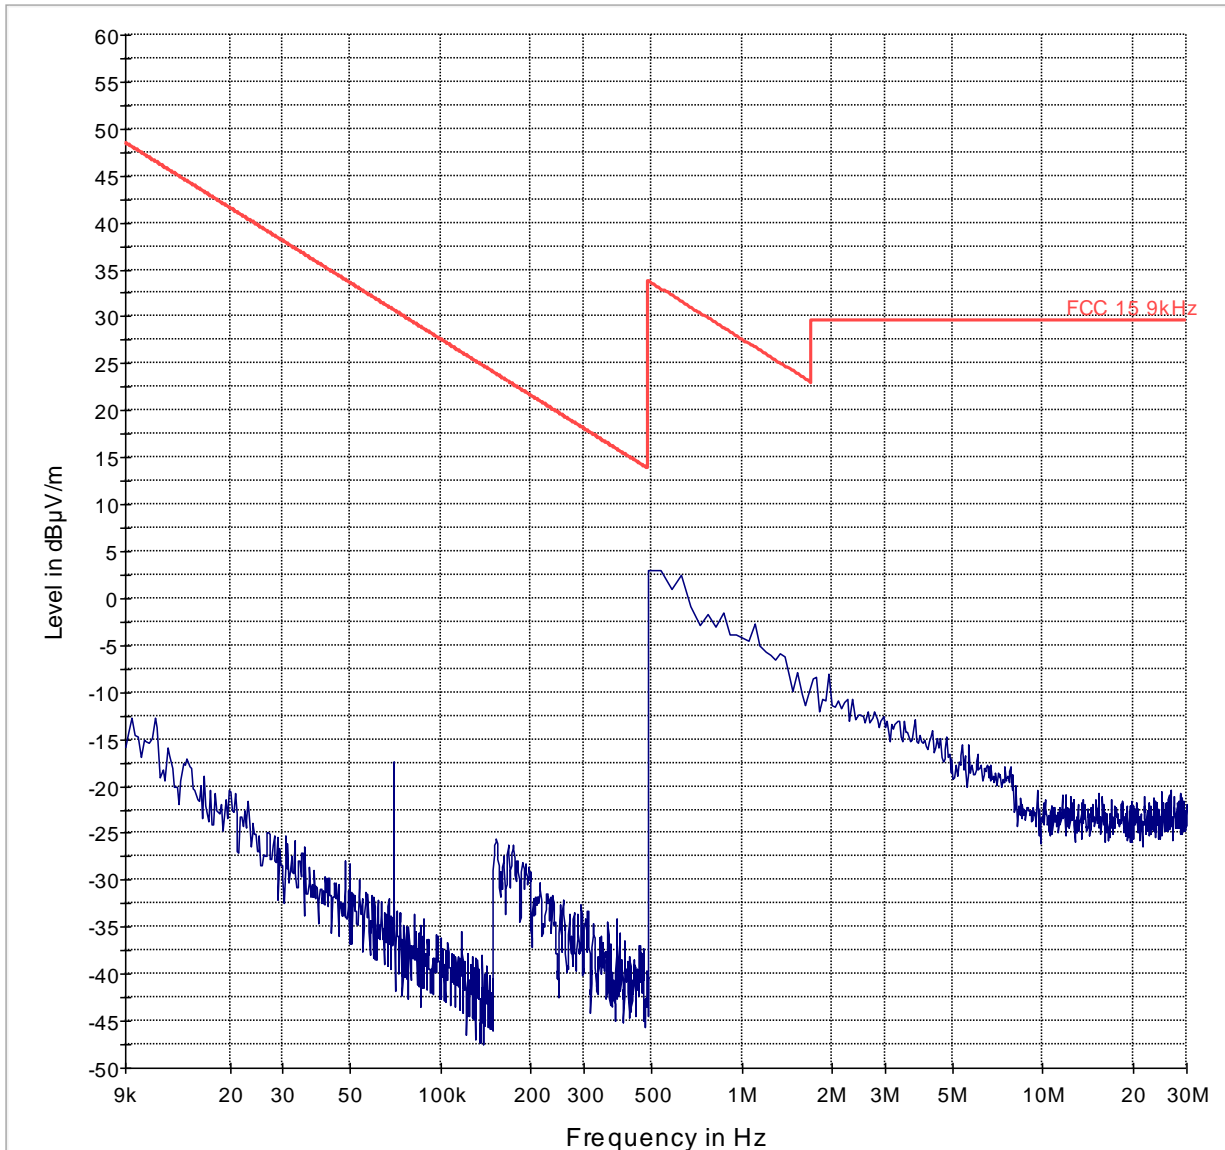

— FCC 15.9kHz — Preview Result 1-PK+

30MHz – 1GHz


Mode: 802.11a-Ch60 (Sub-Band 2)

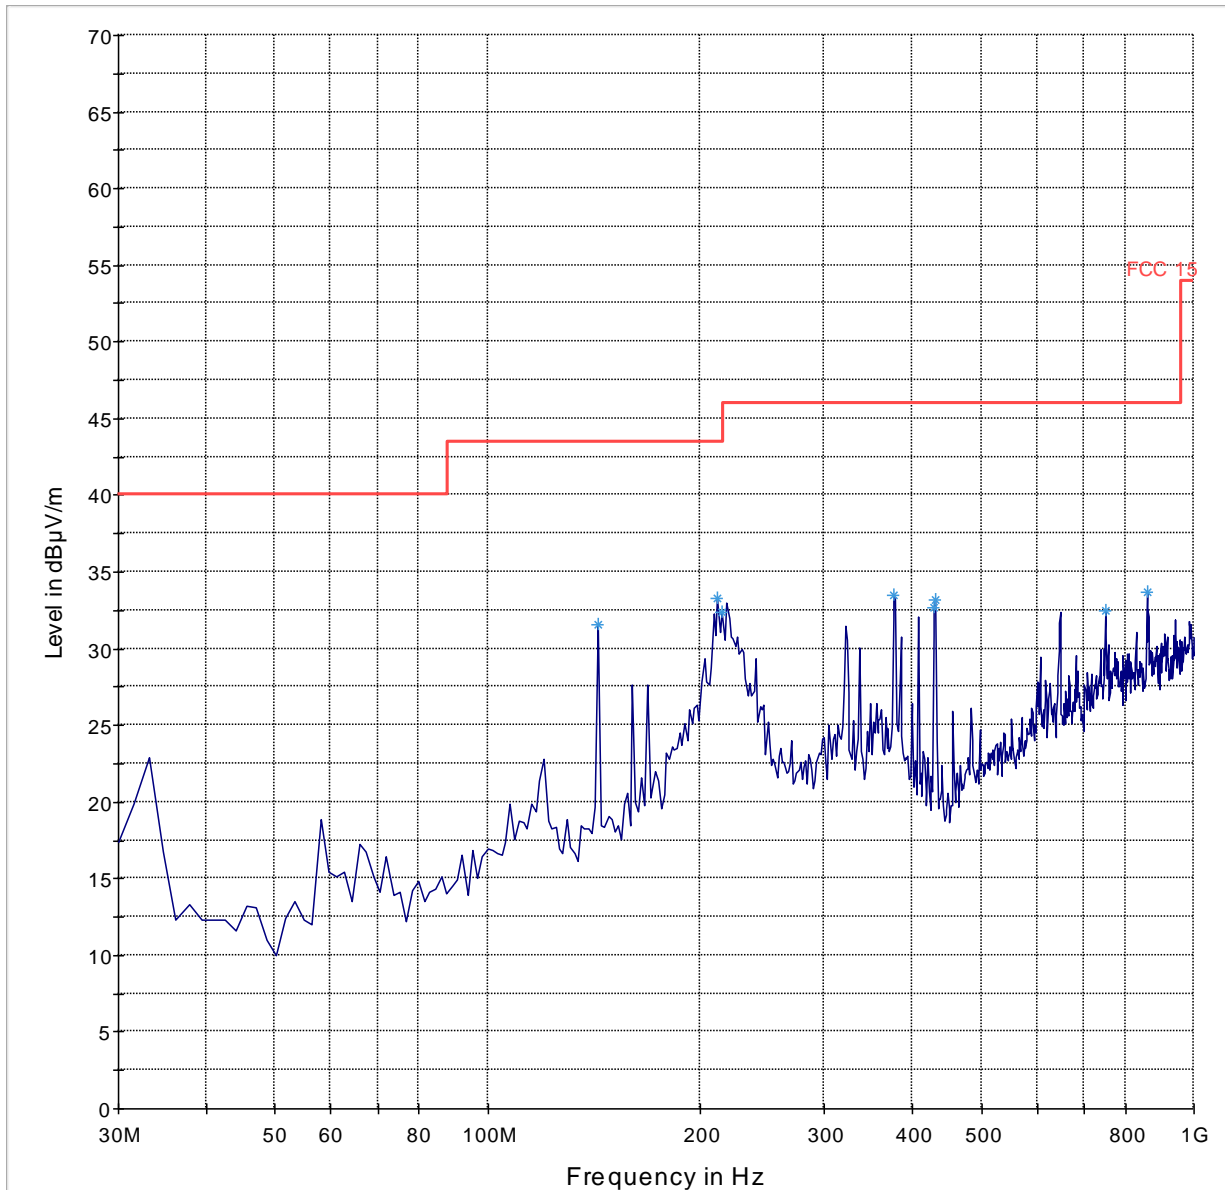

— FCC 15    — Preview Result 1-PK+    \* Data Reduction Result 1 [3]-PK+

1GHz – 18GHz


Mode: 802.11a-Ch60 (Sub-Band 2)

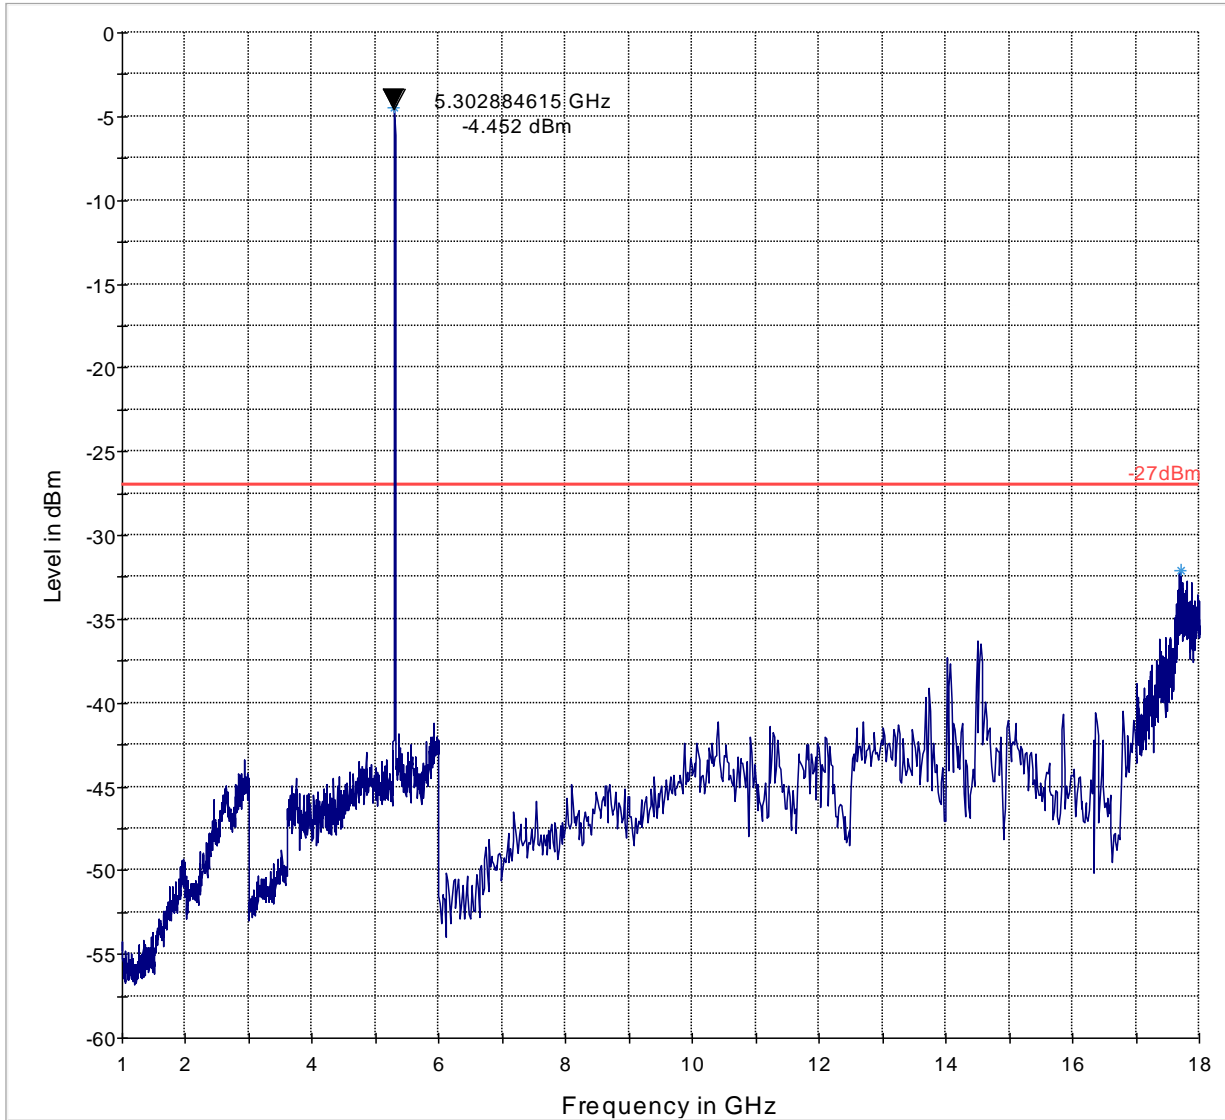

— -27dBm    — Preview Result 1-PK+    \* Data Reduction Result 1 [2]-PK+

18GHz – 40GHz

Mode: 802.11a-Ch60 (Sub-Band 2)

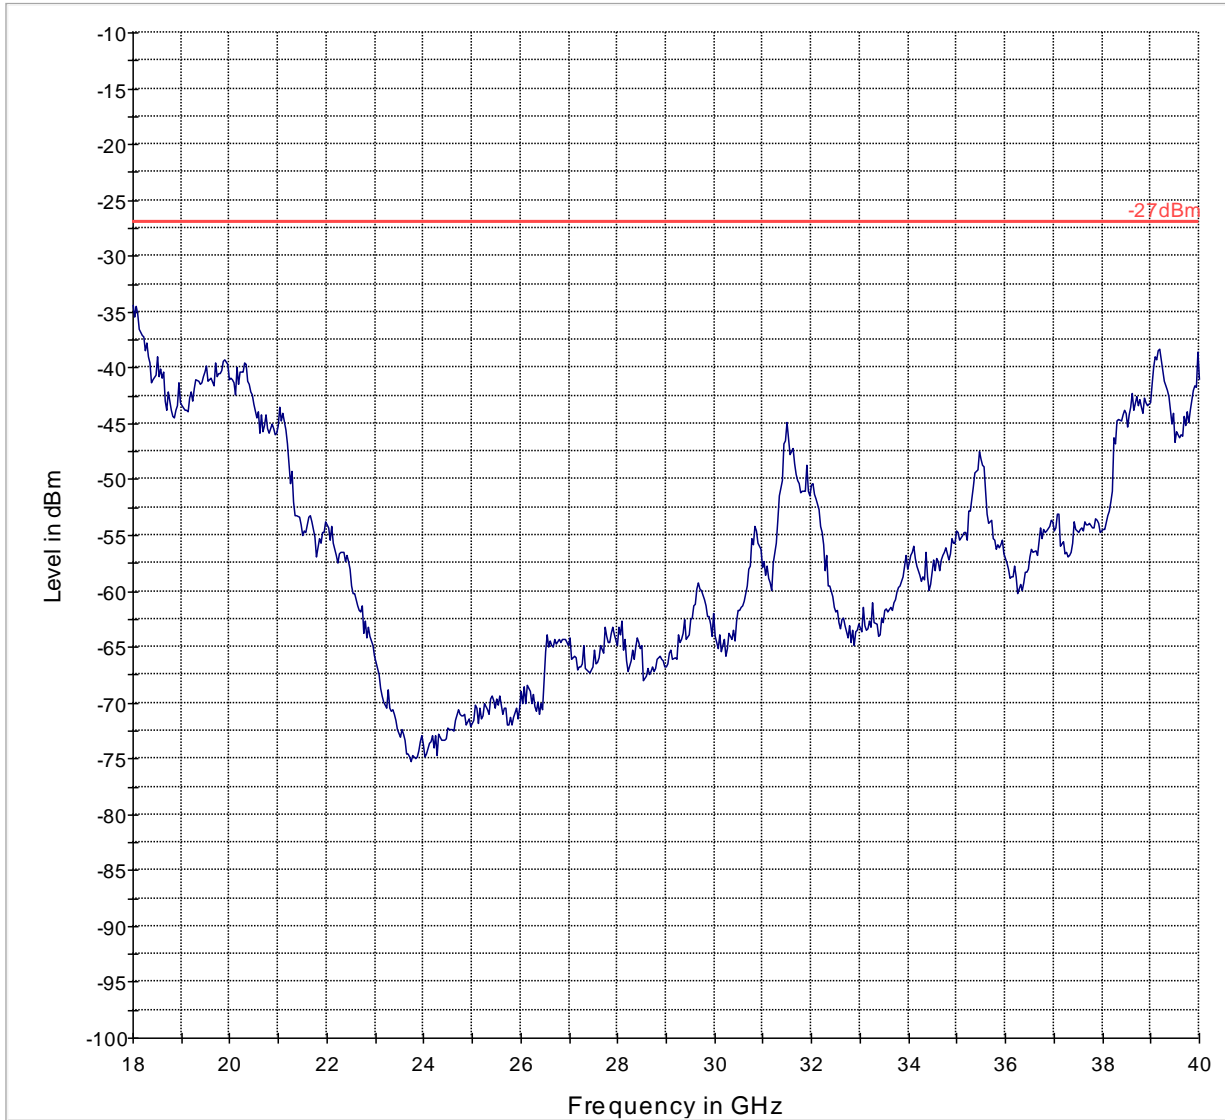


— -27dBm      — Preview Result 1-PK+



<30MHz


Mode: 802.11a-Ch64 (Sub-Band 2)

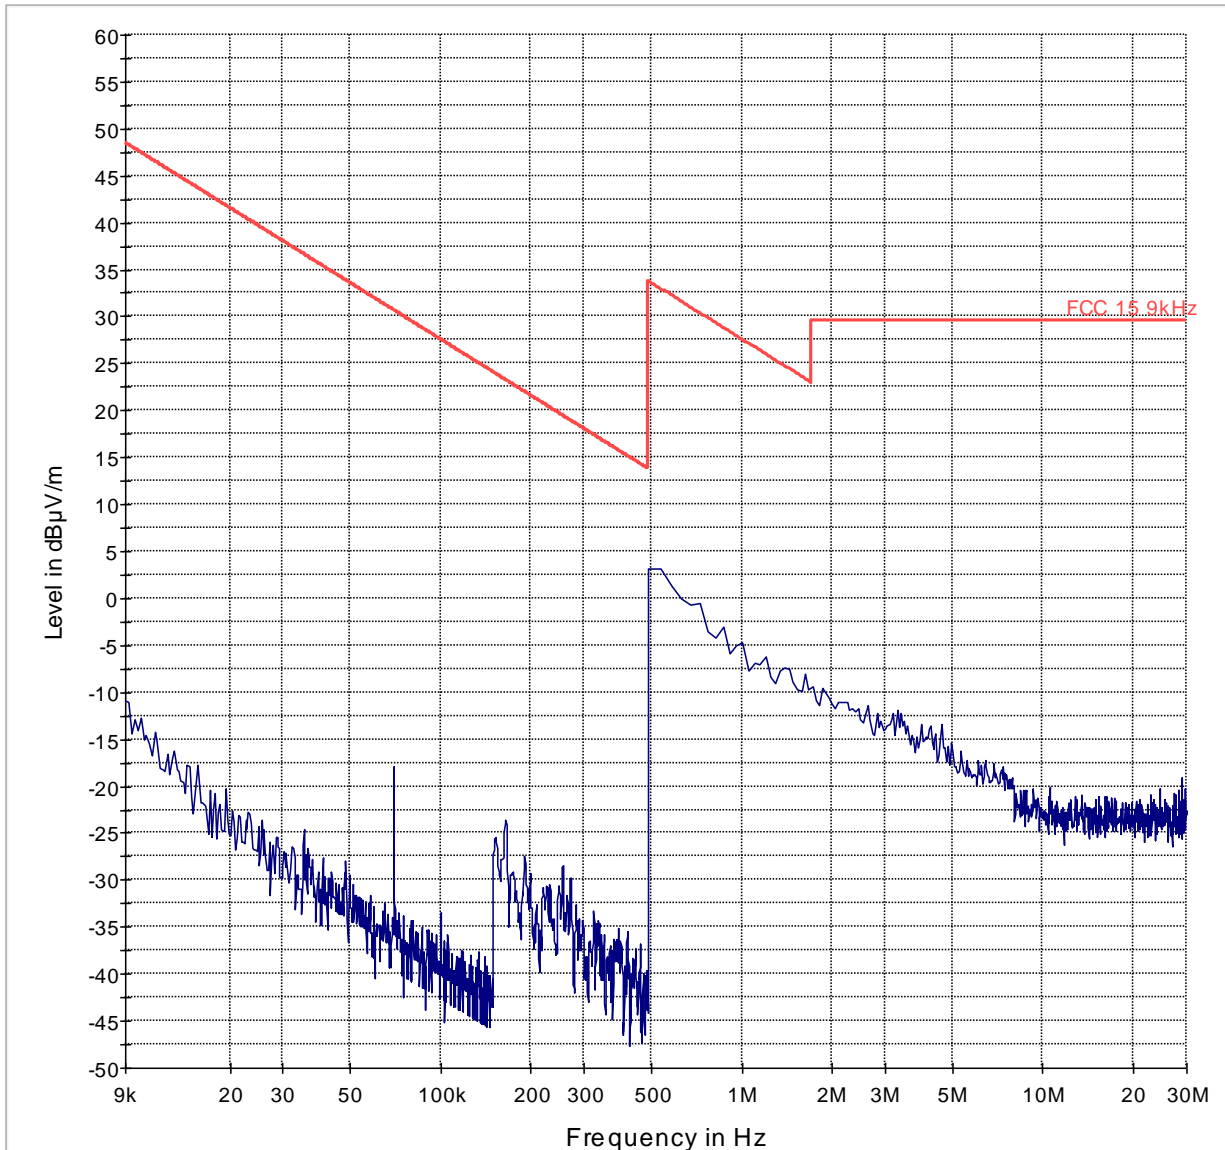

— FCC 15.9kHz — Preview Result 1-PK+

30MHz – 1GHz


Mode: 802.11a-Ch64 (Sub-Band 2)

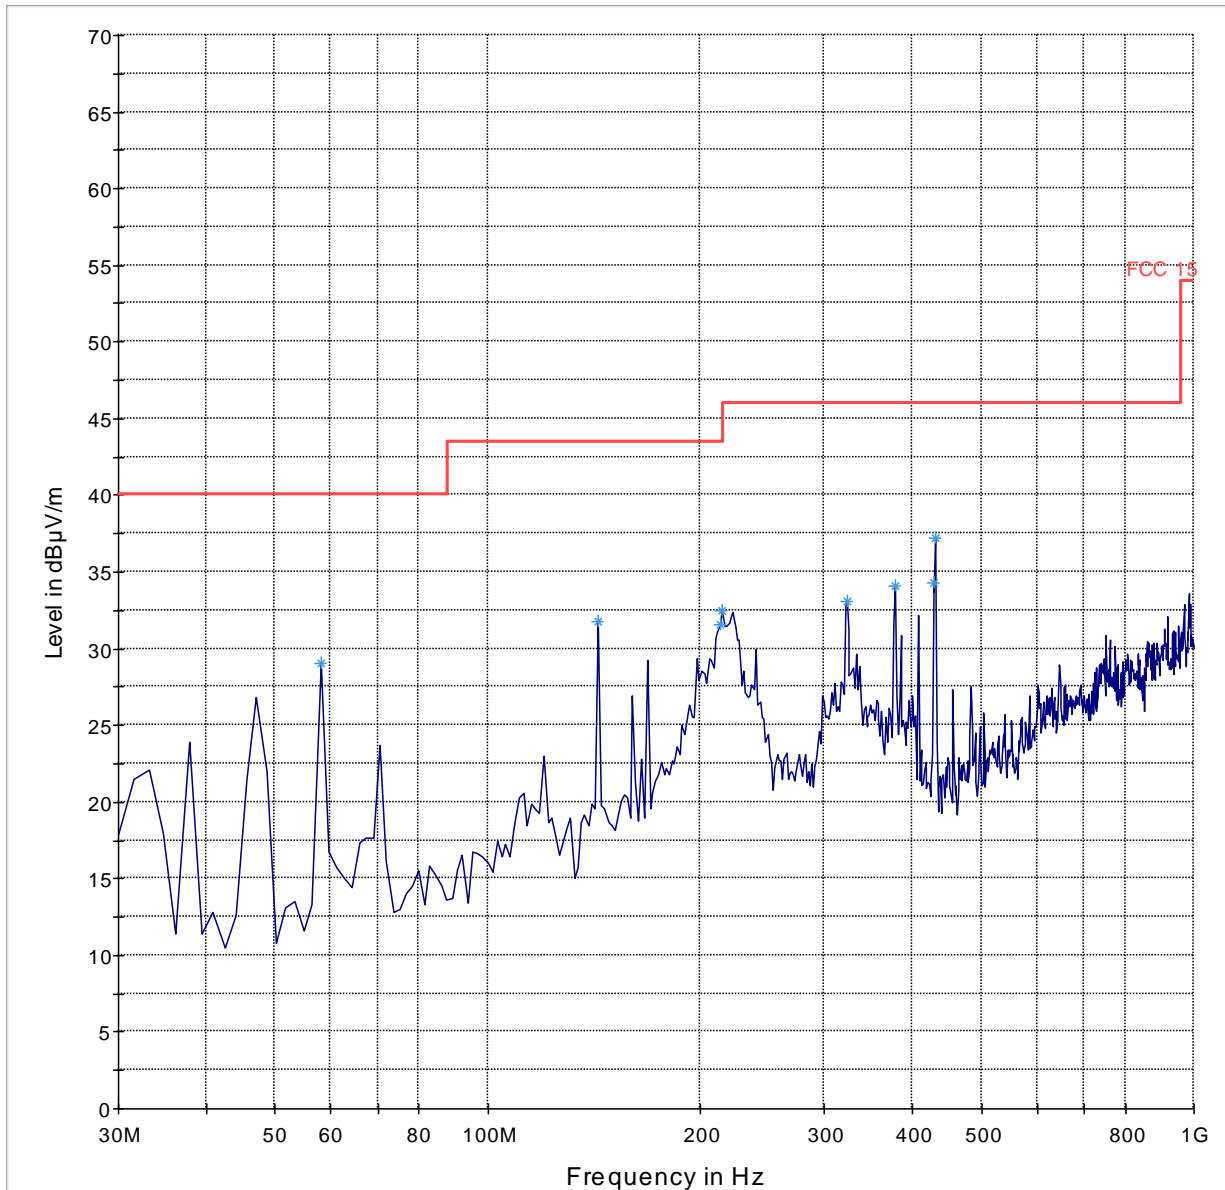

— FCC 15    — Preview Result 1-PK+    \* Data Reduction Result 1 [3]-PK+

1GHz – 18GHz


Mode: 802.11a-Ch64 (Sub-Band 2)

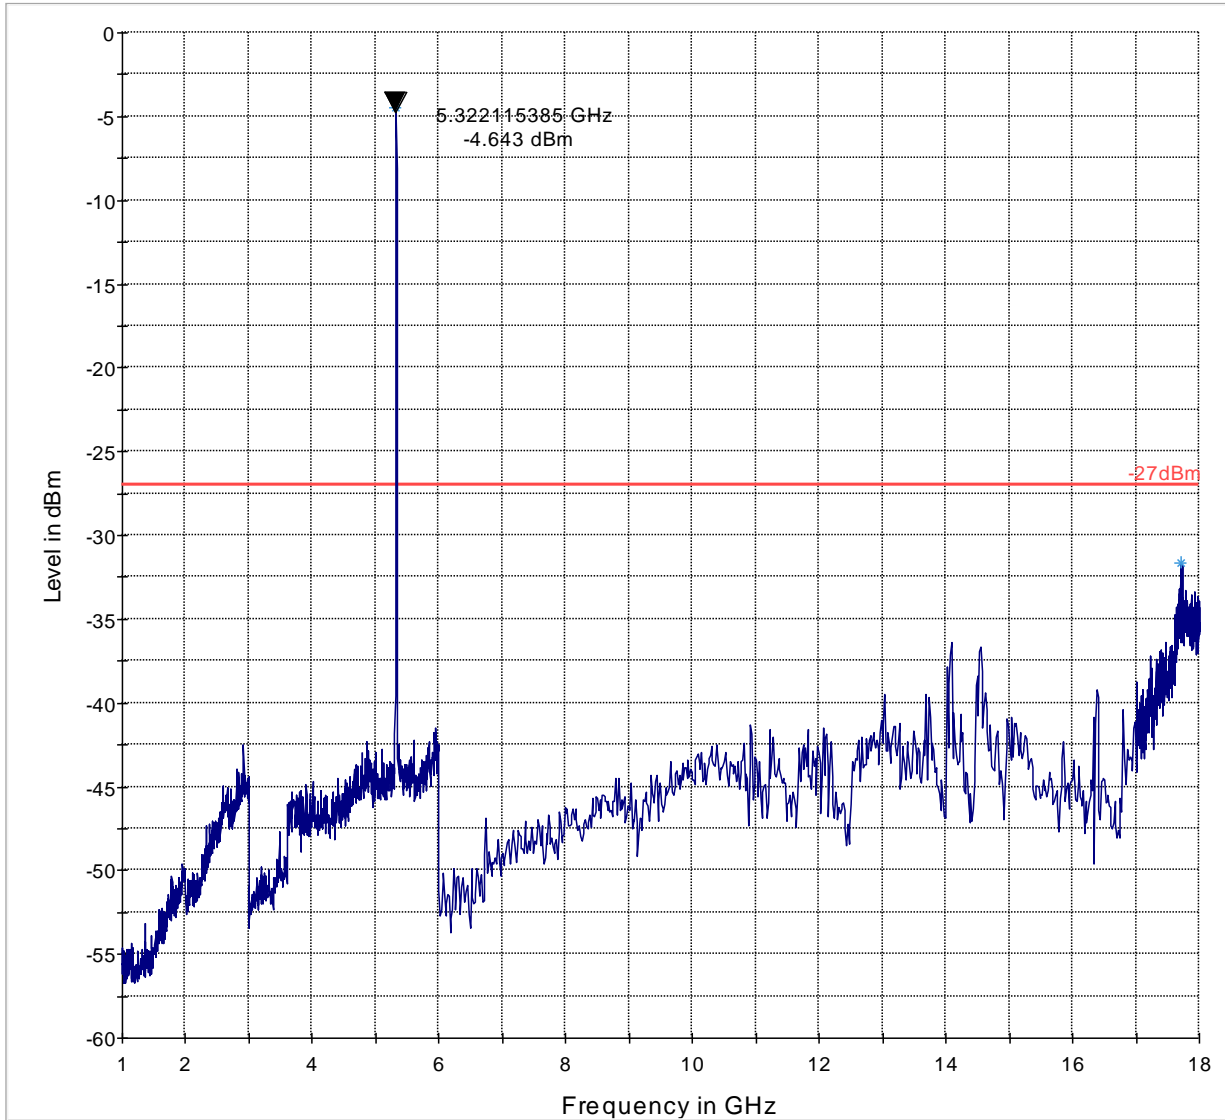

— -27dBm      — Preview Result 1-PK+      \* Data Reduction Result 1 [2]-PK+

18GHz – 40GHz


Mode: 802.11a-Ch64 (Sub-Band 2)

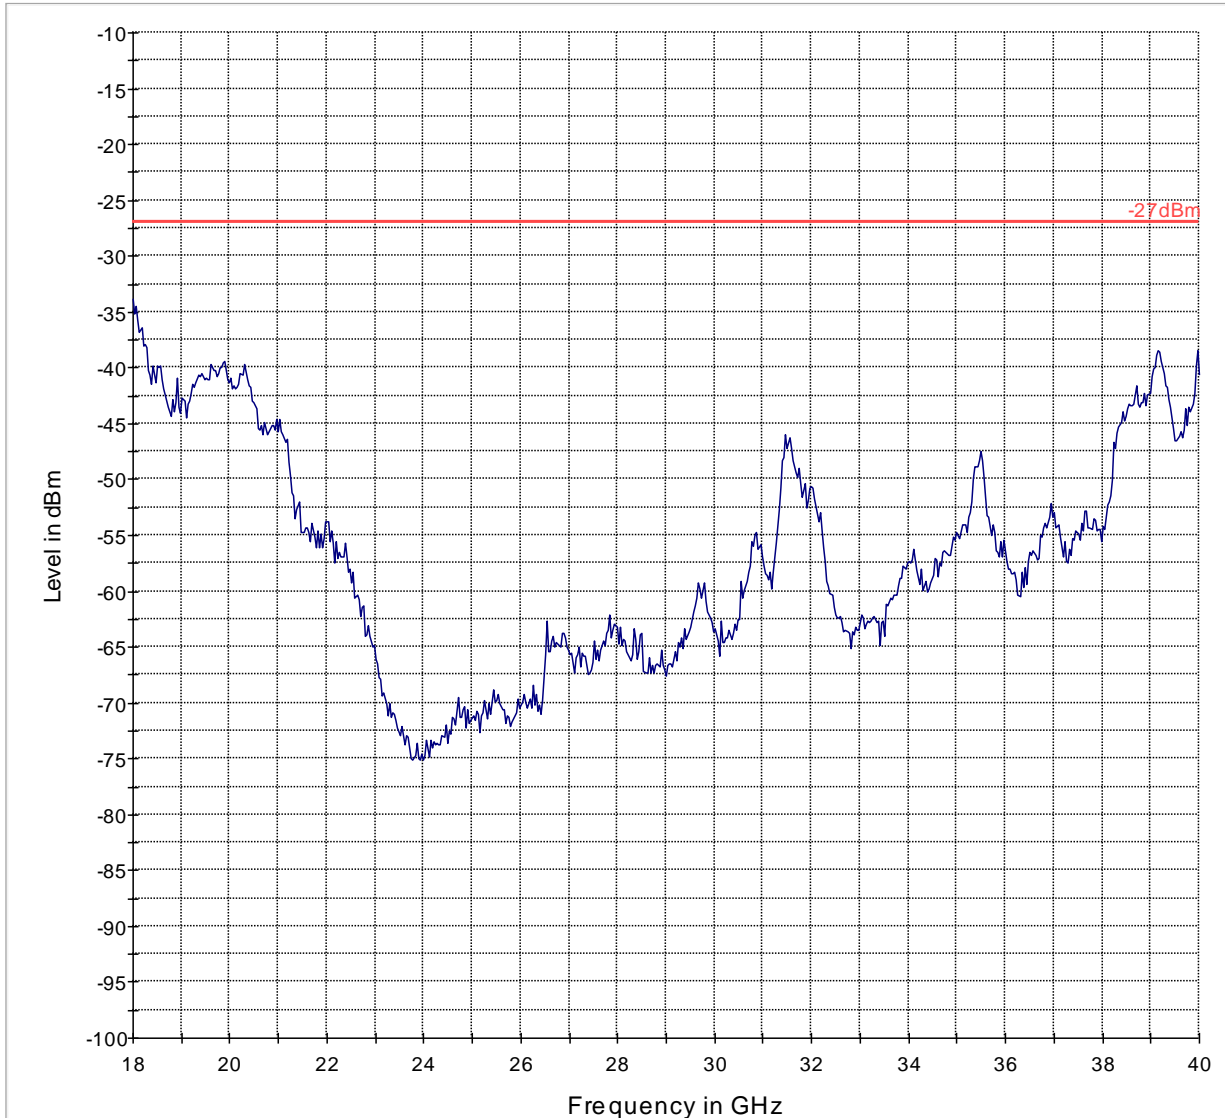

— -27dBm      — Preview Result 1-PK+

<30MHz


Mode: 802.11a-Ch100 (Sub-Band 3)

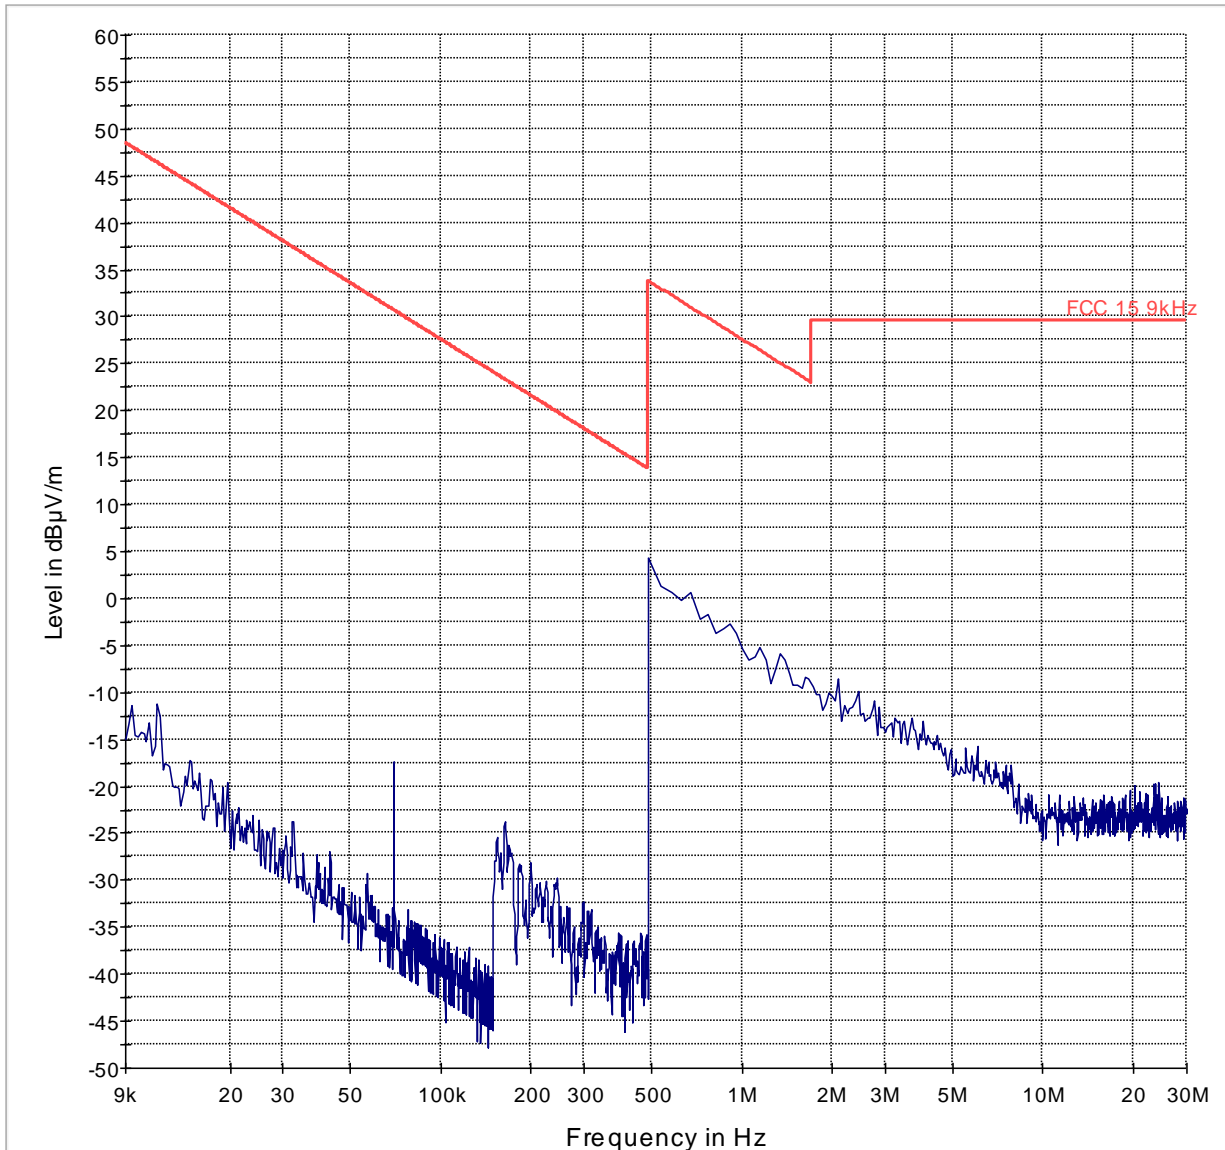

— FCC 15.9kHz — Preview Result 1-PK+

30MHz – 1GHz


Mode: 802.11a-Ch100 (Sub-Band 3)

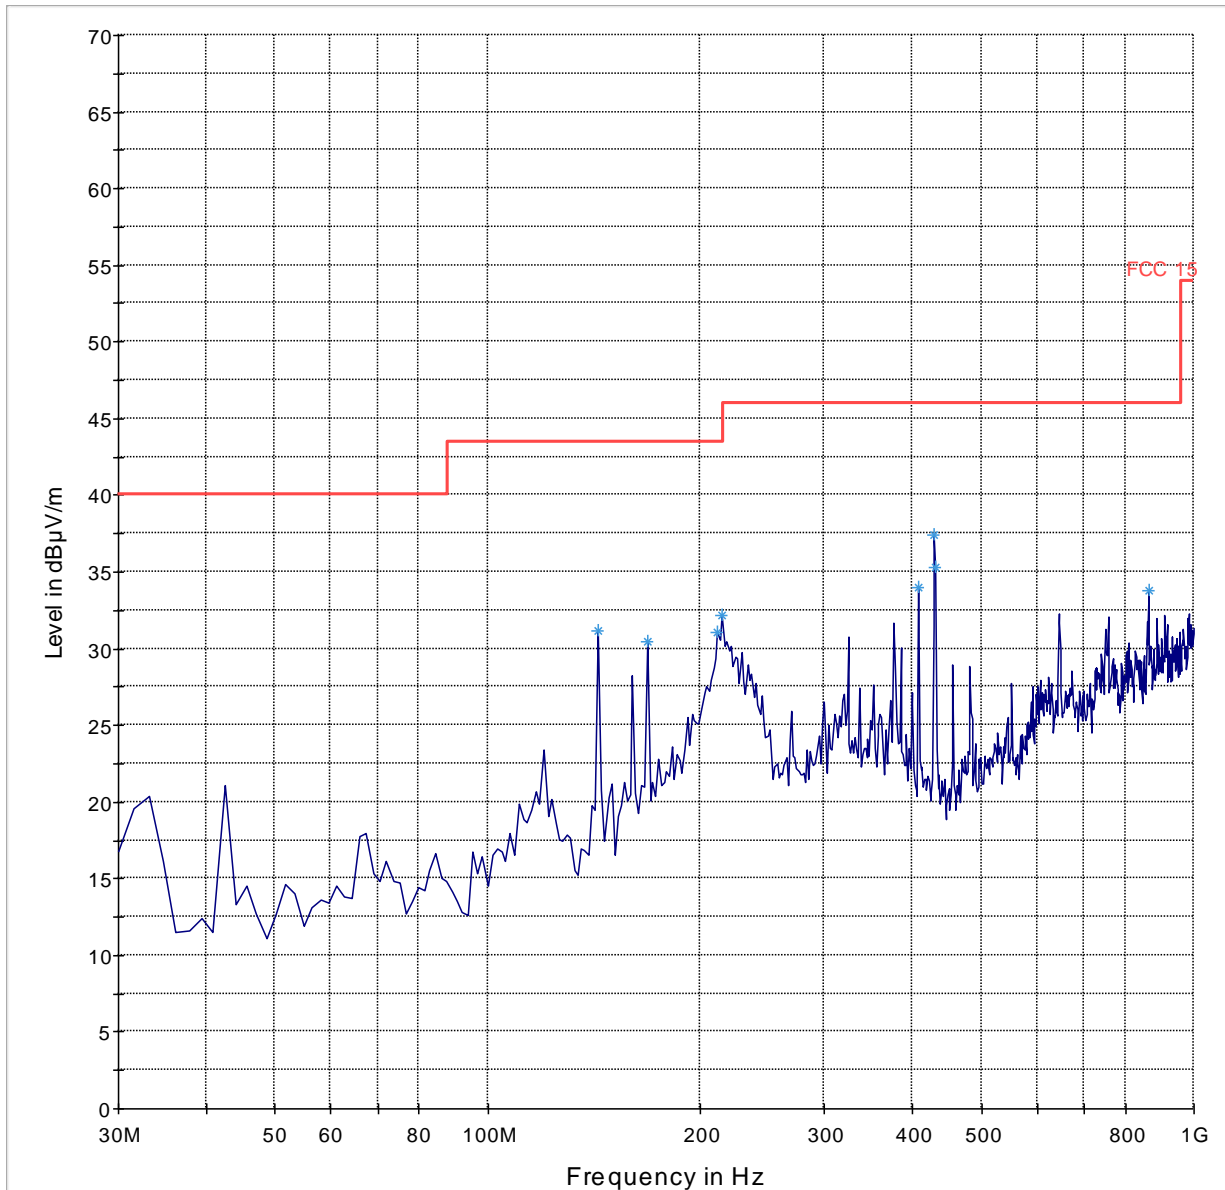

— FCC 15    — Preview Result 1-PK+    \* Data Reduction Result 1 [3]-PK+

1GHz – 18GHz


Mode: 802.11a-Ch100 (Sub-Band 3)

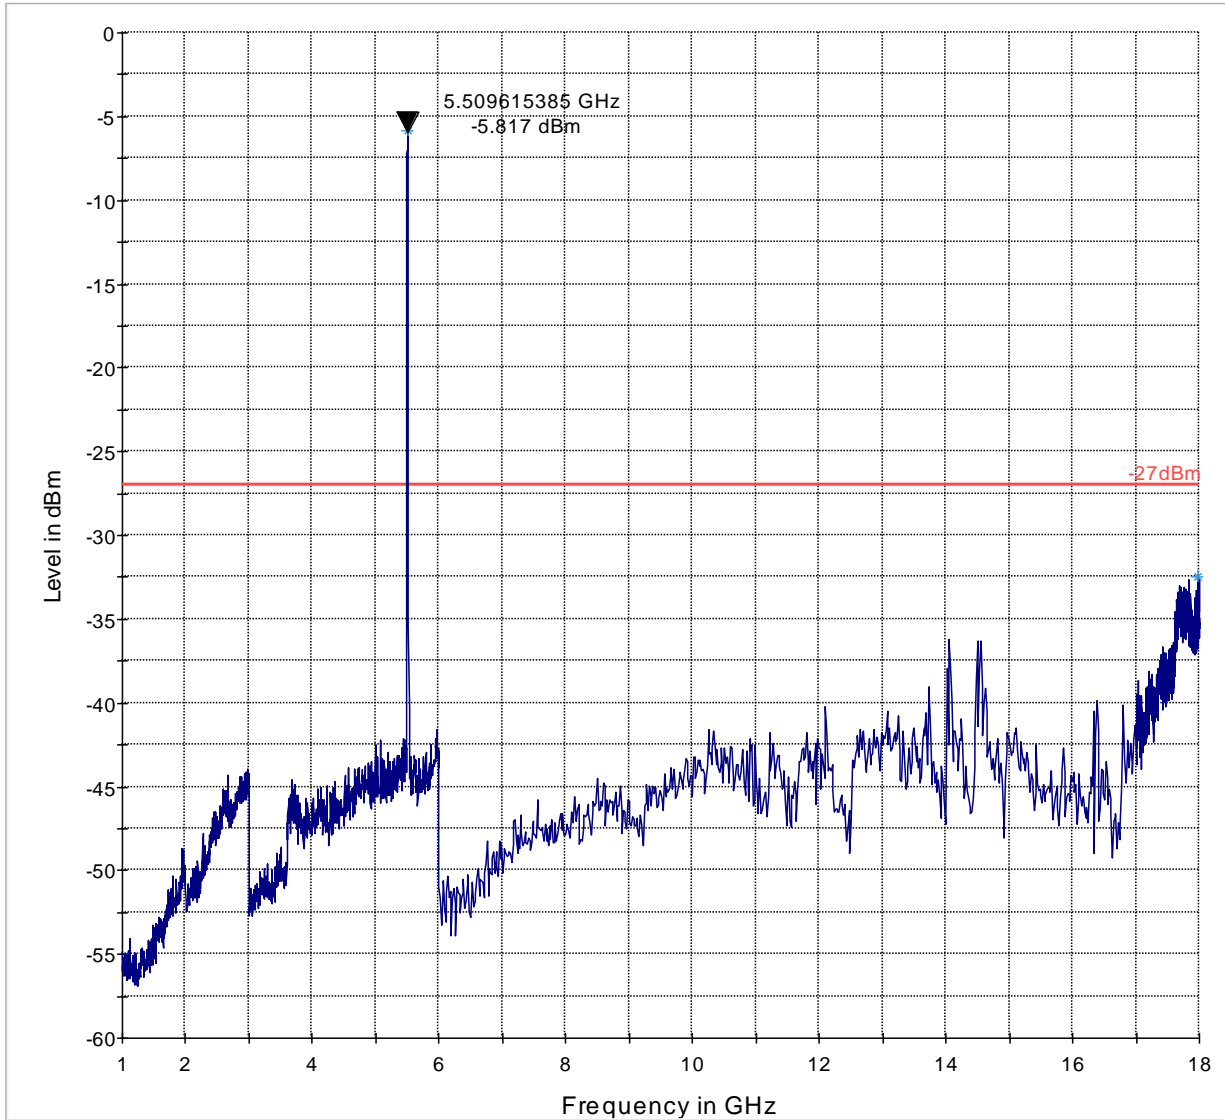

— -27dBm    — Preview Result 1-PK+    \* Data Reduction Result 1 [2]-PK+

18GHz – 40GHz

Mode: 802.11a-Ch100 (Sub-Band 3)

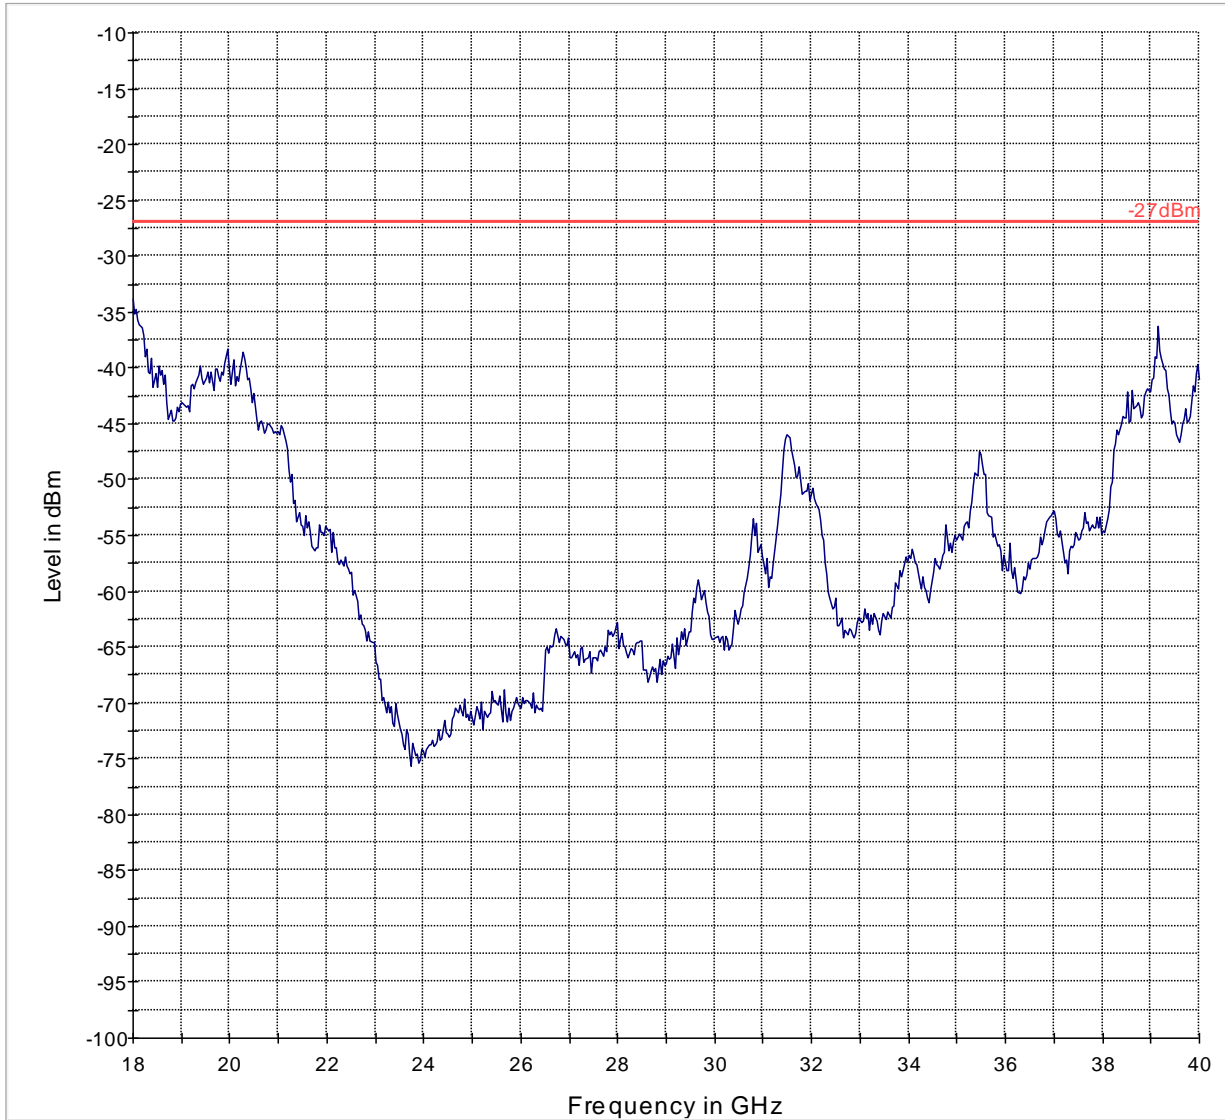


— -27dBm      — Preview Result 1-PK+



<30MHz


Mode: 802.11a-Ch120 (Sub-Band 3)

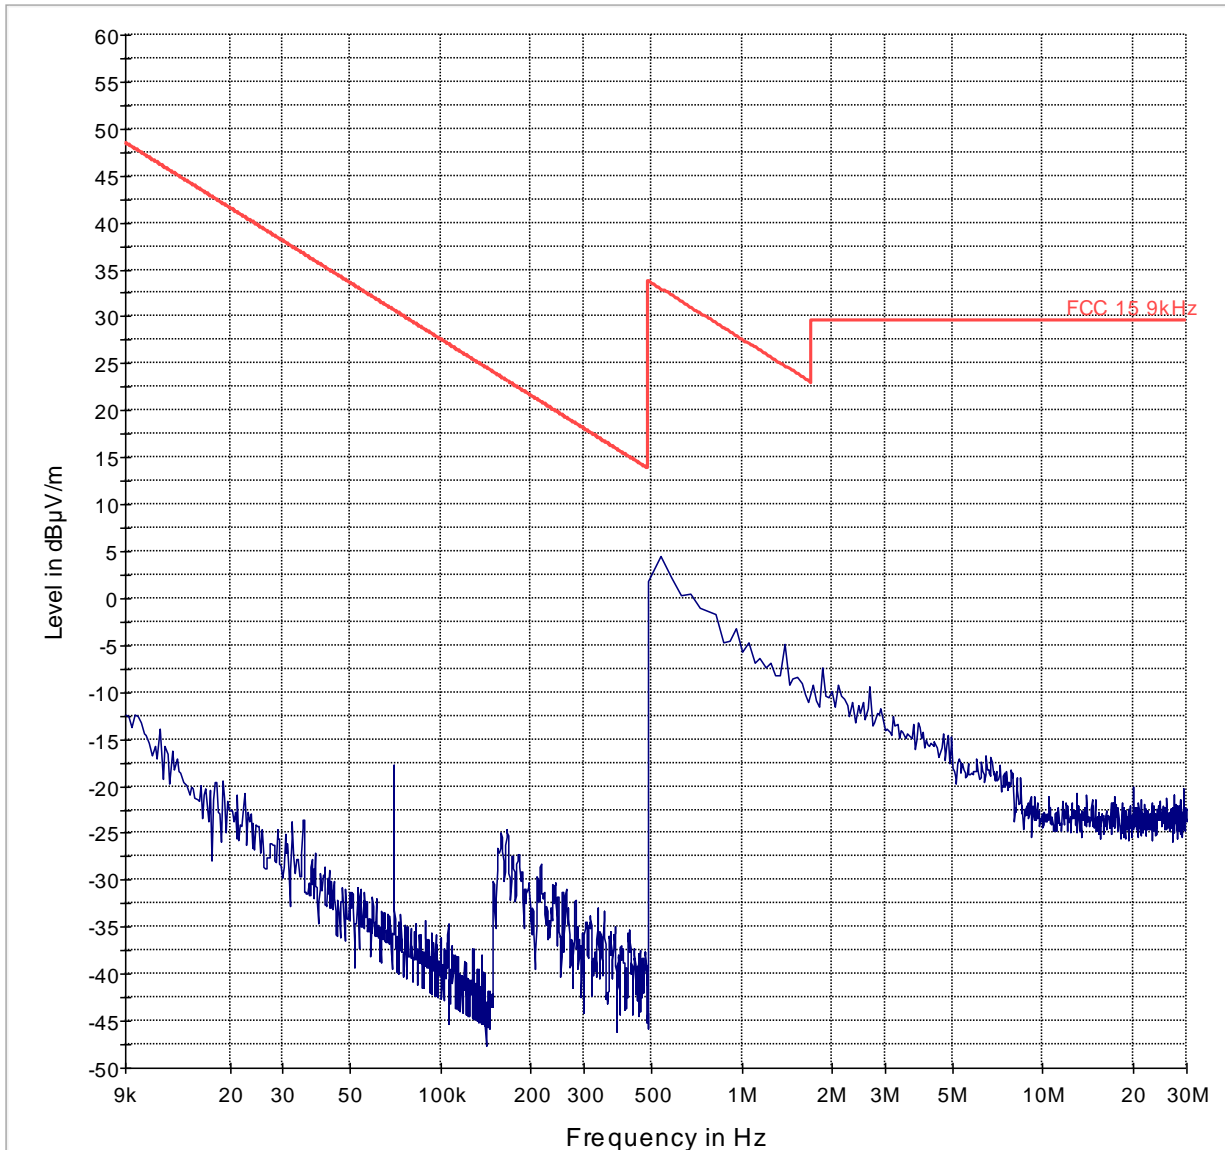

— FCC 15.9kHz — Preview Result 1-PK+

30MHz – 1GHz

Mode: 802.11a-Ch120 (Sub-Band 3)

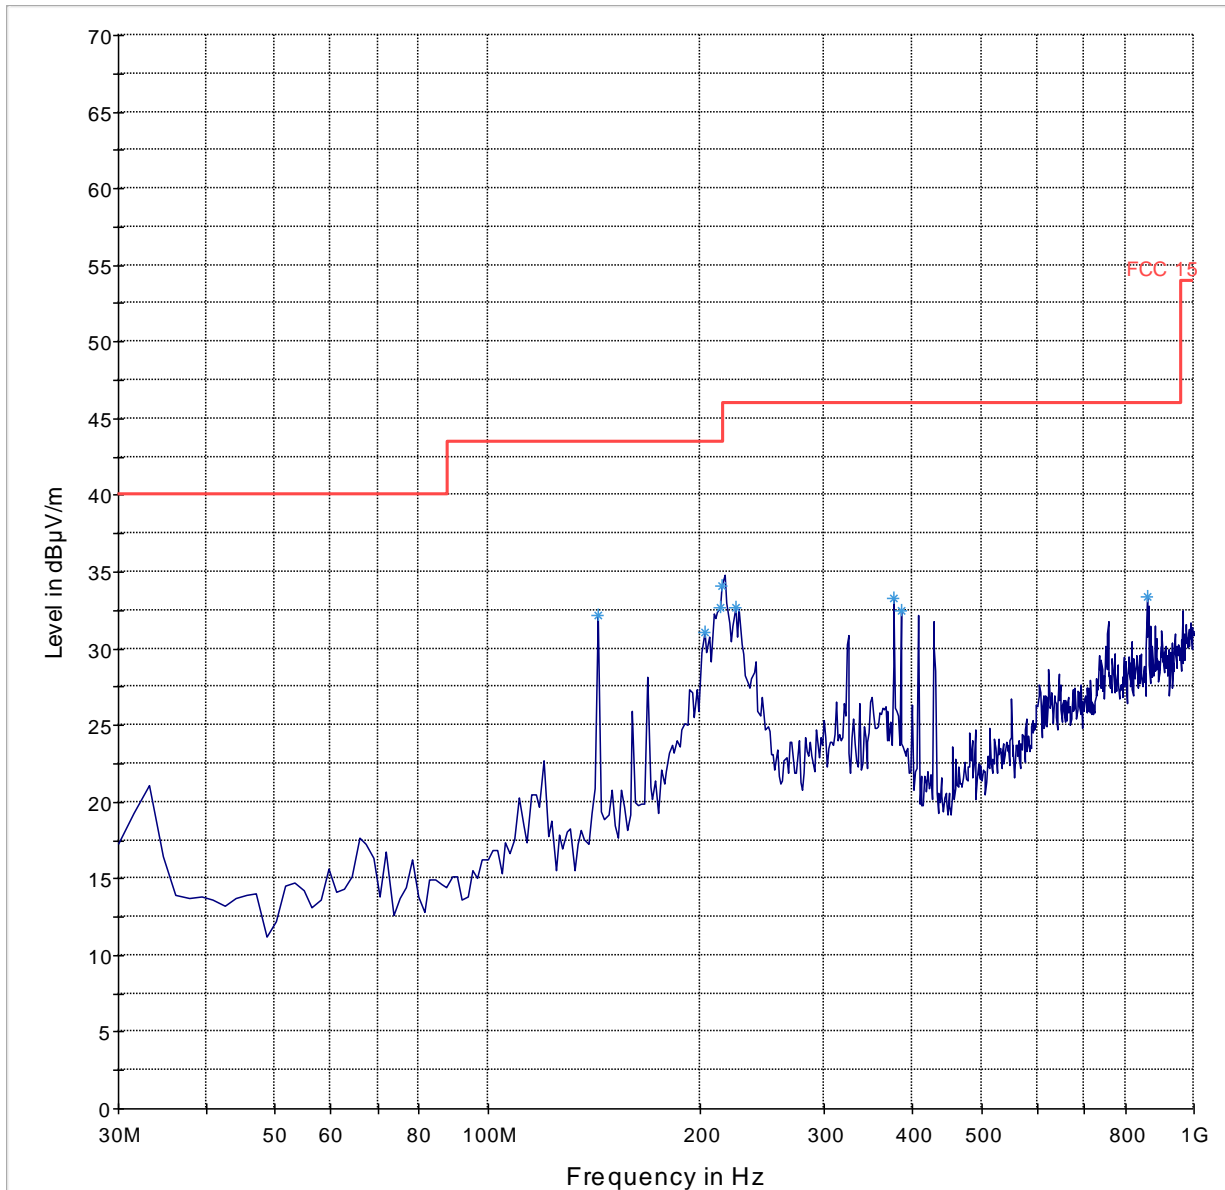


— FCC 15    — Preview Result 1-PK+    \* Data Reduction Result 1 [3]-PK+



1GHz – 18GHz


Mode: 802.11a-Ch120 (Sub-Band 3)

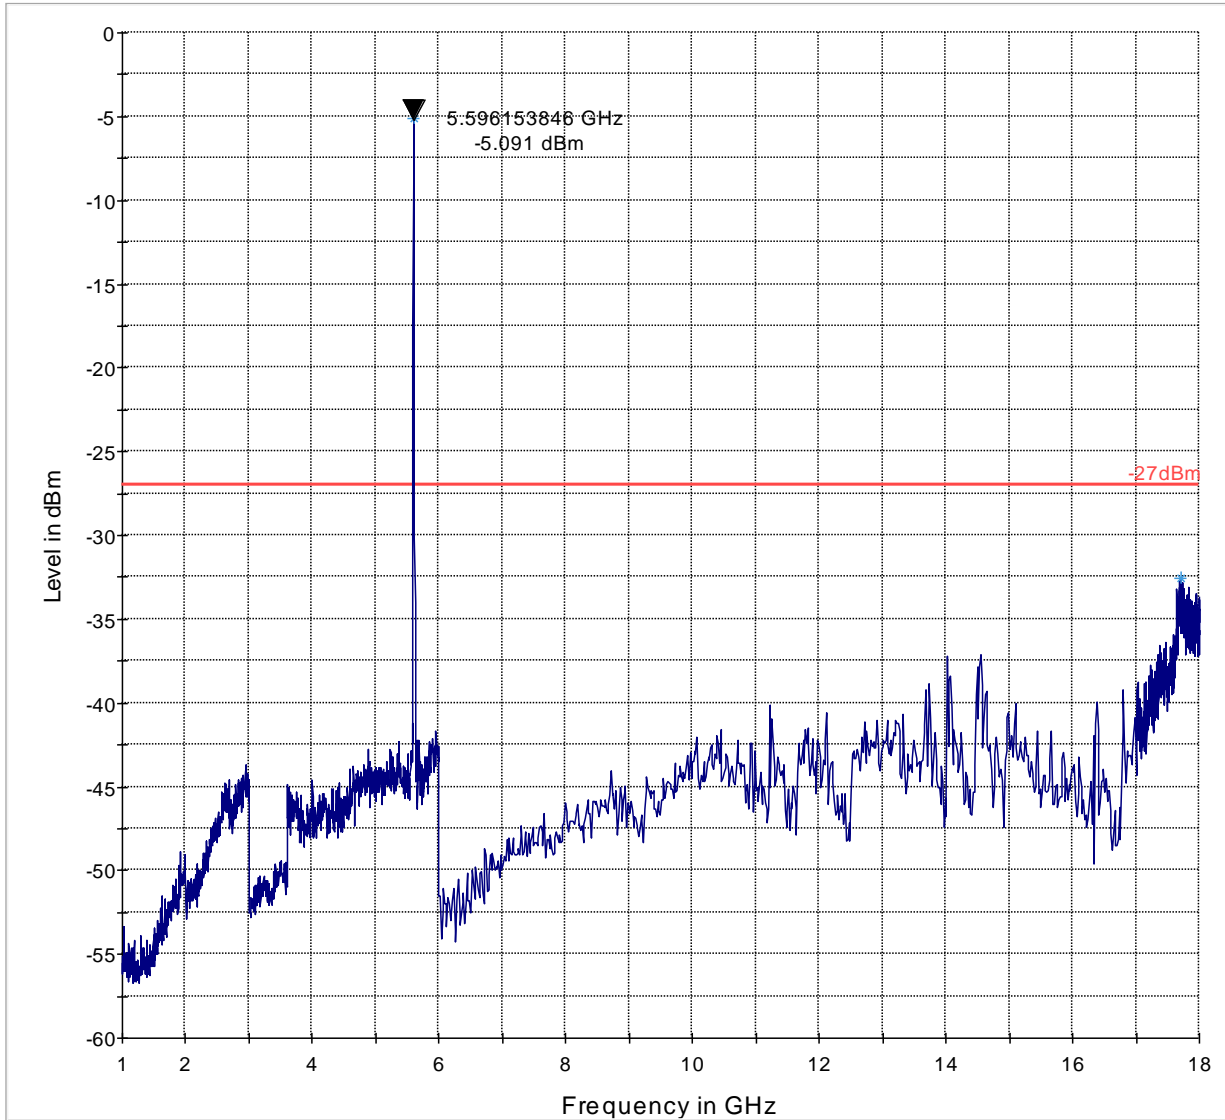

— -27dBm    — Preview Result 1-PK+    \* Data Reduction Result 1 [2]-PK+

18GHz – 40GHz


Mode: 802.11a-Ch120 (Sub-Band 3)

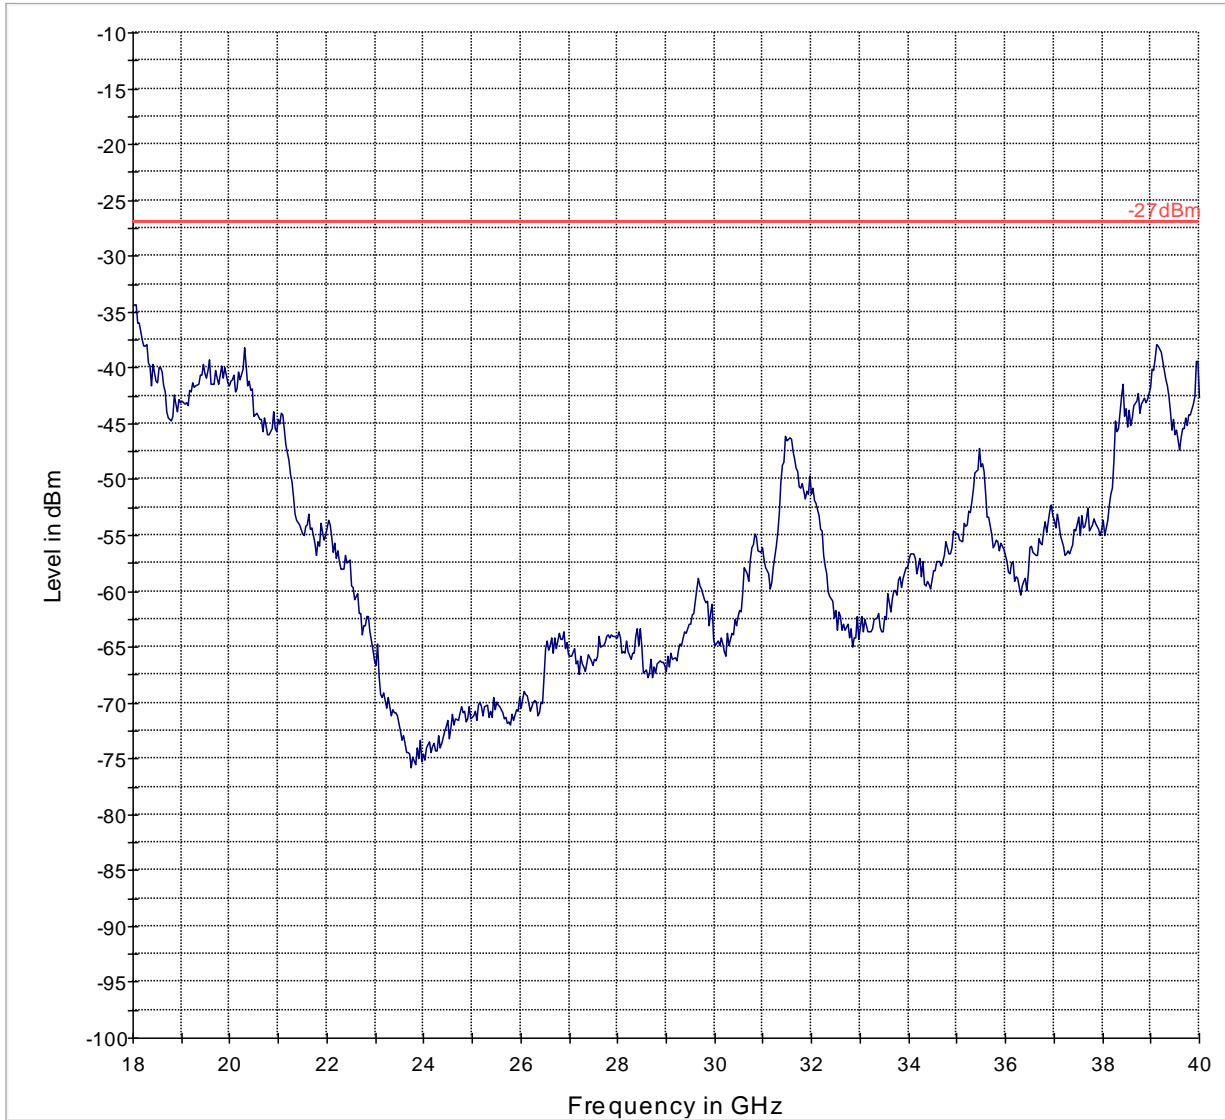

— -27dBm      — Preview Result 1-PK+

<30MHz


Mode: 802.11a-Ch140 (Sub-Band 3)

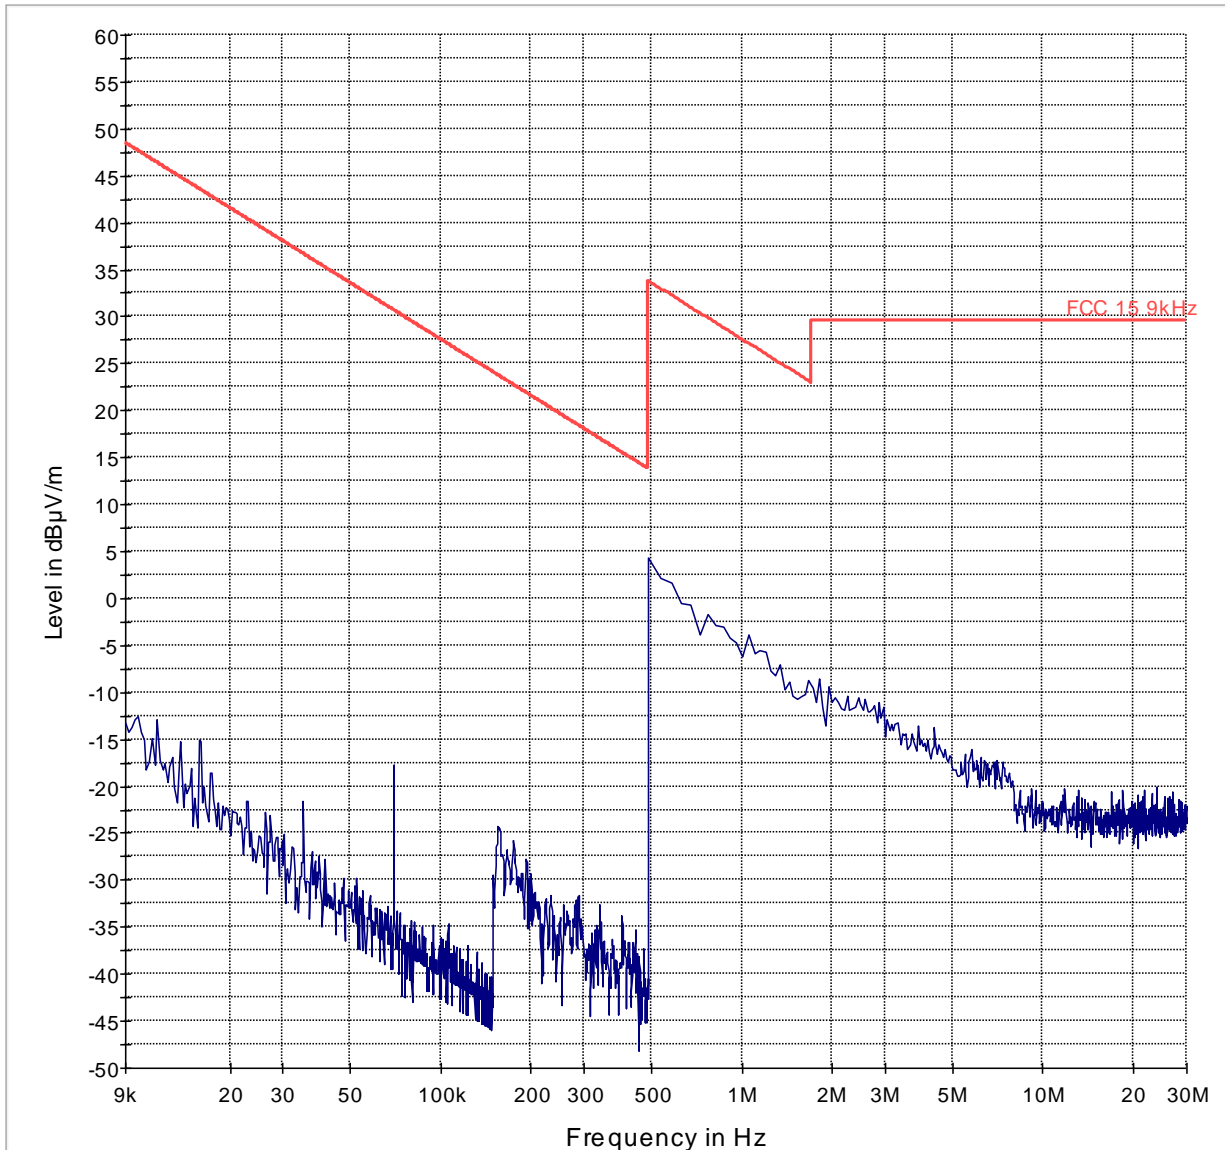

— FCC 15.9kHz    — Preview Result 1-PK+

30MHz – 1GHz


Mode: 802.11a-Ch140 (Sub-Band 3)

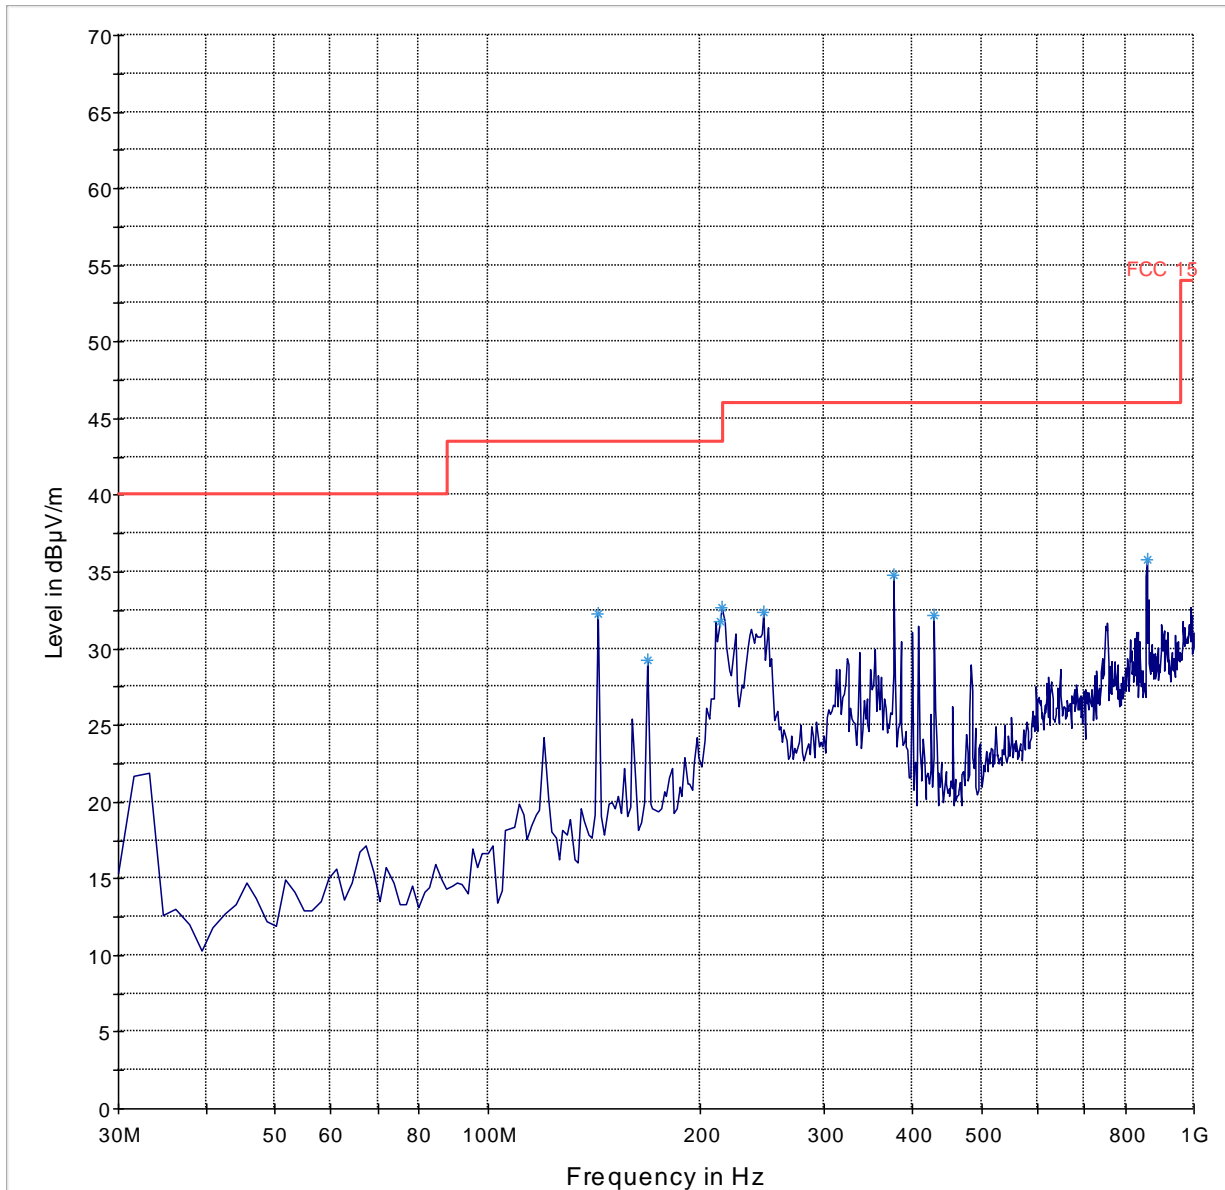

— FCC 15    — Preview Result 1-PK+    \* Data Reduction Result 1 [3]-PK+

1GHz – 18GHz


Mode: 802.11a-Ch140 (Sub-Band 3)

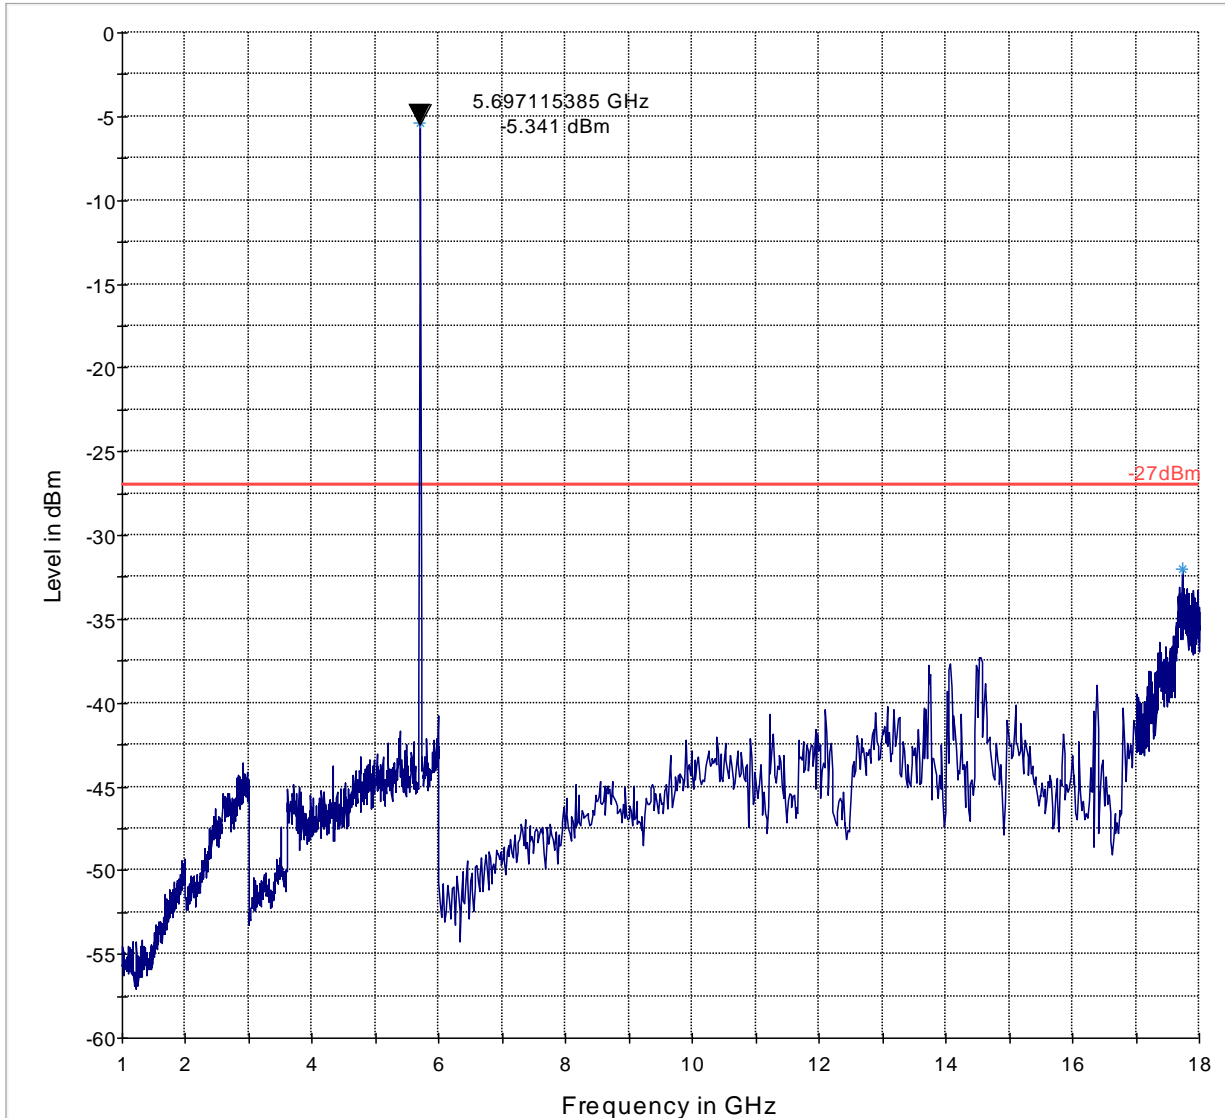

— -27dBm      — Preview Result 1-PK+      \* Data Reduction Result 1 [2]-PK+

18GHz – 40GHz

Mode: 802.11a-Ch140 (Sub-Band 3)

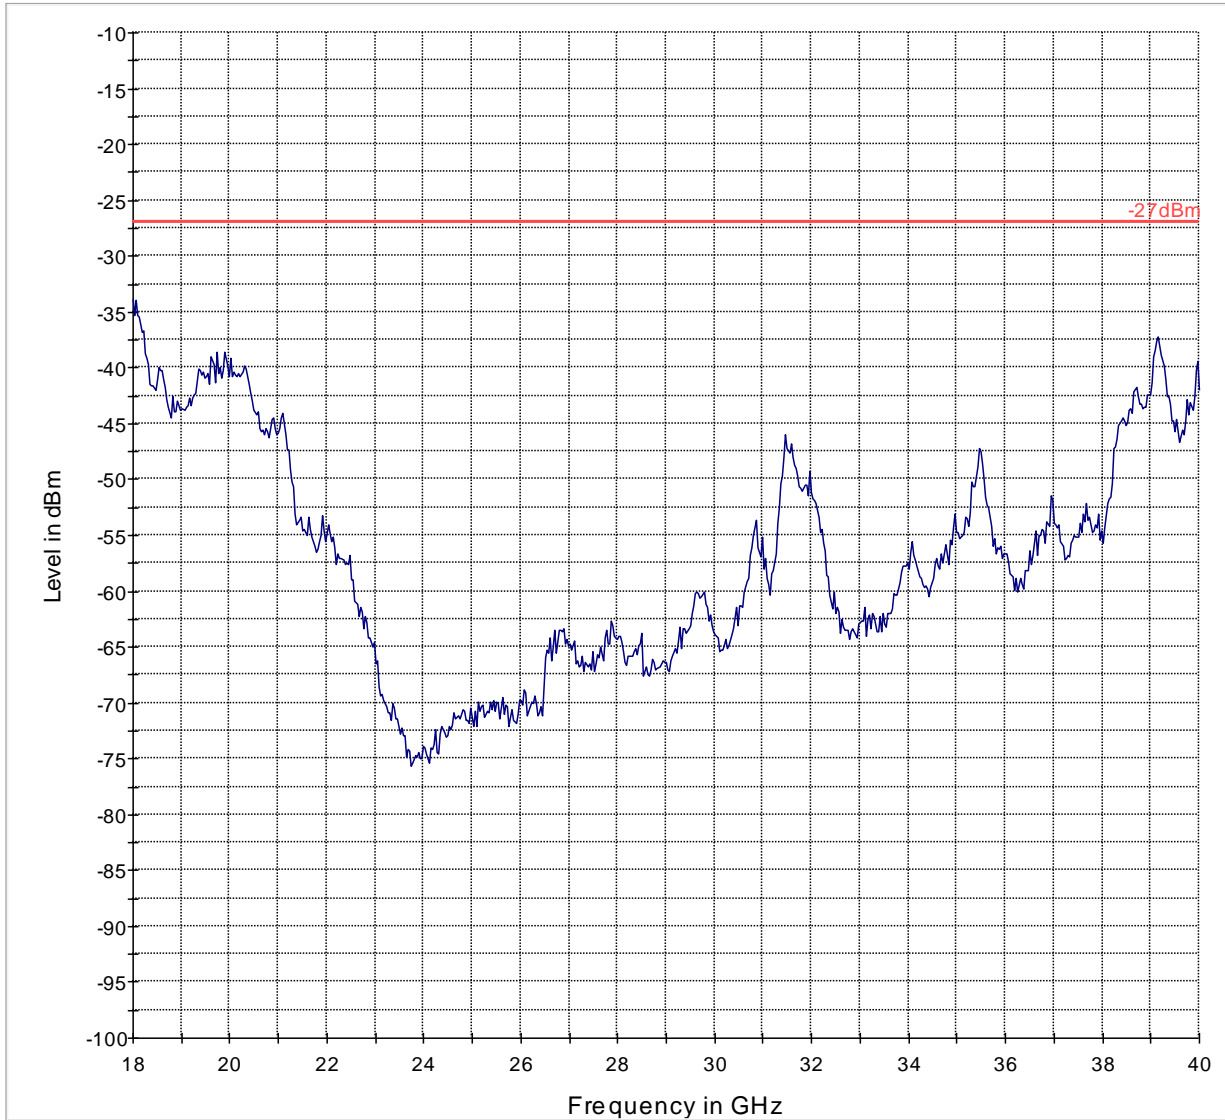


— -27dBm      — Preview Result 1-PK+



<30MHz


Mode: 802.11n\_HT20-Ch36 (Sub-Band 1)

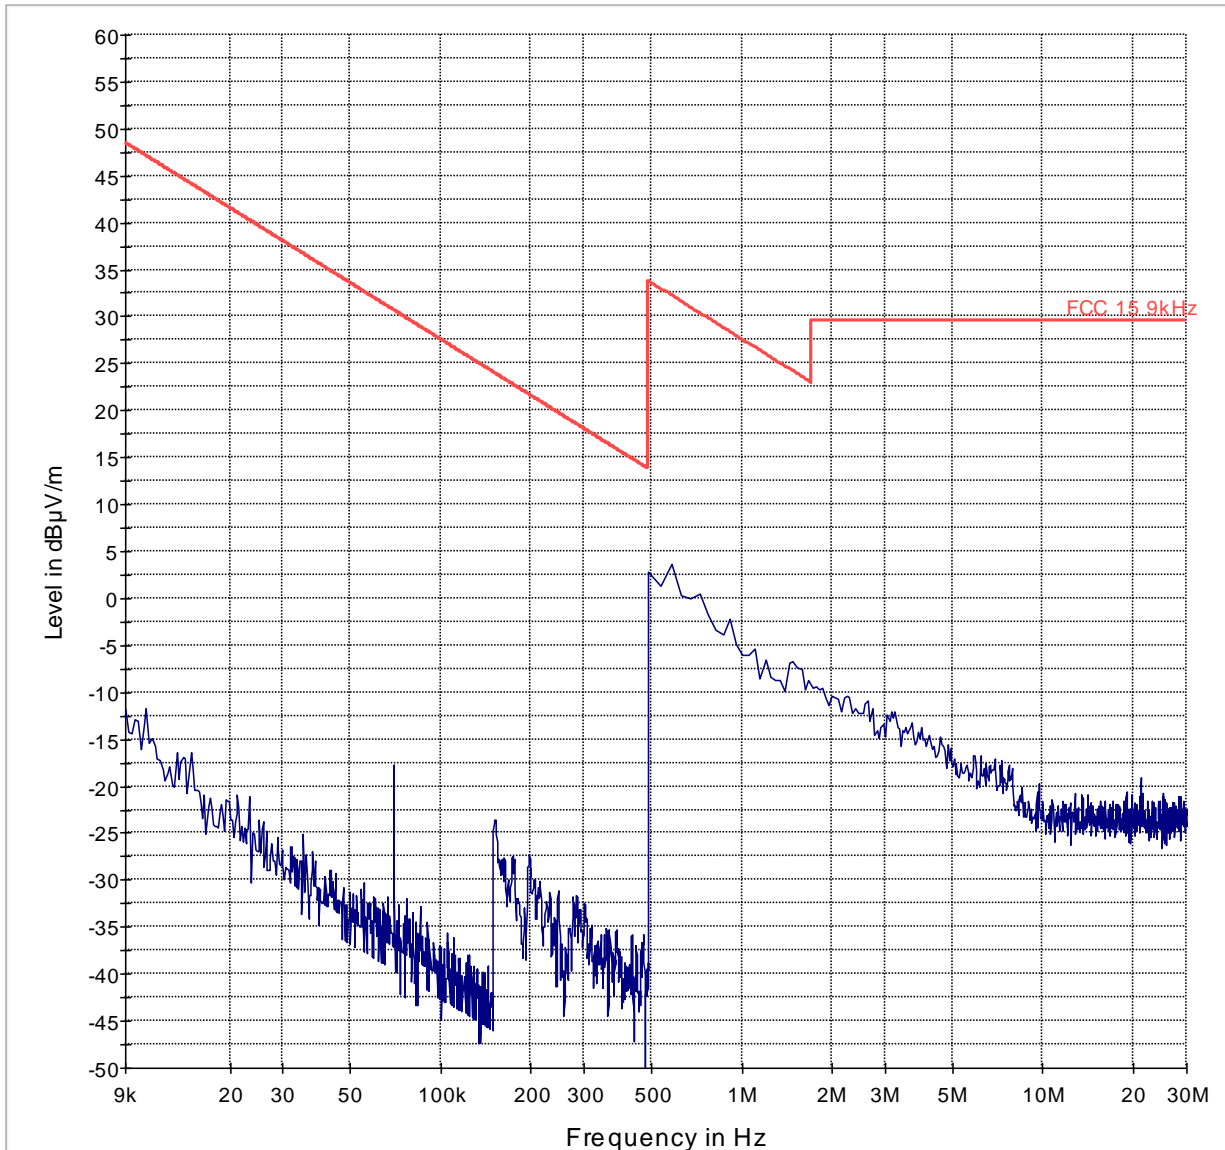

— FCC 15.9kHz — Preview Result 1-PK+

30MHz – 1GHz


Mode: 802.11n\_HT20-Ch36 (Sub-Band 1)

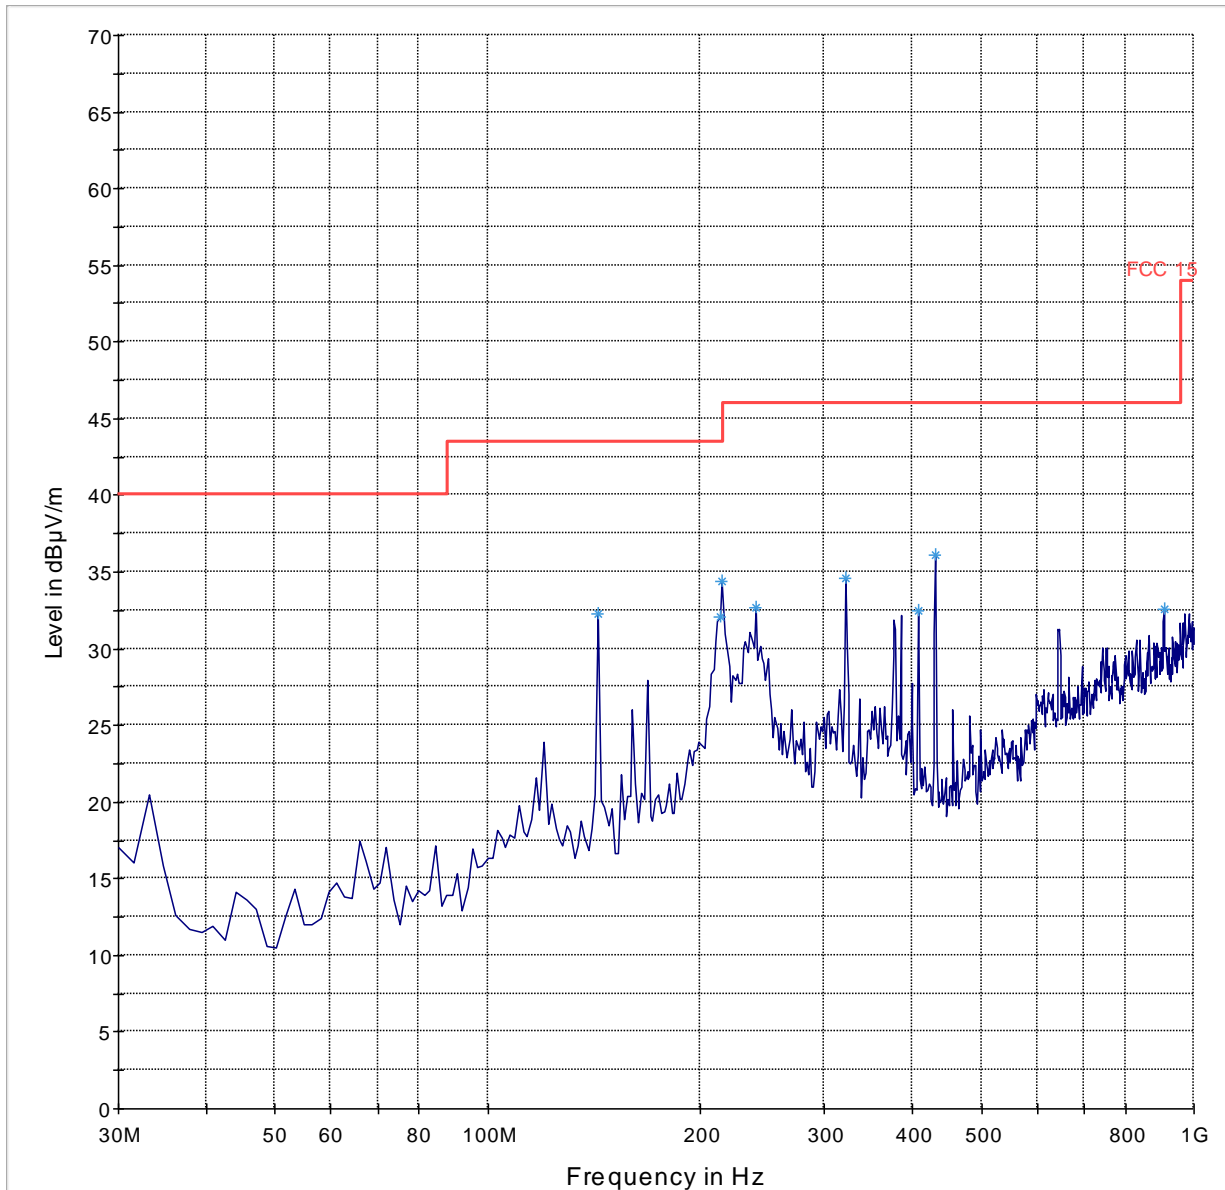

— FCC 15    — Preview Result 1-PK+    \* Data Reduction Result 1 [3]-PK+

1GHz – 18GHz


Mode: 802.11n\_HT20-Ch36 (Sub-Band 1)

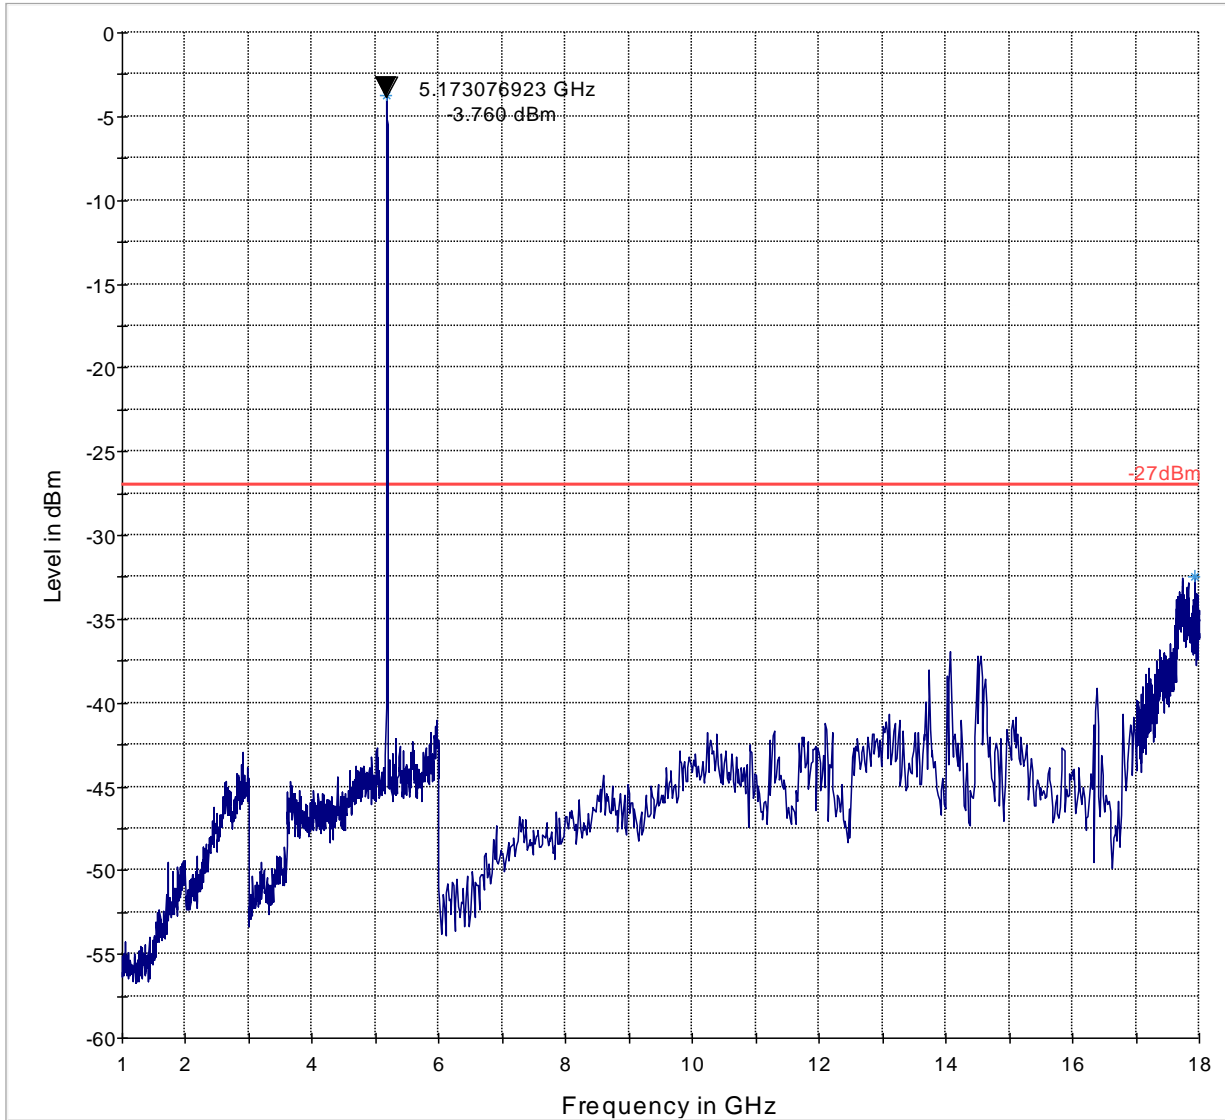

— -27dBm    — Preview Result 1-PK+    \* Data Reduction Result 1 [2]-PK+

18GHz – 40GHz


Mode: 802.11n\_HT20-Ch36 (Sub-Band 1)

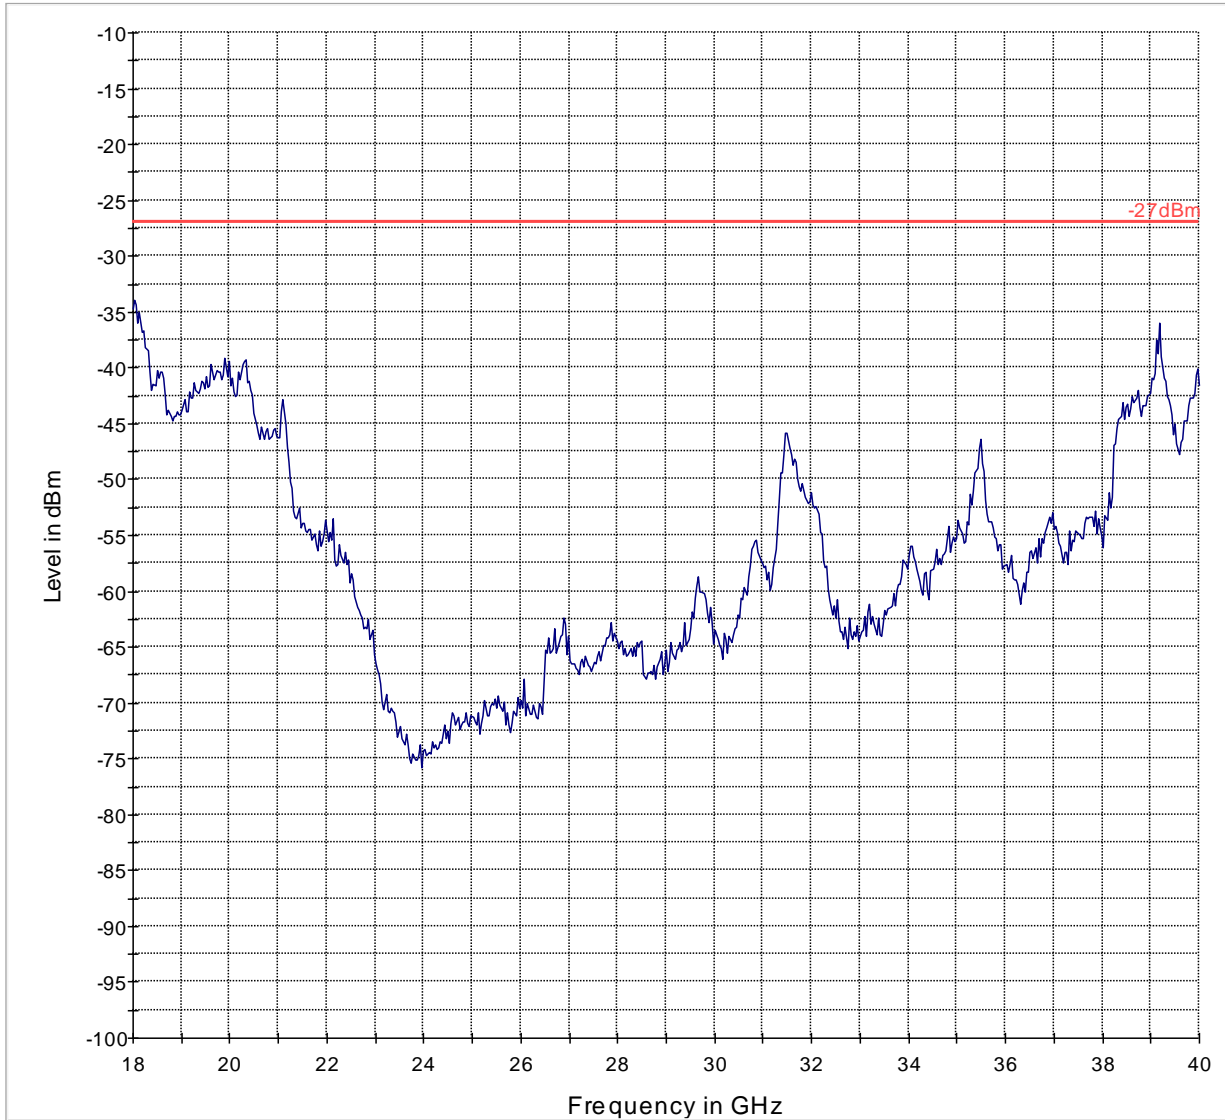

— -27dBm      — Preview Result 1-PK+

<30MHz


Mode: 802.11n\_HT20-Ch40 (Sub-Band 1)

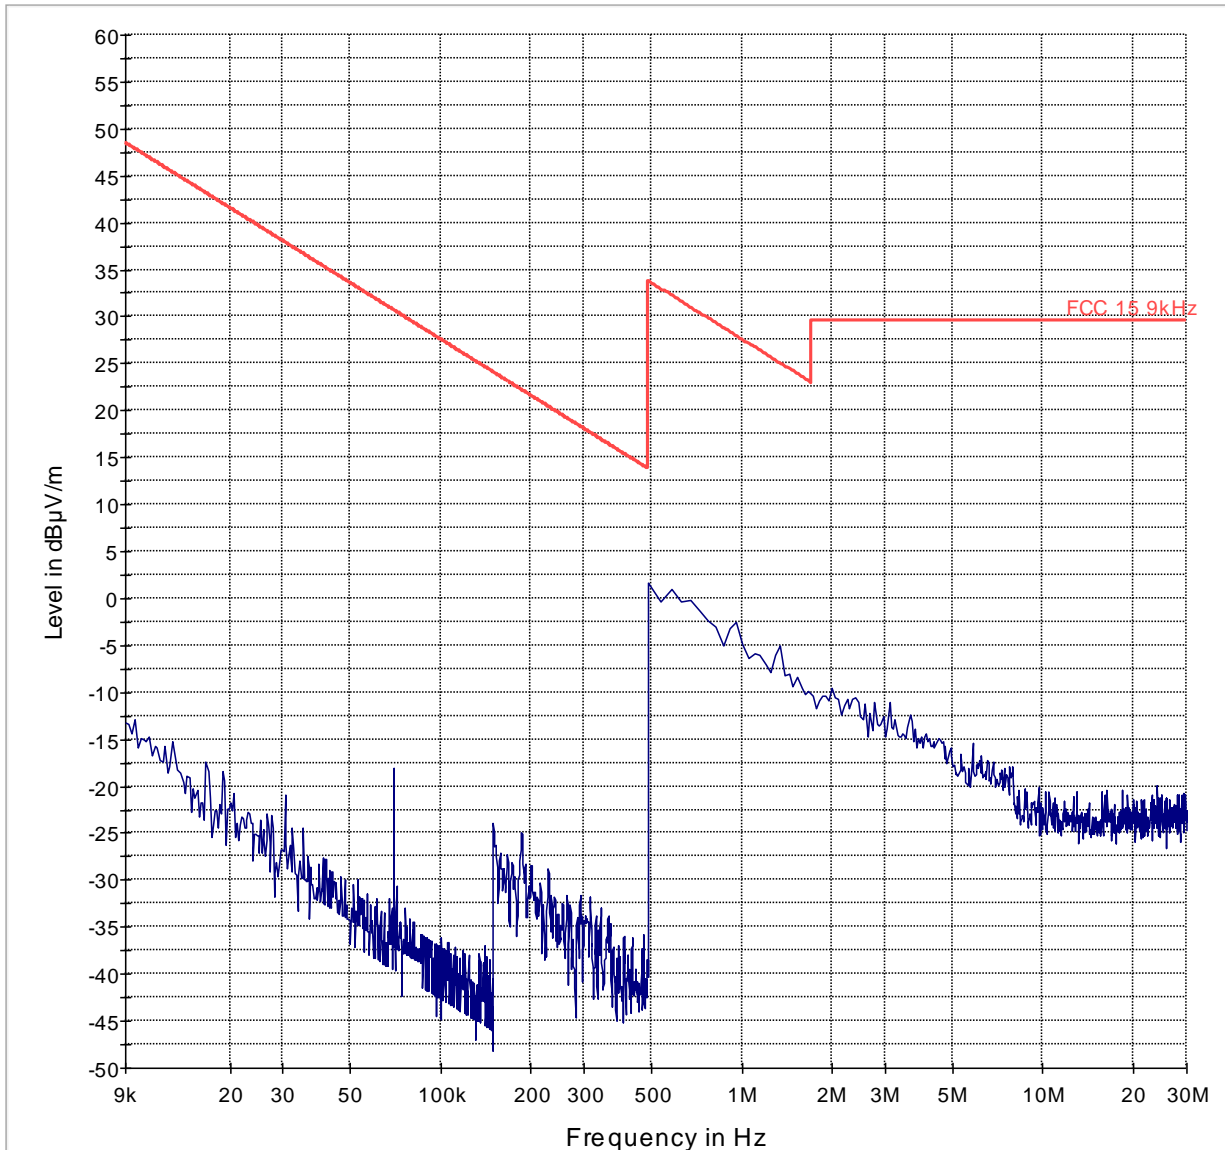

— FCC 15.9kHz — Preview Result 1-PK+

30MHz – 1GHz


Mode: 802.11n\_HT20-Ch40 (Sub-Band 1)

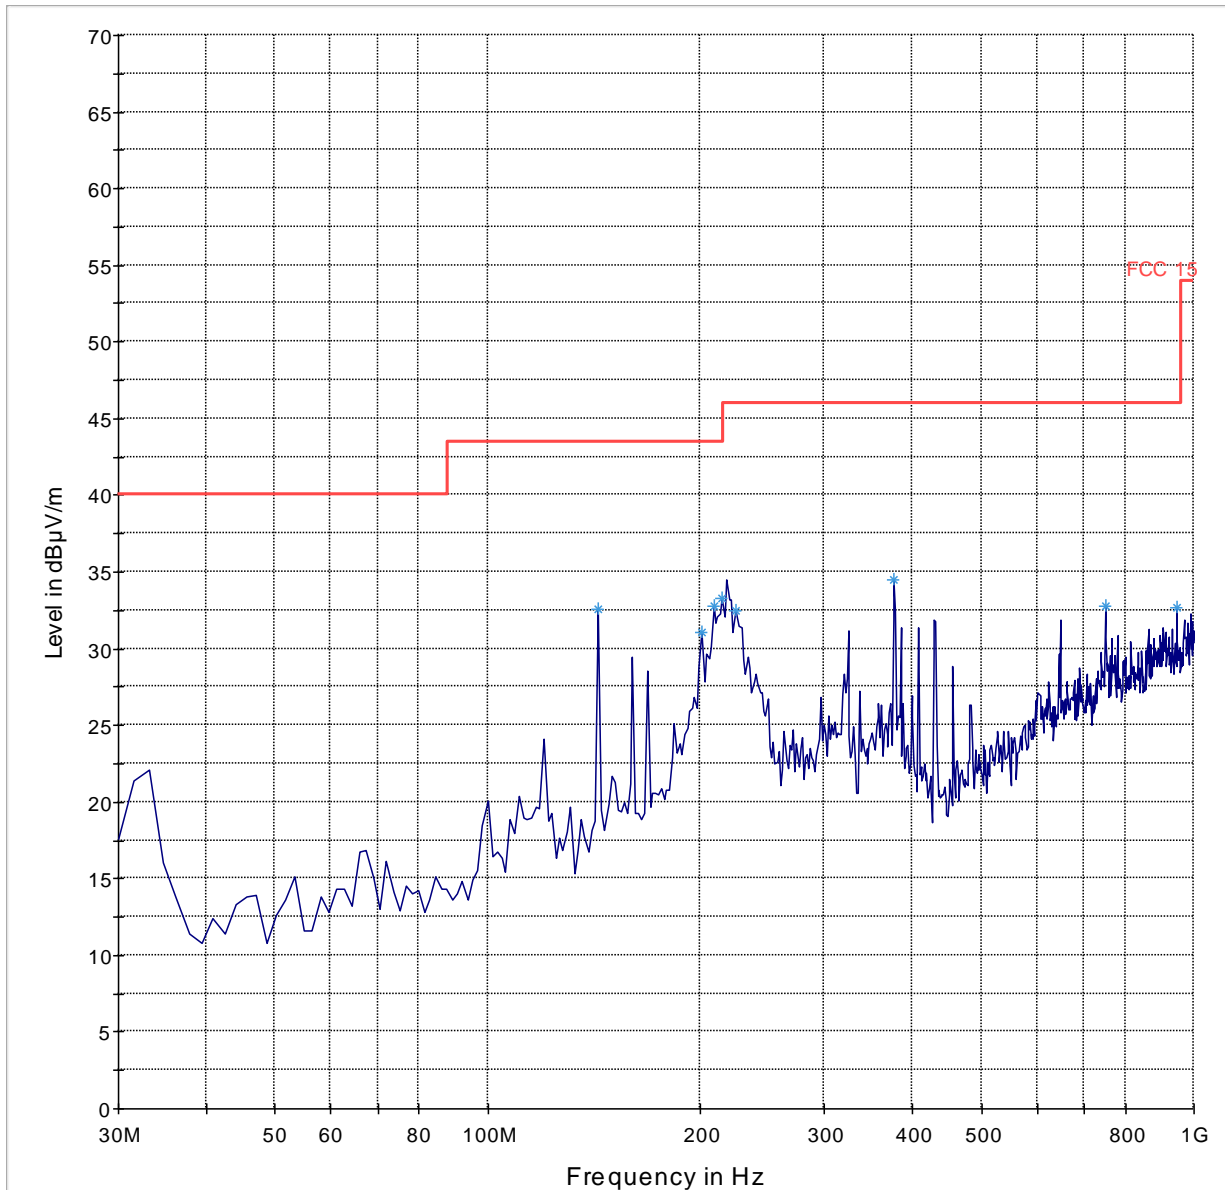

— FCC 15    — Preview Result 1-PK+    \* Data Reduction Result 1 [3]-PK+

1GHz – 18GHz


Mode: 802.11n\_HT20-Ch40 (Sub-Band 1)

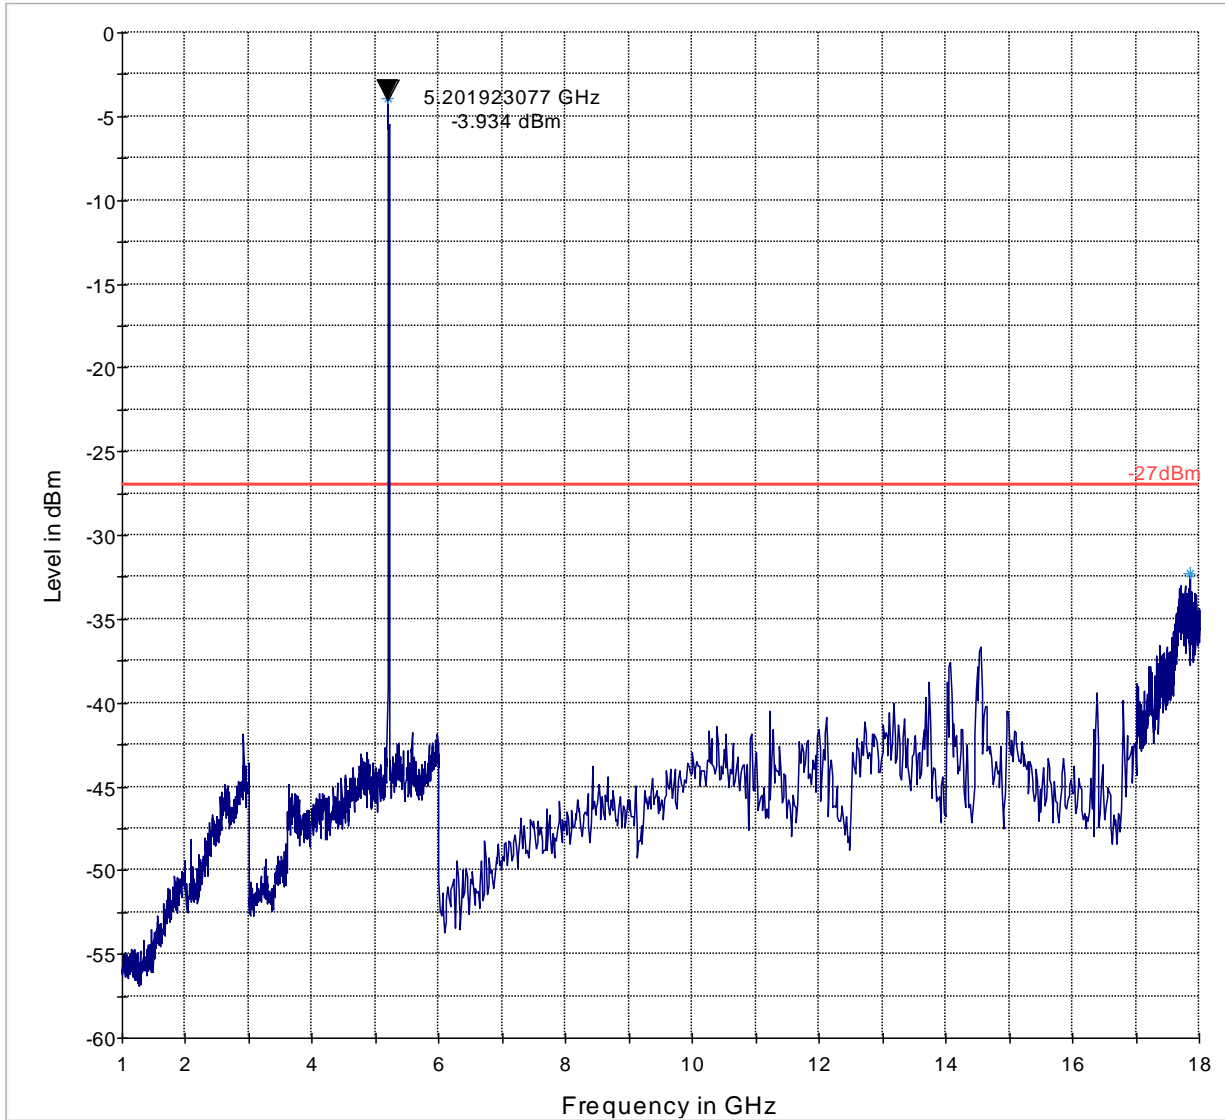

— -27dBm    — Preview Result 1-PK+    \* Data Reduction Result 1 [2]-PK+

18GHz – 40GHz

Mode: 802.11n\_HT20-Ch40 (Sub-Band 1)

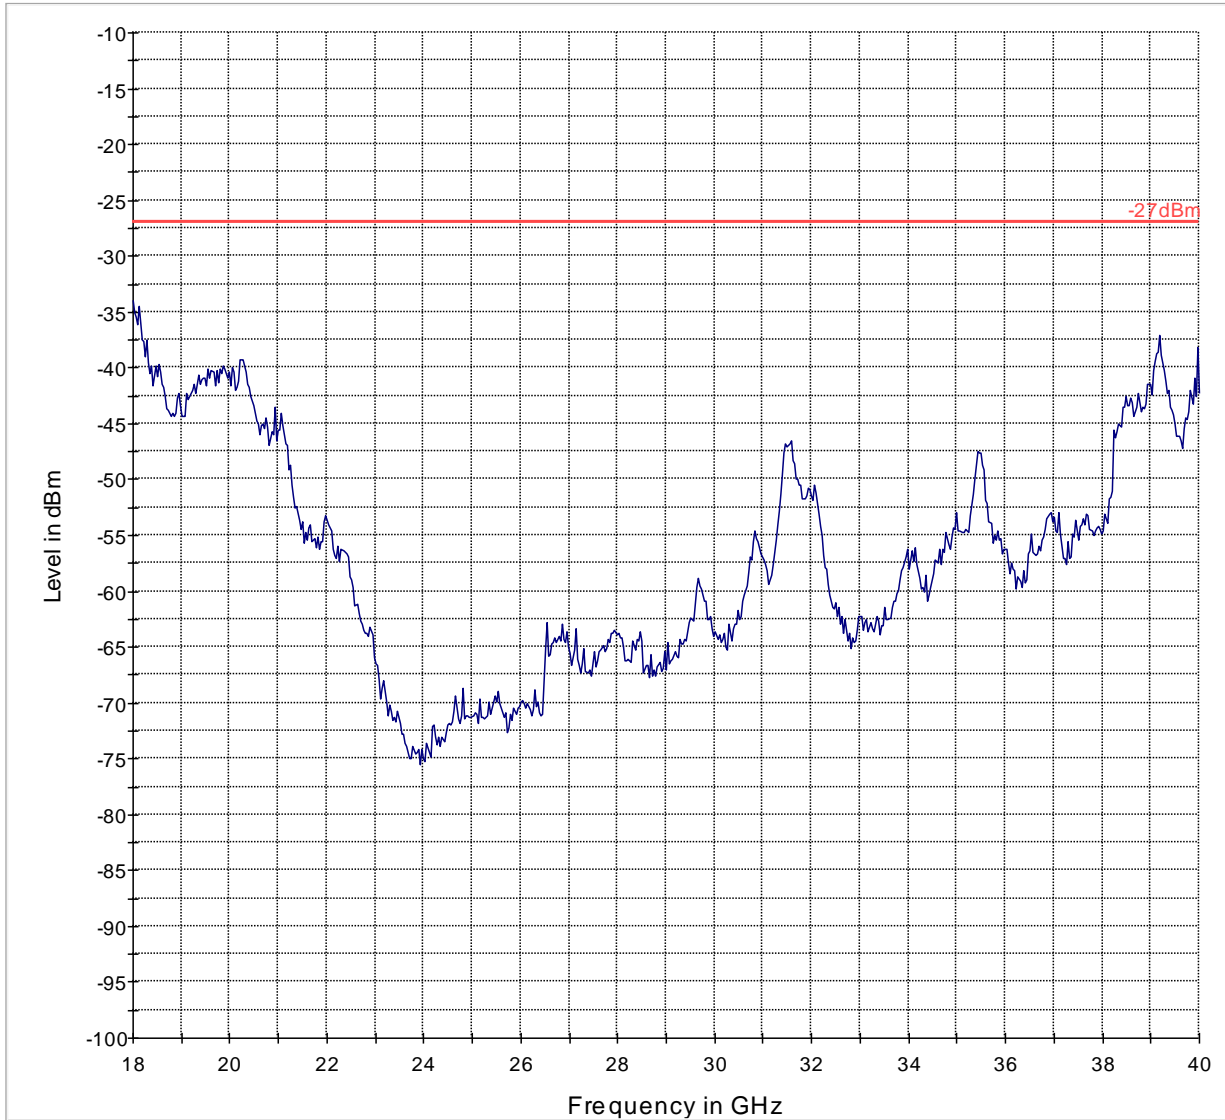


— -27dBm      — Preview Result 1-PK+



<30MHz


Mode: 802.11n\_HT20-Ch48 (Sub-Band 1)

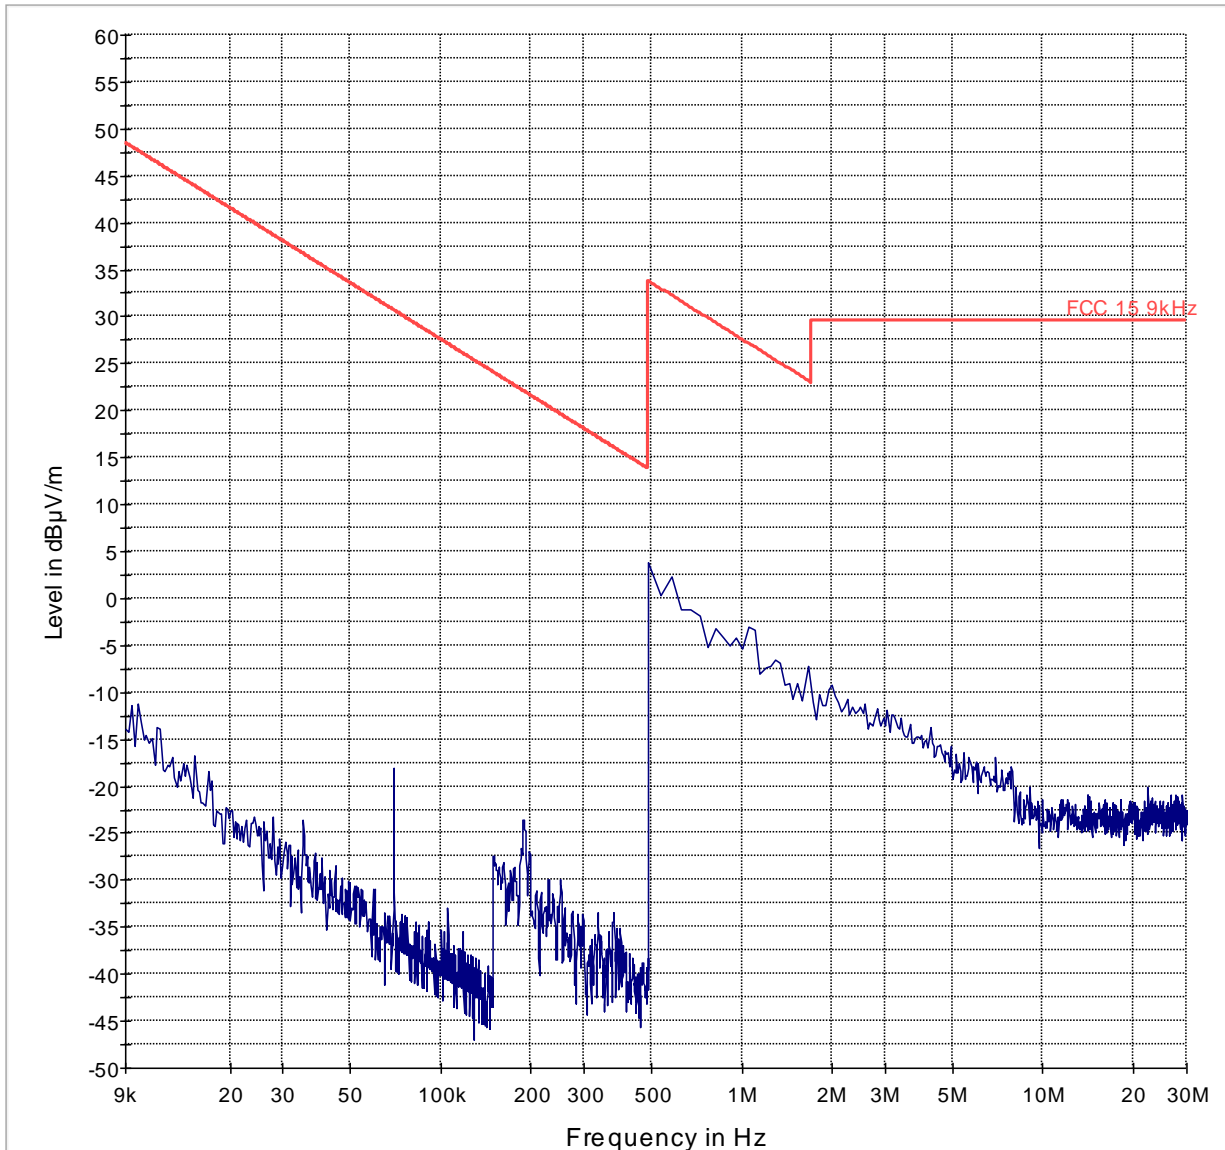

— FCC 15.9kHz — Preview Result 1-PK+

30MHz – 1GHz


Mode: 802.11n\_HT20-Ch48 (Sub-Band 1)

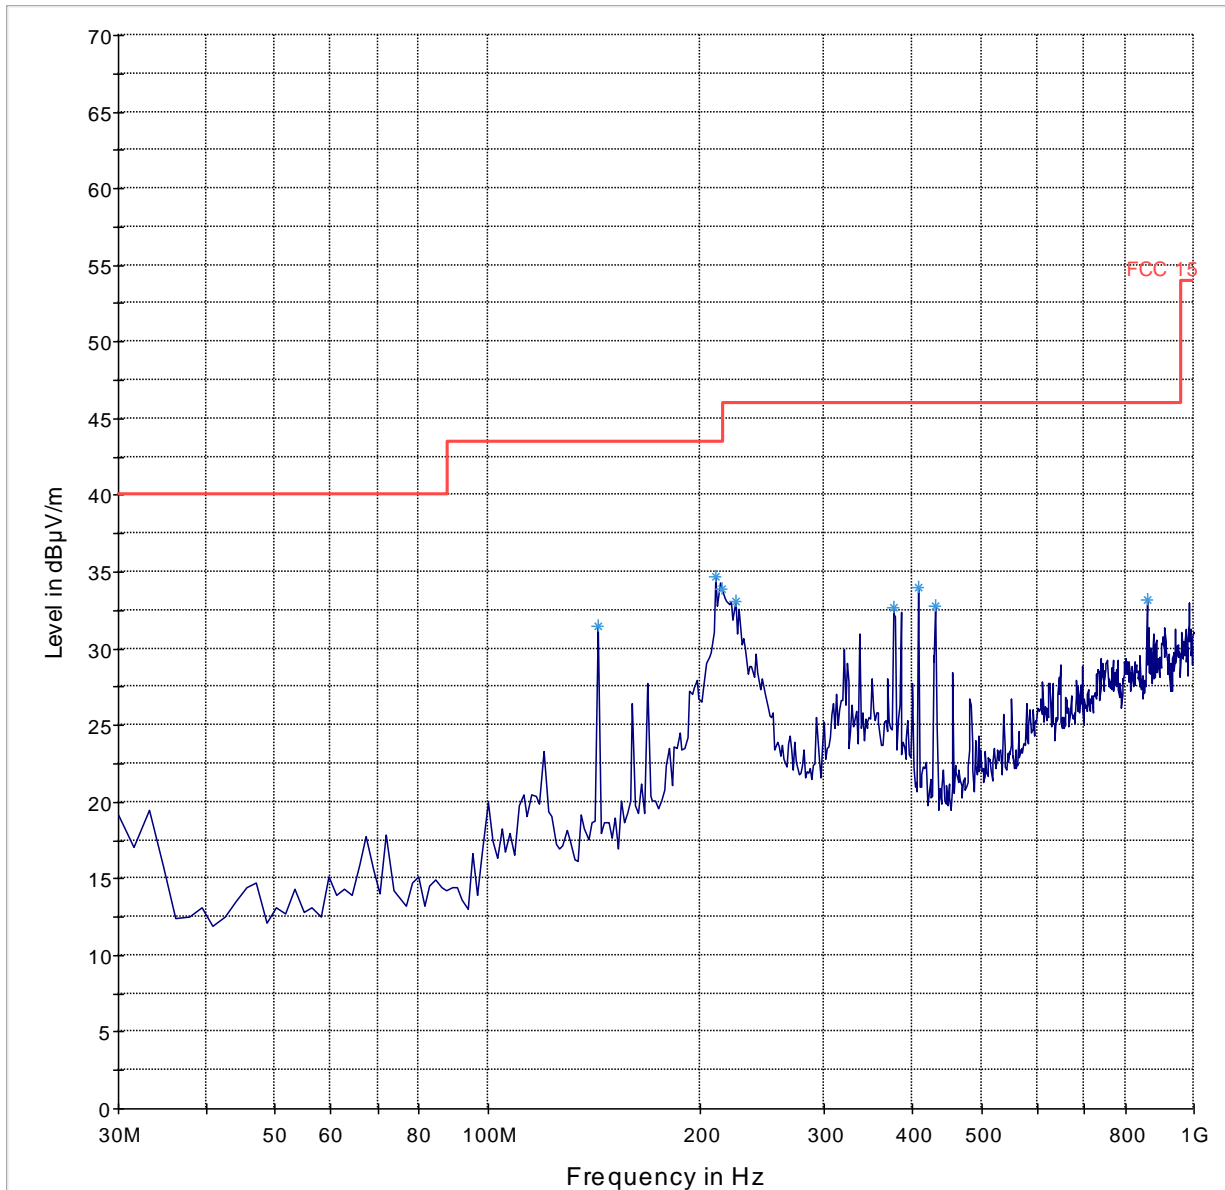

— FCC 15    — Preview Result 1-PK+    \* Data Reduction Result 1 [3]-PK+

1GHz – 18GHz


Mode: 802.11n\_HT20-Ch48 (Sub-Band 1)

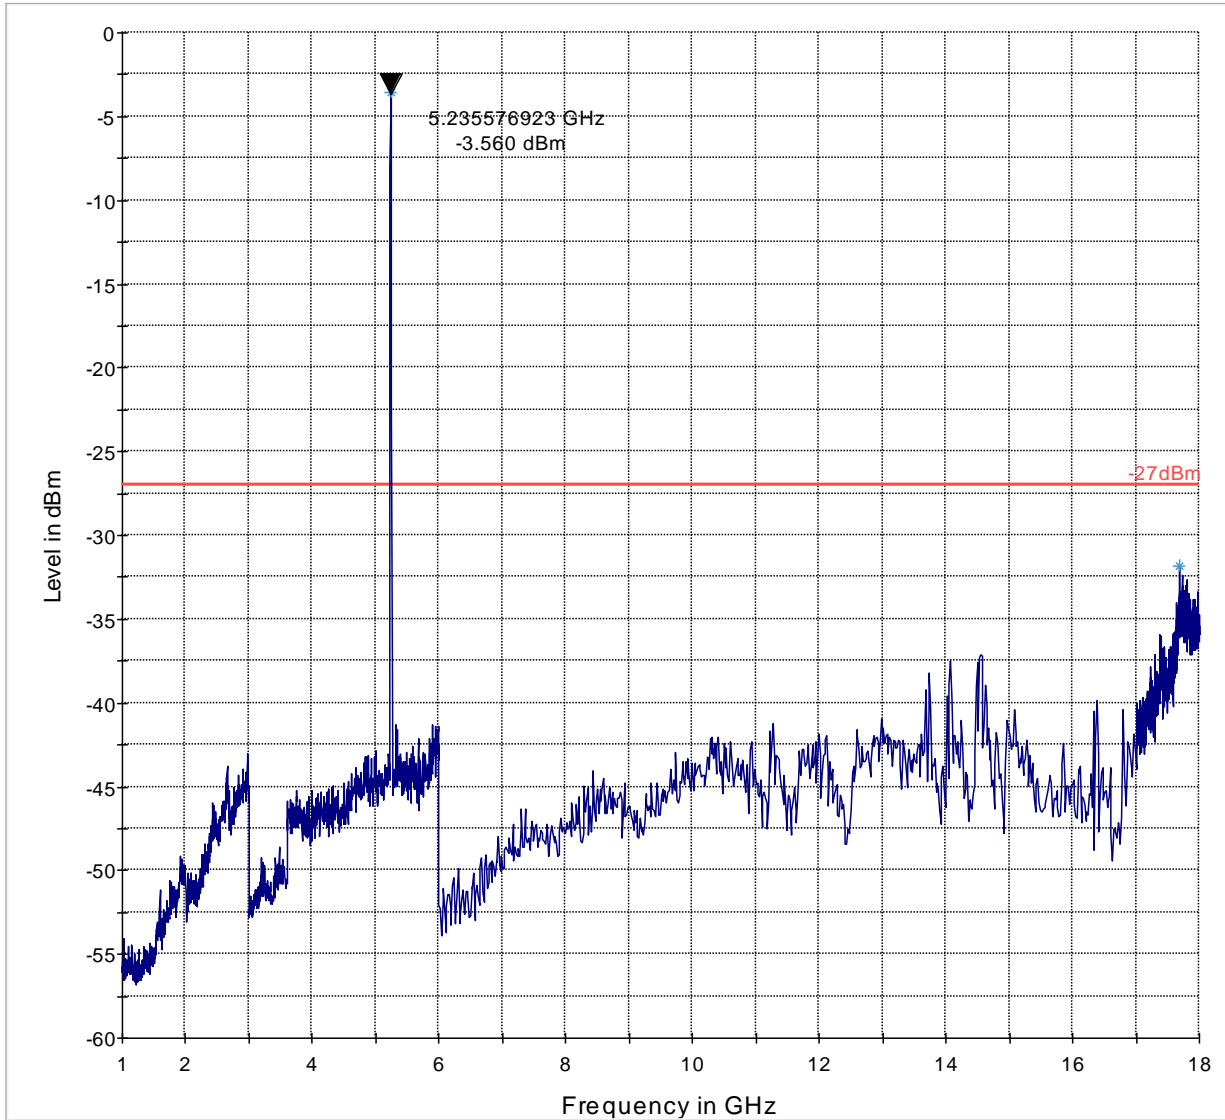

— -27dBm      — Preview Result 1-PK+      \* Data Reduction Result 1 [2]-PK+

18GHz – 40GHz


Mode: 802.11n\_HT20-Ch48 (Sub-Band 1)

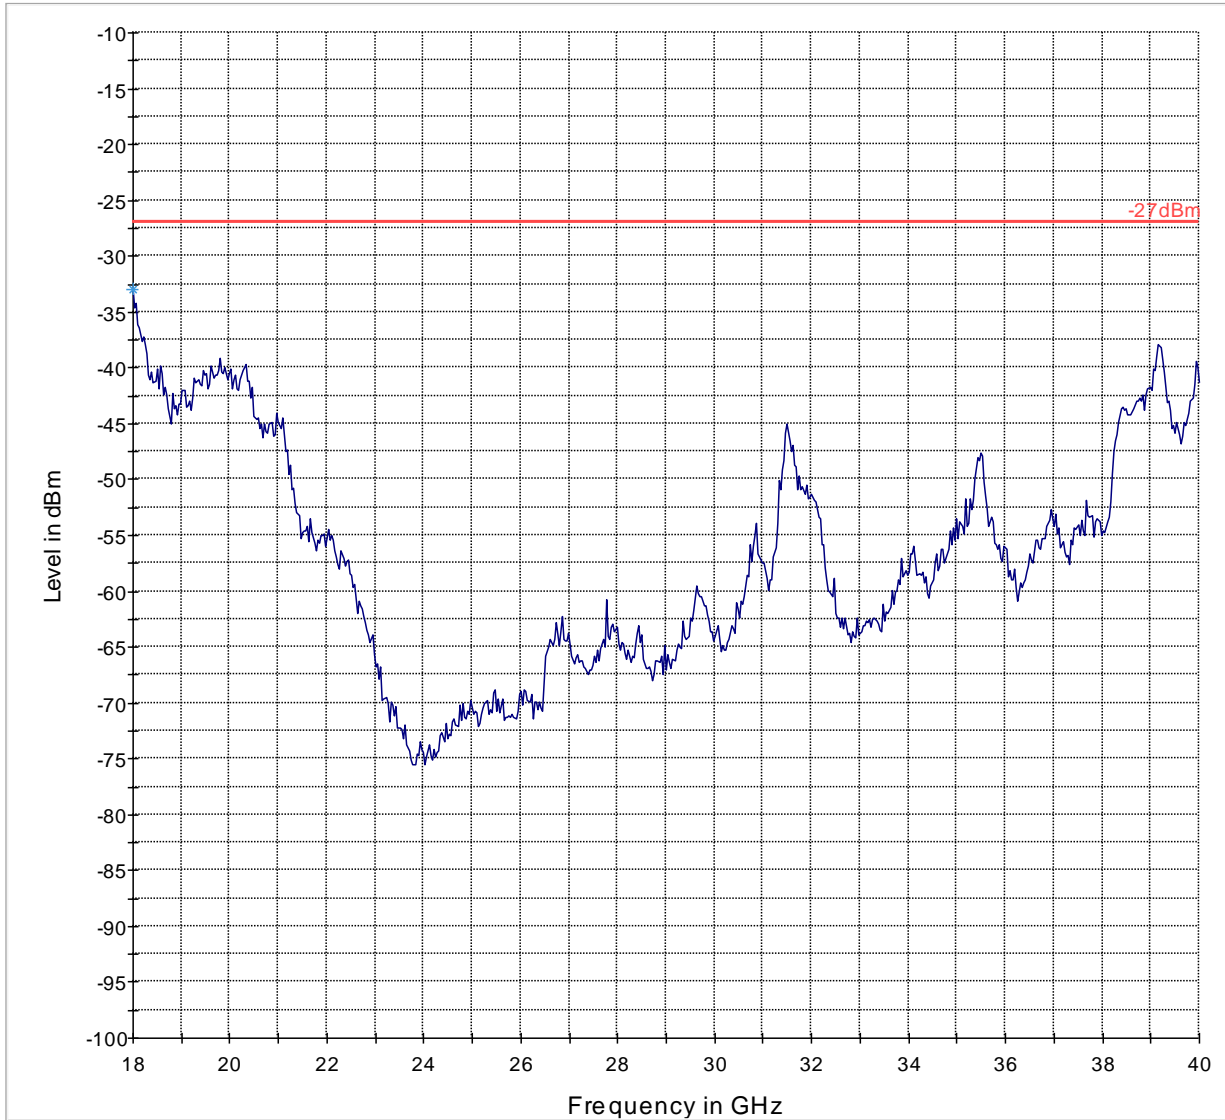

— -27dBm    — Preview Result 1-PK+    \* Data Reduction Result 1 [5]-PK+

<30MHz


Mode: 802.11n\_HT20-Ch52 (Sub-Band 2)

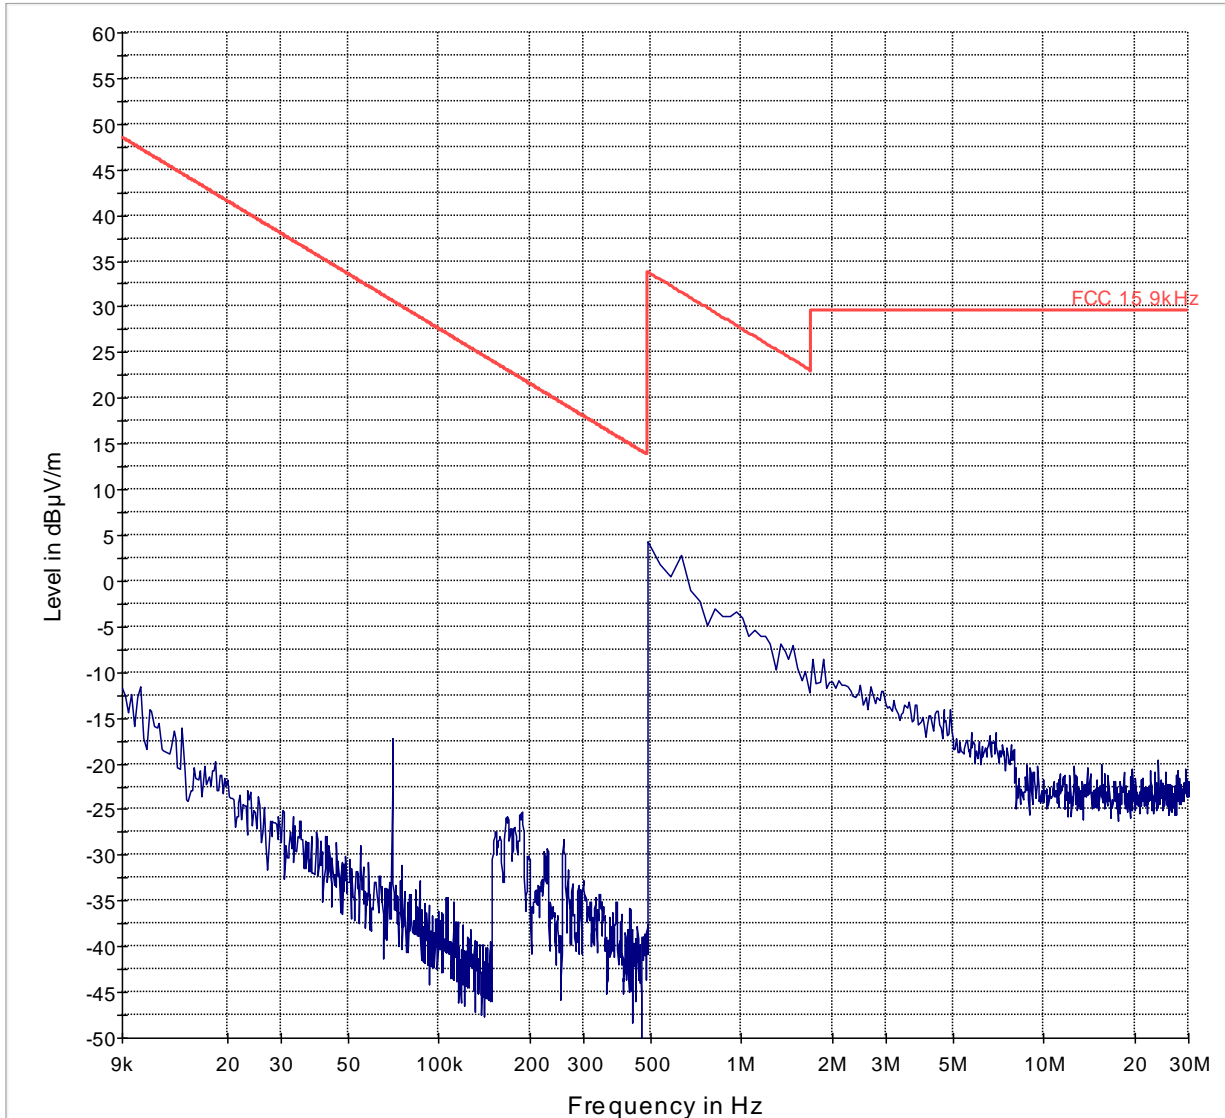

— FCC 15.9kHz — Preview Result 1-PK+

30MHz – 1GHz


Mode: 802.11n\_HT20-Ch52 (Sub-Band 2)

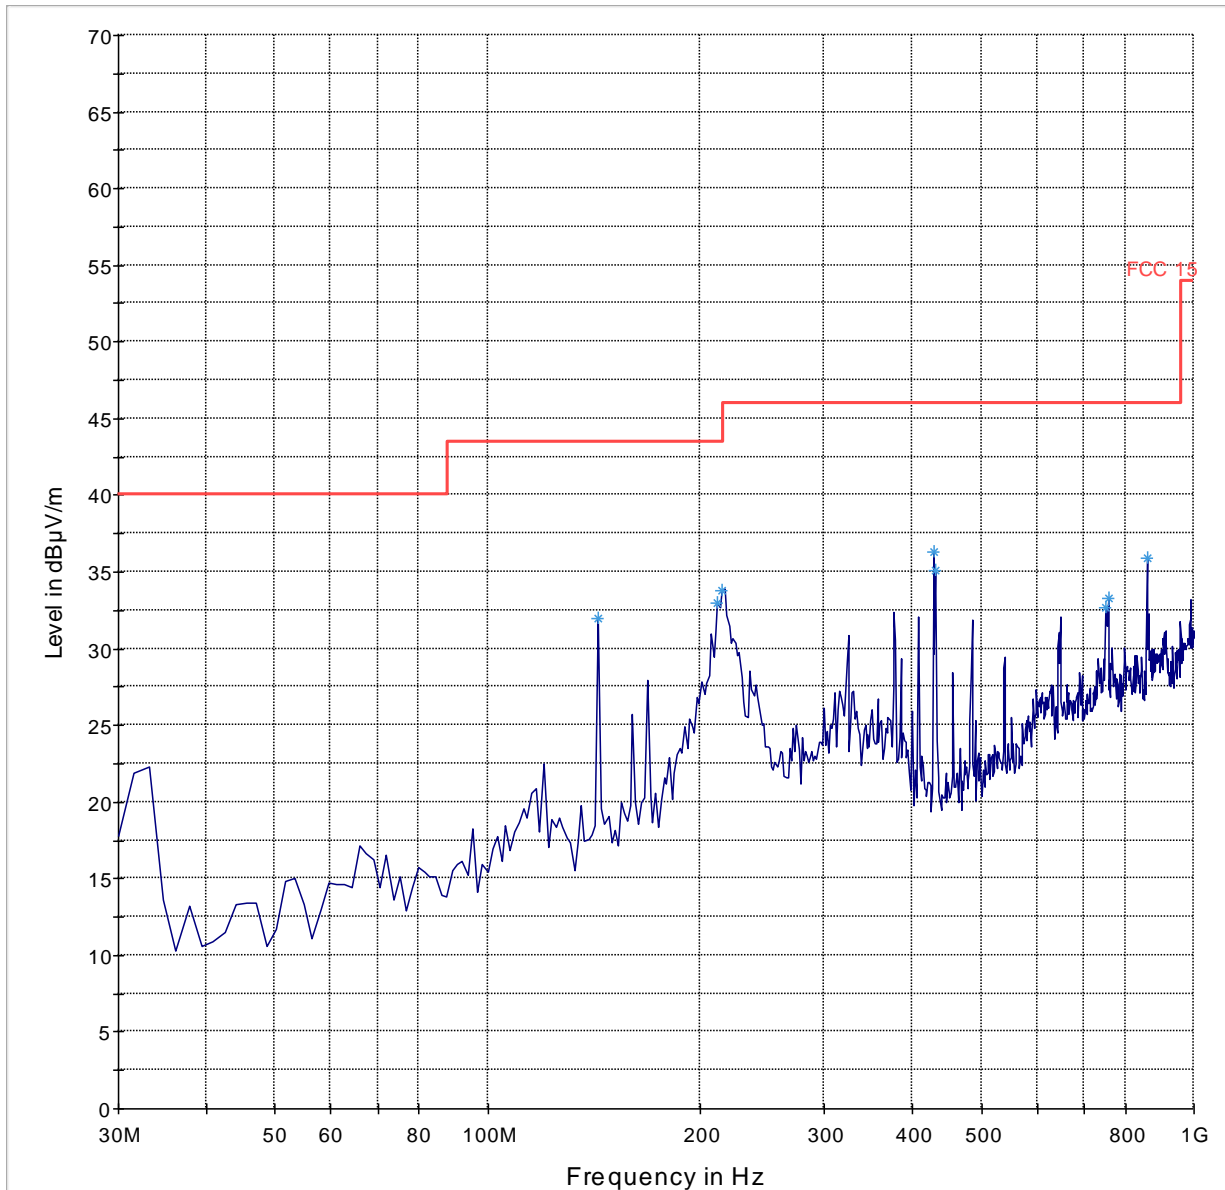

— FCC 15    — Preview Result 1-PK+    \* Data Reduction Result 1 [3]-PK+

1GHz – 18GHz


Mode: 802.11n\_HT20-Ch52 (Sub-Band 2)

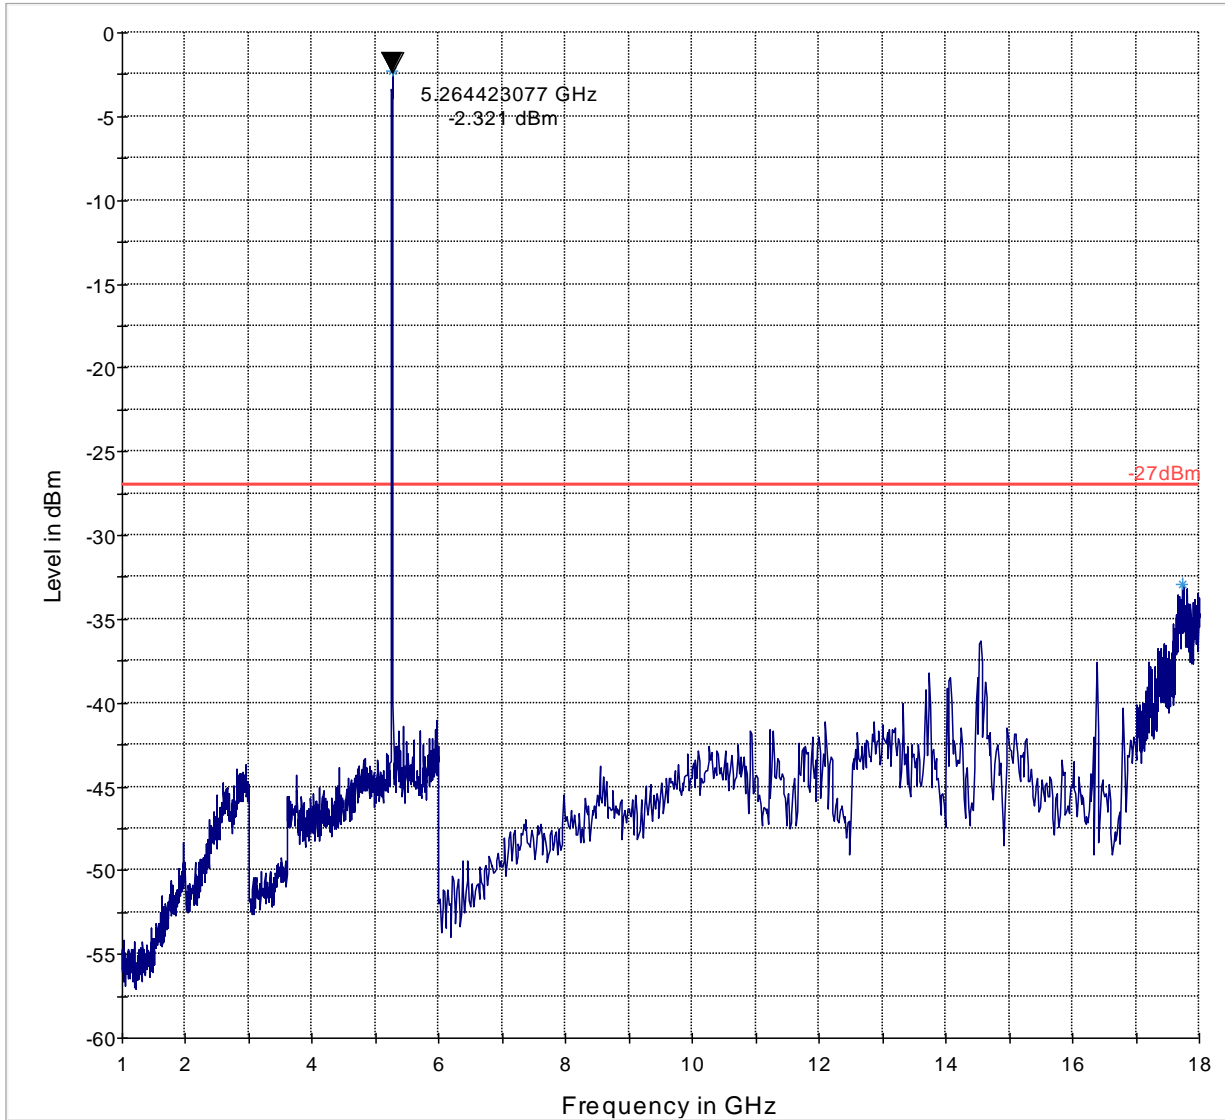

— -27dBm    — Preview Result 1-PK+    \* Data Reduction Result 1 [2]-PK+

18GHz – 40GHz

Mode: 802.11n\_HT20-Ch52 (Sub-Band 2)

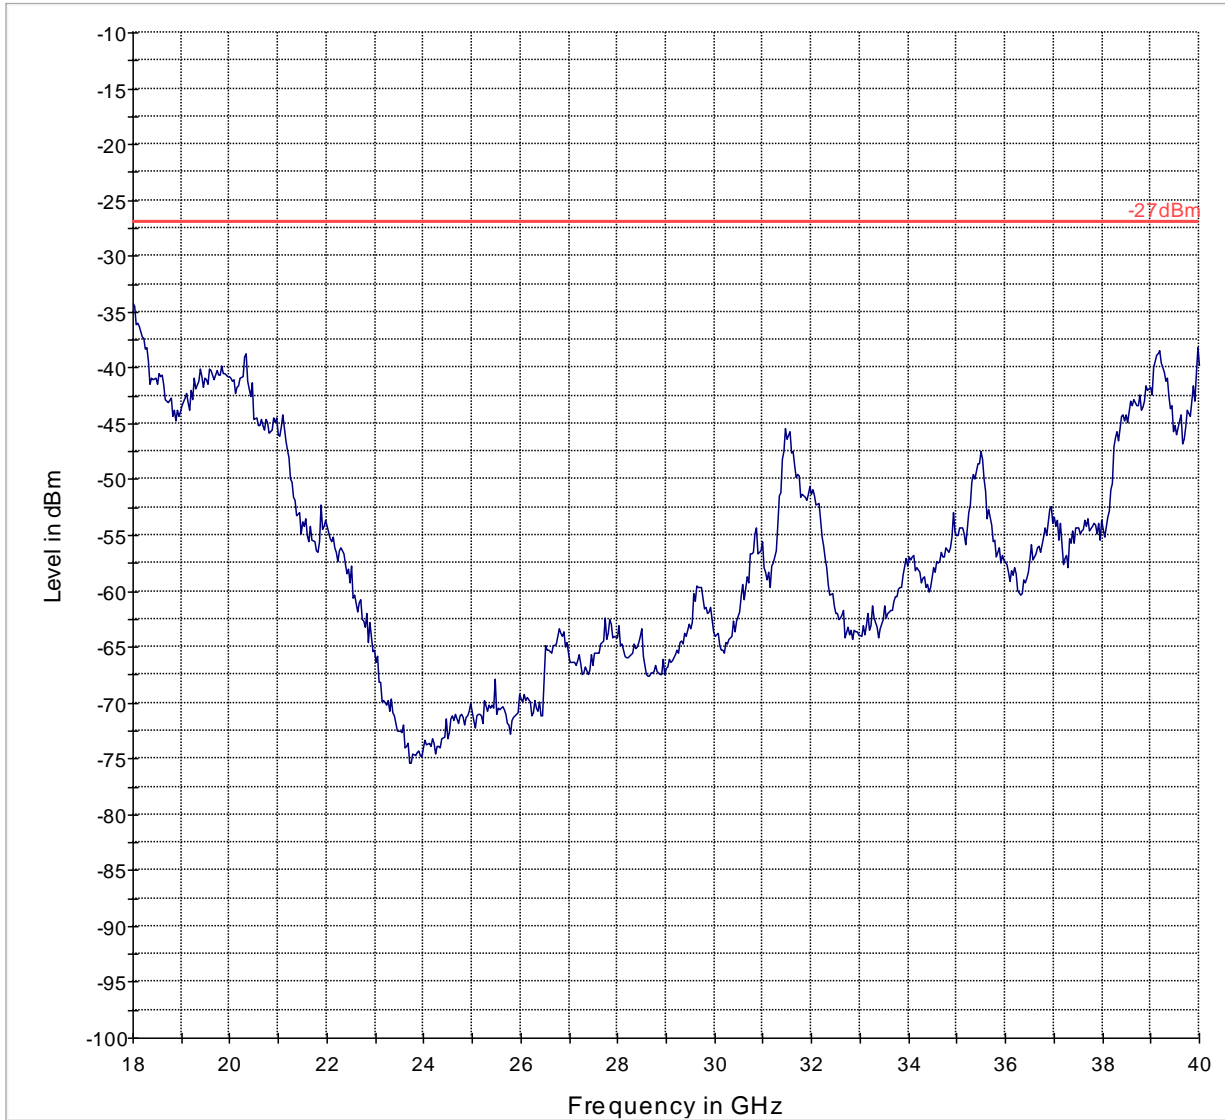


— -27dBm      — Preview Result 1-PK+



<30MHz


Mode: 802.11n\_HT20-Ch60 (Sub-Band 2)

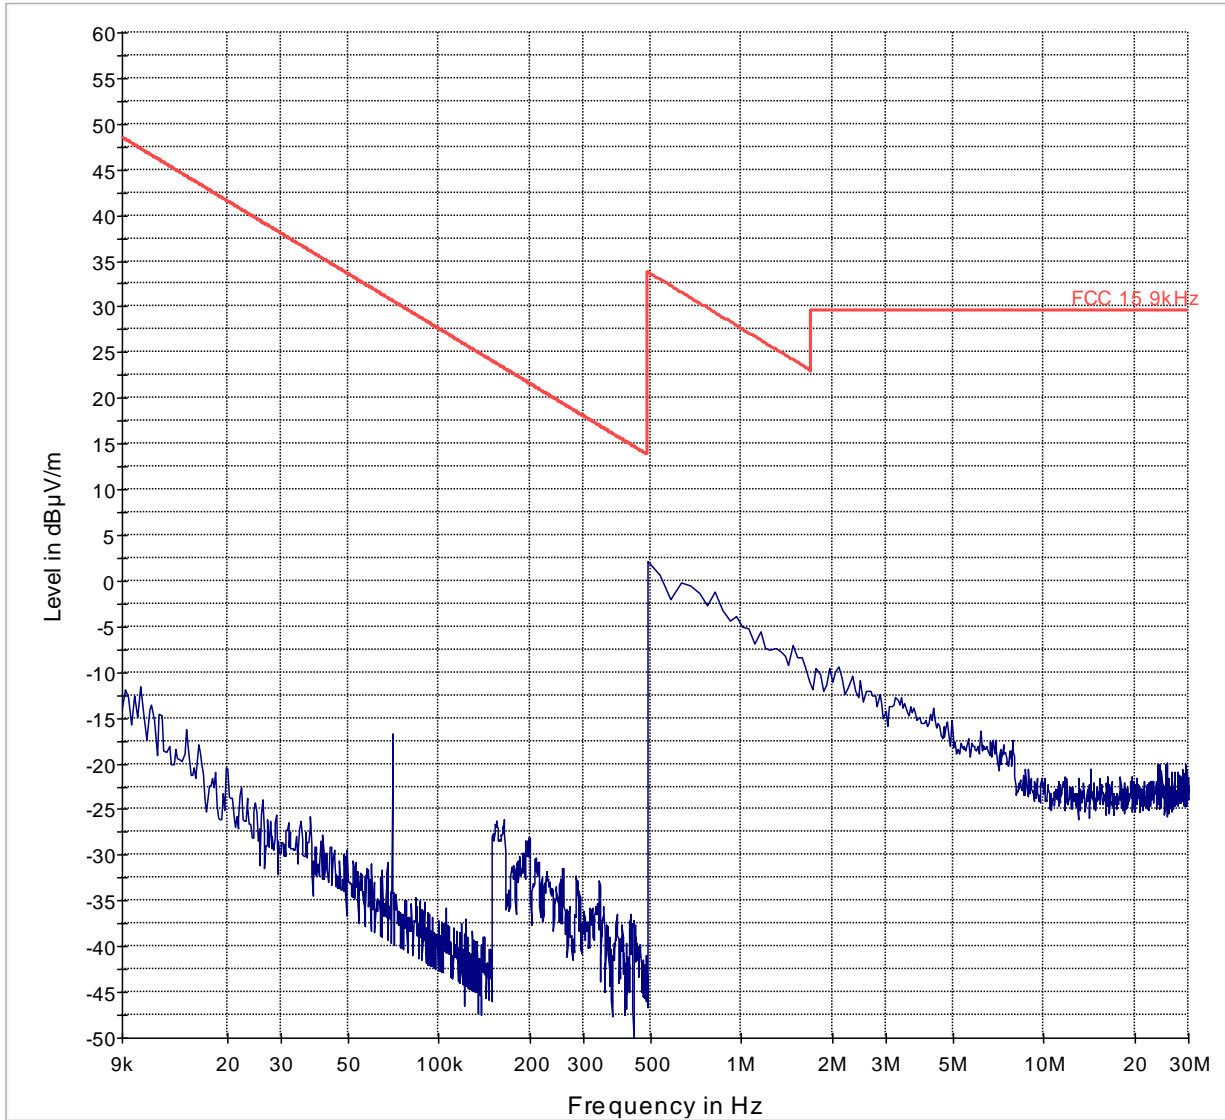

— FCC 15.9kHz — Preview Result 1-PK+

30MHz – 1GHz


Mode: 802.11n\_HT20-Ch60 (Sub-Band 2)

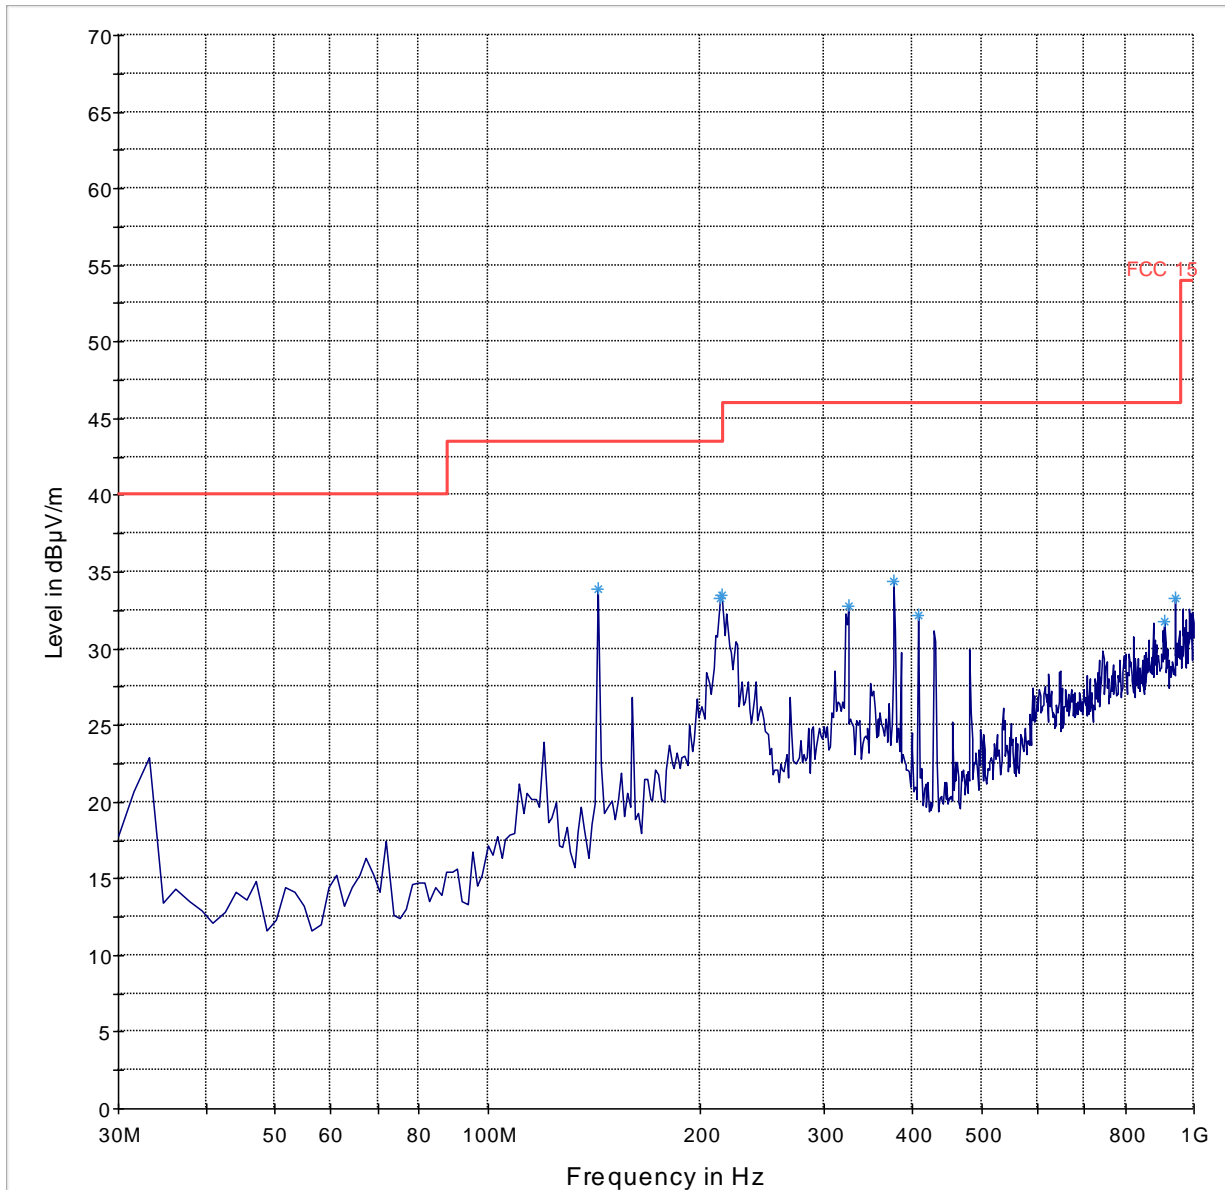

— FCC 15    — Preview Result 1-PK+    \* Data Reduction Result 1 [3]-PK+

1GHz – 18GHz


Mode: 802.11n\_HT20-Ch60 (Sub-Band 2)

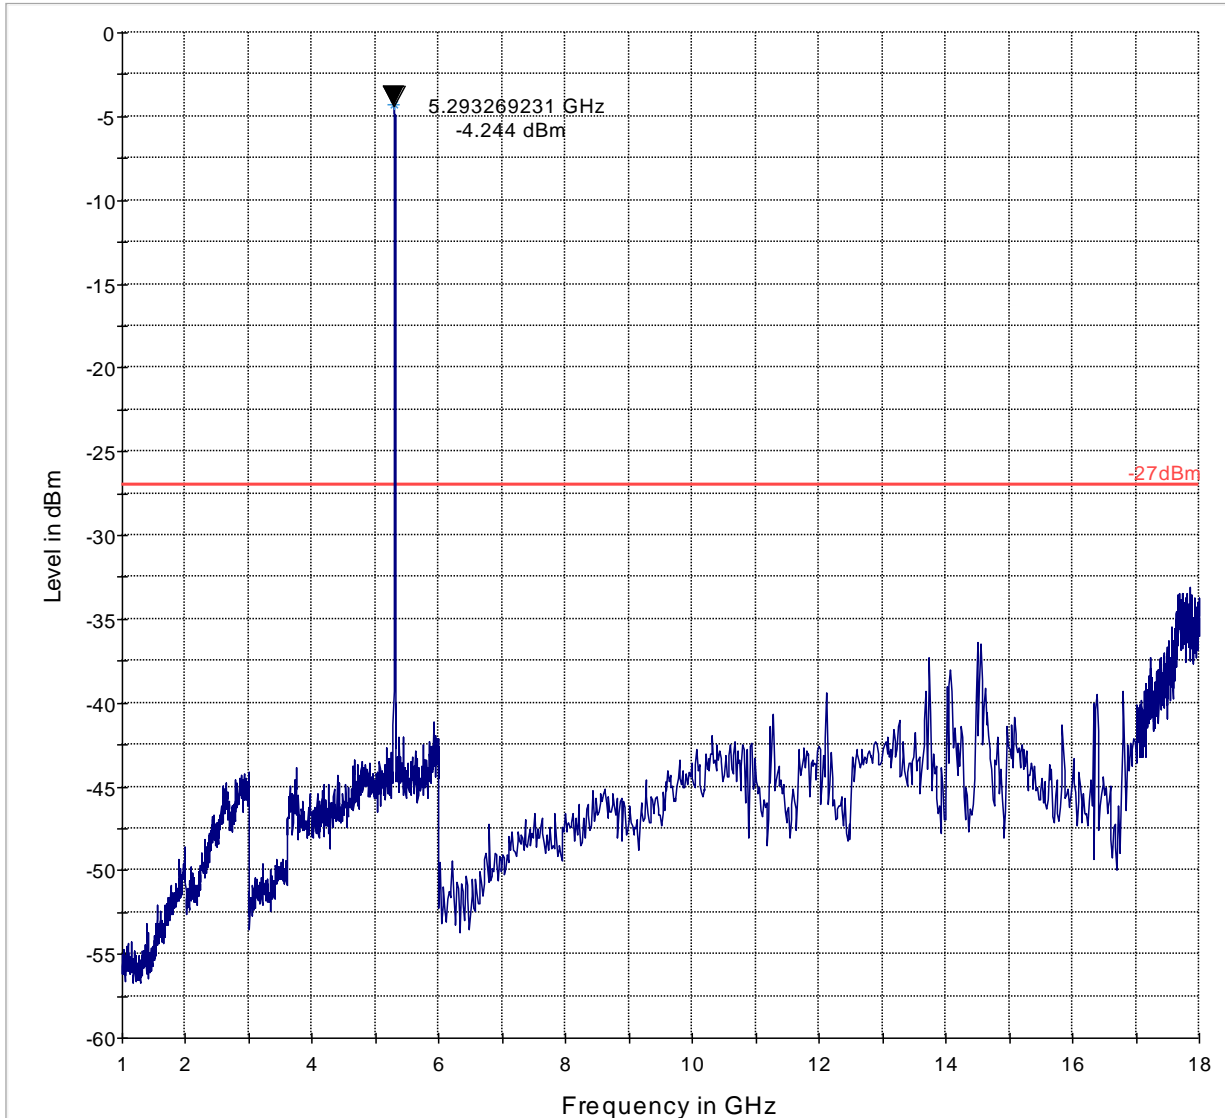

— -27dBm    — Preview Result 1-PK+    \* Data Reduction Result 1 [2]-PK+

18GHz – 40GHz


Mode: 802.11n\_HT20-Ch60 (Sub-Band 2)

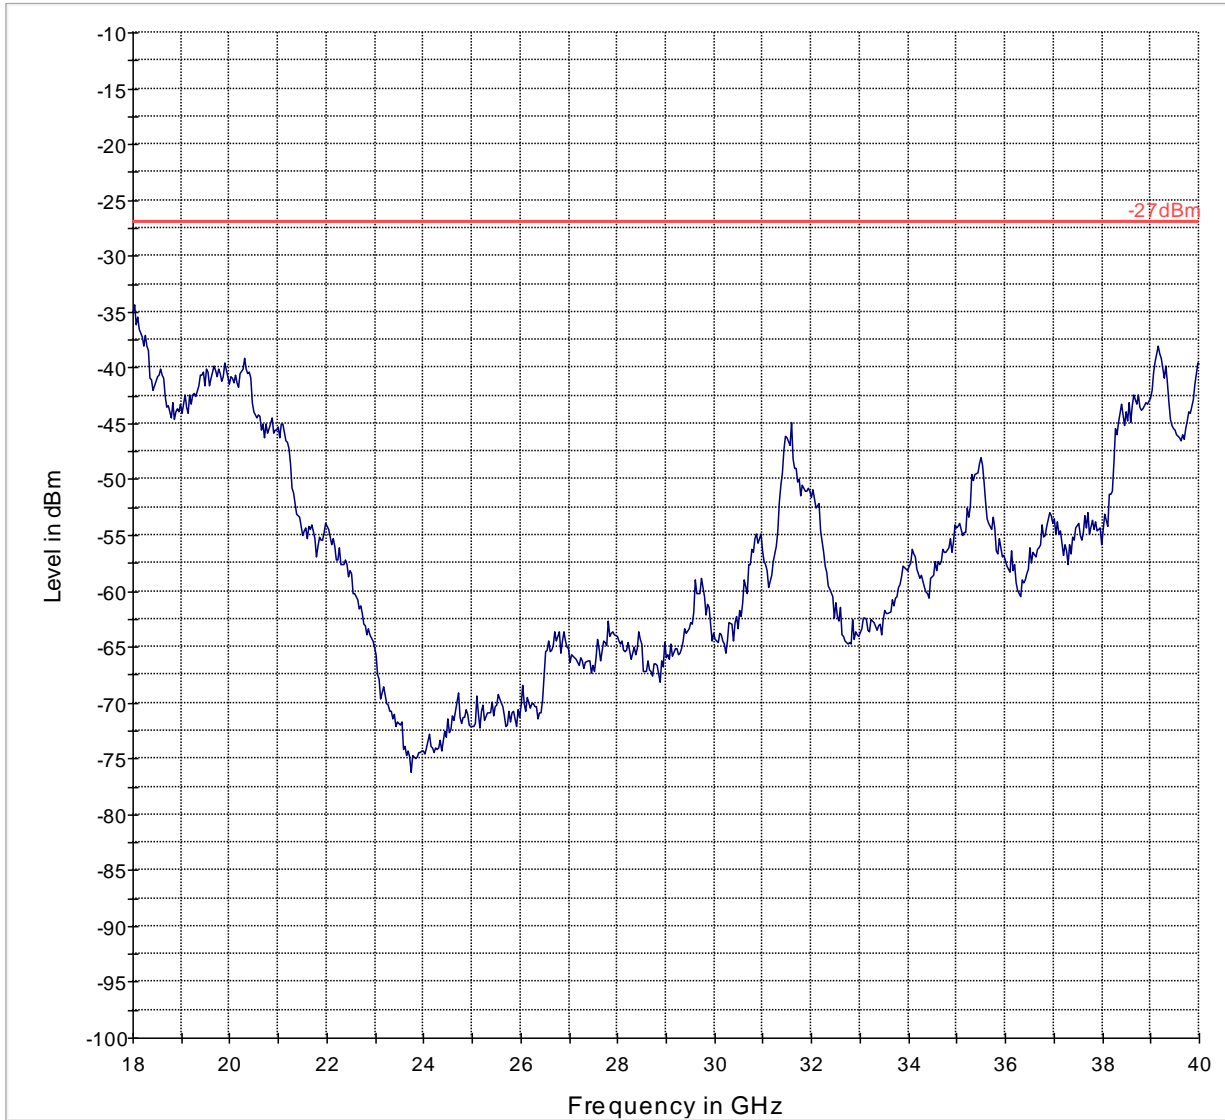

— -27dBm      — Preview Result 1-PK+

<30MHz


Mode: 802.11n\_HT20-Ch64 (Sub-Band 2)

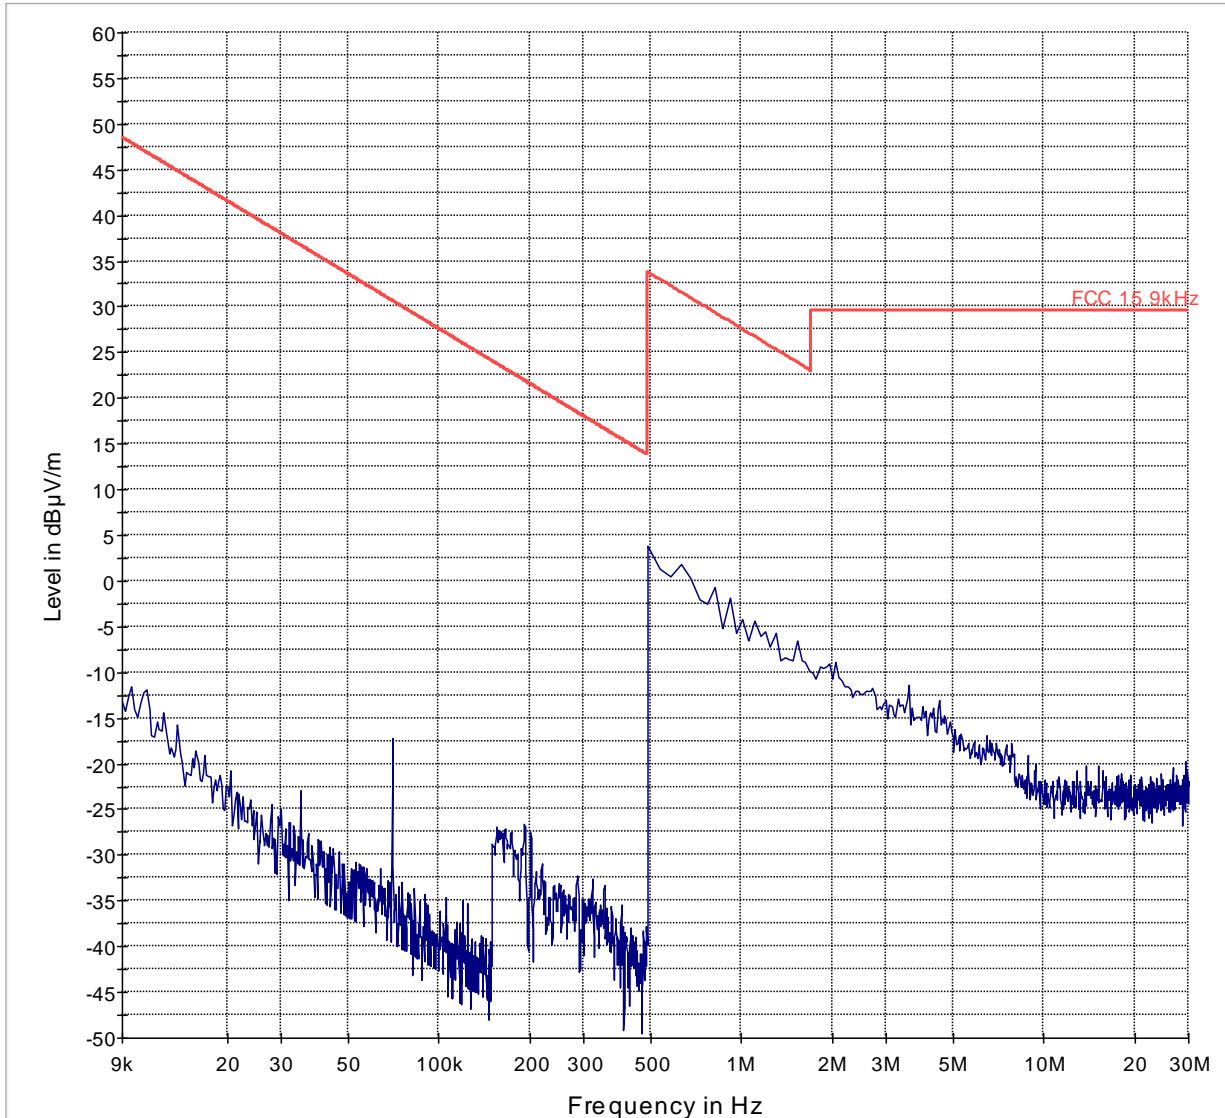

— FCC 15.9kHz — Preview Result 1-PK+

30MHz – 1GHz


Mode: 802.11n\_HT20-Ch64 (Sub-Band 2)

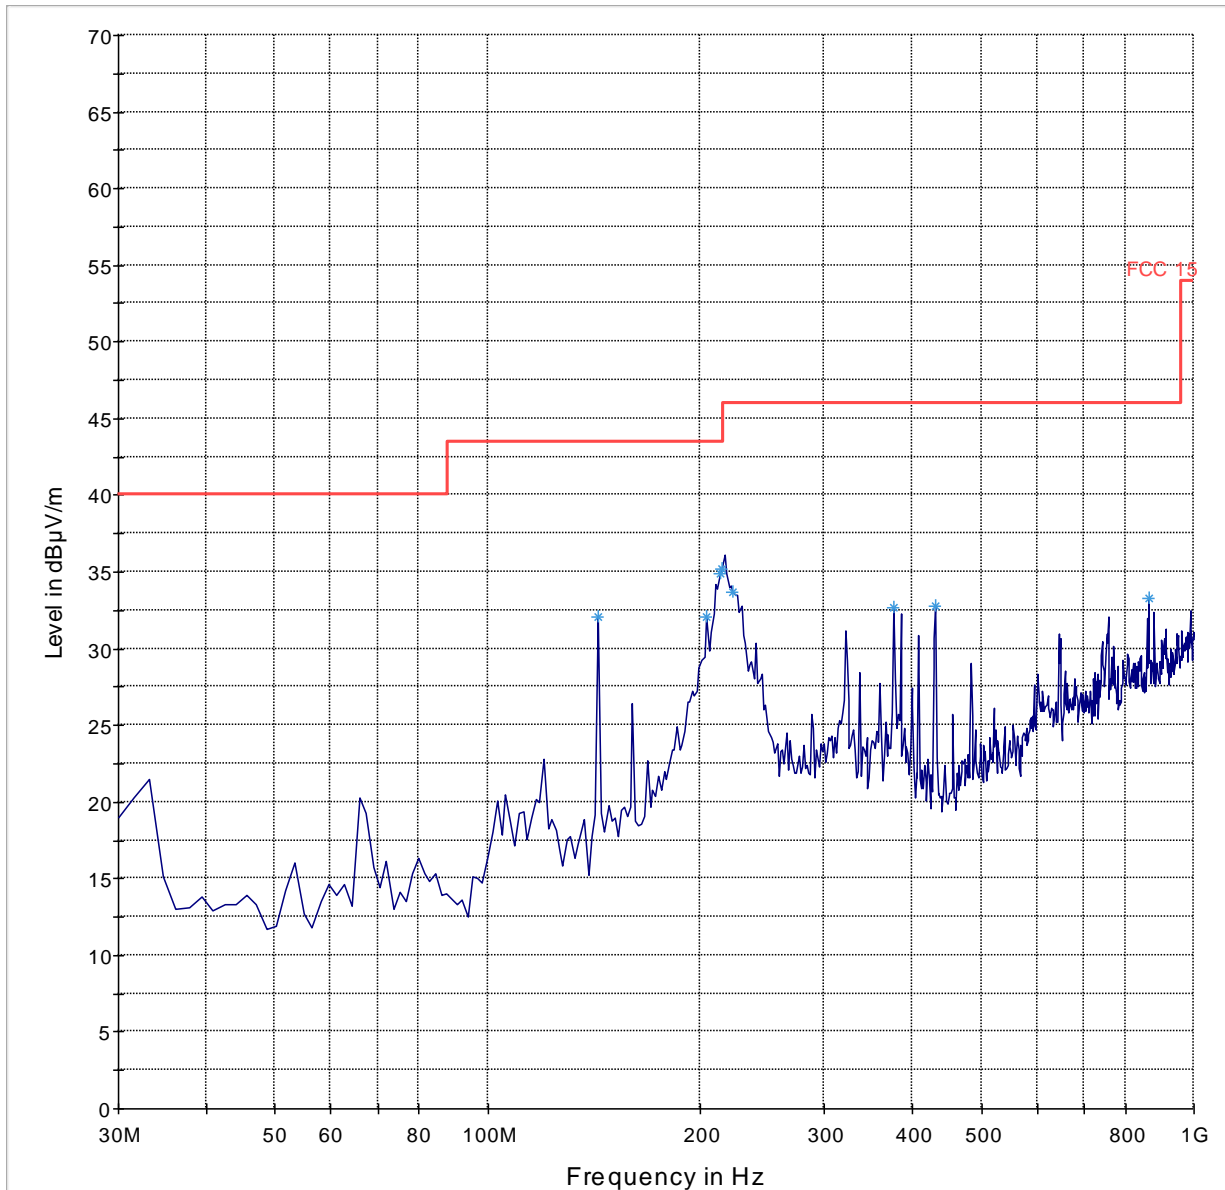

— FCC 15    — Preview Result 1-PK+    \* Data Reduction Result 1 [3]-PK+

1GHz – 18GHz


Mode: 802.11n\_HT20-Ch64 (Sub-Band 2)

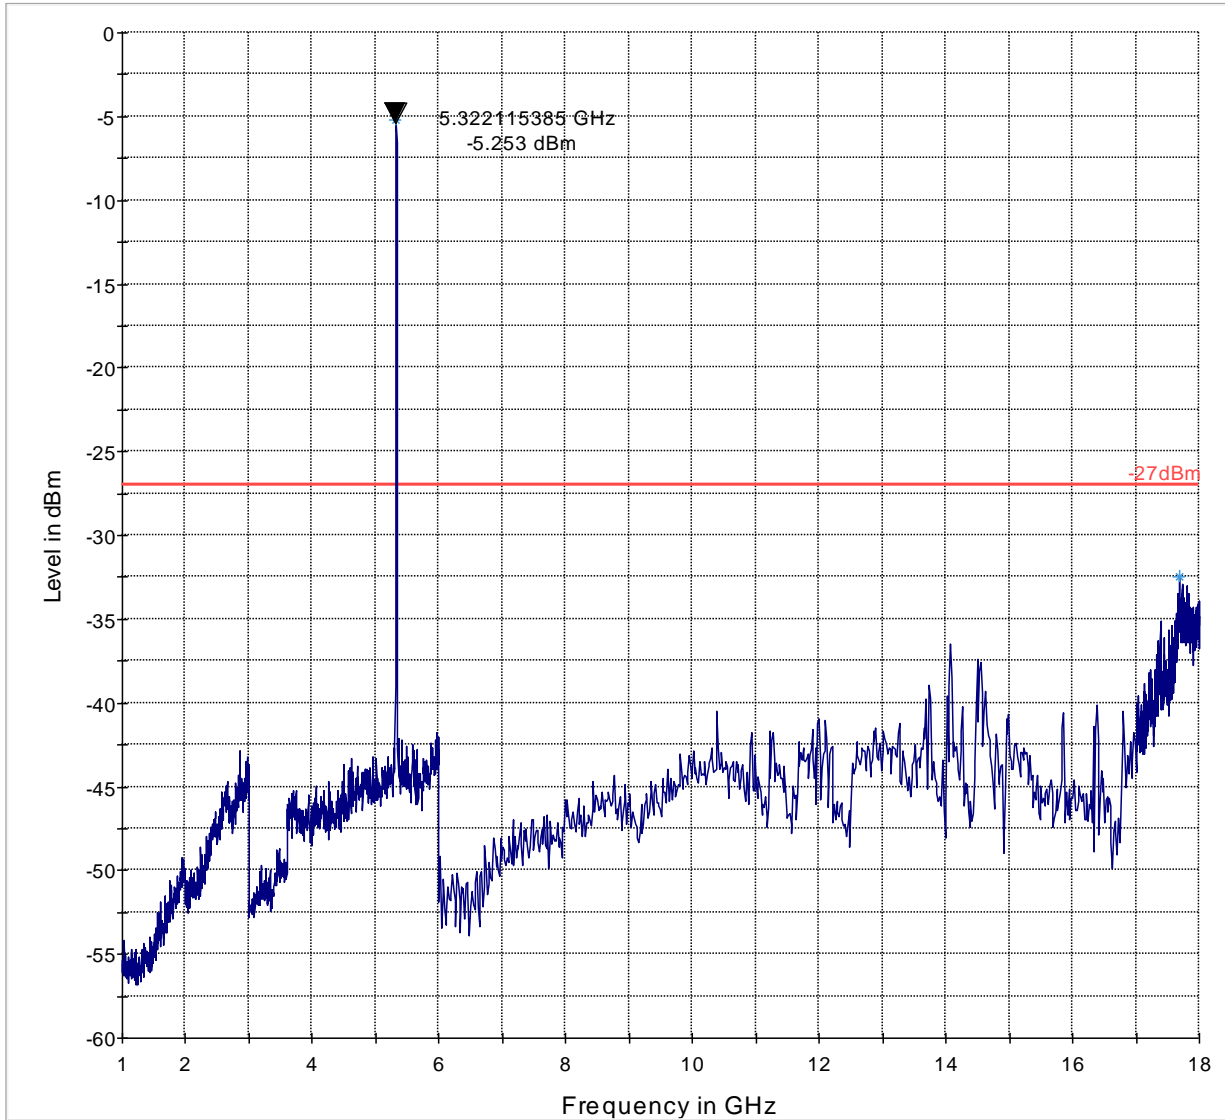

— -27dBm    — Preview Result 1-PK+    \* Data Reduction Result 1 [2]-PK+

18GHz – 40GHz

Mode: 802.11n\_HT20-Ch64 (Sub-Band 2)

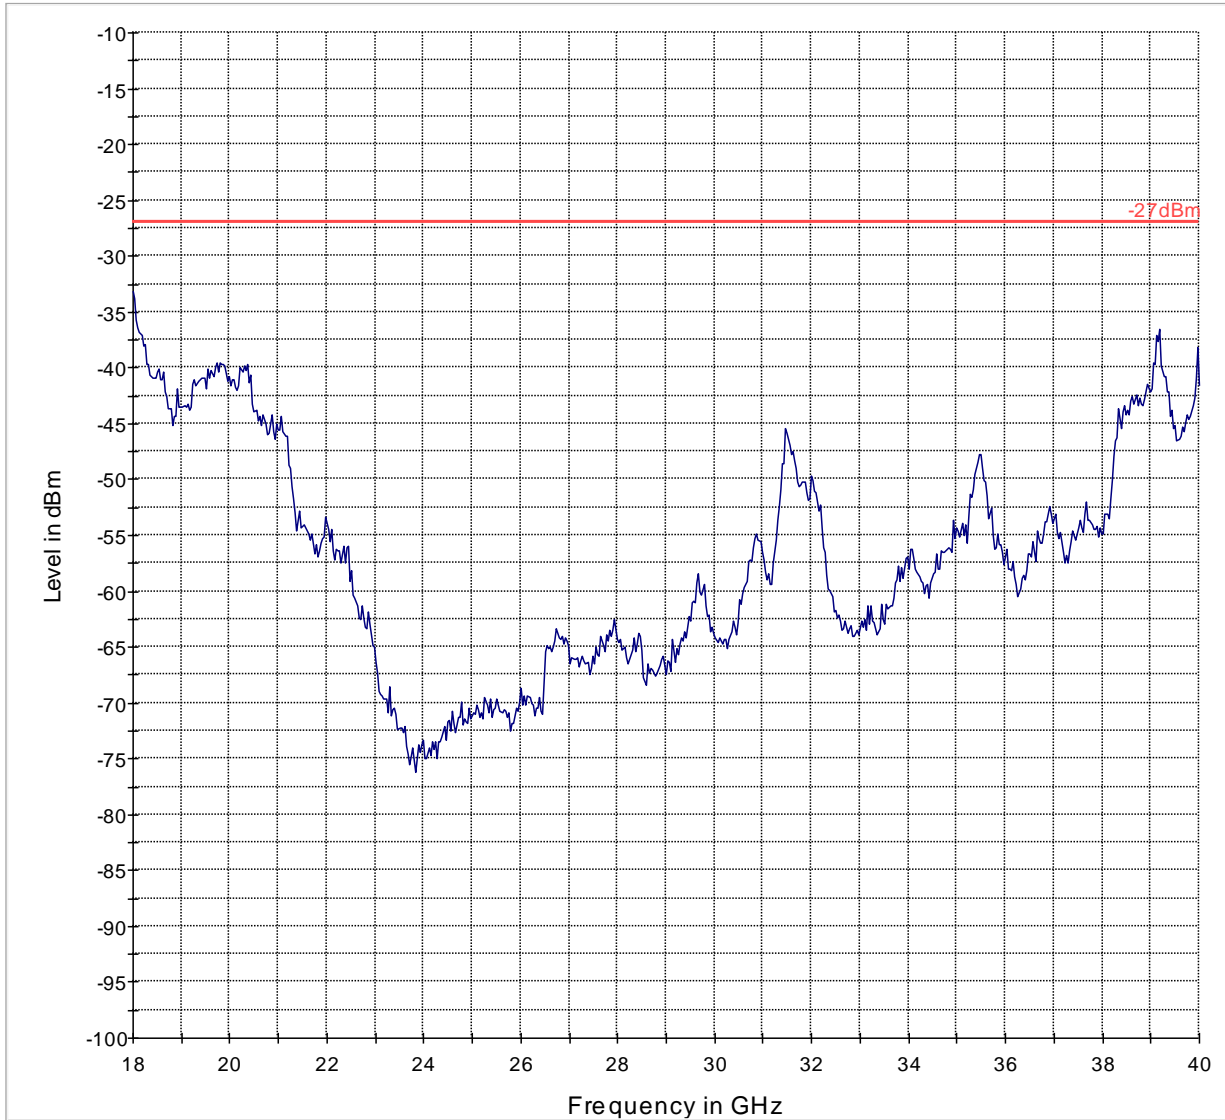


— -27dBm      — Preview Result 1-PK+



<30MHz


Mode: 802.11n\_HT20-Ch100 (Sub-Band 3)

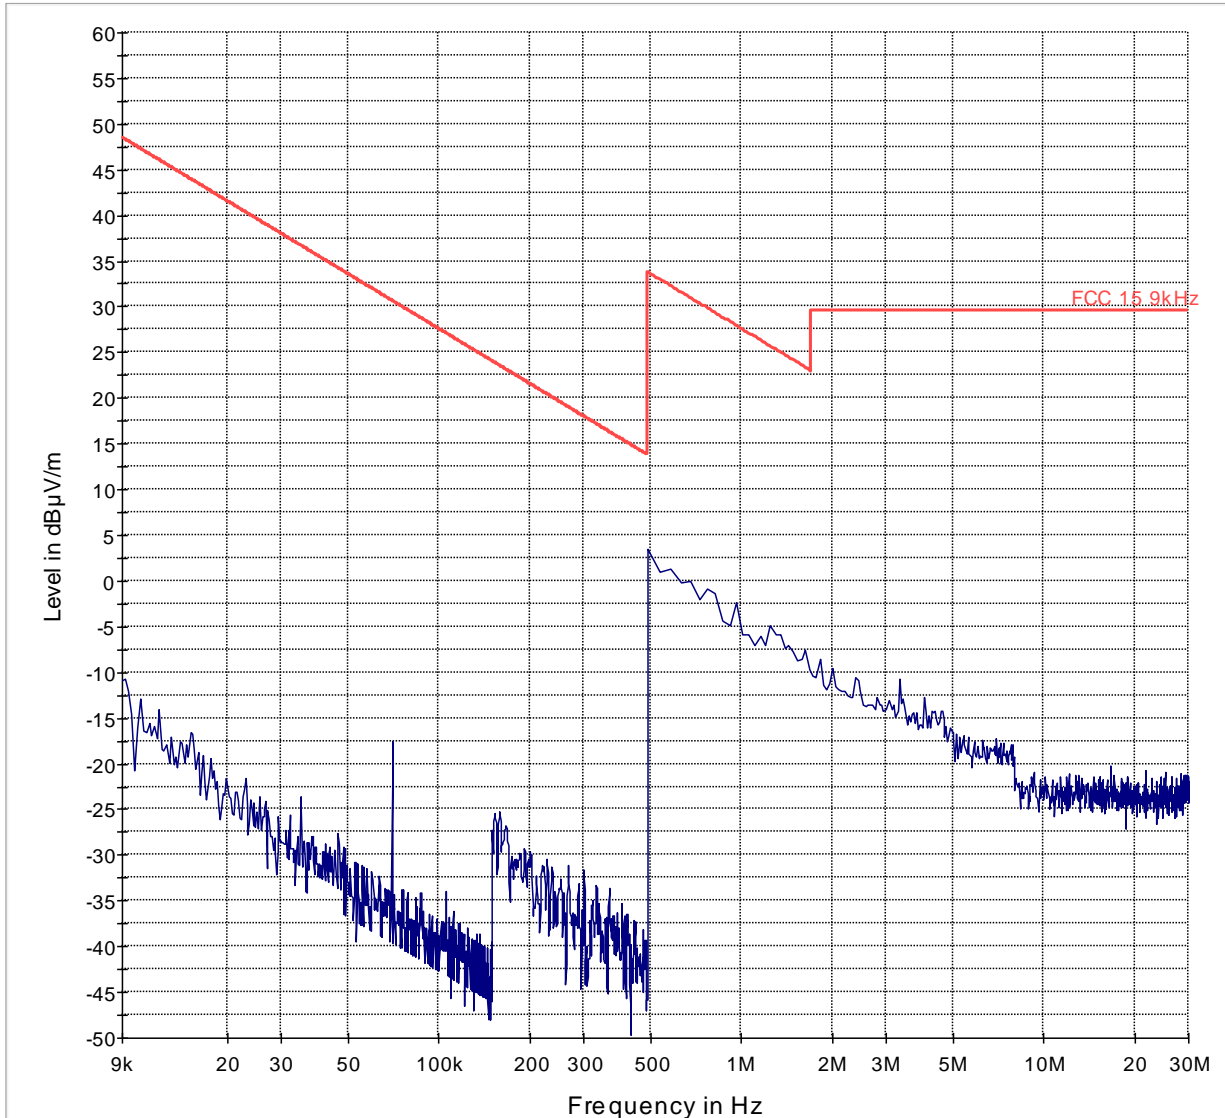

— FCC 15.9kHz — Preview Result 1-PK+

30MHz – 1GHz


Mode: 802.11n\_HT20-Ch100 (Sub-Band 3)

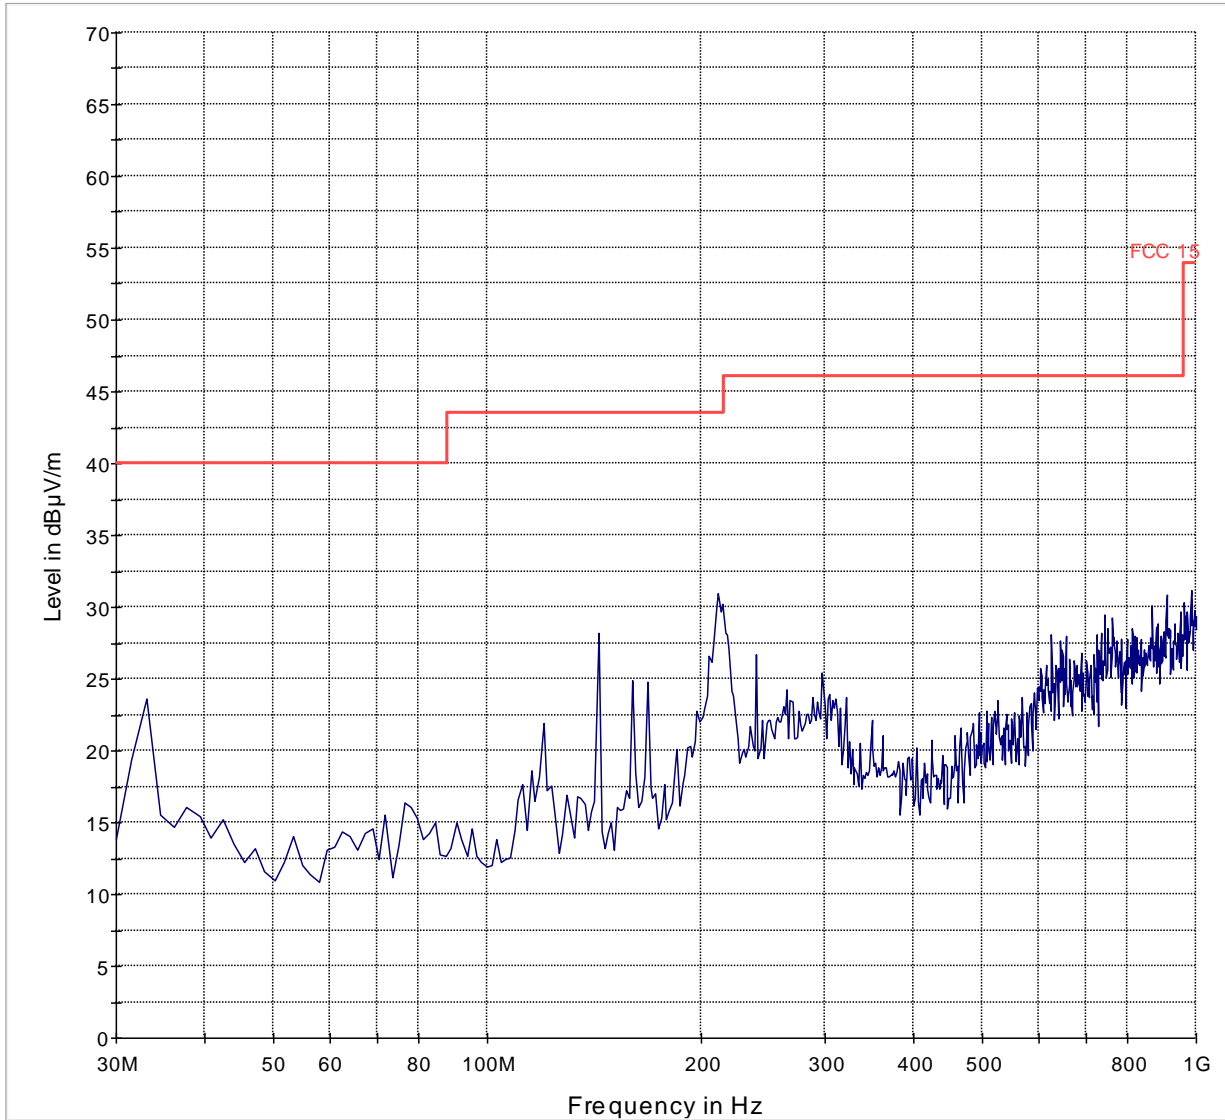

— FCC 15      — Preview Result 1-PK+

1GHz – 18GHz


Mode: 802.11n\_HT20-Ch100 (Sub-Band 3)

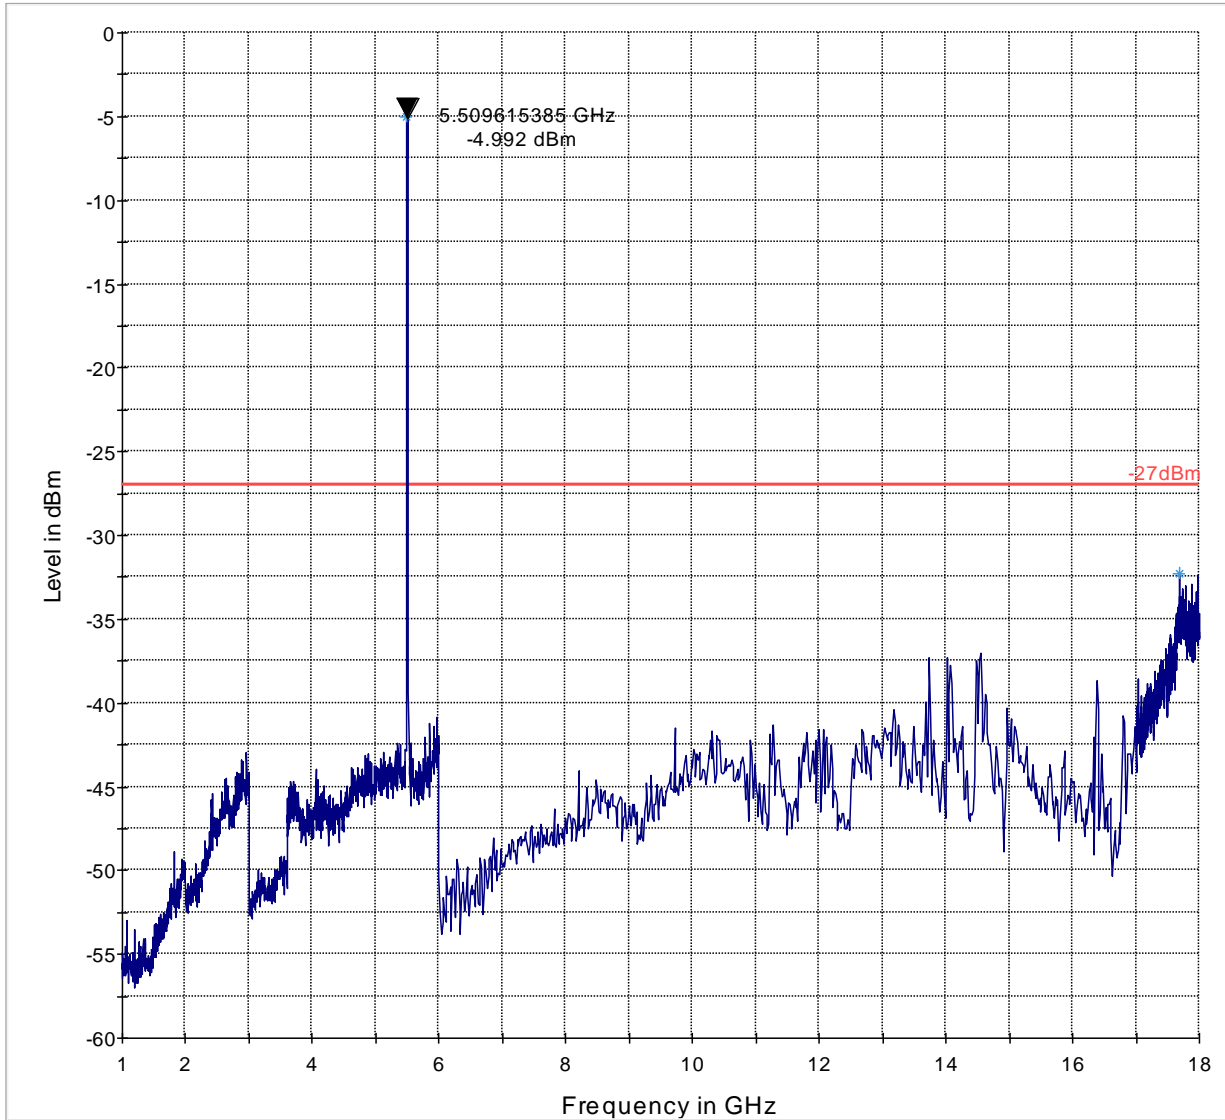

— -27dBm    — Preview Result 1-PK+    \* Data Reduction Result 1 [2]-PK+

18GHz – 40GHz


Mode: 802.11n\_HT20-Ch100 (Sub-Band 3)

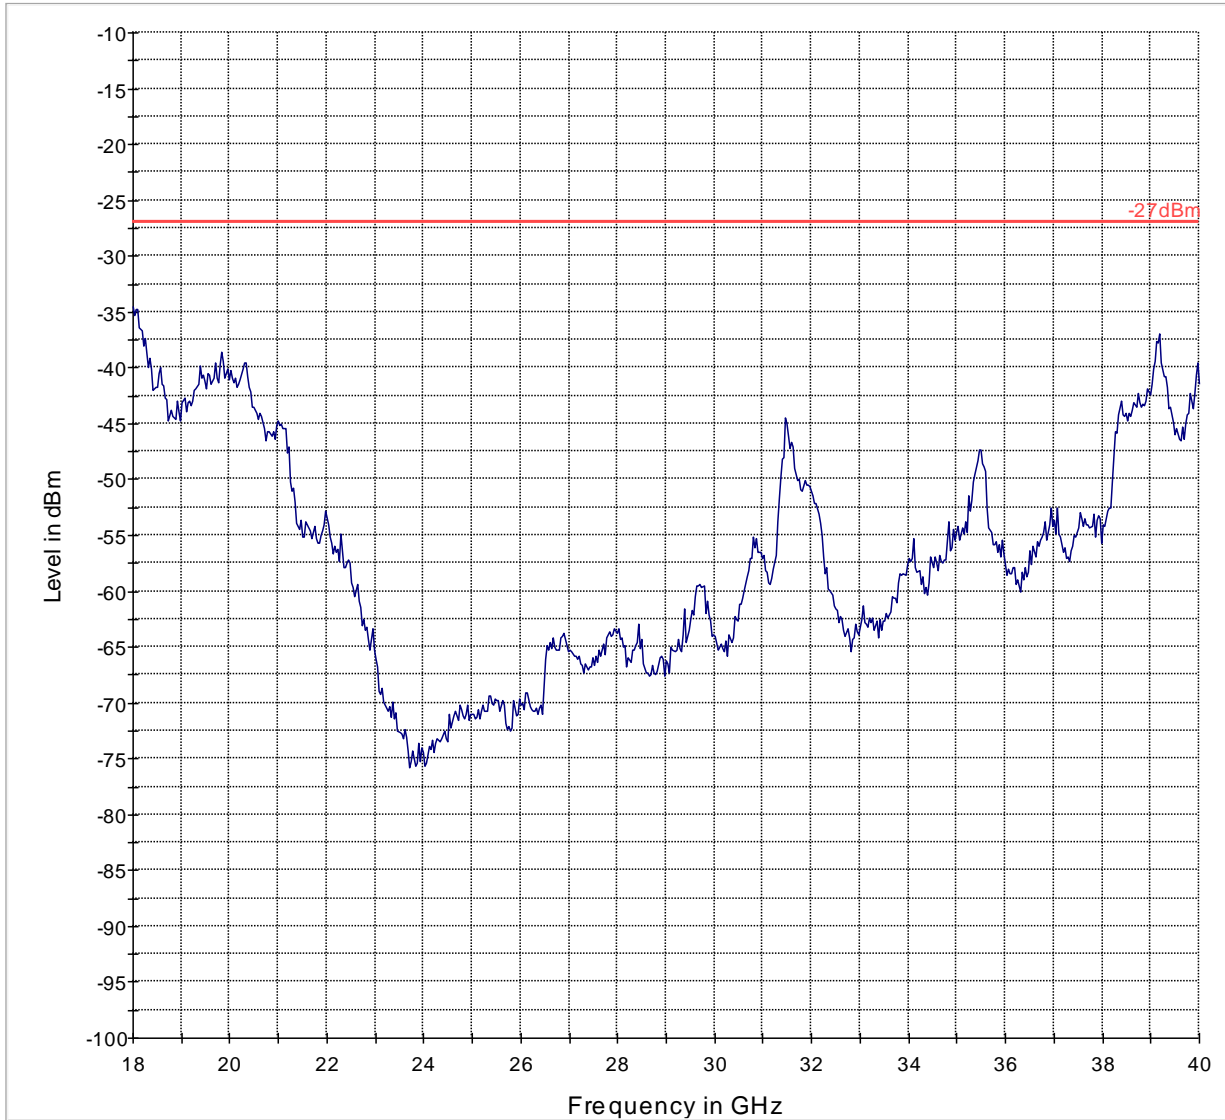

— -27dBm      — Preview Result 1-PK+

<30MHz


Mode: 802.11n\_HT20-Ch120 (Sub-Band 3)

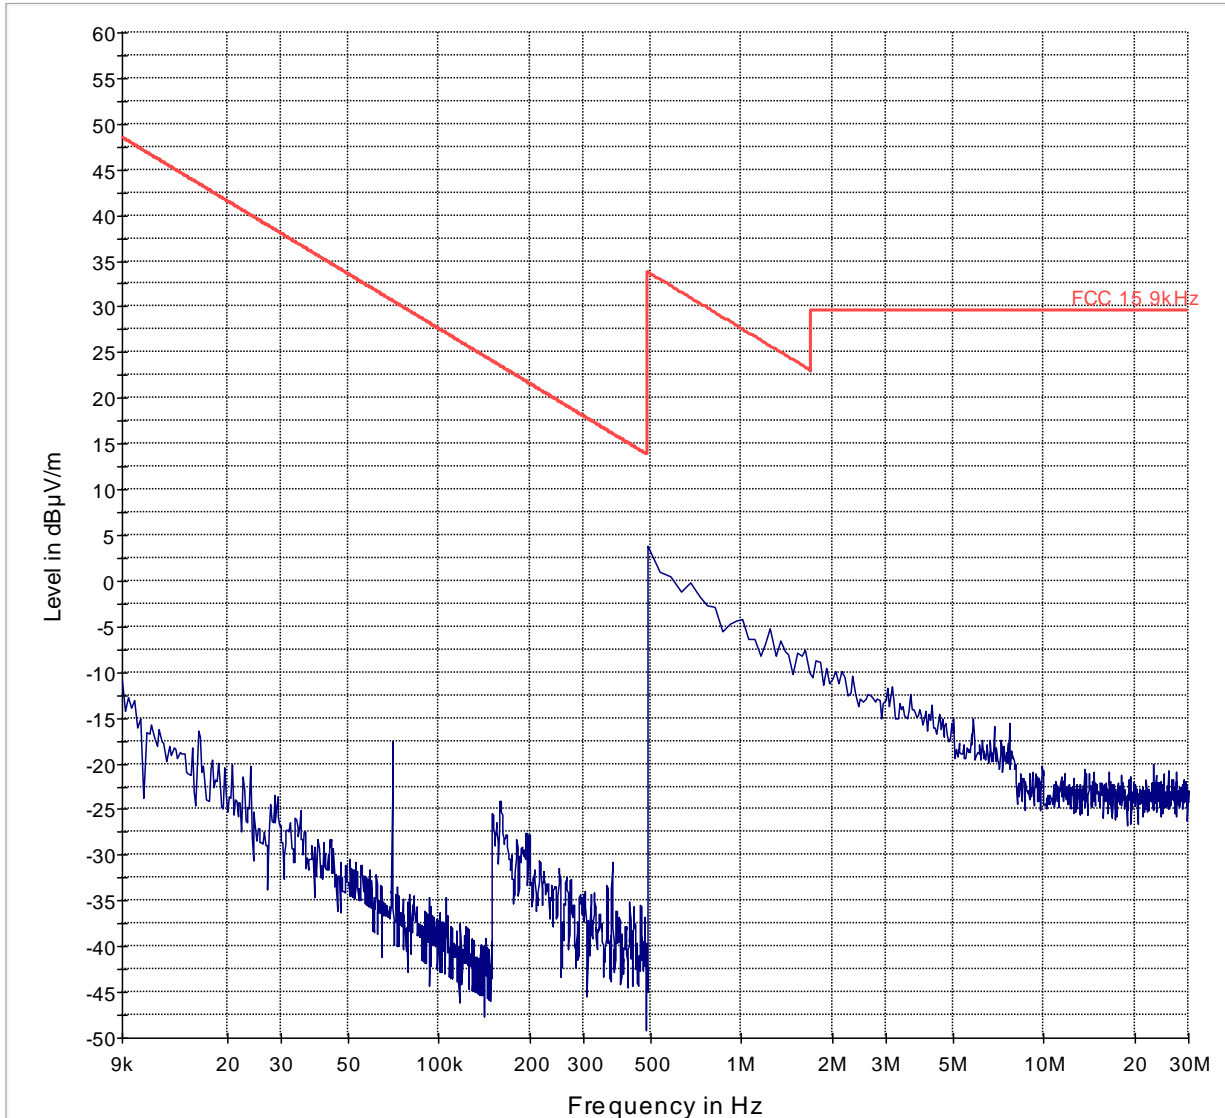

— FCC 15.9kHz — Preview Result 1-PK+

30MHz – 1GHz


Mode: 802.11n\_HT20-Ch120 (Sub-Band 3)

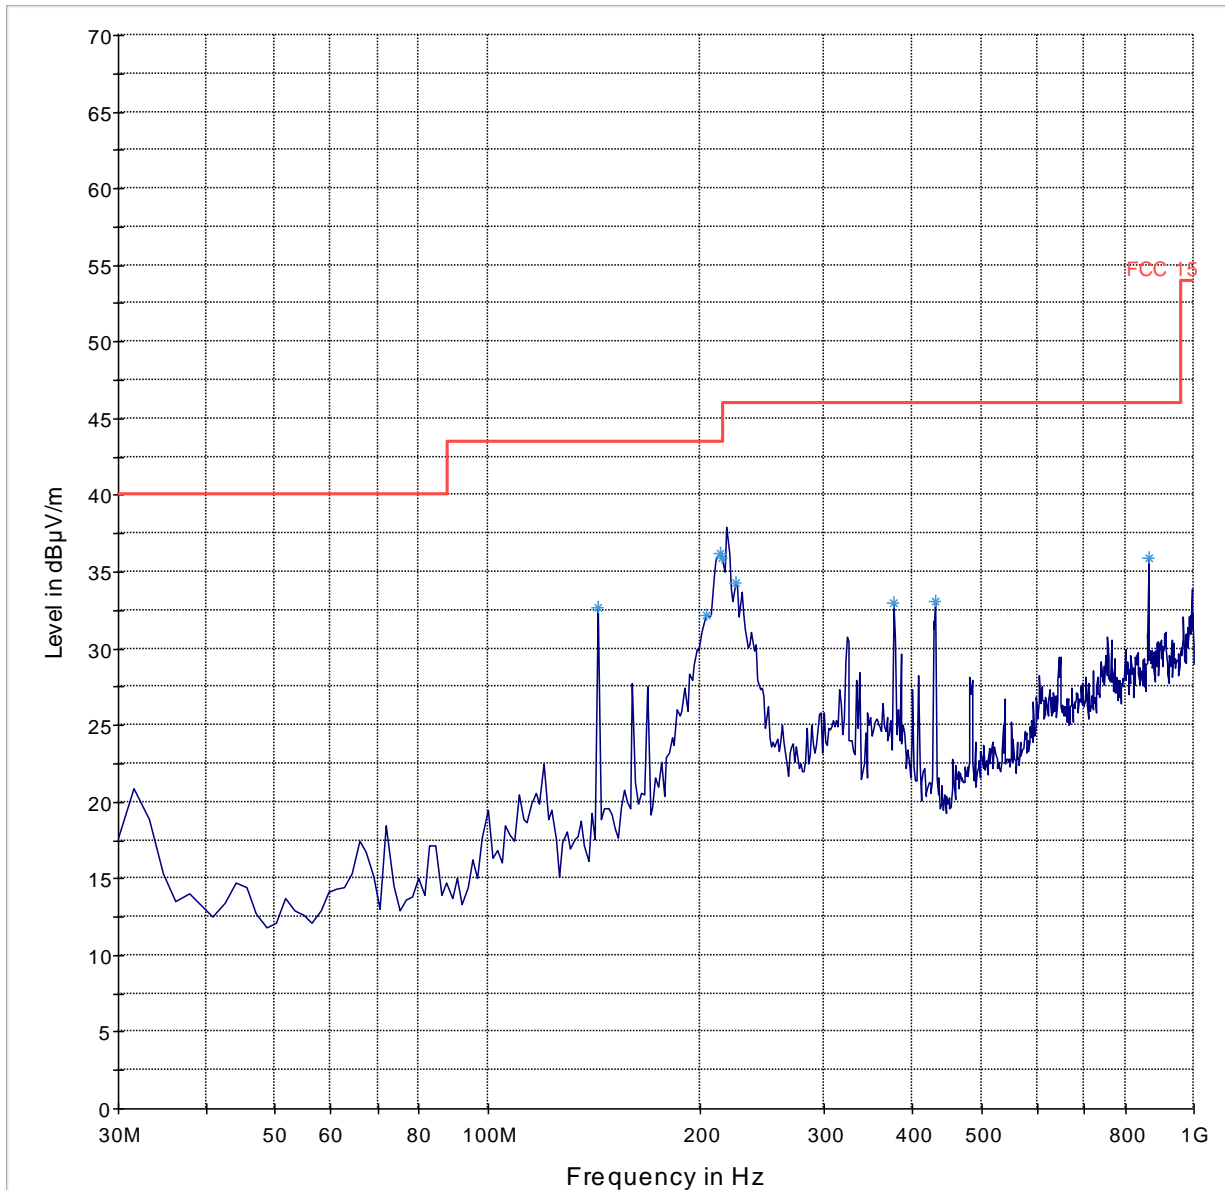

— FCC 15    — Preview Result 1-PK+    \* Data Reduction Result 1 [3]-PK+


1GHz – 18GHz

Mode: 802.11n\_HT20-Ch120 (Sub-Band 3)

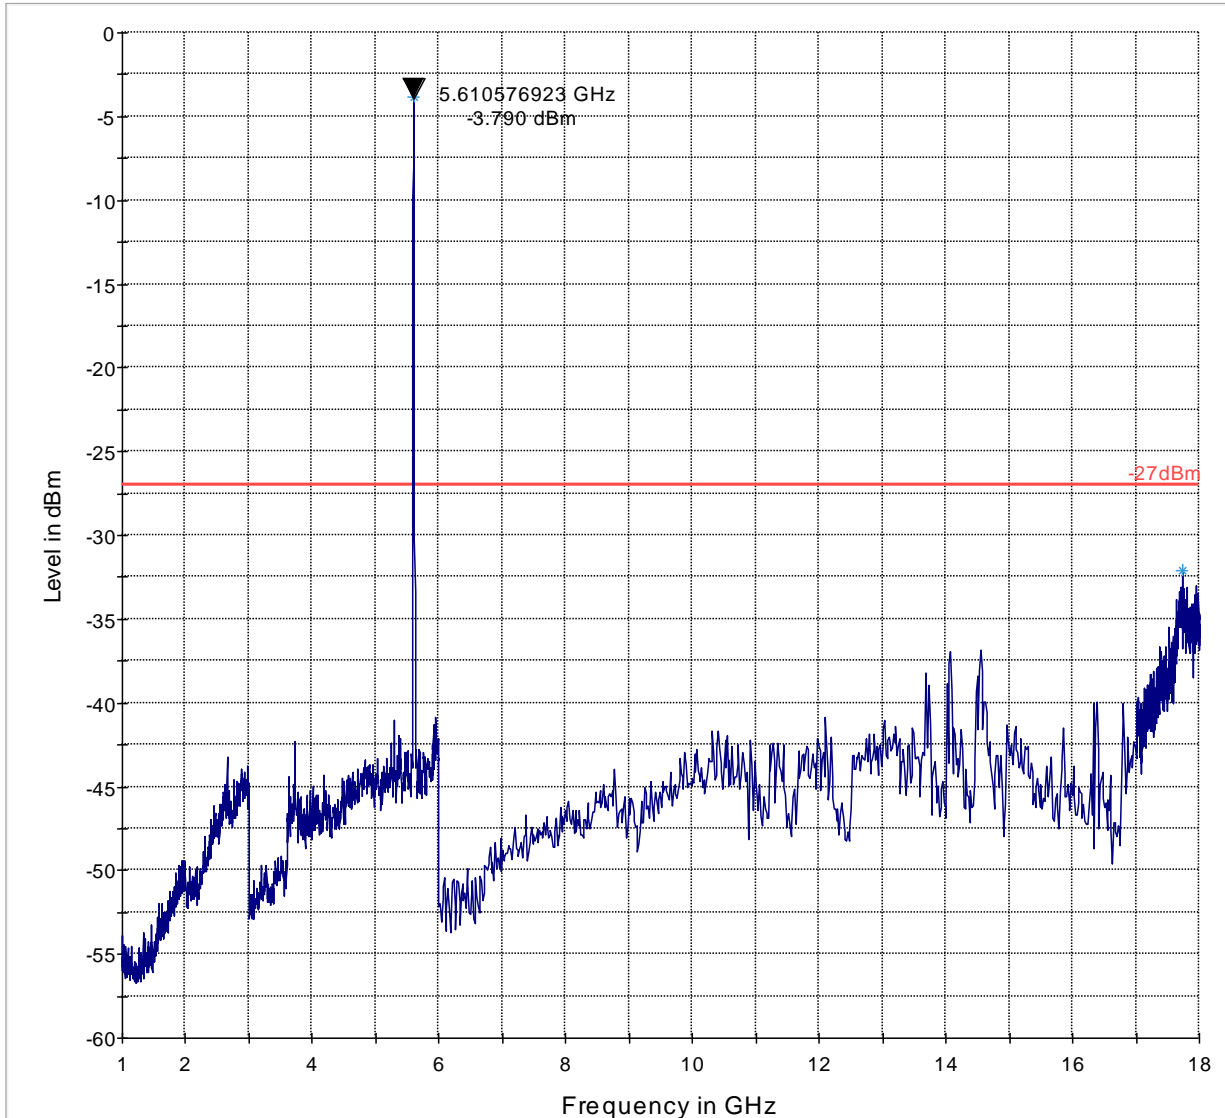

18GHz – 40GHz

Mode: 802.11n\_HT20-Ch120 (Sub-Band 3)

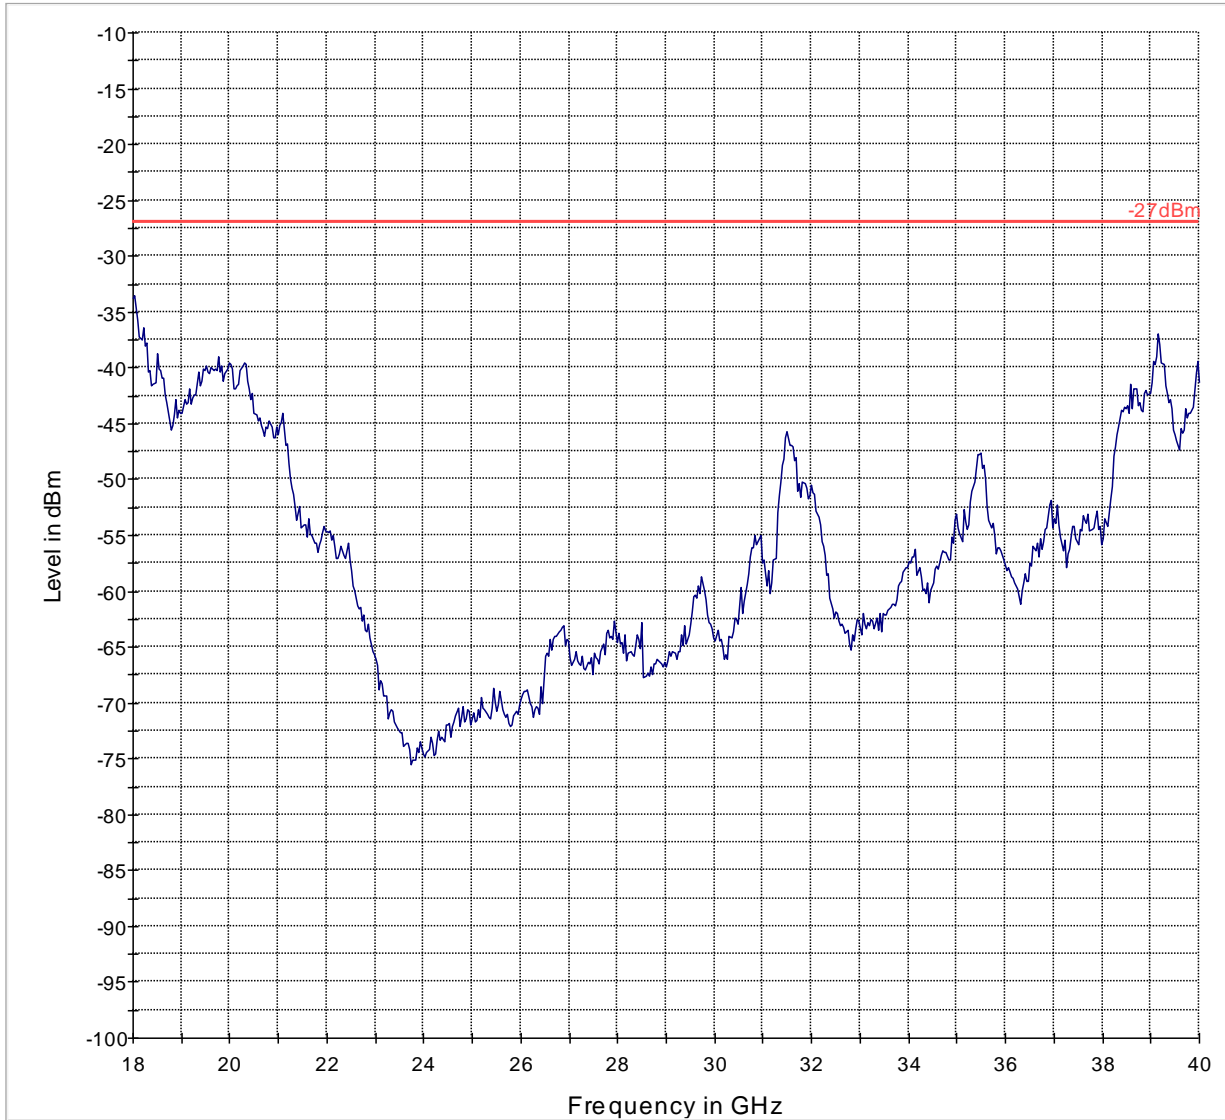


— -27dBm      — Preview Result 1-PK+





<30MHz


Mode: 802.11n\_HT20-Ch140 (Sub-Band 3)

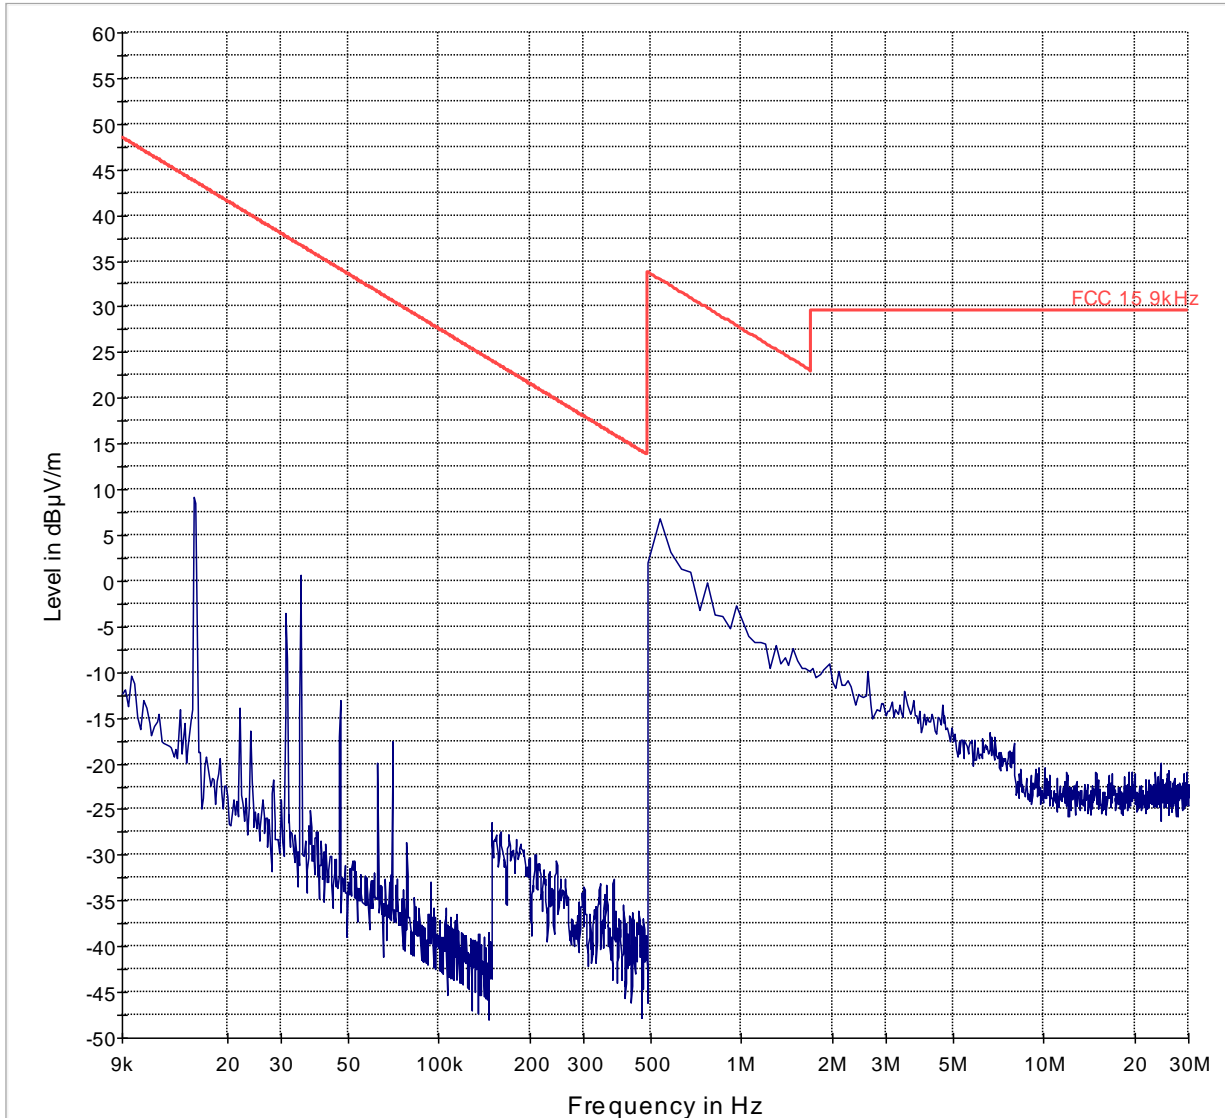

— FCC 15.9kHz — Preview Result 1-PK+

30MHz – 1GHz


Mode: 802.11n\_HT20-Ch140 (Sub-Band 3)

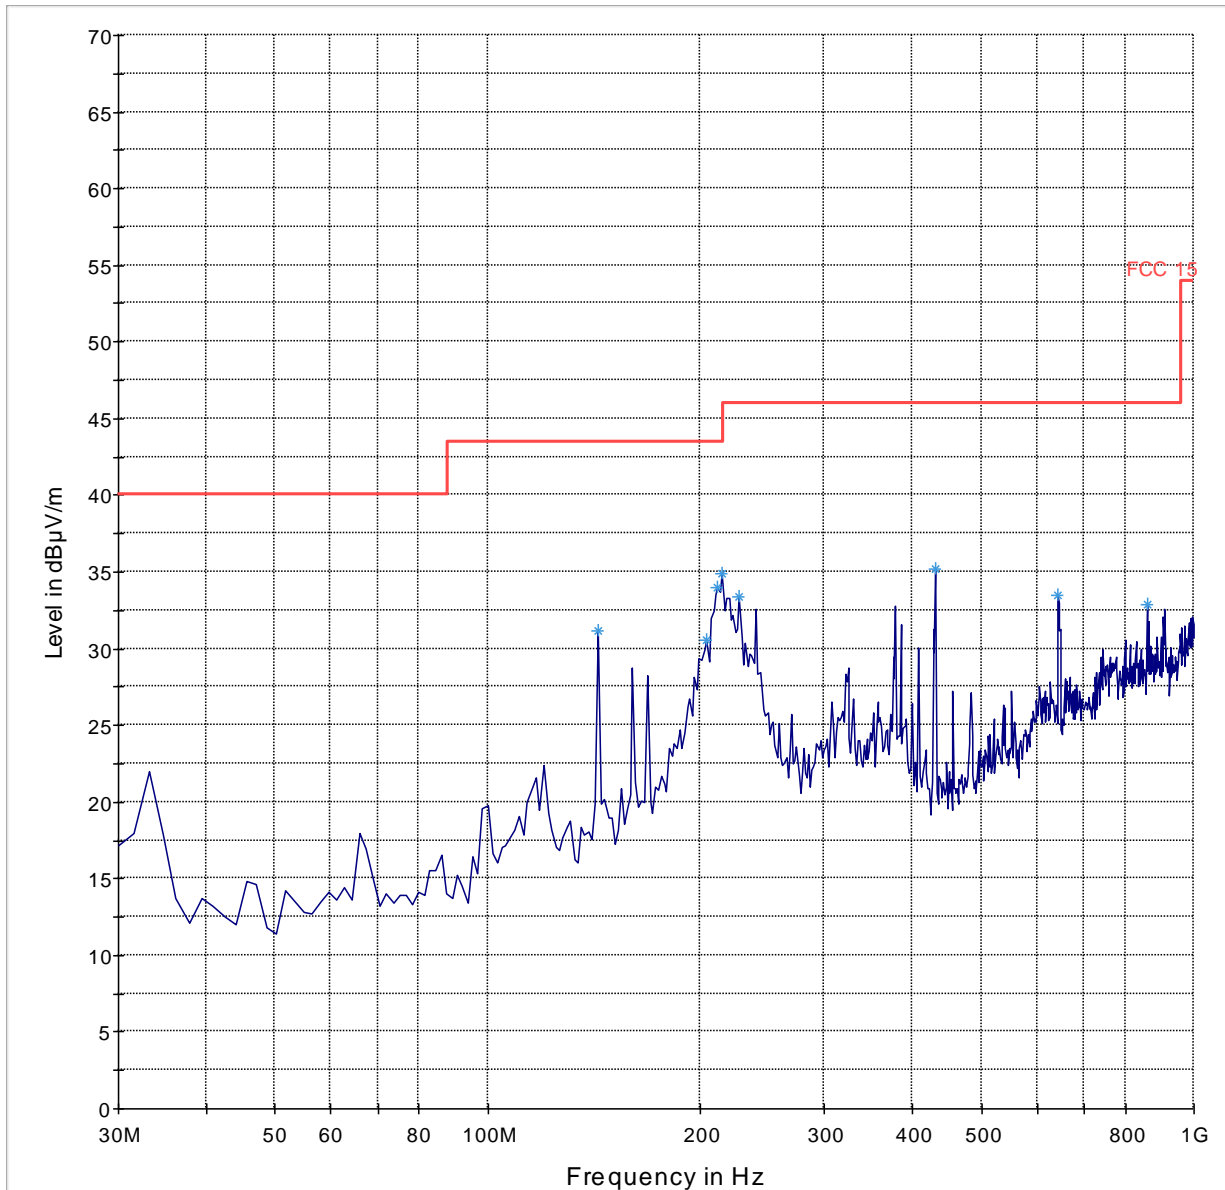

— FCC 15    — Preview Result 1-PK+    \* Data Reduction Result 1 [3]-PK+

1GHz – 18GHz


Mode: 802.11n\_HT20-Ch140 (Sub-Band 3)

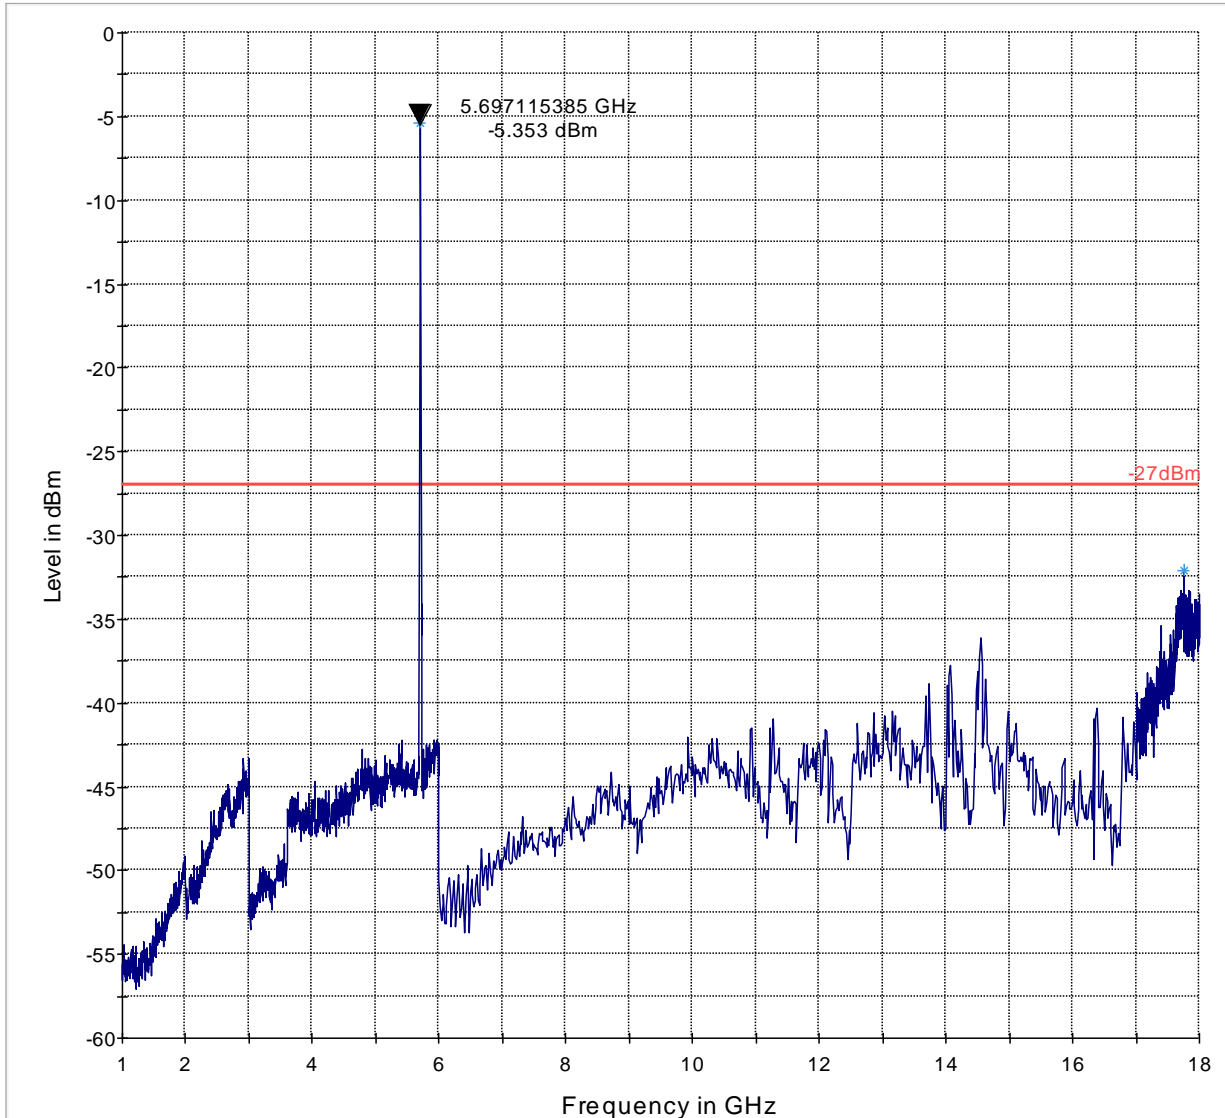

— -27dBm      — Preview Result 1-PK+      \* Data Reduction Result 1 [2]-PK+

18GHz – 40GHz


Mode: 802.11n\_HT20-Ch140 (Sub-Band 3)

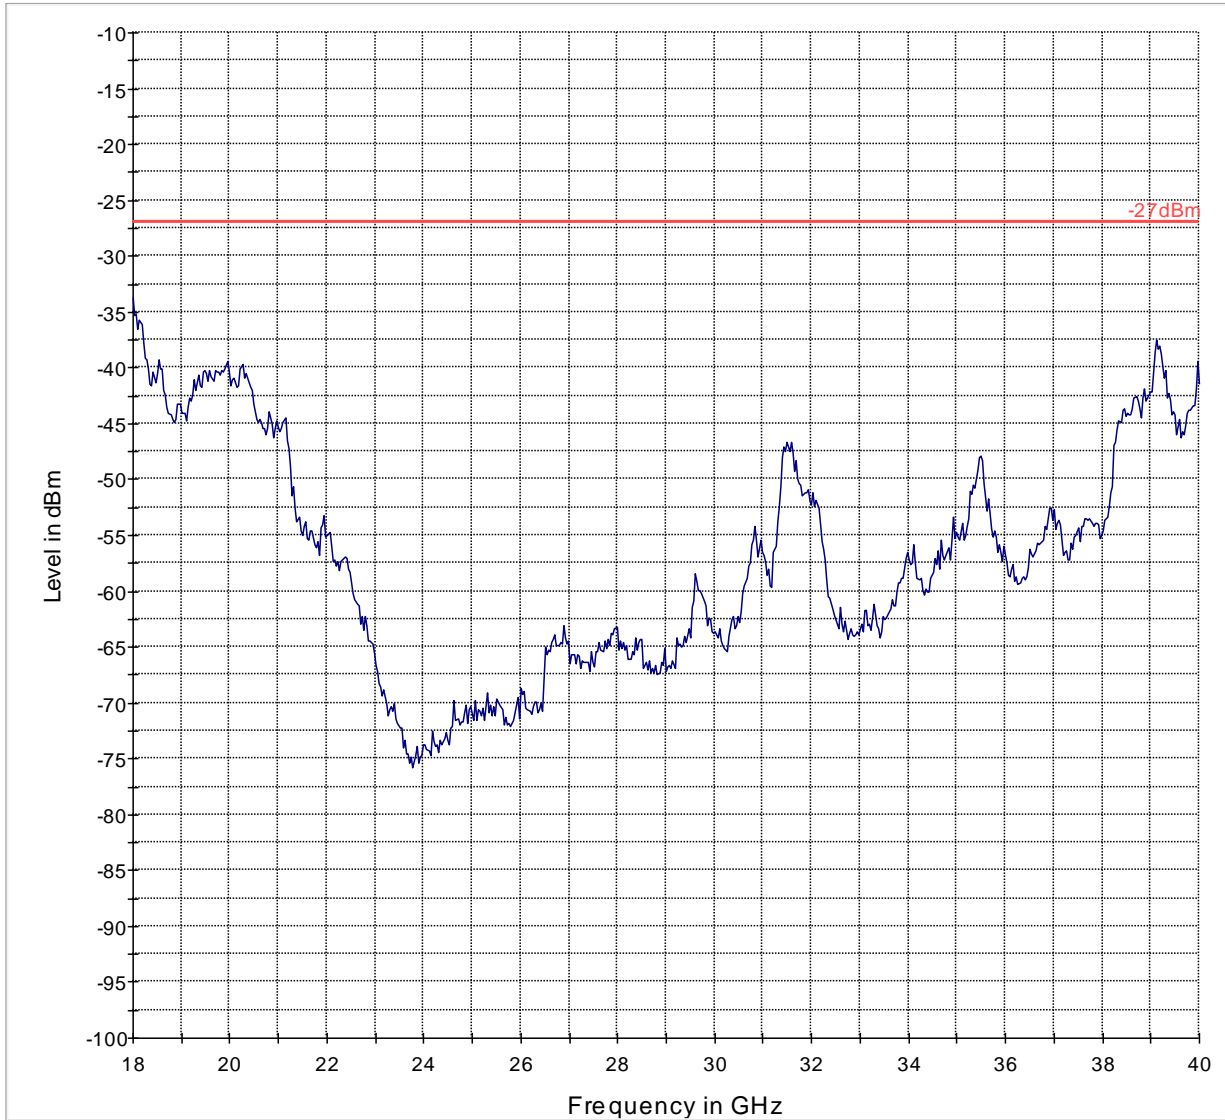

— -27dBm      — Preview Result 1-PK+

<30MHz


Mode: 802.11n\_HT40-Ch38 (Sub-Band 1)

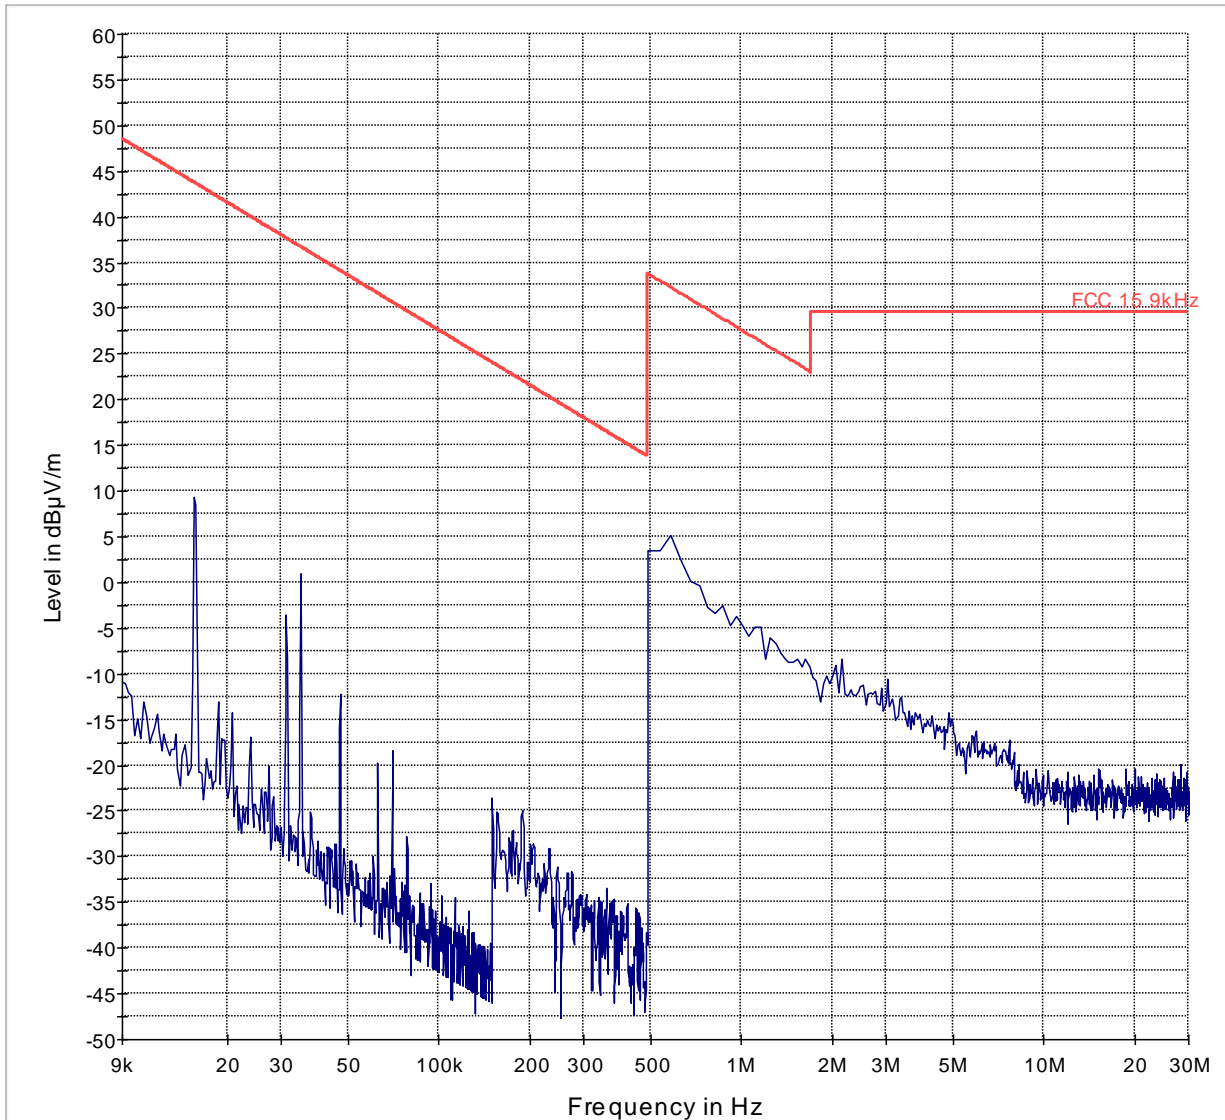

— FCC 15.9kHz — Preview Result 1-PK+

30MHz – 1GHz


Mode: 802.11n\_HT40-Ch38 (Sub-Band 1)

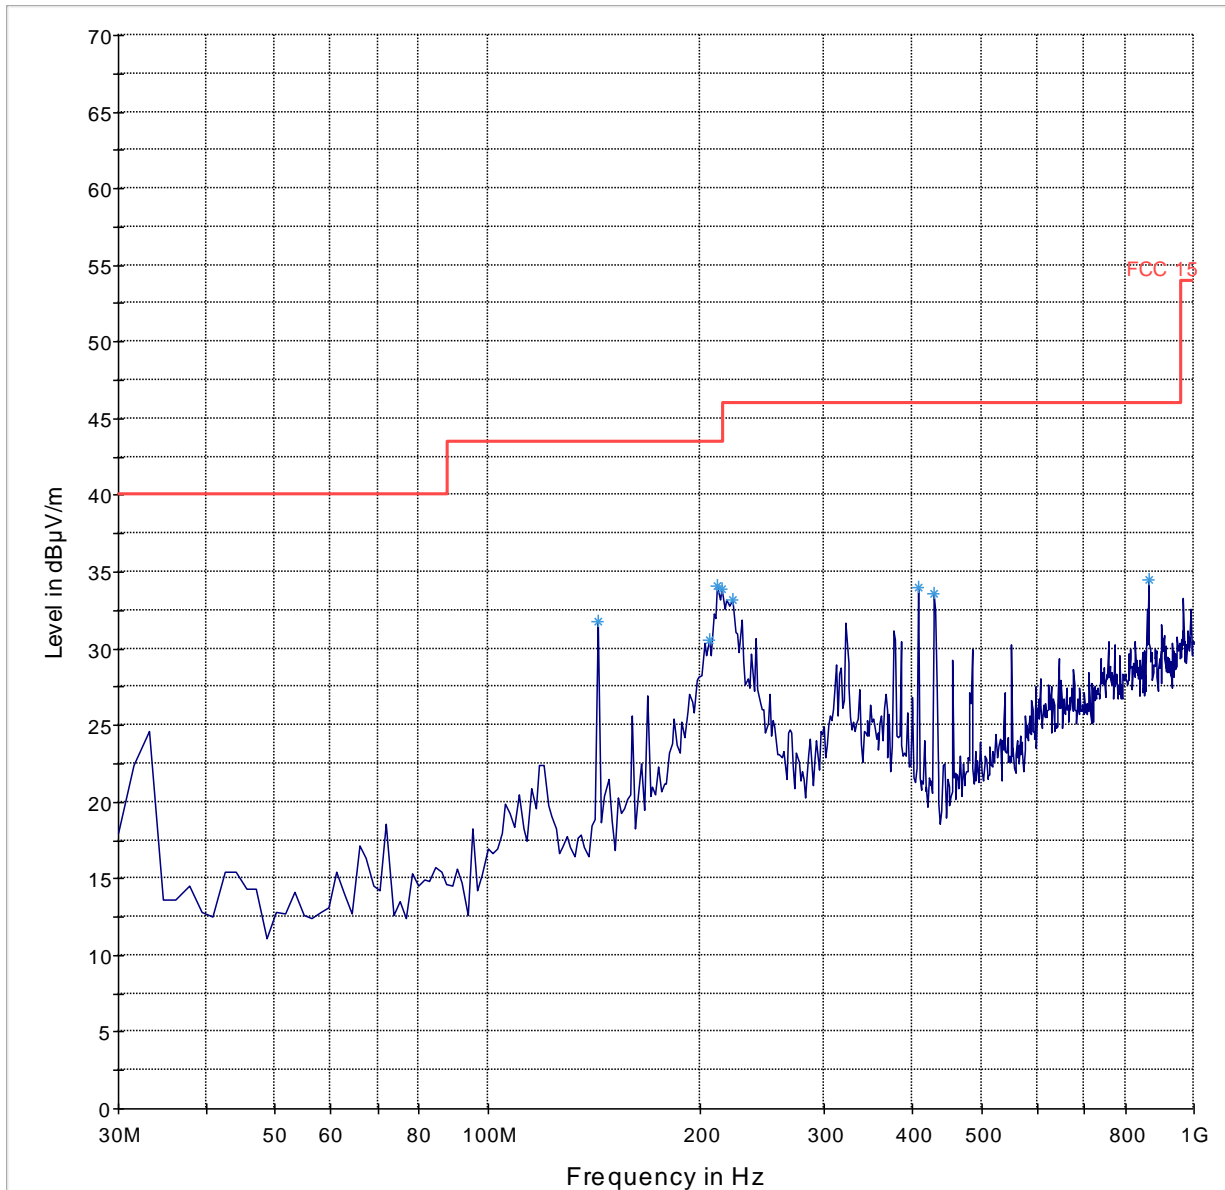

— FCC 15    — Preview Result 1-PK+    \* Data Reduction Result 1 [3]-PK+

1GHz – 18GHz


Mode: 802.11n\_HT40-Ch38 (Sub-Band 1)

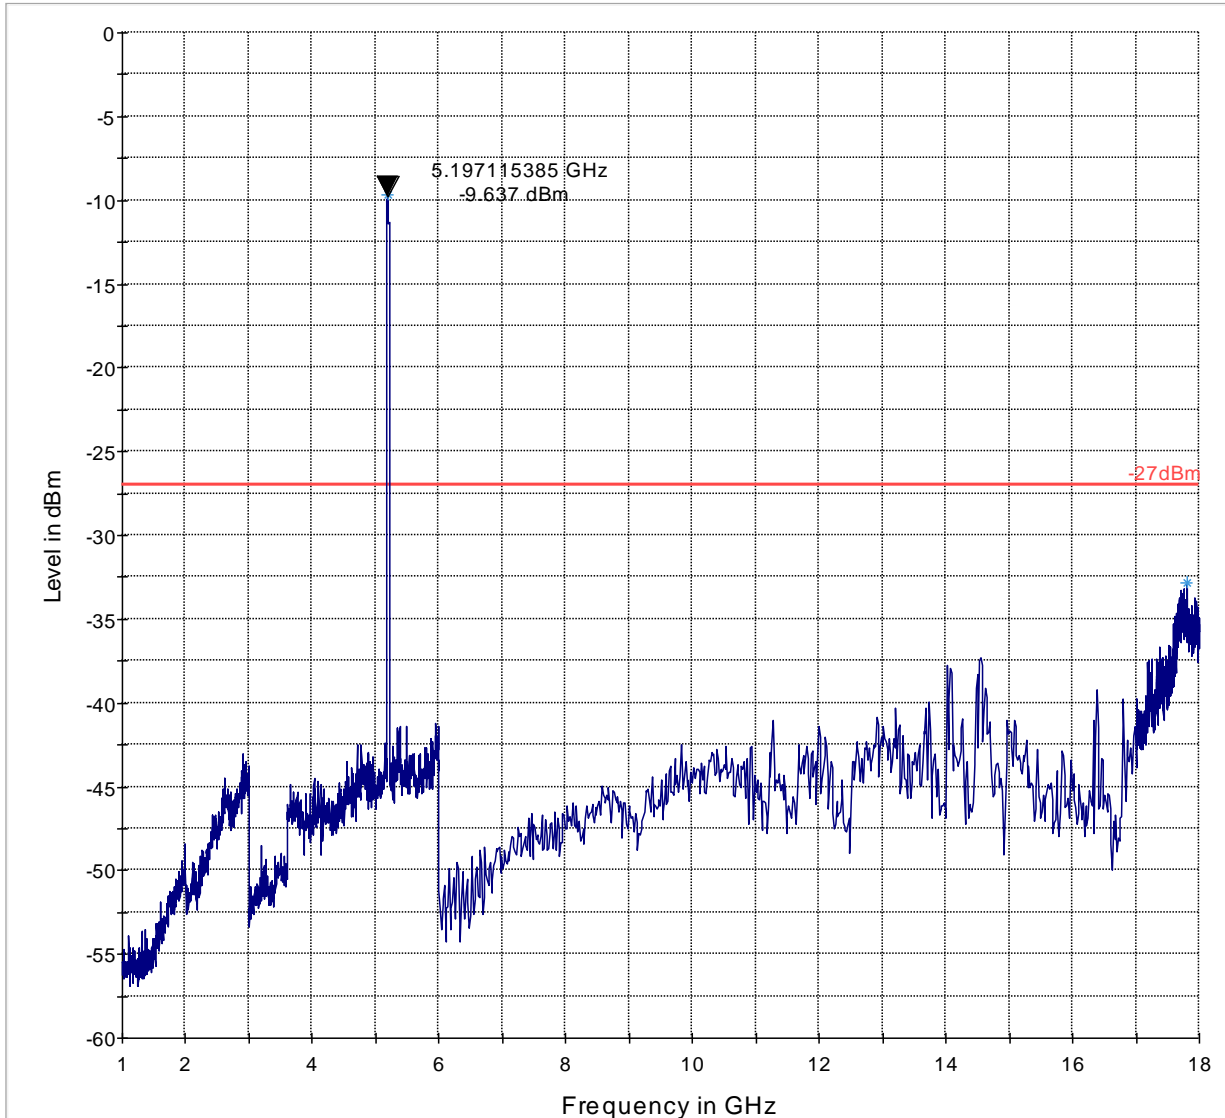

— -27dBm    — Preview Result 1-PK+    \* Data Reduction Result 1 [2]-PK+

18GHz – 40GHz

Mode: 802.11n\_HT40-Ch38 (Sub-Band 1)

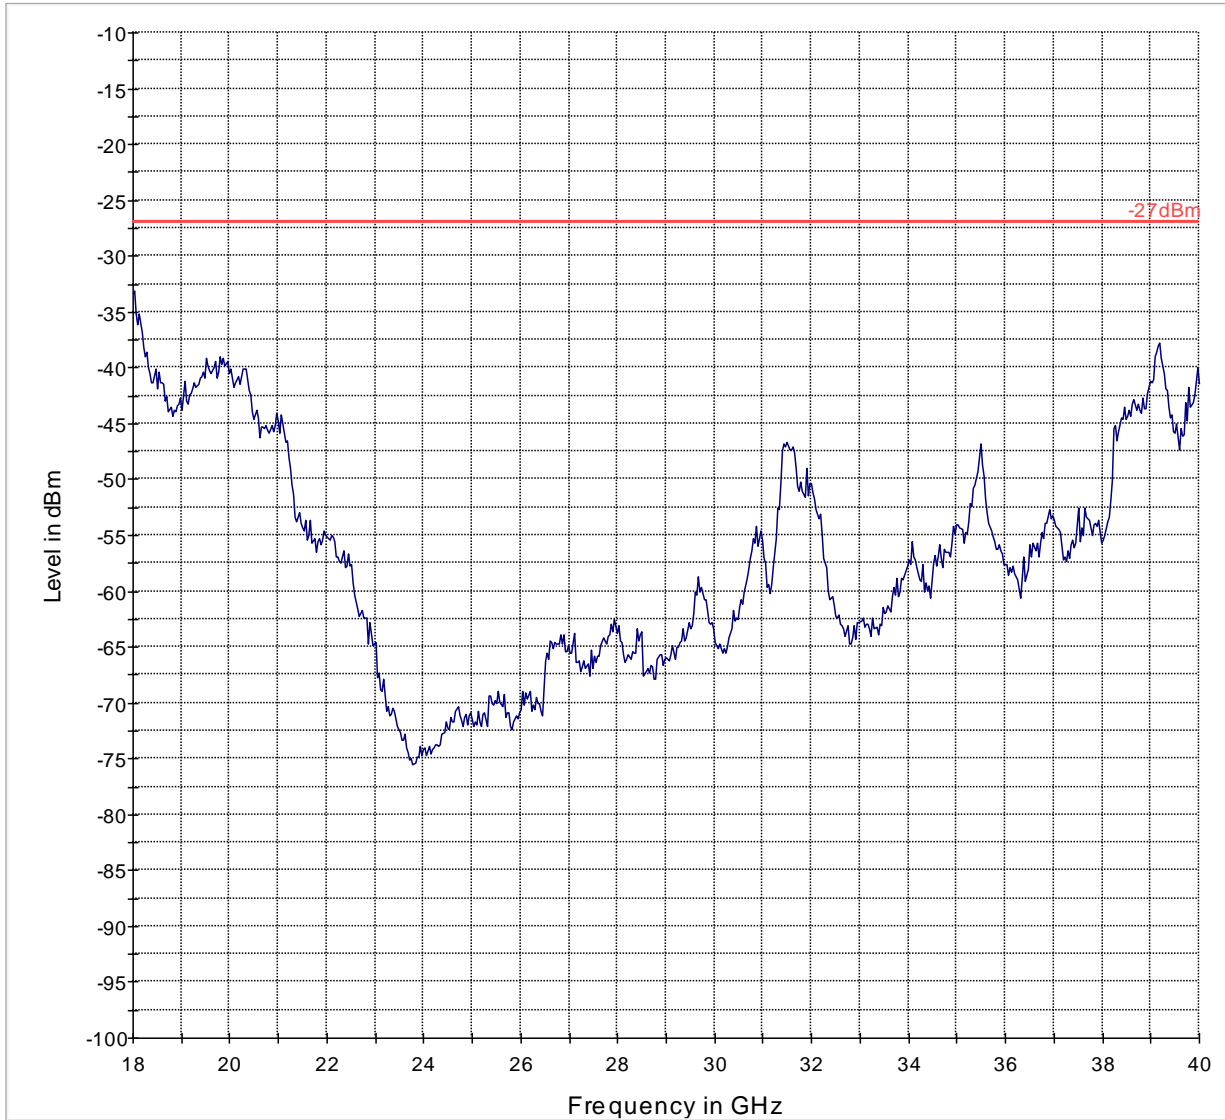


— -27dBm      — Preview Result 1-PK+



<30MHz


Mode: 802.11n\_HT40-Ch46 (Sub-Band 1)

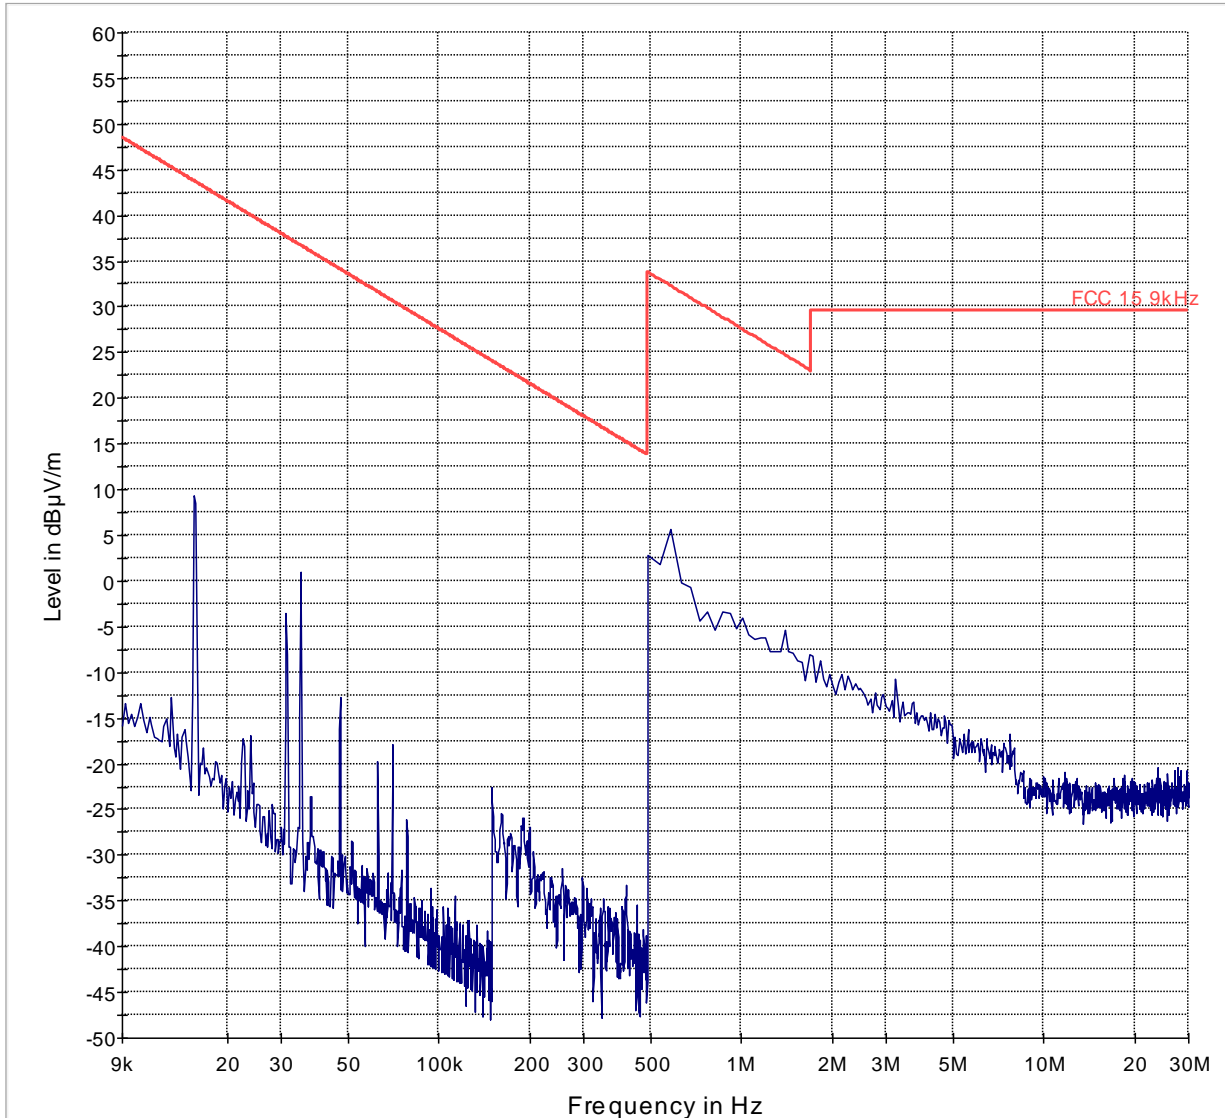

— FCC 15.9kHz — Preview Result 1-PK+

30MHz – 1GHz


Mode: 802.11n\_HT40-Ch46 (Sub-Band 1)

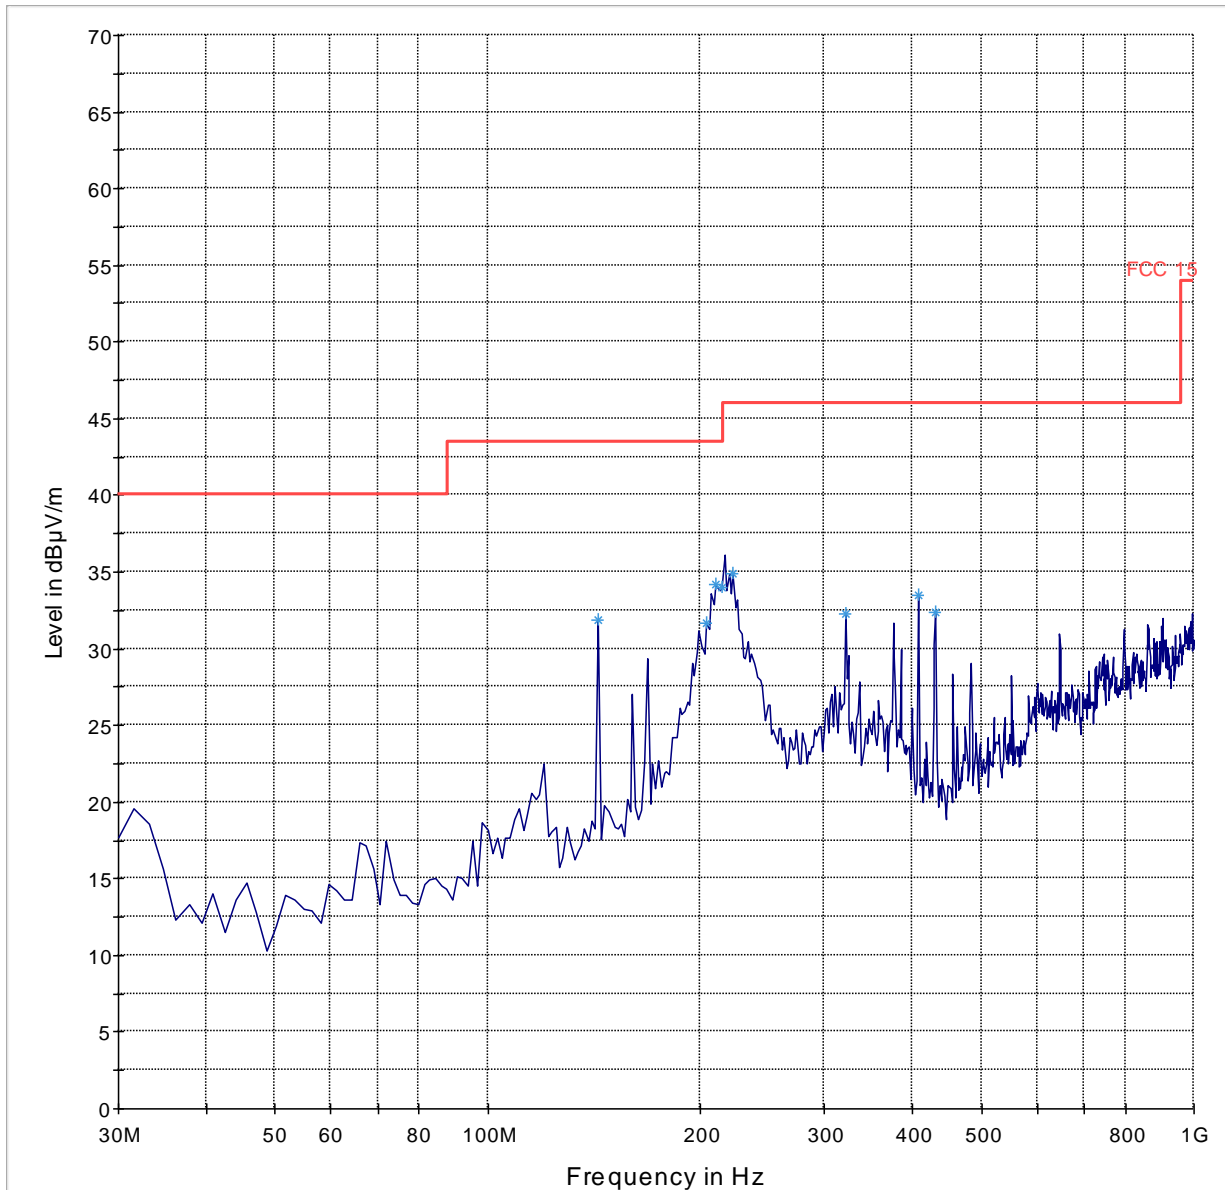

— FCC 15    — Preview Result 1-PK+    \* Data Reduction Result 1 [3]-PK+

1GHz – 18GHz


Mode: 802.11n\_HT40-Ch46 (Sub-Band 1)

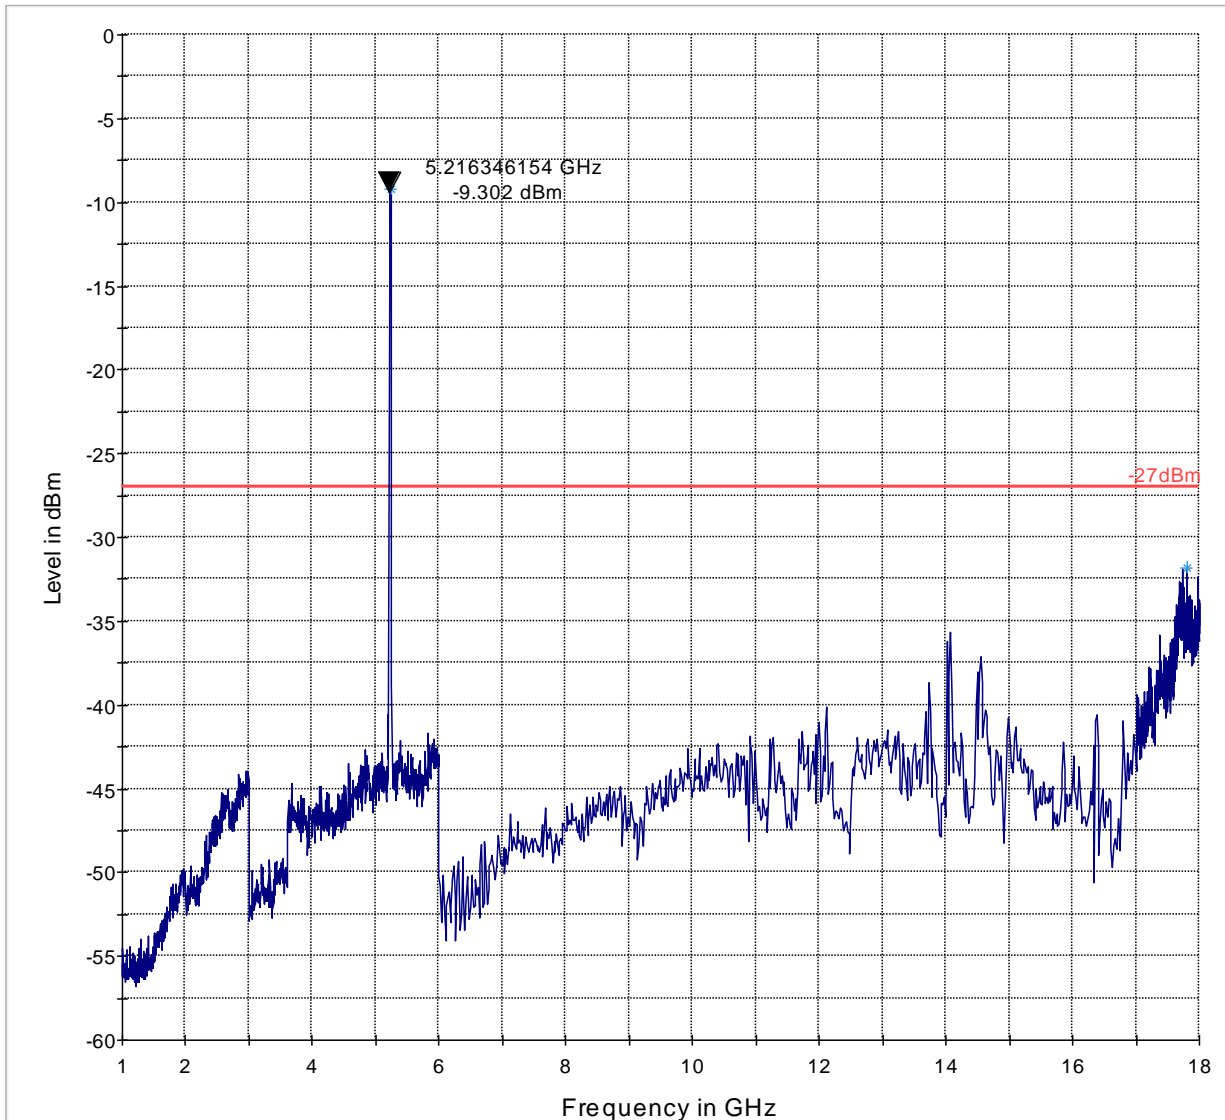

— -27dBm    — Preview Result 1-PK+    \* Data Reduction Result 1 [2]-PK+

18GHz – 40GHz


Mode: 802.11n\_HT40-Ch46 (Sub-Band 1)

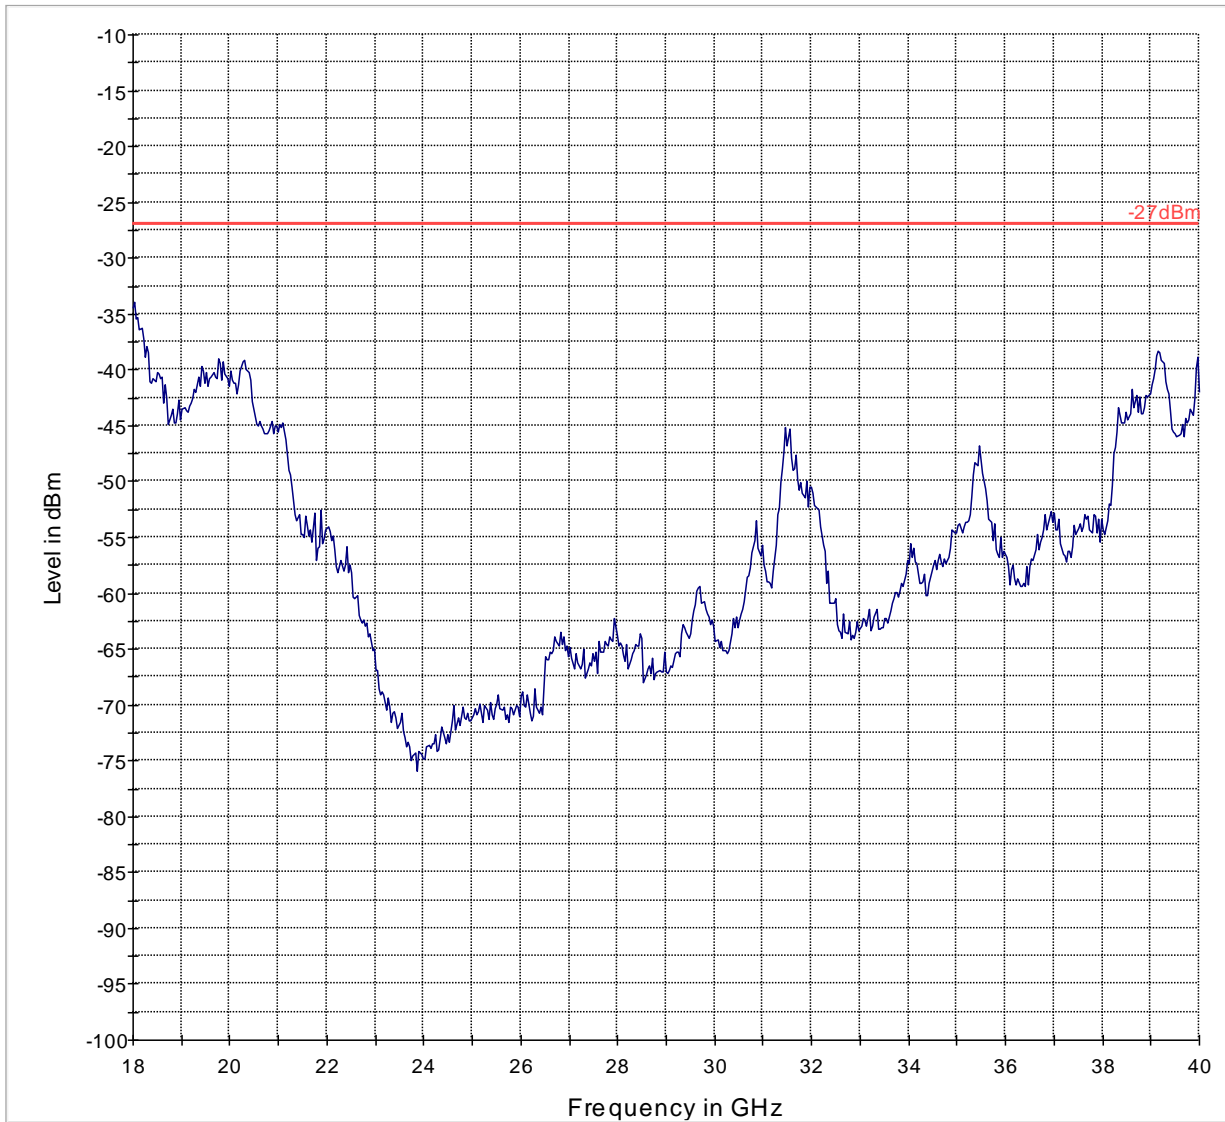

— -27dBm      — Preview Result 1-PK+

<30MHz


Mode: 802.11n\_HT40-Ch54 (Sub-Band 2)

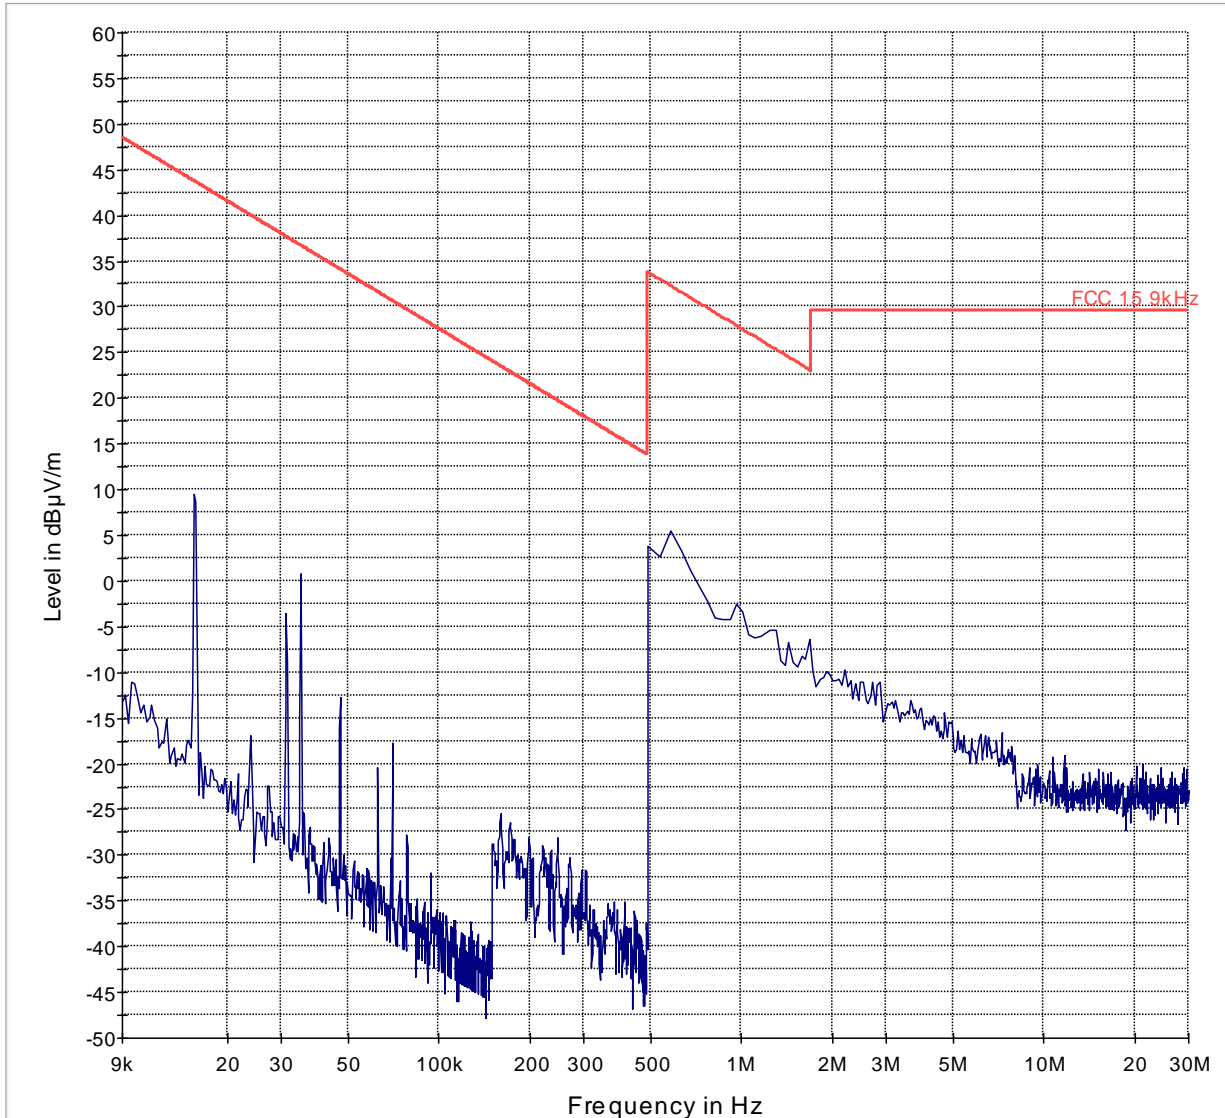

— FCC 15.9kHz — Preview Result 1-PK+

30MHz – 1GHz


Mode: 802.11n\_HT40-Ch54 (Sub-Band 2)

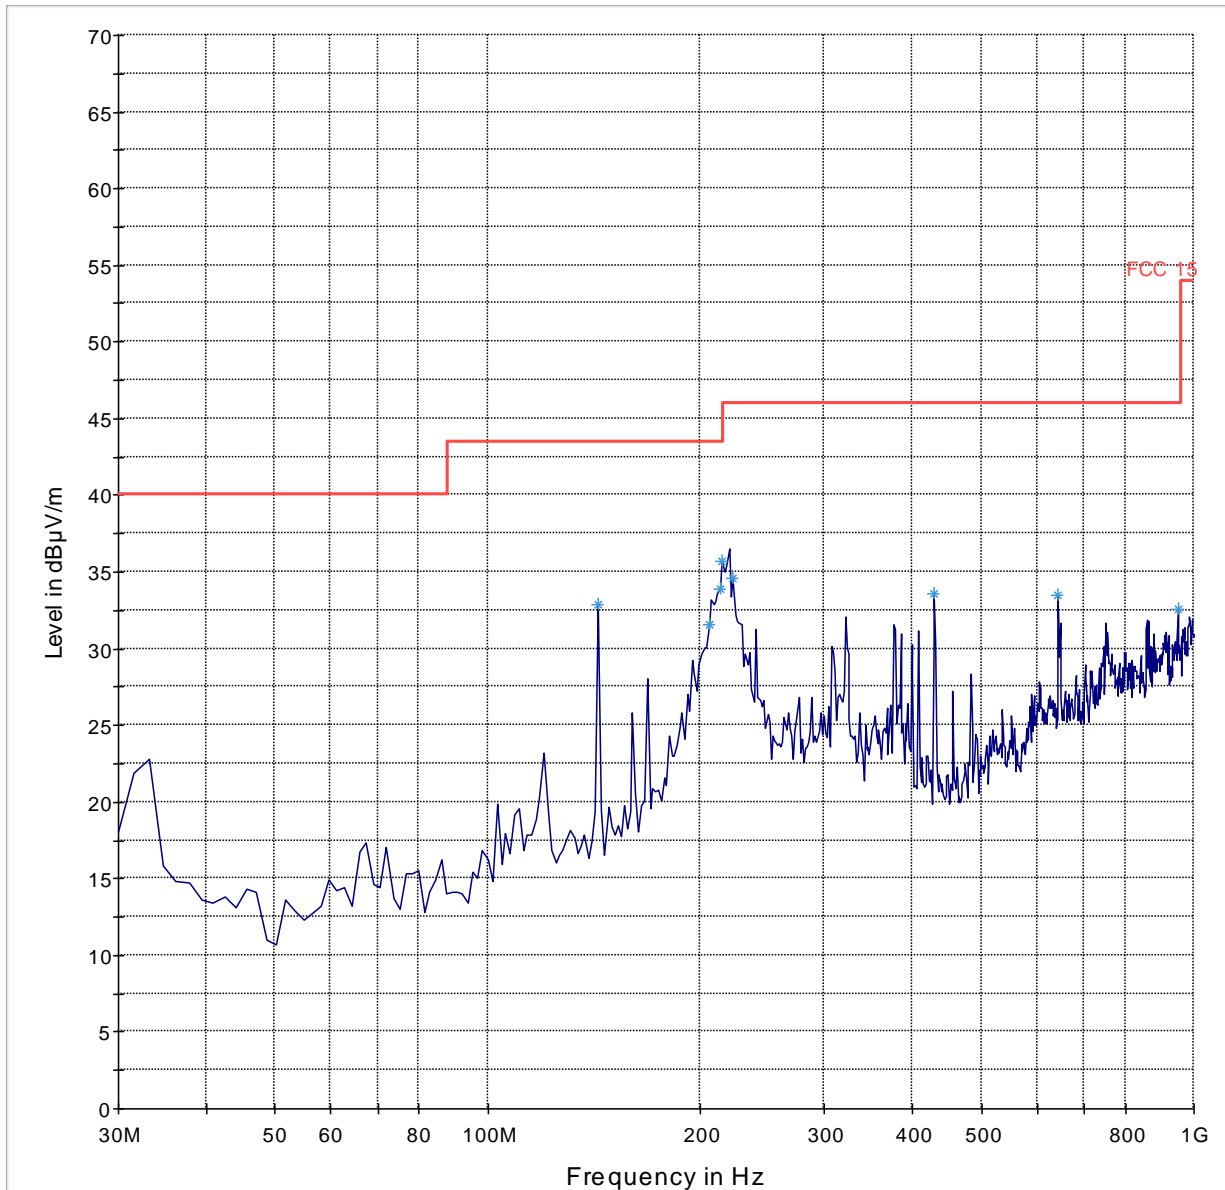

— FCC 15    — Preview Result 1-PK+    \* Data Reduction Result 1 [3]-PK+

1GHz – 18GHz


Mode: 802.11n\_HT40-Ch54 (Sub-Band 2)

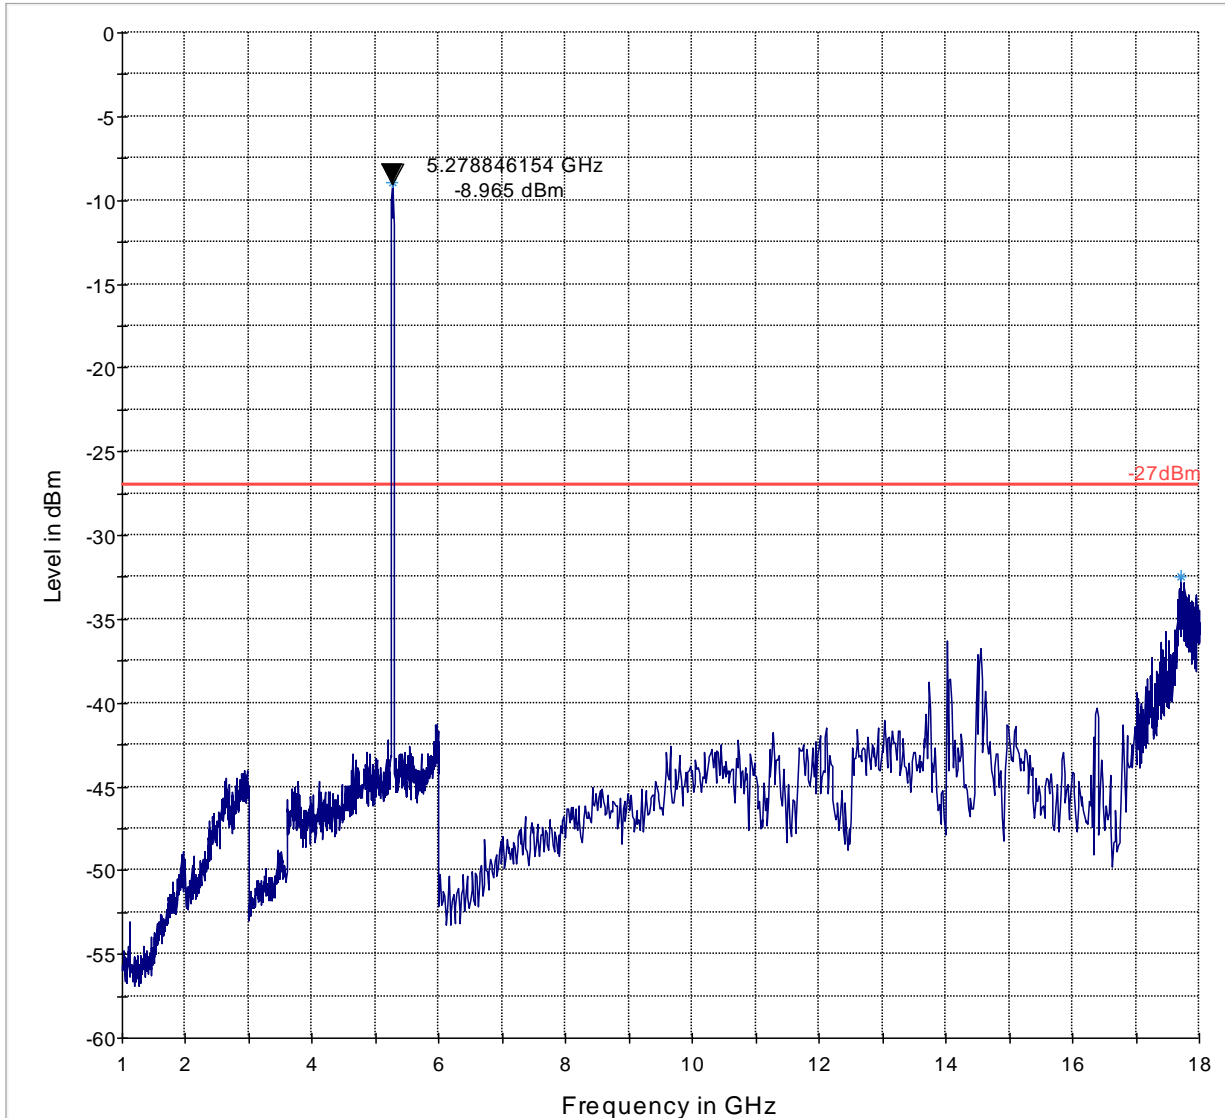

— -27dBm    — Preview Result 1-PK+    \* Data Reduction Result 1 [2]-PK+

18GHz – 40GHz

Mode: 802.11n\_HT40-Ch54 (Sub-Band 2)

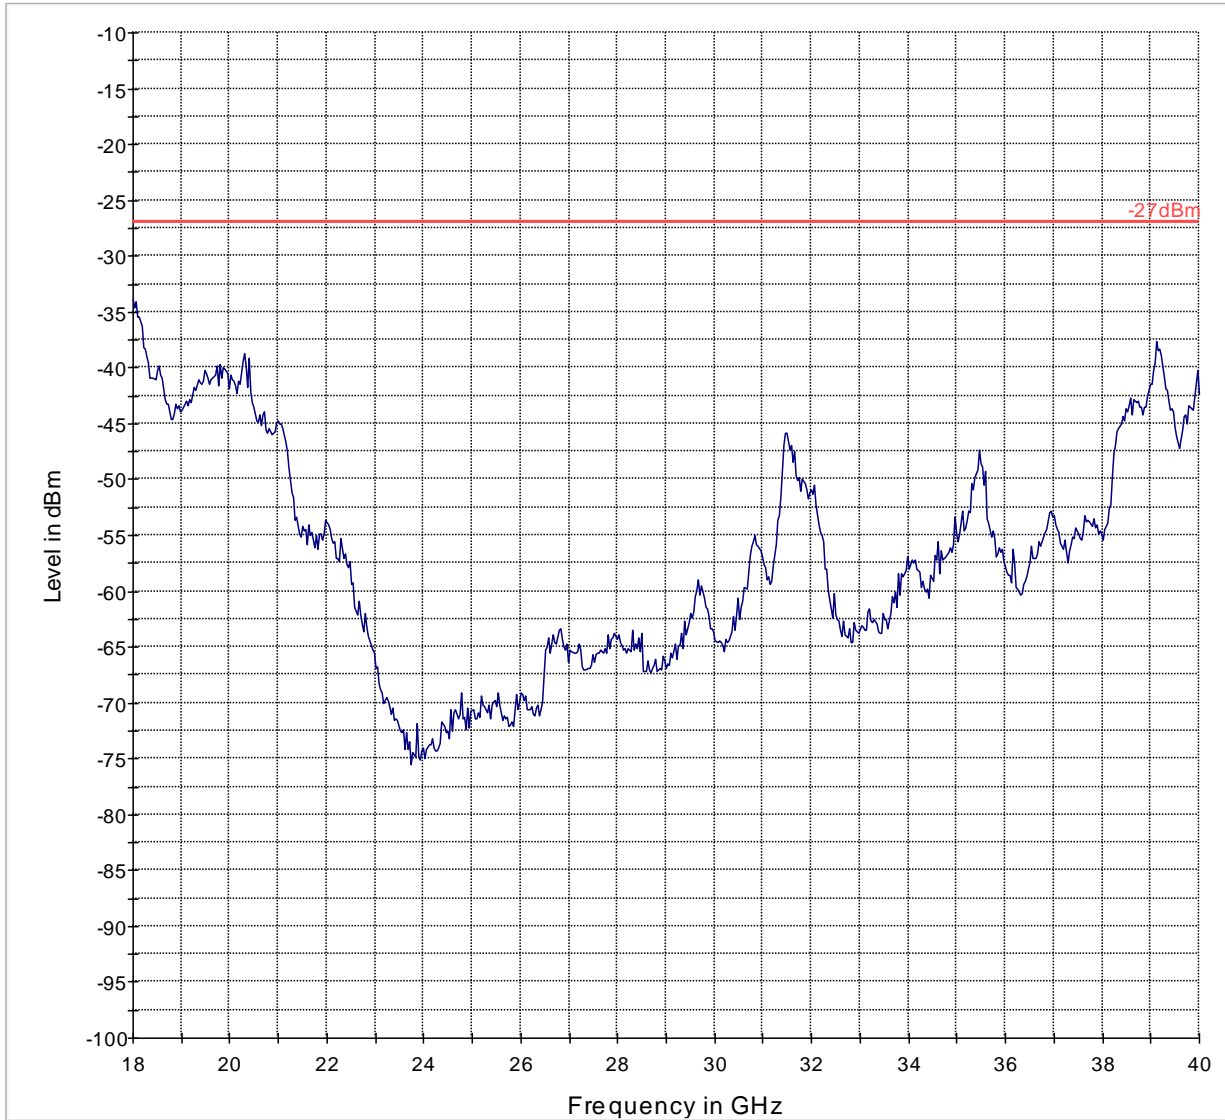


— -27dBm      — Preview Result 1-PK+





<30MHz


Mode: 802.11n\_HT40-Ch62 (Sub-Band 2)

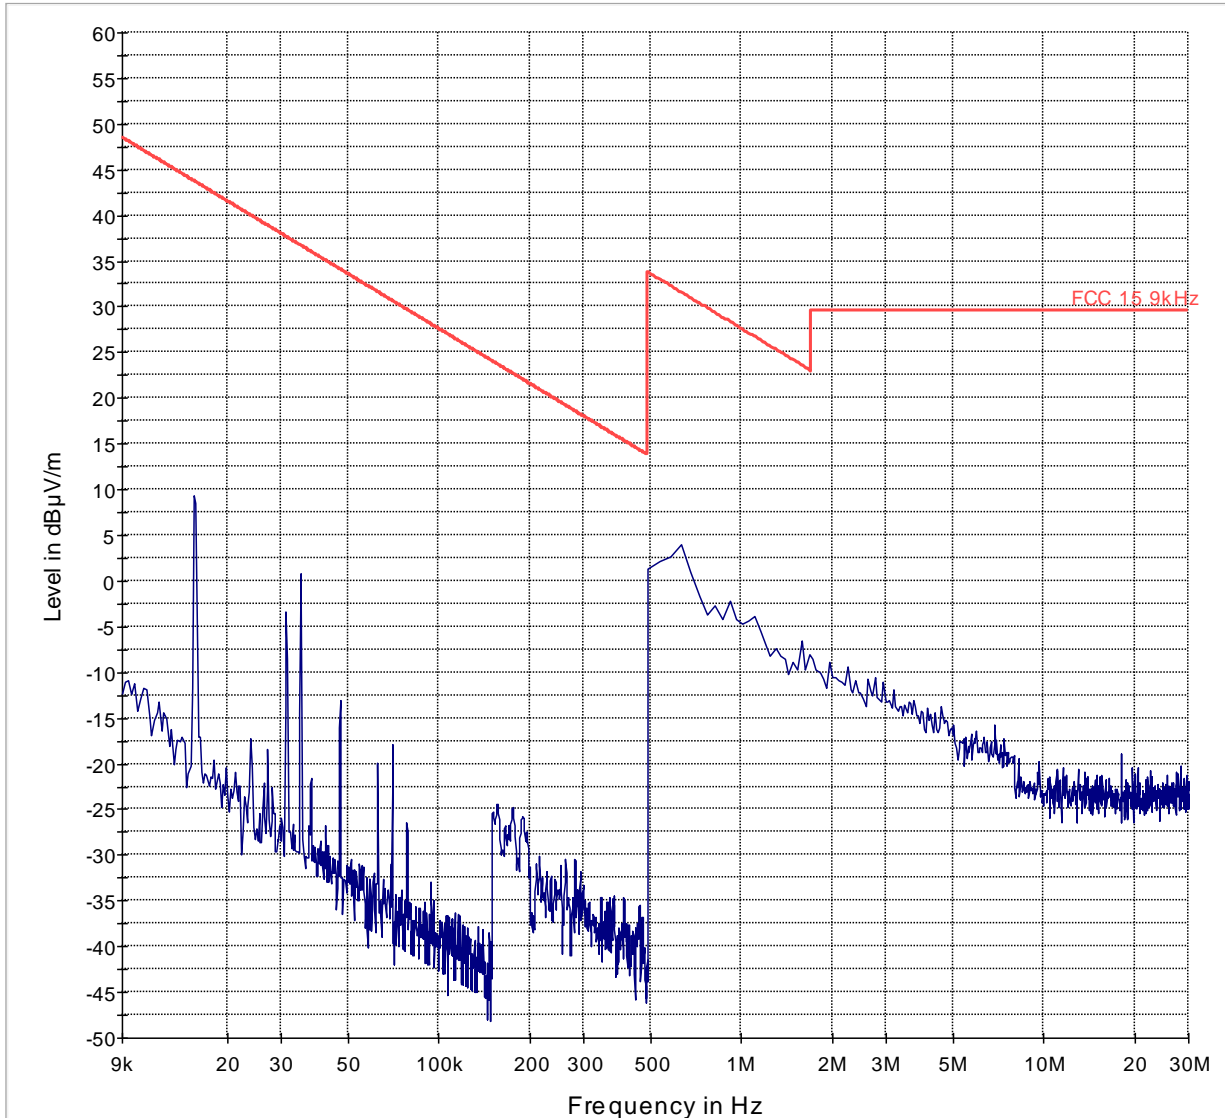

— FCC 15.9kHz — Preview Result 1-PK+

30MHz – 1GHz


Mode: 802.11n\_HT40-Ch62 (Sub-Band 2)

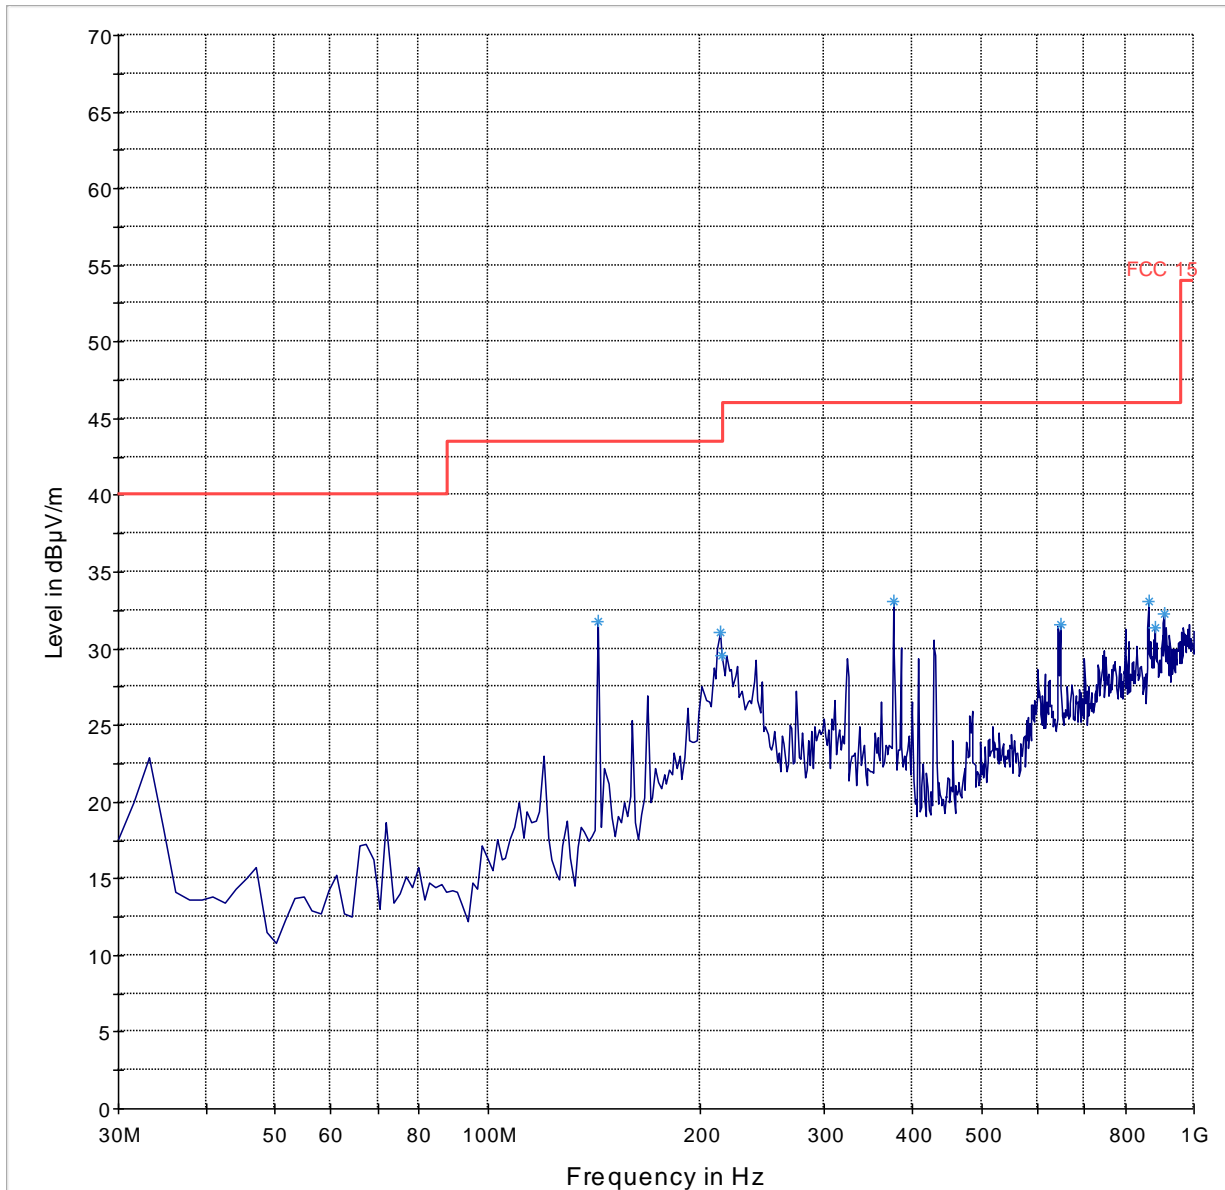

— FCC 15    — Preview Result 1-PK+    \* Data Reduction Result 1 [3]-PK+

1GHz – 18GHz


Mode: 802.11n\_HT40-Ch62 (Sub-Band 2)

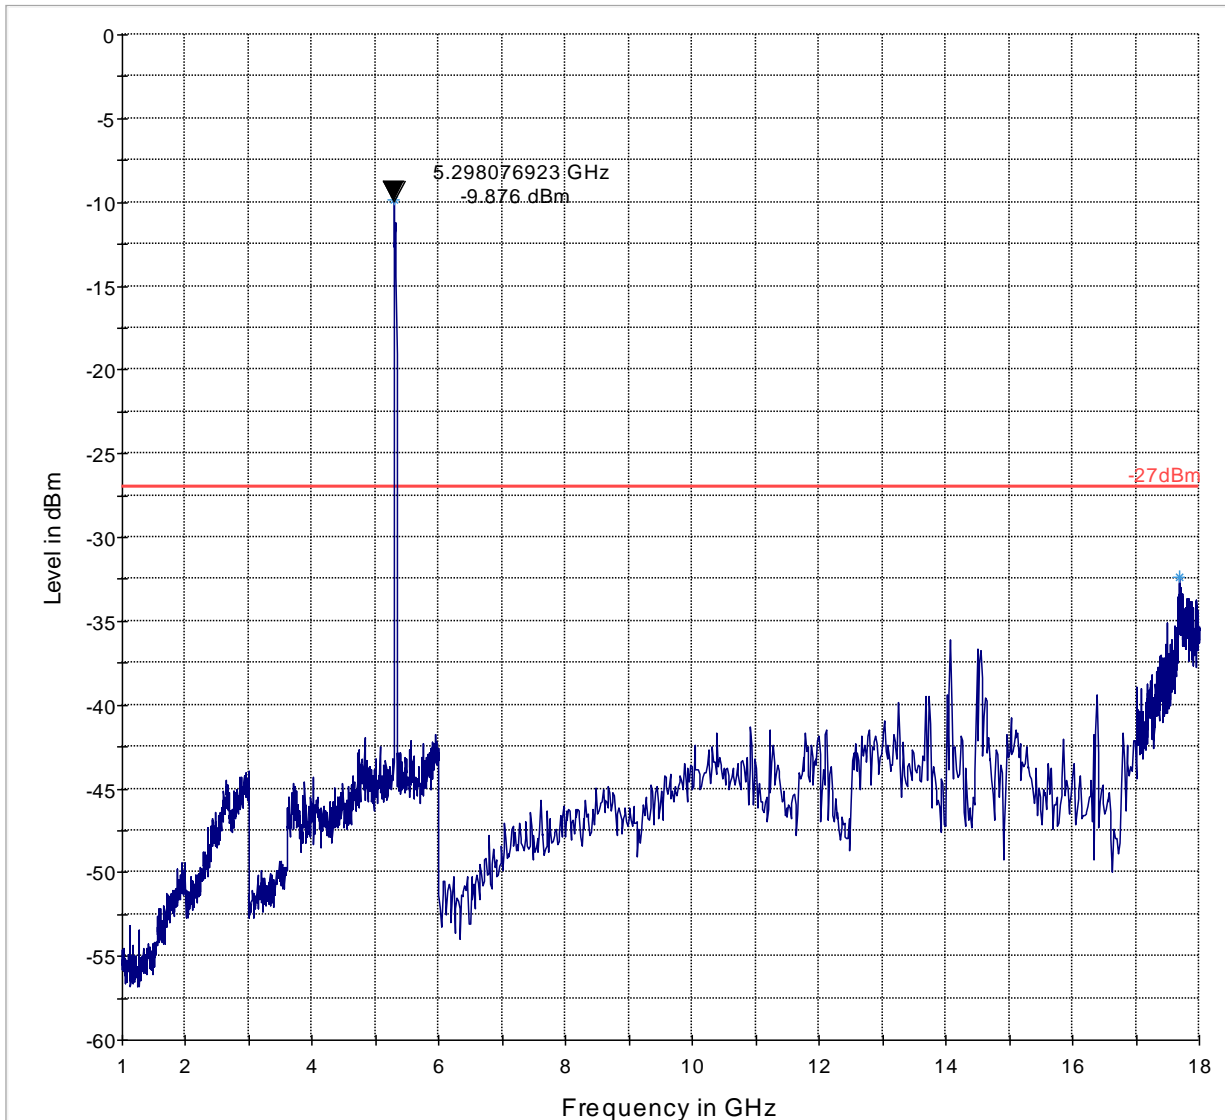

— -27dBm    — Preview Result 1-PK+    \* Data Reduction Result 1 [2]-PK+

18GHz – 40GHz


Mode: 802.11n\_HT40-Ch62 (Sub-Band 2)

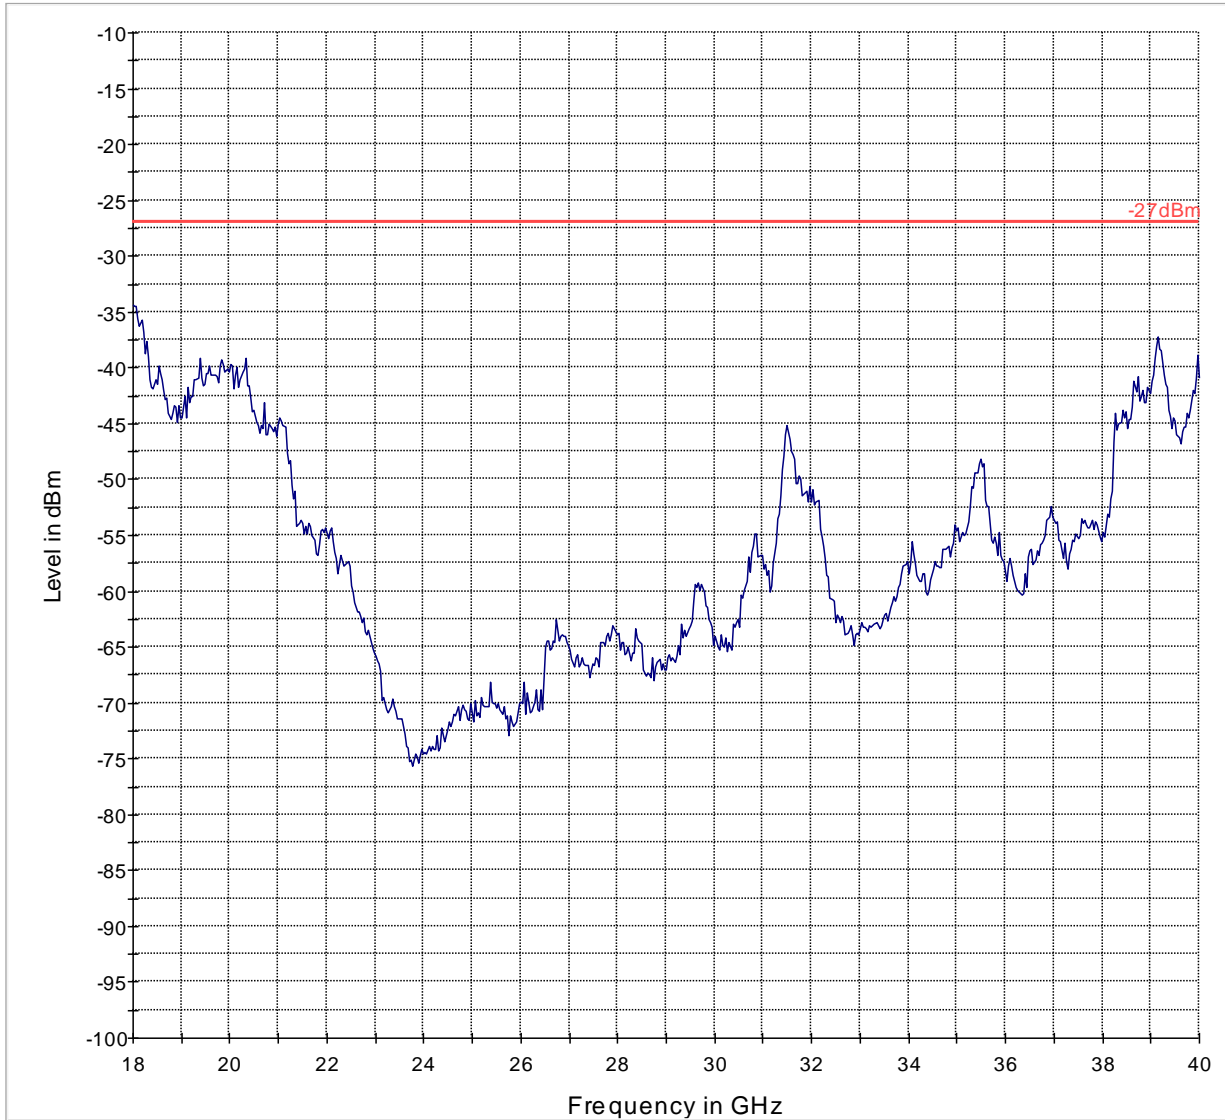

— -27dBm    — Preview Result 1-PK+

<30MHz

Mode: 802.11n\_HT40-Ch102 (Sub-Band 3)

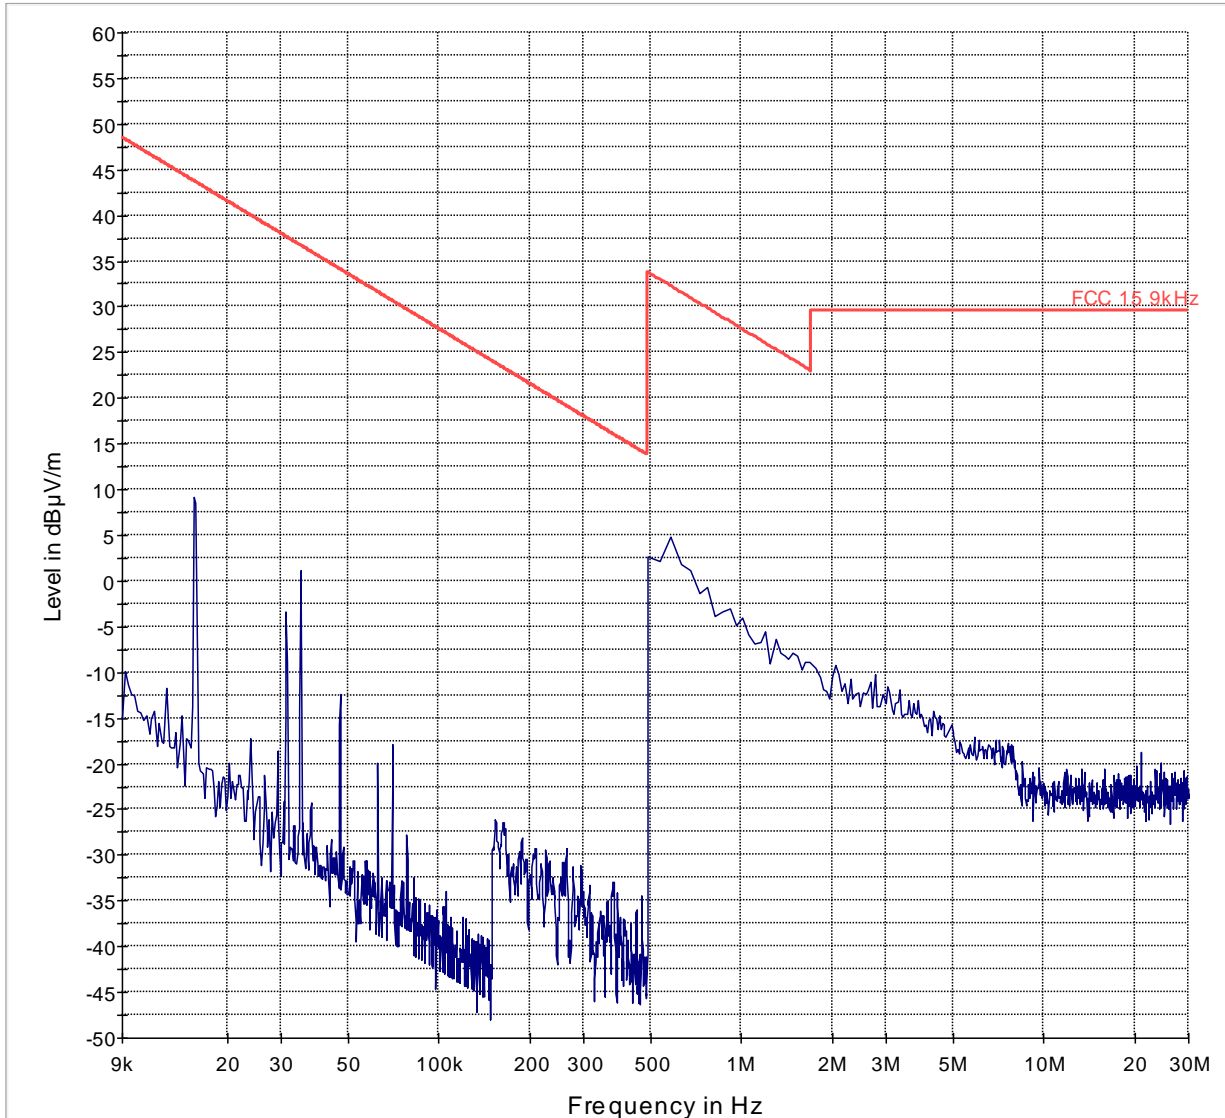


— FCC 15.9kHz — Preview Result 1-PK+



30MHz – 1GHz


Mode: 802.11n\_HT40-Ch102 (Sub-Band 3)

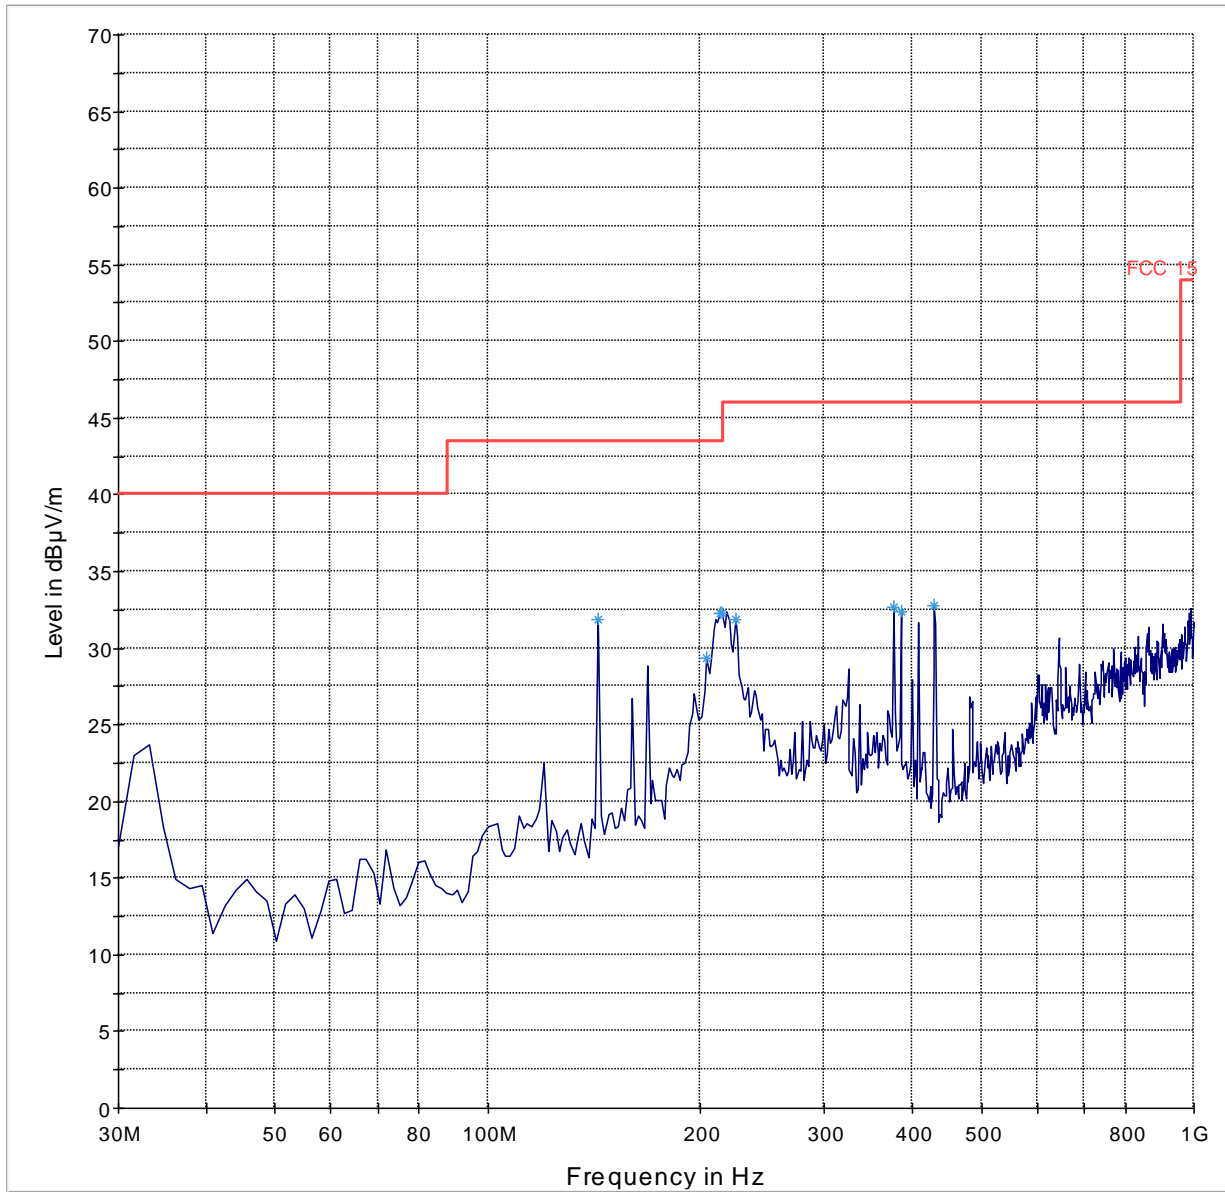

— FCC 15    — Preview Result 1-PK+    \* Data Reduction Result 1 [3]-PK+

1GHz – 18GHz


Mode: 802.11n\_HT40-Ch102 (Sub-Band 3)

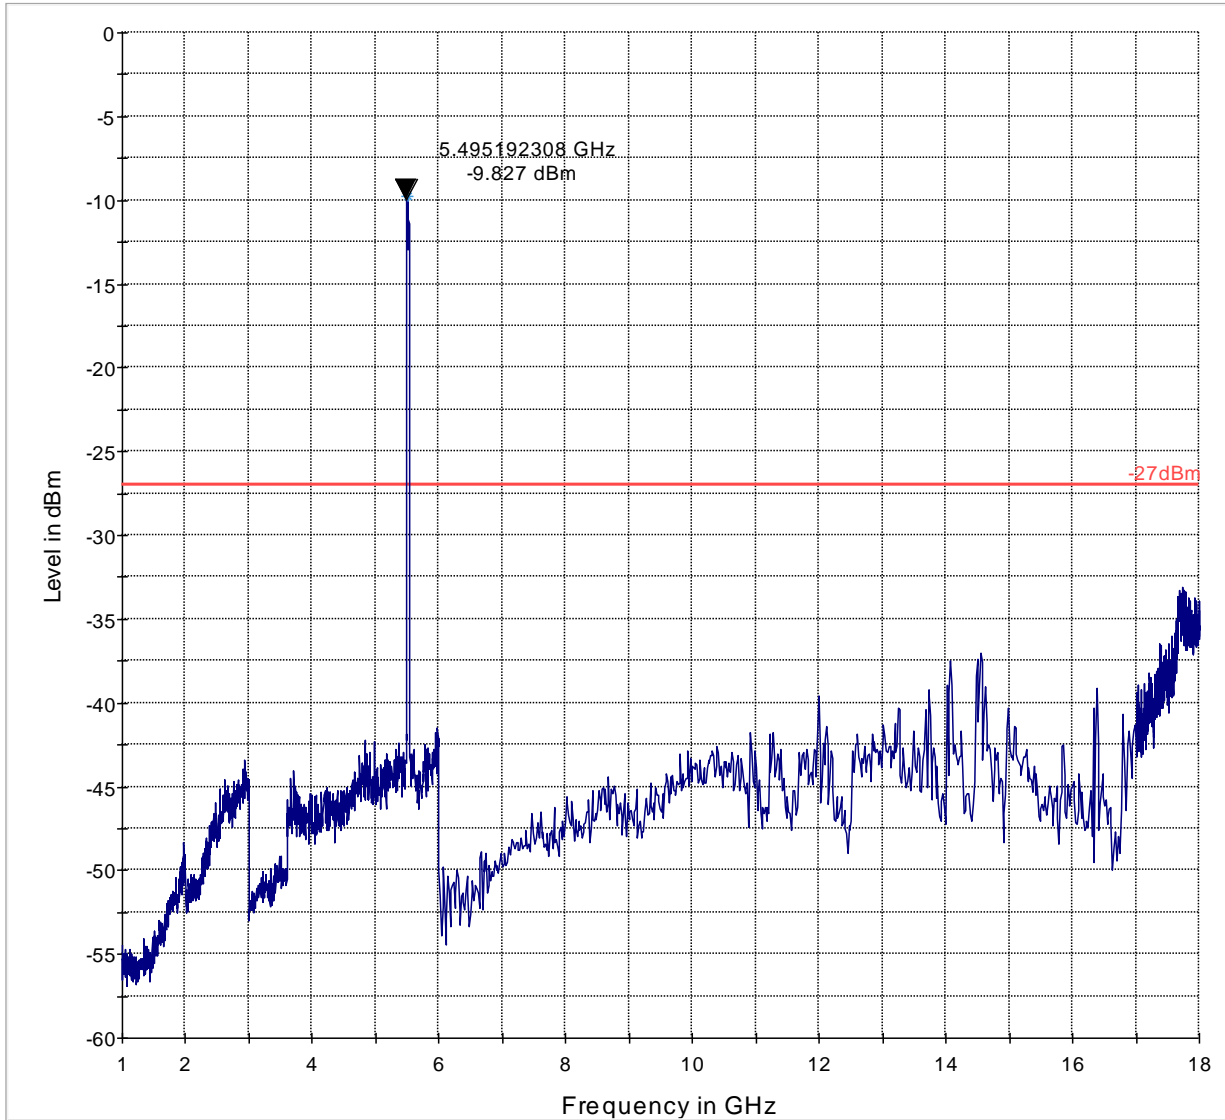

— -27dBm    — Preview Result 1-PK+    \* Data Reduction Result 1 [2]-PK+

18GHz – 40GHz

Mode: 802.11n\_HT40-Ch102 (Sub-Band 3)

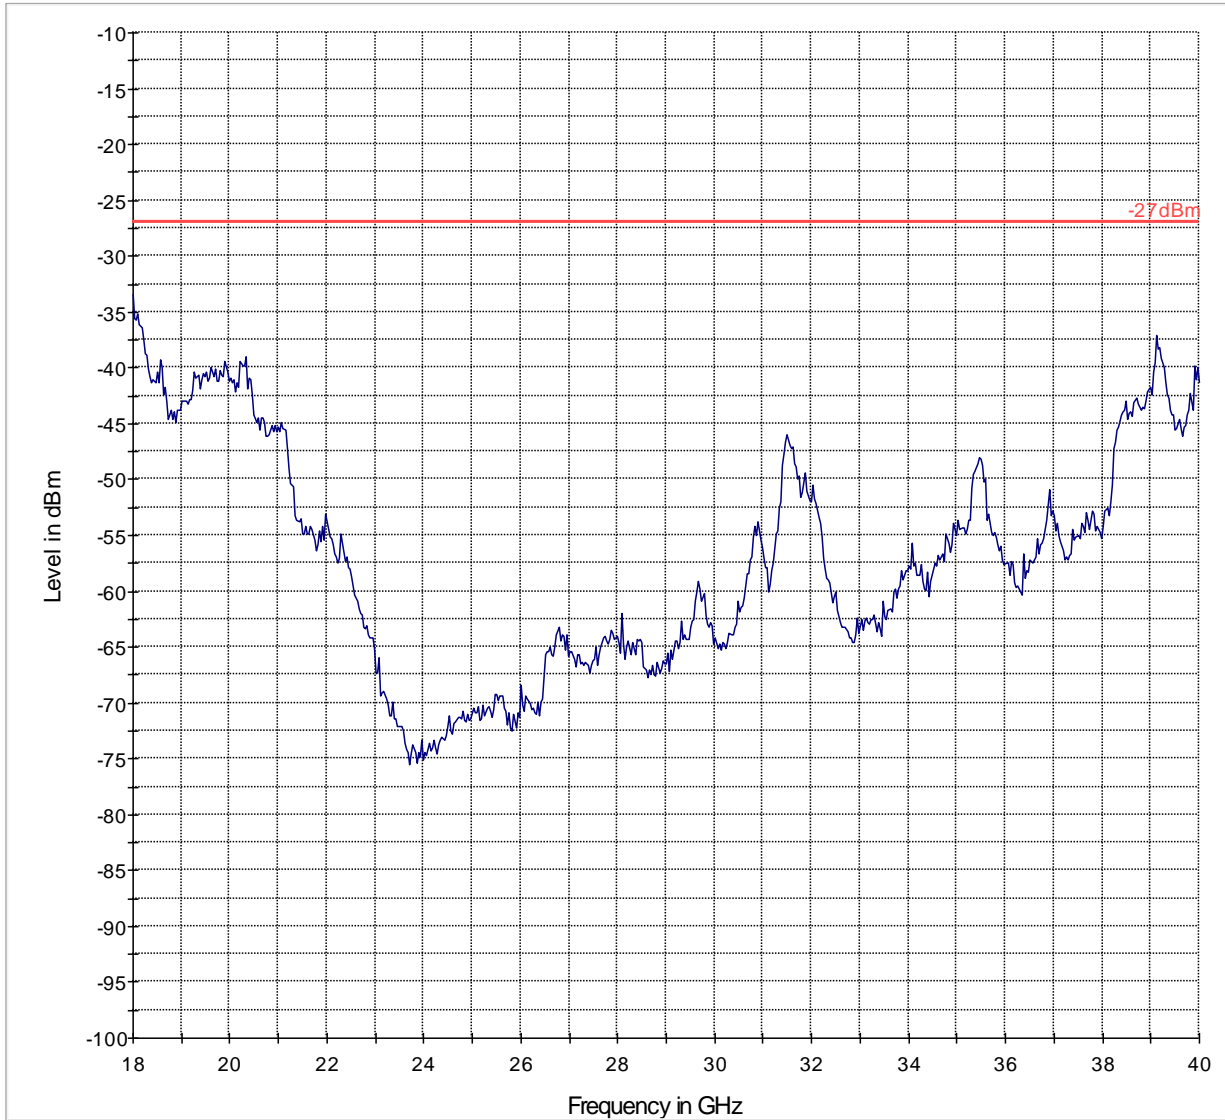


— -27dBm      — Preview Result 1-PK+



<30MHz


Mode: 802.11n\_HT40-Ch118 (Sub-Band 3)

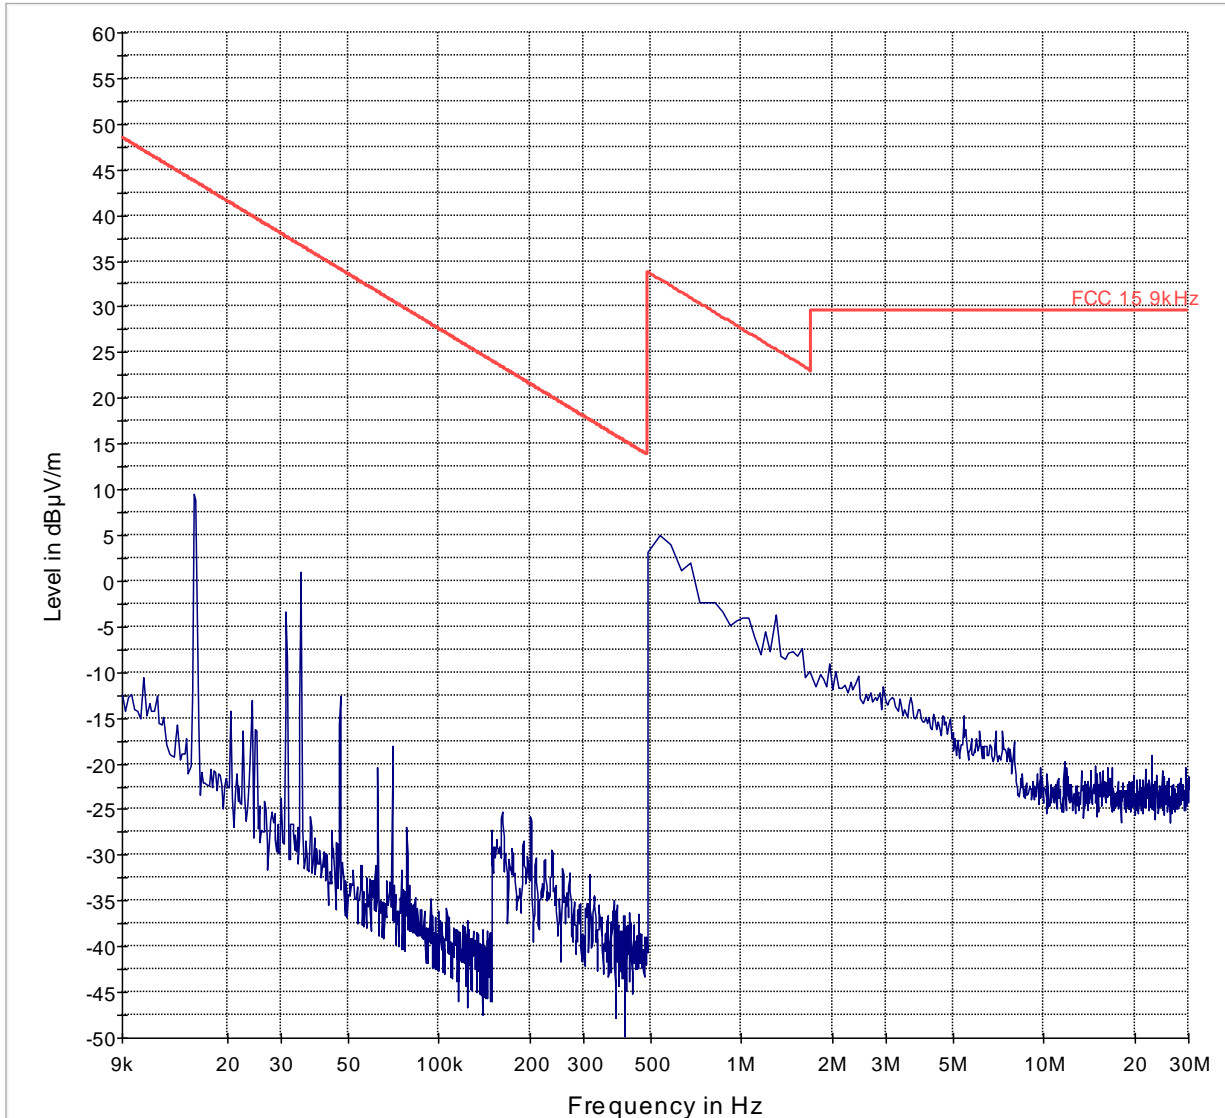

— FCC 15.9kHz — Preview Result 1-PK+

30MHz – 1GHz


Mode: 802.11n\_HT40-Ch118 (Sub-Band 3)

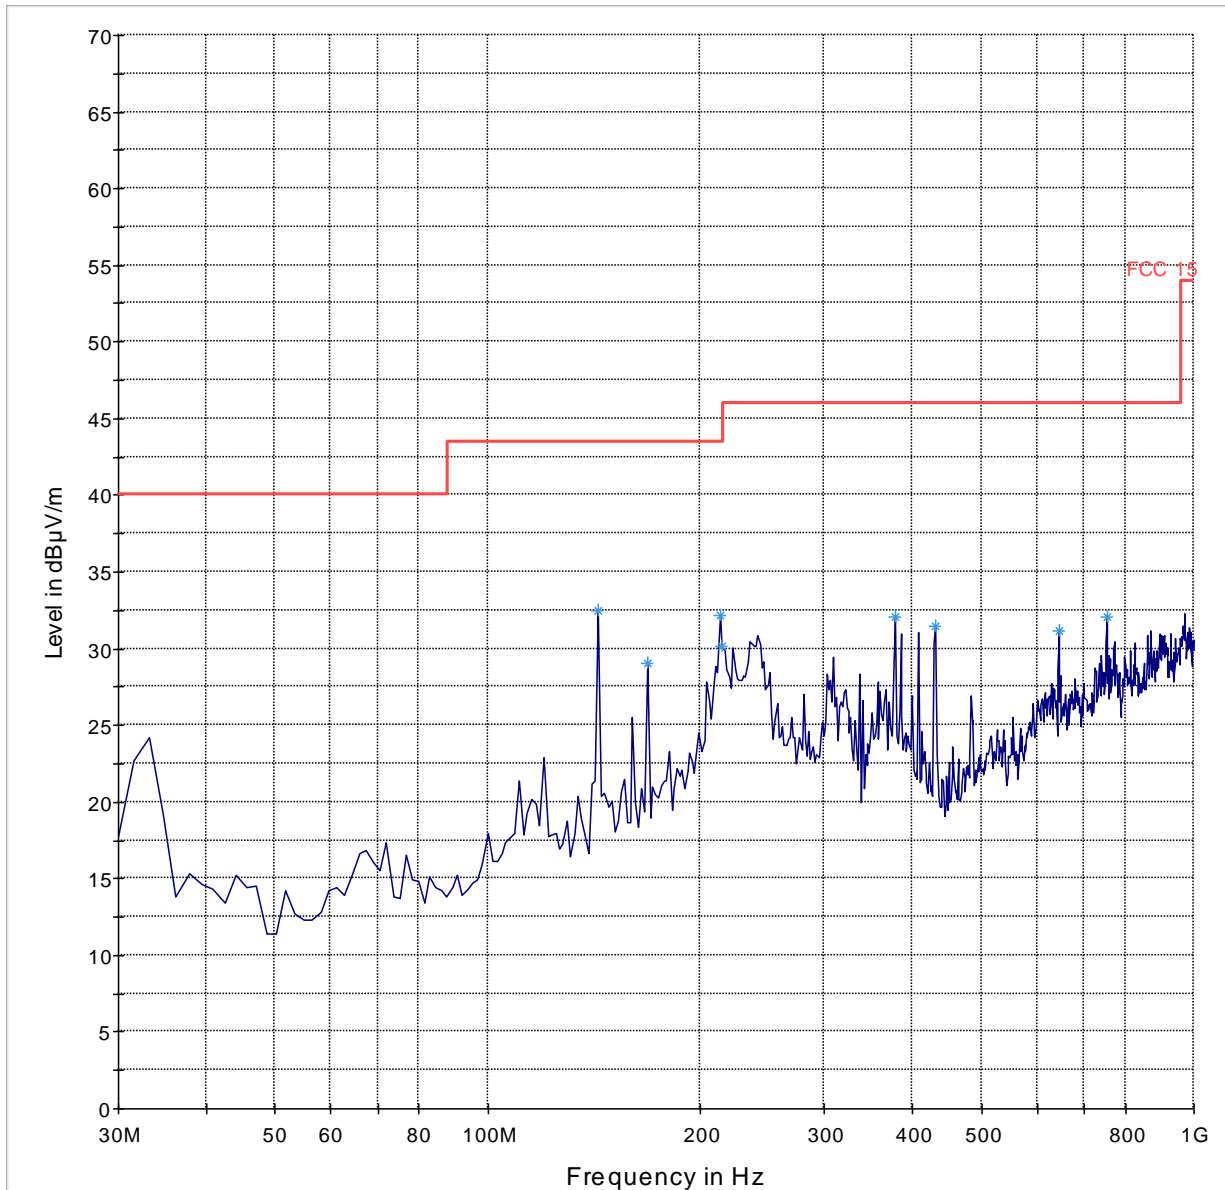

— FCC 15    — Preview Result 1-PK+    \* Data Reduction Result 1 [3]-PK+

1GHz – 18GHz


Mode: 802.11n\_HT40-Ch118 (Sub-Band 3)

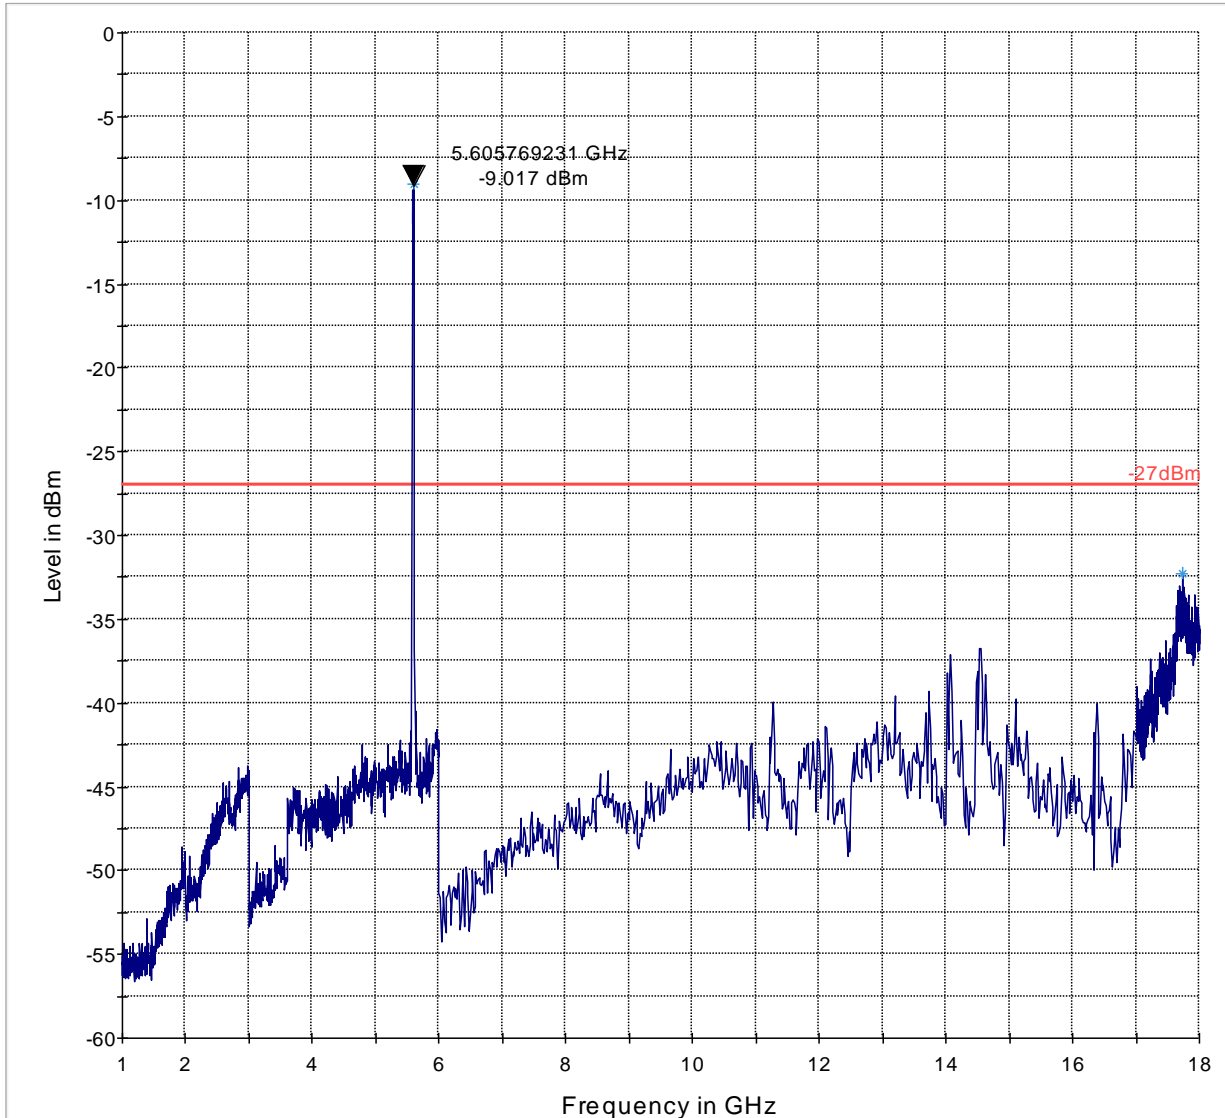

— -27dBm      — Preview Result 1-PK+      \* Data Reduction Result 1 [2]-PK+

18GHz – 40GHz


Mode: 802.11n\_HT40-Ch118 (Sub-Band 3)

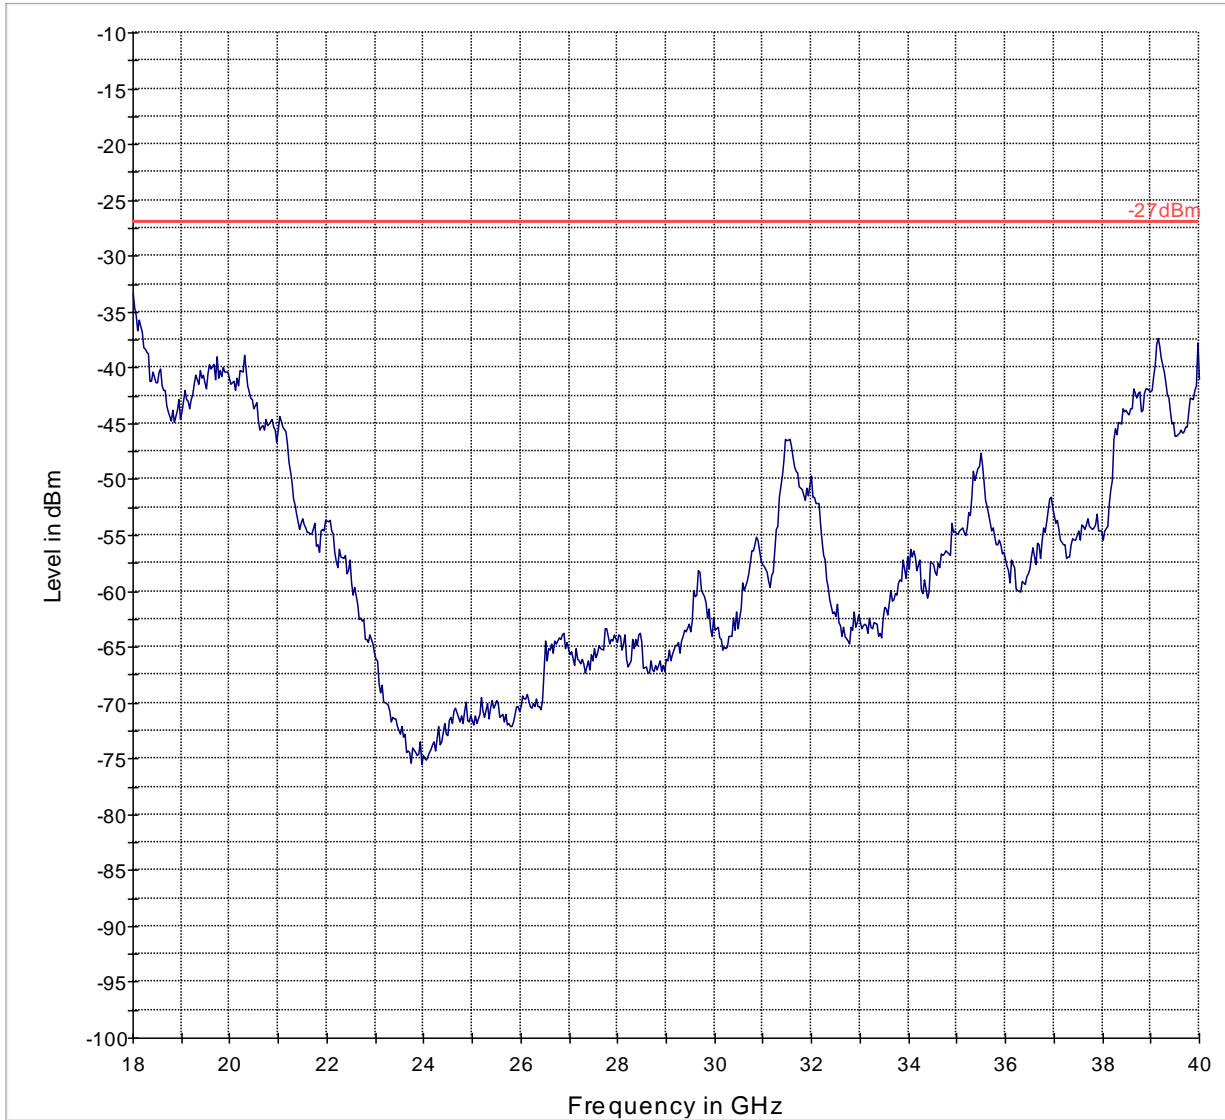

— -27dBm      — Preview Result 1-PK+

<30MHz


Mode: 802.11n\_HT40-Ch134 (Sub-Band 3)

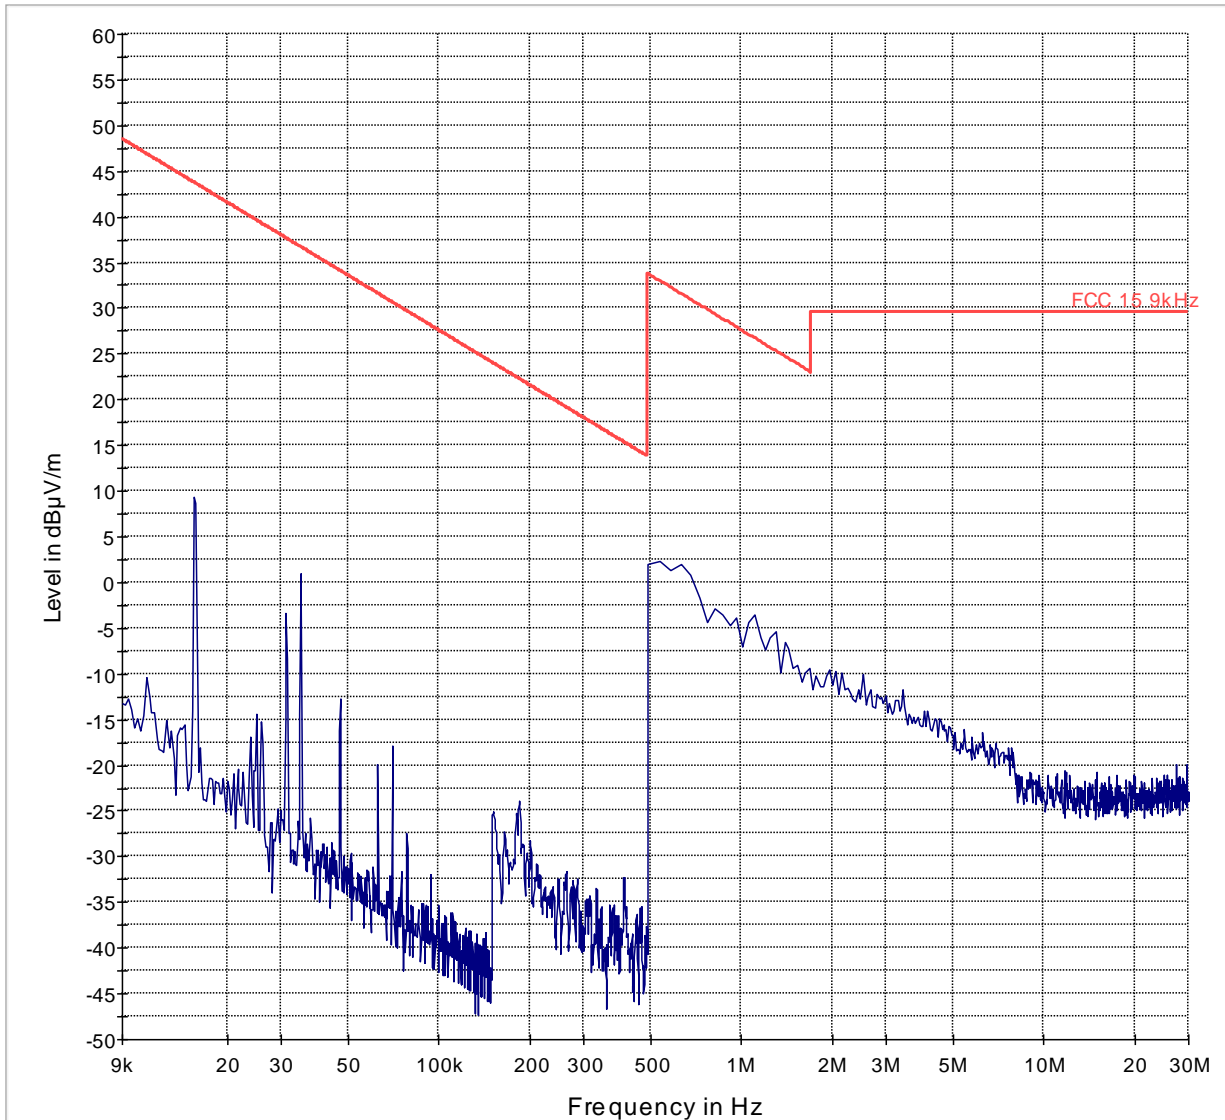

— FCC 15.9kHz — Preview Result 1-PK+

30MHz – 1GHz


Mode: 802.11n\_HT40-Ch134 (Sub-Band 3)

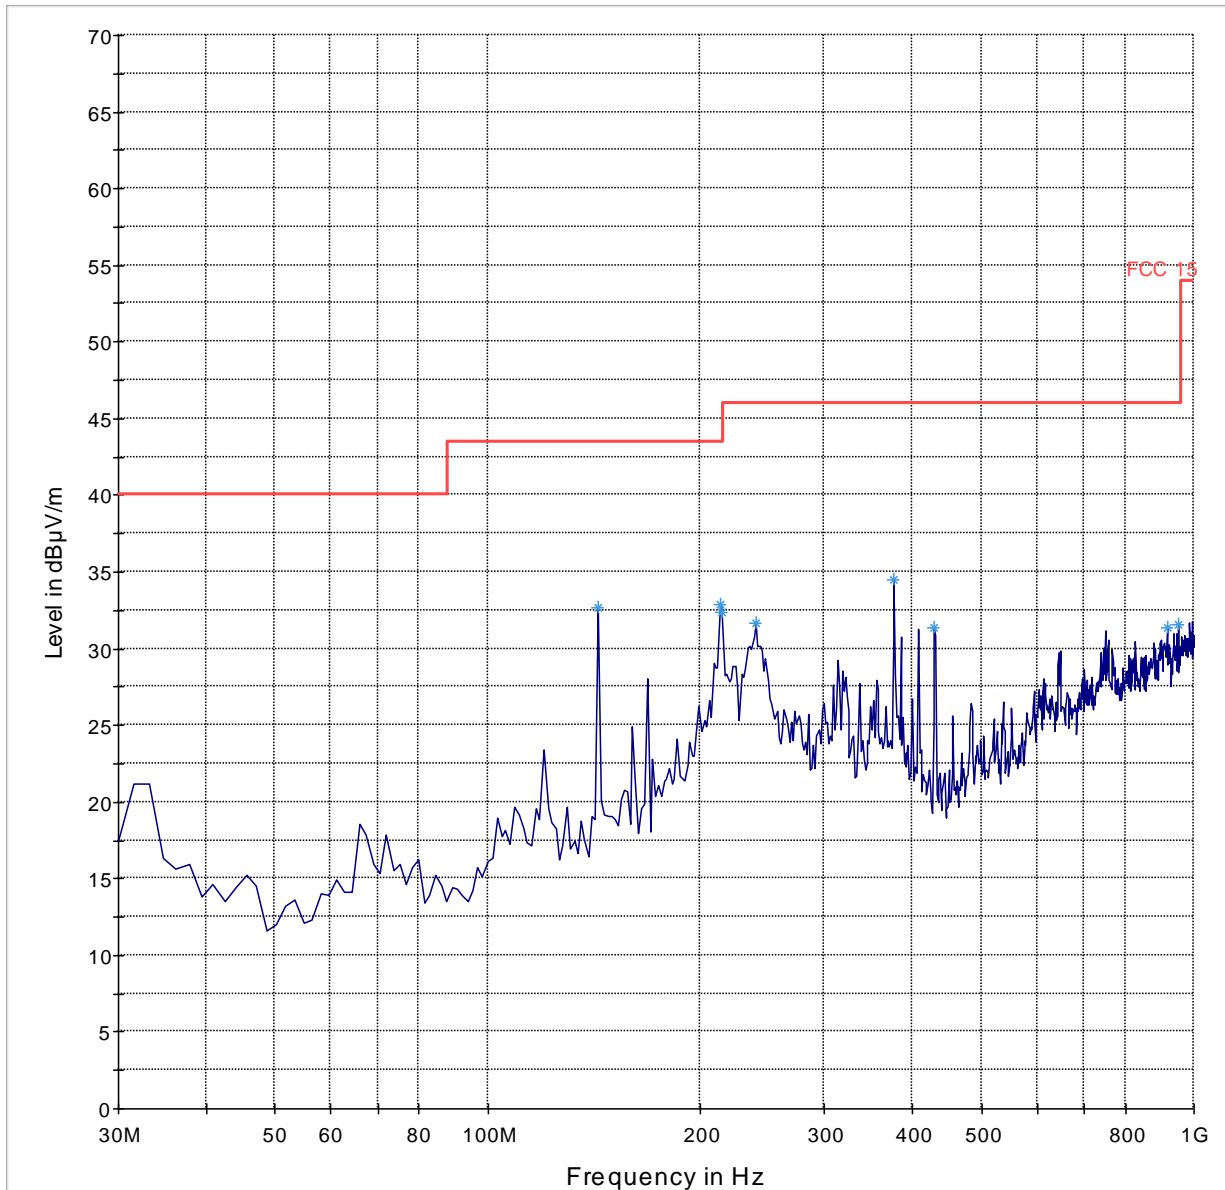

— FCC 15    — Preview Result 1-PK+    \* Data Reduction Result 1 [3]-PK+

1GHz – 18GHz


Mode: 802.11n\_HT40-Ch134 (Sub-Band 3)

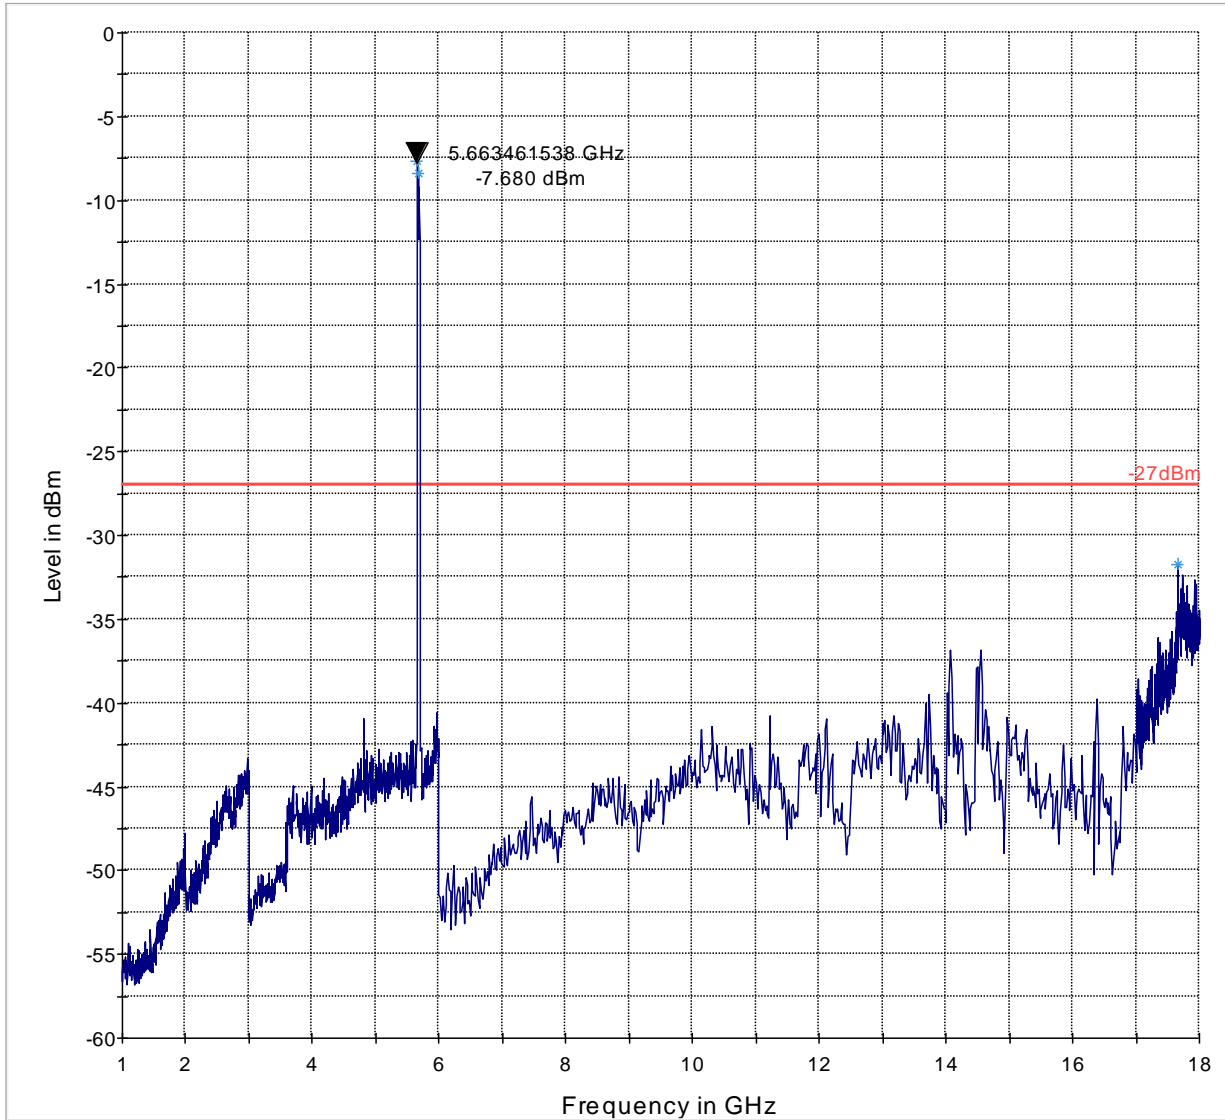

— -27dBm    — Preview Result 1-PK+    \* Data Reduction Result 1 [2]-PK+

18GHz – 40GHz

Mode: 802.11n\_HT40-Ch134 (Sub-Band 3)

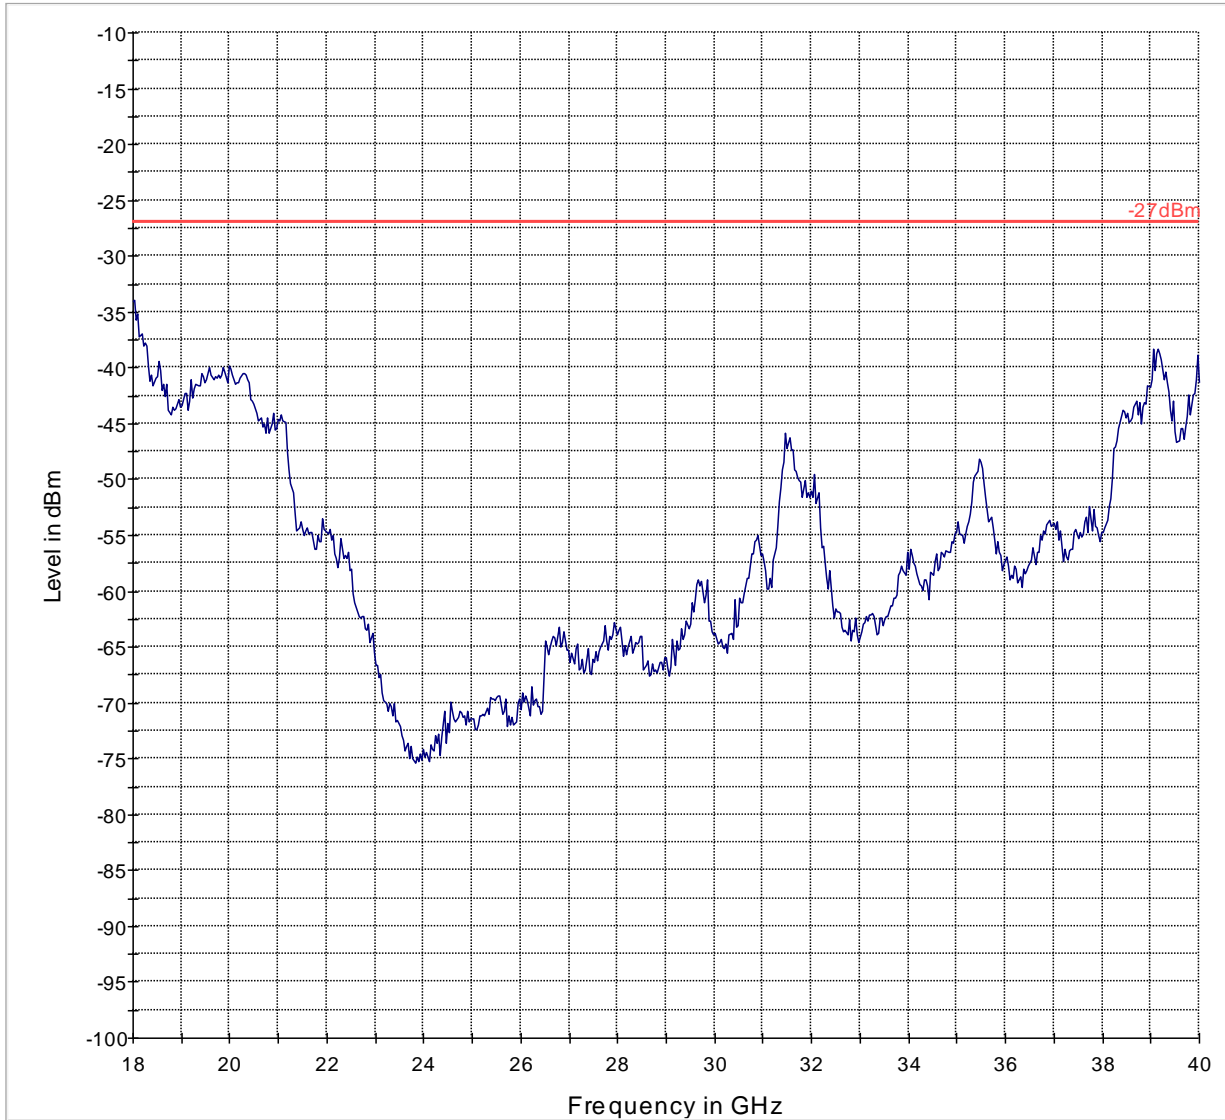


— -27dBm      — Preview Result 1-PK+



<30MHz


Mode: 802.11ac\_HT80-Ch42 (Sub-Band 1)

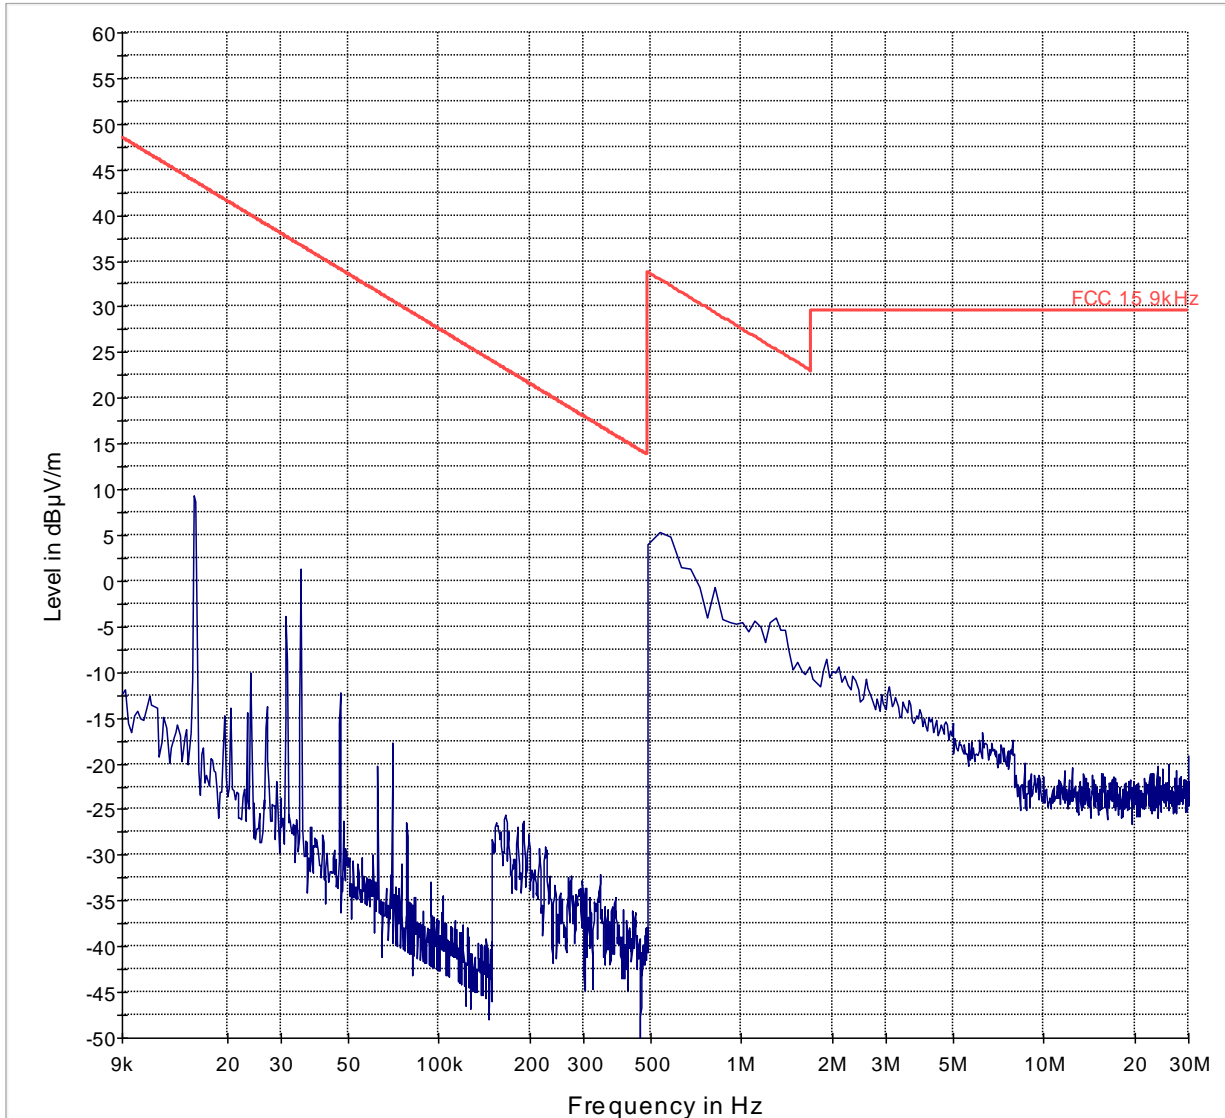

— FCC 15.9kHz — Preview Result 1-PK+

30MHz – 1GHz


Mode: 802.11ac\_HT80-Ch42 (Sub-Band 1)

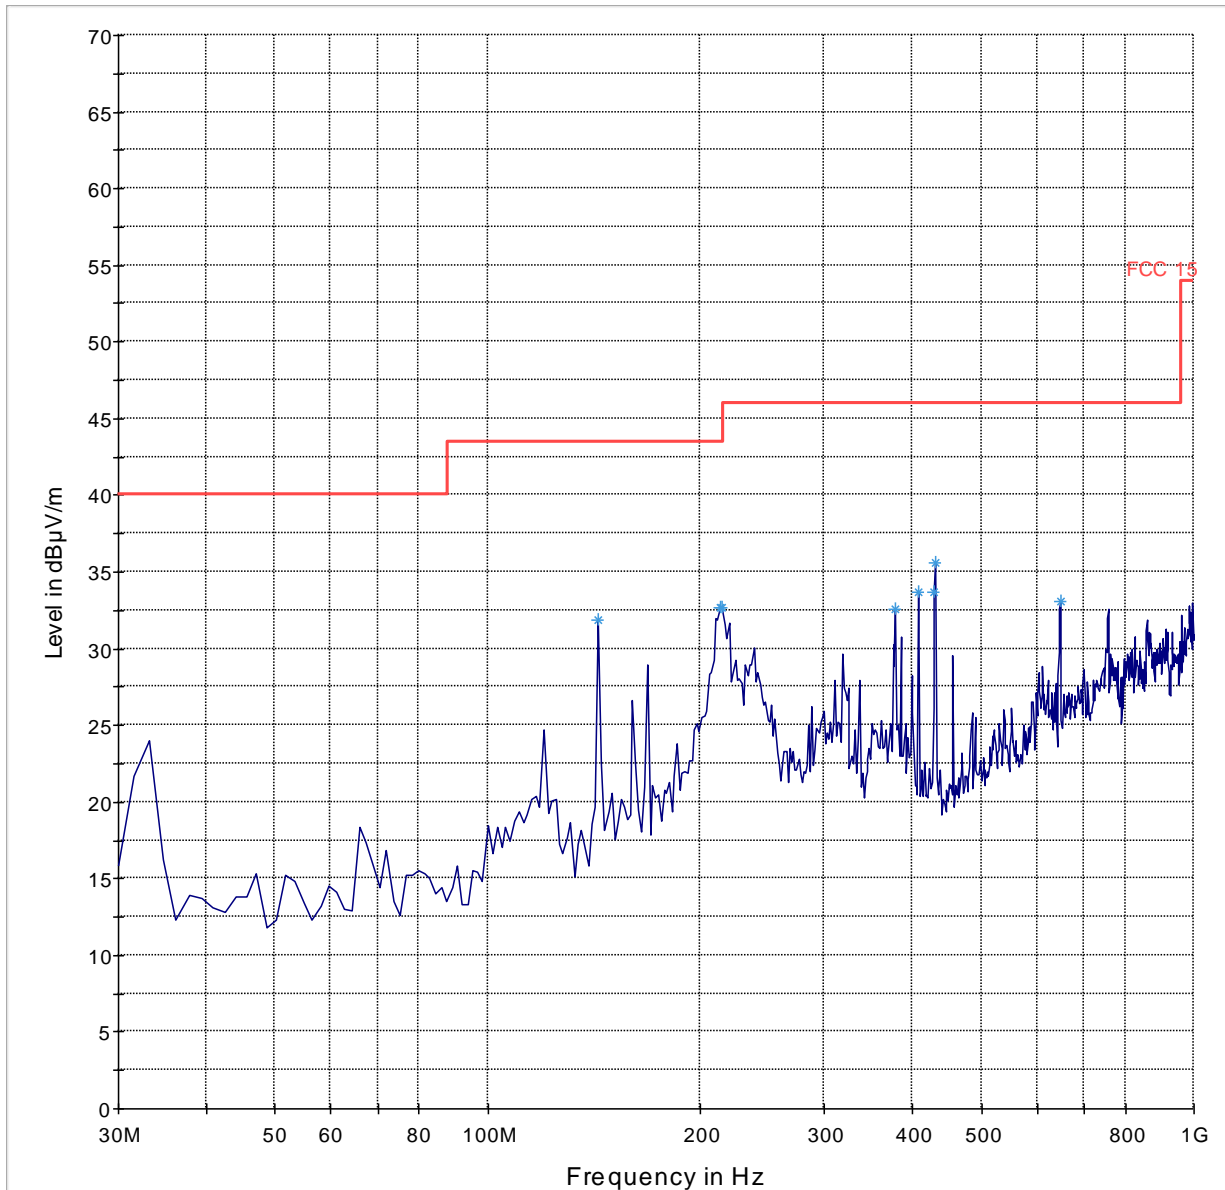

— FCC 15    — Preview Result 1-PK+    \* Data Reduction Result 1 [3]-PK+

1GHz – 18GHz


Mode: 802.11ac\_HT80-Ch42 (Sub-Band 1)

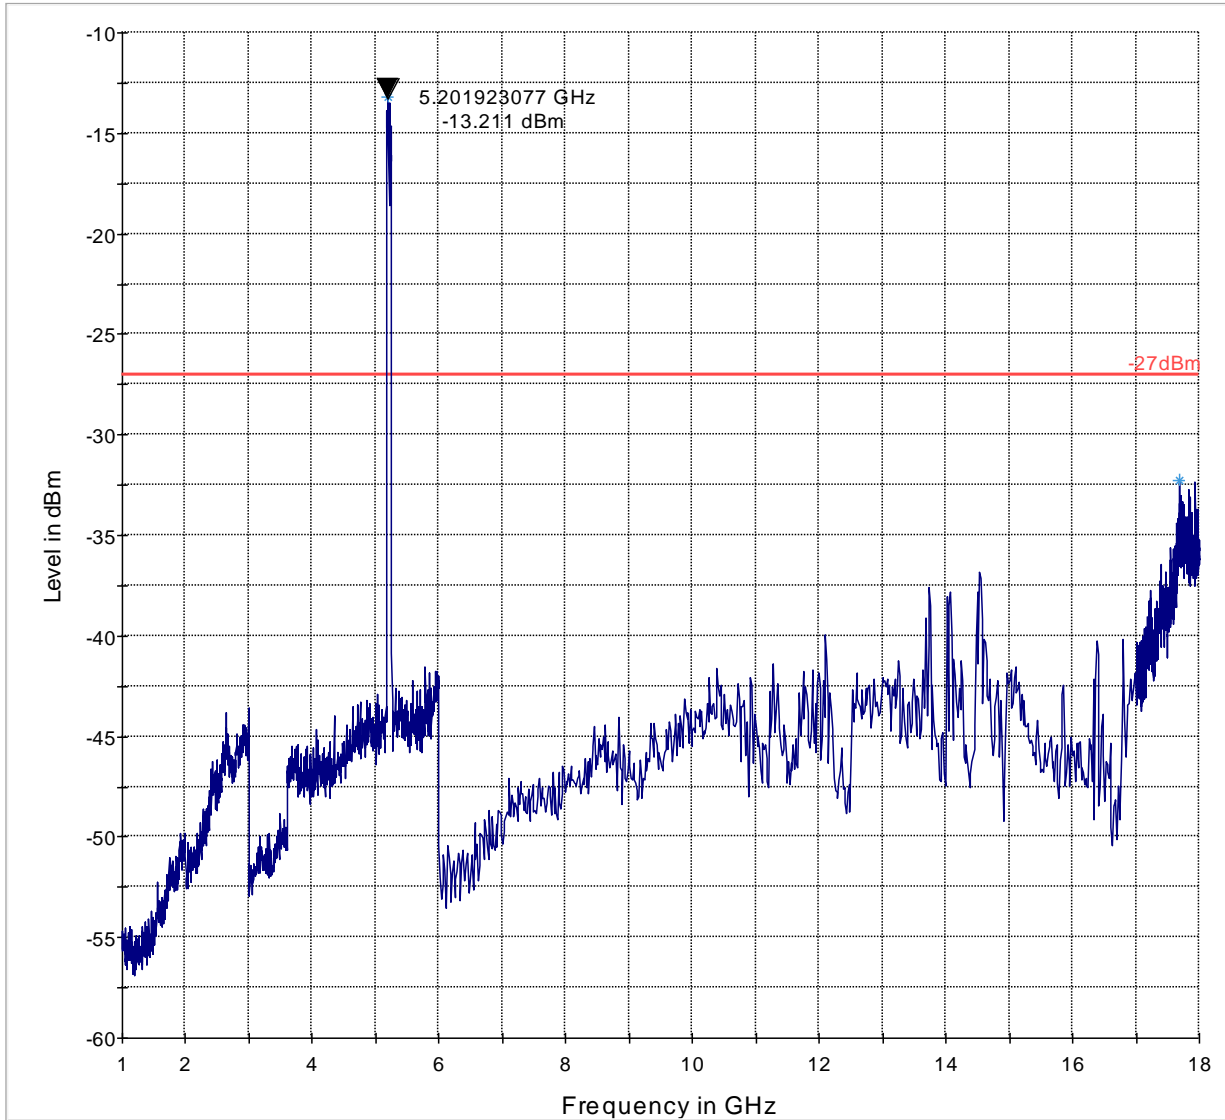

— -27dBm    — Preview Result 1-PK+    \* Data Reduction Result 1 [2]-PK+

18GHz – 40GHz


Mode: 802.11ac\_HT80-Ch42 (Sub-Band 1)

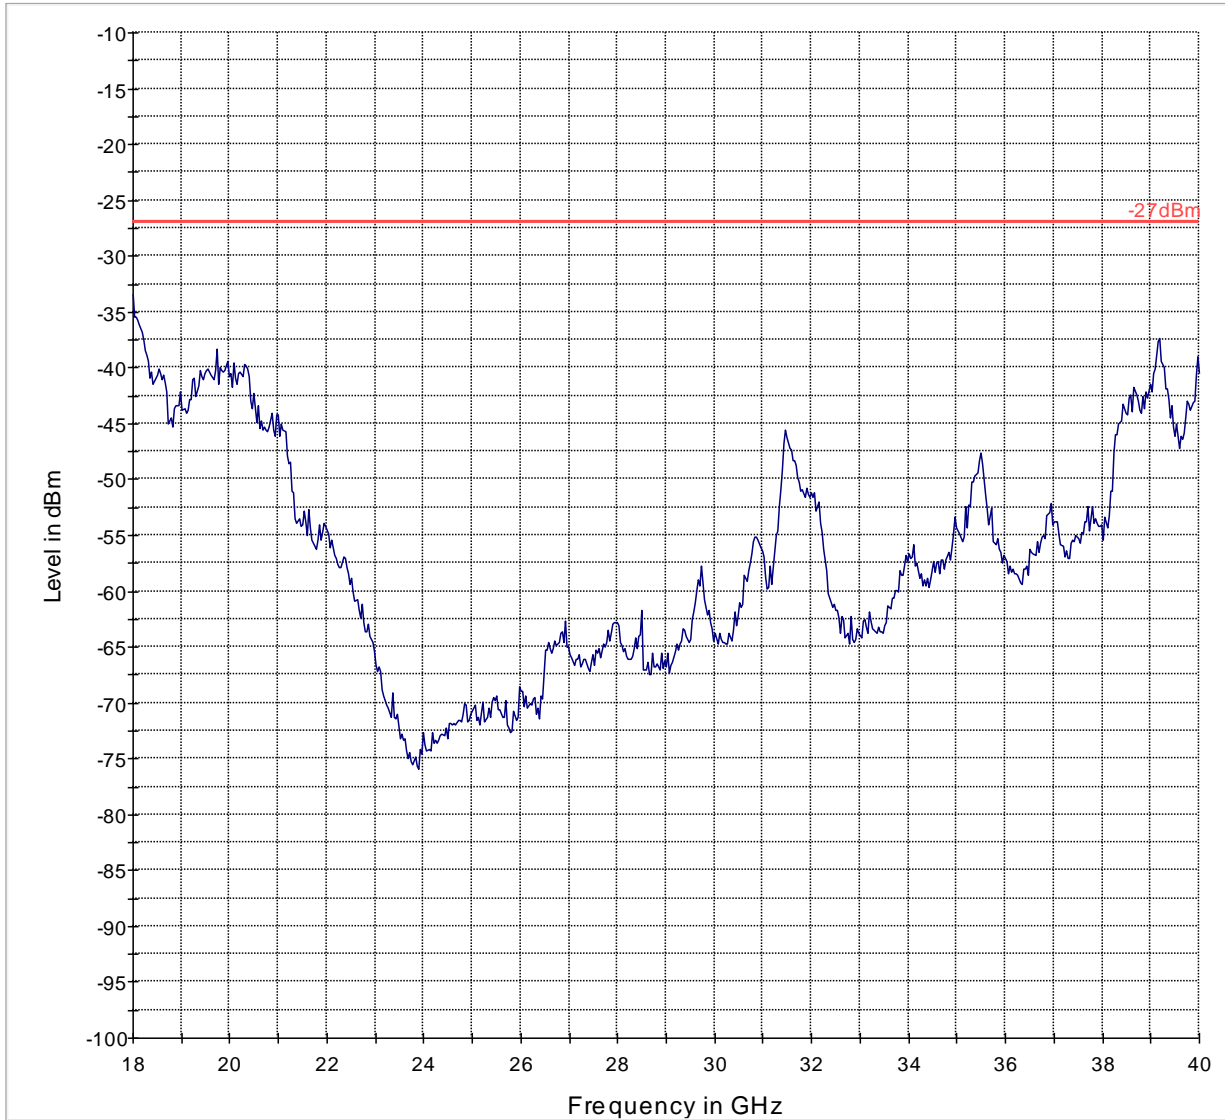

— -27dBm      — Preview Result 1-PK+

<30MHz


Mode: 802.11ac\_HT80-Ch58 (Sub-Band 2)

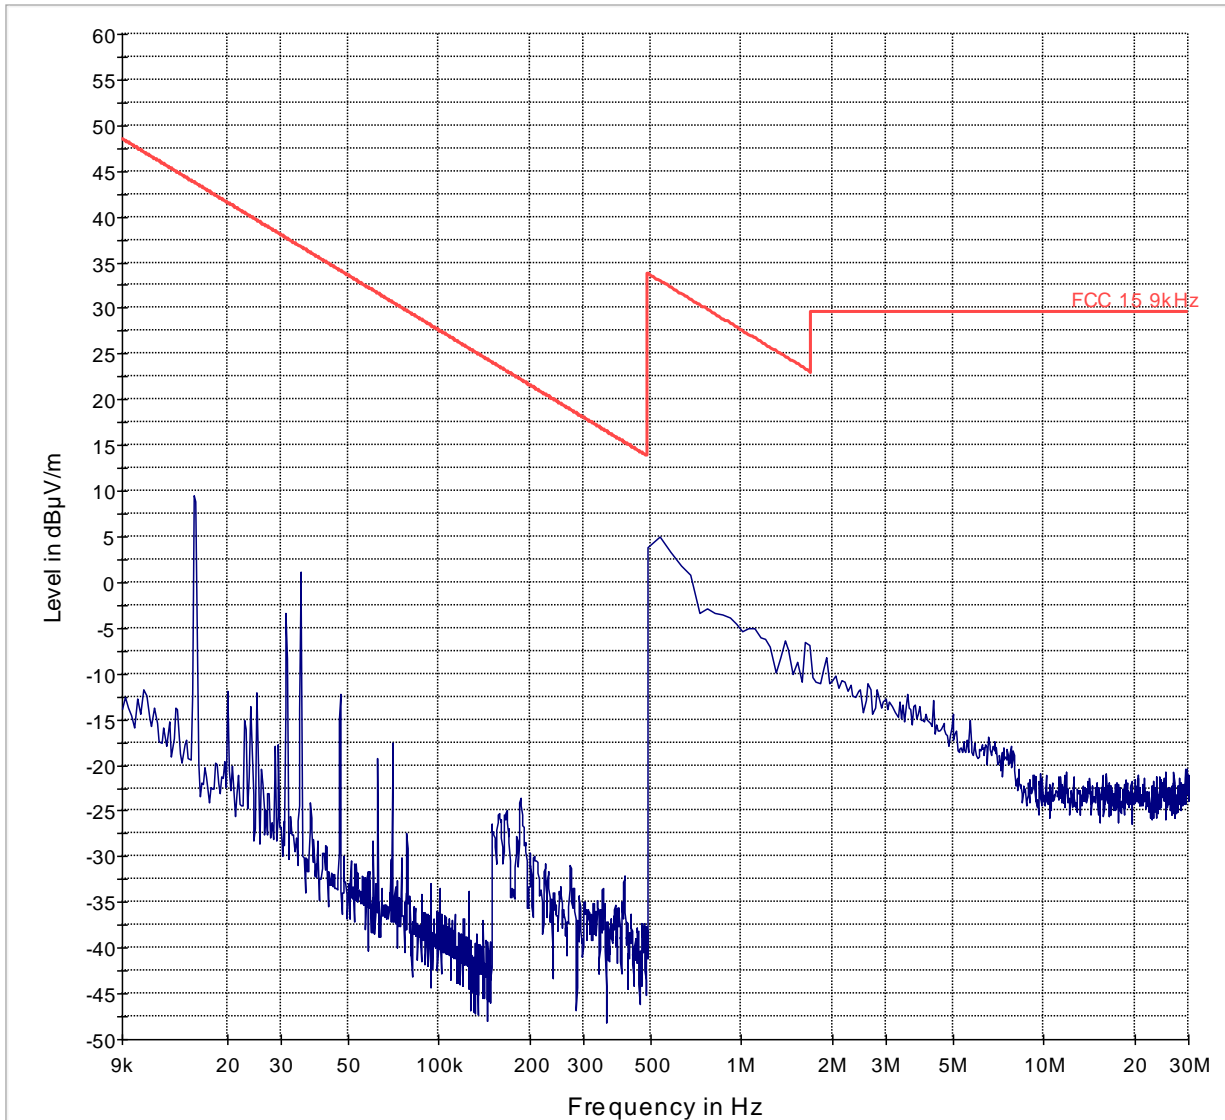

— FCC 15.9kHz — Preview Result 1-PK+

30MHz – 1GHz


Mode: 802.11ac\_HT80-Ch58 (Sub-Band 2)

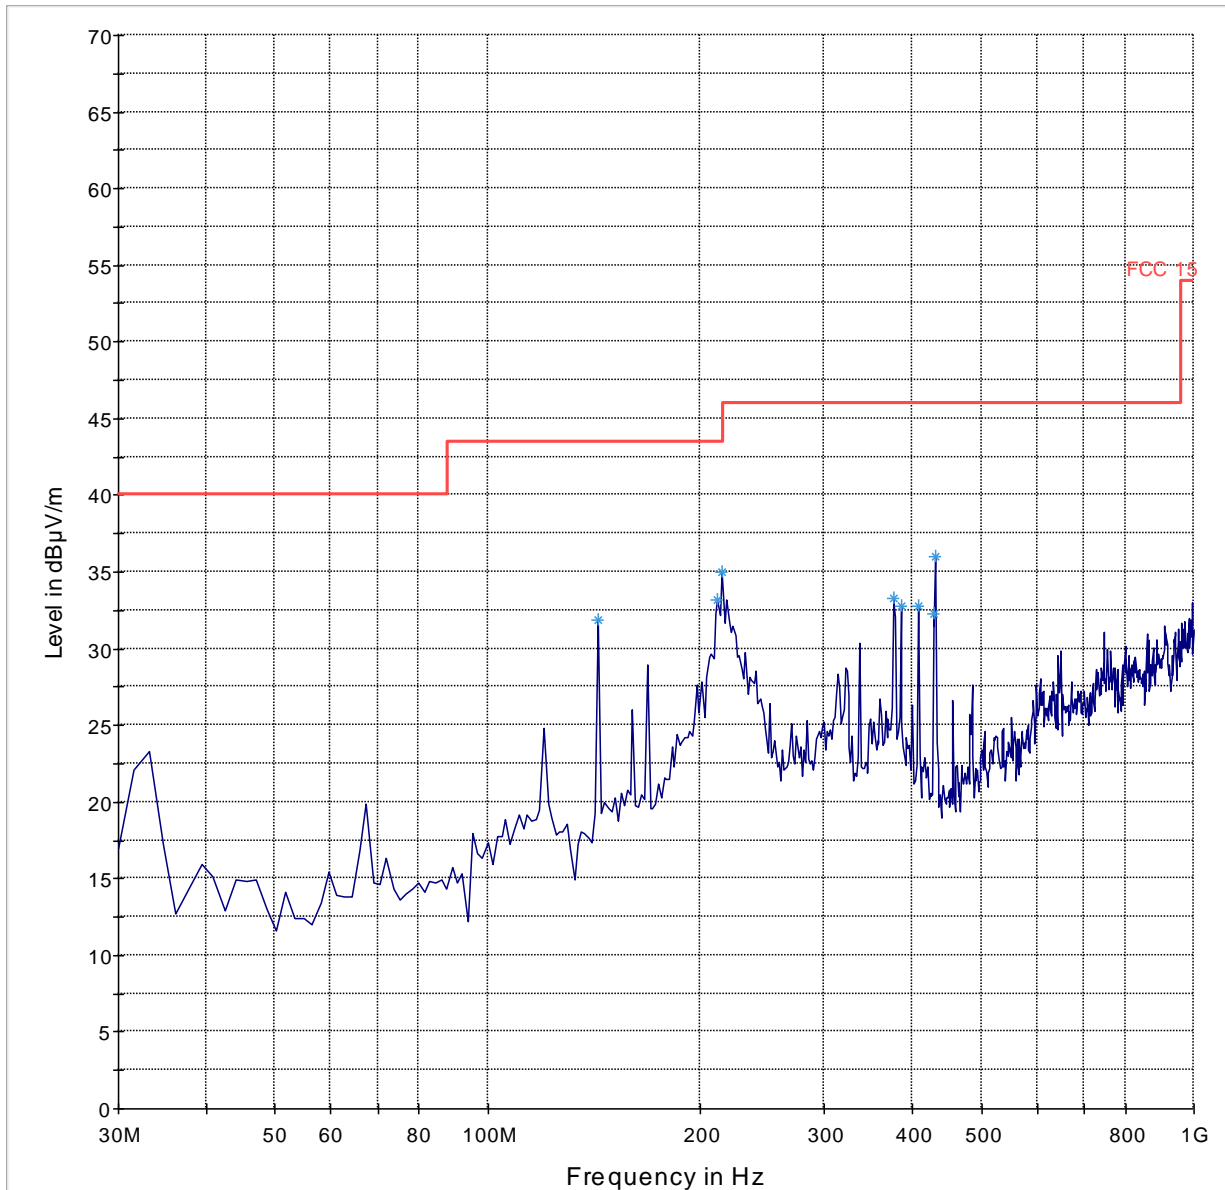

— FCC 15    — Preview Result 1-PK+    \* Data Reduction Result 1 [3]-PK+

1GHz – 18GHz


Mode: 802.11ac\_HT80-Ch58 (Sub-Band 2)

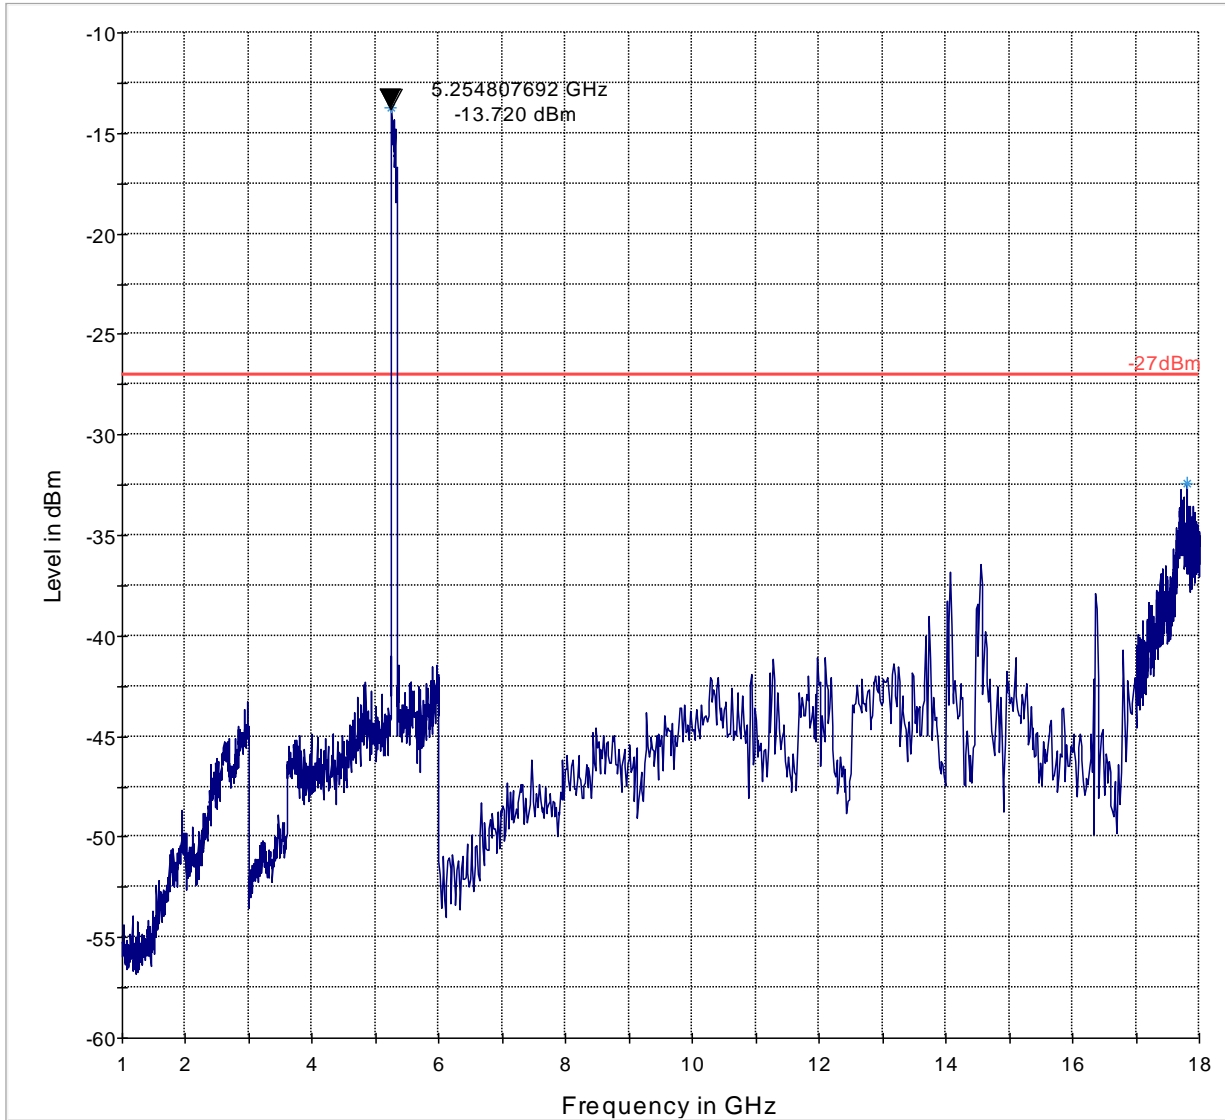

— -27dBm    — Preview Result 1-PK+    \* Data Reduction Result 1 [2]-PK+

18GHz – 40GHz

Mode: 802.11ac\_HT80-Ch58 (Sub-Band 2)

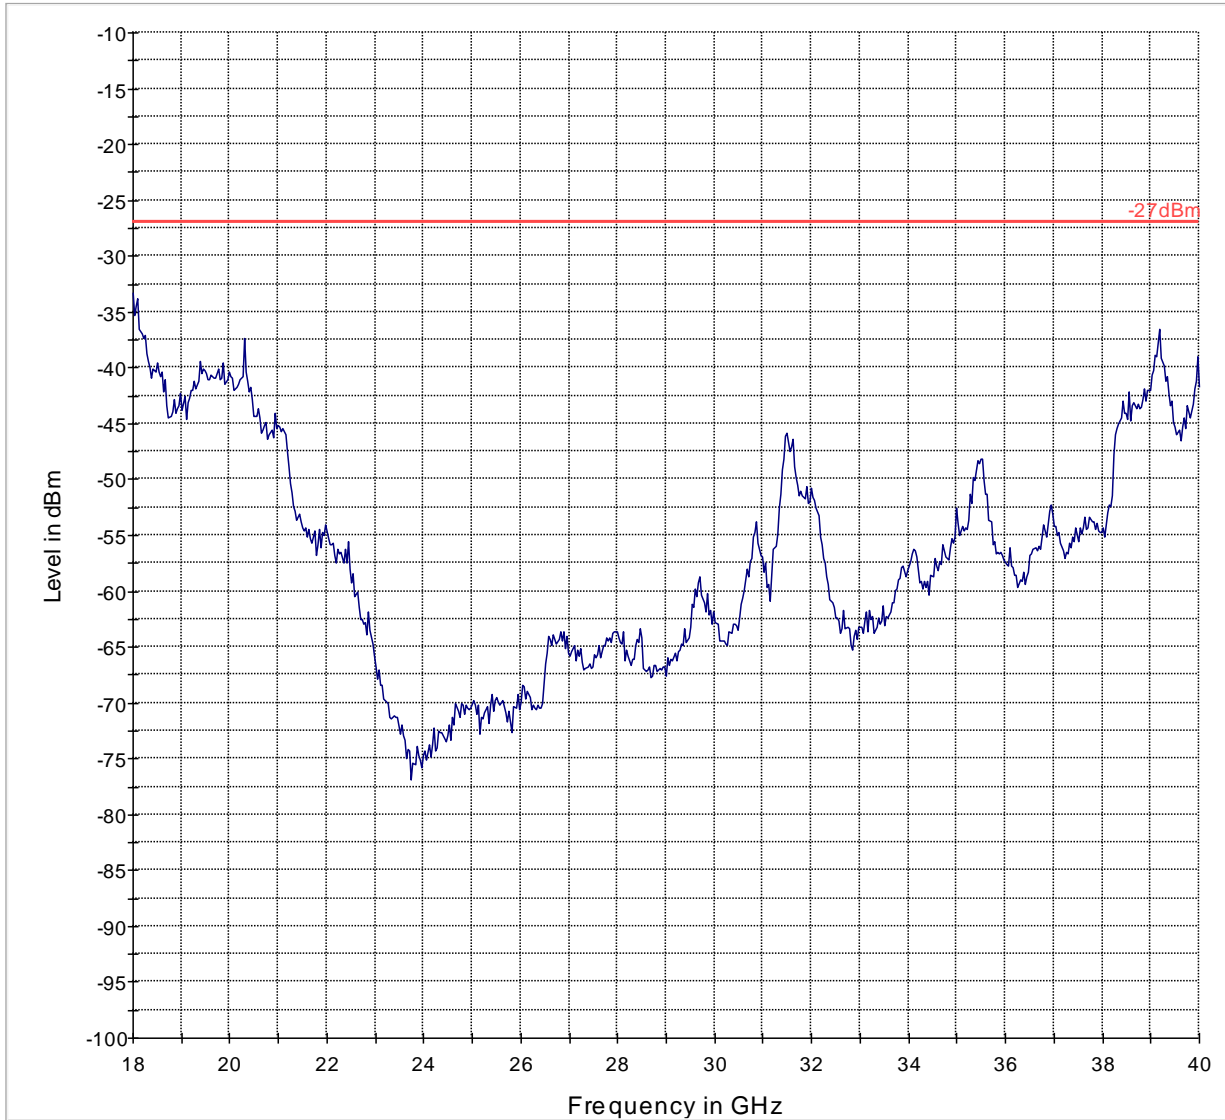


— -27dBm      — Preview Result 1-PK+



<30MHz


Mode: 802.11ac\_HT80-Ch106 (Sub-Band 3)

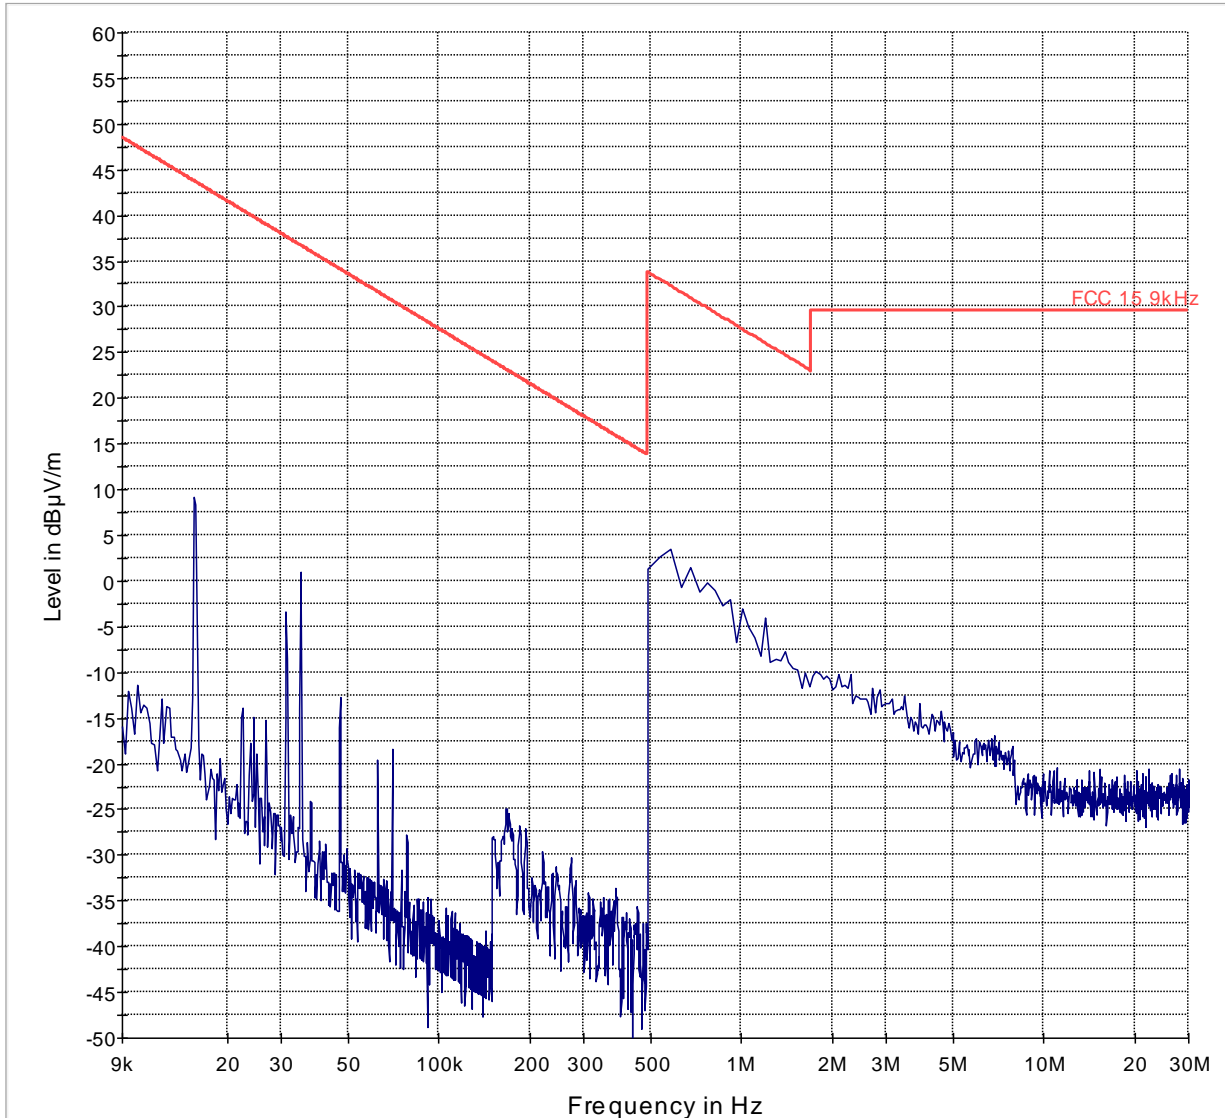

— FCC 15.9kHz — Preview Result 1-PK+

30MHz – 1GHz


Mode: 802.11ac\_HT80-Ch106 (Sub-Band 3)

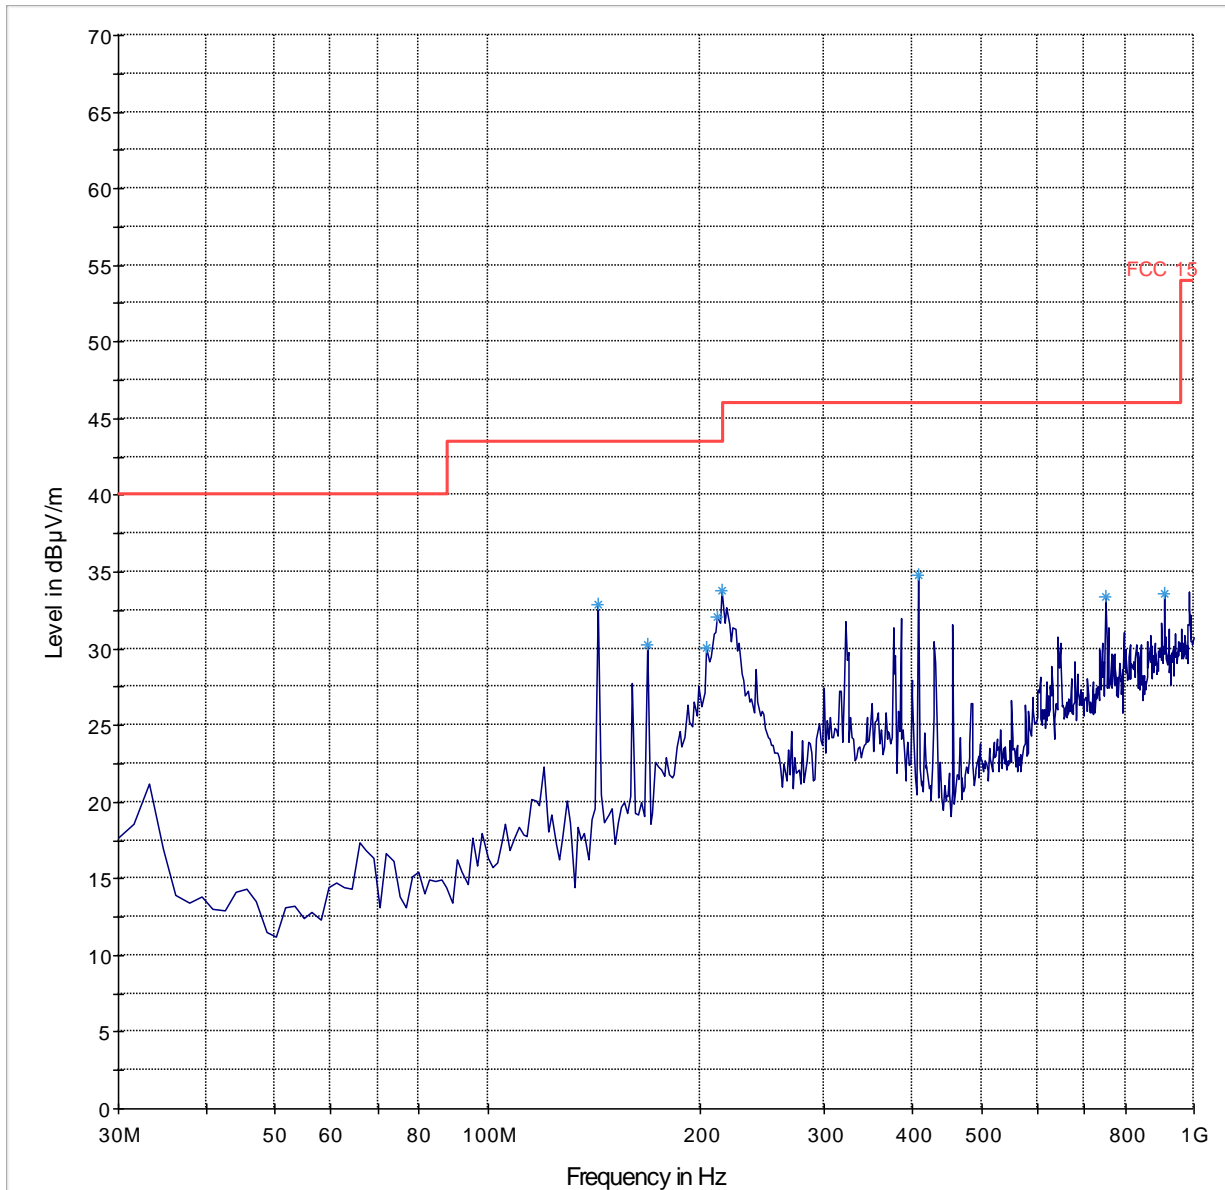

— FCC 15    — Preview Result 1-PK+    \* Data Reduction Result 1 [3]-PK+

1GHz – 18GHz


Mode: 802.11ac\_HT80-Ch106 (Sub-Band 3)

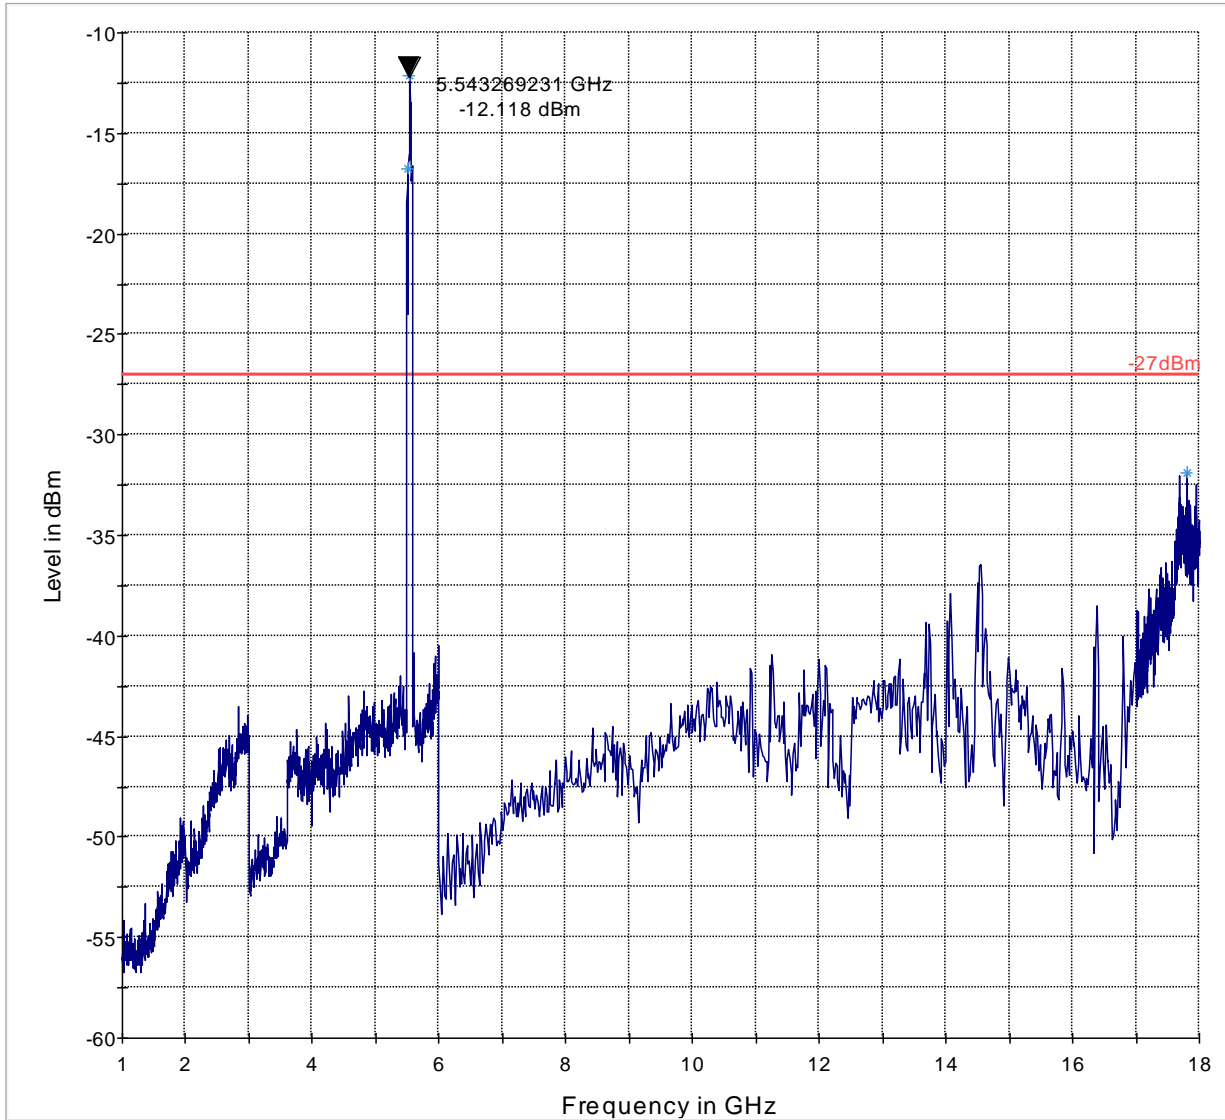

— -27dBm    — Preview Result 1-PK+    \* Data Reduction Result 1 [2]-PK+

18GHz – 40GHz

Mode: 802.11ac\_HT80-Ch106 (Sub-Band 3)

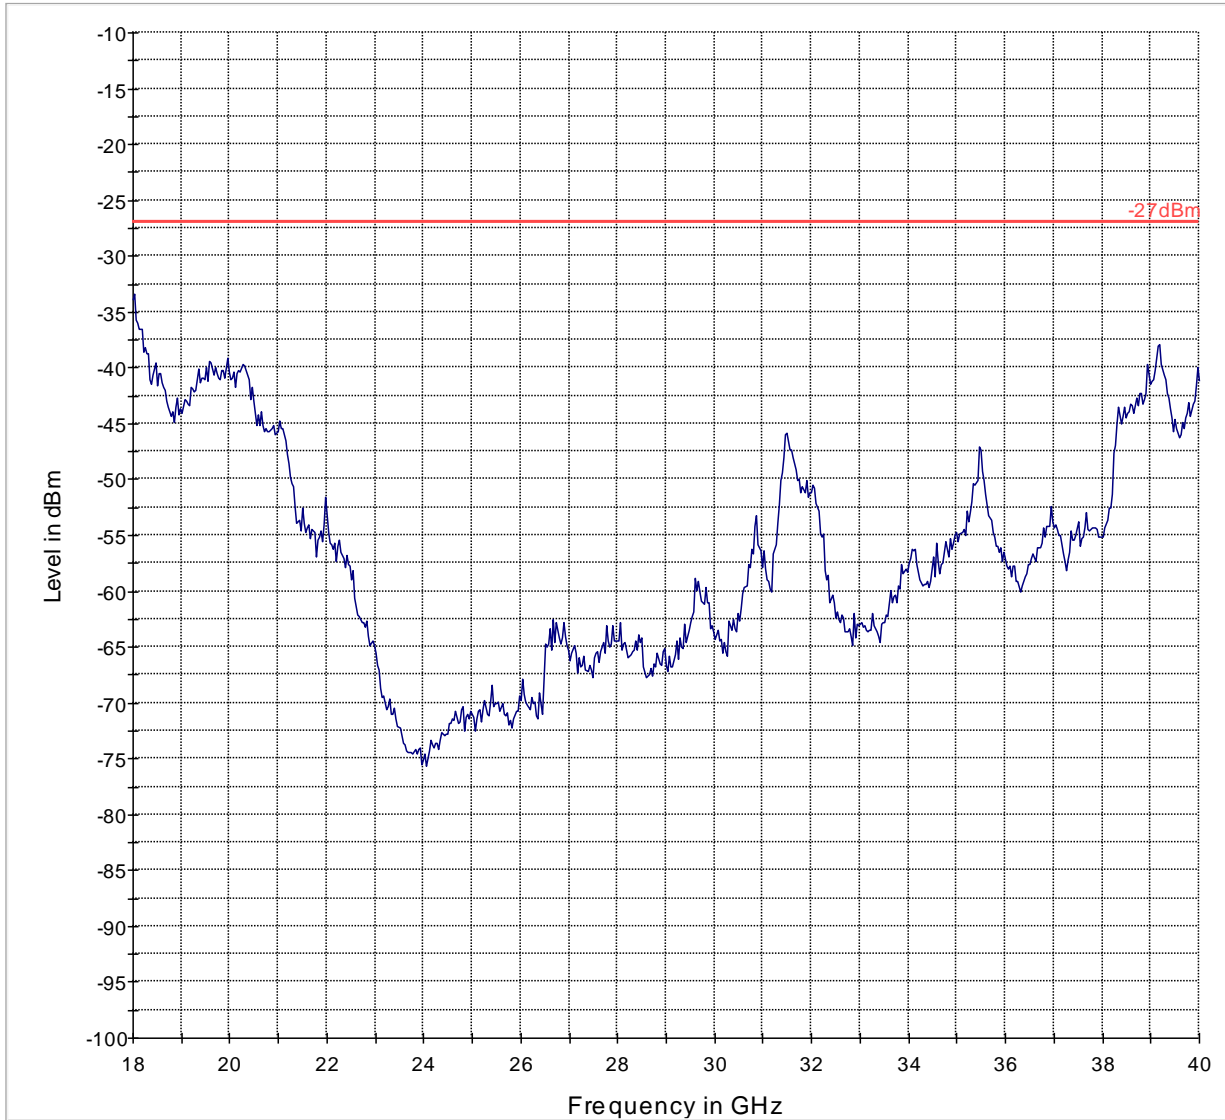

— -27dBm      — Preview Result 1-PK+



## 6.5 Unwanted RX Emissions into restricted and non-restricted bands

### 6.5.1 Limits: §15.109

FCC		IC
RX Spurious Emissions Radiated		
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3

### 6.5.2 Test Conditions

- Tnom: 20°C;
- Vnom: 3.7V DC
- Measurement distance: 3m
- The unit was switched on into normal operation. No networks were available in the chamber to connect to. The resulting emissions are thus a summary of the RX spurious of all the radios of the EUT.

### 6.5.3 Measurement parameter

Measurement parameter	
Detector:	Peak / Quasi Peak / RMS
Sweep time:	Auto
Resolution bandwidth:	F > 1 GHz: 1 MHz F < 1 GHz: 100 kHz
Video bandwidth:	3 x RBW Remeasurement: 10 Hz / 3 MHz
Span:	30 MHz to 25 GHz
Trace-Mode:	Max Hold

### 6.5.4 Result


RX Spurious Emissions Radiated [dBµV/m]		
F [MHz]	Detector	Level [dBµV/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
All detected peaks are below the average limit!		
Measurement uncertainty	± 3 dB	

### 6.5.5 Verdict

Pass


### 6.5.6 Plots

#### 6.5.6.1 RX Emissions: 9kHz – 30MHz; EUT + AC Adapter Mode

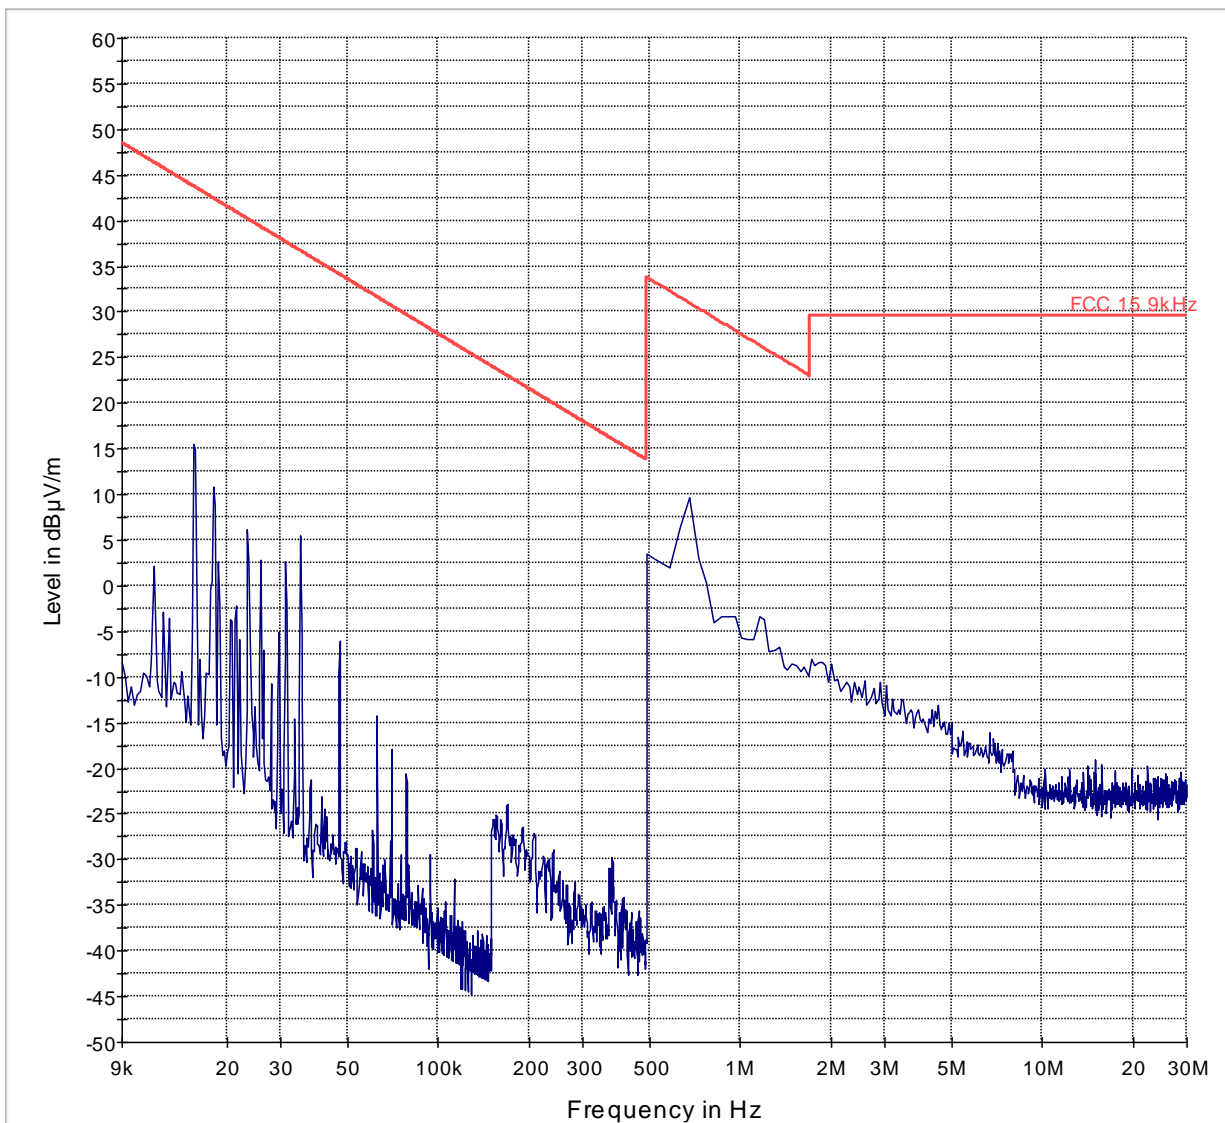

— FCC 15.9kHz    — Preview Result 1-PK+


6.5.6.2 RX Emissions: 30MHz – 1GHz; EUT + AC Adapter Mode

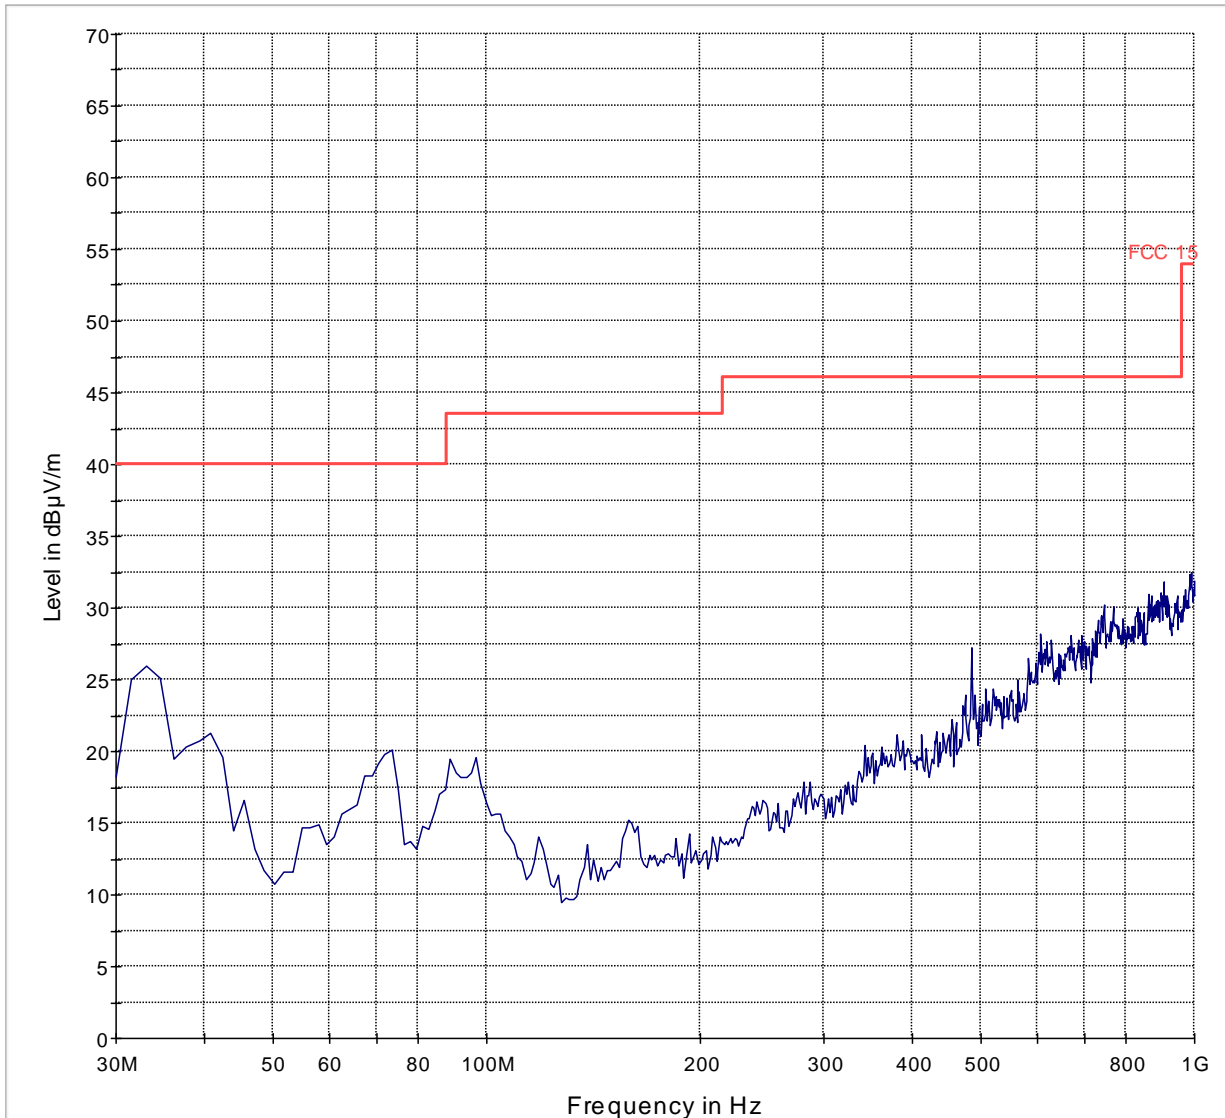

— FCC 15      — Preview Result 1-PK+



6.5.6.3 RX Emissions: 1GHz – 18GHz; EUT + AC Adapter Mode

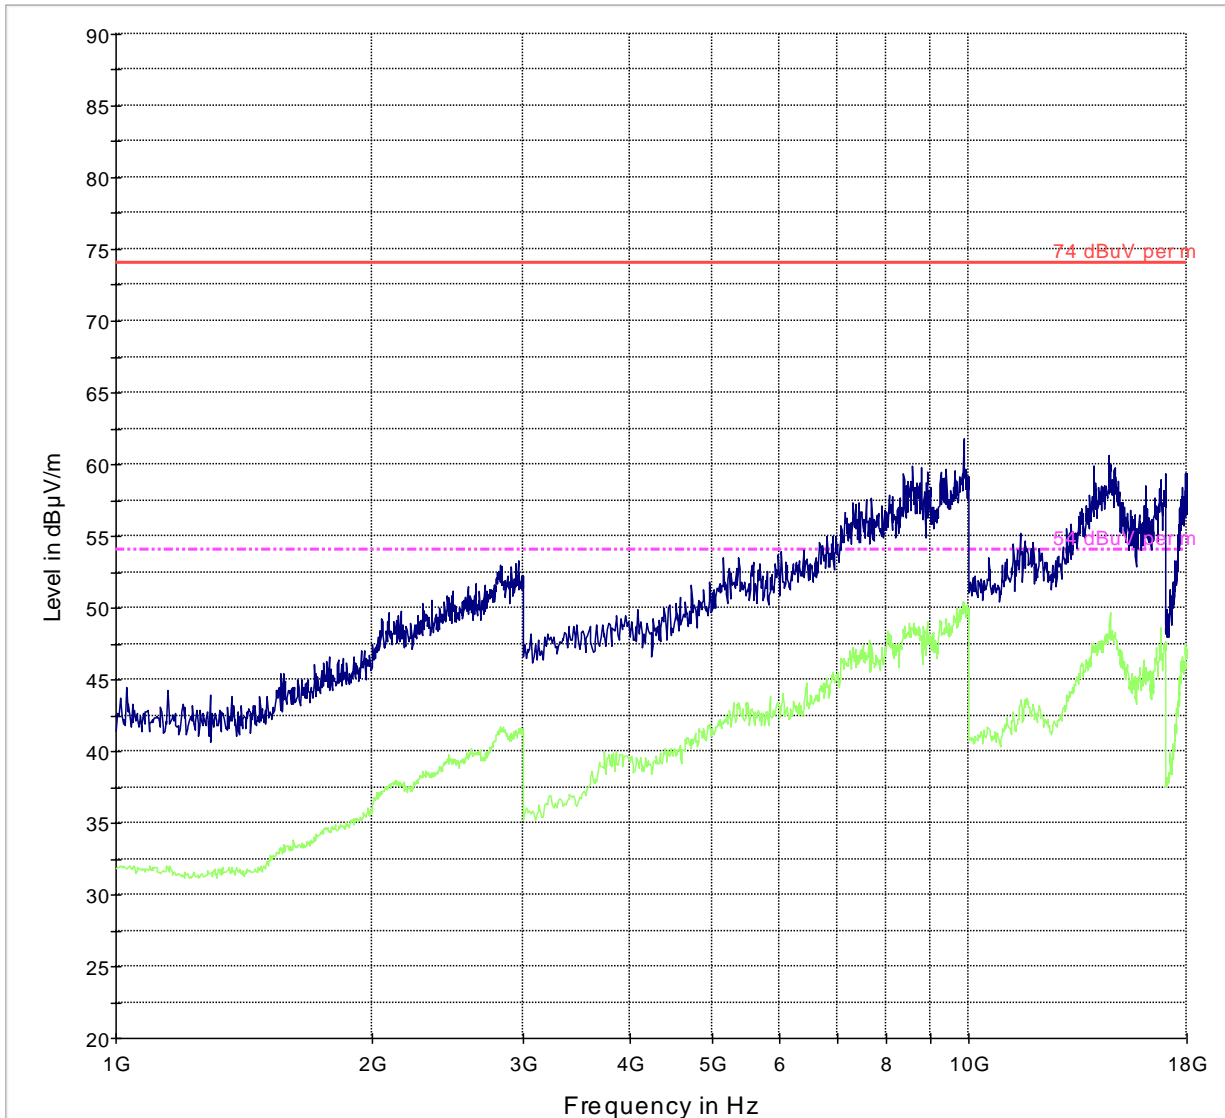


— 74 dBuV per m    - - - 54 dBuV per m    — Preview Result 1-PK+    — Preview Result 2-AVG





6.5.6.4 RX Emissions: 18GHz – 40GHz; EUT + AC Adapter Mode

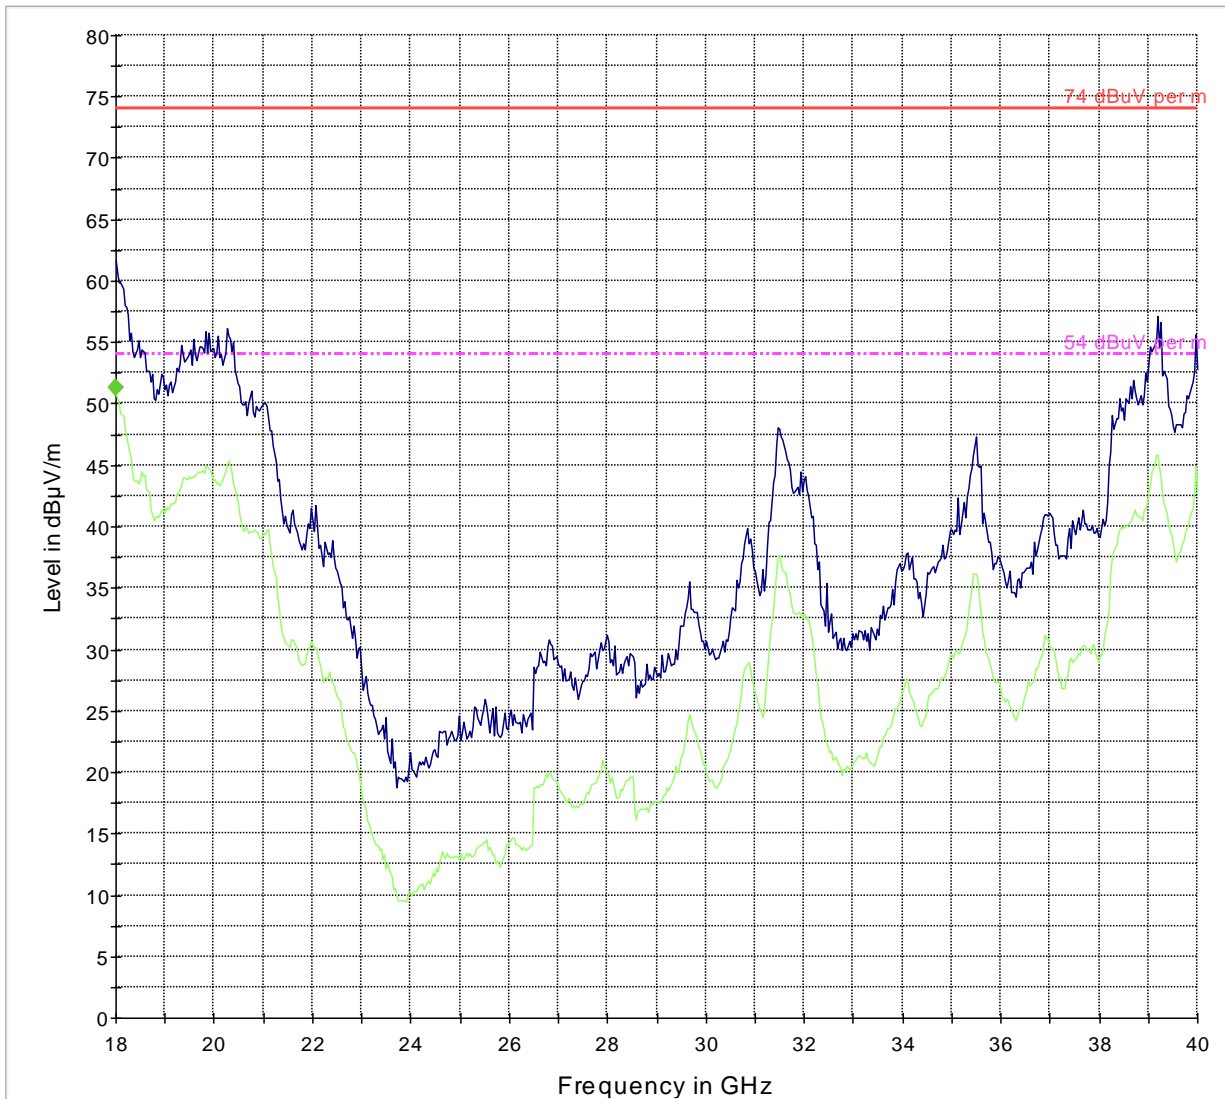

— 74 dBuV per m      - - - 54 dBuV per m      — Preview Result 1-PK+  
— Preview Result 2-AVG      ◆ Final Result 2-AVG



**6.6 AC Power Line Conducted Emissions**

**6.6.1 References:**

FCC: CFR Part 15.207

IC: RSS-Gen Section 7.2.2

The purpose of this test is to measure unwanted radio frequency currents induced in any AC conductor external to the equipment which could conduct interference to other equipment via the AC electrical network.

**6.6.2 Limits:**

**6.6.2.1 §15.207 Conducted limits- Intentional Radiators:**

(a) Except as shown in paragraphs (b) and (c) of this section of the CFR, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table (1), as measured using a 50 μH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

**6.6.2.2 RSS-Gen 7.2.2**

Except when the requirements applicable to a given device state otherwise, for any licence-exempt radiocommunication device equipped to operate from the public utility AC power supply, either directly or indirectly, the radio frequency voltage that is conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown below. The tighter limit applies at the frequency range boundaries.

**Table 1:**

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

\*Decreases with the logarithm of the frequency.

**Analyzer Settings: CISPR Bandwidth- 9 KHz.**

**6.6.3 Test Conditions:**

Modulation: 802.11a mode; mid channel of operation.


Measurement Uncertainty: ±3.0dB

Note: Plots shown here represent the combined worse case emissions for power lines, phases and neutral line.

### 6.6.4 Test Plots:


150 kHz – 30 MHz

Mode: 802.11a

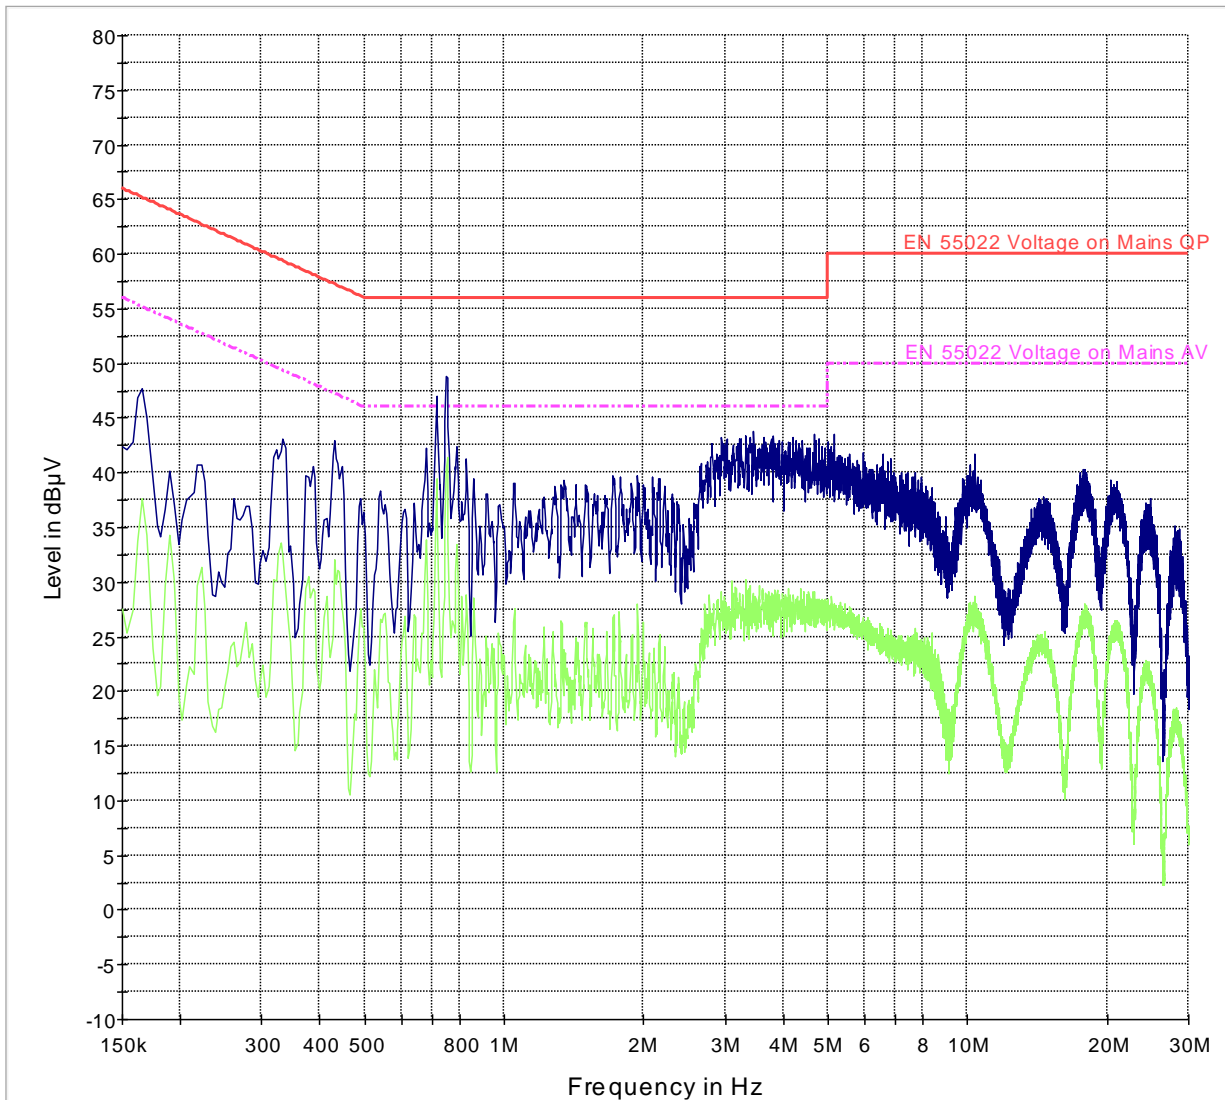

— EN 55022 Voltage on Mains QP      - - - EN 55022 Voltage on Mains AV  
— Preview Result 1-PK+                — Preview Result 2-AVG


150 kHz – 30 MHz  
Mode: 802.11n\_HT20

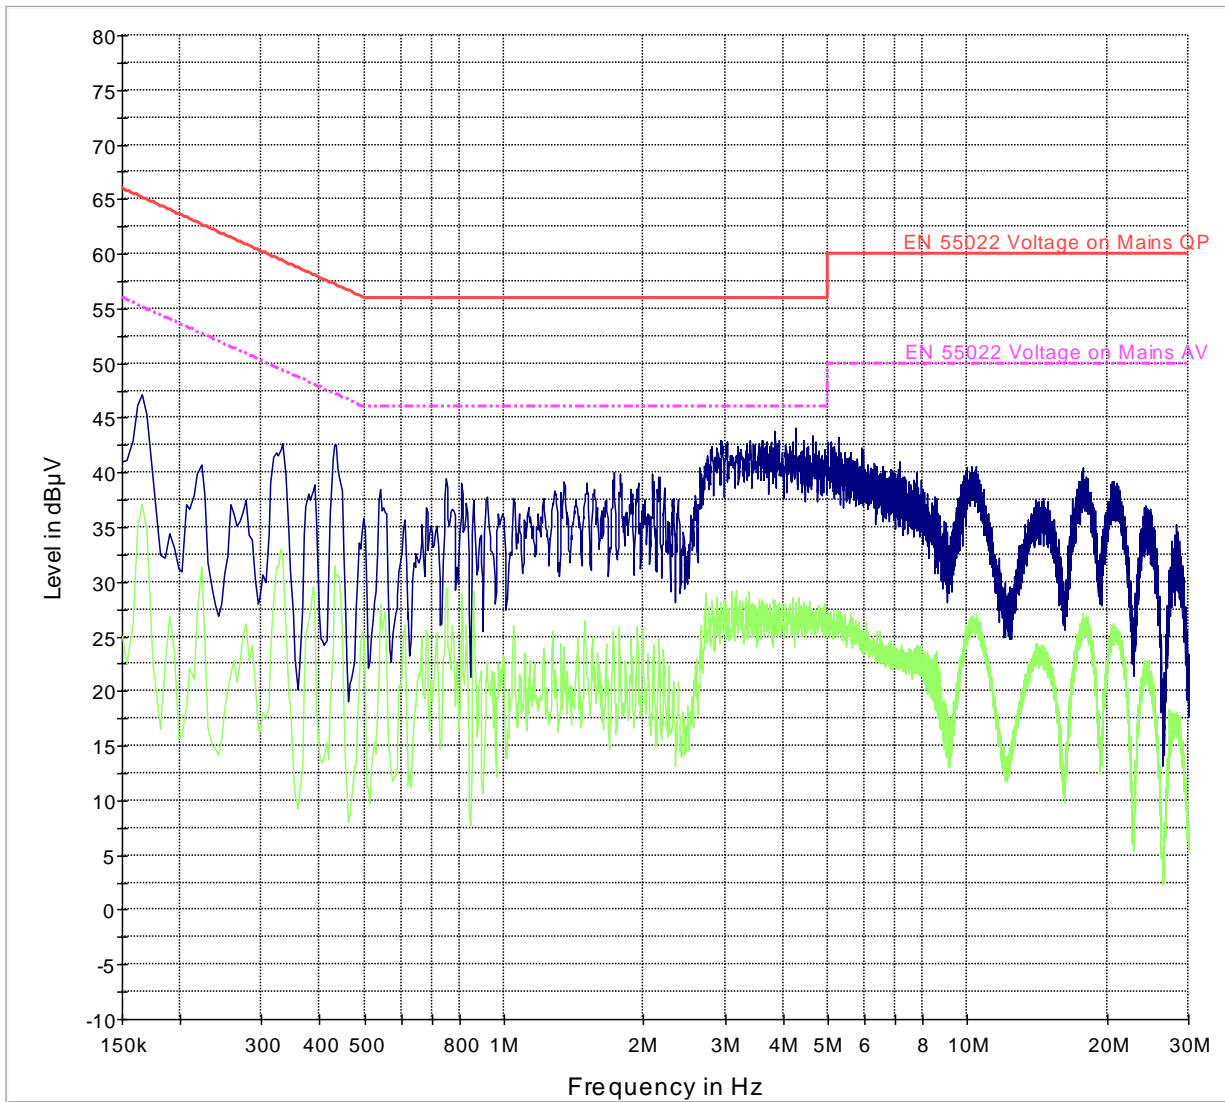

- EN 55022 Voltage on Mains QP
- EN 55022 Voltage on Mains AV
- Preview Result 1-PK+
- Preview Result 2-AVG




150 kHz – 30 MHz  
Mode: 802.11n\_HT40

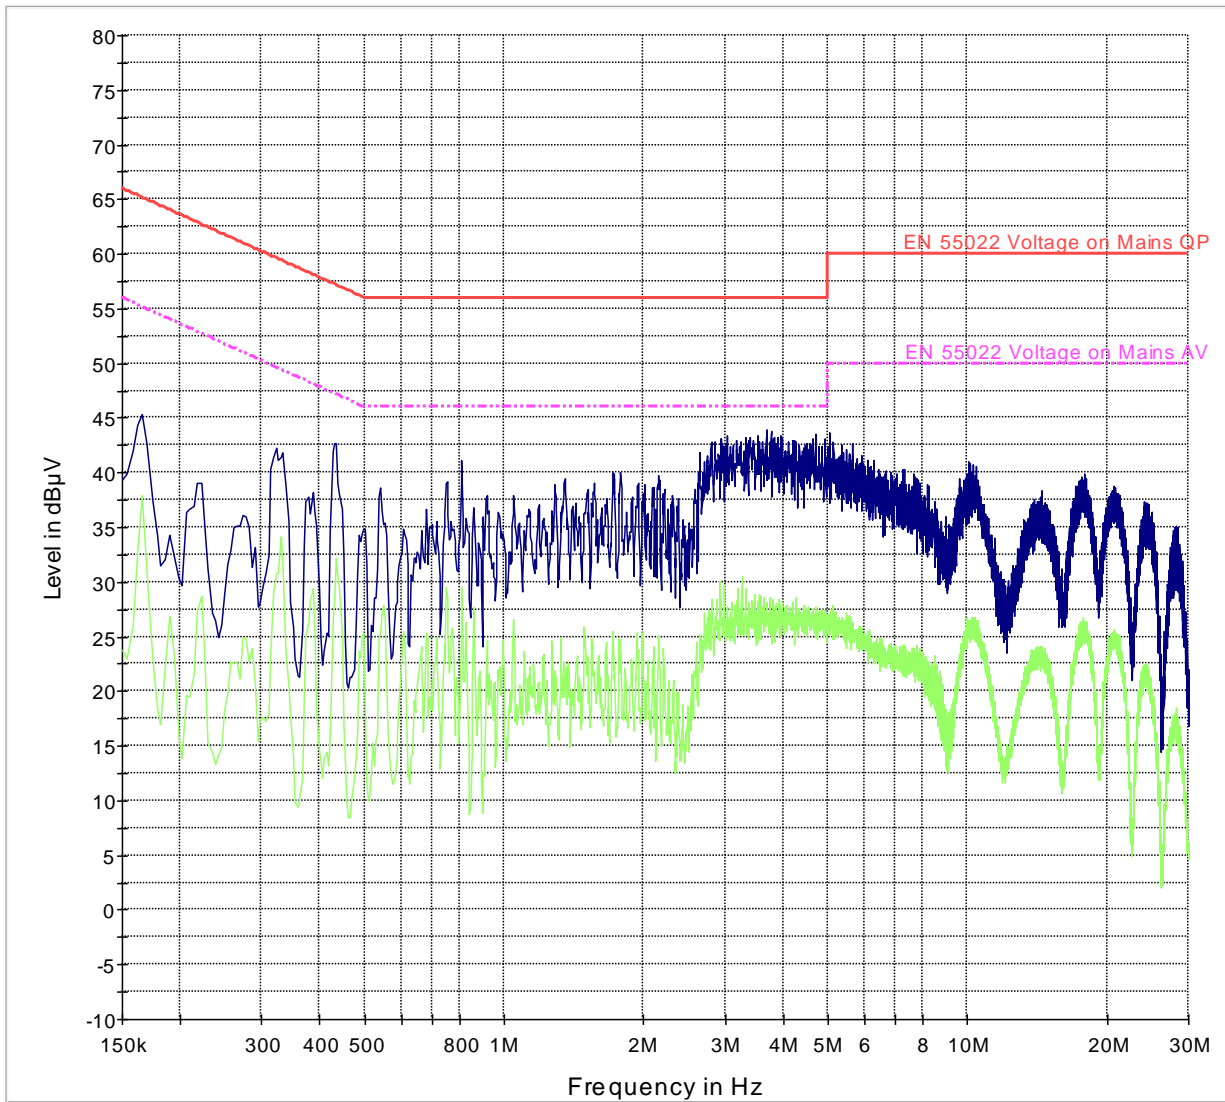

- EN 55022 Voltage on Mains QP
- EN 55022 Voltage on Mains AV
- Preview Result 1-PK+
- Preview Result 2-AVG

150 kHz – 30 MHz  
Mode: 802.11ac\_HT80

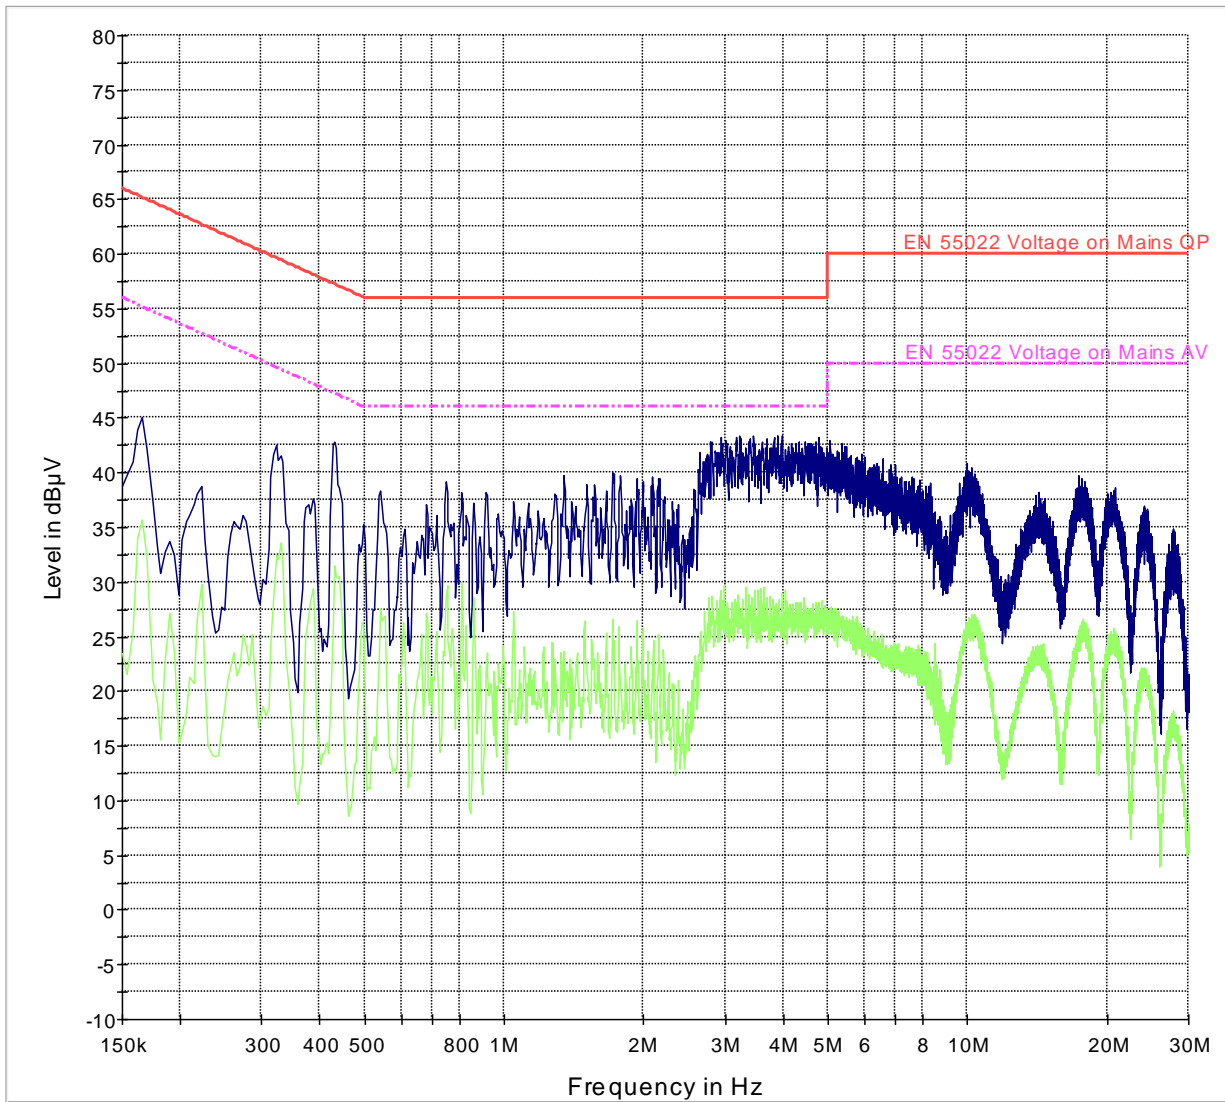

— EN 55022 Voltage on Mains QP      - - - EN 55022 Voltage on Mains AV  
— Preview Result 1-PK+              — Preview Result 2-AVG



**7 Setup Pictures**

See  
TestSetupPhotos\_FCC\_Part15.doc

**8 Test Equipment and ancillaries used for tests**

No.	Equipment Name	Manufacturer	Type/model	Serial No.	Cal Date	Cal Interval
3m Semi- Anechoic Chamber:						
	Turn table	EMCO	2075	N/A	N/A	N/A
	MAPS Position Controller	ETS Lindgren	2092	0004-1510	N/A	N/A
	Antenna Mast	EMCO	2075	N/A	N/A	N/A
	Relay Switch Unit	Rohde&Schwarz	RSU	338964/001	N/A	N/A
	EMI Receiver/Analyzer(*)	Rohde&Schwarz	ESU 40	100365	Feb 2013	1 Year
	1500MHz HP Filter	Filtek	HP12/1700	14c48	N/A	N/A
	2800 MHz HP Filter	Filtek	HP12/2800	14C47	N/A	N/A
	Pre-Amplifier	Miteq	JS40010260	340125	N/A	N/A
	Binconilog Antenna	EMCO	3141	0005-1186	Apr 2012	3 Years
	Binconilog Antenna	ETS	3149	J000123908	Feb 2012	3 years
	Horn Antenna	EMCO	3115	35114	Mar 2012	3 Years
	LISN	FCC	50-25-2-08	08014	Jul 2012	2 Year
Ancillary equipment						
	Multimeter	Klein Tools	MM200	001	Apr 2011	3 Years
	Humidity Temperature Logger	Dickson	TM320	03280063	Apr 2013	1 Year
	Digital Barometer	VWR	35519-055	91119547	Nov 2011	3 Years
	DC Power Supply	HP	E3610A	KR83023316	N/A	N/A
	DC Power Supply	Protek	3003B	H012771	N/A	N/A
	Communication Antenna	IBP5-900/1940	Kathrein	N/A	N/A	N/A

Calibration details valid at the time of testing.

Equipment used meets the measurement uncertainty requirements as required per applicable standards for 95% confidence levels.

Calibration due dates, unless defined specifically, falls on the last day of the month.

Items indicated "N/A" for cal status either do not specifically require calibration or is internally characterized before use.