

## TEST REPORT

Test report no.: 1-6965/13-19-12



Deutsche  
Akkreditierungsstelle  
D-PL-12076-01-01

### Testing laboratory

**CETECOM ICT Services GmbH**  
Untertuerkheimer Strasse 6 – 10  
66117 Saarbruecken / Germany  
Phone: + 49 681 5 98 - 0  
Fax: + 49 681 5 98 - 9075  
Internet: <http://www.cetecom.com>  
e-mail: [ict@cetecom.com](mailto:ict@cetecom.com)

#### Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS). The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01  
Area of Testing:  
Radio Communications & EMC (RCE)

### Applicant

**Sony Mobile Communications AB**  
Nya Vattentorget  
22188 Lund / SWEDEN  
Phone: +46 46 19 30 00  
Fax: -/  
Contact: Mikael Nilsson  
e-mail: [Micke.nilsson@sonymobile.com](mailto:Micke.nilsson@sonymobile.com)  
Phone: +46 7 03 22 75 03

### Manufacturer

**Sony Mobile Communications AB**  
Nya Vattentorget  
22188 Lund / SWEDEN

### Test standard/s

47 CFR Part 15 Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

For further applied test standards please refer to section 3 of this test report.

### Test Item

**Kind of test item:** Smart Phone GPRS/EGPRS 850/900/1800/1900; UMTS HSPA FDD/I/IV/VIII; LTE FDD1/2/3/5/7/8/28; WLAN b/g/n/a/ac; BT 4.0; RFID; A-GPS  
**FCC ID:** PY7PM-0751  
**IC:** -/  
**Frequency:** DTS band 2400 MHz to 2483.5 MHz  
(lowest channel 00 – 2402 MHz, highest channel 39 – 2480 MHz)  
**Technology tested:** Bluetooth®, LE  
**Antenna:** Integrated antenna  
**Power supply:** 4.2 V DC by Li - polymer battery  
**Temperature range:** -30°C to +60°C

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### Test report authorised:

Stefan Bös  
Senior Testing Manager

### Test performed:

Marco Bertolino  
Testing Manager

## 1 Table of contents

1	Table of contents .....	2
2	General information .....	3
2.1	Notes and disclaimer .....	3
2.2	Application details.....	3
3	Test standard/s .....	3
3.1	Measurement guidance.....	3
4	Test environment.....	4
5	Test item .....	4
5.1	Additional information .....	4
6	Test laboratories sub-contracted .....	4
7	Description of the test setup.....	5
7.1	Radiated measurements chamber F.....	5
7.2	Radiated measurements chamber C .....	6
7.3	Radiated measurements 12.75 GHz to 25 GHz .....	7
7.4	AC conducted .....	8
7.5	Conducted measurements .....	9
8	Summary of measurement results .....	10
9	Additional comments .....	11
10	Measurement results .....	12
10.1	Antenna gain .....	12
10.2	Time of occupancy (dwell time).....	13
10.3	Band edge compliance radiated.....	14
10.4	TX spurious emissions radiated.....	16
10.5	RX spurious emissions radiated .....	27
10.6	Spurious emissions radiated < 30 MHz .....	31
10.7	Spurious emissions conducted < 30 MHz .....	33
11	Test equipment and ancillaries used for tests .....	36
12	Observations .....	37
Annex A	Document history .....	38
Annex B	Further information.....	38
Annex C	Accreditation Certificate .....	39

## 2 General information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### 2.2 Application details

Date of receipt of order:	2014-04-14
Date of receipt of test item:	2014-05-05
Start of test:	2014-05-05
End of test:	2014-05-15
Person(s) present during the test:	-/-

## 3 Test standard/s

Test standard	Date	Test standard description
47 CFR Part 15	-/-	Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

### 3.1 Measurement guidance

DTS : KDB 558074	2013-04	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247
------------------	---------	---

#### 4 Test environment

Temperature:	$T_{nom}$	+22 °C during room temperature tests
	$T_{max}$	+60 °C during high temperature tests
	$T_{min}$	-30 °C during low temperature tests
Relative humidity content:		42 %
Barometric pressure:		not relevant for this kind of testing
Power supply:	$V_{nom}$	4.2 V DC by Li - polymer battery
	$V_{max}$	4.2 V
	$V_{min}$	3.3 V

#### 5 Test item

Kind of test item	:	Smart Phone GPRS/EGPRS 850/900/1800/1900; UMTS HSPA FDDI/II/V/VIII; LTE FDD1/2/3/5/7/8/28; WLAN b/g/n/a/ac; BT 4.0; RFID; A-GPS
S/N serial number	:	Conducted units: CB5126Z74E; CB5126Z756 Radiated units: CB5126Z4RH; CB5126Z4R1
HW hardware status	:	No information available!
SW software status	:	RF test software
Frequency band [MHz]	:	DTS band 2400 MHz to 2483.5 MHz (lowest channel 00 – 2402 MHz; highest channel 39 – 2480 MHz)
Type of radio transmission	:	FHSS, DSSS
Use of frequency spectrum	:	
Type of modulation	:	GFSK
Number of channels	:	40
Antenna	:	Integrated antenna
Power supply	:	4.2 V DC by Li - polymer battery
Temperature range	:	-30°C to +60 °C

#### 5.1 Additional information

Test setup- and EUT-photos are included in test report: 1-6965/13-19-01\_AnnexA  
1-6965/13-19-01\_AnnexB  
1-6965/13-19-01\_AnnexD


#### 6 Test laboratories sub-contracted

None

## 7 Description of the test setup

### 7.1 Radiated measurements chamber F


The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

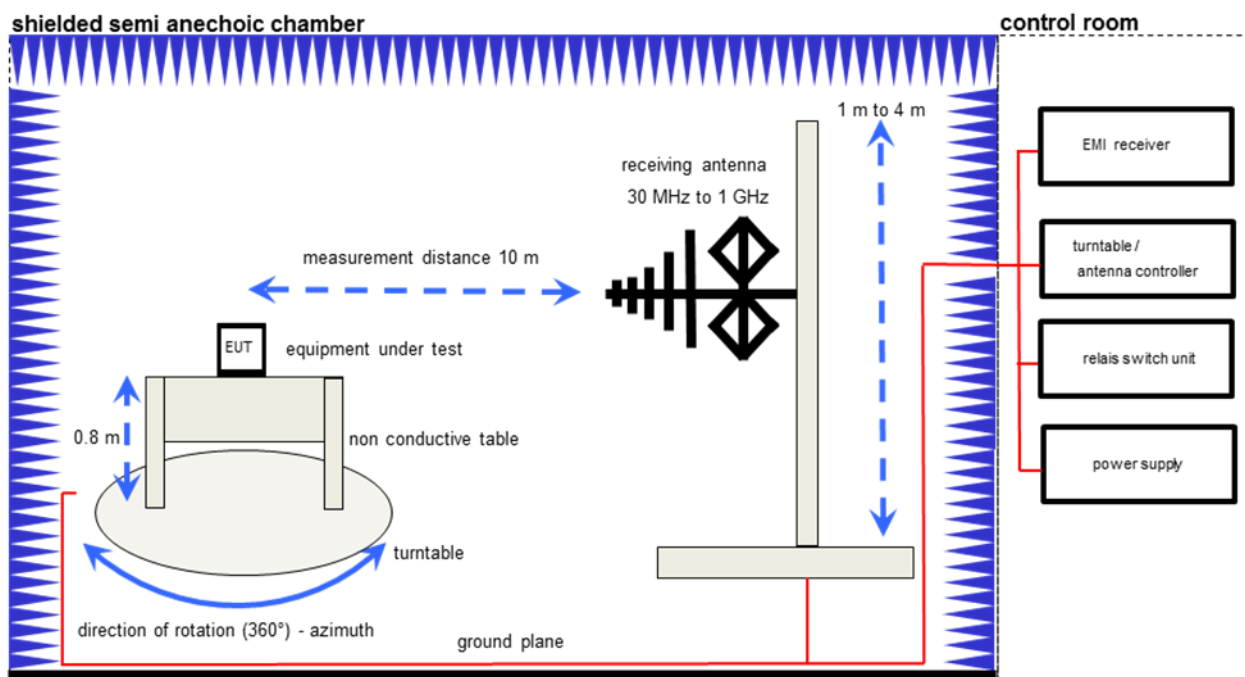

#### Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
Switch-Unit	3488A	HP Meßtechnik	2719A14505	300000368
DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2920A04466	300000580
EMI Test Receiver	ESCI 3	R&S	100083	300003312
Amplifier	JS42-00502650-28-5A	MITEQ	1084532	300003379
Antenna Tower	Model 2175	ETS-LINDGREN	64762	300003745
Positioning Controller	Model 2090	ETS-LINDGREN	64672	300003746
Turntable Interface-Box	Model 105637	ETS-LINDGREN	44583	300003747
TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787

## 7.2 Radiated measurements chamber C

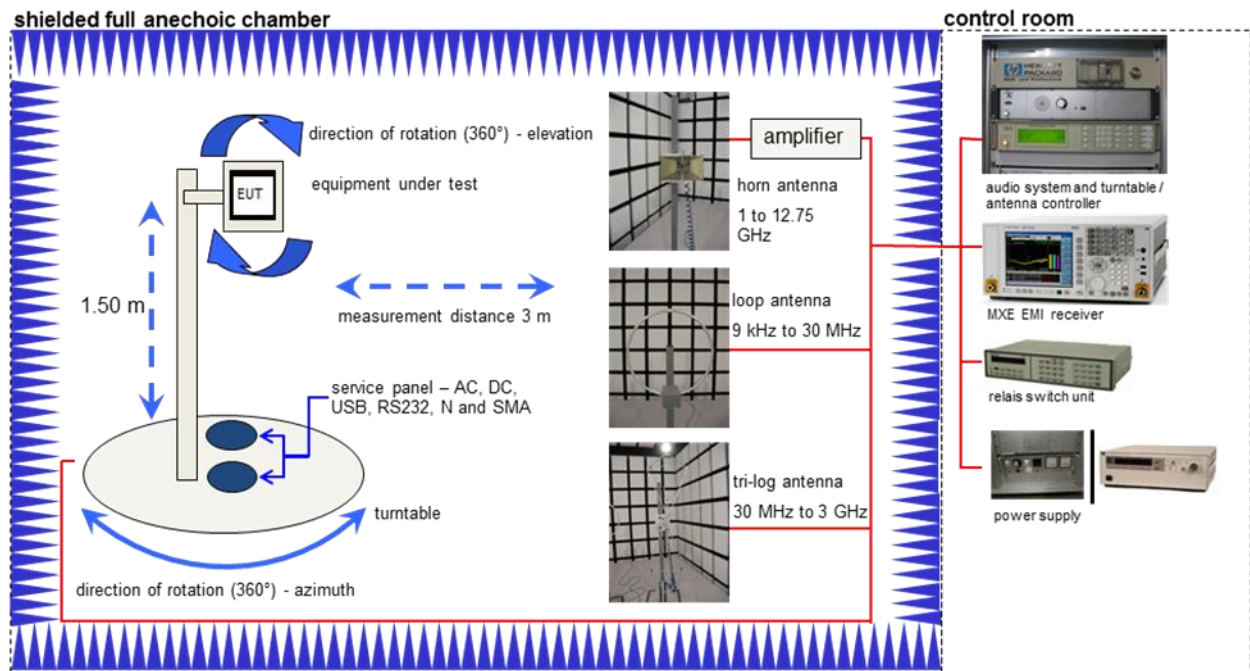

### Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405
TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854
Band Reject filter	WRCG2400/2483-2375/2505-50/10SS	Wainwright	11	300003351
Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	300003789
Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032
Active Loop Antenna	6502	EMCO	8905-2342	300000256
Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996
Switch / Control Unit	3488A	HP Meßtechnik	*	300000199
Switch / Control Unit	3488A	HP Meßtechnik	2719A15013	300001156
Isolating Transformer	MPL IEC625 Bus Regeltrentravo	Erfi	91350	300001155
Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997
Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143


### 7.3 Radiated measurements 12.75 GHz to 25 GHz



**Equipment table:**

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
Std. Gain Horn Antenna 12.4 to 18.0 GHz	639	Narda	8402	300000787
Std. Gain Horn Antenna 18.0 to 26.5 GHz	638	Narda	8205	300002442
Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP Meßtechnik	00419	300002268
Spectrum Analyzer 20 Hz - 50 GHz	FSU50	R&S	200012	300003443
Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517

## 7.4 AC conducted

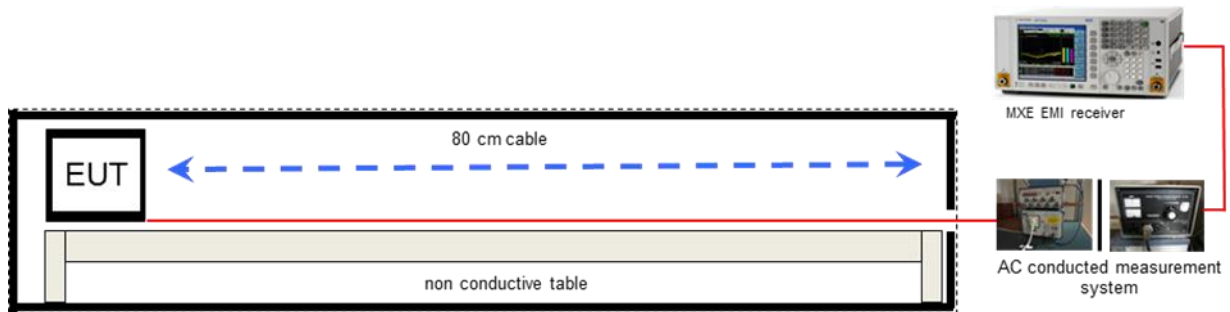


### Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405
Isolating Transformer	MPL IEC625 Bus Regeltrenntravo	Erfi	91350	300001155
Switch / Control Unit	3488A	HP Meßtechnik	*	300000199
Switch / Control Unit	3488A	HP Meßtechnik	2719A15013	300001168
Artificial Mains 9 kHz to 30 MHz	ESH3-Z5	R&S	828576/020	300001210



## 7.5 Conducted measurements

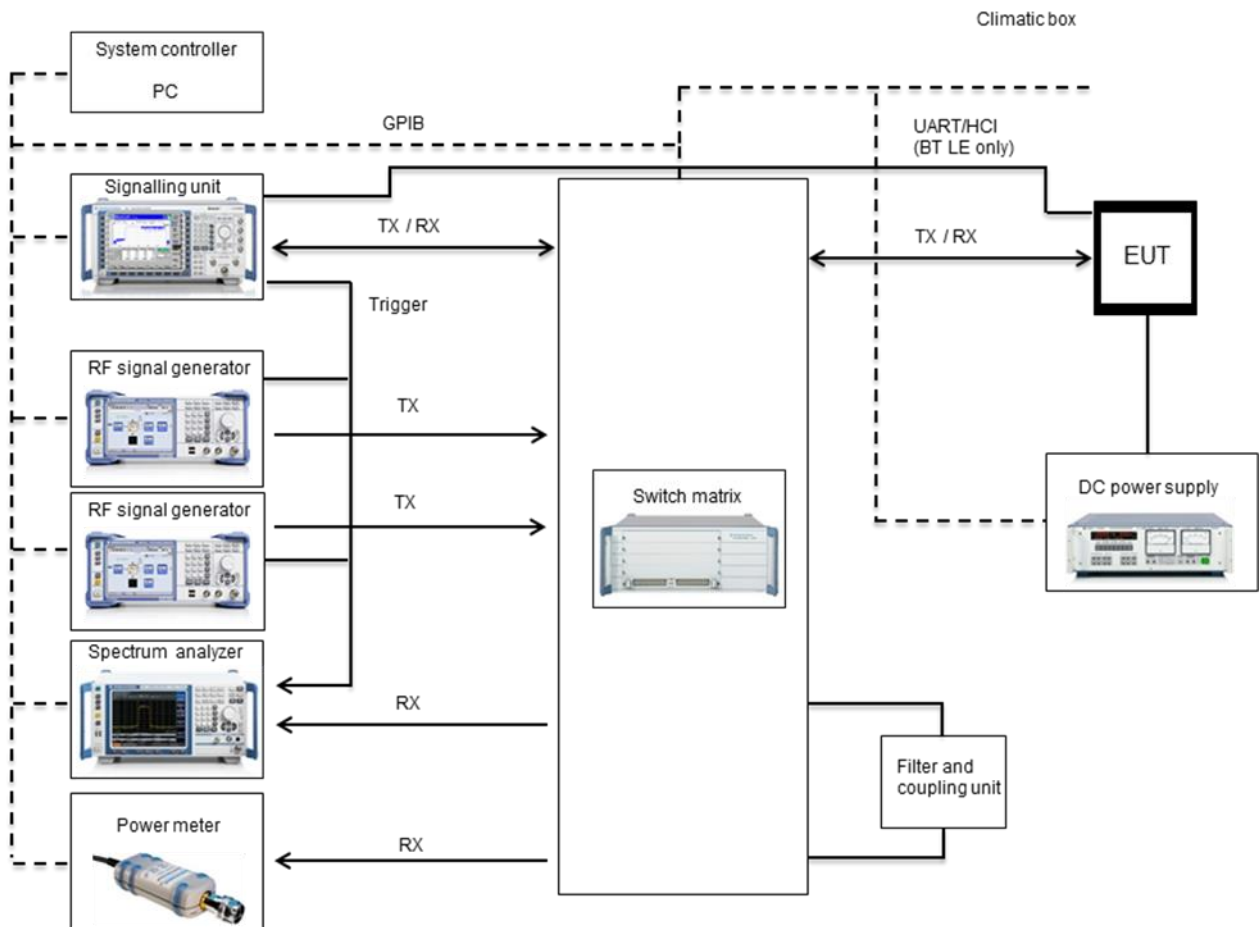

### Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
Power Supply DC	NGPE 40/40	R&S	388	40000078
Signal Analyzer 20Hz-26,5GHz-150 to + 30 DBM	FSIQ26	R&S	835540/018	300002681-0005
Frequency Standard (Rubidium Frequency Standard)	MFS (Rubidium)	R&S (Datum)	002	300002681-0009
Directional Coupler	101020010	Krytar	70215	300002840
DC-Blocker	8143	Inmet Corp.	none	300002842
Powersplitter	6005-3	Inmet Corp.		300002841
Power Supply DC	NGPE 40/40	R&S	388	40000078
Signal Analyzer 20Hz-26,5GHz-150 to + 30 DBM	FSIQ26	R&S	835540/018	300002681-0005

## 8 Summary of measurement results

- No deviations from the technical specifications were ascertained  
 There were deviations from the technical specifications ascertained

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15	Passed	2014-05-15	Delta tests according to manufacturer test plan.

Test specification clause	Test case	Temperature conditions	Power source voltages	Mode	Pass	Fail	NA	NP	Remark
§15.247(b)(4)	Antenna gain	Nominal	Nominal	GFSK	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Declared
§15.247(e)	Power spectral density	Nominal	Nominal	GFSK	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
§15.247(a)(1)	Carrier frequency separation	Nominal	Nominal	GFSK	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
§15.247(a)(1)	Number of hopping channels	Nominal	Nominal	GFSK	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
§15.247(a)(1)(iii)	Time of occupancy (dwell time)	Nominal	Nominal	GFSK	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(2)	Spectrum bandwidth of a FHSS system 6 dB bandwidth	Nominal	Nominal	GFSK	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
§15.247(a)(1)	Spectrum bandwidth of a FHSS system 20 dB bandwidth	Nominal	Nominal	GFSK	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
§15.247(b)(1)	Maximum output power	Nominal	Nominal	GFSK	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
§15.247(d)	Band edge compliance conducted	Nominal	Nominal	GFSK	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
§15.205	Band edge compliance radiated	Nominal	Nominal	GFSK	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d)	TX spurious emissions conducted	Nominal	Nominal	GFSK	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
§15.247(d)	TX spurious emissions radiated	Nominal	Nominal	GFSK	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.109	RX spurious emissions radiated	Nominal	Nominal	-/-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.209(a)	TX spurious emissions radiated < 30 MHz	Nominal	Nominal	GFSK	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.107(a) §15.207	Conducted emissions < 30 MHz	Nominal	Nominal	GFSK	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies

**Note:** NA = Not Applicable; NP = Not Performed

## 9 Additional comments

The Bluetooth® word mark and logos are owned by the Bluetooth SIG Inc. and any use of such marks by Cetecom ICT Services GmbH is under license.

Reference documents: Main test report: 1-6965/13-16-13-A (FCC ID: PY7PM-0750)

Special test descriptions: None

Configuration descriptions: TX tests: were performed with LE packets (37 byte payload) and static PRBS pattern.  
RX/Standby tests: BT enabled, TX Idle

Test mode:

- Bluetooth LE Test mode enabled (EUT is controlled over CBT)
- Special software is used. EUT is transmitting pseudo random data by itself

## 10 Measurement results

### 10.1 Antenna gain

**Limits:**

FCC	-/-
Antenna Gain	
6 dBi	

**Results:**

$T_{nom}$	$V_{nom}$	lowest channel 2402 MHz	middle channel 2441 MHz	highest channel 2480 MHz
Gain [dBi] Declared by the manufacturer!		-0.4	-3.1	-4.4

**Result:** -/-

## 10.2 Time of occupancy (dwell time)

### Measurement:

Measuring/calculation of the pulse width in data transmit mode on one hopping channel for a Bluetooth® LE device.

### Measurement parameters:

Detector: Peak  
 Video bandwidth: 1 MHz  
 Resolution bandwidth: 1 MHz  
 Span: Zero Span  
 Trace: Video triggered

### For Bluetooth® LE devices:

Time slot length: 625us  
 Number of channels: 40  
 Number of time slots per second: 1600/s  
 Max. number of transmissions per channel in 1 s:  $1600/s / 40 = 40$   
 Max. number of transmissions per channel in 16 s:  $40 \times 16 = 640$   
 Period: Number of channels  $\times$  0.4s = 16s


Under normal test conditions only	400 ms within in a period
-----------------------------------	---------------------------

### Results:

Dwell time = standard test packet pulse width\*)  $\times$  number of transmission per channel in 15.6 seconds

Packet type	standard test packet pulse width [ms]	number of hops in 16 sec	calculated dwell time[ms]
Data Transmit mode	0.376	640	241

\*) For Bluetooth® LE devices no measurements are mandatory due to the fixed requirements of the Bluetooth® Core Specification. The standard test packet is defined as:

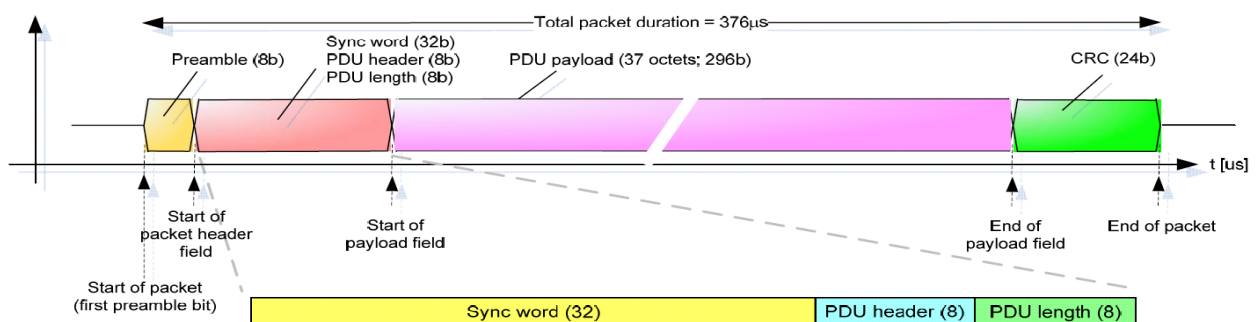

**Result: Passed**

### 10.3 Band edge compliance radiated

**Description:**

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to single channel mode and the transmit channel is channel 00 for the lower restricted band and channel 39 for the upper restricted band. The measurement is repeated for all modulations. Measurement distance is 3m.

**Measurement:**

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	10 Hz
Span:	Lower Band: 2300 – 2400 MHz Upper Band: 2480 – 2500 MHz
Trace-Mode:	Max Hold

**Limits:**

FCC	-/-
Band edge compliance radiated	
<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).</p>	
54 dBµV/m AVG	


**Result:**

Scenario	Band edge compliance radiated [dBµV/m]
Modulation	GFSK
Lower restricted band	< 54 (see plot 1)
Upper restricted band	< 54 (see plot 2)
Measurement uncertainty	± 3 dB


**Result:** Passed

**Plots:**

**Plot 1: Lower restricted band**

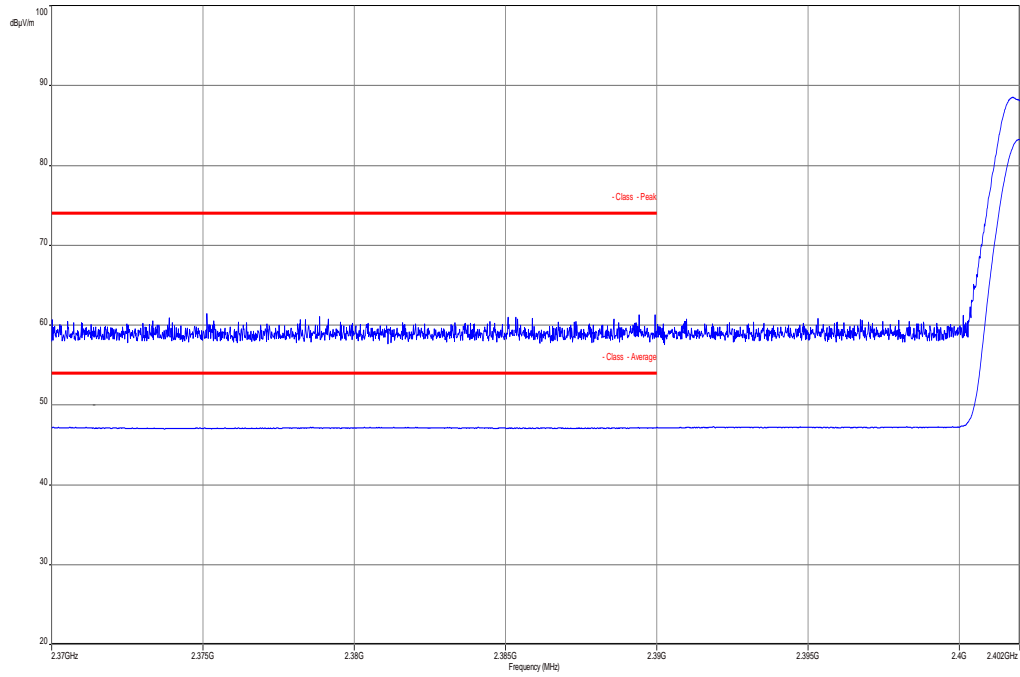

**Plot 2: Upper restricted band**

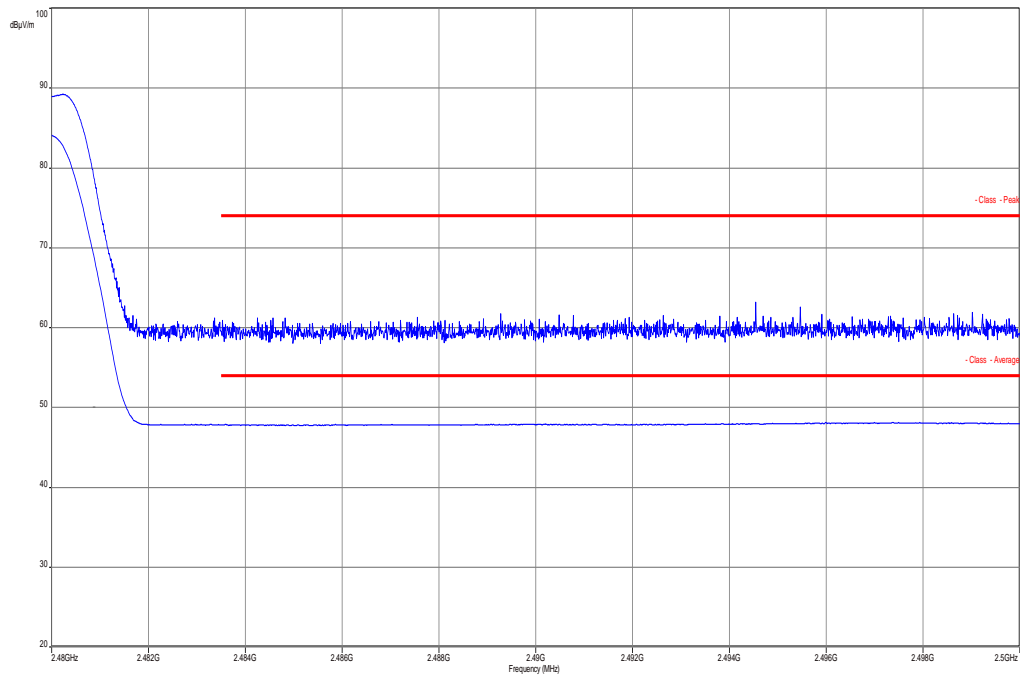

## 10.4 TX spurious emissions radiated

### Description:

Measurement of the radiated spurious emissions in transmit mode. The EUT is set to single channel mode and the transmit channel is channel 00, channel 19 and channel 39. The measurement is performed in the mode with the highest output power.

### Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Video bandwidth:	3 x RBW Re-measurement: 10 Hz
Span:	30 MHz to 25 GHz
Trace-Mode:	Max Hold
Measured Modulation:	GFSK

### Limits:

FCC	-/-	
TX spurious emissions radiated		
<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>		
§15.209		
Frequency (MHz)	Field strength (dBµV/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3



**Results:**


TX spurious emissions radiated [dBµV/m]								
2402 MHz			2440 MHz			2480 MHz		
F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
All detected peak emissions are below the average limit.			All detected peak emissions are below the average limit.			All detected peak emissions are below the average limit.		
Measurement uncertainty			± 3 dB					

**Result:** Passed

**Note:** The limit was recalculated with 20 dB / decade (Part 15.31) for all radiated spurious emissions 30 MHz to 1 GHz from 3 meter limit to a 10 meter distance. (40dB/decade for emissions < 30MHz)

**Plots:**


**Plot 1:** 30 MHz to 1 GHz, lowest channel, vertical & horizontal polarization

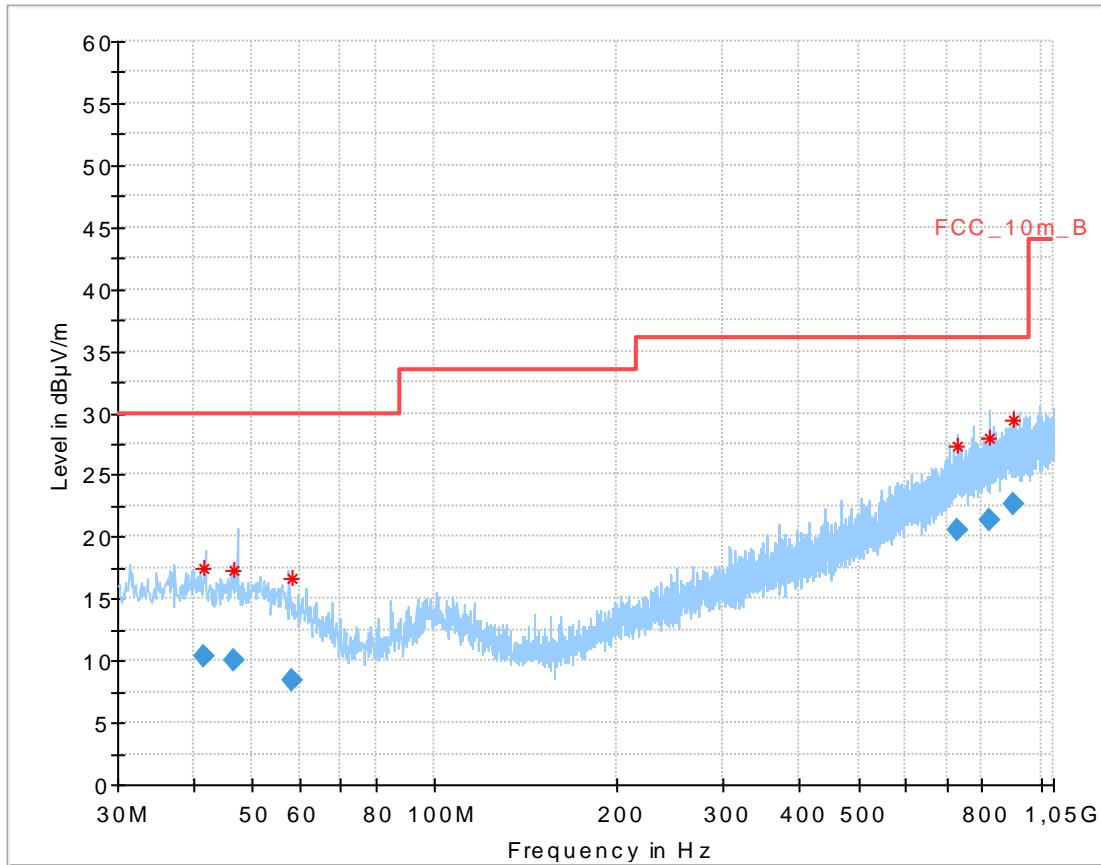

**Final result:**


Frequency (MHz)	Quasi Peak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
41.607900	10.42	30.00	19.58	1000.0	120.000	101.0	V	190.0	13.4
46.751250	10.10	30.00	19.90	1000.0	120.000	170.0	V	10.0	13.3
57.985800	8.42	30.00	21.58	1000.0	120.000	98.0	H	190.0	12.1
729.652200	20.53	36.00	15.47	1000.0	120.000	106.0	V	10.0	23.2
820.468800	21.42	36.00	14.58	1000.0	120.000	155.0	V	10.0	24.1
902.558400	22.60	36.00	13.40	1000.0	120.000	170.0	V	88.0	25.2

**Plot 2:** 1 GHz to 12.75 GHz, lowest channel, vertical & horizontal polarization

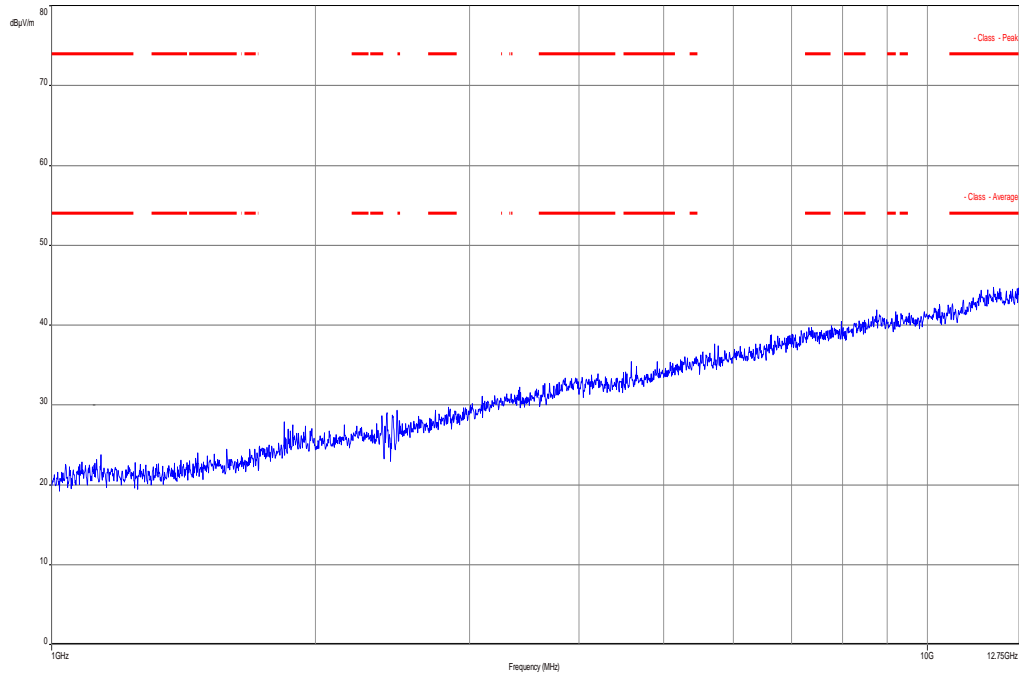


Carrier suppressed with a 2.4 GHz-band rejection filter.

**Plot 3:** 12 GHz to 18 GHz, lowest channel, vertical & horizontal polarization

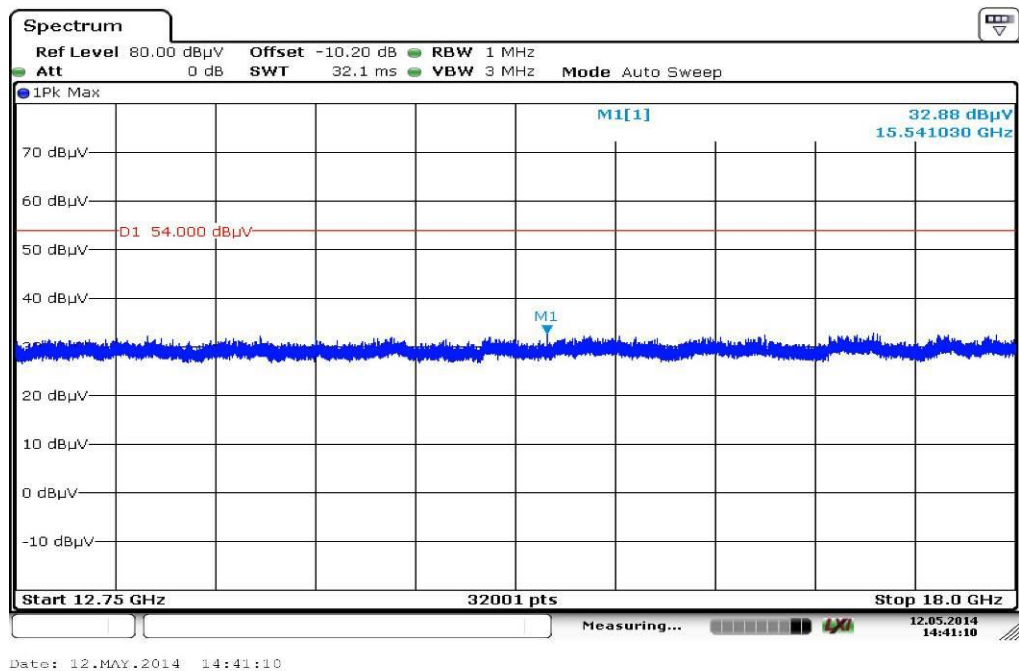


Plot 4: 18 GHz to 26 GHz, lowest channel, vertical & horizontal polarization

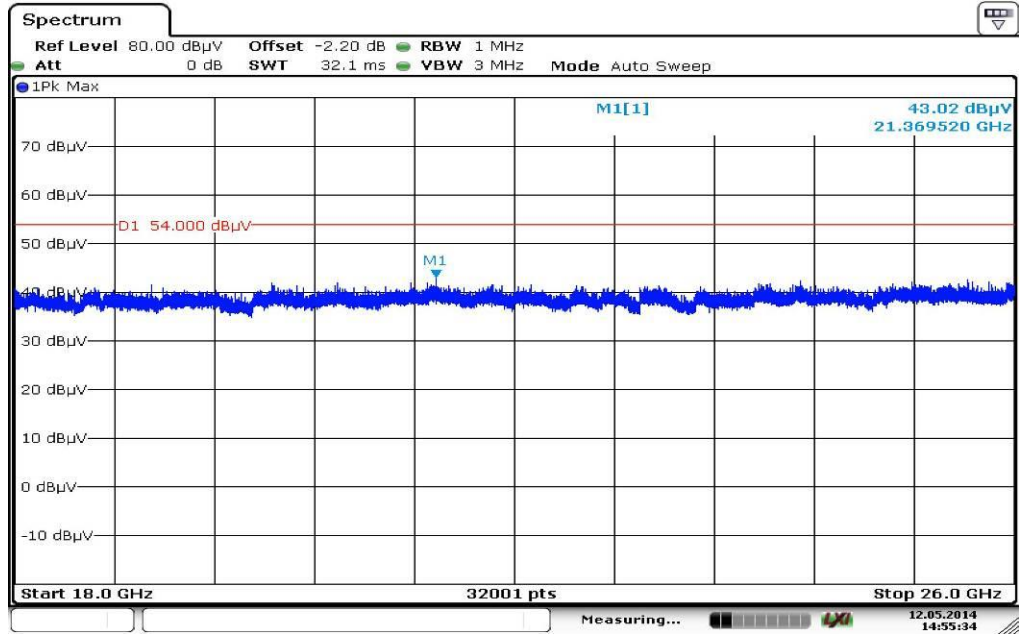

Date: 12.MAY.2014 14:55:34


Plot 5: 30 MHz to 1 GHz, mid channel, vertical & horizontal polarization

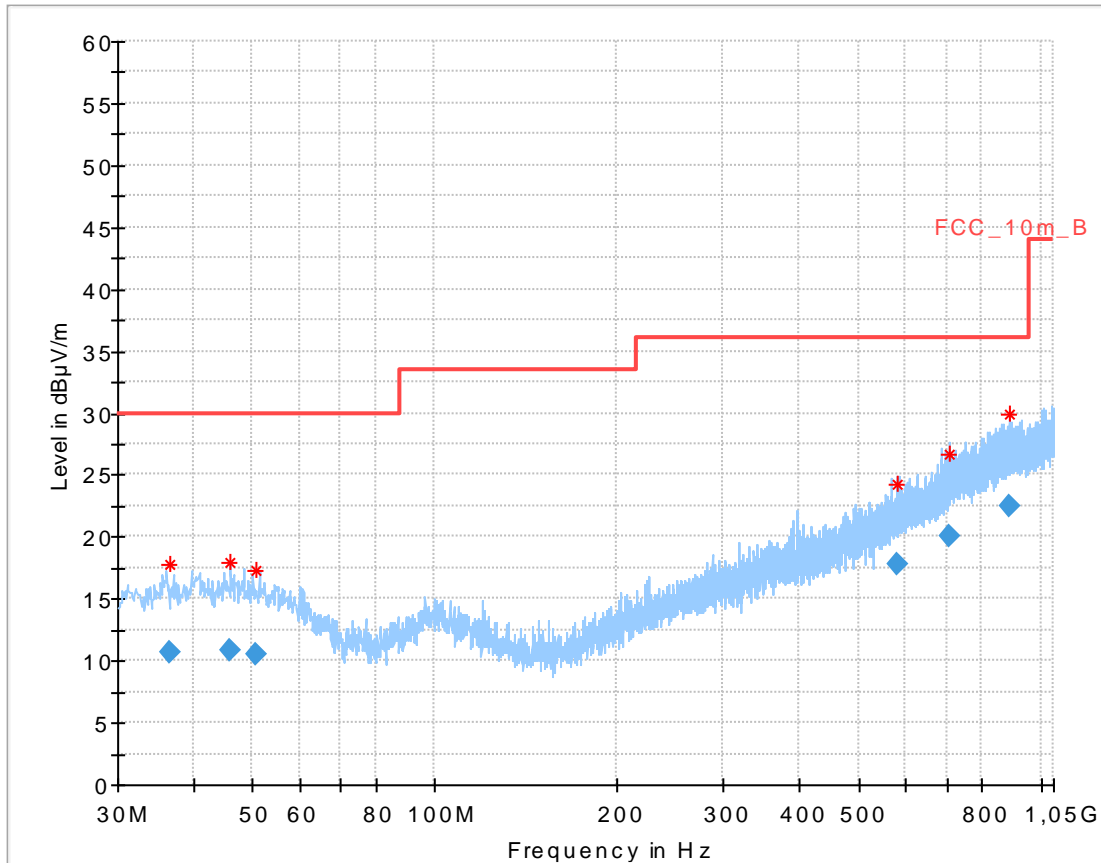

Final result:


Frequency (MHz)	Quasi Peak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
36.609600	10.66	30.00	19.34	1000.0	120.000	141.0	V	10.0	13.2
46.040550	10.90	30.00	19.10	1000.0	120.000	170.0	V	1.0	13.3
50.914200	10.47	30.00	19.53	1000.0	120.000	170.0	H	100.0	13.3
580.032750	17.73	36.00	18.27	1000.0	120.000	105.0	V	-9.0	20.2
706.405500	20.08	36.00	15.92	1000.0	120.000	170.0	V	190.0	22.7
890.435250	22.49	36.00	13.51	1000.0	120.000	145.0	V	100.0	25.1

**Plot 6:** 1 GHz to 12.75 GHz, mid channel, vertical & horizontal polarization

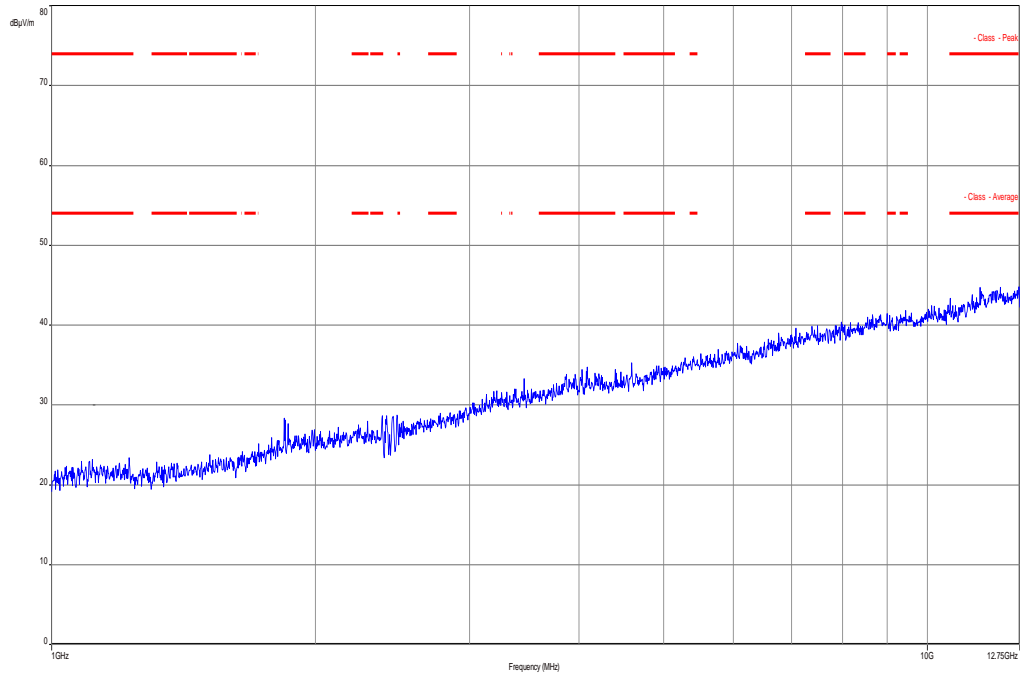


Carrier suppressed with a 2.4 GHz-band rejection filter.

**Plot 7:** 12 GHz to 18 GHz, mid channel, vertical & horizontal polarization

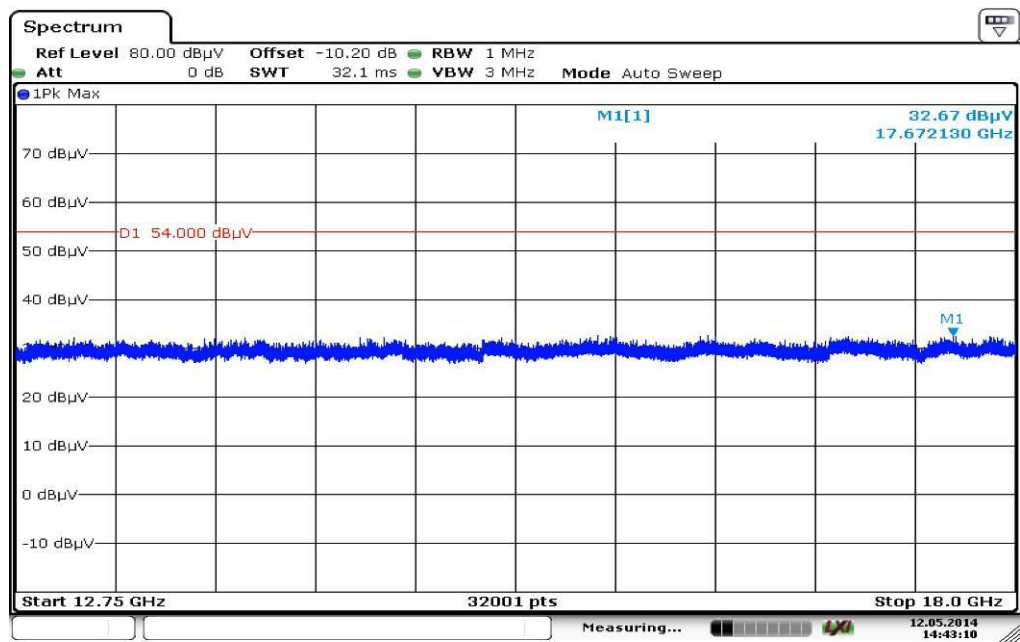


Date: 12.MAY.2014 14:43:10

Plot 8: 18 GHz to 26 GHz, mid channel, vertical & horizontal polarization

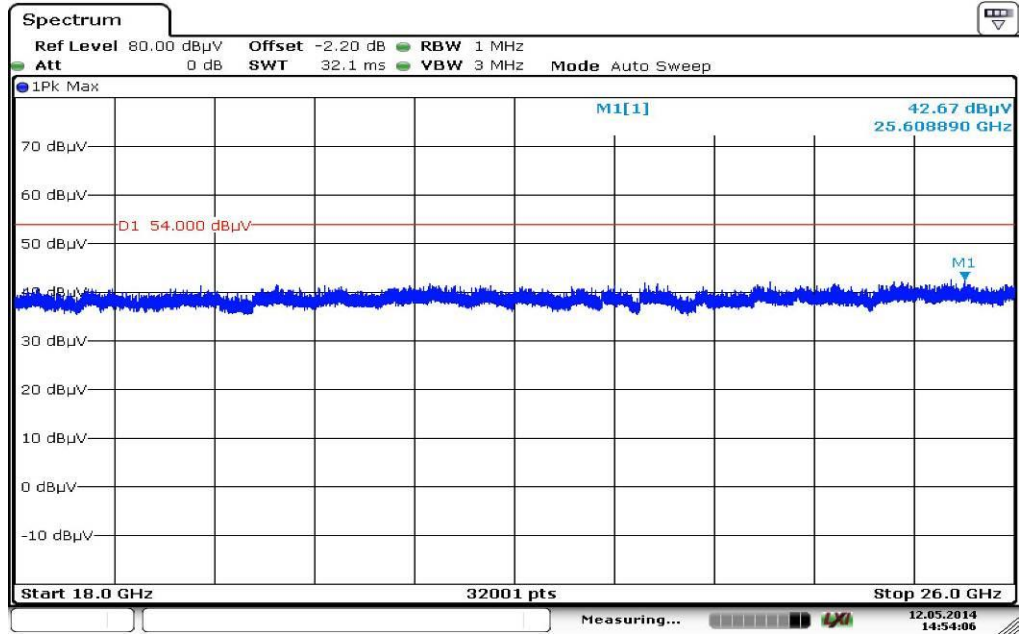

Date: 12.MAY.2014 14:54:06

**Plot 9:** 30 MHz to 1 GHz, highest channel, vertical & horizontal polarization

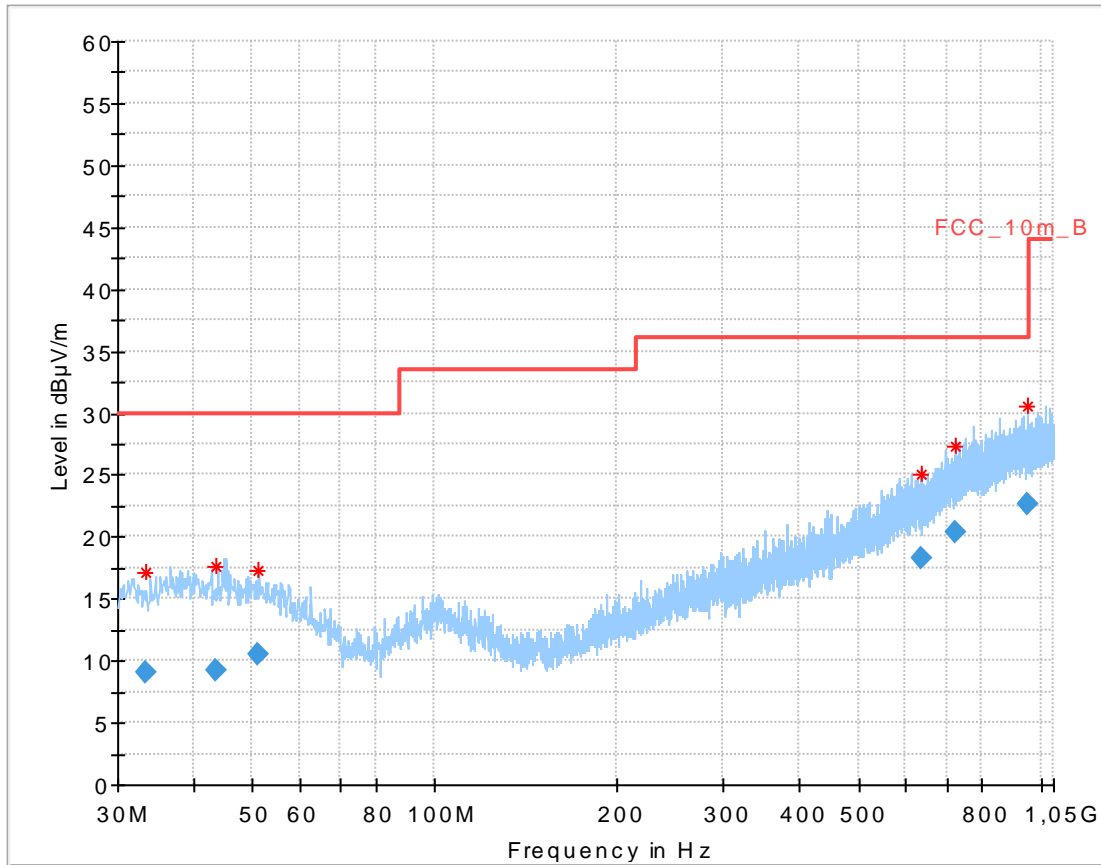


**Final result:**

Frequency (MHz)	Quasi Peak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
33.392250	9.07	30.00	20.93	1000.0	120.000	105.0	V	80.0	12.9
43.641900	9.24	30.00	20.76	1000.0	120.000	170.0	H	83.0	13.3
51.283950	10.44	30.00	19.56	1000.0	120.000	170.0	V	10.0	13.2
635.875200	18.32	36.00	17.68	1000.0	120.000	170.0	V	280.0	21.0
724.806600	20.34	36.00	15.66	1000.0	120.000	170.0	H	266.0	23.1
952.077300	22.60	36.00	13.40	1000.0	120.000	122.0	H	171.0	25.4




**Plot 10:** 1 GHz to 12.75 GHz, highest channel, vertical & horizontal polarization

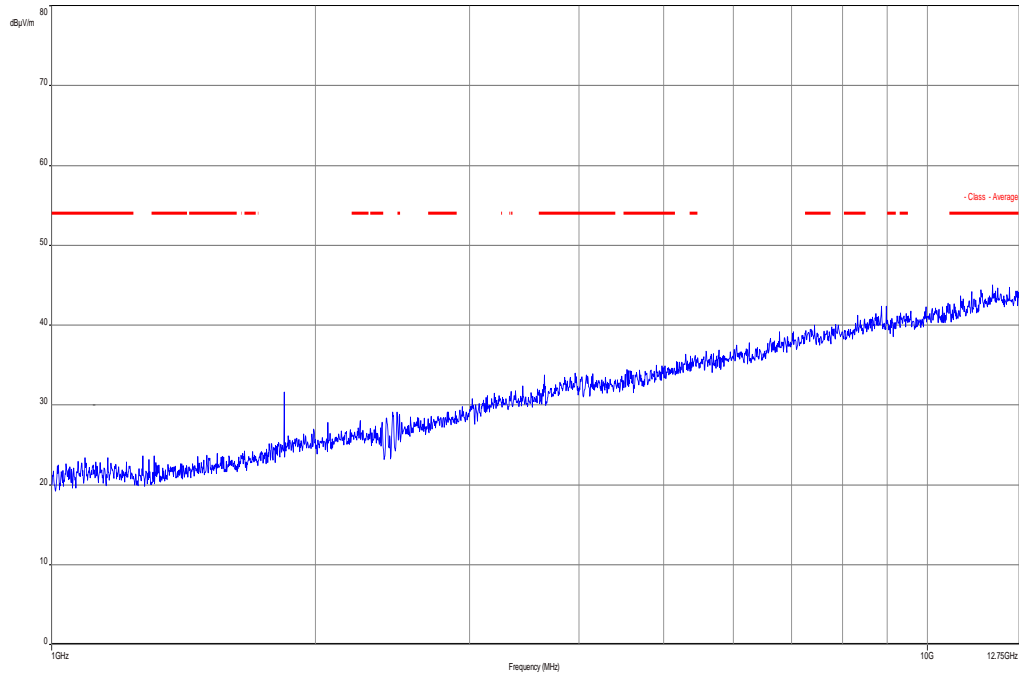


Carrier suppressed with a 2.4 GHz-band rejection filter.

**Plot 11:** 12 GHz to 18 GHz, highest channel, vertical & horizontal polarization

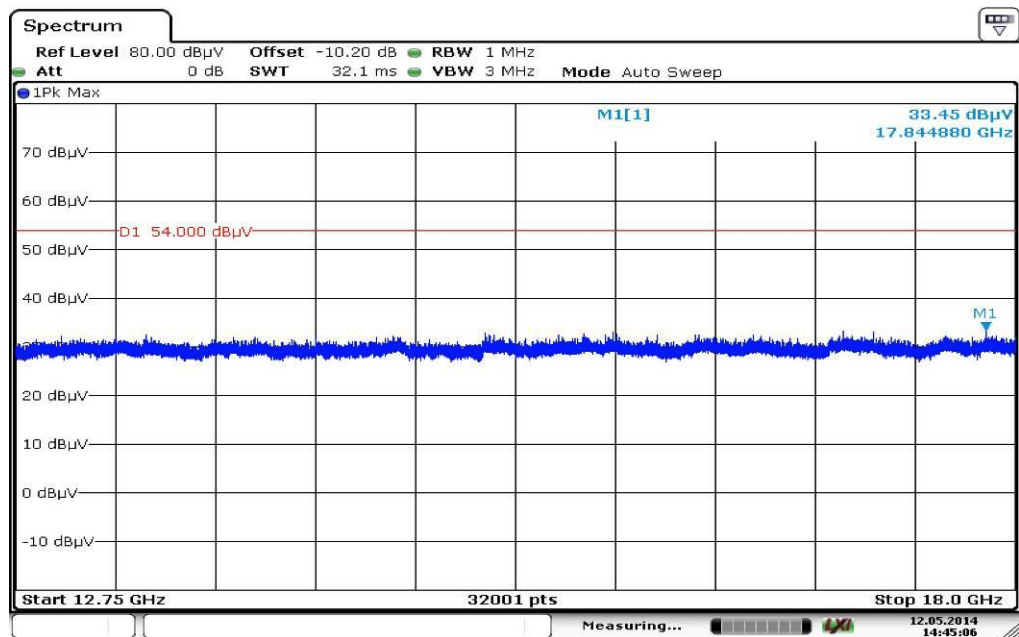

Date: 12.MAY.2014 14:45:06

Plot 12: 18 GHz to 26 GHz, highest channel, vertical & horizontal polarization

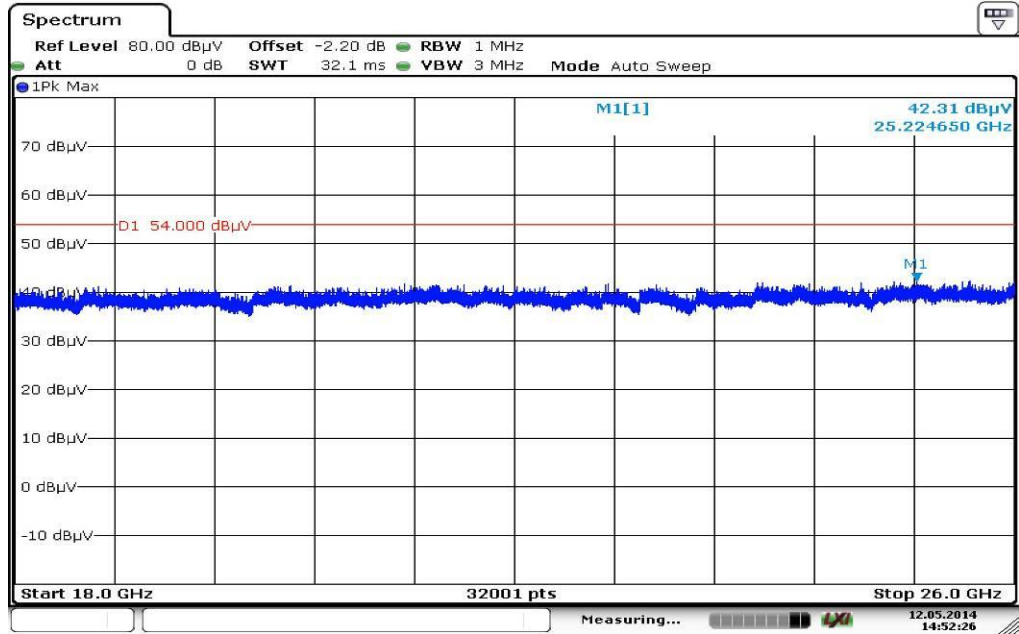

Date: 12.MAY.2014 14:52:26

## 10.5 RX spurious emissions radiated

### Description:

Measurement of the radiated spurious emissions in idle/receive mode. The EUT is detached so all oscillators are active.

### Measurement:

Measurement parameter	
Detector:	Peak / Quasi peak
Sweep time:	Auto
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Video bandwidth:	3 x RBW Remeasurement: 10 Hz
Span:	30 MHz to 25 GHz
Trace-Mode:	Max Hold

### Limits:

FCC	-/-	
RX Spurious Emissions Radiated		
Frequency (MHz)	Field strength (dB $\mu$ V/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3

### Results:


RX spurious emissions radiated [dB $\mu$ V/m]		
F [MHz]	Detector	Level [dB $\mu$ V/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
All detected peak emissions are below the average limit.		
Measurement uncertainty	$\pm 3$ dB	

**Result: Passed**

**Note:** The limit was recalculated with 20 dB / decade (Part 15.31) for all radiated spurious emissions 30 MHz to 1 GHz from 3 meter limit to a 10 meter distance. (40dB/decade for emissions < 30MHz)

**Plots:**


**Plot 1:** 30 MHz to 1 GHz, RX / idle – mode, vertical & horizontal polarization

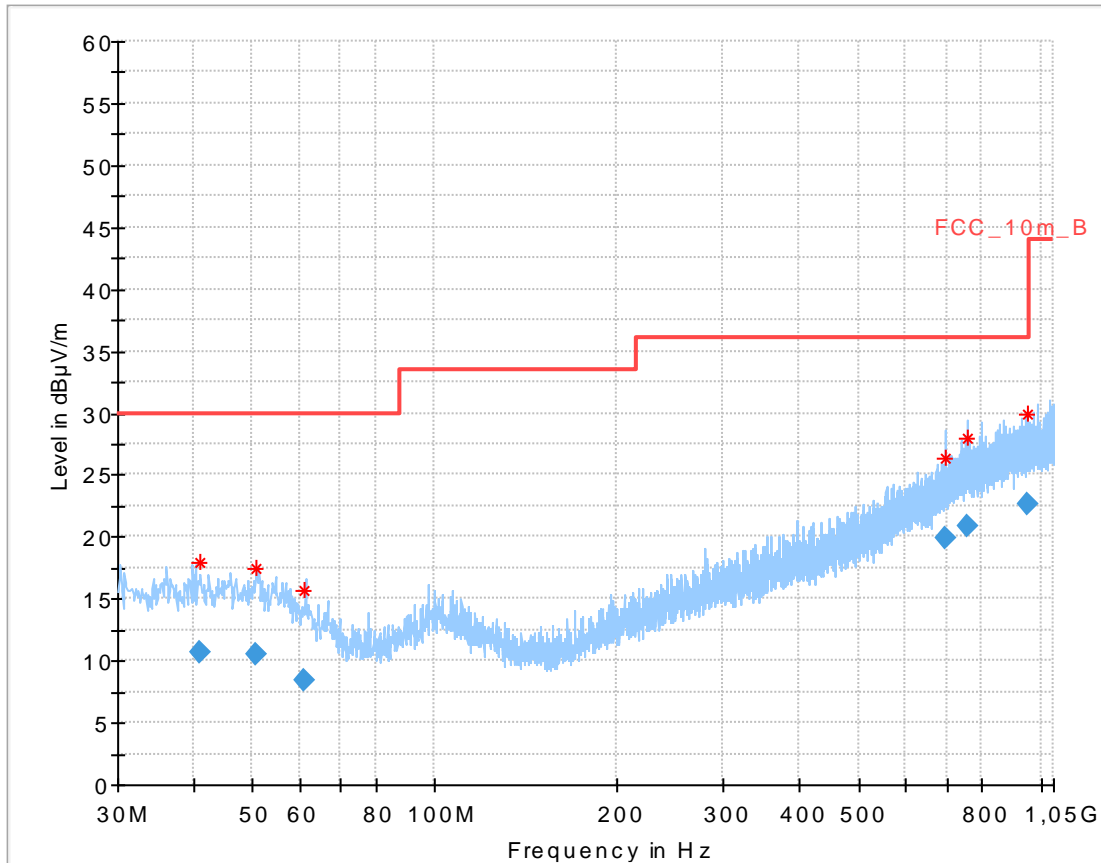


**Final result:**

Frequency (MHz)	Quasi Peak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
40.917600	10.74	30.00	19.26	1000.0	120.000	101.0	V	280.0	13.4
50.706450	10.47	30.00	19.53	1000.0	120.000	170.0	V	100.0	13.3
60.728400	8.36	30.00	21.64	1000.0	120.000	105.0	H	84.0	11.4
697.575750	19.85	36.00	16.15	1000.0	120.000	170.0	H	-4.0	22.4
757.144800	20.93	36.00	15.07	1000.0	120.000	170.0	V	10.0	23.7
954.128250	22.72	36.00	13.28	1000.0	120.000	116.0	V	190.0	25.4

**Plot 2:** 1 GHz to 12.75 GHz, RX / idle – mode, vertical & horizontal polarization

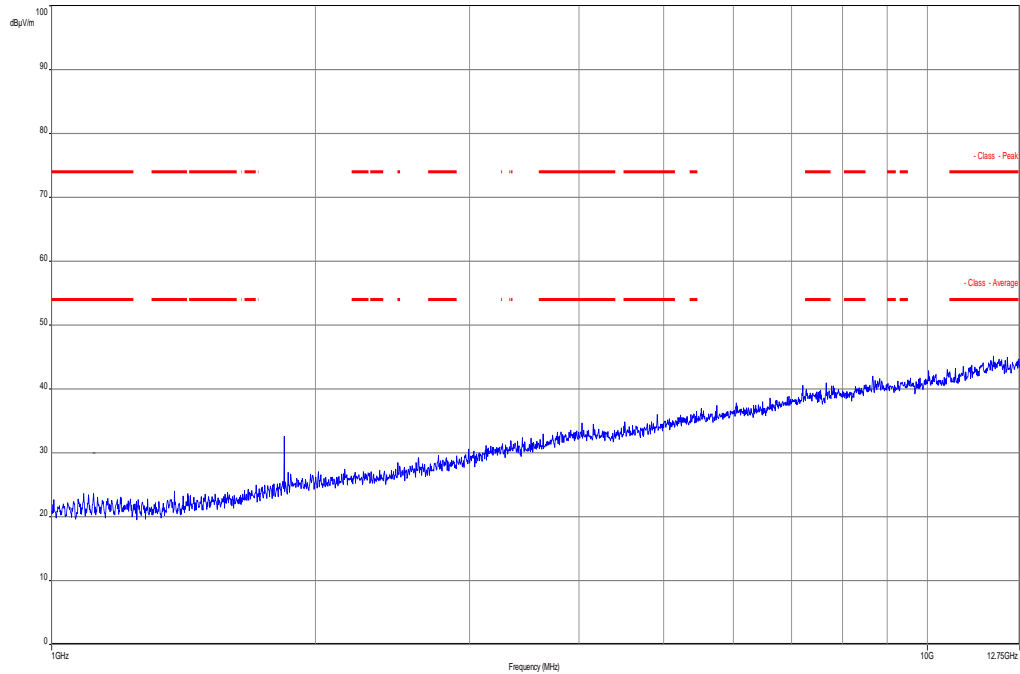


**Plot 3:** 12 GHz to 18 GHz, RX / idle – mode, vertical & horizontal polarization

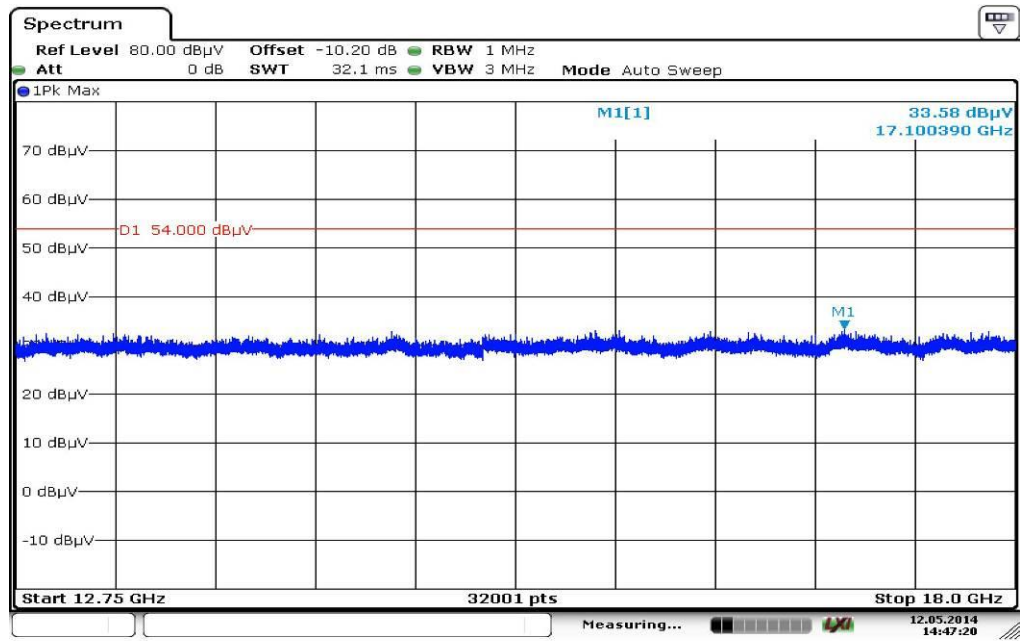

Date: 12.MAY.2014 14:47:21

Plot 4: 18 GHz to 26 GHz, RX / idle – mode, vertical & horizontal polarization

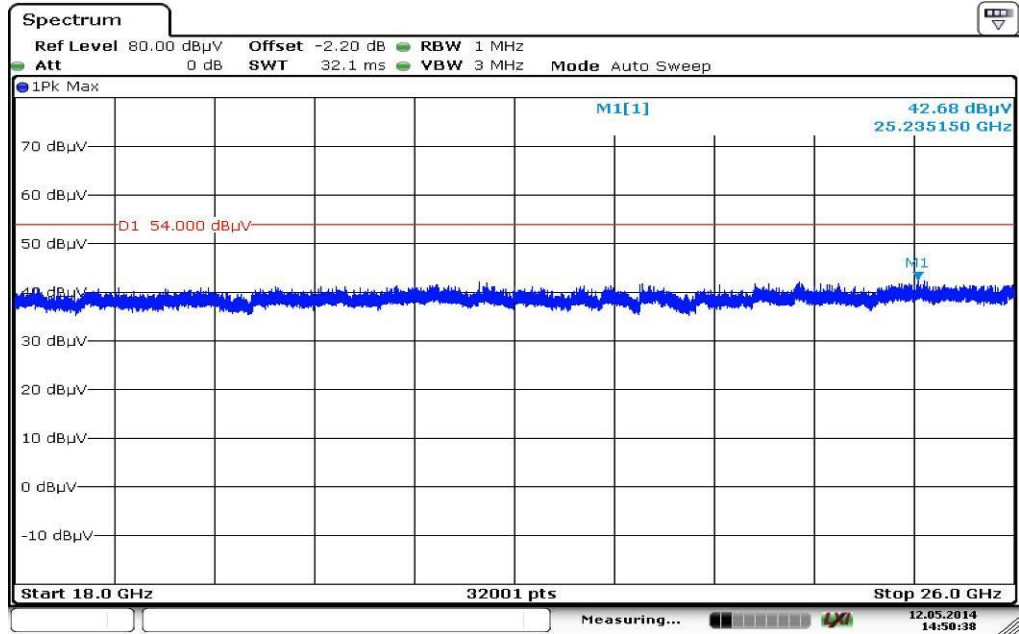

Date: 12.MAY.2014 14:50:39

## 10.6 Spurious emissions radiated < 30 MHz

### Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The EUT is set to single channel mode and the transmit channel is channel 19. This measurement is representative for all channels and modes. If peaks are found channel 00 and channel 39 will be measured too. The measurement is performed in the mode with the highest output power. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

### Measurement:

Measurement parameter	
Detector:	Peak / Quasi peak
Sweep time:	Auto
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

### Limits:

FCC	-/-	
TX spurious emissions radiated < 30 MHz		
Frequency (MHz)	Field strength (dBµV/m)	Measurement distance
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30


### Results:

TX spurious emissions radiated < 30 MHz [dBµV/m]		
F [MHz]	Detector	Level [dBµV/m]
No peaks detected.		
Measurement uncertainty	± 3 dB	


**Result: Passed**

**Plot:**

**Plot 1: 9 kHz to 30 MHz, TX mode**

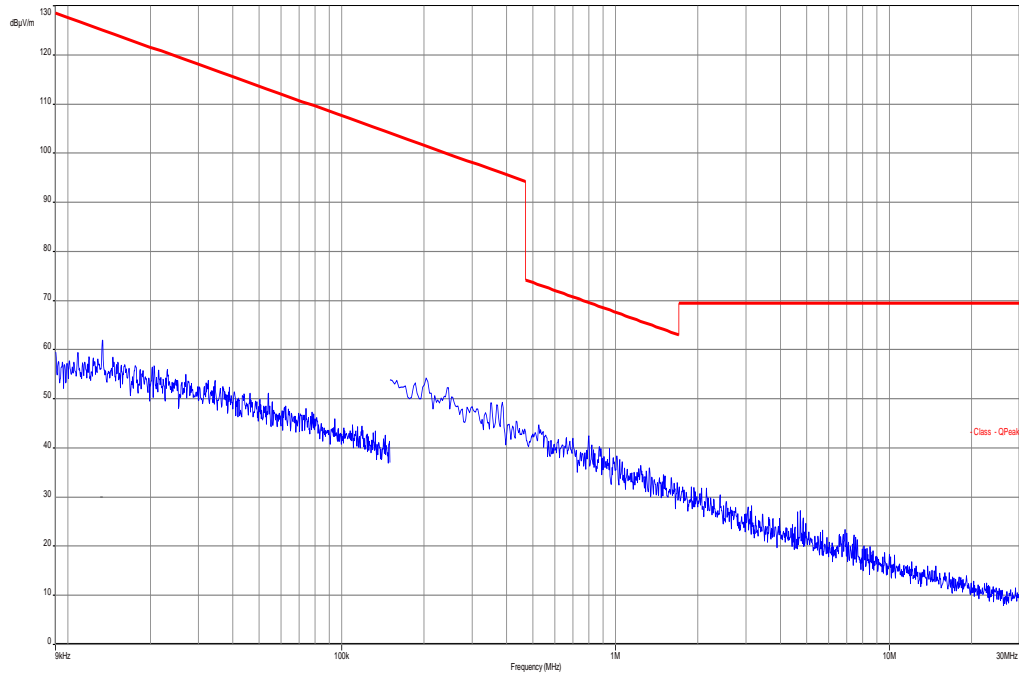

**Plot 2: 9 kHz to 30 MHz, RX mode**

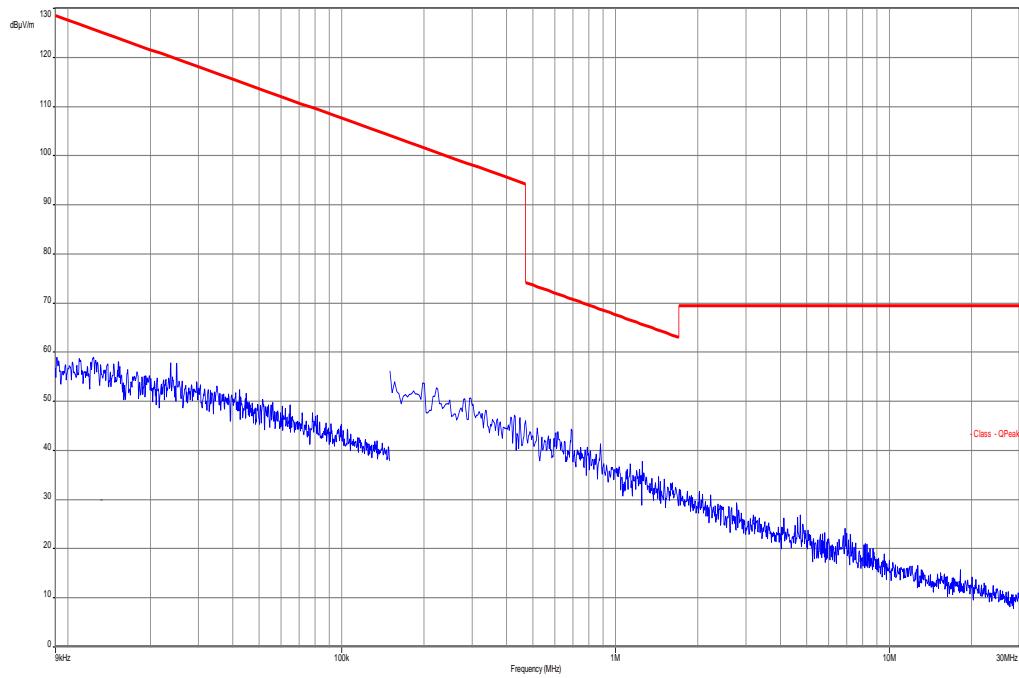



## 10.7 Spurious emissions conducted < 30 MHz

### Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to single channel mode and the transmit channel is channel 19. This measurement is representative for all channels and modes. If peaks are found channel 00 and channel 39 will be measured too. The measurement is performed in the mode with the highest output power. Both power lines, phase and neutral line, are measured. Found peaks are re-measured with average and quasi peak detection to show compliance to the limits.

### Measurement:

Measurement parameter	
Detector:	Peak / Quasi peak / average
Sweep time:	Auto
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

### Limits:

FCC	-/-	
TX spurious emissions conducted < 30 MHz		
Frequency (MHz)	Quasi-peak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30.0	60	50

\*Decreases with the logarithm of the frequency


### Results:

TX spurious emissions conducted < 30 MHz [dB $\mu$ V/m]		
F [MHz]	Detector	Level [dB $\mu$ V/m]
No peaks detected.		
Measurement uncertainty	± 3 dB	


**Result: Passed**

**Plots:**


**Plot 1: 150 kHz to 30 MHz, TX mode, phase line**

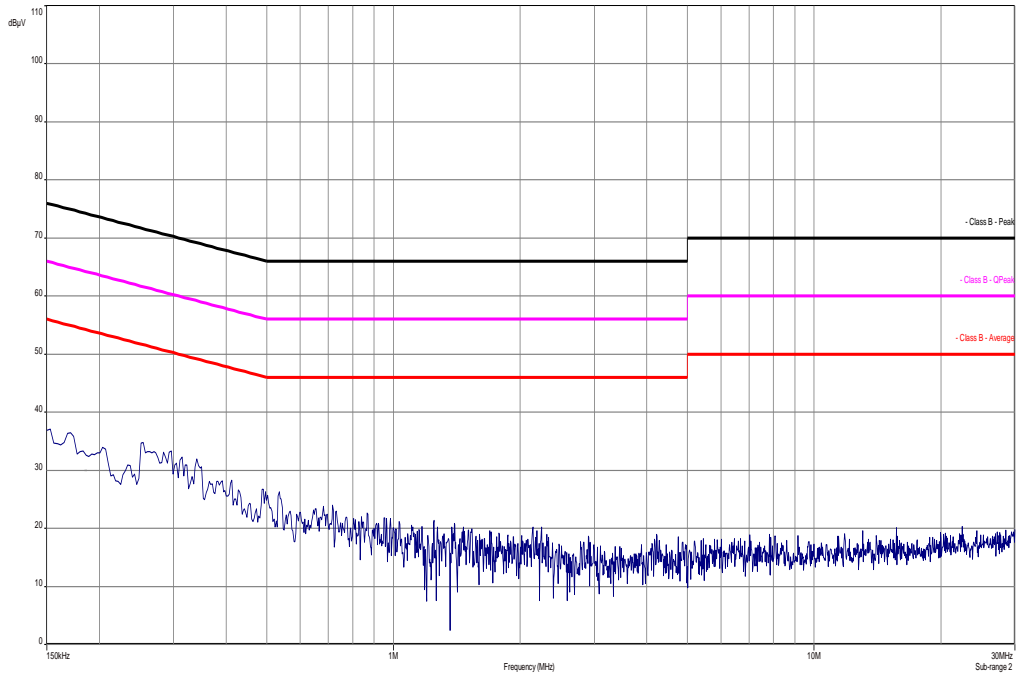


**Plot 2: 150 kHz to 30 MHz, TX mode, neutral line**

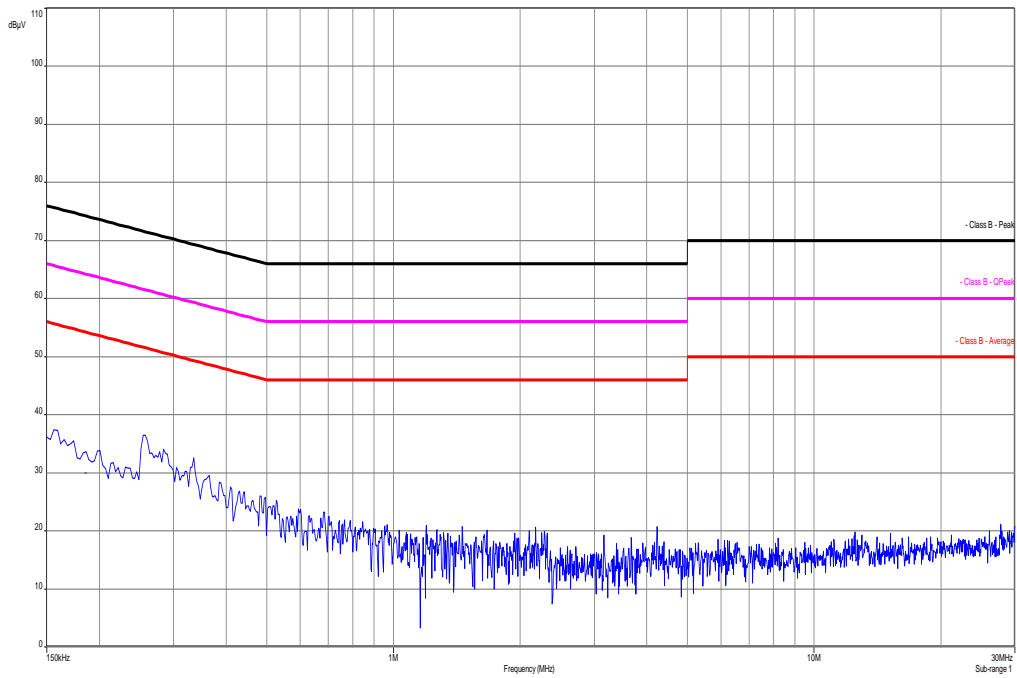

Plot 3: 150 kHz to 30 MHz, RX mode, phase line

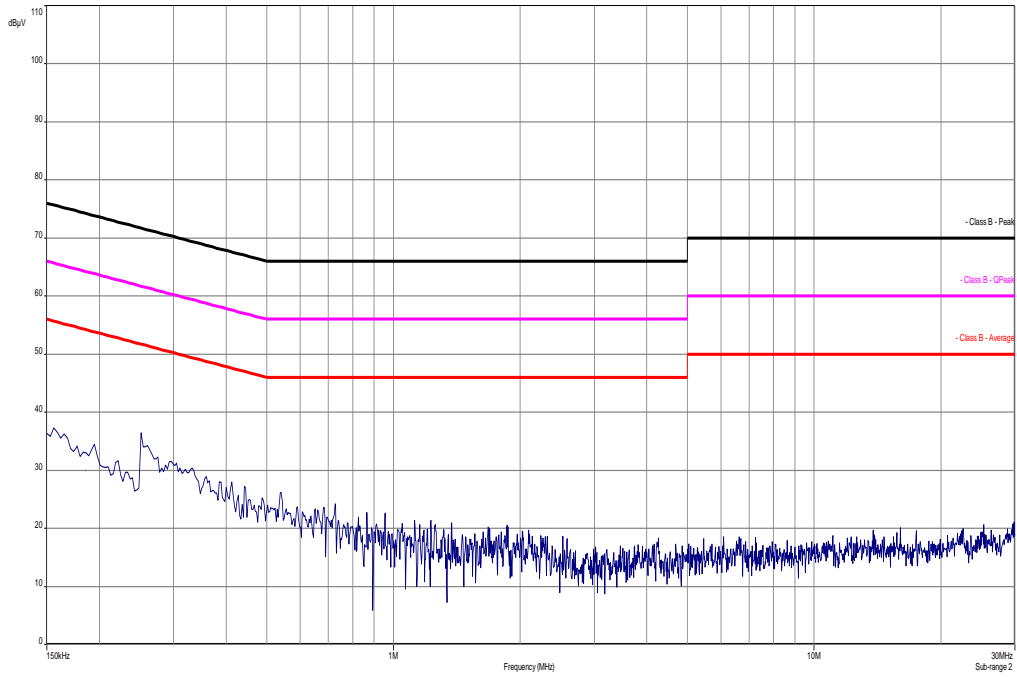

Plot 4: 150 kHz to 30 MHz, RX mode, neutral line

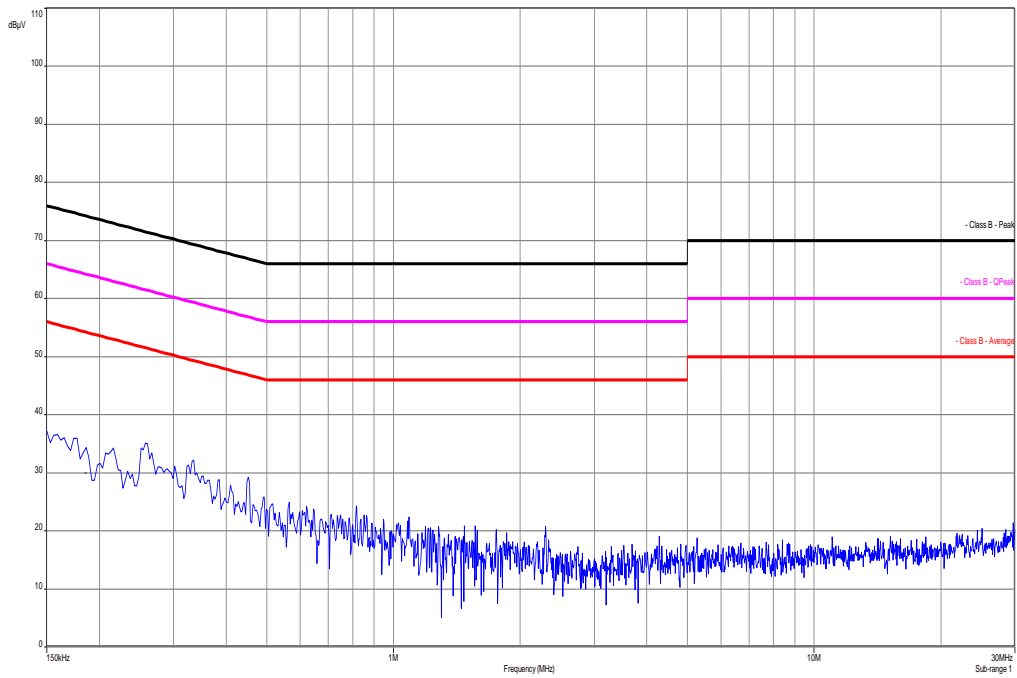

## 11 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	45	Switch-Unit	3488A	HP Meßtechnik	2719A14505	300000368	g		
2	50	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2920A04466	300000580	ne		
3	n. a.	EMI Test Receiver	ESCI 3	R&S	100083	300003312	k	27.01.2014	27.01.2015
4	n. a.	Funkstörmesse mpfänger 20Hz-26,5GHz	ESU26	R&S	100037	300003555	k	28.02.2014	28.02.2015
5	n. a.	Antenna Tower	Model 2175	ETS-LINDGREN	64762	300003745	izw		
6	n. a.	Positioning Controller	Model 2090	ETS-LINDGREN	64672	300003746	izw		
7	n. a.	Turntable Interface-Box	Model 105637	ETS-LINDGREN	44583	300003747	izw		
8	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	22.04.2014	22.04.2016
9	n. a.	Double-Ridged Waveguide Horn Antenna 1-18,0GHz	3115	EMCO	8812-3088	300001032	vKI!	08.05.2013	08.05.2015
10	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev		
11	n. a.	Switch / Control Unit	3488A	HP Meßtechnik	*	300000199	ne		
12	9	Isolating Transformer	MPL IEC625 Bus Regeltrennravo	Erfi	91350	300001155	ne		
13	90	Active Loop Antenna 10 kHz to 30 MHz	6502	Kontron Psychotech	8905-2342	300000256	k	13.06.2013	13.06.2015
14	n. a.	Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143	ne		
15	n. a.	Band Reject filter	WRCG240/2483-2375/2505-50/10SS	Wainwright	11	300003351	ev		
16	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854	vKI!	14.10.2011	14.10.2014
17	n. a.	MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405	k	13.03.2014	13.03.2015
18	11b	Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP Meßtechnik	00419	300002268	ev		
19	A026	Std. Gain Horn Antenna 12.4 to 18.0 GHz	639	Narda	8402	300000787	k	22.07.2013	22.07.2015
20	A029	Std. Gain Horn Antenna 18.0 to 26.5 GHz	638	Narda	8205	300002442	k	19.07.2013	19.07.2015
21	n. a.	Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517	k	21.01.2014	21.01.2015
22	n. a.	Switch / Control	3488A	HP		300001691	ne		

		Unit		Meßtechnik					
23	n. a.	Power Supply DC	NGPE 40/40	R&S	388	400000078	vlk!	21.08.2012	21.08.2014
24	n. a.	Signal Analyzer 20Hz-26,5GHz-150 to + 30 DBM	FSIQ26	R&S	835540/018	300002681-0005	k	30.01.2014	30.01.2016
25	n. a.	Frequency Standard (Rubidium Frequency Standard)	MFS (Rubidium)	R&S (Datum)	002	300002681-0009	Ve	21.08.2012	21.08.2014
26	n. a.	Directional Coupler	101020010	Krytar	70215	300002840	ev		
27	n. a.	DC-Blocker	8143	Inmet Corp.	none	300002842	ne		
28	n. a.	Powersplitter	6005-3	Inmet Corp.		300002841	ev		

**Agenda:** Kind of Calibration

- |      |  |     |  |
|------|--|-----|--|
| k    | calibration / calibrated                   | EK  | limited calibration                                  |
| ne   | not required (k, ev, izw, zw not required) | zw  | cyclical maintenance (external cyclical maintenance) |
| ev   | periodic self verification                 | izw | internal cyclical maintenance                        |
| Ve   | long-term stability recognized             | g   | blocked for accredited testing                       |
| vlk! | Attention: extended calibration interval   |     |  |
| NK!  | Attention: not calibrated                  | *)  | next calibration ordered / currently in progress     |

## 12 Observations

No observations exceeding those reported with the single test cases have been made.

**Annex A Document history**

Version	Applied changes	Date of release
	Initial release	2014-05-15

**Annex B Further information****Glossary**

AVG	-	Average
DUT	-	Device under test
EMC	-	Electromagnetic Compatibility
EN	-	European Standard
EUT	-	Equipment under test
ETSI	-	European Telecommunications Standard Institute
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	Not applicable
PP	-	Positive peak
QP	-	Quasi peak
S/N	-	Serial number
SW	-	Software

## Annex C Accreditation Certificate

Front side of certificate

Back side of certificate



Deutsche Akkreditierungsstelle GmbH

Bellehene gemäß § 8 Absatz 1 AkkStelleG i.V.m. § 1 Absatz 1 AkkStelleGBV  
 Unterzeichnerin der Multilateralen Abkommen  
 von EA, ILAC und IAF zur gegenseitigen Anerkennung

**Akkreditierung**



Die Deutsche Akkreditierungsstelle GmbH bestätigt hiermit, dass das Prüflaboratorium

**CETECOM ICT Services GmbH**  
 Untertürkheimer Straße 6-10, 66117 Saarbrücken

die Kompetenz nach DIN EN ISO/IEC 17025:2005 besitzt, Prüfungen in folgenden Bereichen durchzuführen:

- Drahtgebundene Kommunikation einschließlich xDSL
- VoIP und DECT
- Akustik
- Funk einschließlich WLAN
- Short Range Devices (SRD)
- RFID
- WiFiMax und Richtfunk
- Mobilfunk (GSM / GPRS / UTRAN / DCS, Over the Air (OTA) Performance)
- Elektromagnetische Verträglichkeit (EMV) einschließlich Automotive
- Produktsicherheit
- SAR und Hearing Aid Compatibility (HAC)
- Umweltsimulation
- Smart Card Terminals
- Bluetooth
- Wi-Fi Services

Die Akkreditierungsurkunde gilt nur in Verbindung mit dem Bescheid vom 07.03.2014 mit der Akkreditierungsnummer D-PL-12076-01 und ist gültig 17.01.2018. Sie besteht aus diesem Deckblatt, der Rückseite des Deckblatts und der folgenden Anlage mit insgesamt 77 Seiten.

Registrierungsnummer der Urkunde: D-PL-12076-01-00

Frankfurt am Main, 07.03.2014

Stellen Sie hier

in Auftrag D-PL-12076-01/13/19-12  
 Akkreditierungsstelle

Deutsche Akkreditierungsstelle GmbH

Standort Berlin  
 Spittelmarkt 10  
 10117 Berlin

Standort Frankfurt am Main  
 Gartenstraße 6  
 60504 Frankfurt am Main

Standort Braunschweig  
 Bundesallee 100  
 38116 Braunschweig

Die auszugsweise Veröffentlichung des Akkreditierungsurkunde bedarf der vorherigen schriftlichen Zustimmung der Deutsche Akkreditierungsstelle GmbH (DAkkS). Ausgenommen davon ist die separate Weiterverbreitung des Deckblattes durch die umseitig genannte Konformitätsbewertungsstelle in unveränderter Form.

Es darf nicht der Anschein erweckt werden, dass sich die Akkreditierung auch auf Bereiche erstreckt, die über den durch die DAkkS bestätigten Akkreditierungsbereich hinausgehen.

Die Akkreditierung erfolgte gemäß des Gesetzes über die Akkreditierungsstellen (AkkStelleG) vom 31. Juli 2009 (BGBl. I S. 2675) sowie der Verordnung (EG) Nr. 765/2008 des Europäischen Parlaments und des Rates vom 9. Juli 2008 über die Vorschriften für die Akkreditierung und Marktüberwachung im Zusammenhang mit der Vermarktung von Produkten (AbL L 218 vom 9. Juli 2008, S. 30). Die DAkkS ist Unterzeichnerin der Multilateralen Abkommen zur gegenseitigen Anerkennung der Europäischen Organisation für Akkreditation (EA), des International Accreditation Forum (IAF) und der International Laboratory Accreditation Cooperation (ILAC). Die Unterzeichner dieser Abkommen erkennen ihre Akkreditierungen gegenseitig an.

Der aktuelle Stand der Mitgliedschaft kann folgenden Webseiten entnommen werden:  
 EA: [www.european-accreditation.org](http://www.european-accreditation.org)  
 IAF: [www.iaf.org](http://www.iaf.org)  
 ILAC: [www.ilac.org](http://www.ilac.org)

**Note:**

The current certificate including annex is published on our website (see link below) or may be received from CETECOM ICT Services on request.

<http://www.cetecom.com/eu/de/cetecom-group/europa/deutschland-saarbruecken/akkreditierungen.html>