




# TEST REPORT


**Test Report No. : UL-RPT-RP10295085JD01E V3.0**


**Manufacturer** : Sony Mobile Communications Inc.  
**FCC ID** : PY7PM-0800  
**Technology** : *Bluetooth* – Low Energy  
**Test Standard(s)** : FCC Parts 15.207, 15.209(a) & 15.247

1. This test report shall not be reproduced in full or partial, without the written approval of UL VS LTD.
2. The results in this report apply only to the sample(s) tested.
3. The sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. Version 3.0 supersedes all previous versions.

**Date of Issue:** 01 August 2014

**Checked by:**   
Sarah Williams  
Engineer, Radio Laboratory

**Issued by :**   
pp  
John Newell  
Group Quality Manager,  
Basingstoke,  
UL VS LTD

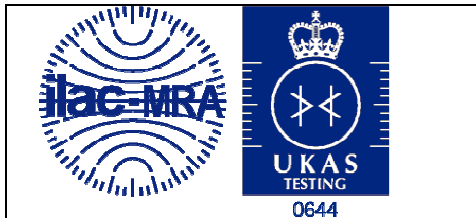

This laboratory is accredited by UKAS. The tests reported herein have been performed in accordance with its' terms of accreditation.

The *Bluetooth*<sup>®</sup> word mark and logos are owned by the *Bluetooth* SIG, Inc. and any use of such marks by UL VS LTD is under licence. Other trademarks and trade names are those of their respective owners.

---

## UL VS LTD

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG, UK  
Telephone: +44 (0)1256 312000  
Facsimile: +44 (0)1256 312001

This page has been left intentionally blank.

---

## **Table of Contents**

<b>1. Customer Information.....</b>	<b>4</b>
<b>2. Summary of Testing.....</b>	<b>5</b>
2.1. General Information	5
2.2. Summary of Test Results	5
2.3. Methods and Procedures	6
2.4. Deviations from the Test Specification	6
<b>3. Equipment Under Test (EUT) .....</b>	<b>7</b>
3.1. Identification of Equipment Under Test (EUT)	7
3.2. Description of EUT	8
3.3. Modifications Incorporated in the EUT	8
3.4. Additional Information Related to Testing	9
3.5. Support Equipment	9
<b>4. Operation and Monitoring of the EUT during Testing .....</b>	<b>10</b>
4.1. Operating Modes	10
4.2. Configuration and Peripherals	10
<b>5. Measurements, Examinations and Derived Results.....</b>	<b>11</b>
5.1. General Comments	11
5.2. Test Results	12
5.2.1. Transmitter AC Conducted Spurious Emissions	12
5.2.2. Transmitter Minimum 6 dB Bandwidth	15
5.2.3. Transmitter Duty Cycle	18
5.2.4. Transmitter Maximum Peak Output Power	21
5.2.5. Transmitter Radiated Emissions	24
5.2.6. Transmitter Band Edge Radiated Emissions	29
<b>6. Measurement Uncertainty .....</b>	<b>31</b>
<b>7. Report Revision History .....</b>	<b>32</b>

**1. Customer Information**








<b>Company Name:</b>	Sony Mobile Communications Inc.
<b>Address:</b>	Nya Vattentornet Mobilvägen 10 Lund 22188 Sweden

## 2. Summary of Testing

### 2.1. General Information

<b>Specification Reference:</b>	47CFR15.247
<b>Specification Title:</b>	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) - Section 15.247
<b>Specification Reference:</b>	47CFR15.207 and 47CFR15.209
<b>Specification Title:</b>	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) - Sections 15.207 and 15.209
<b>Site Registration:</b>	209735
<b>Location of Testing:</b>	UL VS LTD, Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom
<b>Test Dates:</b>	03 June 2014 to 10 June 2014

### 2.2. Summary of Test Results

<b>FCC Reference (47CFR)</b>	<b>Measurement</b>	<b>Result</b>
Part 15.207	Transmitter AC Conducted Emissions	
Part 15.247(a)(2)	Transmitter Minimum 6 dB Bandwidth	
Part 15.35(c)	Transmitter Duty Cycle	Note 1
Part 15.247(e)	Transmitter Power Spectral Density	Note 2
Part 15.247(b)(3)	Transmitter Maximum Peak Output Power	
Part 15.247(d)/15.209(a)	Transmitter Radiated Emissions	
Part 15.247(d)/15.209(a)	Transmitter Band Edge Radiated Emissions	
<b>Key to Results</b>		
 = Complied  = Did not comply		

#### Note(s):

1. This measurement was performed to assist in the calculation of the level in any emissions.
2. In accordance with FCC KDB 558074 Section 10.1, PSD is not required if the maximum conducted output power is less than the PSD limit of 8 dBm / 3 kHz. The PSD level is therefore deemed to be equal to the measured total output power.

### **2.3. Methods and Procedures**

<b>Reference:</b>	ANSI C63.4 (2009)
<b>Title:</b>	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>Reference:</b>	ANSI C63.10 (2009)
<b>Title:</b>	American National Standard for Testing Unlicensed Wireless Devices
<b>Reference:</b>	KDB 558074 D01 DTS Meas Guidance v03r02 June 5, 2014
<b>Title:</b>	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

### **2.4. Deviations from the Test Specification**

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

### **3. Equipment Under Test (EUT)**

#### **3.1. Identification of Equipment Under Test (EUT)**

<b>Brand Name:</b>	Sony
<b>IMEI:</b>	004402452705316 ( <i>Radiated sample #1</i> )
<b>Test Sample Serial Number:</b>	CB5A1Z7PRC
<b>Hardware Version Number:</b>	A
<b>Software Version Number:</b>	ATPV: 1283-9868, 0_25_3_16_A
<b>FCC ID:</b>	PY7PM-0800

<b>Brand Name:</b>	Sony
<b>IMEI:</b>	004402452705373 ( <i>Radiated sample #2</i> )
<b>Test Sample Serial Number:</b>	CB5A1Z7PKX
<b>Hardware Version Number:</b>	A
<b>Software Version Number:</b>	ATPV: 1283-9868, 0_25_3_16_A
<b>FCC ID:</b>	PY7PM-0800

<b>Brand Name:</b>	Sony
<b>IMEI:</b>	004402452706157 ( <i>Conducted sample with RF port</i> )
<b>Test Sample Serial Number:</b>	CB5A1Z79D5
<b>Hardware Version Number:</b>	A
<b>Software Version Number:</b>	ATPV: 1283-9868, 0_25_3_16_A
<b>FCC ID:</b>	PY7PM-0800

<b>Brand Name:</b>	Sony
<b>Description:</b>	AC Charger
<b>Model Name or Number:</b>	EP880

<b>Brand Name:</b>	Monoprice
<b>Description:</b>	MHL Cable
<b>Model Name or Number:</b>	Not marked

<b>Brand Name:</b>	Sony
<b>Description:</b>	MHL Adaptor
<b>Model Name or Number:</b>	IM750

**Identification of Equipment Under Test (EUT) (continued)**

<b>Brand Name:</b>	Sony
<b>Description:</b>	USB Cable
<b>Model Name or Number:</b>	EC803

<b>Brand Name:</b>	Sony
<b>Description:</b>	Deskstand
<b>Model Name or Number:</b>	DK43

<b>Brand Name:</b>	Sony
<b>Description:</b>	PHF
<b>Model Name or Number:</b>	MH410c

**3.2. Description of EUT**

The equipment under test (EUT) was a GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac + NFC & ANT+.

**3.3. Modifications Incorporated in the EUT**

No modifications were applied to the EUT during testing.



**3.4. Additional Information Related to Testing**

<b>Technology Tested:</b>	<i>Bluetooth</i> Low Energy (Digital Transmission System)		
<b>Type of Unit:</b>	Transceiver		
<b>Channel Spacing:</b>	2 MHz		
<b>Modulation:</b>	GFSK		
<b>Data Rate:</b>	1 Mbps		
<b>Power Supply Requirement(s):</b>	Nominal	3.8 VDC	
<b>Maximum Conducted Output Power:</b>	4.1 dBm		
<b>Antenna Gain:</b>	-3.5 dBi		
<b>Transmit Frequency Range:</b>	2402 MHz to 2480 MHz		
<b>Transmit Channels Tested:</b>	<b>Channel ID</b>	<b>Channel Number</b>	<b>Channel Frequency (MHz)</b>
	Bottom	0	2402
	Middle	19	2440
	Top	39	2480

**3.5. Support Equipment**

The following support equipment was used to exercise the EUT during testing:

<b>Description:</b>	Laptop
<b>Brand Name:</b>	Dell
<b>Model Name or Number:</b>	E5410
<b>Serial Number:</b>	UL Number 00763

<b>Description:</b>	2 GB Micro SD Card
<b>Brand Name:</b>	SanDisk
<b>Model Name or Number:</b>	Not marked

<b>Brand Name:</b>	Logik
<b>Description:</b>	22" High Definition Television
<b>Model Name or Number:</b>	L22FE12A
<b>Serial Number:</b>	1309020661

<b>Description:</b>	Test jig
<b>Brand Name:</b>	Not marked
<b>Model Name or Number:</b>	Not marked
<b>Serial Number:</b>	Not marked

## **4. Operation and Monitoring of the EUT during Testing**

### **4.1. Operating Modes**

The EUT was tested in the following operating mode(s):

- Transmitting at maximum power in *Bluetooth* mode with modulation, maximum possible data length available, with a payload set to set Pseudorandom Bit Sequence 9.

### **4.2. Configuration and Peripherals**

The EUT was tested in the following configuration(s):

- Controlled using a software application on the laptop PC supplied by the customer. The application was used to enable continuous transmission and to select the test channels as required.
- For Transmit tests: A test computer with the above mentioned software application was used to place the EUT into *Bluetooth* mode.
- Transmitter radiated spurious emission tests were performed with the following configurations, employing all available accessories:
  - Configuration 1 – Handset with the AC charger, USB Cable, MHL cable (terminated in to a television), MHL adaptor and PHF.
  - Configuration 2 – Handset with the AC charger, USB Cable, Deskstand and PHF.

Pre-scans below 1 GHz were performed in both configurations 1 and 2, with final measurements limited to the configuration which provided worst case results. Pre-scans above 1 GHz were performed in the configuration that employed the most accessories (Configuration 1), with any final measurements being performed in both configurations.

- AC conducted emissions was tested with the EUT transmitting on middle channel as this mode was found to transmit the highest power. Both configurations were tested and configuration 1 was found to be the worst case.
- The conducted sample with IMEI 004402452706157 was used for 6 dB bandwidth and maximum peak output power.
- The radiated samples with IMEI 004402452705316 and 004402452705373 were used for AC conducted emissions and radiated spurious emissions tests.

## **5. Measurements, Examinations and Derived Results**

### **5.1. General Comments**

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6. Measurement Uncertainty* for details.

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

**5.2. Test Results****5.2.1. Transmitter AC Conducted Spurious Emissions****Test Summary:**

<b>Test Engineer:</b>	Georgios Vrezas	<b>Test Date:</b>	04 June 2014
<b>Test Sample IMEI:</b>	004402452705316		

<b>FCC Reference:</b>	Part 15.207
<b>Test Method Used:</b>	As detailed in ANSI C63.10 Section 6.2 referencing ANSI C63.4

**Environmental Conditions:**

<b>Temperature (°C):</b>	21
<b>Relative Humidity (%):</b>	57

**Results: Live / Quasi Peak**

Frequency (MHz)	Line	Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Result
0.227	Live	19.0	62.6	43.6	Complied
0.416	Live	14.2	57.5	43.3	Complied
0.870	Live	13.2	56.0	42.8	Complied
2.936	Live	9.7	56.0	46.3	Complied
4.407	Live	10.3	56.0	45.7	Complied
13.074	Live	11.2	60.0	48.8	Complied

**Results: Live / Average**

Frequency (MHz)	Line	Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Result
0.263	Live	11.5	51.4	39.9	Complied
0.317	Live	11.5	49.8	38.3	Complied
0.488	Live	8.1	46.2	38.1	Complied
0.852	Live	6.2	46.0	39.8	Complied
2.301	Live	5.5	46.0	40.5	Complied
7.854	Live	7.9	50.0	42.1	Complied


**Transmitter AC Conducted Spurious Emissions (continued)****Results: Neutral / Quasi Peak**

Frequency (MHz)	Line	Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Result
0.434	Neutral	19.9	57.2	37.3	Complied
0.443	Neutral	20.1	57.0	36.9	Complied
0.866	Neutral	20.0	56.0	36.0	Complied
1.820	Neutral	12.2	56.0	43.8	Complied
5.357	Neutral	15.4	60.0	44.6	Complied
12.0670	Neutral	15.1	60.0	44.9	Complied


**Results: Neutral / Average**

Frequency (MHz)	Line	Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Result
0.254	Neutral	14.2	51.6	37.4	Complied
0.483	Neutral	12.2	46.3	34.1	Complied
0.866	Neutral	11.5	46.0	34.5	Complied
3.174	Neutral	6.9	46.0	39.1	Complied
7.557	Neutral	8.4	50.0	41.6	Complied
25.058	Neutral	8.8	50.0	41.2	Complied

**Transmitter AC Conducted Spurious Emissions (continued)**

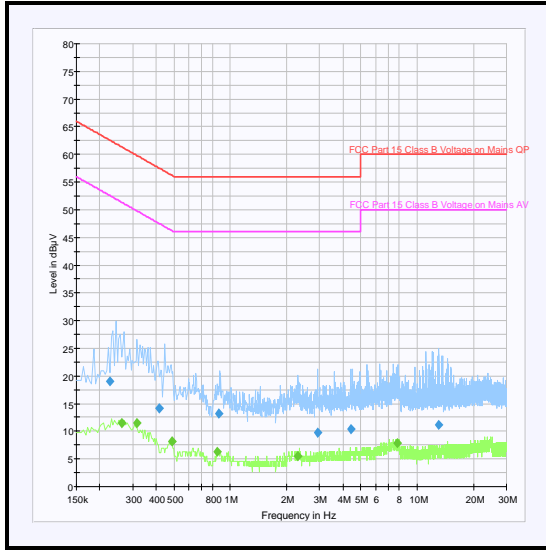

**Live**

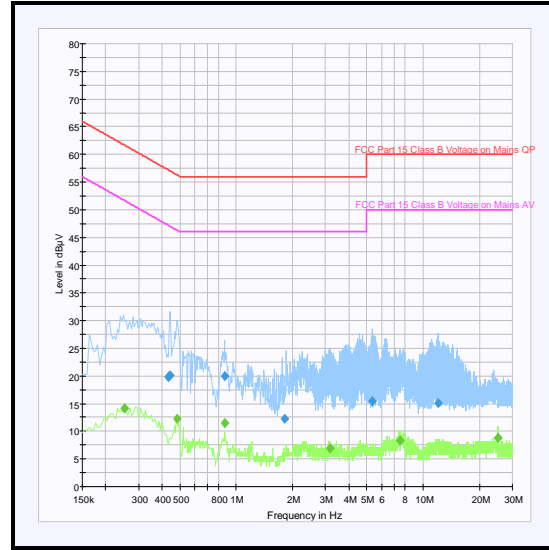

**Neutral**

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1625	Thermohygrometer	JM Handelpunkt	30.5015.06	None stated	31 Dec 2014	12
A004	LISN	Rohde & Schwarz	ESH3-Z5	890604/027	18 Nov 2014	12
A1830	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100668	27 Feb 2015	12
M1263	Test Receiver	Rohde & Schwarz	ESIB 7	100265	14 Oct 2014	12

**5.2.2. Transmitter Minimum 6 dB Bandwidth****Test Summary:**

<b>Test Engineer:</b>	Nick Steele	<b>Test Date:</b>	03 June 2014
<b>Test Sample IMEI:</b>	004402452706157		

<b>FCC Reference:</b>	Part 15.247(a)(2)
<b>Test Method Used:</b>	As detailed in FCC KDB 558074 Section 8.1 Option 1

**Environmental Conditions:**

<b>Temperature (°C):</b>	24
<b>Relative Humidity (%):</b>	40

**Note(s):**


- 6 dB DTS bandwidth tests were performed using a spectrum analyser in accordance with FCC KDB 558074 Section 8.1 Option 1 measurement procedure.
- The spectrum analyser was connected to the RF port on the EUT using suitable attenuation and RF cable.

**Results:**


Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Bottom	701.503	≥500	201.503	Complied
Middle	761.523	≥500	261.523	Complied
Top	761.523	≥500	261.523	Complied

**Transmitter Minimum 6 dB Bandwidth (continued)**


**Results:**

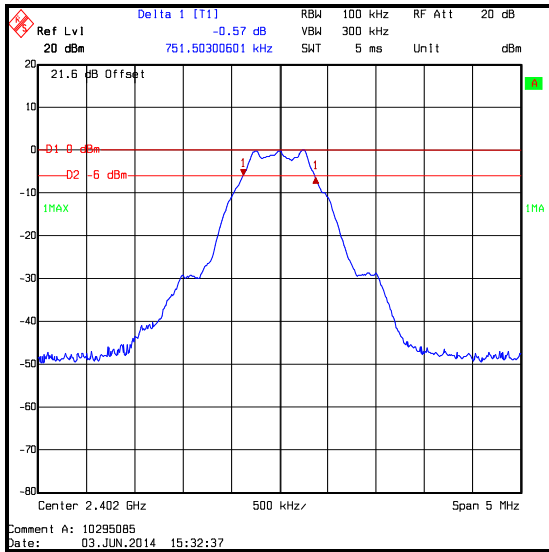

**Bottom Channel**

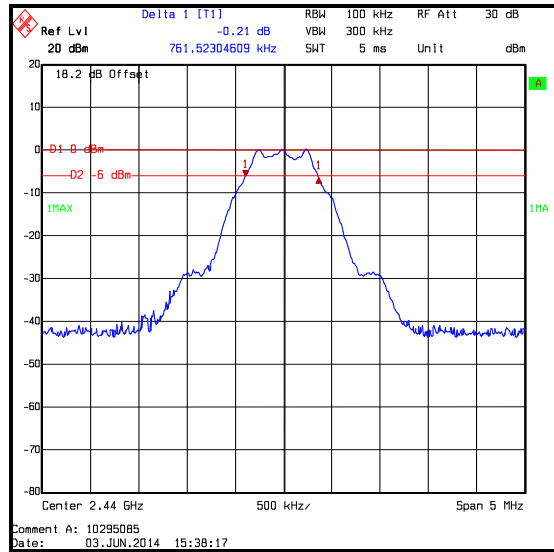

**Middle Channel**

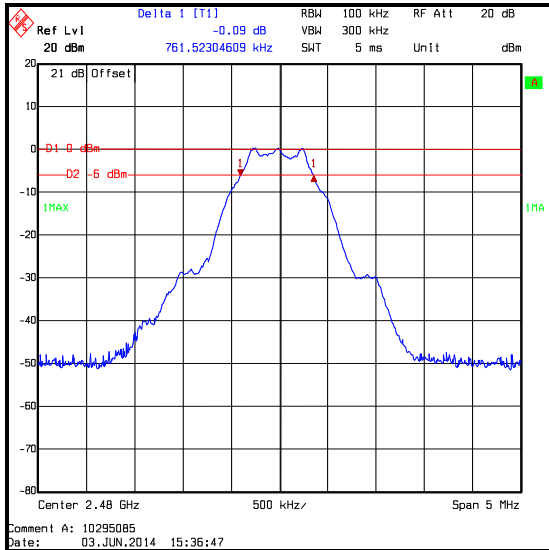

**Top Channel**



**Transmitter Minimum 6 dB Bandwidth (continued)****Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1657	Thermohygrometer	JM Handelspunkt	30.5015.13	Not stated	14 Mar 2015	12
M127	Spectrum Analyser	Rohde & Schwarz	FSEB 30	842 659/016	19 Aug 2014	12
A1998	Attenuator	Huber & Suhner	6820.17.B	07101	Calibrated before use	-
G0608	Signal Generator	Rohde & Schwarz	SMIQ 06B	838341/033	14 Feb 2015	12
M199	Power Meter	Rohde & Schwarz	NRVS	827023/075	08 Apr 2016	24
M1267	Power Sensor	Rohde & Schwarz	NRV-Z52	100155	23 Apr 2016	24
A1256	Power Supply Unit	Farnell	11E30/1B	000378	Calibrated before use	-
M1229	Multimeter	Fluke	179	87640015	24 Apr 2015	12

**5.2.3. Transmitter Duty Cycle****Test Summary:**

<b>Test Engineer:</b>	Nick Steele	<b>Test Date:</b>	03 June 2014
<b>Test Sample IMEI:</b>	004402452706157		

<b>FCC Reference:</b>	Part 15.35(c)
<b>Test Method Used:</b>	As detailed in FCC KDB 558074 Section 6.0

**Environmental Conditions:**

<b>Temperature (°C):</b>	24
<b>Relative Humidity (%):</b>	38

**Note(s):**

1. In order to assist with the determination of the average level of fundamental and spurious emissions field strength, measurements were made of duty cycle to determine the transmission duration and the silent period time of the transmitter. The transmitter duty cycle was measured using a spectrum analyser in the time domain and calculated by using the following calculation:

$$10 \log (1 / (\text{On Time} / \text{Period}))$$


$$10 \log (1 / (389.429 \mu\text{s} / 627.906 \mu\text{s})) = 2.1 \text{ dB}$$

**Transmitter Duty Cycle (continued)**


**Results:**

Pulse Duration (µs)	Duty Cycle Correction (dB)
389.429	2.1


Period (µs)
627.906

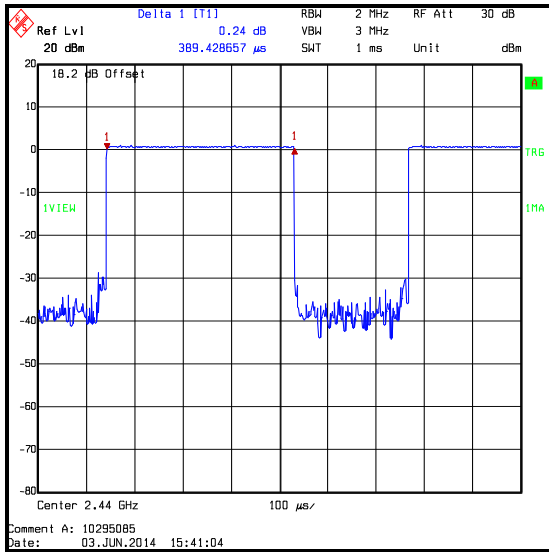

**TX on time**

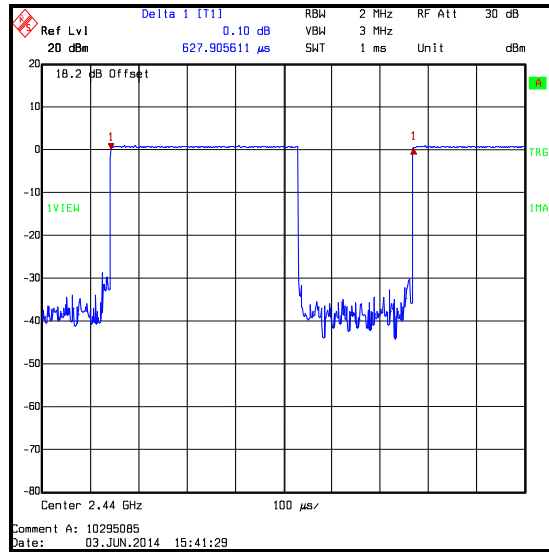

**TX on + off time / period**

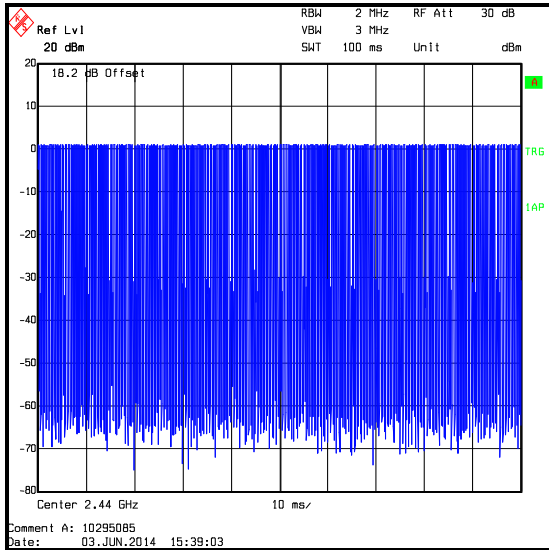

**100 ms**

**Transmitter Duty Cycle (continued)****Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1657	Thermohygrometer	JM Handelspunkt	30.5015.13	Not stated	14 Mar 2015	12
M127	Spectrum Analyser	Rohde & Schwarz	FSEB 30	842 659/016	19 Aug 2014	12
A1998	Attenuator	Huber & Suhner	6820.17.B	07101	Calibrated before use	-
A1256	Power Supply Unit	Farnell	11E30/1B	000378	Calibrated before use	-
M1229	Multimeter	Fluke	179	87640015	24 Apr 2015	12

**5.2.4. Transmitter Maximum Peak Output Power****Test Summary:**

<b>Test Engineer:</b>	Nick Steele	<b>Test Date:</b>	03 June 2014
<b>Test Sample IMEI:</b>	004402452706157		

<b>FCC Reference:</b>	Part 15.247(b)(3)
<b>Test Method Used:</b>	As detailed in FCC KDB 558074 Section 9.1.1

**Environmental Conditions:**

<b>Temperature (°C):</b>	24
<b>Relative Humidity (%):</b>	39

**Note(s):**


1. Conducted power tests were performed using a test receiver in accordance with FCC KDB 558074 Section 9.1.1 with the RBW  $\geq$  DTS bandwidth.
2. The spectrum analyser was connected to the RF port on the EUT using suitable attenuation and RF cable. An RF level offset was entered on the spectrum analyser to compensate for the loss of the attenuator and RF cable.

**Results:**


Channel	Conducted Peak Power (dBm)	Conducted Peak Power Limit (dBm)	Margin (dB)	Result
Bottom	0.6	30.0	29.4	Complied
Middle	4.1	30.0	25.9	Complied
Top	1.5	30.0	28.5	Complied

Channel	Conducted Peak Power (dBm)	Declared Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Bottom	0.6	-3.5	-2.9	36.0	38.9	Complied
Middle	4.1	-3.5	0.6	36.0	35.4	Complied
Top	1.5	-3.5	-2.0	36.0	38.0	Complied


**Transmitter Maximum Peak Output Power (continued)**

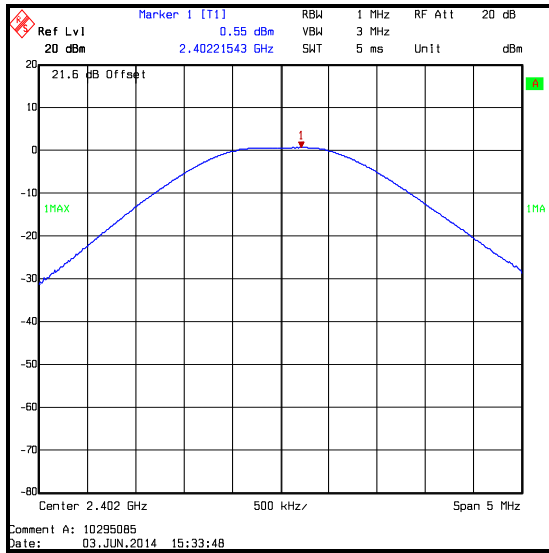

**Bottom Channel**

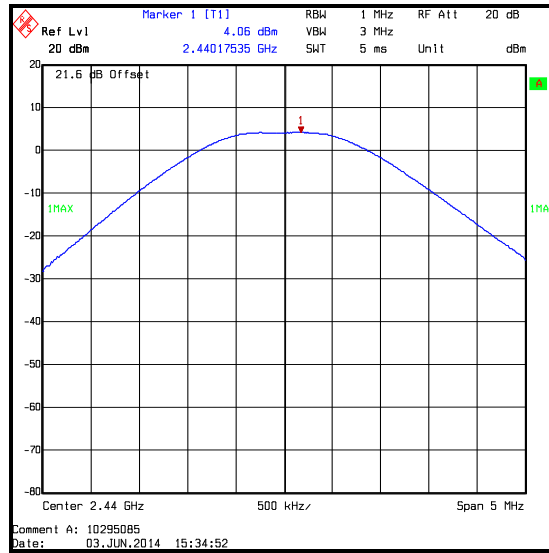

**Middle Channel**

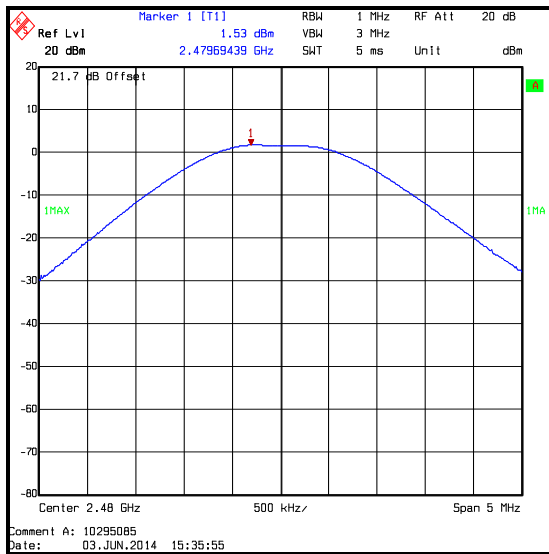

**Top Channel**

**Transmitter Maximum Peak Output Power (continued)****Test Equipment Used:**

<b>Asset No.</b>	<b>Instrument</b>	<b>Manufacturer</b>	<b>Type No.</b>	<b>Serial No.</b>	<b>Date Calibration Due</b>	<b>Cal. Interval (Months)</b>
M1657	Thermohygrometer	JM Handelspunkt	30.5015.13	Not stated	14 Mar 2015	12
M127	Spectrum Analyser	Rohde & Schwarz	FSEB 30	842 659/016	19 Aug 2014	12
A1998	Attenuator	Huber & Suhner	6820.17.B	07101	Calibrated before use	-
G0608	Signal Generator	Rohde & Schwarz	SMIQ 06B	838341/033	14 Feb 2015	12
M199	Power Meter	Rohde & Schwarz	NRVS	827023/075	08 Apr 2016	24
M1267	Power Sensor	Rohde & Schwarz	NRV-Z52	100155	23 Apr 2016	24
A1256	Power Supply Unit	Farnell	11E30/1B	000378	Calibrated before use	-
M1229	Multimeter	Fluke	179	87640015	24 Apr 2015	12

**5.2.5. Transmitter Radiated Emissions****Test Summary:**

<b>Test Engineer:</b>	Georgios Vrezas	<b>Test Date:</b>	10 June 2014
<b>Test Sample IMEI:</b>	004402452705373		

<b>FCC Reference:</b>	Parts 15.247(d) & 15.209(a)
<b>Test Method Used:</b>	As detailed in ANSI C63.10 Sections 6.3 and 6.5 referencing ANSI C63.4
<b>Frequency Range</b>	9 kHz to 1000 MHz

**Environmental Conditions:**

<b>Temperature (°C):</b>	25
<b>Relative Humidity (%):</b>	34

**Note(s):**


1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. The preliminary scans showed similar emission levels below 1 GHz, for each channel of operation. Therefore final radiated emissions measurements were performed with the EUT set to the top channel only.
3. In accordance with FCC part 15.33, pre-scans were performed from 9 kHz to 30 MHz. As there were no emissions observed within 20 dB of the limit, in accordance with 15.31(o), no pre-scans are included in this test report. The pre-scans are kept on file and available upon request.
4. All emissions shown on the pre-scan plot below were investigated and found to be ambient, or >20 dB below the applicable limit or below the measurement system noise floor. Therefore the highest peak noise floor reading of the measuring receiver was recorded in the table below.
5. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

**Results: Top Channel**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
973.768	Horizontal	33.8	54.0	20.2	Complied



**Transmitter Radiated Emissions (continued)**

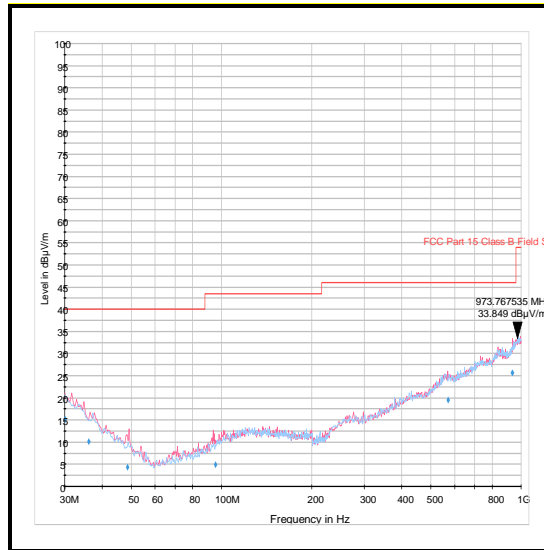

**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1622	Thermohygrometer	JM Handelpunkt	30.5015.06	None stated	31 Dec 2014	12
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	26 Nov 2014	12
A1834	Attenuator	Hewlett Packard	8491B	10444	15 Nov 2014	12
G0543	Amplifier	Sonoma	310N	230801	19 Aug 2014	3
M1273	Test Receiver	Rohde & Schwarz	ESIB 26	100275	15 Feb 2015	12
A490	Antenna	Chase	CBL6111A	1590	29 Apr 2015	12

**Transmitter Radiated Emissions (continued)****Test Summary:**

<b>Test Engineer:</b>	Andrew Edwards	<b>Test Date:</b>	05 June 2014
<b>Test Sample IMEI:</b>	004402452705316		

<b>FCC Reference:</b>	Parts 15.247(d) & 15.209(a)
<b>Test Method Used:</b>	As detailed in ANSI C63.10 Sections 6.3 and 6.6 referencing ANSI C63.4
<b>Frequency Range</b>	1 GHz to 25 GHz

**Environmental Conditions:**

<b>Temperature (°C):</b>	25
<b>Relative Humidity (%):</b>	39





**Note(s):**

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. No spurious emissions were detected above the noise floor of the measuring receiver therefore the highest peak noise floor reading of the measuring receiver was recorded as shown in the table above. The peak level was compared to the average limit as opposed to being compared to the peak limit because this is the more onerous limit.
3. The emission shown on the 1 GHz to 4 GHz plot is the EUT fundamental.
4. Pre-scans above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.



**Results:**

<b>Frequency (MHz)</b>	<b>Antenna Polarity</b>	<b>Peak Level (dB<math>\mu</math>V/m)</b>	<b>Average Limit (dB<math>\mu</math>V/m)</b>	<b>Margin (dB)</b>	<b>Result</b>
16586.538	Vertical	50.6	54.0	3.4	Complied

**Transmitter Radiated Emissions (continued)**

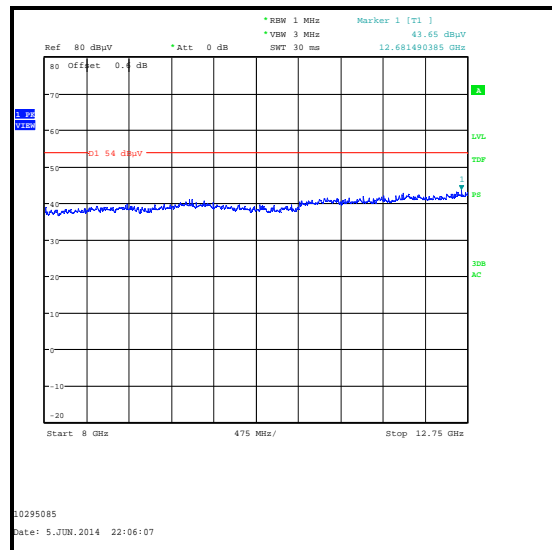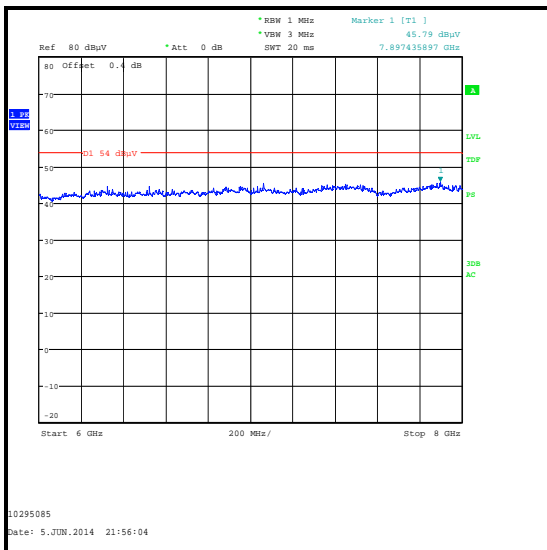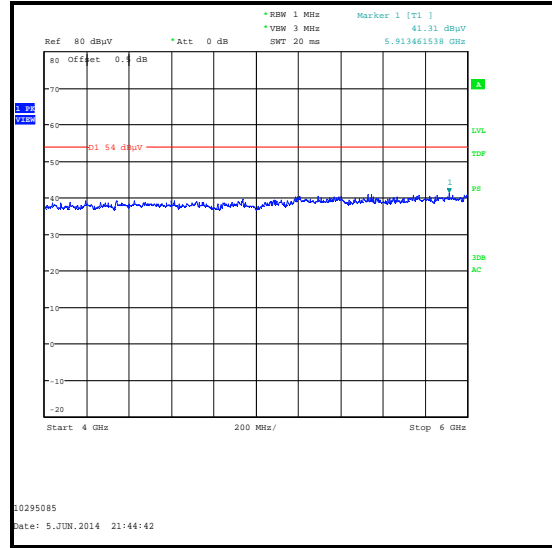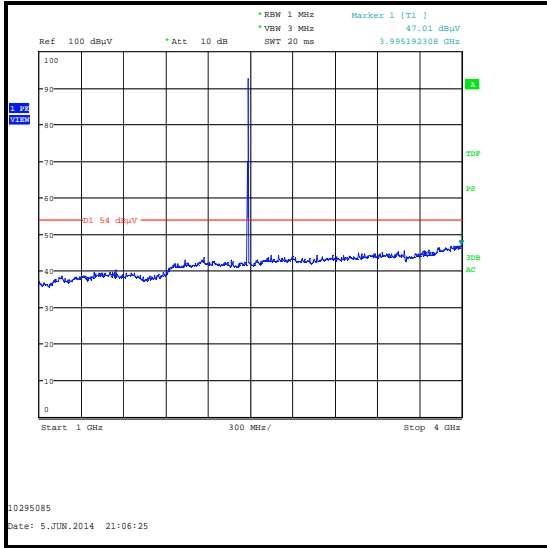

**Transmitter Radiated Emissions (continued)**

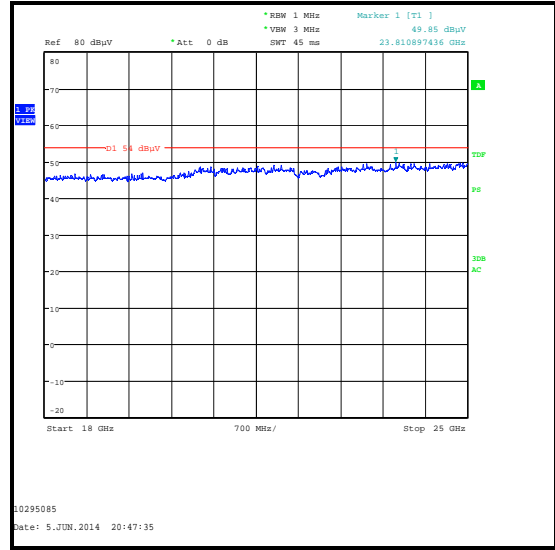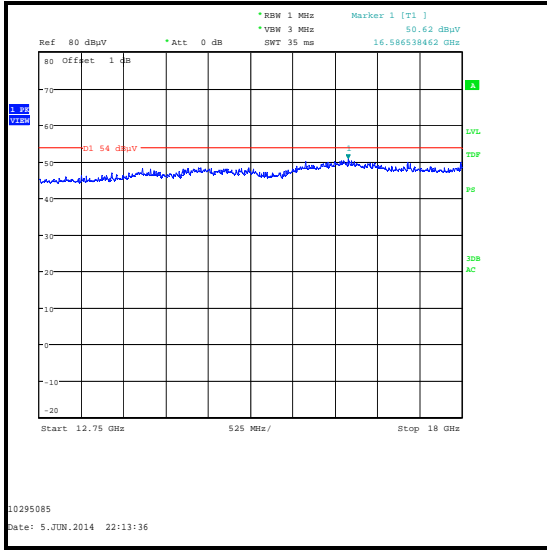

**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1656	Thermohygrometer	JM Handelpunkt	30.5015.13	None stated	14 Mar 2015	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	14 Nov 2014	12
M1874	Test Receiver	Rohde & Schwarz	ESU26	100553	13 May 2015	12
A1534	Pre Amplifier	Hewlett Packard	8449B	3008A00405	18 May 2015	12
A1818	Antenna	EMCO	3115	00075692	14 Nov 2014	12
A253	Antenna	Flann Microwave	12240-20	128	14 Nov 2014	12
A254	Antenna	Flann Microwave	14240-20	139	14 Nov 2014	12
A255	Antenna	Flann Microwave	16240-20	519	14 Nov 2014	12
A256	Antenna	Flann Microwave	18240-20	400	14 Nov 2014	12
A436	Antenna	Flann Microwave	20240-20	330	14 Nov 2014	12
A1974	High Pass Filter	AtlanTecRF	AFH-03000	090424010	12 Apr 2015	12
A2176	High Pass Filter	AtlanTecRF	AFH-07000	800980	12 Apr 2015	12

**5.2.6. Transmitter Band Edge Radiated Emissions****Test Summary:**

<b>Test Engineer:</b>	Andrew Edwards	<b>Test Date:</b>	05 June 2014
<b>Test Sample IMEI:</b>	004402452705316		

<b>FCC Reference:</b>	Parts 15.247(d) & 15.209(a)
<b>Test Method Used:</b>	ANSI C63.10 Section 6.9.2 & FCC KDB 558074 Section 11

**Environmental Conditions:**

<b>Temperature (°C):</b>	24
<b>Relative Humidity (%):</b>	39

**Note(s):**

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. The maximum peak conducted output power was previously measured. In accordance with FCC KDB 558074 Section 11.1(a), the lower band edge measurement should be performed with a peak detector and the -20 dBc limit applied.
3. \* 20 dBc limit.


**Results: Peak**

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2399.038	42.3	75.2*	32.9	Complied
2400.0	41.3	75.2*	33.9	Complied
2483.5	55.7	74.0	18.3	Complied


**Results: Average**

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2483.5	45.3	54.0	8.7	Complied


**Transmitter Band Edge Radiated Emissions (continued)**

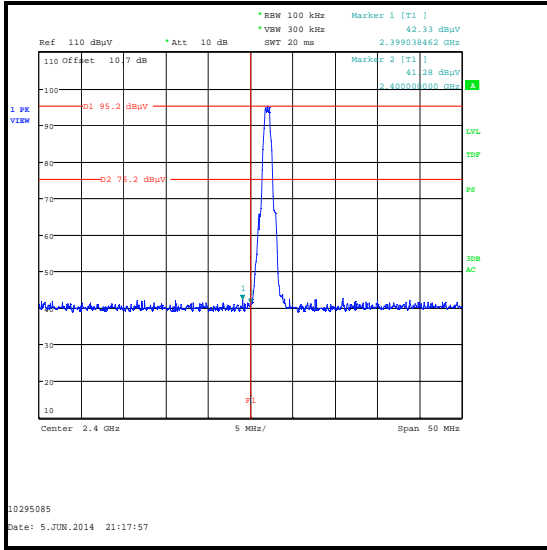

**Lower Band Edge Peak Measurement**

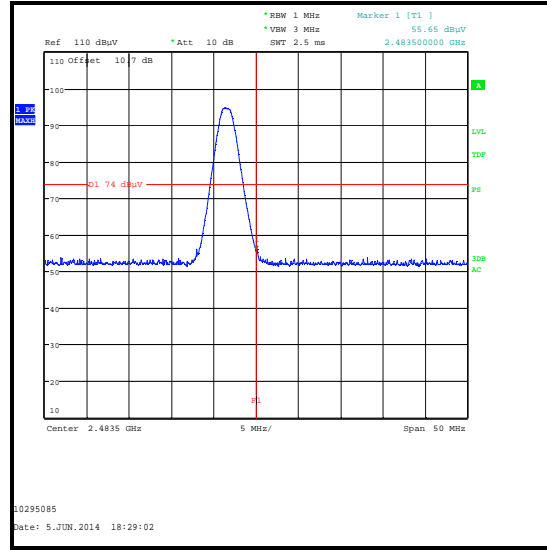

**Upper Band Edge Peak Measurement**

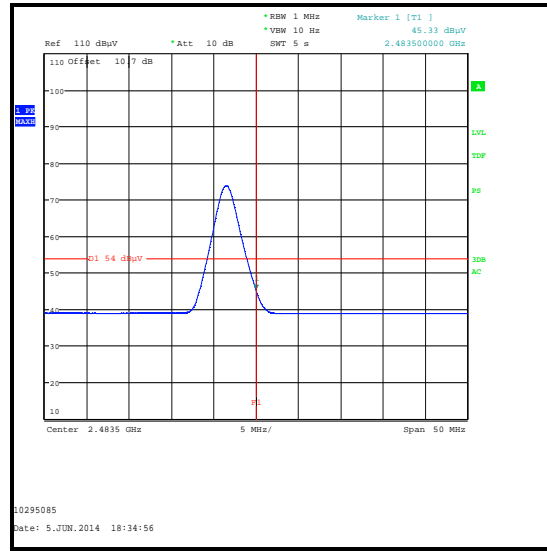

**Upper Band Edge Average Measurement**

**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1656	Thermohygrometer	JM Handelspunkt	30.5015.13	None stated	14 Mar 2015	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	14 Nov 2014	12
M1874	Test Receiver	Rohde & Schwarz	ESU26	100553	13 May 2015	12
A1534	Pre Amplifier	Hewlett Packard	8449B	3008A00405	18 May 2015	12
A1818	Antenna	EMCO	3115	00075692	14 Nov 2014	12
A1396	Attenuator	Huber & Suhner	6810.17.B	757987	02 May 2015	12

## **6. Measurement Uncertainty**

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value measured (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

<b>Measurement Type</b>	<b>Range</b>	<b>Confidence Level (%)</b>	<b>Calculated Uncertainty</b>
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	±4.69 dB
Maximum Peak Output Power	2.4 GHz to 2.4835 GHz	95%	±1.13 dB
Minimum 6 dB Bandwidth	2.4 GHz to 2.4835 GHz	95%	±3.92 %
Radiated Spurious Emissions	30 MHz to 1 GHz	95%	±5.65 dB
Radiated Spurious Emissions	1 GHz to 26.5 GHz	95%	±2.94 dB
Duty Cycle	2.4 GHz to 2.4835 GHz	95%	±0.3 ns

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

## **7. Report Revision History**

Version Number	Revision Details		
	Page No(s)	Clause	Details
1.0	-	-	Initial Version
2.0	-	-	Admin update
3.0	-	-	EUT Description update

--- END OF REPORT ---