

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15CBT_RM-1127_14.docx	Date of Report:	28-Aug-2015
Number of pages:	10	Customer's Contact person:	Tero Huhtala
Testing laboratory:	TCC Microsoft Tampere Laboratory P.O. Box 403 Visiokatu 3 FIN-33101 TAMPERE, FINLAND Tel. +358 71 800 8000 Fax. +358 71 804 6880	Customer:	Microsoft P.O. Box 403 Visiokatu 4 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880
FCC listing no.:	94436		
IC recognition no.:	661AK-1		
Tested devices/ accessories:	Phone RM-1127 / Battery BL-T5A Samsung / Charger AC-18E / Headset WH-108		
FCC ID:	PYARM-1127	IC:	-
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2014), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards, RSS-210 (Issue 8, December 2010). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Microsoft.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Timo Raiskio, System Manager, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	18-Aug-2015
Testing completed	28-Aug-2015
The customer's contact person	Tero Huhtala
Test Plan referred to	T:\Projects\RM-1128\TestPlan\RS_testplan_RM-1128_BT PWR.xlsm
Notes	-
Document name	T:\Projects\RM-1127\EMC\FCC15CBT_RM-1127_14.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:

GSM/WCDMA/WLAN/Bluetooth

The EUT is tested with maximum rated TX power.

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-1128	004402742351954	1510	-	01074.00000.15353.32000	400040
Battery	BL-T5A Samsung	-	PWB v1.1	-	-	400044
Charger	AC-18E	-	-	-	-	43177
Headset	WH-108	-	-	-	-	43046

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4(2)	Conducted peak output power	PASSED
15.247(d), 15.205(b)	A8.5	Band edge compliance of RF emissions	NP
15.247(d)	A8.5	Spurious RF conducted emissions	NP
15.247(d), 15.209	A8.5	Spurious radiated emissions	NP
15.207	7.2.4	AC powerline conducted emissions	NP
15.247(a)(1)	A8.1(a)	20dB(bandwidth)	NP
15.247(a)(1)	A8.1(b)	Carrier frequency separation	NP
15.247(a)(1)(iii)	A8.1(d)	Number of hopping frequencies	NP
15.247(a)(1)(iii)	A8.1(d)	Time of occupancy	NP

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Microsoft Laboratory.

The test results of PYARM-1128 are re-used for certification of the PYARM-1127. The table above indicates the results, which will be re-used.


CONTENTS

1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information.....	2
1.2. Summary of Test Results	2
2. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4(2))	4
2.1. Test Setup	4
2.2. Test method and limit	4
2.3. Bluetooth Test results	6
3. Test Equipment.....	9
3.1. Conducted measurements	9
3.2. Radiated measurements	9

2. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4(2))

EUT with DUT number	RM-1128, DUT 400040
Accessories with DUT numbers	BL-T5A Samsung, DUT 400044; AC-18, DUT43177; WH-108, DUT43046
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 56 / 100.5
Date of measurements	28-Aug-2015
Measured by	Timo Raiskio

2.1. Test Setup

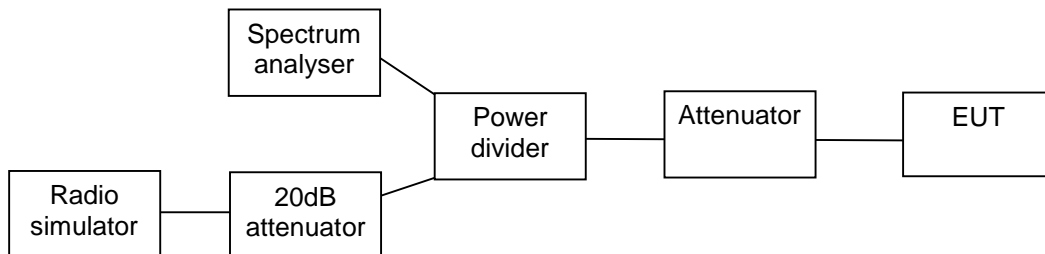

2.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	<= -20

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5 5725 - 5850	≤ 1	≤ 30

2.3. Bluetooth Test results


2.3.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	0.55	1.135	PASSED
40 / 2442	1.99	1.581	PASSED
78 / 2480	0.11	1.026	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

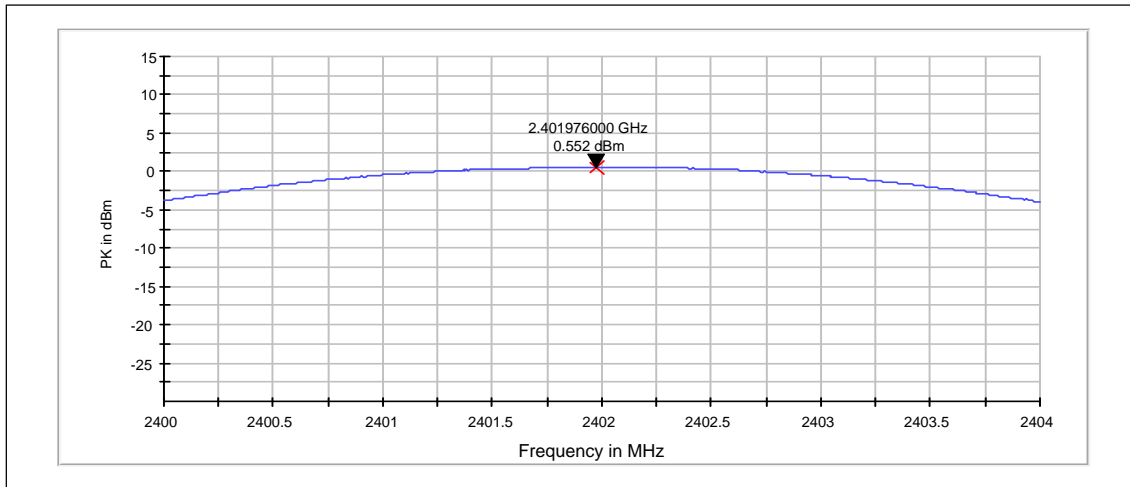

Channel 40 / 2442 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

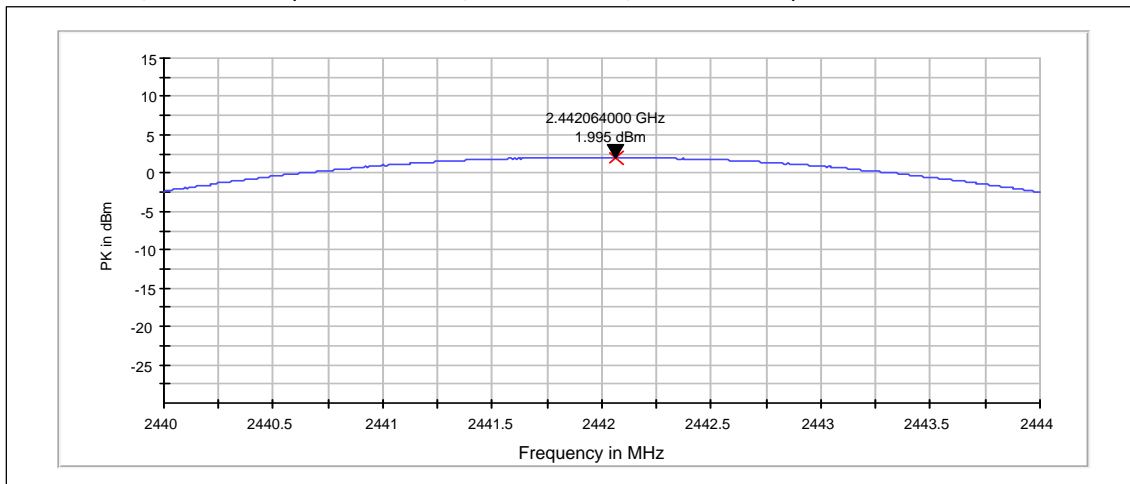


Channel 78 / 2480 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

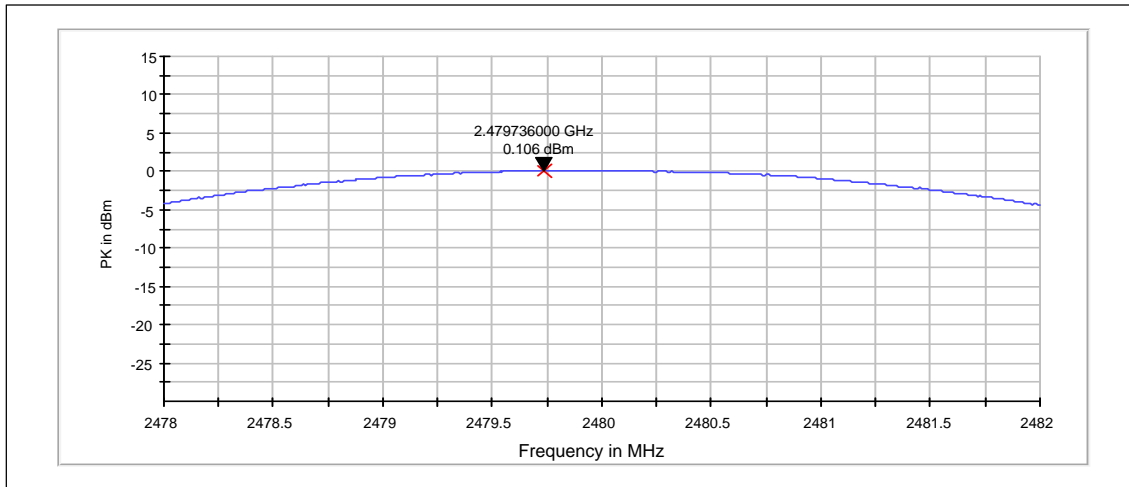


2.3.2 8DPSK modulation, PRBS packet type

Channel / f _c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	1.75	1.496	PASSED
40 / 2442	3.19	2.084	PASSED
78 / 2480	1.31	1.352	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

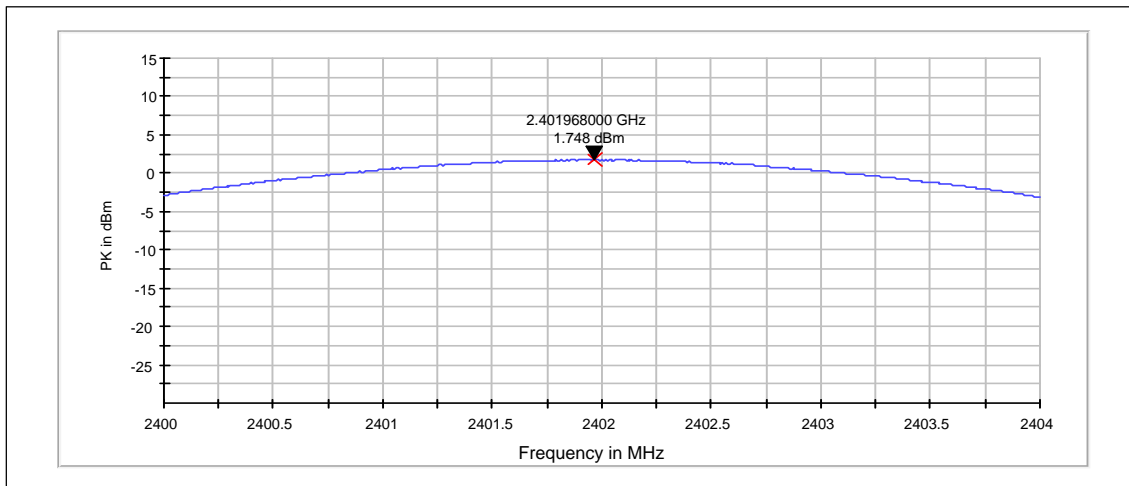

Channel 40 / 2442 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

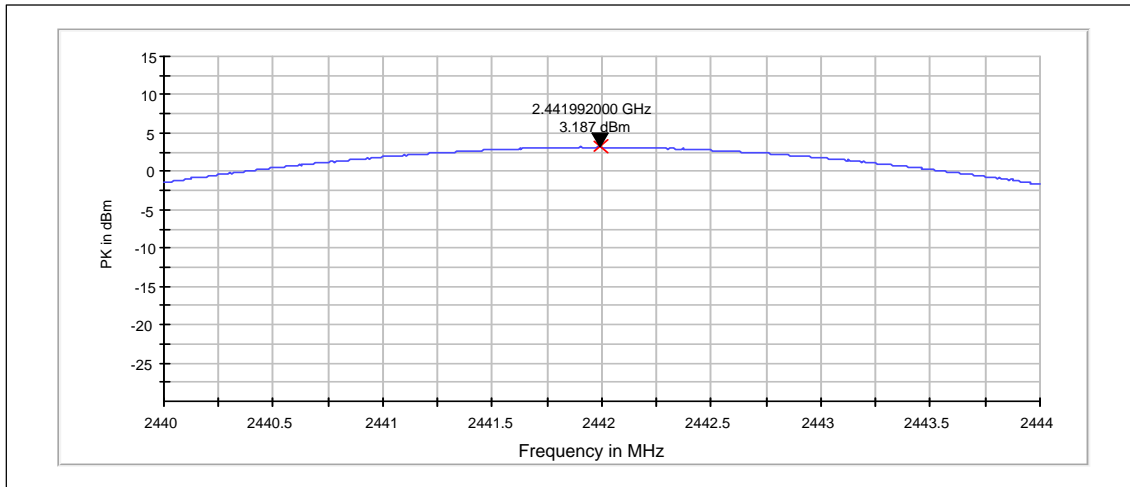

Channel 78 / 2480 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

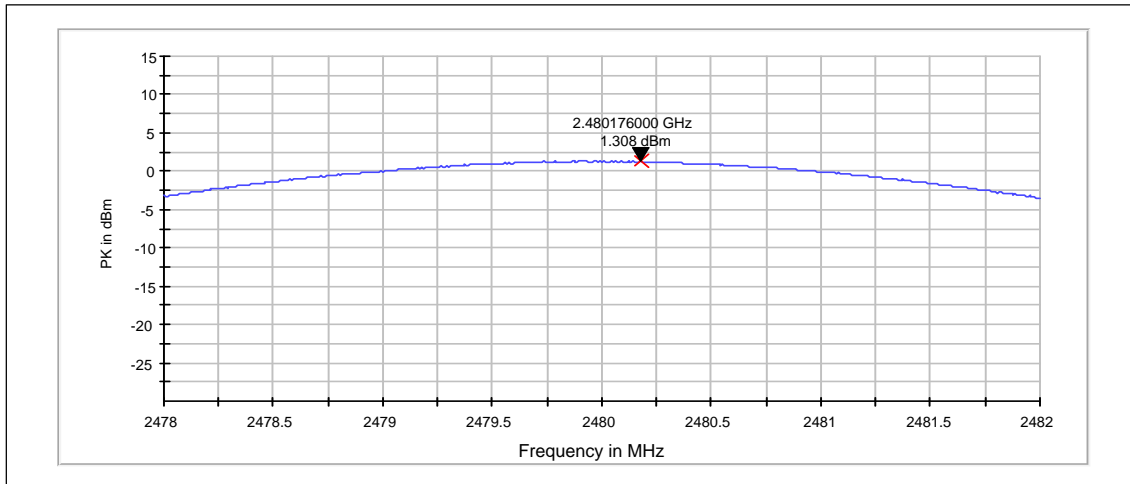

3. Test Equipment

3.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38112	Power supply	6632A	Agilent	22/24/27, 15C, 15E
TM38114	Power supply	6632A	Agilent	22/24/27, 15C, 15E
TM210233	Communication Tester	CMU200	R&S	22/24/27
TM30600	Impulse limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
TM26491	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum Analyzer	FSU26	R&S	22/24/27, 15C, 15E
TM23007	Oscilloscope	TDS684B	Tektronix	15E
TM22806	Battery	BAT 20/E	Fiskars	15C, 15B
TM22805	UPS	PS 20/1.2	Fiskars	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
-	Temperature test chamber	VT 4002	Vötsch	22/24/27
2001	Bluetooth tester	CBT	R&S	15C, 15B
2009	LISN 50 µH	ENV216	R&S	15C, 15B
2010	LISN 50 µH	ENV216	R&S	15C, 15B
2012	Power splitter	11667B	Agilent	22/24/27, 15C
2013	Attenuator	8493C	Agilent	22/24/27, 15C
2014	Attenuator	8493C	Agilent	22/24/27, 15C
2019	Power splitter	ZN2PD-9G-S+	Mini-Circuits	15E
2020	Power splitter	ZN2PD-9G-S+	Mini-Circuits	15E
2021	Communication Tester	CMW500	R&S	22/24/27
2022	Communication Tester	CMU200	R&S	22/24/27
2023	Spectrum Analyzer	ESMI-RF	R&S	15B/15C
2024	Analyzer display unit	ESAI-D	R&S	15B/15C
2026	Signal Generator	SMF 100A	R&S	22/24/27, 15C, 15E, 15B
-	Bluetooth tester	CBT	R&S	15C, 15B
-	Communication Tester	CMU200	R&S	22/24/27, 15B

3.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C
TM38845	Receiver	ESIB 26	R&S	22/24/27, 15C, 15E, 15B
-	Antenna	HL562	R&S	22/24/27, 15C, 15E, 15B
-	Turntable	2188	EMCO	22/24/27, 15C, 15E, 15B
-	Turntable controller	2090	EMCO	22/24/27, 15C, 15E, 15B
-	RF system panel	OSP130	R&S	22/24/27, 15C, 15E, 15B
-	Mini mast	2075-2	ETS Lindgren	22/24/27, 15C, 15B
TM38843	Mini mast	2075	Emco	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	Emco	22/24/27, 15C, 15B
TM30643	LISN 50 µH	LISN-5-20-2	FCC	22/24/27, 15C, 15B
TM30644	LISN 50 µH	LISN-5-20-2	FCC	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C, 15B
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	Miteq	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	Miteq	22/24/27, 15C, 15B
TM30599	Semi anechoic chamber	UNKNOWN	TDK	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	-	22/24/27, 15C, 15E, 15B
TM38066	High pass filter	WHKX3.0/18G-12SS	Wainwright	22/24/27, 15C, 15E, 15B
2028	High pass filter	WHKX 1.0/15G-12SS	Wainwright	22/24/27, 15C, 15E, 15B
TM37545	Tunable notch filter	800.0/960.0-0.2/40-8SSK	Wainwright	22
TM26512	Tunable notch filter	WRCD1850/1910-0.2/40-10SSK	Wainwright	24
-	Band reject filter	WRCG1877/1883-1870/1890-40/6EE	Wainwright	24
-	Band reject filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
TM23892	Controller	G-1000SDX	Yaesu	22/24/27, 15C, 15E
2001	Bluetooth tester	CBT	R&S	15C, 15B
2002	Communication Tester	CMU200	R&S	22/24/27, 15B
6023	Antenna	VUBA 9117	Schwarzbeck	22/24/27
2021	Communication Tester	CMW500	R&S	22/24/27
2025	Antenna	HFH2-Z2	R&S	15C
2026	Signal Generator	SMF 100A	R&S	22/24/27, 15C, 15E, 15B
2052	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C, 15B, 15E
-	Antenna	QSH18S20	Q-Par	22/24/27, 15C, 15B, 15E
-	Antenna	QSH20S20	Q-Par	22/24/27, 15C, 15B, 15E
-	Antenna	QSH20S20	Q-Par	22/24/27, 15C, 15B, 15E
-	Bluetooth tester	CBT	R&S	15C, 15B