

## FCC Part 15C Compliance Test Report

<b>Test Report no.:</b>	FCC15CWLAN_RM-1127_10.docx	<b>Date of Report:</b>	28-Aug-2015
<b>Number of pages:</b>	40	<b>Customer's Contact person:</b>	Tero Huhtala
<b>Testing laboratory:</b>	TCC Microsoft Beijing Laboratory Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550	<b>Customer:</b>	Microsoft P.O. Box 403 Visiokatu 4 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880
<b>FCC listing no.:</b>	975940		
<b>IC recognition no.:</b>	661AH-1		
<b>Tested devices/ accessories:</b>	<b>Phone RM-1127 / Cover CC-3097 / Battery Samsung BL-T5A / AC-Charger AC-18U / Headset WH-108</b>		
<b>FCC ID:</b>	PYARM-1127	<b>IC:</b>	-
<b>Supplement reports:</b>	-		
<b>Testing has been carried out in accordance with:</b>	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2014), DTS procedures KDB 558074, IC standards, RSS-210 (Issue 8, December 2010). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
<b>Documentation:</b>	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Microsoft.		
<b>Test Results:</b>	<b>The EUT complies with the requirements in respect of all parameters subject to the test.</b> The test results relate only to devices specified in this document		
<b>Date and signature for the contents:</b>			

Jia Dongsheng, Manager

# 1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	15-Jun-2015
Testing completed	26-Aug-2015
The customer's contact person	Tero Huhtala
Test Plan referred to	T:\Projects\RM-1128\TestPlan\RS_testplan_RM-1128.xlsm
Notes	-
Document name	FCC15CWLAN_RM-1127_10.docx

## 1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:

GSM/WCDMA/WLAN/Bluetooth

The EUT is tested with maximum rated TX power.

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-1128	004402742351970	1510	-	01065.00000.15265.37000	500100
Cover	CC-3097	-	-	-	-	500127
Battery	Samsung BL-T5A	5241525213V10200063;0670778	PWB Ver.1.1	-	-	500101
AC-Charger	AC-18U	4818715115100100661;0675735	-	-	-	500124
Headset	WH-108	-	-	-	-	500121
Phone	RM-1128	004402742351913	1510	-	01065.00000.15265.37000	500110
Cover	CC-3097	-	-	-	-	500128
Battery	Samsung BL-T5A	5241525213V10205754;0670778	PWB Ver.1.1	-	-	500117
AC-Charger	AC-18U	418715115100100658;0675735	-	-	-	500122
Headset	WH-108	-	-	-	-	500103

## 1.2. Summary of Test Results

WLAN:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4(4)	Conducted peak output power	PASSED
15.247(d), 15.205(b)	A8.5	Band edge compliance of RF emissions	PASSED
15.247(d)	A8.5	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8.5	Spurious radiated emissions	PASSED
15.207	7.2.4	AC powerline conducted emissions	PASSED
15.247(a)(2)	A8.2(a)	6dB(bandwidth)	PASSED
15.247(e)	A8.2(b)	Power spectral density	PASSED

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Microsoft Laboratory.

The test results of PYARM-1128 are re-used for certification of the PYARM-1127. The table above indicates the results, which will be re-used.

## CONTENTS

<b>1. Summary for FCC Part 15C Compliance Test Report.....</b>	<b>2</b>
1.1. EUT and Accessory Information.....	2
1.2. Summary of Test Results.....	2
<b>2. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4(4)) .....</b>	<b>5</b>
2.1. Test Setup .....	5
2.2. Test method and limit .....	5
2.3. Power results summary .....	6
2.4. WLAN Test results.....	7
<b>3. Band edge compliance of RF emissions (FCC 15.247(d), 15.205(b), RSS-210 A8.5) .....</b>	<b>10</b>
3.2. Test method and limit .....	10
3.3. WLAN test results.....	11
<b>4. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5).....</b>	<b>15</b>
4.1. Test Setup .....	15
4.2. Test method and limit .....	15
4.3. WLAN Test results.....	16
<b>5. Spurious radiated emissions (FCC 15.247(d), 15.209, RSS-210 A8.5) .....</b>	<b>20</b>
5.2. Test method and limit .....	20
5.3. WLAN test results.....	22
<b>6. AC powerline conducted emissions (FCC §15.207, RSS-210 7.2.4).....</b>	<b>25</b>
6.1. Test Setup .....	25
6.2. Test method and limit .....	25
6.3. WLAN Test results.....	27
<b>7. 6dB(bandwidth) (FCC §15.247(a)(2), RSS-210 A8.2(a)) .....</b>	<b>28</b>
7.1. Test Setup .....	28
7.2. Test method and limit .....	28
7.3. WLAN Test results.....	30
<b>8. Power spectral density (FCC §15.247(e), RSS-210 A8.2(b)).....</b>	<b>33</b>
8.1. Test Setup .....	33
8.2. Test method and limit .....	33


---

8.3.	WLAN Test results.....	35
<b>9.</b>	<b>Test Equipment.....</b>	<b>38</b>
9.1.	Conducted measurements .....	38
9.2.	Radiated measurements .....	38

## 2. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4(4))

<b>EUT with DUT number</b>	RM-1128, DUT 500110
<b>Accessories with DUT numbers</b>	CC-3097, DUT 500128; Samsung BL-T5A, DUT 500117; AC-18U, DUT 500122; WH-108, DUT 500103
<b>Operation Voltage [V] / [Hz]</b>	Nominal
<b>Results</b>	PASSED
<b>Remarks</b>	Test was in conducted RF2 system.
<b>Temp [°C] / Humidity [%RH] / Air Pressure [kPa]</b>	24/50/100.2
<b>Date of measurements</b>	14-Jul-2015
<b>Measured by</b>	Dou Rubo

### 2.1. Test Setup

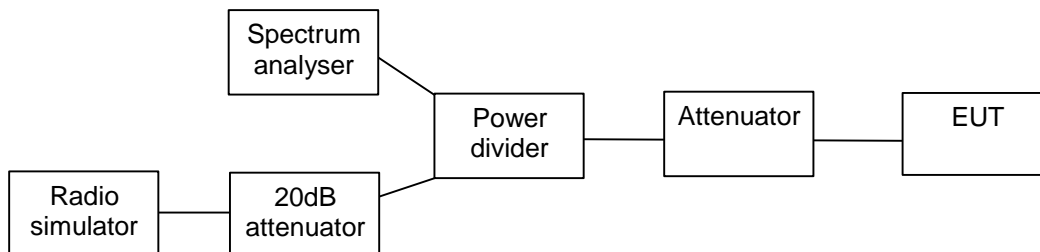

### 2.2. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for conducted peak output power measurements

Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5 5725 - 5850	<= 1	<= 30

### 2.3. Power results summary


Channel / f <sub>c</sub> [MHz]	Mode	Modulation	Data rate	Level [dBm]
1 / 2412	802.11g	BPSK	6 Mbps	22.01
6 / 2437	802.11g	BPSK	6 Mbps	25.79
11 / 2462	802.11g	BPSK	6 Mbps	22.75
1 / 2412	802.11g	16QAM	24 Mbps	21.83
6 / 2437	802.11g	16QAM	24 Mbps	26.19
11 / 2462	802.11g	16QAM	24 Mbps	22.91

## 2.4. WLAN Test results


### 2.4.1 802.11g mode, BPSK modulation, 6 Mbps data rate

Channel / fc [MHz]	P [dBm]	P [mW]	Result
1 / 2412	22.01	158.855	PASSED
6 / 2437	25.79	379.315	PASSED
11 / 2462	22.75	188.365	PASSED


#### Channel 1 / 2412 MHz

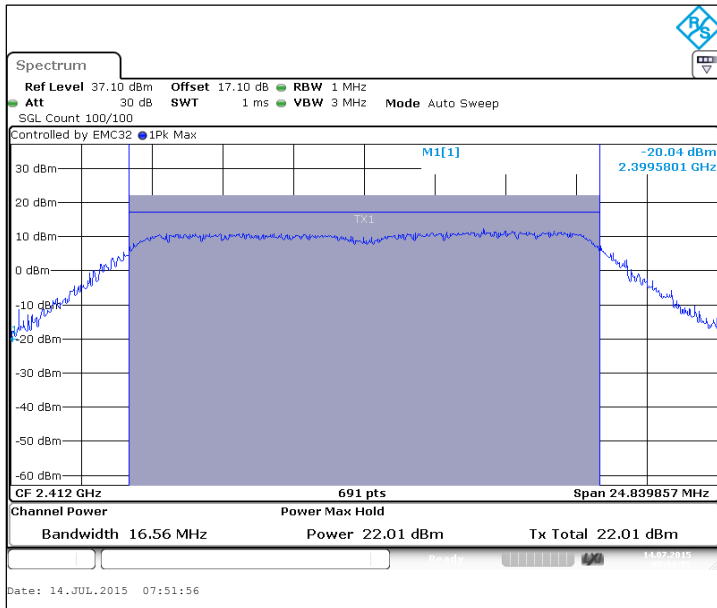

#### Channel 6 / 2437 MHz

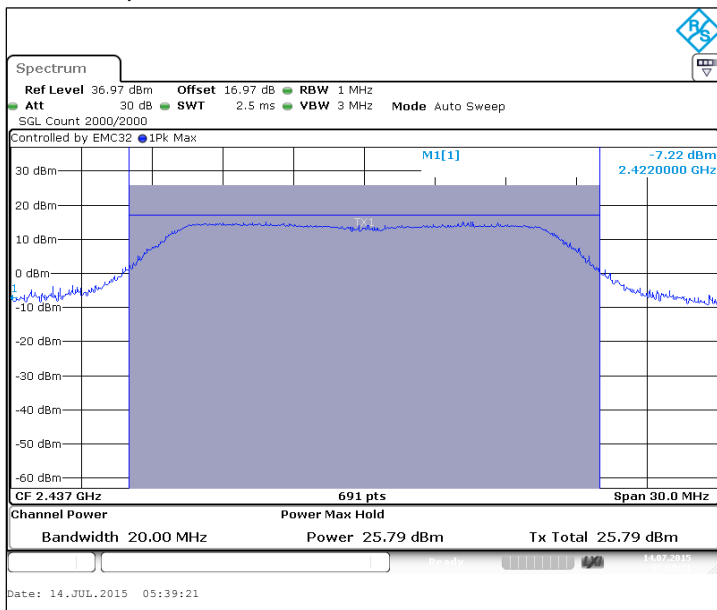


### Channel 11 / 2462 MHz

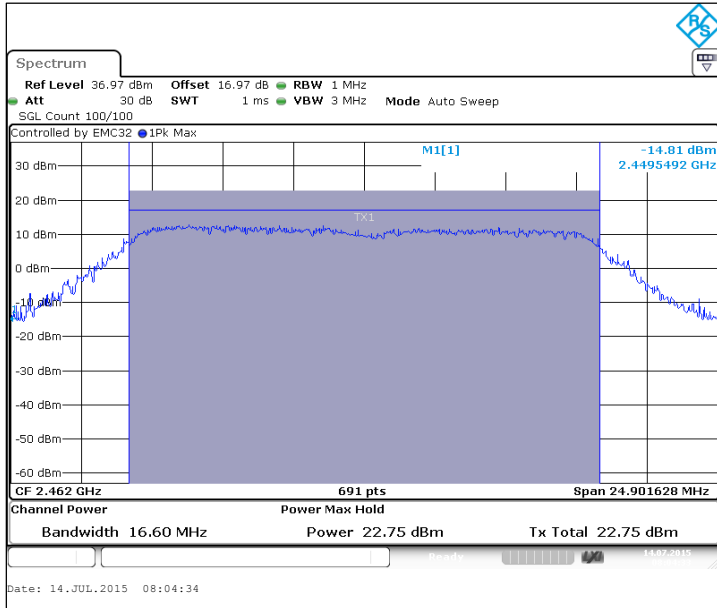

### 2.4.2 802.11g mode, 16QAM modulation, 24 Mbps data rate


Channel / f <sub>c</sub> [MHz]	P [dBm]	P [mW]	Result
1 / 2412	21.83	152.405	PASSED
6 / 2437	26.19	415.911	PASSED
11 / 2462	22.91	195.434	PASSED

### Channel 1 / 2412 MHz

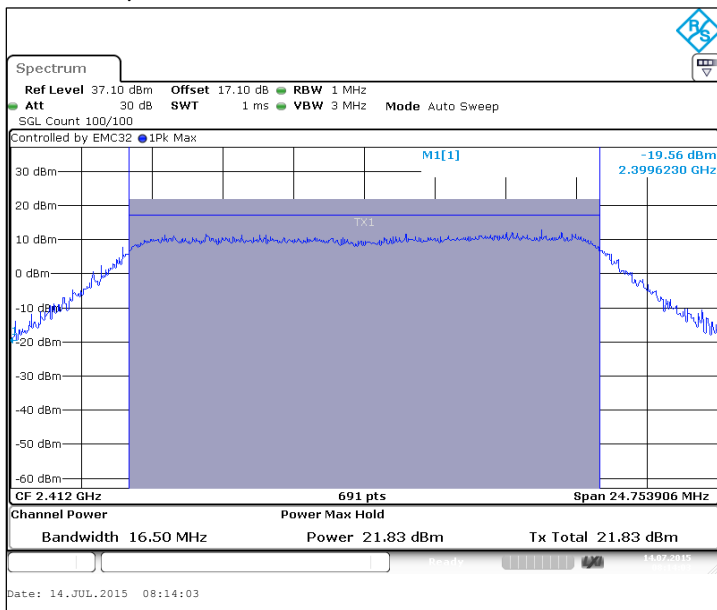




Channel 6 / 2437 MHz

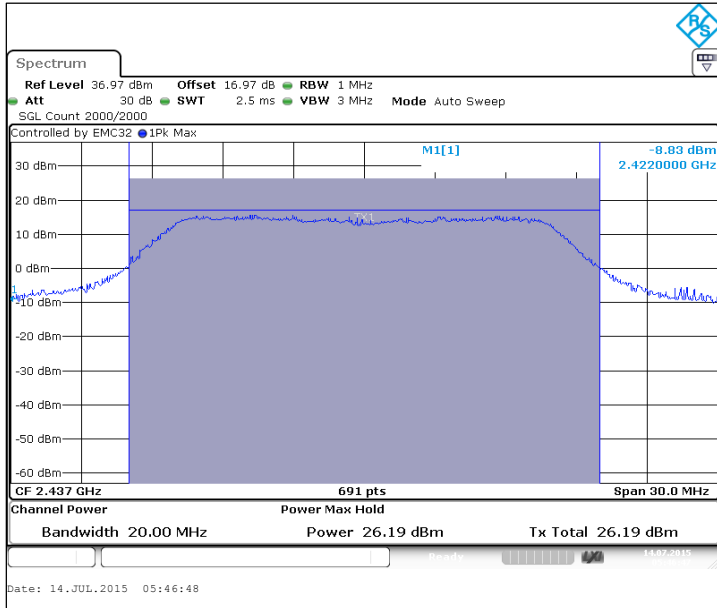


Channel 11 / 2462 MHz

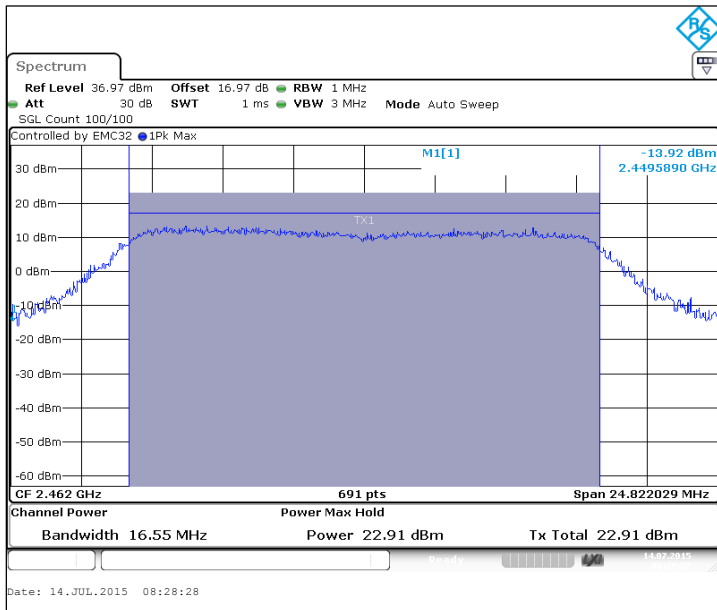

### 3. Band edge compliance of RF emissions (FCC 15.247(d), 15.205(b), RSS-210 A8.5)

<b>EUT with DUT number</b>	RM-1128, DUT 500100
<b>Accessories with DUT numbers</b>	CC-3097, DUT 500127 ; Samsung BL-T5A, DUT 500101; AC-18U, DUT 500124; WH-108, DUT 500121
<b>Operation Voltage [V] / [Hz]</b>	Nominal
<b>Results</b>	PASSED
<b>Remarks</b>	-
<b>Temp [°C] / Humidity [%RH] / Air Pressure [kPa]</b>	21/55/100.2
<b>Date of measurements</b>	15-Jul-2015
<b>Measured by</b>	Dou Rubo

#### 3.1.1 Test setup

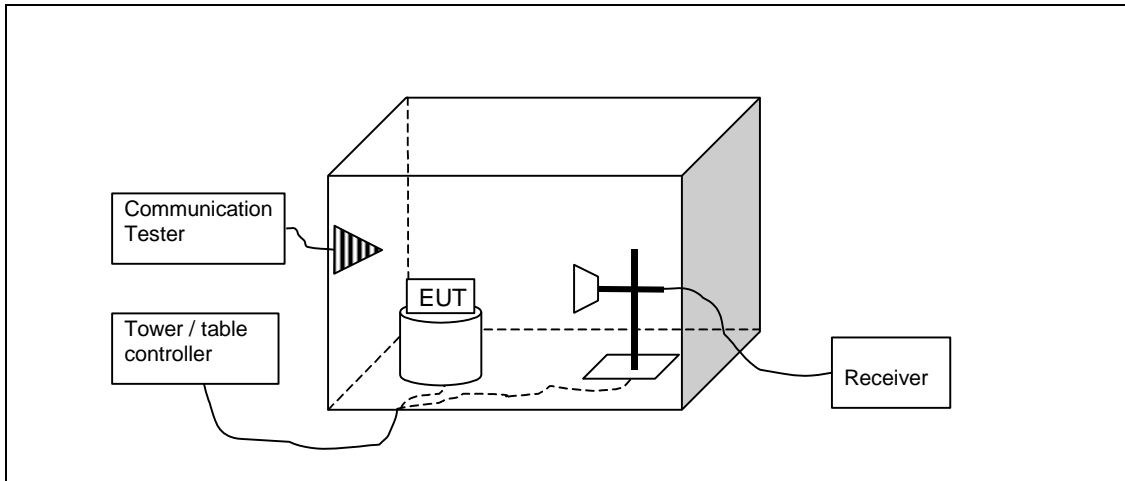

#### 3.2. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + A_{TOT}$$

Where  $U_{RX}$  is receiver reading and  $A_{TOT}$  is total correction factor including cable loss, antenna factor and preamplifier gain ( $A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$ ).


Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit
Below 2390 and above 2483.5	54 dBuV/m (avg) and 74 dBuV/m (pk)
2390 - 2400	-20 dBc (pk)

### 3.3. WLAN test results

#### 3.3.1 802.11g, BPSK modulation, 6 Mbps data rate.

Channel 1 / 2412 MHz

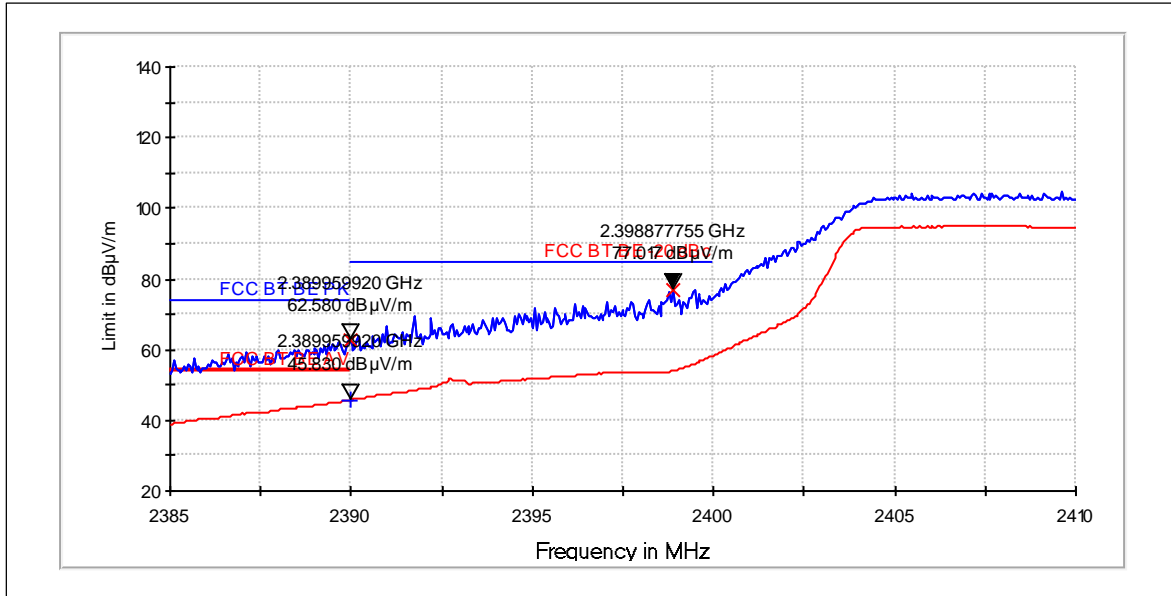


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBµV/m]	E [µV/m]	U <sub>RX</sub> [dBµV]	A <sub>TOT</sub> [dB]	Results
2390	62.58	1345.86	61.78	0.8	PASSED
2399	77.02	7093.327	76.22	0.8	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBµV/m]	E [µV/m]	U <sub>RX</sub> [dBµV]	A <sub>TOT</sub> [dB]	Results
2390	45.83	195.659	45.03	0.8	PASSED

Channel 11 / 2462 MHz

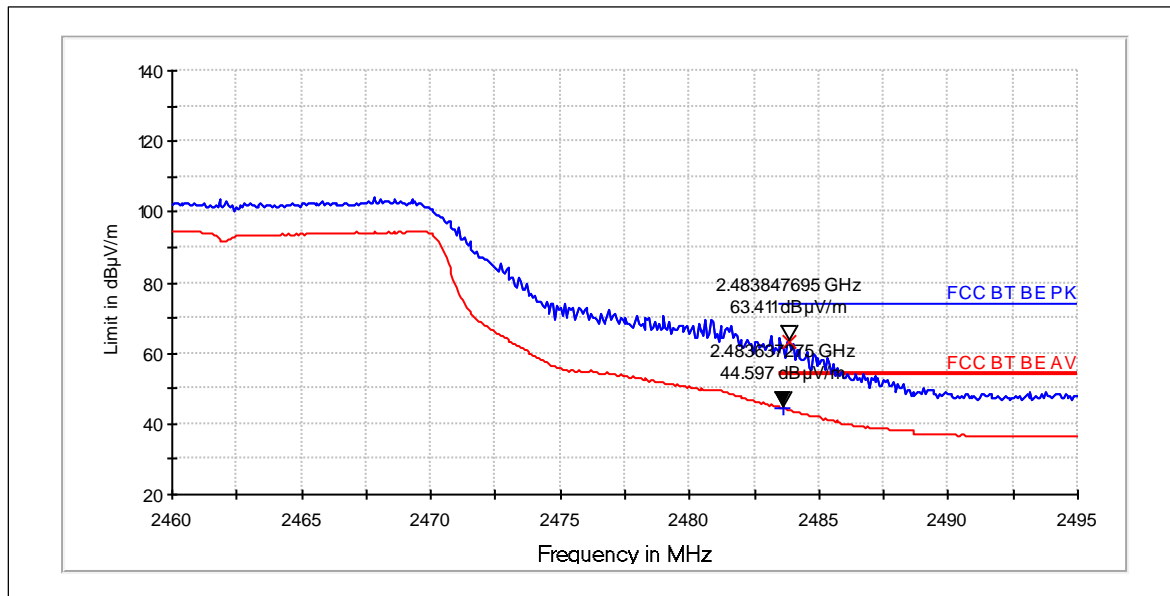

Peak (RBW: 1 MHz, VBW: 1 MHz)


Frequency [MHz]	E [dBµV/m]	E [µV/m]	U <sub>RX</sub> [dBµV]	A <sub>TOT</sub> [dB]	Results
2484	63.41	1480.983	61.78	1.63	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBµV/m]	E [µV/m]	U <sub>RX</sub> [dBµV]	A <sub>TOT</sub> [dB]	Results
2484	44.6	169.766	42.97	1.63	PASSED

### 3.3.2 802.11g, 16QAM modulation, 24 Mbps data rate.

Channel 1 / 2412 MHz

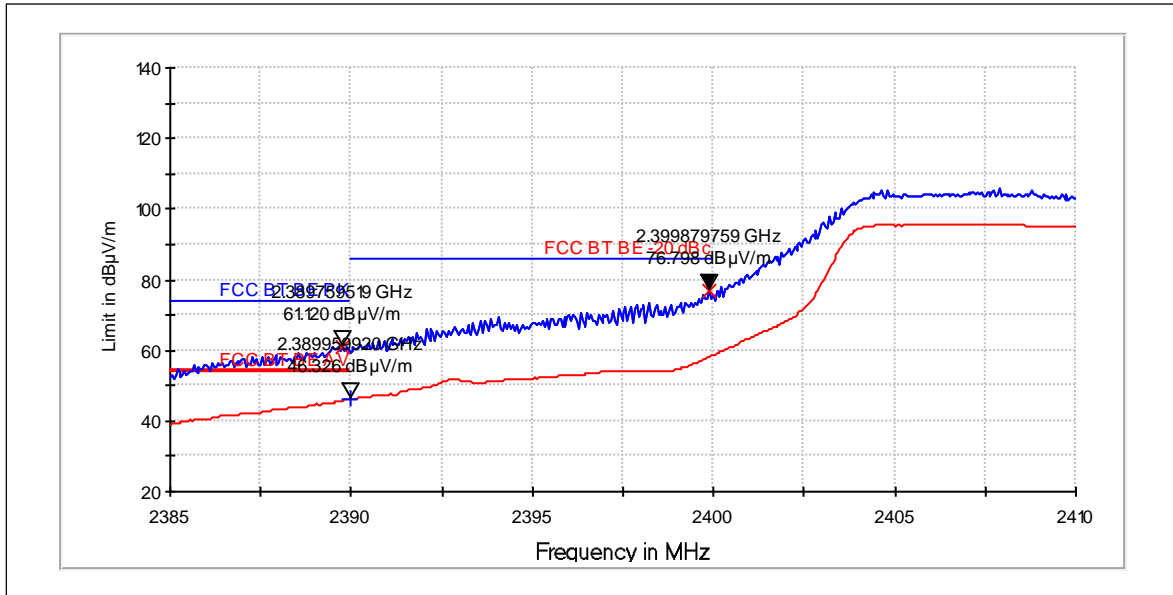


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBµV/m]	E [µV/m]	U <sub>RX</sub> [dBµV]	A <sub>TOT</sub> [dB]	Results
2390	61.12	1137.627	60.32	0.8	PASSED
2400	76.8	6916.717	76	0.8	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBµV/m]	E [µV/m]	U <sub>RX</sub> [dBµV]	A <sub>TOT</sub> [dB]	Results
2390	46.33	207.157	45.53	0.8	PASSED

Channel 11 / 2462 MHz

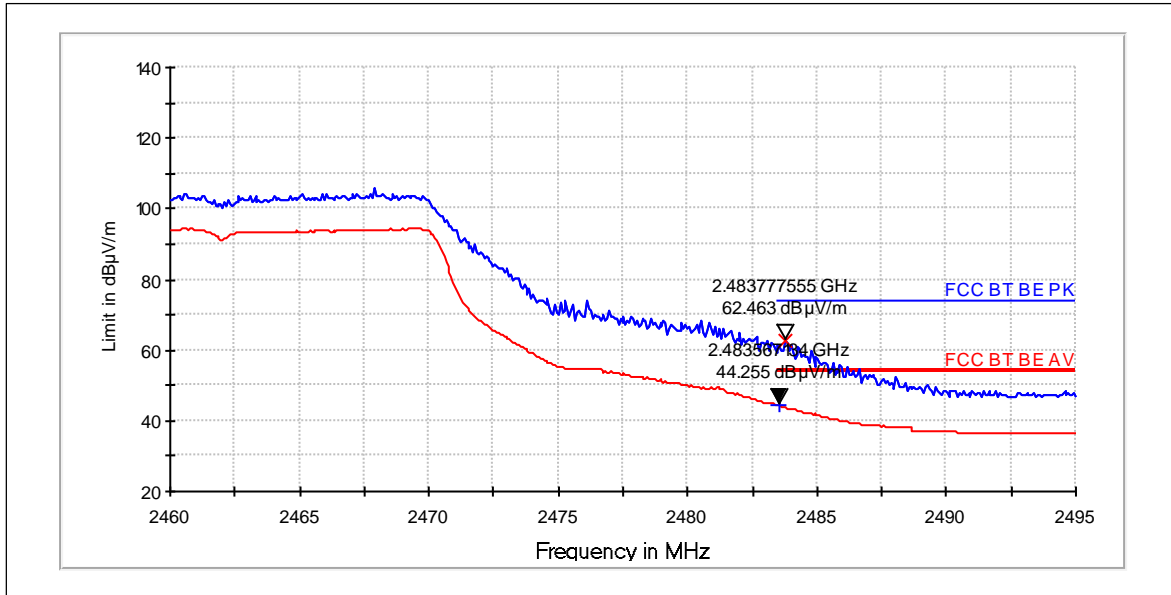

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBµV/m]	E [µV/m]	U <sub>RX</sub> [dBµV]	A <sub>TOT</sub> [dB]	Results
2484	62.46	1327.853	60.83	1.63	PASSED


Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBµV/m]	E [µV/m]	U <sub>RX</sub> [dBµV]	A <sub>TOT</sub> [dB]	Results
2484	44.26	163.211	42.63	1.63	PASSED

#### 4. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5)

<b>EUT with DUT number</b>	RM-1128, DUT 500110
<b>Accessories with DUT numbers</b>	CC-3097, DUT 500128; Samsung BL-T5A, DUT 500117; AC-18U, DUT 500122; WH-108, DUT 500103
<b>Operation Voltage [V] / [Hz]</b>	Nominal
<b>Results</b>	PASSED
<b>Remarks</b>	Test was in conducted RF2 system.
<b>Temp [°C] / Humidity [%RH] / Air Pressure [kPa]</b>	24/50/100.2
<b>Date of measurements</b>	14-Jul-2015
<b>Measured by</b>	Dou Rubo

##### 4.1. Test Setup

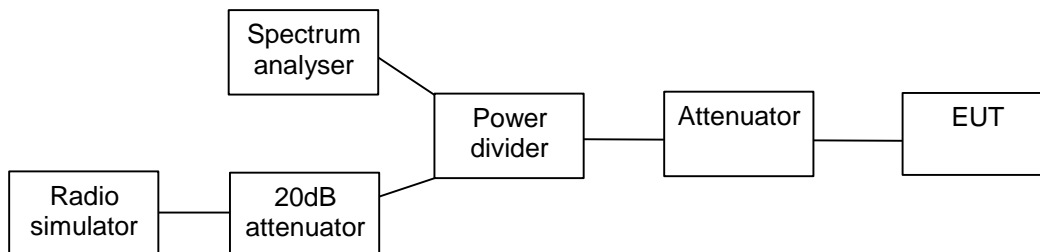

##### 4.2. Test method and limit

The measurement is made according to Public notice KDB 558 074 and IC standard RSS-210.

The reference level for the -20 dBc measurement was obtained as instructed in section 11.2 of the KDB 558074, using span of 1.5 times the OBW.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	<= -20

### 4.3. WLAN Test results

#### 4.3.1 802.11g mode, BPSK modulation, 6 Mbps data rate


Channel 1 / 2412 MHz

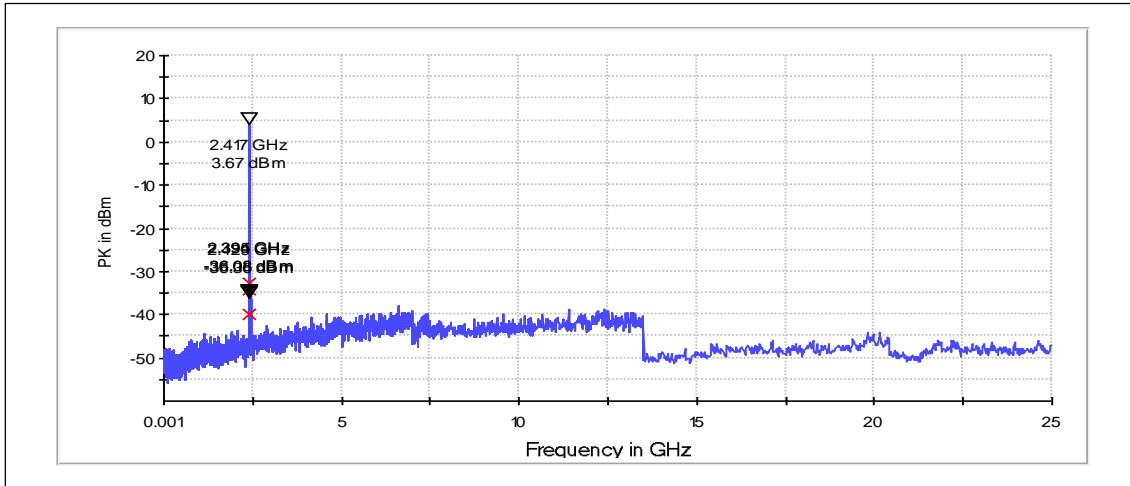

Peak (RBW: 100 kHz, VBW: 300 kHz)

Frequency [MHz]	P [dBc]	Result
2428.560	-32.86	PASSED
2395.440	-34.14	PASSED
2394.047	-39.75	PASSED

Channel 6 / 2437 MHz

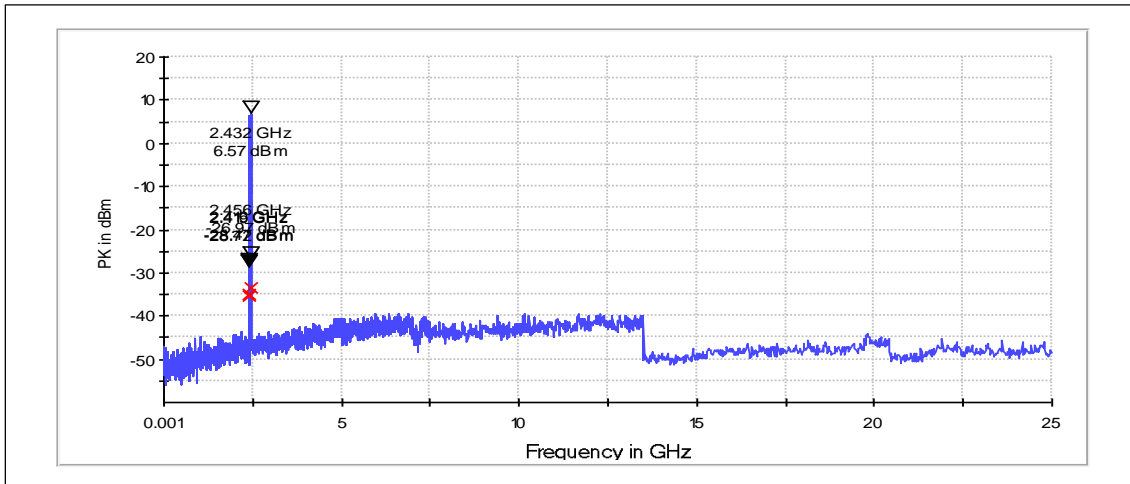


Peak (RBW: 100 kHz, VBW: 300 kHz)

Frequency [MHz]	P [dBc]	Result
2456.088	-33.54	PASSED
2416.001	-35.03	PASSED
2418.836	-35.29	PASSED



Channel 11 / 2462 MHz

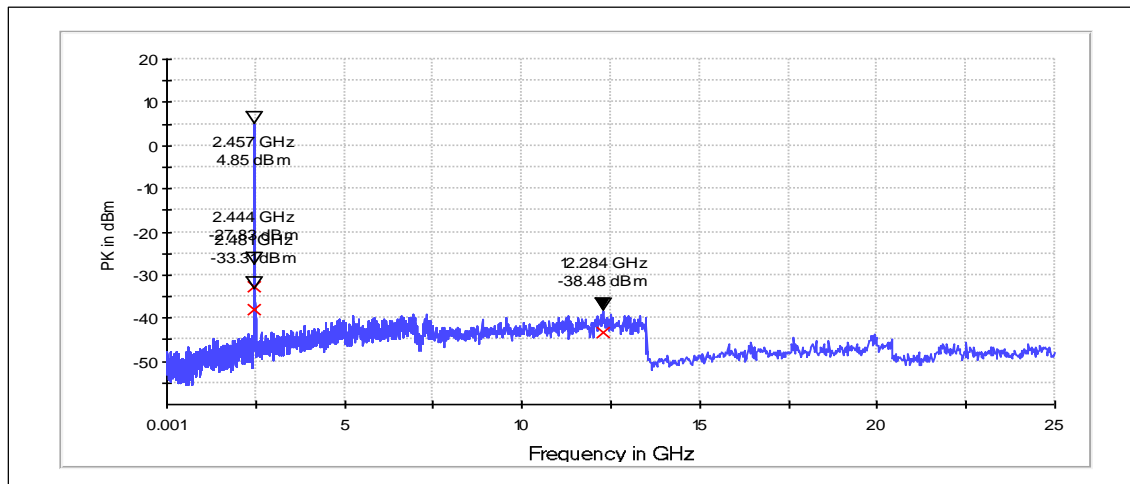


Peak (RBW: 100 kHz, VBW: 300 kHz)

Frequency [MHz]	P [dBc]	Result
2443.956	-32.68	PASSED
2480.918	-38.16	PASSED
12284.431	-43.32	PASSED

### 4.3.2 802.11g mode, 16QAM modulation, 24 Mbps data rate


Channel 1 / 2412 MHz

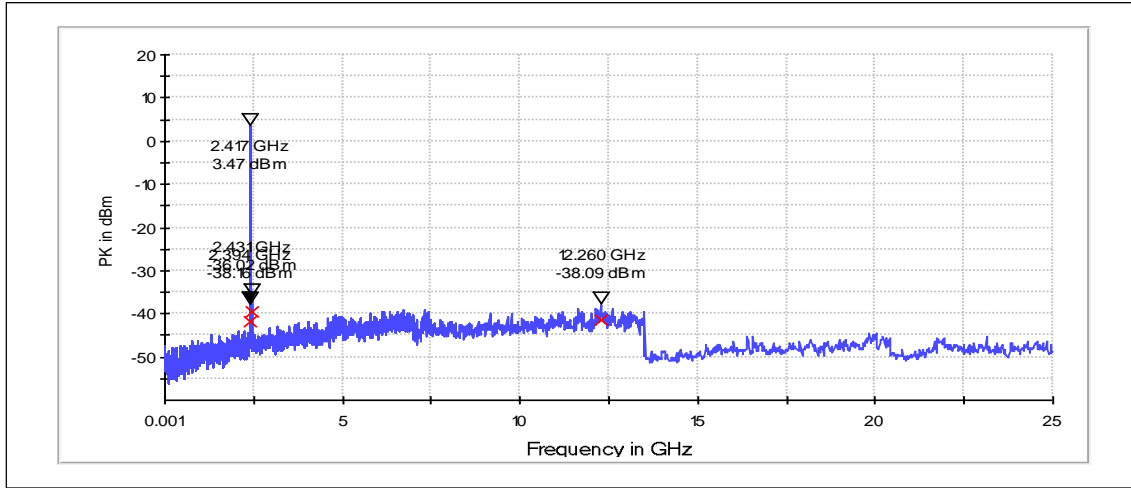

Peak (RBW: 100 kHz, VBW: 300 kHz)

Frequency [MHz]	P [dBc]	Result
2430.869	-39.50	PASSED
12260.479	-41.56	PASSED
2394.105	-41.63	PASSED


Channel 6 / 2437 MHz

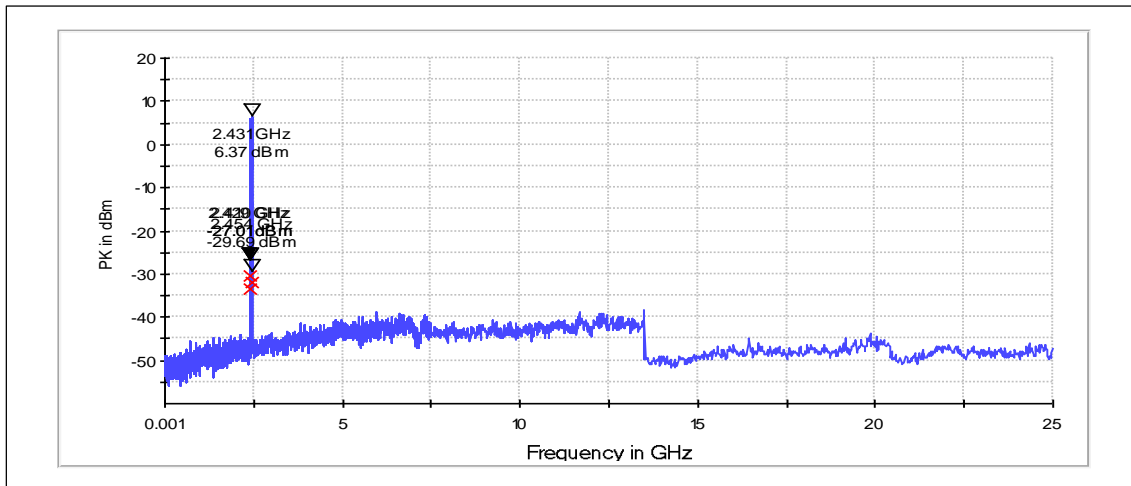

Peak (RBW: 100 kHz, VBW: 300 kHz)

Frequency [MHz]	P [dBc]	Result
2420.403	-30.47	PASSED
2453.597	-31.83	PASSED
2418.986	-33.38	PASSED

Channel 11 / 2462 MHz

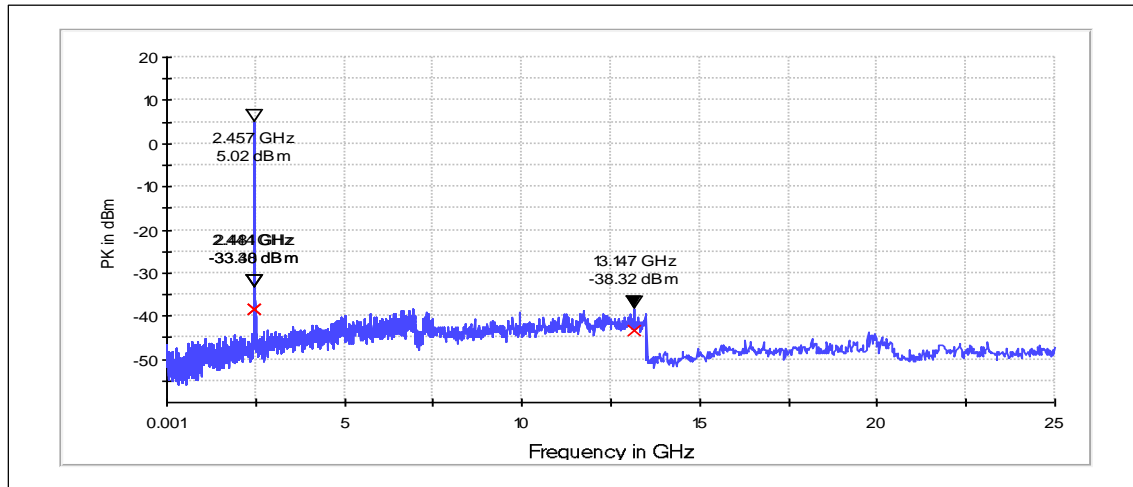


Peak (RBW: 100 kHz, VBW: 300 kHz)

Frequency [MHz]	P [dBc]	Result
2480.865	-38.41	PASSED
2444.009	-38.42	PASSED
13146.707	-43.34	PASSED

## 5. Spurious radiated emissions (FCC 15.247(d), 15.209, RSS-210 A8.5)

<b>EUT with DUT number</b>	RM-1128, DUT 500100
<b>Accessories with DUT numbers</b>	CC-3097, DUT 500127 ; Samsung BL-T5A, DUT 500101; AC-18U, DUT 500124; WH-108, DUT 500121
<b>Operation Voltage [V] / [Hz]</b>	Nominal
<b>Results</b>	PASSED
<b>Remarks</b>	-
<b>Temp [°C] / Humidity [%RH] / Air Pressure [kPa]</b>	21/55/100.2
<b>Date of measurements</b>	15-Jul-2015
<b>Measured by</b>	Dou Rubo

### 5.1.1 Test setup

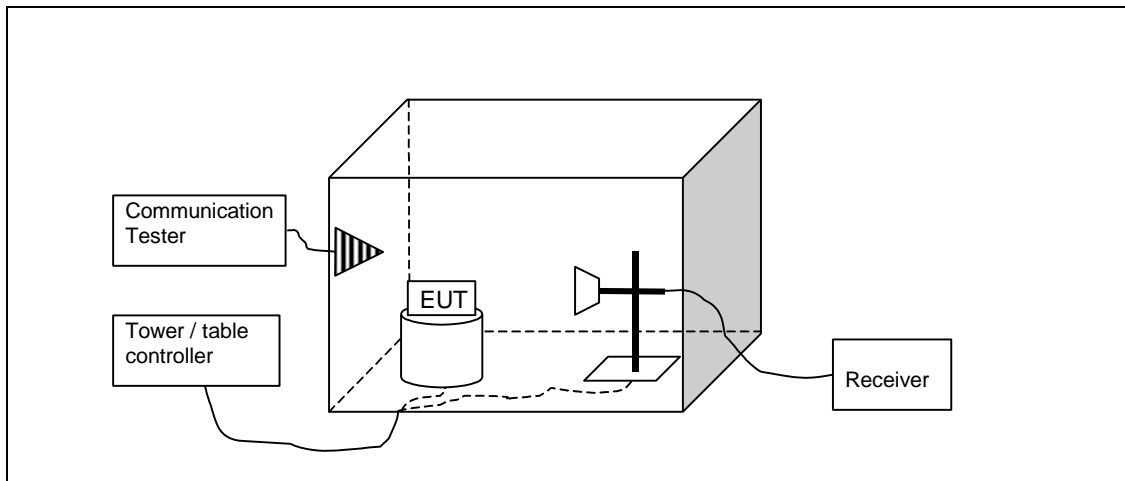

### 5.2. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement is made up to 10th harmonic of the EUT highest TX channel.

The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + A_{TOT}$$

Where  $U_{RX}$  is receiver reading and  $A_{TOT}$  is total correction factor including cable loss, antenna factor and preamplifier gain ( $A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$ ).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [ $\mu V/m$ ]	Limit [dB $\mu V/m$ ]	Detector
30 - 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

### 5.3. WLAN test results

#### 5.3.1 802.11g, BPSK modulation, 6 Mbps data rate.

Channel 1 / 2412 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu$ V/m]	E [ $\mu$ V/m]	U <sub>RX</sub> [dB $\mu$ V]	A <sub>TOT</sub> [dB]	Limit [dB $\mu$ V/m]	Margin	Results
4825.3	44.9	175.792	43.4	1.5	74	29.08	PASSED
7236.7	50.67	341.586	40.17	10.5	95	44.56	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu$ V/m]	E [ $\mu$ V/m]	U <sub>RX</sub> [dB $\mu$ V]	A <sub>TOT</sub> [dB]	Limit [dB $\mu$ V/m]	Margin	Results
4825.3	31.28	36.644	29.78	1.5	54	22.7	PASSED
7236.7	37.21	72.527	26.71	10.5	---	---	PASSED

Channel 6 / 2437 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dB $\mu$ V/m]	E [ $\mu$ V/m]	U <sub>RX</sub> [dB $\mu$ V]	A <sub>TOT</sub> [dB]	Limit [dB $\mu$ V/m]	Margin	Results
31.86	28.1	25.41	33.9	-5.8	40	11.9	PASSED
31.95	28.04	25.235	33.94	-5.9	40	11.96	PASSED
834.216	23.63	15.188	25.93	-2.3	46	22.39	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu$ V/m]	E [ $\mu$ V/m]	U <sub>RX</sub> [dB $\mu$ V]	A <sub>TOT</sub> [dB]	Limit [dB $\mu$ V/m]	Margin	Results
4880.3	46.02	199.986	44.22	1.8	74	27.96	PASSED
7321.2	50.88	349.945	40.08	10.8	74	23.1	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu$ V/m]	E [ $\mu$ V/m]	U <sub>RX</sub> [dB $\mu$ V]	A <sub>TOT</sub> [dB]	Limit [dB $\mu$ V/m]	Margin	Results
4880.3	32.49	42.121	30.69	1.8	54	21.49	PASSED
7321.2	37.63	76.12	26.83	10.8	54	16.35	PASSED

Channel 11 / 2462 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu$ V/m]	E [ $\mu$ V/m]	U <sub>RX</sub> [dB $\mu$ V]	A <sub>TOT</sub> [dB]	Limit [dB $\mu$ V/m]	Margin	Results
4922.5	46.97	223.1	45.17	1.8	74	27.01	PASSED
7386.7	50.28	326.588	39.28	11	74	23.7	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu$ V/m]	E [ $\mu$ V/m]	U <sub>RX</sub> [dB $\mu$ V]	A <sub>TOT</sub> [dB]	Limit [dB $\mu$ V/m]	Margin	Results
4922.5	33.08	45.082	31.28	1.8	54	20.9	PASSED
7386.7	37.23	72.694	26.23	11	54	16.75	PASSED

### 5.3.2 802.11g, 16QAM modulation, 24 Mbps data rate.

Channel 1 / 2412 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu$ V/m]	E [ $\mu$ V/m]	U <sub>RX</sub> [dB $\mu$ V]	A <sub>TOT</sub> [dB]	Limit [dB $\mu$ V/m]	Margin	Results
4825.7	45.59	190.327	44.09	1.5	74	28.39	PASSED
7235.4	50.46	333.426	39.96	10.5	95	44.77	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu$ V/m]	E [ $\mu$ V/m]	U <sub>RX</sub> [dB $\mu$ V]	A <sub>TOT</sub> [dB]	Limit [dB $\mu$ V/m]	Margin	Results
4825.7	32.1	40.272	30.6	1.5	54	21.88	PASSED
7235.4	37.28	73.114	26.78	10.5	---	---	PASSED

Channel 6 / 2437 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dB $\mu$ V/m]	E [ $\mu$ V/m]	U <sub>RX</sub> [dB $\mu$ V]	A <sub>TOT</sub> [dB]	Limit [dB $\mu$ V/m]	Margin	Results
31.948	28.01	25.148	33.91	-5.9	40	11.99	PASSED
32.07	27.85	24.689	33.85	-6	40	12.15	PASSED
830.358	23.61	15.153	26.01	-2.4	46	22.41	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu$ V/m]	E [ $\mu$ V/m]	U <sub>RX</sub> [dB $\mu$ V]	A <sub>TOT</sub> [dB]	Limit [dB $\mu$ V/m]	Margin	Results
4881.3	46.03	200.217	44.23	1.8	74	27.95	PASSED
7319.4	51.23	364.334	40.33	10.9	74	22.75	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu$ V/m]	E [ $\mu$ V/m]	U <sub>RX</sub> [dB $\mu$ V]	A <sub>TOT</sub> [dB]	Limit [dB $\mu$ V/m]	Margin	Results
4881.3	32.32	41.305	30.52	1.8	54	21.66	PASSED
7319.4	37.96	79.068	27.06	10.9	54	16.02	PASSED

Channel 11 / 2462 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu$ V/m]	E [ $\mu$ V/m]	U <sub>RX</sub> [dB $\mu$ V]	A <sub>TOT</sub> [dB]	Limit [dB $\mu$ V/m]	Margin	Results
4922.4	46.01	199.756	44.21	1.8	74	27.97	PASSED
7386.8	50.95	352.777	39.95	11	74	23.03	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)


Frequency [MHz]	E [dB $\mu$ V/m]	E [ $\mu$ V/m]	U <sub>RX</sub> [dB $\mu$ V]	A <sub>TOT</sub> [dB]	Limit [dB $\mu$ V/m]	Margin	Results
4922.4	33.33	46.398	31.53	1.8	54	20.65	PASSED
7386.8	36.93	70.226	25.93	11	54	17.05	PASSED



## 6. AC powerline conducted emissions (FCC §15.207, RSS-210 7.2.4)

<b>EUT with DUT number</b>	RM-1128, DUT 500100
<b>Accessories with DUT numbers</b>	CC-3097, DUT 500127 ; Samsung BL-T5A, DUT 500101; AC-18U, DUT 500124; WH-108, DUT 500121
<b>Operation Voltage [V] / [Hz]</b>	115 / 60
<b>Results</b>	PASSED
<b>Remarks</b>	-
<b>Temp [°C] / Humidity [%RH] / Air Pressure [kPa]</b>	22/65/100.1
<b>Date of measurements</b>	23-Jul-2015
<b>Measured by</b>	Dou Rubo

### 6.1. Test Setup

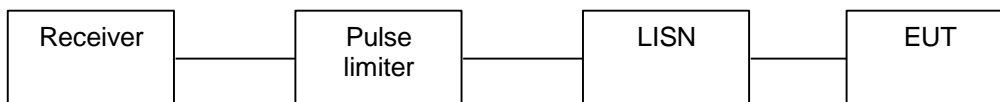

### 6.2. Test method and limit

The measurement is made according to Public notice KDB 558 074 and IC standard RSS-210.

The reference level for the -20 dBc measurement was obtained as instructed in section 11.2 of the KDB 558074, using span of 1.5 times the OBW.

Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	<= -20

The measurement is made according to procedure KDB 558074 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where  $U_{RX}$  is receiver reading and  $A_{TOT}$  is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

### 6.3. WLAN Test results

#### 6.3.1 802.11b mode, QPSK modulation, 11 Mbps data rate

Channel 6 / 2437 MHz

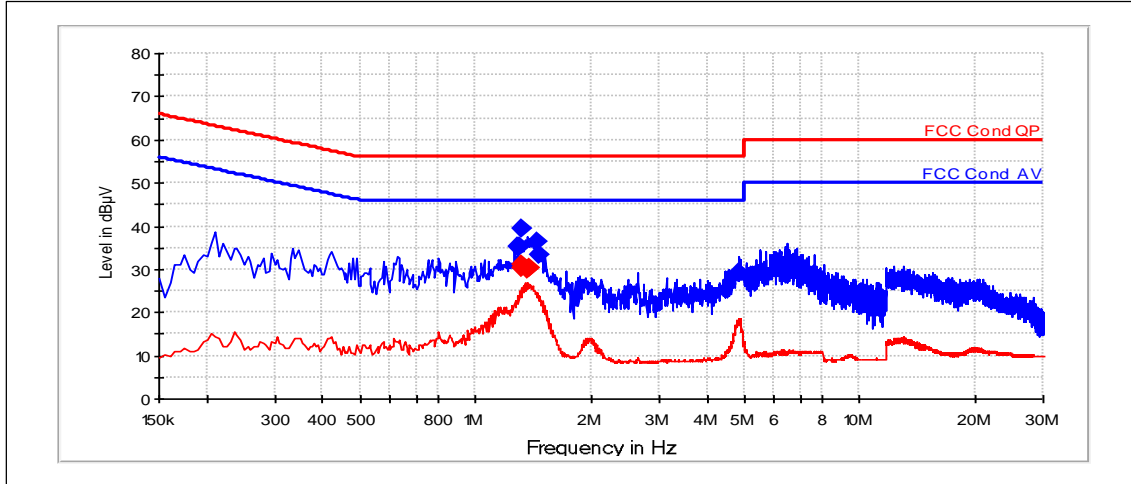

QuasiPeak (RBW: 9 kHz)

Frequency [MHz]	U [dBµV]	Line	Result
1.29	35.21	N	PASSED
1.295	35.23	N	PASSED
1.31	39.36	N	PASSED
1.445	36.46	L1	PASSED
1.455	33.34	L1	PASSED
4.865	29.23	L1	PASSED


Average (RBW: 9 kHz)

Frequency [MHz]	U [dBµV]	Line	Result
1.315	30.42	N	PASSED
1.325	30.96	N	PASSED
1.365	30.07	N	PASSED
1.385	30.15	N	PASSED

**7. 6dB(bandwidth)**  
(FCC §15.247(a)(2), RSS-210 A8.2(a))

<b>EUT with DUT number</b>	RM-1128, DUT 500110
<b>Accessories with DUT numbers</b>	CC-3097, DUT 500128; Samsung BL-T5A, DUT 500117; AC-18U, DUT 500122; WH-108, DUT 500103
<b>Operation Voltage [V] / [Hz]</b>	Nominal
<b>Results</b>	PASSED
<b>Remarks</b>	Test was in conducted RF2 system.
<b>Temp [°C] / Humidity [%RH] / Air Pressure [kPa]</b>	24/50/100.2
<b>Date of measurements</b>	14-Jul-2015
<b>Measured by</b>	Dou Rubo

**7.1. Test Setup**

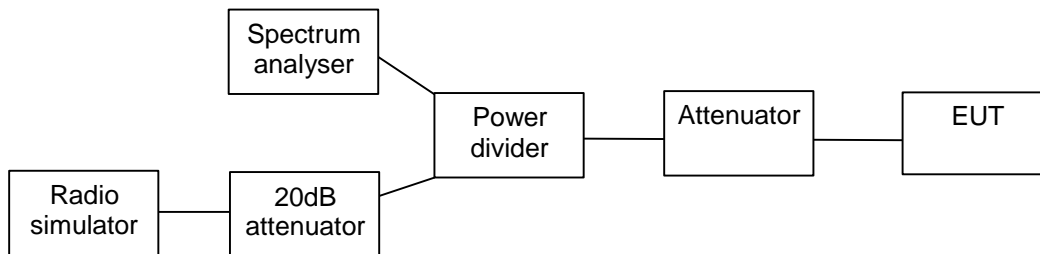

**7.2. Test method and limit**

The measurement is made according to Public notice KDB 558 074 and IC standard RSS-210.

The reference level for the -20 dBc measurement was obtained as instructed in section 11.2 of the KDB 558074, using span of 1.5 times the OBW.

Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	<= -20

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for 6 dB bandwidth measurements


Limit [kHz]
>= 500

### 7.3. WLAN Test results


#### 7.3.1 802.11g mode, BPSK modulation, 6 Mbps data rate

Channel / fc [MHz]	6 dB bandwidth [kHz]	Result
1 / 2412	16559.9	PASSED
6 / 2437	16746.3	PASSED
11 / 2462	16601.1	PASSED


#### Channel 1 / 2412 MHz

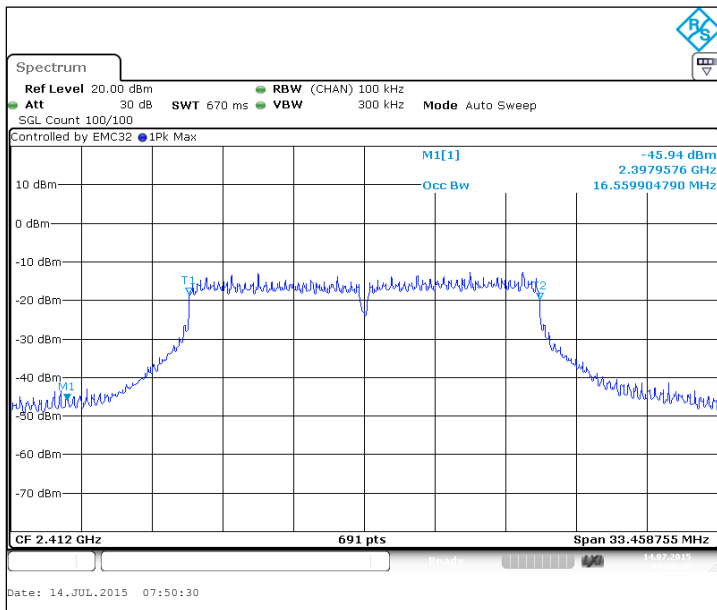

#### Channel 6 / 2437 MHz

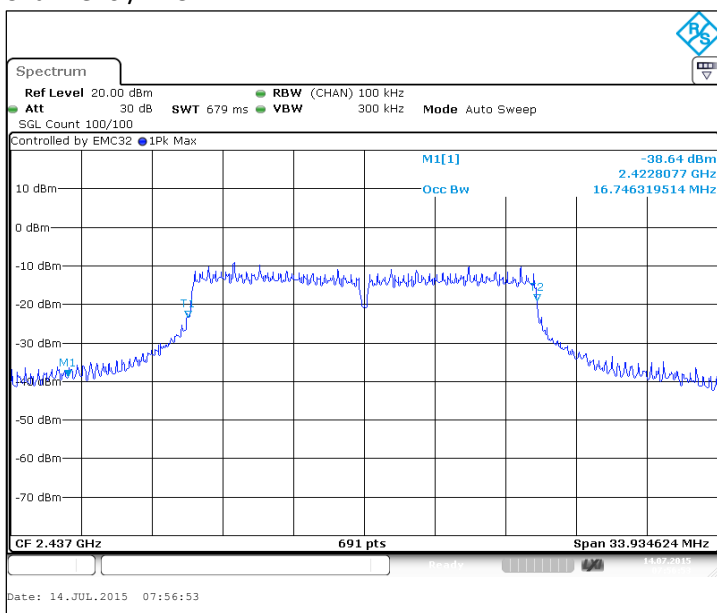


Channel 11 / 2462 MHz

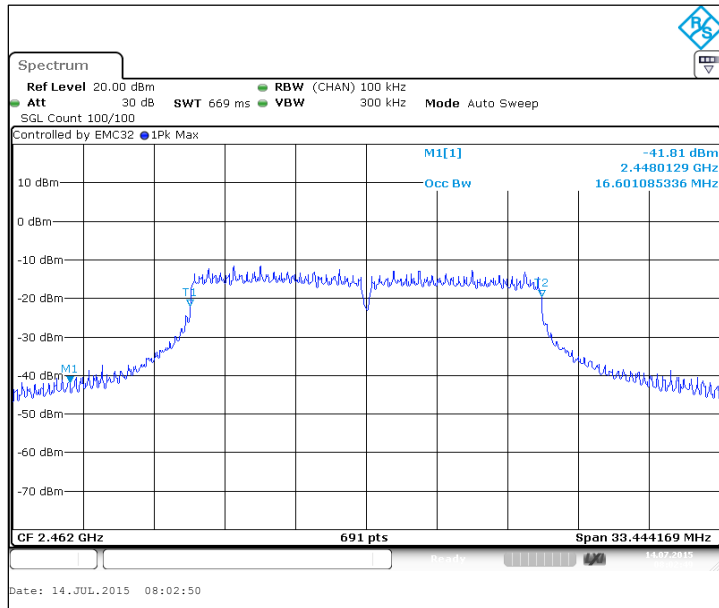


7.3.2 802.11g mode, 16QAM modulation, 24 Mbps data rate

Channel / f <sub>c</sub> [MHz]	6 dB bandwidth [kHz]	Result
1 / 2412	16502.6	PASSED
6 / 2437	16596.6	PASSED
11 / 2462	16548	PASSED


Channel 1 / 2412 MHz

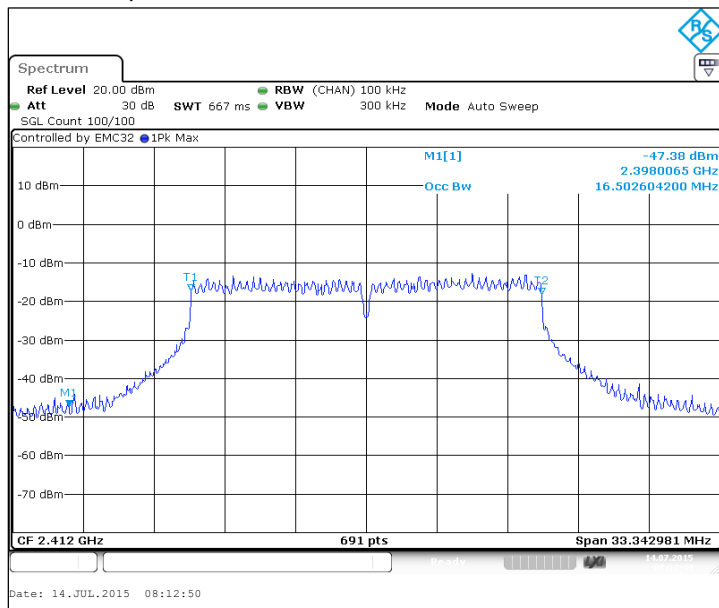

Channel 6 / 2437 MHz

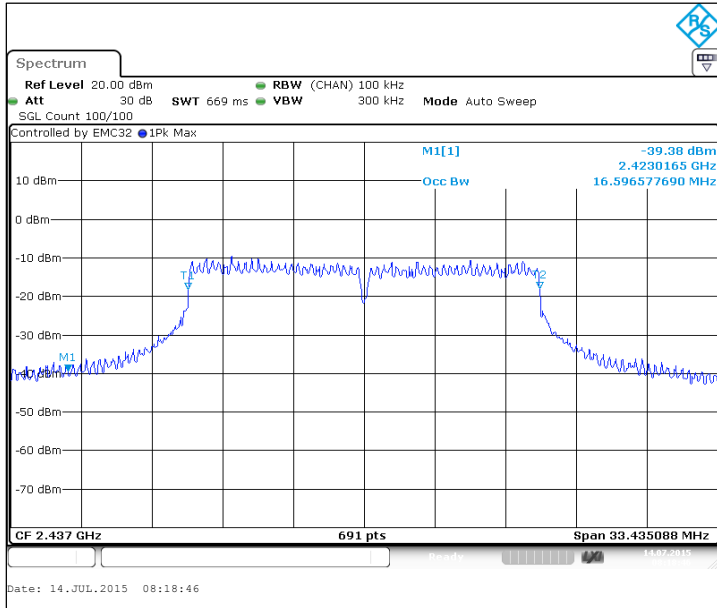

Channel 11 / 2462 MHz

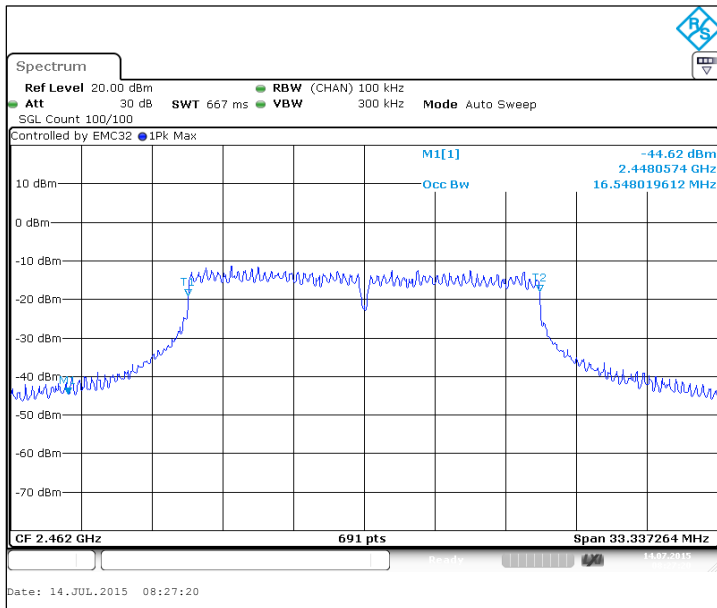




**8. Power spectral density**  
(FCC §15.247(e), RSS-210 A8.2(b))

<b>EUT with DUT number</b>	RM-1128, DUT 500110
<b>Accessories with DUT numbers</b>	CC-3097, DUT 500128; Samsung BL-T5A, DUT 500117; AC-18U, DUT 500122; WH-108, DUT 500103
<b>Operation Voltage [V] / [Hz]</b>	Nominal
<b>Results</b>	PASSED
<b>Remarks</b>	Test was in conducted RF2 system.
<b>Temp [°C] / Humidity [%RH] / Air Pressure [kPa]</b>	24/50/100.2
<b>Date of measurements</b>	14-Jul-2015
<b>Measured by</b>	Dou Rubo

**8.1. Test Setup**

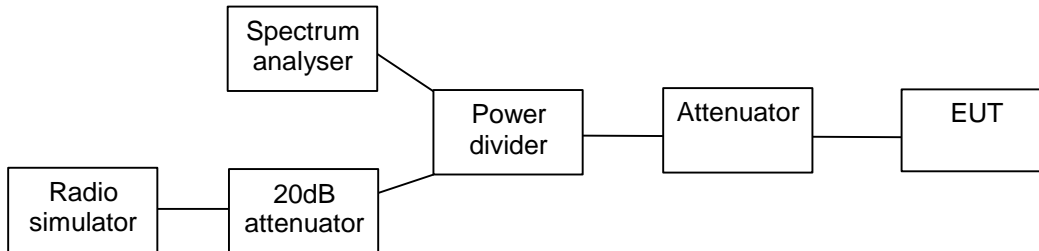

**8.2. Test method and limit**

The measurement is made according to Public notice KDB 558 074 and IC standard RSS-210.

The reference level for the -20 dBc measurement was obtained as instructed in section 11.2 of the KDB 558074, using span of 1.5 times the OBW.

Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	<= -20

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for power spectral density measurements

Limit [dBm] @ 3 kHz
<= 8


### 8.3. WLAN Test results

#### 8.3.1 802.11g mode, BPSK modulation, 6 Mbps data rate


Peak (RBW: 500 kHz, VBW: 3 MHz, Max hold)

Channel / fc [MHz]	P [dBm]	Result
1 / 2412	-10.56	PASSED
6 / 2437	-7.96	PASSED
11 / 2462	-10	PASSED


Channel 1 / 2412 MHz

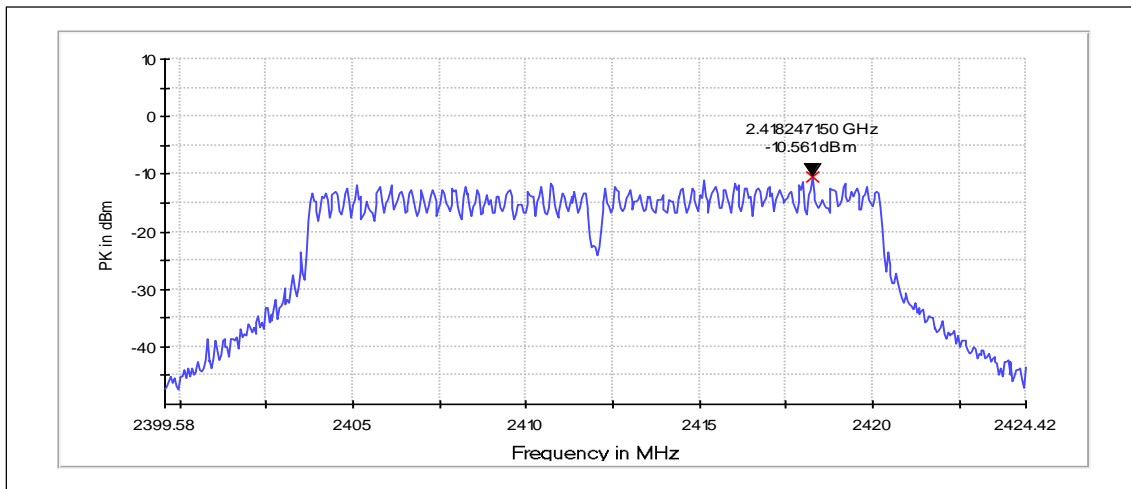

Channel 6 / 2437 MHz

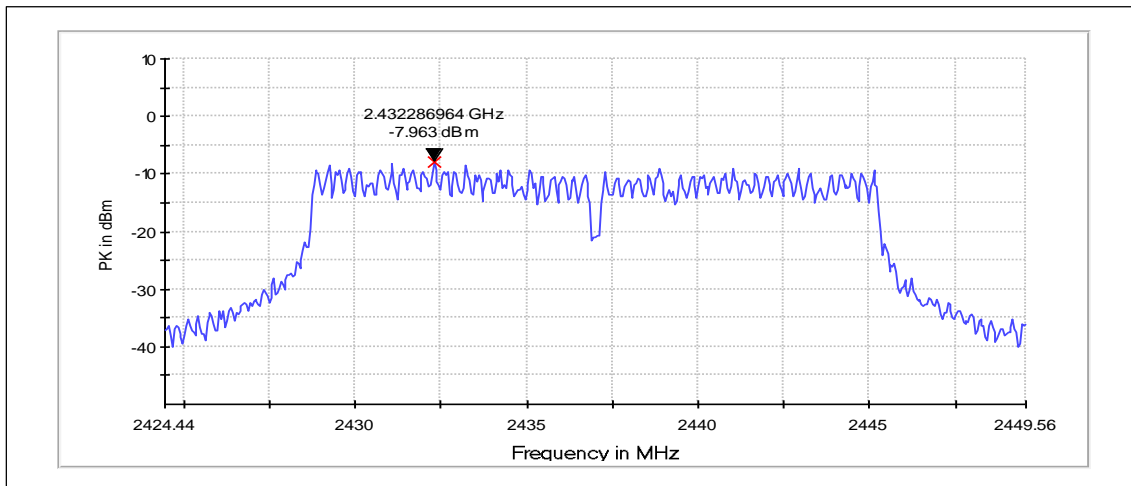

Channel 11 / 2462 MHz

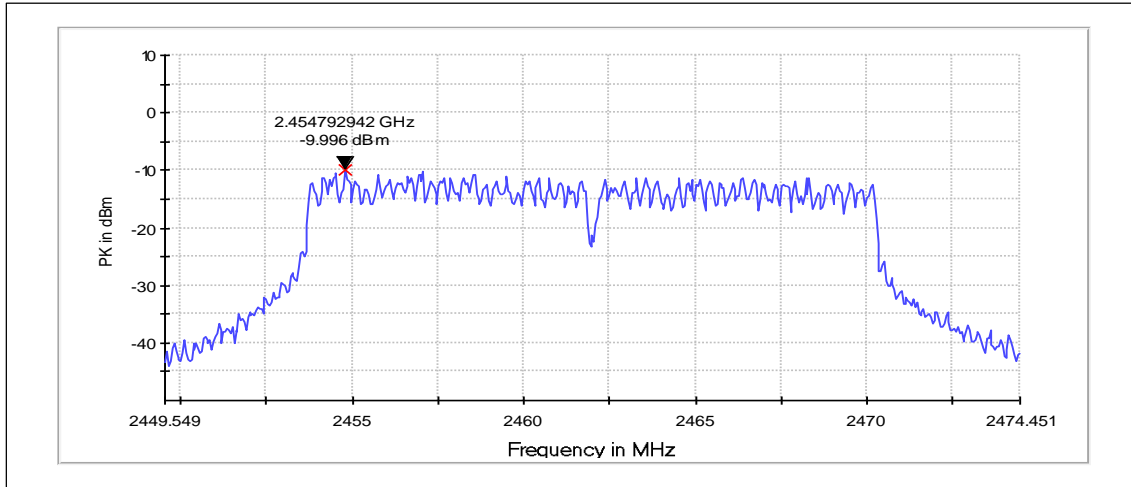


8.3.2 802.11g mode, 16QAM modulation, 24 Mbps data rate


Peak (RBW: 500 kHz, VBW: 3 MHz, Max hold)

Channel / f <sub>c</sub> [MHz]	P [dBm]	Result
1 / 2412	-10.05	PASSED
6 / 2437	-7.52	PASSED
11 / 2462	-9.17	PASSED


Channel 1 / 2412 MHz

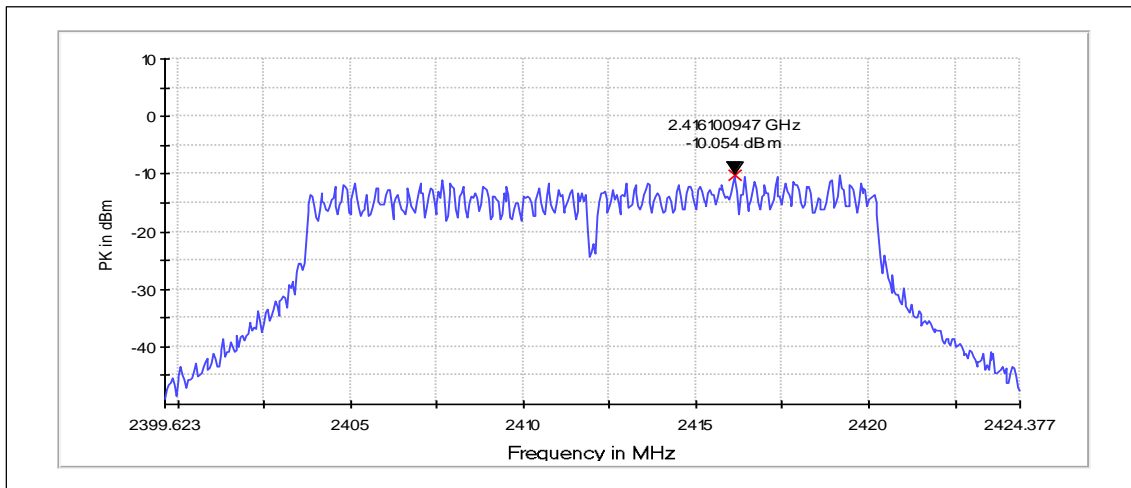

Channel 6 / 2437 MHz

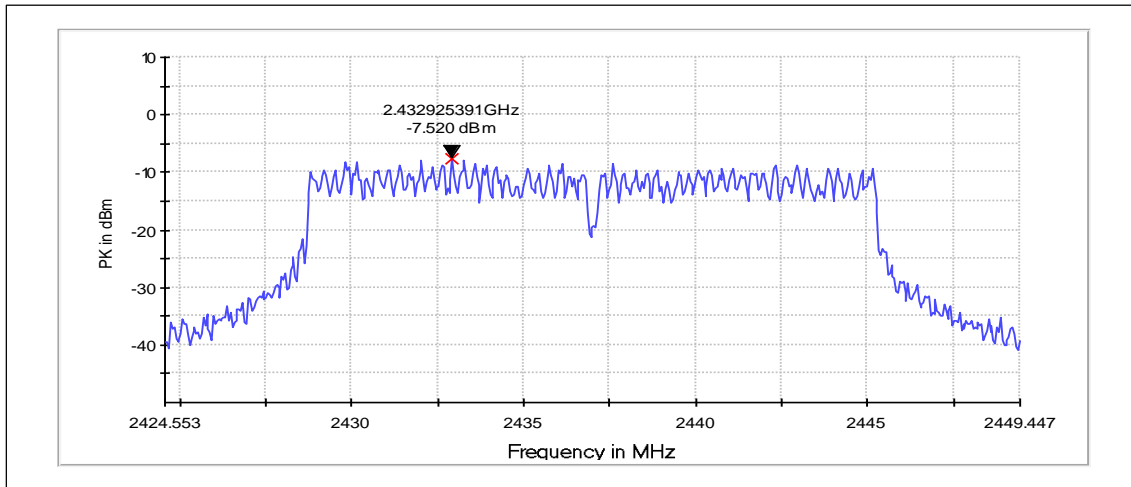

Channel 11 / 2462 MHz

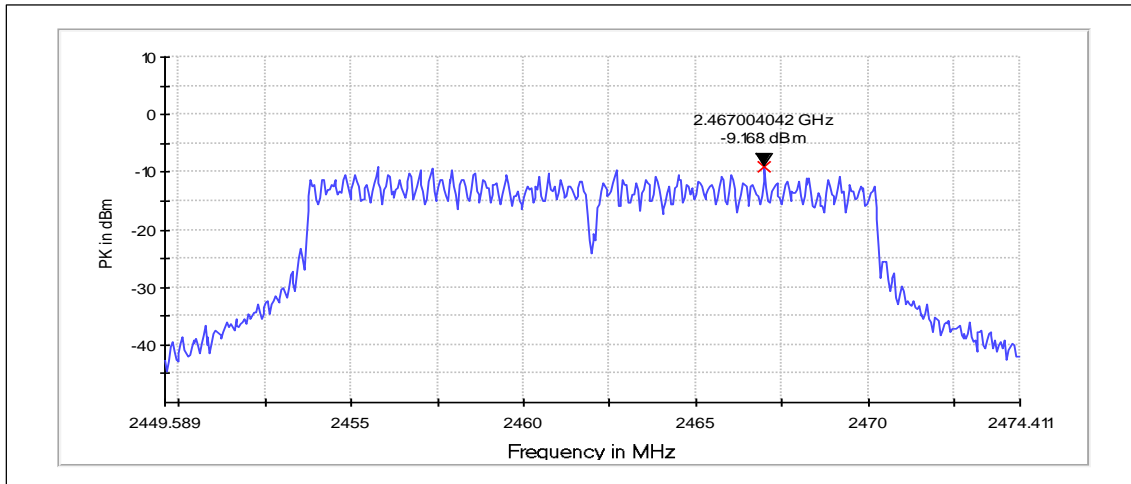

## 9. Test Equipment

### 9.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	EMC32 Test Software	R&S	22/24/27, 15C, 15B
BJPCHW0020	DC Power supply	Hp6632B	HP	22/24/27, 15C
BJPCPT0040	Receiver	ESCS30	R&S	15C,15B
BJPCPT0069	LISN 50 μH	ESH3-Z5	R&S	15C,15B
BJPCTC0323	Signal Generator	SMR 27	R&S	22/24/27, 15C, 15B
BJPCPT0073	Signal Generator	SMR 20	R&S	22/24/27, 15C, 15B
BJPCPT0191	Pulse Limiter	ESH3-Z2	R&S	15C,15B
BJPCPT0208	UPS	PULSAR RX10	Merlin gerin	15C.15B
BJPCTC0001	DIGITAL CAMERA	PC1015	CANON	15C.15R
BJPCTC0017	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0062	AC Power source	6812B	Hp	15C.15B
BJPCTC0067	Bluetooth Tester	CBT	R&S	22/24/27, 15C
BJPCTC0082	Humidity and Temperature Sensor	175-H2	Testo	15B,15C
BJPCTC0088	Absolut pressure meter	testo 511	Testo	22/24/27, 15B,15C
BJPCTC0089	Tempreture Test chamber	VT4002	Votsch industrietechnik	22/24/27, 15C
BJPCTC0090	FSP spectrum analyzer	FSP30	R&S	22/24/27, 15C
BJPCTC0094	GPIB-RS232 convertor	GPIB-RS232	NI	22/24/27, 15C
BJPCTC0112	Power Splitter	11667B	Agilent	22/24/27, 15C
BJPCTC0127	AC Power source	SOYI-500VA	SOYI	15B 15C
BJPCTC0128	Communication antenna	JTXLB-10180	A-INFOMW	22/24/27 15B 15C
BJPCTC0129	Communication antenna	JTXLB-10180	A-INFOMW	22/24/27 15B 15C
BJPCTC0131	Communication tester	CMW500	R&S	22/24/27 15B 15C
BJPCTC0136	Communication antenna	JTXLB-880-NF	A-INFOMW	15B 15C
BJPCTC0306	Power Splitter	11667B	Agilent	22/24/27, 15C
BJPCTC0305	GPIB converter	GPIB-RS232	NI	22/24/27, 15C
BJPCTC0304	Spectrum Analyser	FSV30	R&S	22/24/27, 15C
BJPCTC0309	GPIB-RS232 convertor	RS232	NI	22/24/27, 15C
BJPCTC0307	Dual channel battery/charger simulator	2306	KEITHLEY	22/24/27, 15C
BJPCTC0308	Dual channel battery/charger simulator	2306	KEITHLEY	22/24/27, 15C
BJPCTC0352	Signal Generator 20GHz	MG3692B	Anritsu	22/24/27, 15C
BJBDATC0169	Tempreture Test chamber	VT4002	Votsch	22/24/27, 15C
BJPCTC0334	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0342	Communication Tester	CMU200	R&S	15B, 15C
BJPCTC0343	Power Splitter	1167A	Agilent	EN300328
BJPCTC0344	Power Splitter	1167A	Agilent	EN300328
BJPCTC0345	Power Splitter	1167A	Agilent	EN300328
BJPCTC0346	Attenuator	8496A	Agilent	EN300328
BJPCTC0347	Directional Coupler	4226-20	Narda	EN300328
BJPCTC0348	Signal generator	E4438C	Agilent	EN300328
BJPCTC0336	Signal Generator	SMP22	R&S	22/24/27, 15C
BJPCTC0357	Signal Generator	SMB100A	R&S	-

### 9.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	EMC32 Test Software	R&S	22/24/27, 15C, 15B
BJPCPT0072	Receiver	ESIB26	R&S	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
BJPCPT0150	High Pass Filter	WHKS1200-10SS	Wainwright	22/24/27, 15C, 15B
BJPCPT0151	Band Reject Filter	WRCD1880/2000-0.2/40-5SSK	Wainwright	24, 15B
BJPCPT0154	Band Reject Filter	WRCT2402/2480-2400/2483.5-30-20SS	Wainwright	15C, 15B
BJPCPT0166	Antenna	VUBA 9117	Swarzbeck	22/24/27
BJPCPT0208	UPS	PULSAR RX10	Merlin gerin	15C.15B
BJPCTC0001	DIGITAL CAMERA	PC1015	CANON	15C.15R
BJPCTC0007	Antenna	HL562	R&S	22/24/27, 15C, 15B
BJPCTC0029	Antenna	HF906	R&S	22/24/27, 15C, 15B
BJPCTC0034	Band Reject Filter	WRCT 800/880-0.2/40-5SSK	Wainwright	22, 15B
BJPCTC0049	Preamplifier	Bima 0118-1A-Bt	Bonn	22/24/27, 15C, 15B
BJPCTC0055	Communication Tester	CMU200	R&S	22/24/27,15C,15B
BJPCTC0058	Bluetooth Tester	CBT	R&S	15C, 15B
BJPCTC0062	AC Power source	6812B	Hp	15C.15B
BJPCTC0064	Band Reject Filter	WRCG1877/1883-1870/1890-40/6SS	Wainwright	24, 15B
BJPCTC0071	Multi-Device Controller	2090	EMCO	22/24/27, 15C, 15B
BJPCTC0072	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	ETS	22/24/27, 15C, 15B
BJPCTC0073	MAST	Model-TR/POL	ETS	22/24/27, 15C, 15B
BJPCTC0074	MAST	Model 2070-2	ETS	22/24/27, 15C, 15B
BJPCTC0075	Turntable	Model 2188	ETS-EMCO	22/24/27, 15C, 15B
BJPCTC0081	Humidity and Temperature Sensor	175-H2	Testo	15B, 15C
BJPCTC0088	Absolut pressure meter	testo 511	Testo	22/24/27, 15B,15C
BJPCTC0124	Attenuator	SA18N200W-40	Fairview Microwave	-
BJPCTC0125	Loop Antenna	HFH2-Z2	R&S	15C
BJPCTC0126	Tripod	FHU-Z	R&S	15C
BJPCTC0128	Communication antenna	JTXLB-10180	A-INFOMW	22/24/27 15B 15C
BJPCTC0129	Communication antenna	JTXLB-10180	A-INFOMW	22/24/27 15B 15C
BJPCTC0131	Communication tester	CMW500	R&S	22/24/27 15B 15C
BJPCTC0133	Open Swith and contril unit	OSP 150	R&S	15B,15C
BJPCTC0134	Open Swith and contril unit	OSP 150	R&S	15B,15C
BJPCTC0135	Open Swith and contril unit	OSP 130	R&S	15B,15C
BJPCTC0136	Communication antenna	JTXLB-880-NF	A-INFOMW	15B 15C
BJPCTC0171	Broad-band Horn Antenna	BBHA9120 D	SCHWARZBECK MESS - ELEKTRONIK	22/24/27, 15C, 15B
BJPCTC0310	Horn Antenna	QSH20SMA	Q-par	22/24/27, 15C, 15B
BJPCTC0311	Horn Antenna	QSH18SMA	Q-par	22/24/27, 15C, 15B
BJPCTC0312	Relay Switch Unit	-	-	22/24/27, 15C, 15B
BJPCTC0313	High Pass Filter	WHKX1.0/15G-12SS	Wainwright	22/24/27, 15C, 15B
BJPCTC0314	High Pass Filter	WHKX8.0/18G-88SS	Wainwright	22/24/27, 15C, 15B
BJPCTC0315	High Pass Filter	WHKX3.0/18G-12SS	Wainwright	22/24/27, 15C, 15B
BJPCTC0316	Preamplifier	AMT-5F-18002550-25-108	-	22/24/27, 15C, 15B
BJPCTC0317	Preamplifier	AMF-6D-02001800-29-20P	-	22/24/27, 15C, 15B
BJPCTC0350	Preamplifier	AMF-4D-01000800-30-29P	Miteq	22/24/27, 15C, 15B
BJPCTC0324	Preamplifier	AFS4-00100300-20-23P-6	Miteq	22/24/27, 15C, 15B
BJPCTC0329	Relay Switch Unit	-	-	22/24/27, 15C, 15B
BJPCTC0334	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0342	Communication Tester	CMU200	R&S	15B, 15C
BJPCTC0349	Preamplifier	AMF-4D-01000800-30-79P	Miteq	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
BJPCTC0350	Preamplifier	AMF-4D-01000800-30-29P	Miteg	22/24/27, 15C, 15B
BJPCTC0351	Preamplifier	AFS4-00101800	-	22/24/27, 15C, 15B
BJPCTC0113	Receiver	ESI B26	R&S	22/24/27, 15B, 15C