

FCC Part 22/24 Compliance Test Report

Test Report no.:	Tre_FCC_0815_05.doc	Date of Report:	11-Apr-2008
Number of pages:	12	Customer's Contact person:	Lasse Vaattovaara

Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation P.O. Box 86 Joensuukatu 7 FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 44277
FCC listing no.:	94436		
IC recognition no.:	3608		

Tested devices/ accessories: **GSM phone RM-407 / Battery BP-4L, AC charger AC-5E, Headset HS-47, Dummy battery SD-47**

FCC ID:	PYARM-407	IC:	661V-RM407
----------------	-----------	------------	------------

Supplement reports: -

Testing has been carried out in accordance with: CFR 47, FCC rules Parts 22 and 24, TIA-603-C-2004 and IC standards RSS-GEN (Issue 2, June 2007), RSS-132 (Issue 2, September 2005) and RSS-133 (Issue 4, February 2008). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".

Documentation: The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.

Test Results: **The EUT complies with the requirements in respect of all parameters subject to the test.**
The test results relate only to devices specified in this document.

Date and signature for the contents:

Jari Jantunen, System Manager

1. Summary for FCC Part 22/24 Compliance Test Report

Date of receipt	2.1.2008
Testing completed	4.1.2008
The customer's contact person	Lasse Vaattovaara
Test Plan referred to	T:\Projects\
Notes	-
Document name	T:\Projects\RM-346\EMC\Results\FCC\Tre_FCC_0801_01.doc

1.1. EUT and Accessory Information

The EUT is a 6-band (GSM850/900/1800/1900 and WCDMA Band II/V) mobile phone with GPRS, EGPRS, Bluetooth and WLAN. The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
GSM phone	RM-346	004401014291526	0508	-	007.45.3	41346
GSM phone	RM-346	004401014291385	0508	-	007.45.3	41347
Battery	BP-4L	-	-	-	-	41348
AC Charger	AC-5E	-	-	-	-	41350
Headset	HS-47	-	-	-	-	41352
Dummy Battery	SD-47	-	V.1013	-	-	41354

1.2. Summary of Test Results

GSM 850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.6, 4.4	Conducted RF output power	NP
§22.913(a)	4.6, 4.4	Radiated RF output power	NP
§2.1049(h)	4.4.1	99 % occupied bandwidth	PASSED
§22.917(a)	4.7, 4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.7, 4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.7, 4.5	Spurious radiated emissions	NP
§2.1055(a)	4.5, 4.3	Frequency stability, temperature variation	PASSED
§2.1055(d)	4.5, 4.3	Frequency stability, voltage variation	PASSED

GSM 1900:

Section in CFR 47	Section in RSS-133	Name of the test	Result
§2.1046(a)	6.2	Conducted RF output power	NP
§24.232(b)	6.2	Radiated RF output power	NP
§2.1049(h)	5.6	99 % occupied bandwidth	PASSED
§24.238(a)	6.3	Band edge compliance	NP
§24.238(a), §2.1051	6.3	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.3	Spurious radiated emissions	NP
§2.1055(a)	7	Frequency stability, temperature variation	PASSED
§2.1055(d)	7	Frequency stability, voltage variation	PASSED

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Nokia Tampere Laboratory.

The test results of PYARM-346 are re-used for certification of the PYARM-407. The table above indicates the results, which will be re-used.


CONTENTS

1. Summary for FCC Part 22/24 Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. 99 % occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.4.1, RSS-133 5.6).....	5
2.1. Test setup	5
2.2. Test method and limit	5
2.3. GSM 850 Test results	6
2.4. GSM 1900 Test results	7
3. Frequency stability, temperature variation (FCC §2.1055(a), RSS-GEN 4.5, RSS-132 4.3, RSS-133 7).....	8
3.1. Test setup	8
3.2. Test method and limit	8
3.3. GSM 850 Test results	9
3.4. GSM 1900 Test results	9
4. Frequency stability, voltage variation (FCC §2.1055(d), RSS-GEN 4.5, RSS-132 4.3, RSS-133 7)	10
4.1. Test setup	10
4.2. Test method and limit	10
4.3. GSM 850 Test results	10
4.4. GSM 1900 Test results	10
5. Test Equipment.....	11
5.1. Conducted measurements	11
5.2. Radiated measurements	11

2. 99 % occupied bandwidth
(FCC §2.1049(h), RSS-GEN 4.4.1, RSS-133 5.6)

EUT with DUT number	RM-346 DUT 41347
Accessories with DUT numbers	BP-4L DUT 41348, AC-5E DUT 41350, HS-47 DUT 41352
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22-23 / 47-48 / 104.8-105.0
Date of measurements	3-4.1.2007
Measured by	Jari Jantunen

2.1. Test setup

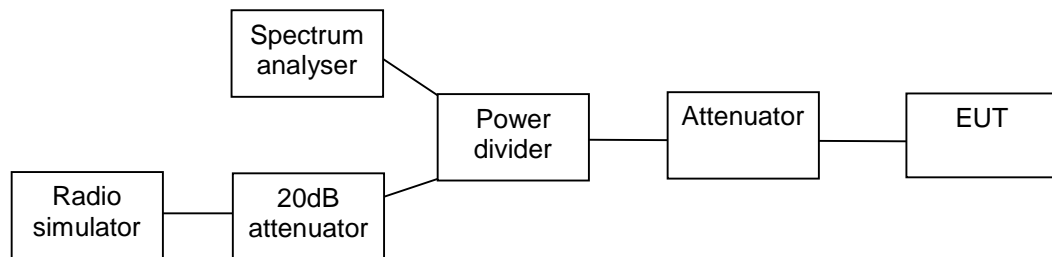


2.2. Test method and limit

The measurement is made according to FCC rules parts 22 and 24 and IC standards RSS-GEN and RSS-133.


2.3. GSM 850 Test results

Operation mode (TX on)	99% occupied bandwidth [kHz]
GSM	241.987
EGPRS	238.782

GSM mode, channel 190 / 836.6 MHz

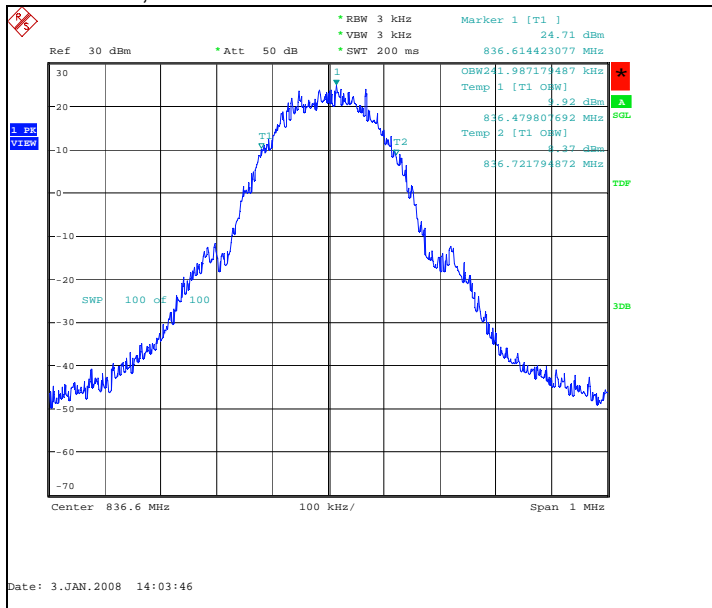


EGPRS mode, channel 190 / 836.6 MHz

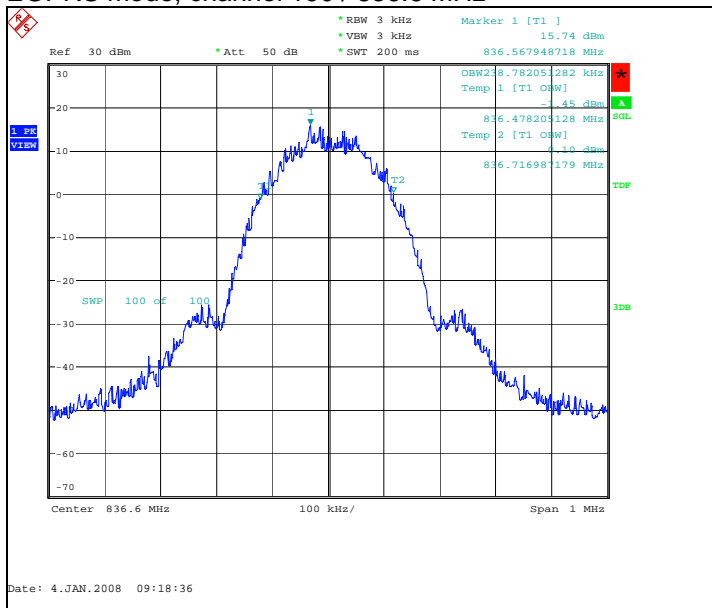


2.4. GSM 1900 Test results

Operation mode (TX on)	99% occupied bandwidth [kHz]
GSM	245.192
EGPRS	240.385

GSM mode, channel 661 / 1880.0 MHz

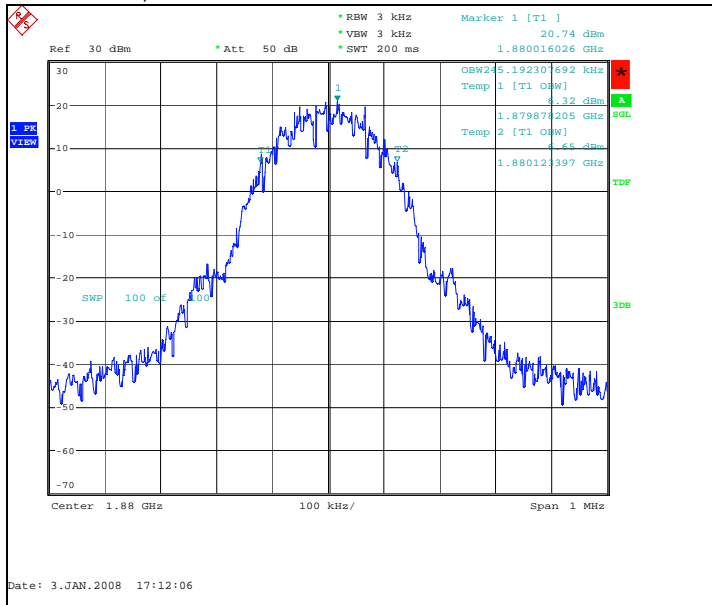


EGPRS mode, channel 661 / 1880.0 MHz

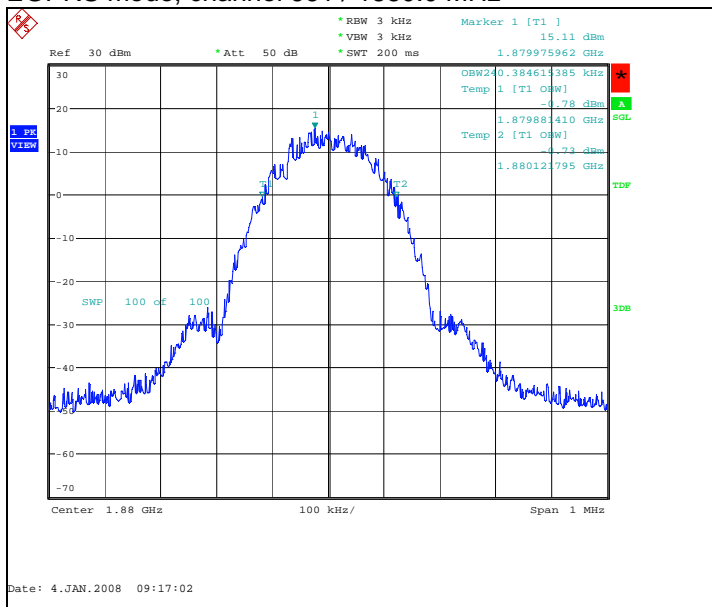

3. Frequency stability, temperature variation (FCC §2.1055(a), RSS-GEN 4.5, RSS-132 4.3, RSS-133 7)

EUT with DUT number	RM-346 DUT 41347
Accessories with DUT numbers	BP-4L DUT 41348, AC-5E DUT 41350, HS-47 DUT 41352
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 47 / 104.8
Date of measurements	3.1.2008
Measured by	Jari Jantunen

3.1. Test setup

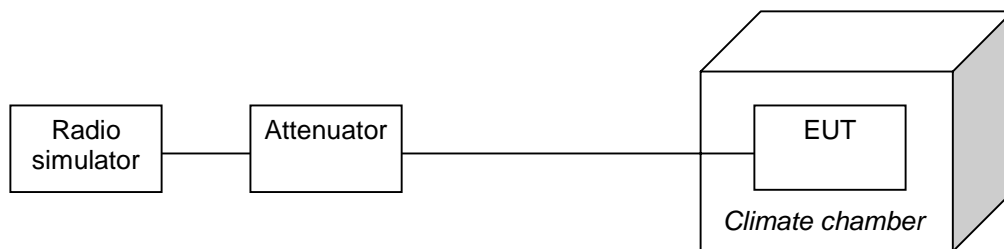

3.2. Test method and limit

The measurement is made according to FCC rules parts 22 and 24 and IC standards RSS-GEN, RSS-132 and RSS-133 as follows:

- The climate chamber temperature is set to the maximum value and the temperature is allowed to stabilize.
- The EUT is placed in the chamber.
- The EUT is set in idle mode for 15 minutes.
- The EUT is set to transmit.
- The transmit frequency error was measured immediately.
- The steps c - e were repeated for each temperature.

Limits for frequency stability, temperature variation measurements

Frequency deviation [ppm]
± 2.5

3.3. GSM 850 Test results

GSM mode, channel 190 / 836.6 MHz

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
50	-25	-0.0299
40	-24	-0.0287
30	-23	-0.0275
20	-22	-0.0263
10	-20	-0.0239
0	-18	-0.0215
-10	-19	-0.0227
-20	-21	-0.0251
-30	-23	-0.0275

3.4. GSM 1900 Test results


GSM mode, channel 661 / 1880.0 MHz

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
50	-74	-0.0394
40	-67	-0.0356
30	-76	-0.0404
20	-68	-0.0362
10	-53	-0.0282
0	-64	-0.0340
-10	-57	-0.0303
-20	-55	-0.0293
-30	-57	-0.0303

4. Frequency stability, voltage variation (FCC §2.1055(d), RSS-GEN 4.5, RSS-132 4.3, RSS-133 7)

EUT with DUT number	RM-346 DUT 41347
Accessories with DUT numbers	SD-47 DUT 41354
Operation Voltage [V] / [Hz]	3.70 VDC and 3.20 VDC
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 48 / 105.0
Date of measurements	4.1.2008
Measured by	Jari Jantunen

4.1. Test setup



4.2. Test method and limit

The measurement is made according to FCC rules parts 22 and 24 and IC standards RSS-GEN, RSS-132 and RSS-133 as follows:

The EUT battery was replaced with an adjustable power supply. The frequency stability was measured at nominal voltage and at the battery cut-off point.

Limits for frequency stability, voltage variation measurements

Frequency deviation [ppm]
± 2.5

4.3. GSM 850 Test results

GSM mode, channel 190 / 836.6 MHz

Voltage level [V]	Deviation [Hz]	Deviation [ppm]
Battery cut-off point / 3.20	-29	-0.0347
Nominal / 3.70	-16	-0.0191

4.4. GSM 1900 Test results

GSM mode, channel 661 / 1880.0 MHz

Voltage level [V]	Deviation [Hz]	Deviation [ppm]
Battery cut-off point / 3.20	-46	-0.0245
Nominal / 3.70	-60	-0.0319

5. Test Equipment

5.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30597	Power splitter	11667A	Agilent	22/24/27, 15C
TM37499	Power splitter	11667A	Agilent	22/24/27, 15C
TM38111	Multimeter	34401A	Agilent	22/24/27, 15C
TM38112	DC power supply	6632A	Agilent	22/24/27, 15C
TM22901	Attenuator	8496A	Agilent	22/24/27, 15C
TM30636	Artificial mains net	L2-16	PMM	15C, 15B
TM37678	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM37773	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM30600	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum analyzer	FSU	R&S	22/24/27, 15C
TM22835	Multimeter	87	Fluke	15C, 15B
TM37500	Microwave switch system	7116-MSW	Keithley	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Transformatic	22/24/27, 15C, 15B
	Temperature chamber	VT4002	Vötsch	22/24/27, 15C
2058	EMI Test receiver	ESPC	R&S	15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B

5.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30599	3m semi-anechoic chamber		TDK	22/24/27, 15C, 15B
TM38845	EMI receiver	ESI 40	R&S	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	MITEQ	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	MITEQ	22/24/27, 15C, 15B
TM37516	Biconilog antenna	HL562	R&S	22/24/27, 15C, 15B
TM26496	Double ridged waveguide antenna	3115	EMCO	22/24/27, 15C, 15B
TM39158	Horn antenna	3116	EMCO	22/24/27, 15C, 15B
TM26492	Reference dipole set	UHAP/VHAP	Schwarzbeck	22/24/27, 15C, 15B
TM37501	Dipole antenna	3125-870	EMCO	22/24/27
TM37502	Dipole antenna	3125-1880	EMCO	22/24/27
TM37773	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM38631	Signal generator	83640L	Agilent	22/24/27, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24/27, 15C, 15B
TM26511	Tunable notch filter	WRCA870	Wainwright	22/24/27
TM38215	Tunable notch filter	WRCD1850/1910-0.2/40	Wainwright	22/24/27
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30	Wainwright	15C
TM30642	Mast/Turntable controller	HD-100	Deisel	22/24/27, 15C, 15B
TM26500	Turntable	DS412	Deisel	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	EMCO	22/24/27, 15C, 15B
TM38843	Antenna mast	2075	EMCO	22/24/27, 15C, 15B
TM38114	DC power supply	6632A	Agilent	22/24/27, 15C, 15B
TM38323	Preamplifier	PA-02 18-26 GHz	EMC Automation	22/24/27, 15C, 15B
TM37678	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Transformatic	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
TM23892	Yaesu controller	G-1000SDX	Yaesu	22/24/27, 15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B