

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15CNFC_RM-1104_49	Date of Report:	30-Oct-2015
Number of pages:	8	Customer's Contact person:	Jari Rontu
Testing laboratory:	TCC Microsoft Salo Laboratory P.O.Box(86) Joensuunkatu 7E FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 71 80 44122	Customer:	Microsoft P.O.Box(86) Joensuunkatu 7E FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 71 80 44122
FCC listing no.:	533467		
IC recognition no.:	661V-1		
Tested devices/ accessories:	Phone RM-1104 / Battery (Samsung) BV-T5E / Charger AC-100E / Headset WH-308		
FCC ID:	PYASTT	IC:	661X-STT
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2014), IC standards, RSS-210 (Issue 8, December 2010). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Microsoft.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Timo Raiskio, System Manager, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	15-Jun-2015
Testing completed	28-Oct-2015
The customer's contact person	Jari Rontu
Test Plan referred to	T:\Projects\RM-1104\TestPlan\RS_TestPlan_RM-1104_EMC_FCC.xlsm
Notes	-
Document name	\FCC15CNFC_RM-1104_49.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:
GSM/WCDMA/WLAN
The EUT is tested with maximum rated TX power.

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-1104	004402742178605;059X034	2012	S2	01066.00001.15257.14000	100205
Battery (Samsung)	BV-T5E	4181575182S10605359;0670775	V6	-	-	100208
Charger	AC-100E	409049512558030174860675758	0.3	B2.0	-	100196
Headset	WH-308	-	-	-	-	100195

1.2. Summary of Test Results

NFC:

Section in CFR 47	Section in RSS-GEN or RSS-247	Name of the test	Result
15.209	2.6	Radiated emission below 30 MHz	PASSED
15.209	A2.6	Radiated emission above 30 MHz	
15.225(a-d)	A2.6	Field strength in the 13.56 MHz band	
	4.6.1	Occupied Bandwidth	
15.225(e)	A2.6	Frequency stability, temperature variation	
15.225(e)	A2.6	Frequency stability, voltage variation	
15.207	7.2.2	AC power line conducted emission	

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Microsoft Laboratory.


CONTENTS

1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information.....	2
1.2. Summary of Test Results.....	2
2. Radiated emission below 30 MHz (FCC 15.209, RSS-247 2.6).....	4
2.2. Test method and limit.....	4
2.3. NFC test results.....	6
3. Test Equipment.....	7
3.1. Conducted measurements.....	7
3.2. Radiated measurements.....	7

2. Radiated emission below 30 MHz (FCC 15.209, RSS-247 2.6)

EUT with DUT number	RM-1104, DUT 100205
Accessories with DUT numbers	BV-T5E, DUT 100208 ; AC-100E, DUT 100196 ; WH-308, DUT 100195
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 45 / 100.6
Date of measurements	28-Oct-2015
Measured by	Kalle Hannila

2.1.1 Test setup

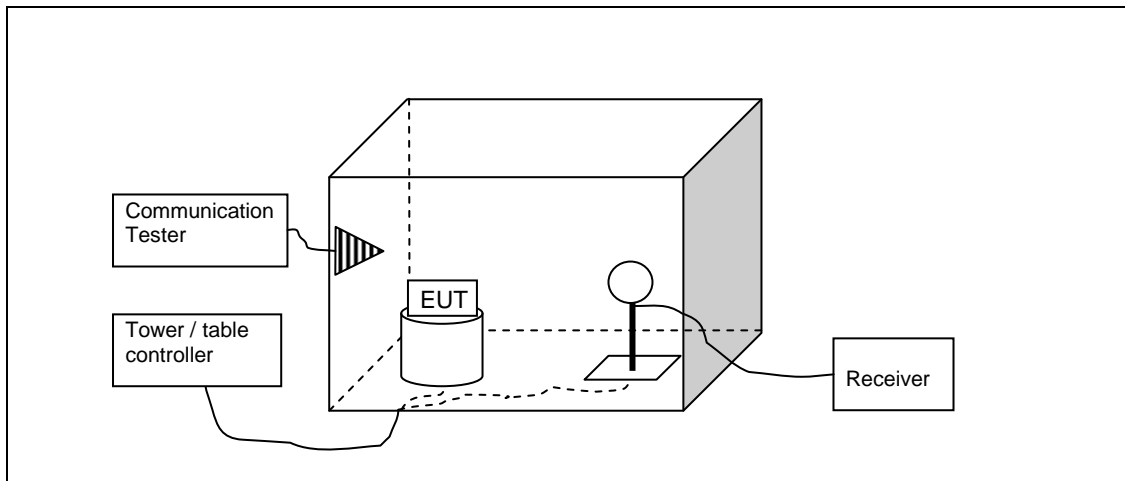

2.2. Test method and limit

The measurement is made according to ANSI C63.4-2014 and RSS-GEN as follows:

The measurement distance is 3 m.

The limit line has been adjusted with the distance correction factor (+40 dB for 30 m distance, +80 dB for 300 m distance).

The measurement is divided into the Preliminary Measurement and the Final Measurement. The suspected frequencies are searched for in Preliminary Measurement with measuring antenna at fixed height using 2-axis EUT position system, set on the turntable, which is rotated 360 degrees. For all identified emissions, the antenna is adjusted for maximum reading.

The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + 20 dB [1/m] + L_{CABLES}$$

Where U_{RX} is receiver reading, 20 dB the antenna factor of the loop antenna and L the cable attenuation.

Limits for radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu V/m$]	Distance [m]	Detector	RBW [kHz]
0.009 - 0.09	2400 / f[kHz]	300	Pk & Avg*	0.2

0.09 - 0.11	2400 / f[kHz]	300	QP	0.2
0.11 - 0.15	2400 / f[kHz]	300	Pk & Avg	0.2
0.15 - 0.49	2400 / f[kHz]	300	Pk & Avg*	9
0.49 - 1.705	24000 / f[kHz]	30	QP	9
1.705 - 30	30	30	QP	9

* These are average limits. The peak limit is 20 dB above the average limit.

2.3. NFC test results

Transmit

MaxPeak

Frequency [MHz]	Reading [dB μ V/m]	Limit [μ V/m]	Distance CF [dB]	Limit @ 3m [dB μ V/m]	Height [cm]	Pol	Results
0.0306	60.14	78.43	80	137.91	170	H	PASSED
0.325	53.63	7.38	80	117.36	170	H	PASSED
0.33	54.45	7.27	80	117.23	170	H	PASSED
0.335	53.85	7.16	80	117.10	170	H	PASSED

Average

Frequency [MHz]	Reading [dB μ V/m]	Limit [μ V/m]	Distance CF [dB]	Limit @ 3m [dB μ V/m]	Height [cm]	Pol	Results
0.0306	58.77	78.43	80	117.91	170	H	PASSED
0.325	32.56	7.38	80	97.36	170	H	PASSED
0.33	33.18	7.27	80	97.23	170	H	PASSED
0.335	31.99	7.16	80	97.10	170	H	PASSED

Transmit

QuasiPeak

Frequency [MHz]	Reading [dB μ V/m]	Limit [μ V/m]	Distance CF [dB]	Limit @ 3m [dB μ V/m]	Height [cm]	Pol	Results
0.505	37.84	47.52	40	73.54	170	H	PASSED
0.51	37.6	47.06	40	73.45	170	H	PASSED

3. Test Equipment

3.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
6039	USB Interface	5541765	Testo	22/24/27, 15C, 15B
6044	V-network	ESH3-Z6	R&S	-
2059	V-network	ESH3-Z6	R&S	-
1759	LISN 50 µH	ESH3-Z5	R&S	22/24/27, 15C, 15B
2097	Pulse Limiter	ESH3-Z2	R&S	22/24/27, 15C, 15B
1999	Receiver	ESIB26	R&S	22/24/27, 15C, 15B
2180	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2390	Directional Coupler	DC2600	AR	-
-	RF immunity / Emission Software	EMC32	R&S	22/24/27, 15C, 15B
2060	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
1759	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
2039	Power Supply	PL330QMD	Thurlby	15C, 15B
6036	Data Logger	175-H2	Testo	22/24/27, 15C, 15B
2359	Temperature Test Chamber	VT4002	Vötsch	22/24/27
2352	Spectrum Analyzer	FSP-30	R&S	22/24/27, 15C
6109	Communication Tester	CMU200	R&S	22/24/27, 15C
6246	Power Supply	66332A	HP	22/24/27, 15C
1992	Signal Generator	83630B	Agilent	15C, 15B
6098	Signal Generator	8648C	Agilent	-
6046	Attenuator 10dB	8493C	Agilent	22/24/27, 15C
6047	Attenuator 20dB	8493C	Agilent	22/24/27, 15C
6045	Power splitter	11667B	Agilent	22/24/27, 15C
6247	Communication Tester	CBT	R&S	22/24/27, 15C 15B
6052	Communication Tester	CMU200	R&S	22/24/27, 15C 15B
6248	Power Supply	6632B	-	22/24/27, 15C 15B
6106	Spectrum Analyzer	FSP-30	R&S	22/24/27, 15C 15B
6113	Signal Generator	SMF100A	R&S	22/24/27, 15C 15B
6202	Temperature Test Chamber	VT4002	Vötsch	22/24/27, 15C 15B
6122	Power Splitter	11667B	Agilent	22/24/27, 15C 15B
6134	Attenuator 10dB	BW-S10-2W263+	Mini-Circuits	22/24/27, 15C
6136	Attenuator 20dB	BW-S20-2W263+	Mini-Circuits	22/24/27, 15C
6103	Bluetooth tester	CBT	R&S	22/24/27, 15C 15B
6250	Power Supply	6651A	Agilent	22/24/27, 15C 15B
6108	Communication Tester	CMU200	R&S	22/24/27, 15C 15B
6105	Spectrum Analyzer	FSV-30	R&S	22/24/27, 15C 15B
6251	Temperature Test Chamber	VT4002	Vötsch	22/24/27, 15C 15B
6243	Power Splitter	1167B	Agilent	22/24/27, 15C 15B
6245	Attenuator 10dB	BW-S10-2W263+	Mini-Circuits	22/24/27, 15C 15B
6244	Attenuator 20dB	BW-S20-2W263+	Mini-Circuits	22/24/27, 15C 15B

3.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
2388	Bluetooth Tester	CBT	R&S	15B
10479	Communication Tester	CMW500	R&S	22/24/27, 15C, 15B
2347	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2009	Signal Generator	SMP 22	R&S	22/24/27, 15C, 15B
2348	Controller	G-1000DXC	Yaesu	22/24/27, 15C, 15B
2349	Computer Controller	g-1000DXC	Yaesu	22/24/27, 15C, 15B
2116	Controller	EMCO 2090	ETS	22/24/27, 15C, 15B
2109	Power Supply	PL330QMD	Thurlby	22/24/27, 15C, 15B
2353	Receiver	ESIB26	R&S	22/24/27, 15C, 15B
6115	Open switch and control unit	OSP 130	R&S	22/24/27, 15C 15B
6116	Open switch and control unit	OSP 150	R&S	22/24/27, 15C 15B

Eq. No	Equipment	Type	Manufacturer	Used in
6117	Open switch and control unit	OSP 150	R&S	22/24/27, 15C 15B
6131	Notch Filter	WRCT902.4-0.4/40-8SS	Wainwright	22/24/27, 15C 15B
6130	Notch Filter	WRCD1880-1.1.25/50-10SS	Wainwright	22/24/27
6159	Band Reject Filter	WRCD1747.8-0.4/40-5SS	Wainwright	22/24/27, 15C, 15B
6158	Band Reject Filter	WRCT836.6-0.4/40-8SS	Wainwright	22/24/27, 15C, 15B
6197	Band Reject Filter	WRCJV2531/2539-2523/2547-60/12SS	Wainwright	22/24/27, 15C, 15B
2231	Band Reject Filter	WRCG1947/1953-1940/1960-40/6SS	Wainwright	22/24/27, 15C, 15B
2391	Band Reject Filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
2386	Band Reject Filter	WRCG1764.4/1770.4-1760.4/1774.4-40/6SS	Wainwright	22/24/27, 15C, 15B
2385	Band Reject Filter	WRCG1744.4/1750.4-1740.4/1754.4-40/6SS	Wainwright	22/24/27, 15C, 15B
2357	Band Reject Filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	15C
2188	Preamplifier	AFS4-00100300-20-23P-6	Miteq	22/24/27, 15C, 15B
6195	High Pass Filter	-	Wainwright	22/24/27, 15C, 15B
2364	Band Reject Filter	WRCG1877/1883 - 1870/1890-40/6SS	Wainwright	24
2361	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	Euroshield	22/24/27, 15C, 15B
6212	Antenna Array system	-	TCC	22/24/27, 15C, 15B
-	RF immunity / Emission Software	EMC32	R&S	22/24/27, 15C, 15B
6089	Antenna	HFH2-Z2	R&S	15C, 15B
2027	CDN	M2 (modified) DC1	MEB	22/24/27, 15C, 15B
2028	CDN	M3 (modified) DC2	MEB	22/24/27, 15C, 15B
2176	CDN	CDN 801-M3	Lüthi	22/24/27, 15C, 15B
2135	CDN	CDN 801-M3	Lüthi	22/24/27, 15C, 15B
2029	Power Supply	PL330	Thurlby	22/24/27, 15C
6038	Data Logger	Testo 580	Testo	22/24/27, 15C, 15B
6037	Data Logger	175-H2	Testo	22/24/27, 15C, 15B
6039	USB Interface	5541765	Testo	22/24/27, 15C, 15B

END OF REPORT