

TEST REPORT FROM RFI GLOBAL SERVICES LTD

Test of: GN Mobile A/S.
Olivia

To: FCC Part 15.247: 2005 (Subpart C)

Test Report Serial No:
RFI/MPTE3/RP48335JD08A

Superseded Test Report Serial No:
RFI/MPTE2/RP48335JD08A

This Test Report Is Issued Under The Authority
Of Andrew Brown, Operations Manager:

A handwritten signature in black ink, appearing to read 'Andrew Brown'.

Tested By: Steven Wong

A handwritten signature in black ink, appearing to read 'Steven Wong'.

Checked By: Tony Henriques

A handwritten signature in black ink, appearing to read 'Tony Henriques'.

pp

Report Copy No: PDF01

Issue Date: 21 September 2006

Test Dates: 28 June 2006 to 11 July 2006

The *Bluetooth*® word mark and logos are owned by the *Bluetooth* SIG, Inc. and any use of such marks by RFI Global Services Ltd. is under license. Other trademarks and trade names are those of their respective owners.

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields.

This report may be copied in full. The results in this report apply only to the sample(s) tested.

RFI Global Services Ltd

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire RG23 8BG

Telephone: +44 (0)1256 312000 Facsimile: +44 (0)1256 312001

Email: info@rfi-global.com Website: www.rfi-global.com

Registered in England and Wales. Company number: 2117901

Test of: GN Mobile A/S.
Olivia

To: FCC Part 15.247: 2005 (Subpart C)

This page has been left intentionally blank.

Test of: GN Mobile A/S.

Olivia

To: FCC Part 15.247: 2005 (Subpart C)

Table of Contents

1. Client Information	4
2. Equipment Under Test (EUT)	5
3. Test Results	8
4. Deviations from the Test Specification	9
5. Operation of the EUT during Testing	10
6. Summary of Test Results	11
7. Measurements, Examinations and Derived Results	12
8. Measurement Uncertainty	38
9. Measurement Methods	39
Appendix 1. Test Equipment Used	47
Appendix 2. Test Configuration Drawings	48

Test Report Serial No: RFI/MPTE3/RP48335JD08A

Supersedes Test Report Serial No: RFI/MPTE2/RP48335JD08A

Test of: GN Mobile A/S.
Olivia

To: FCC Part 15.247: 2005 (Subpart C)

1. Client Information

Company Name:	GN Mobile A/S
Address:	Metalbuen 66 P.O. Box 201 DK-2750 Ballerup Denmark
Contact Name:	Mr T. Ringtved

Test of: GN Mobile A/S.

Olivia

To: FCC Part 15.247: 2005 (Subpart C)

2. Equipment Under Test (EUT)

The following information (with the exception of the Date of Receipt) has been supplied by the client:

2.1. Identification of Equipment Under Test (EUT)

Brand Name:	Nokia
Model Name or Number:	Olivia
Serial Number:	<i>Radiation 1; EDR 1*</i>
Hardware Version:	Rev2
Software Version:	21a
FCC ID Number:	PYAHS-38W
Country of Manufacture:	China
Date of Receipt:	28 June 2006

**All EDR testing was performed using sample EDR 1 whilst all other tests were performed on the sample Radiation 1*

2.2. Description of EUT

The equipment under test is a Wireless *Bluetooth* Headset

2.3. Modifications Incorporated in EUT

During the course of testing the EUT was not modified.

Test of: GN Mobile A/S.

Olivia

To: FCC Part 15.247: 2005 (Subpart C)

2.4. Additional Information Related to Testing

ITU Emission Code:	1M23F7D		
Power Supply Requirement:	Internal battery supply of 3.7 V		
Equipment Category:	Bluetooth Transceiver		
Type of Unit:	Portable (Standalone battery powered device)		
Modulation Type:	GFSK & 8DPSK (EDR)		
Transmit Frequency Range:	2402 to 2480 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	1	2402
	Middle	40	2441
	Top	79	2480
Receive Frequency Range:	2402 to 2480 MHz		
Receive Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	1	2402
	Middle	40	2441
	Top	79	2480
Maximum Power Output (EIRP)	-0.5 dBm & -2.5 dBm (EDR)		

2.5. Port Identification

Port	Description	Type/Length	Applicable
1	DC Power Charging Port	-	Y

Test of: GN Mobile A/S.
Olivia

To: FCC Part 15.247: 2005 (Subpart C)

2.6. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	AC Charger
Brand Name:	Nokia
Model Name or Number:	AC-3E
Serial Number:	4090495135931000600; 0675370
Cable Length and Type:	1.8 m
Connected to Port:	DC charging

Description:	Bluetooth Development Kit
Brand Name:	CASIRA
Model Name or Number:	BCES301199/1
Serial Number:	50130503D1

Test of: GN Mobile A/S.
Olivia

To: FCC Part 15.247: 2005 (Subpart C)

3. Test Results

Reference:	FCC Part 15.247: 2005 Subpart C
Title:	Code of Federal Regulations, Part 15.247 (47CFR22) (Intentional Radiators operating within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz)

3.1. Methods and Procedures

The methods and procedures used were as detailed in:

ANSI/TIA-603-B-2003

Land Mobile Communications Equipment, Measurements and performance Standards

ANSI C63.2 (1987)

Title: American National Standard for Instrumentation - Electromagnetic noise and field strength.

ANSI C63.4 (2003)

Title: American National Standard Methods of Measurement of Electromagnetic Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

ANSI C63.5 (1988)

Title: American National Standard for the Calibration of antennas used for Radiated Emission measurements in Electromagnetic Interference (EMI) control.

ANSI C63.7 (1988)

Title: American National Standard Guide for Construction of Open Area Test Sites for performing Radiated Emission Measurements.

CISPR 16-1: (1999)

Title: Specification For Radio Disturbance and Immunity Measuring Apparatus and Methods. Part 1: Radio Disturbance and Immunity Measuring Apparatus.

DA00-705 (2000)

Title: Filing and Frequency Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

3.2. Definition of Measurement Equipment

The measurement equipment used complied with the requirements of the standards referenced in the methods & procedures section above. Appendix 1 contains a list of the test equipment used.

Test of: GN Mobile A/S.
Olivia

To: FCC Part 15.247: 2005 (Subpart C)

4. Deviations from the Test Specification

There were no deviations specifications.

Test of: GN Mobile A/S.
Olivia

To: FCC Part 15.247: 2005 (Subpart C)

5. Operation of the EUT during Testing

5.1. Operating Modes

The EUT was tested in the following operating modes, unless otherwise stated.

For all transmit mode measurements the *Bluetooth* test mode was active and set to transmit on top, middle and bottom channels and hopping on all channels as necessary with the longest data packet size.

For the Transmitter 20 dB Bandwidth, Transmitter Carrier Frequency Separation, Transmitter Maximum Peak Output Power and Transmitter Band Edge Radiated Emissions tests, the EUT was tested with both GFSK and 8DPSK (EDR Mode) modulation.

For the rest of the transmitter tests testing was performed in the GFSK modulation operating mode as this was found to be worst case i.e. the mode that exhibited the highest EIRP.

Receive mode measurements were performed with the EUT in charging mode (worst case mode).

5.2. Configuration and Peripherals

The EUT was tested in the following configuration:

Testing was performed with EUT configured as standalone during all transmitter tests (as the transmitter does not operate with AC Charger connected).

For receiver/idle mode testing, EUT was connected to an external 110V AC mains supply via an AC charger. This configuration was found to be the worst case mode.

Test of: GN Mobile A/S.

Olivia

To: FCC Part 15.247: 2005 (Subpart C)

6. Summary of Test Results

Range of Measurements	Specification Reference	Port Type	Compliance Status
Idle Mode AC Conducted Emissions (150 kHz to 30 MHz)	C.F.R. 47 FCC Part 15: 2005 Section 15.107	AC Mains	Complied
Idle Mode Radiated Spurious Emissions	C.F.R. 47 FCC Part 15: 2005 Section 15.109	Antenna	Complied
Transmitter 20 dB Bandwidth	C.F.R. 47 FCC Part 15: 2005 Section 15.247(a)(1)	Antenna	Complied
Transmitter Carrier Frequency Separation	C.F.R. 47 FCC Part 15: 2005 Section 15.247(a)(1)	Antenna	Complied
Transmitter Average Time of Occupancy	C.F.R. 47 FCC Part 15: 2005 Section 15.247(a)(1)(iii)	Antenna	Complied
Transmitter Maximum Peak Output Power	C.F.R. 47 FCC Part 15: 2005 Section 15.247(b)(1)	Antenna	Complied
Transmitter Radiated Emissions	C.F.R. 47 FCC Part 15: 2005 Sections 15.247(d) & 15.209(a)	Antenna	Complied
Transmitter Band Edge Radiated Emissions	C.F.R. 47 FCC Part 15: 2005 Sections 15.247(d) & 15.209(a)	Antenna	Complied

6.1. Location of Tests

All the measurements described in this report were performed at the premises of RFI Global Services Ltd, Ewhurst Park, Ramsdell, Basingstoke, Hampshire, RG26 5RQ.

Test of: GN Mobile A/S.
Olivia

To: FCC Part 15.247: 2005 (Subpart C)

7. Measurements, Examinations and Derived Results

7.1. General Comments

This section contains test results only.

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to section 8 for details of measurement uncertainties.

Test of: GN Mobile A/S.

Olivia

To: FCC Part 15.247: 2005 (Subpart C)

7.2. Test Results

7.2.1. Idle Mode AC Conducted Spurious Emissions: Section 15.107

The EUT was configured as for AC conducted emission measurements as described in section 9 of this report.

Tests were performed to identify the maximum emission levels present on the ac mains line of the EUT.

Results:

Quasi-Peak Detector Measurements on Live and Neutral Lines

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.20963	Neutral	43.96	63.22	19.26	Complied
0.42931	Live	47.64	57.27	9.63	Complied
0.61295	Neutral	45.00	56.00	11.00	Complied
0.83938	Neutral	15.90	56.00	40.10	Complied
1.08935	Neutral	49.27	56.00	6.73	Complied
1.27355	Neutral	44.80	56.00	11.20	Complied


Average Detector Measurements on Live and Neutral Lines

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.20963	Live	30.42	53.22	22.80	Complied
0.42931	Live	38.63	47.27	8.64	Complied
0.61295	Neutral	26.72	46.00	19.28	Complied
0.83938	Neutral	11.07	46.00	34.93	Complied
1.08935	Neutral	42.61	46.00	3.39	Complied
1.27355	Neutral	39.29	46.00	6.71	Complied

Test of: GN Mobile A/S.
Olivia

To: FCC Part 15.247: 2005 (Subpart C)

Idle Mode AC Conducted Spurious Emissions: Section 15.107 (Continued)

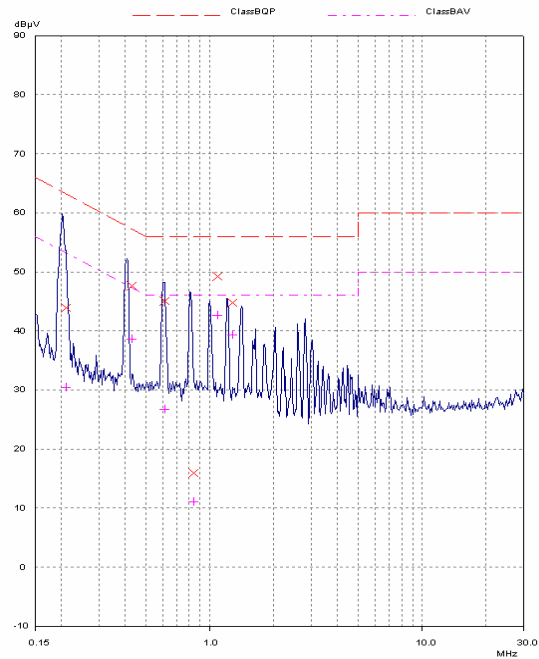

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.

Test of: GN Mobile A/S.

Olivia

To: FCC Part 15.247: 2005 (Subpart C)


7.2.2. Idle Mode Radiated Spurious Emissions: Section 15.109

The EUT was configured as for radiated emission testing as described in section 9 of this report.

Tests were performed to identify the maximum receiver or standby radiated emission levels.

Results:**Electric Field Strength Measurements (Frequency Range: 30 to 1000 MHz)**

Frequency (MHz)	Antenna Polarity	Q-P Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
62.214	Vertical	16.0	40.0	24.0	Complied
85.238	Vertical	16.4	40.0	23.6	Complied
120.651	Vertical	13.0	43.5	30.5	Complied
496.523	Vertical	38.2	46.0	7.8	Complied
506.543	Vertical	38.0	46.0	8.0	Complied
511.914	Vertical	39.1	46.0	6.9	Complied
544.779	Vertical	31.0	46.0	15.0	Complied
583.998	Vertical	32.4	46.0	13.6	Complied
722.074	Horizontal	28.0	46.0	28.0	Complied

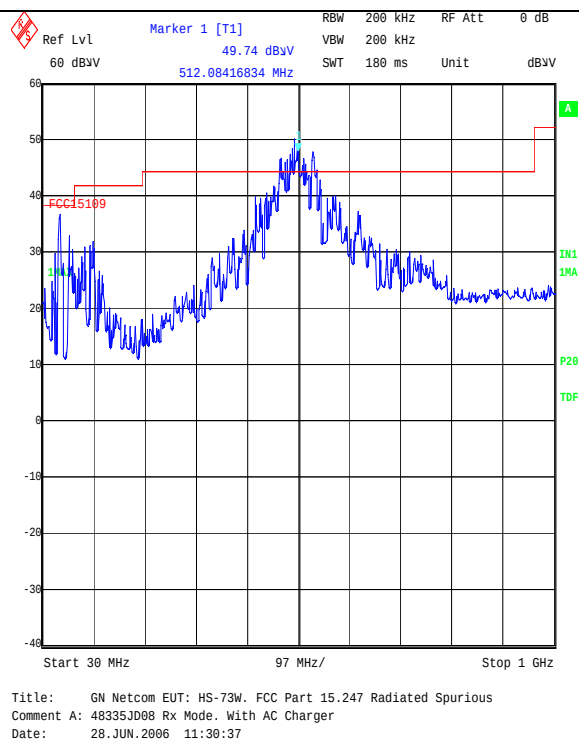

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.

Test of: GN Mobile A/S.

Olivia


To: FCC Part 15.247: 2005 (Subpart C)

7.2.3. Idle Mode Radiated Spurious Emissions: Section 15.109**Results:****Electric Field Strength Measurements (Frequency Range: 1 to 12.5 GHz)****Highest Peak Level:**


Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1.175009	Vertical	45.8	-12.7	33.1	74.0	40.9	Complied

Highest Average Level:

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1.175009	Vertical	36.7	-12.7	24.0	54.0	30.0	Complied

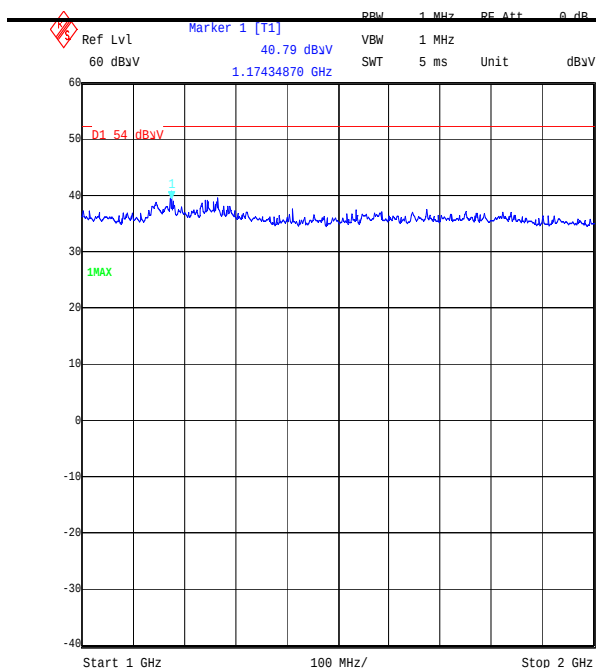

Title: GN Netcom EUT: HS-73W. FCC Part 15.247 Radiated Spurious
 Comment A: 48335JD08 Rx Mode. With AC Charger
 Date: 28.JUN.2006 13:00:15

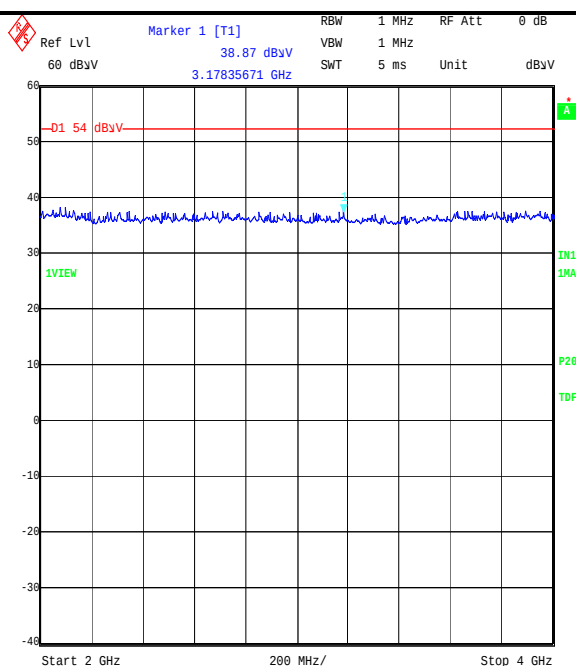


Title: GN Netcom EUT: HS-73W. FCC Part 15.247 Radiated Spurious
 Comment A: 48335JD08 Rx Mode. With AC Charger
 Date: 28.JUN.2006 12:54:13


Test of: GN Mobile A/S.

Olivia


To: FCC Part 15.247: 2005 (Subpart C)

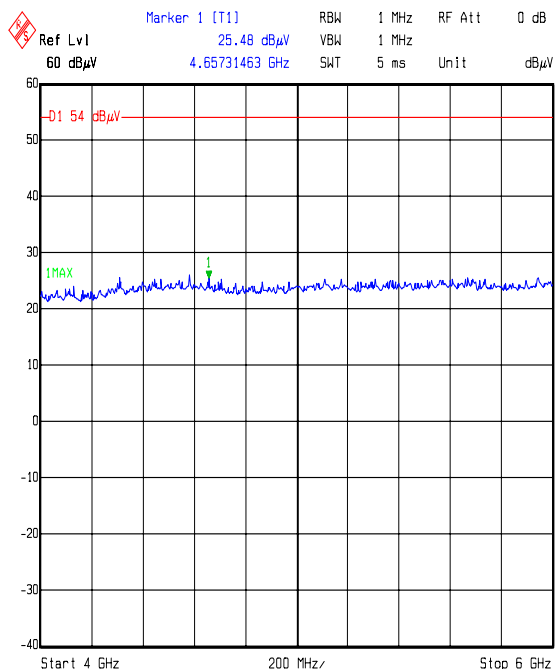Idle Mode Radiated Spurious Emissions: Section 15.109 (Continued)

Title: GN Mobile EUT: HS-73W, FCC Part 15.247, Radiated Emissions
Comment A: 48335JD08 Rx Mode, AC Charger
Date: 29.JUN.2006 14:20:31

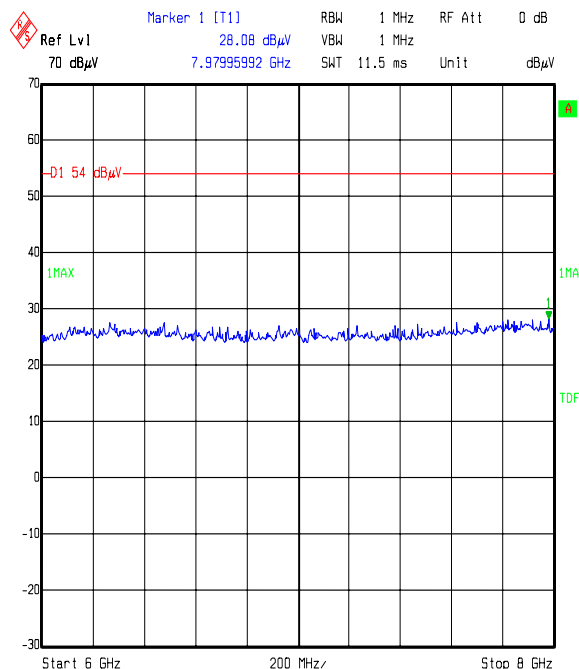

Title: GN Mobile EUT: HS-73W, FCC Part 15.247 Radiated Emissions
Comment A: 48335JD08 Rx Mode, With AC Charger
Date: 29.JUN.2006 15:11:35

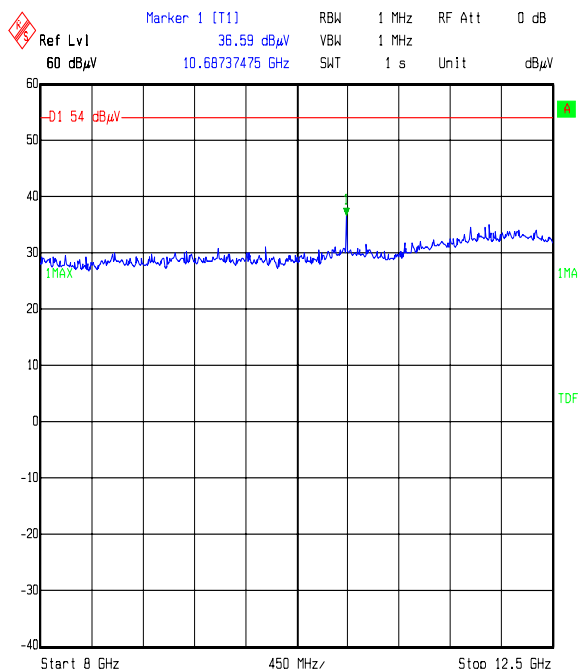

Title: GN Mobile EUT: HS-73W, FCC Part 15.247 Radiated Emissions
Comment A: 48335JD08 Rx Mode, With AC Charger
Date: 29.JUN.2006 15:27:05

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Note: The emission shown in the plot above at approximately 10.687 GHz is an ambient and does not emanate from the EUT, consequently no measurement of this emission was performed.

Test of: GN Mobile A/S.
Olivia

To: FCC Part 15.247: 2005 (Subpart C)

7.2.4. Transmitter 20 dB Bandwidth: Section 15.247(a)(1)

The EUT was configured for 20 dB bandwidth measurements as described in section 9 of this report.

Tests were performed to identify the 20 dB bandwidth.

Results: (GFSK Modulation Mode)

Transmitter 20 dB Bandwidth (kHz)	Limit (kHz)
873.747	None specified




Title: GN Mobile EUT: HS-73W, FCC Part 15.247 20dB Bandwidth
 Comment A: 48335JD08 Tx Mode, Hopping on All Channels, GFSK Mod.
 Date: 30.JUN.2006 12:12:37

Test of: GN Mobile A/S.
Olivia
To: FCC Part 15.247: 2005 (Subpart C)

The EUT was configured for 20 dB bandwidth measurements as described in section 9 of this report. Tests were performed to identify the 20 dB bandwidth.

Transmitter 20 dB Bandwidth (kHz)	Limit (kHz)
1226.453	None specified

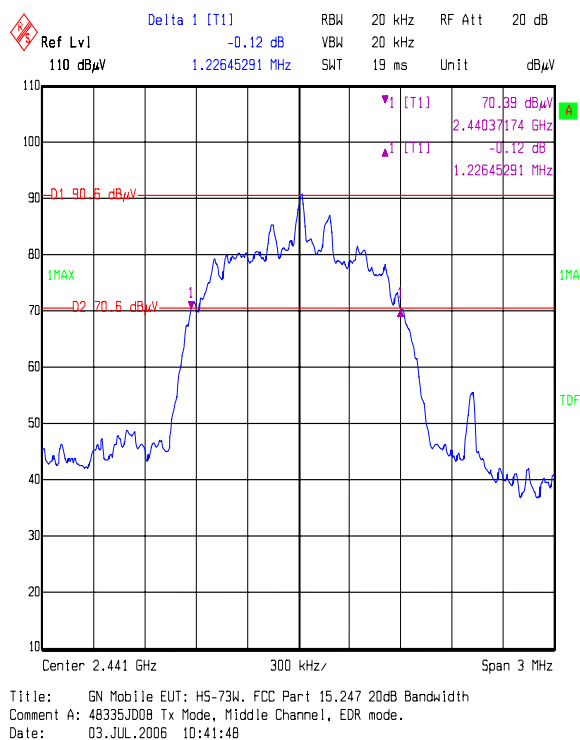

Test of: GN Mobile A/S.
Olivia

To: FCC Part 15.247: 2005 (Subpart C)


7.2.6. Transmitter Carrier Frequency Separation: Section 15.247(a)(1)

The EUT was configured for carrier frequency separation measurements as described in section 9 of this report.

Tests were performed to identify the carrier frequency separation.

Results: (GFSK Modulation Mode)

Transmitter Carrier Frequency Separation (kHz)	Limit (> 20 dB or $\frac{2}{3}$ of 20 dB BW) (kHz)	Margin (kHz)	Result
997.996	582.498	415.498	Complied

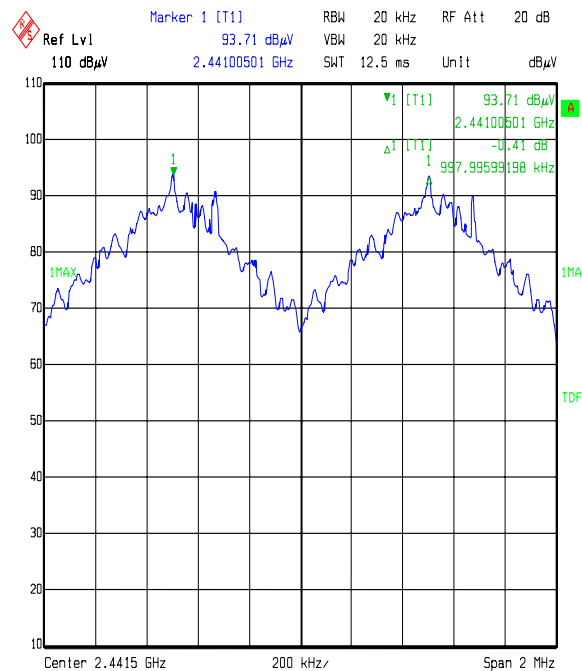

Title: GN Mobile EUT: HS-73W, FCC Part 15.247 Carrier Separation
 Comment A: 48335JD08 Tx Mode, Hopping on All Channels, GFSK Mod.
 Date: 30.JUN.2006 12:18:16

Test of: GN Mobile A/S.
Olivia

To: FCC Part 15.247: 2005 (Subpart C)


7.2.7. Transmitter Carrier Frequency Separation: Section 15.247(a)(1)

The EUT was configured for carrier frequency separation measurements as described in section 9 of this report.

Tests were performed to identify the carrier frequency separation.

Results: (8DPSK Modulation EDR Mode)

Transmitter Carrier Frequency Separation (kHz)	Limit (> 20 dB or $\frac{2}{3}$ of 20 dB BW) (kHz)	Margin (kHz)	Result
1002.004	817.635	184.369	Complied

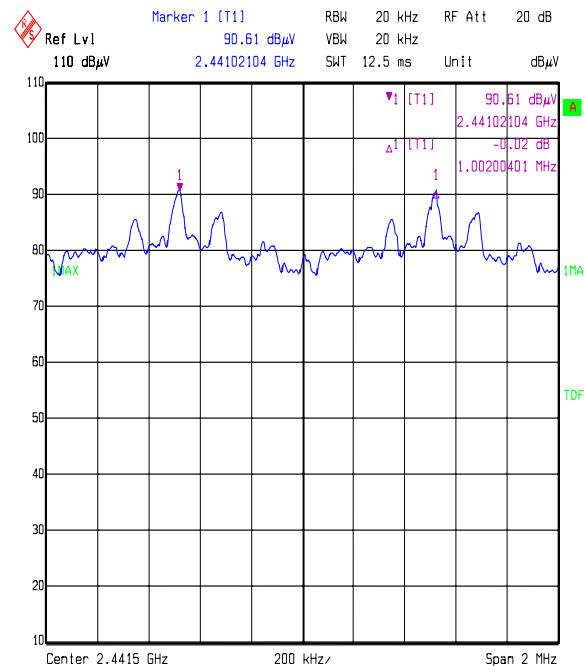

Title: GN Mobile EUT: HS-73W, FCC Part 15.247 Carrier Separation
Comment A: 48335JD08 Tx Mode, Middle Channel, EDR mode.
Date: 03.JUL.2006 10:43:39

Test of: GN Mobile A/S.
Olivia

To: FCC Part 15.247: 2005 (Subpart C)

7.2.8. Transmitter Average Time of Occupancy: Section 15.247(a)(1)(iii)

The EUT was configured for average time of occupancy measurements as described in section 9 of this report.

Tests were performed to identify the average time of occupancy in number of channels (79) x 0.4 seconds. The calculated period is 31.6 seconds.


Results: (GFSK Modulation Mode)

Emission Width (μs)	Number of Hops in 31.6 Seconds	Average Time of Occupancy (s)	Limit (s)	Margin (s)	Result
2935.872	81	0.238	0.4	0.162	Complied


Test of: GN Mobile A/S.

Olivia


To: FCC Part 15.247: 2005 (Subpart C)

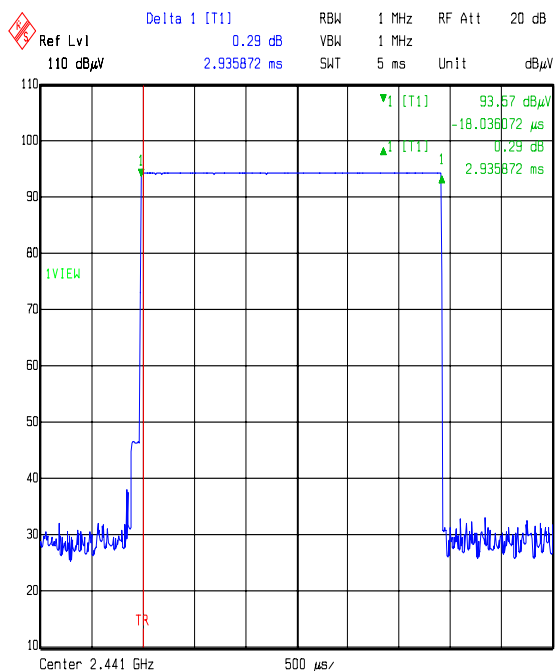Transmitter Average Time of Occupancy: Section 15.247(a)(1)(iii) (Continued)

Title: GN Mobile EUT: HS-73W. FCC Part 15.247 Emission Width
Comment A: 48335JD08 Tx Mode, Hopping on All Channels, GFSK Mod.
Date: 30.JUN.2006 12:27:00

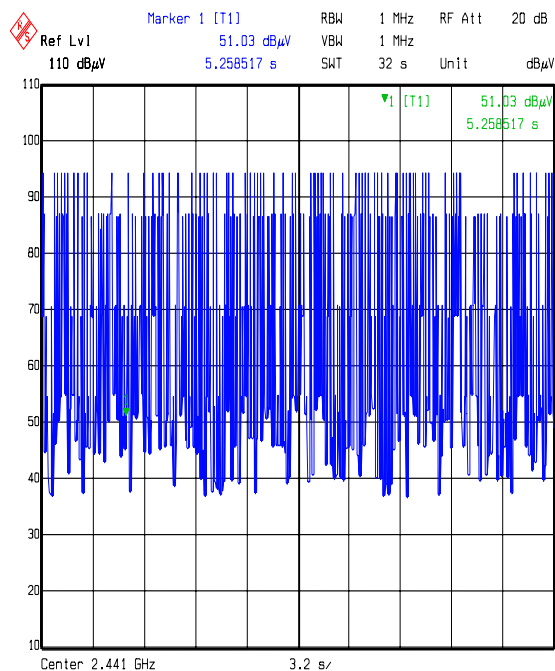

Title: GN Mobile EUT: HS-73W. FCC Part 15.247 Number of Hops in 32s
Comment A: 48335JD08 Tx Mode, Hopping on All Channels, GFSK Mod.
Date: 30.JUN.2006 12:29:41

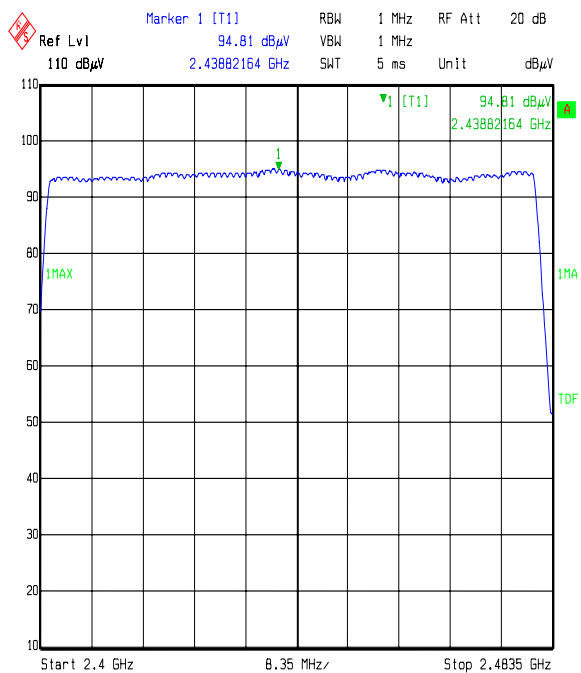

Title: GN Mobile EUT: HS-73W. FCC Part 15.247 Number of Channels
Comment A: 48335JD08 Tx Mode, Hopping on All Channels, GFSK Mod.
Date: 30.JUN.2006 12:38:53

Test of: GN Mobile A/S.

Olivia

To: FCC Part 15.247: 2005 (Subpart C)

7.2.9. Transmitter Maximum Peak Output Power: (EIRP) Section 15.247(b)(1)

The EUT was configured for transmitter peak output power measurements as described in Section 9 of this report.

Tests were performed to identify the transmitter maximum peak output power (EIRP) of the EUT.

Results: (GFSK Modulation Mode)**Battery Powered Devices**

Channel	EIRP (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	-2.0	30.0	32.0	Complied
Middle	-0.5	30.0	30.5	Complied
Top	-1.1	30.0	31.1	Complied


Note(s):

1. These tests were performed radiated; therefore the EUT antenna gain is encompassed in the final result and not measurable.


Test of: GN Mobile A/S.

Olivia


To: FCC Part 15.247: 2005 (Subpart C)

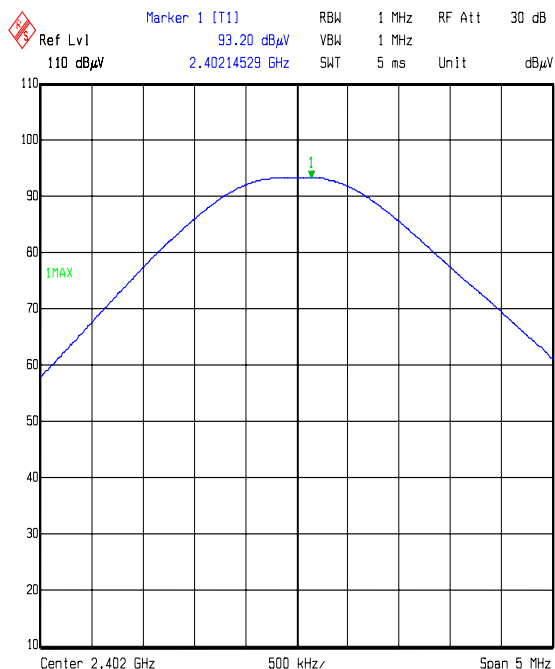Transmitter Maximum Peak Output Power: (EIRP) Section 15.247(b)(1) (Continued)

Title: GN Mobile EUT: HS-73W, FCC Part 15.247 Peak Output Power
Comment A: 48335JD08 Tx Mode, Bottom Channel, GFSK Mod.
Date: 30.JUN.2006 11:44:42

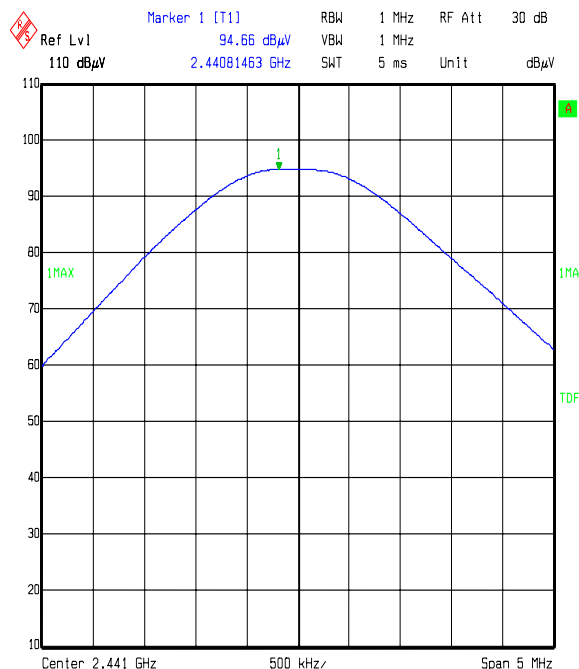

Title: GN Mobile EUT: HS-73W, FCC Part 15.247 Peak Output Power
Comment A: 48335JD08 Tx Mode, Middle Channel, GFSK Mod.
Date: 30.JUN.2006 11:42:44

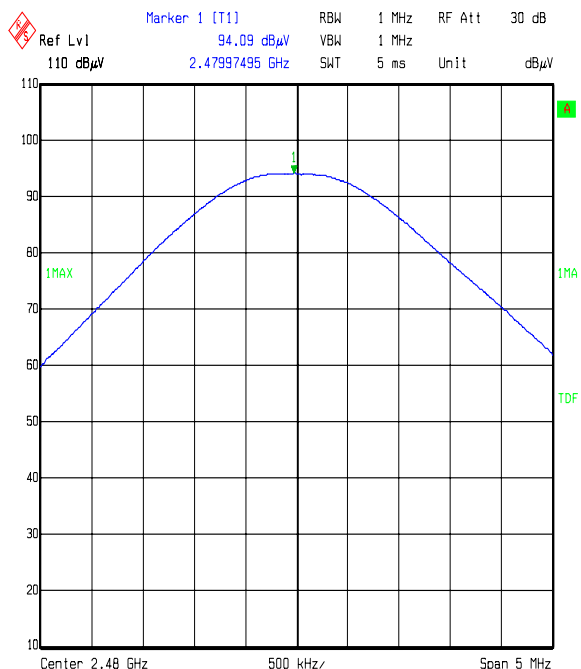

Title: GN Mobile EUT: HS-73W, FCC Part 15.247 Peak Output Power
Comment A: 48335JD08 Tx Mode, Top Channel, GFSK Mod.
Date: 30.JUN.2006 11:40:15

Test of: GN Mobile A/S.

Olivia

To: FCC Part 15.247: 2005 (Subpart C)

7.2.10. Transmitter Maximum Peak Output Power: (EIRP) Section 15.247(b)(1)

The EUT was configured for transmitter peak output power measurements as described in Section 9 of this report.

Tests were performed to identify the transmitter maximum peak output power (EIRP) of the EUT.

Results: (8DPSK Modulation EDR Mode)**Battery Powered Devices**

Channel	EIRP (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	-4.1	30.0	34.1	Complied
Middle	-2.5	30.0	32.5	Complied
Top	-3.3	30.0	33.3	Complied


Note(s):

1. These tests were performed radiated; therefore the EUT antenna gain is encompassed in the final result and not measurable.


Test of: GN Mobile A/S.

Olivia


To: FCC Part 15.247: 2005 (Subpart C)

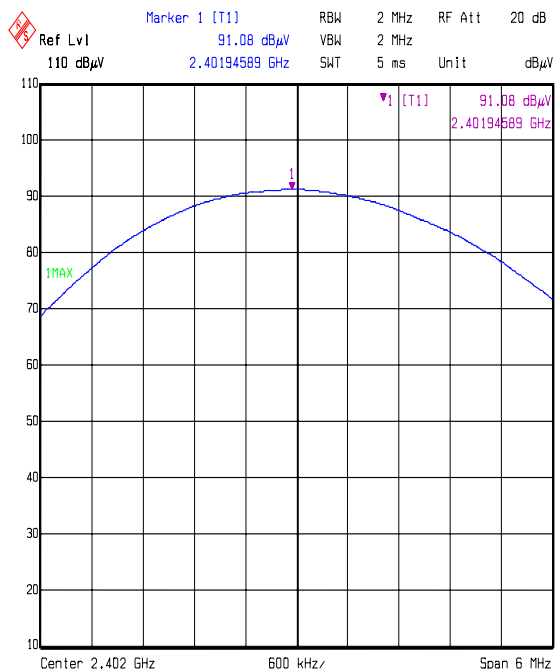Transmitter Maximum Peak Output Power: (EIRP) Section 15.247(b)(1) (Continued)

Title: GN Mobile EUT: HS-73W. FCC Part 15.247 Peak Output Power
Comment A: 48335JD08 Tx Mode, Bottom Channel, EDR mode.
Date: 03.JUL.2006 10:39:03

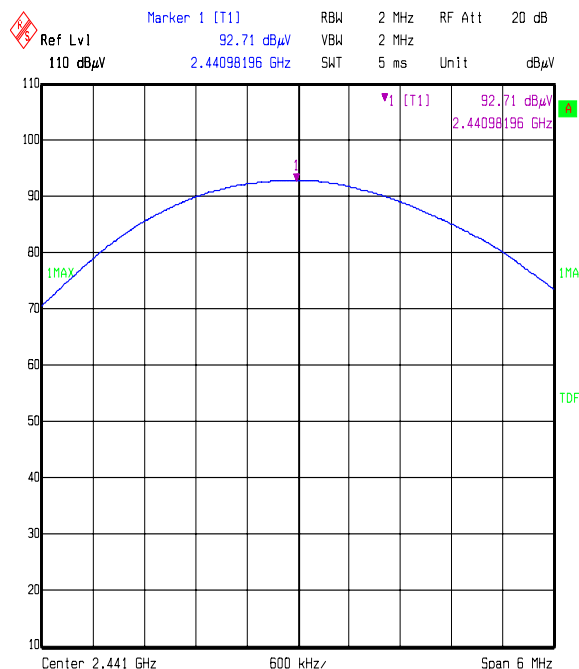

Title: GN Mobile EUT: HS-73W. FCC Part 15.247 Peak Output Power
Comment A: 48335JD08 Tx Mode, Middle Channel, EDR mode.
Date: 03.JUL.2006 10:39:53

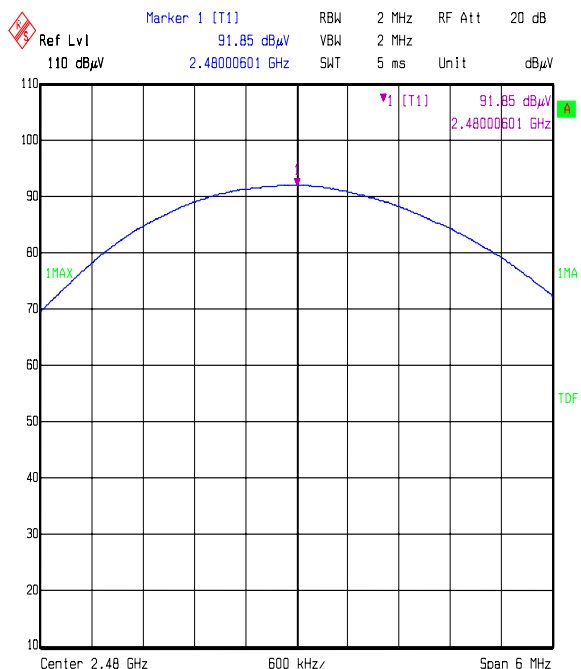

Title: GN Mobile EUT: HS-73W. FCC Part 15.247 Peak Output Power
Comment A: 48335JD08 Tx Mode, Top Channel, EDR mode.
Date: 03.JUL.2006 10:38:05

Test of: GN Mobile A/S.

Olivia

To: FCC Part 15.247: 2005 (Subpart C)

7.2.11. Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a)

The EUT was configured for radiated emission testing as described in section 9 of this report.


Tests were performed to identify the maximum transmitter radiated emission levels.

Results: (GFSK Modulation Mode)**Electric Field Strength Measurements: 30 to 1000 MHz
(emissions outside the restricted bands)****Top Channel**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Result
489.408	Horizontal	24.9	73.9	49.0	Complied
509.930	Horizontal	24.9	73.9	49.0	Complied
532.274	Horizontal	29.5	73.9	44.4	Complied
539.329	Horizontal	30.9	73.9	43.0	Complied

Note(s):

- The preliminary scans showed similar emission levels for each mode below 1 GHz, therefore final radiated emissions measurements were performed with the EUT set to the top channel only.

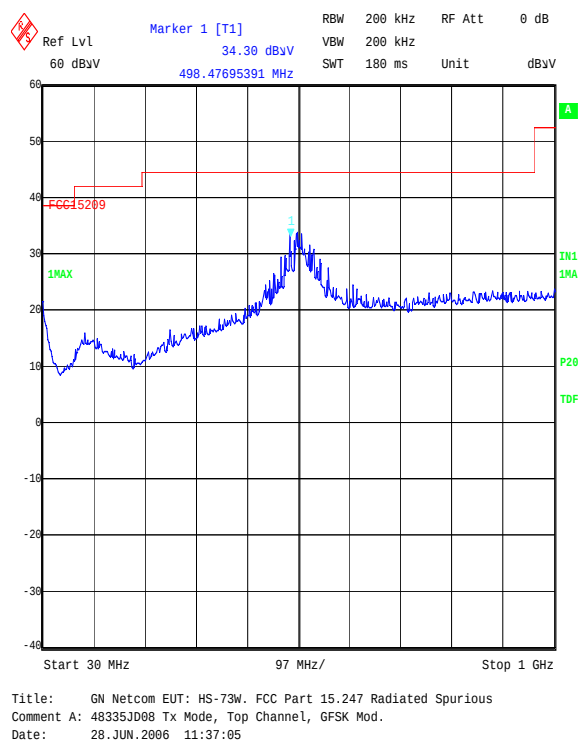

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.

Test of: GN Mobile A/S.
Olivia

To: FCC Part 15.247: 2005 (Subpart C)

7.2.12. Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a) -

The EUT was configured for radiated emission testing as described in section 9 of this report.

Tests were performed to identify the maximum transmitter radiated emission levels.

Results:

Electric Field Strength Measurements (Frequency Range: 1 to 25 GHz) (emissions occurring in the restricted bands)

Highest Peak Level: Bottom Channel

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1.601964	Vertical	51.5	-11.8	39.7	74.0	34.3	Complied
4.803975	Vertical	60.5	-6.5	54.0	74.0	20.0	Complied

Highest Average Level: Bottom Channel

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1.601964	Vertical	43.2	-11.8	31.4	54.0	22.6	Complied
4.803975	Vertical	53.4	-6.5	46.9	54.0	7.1	Complied

Highest Peak Level: Middle Channel

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
4.881995	Vertical	58.9	-6.2	52.7	74.0	21.3	Complied
7.322895	Horizontal	43.2	-4.3	38.9	74.0	35.1	Complied

Highest Average Level: Middle Channel

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
4.881995	Vertical	51.6	-6.2	45.4	54.0	8.6	Complied
7.322895	Horizontal	28.9	-4.3	24.6	54.0	29.4	Complied

Test of: GN Mobile A/S.

Olivia

To: FCC Part 15.247: 2005 (Subpart C)

Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a) (Continued)**Highest Peak Level: Top Channel**

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
4.960015	Vertical	57.9	-5.9	52.0	74.0	22.0	Complied
7.439940	Horizontal	41.8	-4.2	37.6	74.0	36.4	Complied

Highest Average Level: Top Channel

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
4.960015	Vertical	50.0	-5.9	44.1	54.0	9.9	Complied
7.439940	Horizontal	25.3	-4.2	21.1	54.0	32.9	Complied

Highest Peak Level: Hopping Mode

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
4.823931	Vertical	59.9	-6.5	53.4	74.0	20.6	Complied

Highest Average Level: Hopping Mode

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
4.823931	Vertical	53.5	-6.5	47.0	54.0	7.0	Complied

Test of: GN Mobile A/S.
Olivia

To: FCC Part 15.247: 2005 (Subpart C)

7.2.13. Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a)

The EUT was configured for radiated emission testing as described in section 9 of this report.

Tests were performed to identify the maximum transmitter radiated emission levels.

Results: (GFSK Modulation Mode)

Electric Field Strength Measurements (Frequency Range: 1 to 25 GHz) (emissions outside the restricted bands)

Highest Peak Level: Bottom Channel

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Result
3.203972	Vertical	44.3	-11.1	33.2	73.1	39.9	Complied
7.205963	Horizontal	40.6	-4.4	36.2	73.1	36.9	Complied

Highest Peak Level: Middle Channel

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Result
1.627972	Vertical	49.7	-11.8	37.9	74.6	36.7	Complied
3.255955	Vertical	44.6	-11.0	33.6	74.6	41.0	Complied

Highest Peak Level: Top Channel

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Result
1.653967	Vertical	49.9	-11.7	38.2	73.9	35.7	Complied
3.30729	Vertical	44.5	-11.0	33.5	73.9	40.4	Complied


Highest Peak Level: Hopping Mode

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Result
1.638648	Vertical	51.8	-11.8	40.0	73.7	33.7	Complied
3.246628	Vertical	44.6	-11.1	33.5	73.7	40.2	Complied
7.217954	Horizontal	40.7	-4.4	36.3	73.7	37.4	Complied


Test of: GN Mobile A/S.

Olivia


To: FCC Part 15.247: 2005 (Subpart C)

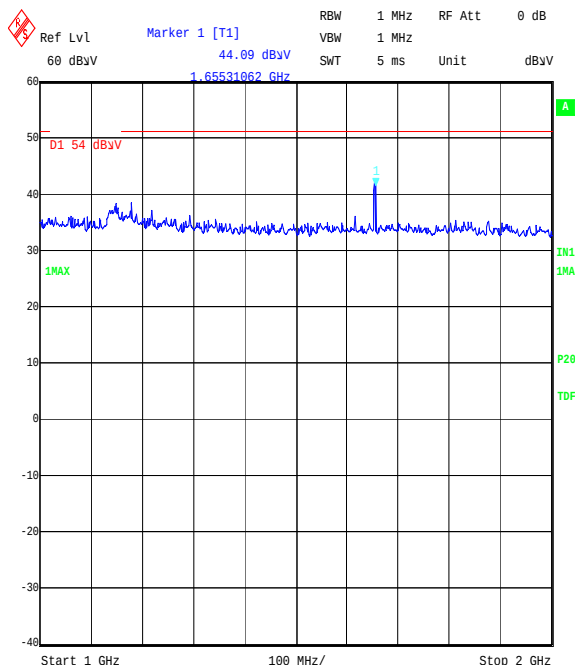Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a) (Continued)


Title: GN Netcom EUT: HS-73W. FCC Part 15.247 Radiated Spurious
Comment A: 48335JD08 Tx Mode, Top Channel, GFSK Mod.
Date: 28.JUN.2006 12:41:12

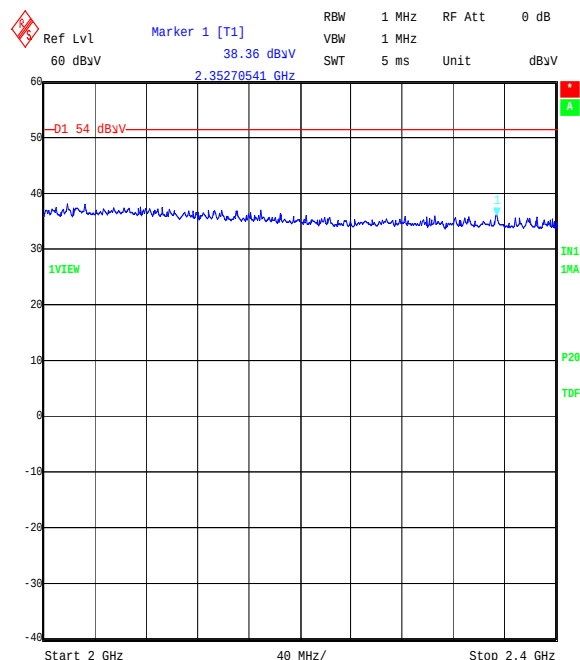

Title: GN Netcom EUT: HS-73W. FCC Part 15.247 Radiated Spurious
Comment A: 48335JD08 Tx Mode, Top Channel, GFSK Mod.
Date: 28.JUN.2006 12:46:58

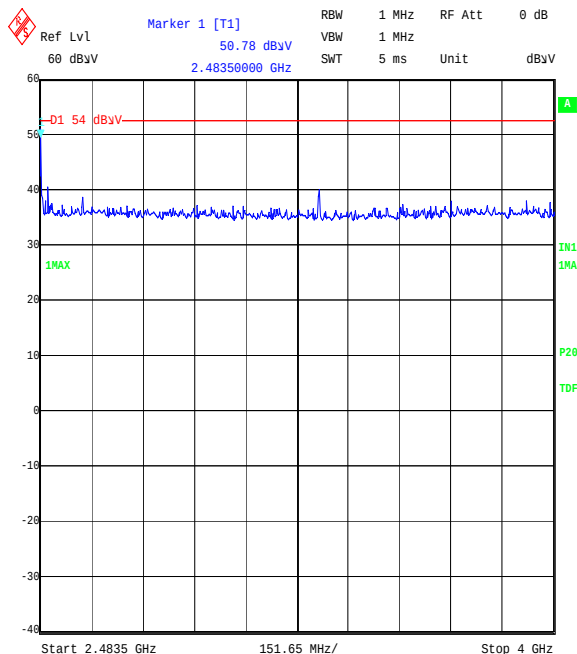

Title: GN Netcom EUT: HS-73W. FCC Part 15.247 Radiated Spurious
Comment A: 48335JD08 Tx Mode, Top Channel, GFSK Mod.
Date: 28.JUN.2006 12:48:46

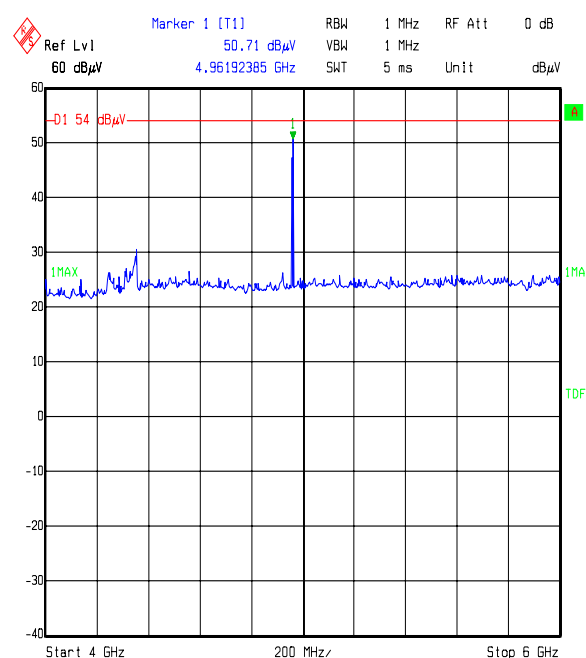


Title: GN Mobile EUT: HS-73W. FCC Part 15.247. Radiated Emissions
Comment A: 48335JD08 Tx Mode, Top Channel, GFSK Mod.
Date: 29.JUN.2006 14:24:59

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.


Test of: GN Mobile A/S.

Olivia


To: FCC Part 15.247: 2005 (Subpart C)

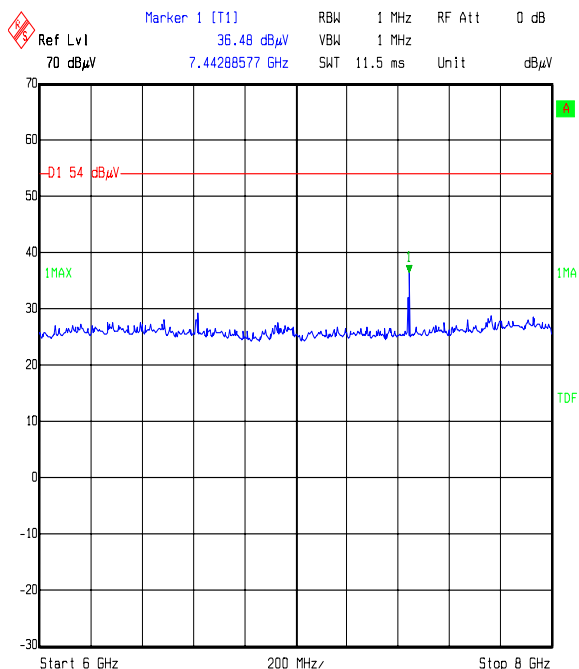Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a) (Continued)


Title: GN Mobile EUT: HS-73W, FCC Part 15.247 Radiated Emissions
Comment A: 48335JD08 Tx Mode, Top Channel, GFSK Mod.
Date: 29.JUN.2006 14:59:32

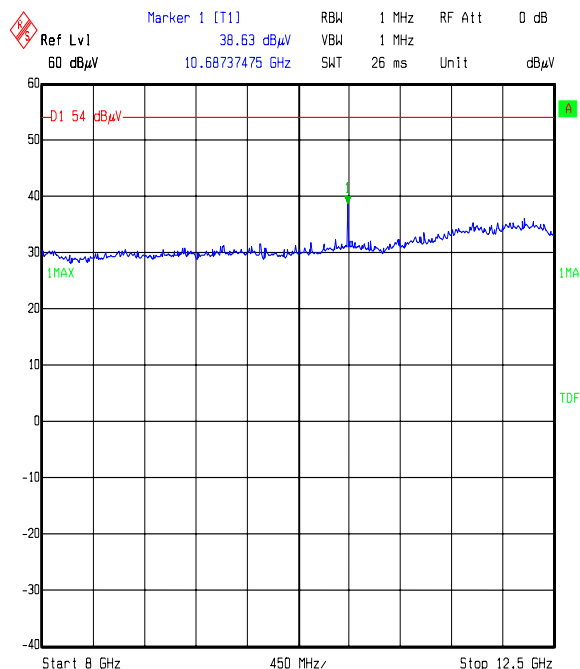

Title: GN Mobile EUT: HS-73W, FCC Part 15.247 Radiated Emissions
Comment A: 48335JD08 Tx Mode, Top Channel, GFSK Mod.
Date: 29.JUN.2006 15:30:01

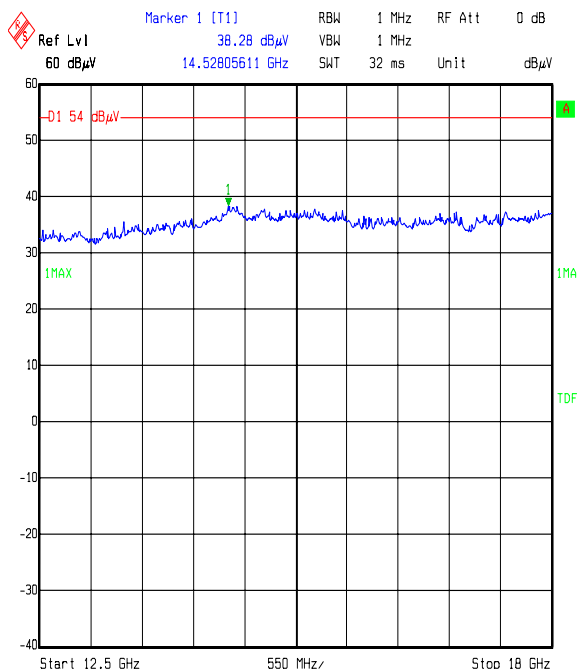

Title: GN Mobile EUT: HS-73W, FCC Part 15.247 Radiated Emissions
Comment A: 48335JD08 Tx Mode, Top Channel, GFSK Mod.
Date: 29.JUN.2006 15:57:25

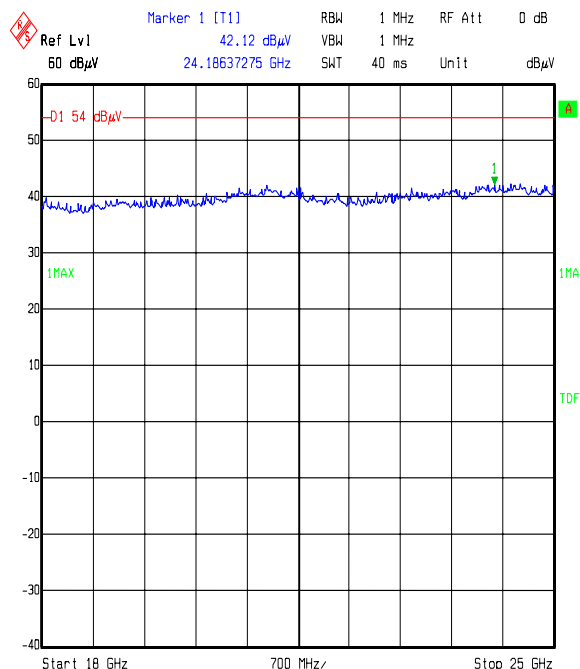

Title: GN Mobile EUT: HS-73W, FCC Part 15.247 Radiated Emissions
Comment A: 48335JD08 Tx Mode, Top Channel, GFSK Mod.
Date: 29.JUN.2006 16:03:01

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Note: The emission shown in the plot above at approximately 10.687 GHz is an ambient and does not emanate from the EUT, consequently no measurement of this emission was performed.

Test of: GN Mobile A/S.
Olivia

To: FCC Part 15.247: 2005 (Subpart C)

7.2.14. Transmitter Band Edge Radiated Emissions: Section 15.247(d) & 15.209(a)

The EUT was configured for band edge compliance of radiated emission measurements as described in section 9 of this report.

Tests were performed to identify the maximum radiated band edge emissions.

Results: (GFSK Modulation Mode)

Electric Field Strength Measurements


Peak Power Level Hopping Mode:

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2.4000	Horizontal	52.4	-11.4	41.0	73.7*	32.7	Complied
2.4835	Horizontal	61.6	-11.0	50.6	74.0	23.4	Complied


*-20 dBc limit

Average Power Level Hopping Mode:

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2.4835	Horizontal	56.9	-11.0	45.9	54.0	8.1	Complied

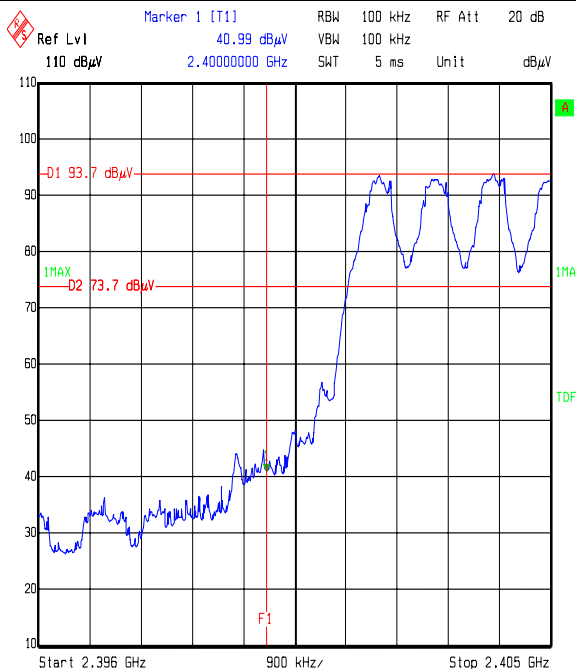

Title: GN Mobile EUT: HS-73W, FCC Part 15.247 Radiated Band Edge
Comment A: 48335JD08 Tx Mode, Hopping on All Channels, GFSK Mod.
Date: 30.JUN.2006 11:58:40

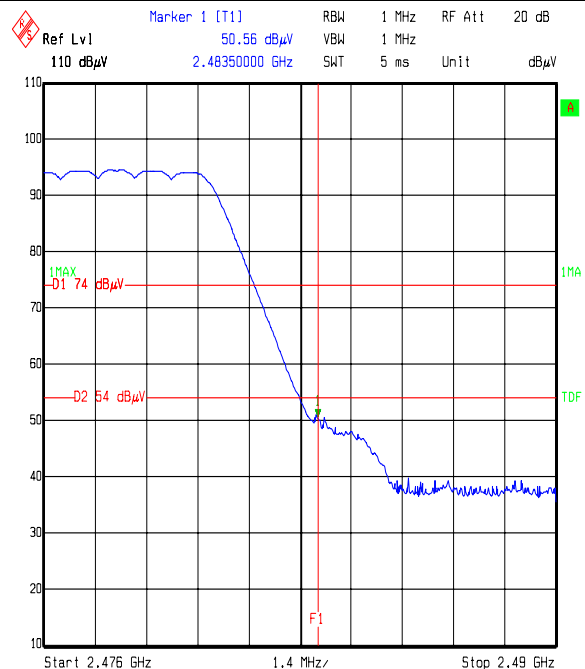

Title: GN Mobile EUT: HS-73W, FCC Part 15.247 Radiated Band Edge
Comment A: 48335JD08 Tx Mode, Hopping on All Channels, GFSK Mod.
Date: 30.JUN.2006 12:01:34

Test of: GN Mobile A/S.
Olivia

To: FCC Part 15.247: 2005 (Subpart C)

7.2.15. Transmitter Band Edge Radiated Emissions: Section 15.247(d) & 15.209(a)

The EUT was configured for band edge compliance of radiated emission measurements as described in section 9 of this report.

Tests were performed to identify the maximum radiated band edge emissions.

Results: (8DPSK Modulation EDR Mode)

Electric Field Strength Measurements


Peak Power Level Hopping Mode:

Frequency (GHz)	Antenna Polarity	Detector Level (dBμV)	Transducer Factor (dB)	Actual Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
2.4000	Horizontal	50.4	-11.4	39.0	70.5*	31.5	Complied
2.4835	Horizontal	66.1	-11.0	55.1	74.0	18.9	Complied


*-20 dBc limit

Average Power Level Hopping Mode:

Frequency (GHz)	Antenna Polarity	Detector Level (dBμV)	Transducer Factor (dB)	Actual Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
2.4835	Horizontal	59.3	-11.0	48.3	54.0	5.7	Complied

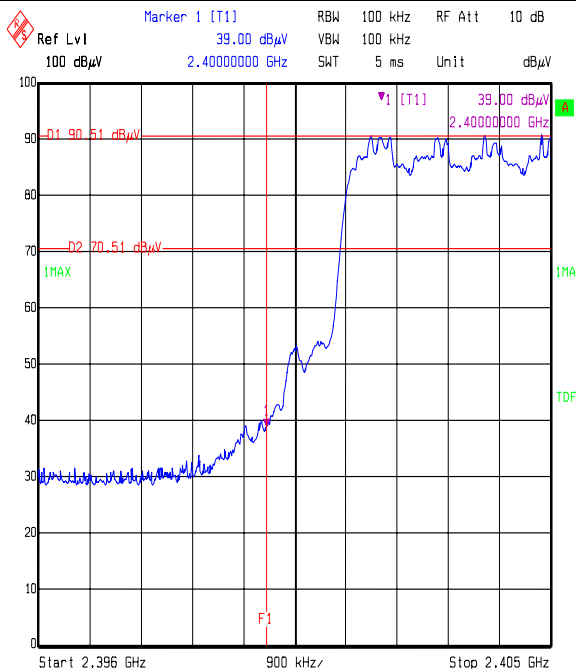

Title: GN Mobile EUT: HS-73W, FCC Part 15.247 Radiated Bandedge
Comment A: 48335JD08 Tx Mode, Hopping on All Channels, EDR mode.
Date: 03.JUL.2006 10:15:47

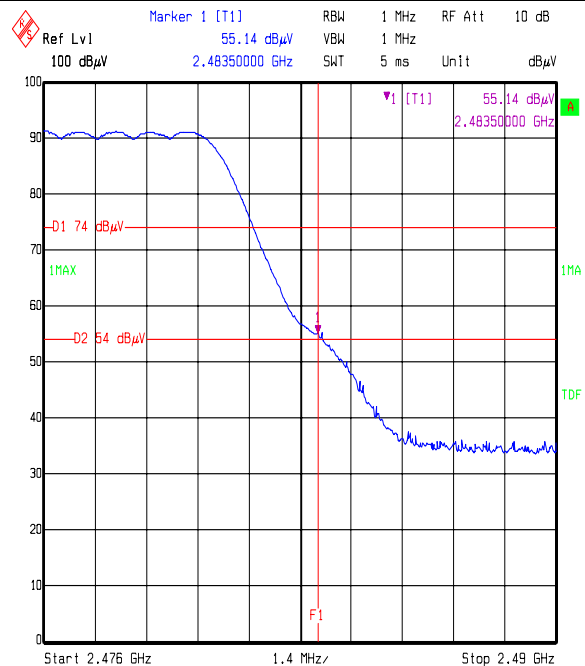

Title: GN Mobile EUT: HS-73W, FCC Part 15.247 Radiated Bandedge
Comment A: 48335JD08 Tx Mode, Hopping on All Channels, EDR mode.
Date: 03.JUL.2006 10:30:43

Test of: GN Mobile A/S.
Olivia

To: FCC Part 15.247: 2005 (Subpart C)

7.2.16. Transmitter Band Edge Radiated Emissions: Section 15.247(d) & 15.209(a)

The EUT was configured for band edge compliance of radiated emission measurements as described in section 9 of this report.

Tests were performed to identify the average radiated band edge emissions.

Results: (GFSK Modulation Mode)


Peak Power Level Static Mode:

Frequency (GHz)	Antenna Polarity	Detector Level (dBμV)	Transducer Factor (dB)	Actual Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
2.4000	Horizontal	57.1	-11.4	45.7	73.1*	27.4	Complied
2.4835	Horizontal	62.2	-11.0	51.2	74.0	22.8	Complied


*-20 dBc limit

Average Power Level Static Mode:

Frequency (GHz)	Antenna Polarity	Detector Level (dBμV)	Transducer Factor (dB)	Actual Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
2.4835	Horizontal	57.3	-11.0	46.3	54.0	7.7	Complied

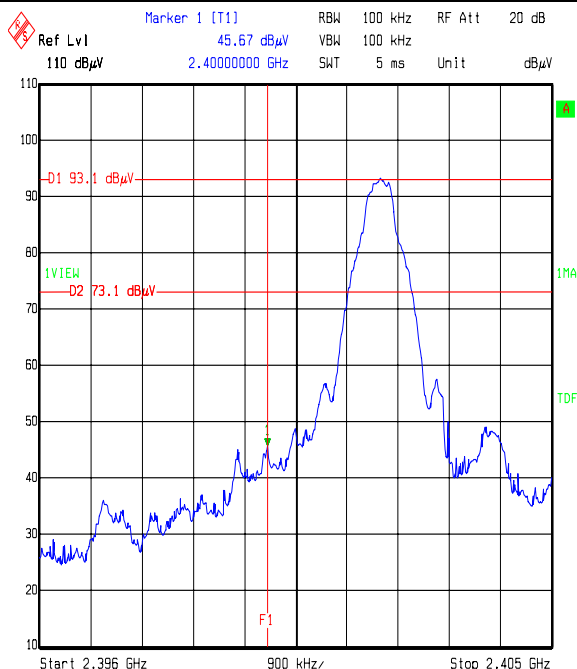

Title: GN Mobile EUT: HS-73W. FCC Part 15.247 Radiated Band Edge
Comment A: 48335JD08 Tx Mode, Bottom Channel, GFSK Mod.
Date: 30.JUN.2006 11:52:11

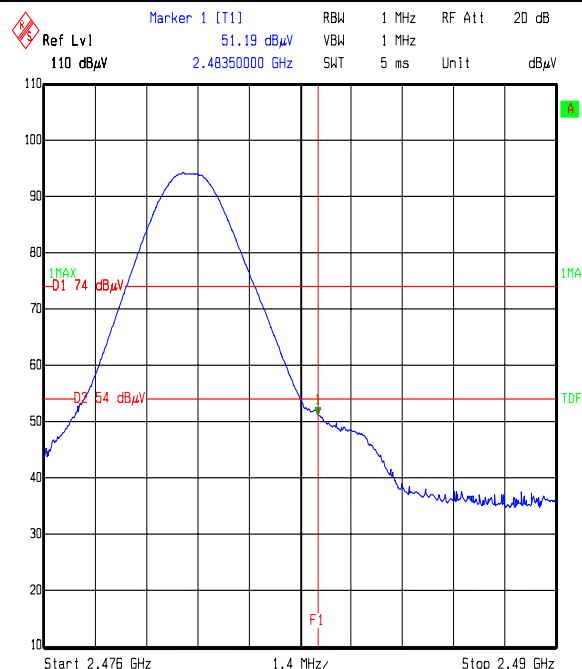

Title: GN Mobile EUT: HS-73W. FCC Part 15.247 Radiated Band Edge
Comment A: 48335JD08 Tx Mode, Top Channel, GFSK Mod.
Date: 30.JUN.2006 12:02:34

Test of: GN Mobile A/S.

Olivia

To: FCC Part 15.247: 2005 (Subpart C)

7.2.17. Transmitter Band Edge Radiated Emissions: Section 15.247(d) & 15.209(a)

The EUT was configured for band edge compliance of radiated emission measurements as described in section 9 of this report.

Tests were performed to identify the average radiated band edge emissions.


Results: (8DPSK Modulation EDR Mode)**Peak Power Level Static Mode:**

Frequency (GHz)	Antenna Polarity	Detector Level (dBμV)	Transducer Factor (dB)	Actual Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
2.4000	Horizontal	49.7	-11.4	38.3	70.4*	32.1	Complied
2.4835	Horizontal	66.1	-11.0	55.1	74.0	18.9	Complied


*-20 dBc limit

Average Power Level Static Mode:

Frequency (GHz)	Antenna Polarity	Detector Level (dBμV)	Transducer Factor (dB)	Actual Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
2.4835	Horizontal	59.1	-11.0	48.1	54.0	5.9	Complied

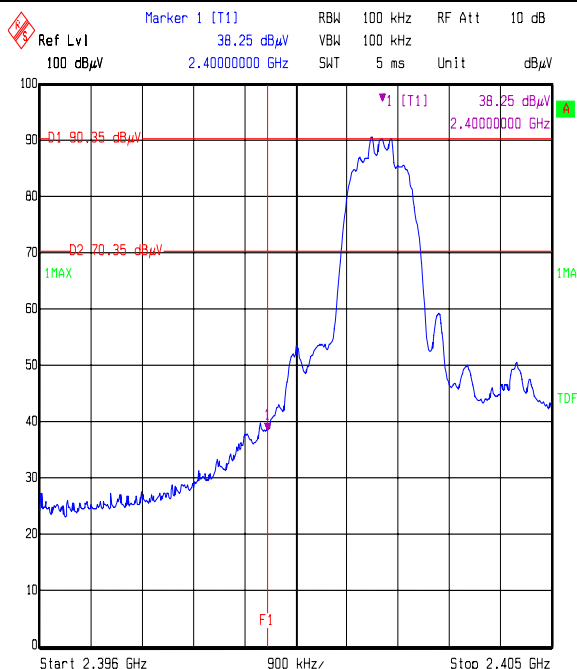

Title: GN Mobile EUT: HS-73W. FCC Part 15.247 Radiated Bandedge
Comment A: 48335JD08 Tx Mode, Bottom Channel, EDR mode.
Date: 03.JUL.2006 10:17:36

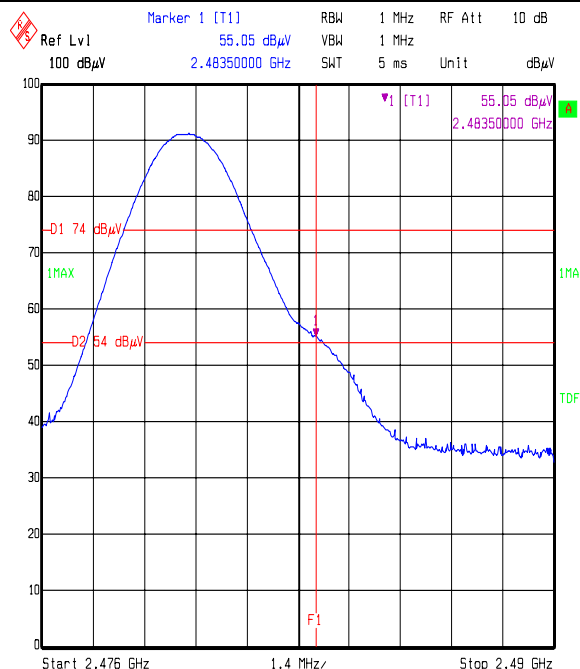

Title: GN Mobile EUT: HS-73W. FCC Part 15.247 Radiated Bandedge
Comment A: 48335JD08 Tx Mode, Top Channel, EDR mode.
Date: 03.JUL.2006 10:19:23

Test of: GN Mobile A/S.
Olivia

To: FCC Part 15.247: 2005 (Subpart C)

8. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently, the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor, such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	±3.25 dB
Transmitter Maximum Peak Output Power	Not applicable	95%	±2.94 dB
Transmitter Carrier Frequency Separation	Not applicable	95%	±0.01 ppm
Transmitter Average Time of Occupancy	Not applicable	95%	±10 %
20 dB Bandwidth	Not applicable	95%	± 0.12 %
Radiated Spurious Emissions	30 MHz to 1000 MHz	95%	± 5.26 dB
Radiated Spurious Emissions	1 GHz to 40 GHz	95%	±2.94 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty, the published guidance of the appropriate accreditation body is followed.

Test of: GN Mobile A/S.
Olivia

To: FCC Part 15.247: 2005 (Subpart C)

9. Measurement Methods

9.1. AC Mains Conducted Emissions

AC mains conducted emissions measurements were performed in accordance with the standard, against appropriate limits for each detector function.

The test was performed in a shielded enclosure with the equipment arranged as detailed in the standard on a wooden bench using the floor of the screened enclosure as the ground reference plane. The EUT was powered with 110V 60 Hz ac mains supplied via a line impedance stabilisation network (LISN).

Initial measurements in the form of swept scans covering the entire measurement band were performed in order to identify frequencies on which the EUT was generating interference. In order to minimise the time taken for these swept measurements, a peak detector was used in conjunction with the appropriate detector IF measuring bandwidths (see table below). Repetitive scans were performed to allow for emissions with low repetition rates, and the duty cycle of the EUT. The test configuration was the same for the initial scans as for the final measurements.

Following the initial scans, a graph was produced giving an overview of the emissions from the EUT plotted against the appropriate specification limit. A tolerance line was set 6 dB below the specification limit and levels above the tolerance line were re-tested (at individual frequencies) using the appropriate detector function.

The test equipment settings for conducted emissions measurements were as follows:

Receiver Function	Initial Scan	Final Measurements
Detector Type:	Peak	Quasi-Peak (CISPR)/Average
Mode:	Max Hold	Not applicable
Bandwidth:	10 kHz	9 kHz
Amplitude Range:	60 dB	20 dB
Measurement Time:	Not applicable	>1 s
Observation Time:	Not applicable	>15 s
Step Size:	Continuous sweep	Not applicable
Sweep Time:	Coupled	Not applicable

Test of: GN Mobile A/S.
Olivia

To: FCC Part 15.247: 2005 (Subpart C)

9.2. Radiated Emissions

Radiated emissions measurements were performed in accordance with the standard, against appropriate limits for each detector function.

Initial measurements covering the entire measurement band in the form of swept scans in a shielded enclosure were performed in order to identify frequencies on which the EUT was generating interference. This determined the frequencies on which the EUT should be re-measured in full on the open area test site. In order to minimise the time taken for the swept measurements, a peak detector was used in conjunction with the appropriate detector IF measuring bandwidth (see table below). Repetitive scans were performed to allow for emissions with low repetition rates.

The initial scans were performed using an antenna height of 1.5 m and a measurement distance of 3 m. Following the initial scans, graphs were produced giving an overview of the emissions from the EUT plotted against the appropriate specification limit. Any emission within 20 dB of the limit were then measured on the open area test site, except in cases where the noise floor was within 20 dB of the limit, in these cases the highest point of the noise floor was measured.

Where an emission fell inside a restricted band, measurements were made at the appropriate test distance using a measuring receiver with a quasi peak detector for measurements below 1000 MHz and an average and peak detector for measurements above 1000 MHz. A peak detector was used for all other measurements.

For the final measurements the EUT was arranged on a non-conducting turn table on a standard test site compliant with ANSI C63.4 – 2003 Clause 5.4.

All measurements on the open area test site were performed using broadband antennas in both vertical and horizontal polarisations.

On the open area test site, at each frequency where a signal was to be measured, the trace was maximised by rotating a turntable through 360°. The angle at which the maximum signal was observed was locked out. For frequencies below 1000 MHz the test antenna was varied in height between 1 m and 4 m in order to further maximise the target emission.

For frequencies above 1000 MHz where a horn antenna was used, height searching was performed to locate the optimal height of the horn with respect to the EUT. At this point the horn was locked off and the turntable was again rotated through 360° to maximise the target signal. It should be noted that the received signal from the EUT would diminish very quickly after it exits the beam width of the horn antenna, for this reason it may not be necessary to fully height search with the horns.

Test of: GN Mobile A/S.

Olivia

To: FCC Part 15.247: 2005 (Subpart C)

Radiated Emissions (Continued)

At this point, any signals found to be between the limit and a level 6 dB below it were further maximised by changing the configuration of the EUT, e.g. re-routing cables to peripherals and moving peripherals with respect to the EUT.

Scans were performed to the upper frequency limits as stated in section 15.33

The final field strength was determined as the indicated level in dB μ V plus cable loss and antenna factor.

The test equipment settings for radiated emissions measurements were as follows:

Receiver Function	Initial Scan	Final Measurements <1 GHz	Final Measurements ≥1 GHz
Detector Type:	Peak	Quasi-Peak (CISPR)	Peak / Average
Mode:	Max Hold	Not applicable	Max Hold
Bandwidth:	(120 kHz <1 GHz) (1 MHz ≥1 GHz)	120 kHz	1 MHz
Amplitude Range:	100 dB	100 dB	100 dB
Step Size:	Continuous sweep	Not applicable	Not applicable
Sweep Time:	Coupled	Not applicable	Not applicable

Test of: GN Mobile A/S.
Olivia

To: FCC Part 15.247: 2005 (Subpart C)

9.3. Carrier Frequency Separation / 20 dB Bandwidth

The EUT and spectrum analyser was configured as for radiated measurements, and as per FCC Public Notice DA 00-705, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

To determine the bandwidth and separation of each transmission channel the measurement analyser was configured to measure two adjacent channels whilst the EUT was in hopping mode. The spectrum analyser was configured with a resolution bandwidth and video bandwidth greater than 1% of the frequency span.

The analyser was set for a maximum hold scan to capture the profile of the signal. The peak points on the two adjacent channels were noted and the separation between them recorded.

To determine the occupied bandwidth, resolution bandwidths of 10 kHz and 20 kHz was used for GFSK and 8DPSK respectively, which is greater than 1% of the 20 dB bandwidth. A video bandwidth of, at least, the same value was used.

The analyser was set for a maximum hold scan to capture the profile of the signal. The peak level was then determined, and a reference line was drawn 20 dB below the peak level.

The bandwidth was determined at the points where the 20 dB reference line intercepted the power envelope of the emission.

Test of: GN Mobile A/S.
Olivia

To: FCC Part 15.247: 2005 (Subpart C)

9.4. Average Time of Occupancy

The EUT and spectrum analyser was configured as for radiated measurements, and as per FCC Public Notice DA 00-705, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

First the maximum packet length was determined on the centre channel.

The measurement analyser was configured to the time domain mode by setting the span to zero with a sweep time sufficiently wide enough to measure one pulse.

The EUT was configured to operate in normal mode of operation. The pulse width of one transmission was then recorded. The measurement analyser was then configured in zero span i.e. in the time domain and the sweep time was set to 32 seconds (the closest allowable setting to 31.6 seconds). This 31.6 second period was determined by multiplying the number of channels the device operates over (79) by 0.4 seconds.

The number of transmissions within this period was noted and multiplied by the pulse width recorded earlier. This gives the maximum occupancy over 31.6 seconds.

Test of: GN Mobile A/S.
Olivia

To: FCC Part 15.247: 2005 (Subpart C)

9.5. Effective Isotropic Radiated Power (EIRP)

EIRP measurements were performed in accordance with the standard, against appropriate limits.

The EIRP was measured with the EUT arranged on a non-conducting turn table on a standard test site compliant with ANSI C63.4 – 2003 Clause 5.4. The transmitter was fitted with an integral antenna; therefore all radiated tests were performed with the unit operating into the integral antenna.

The level of the EIRP was measured using a spectrum analyser.

The test antenna was positioned in the horizontal plane. The EUT was oriented in the X plane. The test antenna was then raised and lowered until a maximum peak was observed. The turntable was then rotated through 360 degrees and the maximum peak reading obtained. The height search was then repeated to take into consideration the new angular position of the turntable. The maximum reading observed was then recorded. This procedure was then repeated with the EUT oriented in the Y and Z planes. The highest reading taken in all 3 planes was recorded. The entire procedure was then repeated with the test antenna set in the vertical polarity.

Once the final amplitude (maximised) had been obtained, the EUT was substituted with a horn antenna. The centre of the substitution antenna was set to approximately the same centre location as the EUT. The substitution antenna was set to the horizontal polarity. The substitution antenna was matched into a signal generator using a 6 dB or greater attenuator. The signal generator was tuned to the EUT's frequency under test.

The test antenna was then raised and lowered to obtain a maximum reading on the spectrum analyser. The level of the signal generator output was then adjusted until the maximum recorded EUT level was observed. The signal generator level was noted. This procedure was repeated with both test antenna and substitution antenna vertically polarised. The EIRP was calculated as:-

$$\text{EIRP} = \text{Signal Generator Level} - \text{Cable Loss} + \text{Antenna Gain}$$

Test of: GN Mobile A/S.
Olivia

To: FCC Part 15.247: 2005 (Subpart C)

Effective Isotropic Radiated Power (EIRP) (Continued)

Circumstances where the signal generator could not produce the desired a power substitution was performed with the signal generator set to 0 dBm. The radiated signal was maximised as previously described. The level indicated on the measuring receiver was noted. The delta between this level and the maximum level for the EUT was calculated and also noted. The EIRP of the signal generator was calculated using the above formulae. The recorded delta was added to the calculated EIRP to obtain the substituted EUT EIRP.

$$\text{Delta (dB)} = \text{EUT} - \text{SG}$$

where :

EUT = spectrum analyser indicated EUT raw level

SG = spectrum analyser indicated signal generator raw level

The signal generator actual EIRP is calculated as:

$$\text{EIRP SG} = \text{Signal Generator Level} - \text{Cable Loss} + \text{Antenna Gain}$$

The EUT EIRP is calculated as:

$$\text{EIRP EUT} = \text{EIRP SG} + \text{Delta.}$$

The test equipment settings for EIRP measurements were as follows:

Receiver Function	Setting
Detector Type:	Peak
Mode:	Not applicable
Bandwidth:	1 MHz
Amplitude Range:	100 dB
Sweep Time:	Coupled

Test of: GN Mobile A/S.
Olivia

To: FCC Part 15.247: 2005 (Subpart C)

9.6. Band Edge Compliance of RF Radiated Emissions

The EUT and spectrum analyser were configured as for radiated measurements and as per FCC Public Notice DA 00-705, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

To determine band edge compliance, the analyser resolution bandwidth was set to $\geq 1\%$ of the analyser span. The video bandwidth was set to be $\geq$ to the resolution bandwidth. The sweep was set to auto and the detector to peak. The trace was set to max hold and a trace was produced.

A plot of the lower band edge of the allocated frequency band was produced. A marker was set to the level of the highest in band emission with a limit line set to 20 dB below this. The marker was then placed on the highest out of band emission (the specification states that either the band edge level must be measured or the highest out of band emission, whichever is the greater). The plots show that the highest out of band emission complies with the -20 dBc limit.

The above procedure was then repeated for the upper band edge except that, as the upper band edge fell on a restricted band edge (as defined in section 15.205(a)), the limit for the restricted band was applied instead of the -20 dBc limit i.e. the general limits defined in section 15.209(a).

Final measurements were performed on the worst-case configuration as described in Part 15.31(i).

Test of: GN Mobile A/S.

Olivia

To: FCC Part 15.247: 2005 (Subpart C)

Appendix 1. Test Equipment Used

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Calibration Date:
A027	Horn Antenna	Eaton	9188-2	301	08/06/06
A031	Horn Antenna	Eaton	91889-2	557	08/06/06
A1069	LISN	Rohde & Schwarz	ESH3-Z5	837469/012	31/01/06
A1360	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	20112003	29/04/06
A1534	Preamplifier	Hewlett Packard	8449B OPT H02	3008A00405	Cal before use
A239	Attenuator	Schaffner	6806-17-B	NONE	Cal before use
A254	Horn Antenna	Flann	14240-20	139	08/06/06
A255	Horn Antenna	Flann	16240-20	519	08/06/06
A256	Horn Antenna	Flann	18240-20	400	08/06/06
A259	Bilog Antenna	Chase	CBL6111	1513	21/02/05
A392	Attenuator	Suhner	6803.17.B	None	Cal before use
A428	Horn Antenna	Flann	12240-20	134	08/06/06
A430	Horn Antenna	Flann	18240-20	425	08/06/06
A436	Horn Antenna	Flann	20240-20	330	08/06/06
A442	Horn Antenna	Narda	645	8608	08/06/06
A490	Bilog Antenna	Chase	CBL6111A	1590	09/09/05
M003	Spectrum Monitor	Rohde & Schwarz	EZM	883 580/008	Cal not reqd.
M023	ESVP Receiver	Rohde & Schwarz	ESVP	872 991/027	10/04/06
M1149	<i>Bluetooth</i> Test Set	Anritsu	MT8852A	6K00001529	Cal not reqd.
M1242	Spectrum Analyser	Rohde & Schwarz	FSEM30	845986_022	25/08/05
M1263	Spectrum Analyser	Rohde & Schwarz	ESIB7	100265	12/01/06
M127	Spectrum Analyser	Rohde & Schwarz	FSEB 30	842 659/016	21/06/05
S0520	DC Power Supply	GW Instek	GPC-3030	E835141	Cal not reqd.
S201	Site 1	RFI	1		22/07/05
S202	Site 2	RFI	2		Cal before use

NB In accordance with UKAS requirements, all the measurement equipment is on a calibration schedule.

Test of: GN Mobile A/S.
Olivia

To: FCC Part 15.247: 2005 (Subpart C)


Appendix 2. Test Configuration Drawings

This appendix contains the following drawings:

Drawing Reference Number	Title
DRG\48335JD08\EMICON	Test configuration for measurement of conducted emissions.
DRG\48335JD08\EMIRAD	Test configuration for measurement of radiated emissions.

Test of: GN Mobile A/S.
Olivia
To: FCC Part 15.247: 2005 (Subpart C)

DRG\48335JD08\EMICON

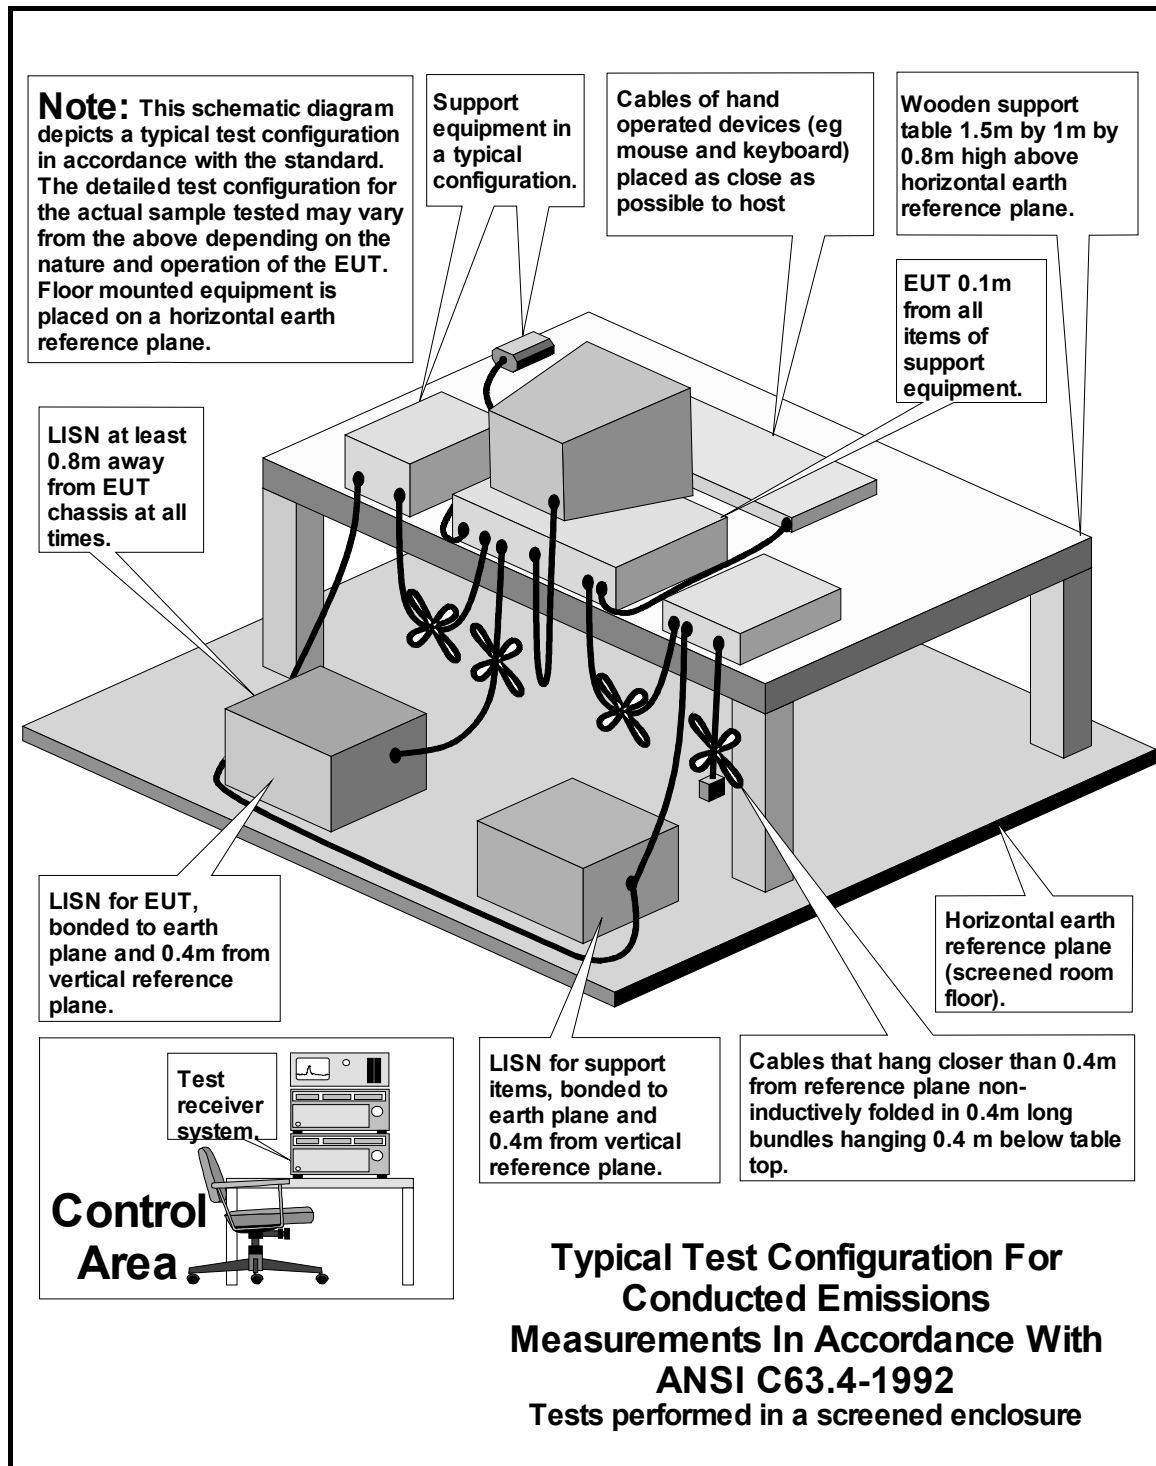

Test of: GN Mobile A/S.
Olivia

To: FCC Part 15.247: 2005 (Subpart C)

DRG\48335JD08\EMIRAD

