



FCC PART 15.247
TEST REPORT

For

Summer Infant, Inc.

1275 Park East Drive, Woonsocket, Rhode Island, United States

FCC ID: PZK-958T

Report Type: Original Report	Product Type: Baby Monitor(Camera Unit)
Report Number:	RSZ160823006-00B
Report Date:	2016-10-18
Reviewed By:	Manager Jesse Huang <i>Jesse Huang</i>
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) Chenghu Road, Kunshan Development Zone No.248, Kunshan, Jiangsu, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE.....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY.....	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY.....	5
SYSTEM TEST CONFIGURATION.....	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP.....	6
SUMMARY OF TEST RESULTS.....	7
TEST EQUIPMENT LIST.....	8
FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	9
APPLICABLE STANDARD.....	9
RESULT.....	9
FCC §15.203 – ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD.....	10
ANTENNA CONNECTOR CONSTRUCTION.....	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS.....	11
APPLICABLE STANDARD.....	11
EUT SETUP.....	11
EMI TEST RECEIVER SETUP.....	11
TEST PROCEDURE.....	11
CORRECTED FACTOR & MARGIN CALCULATION.....	12
TEST RESULTS SUMMARY.....	12
TEST DATA.....	12
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	15
APPLICABLE STANDARD.....	15
EUT SETUP.....	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP.....	16
TEST PROCEDURE.....	16
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	16
TEST RESULTS SUMMARY.....	16
TEST DATA.....	16
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST.....	19
APPLICABLE STANDARD.....	19
TEST PROCEDURE.....	19
TEST DATA.....	19
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	22
APPLICABLE STANDARD.....	22
TEST PROCEDURE.....	22
TEST DATA.....	22

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST25
 APPLICABLE STANDARD25
 TEST PROCEDURE25
 TEST DATA25

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....27
 APPLICABLE STANDARD27
 TEST PROCEDURE27
 TEST DATA27

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT30
 APPLICABLE STANDARD30
 TEST PROCEDURE30
 TEST DATA30

FCC §15.247(d) - BAND EDGES TESTING31
 APPLICABLE STANDARD31
 TEST PROCEDURE31
 TEST DATA31

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Summer Infant, Inc.*'s product, model number: 29580(FCC ID: PZK-958T) or the "EUT" in this report was a *Baby Monitor(Camera Unit)*, which was measured approximately: 86 mm(L) × 86 mm (W) × 101 mm (H), rated with input voltage: DC 7.5V from adapter.

Adapter information:

Model: P6 0750500

Input: AC100-240V~50/60Hz, 250 mA

Output: DC 7.5V, 500 mA

**All measurement and test data in this report was gathered from production sample serial number: 1603042 (Assigned by BACL, Kunshan).The EUT supplied by the applicant was received on 2016-08-23.*

Objective

This report is prepared on behalf of *Summer Infant, Inc.* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS submissions with FCC ID: PZK-958R.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		±3.26 dB
RF conducted test with spectrum		±0.9dB
RF Output Power with Power meter		±0.5dB
Radiated emission	30MHz~1GHz	±5.91dB
	Above 1G	±4.92dB
Occupied Bandwidth		±0.5kHz
Temperature		±1.0°C
Humidity		±6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the Chenghu Lake Road, Kunshan Development Zone No.248, Kunshan, Jiangsu, China

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

N/A

Special Accessories

No special accessory.

Equipment Modifications


No modification was made to the EUT tested.

External I/O Cable

Cable Description	Length (m)	From Port	To
Unshielded Undetachable DC Power Cable	2.4	EUT	Adapter

Block Diagram of Test Setup

For conducted emission:

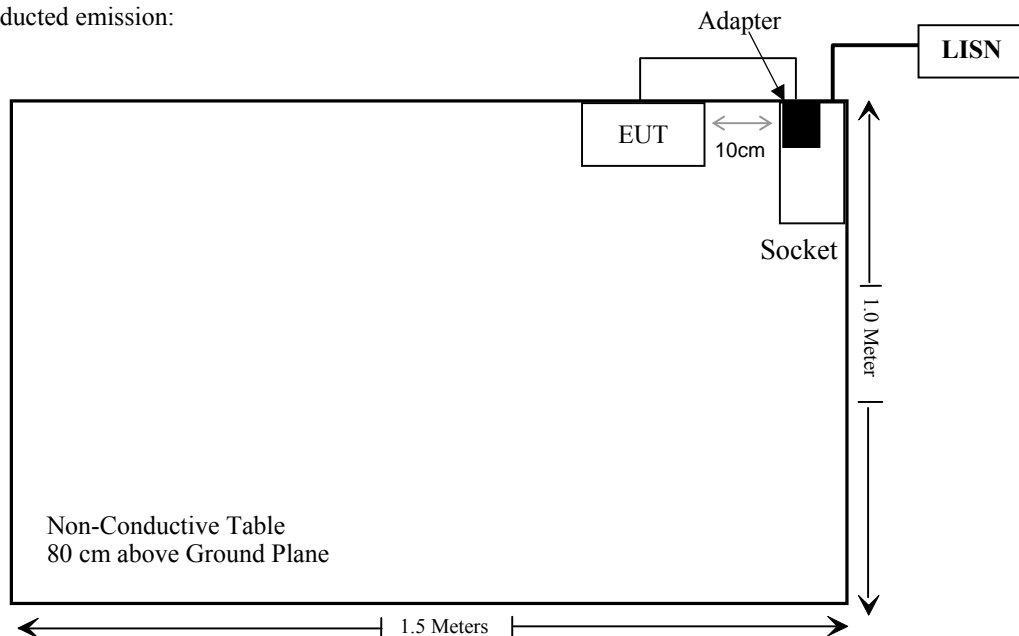

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i) & §1.1307 (b) (1) & §2.1091	Maximum Permissible exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conducted test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	934115/007	2015-11-12	2016-11-11
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2015-11-12	2016-11-11
Rohde & Schwarz	Pulse limiter	ESH3-Z2	879940/0058	2016-06-19	2017-06-18
MICRO-COAX	Coaxial line	UFB-293B-1-0480-50X50	97F0173	2016-09-01	2017-09-01
Rohde & Schwarz	CE Test software	EMC 32	V 09.10.0	NCR	NCR
Radiation test					
Sonoma Instrument	Amplifier	330	171377	2016-09-16	2017-09-16
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2015-11-12	2016-11-11
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2015-11-07	2016-11-06
Mini	Pre-amplifier	ZVA-183-S+	857001418	2016-09-16	2017-09-15
DUCOMMUN	Pre-amplifier	ALN-22093530-01	990147	2016-09-16	2017-09-15
EMCO	Horn Antenna	3116	9510-2384	2015-11-07	2016-11-06
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2015-11-12	2016-11-11
Rohde & Schwarz	Signal Analyzer	FSV40	101116	2016-07-04	2017-07-03
ETS	Horn Antenna	3115	6229	2015-11-07	2016-11-06
R&S	Auto test Software	EMC32	V 09.10.0	NCR	NCR
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15
BACL	RF cable	KS-LAB-010	KS-LAB-010	2015-12-16	2016-12-15
RF Conducted test					
BACL	TS 8997 Cable-01	T-KS-EMC086	T-KS-EMC086	2015-12-10	2016-12-09
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15
WEINSCHL	3dB Attenuator	5326	N/A	2016-06-18	2017-06-18
Rohde & Schwarz	OSP120 BASE UNIT	OSP120	101247	2016-07-04	2017-07-03
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131	2016-09-21	2017-09-21

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2437.2	0	1.0	18.32	67.92	20	0.0135	1

Note: To maintain compliance with the FCC’s RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliance

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has internal antenna arrangement which was permanently attached and the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

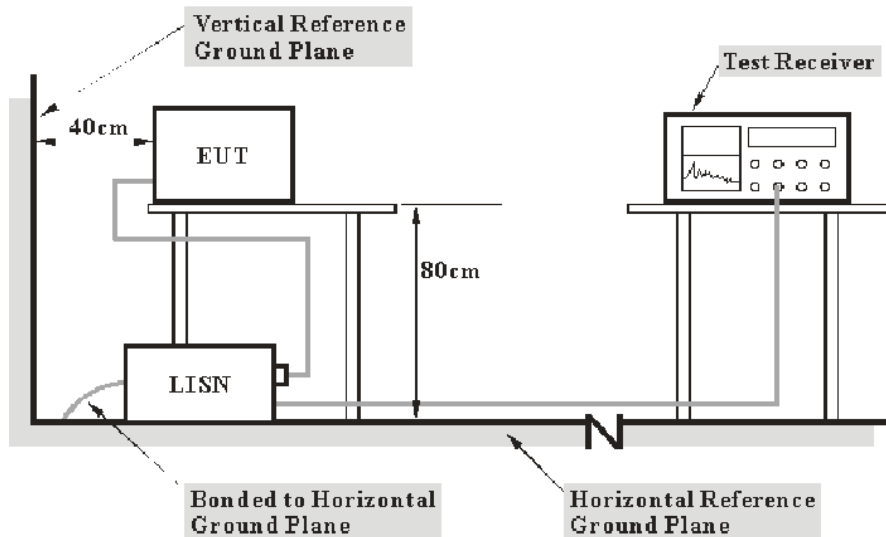

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207,

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BAEL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data


Environmental Conditions

Temperature:	26 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Chris Wang on 2016-10-08.


EUT operation mode: Transmitting

AC 120V/60 Hz, Line:

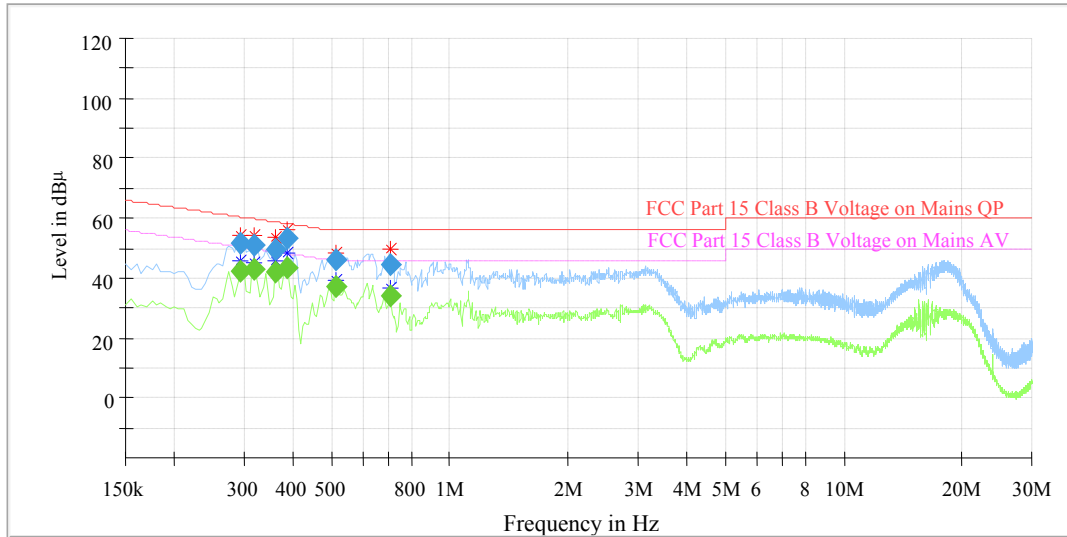

Frequency (MHz)	QuasiPeak (dBµV)	Average (dB µ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.295000	---	42.04	9.000	L1	10.3	8.34	50.38	Compliance
0.295000	51.62	---	9.000	L1	10.3	8.76	60.38	Compliance
0.320000	---	42.30	9.000	L1	10.3	7.41	49.71	Compliance
0.320000	50.15	---	9.000	L1	10.3	9.56	59.71	Compliance
0.360000	---	41.58	9.000	L1	10.3	7.15	48.73	Compliance
0.360000	49.02	---	9.000	L1	10.3	9.71	58.73	Compliance
0.385000	---	43.89	9.000	L1	10.3	4.28	48.17	Compliance
0.385000	53.54	---	9.000	L1	10.3	4.63	58.17	Compliance
0.515000	---	38.03	9.000	L1	10.3	7.97	46.00	Compliance
0.515000	46.67	---	9.000	L1	10.3	9.33	56.00	Compliance
0.705000	---	34.60	9.000	L1	10.3	11.40	46.00	Compliance
0.705000	44.53	---	9.000	L1	10.3	11.47	56.00	Compliance

AC 120V/60 Hz, Neutral:

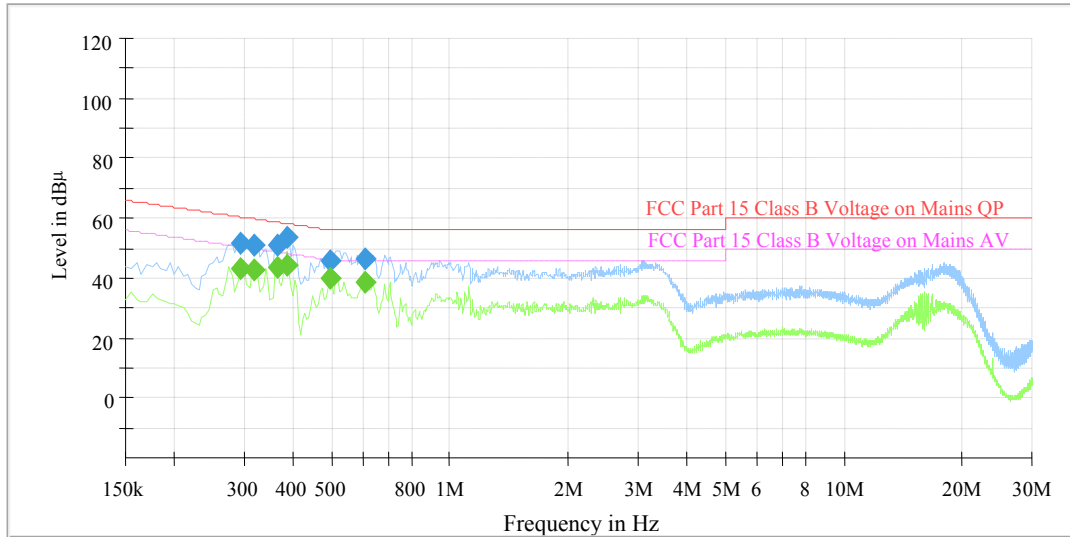

Frequency (MHz)	QuasiPeak (dBµV)	Average (dB µ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.295000	---	42.42	9.000	N	10.3	7.96	50.38	Compliance
0.295000	51.93	---	9.000	N	10.3	8.45	60.38	Compliance
0.320000	---	42.09	9.000	N	10.3	7.62	49.71	Compliance
0.320000	51.24	---	9.000	N	10.3	8.47	59.71	Compliance
0.365000	---	43.44	9.000	N	10.3	5.17	48.61	Compliance
0.365000	51.19	---	9.000	N	10.3	7.42	58.61	Compliance
0.385000	---	44.37	9.000	N	10.3	3.80	48.17	Compliance
0.385000	53.88	---	9.000	N	10.3	4.29	58.17	Compliance
0.495000	---	40.16	9.000	N	10.3	5.92	46.08	Compliance
0.495000	45.78	---	9.000	N	10.3	10.30	56.08	Compliance
0.610000	---	38.36	9.000	N	10.3	7.64	46.00	Compliance
0.610000	46.26	---	9.000	N	10.3	9.74	56.00	Compliance

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude


FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d)

EUT Setup

Below 1 GHz:

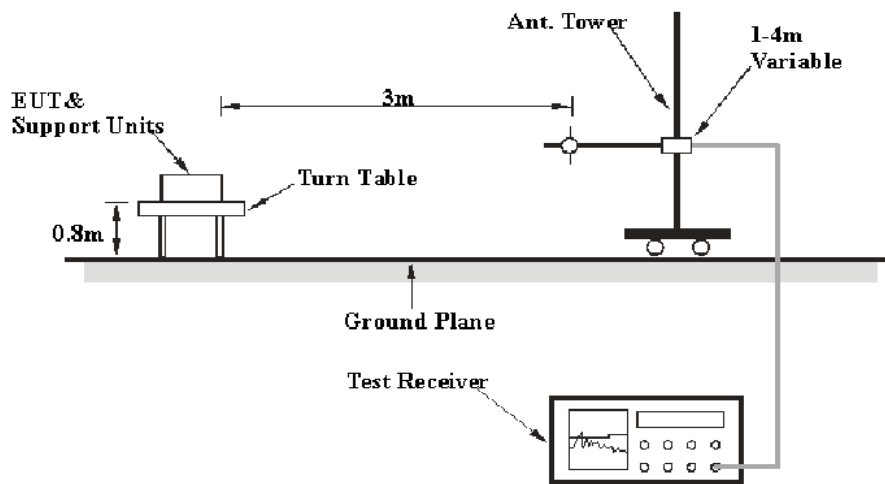

Above 1GHz:

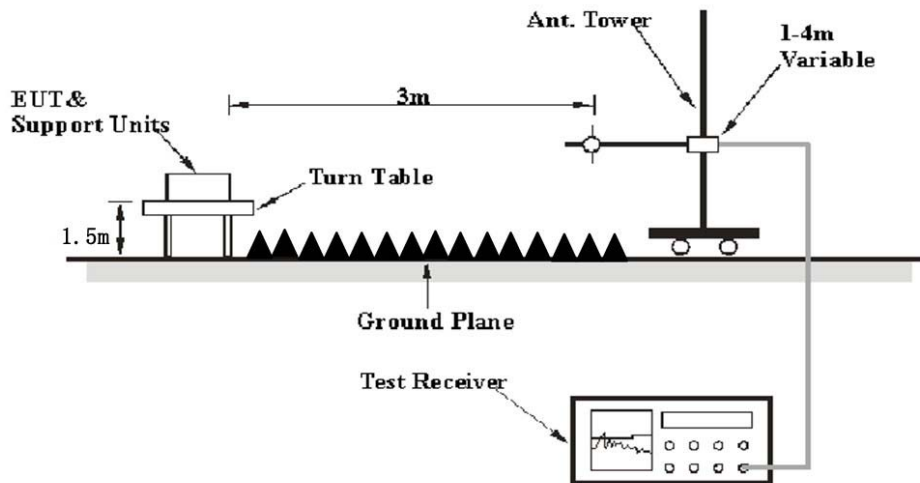

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{lim} + U_{cispr}$$

In BAEL, $U_{(L_m)}$ is less than $+U_{cispr}$, if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Chris Wang on 2016-10-07.

EUT operation mode: Transmitting

30 MHz -25 GHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
Low Channel (2409 MHz)									
504.0	50.26	QP	160	2.2	V	-5.35	44.91	46.0	1.09
2409	111.17	PK	235	2.1	H	-3.04	108.13	/	/
2409	97.40	Ave.	235	2.1	H	-3.04	94.36	/	/
2409	107.36	PK	334	1.5	V	-3.04	104.32	/	/
2409	93.69	Ave.	334	1.5	V	-3.04	90.65	/	/
2381.04	57.80	PK	173	1.7	H	-3.06	54.74	74	19.26
2381.04	35.73	Ave.	173	1.7	H	-3.06	32.67	54	21.33
2486.09	42.72	PK	175	2.1	H	-2.99	39.73	74	34.27
2486.09	29.46	Ave.	175	2.1	H	-2.99	26.47	54	27.53
4818.00	50.61	PK	352	1.0	H	7.18	57.79	74	16.21
4818.00	33.94	Ave.	352	1.0	H	7.18	41.12	54	12.88
7227.00	38.68	PK	319	1.9	H	15.96	54.64	74	19.36
7227.00	21.88	Ave.	319	1.9	H	15.96	37.84	54	16.16
Middle Channel (2437.2MHz)									
504.0	49.18	QP	18	1.6	V	-5.35	43.83	46.0	2.17
2437.2	110.34	PK	188	2.2	H	-3.02	107.32	/	/
2437.2	96.64	Ave.	188	2.2	H	-3.02	93.62	/	/
2437.2	106.67	PK	173	1.6	V	-3.02	103.65	/	/
2437.2	92.49	Ave.	173	1.6	V	-3.02	89.47	/	/
2380.50	40.91	PK	356	2.2	H	-3.06	37.85	74	36.15
2380.50	28.09	Ave.	356	2.2	H	-3.06	25.03	54	28.97
2484.71	42.43	PK	280	2.3	H	-2.99	39.44	74	34.56
2484.71	30.40	Ave.	280	2.3	H	-2.99	27.41	54	26.59
4874.40	51.53	PK	50	1.7	H	7.27	58.80	74	15.20
4874.40	33.46	Ave.	50	1.7	H	7.27	40.73	54	13.27
7311.60	39.31	PK	114	1.5	H	16.33	55.64	74	18.36
7311.60	24.04	Ave.	114	1.5	H	16.33	40.37	54	13.63

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
High Channel (2469.8 MHz)									
504.0	49.90	QP	266	1.4	V	-5.35	44.55	46.0	1.45
2469.8	109.35	PK	316	2.0	H	-3.00	106.35	/	/
2469.8	95.45	Ave.	316	2.0	H	-3.00	92.45	/	/
2469.8	104.27	PK	330	1.3	V	-3.00	101.27	/	/
2469.8	90.95	Ave.	330	1.3	V	-3.00	87.95	/	/
2383.67	42.17	PK	254	1.4	H	-3.06	39.11	74	34.89
2383.67	28.95	Ave.	254	1.4	H	-3.06	25.89	54	28.11
2486.71	66.84	PK	250	1.5	H	-2.99	63.85	74	10.15
2486.71	39.83	Ave.	250	1.5	H	-2.99	36.84	54	17.16
4939.60	50.36	PK	168	1.9	H	7.37	57.73	74	16.27
4939.60	34.85	Ave.	168	1.9	H	7.37	42.22	54	11.78
7409.40	38.82	PK	278	1.3	H	16.75	55.57	74	18.43
7409.40	23.06	Ave.	278	1.3	H	16.75	39.81	54	14.19

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude

The other spurious emission which is 20dB below the limit was not recorded.

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	27 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Chris Wang on 2016-09-24.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots


Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	≥Limit (MHz)	Result
GFSK	Channel 1	2409.0	3.38	2.35	Pass
	Channel 2	2412.4			
	Channel 9	2437.2	3.35	2.34	Pass
	Channel 10	2440.6			
	Channel 17	2466.4	3.38	2.29	Pass
	Channel 18	2469.8			

Note: Limit = 20 dB bandwidth *2/3

Low Channel



Middle Channel

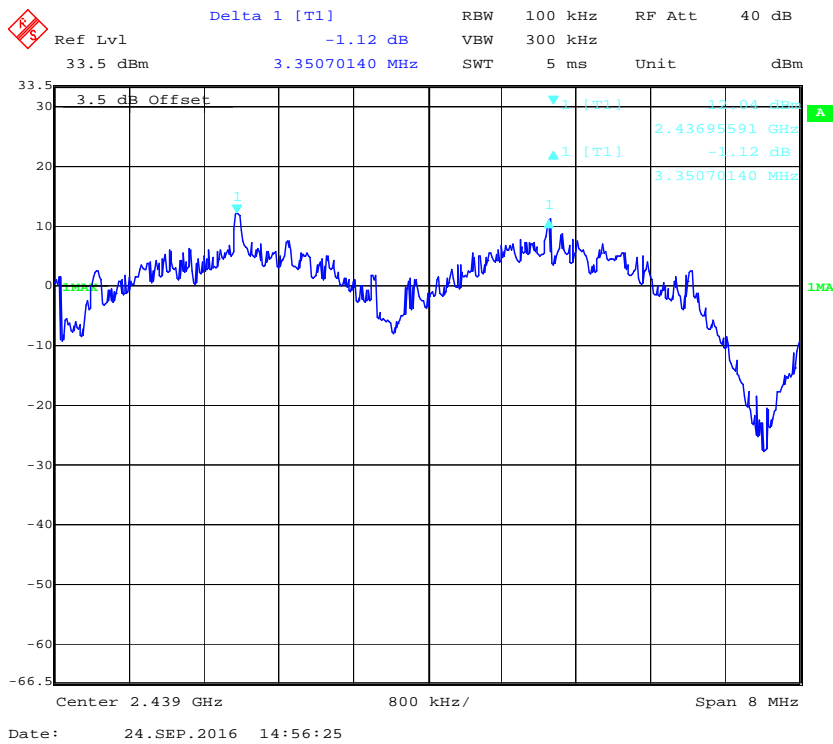

High Channel



FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	27 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa


The testing was performed by Chris Wang on 2016-09-24.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following table and plots.

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
GFSK	Low	2409.0	3.53
	Middle	2437.2	3.51
	High	2469.8	3.43

Low Channel

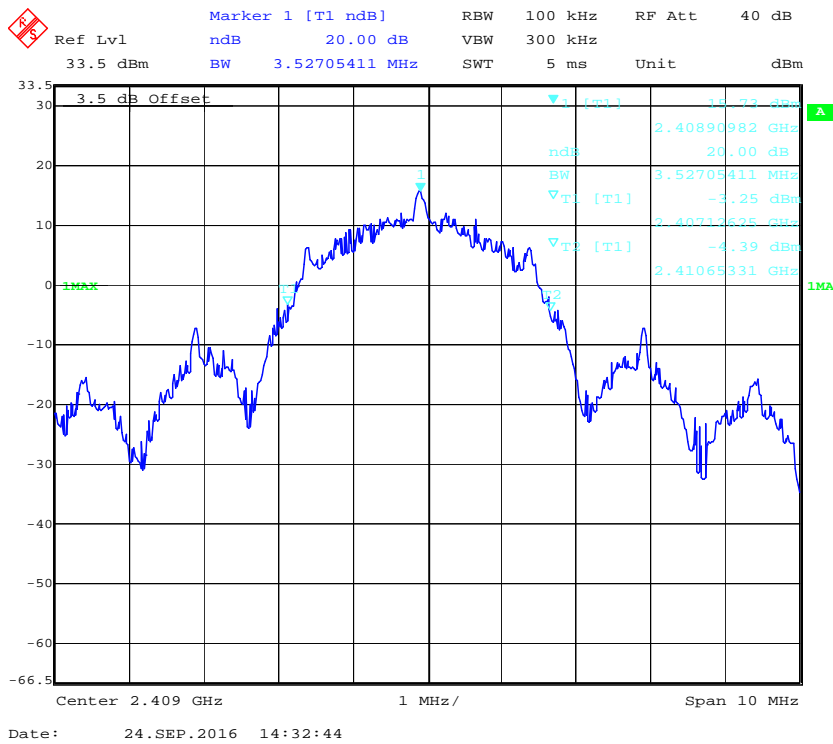

Middle Channel

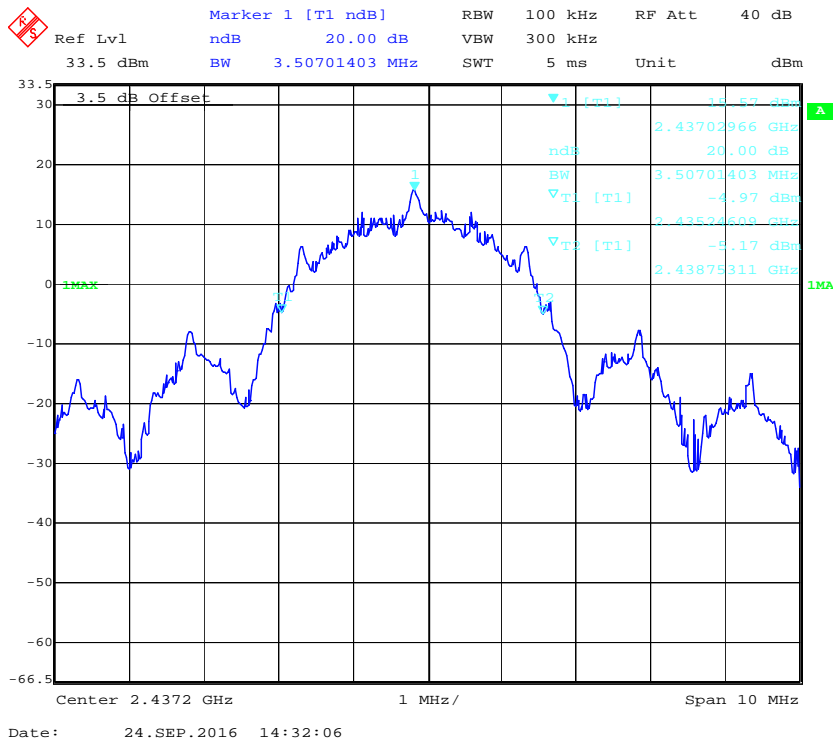

High Channel



FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Data**Environmental Conditions**

Temperature:	27 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa


The testing was performed by Chris Wang on 2016-09-24.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plot.

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
GFSK	2400-2483.5	18	≥15

Number of Hopping Channels

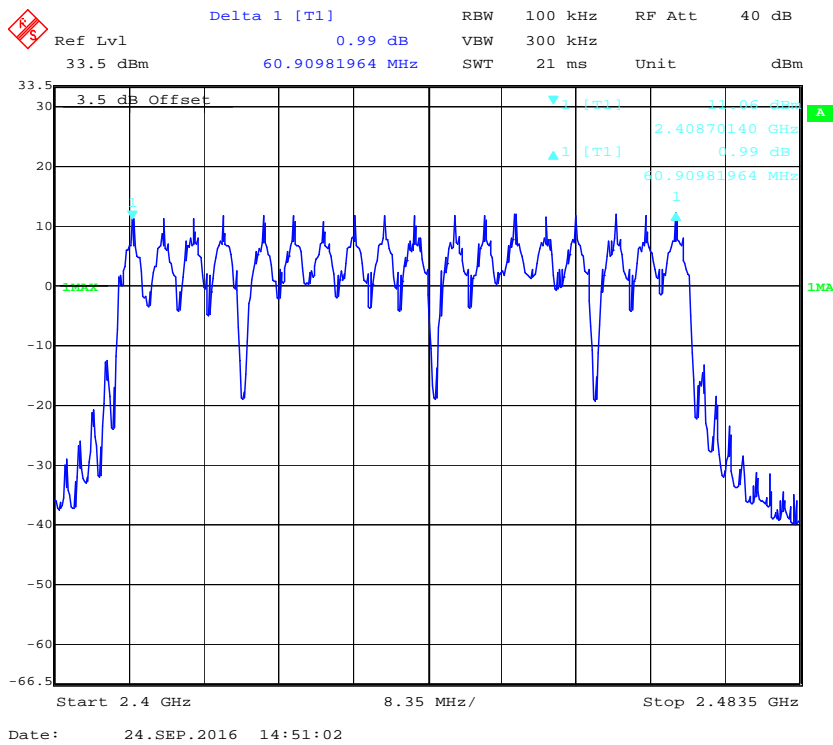

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Test Data

Environmental Conditions

Temperature:	27 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa


The testing was performed by Chris Wang on 2016-10-18.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following table and plots.

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
GFSK	Low	2.537	0.152	0.4	Pass
	Middle	2.537	0.152	0.4	Pass
	High	2.537	0.152	0.4	Pass
Note: Dwell time = Pulse time*(150/18)*18*0.4s Hopping rate =150 times per second					


Pulse time, Low Channel

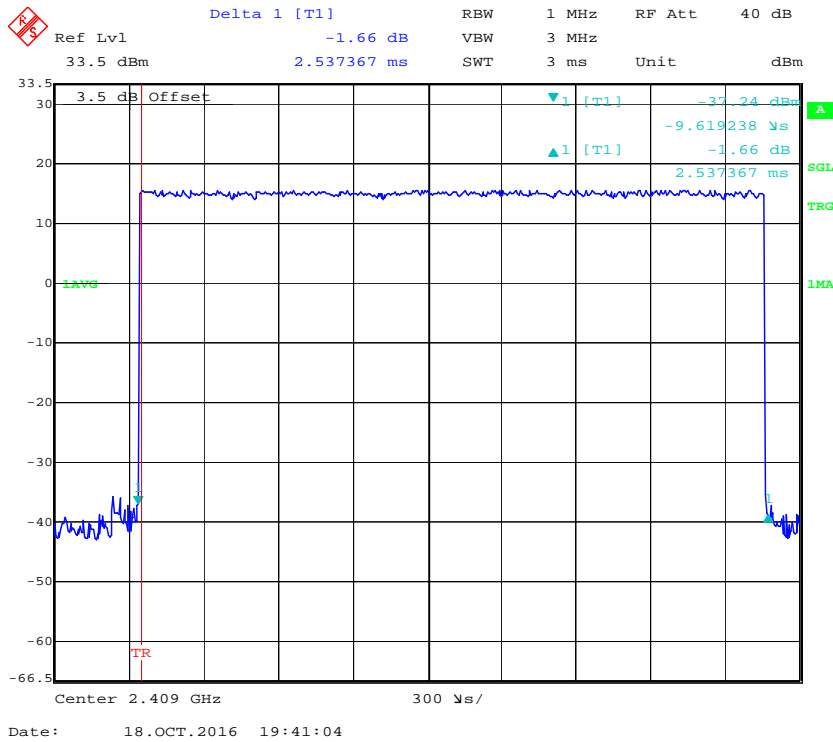

Pulse time, Middle Channel

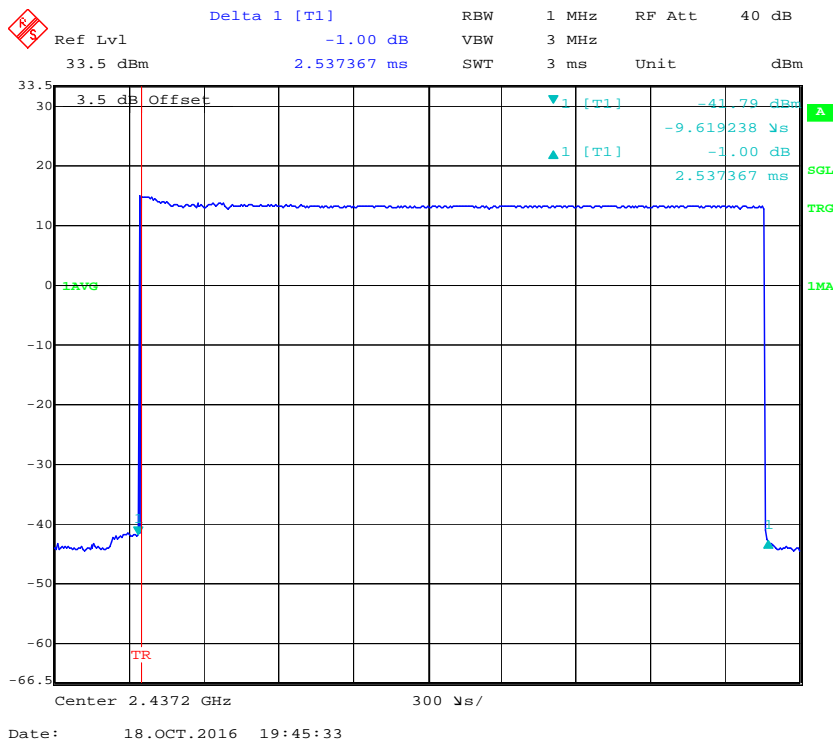

Pulse time, High Channel

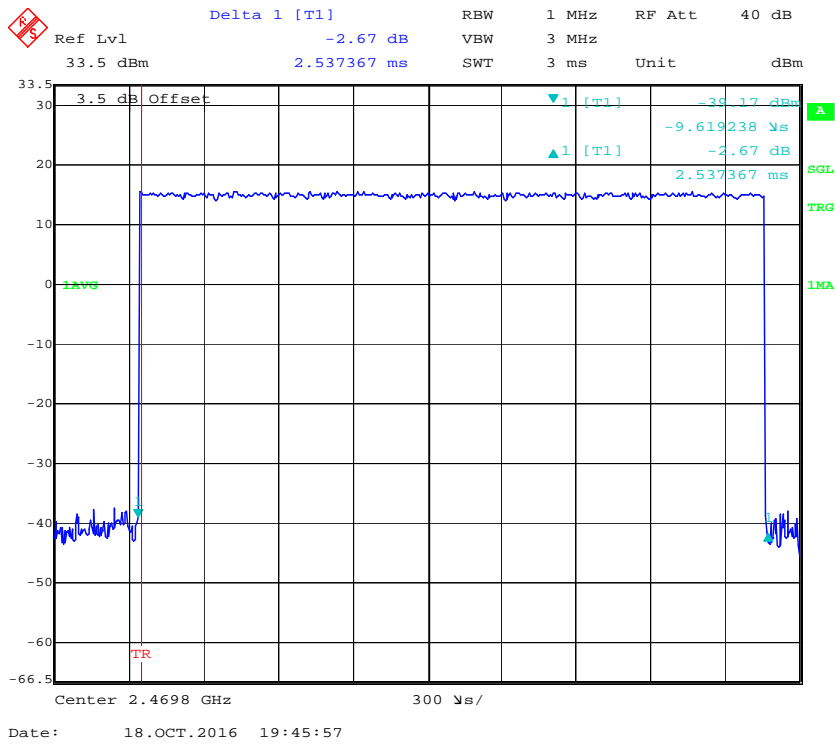

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Data

Environmental Conditions

Temperature:	27 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Chris Wang on 2016-09-20.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table.

Mode	Channel	Frequency (MHz)	Peak Output Power		Limit (mW)
			(dBm)	(mW)	
GFSK	Low	2409.0	18.22	66.37	125
	Middle	2437.2	18.32	67.92	125
	High	2469.8	17.64	58.08	125

Note: The data above was tested in conducted mode.

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions


Temperature:	27 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Chris Wang on 2016-09-24.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following plots.

GFSK: Band Edge-Left Side

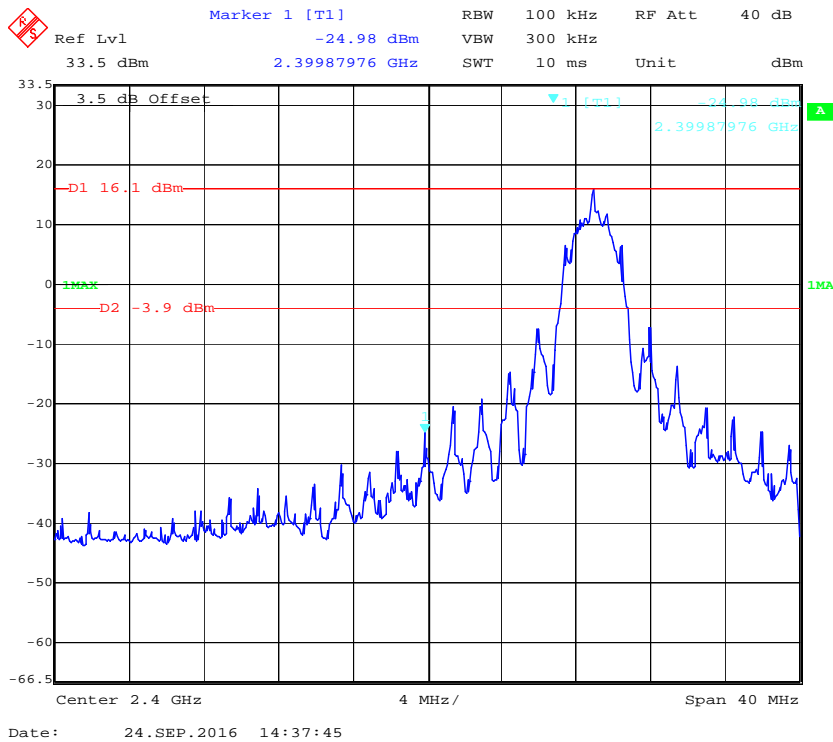

GFSK: Band Edge-Right Side

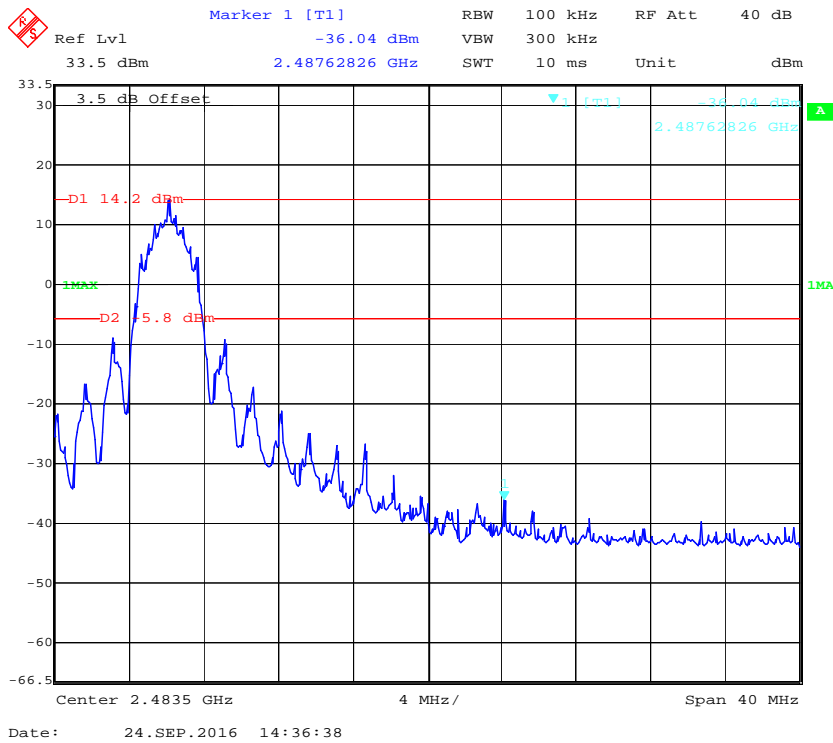

******* END OF REPORT *******