




FCC PART 15.247
TEST REPORT

For

Summer Infant, Inc.

1275 Park East Drive, Woonsocket, Rhode Island, United States

FCC ID: PZK-962T

| | |
|--|--|
| Report Type: Original Report | Product Type: Baby Monitor (Camera Unit) |
| Report Number: <u>RSZ161020001-00B</u> | |
| Report Date: <u>2016-12-14</u> | |
| Oscar Ye  | |
| Reviewed By: <u>Engineer</u> | |
| Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn | |

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

| | |
|--|-----------|
| GENERAL INFORMATION | 4 |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... | 4 |
| OBJECTIVE..... | 4 |
| RELATED SUBMITTAL(S)/GRANT(S)..... | 4 |
| TEST METHODOLOGY..... | 4 |
| MEASUREMENT UNCERTAINTY..... | 5 |
| TEST FACILITY..... | 5 |
| SYSTEM TEST CONFIGURATION | 6 |
| EXTERNAL I/O CABLE..... | 6 |
| BLOCK DIAGRAM OF TEST SETUP..... | 6 |
| SUMMARY OF TEST RESULTS | 7 |
| TEST EQUIPMENT LIST | 8 |
| FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE) | 9 |
| APPLICABLE STANDARD..... | 9 |
| RESULT..... | 9 |
| FCC §15.203 – ANTENNA REQUIREMENT | 10 |
| APPLICABLE STANDARD..... | 10 |
| ANTENNA CONNECTOR CONSTRUCTION..... | 10 |
| FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS | 11 |
| APPLICABLE STANDARD..... | 11 |
| EUT SETUP..... | 11 |
| EMI TEST RECEIVER SETUP..... | 11 |
| TEST PROCEDURE..... | 11 |
| CORRECTED FACTOR & MARGIN CALCULATION..... | 12 |
| TEST RESULTS SUMMARY..... | 12 |
| TEST DATA..... | 12 |
| FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS | 15 |
| APPLICABLE STANDARD..... | 15 |
| EUT SETUP..... | 15 |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP..... | 16 |
| TEST PROCEDURE..... | 16 |
| CORRECTED AMPLITUDE & MARGIN CALCULATION..... | 16 |
| TEST RESULTS SUMMARY..... | 16 |
| TEST DATA..... | 16 |
| FCC §15.247(a) (1)-CHANNEL SEPARATION TEST | 19 |
| APPLICABLE STANDARD..... | 19 |
| TEST PROCEDURE..... | 19 |
| TEST DATA..... | 19 |
| FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH | 22 |
| APPLICABLE STANDARD..... | 22 |
| TEST PROCEDURE..... | 22 |
| TEST DATA..... | 22 |

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST25
 APPLICABLE STANDARD25
 TEST PROCEDURE25
 TEST DATA25

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....27
 APPLICABLE STANDARD27
 TEST PROCEDURE27
 TEST DATA27

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT30
 APPLICABLE STANDARD30
 TEST PROCEDURE30
 TEST DATA30

FCC §15.247(d) - BAND EDGES TESTING31
 APPLICABLE STANDARD31
 TEST PROCEDURE31
 TEST DATA31

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The Summer Infant, Inc.'s product, model number: 29620 (FCC ID: PZK-962T) or the "EUT" in this report was a Baby Monitor (Camera Unit), which was measured approximately: 8.8cm (L) × 8.8cm (W) × 11.7cm (H), rated with input voltage: DC 7.5 V from adapter.

Adapter information:

Model: P6 0750500

Input: AC100-240V~50/60Hz, 250 mA

Output: DC 7.5V, 500 mA

*All measurement and test data in this report was gathered from production sample serial number: 1603474 (Assigned by BACL, Kunshan). The EUT supplied by the applicant was received on 2016-10-20.

Objective

This test report is prepared on behalf of *Summer Infant, Inc.* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS submissions with FCC ID: PZK-962R.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

| Item | | Uncertainty |
|------------------------------------|------------|-------------|
| AC Power Lines Conducted Emissions | | ±3.26 dB |
| RF conducted test with spectrum | | ±0.9dB |
| RF Output Power with Power meter | | ±0.5dB |
| Radiated emission | 30MHz~1GHz | ±5.91dB |
| | Above 1G | ±4.92dB |
| Occupied Bandwidth | | ±0.5kHz |
| Temperature | | ±1.0°C |
| Humidity | | ±6% |

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.10-2013.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

N/A

Special Accessories

No special accessory.

Equipment Modifications


No modification was made to the EUT tested.

External I/O Cable

| Cable Description | Length (m) | From Port | To |
|--|------------|-----------|---------|
| Unshielded Undetachable DC Power Cable | 2.4 | EUT | Adapter |

Block Diagram of Test Setup

For conducted emission

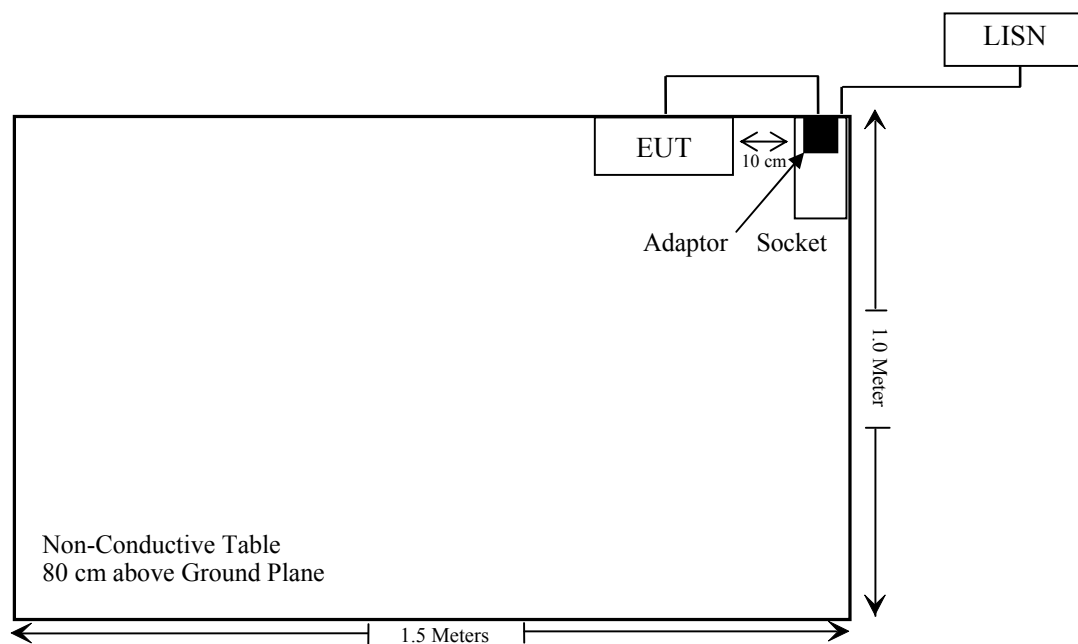

SUMMARY OF TEST RESULTS

| FCC Rules | Description of Test | Result |
|---|------------------------------------|---------------|
| §15.247 (i) & §1.1307 (b) (1) & §2.1091 | Maximum Permissible exposure (MPE) | Compliance |
| §15.203 | Antenna Requirement | Compliance |
| §15.207(a) | AC Line Conducted Emissions | Compliance |
| §15.205, §15.209 & §15.247(d) | Radiated Emissions | Compliance |
| §15.247(a)(1) | 20 dB Emission Bandwidth | Compliance |
| §15.247(a)(1) | Channel Separation Test | Compliance |
| §15.247(a)(1)(iii) | Time of Occupancy (Dwell Time) | Compliance |
| §15.247(a)(1)(iii) | Quantity of hopping channel Test | Compliance |
| §15.247(b)(1) | Peak Output Power Measurement | Compliance |
| §15.247(d) | Band edges | Compliance |

TEST EQUIPMENT LIST

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-------------------------------|--------------------|-----------------------|---------------|------------------|----------------------|
| AC Line Conducted test | | | | | |
| Rohde & Schwarz | EMI Test Receiver | ESCS30 | 834115/007 | 2016-11-25 | 2017-11-25 |
| Rohde & Schwarz | LISN | ESH3-Z5 | 862770/011 | 2016-10-10 | 2017-10-10 |
| Rohde & Schwarz | Pulse limiter | ESH3-Z2 | 879940/0058 | 2016-06-19 | 2017-06-18 |
| MICRO-COAX | Coaxial line | UFB-293B-1-0480-50X50 | 97F0173 | 2016-09-08 | 2017-09-08 |
| Rohde & Schwarz | CE Test software | EMC 32 | V 09.10.0 | NCR | NCR |
| Radiation test | | | | | |
| Sonoma Instrument | Amplifier | 330 | 171377 | 2015-12-12 | 2016-12-12 |
| Rohde & Schwarz | EMI Test Receiver | ESCI | 100195 | 2016-11-25 | 2017-11-25 |
| Sunol Sciences | Broadband Antenna | JB3 | A090314-2 | 2016-01-09 | 2019-01-08 |
| Narda | Pre-amplifier | AFS42-00101800 | 2001270 | 2016-09-08 | 2017-09-08 |
| EMCO | Horn Antenna | 3116 | 9510-2384 | 2015-11-07 | 2018-11-06 |
| Rohde & Schwarz | Signal Analyzer | FSIQ26 | 100048 | 2016-11-25 | 2017-11-25 |
| ETS | Horn Antenna | 3115 | 9311-4159 | 2016-01-11 | 2019-01-10 |
| R&S | Auto test Software | EMC32 | V 09.10.0 | NCR | NCR |
| haojintech | Coaxial Cable | Cable-1 | 001 | 2016-09-08 | 2017-09-07 |
| haojintech | Coaxial Cable | Cable-2 | 002 | 2016-09-08 | 2017-09-07 |
| haojintech | Coaxial Cable | Cable-3 | 003 | 2016-09-08 | 2017-09-07 |
| MICRO-COAX | Coaxial Cable | Cable-4 | 004 | 2016-11-18 | 2017-11-17 |
| MICRO-COAX | Coaxial Cable | Cable-5 | 005 | 2016-11-18 | 2017-11-17 |
| RF Conducted test | | | | | |
| BACL | TS 8997 Cable-01 | T-KS-EMC086 | T-KS-EMC086 | 2015-12-10 | 2016-12-09 |
| BACL | RF cable | KS-LAB-012 | KS-LAB-012 | 2015-12-16 | 2016-12-15 |
| WEINSCHHEL | 3dB Attenuator | 5326 | N/A | 2016-06-18 | 2017-06-18 |
| WEINSCHHEL | 10dB Attenuator | 5328 | N/A | 2016-06-18 | 2017-06-18 |
| Agilent | Power Meter | N1912A | MY5000492 | 2016-11-18 | 2017-11-17 |
| Agilent | Power Sensor | N1921A | MY54210024 | 2016-11-18 | 2017-11-17 |
| Rohde & Schwarz | Signal Analyzer | FSIQ26 | 836131 | 2016-09-21 | 2017-09-21 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

| Limits for General Population/Uncontrolled Exposure | | | | |
|---|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| Frequency Range (MHz) | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm ²) | Averaging Time (Minutes) |
| 0.3-1.34 | 614 | 1.63 | *(100) | 30 |
| 1.34-30 | 824/f | 2.19/f | *(180/f ²) | 30 |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 |
| 300-1500 | / | / | f/1500 | 30 |
| 1500-100,000 | / | / | 1.0 | 30 |

f = frequency in MHz

* = Plane-wave equivalent power density

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

| Frequency (MHz) | Antenna Gain | | Turn up Power | | Evaluation Distance (cm) | Power Density (mW/cm ²) | MPE Limit (mW/cm ²) |
|-----------------|--------------|-----------|---------------|-------|--------------------------|-------------------------------------|---------------------------------|
| | (dBi) | (numeric) | (dBm) | (mW) | | | |
| 2468 | 0 | 1.0 | 16.10 | 40.74 | 20 | 0.008 | 1 |

Note: To maintain compliance with the FCC’s RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliance

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has internal antenna arrangement which was permanently attached and the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

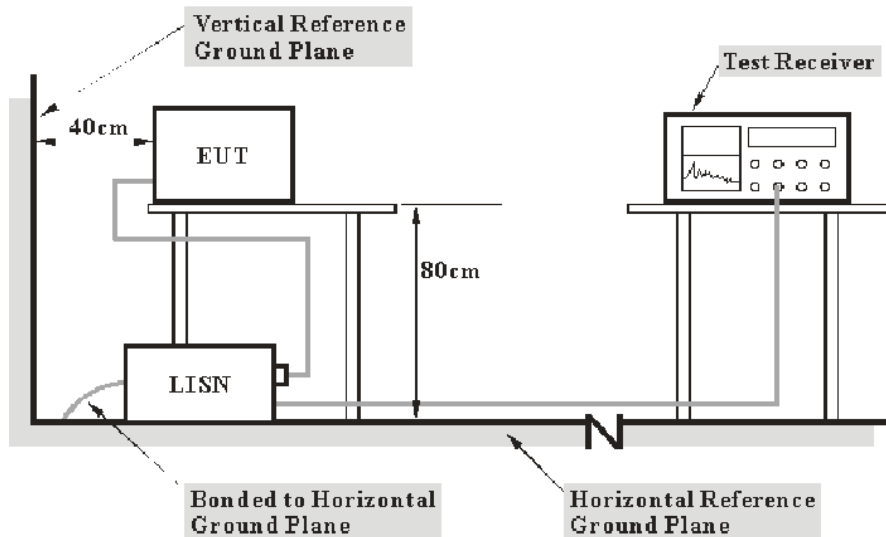

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz |

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207,

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data


Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 23 °C |
| Relative Humidity: | 50 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Layne Li on 2016-12-10.


EUT operation mode: Transmitting

AC 120V/60 Hz, Line:

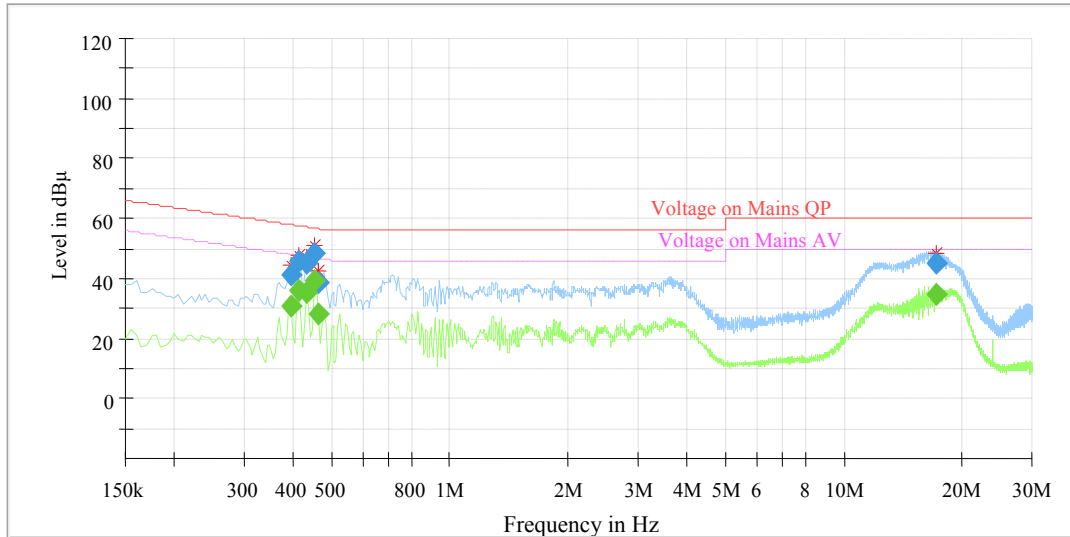

| Frequency (MHz) | QuasiPeak (dBµV) | Average (dB µ V) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) | Comment |
|-----------------|------------------|------------------|-----------------|------|------------|-------------|--------------|------------|
| 0.395000 | --- | 30.70 | 9.000 | L1 | 10.3 | 17.26 | 47.96 | Compliance |
| 0.395000 | 41.23 | --- | 9.000 | L1 | 10.3 | 16.73 | 57.96 | Compliance |
| 0.415000 | --- | 36.00 | 9.000 | L1 | 10.3 | 11.55 | 47.55 | Compliance |
| 0.415000 | 45.88 | --- | 9.000 | L1 | 10.3 | 11.67 | 57.55 | Compliance |
| 0.435000 | --- | 35.21 | 9.000 | L1 | 10.3 | 11.95 | 47.16 | Compliance |
| 0.435000 | 45.17 | --- | 9.000 | L1 | 10.3 | 11.99 | 57.16 | Compliance |
| 0.455000 | --- | 39.51 | 9.000 | L1 | 10.3 | 7.27 | 46.78 | Compliance |
| 0.455000 | 48.49 | --- | 9.000 | L1 | 10.3 | 8.29 | 56.78 | Compliance |
| 0.465000 | --- | 27.88 | 9.000 | L1 | 10.3 | 18.72 | 46.60 | Compliance |
| 0.465000 | 38.90 | --- | 9.000 | L1 | 10.3 | 17.70 | 56.60 | Compliance |
| 17.110000 | --- | 34.82 | 9.000 | L1 | 10.5 | 15.18 | 50.00 | Compliance |
| 17.110000 | 44.86 | --- | 9.000 | L1 | 10.5 | 15.14 | 60.00 | Compliance |

AC 120V/60 Hz, Neutral:

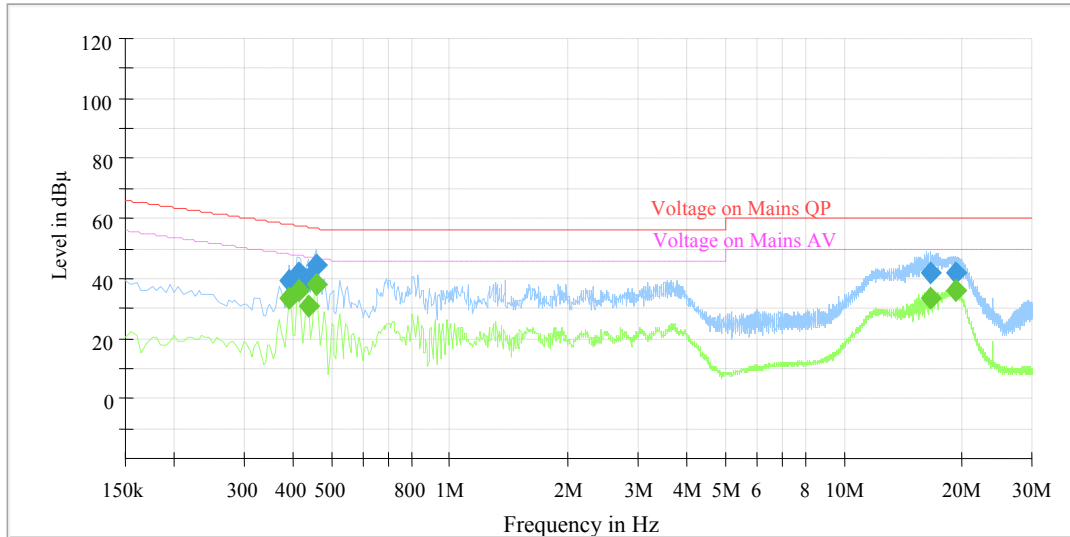

| Frequency (MHz) | QuasiPeak (dBµV) | Average (dB µ V) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) | Comment |
|-----------------|------------------|------------------|-----------------|------|------------|-------------|--------------|------------|
| 0.390000 | --- | 33.52 | 9.000 | N | 10.3 | 14.54 | 48.06 | Compliance |
| 0.390000 | 39.13 | --- | 9.000 | N | 10.3 | 18.93 | 58.06 | Compliance |
| 0.415000 | --- | 36.12 | 9.000 | N | 10.3 | 11.43 | 47.55 | Compliance |
| 0.415000 | 41.83 | --- | 9.000 | N | 10.3 | 15.72 | 57.55 | Compliance |
| 0.440000 | --- | 30.99 | 9.000 | N | 10.3 | 16.07 | 47.06 | Compliance |
| 0.440000 | 39.83 | --- | 9.000 | N | 10.3 | 17.23 | 57.06 | Compliance |
| 0.460000 | --- | 38.25 | 9.000 | N | 10.3 | 8.44 | 46.69 | Compliance |
| 0.460000 | 44.51 | --- | 9.000 | N | 10.3 | 12.18 | 56.69 | Compliance |
| 16.550000 | --- | 33.53 | 9.000 | N | 10.5 | 16.47 | 50.00 | Compliance |
| 16.550000 | 41.87 | --- | 9.000 | N | 10.5 | 18.13 | 60.00 | Compliance |
| 19.165000 | --- | 35.99 | 9.000 | N | 10.5 | 14.01 | 50.00 | Compliance |
| 19.165000 | 41.97 | --- | 9.000 | N | 10.5 | 18.03 | 60.00 | Compliance |

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude


FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d)

EUT Setup

Below 1 GHz:

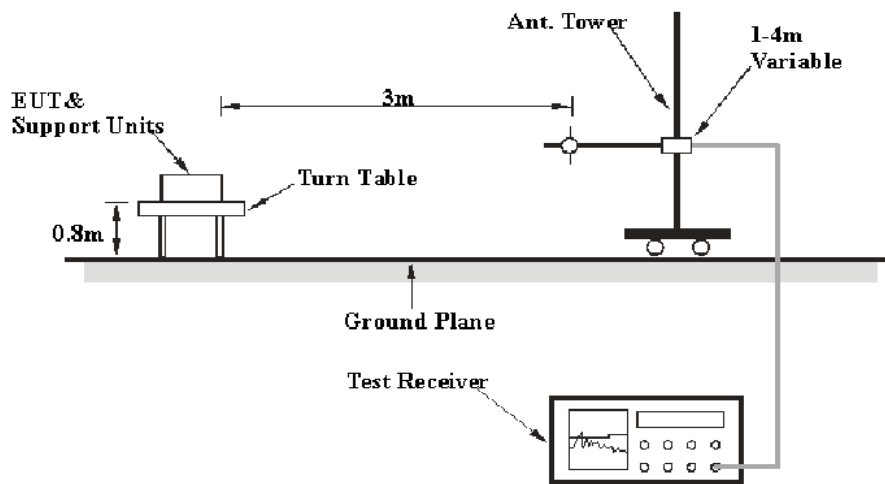

Above 1GHz:

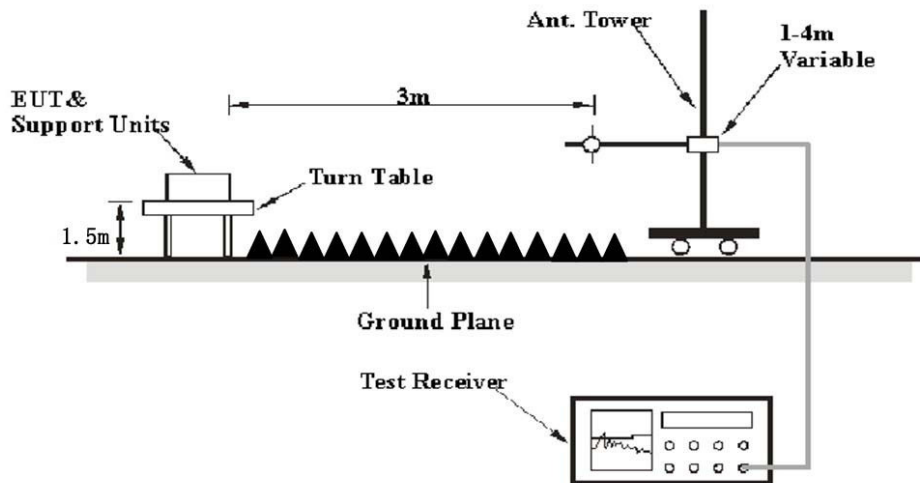

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range | RBW | Video B/W | IF B/W | Detector |
|-------------------|---------|-----------|---------|----------|
| 30 MHz – 1000 MHz | 100 kHz | 300 kHz | 120 kHz | QP |
| Above 1 GHz | 1 MHz | 3 MHz | / | PK |
| | 1 MHz | 10 Hz | / | Ave. |

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(L_m)}$ is less than $+ U_{cispr}$, if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 23 °C |
| Relative Humidity: | 50 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Layne Li on 2016-12-10.

EUT operation mode: Transmitting

30 MHz -25 GHz

| Frequency (MHz) | Receiver | | Turntable Degree | Rx Antenna | | Corrected Factor (dB) | Corrected Amplitude (dBµV/m) | FCC Part 15.247/205/209 | |
|------------------------------------|----------------|-----------------------|------------------|------------|-------------|-----------------------|------------------------------|-------------------------|-------------|
| | Reading (dBµV) | Detector (PK/QP/Ave.) | | Height (m) | Polar (H/V) | | | Limit (dBµV/m) | Margin (dB) |
| Low Channel (2417.0 MHz) | | | | | | | | | |
| 672.00 | 47.33 | QP | 296 | 1.4 | V | -3.17 | 44.16 | 46 | 1.84 |
| 2417.00 | 107.15 | PK | 90 | 2.2 | H | -3.03 | 104.12 | / | / |
| 2417.00 | 91.03 | Ave. | 90 | 2.2 | H | -3.03 | 88.00 | / | / |
| 2417.00 | 107.54 | PK | 41 | 1.5 | V | -3.03 | 104.51 | / | / |
| 2417.00 | 91.57 | Ave. | 41 | 1.5 | V | -3.03 | 88.54 | / | / |
| 2331.96 | 63.51 | PK | 236 | 2.4 | H | -3.09 | 60.42 | 74 | 13.58 |
| 2331.96 | 48.17 | Ave. | 236 | 2.4 | H | -3.09 | 45.08 | 54 | 8.92 |
| 2376.21 | 63.70 | PK | 275 | 1.9 | H | -3.06 | 60.64 | 74 | 13.36 |
| 2376.21 | 48.25 | Ave. | 275 | 1.9 | H | -3.06 | 45.19 | 54 | 8.81 |
| 2484.19 | 67.95 | PK | 33 | 2.5 | H | -2.99 | 64.96 | 74 | 9.04 |
| 2484.19 | 48.68 | Ave. | 33 | 2.5 | H | -2.99 | 45.69 | 54 | 8.31 |
| 4834.00 | 57.12 | PK | 87 | 2.4 | V | 7.21 | 64.33 | 74 | 9.67 |
| 4834.00 | 45.28 | Ave. | 87 | 2.4 | V | 7.21 | 52.49 | 54 | 1.51 |
| Middle Channel (2444.5 MHz) | | | | | | | | | |
| 672.00 | 47.28 | QP | 296 | 1.4 | V | -3.17 | 44.11 | 46 | 1.89 |
| 2444.5 | 108.44 | PK | 85 | 2.3 | H | -3.02 | 105.42 | / | / |
| 2444.5 | 88.09 | Ave. | 85 | 2.3 | H | -3.02 | 85.07 | / | / |
| 2444.50 | 109.92 | PK | 125 | 2.0 | V | -3.02 | 106.90 | / | / |
| 2444.50 | 94.36 | Ave. | 125 | 2.0 | V | -3.02 | 91.34 | / | / |
| 2340.15 | 64.19 | PK | 212 | 2.0 | H | -3.08 | 61.11 | 74 | 12.89 |
| 2340.15 | 48.16 | Ave. | 212 | 2.0 | H | -3.08 | 45.08 | 54 | 8.92 |
| 2388.87 | 66.23 | PK | 323 | 1.2 | H | -3.05 | 63.18 | 74 | 10.82 |
| 2388.87 | 48.24 | Ave. | 323 | 1.2 | H | -3.05 | 45.19 | 54 | 8.81 |
| 2485.08 | 72.66 | PK | 284 | 1.2 | H | -2.99 | 69.67 | 74 | 4.33 |
| 2485.08 | 47.68 | Ave. | 284 | 1.2 | H | -2.99 | 44.69 | 54 | 9.31 |
| 4889.00 | 58.03 | PK | 320 | 1.6 | V | 7.29 | 65.32 | 74 | 8.68 |
| 4889.00 | 45.29 | Ave. | 320 | 1.6 | V | 7.29 | 52.58 | 54 | 1.42 |

| Frequency (MHz) | Receiver | | Turntable Degree | Rx Antenna | | Corrected Factor (dB) | Corrected Amplitude (dBµV/m) | FCC Part 15.247/205/209 | |
|----------------------------------|----------------|-----------------------|------------------|------------|-------------|-----------------------|------------------------------|-------------------------|-------------|
| | Reading (dBµV) | Detector (PK/QP/Ave.) | | Height (m) | Polar (H/V) | | | Limit (dBµV/m) | Margin (dB) |
| High Channel (2468.0 MHz) | | | | | | | | | |
| 672.00 | 47.18 | QP | 296 | 1.4 | V | -3.17 | 44.01 | 46 | 1.99 |
| 2468.00 | 104.95 | PK | 90 | 1.7 | H | -3.00 | 101.95 | / | / |
| 2468.00 | 86.34 | Ave. | 90 | 1.7 | H | -3.00 | 83.34 | / | / |
| 2468.00 | 109.26 | PK | 141 | 1.4 | V | -3.00 | 106.26 | / | / |
| 2468.00 | 90.00 | Ave. | 141 | 1.4 | V | -3.00 | 87.00 | / | / |
| 2360.82 | 64.41 | PK | 303 | 2.1 | V | -3.07 | 61.34 | 74 | 12.66 |
| 2360.82 | 48.26 | Ave. | 303 | 2.1 | V | -3.07 | 45.19 | 54 | 8.81 |
| 2492.79 | 66.27 | PK | 36 | 1.7 | V | -2.98 | 63.29 | 74 | 10.71 |
| 2492.79 | 48.67 | Ave. | 36 | 1.7 | V | -2.98 | 45.69 | 54 | 8.31 |
| 2487.96 | 65.56 | PK | 284 | 1.8 | V | -2.99 | 62.57 | 74 | 11.43 |
| 2487.96 | 48.68 | Ave. | 284 | 1.8 | V | -2.99 | 45.69 | 54 | 8.31 |
| 4936.00 | 58.05 | PK | 190 | 2.0 | V | 7.36 | 65.41 | 74 | 8.59 |
| 4936.00 | 45.33 | Ave. | 190 | 2.0 | V | 7.36 | 52.69 | 54 | 1.31 |

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude

The other spurious emission which is 20dB below the limit was not recorded.

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

| | |
|---------------------------|-----------------|
| Temperature: | 23~24 °C |
| Relative Humidity: | 46~47 % |
| ATM Pressure: | 101.0~101.5 kPa |

The testing was performed by Phil Zhu from 2016-12-06 to 2016-12-08.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots


| Channel | Frequency (MHz) | Channel Separation (MHz) | ≥Limit (MHz) | Result |
|------------|-----------------|--------------------------|--------------|--------|
| Channel 1 | 2417.0 | 4.028 | 3.06 | Pass |
| Channel 2 | 2421.0 | | | |
| Channel 9 | 2444.5 | 3.527 | 2.94 | Pass |
| Channel 10 | 2448.0 | | | |
| Channel 15 | 2465.0 | 3.026 | 2.97 | Pass |
| Channel 16 | 2468.0 | | | |

Note: Limit = 20 dB bandwidth *2/3


Low Channel

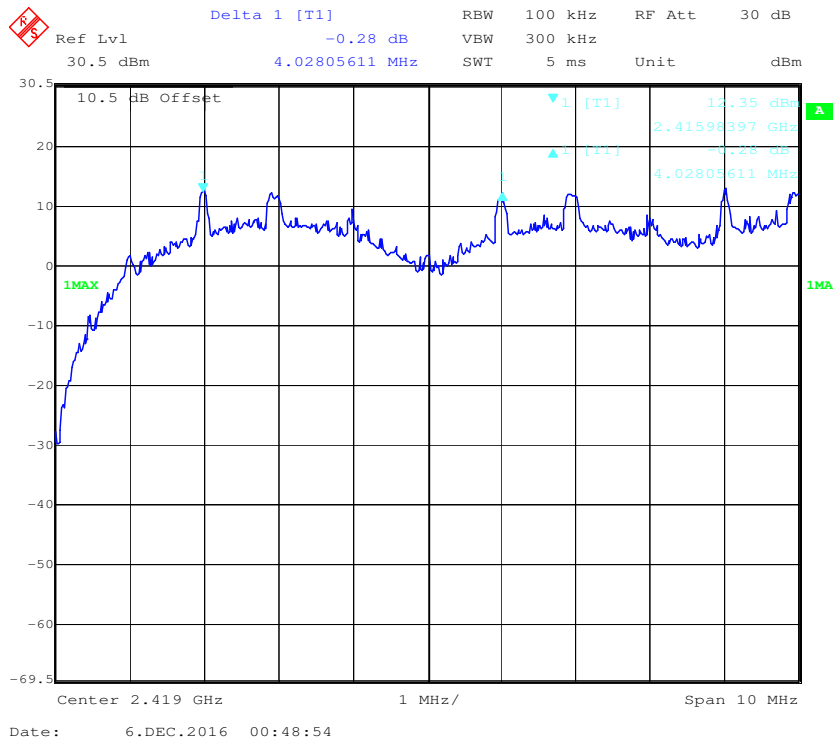

Middle Channel

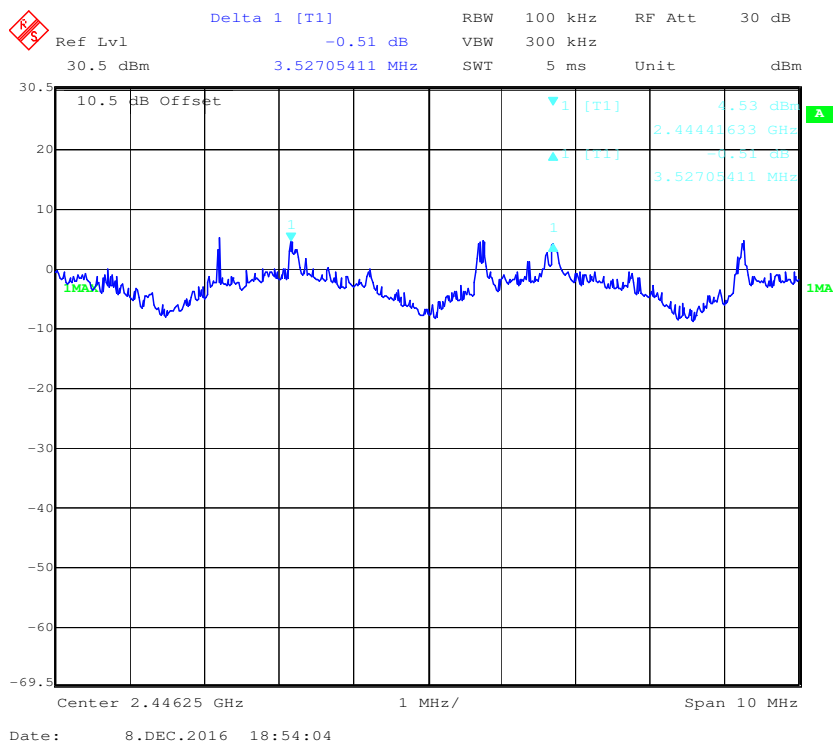

High Channel

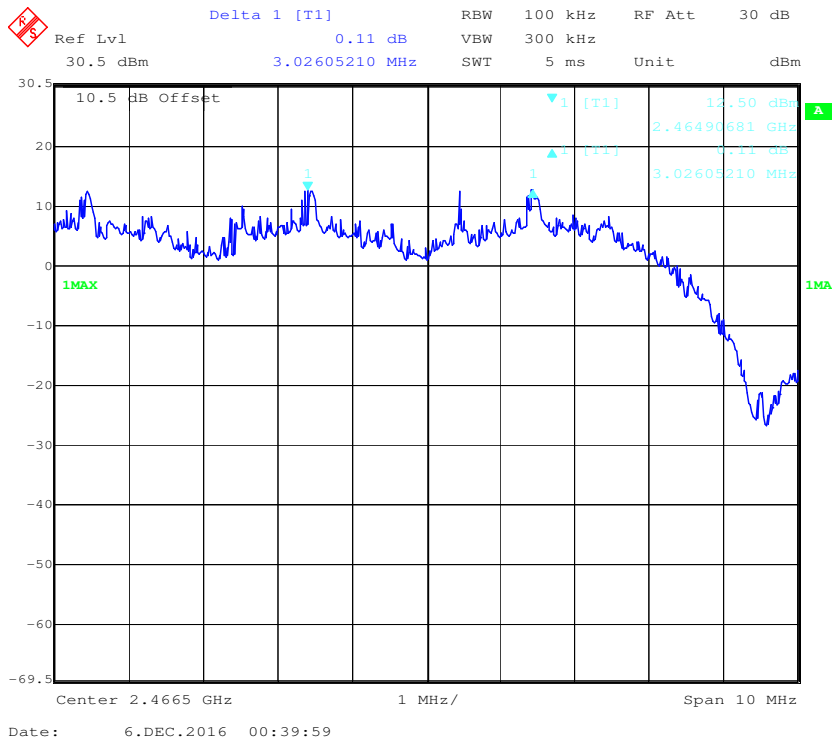

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 25.5 °C |
| Relative Humidity: | 51 % |
| ATM Pressure: | 101.0 kPa |


The testing was performed by Phil Zhu on 2016-11-30.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following table and plots.

| Channel | Frequency (MHz) | 20 dB Emission Bandwidth (MHz) |
|---------|-----------------|--------------------------------|
| Low | 2417.0 | 4.59 |
| Middle | 2444.5 | 4.41 |
| High | 2468.0 | 4.45 |


Low Channel

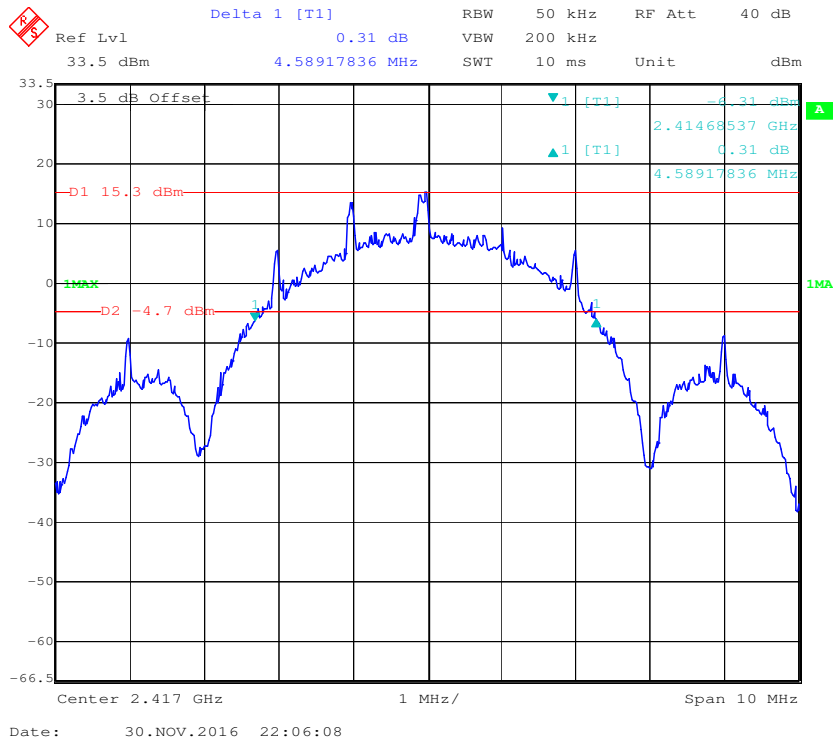

Middle Channel

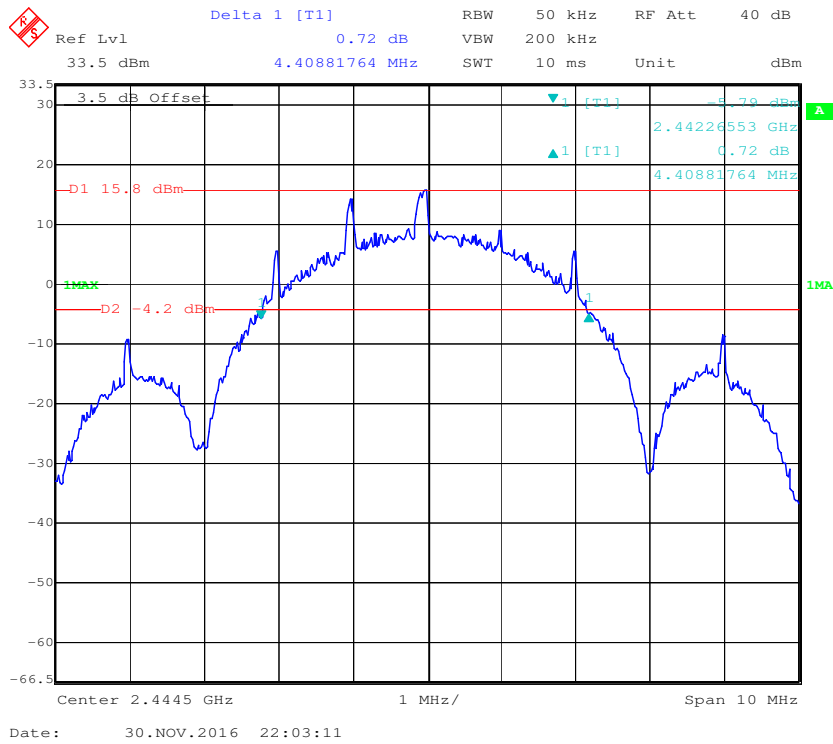

High Channel

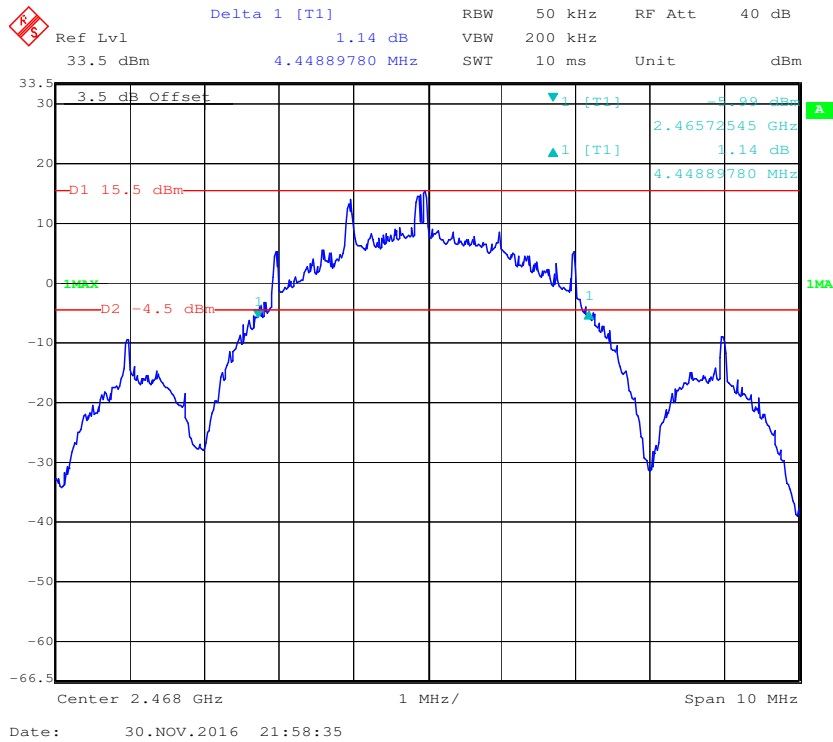

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Data**Environmental Conditions**

| | |
|---------------------------|-----------|
| Temperature: | 23 °C |
| Relative Humidity: | 47 % |
| ATM Pressure: | 101.0 kPa |


The testing was performed by Phil Zhu on 2016-12-08.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.

| Frequency Range (MHz) | Quantity of Hopping Channel (CH) | Limit (CH) |
|-----------------------|----------------------------------|------------|
| 2400-2483.5 | 16 | ≥15 |

Number of Hopping Channels

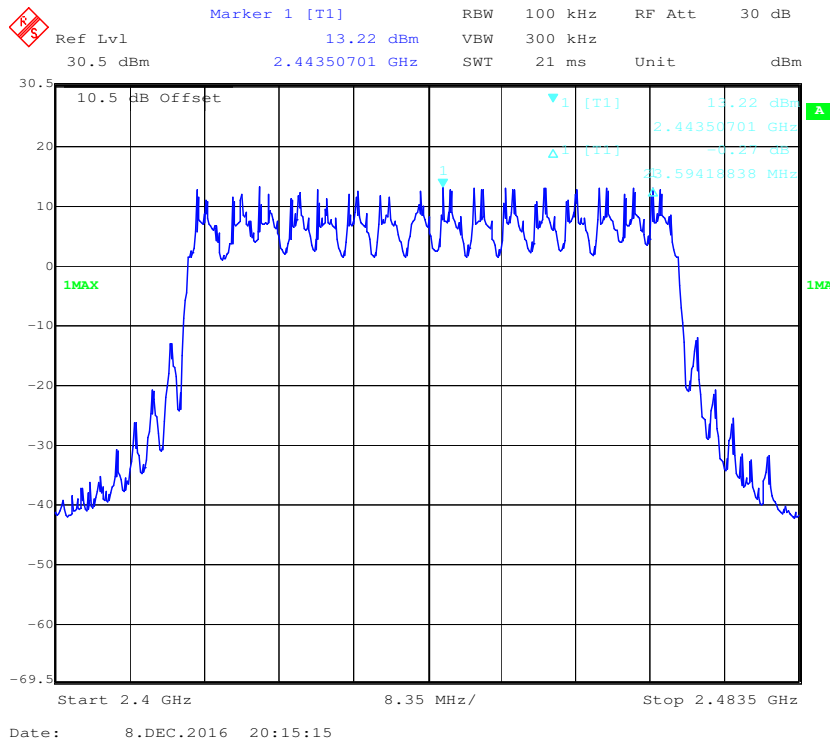

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 23 °C |
| Relative Humidity: | 47 % |
| ATM Pressure: | 101.0 kPa |


The testing was performed by Phil Zhu on 2016-12-08.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following table and plots.

| Mode | Channel | Pulse Width (ms) | Dwell Time (s) | Limit (s) | Result |
|--|---------|------------------|----------------|-----------|--------|
| GFSK | Low | 2.008 | 0.12 | 0.4 | Pass |
| | Middle | 2.008 | 0.12 | 0.4 | Pass |
| | High | 2.008 | 0.12 | 0.4 | Pass |
| Note: Dwell time = Pulse time*(150/16)*16*0.4s Hopping rate =150 times per second | | | | | |


Pulse time, Low Channel

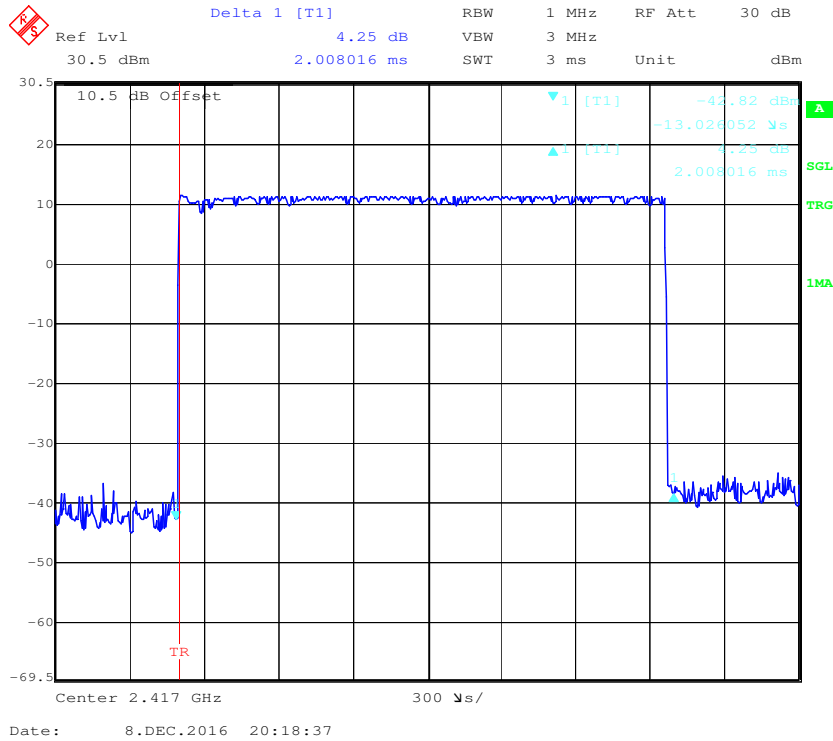

Pulse time, Middle Channel

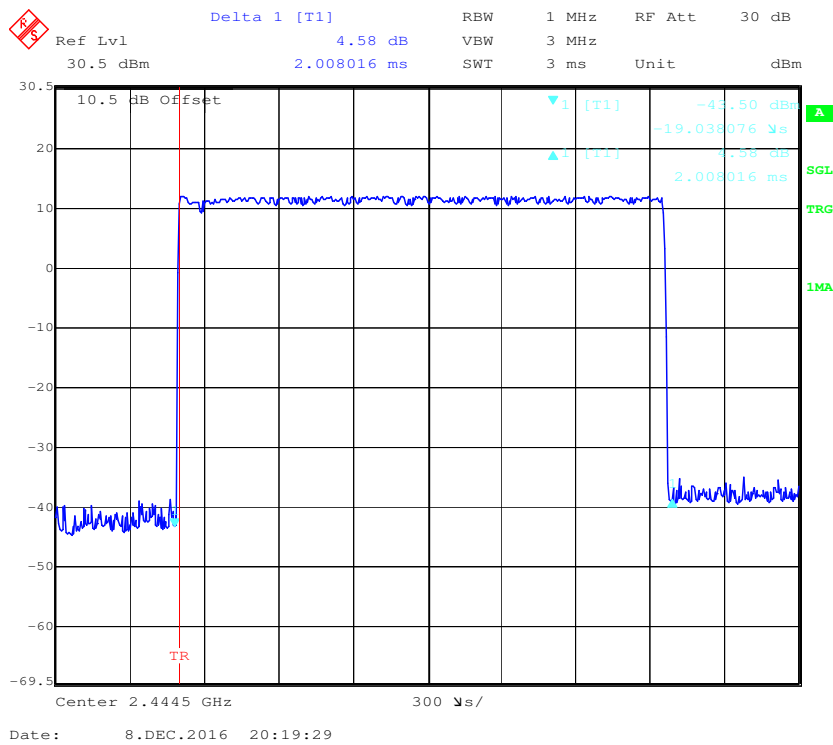

Pulse time, High Channel

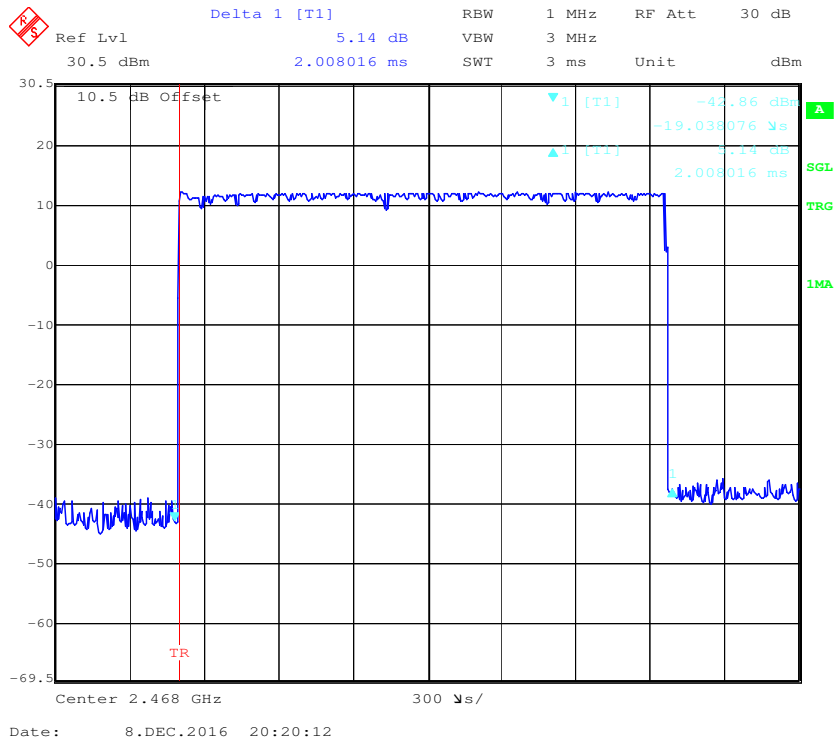

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 25.5 °C |
| Relative Humidity: | 51 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Phil Zhu on 2016-11-30.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table.

| Mode | Channel | Frequency (MHz) | Peak Output Power | | Limit (mW) |
|------|---------|-----------------|-------------------|-------|------------|
| | | | (dBm) | (mW) | |
| GFSK | Low | 2417.0 | 16.01 | 39.90 | 125 |
| | Middle | 2444.5 | 16.01 | 39.90 | 125 |
| | High | 2468.0 | 15.89 | 38.82 | 125 |

Note: The data above was tested in conducted mode.

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions


| | |
|---------------------------|-----------|
| Temperature: | 25.5 °C |
| Relative Humidity: | 51 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Phil Zhu on 2016-11-30.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following plots.

Band Edge-Left Side

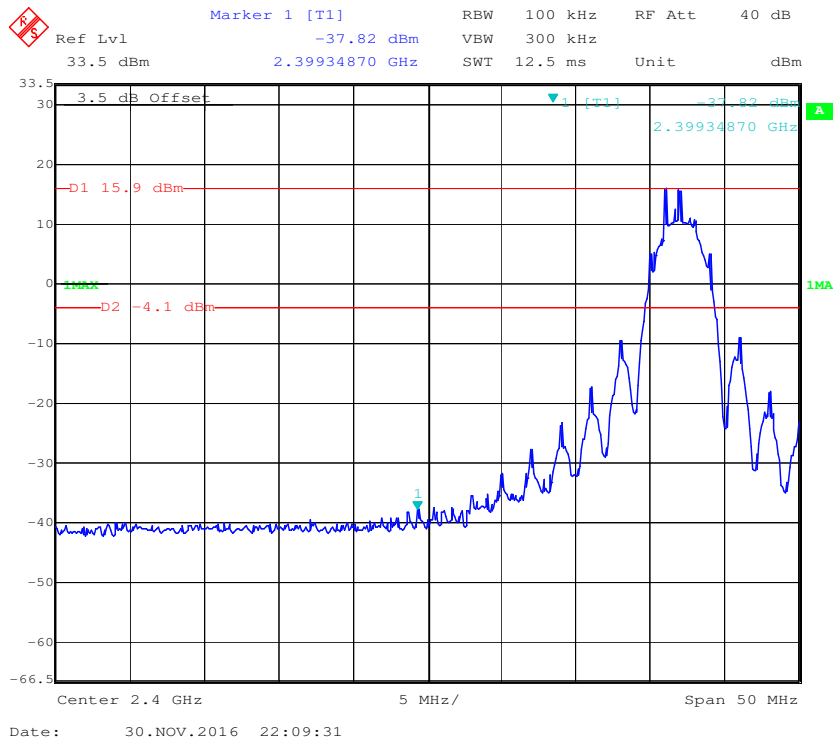

Band Edge-Right Side

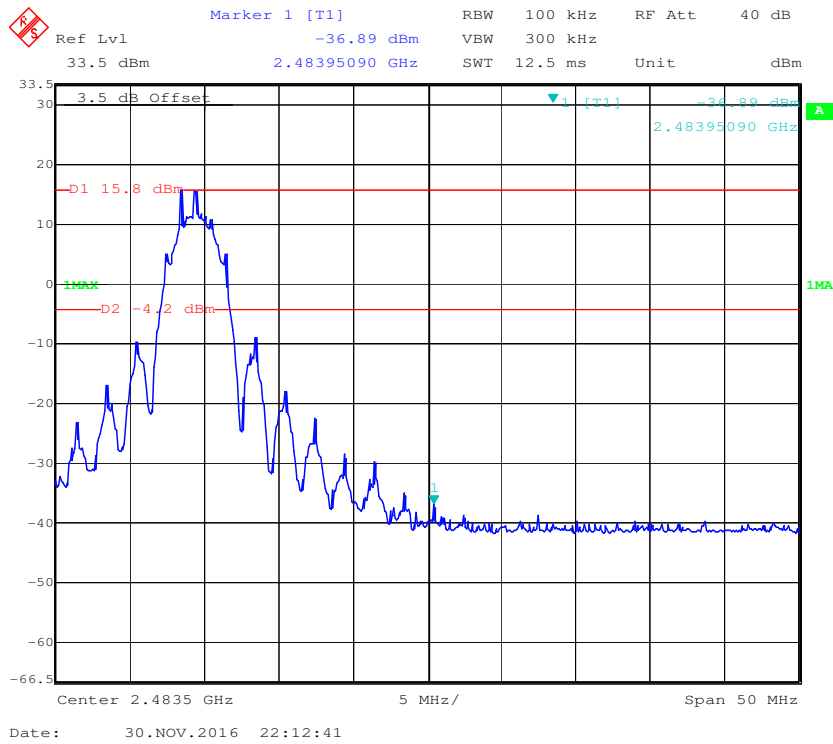

***** END OF REPORT *****