



FCC PART 22/24 TEST REPORT

FCC Part 22 /Part 24

Report Reference No..... : TRE1309009402 R/C: 26970

FCC ID..... : Q34-E360

Compiled by

(position+printed name+signature)..... : File administrators Jerome Luo

Jerome Luo

Supervised by

(position+printed name+signature)..... : Test Engineer Yuchao Wang

yuchao.wang

Approved by

(position+printed name+signature)..... : Manager Wenliang Li

Wenliang Li

Date of issue..... : Oct 28, 2013

Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd

Address..... : Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China

Applicant's name : Star Computer Group

Address..... : 2175 NORTHWEST 115TH AVE. DORAL FL 33172, USA

Test specification:

Standard : FCC Part 22: PUBLIC MOBILE SERVICES

FCC Part 24: PERSONAL COMMUNICATIONS SERVICES

TRF Originator..... : Shenzhen Huatongwei International Inspection CO., Ltd

Master TRF..... : Dated 2006-06

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description : Mobile phone

Trade Mark : Argom

Manufacturer..... : Star Computer Group

Model/Type reference..... : E360

Listed Models : /

Ratings..... : DC 3.70V

Modulation : QPSK

Hardware version : H5-MBPCB_V4.0

Software version : 3.0.13

Android version : 4.0.4

Frequency..... : FDD WCDMA Band II,FDD WCDMA Band V

Result..... : Positive

T E S T R E P O R T

Test Report No. : TRE1309009402	Oct 28, 2013 Date of issue
---	-------------------------------

Equipment under Test : Mobile Phone

Model /Type : E360

Listed Models : /

Applicant : **Star Computer Group**

Address : 2175 NORTHWEST 115TH AVE. DORAL FL 33172, USA

Manufacturer : **Star Computer Group**

Address : 2175 NORTHWEST 115TH AVE. DORAL FL 33172, USA

Test Result according to the standards on page 4:	Positive
--	-----------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1.</u>	<u>TEST STANDARDS</u>	<u>4</u>
<u>2.</u>	<u>SUMMARY</u>	<u>5</u>
2.1.	General Remarks	5
2.2.	Product Description	5
2.3.	Equipment under Test	5
2.4.	Short description of the Equipment under Test (EUT)	6
2.5.	Internal Identification of EUT used during the test	6
2.6.	Internal Identification of AE used during the test	6
2.7.	Normal Accessory setting	6
2.8.	EUT configuration	6
2.9.	Related Submittal(s) / Grant (s)	6
2.10.	Modifications	7
2.11.	Note	7
<u>3.</u>	<u>TEST ENVIRONMENT</u>	<u>8</u>
3.1.	Address of the test laboratory	8
3.2.	Test Facility	8
3.3.	Environmental conditions	9
3.4.	Statement of the measurement uncertainty	9
3.5.	Test Description	9
3.6.	Equipments Used during the Test	10
<u>4.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>11</u>
4.1.	Conducted Emissions Test	11
4.2.	OUTPUT POWER	20
4.3.	Radiated Spurious Emssion	23
4.4.	OCCUPIED BANDWIDTH	27
4.5.	EMISSION BANDWIDTH	32
4.6.	BAND EDGE COMPLIANCE	37
4.7.	Spurious Emssion on Antenna Port	41
4.8.	Frequency Stability Test	64
<u>5.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>66</u>
<u>6.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>68</u>

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 22 \(10-1-12 Edition\)](#): PRIVATE LAND MOBILE RADIO SERVICES.

[FCC Part 24\(10-1-12 Edition\)](#): PUBLIC MOBILE SERVICES

[TIA/EIA 603 D June 2010](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[47 CFR FCC Part 15 Subpart B](#): - Unintentional Radiators

[FCC Part 2](#): FREQUENCY ALLOCA-TIONS AND RADIO TREATY MAT-TERS; GENERAL RULES AND REG-ULATIONS

[KDB971168 D01:201](#): Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems

[ANSI C63.4:2009](#): Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Sep 24, 2013
Testing commenced on	:	Sep 24, 2013
Testing concluded on	:	Oct 11, 2013

2.2. Product Description

The **Star Computer Group's** Model: E360 or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

Name of EUT	Mobile Phone
Model Number	E360
FCC ID	Q34-E360
Modulation Type	QPSK for WCDMA, GMSK for GSM/GPRS/EDGE
Antenna Type	Internal
Hardware version	H5-MBPCB_V4.0
Software version	3.0.13
Android version	4.0.4
GSM/EDGE/GPRS	Supported GSM/GPRS/EDGE
WCDMA Operation Frequency Band	FDD Band II, FDD Band V
HSDPA Release Version	Release 8
HSUPA Release Version	Release 6
WCDMA Release Version	R99
Extreme temp. Tolerance	-30°C to +60°C
Extreme vol. Limits	3.40VDC to 4.20VDC (nominal: 3.70VDC)
GSM/GPRS Operation Frequency Band	GSM850/PCS1900
GSM Release Version	R99
GPRS operation mode	Class B
GPRS Multislot Class	12
EGPRS Multislot Class	12

2.3. Equipment under Test

Power supply system utilised

Power supply voltage	:	<input type="radio"/> 120V / 60 Hz	<input type="radio"/> 115V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 3.70V

Test frequency list

Modulation Type	Test Channel	Channel Number	Test Frequency
FDD Band II	Low	9262	1852.4 MHz
	Middle	9400	1880.0 MHz
	High	9538	1907.6 MHz
FDD Band V	Low	4132	826.40 MHz
	Middle	4182	836.60 MHz
	High	4233	846.60 MHz

2.4. Short description of the Equipment under Test (EUT)

The Equipment Under Test (EUT) is a model of Mobile Phone with

WCDMA/HSUPA/HSDPA/GPRS/GSM,WLAN and Bluetooth function and integrated antenna. Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the Client.

2.5. Internal Identification of EUT used during the test

SN or IMEI	HW Version	SW Version
354718041824829	H5-MBPCB_V4.0	3.0.13
354718041824853	H5-MBPCB_V4.0	3.0.13
354718041824814	H5-MBPCB_V4.0	3.0.13

2.6. Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery
AE2	Charger and USB cable

AE1

Model:E360
 Manufacturer: Star Computer Group
 Capacitance:650mAh
 Nominal Voltage:3.70V

AE2:

Model: E360
 Manufacturer: Star Computer Group
 Input: 100-240V~50/60Hz 0.15A
 Output: OUTPUT: 5.0V DC 0.5A
 Power Cable Length: 80cm
☐ Shielded ☒ Unshielded

*AE ID: is used to identify the test sample in the lab internally.

2.7. Normal Accessory setting

Fully charged battery was used during the test.

2.8. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

☒ - supplied by the manufacturer

☐ - supplied by the lab

<input type="radio"/>	Power Cable	Length (m) :	/
		Shield :	/
		Detachable :	/
<input type="radio"/>	Multimeter	Manufacturer :	/
		Model No. :	/

2.9. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **Q34-E360** filing to comply with FCC Part 22 and Part 24 Rules

2.10. Modifications

No modifications were implemented to meet testing criteria.

2.11. Note

1. The EUT is a WCDMA Mobile Phone with WLAN and Bluetooth function, The functions of the EUT listed as below:

	Test Standards	Reference Report
GSM/GPRS/EGPRS	FCC Part 22/FCC Part 24	TRE1309009401
WCDMA/HSUPA/HSDPA	FCC Part 22/FCC Part 24	TRE1309009402
WLAN	FCC Part 15 C 15.247	TRE1309009403
Bluetooth v2.1	FCC Part 15 C 15.247	TRE1309009404
Bluetooth 4.0	FCC Part 15 C 15.247	TRE1309009405
USB Port	FCC Part 15 B	TRE1309009406
SAR	FCC Part 2 §2.1093	TRE1309009407

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Huatongwei International Inspection Co., Ltd
Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China
Phone: 86-755-26715686 Fax: 86-755-26748089

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2009) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: Mar 01, 2012. Valid time is until Feb 28, 2015.

A2LA-Lab Cert. No. 2243.01

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is until Sept 30, 2015.

FCC-Registration No.: 662850

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 662850, Renewal date June 01, 2015.

IC-Registration No.: 5377

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377 on Jan 25, 2011. Valid time is until Jan 24, 2014

ACA

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

VCCI

The 3m Semi-anechoic chamber (12.2m×7.95m×6.7m) and Shielded Room (8m×4m×3m) of Shenzhen Huatongwei International Inspection Co., Ltd has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2484. Date of Registration: December 20, 2009. Valid time is until December 19, 2013.

Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: December 20, 2009. Valid time is until December 19, 2013.

DNV

Shenzhen Huatongwei International Inspection Co Ltd has been found to comply with the requirements of DNV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Directives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-ups according to relevant parts of ISO/IEC Guide 17025(2005), in accordance with the requirements of the DNV Laboratory Quality Manual towards subcontractors. Valid time is until Aug 24, 2016.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Frequency stability	25 Hz	(1)
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-12.75 GHz	1.60 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission 30~1000MHz	4.24 dB	(1)
Radiated Emission 1~18GHz	5.16 dB	(1)
Radiated Emission 18-40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)
Emission Mask	-----	(1)
Modulation Characteristic	-----	(1)
Transmitter Frequency Behavior	-----	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

3.5. Test Description

Test Items	Clause in FCC rules	Verdict
Conducted Emission	15.107/15.207	PASS
Output Power	22.913(a)/24.232(c)	PASS
Radiated Spurious Emission	2.1051/22.917/24.238	PASS
Frequency Stability	2.1055/24.235	PASS
Occupied Bandwidth	2.1049(h)(i)	PASS
Emission Bandwidth	22.917(b)/24.238(b)	PASS
Band Edge Compliance	22.917(b)/24.238(b)	PASS
Conducted Spurious Emission	2.1057/22.917/24.238	PASS

Remark:

1. The measurement uncertainty is not included in the test result.

3.6. Equipments Used during the Test

AC Power Conducted Emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Artificial Mains	Rohde&Schwarz	ESH2-Z5	100028	2013/10/26
2	EMI Test Receiver	Rohde&Schwarz	ESCS 30	100038	2013/10/26
3	Pulse Limiter	Rohde&Schwarz	ESHSZ2	100044	2013/10/26
4	EMI Test Software	Rohde&Schwarz	ES-K1 V1.71	N/A	N/A
5	UNIVERSAL RADIO COMMUNICATION	Rohde&Schwarz	CMU200	112012	2013/10/26

Output Power(Conducted) & Occupied Bandwidth & Emission Bandwidth & Band Edge Compliance & Conducted Spurious Emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	UNIVERSAL RADIO COMMUNICATION	Rohde&Schwarz	CMU200	112012	2013/10/26
2	Spectrum Analyzer	Rohde&Schwarz	FSU26	201141	2013/10/26
3	Splitter	Mini-Circuit	ZAPD-4	400059	2013/10/26

Frequency Stability					
No.	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	UNIVERSAL RADIO COMMUNICATION	Rohde&Schwarz	CMU200	112012	2013/10/26
2	Spectrum Analyzer	Rohde&Schwarz	FSU26	201141	2013/10/26
3	Climate Chamber	ESPEC	EL-10KA	05107008	2013/10/26
4	Splitter	Mini-Circuit	ZAPD-4	400059	2013/10/26

Output Power (Radiated) & Radiated Spurious Emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	UNIVERSAL RADIO COMMUNICATION	Rohde&Schwarz	CMU200	112012	2013/10/26
2	Spectrum Analyzer	Rohde&Schwarz	FSU26	201141	2013/10/26
3	HORN ANTENNA	ShwarzBeck	9120D	1012	2013/10/26
4	HORN ANTENNA	ShwarzBeck	9120D	1011	2013/10/26
5	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	538	2013/10/26
6	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	539	2013/10/26
7	TURNTABLE	MATURO	TT2.0	----	N/A
8	ANTENNA MAST	MATURO	TAM-4.0-P	----	N/A
9	EMI Test Software	Audix	E3	N/A	N/A
10	EMI Test Receiver	Rohde&Schwarz	ESIB 26	100009	2013/10/26
11	RF Test Panel	Rohde&Schwarz	TS / RSP	335015/ 0017	N/A
12	High pass filter	Compliance Direction systems	BSU-6	34202	2013/10/26
13	Splitter	Mini-Circuit	ZAPD-4	400059	2013/10/26
14	Horn Antenna	SCHWARZBECK	BBHA9170	25841	2013/10/26
15	Horn Antenna	SCHWARZBECK	BBHA9170	25842	2013/10/26
16	Preamplifier	ShwarzBeck	BBV 9718	BBV 9718	2013/10/26
17	Broadband Preamplifier	ShwarzBeck	BBV743	9743-0079	2013/10/26
18	Signal Generator	Rohde&Schwarz	SMF100A	101932	2013/10/26
19	Amplifier	Compliance Direction systems	PAP1-4060	120	2013/10/26
20	TURNTABLE	ETS	2088	2149	N/A
21	ANTENNA MAST	ETS	2075	2346	N/A
22	HORN ANTENNA	Rohde&Schwarz	HF906	100068	2013/10/26
23	HORN ANTENNA	Rohde&Schwarz	HF906	100039	2013/10/26

The calibration interval was one year.


4. TEST CONDITIONS AND RESULTS

4.1. Conducted Emissions Test

TEST APPLICABLE

The EUT was tested according to ANSI C63.4 - 2009. The frequency spectrum from 0.15 MHz to 30 MHz was investigated. The LISN used was 50 ohm / 50 u Henry as specified by section 5.1 of ANSI C63.4 - 2009. Cables and peripherals were moved to find the maximum emission levels for each frequency.

TEST CONFIGURATION

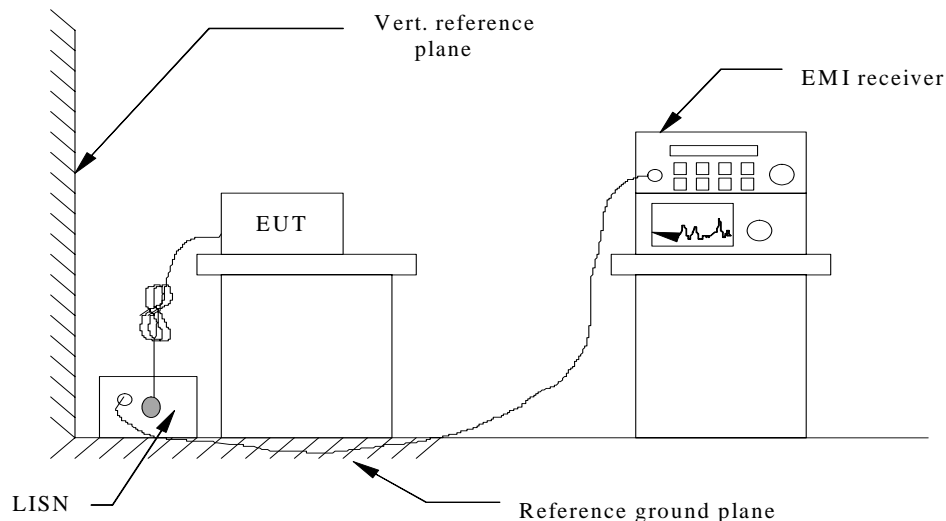

TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4-2009.
2. Support equipment, if needed, was placed as per ANSI C63.4-2009.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4-2009.
4. If EUT received DC power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

Conducted Power Line Emission Limit

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dBμV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency


For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

TEST RESULTS

WCDMA Band II-AE2

SCAN TABLE: "Voltage (9K-30M) FIN"

Short Description: 150K-30M Voltage

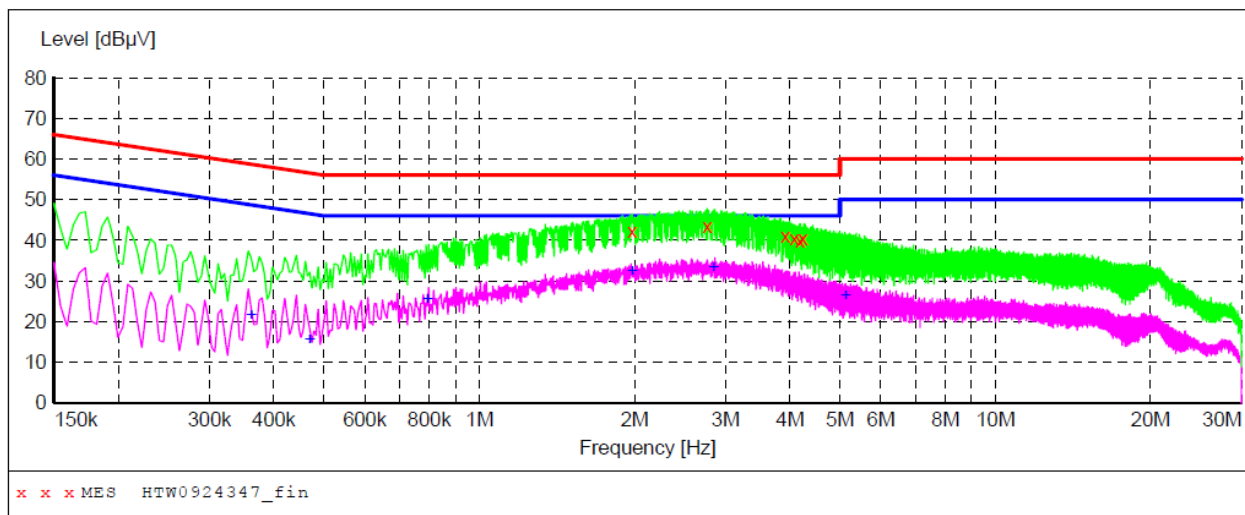

MEASUREMENT RESULT: "HTW0924347_fin"

9/24/2013 5:31PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
1.977000	42.20	10.3	56	13.8	QP	L1	GND
2.769000	43.50	10.3	56	12.5	QP	L1	GND
3.916500	41.00	10.3	56	15.0	QP	L1	GND
4.078500	40.60	10.3	56	15.4	QP	L1	GND
4.186500	39.90	10.3	56	16.1	QP	L1	GND
4.245000	40.40	10.3	56	15.6	QP	L1	GND


MEASUREMENT RESULT: "HTW0924347_fin2"

9/24/2013 5:31PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.361500	21.60	10.1	49	27.1	AV	L1	GND
0.469500	15.60	10.1	47	30.9	AV	L1	GND
0.793500	25.40	10.2	46	20.6	AV	L1	GND
1.977000	32.20	10.3	46	13.8	AV	L1	GND
2.845500	33.30	10.3	46	12.7	AV	L1	GND
5.122500	26.30	10.3	50	23.7	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

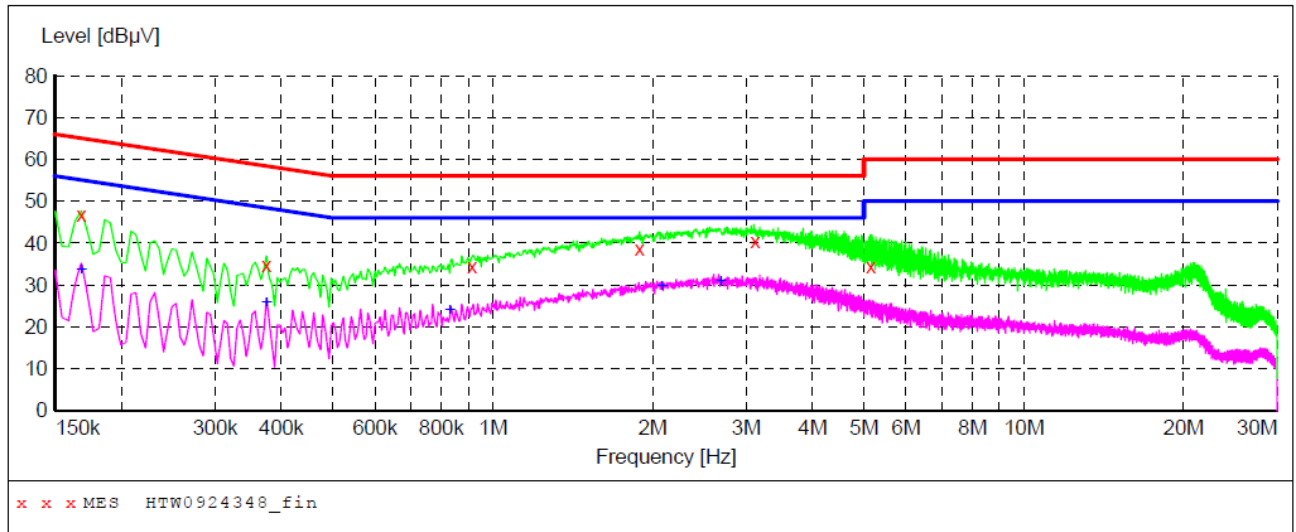**MEASUREMENT RESULT: "HTW0924348_fin"**

9/24/2013 5:35PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.168000	46.70	10.1	65	18.4	QP	N	GND
0.375000	34.80	10.1	58	23.6	QP	N	GND
0.915000	34.40	10.2	56	21.6	QP	N	GND
1.891500	38.80	10.3	56	17.2	QP	N	GND
3.124500	40.50	10.3	56	15.5	QP	N	GND
5.158500	34.50	10.3	60	25.5	QP	N	GND


MEASUREMENT RESULT: "HTW0924348_fin2"

9/24/2013 5:35PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.168000	33.60	10.1	55	21.5	AV	N	GND
0.375000	25.60	10.1	48	22.8	AV	N	GND
0.829500	23.80	10.2	46	22.2	AV	N	GND
2.080500	29.50	10.3	46	16.5	AV	N	GND
2.683500	30.80	10.3	46	15.2	AV	N	GND

WCDMA Band V-AE2**SCAN TABLE: "Voltage (9K-30M)FIN"**

Short Description: 150K-30M Voltage

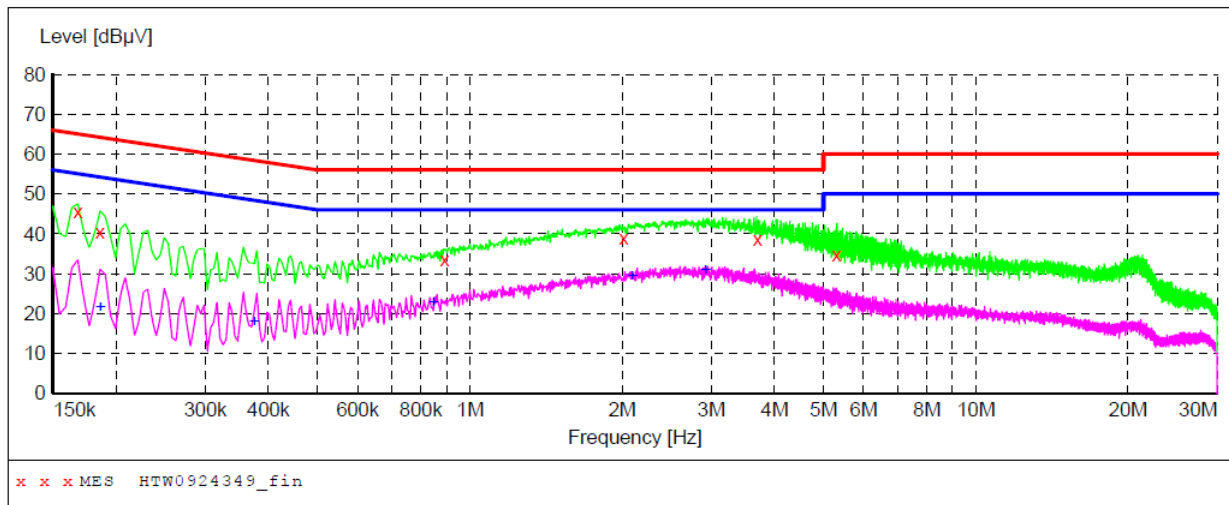**MEASUREMENT RESULT: "HTW0924349_fin"**

9/24/2013 5:38PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.168000	45.70	10.1	65	19.4	QP	N	GND
0.186000	40.50	10.1	64	23.7	QP	N	GND
0.892500	33.60	10.2	56	22.4	QP	N	GND
2.017500	39.00	10.3	56	17.0	QP	N	GND
3.705000	38.80	10.3	56	17.2	QP	N	GND
5.307000	34.90	10.3	60	25.1	QP	N	GND


MEASUREMENT RESULT: "HTW0924349_fin2"

9/24/2013 5:38PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.186000	21.60	10.1	54	32.6	AV	N	GND
0.375000	17.90	10.1	48	30.5	AV	N	GND
0.847500	22.80	10.2	46	23.2	AV	N	GND
2.094000	29.40	10.3	46	16.6	AV	N	GND
2.922000	30.70	10.3	46	15.3	AV	N	GND

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

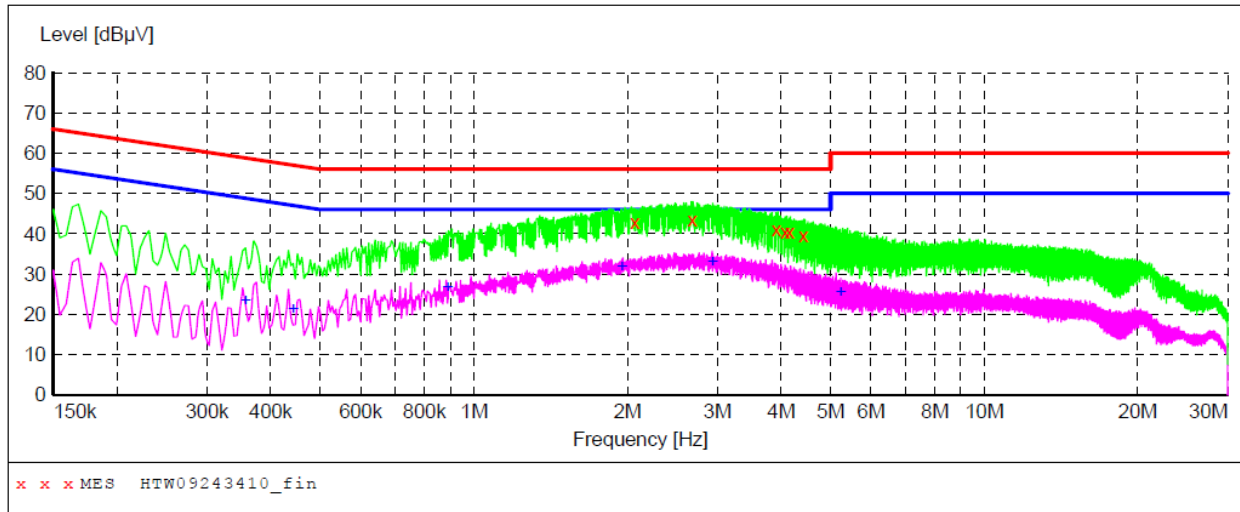**MEASUREMENT RESULT: "HTW09243410_fin"**

9/24/2013 5:41PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
2.067000	42.90	10.3	56	13.1	QP	L1	GND
2.679000	43.60	10.3	56	12.4	QP	L1	GND
3.912000	41.20	10.3	56	14.8	QP	L1	GND
4.074000	40.60	10.3	56	15.4	QP	L1	GND
4.159500	40.50	10.3	56	15.5	QP	L1	GND
4.425000	39.40	10.3	56	16.6	QP	L1	GND


MEASUREMENT RESULT: "HTW09243410_fin2"

9/24/2013 5:41PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.357000	23.20	10.1	49	25.6	AV	L1	GND
0.442500	21.30	10.1	47	25.7	AV	L1	GND
0.888000	26.50	10.2	46	19.5	AV	L1	GND
1.950000	31.70	10.3	46	14.3	AV	L1	GND
2.935500	33.00	10.3	46	13.0	AV	L1	GND
5.230500	25.30	10.3	50	24.7	AV	L1	GND

MP3-AE2**SCAN TABLE: "Voltage (9K-30M) FIN"**

Short Description: 150K-30M Voltage

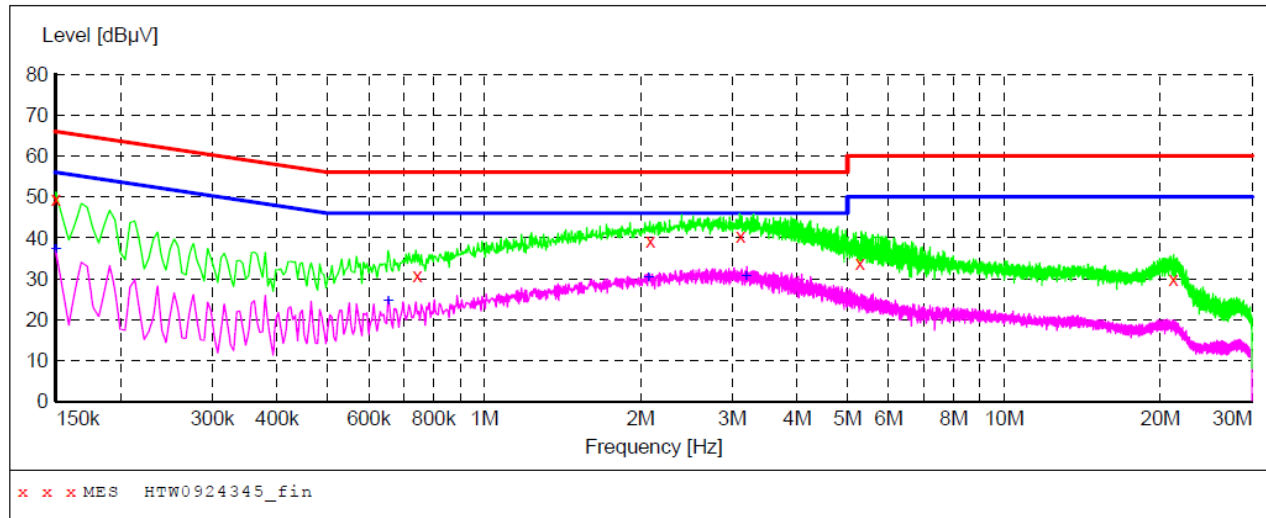**MEASUREMENT RESULT: "HTW0924345_fin"**

9/24/2013 5:26PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	49.60	10.1	66	16.4	QP	N	GND
0.744000	30.90	10.2	56	25.1	QP	N	GND
2.089500	39.30	10.3	56	16.7	QP	N	GND
3.115500	40.60	10.3	56	15.4	QP	N	GND
5.289000	33.70	10.3	60	26.3	QP	N	GND
21.192000	30.00	10.9	60	30.0	QP	N	GND


MEASUREMENT RESULT: "HTW0924345_fin2"

9/24/2013 5:26PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	37.20	10.1	56	18.8	AV	N	GND
0.654000	24.40	10.2	46	21.6	AV	N	GND
2.071500	30.20	10.3	46	15.8	AV	N	GND
3.192000	30.50	10.3	46	15.5	AV	N	GND

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

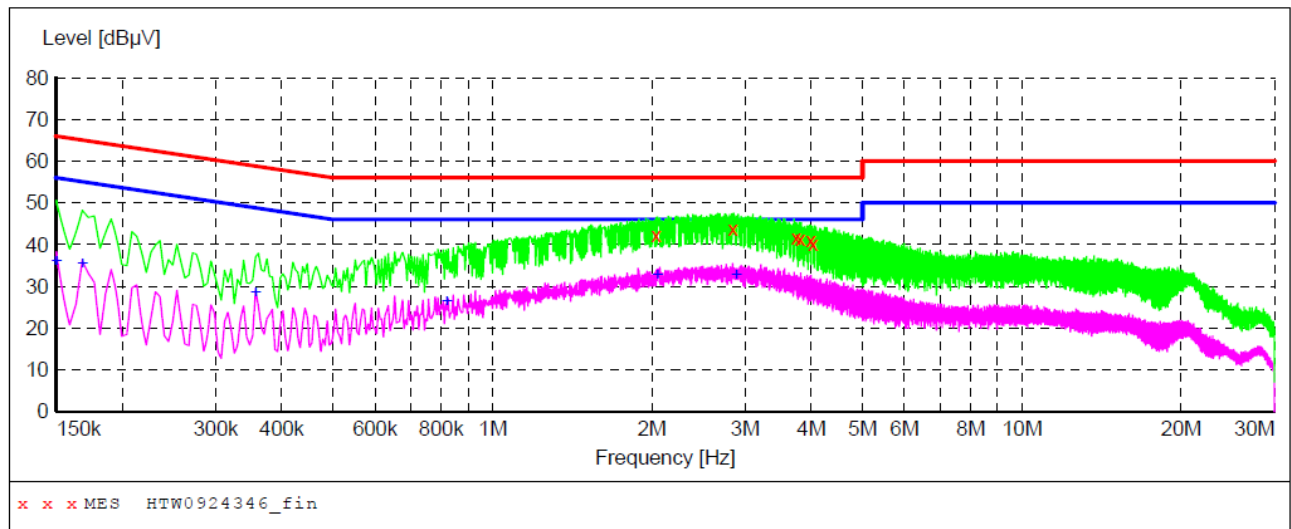**MEASUREMENT RESULT: "HTW0924346_fin"**

9/24/2013 5:29PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
2.035500	42.30	10.3	56	13.7	QP	L1	GND
2.845500	43.80	10.3	56	12.2	QP	L1	GND
3.750000	41.60	10.3	56	14.4	QP	L1	GND
3.817500	41.30	10.3	56	14.7	QP	L1	GND
3.993000	41.00	10.3	56	15.0	QP	L1	GND
4.029000	40.20	10.3	56	15.8	QP	L1	GND


MEASUREMENT RESULT: "HTW0924346_fin2"

9/24/2013 5:29PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	35.90	10.1	56	20.1	AV	L1	GND
0.168000	35.40	10.1	55	19.7	AV	L1	GND
0.357000	28.30	10.1	49	20.5	AV	L1	GND
0.820500	26.30	10.2	46	19.7	AV	L1	GND
2.049000	32.70	10.3	46	13.3	AV	L1	GND
2.886000	32.70	10.3	46	13.3	AV	L1	GND

CAMERA-AE2**SCAN TABLE: "Voltage (9K-30M) FIN"**

Short Description: 150K-30M Voltage

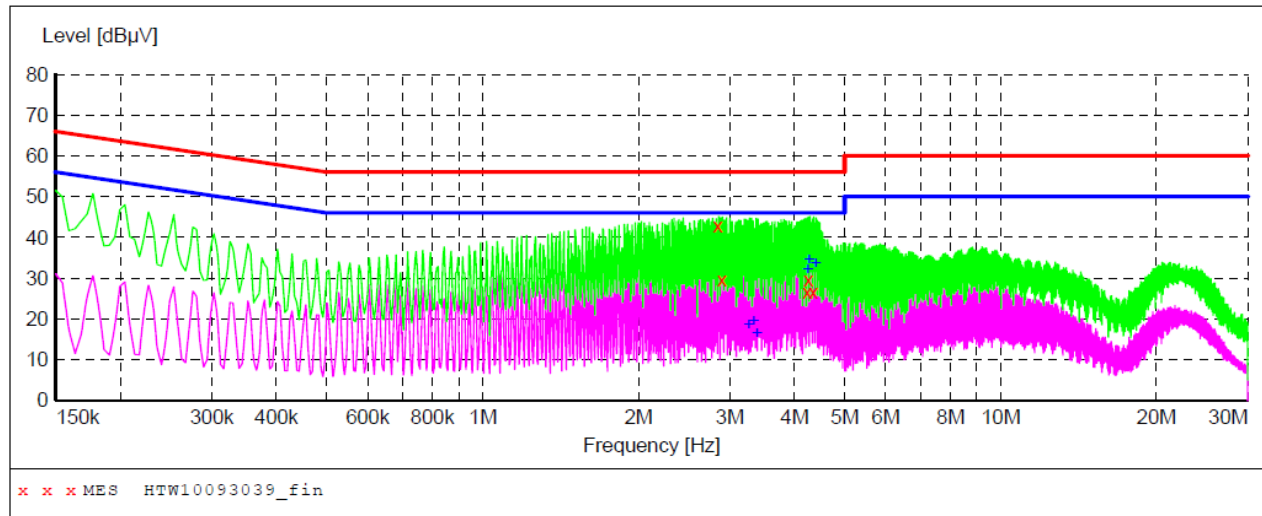**MEASUREMENT RESULT: "HTW10093039_fin"**

10/9/2013 5:51PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
2.845500	43.00	10.3	56	13.0	QP	L1	GND
2.895000	29.50	10.3	56	26.5	QP	L1	GND
4.231500	26.50	10.3	56	29.5	QP	L1	GND
4.258500	29.50	10.3	56	26.5	QP	L1	GND
4.353000	26.50	10.3	56	29.5	QP	L1	GND

MEASUREMENT RESULT: "HTW10093039_fin2"

10/9/2013 5:51PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
3.259500	18.60	10.3	46	27.4	AV	L1	GND
3.331500	19.30	10.3	46	26.7	AV	L1	GND
3.381000	16.40	10.3	46	29.6	AV	L1	GND
4.249500	31.90	10.3	46	14.1	AV	L1	GND
4.272000	34.40	10.3	46	11.6	AV	L1	GND
4.393500	33.60	10.3	46	12.4	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M)FIN"
Short Description: 150K-30M Voltage

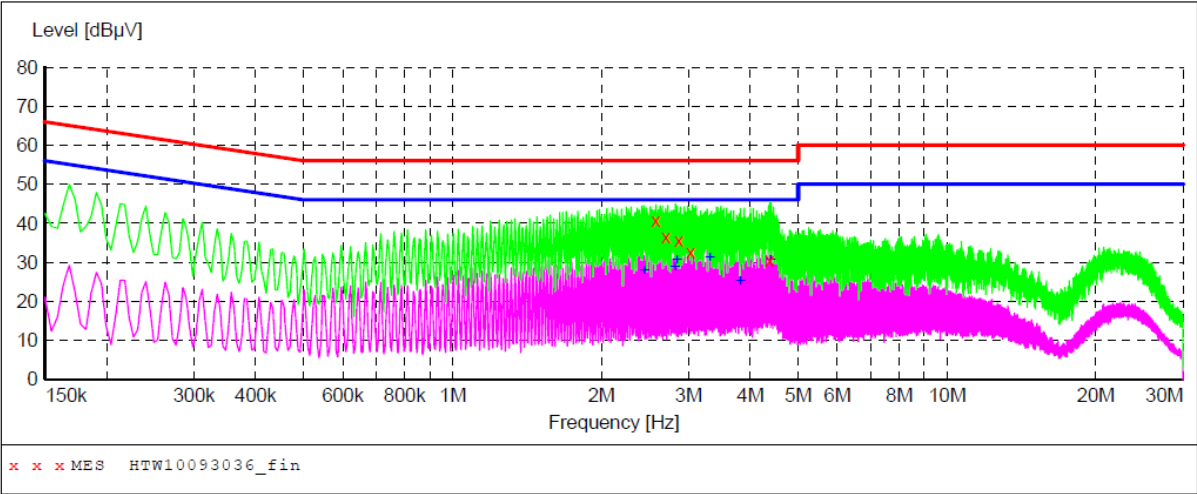

MEASUREMENT RESULT: "HTW10093036_fin"

10/9/2013 5:39PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
2.580000	40.70	10.3	56	15.3	QP	N	GND
2.701500	36.40	10.3	56	19.6	QP	N	GND
2.868000	35.50	10.3	56	20.5	QP	N	GND
3.034500	32.70	10.3	56	23.3	QP	N	GND
4.384500	30.40	10.3	56	25.6	QP	N	GND

MEASUREMENT RESULT: "HTW10093036_fin2"

10/9/2013 5:39PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
2.440500	27.80	10.3	46	18.2	AV	N	GND
2.818500	28.60	10.3	46	17.4	AV	N	GND
2.841000	30.60	10.3	46	15.4	AV	N	GND
3.313500	31.10	10.3	46	14.9	AV	N	GND
3.813000	25.20	10.3	46	20.8	AV	N	GND
4.402500	30.40	10.3	46	15.6	AV	N	GND


4.2. OUTPUT POWER

TEST APPLICABLE

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

4.2.1. Conducted Output Power

TEST CONFIGURATION

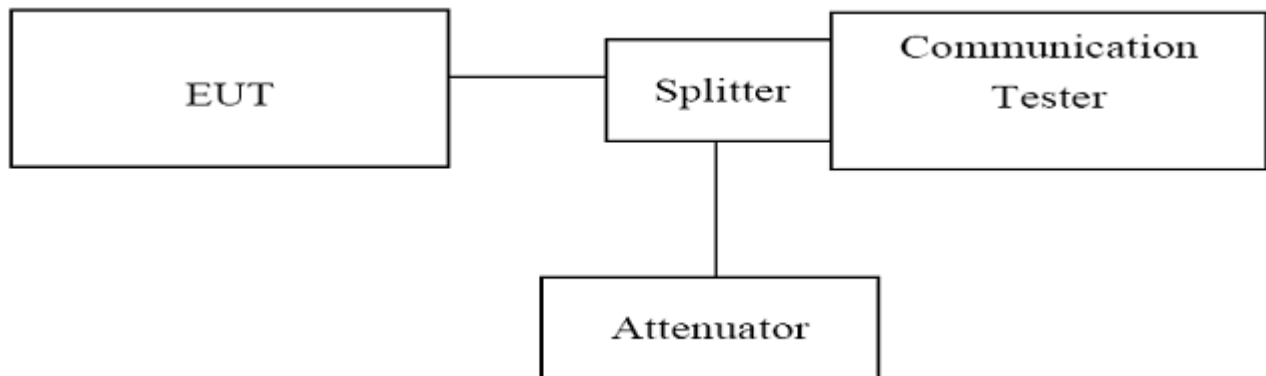

TEST PROCEDURE

1. The EUT was set up for the max output power with pseudo random data modulation.
2. The power was measured with Rhode & Schwarz Spectrum Analyzer FSU (peak)
3. These measurements were done at 3 frequencies, 1850.20 MHz, 1880.00 MHz and 1907.60 MHz for WCDMA band II; 826.40 MHz, 836.60 MHz and 846.60 MHz for WCDMA band V. (low, middle and high of operational frequency range).

TEST CONDITION

RBW	VBW	Sweep Time	Span
10MHz	10MHz	800ms	50MHz

TEST RESULTS

WCDMA V		
Channel	Frequency (MHz)	Output Power(dBm)
4132	826.40	22.99
4183	836.60	22.09
4233	846.60	23.08

WCDMA II		
Channel	Frequency (MHz)	Output Power(dBm)
9262	1852.40	22.86
9400	1880.00	22.23
9538	1907.60	22.35


4.2.2. Radiated Output Power

TEST DESCRIPTION

This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(c) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts." and Rule Part 27.50(d)(2) specifies, "Fixed, mobile, and portable (handheld) stations operating in the 1710–1755 MHz band are limited to a peak EIRP of 1 watt."

TEST CONFIGURATION

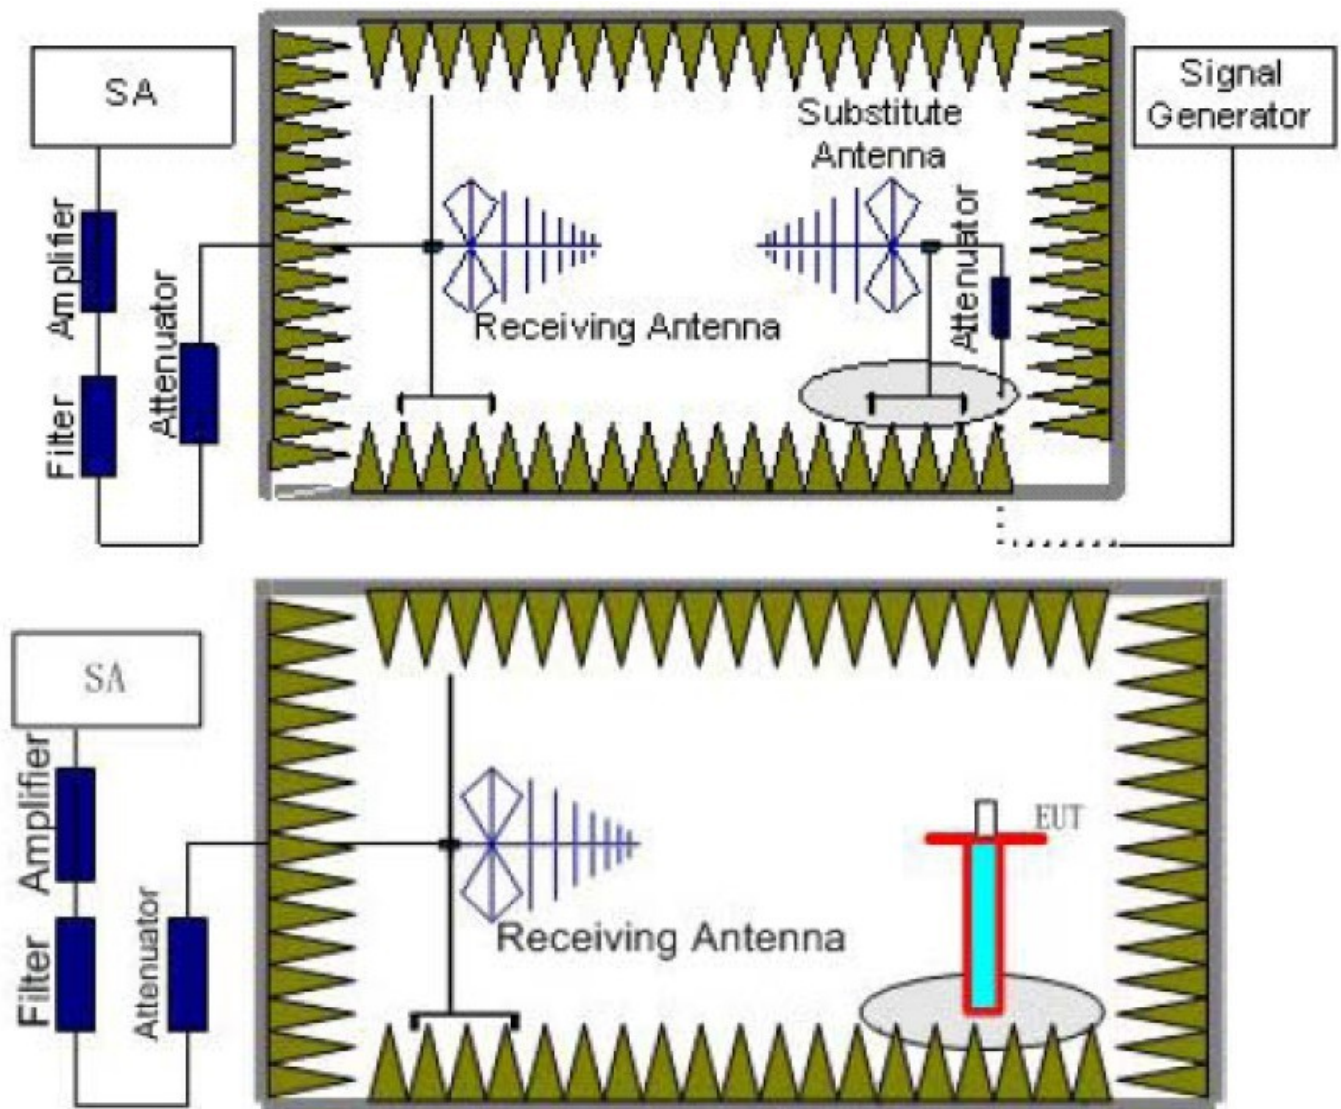

TEST PROCEDURE

1. EUT was placed on a 0.80 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 0.80m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=10MHz, VBW=10MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.
The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} - G_a$$
 We used SMF100A microwave signal generator which signal level can up to 33dBm, so we not used power Amplifier for substitution test; The measurement results are amend as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{cl} - G_a$$
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

TEST LIMIT

According to 22.913(a) and 24.232(c), the ERP should be not exceed following table limits:

	Burst Peak EIRP
WCDMA Band II	33dBm (2W)
	Burst Peak ERP
WCDMA Band V	38.45dBm (7W)

TEST RESULTS

WCDMA Band II						
Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain (dB)	Correction (dB)	EIRP (dBm)	Polarization
1852.4	20.84	3.52	8.35	2.15	25.67	H
1880.0	21.30	3.61	8.29	2.15	25.98	H
1907.6	20.75	3.67	8.37	2.15	25.45	H
1852.4	20.99	3.52	8.35	2.15	25.82	V
1880.0	21.48	3.61	8.29	2.15	26.16	V
1907.6	21.00	3.67	8.37	2.15	25.70	V


WCDMA Band V						
Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain (dB)	Correction (dB)	ERP (dBm)	Polarization
826.40	15.44	1.56	8.45	2.15	20.18	H
836.60	16.06	1.50	8.45	2.15	20.86	H
846.60	15.96	1.67	8.39	2.15	20.53	H
826.40	15.77	1.56	8.45	2.15	20.51	V
836.60	16.32	1.50	8.45	2.15	21.12	V
846.60	16.26	1.67	8.39	2.15	20.83	V

4.3. Radiated Spurious Emission

TEST APPLICABLE

According to the TIA/EIA 603D:2010 test method, The Receiver or Spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set as outlined in Part 24.238 and Part 22.917. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band II and WCDMA Band V.

TEST CONFIGURATION

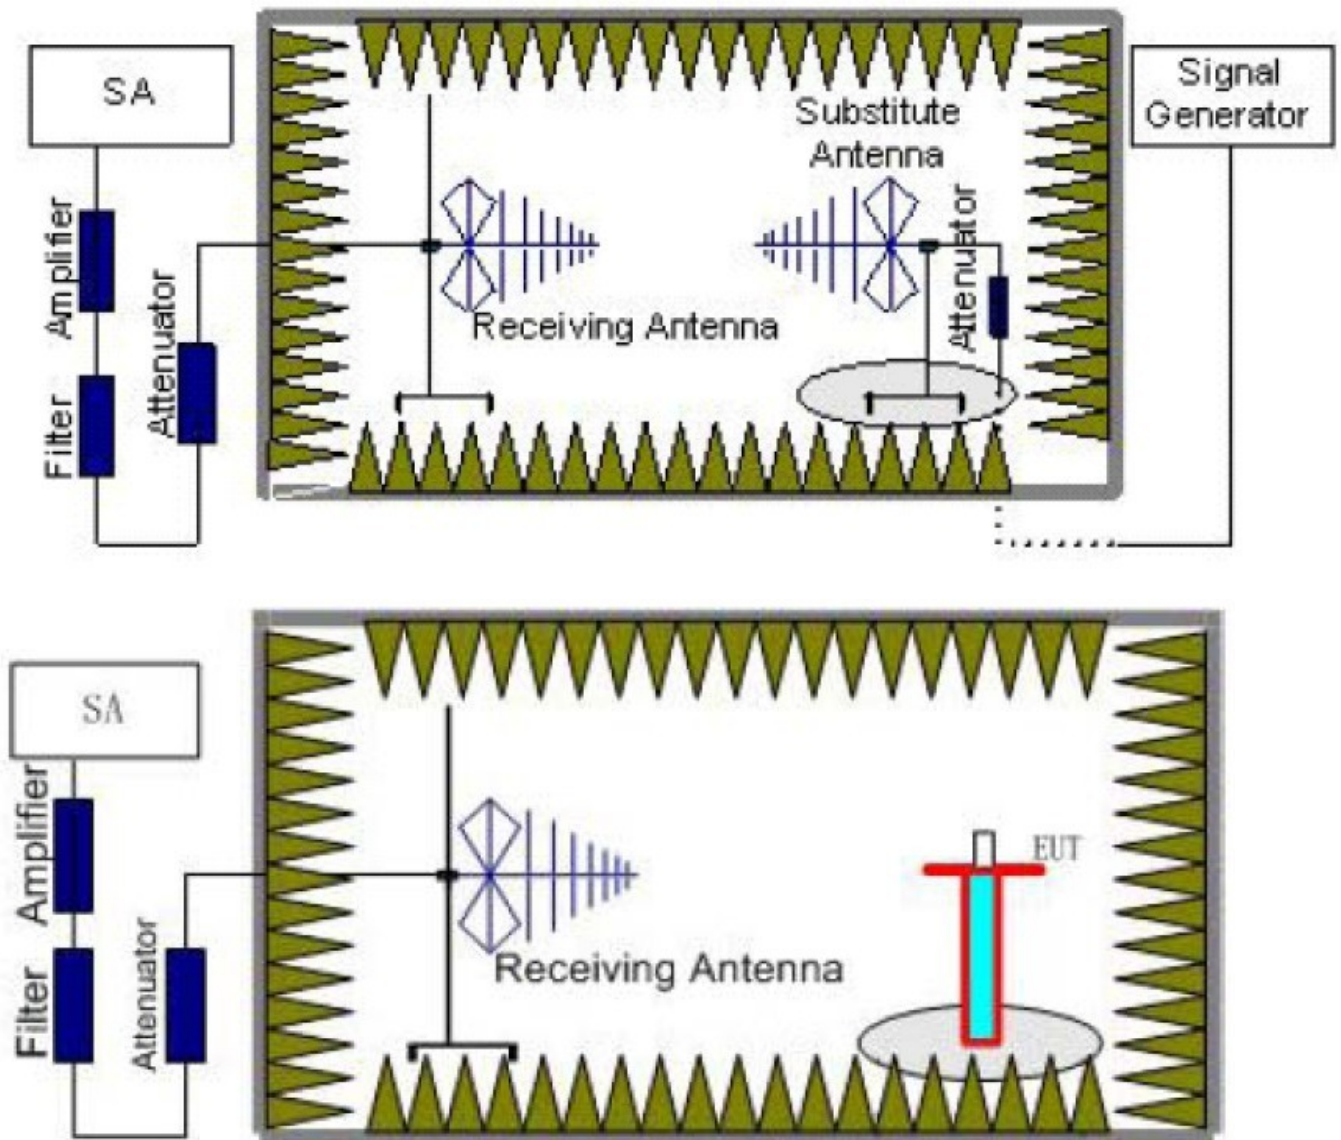

TEST PROCEDURE

1. EUT was placed on a 0.80 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 0.80m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.
The measurement results are obtained as described below:
 $Power(EIRP) = P_{Mea} - P_{Ag} - P_{cl} + G_a$
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15dBi$.
8. In order to make sure test results more clearly, we set frequency range and sweep time for difference frequency range as follows table:

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
850MHz	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10	1 MHz	3 MHz	3
94000MHz	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2

TEST LIMITS

According to 24.238 and 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Frequency	Channel	Frequency Range	Verdict
GSM 850MHz	Low	30MHz-10GHz	PASS
	Middle	30MHz-10GHz	PASS
	High	30MHz-10GHz	PASS
GSM 94000MHz	Low	30MHz-20GHz	PASS
	Middle	30MHz-20GHz	PASS
	High	30MHz-20GHz	PASS

WCDMA Band II							
Channel Number: 9262				Test Frequency: 1852.40 MHz			
Frequency (MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
3704.80	-32.19	4.55	12.34	2.15	-26.55	-13.00	H
5557.20	-28.71	5.05	13.53	2.15	-22.38	-13.00	H
7409.60	-29.98	4.64	11.60	2.15	-25.17	-13.00	H
3704.80	-28.67	4.55	12.34	2.15	-23.03	-13.00	V
5557.20	-26.08	5.05	13.53	2.15	-19.75	-13.00	V
7409.60	-26.70	4.64	11.60	2.15	-21.89	-13.00	V

WCDMA Band II							
Channel Number: 9400				Test Frequency: 1880.00 MHz			
Frequency (MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
3760.00	-32.68	4.55	12.40	2.15	-26.98	-13.00	H
5640.00	-29.60	4.96	13.60	2.15	-23.11	-13.00	H
7520.00	-29.51	4.71	11.89	2.15	-24.48	-13.00	H
3760.00	-28.72	4.55	12.40	2.15	-23.02	-13.00	V
5640.00	-26.37	4.96	13.60	2.15	-19.88	-13.00	V
7520.00	-26.55	4.71	11.89	2.15	-21.52	-13.00	V

WCDMA Band II							
Channel Number: 9538				Test Frequency: 1907.60 MHz			
Frequency (MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
3815.20	-30.48	4.51	12.43	2.15	-24.71	-13.00	H
5722.80	-27.92	4.90	13.61	2.15	-21.36	-13.00	H
7630.40	-27.92	4.78	12.00	2.15	-22.85	-13.00	H
3815.20	-26.77	4.51	12.43	2.15	-21.00	-13.00	V
5722.80	-25.52	4.90	13.61	2.15	-18.96	-13.00	V
7630.40	-25.19	4.78	12.00	2.15	-20.12	-13.00	V

WCDMA Band V							
Channel Number: 4132				Test Frequency: 826.40 MHz			
Frequency (MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
2479.20	-23.76	4.32	6.77	2.15	-23.46	-13.00	H
3305.60	-26.93	4.55	12.25	2.15	-21.38	-13.00	H
4958.40	-29.69	4.70	12.92	2.15	-23.62	-13.00	H
2479.20	-22.11	4.32	6.77	2.15	-21.81	-13.00	V
3305.60	-25.00	4.55	12.25	2.15	-19.45	-13.00	V
4958.40	-27.69	4.59	12.76	2.15	-21.67	-13.00	V

WCDMA Band V							
Channel Number: 4183				Test Frequency: 836.60 MHz			
Frequency (MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
3342.30	-31.30	4.55	12.25	2.15	-25.75	-13.00	H
4183.00	-28.70	4.59	12.76	2.15	-22.68	-13.00	H
5014.44	-29.67	4.78	12.88	2.15	-23.72	-13.00	H
3342.30	-27.88	4.55	12.25	2.15	-22.33	-13.00	V
4183.00	-25.98	4.59	12.76	2.15	-19.96	-13.00	V
5014.44	-26.38	4.78	12.88	2.15	-20.43	-13.00	V

WCDMA Band V							
Channel Number: 4233				Test Frequency: 846.60 MHz			
Frequency (MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
2547.31	-26.81	4.29	6.83	2.15	-26.42	-13.00	H
3390.64	-29.67	4.58	12.59	2.15	-23.81	-13.00	H
4232.50	-31.17	4.59	12.76	2.15	-25.15	-13.00	H
2547.31	-24.13	4.29	6.83	2.15	-23.74	-13.00	V
3390.64	-26.84	4.58	12.59	2.15	-20.98	-13.00	V
4232.50	-29.35	4.59	12.76	2.15	-23.33	-13.00	V

Note: 1. In general, the worse case attenuation requirement shown above was applied.


3. *** means that the emission level is too low to be measured or at least 20 dB down than the limit.

4.4. OCCUPIED BANDWIDTH

TEST APPLICABLE

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of WCDMA Band II and WCDMA band V. The table below lists the measured 99% BW.

TEST CONFIGURATION

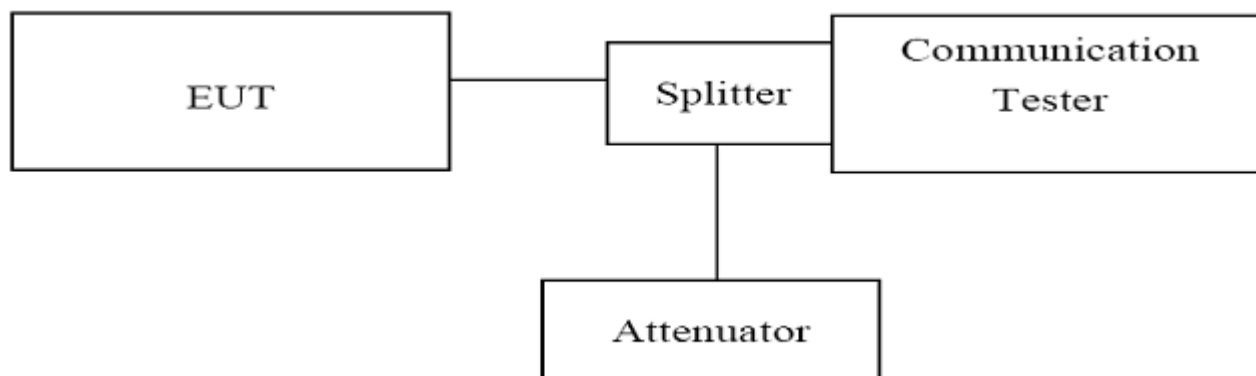


TEST PROCEDURE

1. The EUT was set up for the max output power with pseudo random data modulation;
2. The Occupied bandwidth was measured with Rhode & Schwarz Spectrum Analyzer FSU (peak);
3. Set RBW=5KHz,VBW=50KHz,Span=500KHz,SWT=20ms;
4. Set SPA Max hold. Mark peak, Set 99% Occupied Bandwidth
5. These measurements were done at 3 frequencies, 1850.20 MHz, 1880.00 MHz and 1709.80 MHz for WCDMA band II; 826.40 MHz, 836.60 MHz and 846.60 MHz for WCDMA band V. (low, middle and high of operational frequency range).


TEST RESULTS

WCDMA Band II				
Channel Number	Frequency (MHz)	Occupied Bandwidth (99% BW) (kHz)	Refer to Plot	Verdict
9262	1852.4	4230.77	Plot 4.4.1 A	PASS
9400	1880.0	4230.77	Plot 4.4.1 B	PASS
9538	1907.6	4214.74	Plot 4.4.1 C	PASS

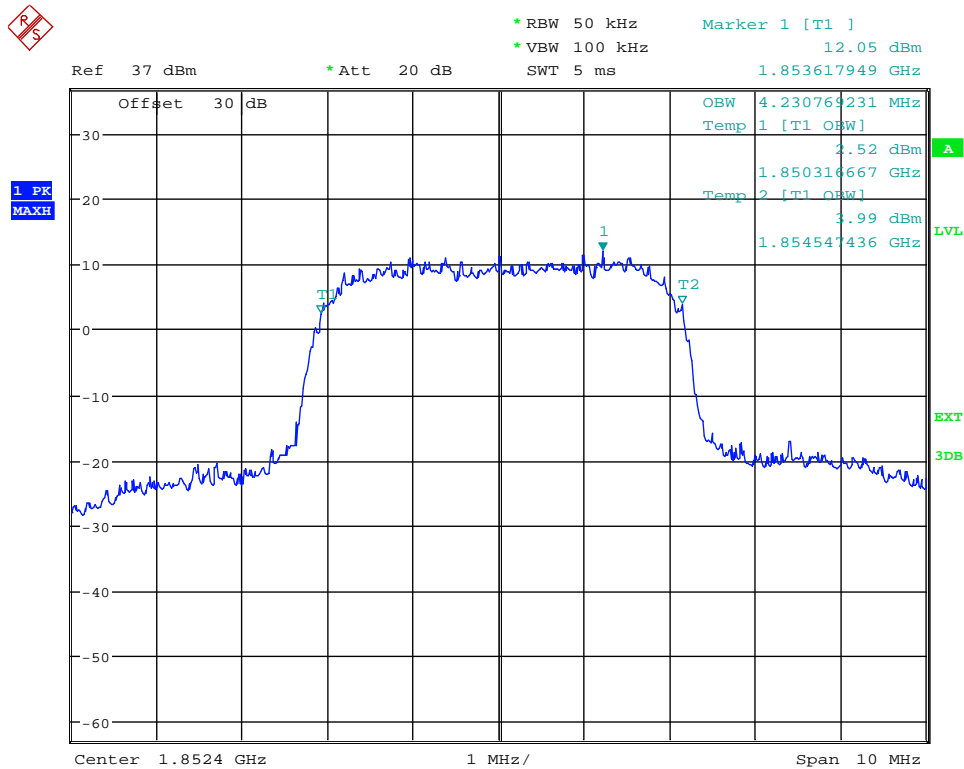


Date: 11.OCT.2013 16:39:25

(Plot 4.4.1 A: Channel 9262: 1852.4MHz WCDMA Band II)

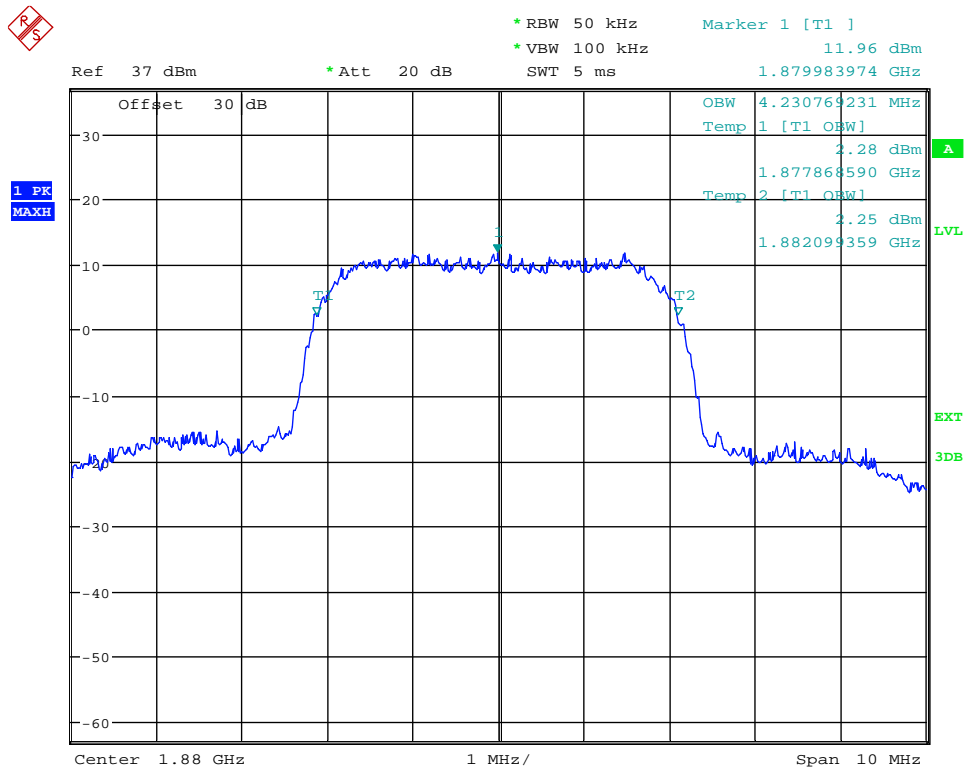

Date: 11.OCT.2013 16:38:40


(Plot 4.4.1 B: Channel 9400: 1880.0MHz WCDMA Band II)

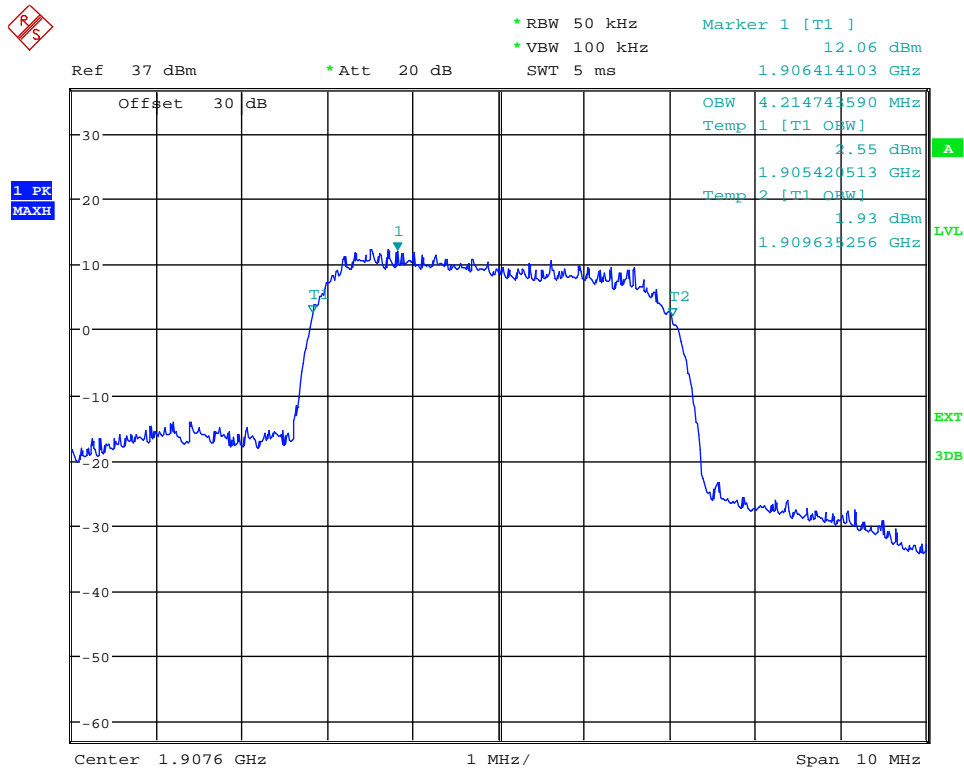

Date: 11.OCT.2013 16:37:45


(Plot 4.4.1 C: Channel 9538: 1907.6MHz WCDMA Band II)

WCDMA Band V				
Channel Number	Frequency (MHz)	Occupied Bandwidth (99% BW) (kHz)	Refer to Plot	Verdict
4132	826.4	4166.67	Plot 4.4.2 A	PASS
4183	836.6	4182.69	Plot 4.4.2 B	PASS
4233	846.6	4166.67	Plot 4.4.2 C	PASS

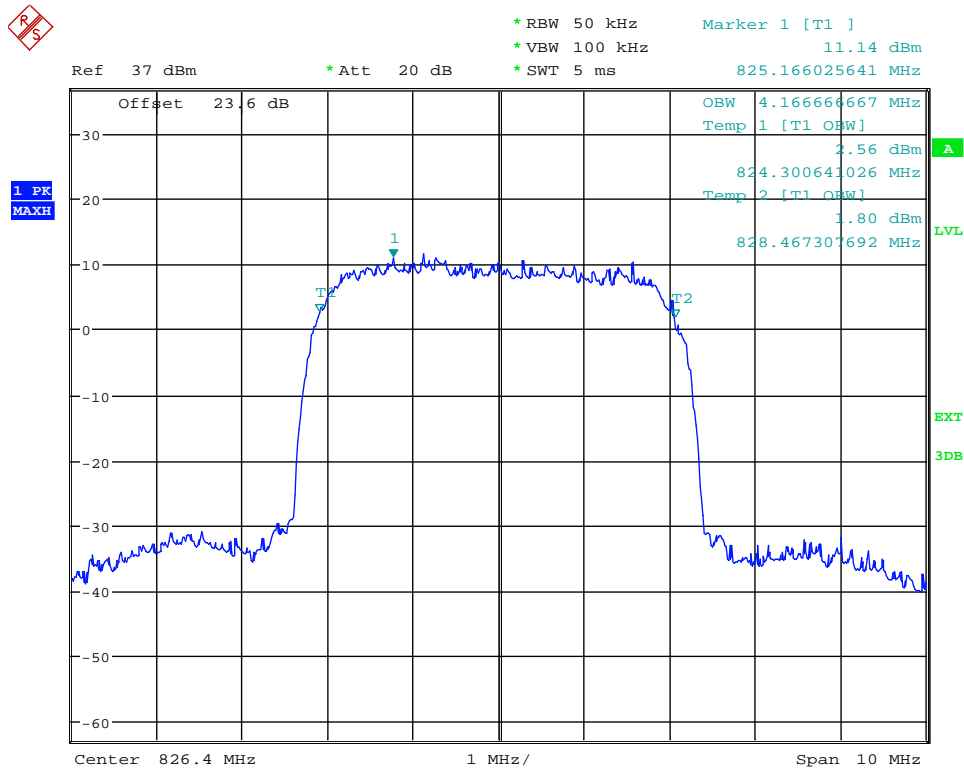

Date: 11.OCT.2013 18:17:21

(Plot 4.4.2 A: Channel 4132:826.4MHz @ WCDMA Band V)

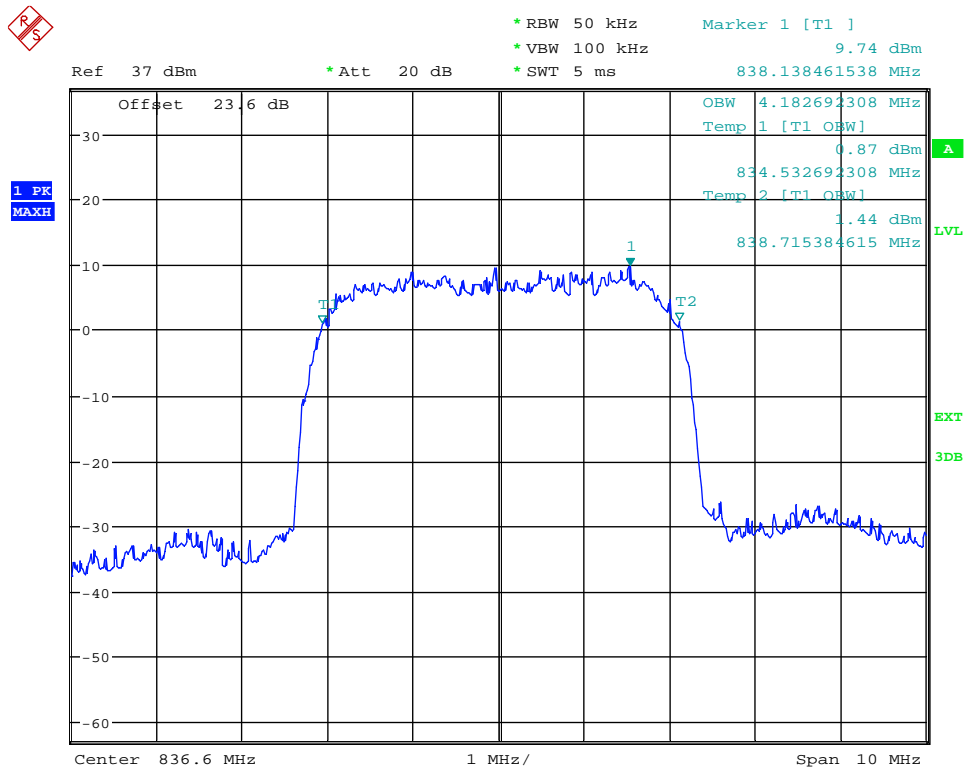

Date: 11.OCT.2013 18:16:55

(Plot 4.4.2 B: Channel 4183:836.6MHz @ WCDMA Band V)




```
* RBW 50 kHz      Marker 1 [T1 ]
* VBW 100 kHz      11.97 dBm
* SWT 5 ms         845.686538462 MHz
```

Ref 37 dBm

* Att 20 dB

- * SWT 5 ms

845.686538462 MHz

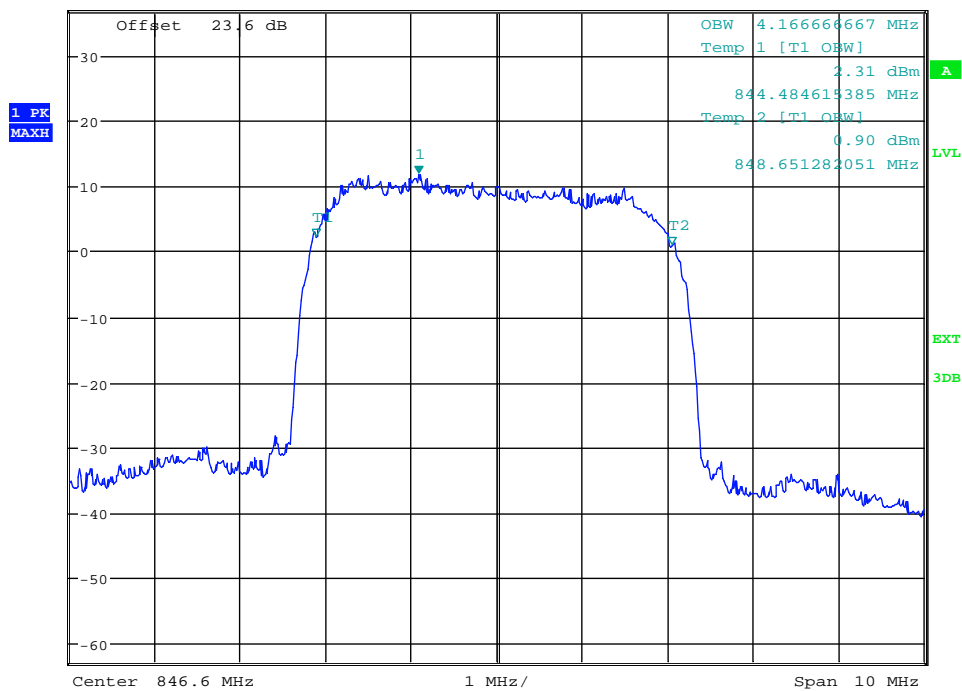

Date: 11.OCT.2013 18:16:27


(Plot 4.4.4 C: Channel 4233:846.6MHz @ WCDMA Band V)

4.5. EMISSION BANDWIDTH

TEST APPLICABLE

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of PCS94000 band and WCDMA II band. The table below lists the measured -26dBc BW.

TEST CONFIGURATION

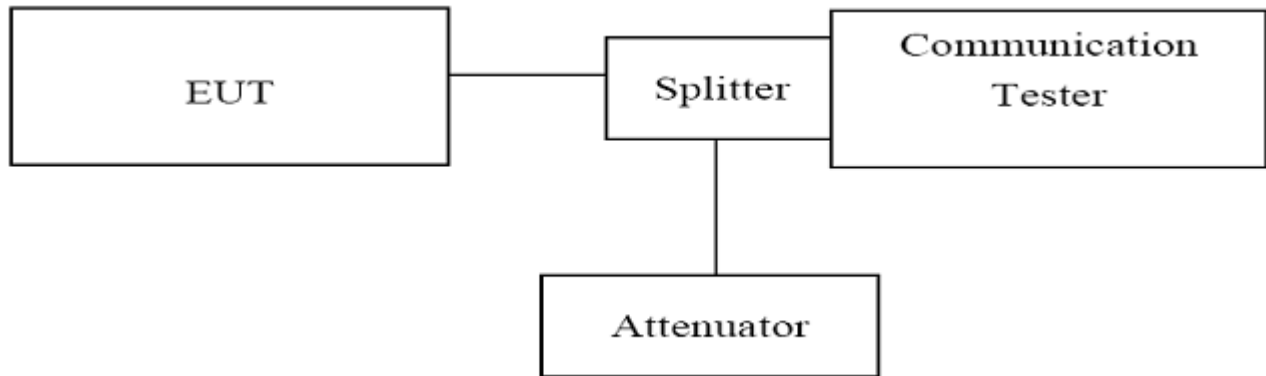


TEST PROCEDURE

1. The EUT was set up for the max output power with pseudo random data modulation;
2. The Occupied bandwidth was measured with Rhode & Schwarz Spectrum Analyzer FSU (peak);
3. Set RBW=5KHz, VBW=50KHz, Span=500KHz, SWT=20ms;
4. Set SPA Max hold. Mark peak, Set -26dBc Occupied Bandwidth
5. These measurements were done at 3 frequencies, 1850.20 MHz, 1880.00 MHz and 94009.80 MHz for WCDMA band II; 826.40 MHz, 836.60 MHz and 846.60 MHz for WCDMA band V. (low, middle and high of operational frequency range).


TEST RESULTS

WCDMA Band II				
Channel Number	Frequency (MHz)	Occupied Bandwidth (-26dBc BW) (kHz)	Refer to Plot	Verdict
9262	1852.4	4711.94	Plot 4.5.1 A	PASS
9400	1880.0	4727.86	Plot 4.5.1 B	PASS
9538	1907.6	4695.51	Plot 4.5.1 C	PASS

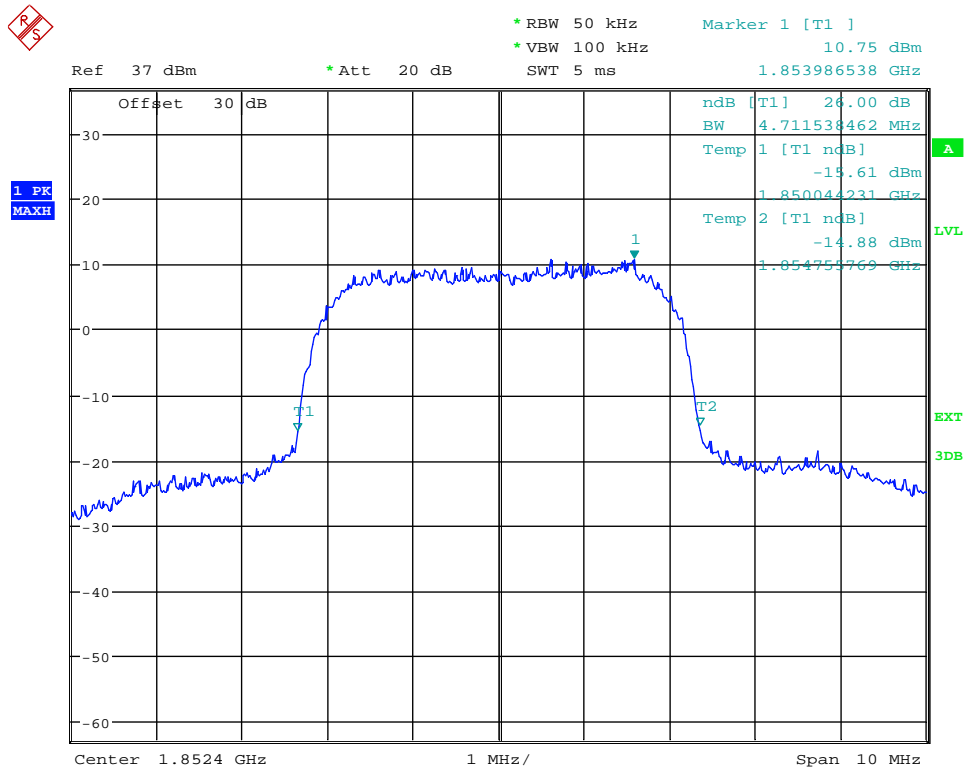


Date: 11.OCT.2013 16:41:19

(Plot 4.5.1 A: Channel 9262: 1852.4MHz WCDMA Band II)

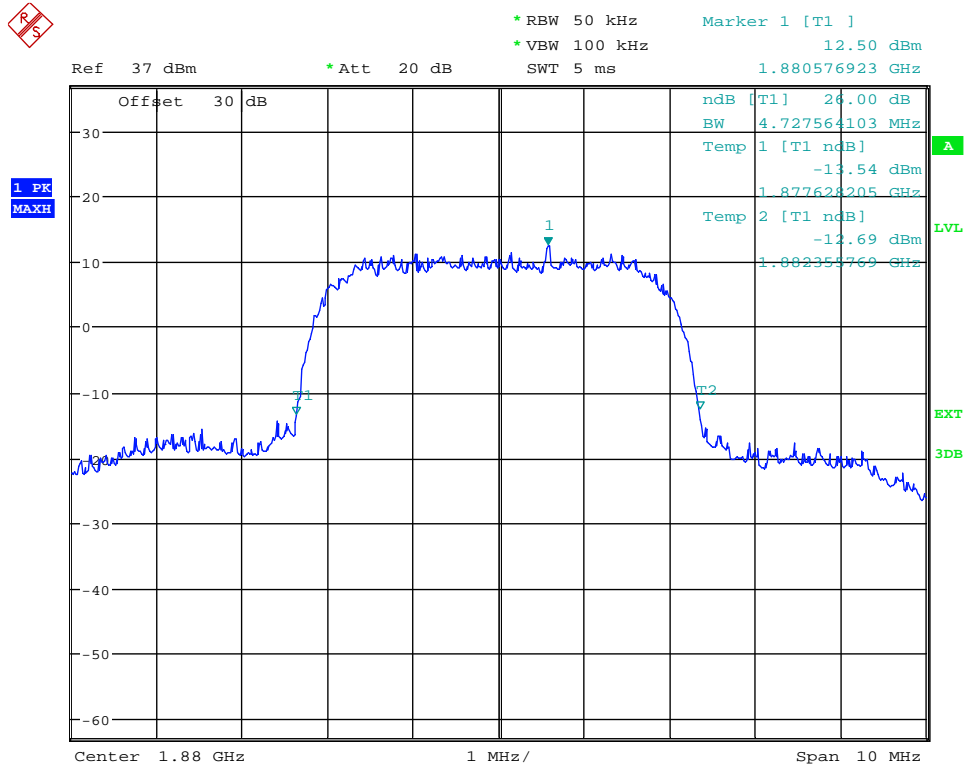

Date: 11.OCT.2013 16:42:07


(Plot 4.5.1 B: Channel 9400: 1880.0MHz WCDMA Band II)

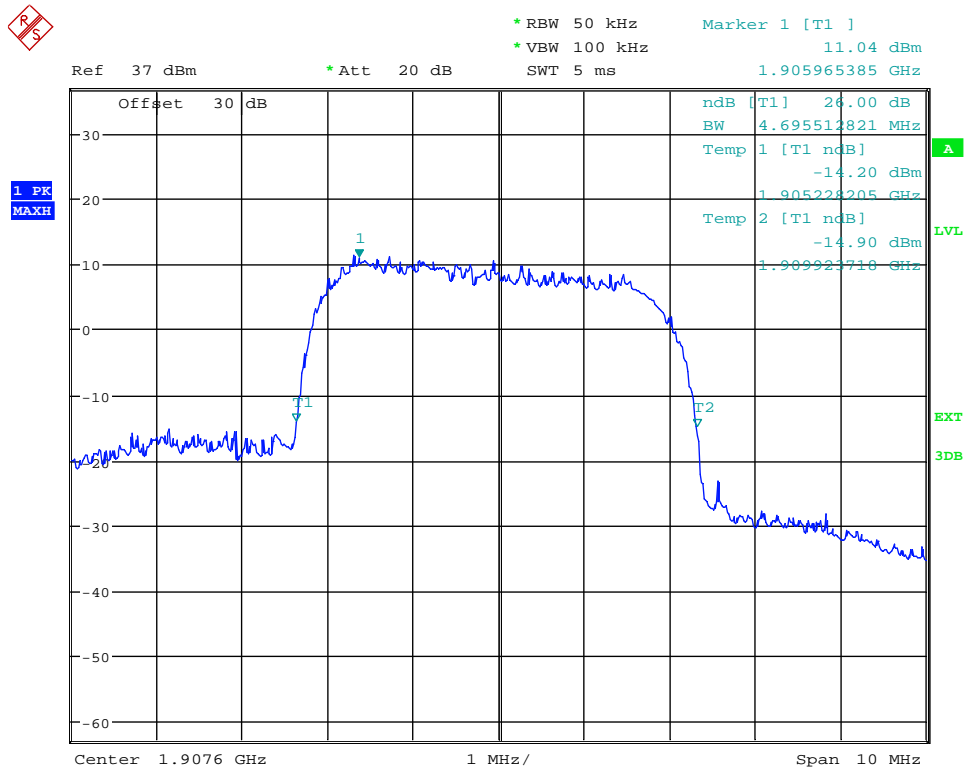

Date: 11.OCT.2013 16:43:15


(Plot 4.5.1 C: Channel 9538: 1907.6MHz WCDMA Band II)

WCDMA Band V				
Channel Number	Frequency (MHz)	Occupied Bandwidth (99% BW) (kHz)	Refer to Plot	Verdict
4132	826.4	4647.44	Plot 4.5.2 A	PASS
4183	836.6	4647.44	Plot 4.5.2 B	PASS
4233	846.6	4647.44	Plot 4.5.2 C	PASS

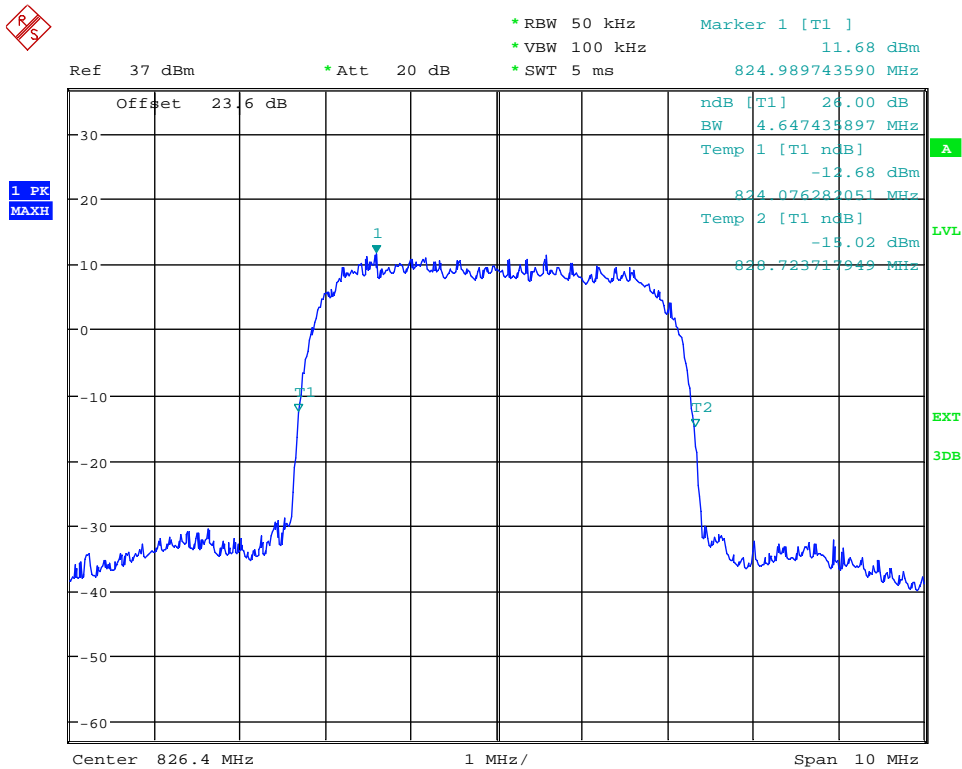


Date: 11.OCT.2013 18:17:50

(Plot 4.5.2 A: Channel 4132:826.4MHz @ WCDMA Band V)

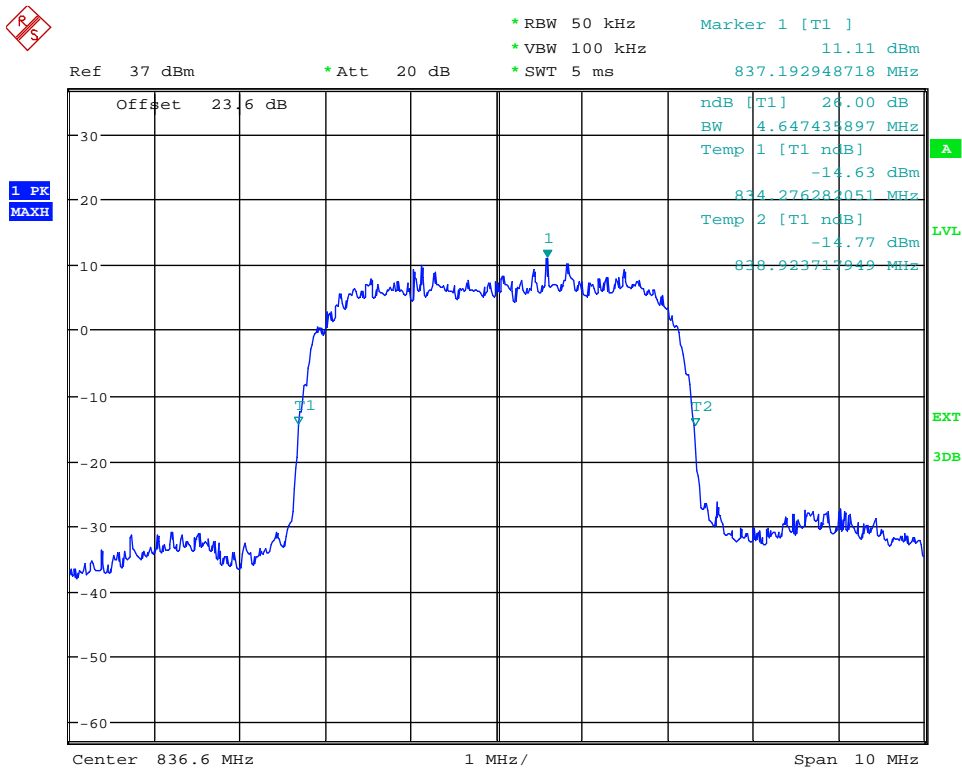

Date: 11.OCT.2013 18:18:07

(Plot 4.5.2 B: Channel 4183:836.6MHz @ WCDMA Band V)

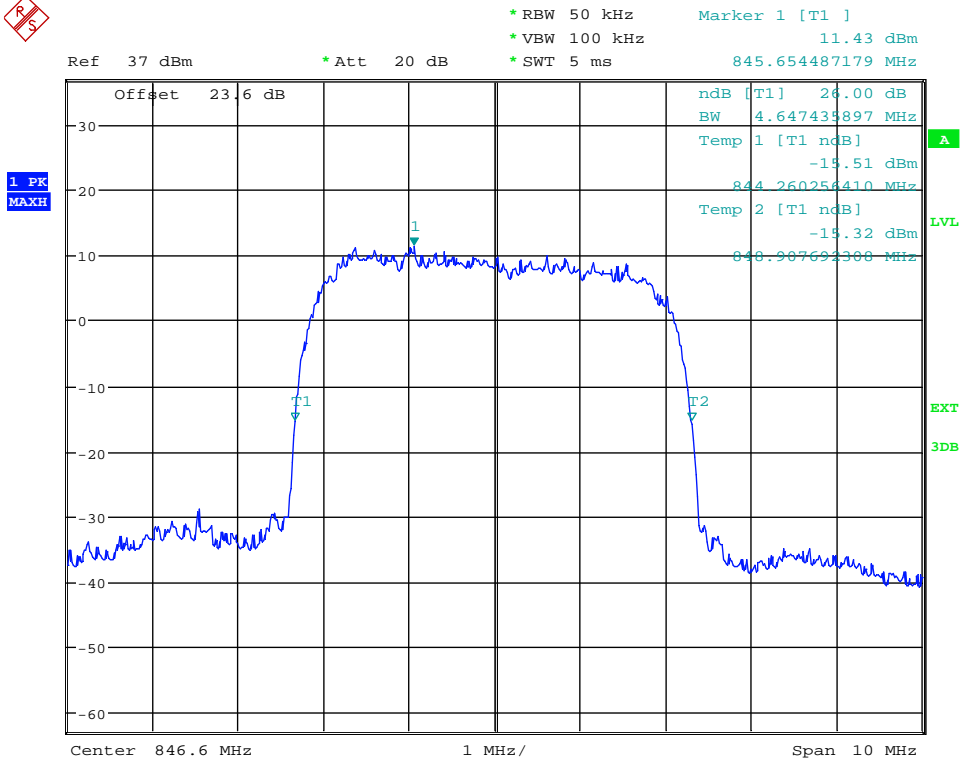

Date: 11.OCT.2013 18:18:34


(Plot 4.5.2 C: Channel 4233:846.6MHz @ WCDMA Band V)

4.6. BAND EDGE COMPLIANCE

TEST APPLICABLE

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure max power transmission and proper modulation.

TEST CONFIGURATION

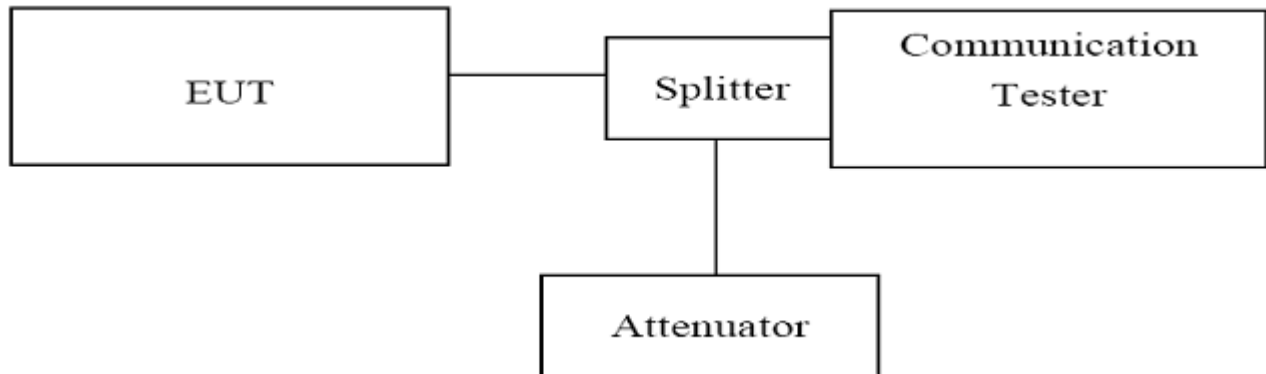


TEST PROCEDURE

1. The EUT was set up for the max output power with pseudo random data modulation;
2. The power was measured with Rhode & Schwarz Spectrum Analyzer FSU (peak);
3. Set RBW=5KHz,VBW=50KHz,Span=1MHz,SWT=300ms;
4. These measurements were done at 3 frequencies, 1850.20 MHz, 1880.00 MHz and 94009.80 MHz for WCDMA band II; 826.4 MHz, 836.6 MHz and 846.6 MHz for WCDMA band V. (low, middle and high of operational frequency range).


TEST RESULTS

WCDMA Band V						
Channel Number	Frequency (MHz)	Measurement Results		Limit (dBm)	Refer to Plot	Verdict
		Frequency (MHz)	Values (dBm)			
9262	1852.4	1849.99	-17.34	-13.00	Plot 4.6.1 A	PASS
9538	1907.6	1910.02	-25.08	-13.00	Plot 4.6.1 B	PASS

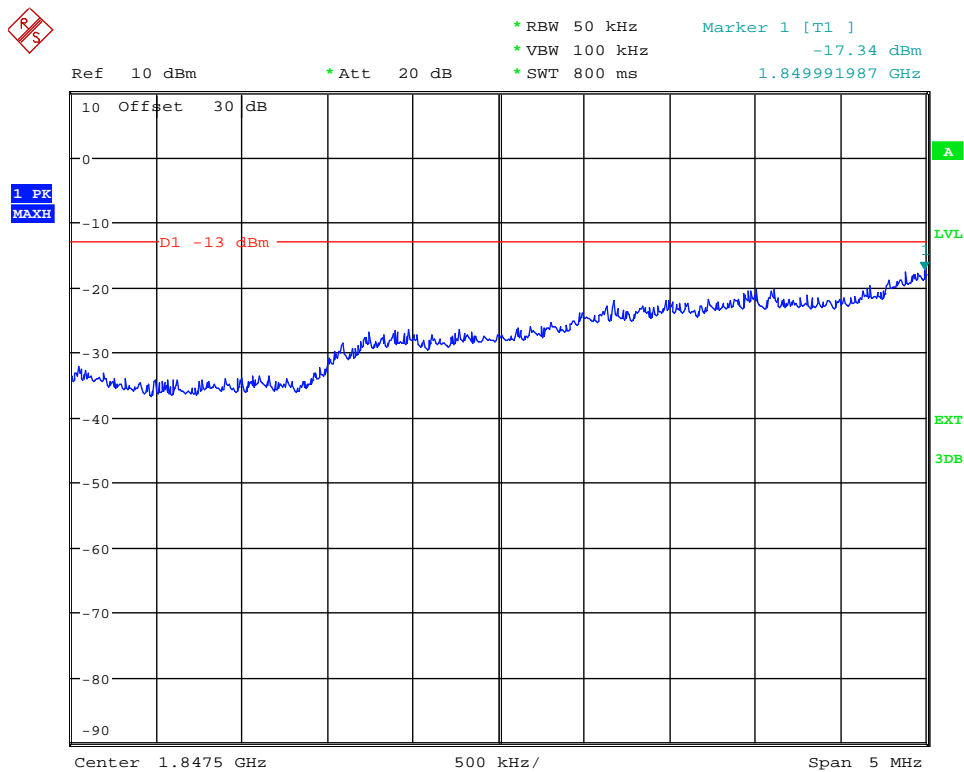

Date: 11.OCT.2013 16:46:42


(Plot 4.6.1 A: Channel 9262: 1852.4MHz WCDMA Band II)

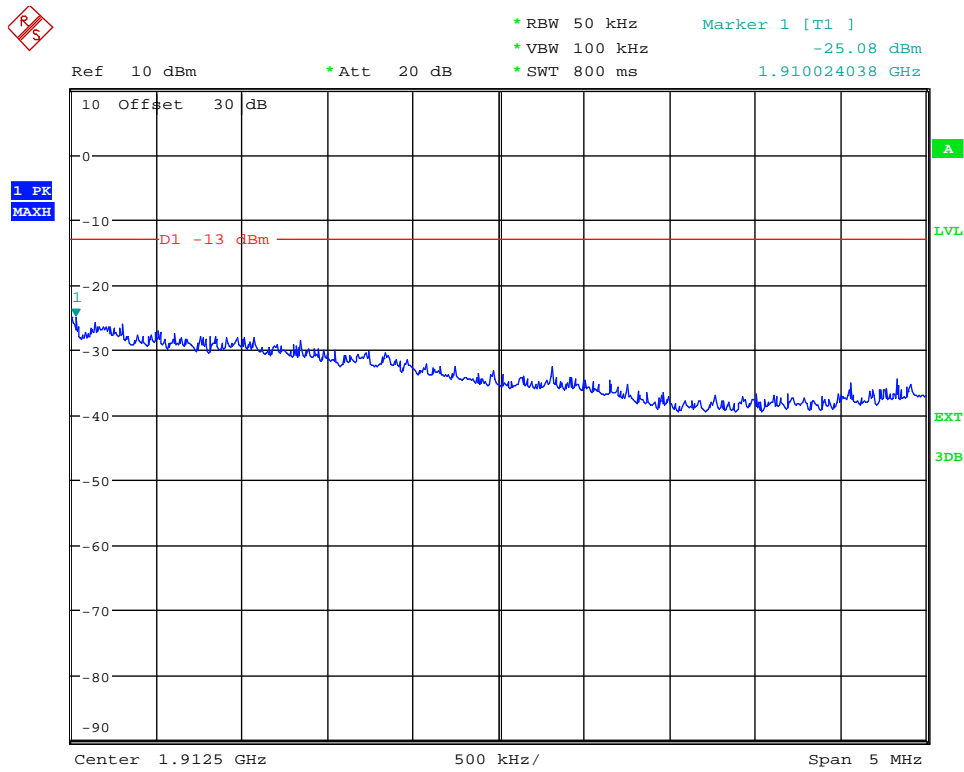

Date: 11.OCT.2013 16:45:59


(Plot 4.6.1 B: Channel 9538: 1907.6MHz WCDMA Band II)

WCDMA Band V						
Channel Number	Frequency (MHz)	Measurement Results		Limit (dBm)	Refer to Plot	Verdict
		Frequency (MHz)	Values (dBm)			
4132	826.4	823.94	--30.73	-13.00	Plot 4.6.2 A	PASS
4233	846.6	849.05	-23.95	-13.00	Plot 4.6.2 B	PASS

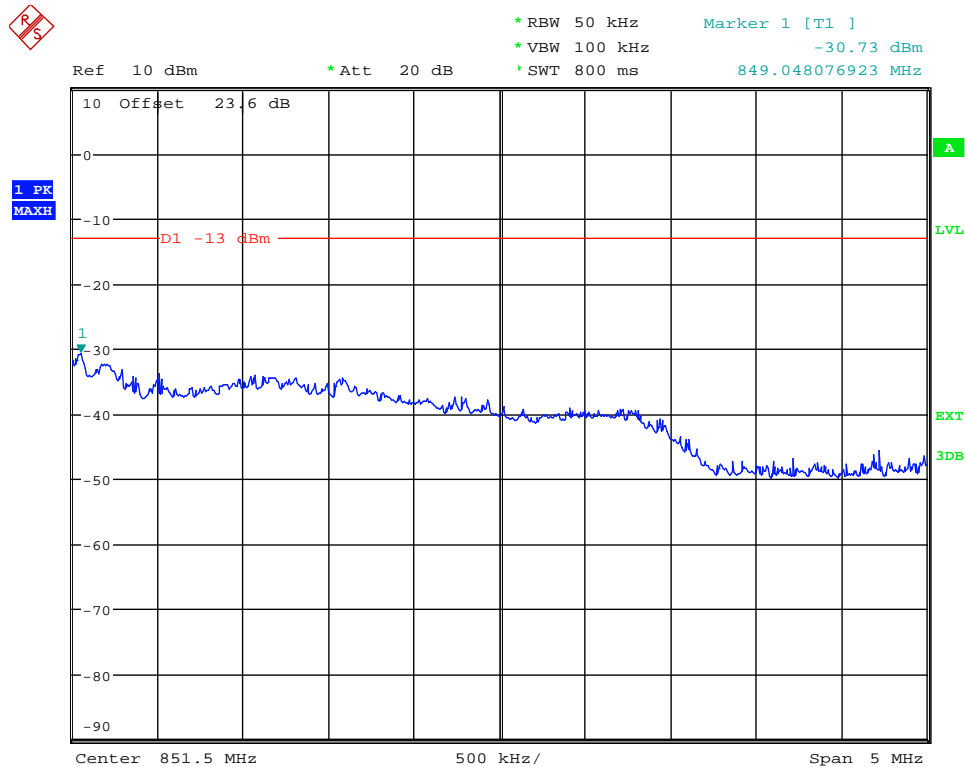

Date: 11.OCT.2013 18:23:17

(Plot 4.6.2 A: Channel 4132: 826.4MHz @ WCDMA Band V)

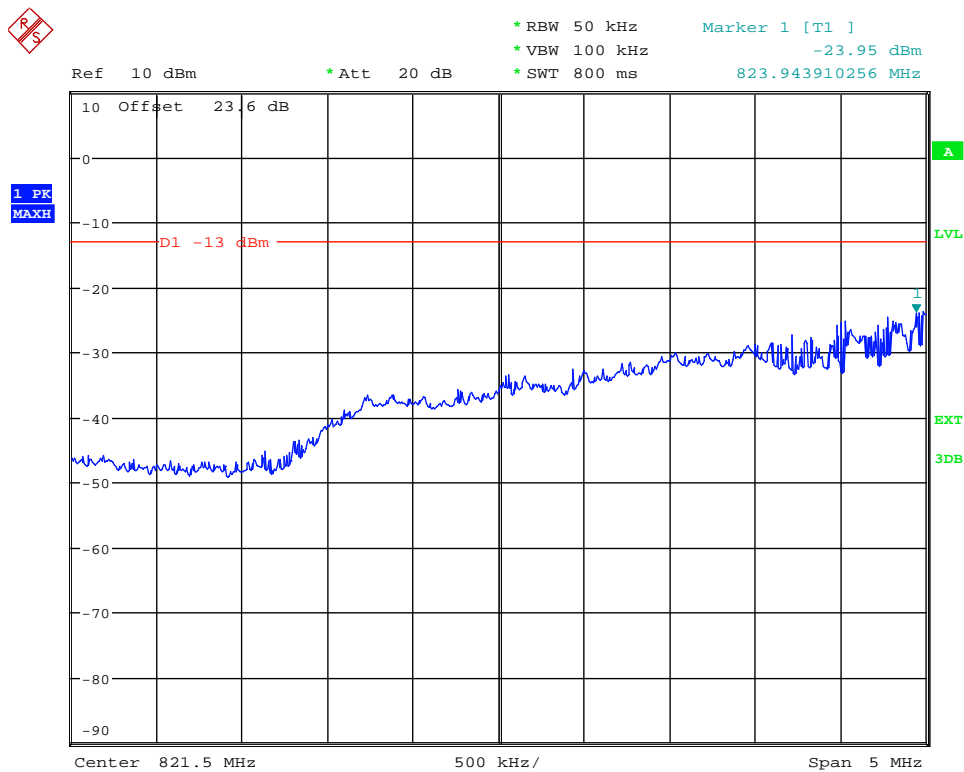

Date: 11.OCT.2013 18:25:12

(Plot 4.6.2 B: Channel 4233: 846.6MHz @ WCDMA Band V)


4.7. Spurious Emission on Antenna Port

TEST APPLICABLE

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of WCDMA band II, this equates to a frequency range of 30 MHz to 20GHz, data taken from 30 MHz to 20 GHz. For WCDMA Band V, data taken from 30 MHz to 10 GHz.
2. The sweep time is set automatically by instrument itself. That should be the optimal sweep time for the span and the RBW. If the sweep time is too short, that is sweep is too fast, the sweep result is not accurate; if the sweep time is too long, that is sweep is too low, some frequency components may be lost. The instrument will give a optimal sweep time according the selected span and RBW.
3. The procedure to get the conducted spurious emission is as follows:
The trace mode is set to MaxHold to get the highest signal at each frequency;
Wait 25 seconds;
Get the result.
4. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

TEST CONFIGURATION

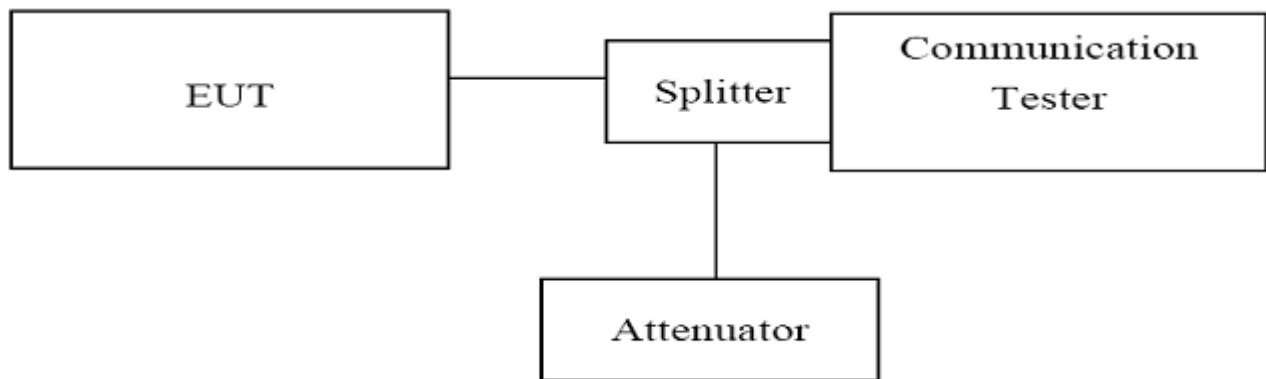

TEST PROCEDURE

1. The EUT was set up for the max output power with pseudo random data modulation;
2. The power was measured with Rhode & Schwarz Spectrum Analyzer FSU (peak);
3. These measurements were done at 3 frequencies, 1850.20 MHz, 1880.00 MHz and 1709.80 MHz for WCDMA band II; 826.4 MHz, 836.6 MHz and 846.6 MHz for WCDMA band V. (low, middle and high of operational frequency range).

TEST LIMIT

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

TEST RESULTS

WCDMA Band II						
Channel Number: 9262		Test Frequency: 1852.4 MHz			Test Mode: Traffic	
Start Frequency (MHz)	Stop Frequency (MHz)	Measurement Results		Limit (dBm)	Refer to Plot	Verdict
		Frequency (MHz)	Values (dBm)			
30	1000	925.38	-30.82	-13.00	Plot 4.7.1 A1	PASS
1000	2500	***	***	-13.00	Plot 4.7.1 A2	PASS
2500	7500	2557.68	-27.40	-13.00	Plot 4.7.1 A3	PASS
7500	10000	9110.58	-28.82	-13.00	Plot 4.7.1 A4	PASS
10000	15000	10520.83	-29.74	-13.00	Plot 4.7.1 A5	PASS
15000	20000	17299.67	-28.82	-13.00	Plot 4.7.1 A6	PASS


WCDMA Band II						
Channel Number: 9400		Test Frequency: 1880.0 MHz			Test Mode: Traffic	
Start Frequency (MHz)	Stop Frequency (MHz)	Measurement Results		Limit (dBm)	Refer to Plot	Verdict
		Frequency (MHz)	Values (dBm)			
30	1000	640.91	-30.87	-13.00	Plot 4.7.2 A1	PASS
1000	2500	***	***	-13.00	Plot 4.7.2 A2	PASS
2500	7500	2532.05	-27.84	-13.00	Plot 4.7.2 A3	PASS
7500	10000	9687.80	-29.62	-13.00	Plot 4.7.2 A4	PASS
10000	15000	14294.87	-28.71	-13.00	Plot 4.7.2 A5	PASS
15000	20000	17443.91	-28.49	-13.00	Plot 4.7.2 A6	PASS

WCDMA Band II						
Channel Number: 9538		Test Frequency: 1907.6 MHz			Test Mode: Traffic	
Start Frequency (MHz)	Stop Frequency (MHz)	Measurement Results		Limit (dBm)	Refer to Plot	Verdict
		Frequency (MHz)	Values (dBm)			
30	1000	345.56	-31.32	-13.00	Plot 4.7.3 A1	PASS
1000	2500	***	***	-13.00	Plot 4.7.3 A2	PASS
2500	7500	2780.44	-28.15	-13.00	Plot 4.7.3 A3	PASS
7500	10000	8677.88	-29.63	-13.00	Plot 4.7.3 A4	PASS
10000	15000	12075.32	-29.40	-13.00	Plot 4.7.3 A5	PASS
15000	20000	19447.12	-28.30	-13.00	Plot 4.7.3 A6	PASS

WCDMA Band II						
Test Mode: Idle						
Start Frequency (MHz)	Stop Frequency (MHz)	Measurement Results		Limit (dBm)	Refer to Plot	Verdict
		Frequency (MHz)	Values (dBm)			
30	1000	418.62	-31.04	-13.00	Plot 4.7.4 A1	PASS
1000	2500	2478.96	-28.94	-13.00	Plot 4.7.4 A2	PASS
2500	7500	3477.56	-27.73	-13.00	Plot 4.7.4 A3	PASS
7500	10000	8245.19	-29.38	-13.00	Plot 4.7.4 A4	PASS
10000	15000	12435.90	-28.93	-13.00	Plot 4.7.4 A5	PASS
15000	20000	17219.55	-28.58	-13.00	Plot 4.7.4 A6	PASS


Note: 1. In general, the worse case attenuation requirement shown above was applied.

2. *** means that the emission level is too low to be measured or at least 20 dB down than the limit.

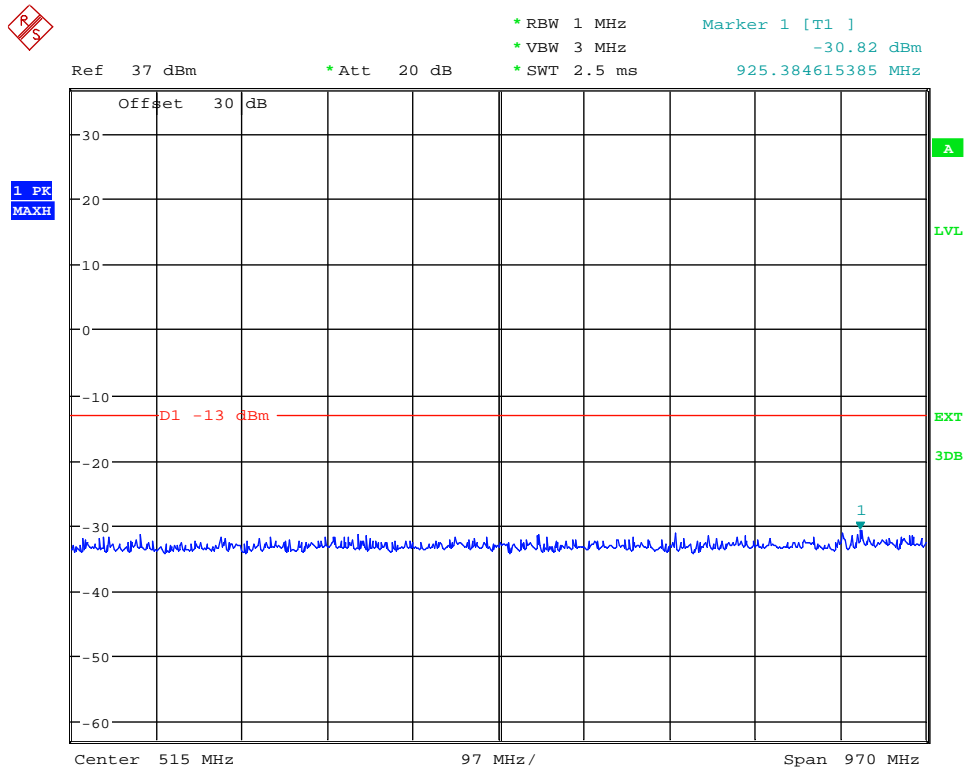


Date: 11.OCT.2013 16:48:48

(Plot 4.7.1 A1: Channel 9262: 1852.4MHz @ Traffic WCDMA Band II)

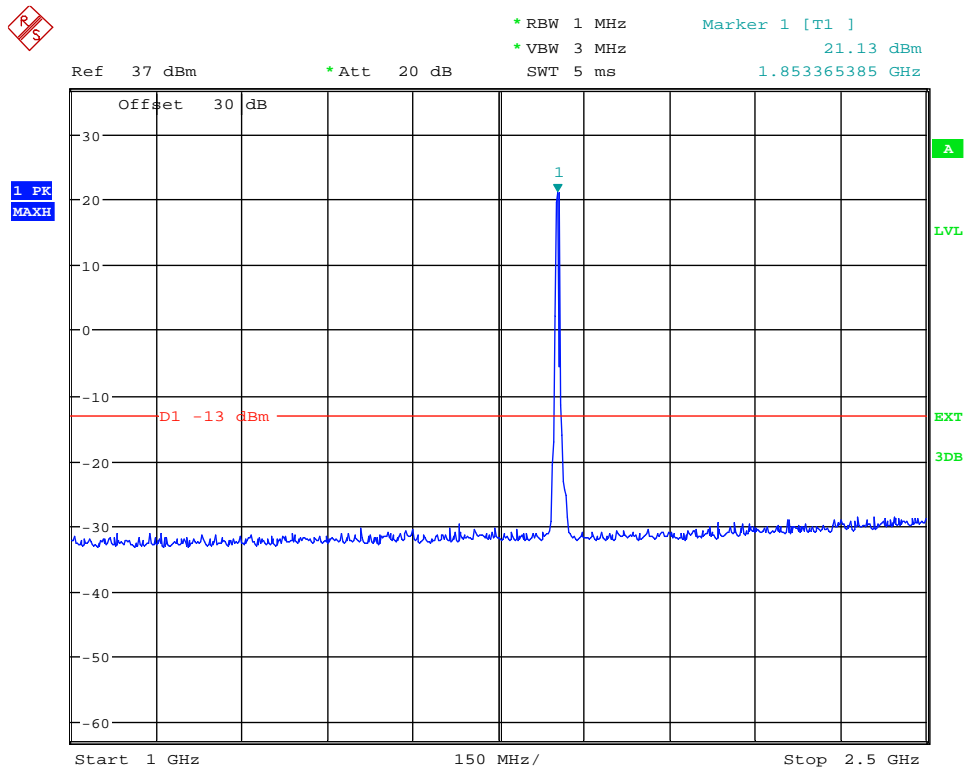


Date: 11.OCT.2013 16:51:06

(Plot 4.7.1 A2: Channel 9262: 1852.4MHz @ Traffic WCDMA Band II)

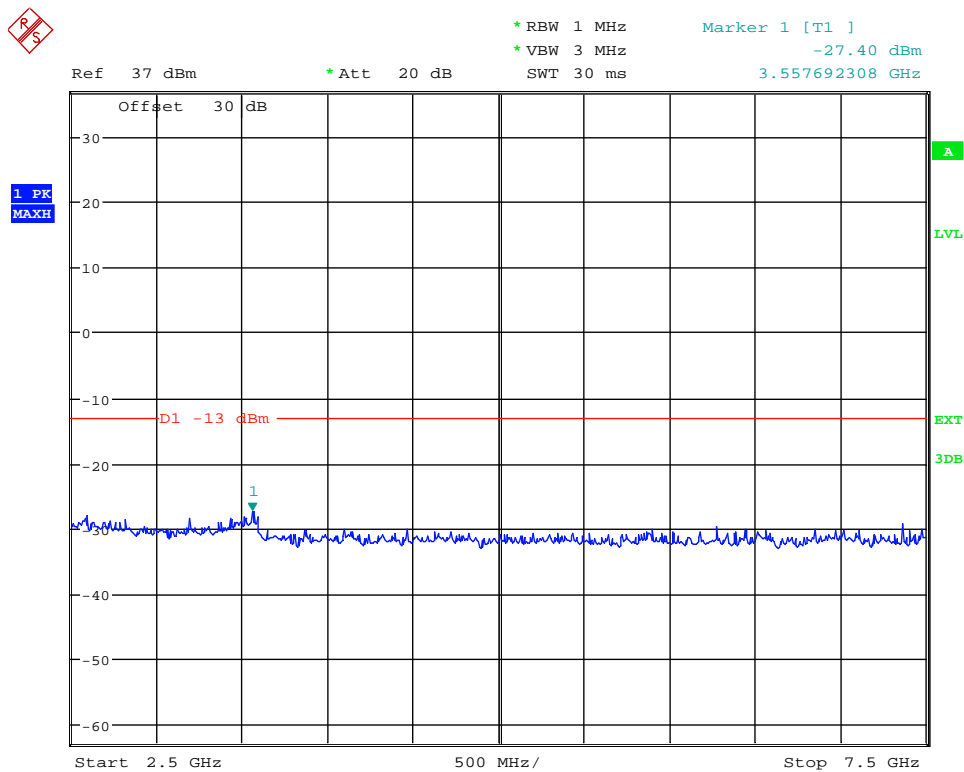


Date: 11.OCT.2013 16:51:28

(Plot 4.7.1 A3: Channel 9262: 1852.4MHz @ Traffic WCDMA Band II)

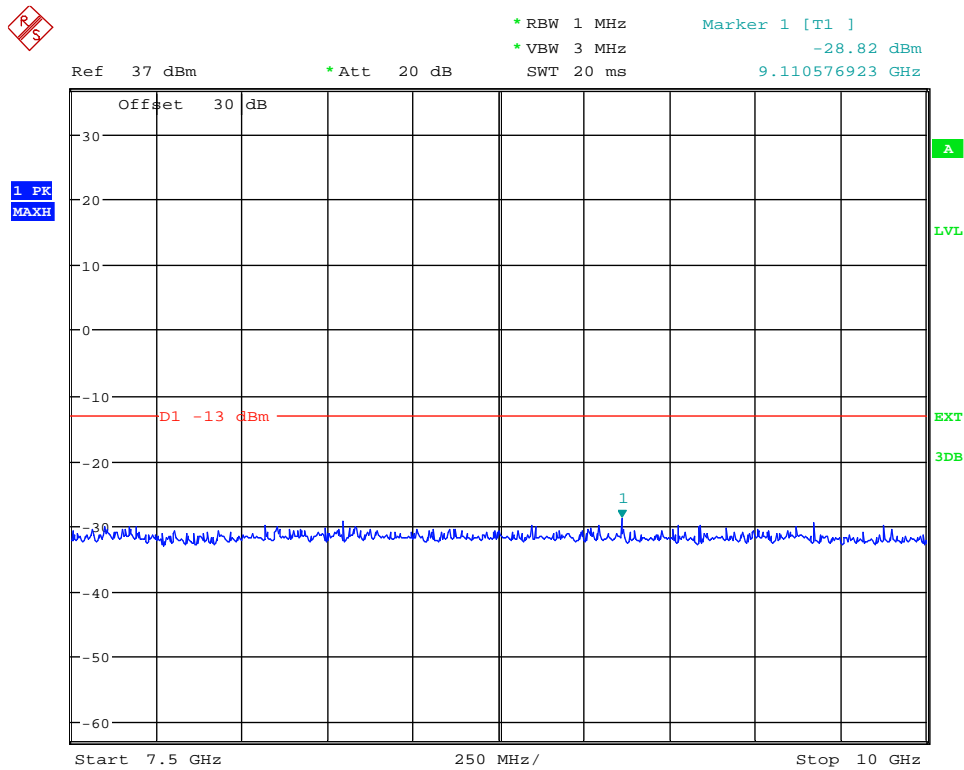


Date: 11.OCT.2013 16:51:44

(Plot 4.7.1 A4: Channel 9262: 1852.4MHz @ Traffic WCDMA Band II)

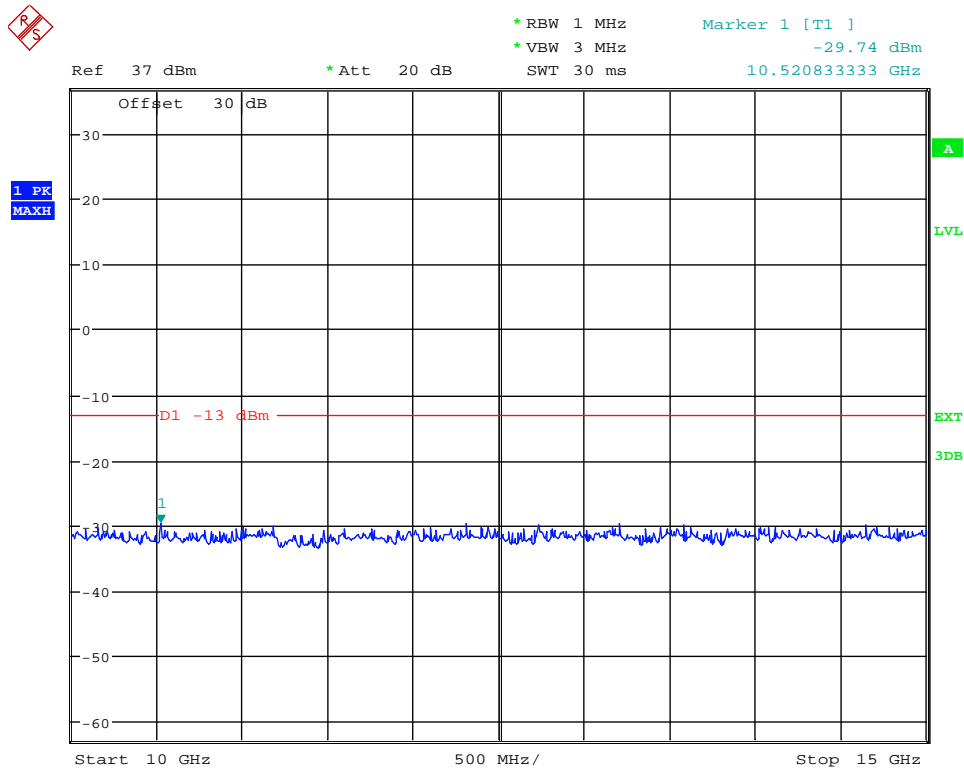


Date: 11.OCT.2013 16:52:21

(Plot 4.7.1 A5: Channel 9262: 1852.4MHz @ Traffic WCDMA Band II)

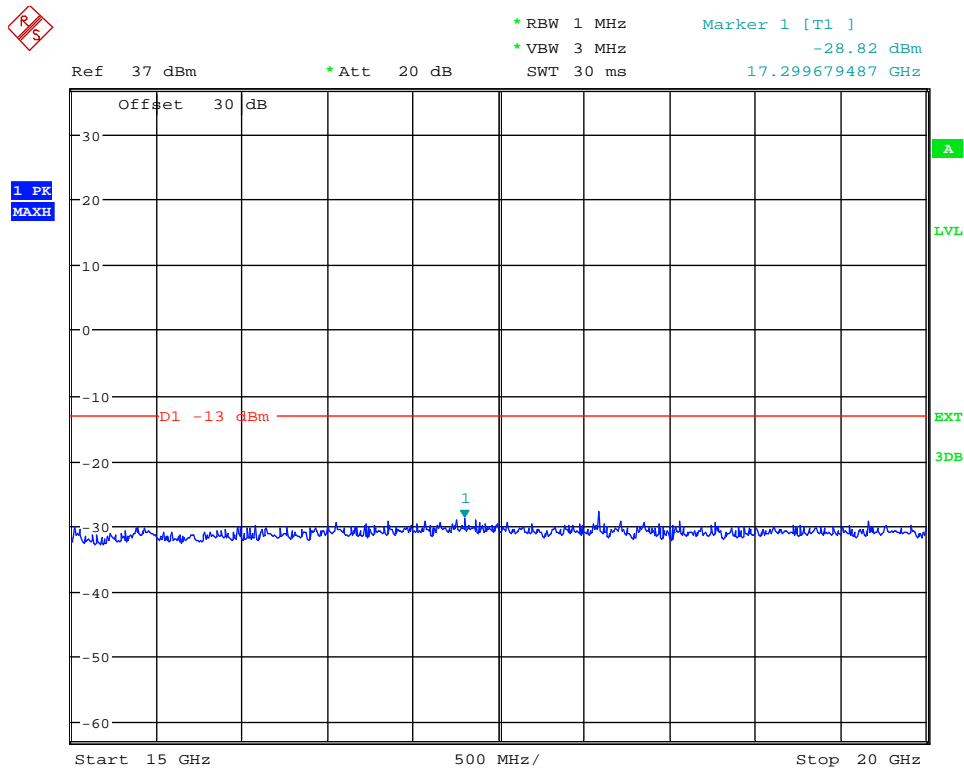


Date: 11.OCT.2013 16:52:36

(Plot 4.7.1 A6: Channel 9262: 1852.4MHz @ Traffic WCDMA Band II)

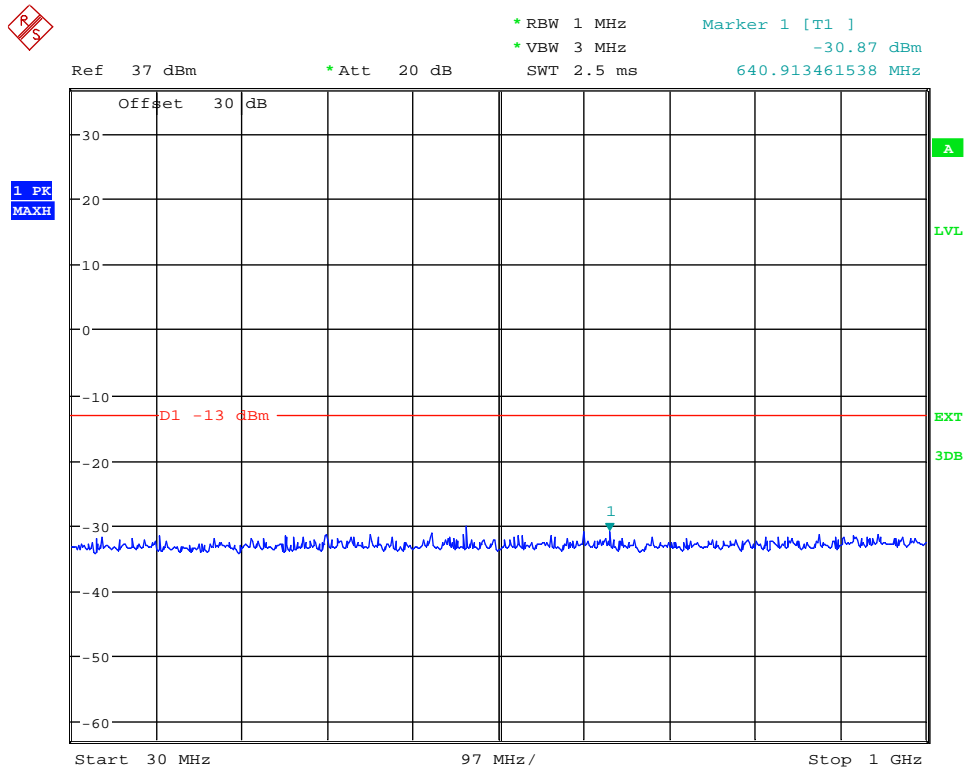


Date: 11.OCT.2013 16:53:29

(Plot 4.7.2 A1: Channel 9400: 1880.0MHz @ Traffic WCDMA Band II)

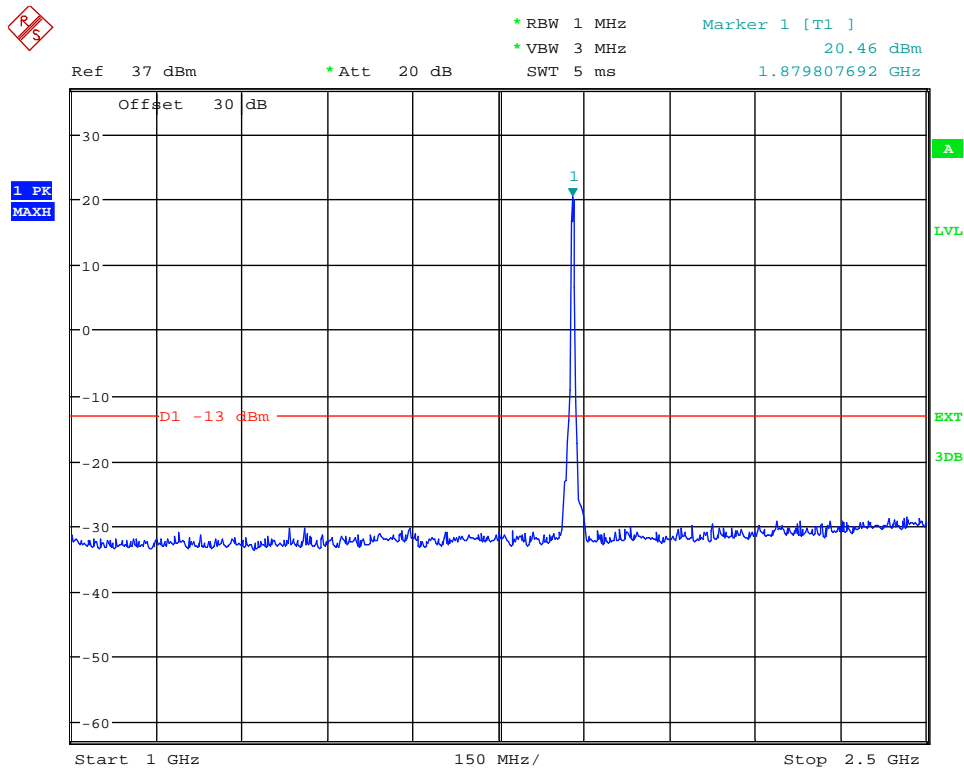


Date: 11.OCT.2013 16:54:01

(Plot 4.7.2 A2: Channel 9400: 1880.0MHz @ Traffic WCDMA Band II)

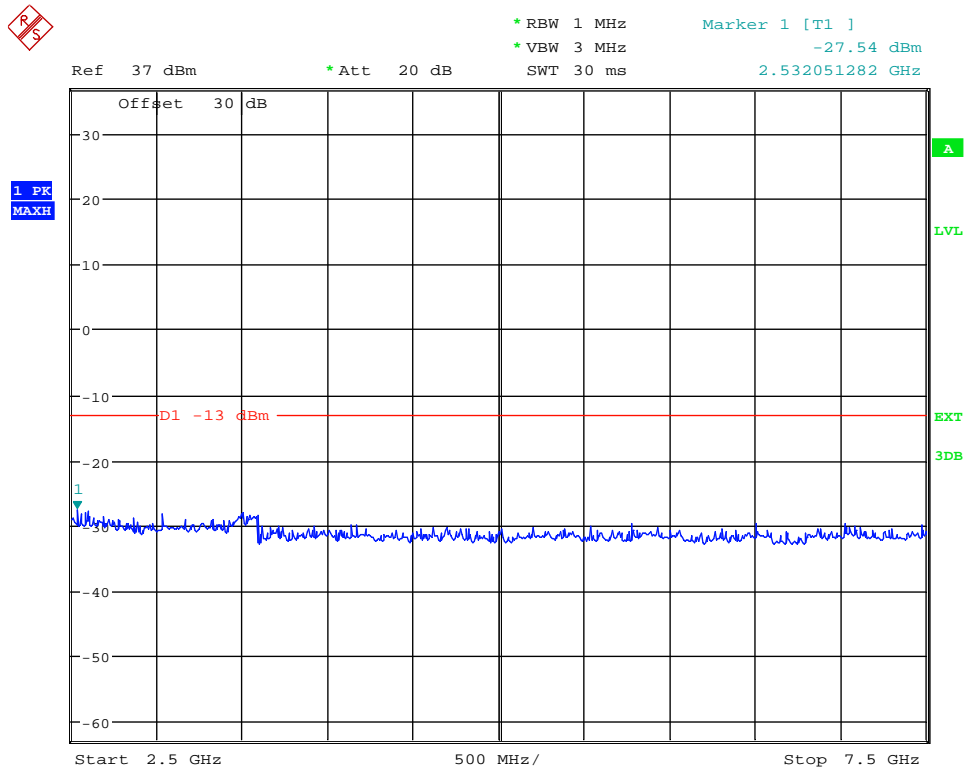


Date: 11.OCT.2013 16:54:18

(Plot 4.7.2 A3: Channel 9400: 1880.0MHz @ Traffic WCDMA Band II)

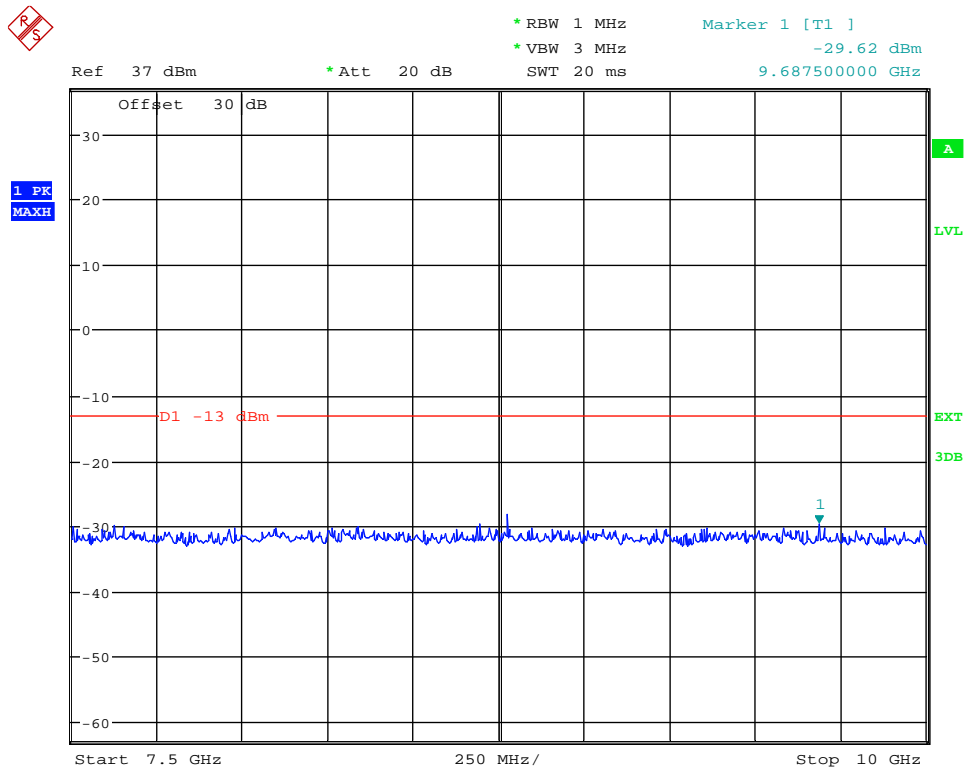


Date: 11.OCT.2013 16:54:32

(Plot 4.7.2 A4: Channel 9400: 1880.0MHz @ Traffic WCDMA Band II)

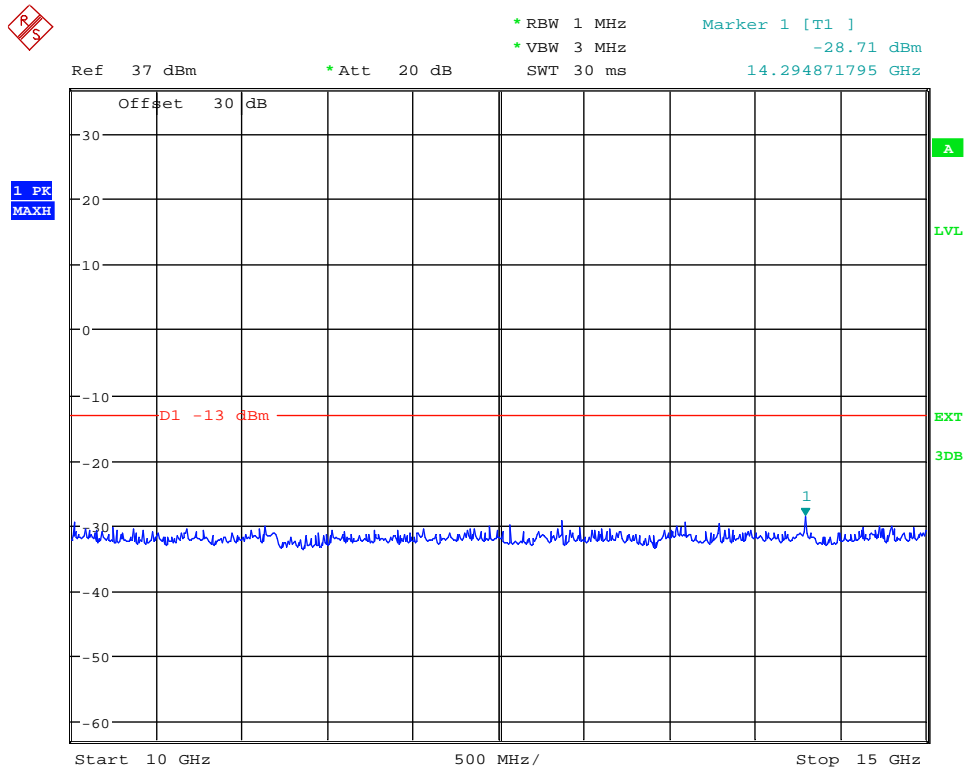


Date: 11.OCT.2013 16:54:45

(Plot 4.7.2 A5: Channel 9400: 1880.0MHz @ Traffic WCDMA Band II)

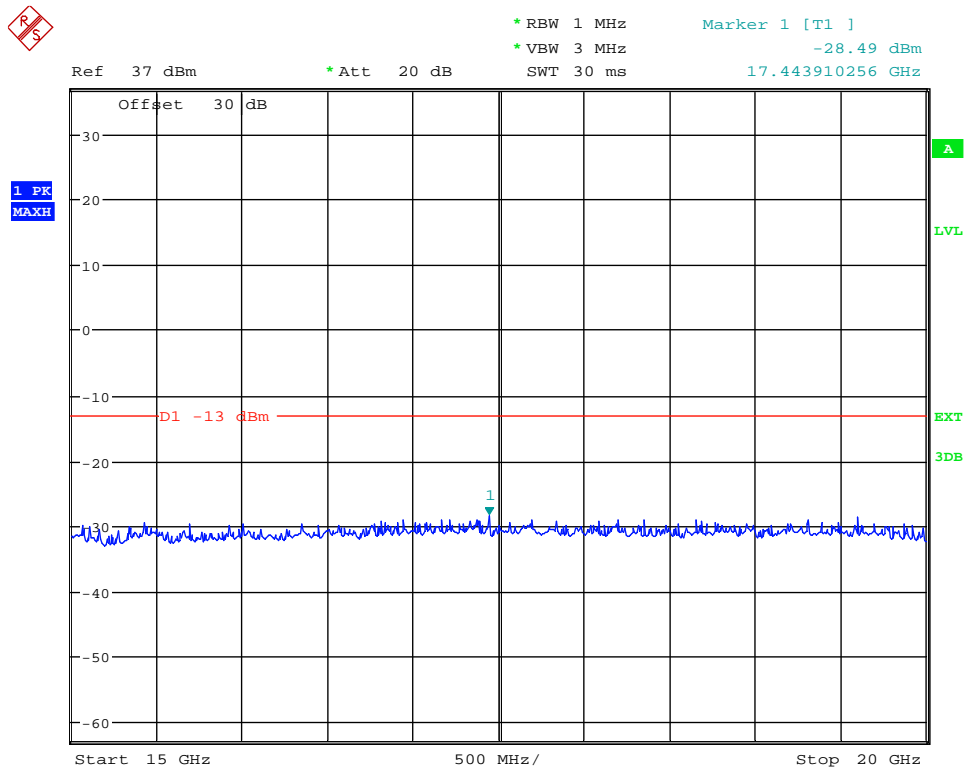


Date: 11.OCT.2013 16:54:57

(Plot 4.7.2 A6: Channel 9400: 1880.0MHz @ Traffic WCDMA Band II)

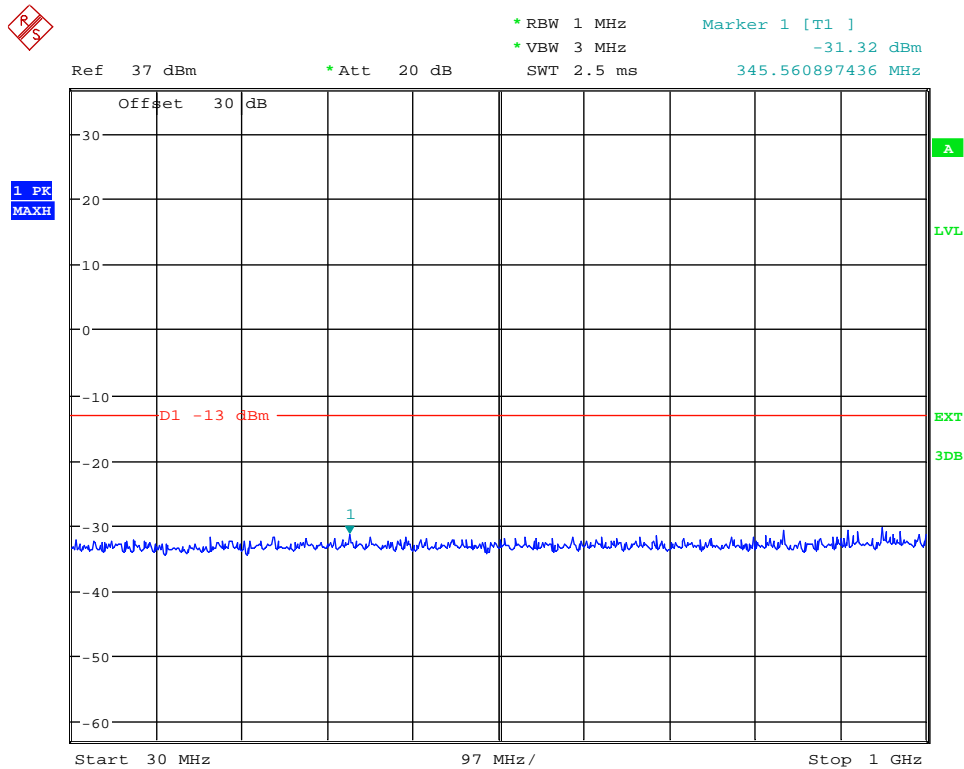


Date: 11.OCT.2013 16:55:27

(Plot 4.7.3 A1: Channel 9538: 1907.6MHz @ Traffic WCDMA Band II)

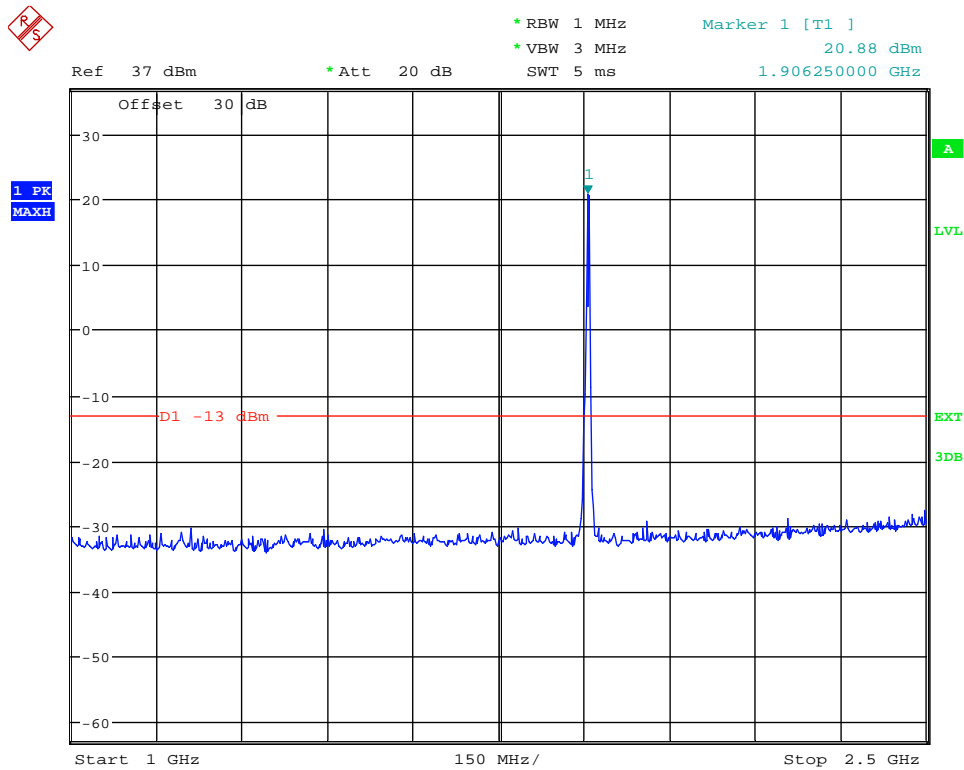


Date: 11.OCT.2013 16:55:58

(Plot 4.7.3 A2: Channel 9538: 1907.6MHz @ Traffic WCDMA Band II)

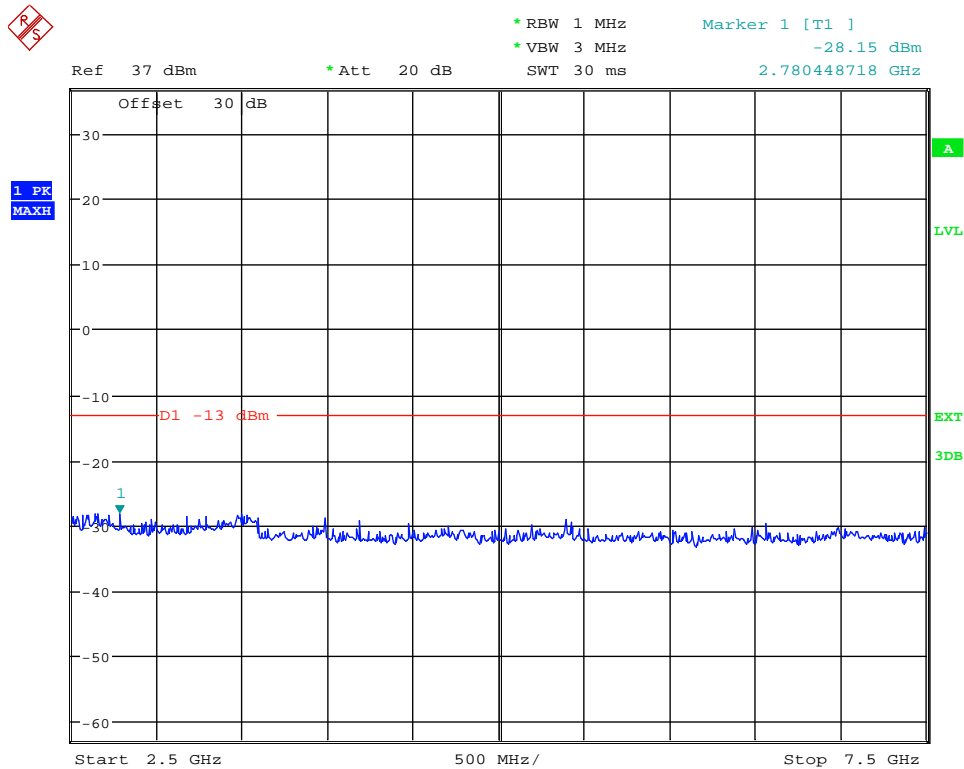


Date: 11.OCT.2013 16:56:13

(Plot 4.7.3 A3: Channel 9538: 1907.6MHz @ Traffic WCDMA Band II)

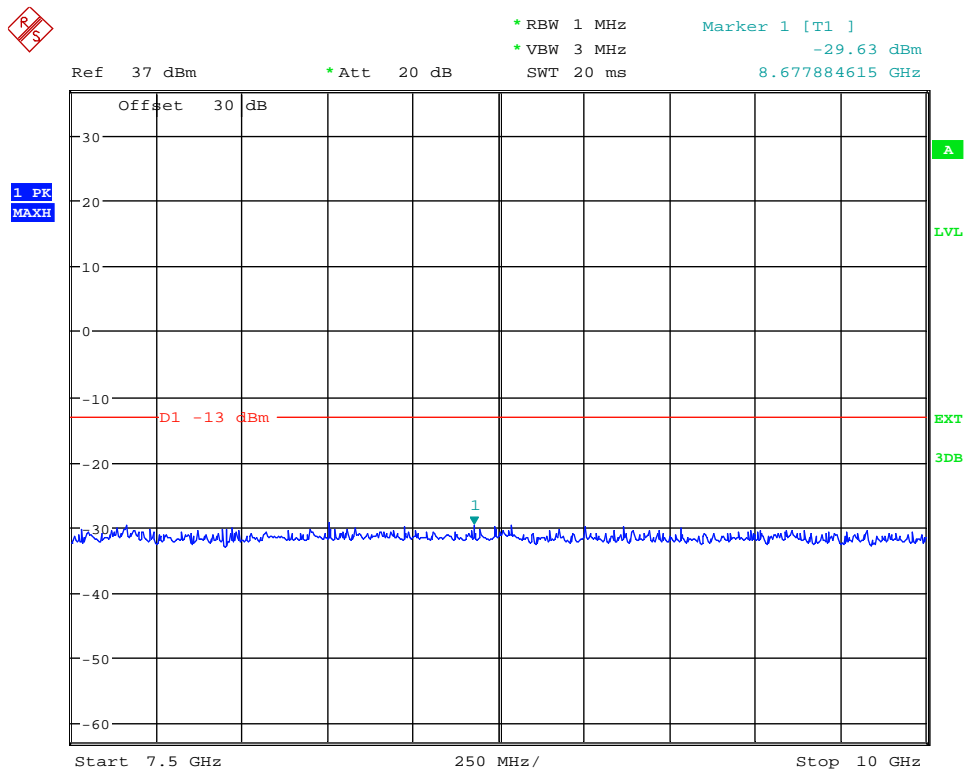


Date: 11.OCT.2013 16:56:31

(Plot 4.7.3 A4: Channel 9538: 1907.6MHz @ Traffic WCDMA Band II)

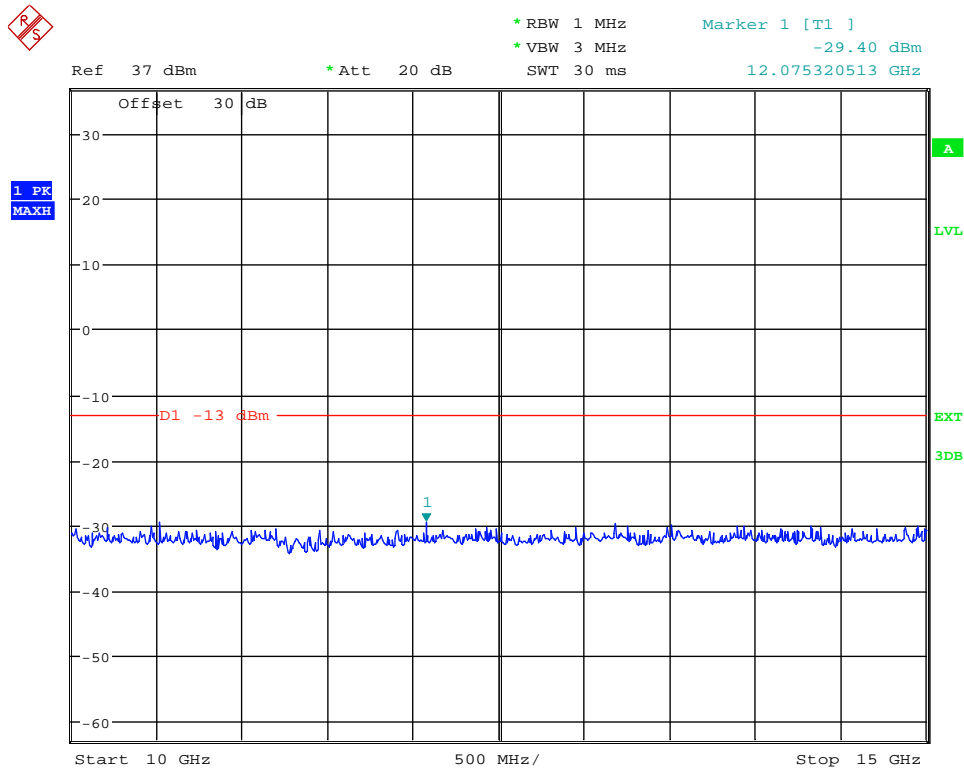


Date: 11.OCT.2013 16:56:42

(Plot 4.7.3 A5: Channel 9538: 1907.6MHz @ Traffic WCDMA Band II)

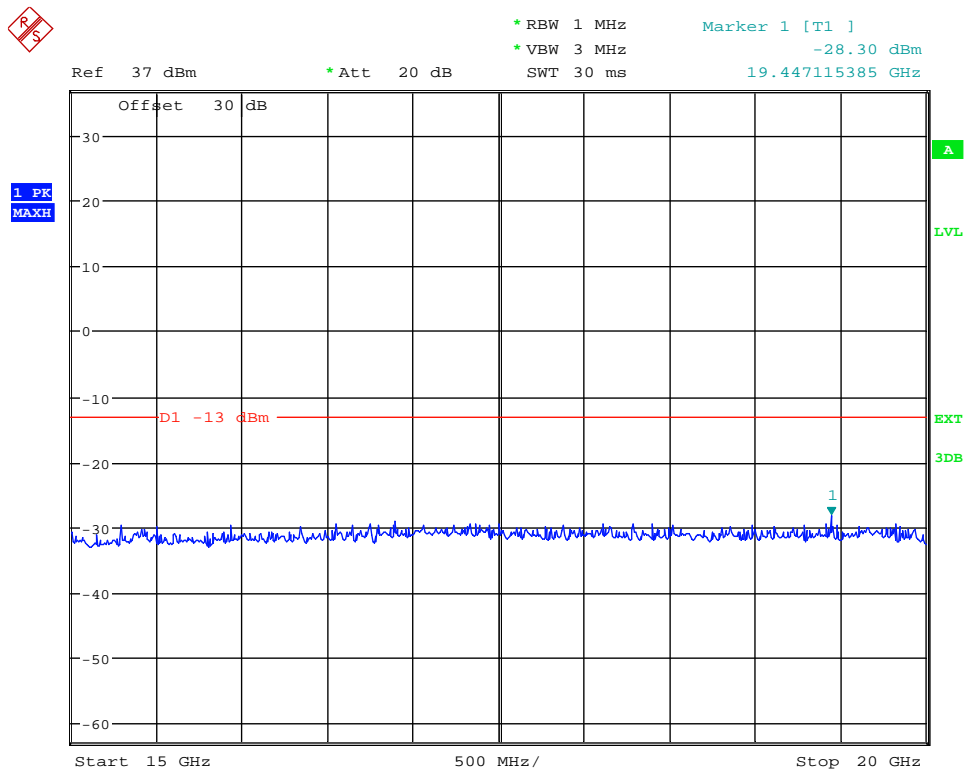


Date: 11.OCT.2013 16:56:52

(Plot 4.7.3 A6: Channel 9538: 1907.6MHz @ Traffic WCDMA Band II)

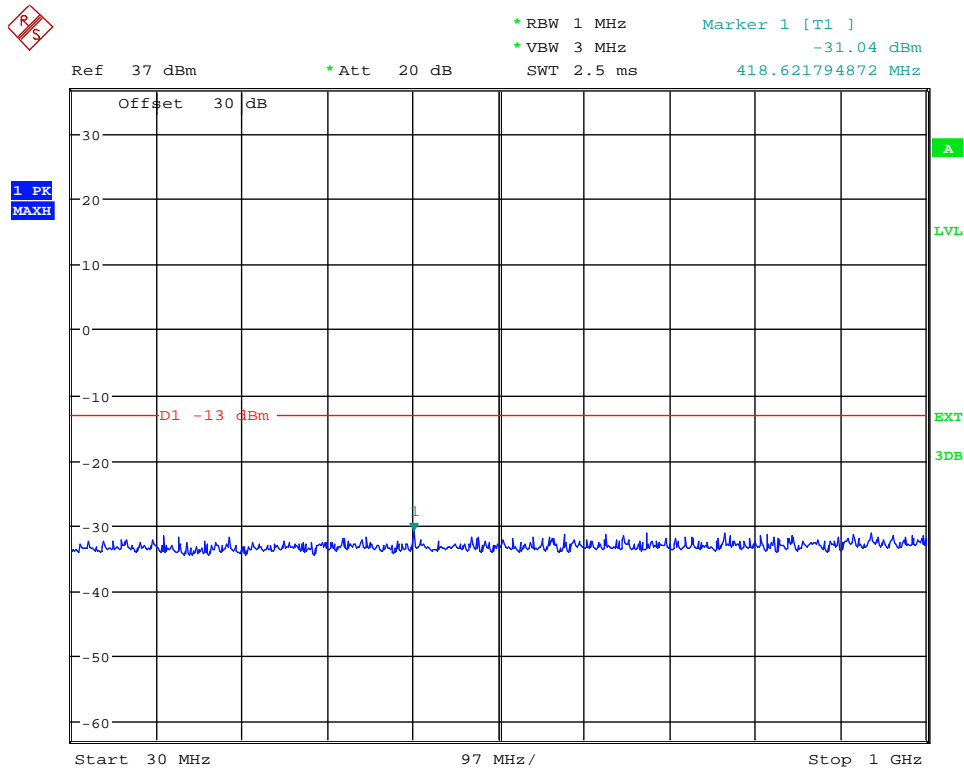


Date: 11.OCT.2013 16:57:18

(Plot 4.7.4 A1: Idle WCDMA Band II)

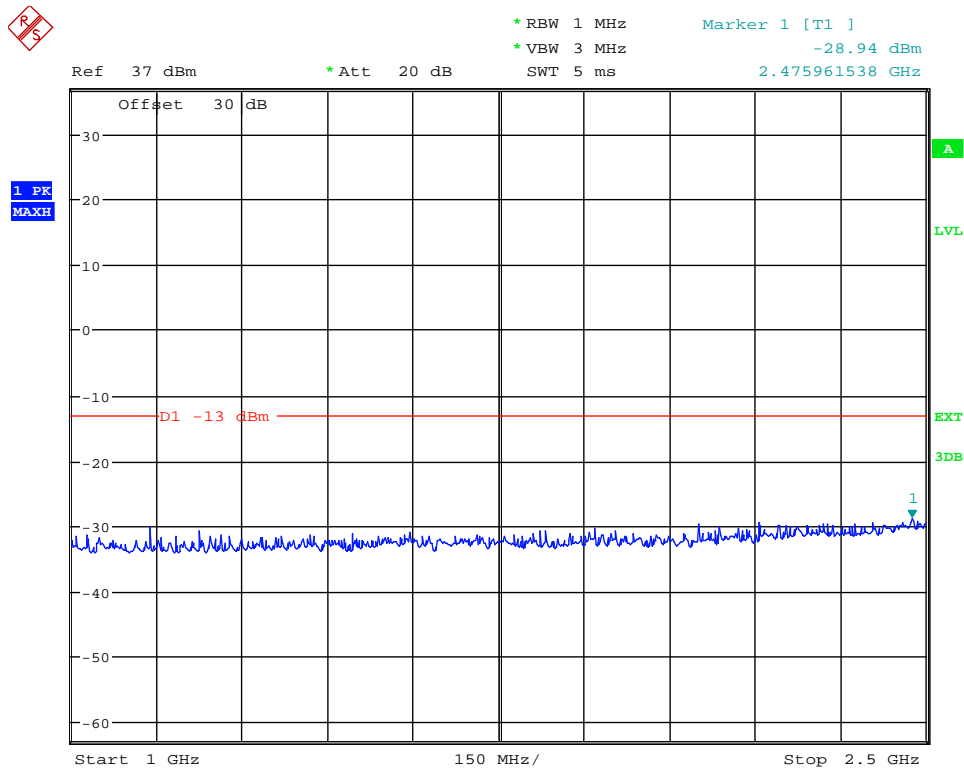


Date: 11.OCT.2013 16:57:34

(Plot 4.7.4 A2: Idle WCDMA Band II)

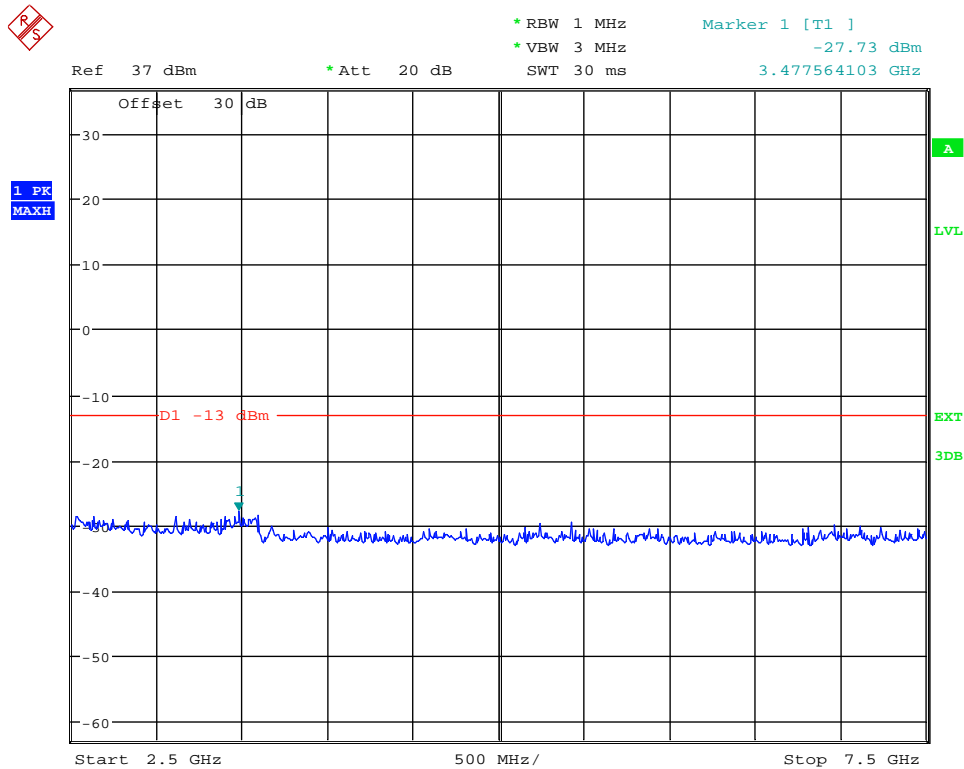


Date: 11.OCT.2013 16:57:47

(Plot 4.7.4 A3: Idle WCDMA Band II)

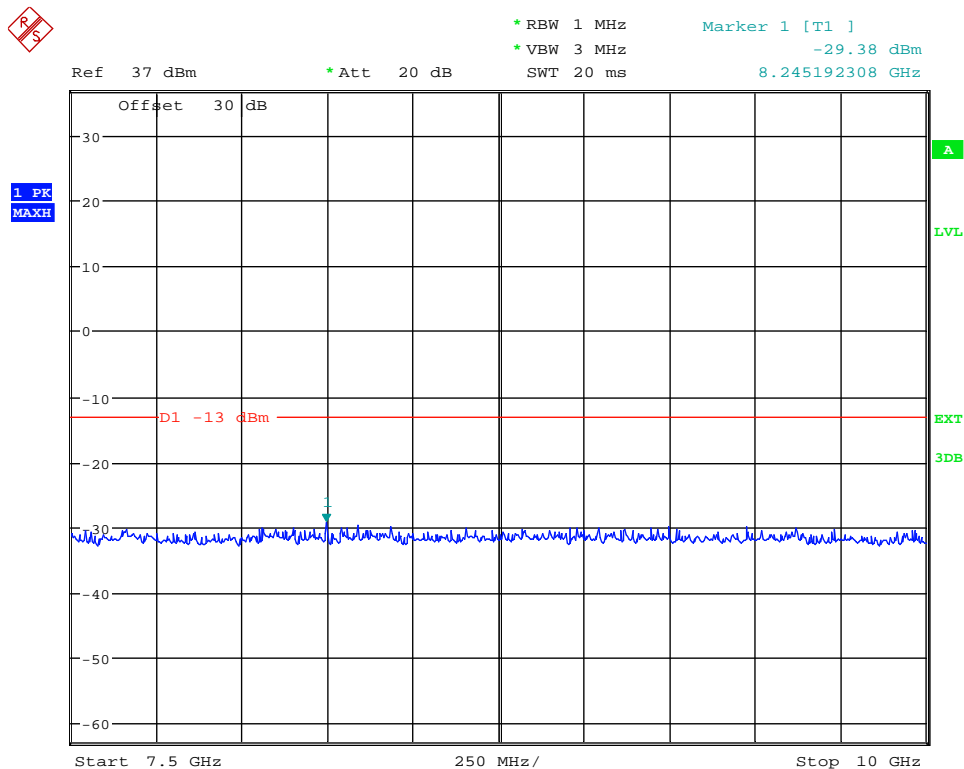


Date: 11.OCT.2013 16:58:05

(Plot 4.7.4 A4: Idle WCDMA Band II)

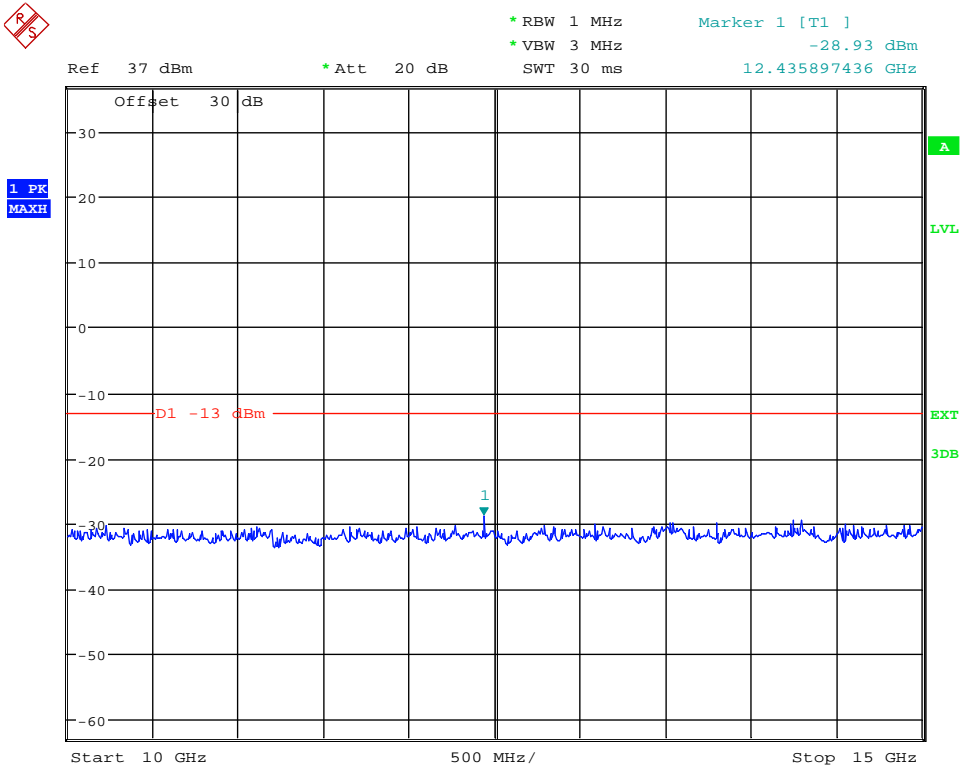

Date: 11.OCT.2013 16:58:20

(Plot 4.7.4 A5: Idle WCDMA Band II)

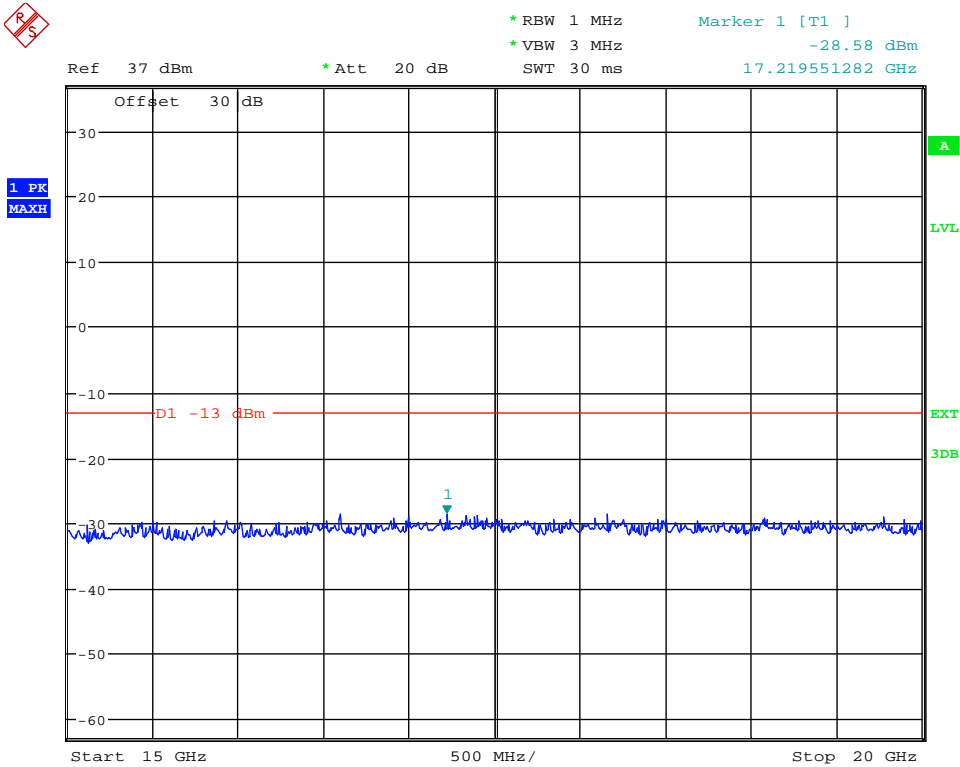

Date: 11.OCT.2013 16:58:56

(Plot 4.7.4 A6: Idle WCDMA Band II)

WCDMA Band V						
Channel Number: 4132		Test Frequency: 826.40 MHz			Test Mode: Traffic	
Start Frequency (MHz)	Stop Frequency (MHz)	Measurement Results		Limit (dBm)	Refer to Plot	Verdict
		Frequency (MHz)	Values (dBm)			
30	1000	***	***	-13.00	Plot 4.7.5 A1	PASS
1000	2500	2495.19	-33.22	-13.00	Plot 4.7.5 A2	PASS
2500	7500	3261.21	-32.12	-13.00	Plot 4.7.5 A3	PASS
7500	10000	8806.08	-34.31	-13.00	Plot 4.7.5 A4	PASS


WCDMA Band V						
Channel Number: 4183		Test Frequency: 836.60 MHz			Test Mode: Traffic	
Start Frequency (MHz)	Stop Frequency (MHz)	Measurement Results		Limit (dBm)	Refer to Plot	Verdict
		Frequency (MHz)	Values (dBm)			
30	1000	***	***	-13.00	Plot 4.7.6 A1	PASS
1000	2500	2384.61	-33.58	-13.00	Plot 4.7.6 A2	PASS
2500	7500	3565.70	-33.42	-13.00	Plot 4.7.6 A3	PASS
7500	10000	9911.86	-34.61	-13.00	Plot 4.7.6 A4	PASS

WCDMA Band V						
Channel Number: 4233		Test Frequency: 846.60 MHz			Test Mode: Traffic	
Start Frequency (MHz)	Stop Frequency (MHz)	Measurement Results		Limit (dBm)	Refer to Plot	Verdict
		Frequency (MHz)	Values (dBm)			
30	1000	***	***	-13.00	Plot 4.7.7 A1	PASS
1000	2500	2411.06	-34.65	-13.00	Plot 4.7.7 A2	PASS
2500	7500	3581.73	-32.94	-13.00	Plot 4.7.7 A3	PASS
7500	10000	8297.28	-34.17	-13.00	Plot 4.7.7 A4	PASS

WCDMA Band V						
Test Mode: Idle						
Start Frequency (MHz)	Stop Frequency (MHz)	Measurement Results		Limit (dBm)	Refer to Plot	Verdict
		Frequency (MHz)	Values (dBm)			
30	1000	376.21	-35.85	-13.00	Plot 4.7.8 A1	PASS
1000	2500	2235.58	-33.61	-13.00	Plot 4.7.8 A2	PASS
2500	7500	2469.55	-32.86	-13.00	Plot 4.7.8 A3	PASS
7500	10000	7696.31	-33.58	-13.00	Plot 4.7.8 A4	PASS


Note: 1. In general, the worse case attenuation requirement shown above was applied.

2. *** means that the emission level is too low to be measured or at least 20 dB down than the limit.

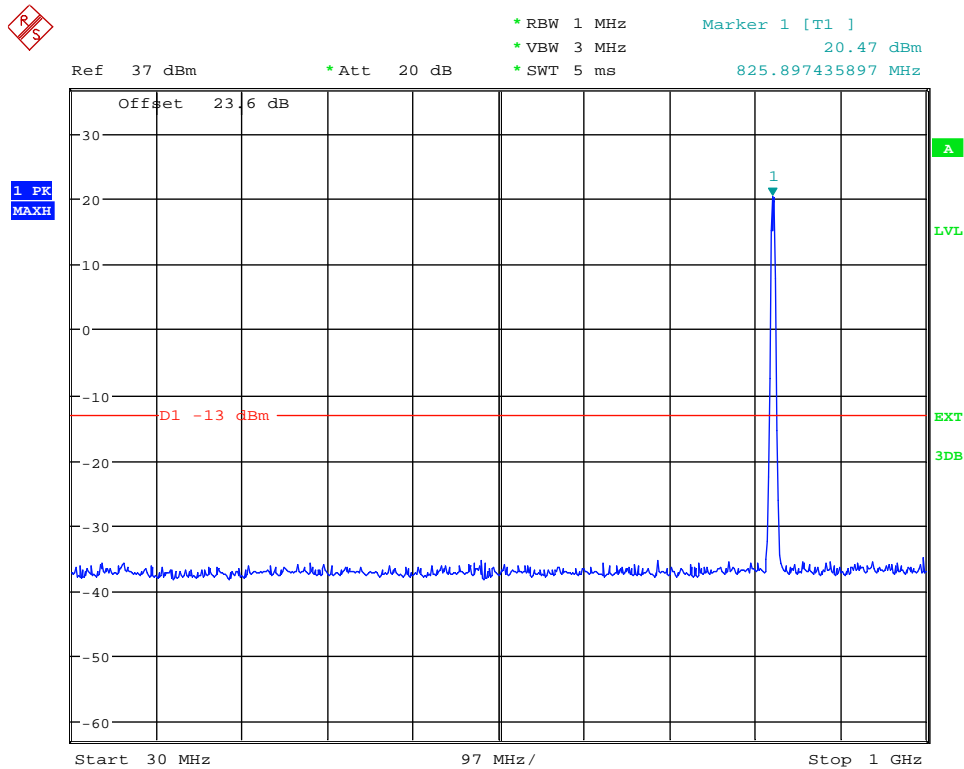


Date: 11.OCT.2013 18:27:19

(Plot 4.7.5 A1: Channel 4132: 826.40 MHz @ WCDMA Band V)

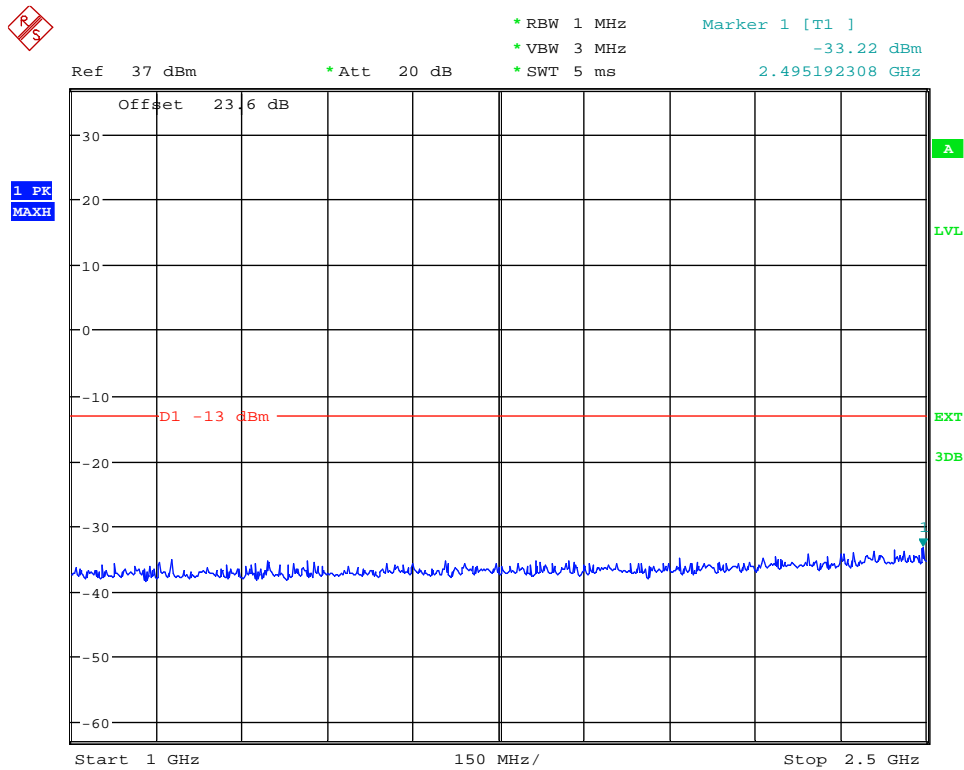


Date: 11.OCT.2013 18:28:30

(Plot 4.7.5 A2: Channel 4132: 826.40 MHz @ WCDMA Band V)

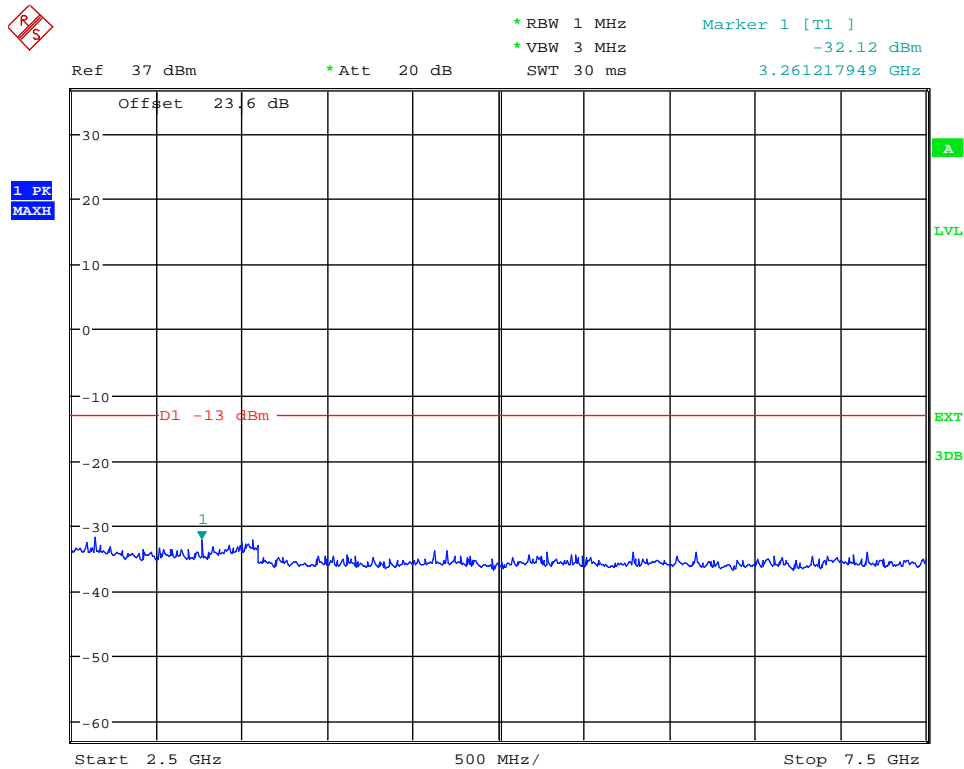


Date: 11.OCT.2013 18:30:53

(Plot 4.7.5 A3: Channel 4132: 826.40 MHz @ WCDMA Band V)

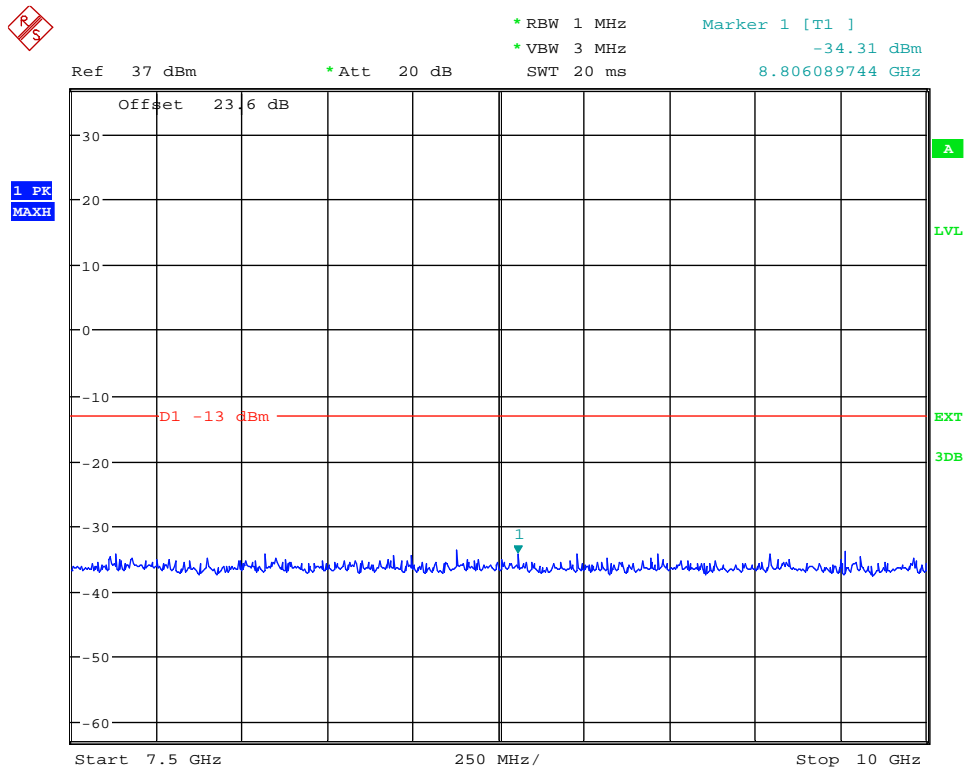


Date: 11.OCT.2013 18:32:48

(Plot 4.7.5 A4: Channel 4132: 826.40 MHz @ WCDMA Band V)

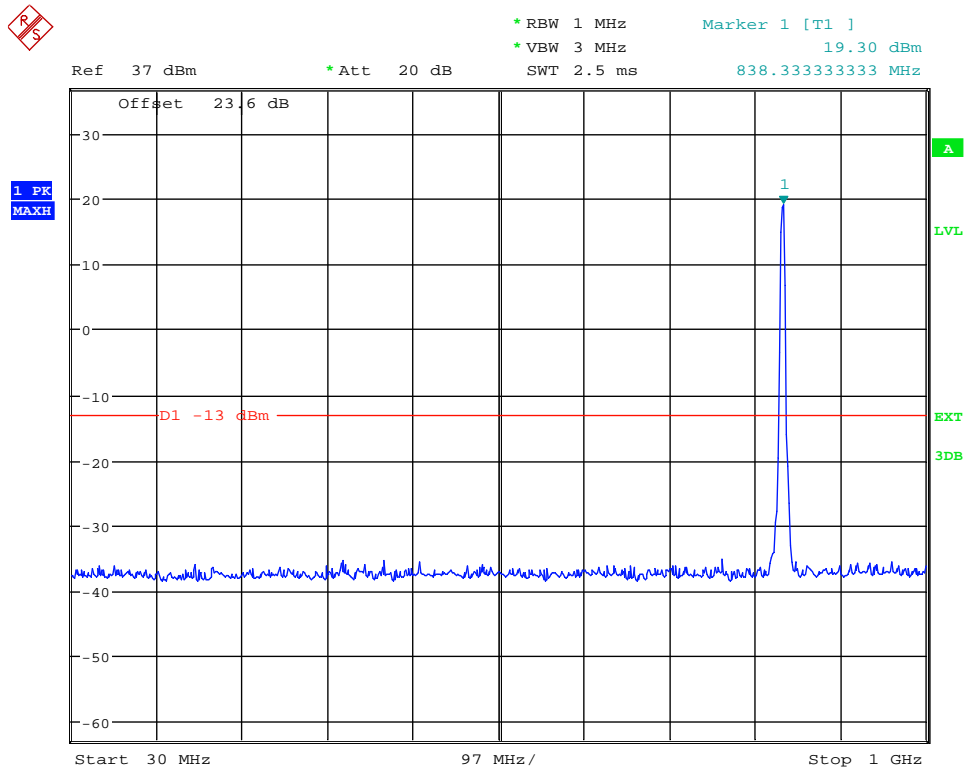


Date: 11.OCT.2013 18:36:21

(Plot 4.7.6 A1: Channel 4183: 836.60 MHz @ WCDMA Band V)

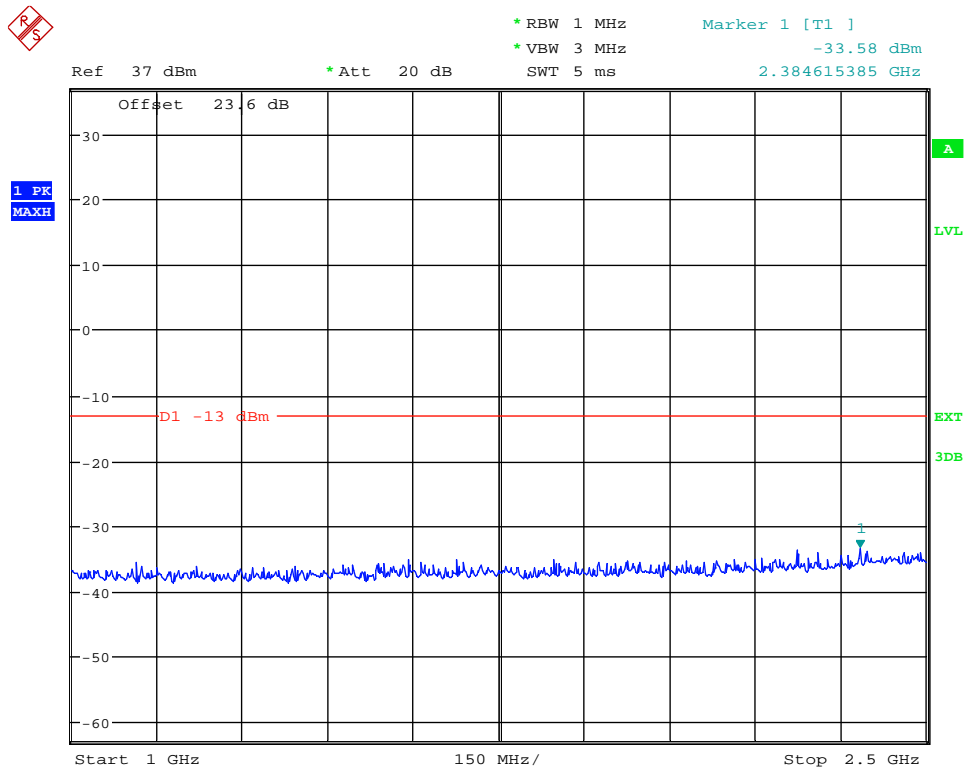


Date: 11.OCT.2013 18:38:18

(Plot 4.7.6 A2: Channel 4183: 836.60 MHz @ WCDMA Band V)

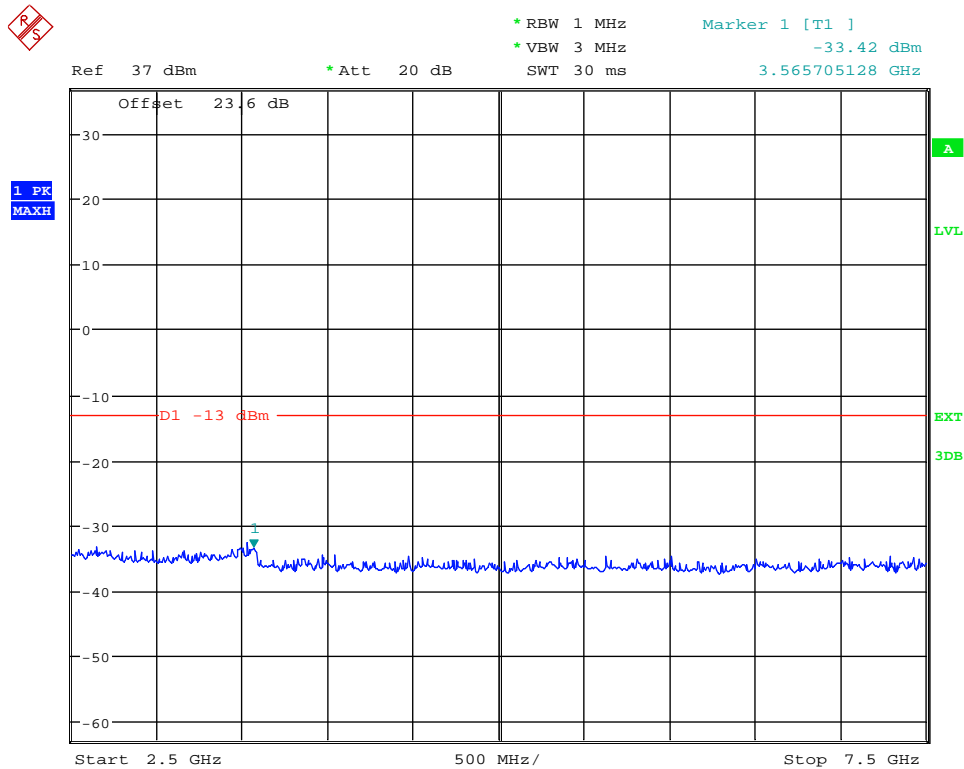


Date: 11.OCT.2013 18:38:43

(Plot 4.7.6 A3: Channel 4183: 836.60 MHz @ WCDMA Band V)

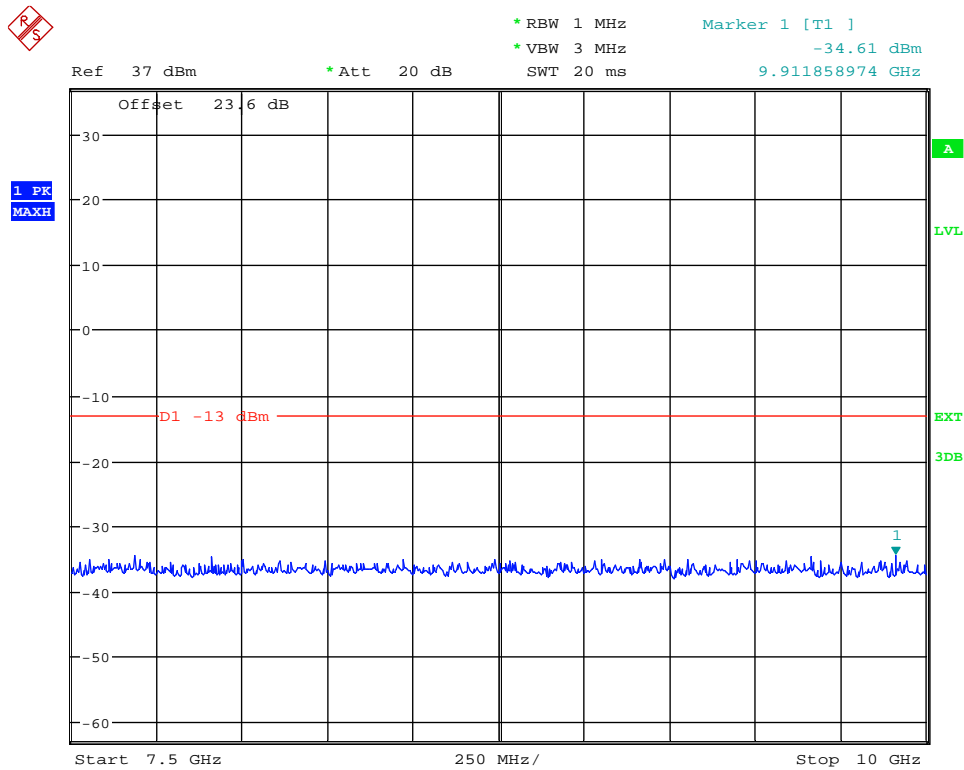


Date: 11.OCT.2013 18:39:30

(Plot 4.7.6 A4: Channel 4183: 836.60 MHz @ WCDMA Band V)

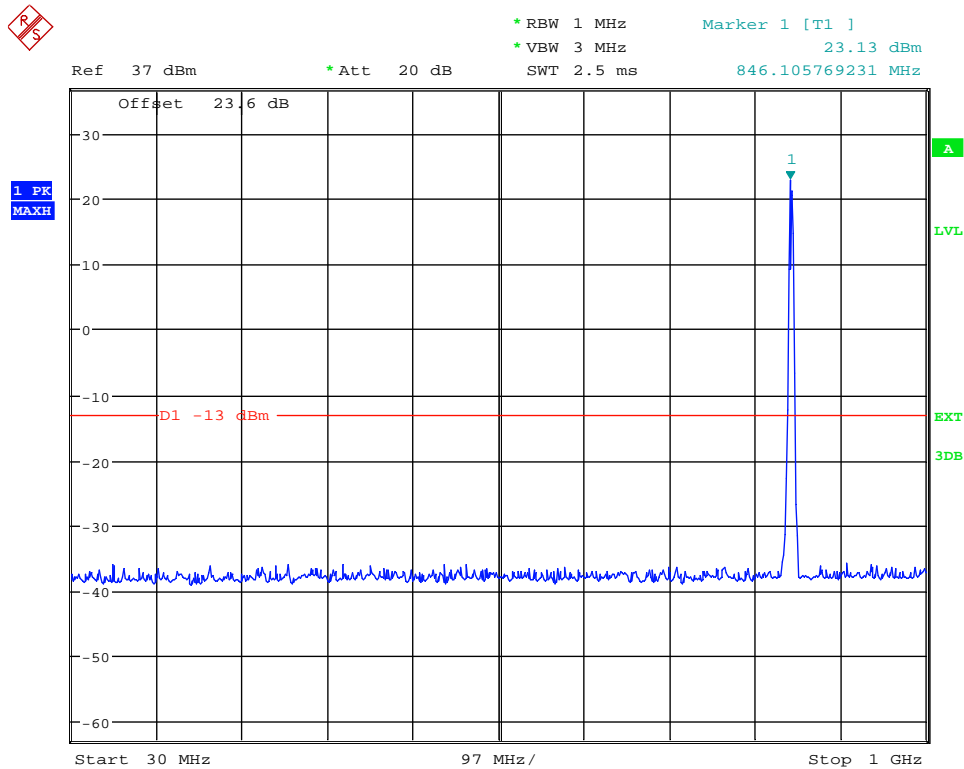


Date: 11.OCT.2013 18:57:48

(Plot 4.7.7 A1: Channel 4233: 846.60 MHz @ WCDMA Band V)

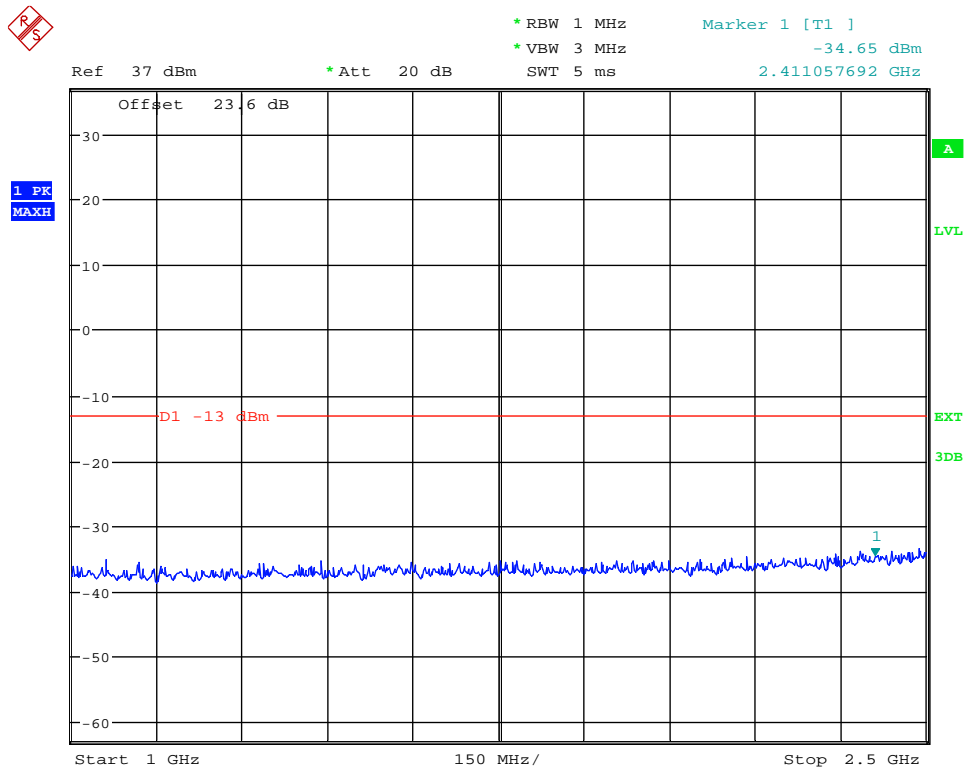


Date: 11.OCT.2013 18:57:14

(Plot 4.7.7 A2: Channel 4233: 846.60 MHz @ WCDMA Band V)

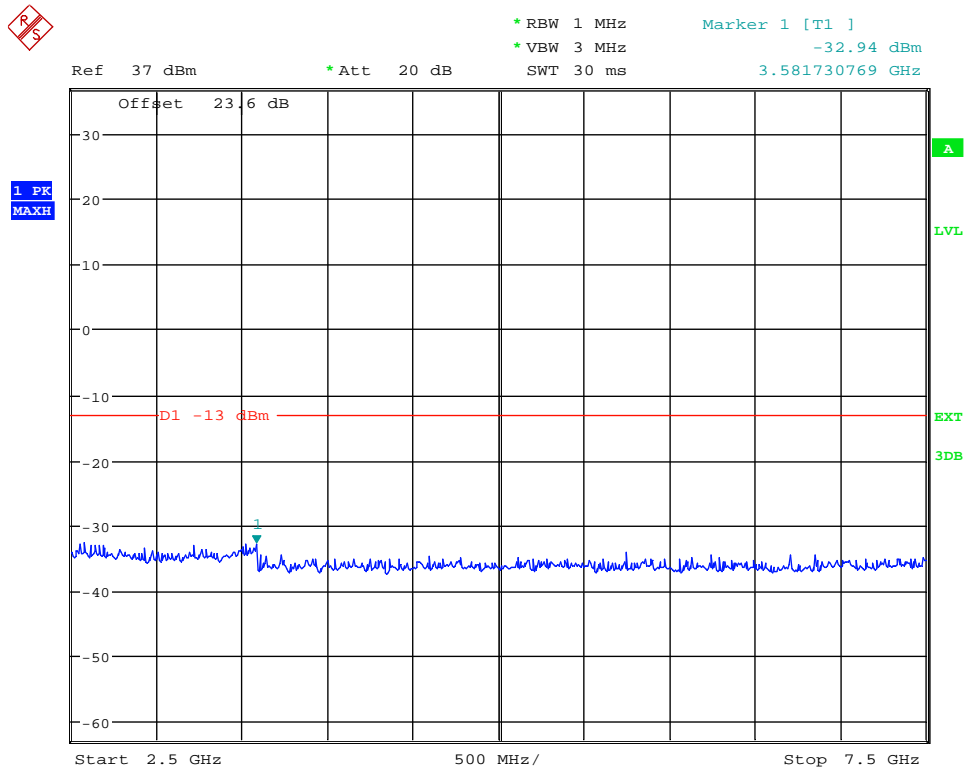


Date: 11.OCT.2013 18:59:31

(Plot 4.7.7 A3: Channel 4233: 846.60 MHz @ WCDMA Band V)

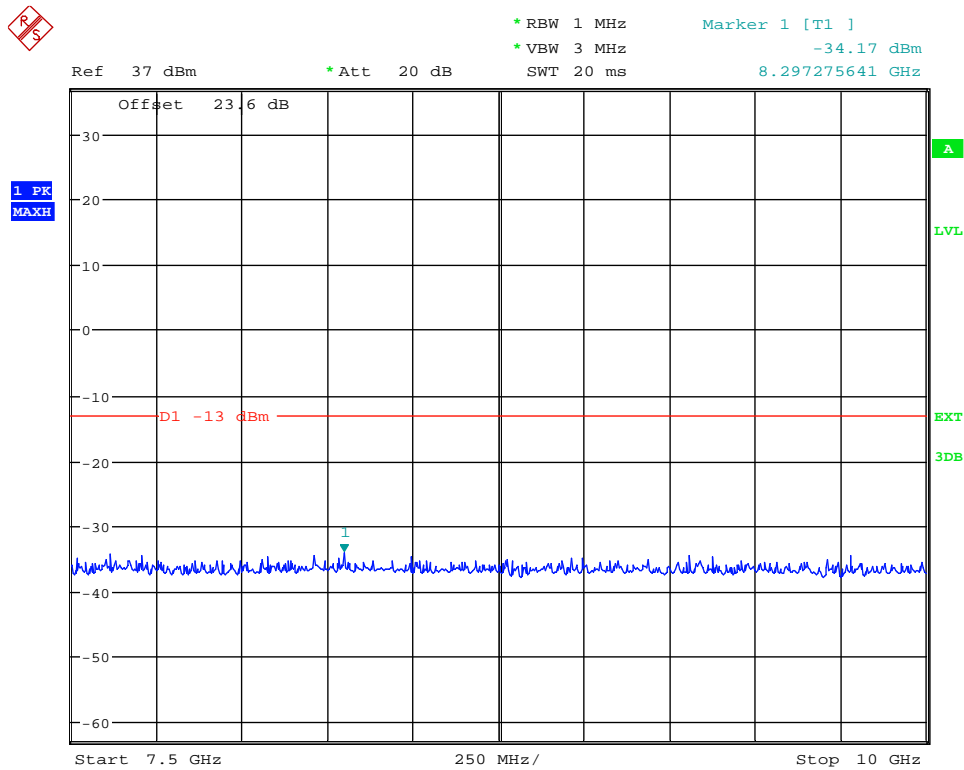


Date: 11.OCT.2013 19:00:05

(Plot 4.7.7 A4: Channel 4233: 846.60 MHz @ WCDMA Band V)

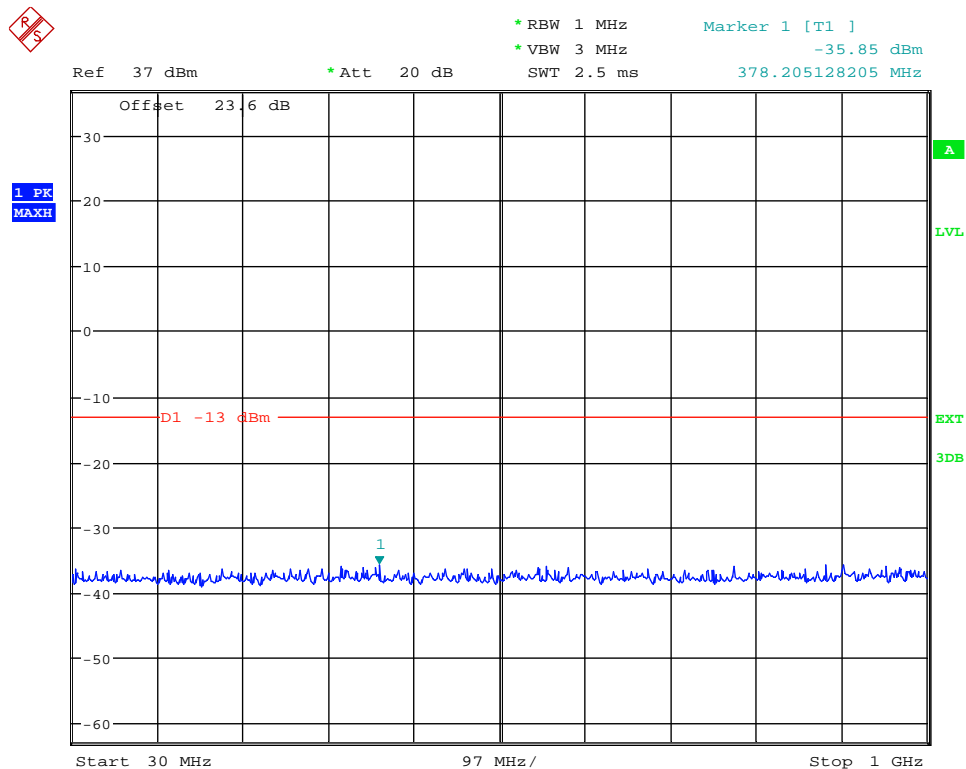


Date: 11.OCT.2013 18:40:42

(Plot 4.7.8 A1: Idle @ WCDMA Band V)

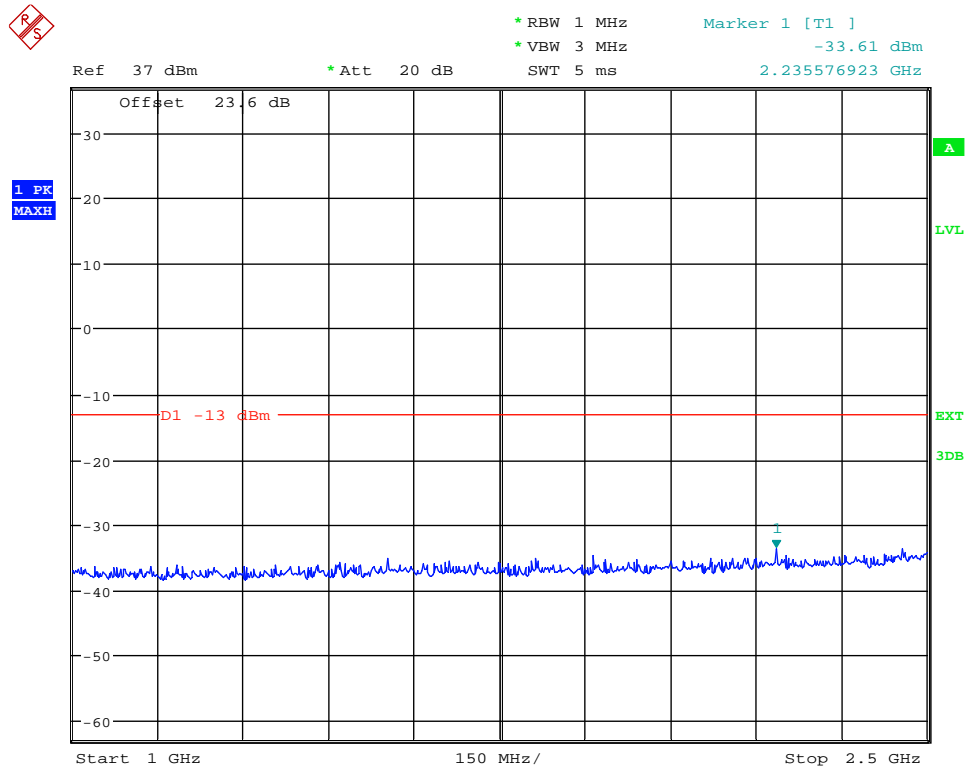


Date: 11.OCT.2013 18:40:57

(Plot 4.7.8 A2: Idle @ WCDMA Band V)

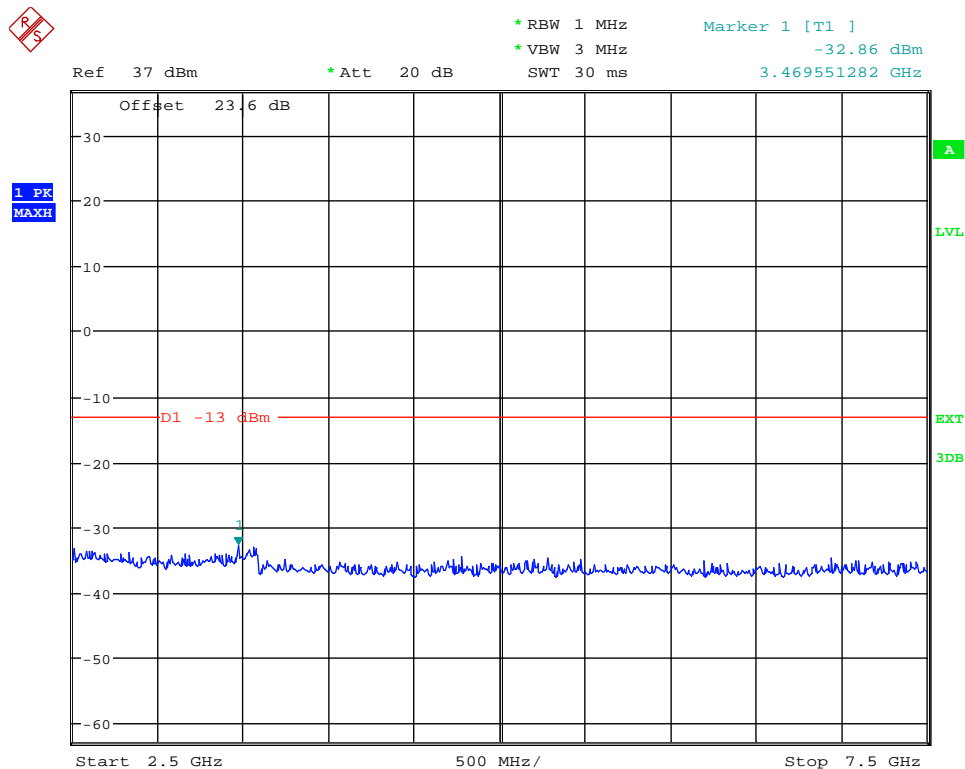

Date: 11.OCT.2013 18:42:14

(Plot 4.7.8 A3: Idle @ WCDMA Band V)

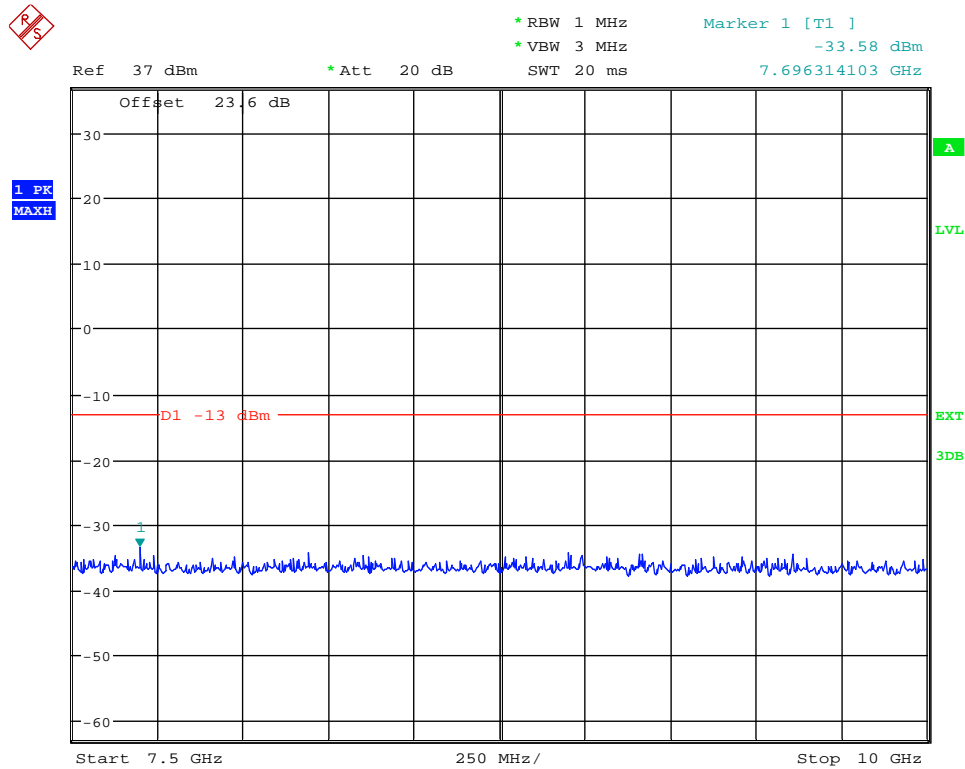

Date: 11.OCT.2013 18:42:37

(Plot 4.7.8 A4: Idle @ WCDMA Band V)

4.8. Frequency Stability Test

TEST APPLICABLE


1. According to FCC Part 2 Section 2.1055 (a)(1), the frequency stability shall be measured with variation of ambient temperature from -30°C to +50°C centigrade.
2. According to FCC Part 2 Section 2.1055 (a) (2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacture.
3. Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried voltage equipment and the end voltage point was 3.45V.

TEST PROCEDURE

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature;
2. Subject the EUT to overnight soak at -30°C;
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on middle channel of PCS 94000 and WCDMA II, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming;
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 0.5 hours at each temperature, unpowered, before making measurements;
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 0.5 hours unpowered, to allow any self-heating to stabilize, before continuing;
6. Subject the EUT to overnight soak at +50°C;
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming;
8. Repeat the above measurements at 10°C increments from +50°C to -30°C. Allow at least 0.5 hours at each temperature, unpowered, before making measurements;
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure;

TEST CONFIGURATION

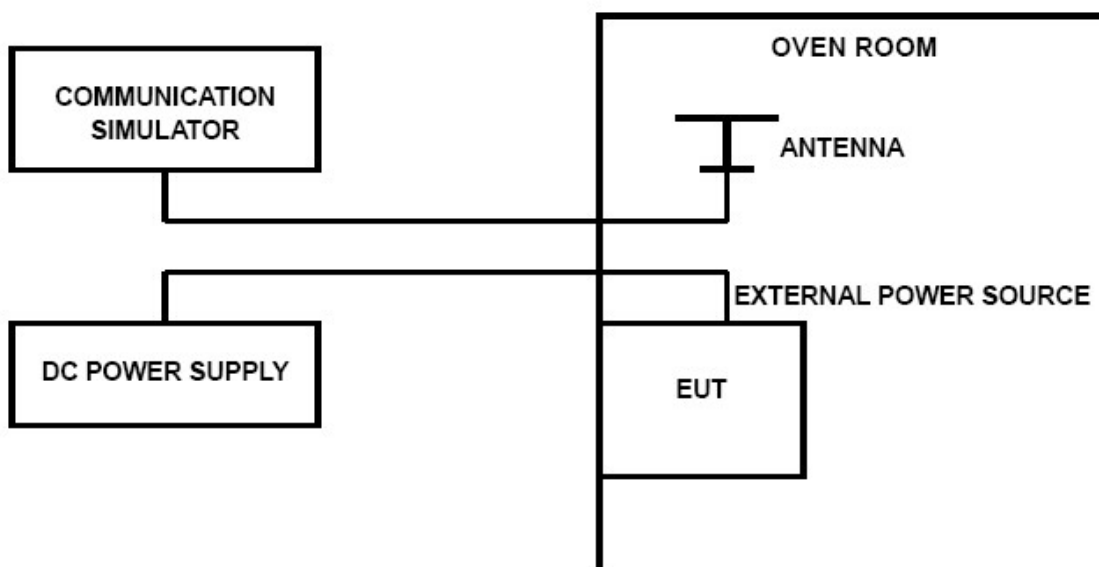

TEST LIMITS

For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability.

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.40VDC and 4.20VDC, with a nominal voltage of 3.70DC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

TEST RESULTS

WCDMA Band V					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
3.40	25	29	0.035	0.10	PASS
3.70	25	-24	0.029	0.10	PASS
4.20	25	-18	0.022	0.10	PASS
3.70	-30	-26	0.031	0.10	PASS
3.70	-20	-23	0.028	0.10	PASS
3.70	-10	-19	0.023	0.10	PASS
3.70	0	-18	0.022	0.10	PASS
3.70	10	-29	0.035	0.10	PASS
3.70	20	-26	0.031	0.10	PASS
3.70	30	-26	0.031	0.10	PASS
3.70	40	-19	0.023	0.10	PASS
3.70	50	-16	0.019	0.10	PASS

WCDMA Band II					
DC Power	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
3.40	20	-48	0.026	0.10	PASS
3.70	20	-50	0.027	0.10	PASS
4.20	20	-46	0.025	0.10	PASS
3.70	-30	-38	0.021	0.10	PASS
3.70	-20	-42	0.023	0.10	PASS
3.70	-10	-42	0.023	0.10	PASS
3.70	0	-48	0.026	0.10	PASS
3.70	10	-37	0.020	0.10	PASS
3.70	20	-50	0.027	0.10	PASS
3.70	30	-46	0.025	0.10	PASS
3.70	40	-38	0.021	0.10	PASS
3.70	50	-39	0.020	0.10	PASS

5. Test Setup Photos of the EUT





6. External and Internal Photos of the EUT

External photos of the EUT











Internal photos of the EUT

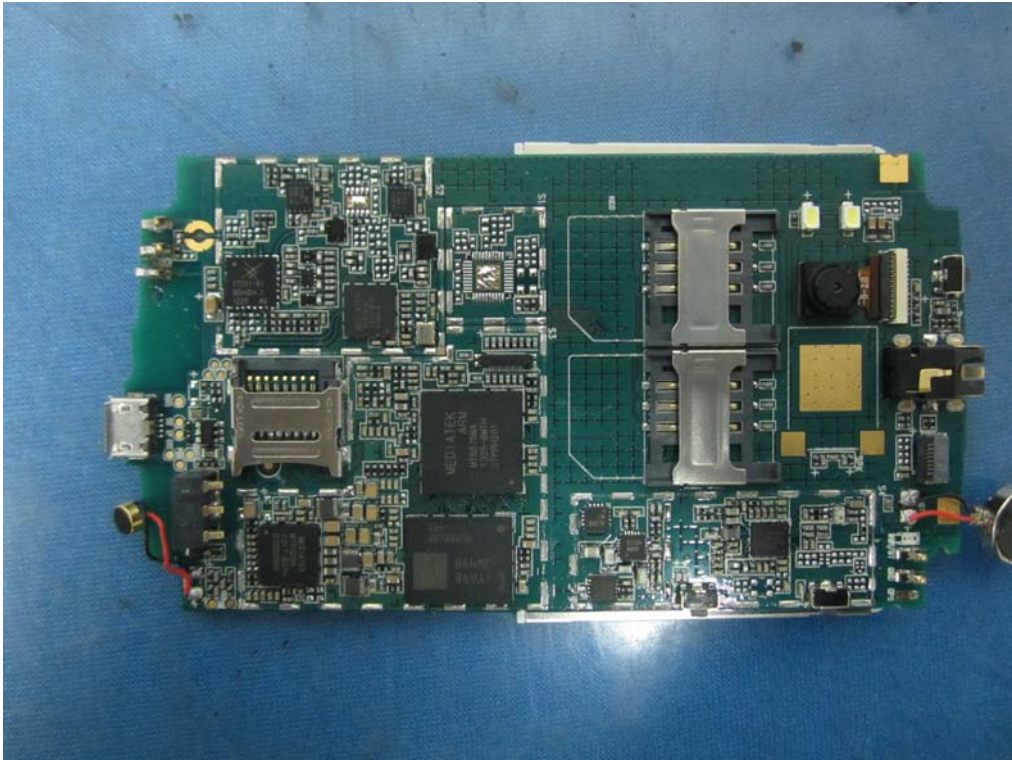

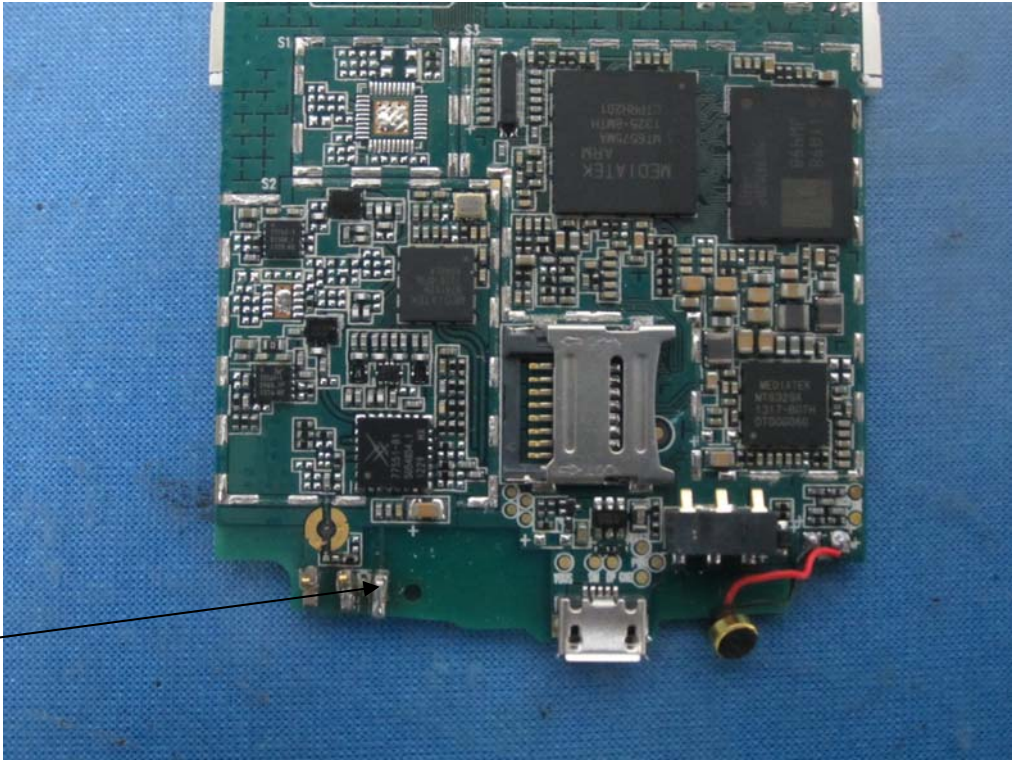

.....End of Report.....