



## TEST REPORT

Report Reference No.: TRE1309009407 R/C: 49040

FCC ID: Q34-E360

Compiled by

( position+printed name+signature): File administrators Jerome Luo

*Jerome Luo*

Supervised by

( position+printed name+signature): Test Engineer Yuchao Wang

*yuchao.wang*

Approved by

( position+printed name+signature): Manager Wenliang Li

*Wenliang Li*

Date of issue: Oct 28, 2013

Testing Laboratory Name: Shenzhen Huatongwei International Inspection Co., Ltd

Address: Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China

Applicant's name: Star Computer Group

Address: 2175 NORTHWEST 115TH AVE. DORAL FL 33172, USA

### Test specification:

Standard: ANSI C95.1-1999

47CFR § 2.1093

TRF Originator: Shenzhen Huatongwei International Inspection CO., Ltd

Master TRF: Dated 2006-06

**Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: Mobile phone

Trade Mark: Argom

Manufacturer: GPLUS TELECOM CO.,LTD.

Model/Type reference: E360

Listed Models: /

Operation Frequency: GSM 850MHz/PCS1900MHz/WCDMA850/WCDMA1900

Modulation Type: GSM(GMSK), WLAN(CCK, OFDM), Bluetooth(GFSK, 8DPSK, II /4DQPSK, QPSK for WCDMA

Hardware version: H5-MBPCB\_V4.0

Software version: 3.0.13

Android version: 4.0.4

GPRS operation mode: Class B

Ratings: DC 3.70V

Result: Positive

**T E S T   R E P O R T**

<b>Test Report No. :</b> <b>TRE1309009407</b>	Oct 28, 2013 Date of issue
---	-------------------------------

Equipment under Test                      :              Mobile phone

Model /Type                                        :              E360

Listed Models                                        :              /

**Applicant**    :              **Star Computer Group**

Address    :              2175 NORTHWEST 115TH AVE. DORAL FL 33172, USA

**Manufacturer**    :              **Star Computer Group**

Address    :              2175 NORTHWEST 115TH AVE. DORAL FL 33172, USA

<b>Test Result</b> according to the standards on page 5:	<b>Positive</b>
--	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

<b>1.</b>	<b><u>TEST STANDARDS</u></b>	<b>5</b>
<b>2.</b>	<b><u>SUMMARY</u></b>	<b>6</b>
2.1.	General Remarks	6
2.2.	Product Description	6
2.3.	Statement of Compliance	6
2.4.	Equipment under Test	7
2.5.	Short description of the Equipment under Test (EUT)	7
2.6.	EUT configuration	8
2.7.	Internal Identification of AE used during the test	8
2.8.	Note	8
<b>3.</b>	<b><u>TEST ENVIRONMENT</u></b>	<b>9</b>
3.1.	Address of the test laboratory	9
3.2.	Test Facility	9
3.3.	Environmental conditions	10
3.4.	SAR Limits	10
3.5.	Equipments Used during the Test	10
<b>4.</b>	<b><u>SAR MEASUREMENTS SYSTEM CONFIGURATION</u></b>	<b>11</b>
4.1.	SAR Measurement Set-up	11
4.2.	DASY5 E-field Probe System	12
4.3.	Phantoms	13
4.4.	Device Holder	13
4.5.	Scanning Procedure	14
4.6.	Data Storage and Evaluation	14
4.7.	Tissue Dielectric Parameters for Head and Body Phantoms	16
4.8.	Tissue equivalent liquid properties	16
4.9.	System Check	17
4.10.	SAR measurement procedure	19
<b>5.</b>	<b><u>TEST CONDITIONS AND RESULTS</u></b>	<b>25</b>
5.1.	Conducted Power Results	25
5.2.	Simultaneous TX SAR Considerations	28
5.3.	SAR Measurement Results	31
5.4.	SAR Measurement Variability	35
5.5.	Measurement Uncertainty (300MHz-3GHz)	35
5.6.	System Check Results	37
5.7.	SAR Test Graph Results	43
<b>6.</b>	<b><u>CALIBRATION CERTIFICATE</u></b>	<b>137</b>
6.1.	Probe Calibration Certificate	137
6.2.	D835V2 Dipole Calibration Certificate	148
6.3.	D1900V2 Dipole Calibration Certificate	156
6.4.	D2450V2 Dipole Calibration Certificate	164
6.5.	DAE4 Calibration Certificate	172
<b>7.</b>	<b><u>TEST SETUP PHOTOS</u></b>	<b>177</b>

**8.      EXTERNAL AND INTERNAL PHOTOS OF THE EUT      186**

# **1. TEST STANDARDS**

The tests were performed according to following standards:

[IEEE Std C95.1, 1999](#): IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 KHz to 300 GHz. It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

[IEEE Std 1528™-2003](#): IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

[KDB 447498 D01 Mobile Portable RF Exposure v05r01](#): Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies

[KDB 616217 D04 SAR for laptop and tablets v01](#): SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers

[KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01](#): SAR Measurement Requirements for 100 MHz to 6 GHz

[KDB865664 D02 SAR Reporting v01](#): RF Exposure Compliance Reporting and Documentation Considerations

[KDB248227](#): SAR measurement procedures for 802.112abg transmitters

[FCC Part 2.1093 Radiofrequency Radiation Exposure Evaluation](#): Portable Devices

[KDB648474 D04 SAR Handsets Multi Xmitter and Ant v01](#): SAR Evaluation Considerations for Wireless Handsets.

[KDB941225 D06 Hot Spot SAR v01](#): SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

[KDB941225 D03 Test Reduction GSM GPRS EDGE V01](#): Recommended SAR Test Reduction Procedures for GSM/GPRS/EDGE

## 2. SUMMARY

### 2.1. General Remarks

Date of receipt of test sample	:	Sep 24, 2013
Testing commenced on	:	Sep 25, 2013
Testing concluded on	:	Sep 27, 2013

### 2.2. Product Description

The **Star Computer Group's** Model: E360 or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

Name of EUT	Mobile Phone
Model Number	E360
FCC ID	Q34-E360
Modulation Type	QPSK for WCDMA, GMSK for GSM/GPRS/EDGE
Antenna Type	Internal
Hardware version	H5-MBPCB_V4.0
Software version	3.0.13
Android version	4.0.4
GSM/EDGE/GPRS	Supported GSM/GPRS/EDGE
WCDMA Operation Frequency Band	FDD Band II, FDD Band V
HSDPA Release Version	Release 8
HSUPA Release Version	Release 6
WCDMA Release Version	R99
Extreme temp. Tolerance	-30°C to +60°C
Extreme vol. Limits	3.40VDC to 4.20VDC (nominal: 3.70VDC)
GSM/GPRS Operation Frequency Band	GSM850/PCS1900
Support Hotspot	No, Not supported hot spots
GSM Release Version	R99
GPRS operation mode	Class B
GPRS Multislot Class	12
EGPRS Multislot Class	12

### 2.3. Statement of Compliance

The maximum of results of SAR found during testing for E360 are follows:

Exposure Configuration	Technolohy Band	Highest Reported SAR 1g(W/Kg)	Equipment Class
Head (Separation Distance 0mm)	GSM850	0.367	PCE
	PCS1900	0.473	
	WCDMA Band V	0.371	
	WCDMA Band II	0.320	
	WLAN2450	0.210	DTS
Body-worn (Separation Distance 10mm)	GSM850	0.702	PCE
	PCS1900	0.725	
	WCDMA Band V	0.569	
	WCDMA Band II	0.511	
	WLAN2450	0.261	DTS

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6W/Kg as averaged over any 1g tissue accordintg to the ANSI C95.1-1999.

For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and which provides a minimum separation distance of 10mm between this device and the body of the user. User of other accessories may not ensure compliance with FCC RF exposure guidelines.

The EUT battery must be fully charged and checked periodically during the test to ascertain iniform power output.

Transmitter						Test Position	Main Antenna Reported SAR(1g) (W/kg)	Wi-Fi Reported SAR(1g) (W/kg)	Bluetooth Estimated SAR (W/Kg)	Summation Reported SAR(1g) (W/kg)	SAR –to-peak-location Separation Ratio	Simultaneous Measurement Required?
WCDMA Band II	WCDMA Band V	GSM 850	GSM 1900	WLAN	BT							
●				●		Head Left Touch	0.320	0.210		0.530<1.6	/	No
●					●	Head Left Touch	0.320		0.209	0.529<1.6	/	No
	●			●		Head Left Touch	0.371	0.210		0.581<1.6	/	No
	●				●	Head Left Touch	0.371		0.209	0.580<1.6	/	No
		●		●		Head Left Touch	0.367	0.210		0.577<1.6	/	No
		●			●	Head Left Touch	0.367		0.209	0.576<1.6	/	No
			●	●		Head Left Touch	0.473	0.210		0.683<1.6	/	No
			●		●	Head Left Touch	0.473		0.209	0.682<1.6	/	No
●				●		Body Rear	0.511	0.261		0.772<1.6	/	No
●					●	Body Rear	0.511		0.105	0.616<1.6	/	No
	●			●		Body Rear	0.569	0.261		0.830<1.6	/	No
	●				●	Body Rear	0.569		0.105	0.674<1.6	/	No
		●		●		Body Rear	0.702	0.261		0.963<1.6	/	No
		●			●	Body Rear	0.702		0.105	0.807<1.6	/	No
			●	●		Body Rear	0.725	0.261		0.986<1.6	/	No
			●		●	Body Rear	0.725		0.105	0.830<1.6	/	No

Accordint to the above tables,the highest sum of reported SAR values is **0.683W/Kg** for Head and **0.986W/Kg** for Body.

## 2.4. Equipment under Test

### Power supply system utilised

Power supply voltage	:	<input type="radio"/> 120V / 60 Hz	<input type="radio"/> 115V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 3.70 V

## 2.5. Short description of the Equipment under Test (EUT)

Mobile phone (Model: E360).

The EUT battery must be fully charged and checked periodically during the test to ascertain maximum power output.

## 2.6. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

● - supplied by the manufacturer

○ - supplied by the lab

○	Power Cable	Length (m) :	/
		Shield :	/
		Detachable :	/
○	Multimeter	Manufacturer :	/
		Model No. :	/

## 2.7. Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery
AE2	Charger and USB cable

AE1

Model:E360  
 Manufacturer: Star Computer Group  
 Capacitance:650mAh  
 Nominal Voltage:3.70V

AE2:

Model: E360  
 Manufacturer: Star Computer Group  
 Input: 100-240V~50/60Hz 0.15A  
 Output: OUTPUT: 5.0V DC 0.5A  
 Power Cable Length: 80cm  
 ○ Shielded      ● Unshielded

\*AE ID: is used to identify the test sample in the lab internally.

## 2.8. Note

- The EUT is a WCDMA Mobile Phone with WLAN and Bluetooth fuction,The functions of the EUT listed as below:

	Test Standards	Reference Report
GSM/GPRS/EGPRS	FCC Part 22/FCC Part 24	TRE1309009401
WCDMA/HSUPA/HSDPA	FCC Part 22/FCC Part 24	TRE1309009402
WLAN	FCC Part 15 C 15.247	TRE1309009403
Bluetooth v2.1	FCC Part 15 C 15.247	TRE1309009404
Bluetooth 4.0	FCC Part 15 C 15.247	TRE1309009405
USB Port	FCC Part 15 B	TRE1309009406
SAR	FCC Part 2 §2.1093	TRE1309009407



### **3. TEST ENVIRONMENT**

#### **3.1. Address of the test laboratory**

Shenzhen Huatongwei International Inspection Co., Ltd  
Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China  
Phone: 86-755-26715686 Fax: 86-755-26748089

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2009) and CISPR Publication 22.

#### **3.2. Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

##### **CNAS-Lab Code: L1225**

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: Mar. 29, 2012. Valid time is until Feb. 28, 2015.

##### **A2LA-Lab Cert. No. 2243.01**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is until Sept. 30, 2015.

##### **FCC-Registration No.: 662850**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 662850, Renewal date June. 01, 2012, valid time is until June. 01, 2015.

##### **IC-Registration No.: 5377A**

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377A on Jan. 25, 2011, valid time is until Jan. 24, 2014.

##### **ACA**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

##### **VCCI**

The 3m Semi-anechoic chamber (12.2m×7.95m×6.7m) and Shielded Room (8m×4m×3m) of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-292. Date of Registration: Dec. 24, 2010. Valid time is until Dec. 23, 2013.

Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: Dec. 20, 2012. Valid time is until Dec. 19, 2015.

Telecommunication Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-1837. Date of Registration: May 07, 2013. Valid time is until May 06, 2016.

##### **DNV**

Shenzhen Huatongwei International Inspection Co., Ltd. has been found to comply with the requirements of DNV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Directives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-ups

according to relevant parts of ISO/IEC Guide 17025 (2005), in accordance with the requirements of the DNV Laboratory Quality Manual towards subcontractors. Valid time is until Aug. 24, 2016.

### 3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	18-25 ° C
Humidity:	40-65 %
Atmospheric pressure:	950-1050mbar

### 3.4. SAR Limits

FCC Limit (1g Tissue)

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

### 3.5. Equipments Used during the Test

Test Equipment	Manufacturer	Type/Model	Serial Number	Calibration	
				Last Calibration	Calibration Interval
Data Acquisition Electronics DAEx	SPEAG	DAE4	1315	2013/2/27	1
E-field Probe	SPEAG	ES3DV3	3292	2013/2/24	1
System Validation Dipole 835V2	SPEAG	D835V2	4d134	2013/2/27	1
System Validation Dipole 1900V2	SPEAG	D1900V2	Sd150	2013/2/28	1
System Validation Dipole 2450V2	SPEAG	D2450V2	884	2013/2/29	1
Network analyzer	Agilent	8753E	US37390562	2013/3/25	1
Universal Radio Communication Tester	ROHDE & SCHWARZ	CMU200	112012	2013/10/26	1
Dielectric Probe Kit	Agilent	85070E	US44020288	/	/
Power meter	Agilent	E4417A	GB41292254	2013/03/26	1
Power sensor	Agilent	8481H	MY41095360	2013/03/26	1
Signal generator	IFR	2032	203002/100	2013/10/26	1
Amplifier	AR	75A250	302205	2013/10/26	1

## 4. SAR Measurements System configuration

### 4.1. SAR Measurement Set-up

The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).

A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

A unit to operate the optical surface detector which is connected to the EOC.

The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.

The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003.

DASY5 software and SEMCAD data evaluation software.


Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.

The generic twin phantom enabling the testing of left-hand and right-hand usage.

The device holder for handheld mobile phones.

Tissue simulating liquid mixed according to the given recipes.

System validation dipoles allowing to validate the proper functioning of the system.

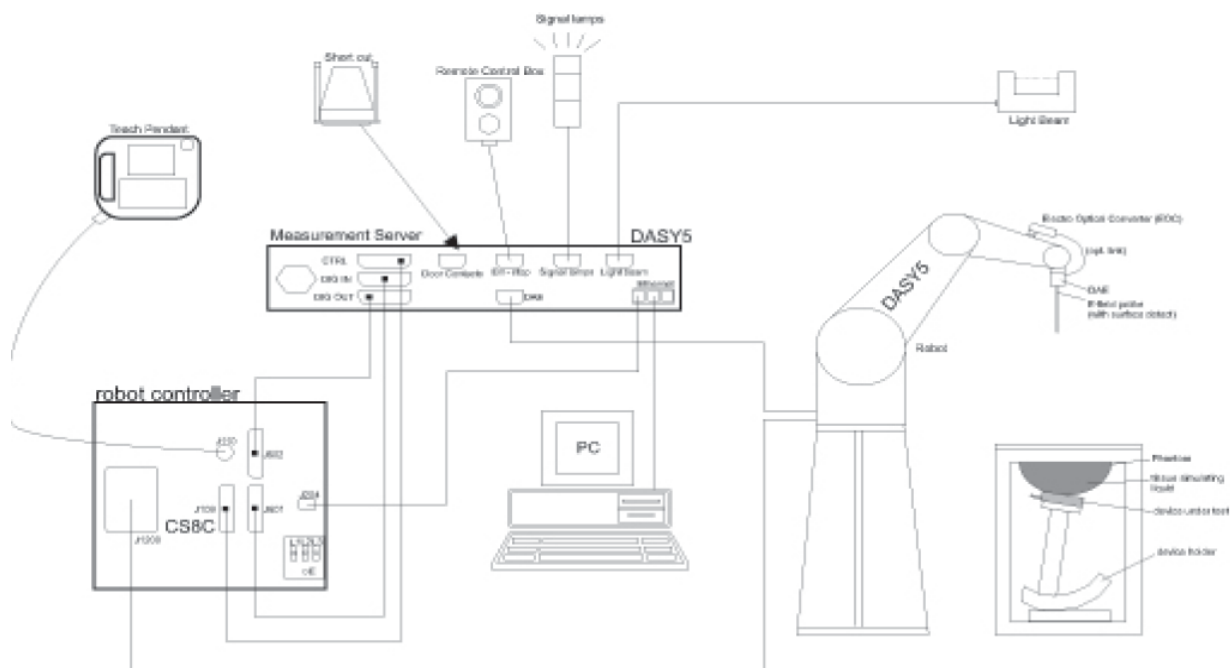

## 4.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe ES3DV3 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

### Probe Specification


Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to 4 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 4 GHz)
Directivity	$\pm 0.2$ dB in HSL (rotation around probe axis) $\pm 0.3$ dB in tissue material (rotation normal to probe axis)
Dynamic Range	5 $\mu\text{W/g}$ to > 100 mW/g; Linearity: $\pm 0.2$ dB
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI



### Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

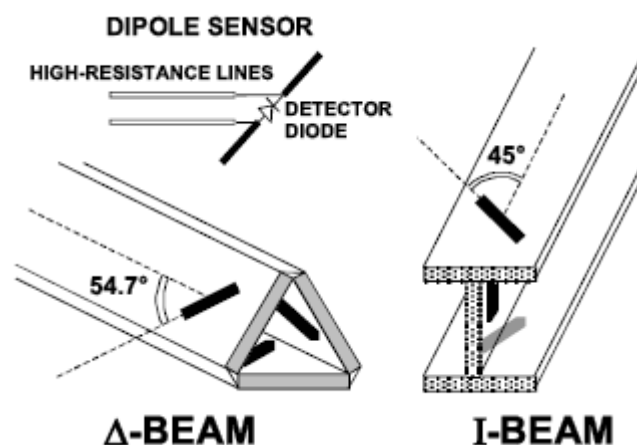

### 4.3. Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6mm).

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.



SAM Twin Phantom

### 4.4. Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the DASY system.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.



Device holder supplied by SPEAG

## 4.5. Scanning Procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max.  $\pm 5\%$ .

The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above  $\pm 0.1\text{mm}$ ). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe (It does not depend on the surface reflectivity or the probe angle to the surface within  $\pm 30^\circ$ .)

### Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing of  $15\text{ mm} \times 15\text{ mm}$  is set. During the scan the distance of the probe to the phantom remains unchanged. After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

### Zoom Scan

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by  $7 \times 7 \times 7$  points within a cube whose base is centered around the maxima found in the preceding area scan.

### Spatial Peak Detection

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY5 system allows evaluations that combine measured data and robot positions, such as: • maximum search • extrapolation • boundary correction • peak search for averaged SAR. During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard’s method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space. They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard’s method for extrapolation. For a grid using  $7 \times 7 \times 7$  measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10g cubes.

A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube  $7 \times 7 \times 7$  scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

## 4.6. Data Storage and Evaluation

### Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DA4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected

probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

#### Data Evaluation

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
	- Conversion factor	ConvFi
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	$\sigma$
	- Density	$\rho$

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

With	$V_i$	= compensated signal of channel i	(i = x, y, z)
	$U_i$	= input signal of channel i	(i = x, y, z)
	cf	= crest factor of exciting field	(DASY parameter)
	dcp_i	= diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$E - \text{fieldprobes : } E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$H - \text{fieldprobes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

With	$V_i$	= compensated signal of channel i	(i = x, y, z)
	Normi	= sensor sensitivity of channel i	(i = x, y, z)
		[mV/(V/m)²] for E-field Probes	
	ConvF	= sensitivity enhancement in solution	
	aij	= sensor sensitivity factors for H-field probes	
	f	= carrier frequency [GHz]	
	$E_i$	= electric field strength of channel i in V/m	
	$H_i$	= magnetic field strength of channel i in A/m	

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

with	SAR	= local specific absorption rate in mW/g
	$E_{tot}$	= total field strength in V/m
	$\sigma$	= conductivity in [mho/m] or [Siemens/m]
	$\rho$	= equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

#### 4.7. Tissue Dielectric Parameters for Head and Body Phantoms

The liquid is consisted of water,salt,Glycol,Sugar,Preventol and Cellulose.The liquid has previously been proven to be suited for worst-case.The table 3 and table 4 show the detail solition.It's satisfying the latest tissue dielectric parameters requirements proposed by the KDB865664.

Table 3:Composition of the Head Tissue Equivalent Matter

MIXTURE%	FREQUENCY(Brain) 835MHz
Water	41.45
Sugar	56
Salt	1.45
Preventol	0.12
Cellulose	1.0
Dielectric Paramters Target Value	f=835MHz $\epsilon=41.50$ $\sigma=0.9$

MIXTURE%	FREQUENCY(Brain) 1750MHz
Water	55.24
Glycol	44.45
Salt	0.31
Dielectric Paramters Target Value	f=1750MHz $\epsilon=40.10$ $\sigma=1.37$

MIXTURE%	FREQUENCY(Brain) 1900MHz
Water	55.242
Glycol monobutyl	44.452
Salt	0.306
Dielectric Paramters Target Value	f=1900MHz $\epsilon=40.00$ $\sigma=1.40$

MIXTURE%	FREQUENCY(Brain) 2450MHz
Water	62.70
Glycol	36.80
Salt	0.50
Dielectric Paramters Target Value	f=2450MHz $\epsilon=39.20$ $\sigma=1.80$

Table 4:Composition of the Body Tissue Equivalent Matter

MIXTURE%	FREQUENCY(Brain) 835MHz
Water	52.50
Sugar	45
Salt	1.40
Preventol	0.10
Cellulose	1.00
Dielectric Paramters Target Value	f=835MHz $\epsilon=55.20$ $\sigma=0.97$

MIXTURE%	FREQUENCY(Brain) 1750MHz
Water	69.61
Glycol	29.97
Salt	0.12
Dielectric Paramters Target Value	f=1750MHz $\epsilon=53.40$ $\sigma=1.49$

MIXTURE%	FREQUENCY(Brain) 1900MHz
Water	69.91
Glycol monobutyl	29.96
Salt	0.13
Dielectric Paramters Target Value	f=1900MHz $\epsilon=53.30$ $\sigma=1.52$

MIXTURE%	FREQUENCY(Brain) 2450MHz
Water	73.20
Glycol	26.70
Salt	0.10
Dielectric Paramters Target Value	f=2450MHz $\epsilon=52.70$ $\sigma=1.95$

#### 4.8. Tissue equivalent liquid properties

Dielectric performance of Head and Body tissue simulating liquid




Frequency	Description	Dielectric parameters	
		$\epsilon_r$	$\sigma$
835MHz(Head)	Target Value $\pm 5\%$	41.5 (39.4~43.6)	0.90 (0.86~0.95)
	Measurement Value 2013-09-25	42.05	0.91
835MHz(Body)	Target Value $\pm 5\%$	56.1 (53.30~58.91)	0.97 (0.90~1.00)
	Measurement Value 2013-09-25	56.70	0.95
1900MHz(Head)	Target Value $\pm 5\%$	40.0 (38.0~42.0)	1.40 (1.33~1.47)
	Measurement Value 2013-09-26	40.60	1.35
1900MHz(Body)	Target Value $\pm 5\%$	54.00 (51.30~56.70)	1.45 (1.38~1.52)
	Measurement Value 2013-09-26	54.30	1.48
2450MHz(Head)	Target Value $\pm 5\%$	39.2 (37.2~41.2)	1.80 (1.71~1.89)
	Measurement Value 2013-09-27	39.1	1.82
2450MHz(Body)	Target Value $\pm 5\%$	52.7 (50.1~55.3)	1.95 (1.85~2.05)
	Measurement Value 2013-09-27	52.9	1.92

#### 4.9. System Check

The purpose of the system check is to verify that the system operates within its specifications at the device test frequency. The system check is a simple check of repeatability to make sure that the system works correctly at the time of the compliance test;

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ( $\pm 10\%$ ).

System check is performed regularly on all frequency bands where tests are performed with the DASY5 system.

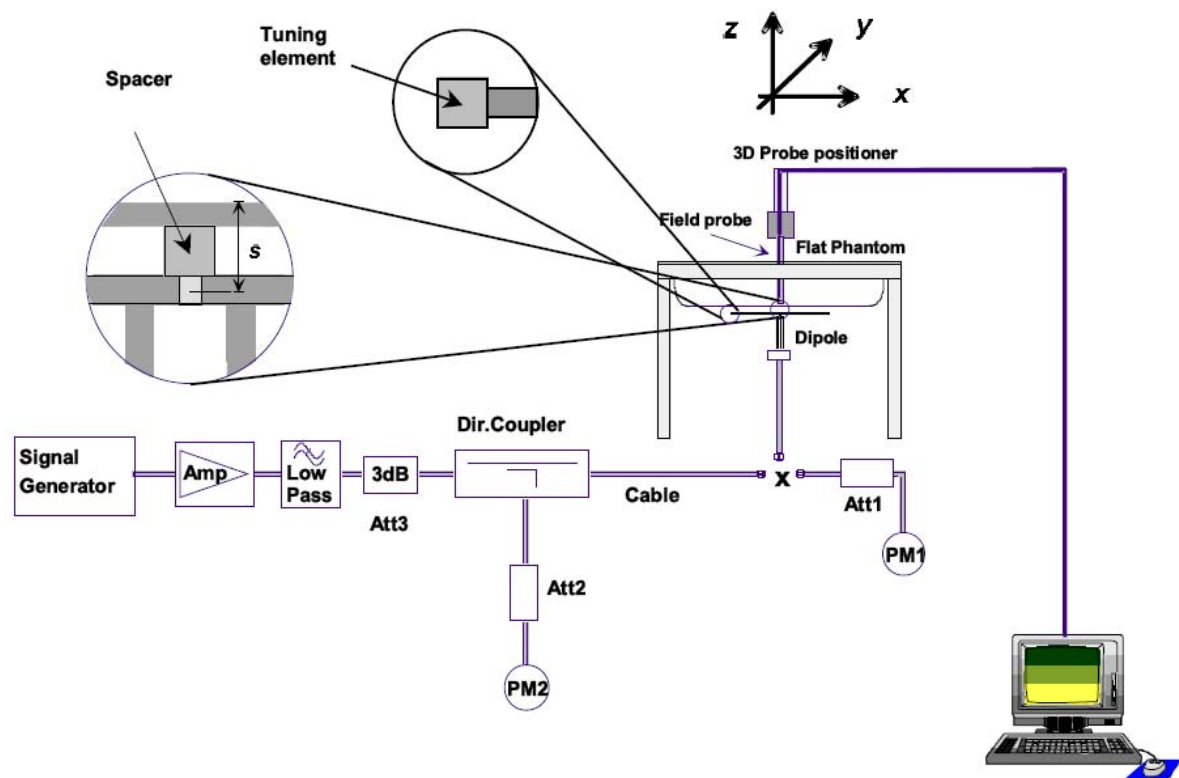

The output power on dipole port must be calibrated to 24 dBm (250mW) before dipole is connected.

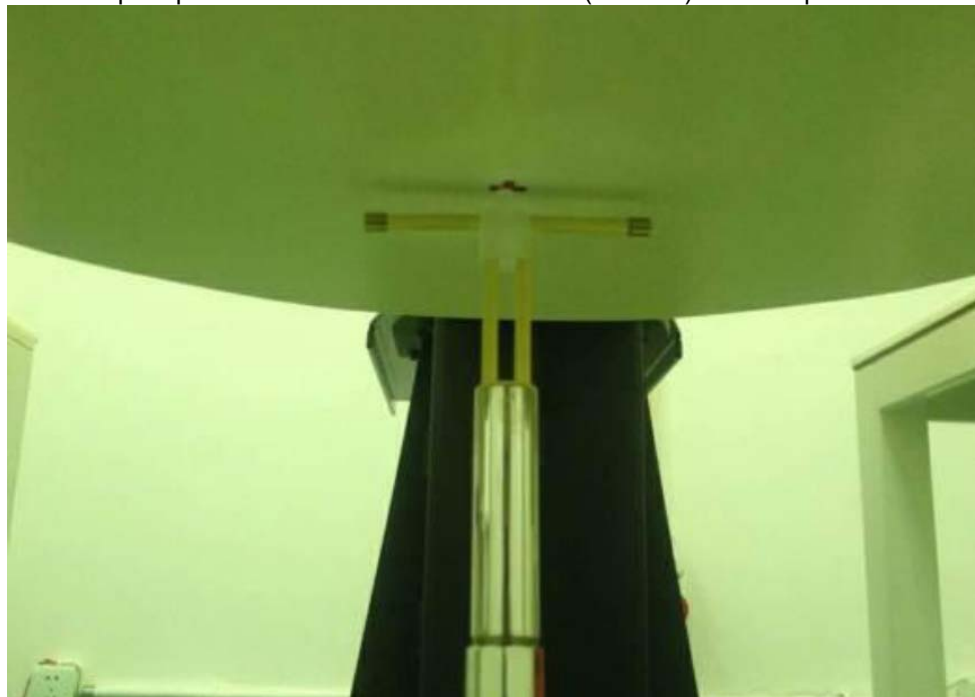


Photo of Dipole Setup

#### System Validation of Head

Measurement is made at temperature 22.0 °C and relative humidity 55%.							
Measurement Date: 835MHz Sep 25 <sup>th</sup> , 2013;							
Verification results	Frequency (MHz)	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
	835	1.52	2.33	1.40	2.36	-7.89%	1.29%

Measurement is made at temperature 22.0 °C and relative humidity 55%.							
Measurement Date: 1900MHz Sep 26 <sup>th</sup> , 2013;							
Verification results	Frequency (MHz)	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
	1900	5.24	9.94	5.01	9.56	-4.39%	-3.82%

Measurement is made at temperature 22.0 °C and relative humidity 55%.							
Measurement Date: 2450MHz Sep 27 <sup>th</sup> , 2013;							
Verification results	Frequency (MHz)	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
	2450	6.36	13.70	5.93	12.76	-6.76%	-8.20%

#### System Validation of Body

Measurement is made at temperature 22.0 °C and relative humidity 55%.							
Measurement Date: 835MHz Sep 25 <sup>th</sup>							
Verification results	Frequency (MHz)	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
	835	1.60	2.44	1.58	2.39	-1.25%	-2.05%

Measurement is made at temperature 22.0 °C and relative humidity 55%.							
Measurement Date: 1900MHz Sep 26 <sup>th</sup>							
Verification results	Frequency (MHz)	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
	1900	5.32	10.20	5.44	10.20	2.26%	0.00%

Measurement is made at temperature 22.0 °C and relative humidity 55%.							
Measurement Date: 1900MHz Sep 27 <sup>th</sup>							
Verification results	Frequency (MHz)	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
	2450	5.98	12.80	6.12	12.88	2.34%	0.63%

## 4.10. SAR measurement procedure

### 4.10.1 Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in Picture 11.1.


Step 1: The tests described in 11.2 shall be performed at the channel that is closest to the centre of the transmit frequency band ( $f_c$ ) for:

- all device positions (cheek and tilt, for both left and right sides of the SAM phantom;
- all configurations for each device position in a), e.g., antenna extended and retracted, and
- all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e.,  $N_c > 3$ ), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 11.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

Step 3: Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

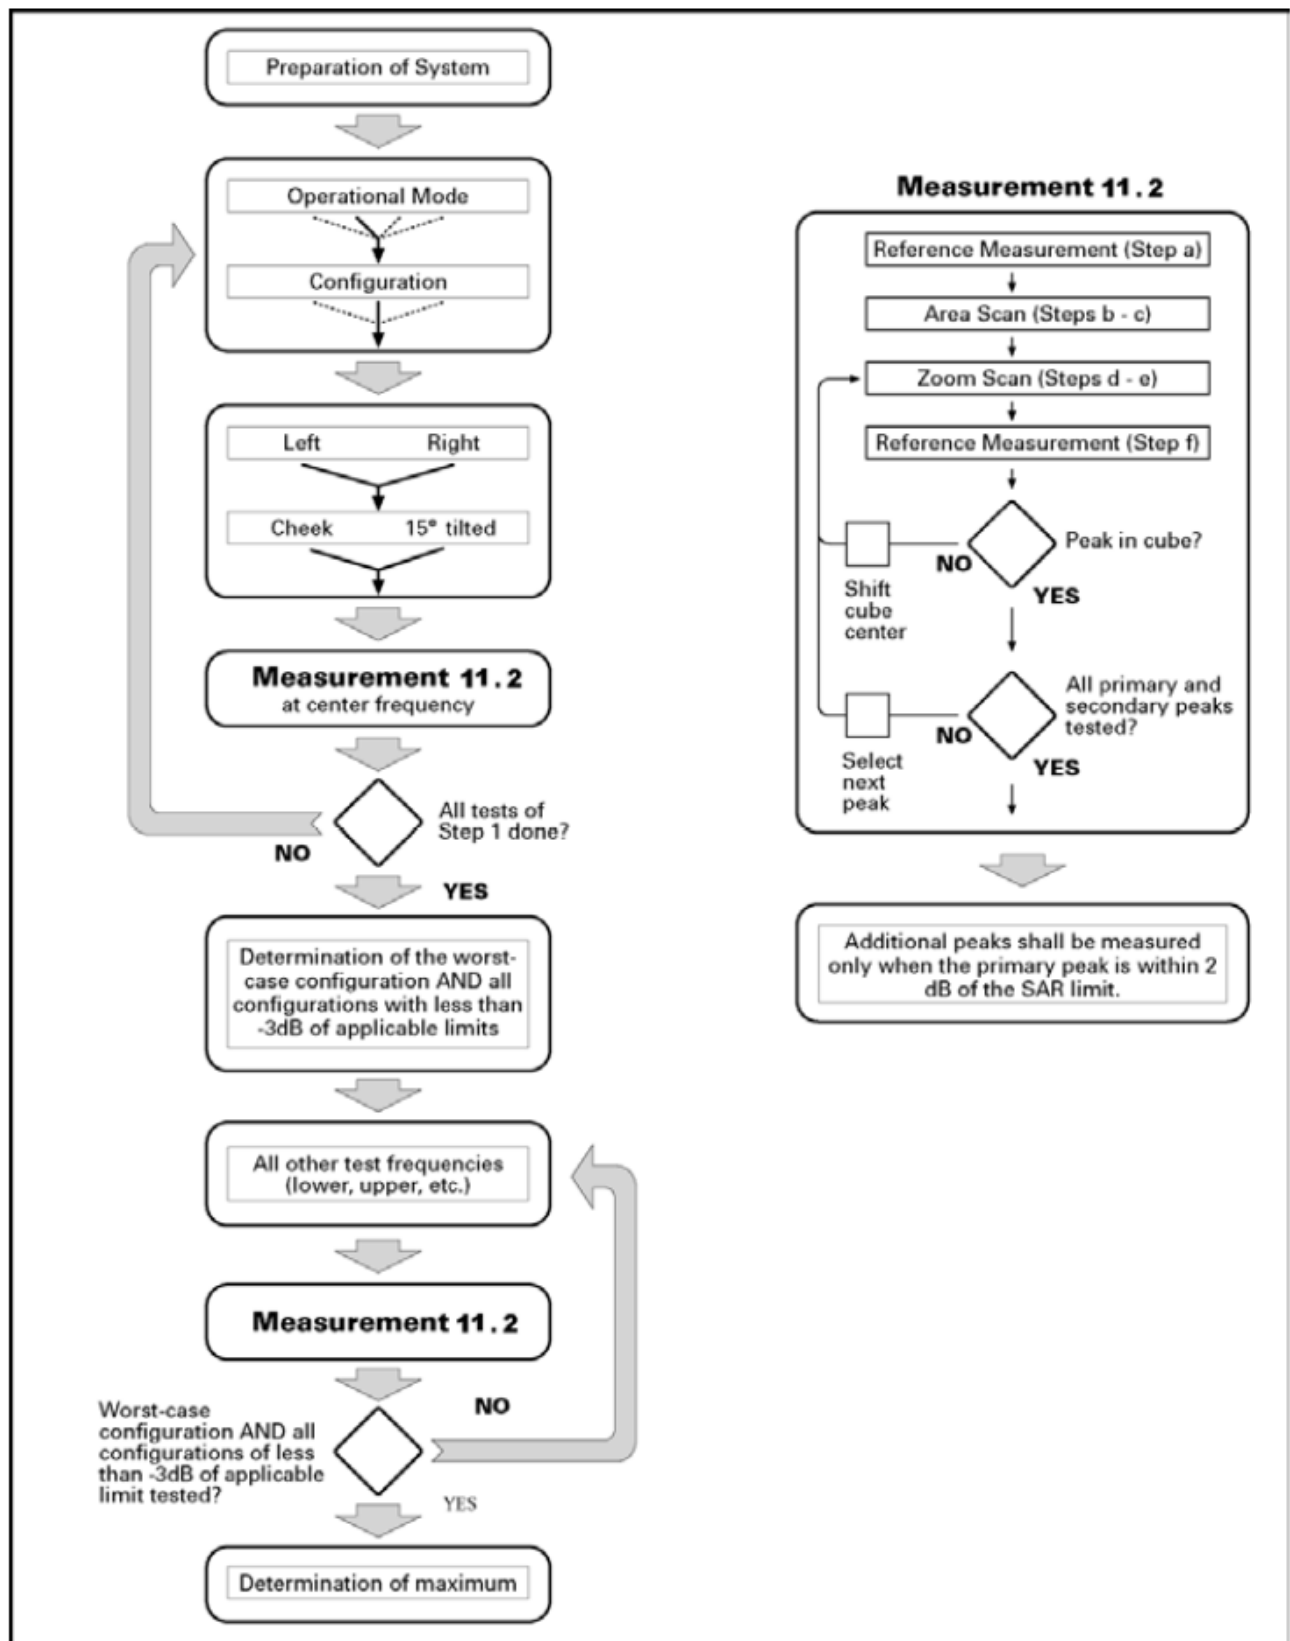

Picture 10.1 Block diagram of the tests to be performed

#### 4.10.2 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements,

according to the reference distribution functions specified in IEEE Std 1528-2003. The results should be documented as part of the system validation records and may be requested to support test results when all the measurement parameters in the following table are not satisfied.

			$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$			$\leq 2$ GHz: $\leq 15$ mm 2 – 3 GHz: $\leq 12$ mm	3 – 4 GHz: $\leq 12$ mm 4 – 6 GHz: $\leq 10$ mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$			$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the area scan based <i>I-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

#### 4.10.3 GSM Test Configuration

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a System Simulator (SS) by air link. Using E5515C the power level is set to “5” for GSM 850, set to “0” for GSM 1900. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslots is 5. The EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslots is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot. The allowed power reduction in the multi-slot configuration is as following: Output power of reductions:

The allowed power reduction in the multi-slot configuration

Number of timeslots in uplink assignment	Permissible nominal reduction of maximum output power (dB)
1	0
2	0 to 3.0
3	1.8 to 4.8
4	3.0 to 6.0

#### 4.10.4 UMTS Test Configuration

##### 4.10.4.1 Output power Verification

Maximum output power is verified on the High, Middle and Low channel according to the procedures described in section 5.2 of 3GPP TS 34. 121, using the appropriate RMC or AMR with TPC(transmit power control) set to all up bits for WCDMA/HSDPA or applying the required inner loop power control procedures to the maximum output power while HSUPA is active. Results for all applicable physical channel configuration (DPCCH, DPDCH<sub>n</sub> and spreading codes, HSDPA, HSPA) should be tabulated in the SAR report. All configuration that are not supported by the DUT or can not be measured due to technical or equipment limitations should be clearly identified

##### 4.10.4.2 Head SAR Measurements

SAR for head exposure configurations in voice mode is measured using a 12.2kbps RMC with TPC bits configured to all up bits. SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2kbps AMR is less than 1/4 dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2kbps AMR with a 3.4 kbps SRB( Signaling radio bearer) using the exposure configuration that results in the highest SAR in 12.2kbps RMC for that RF channel.

##### 4.10.4.3 Body SAR Measurements

SAR for body exposure configurations in voice and data modes is measured using 12.2kbps RMC with TPC bits configured to all up bits. SAR for other spreading codes and multiple DPDCH<sub>n</sub>, when supported by the DUT, are not required when the maximum average output of each RF channel, for each spreading code and DPDCH<sub>n</sub> configuration, are less than 1/4 dB higher than those measured in 12.2kbps RMC. Otherwise, SAR is measured on the maximum output channel with an applicable RMC configuration for the corresponding spreading code or DPDCH<sub>n</sub> using the exposure configuration that results in the highest SAR with 12.2 kbps RMC. When more than 2 DPDCH<sub>n</sub> are supported by the DUT, it may be necessary to configure additional DPDCH<sub>n</sub> for a DUT using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

##### 4.10.4.4 HSDPA Test Configuration

SAR for body exposure configurations is measured according to the 'Body SAR Measurements' procedures of that section. In addition, body SAR is also measured for HSDPA when the maximum average output of each RF channel with HSDPA active is at least ¼ dB higher than that measured without HSDPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA.

HSDPA should be configured according to the UE category of a test device. The number of HSDSCH/ HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors( $\beta_c$ ,  $\beta_d$ ), and HS-DPCCH power offset parameters ( $\Delta_{ACK}$ ,  $\Delta_{NACK}$ ,  $\Delta_{CQI}$ ) should be set according to values indicated in the Table below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Subtests for UMTS Release 5 HSDPA

Sub-set	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}$ (note 1, note 2)	CM(dB) (note 3)	MPR(dB)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (note 4)	15/15 (note 4)	64	2/15 (note 4)	24/15	1.0	0.0
3	15/15	8/15	64	2/15	30/15	1.5	0.5
4	15/15	4/15	64	2/15	30/15	1.5	0.5

Note1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI}$  = 8,  $A_{hs} = \beta_{hs}/\beta_c = 30/15$ ,  $\beta_{hs} = 30/15 * \beta_c$

Note2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude(EVM) with HS-DPCCH test in clause 5.13.1.A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK}$  = 8(  $A_{hs} = 30/15$ ) with  $\beta_{hs} = 30/15 * \beta_c$ , and  $\Delta_{CQI}$  = 7(  $A_{hs} = 24/15$ ) with  $\beta_{hs} = 24/15 * \beta_c$ .

Note3: CM=1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period(TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TFC1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

Settings of required H-Set 1 QPSK in HSDPA mode

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	534
Inter-TTI Distance	TTI's	3
Number of HARQ Processes	Processes	2
Information Bit Payload ( $N_{INF}$ )	Bits	3202
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	4800
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	9600
Coding Rate	/	0.67
Number of Physical Channel Codes	Codes	5
Modulation	/	QPSK

**4.10.4.5 HSUPA Test Configuration**

Body SAR is also measured for HSPA when the maximum average output of each RF channel with HSPA active is at least ¼ dB higher than that measured without HSPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 with power control algorithm 2, according to the highest body SAR configuration in 12.2 kbps RMC without HSPA.

Due to inner loop power control requirements in HSPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA should be configured according to the  $\beta$  values indicated below as well as other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Devices' sections of 3 G device.

Sub-Test 5 Setup for Release 6 HSUPA

Sub-set	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}^{(1)}$	$\beta_{ec}$	$\beta_{ed}$	$\beta_{ed}$ (SF)	$\beta_{ed}$ (codes)	CM (2) (dB)	MPR (dB)	AG <sup>(4)</sup> Index	E-TFCI
1	11/15 <sup>(3)</sup>	15/15 <sup>(3)</sup>	64	11/15 <sup>(3)</sup>	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	9/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	15/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4	1	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 <sup>(4)</sup>	15/15 <sup>(4)</sup>	64	15/15 <sup>(4)</sup>	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1:  $\Delta ACK$ ,  $\Delta NACK$  and  $\Delta CQI = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Figure 5.1g.

Note 6:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value

HSUPA UE category

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI (ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	10	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	2	2 SF2 & 2 SF4	11484	5.76
	4	4	10		20000	2.00
7 (No DPDCH)	4	8	2	2 SF2 & 2 SF4	22996	?
	4	4	10		20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE Categories 1 to 6 supports QPSK only. UE Category 7 supports QPSK and 16QAM. (TS25.306-7.3.0)

#### 4.10.5 Wi-Fi Test Configuration

For WLAN SAR testing, WLAN engineering testing software installed on the DUT can provide continuous transmitting RF signal. The Tx power is set to 23 for 802.11 b mode, set to 19 for 802.11 g mode, set to 19 for 802.11 n mode by software, This RF signal utilized in SAR measurement has almost 100% duty cycle and its crest factor is 1.

For the 802.11b/g/n SAR tests, a communication link is set up with the test mode software for WIFI mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. Each channel should be tested at the highest power rate.

802.11b/g/n operating modes are tested independently according to the service requirements in each frequency band. 802.11b/g/n modes are tested on the maximum average output channel;

SAR is not required for 802.11g/n channels when the maximum average output power is less than 0.25dB higher than that measured on the corresponding 802.11b channels.

#### 4.10.6 BT Test Configuration

For BT SAR testing, BT engineering testing software installed on the EUT can provide continuous transmitting RF signal with maximum output power. This RF signal utilized in SAR measurement has Almost 100% duty cycle and its crest factor is 1.

#### 4.10.7 Power Drift

To control the output power stability during the SAR test, DASY5 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Table 14.1 to Table 14.11 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

#### 4.10.8 Area Scan Based 1-g SAR

##### 4.10.8.1 Requirement of KDB

According to the KDB447498 D01 v05, when the implementation is based the specific polynomial fit algorithm as presented at the 29th Bioelectromagnetics Society meeting (2007) and the estimated 1-g SAR is  $\leq 1.2$  W/kg, a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. The SAR system verification must also demonstrate that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR (See Annex B). When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

##### 4.10.8.2 Fast SAR Algorithms

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FAST SAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz) and for both 1- and 10-g averaged SAR using a sample of 264 SAR measurements from 55 wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm are 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30-6000MHz. Details of this study can be found in the BEMS 2007 Proceedings.

Both algorithms are implemented in DASY software.



## 5. TEST CONDITIONS AND RESULTS

### 5.1. Conducted Power Results

Max Conducted power measurement results and power drift from tune-up tolerance provide by manufacturer:

*The conducted power measurement results for GSM850/PCS1900*

Test Mode	Conducted Power (dBm)		
GSM 850MHz	Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)
	32.07	32.13	32.33
GSM 1900MHz	Channel 810(1909.8MHz)	Channel 661(1880.0MHz)	Channel 512(1850.2MHz)
	28.12	28.68	29.74

*The conducted power measurement results for GPRS/EGPRS*

Test Mode	Measured Power (dBm)			Calculation (dB)	Averaged Power (dBm)		
GSM 850 GPRS (GMSK)	Test Channel				Test Channel		
	251	190	128		251	190	128
1 Txslot	32.32	32.16	32.10	-9.03	23.29	23.13	23.07
2 Txslot	30.15	30.02	29.96	-6.02	24.13	24.00	23.94
3 Txslot	28.69	28.49	28.37	-4.26	24.43	24.23	24.11
4 Txslot	27.77	27.53	27.45	-3.01	24.76	24.52	24.44
Test Mode	Measured Power (dBm)			Calculation (dB)	Averaged Power (dBm)		
GSM 850 EGPRS (GMSK)	Test Channel				Test Channel		
	251	190	128		251	190	128
1 Txslot	32.22	32.14	32.09	-9.03	23.19	23.11	23.06
2 Txslot	30.10	30.02	30.03	-6.02	24.08	24.00	24.01
3 Txslot	28.63	28.44	28.40	-4.26	24.37	24.18	24.14
4 Txslot	27.52	27.37	27.38	-3.01	24.51	24.36	24.37
Test Mode	Measured Power (dBm)			Calculation (dB)	Averaged Power (dBm)		
GSM1900 GPRS (GMSK)	Test Channel				Test Channel		
	810	661	512		810	661	512
1 Txslot	28.12	28.68	29.74	-9.03	19.09	19.65	20.71
2 Txslot	27.23	27.66	28.36	-6.02	21.21	21.64	22.34
3 Txslot	25.97	26.32	26.82	-4.26	21.71	22.06	22.56
4 Txslot	25.01	25.54	26.17	-3.01	22.00	22.53	23.16
Test Mode	Measured Power (dBm)			Calculation (dB)	Averaged Power (dBm)		
GSM1900 EGPRS (GMSK)	Test Channel				Test Channel		
	810	661	512		810	661	512
1 Txslot	28.05	28.68	29.72	-9.03	19.02	19.68	19.97
2 Txslot	26.77	27.62	28.39	-6.02	20.75	21.08	20.98
3 Txslot	25.82	26.29	26.78	-4.26	21.56	21.13	20.96
4 Txslot	25.08	25.54	26.20	-3.01	22.07	21.37	21.20

#### NOTES:

##### 1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

**According to the conducted power as above, the body measurements are performed with 4Txslots for GPRS850 and GPRS1900.**

**Note:** 1. According to the KDB941225 D03, "when SAR tests for EDGE or EGPRS mode is necessary, GMSK modulation should be used".

2. The product can only supported EDGE Downlink mode and can not support Uplink mode;so can not need test SAR for EDGE at 8PSK modulation.

**The conducted power measurement results for WCDMA**

Item	band	FDD Band V result (dBm)			FDD Band II result (dBm)		
		Test Channel			Test Channel		
	ARFCN	4132	4183	4233	9262	9400	9538
5.2(WCDMA)	\	22.99	22.09	23.08	22.86	22.23	22.35
5.2AA (HSDPA)	1	22.93	22.04	22.94	22.80	22.21	22.29
	2	22.85	21.96	22.88	22.69	22.20	22.16
	3	22.42	21.58	22.43	22.31	21.88	21.92
	4	22.36	21.52	22.39	22.24	21.79	21.80
5.2B (HSUPA)	1	22.91	22.04	22.94	22.77	22.18	22.24
	2	22.45	21.67	22.49	22.25	21.79	21.81
	3	22.88	21.93	22.87	22.72	22.14	22.20
	4	22.51	21.70	22.53	22.31	21.80	21.75
	5	22.86	22.02	22.90	22.77	22.13	22.19

**Note:** HSUPA body SAR are not required, because maximum average output power of each RF channel with HSDPA active is not 1/4 dB higher than that measured without HSUPA and the maximum SAR for WCDMA850 and WCDMA1900 are not above 75% of the SAR limit.

**WLAN**

Mode	Channel	Frequency (MHz)	Worst case Data rate of worst case	Conducted Output Power (dBm)	
				Peak	Average
802.11b	1	2412	1Mbps	17.15	14.26
	6	2437	1Mbps	17.77	14.55
	11	2462	1Mbps	17.68	14.50
802.11g	1	2412	6Mbps	16.03	11.78
	6	2437	6Mbps	16.44	12.45
	11	2462	6Mbps	16.84	12.68
802.11n(20MHz)	1	2412	6.5 Mbps	15.86	10.35
	6	2437	6.5 Mbps	16.11	10.78
	11	2462	6.5 Mbps	16.33	10.89
802.11n(40MHz)	3	2422	13.5 Mbps	15.49	9.85
	6	2437	13.5 Mbps	15.76	10.03
	9	2452	13.5 Mbps	15.71	10.01

**Note:** SAR is not required for 802.11b/g/n channels if the output power is less than 0.25dB higher than that measured on the corresponding 802.11b channels, and for each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 0.25dB higher than those measured at the lowest data rate. According to the above conducted power, the EUT should not be tested for “802.11b/g/n”.

**Bluetooth V2.1+EDR**

Mode	Channel	Frequency (MHz)	Conducted Peak Output Power (dBm)
GFSK	00	2402	6.70
	41	2441	6.98
	79	2480	6.77
$\pi$ /4DQPSK	00	2402	5.81
	40	2441	6.01
	79	2480	5.74
8DPSK	00	2402	5.65
	40	2441	5.86
	79	2480	5.62

**Bluetooth 4.0**

Mode	Channel	Frequency (MHz)	Conducted Peak Output Power (dBm)
GFSK	00	2402	1.87
	19	2440	2.48
	39	2480	2.97

**Manufacturing tolerance****GSM Speech**

<b>GSM 850</b>			
Channel	Channel 251	Channel 190	Channel 190
Target (dBm)	31.50	31.50	31.50
Tolerance $\pm$ (dB)	1	1	1
<b>GSM 1900</b>			
Channel	Channel 810	Channel 661	Channel 512
Target (dBm)	29.00	29.00	29.00
Tolerance $\pm$ (dB)	1	1	1

**GPRS/EGPRS (GMSK Modulation)**

<b>GSM 850 GPRS</b>				
Channel		251	190	128
1 Txslot	Target (dBm)	31.5	31.5	31.5
	Tolerance $\pm$ (dB)	1	1	1
2 Txslot	Target (dBm)	29.5	29.5	29.5
	Tolerance $\pm$ (dB)	1	1	1
3 Txslot	Target (dBm)	28.0	28.0	28.0
	Tolerance $\pm$ (dB)	1	1	1
4 Txslot	Target (dBm)	27.0	27.0	27.0
	Tolerance $\pm$ (dB)	1	1	1
<b>GSM 850 EGPRS</b>				
Channel		251	190	128
1 Txslot	Target (dBm)	31.5	31.5	31.5
	Tolerance $\pm$ (dB)	1	1	1
2 Txslot	Target (dBm)	29.5	29.5	29.5
	Tolerance $\pm$ (dB)	1	1	1
3 Txslot	Target (dBm)	28.0	28.0	28.0
	Tolerance $\pm$ (dB)	1	1	1
4 Txslot	Target (dBm)	27.0	27.0	27.0
	Tolerance $\pm$ (dB)	1	1	1
<b>GSM 1900 GPRS</b>				
Channel		810	661	512
1 Txslot	Target (dBm)	29.0	29.0	29.0
	Tolerance $\pm$ (dB)	1	1	1
2 Txslot	Target (dBm)	27.5	27.5	27.5
	Tolerance $\pm$ (dB)	1	1	1
3 Txslot	Target (dBm)	26.0	26.0	26.0
	Tolerance $\pm$ (dB)	1	1	1
4 Txslot	Target (dBm)	26.0	26.0	26.0
	Tolerance $\pm$ (dB)	1	1	1
<b>GSM 1900 EGPRS</b>				
Channel		810	661	512
1 Txslot	Target (dBm)	29.0	29.0	29.0
	Tolerance $\pm$ (dB)	1	1	1
2 Txslot	Target (dBm)	27.5	27.5	27.5
	Tolerance $\pm$ (dB)	1	1	1
3 Txslot	Target (dBm)	26.0	26.0	26.0
	Tolerance $\pm$ (dB)	1	1	1
4 Txslot	Target (dBm)	26.0	26.0	26.0
	Tolerance $\pm$ (dB)	1	1	1

**WCDMA**

<b>WCDMA Band V</b>			
Channel	Channel 4132	Channel 4182	Channel 4233
Target (dBm)	22.5	22.5	22.5
Tolerance $\pm$ (dB)	1	1	1
<b>WCDMA Band II</b>			
Channel	Channel 810	Channel 661	Channel 512
Target (dBm)	22.5	22.5	22.5
Tolerance $\pm$ (dB)	1	1	1

**WLAN**

<b>802.11b</b>			
Channel	Channel 1	Channel 6	Channel 11
Target (dBm)	14.0	14.0	14.0
Tolerance $\pm$ (dB)	1	1	1
<b>802.11g</b>			
Channel	Channel 810	Channel 661	Channel 512
Target (dBm)	12.0	12.0	12.0
Tolerance $\pm$ (dB)	1	1	1
<b>802.11n(20MHz)</b>			
Channel	Channel 1	Channel 6	Channel 11
Target (dBm)	10.0	10.0	10.0
Tolerance $\pm$ (dB)	1	1	1
<b>802.11n(40MHz)</b>			
Channel	Channel 3	Channel 6	Channel 9
Target (dBm)	10.0	10.0	10.0
Tolerance $\pm$ (dB)	1	1	1

**Bluetooth v2.1+EDR**

<b>GFSK</b>			
Channel	Channel 00	Channel 41	Channel 79
Target (dBm)	6.0	6.0	6.0
Tolerance $\pm$ (dB)	1	1	1
<b>8DPSK</b>			
Channel	Channel 00	Channel 41	Channel 79
Target (dBm)	6.0	6.0	6.0
Tolerance $\pm$ (dB)	1	1	1
<b><math>\pi/4</math>DQPSK</b>			
Channel	Channel 00	Channel 41	Channel 79
Target (dBm)	6.0	6.0	6.0
Tolerance $\pm$ (dB)	1	1	1

**Bluetooth 4.0**

<b>GFSK</b>			
Channel	Channel 00	Channel 19	Channel 39
Target (dBm)	2.0	2.0	2.0
Tolerance $\pm$ (dB)	1	1	1

**5.2. Simultaneous TX SAR Considerations****5.2.1 Introduction**

Simultaneous multi-band transmission means that the device can transmit multiple transmission modes at the same time. The time-averaged output power of a secondary transmitter may be much lower than that of the primary transmitter. In some cases, the secondary transmitter can be excluded from SAR testing when used alone. However, when the primary and secondary transmitters are used together, the SAR limits may still be exceeded. A means of determining the threshold power for the secondary transmitter allows it to be excluded from SAR testing is needed.

For the DUT, the WLAN and BT modules sharing difference antenna, and so these two modules can not transmit signal simultaneously; WCDMA and GSM module sharing a single antenna, So we can get following combination that can transmit signal simultaneously.


WCDMA and BT

GSM and BT

GSM and WLAN

WLAN and WCDMA

**5.2.2 Transmit Antenna Separation Distances**

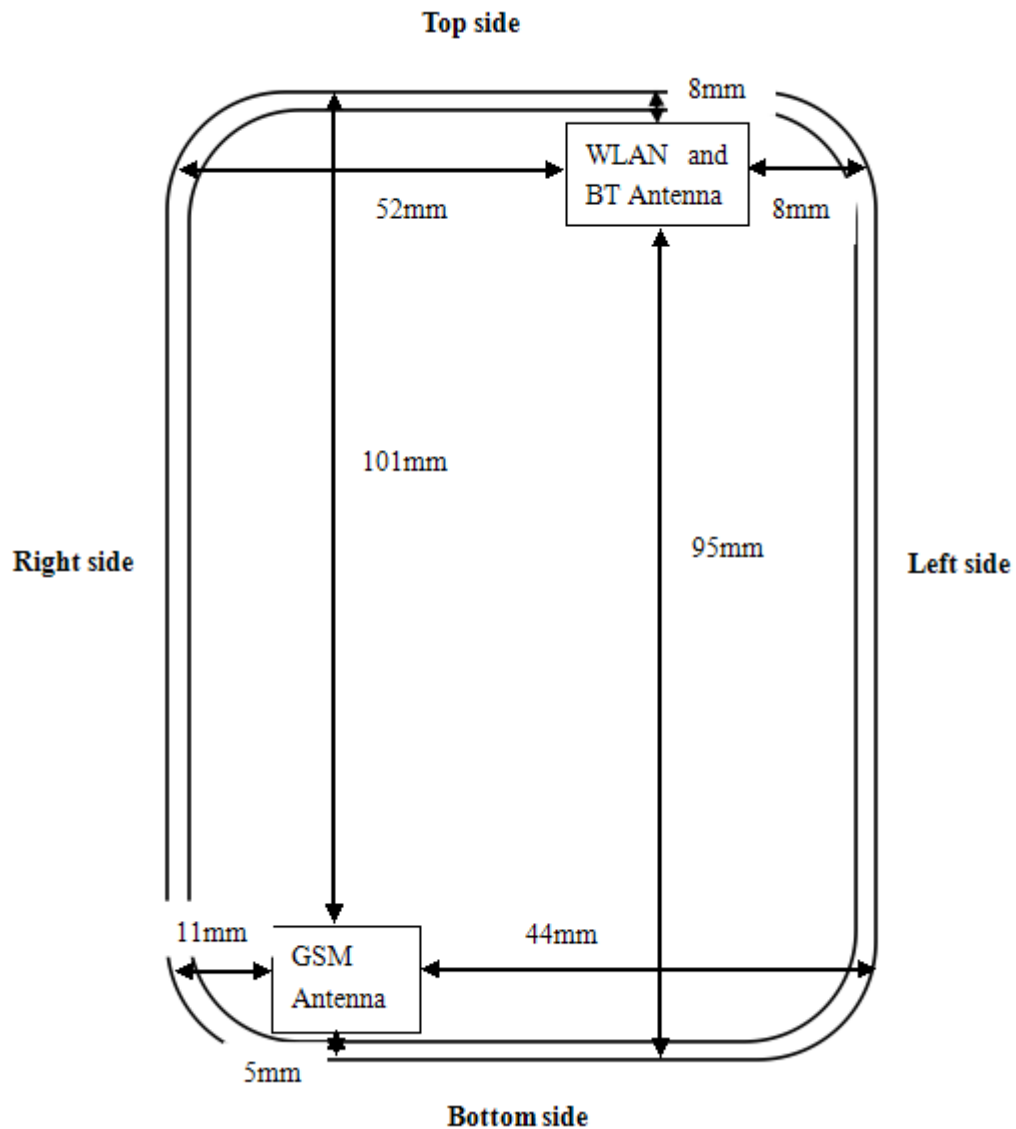

### 5.2.2 SAR Measurement Positions

According to the KDB941225 D06 Hot Spot SAR v01, the edges with less than 2.5 cm distance to the antennas need to be tested for SAR.

SAR measurement positions						
Mode	Front	Rear	Left edge	Right edge	Top edge	Bottom edge
Main antenna(GSM/WCDMA)	Yes	Yes	Yes	Yes	Yes	Yes
WLAN	Yes	Yes	Yes	No	Yes	No

### 5.2.3 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied.

The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR, where}$$

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

## Appendix A

## SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and ≤ 50 mm

Approximate SAR Test Exclusion Power Thresholds at Selected Frequencies and Test Separation Distances are illustrated in the following Table.

MHz	5	10	15	20	25	mm
150	39	77	116	155	194	SAR Test Exclusion Threshold (mW)
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	
1500	12	24	37	49	61	
1900	11	22	33	44	54	
2450	10	19	29	38	48	
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	

Picture 12.2 Power Thresholds

Table 5.2.3.1 Standalone SAR test exclusion considerations

Band/Mode	F(GHz)	SAR test exclusion threshold (mW)	RF output power		SAR test exclusion
			dBm	mW	
2.4GHz WLAN 802.11 b	2.45	19	14.55	28.51	Yes
Bluetooth	2.441	19	6.98	4.99	No

## 5.2.4 Estimated SAR

When standalone SAR is not required to be measured per FCC KDB 447498 D01, the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{(\text{max.power of channel, including tune-up tolerance, mW})}{(\text{min.test separation distance, mm})} * \frac{\sqrt{f(\text{GHz})}}{7.5}$$

Per FCC KD B447498 D01, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the transmitting antenna in a specific a physical test configuration is ≤ 1.6 W/Kg. When the sum is greater than the SAR limit, SAR test exclusion is determined by the SAR to peak location separation ratio.

$$\text{Ratio} = \frac{(\text{SAR}_1 + \text{SAR}_2)^{1.5}}{(\text{peak location separation, mm})} < 0.04$$

For Bluetooth v2.1+EDR, the Estimated SAR for Head at 5mm for estimate and 10mm to Estimated Body SAR

$$\text{Estimated SAR}_{\text{Head}} = ((5.01\text{mW})/5\text{mm}) * (1.5627/7.5) = 0.2089\text{W/Kg}$$

$$\text{Estimated SAR}_{\text{Body}} = ((5.01\text{mW})/10\text{mm}) * (1.5627/7.5) = 0.1045\text{W/Kg}$$

For Bluetooth 4.0, the Estimated SAR for Head at 5mm for estimate and 10mm to Estimated Body SAR

$$\text{Estimated SAR}_{\text{Head}} = ((2.00\text{mW})/5\text{mm}) * (1.5627/7.5) = 0.08344\text{W/Kg}$$

$$\text{Estimated SAR}_{\text{Body}} = ((2.00\text{mW})/10\text{mm}) * (1.5627/7.5) = 0.04167\text{W/Kg}$$

As Estimated SAR of Bluetooth v2.1+EDR higher than Bluetooth 4.0, so we used Bluetooth v2.1+EDR Estimated SAR to Evaluation Simultaneous SAR.

## 5.2.5 Evaluation of Simultaneous SAR

Transmitter						Test Position	Main Antenna Reported SAR(1g) (W/kg)	Wi-Fi Reported SAR(1g) (W/kg)	Bluetooth Estimated SAR (W/Kg)	Summation Reported SAR(1g) (W/kg)	SAR –to-peak-location Separation Ratio	Simultaneous Measurement Required?
WCDMA Band II	WCDMA Band V	GSM 850	GSM 1900	WLAN	BT							
●				●		Head Left Touch	0.320	0.210		0.530<1.6	/	No
●					●	Head Left Touch	0.320		0.209	0.529<1.6	/	No
	●			●		Head Left Touch	0.371	0.210		0.581<1.6	/	No
	●				●	Head Left Touch	0.371		0.209	0.580<1.6	/	No
		●		●		Head Left Touch	0.367	0.210		0.577<1.6	/	No
		●			●	Head Left Touch	0.367		0.209	0.576<1.6	/	No
			●	●		Head Left Touch	0.473	0.210		0.683<1.6	/	No
			●		●	Head Left Touch	0.473		0.209	0.682<1.6	/	No
●				●		Body Rear	0.511	0.261		0.772<1.6	/	No
●					●	Body Rear	0.511		0.105	0.616<1.6	/	No
	●			●		Body Rear	0.569	0.261		0.830<1.6	/	No
	●				●	Body Rear	0.569		0.105	0.674<1.6	/	No
		●		●		Body Rear	0.702	0.261		0.963<1.6	/	No
		●			●	Body Rear	0.702		0.105	0.807<1.6	/	No
			●	●		Body Rear	0.725	0.261		0.986<1.6	/	No
			●		●	Body Rear	0.725		0.105	0.830<1.6	/	No

## 5.3. SAR Measurement Results

The product with 2 SIMs and 2 SIMs(SIM1 and SIM2) can not used Simultaneous, we tested 2 SIMs(SIM1 and SIM2) and recorded worst case at SIM 1

It is determined by user manual for the distance between the EUT and the phantom bottom. The distance is 10mm and just applied to the condition of body worn accessory.

The calculated SAR is obtained by the following formula:

$$\text{Reported SAR} = \text{Measured SAR} \times 10^{(P_{\text{target}} - P_{\text{measured}})/10}$$

$$\text{Scaling factor} = 10^{(P_{\text{target}} - P_{\text{measured}})/10}$$

$$\text{Reported SAR} = \text{Measured SAR} \times \text{Scaling factor}$$

Where  $P_{\text{target}}$  is the power of manufacturing upper limit;

$P_{\text{measured}}$  is the measured power;

Measured SAR is measured SAR at measured power which including power drift)

Reported SAR which including Power Drift and Scaling factor

## Duty Cycle

Test Mode	Duty Cycle
Speech for GSM850/1900	1:8.3
GPRS for GSM850/1900	1:2
WCDMA 850/1900	1:1
WiFi 2450	1:1

**SAR Values (GSM 850 MHz Band-Head)**

Test Frequency		Side	Test Position	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Measurement SAR over 1g(W/kg)	Power drift	Scaling Factor	Reported SAR over 1g(W/kg)	SAR limit 1g (W/kg)	Ref. Plot #
Ch	MHz										
128	824.20	Left	Touch	32.50	32.33	0.323	-0.02	1.04	0.336	1.60	1
190	836.60	Left	Touch	32.50	32.13	0.337	-0.05	1.09	0.367	1.60	2
251	848.80	Left	Touch	32.50	32.07	0.321	-0.10	1.11	0.356	1.60	3
128	824.20	Left	Tilt	32.50	32.33	0.308	-0.11	1.04	0.320	1.60	4
190	836.60	Left	Tilt	32.50	32.13	0.314	-0.16	1.09	0.342	1.60	5
251	848.80	Left	Tilt	32.50	32.07	0.310	-0.09	1.11	0.344	1.60	6
128	824.20	Right	Touch	32.50	32.33	0.257	-0.08	1.04	0.267	1.60	7
190	836.60	Right	Touch	32.50	32.13	0.262	-0.11	1.09	0.286	1.60	8
251	848.80	Right	Touch	32.50	32.07	0.252	-0.15	1.11	0.280	1.60	9
128	824.20	Right	Tilt	32.50	32.33	0.249	-0.18	1.04	0.259	1.60	10
190	836.60	Right	Tilt	32.50	32.13	0.268	-0.14	1.09	0.292	1.60	11
251	848.80	Right	Tilt	32.50	32.07	0.247	-0.10	1.11	0.274	1.60	12

**SAR Values (GSM 850 MHz Band-Body)**

Test Frequency		Mode (number of timeslots)	Test Position	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Measurement SAR over 1g(W/kg)	Power drift	Scaling Factor	Reported SAR over 1g(W/kg)	SAR limit 1g (W/kg)	Ref. Plot #
Ch	MHz										
190	836.60	GPRS (4)	Front	28.00	27.53	0.535	-0.24	1.12	0.599	1.60	13
190	836.60	GPRS (4)	Rear	28.00	27.53	0.627	0.03	1.12	0.702	1.60	14
128	824.20	GPRS (4)	Rear	28.00	27.45	0.608	0.12	1.14	0.693	1.60	15
251	848.80	GPRS (4)	Rear	28.00	27.77	0.614	-0.18	1.06	0.651	1.60	16
190	836.60	GPRS (4)	Left	28.00	27.53	0.355	0.16	1.12	0.398	1.60	17
190	836.60	GPRS (4)	Right	28.00	27.53	0.343	-0.04	1.12	0.384	1.60	18
190	836.60	GPRS (4)	Top	28.00	27.53	0.108	-0.20	1.12	0.121	1.60	19
190	836.60	GPRS (4)	Bottom	28.00	27.53	0.091	-0.17	1.12	0.102	N/A	20
190	836.60	EGPRS (4)	Rear	28.00	27.37	0.373	0.07	1.16	0.433	1.60	21
190	836.60	Speech	Rear with Headset	32.50	32.13	0.359	0.13	1.09	0.391	1.60	22

Note1: The distance between the EUT and the phantom bottom is 10mm.

**SAR Values (GSM 1900 MHz Band-Head)**

Test Frequency		Side	Test Position	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Measurement SAR over 1g(W/kg)	Power drift	Scaling Factor	Reported SAR over 1g(W/kg)	SAR limit 1g (W/kg)	Ref. Plot #
Ch	MHz										
512	1850.2	Left	Touch	30.00	29.74	0.315	-0.15	1.07	0.337	1.60	23
661	1880.0	Left	Touch	30.00	28.68	0.324	-0.10	1.45	0.470	1.60	24
810	1909.8	Left	Touch	30.00	28.12	0.307	-0.17	1.54	0.473	1.60	25
512	1850.2	Left	Tilt	30.00	29.74	0.310	0.14	1.07	0.332	1.60	26
661	1880.0	Left	Tilt	30.00	28.68	0.321	-0.10	1.45	0.465	1.60	27
810	1909.8	Left	Tilt	30.00	28.12	0.301	0.11	1.54	0.464	1.60	28
512	1850.2	Right	Touch	30.00	29.74	0.259	-0.17	1.07	0.277	1.60	29
661	1880.0	Right	Touch	30.00	28.68	0.267	-0.12	1.45	0.387	1.60	30
810	1909.8	Right	Touch	30.00	28.12	0.228	-0.21	1.54	0.351	1.60	31
512	1850.2	Right	Tilt	30.00	29.74	0.234	-0.03	1.07	0.250	1.60	32
661	1880.0	Right	Tilt	30.00	28.68	0.261	-0.16	1.45	0.378	1.60	33
810	1909.8	Right	Tilt	30.00	28.12	0.217	-0.04	1.54	0.334	1.60	34



**SAR Values (GSM 1900 MHz Band-Body)**

Test Frequency		Mode (number of timeslots)	Test Position	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Measurement SAR over 1g(W/kg)	Power drift	Scaling Factor	Reported SAR over 1g(W/kg)	SAR limit 1g (W/kg)	Ref. Plot #
Ch	MHz										
661	1880.0	GPRS (4)	Front	27.00	25.54	0.336	-0.08	1.40	0.470	1.60	35
661	1880.0	GPRS (4)	Rear	27.00	25.54	0.481	-0.18	1.40	0.673	1.60	36
512	1850.2	GPRS (4)	Rear	27.00	26.17	0.457	-0.20	1.21	0.553	1.60	37
810	1909.8	GPRS (4)	Rear	27.00	25.01	0.459	-0.14	1.58	0.725	1.60	38
661	1880.0	GPRS (4)	Left	27.00	25.54	0.161	0.03	1.40	0.225	1.60	39
661	1880.0	GPRS (4)	Right	27.00	25.54	0.152	-0.11	1.40	0.213	1.60	40
661	1880.0	GPRS (4)	Top	27.00	25.54	0.100	-0.01	1.40	0.140	1.60	41
661	1880.0	GPRS (4)	Bottom	27.00	25.54	0.112	-0.09	1.40	0.157	N/A	42
661	1880.0	EGPRS (4)	Rear	27.00	25.54	0.427	-0.25	1.40	0.598	1.60	43
190	836.60	Speech	Rear with Headset	30.00	28.68	0.439	-0.12	1.45	0.637	1.60	44

**SAR Values (WCDMA Band V-Head)**

Test Frequency		Side	Test Position	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Measurement SAR over 1g(W/kg)	Power drift	Scaling Factor	Reported SAR over 1g(W/kg)	SAR limit 1g (W/kg)	Ref. Plot #
Ch	MHz										
4132	826.40	Left	Touch	23.50	22.99	0.245	0.09	1.13	0.277	1.60	45
4182	836.40	Left	Touch	23.50	22.09	0.267	-0.14	1.39	0.371	1.60	46
4233	846.60	Left	Touch	23.50	23.08	0.238	-0.10	1.10	0.262	1.60	47
4132	826.40	Left	Tilt	23.50	22.99	0.237	0.08	1.13	0.268	1.60	48
4182	836.40	Left	Tilt	23.50	22.09	0.251	-0.02	1.39	0.349	1.60	49
4233	846.60	Left	Tilt	23.50	23.08	0.212	-0.10	1.10	0.233	1.60	50
4132	826.40	Right	Touch	23.50	22.99	0.192	0.15	1.13	0.217	1.60	51
4182	836.40	Right	Touch	23.50	22.09	0.207	-0.16	1.39	0.288	1.60	52
4233	846.60	Right	Touch	23.50	23.08	0.201	-0.06	1.10	0.221	1.60	53
4132	826.40	Right	Tilt	23.50	22.99	0.214	-0.17	1.13	0.242	1.60	54
4182	836.40	Right	Tilt	23.50	22.09	0.223	0.10	1.39	0.310	1.60	55
4233	846.60	Right	Tilt	23.50	23.08	0.208	-0.24	1.10	0.229	1.60	56

**SAR Values (WCDMA Band V-Body)**

Test Frequency		Mode (number of timeslots)	Test Position	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Measurement SAR over 1g(W/kg)	Power drift	Scaling Factor	Reported SAR over 1g(W/kg)	SAR limit 1g (W/kg)	Ref. Plot #
Ch	MHz										
4182	836.40	RMC	Front	23.50	22.09	0.323	-0.02	1.39	0.449	1.60	57
4182	836.40	RMC	Rear	23.50	22.09	0.409	0.27	1.39	0.569	1.60	58
4132	826.40	RMC	Rear	23.50	22.99	0.386	0.12	1.10	0.425	1.60	59
4233	846.60	RMC	Rear	23.50	23.08	0.392	-0.18	1.13	0.443	1.60	60
4182	836.40	RMC	Left	23.50	22.09	0.124	-0.11	1.39	0.172	1.60	61
4182	836.40	RMC	Right	23.50	22.09	0.111	-0.04	1.39	0.154	1.60	62
4182	836.40	RMC	Top	23.50	22.09	0.101	-0.22	1.39	0.140	1.60	63
4182	836.40	RMC	Bottom	23.50	22.09	0.112	-0.08	1.39	0.156	N/A	64
4182	836.40	Speech	Rear with Headset	23.50	22.09	0.314	-0.09	1.39	0.436	1.60	65

Note1: The distance between the EUT and the phantom bottom is 10mm.

**SAR Values (WCDMA Band II-Head)**

Test Frequency		Side	Test Position	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Measurement SAR over 1g(W/kg)	Power drift	Scaling Factor	Reported SAR over 1g(W/kg)	SAR limit 1g (W/kg)	Ref. Plot #
Ch	MHz										
9262	1852.4	Left	Touch	23.50	22.86	0.228	-0.27	1.16	0.264	1.60	66
9400	1880.0	Left	Touch	23.50	22.23	0.239	-0.17	1.34	0.320	1.60	67
9538	1907.6	Left	Touch	23.50	22.35	0.205	-0.14	1.30	0.267	1.60	68
9262	1852.4	Left	Tilt	23.50	22.86	0.201	-0.10	1.16	0.233	1.60	69
9400	1880.0	Left	Tilt	23.50	22.23	0.227	-0.19	1.34	0.304	1.60	70
9538	1907.6	Left	Tilt	23.50	22.35	0.211	-0.21	1.30	0.274	1.60	71
9262	1852.4	Right	Touch	23.50	22.86	0.201	-0.16	1.16	0.233	1.60	72
9400	1880.0	Right	Touch	23.50	22.23	0.214	-0.15	1.34	0.287	1.60	73
9538	1907.6	Right	Touch	23.50	22.35	0.208	-0.29	1.30	0.270	1.60	74
9262	1852.4	Right	Tilt	23.50	22.86	0.225	-0.01	1.16	0.261	1.60	75
9400	1880.0	Right	Tilt	23.50	22.23	0.231	-0.17	1.34	0.310	1.60	76
9538	1907.6	Right	Tilt	23.50	22.35	0.214	-0.12	1.30	0.278	1.60	77

**SAR Values (WCDMA Band II-Body)**

Test Frequency		Mode (number of timeslots)	Test Position	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Measurement SAR over 1g(W/kg)	Power drift	Scaling Factor	Reported SAR over 1g(W/kg)	SAR limit 1g (W/kg)	Ref. Plot #
Ch	MHz										
9400	1880.0	RMC	Front	23.50	22.23	0.223	-0.18	1.34	0.299	1.60	78
9400	1880.0	RMC	Rear	23.50	22.23	0.381	-0.08	1.34	0.511	1.60	79
9262	1852.4	RMC	Rear	23.50	22.35	0.334	-0.17	1.30	0.434	1.60	80
9538	1907.6	RMC	Rear	23.50	22.86	0.301	-0.21	1.16	0.349	1.60	81
9400	1880.0	RMC	Left	23.50	22.23	0.092	-0.02	1.34	0.123	1.60	82
9400	1880.0	RMC	Right	23.50	22.23	0.083	-0.14	1.34	0.111	1.60	83
9400	1880.0	RMC	Top	23.50	22.23	0.060	-0.03	1.34	0.080	1.60	84
9400	1880.0	RMC	Bottom	23.50	22.23	0.084	-0.08	1.34	0.113	N/A	85
9400	1880.0	Speech	Rear with Headset	23.50	22.23	0.281	-0.12	1.34	0.377	1.60	86

Note1: The distance between the EUT and the phantom bottom is 10mm.

**SAR Values (WLAN 2450MHz Band-Head)**

Test Frequency		Side	Test Position	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Measurement SAR over 1g(W/kg)	Power drift	Scaling Factor	Reported SAR over 1g (W/kg)	SAR limit 1g (W/kg)	Ref. Plot #
Ch	MHz										
6	2437	Left	Touch	15.00	14.55	0.189	-0.16	1.11	0.210	1.60	87
6	2437	Left	Tilt	15.00	14.55	0.175	-0.09	1.11	0.194	1.60	88
6	2437	Right	Touch	15.00	14.55	0.177	-0.11	1.11	0.196	1.60	89
6	2437	Right	Tilt	15.00	14.55	0.148	-0.07	1.11	0.164	1.60	90

**SAR Values (WLAN 2450 MHz Band-Body)**

Test Frequency		Test Position	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Measurement SAR over 1g(W/kg)	Power drift	Scaling Factor	Reported SAR over 1g (W/kg)	SAR limit 1g (W/kg)	Ref. Plot #
Ch	MHz									
6	2437	Front	15.00	14.55	0.227	0.01	1.11	0.252	1.60	91
6	2437	Rear	15.00	14.55	0.235	-0.17	1.11	0.261	1.60	92
6	2437	Left	15.00	14.55	0.162	-0.13	1.11	0.180	1.60	93
6	2437	Top	15.00	14.55	0.158	0.13	1.11	0.175	1.60	94
6	2437	Right	15.00	14.55	N/A	N/A	N/A	N/A	N/A	N/A
6	2437	Bottom	15.00	14.55	N/A	N/A	N/A	N/A	N/A	N/A

Note: 1. The distance between the EUT and the phantom bottom is 10mm.

2. According to KDB447498, When the 1-g SAR for the mid-band channel, or the channel with highest output power satisfy the following conditions, testing of the other channels in the band is not required.

≤0.8W/Kg and transmission band ≤100MHz;

≤0.6W/Kg and 100MHz ≤transmission band ≤200MHz;

≤ 0.4W/Kg and transmission band >200MHz

3. According to KDB 248227, Each channel should be tested at the lowest data rate in each mode.

#### 5.4. SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg (~10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

#### 5.5. Measurement Uncertainty (300MHz-3GHz)

No.	Error Description	Type	Uncertainty Value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
<b>Measurement System</b>										
1	Probe calibration	B	5.50%	N	1	1	1	5.50%	5.50%	$\infty$
2	Axial isotropy	B	4.70%	R	$\sqrt{3}$	0.7	0.7	1.90%	1.90%	$\infty$
3	Hemispherical isotropy	B	9.60%	R	$\sqrt{3}$	0.7	0.7	3.90%	3.90%	$\infty$
4	Boundary Effects	B	1.00%	R	$\sqrt{3}$	1	1	0.60%	0.60%	$\infty$
5	Probe Linearity	B	4.70%	R	$\sqrt{3}$	1	1	2.70%	2.70%	$\infty$
6	Detection limit	B	1.00%	R	$\sqrt{3}$	1	1	0.60%	0.60%	$\infty$
7	RF ambient conditions-noise	B	0.00%	R	$\sqrt{3}$	1	1	0.00%	0.00%	$\infty$
8	RF ambient conditions-reflection	B	0.00%	R	$\sqrt{3}$	1	1	0.00%	0.00%	$\infty$
9	Response time	B	0.80%	R	$\sqrt{3}$	1	1	0.50%	0.50%	$\infty$
10	Integration time	B	5.00%	R	$\sqrt{3}$	1	1	2.90%	2.90%	$\infty$
11	RF ambient	B	3.00%	R	$\sqrt{3}$	1	1	1.70%	1.70%	$\infty$
12	Probe positioned mech. restrictions	B	0.40%	R	$\sqrt{3}$	1	1	0.20%	0.20%	$\infty$
13	Probe positioning with respect to phantom shell	B	2.90%	R	$\sqrt{3}$	1	1	1.70%	1.70%	$\infty$
14	Max.SAR evalation	B	3.90%	R	$\sqrt{3}$	1	1	2.30%	2.30%	$\infty$
<b>Test Sample Related</b>										
15	Test sample positioning	A	1.86%	N	1	1	1	1.86%	1.86%	$\infty$
16	Device holder uncertainty	A	1.70%	N	1	1	1	1.70%	1.70%	$\infty$

17	Drift of output power	B	5.00%	R	$\sqrt{3}$	1	1	2.90%	2.90%	$\infty$
Phantom and Set-up										
18	Phantom uncertainty	B	4.00%	R	$\sqrt{3}$	1	1	2.30%	2.30%	$\infty$
19	Liquid conductivity (target)	B	5.00%	R	$\sqrt{3}$	0.64	0.43	1.80%	1.20%	$\infty$
20	Liquid conductivity (meas.)	A	0.50%	N	1	0.64	0.43	0.32%	0.26%	$\infty$
21	Liquid permittivity (target)	B	5.00%	R	$\sqrt{3}$	0.64	0.43	1.80%	1.20%	$\infty$
22	Liquid permittivity (meas.)	A	0.16%	N	1	0.64	0.43	0.10%	0.07%	$\infty$
Combined standard uncertainty	$u_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$		/	/	/	/	/	10.20%	10.00%	$\infty$
Expanded uncertainty (confidence interval of 95 %)	$u_e = 2u_c$		/	R	K=2	/	/	20.40%	20.00%	$\infty$

## 5.6. System Check Results

### System Performance Check at 835 MHz Head

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d134

Date/Time: 09/25/2013 AM

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 835$  MHz;  $\sigma = 0.88$  S/m;  $\epsilon_r = 41.90$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

Probe: ES3DV3 - SN3292; ConvF(6.06, 6.06, 6.06); Calibrated: 24/02/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 02/27/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.5 (6469)

**Area Scan (61x91x1):** Measurement grid: dx=15.00 mm, dy=15.00 mm

Maximum value of SAR (interpolated) = 2.54W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.131 V/m; Power Drift = 0.085 dB

Peak SAR (extrapolated) = 3.479 W/kg

**SAR(1 g) = 2.36 mW/g; SAR(10 g) = 1.54 mW/g**

Maximum value of SAR (measured) = 2.55 mW/g

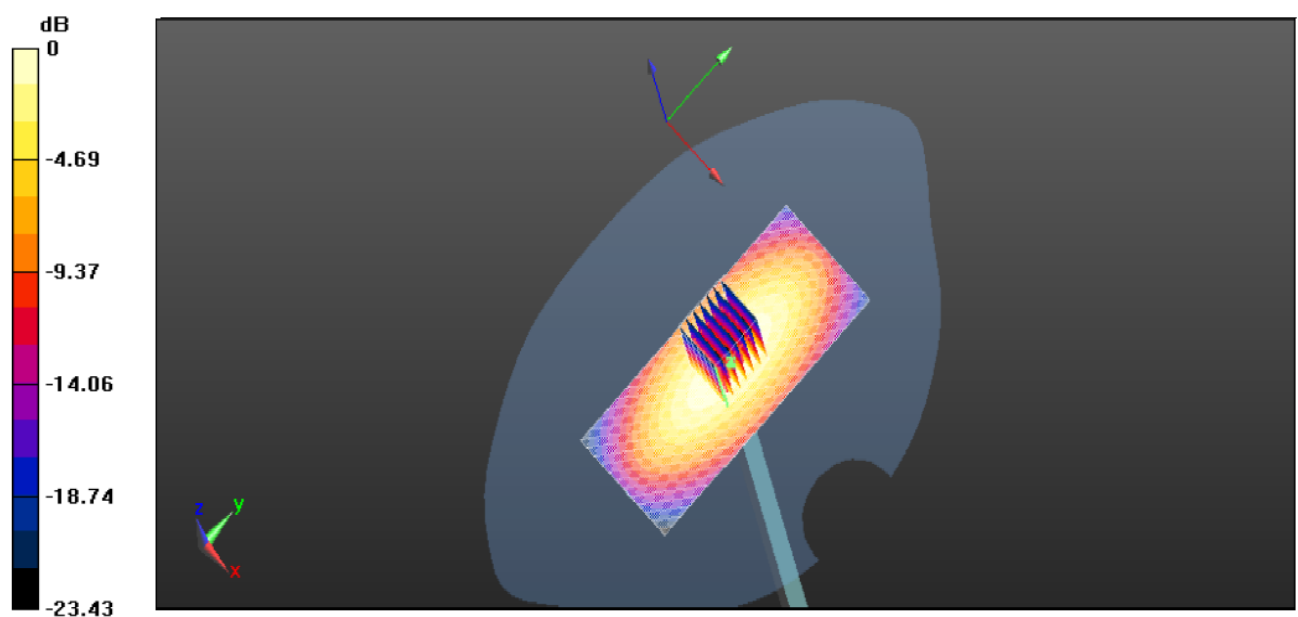

0 dB = 2.54mW/g=8.10dB mW/g

System Performance Check 835MHz Head 250mW

**System Performance Check at 835 MHz Body**

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d134

Date/Time: 09/25/2013 PM

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 835$  MHz;  $\sigma = 0.92$  S/m;  $\epsilon_r = 54.60$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

Probe: ES3DV3 - SN3292; ConvF(6.14, 6.14, 6.14); Calibrated: 24/02/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 02/27/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.5 (6469)

**Area Scan (61x91x1):** Measurement grid: dx=15.00 mm, dy=15.00 mm

Maximum value of SAR (interpolated) = 2.58 mW/g


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 46.603 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 3.586 W/kg

**SAR(1 g) = 2.39 mW/g; SAR(10 g) = 1.60 mW/g**

Maximum value of SAR (measured) = 2.58 mW/g

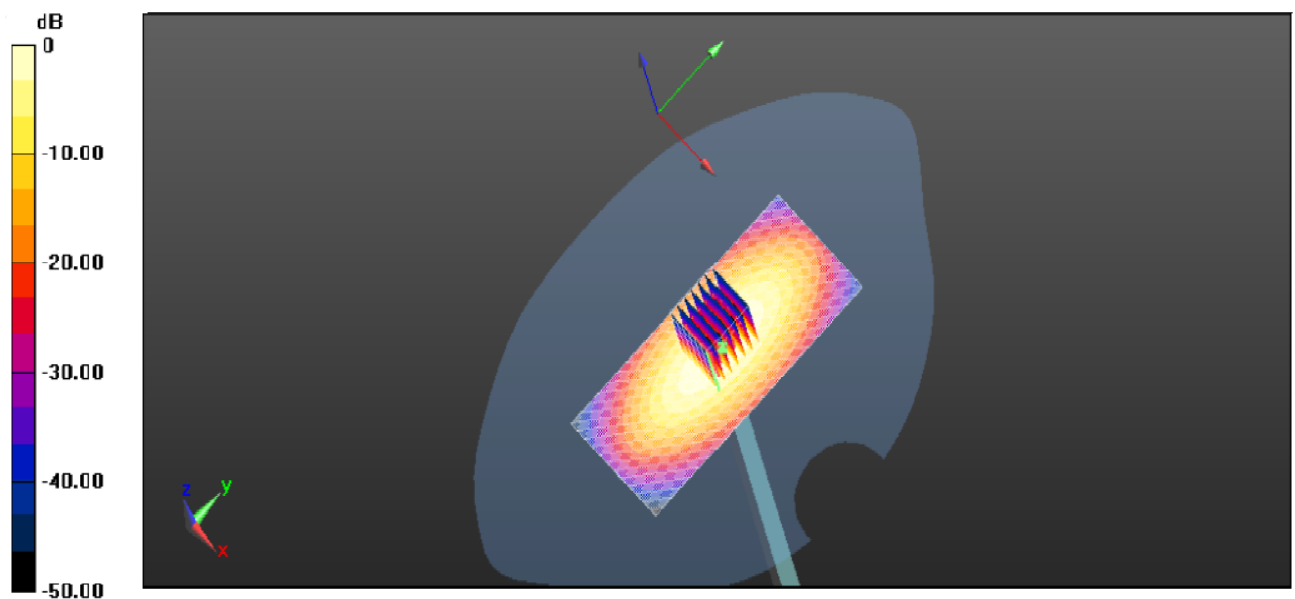

0 dB = 2.58 mW/g = 8.23 dB mW/g

System Performance Check 835MHz Body 250mW

**System Performance Check at 1900 MHz Head**

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d150

Date/Time: 09/26/2013 AM

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1900$  MHz;  $\sigma = 1.42$  S/m;  $\epsilon_r = 39.70$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

Probe: ES3DV3 - SN3292; ConvF(5.21, 5.21, 5.21); Calibrated: 24/02/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 02/27/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Area Scan (61x91x1):** Measurement grid: dx=15.00 mm, dy=15.00 mm

Maximum value of SAR (interpolated) = 10.9 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.167 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 17.874 W/kg

**SAR(1 g) = 9.56 W/kg; SAR(10 g) = 5.01 W/kg**

Maximum value of SAR (measured) = 10.8 W/kg

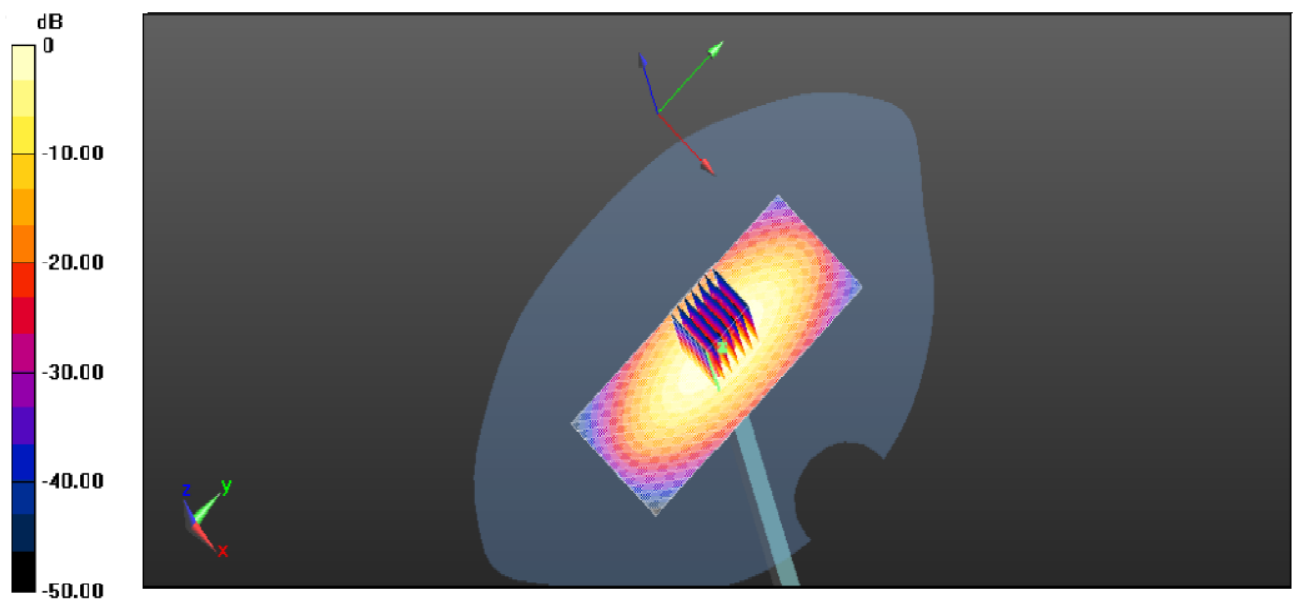

0 dB = 10.9 W/kg = 20.75 dB W/kg

System Performance Check 1900MHz Head 250mW

**System Performance Check at 1900 MHz Body**

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d150

Date/Time: 09/26/2013 PM

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1900$  MHz;  $\sigma = 1.48$  S/m;  $\epsilon_r = 55.24$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

Probe: ES3DV3 - SN3292; ConvF(4.66, 4.66, 4.66); Calibrated: 24/02/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 02/27/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Area Scan (61x91x1):** Measurement grid: dx=15.00 mm, dy=15.00 mm

Maximum value of SAR (interpolated) = 11.5 mW/g


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 85.137 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 16.68 W/kg

**SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.44 mW/g**

Maximum value of SAR (measured) = 11.6 mW/g

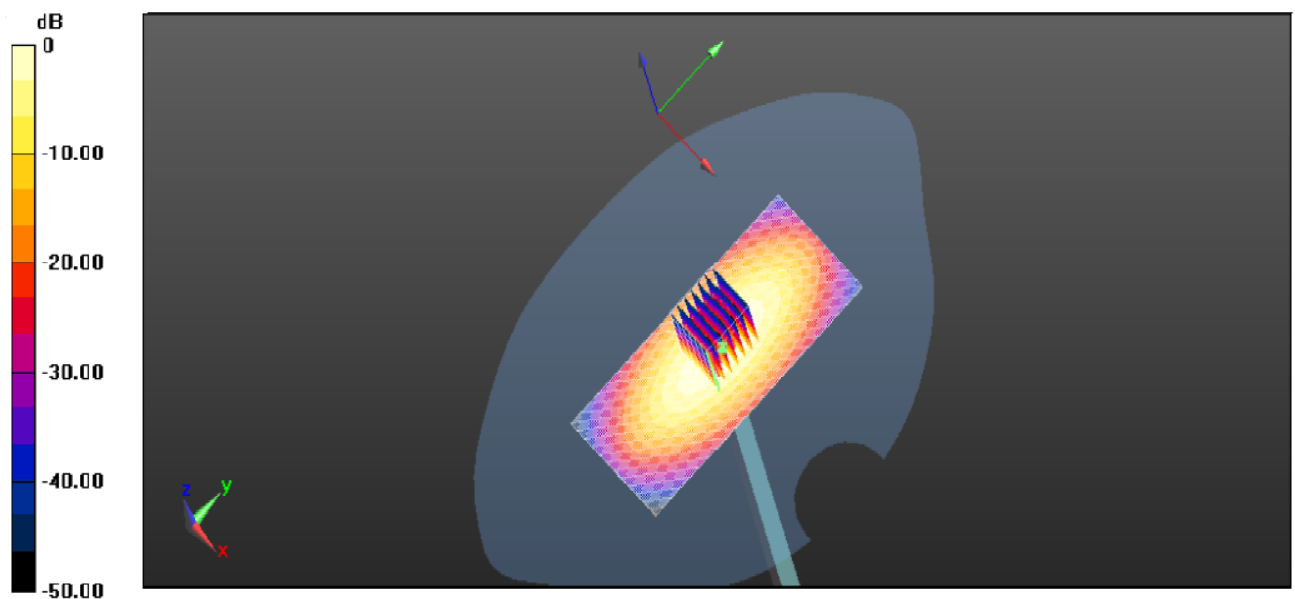

0 dB = 11.5 mW/g = 21.21 dB mW/g

System Performance Check 1900MHz Body 250mW



**System Performance Check at 2450 MHz Head**

DUT: Dipole 1900 MHz; Type: D2450V2; Serial: 884

Date/Time: 09/27/2013 AM

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2450$  MHz;  $\sigma = 1.82$  S/m;  $\epsilon_r = 40.10$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

Probe: ES3DV3 - SN3292; ConvF(4.47, 4.47, 4.47); Calibrated: 24/02/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 02/27/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Area Scan (61x91x1):** Measurement grid: dx=15.00 mm, dy=15.00 mm

Maximum value of SAR (interpolated) = 14.9 mW/g


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.276 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 25.964 mW/g

**SAR(1 g) = 12.76 mW/g; SAR(10 g) = 5.93 mW/g**

Maximum value of SAR (measured) = 14.7 mW/g

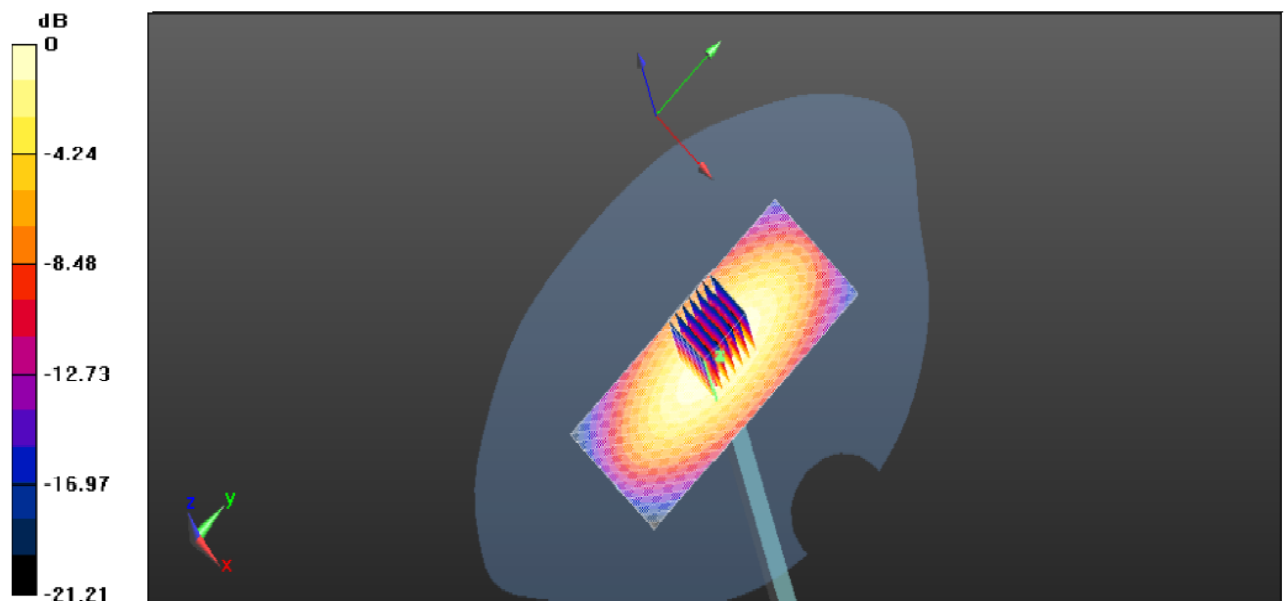

0 dB = 14.9 mW/g = 23.46 dB mW/g

System Performance Check 2450MHz Head 250mW

**System Performance Check at 2450 MHz Body**

DUT: Dipole 1900 MHz; Type: D2450V2; Serial: 884

Date/Time: 09/27/2013 PM

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2450$  MHz;  $\sigma = 1.98$  S/m;  $\epsilon_r = 53.50$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

Probe: ES3DV3 - SN3292; ConvF(4.24, 4.25, 4.25); Calibrated: 24/02/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 02/27/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Area Scan (61x91x1):** Measurement grid: dx=15.00 mm, dy=15.00 mm

Maximum value of SAR (interpolated) = 14.9 mW/g


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 97.714 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 26.08 mW/g

**SAR(1 g) = 12.88 mW/g; SAR(10 g) = 6.12 mW/g**

Maximum value of SAR (measured) = 14.8 mW/g

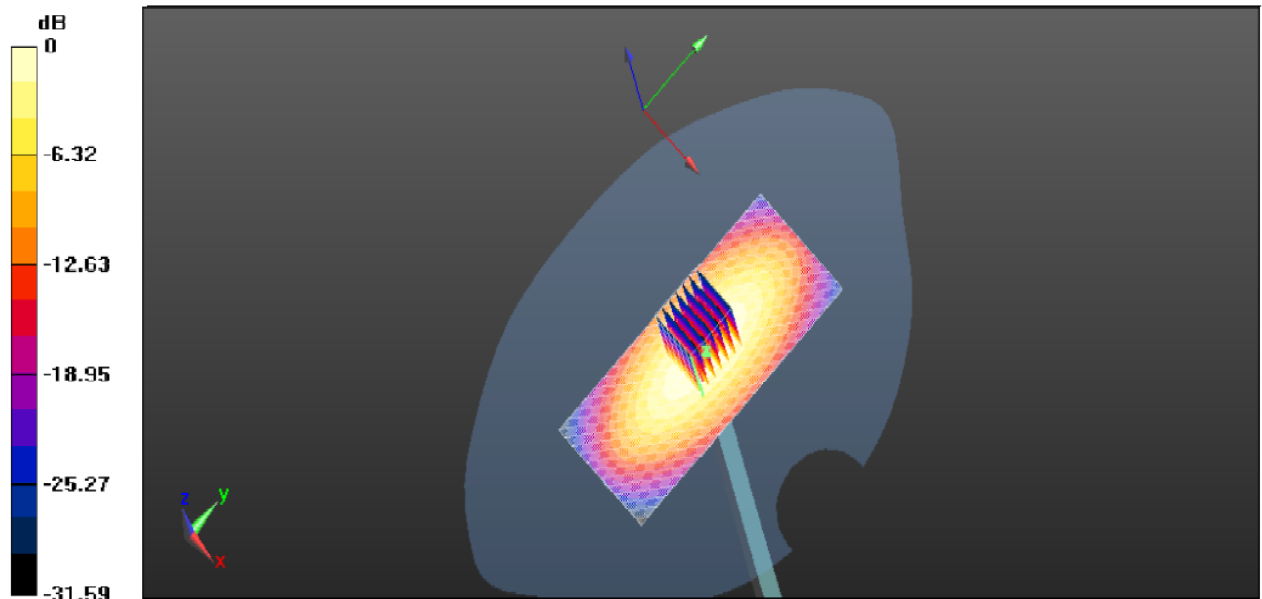

0 dB = 14.9 mW/g = 23.46 dB mW/g

System Performance Check 2450MHz Body 250mW

## 5.7. SAR Test Graph Results

### GSM850 Left Head Touch Low Channel

Communication System: Customer System; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.92$  S/m;  $\epsilon_r = 41.90$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section : Left Head Section

Probe: ES3DV3 - SN3292; ConvF(6.06, 6.06, 6.06); Calibrated: 24/02/2013;

Electronics: DAE4 Sn1315; Calibrated: 02/27/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (81x101x1):** Measurement grid:  $dx=1.50$  mm,  $dy=1.50$  mm

Maximum value of SAR (interpolated) = 0.351 W/kg


**Zoom Scan (5x5x5)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 4.361 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.343 W/Kg

**SAR(1 g) = 0.323 W/Kg; SAR(10 g) = 0.194 W/Kg**

Maximum value of SAR (measured) = 0.354 W/kg

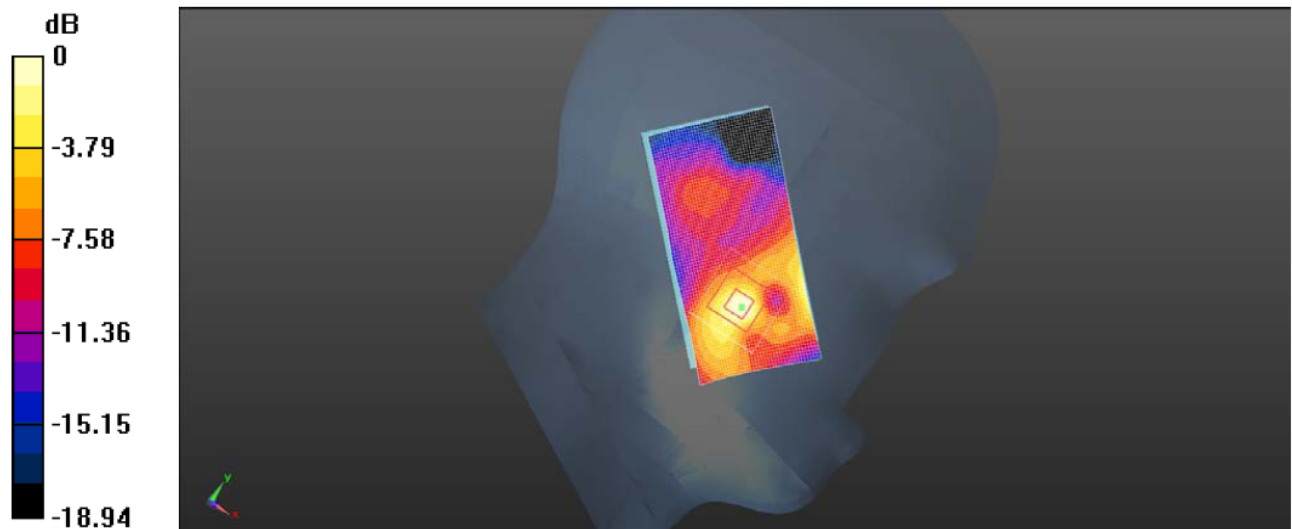

0dB = 0.358 W/kg = -1.27 dBW/kg

Plot 1: Left Head Touch (GSM850 Low Channel)

**GSM850 Left Head Touch Middle Channel**

Communication System: Customer System; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.90$  S/m;  $\epsilon_r = 42.10$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section : Left Head Section

Probe: ES3DV3 - SN3292; ConvF(6.06, 6.06, 6.06); Calibrated: 24/02/2013;

Electronics: DAE4 Sn1315; Calibrated: 02/27/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (81x101x1):** Measurement grid:  $dx=1.50$  mm,  $dy=1.50$  mm

Maximum value of SAR (interpolated) = 0.367 W/kg


**Zoom Scan (5x5x5)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 4.650 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.351 W/Kg

**SAR(1 g) = 0.337 W/Kg; SAR(10 g) = 0.198 W/Kg**

Maximum value of SAR (measured) = 0.365 W/kg

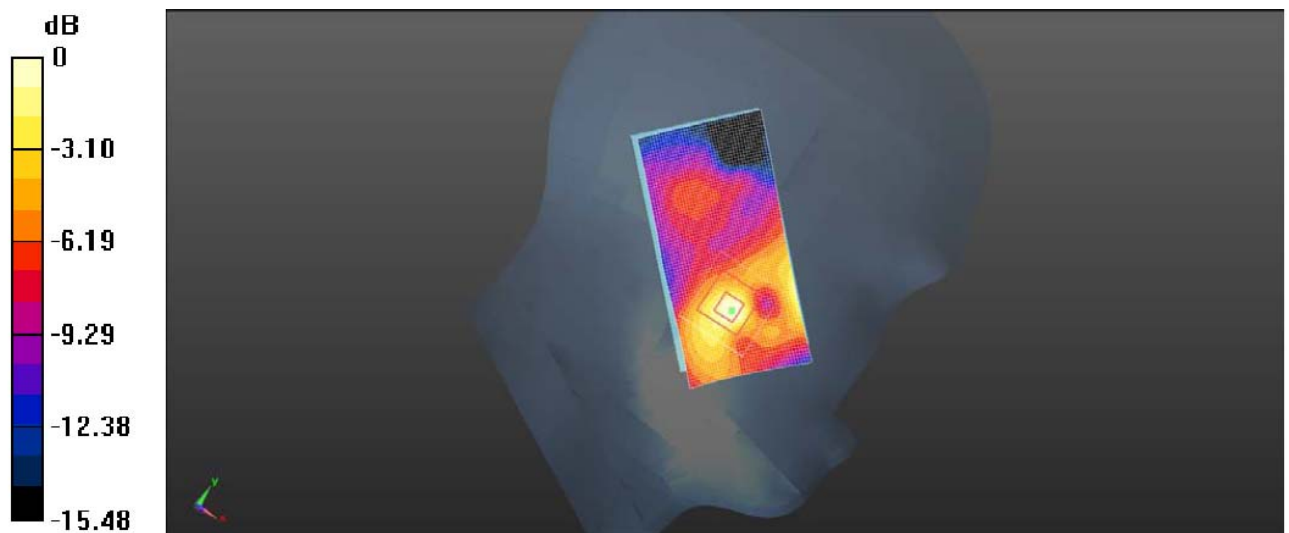

0dB = 0.365 W/kg = -1.13 dBW/kg

Plot 2: Left Head Touch (GSM850 Middle Channel)

**GSM850 Left Head Touch High Channel**

Communication System: Customer System; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.92$  S/m;  $\epsilon_r = 41.70$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section : Left Head Section

Probe: ES3DV3 - SN3292; ConvF(6.06, 6.06, 6.06); Calibrated: 24/02/2013;

Electronics: DAE4 Sn1315; Calibrated: 02/27/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (81x101x1):** Measurement grid:  $dx=1.50$  mm,  $dy=1.50$  mm

Maximum value of SAR (interpolated) = 0.342 W/kg


**Zoom Scan (5x5x5)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 4.356 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.340 W/Kg

**SAR(1 g) = 0.321 W/Kg; SAR(10 g) = 0.190 W/Kg**

Maximum value of SAR (measured) = 0.342 W/kg

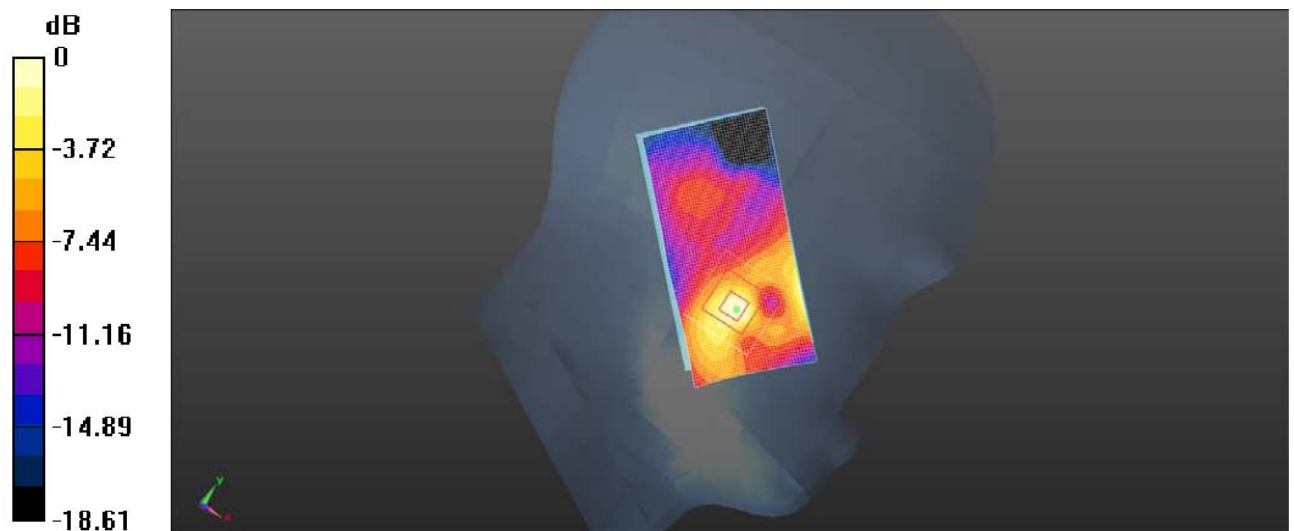

0dB = 0.342 W/kg = -1.83 dBW/kg

Plot 3: Left Head Touch (GSM850 High Channel)

**GSM850 Left Head Tilt Low Channel**

Communication System: Customer System; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.92$  S/m;  $\epsilon_r = 41.90$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section : Left Head Section

Probe: ES3DV3 - SN3292; ConvF(6.06, 6.06, 6.06); Calibrated: 24/02/2013;

Electronics: DAE4 Sn1315; Calibrated: 02/27/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (81x101x1):** Measurement grid:  $dx=1.50$  mm,  $dy=1.50$  mm

Maximum value of SAR (interpolated) = 0.317 W/kg


**Zoom Scan (5x5x5)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 4.368 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.365 W/Kg

**SAR(1 g) = 0.308 W/Kg; SAR(10 g) = 0.164 W/Kg**

Maximum value of SAR (measured) = 0.328 W/kg

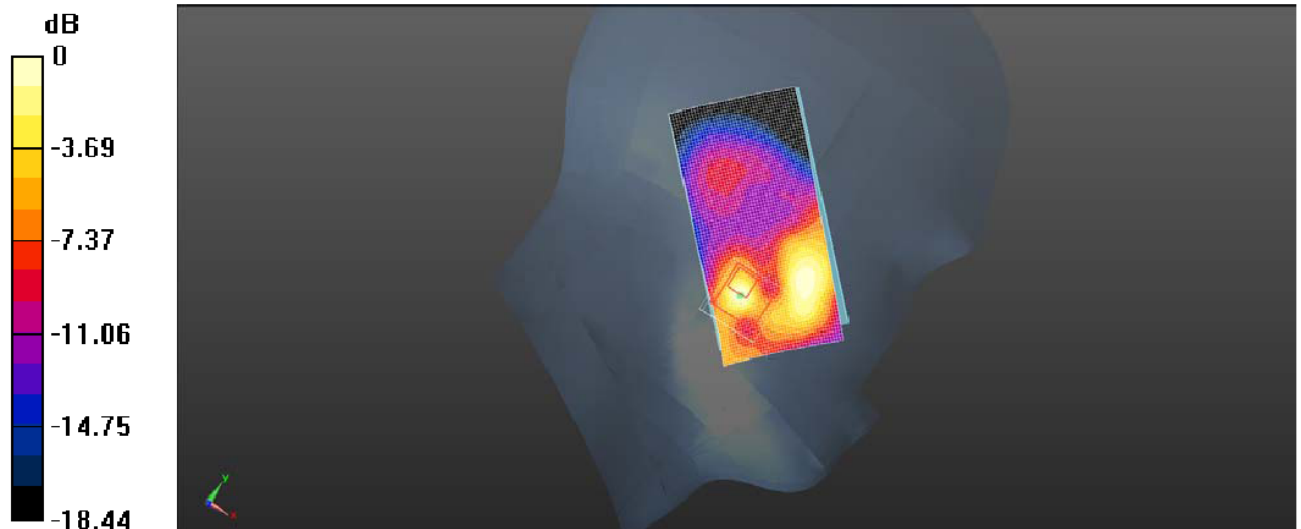

0dB = 0.328 W/kg = -3.97 dBW/kg

Plot 4: Left Head Tilt (GSM850 Low Channel)

**GSM850 Head Tilt Middle Channel**

Communication System: Customer System; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.90$  S/m;  $\epsilon_r = 42.10$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section : Left Head Section

Probe: ES3DV3 - SN3292; ConvF(6.06, 6.06, 6.06); Calibrated: 24/02/2013;

Electronics: DAE4 Sn1315; Calibrated: 02/27/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (81x101x1):** Measurement grid:  $dx=1.50$  mm,  $dy=1.50$  mm

Maximum value of SAR (interpolated) = 0.324 W/kg


**Zoom Scan (5x5x5)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 4.954 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.368 W/Kg

**SAR(1 g) = 0.314 W/Kg; SAR(10 g) = 0.176 W/Kg**

Maximum value of SAR (measured) = 0.357 W/kg

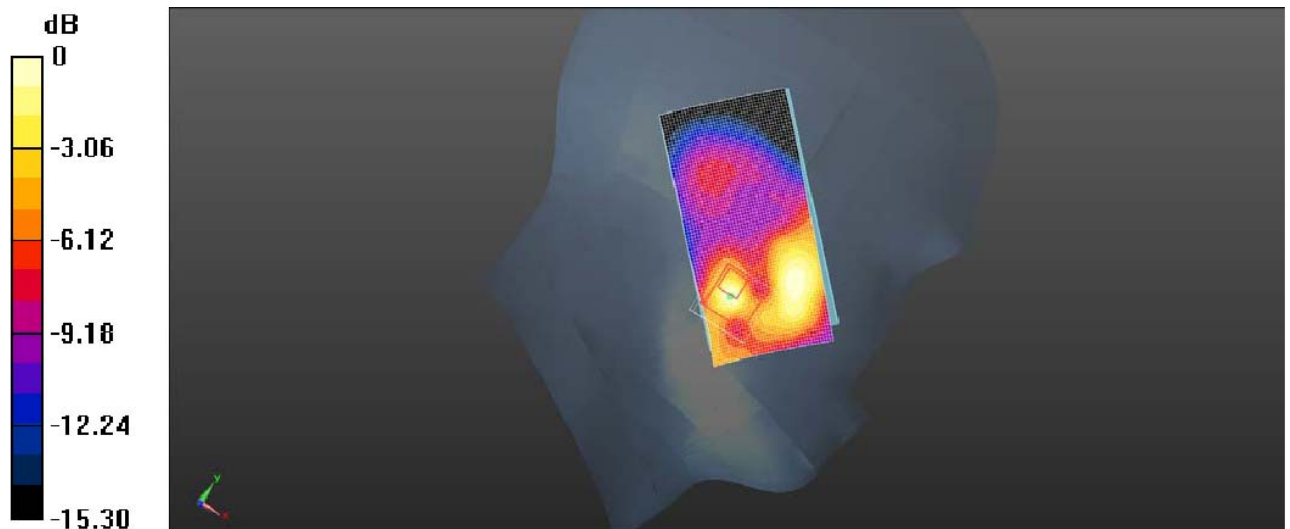

0dB = 0.357 W/kg = -3.84 dBW/kg

Plot 5: Left Head Tilt (GSM850 Middle Channel)

**GSM850 Left Head Tilt High Channel**

Communication System: Customer System; Frequency: 848.8 MHz;Duty Cycle:1:8.3

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.92$  S/m;  $\epsilon_r = 41.70$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section : Left Head Section

Probe: ES3DV3 - SN3292; ConvF(6.06, 6.06, 6.06); Calibrated: 24/02/2013;

Electronics: DAE4 Sn1315; Calibrated: 02/27/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (81x101x1):** Measurement grid: dx=1.50 mm, dy=1.50 mm

Maximum value of SAR (interpolated) = 0.318 W/kg


**Zoom Scan (5x5x5)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.027 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.350 W/Kg

**SAR(1 g) = 0.310 W/Kg; SAR(10 g) = 0.172 W/Kg**

Maximum value of SAR (measured) = 0.364 W/kg

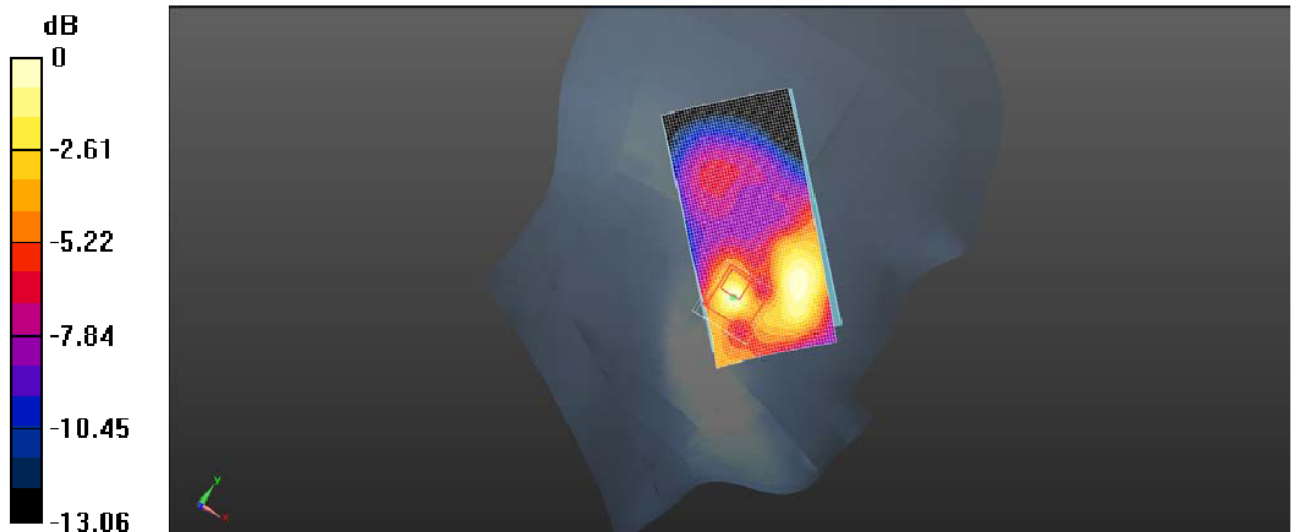

0dB = 0.368 W/kg = -5.07 dBW/kg

Plot 6: Left Head Tilt (GSM850 High Channel)



**GSM850 Right Head Touch Low Channel**

Communication System: Customer System; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.92$  S/m;  $\epsilon_r = 41.90$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section : Right Head Section

Probe: ES3DV3 - SN3292; ConvF(6.06, 6.06, 6.06); Calibrated: 24/02/2013;

Electronics: DAE4 Sn1315; Calibrated: 02/27/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (81x101x1):** Measurement grid:  $dx=1.50$  mm,  $dy=1.50$  mm

Maximum value of SAR (interpolated) = 0.394 W/kg


**Zoom Scan (5x5x5)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 5.717 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.351 W/Kg

**SAR(1 g) = 0.257 W/Kg; SAR(10 g) = 0.171 W/Kg**

Maximum value of SAR (measured) = 0.382 W/kg

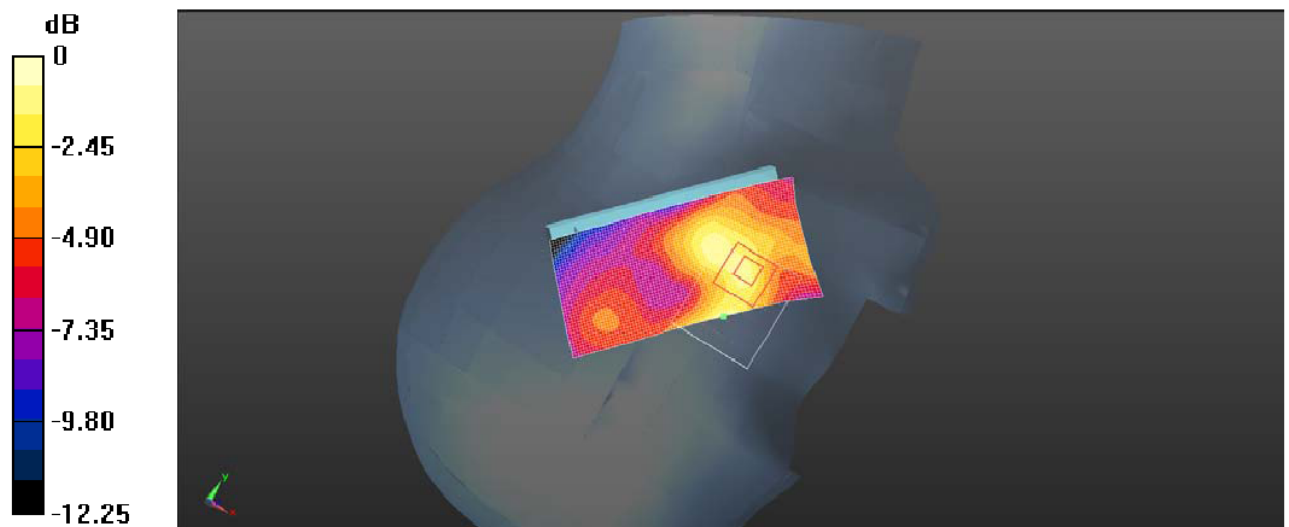

0dB = 0.382 W/kg = -4.89 dBW/kg

Plot 7: Right Head Touch (GSM850 Low Channel)

**GSM850 Right Head Touch Middle Channel**

Communication System: Customer System; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.90$  S/m;  $\epsilon_r = 42.10$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section : Right Head Section

Probe: ES3DV3 - SN3292; ConvF(6.06, 6.06, 6.06); Calibrated: 24/02/2013;

Electronics: DAE4 Sn1315; Calibrated: 02/27/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (81x101x1):** Measurement grid:  $dx=1.50$  mm,  $dy=1.50$  mm

Maximum value of SAR (interpolated) = 0.392 W/kg


**Zoom Scan (5x5x5)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 5.514 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.324 W/Kg

**SAR(1 g) = 0.262 W/Kg; SAR(10 g) = 0.183 W/Kg**

Maximum value of SAR (measured) = 0.394 W/kg

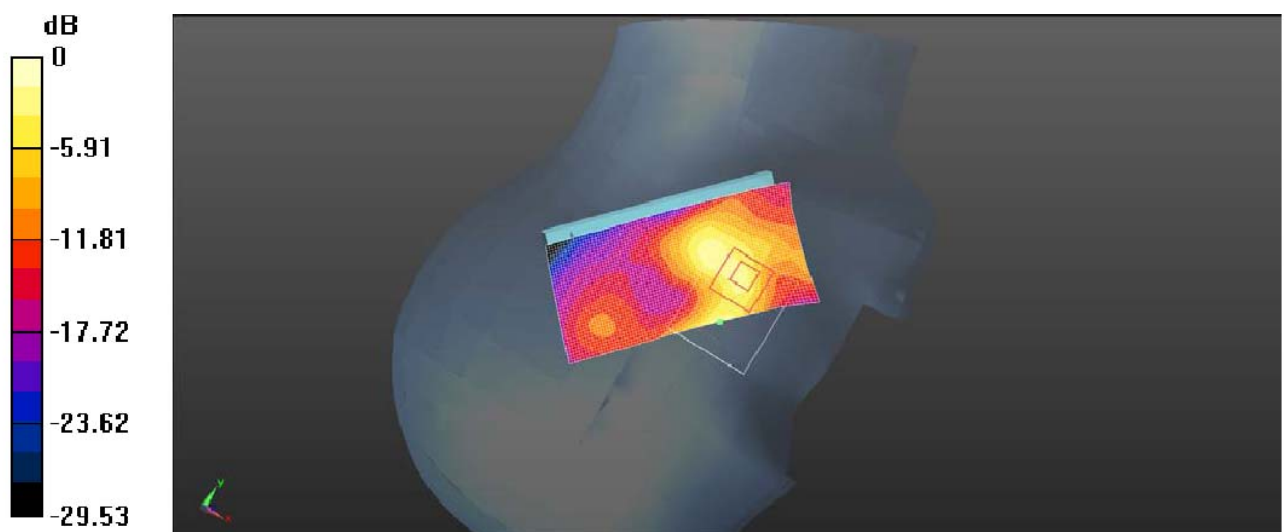

0dB = 0.394 W/kg = -4.24 dBW/kg

Plot 8: Right Head Touch (GSM850 Middle Channel)

**GSM850 Right Head Touch High Channel**

Communication System: Customer System; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.92$  S/m;  $\epsilon_r = 41.70$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section : Right Head Section

Probe: ES3DV3 - SN3292; ConvF(6.06, 6.06, 6.06); Calibrated: 24/02/2013;

Electronics: DAE4 Sn1315; Calibrated: 02/27/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (81x101x1):** Measurement grid: dx=1.50 mm, dy=1.50 mm

Maximum value of SAR (interpolated) = 0.351 W/kg


**Zoom Scan (5x5x5)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.651 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.347 W/Kg

**SAR(1 g) = 0.252 W/Kg; SAR(10 g) = 0.164 W/Kg**

Maximum value of SAR (measured) = 0.375 W/kg

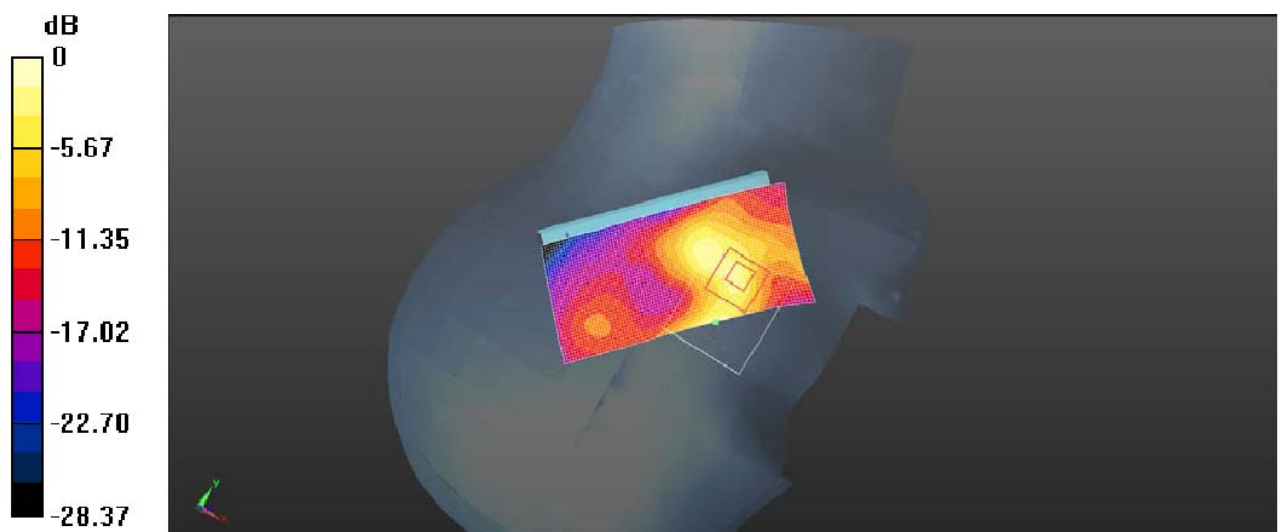

0dB = 0.375 W/kg = -4.59 dBW/kg

Plot 9: Right Head Touch (GSM850 High Channel)

**GSM850 Right Head Tilt Low Channel**

Communication System: Customer System; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.92$  S/m;  $\epsilon_r = 41.90$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section : Right Head Section

Probe: ES3DV3 - SN3292; ConvF(6.06, 6.06, 6.06); Calibrated: 24/02/2013;

Electronics: DAE4 Sn1315; Calibrated: 02/27/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (81x101x1):** Measurement grid:  $dx=1.50$  mm,  $dy=1.50$  mm

Maximum value of SAR (interpolated) = 0.381 W/kg


**Zoom Scan (5x5x5)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 5.418 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.362 W/Kg

**SAR(1 g) = 0.249 W/Kg; SAR(10 g) = 0.167 W/Kg**

Maximum value of SAR (measured) = 0.392 W/kg

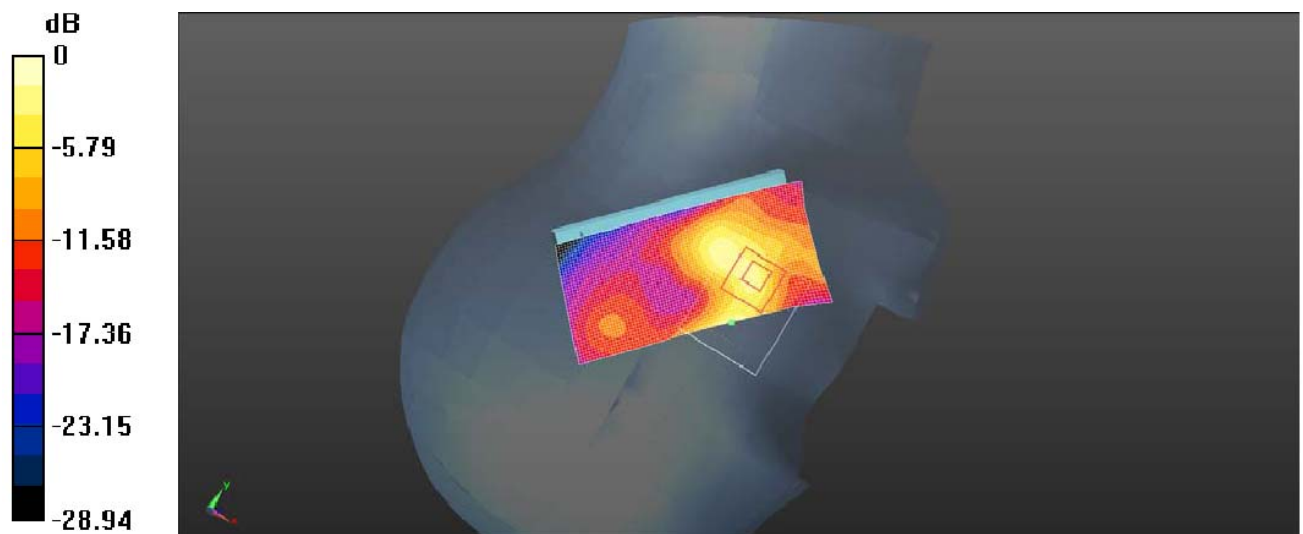

0dB = 0.398 W/kg = -4.95 dBW/kg

Plot 10: Right Head Tilt (GSM850 Low Channel)

**GSM850 Right Head Tilt Middle Channel**

Communication System: Customer System; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.90$  S/m;  $\epsilon_r = 42.10$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section : Right Head Section

Probe: ES3DV3 - SN3292; ConvF(6.06, 6.06, 6.06); Calibrated: 24/02/2013;

Electronics: DAE4 Sn1315; Calibrated: 02/27/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (81x101x1):** Measurement grid:  $dx=1.50$  mm,  $dy=1.50$  mm

Maximum value of SAR (interpolated) = 0.395 W/kg


**Zoom Scan (5x5x5)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 5.431 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.371 W/Kg

**SAR(1 g) = 0.268 W/Kg; SAR(10 g) = 0.179 W/Kg**

Maximum value of SAR (measured) = 0.363 W/kg

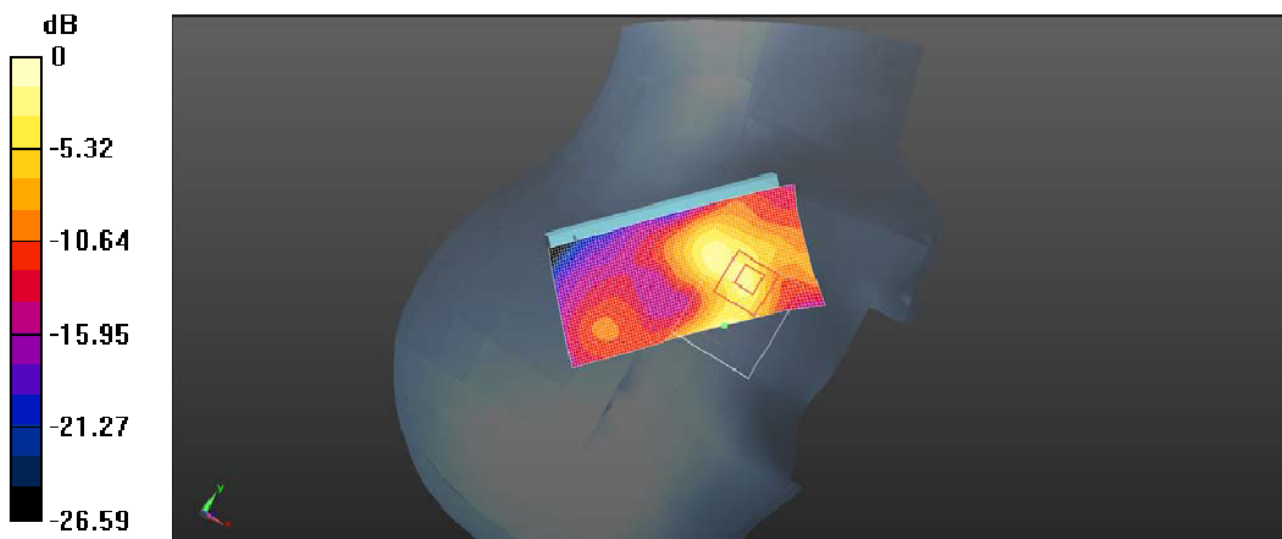

0dB = 0.363 W/kg = -4.81 dBW/kg

Plot 11: Right Head Tilt (GSM850 Middle Channel)

**GSM850 Right Head Tilt High Channel**

Communication System: Customer System; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.92$  S/m;  $\epsilon_r = 41.70$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section : Right Head Section

Probe: ES3DV3 - SN3292; ConvF(6.06, 6.06, 6.06); Calibrated: 24/02/2013;

Electronics: DAE4 Sn1315; Calibrated: 02/27/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (81x101x1):** Measurement grid:  $dx=1.50$  mm,  $dy=1.50$  mm

Maximum value of SAR (interpolated) = 0.374 W/kg


**Zoom Scan (5x5x5)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 4.951 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.352 W/Kg

**SAR(1 g) = 0.247 W/Kg; SAR(10 g) = 0.159 W/Kg**

Maximum value of SAR (measured) = 0.384 W/kg

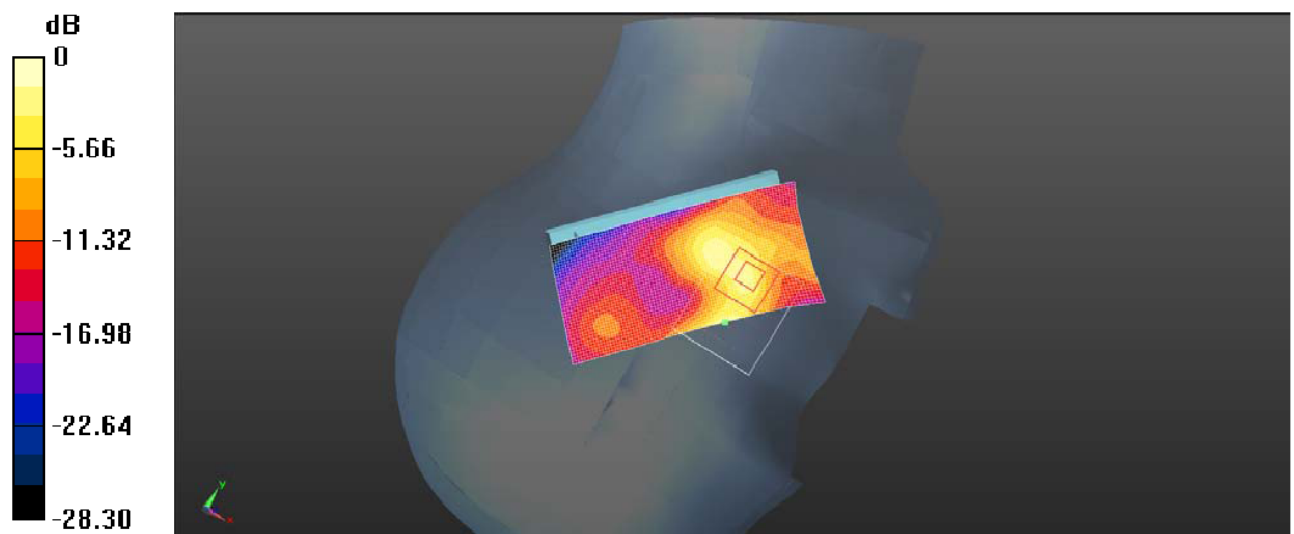

0dB = 0.384 W/kg = -3.57 dBW/kg

Plot 12: Right Head Tilt (GSM850 High Channel)

**GSM850 GPRS 4TS Body Front Side Middle Channel**

Communication System: Customer System; Frequency: 836.6 MHz;Duty Cycle:1:2

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.98$  S/m;  $\epsilon_r = 56.90$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section : Body- worn

Probe: ES3DV3 - SN3292; ConvF(6.14, 6.14, 6.14); Calibrated: 24/02/2013;

Electronics: DAE4 Sn1315; Calibrated: 02/27/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (81x101x1):** Measurement grid: dx=1.50 mm, dy=1.50 mm

Maximum value of SAR (interpolated) = 0.621 W/kg


**Zoom Scan (5x5x5)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.524 V/m; Power Drift = -0.24 dB

Peak SAR (extrapolated) = 0.839 W/Kg

**SAR(1 g) = 0.535 W/Kg; SAR(10 g) = 0.349 W/Kg**

Maximum value of SAR (measured) = 0.573 W/kg

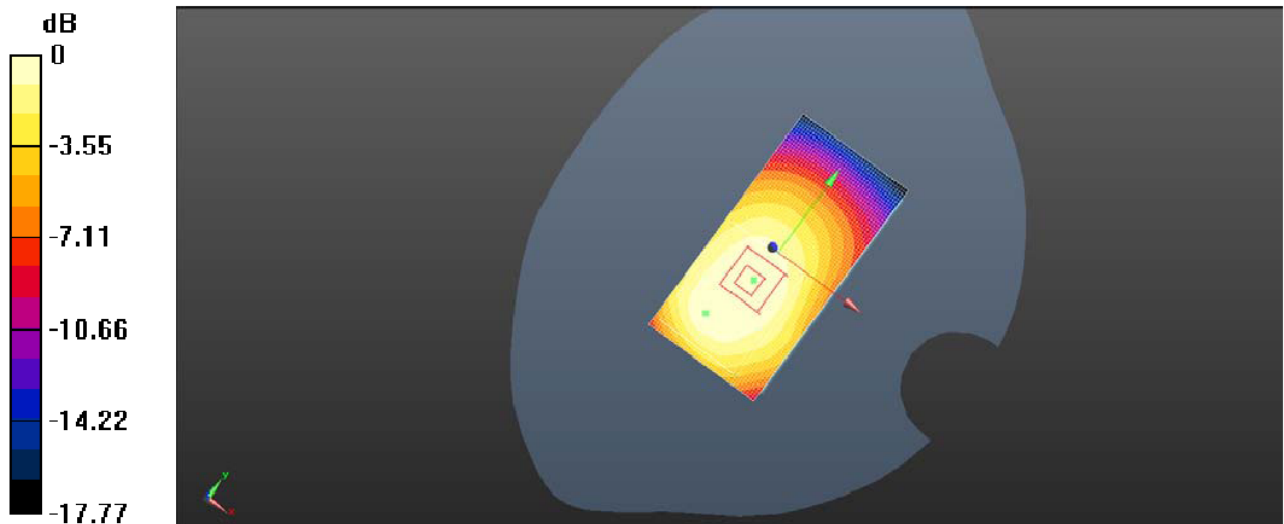

0dB = 0.621 W/kg = -2.07 dBW/kg

Plot 13: Body Front Side(GSM850 GPRS 4TS Middle Channel)

**GSM850 GPRS 4TS Body Rear Side Middle Channel**

Communication System: Customer System; Frequency: 836.6 MHz; Duty Cycle: 1:2

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.98$  S/m;  $\epsilon_r = 56.90$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section : Body- worn

Probe: ES3DV3 - SN3292; ConvF(6.14, 6.14, 6.14); Calibrated: 24/02/2013;

Electronics: DAE4 Sn1315; Calibrated: 02/27/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (81x101x1):** Measurement grid:  $dx=1.50$  mm,  $dy=1.50$  mm

Maximum value of SAR (interpolated) = 0.715 W/kg


**Zoom Scan (5x5x5)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 12.801 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.865 W/Kg

**SAR(1 g) = 0.627 W/Kg; SAR(10 g) = 0.376 W/Kg**

Maximum value of SAR (measured) = 0.692 W/kg

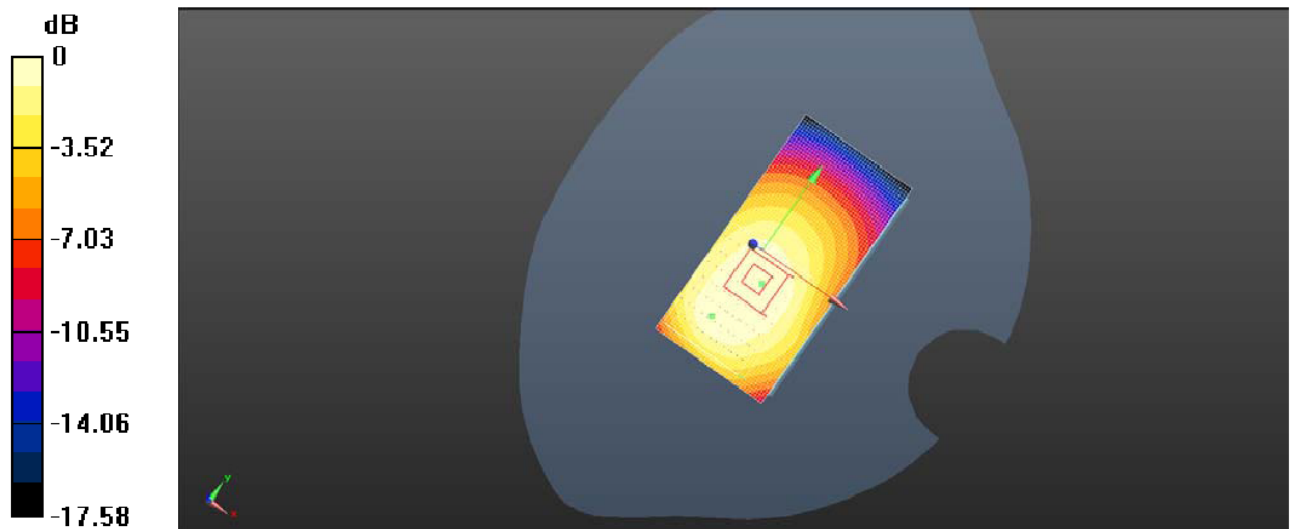

0dB = 0.715 W/kg = -1.45 dBW/kg

Plot 14: Body Rear Side (GSM850 GPRS 4TS Middle Channel)



**GSM850 GPRS 4TS Body Rear Side Low Channel**

Communication System: Customer System; Frequency: 824.2 MHz; Duty Cycle: 1:2

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 57.20$   $\rho = 1000$  kg/m<sup>3</sup>

Phantom section : Body- worn

Probe: ES3DV3 - SN3292; ConvF(6.14, 6.14, 6.14); Calibrated: 24/02/2013;

Electronics: DAE4 Sn1315; Calibrated: 02/27/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (81x101x1):** Measurement grid: dx=1.50 mm, dy=1.50 mm

Maximum value of SAR (interpolated) = 0.724 W/kg


**Zoom Scan (5x5x5)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.517 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.858 W/Kg

**SAR(1 g) = 0.608 W/Kg; SAR(10 g) = 0.350 W/Kg**

Maximum value of SAR (measured) = 0.724 W/kg

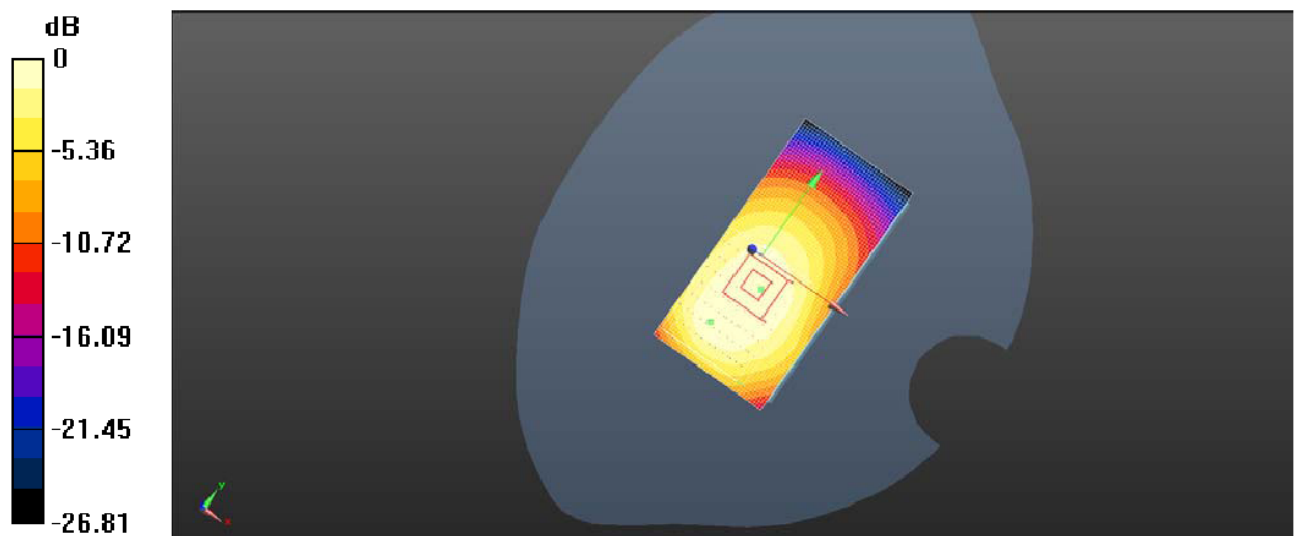

0dB = 0.724 W/kg = -1.37 dBW/kg

Plot 15: Body Rear Side (GSM850 GPRS 4TS Lows Channel)

**GSM850 GPRS 4TS Body Rear Side High Channel**

Communication System: Customer System; Frequency: 848.8 MHz; Duty Cycle: 1:2

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.96$  S/m;  $\epsilon_r = 57.80$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section : Body- worn

Probe: ES3DV3 - SN3292; ConvF(6.14, 6.14, 6.14); Calibrated: 24/02/2013;

Electronics: DAE4 Sn1315; Calibrated: 02/27/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (81x101x1):** Measurement grid: dx=1.50 mm, dy=1.50 mm

Maximum value of SAR (interpolated) = 0.704 W/kg


**Zoom Scan (5x5x5)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.155 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.867 W/Kg

**SAR(1 g) = 0.614 W/Kg; SAR(10 g) = 0.362 W/Kg**

Maximum value of SAR (measured) = 0.704 W/kg

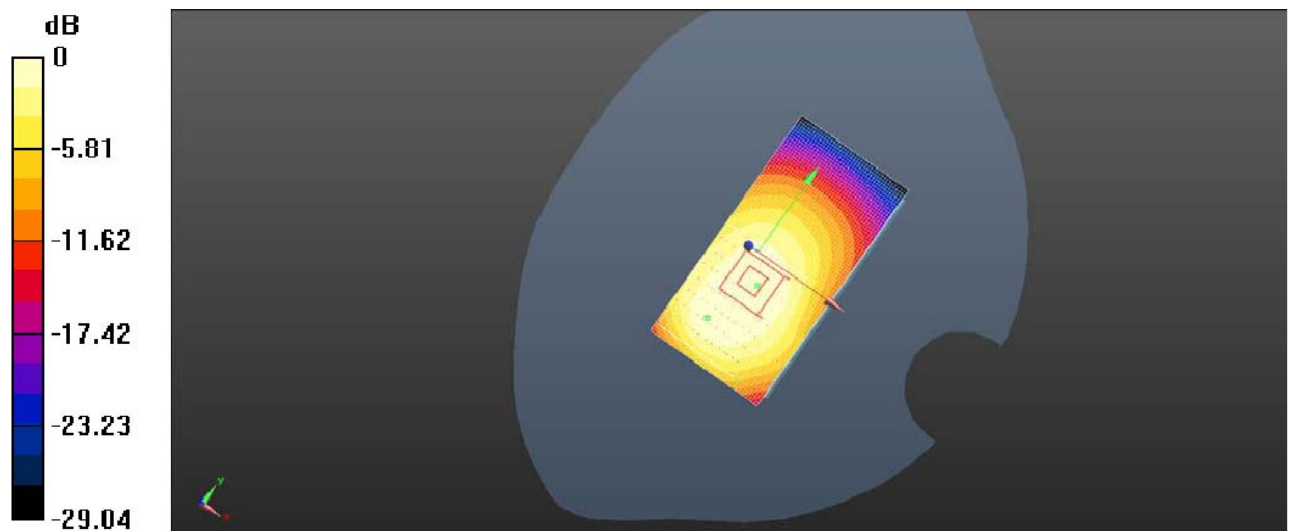

0dB = 0.704 W/kg = -2.09 dBW/kg

Plot 16: Body Rear Side (GSM850 GPRS 4TS High Channel)

**GSM850 GPRS 4TS Body Left side Middle Channel**

Communication System: Customer System; Frequency: 836.6 MHz; Duty Cycle: 1:2

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.98$  S/m;  $\epsilon_r = 56.90$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section : Body- worn

Probe: ES3DV3 - SN3292; ConvF(6.14, 6.14, 6.14); Calibrated: 24/02/2013;

Electronics: DAE4 Sn1315; Calibrated: 02/27/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (81x101x1):** Measurement grid: dx=1.50 mm, dy=1.50 mm

Maximum value of SAR (interpolated) = 0.379 W/kg


**Zoom Scan (5x5x5)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.483 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.541 W/Kg

**SAR(1 g) = 0.355 W/Kg; SAR(10 g) = 0.222 W/Kg**

Maximum value of SAR (measured) = 0.372 W/kg

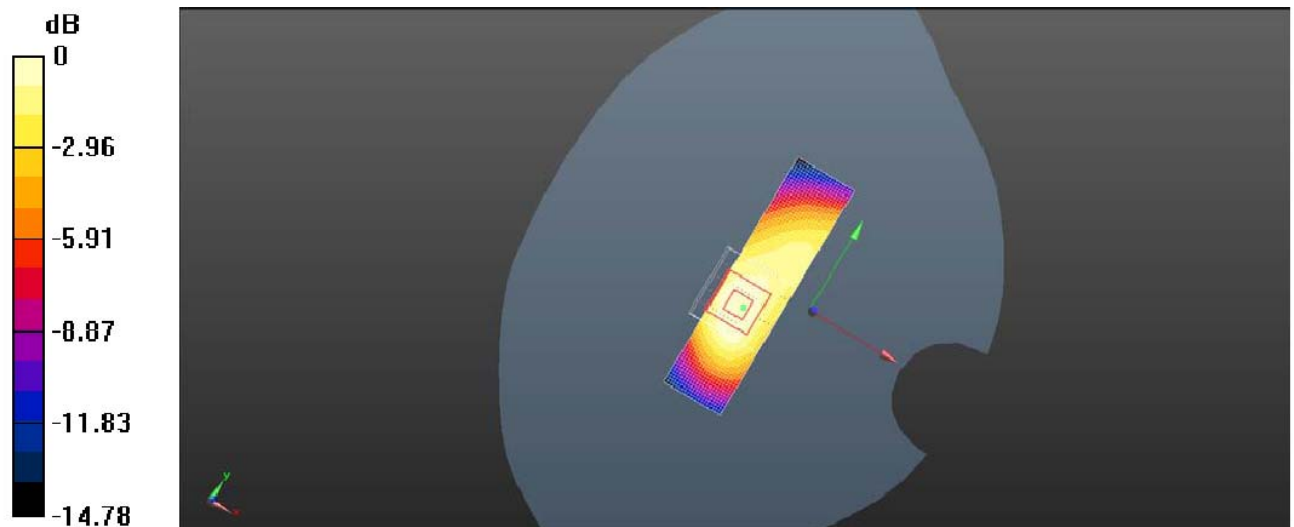

0dB = 0.379 W/kg = -4.21 dBW/kg

Plot 17: Body Left side (GSM850 GPRS 4TS Middle Channel)

**GSM850 GPRS 4TS Body Right side Middle Channel**

Communication System: Customer System; Frequency: 836.6 MHz; Duty Cycle: 1:2

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.98$  S/m;  $\epsilon_r = 56.90$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section : Body- worn

Probe: ES3DV3 - SN3292; ConvF(6.14, 6.14, 6.14); Calibrated: 24/02/2013;

Electronics: DAE4 Sn1315; Calibrated: 02/27/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (81x101x1):** Measurement grid: dx=1.50 mm, dy=1.50 mm

Maximum value of SAR (interpolated) = 0.351 W/kg


**Zoom Scan (5x5x5)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.593 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.550 W/Kg

**SAR(1 g) = 0.343 W/Kg; SAR(10 g) = 0.216 W/Kg**

Maximum value of SAR (measured) = 0.374 W/kg

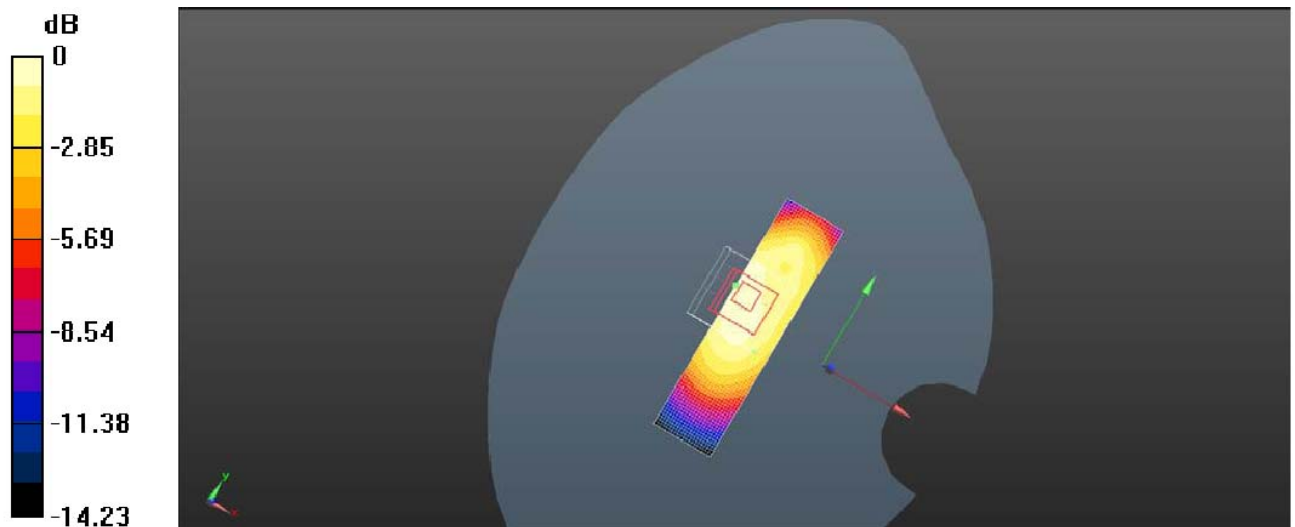

0dB = 0.351 W/kg = -4.54 dBW/kg

Plot 18: Body Right side (GSM850 GPRS 4TS Middle Channel)

**GSM850 GPRS 4TS Body Top side Middle Channel**

Communication System: Customer System; Frequency: 836.6 MHz; Duty Cycle: 1:2

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.98$  S/m;  $\epsilon_r = 56.90$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section : Body- worn

Probe: ES3DV3 - SN3292; ConvF(6.14, 6.14, 6.14); Calibrated: 24/02/2013;

Electronics: DAE4 Sn1315; Calibrated: 02/27/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (81x101x1):** Measurement grid:  $dx=1.50$  mm,  $dy=1.50$  mm

Maximum value of SAR (interpolated) = 0.115 W/kg


**Zoom Scan (5x5x5)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 6.665 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 1.03 W/Kg

**SAR(1 g) = 0.108 W/Kg; SAR(10 g) = 0.050 W/Kg**

Maximum value of SAR (measured) = 0.155 W/kg

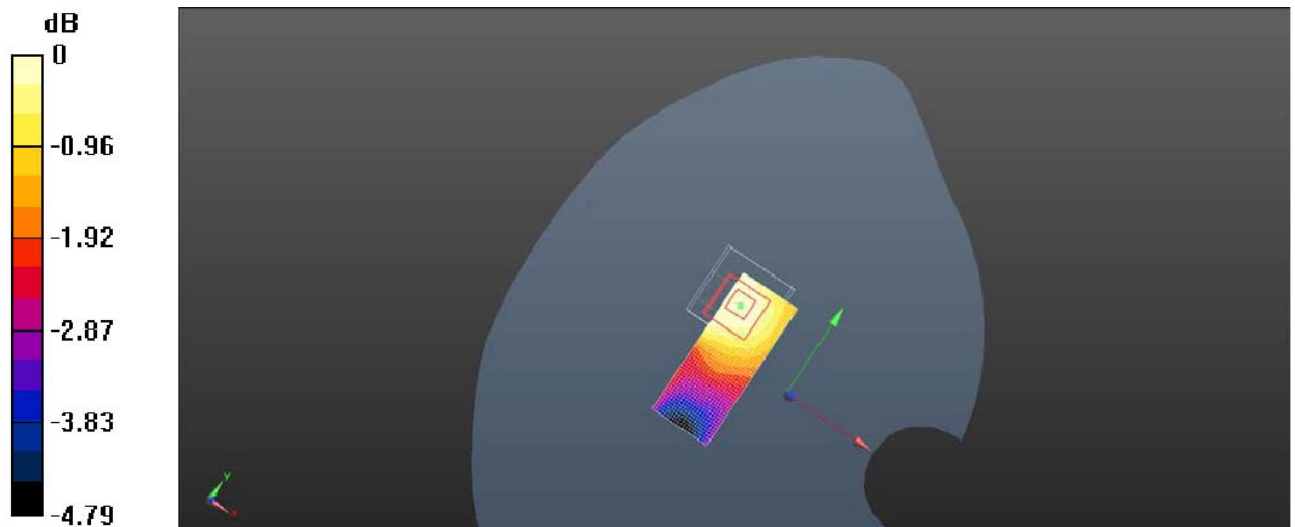

0dB = 0.155 W/kg = -16.30 dBW/kg

Plot 19: Body Top Side (GSM850 GPRS 4TS Middle Channel)

**GSM850 GPRS 4TS Body Bottom side Middle Channel**

Communication System: Customer System; Frequency: 836.6 MHz; Duty Cycle: 1:2

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.98$  S/m;  $\epsilon_r = 56.90$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section : Body- worn

Probe: ES3DV3 - SN3292; ConvF(6.14, 6.14, 6.14); Calibrated: 24/02/2013;

Electronics: DAE4 Sn1315; Calibrated: 02/27/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (81x101x1):** Measurement grid:  $dx=1.50$  mm,  $dy=1.50$  mm

Maximum value of SAR (interpolated) = 0.116 W/kg


**Zoom Scan (5x5x5)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 6.651 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.03 W/Kg

**SAR(1 g) = 0.091 W/Kg; SAR(10 g) = 0.052 W/Kg**

Maximum value of SAR (measured) = 0.153 W/kg

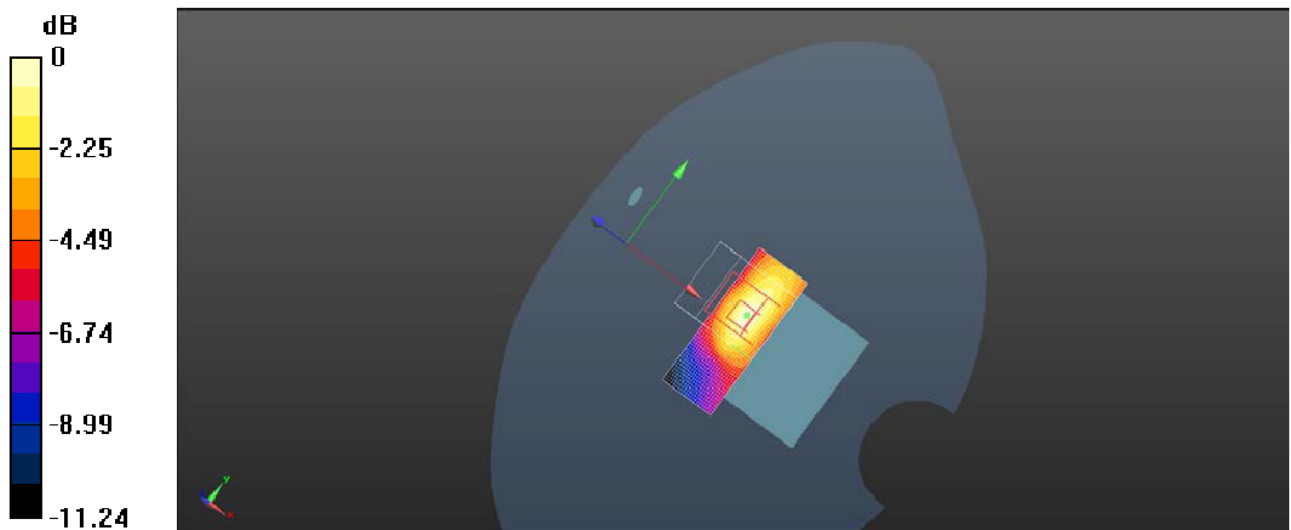

0dB = 0.153 W/kg = -16.31 dBW/kg

Plot 20: Body Bottom Side (GSM850 GPRS 4TS Middle Channel)

**GSM850 EGPRS 4TS Body Rear Side Middle Channel**

Communication System: Customer System; Frequency: 836.6 MHz; Duty Cycle: 1:2

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.98$  S/m;  $\epsilon_r = 56.90$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section : Body- worn

Probe: ES3DV3 - SN3292; ConvF(6.14, 6.14, 6.14); Calibrated: 24/02/2013;

Electronics: DAE4 Sn1315; Calibrated: 02/27/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (81x101x1):** Measurement grid:  $dx=1.50$  mm,  $dy=1.50$  mm

Maximum value of SAR (interpolated) = 0.384 W/kg


**Zoom Scan (5x5x5)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 8.819 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.551 W/Kg

**SAR(1 g) = 0.373 W/Kg; SAR(10 g) = 0.241 W/Kg**

Maximum value of SAR (measured) = 0.384 W/kg

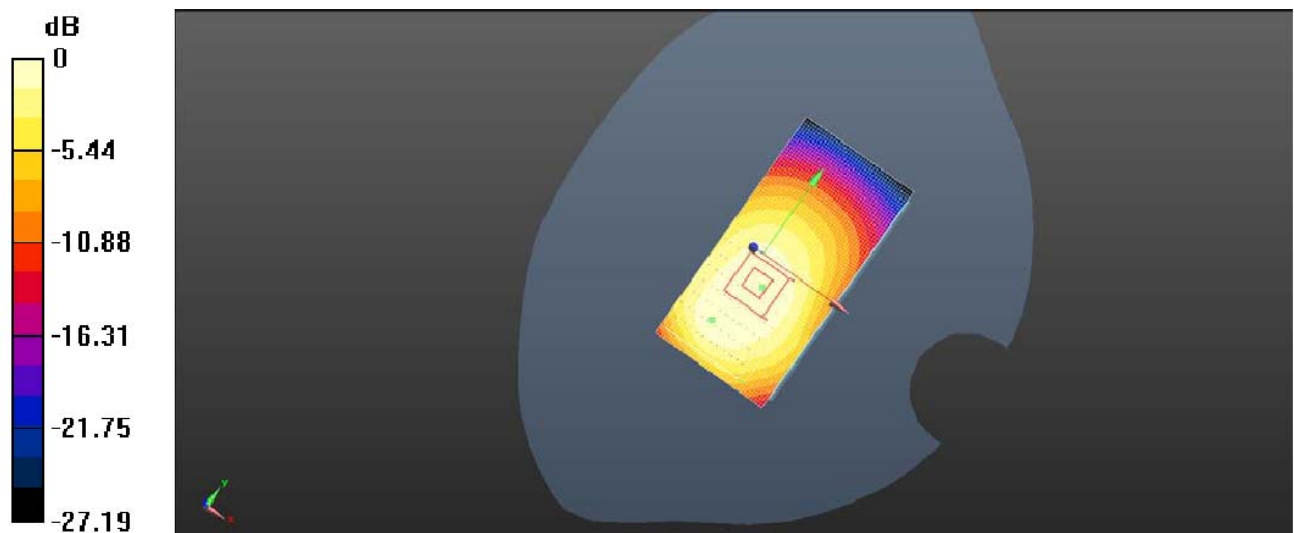

0dB = 0.384 W/kg = -3.17 dBW/kg

Plot 21: Body Rear Side (GSM850 EGPRS 4TS Middle Channel)

**GSM850 Body (Speech) With Headset Rear Side Middle Channel**

Communication System: Customer System; Frequency: 836.6 MHz; Duty Cycle: 1:2

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.98$  S/m;  $\epsilon_r = 56.90$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section : Body- worn

Probe: ES3DV3 - SN3292; ConvF(6.14, 6.14, 6.14); Calibrated: 24/02/2013;

Electronics: DAE4 Sn1315; Calibrated: 02/27/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (81x101x1):** Measurement grid: dx=1.50 mm, dy=1.50 mm

Maximum value of SAR (interpolated) = 0.387 W/kg


**Zoom Scan (5x5x5)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.386 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.515 W/Kg

**SAR(1 g) = 0.359 W/Kg; SAR(10 g) = 0.231 W/Kg**

Maximum value of SAR (measured) = 0.392 W/kg

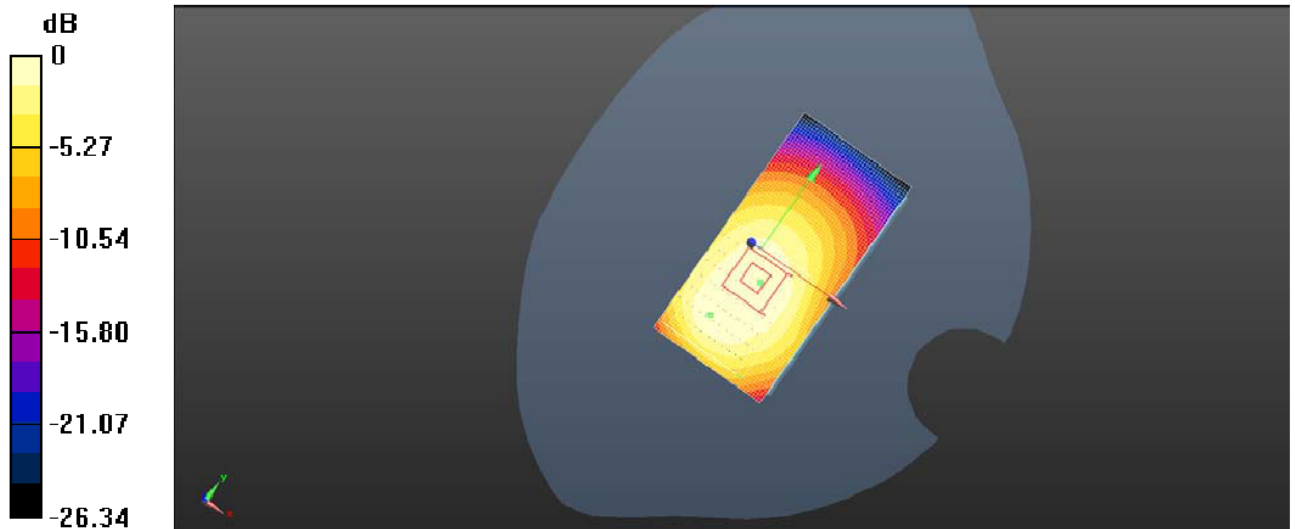

0dB = 0.392 W/kg = -5.11 dBW/kg

Plot 22: Body Rear Side (GSM850 Speech With Headset Middle Channel)



**GSM1900 Left Head Touch Low Channel**

Communication System: Customer System; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.42$  S/m;  $\epsilon_r = 39.90$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section : Left Head Section

Probe: ES3DV3 - SN3292; ConvF(5.21, 5.21, 5.21); Calibrated: 24/02/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 27/02/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (81x101x1):** Measurement grid:  $dx=1.50$  mm,  $dy=1.50$  mm

Maximum value of SAR (interpolated) = 0.364 W/kg


**Zoom Scan (5x5x5)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 8.159 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.517 W/Kg

**SAR(1 g) = 0.315 W/Kg; SAR(10 g) = 0.196 W/Kg**

Maximum value of SAR (measured) = 0.367 W/kg

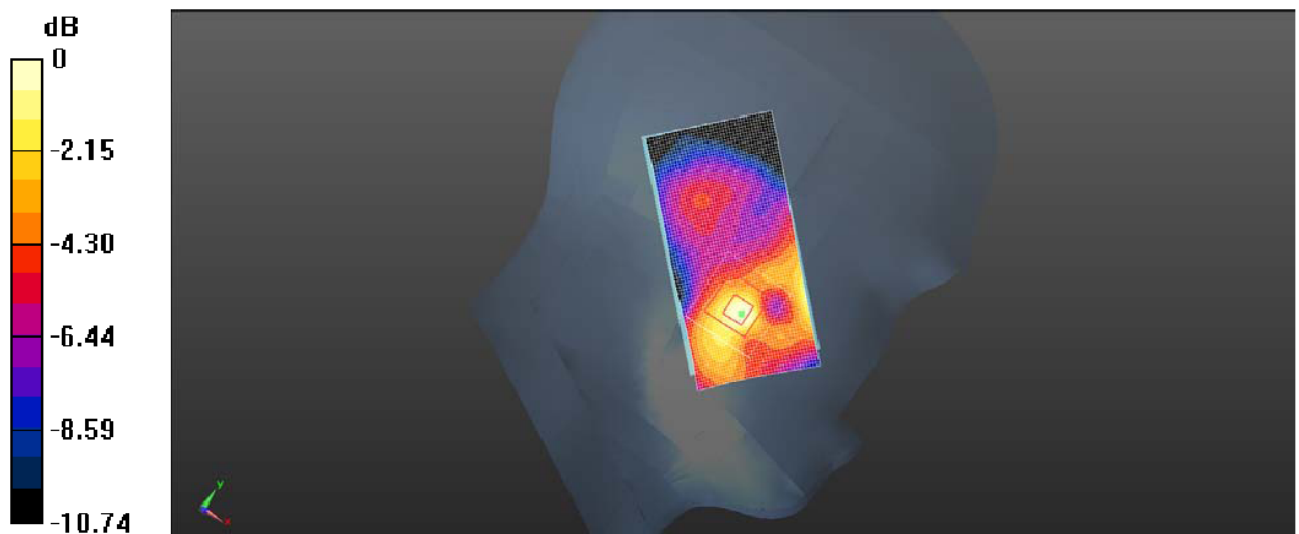

0dB = 0.367 W/kg = -4.27 dBW/kg

Plot 23: Left Head Touch (GSM1900 Low Channel)

**GSM1900 Left Head Touch Middle Channel**

Communication System: Customer System; Frequency: 1880.0 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 1880.0$  MHz;  $\sigma = 1.43$  S/m;  $\epsilon_r = 41.30$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section : Left Head Section

Probe: ES3DV3 - SN3292; ConvF(5.21, 5.21, 5.21); Calibrated: 24/02/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 27/02/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (81x101x1):** Measurement grid:  $dx=1.50$  mm,  $dy=1.50$  mm

Maximum value of SAR (interpolated) = 0.354 W/kg


**Zoom Scan (5x5x5)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 8.517 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.514 W/Kg

**SAR(1 g) = 0.324 W/Kg; SAR(10 g) = 0.198 W/Kg**

Maximum value of SAR (measured) = 0.371 W/kg

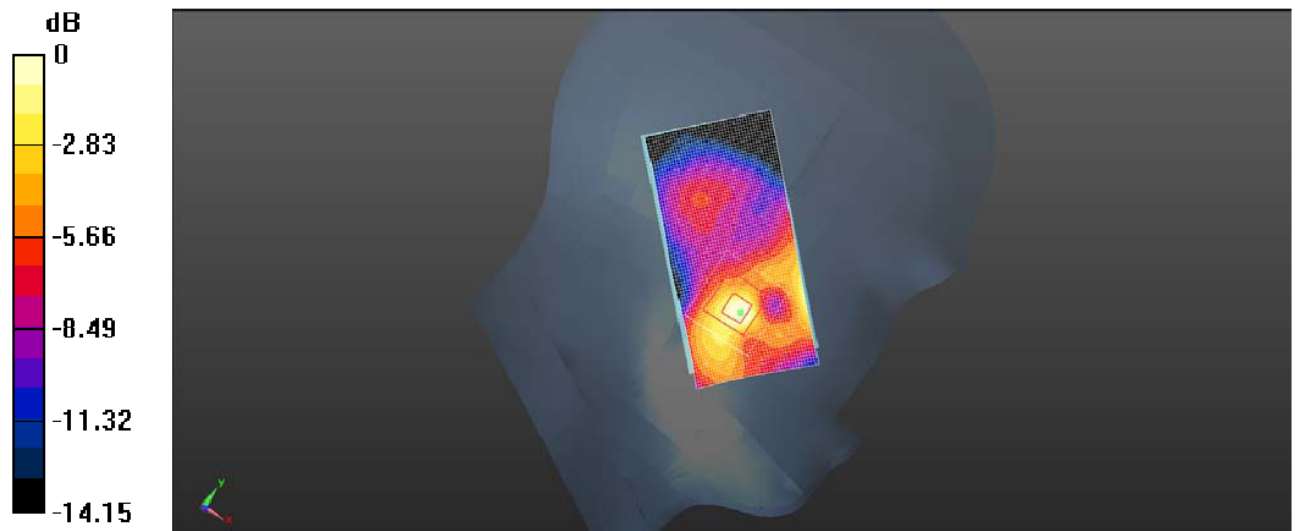

0dB = 0.371 W/kg = -4.14 dBW/kg

Plot 24: Left Head Touch (GSM1900 Middle Channel)

**GSM1900 Left Head Touch High Channel**

Communication System: Customer System; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 1909.8$  MHz;  $\sigma = 1.38$  S/m;  $\epsilon_r = 41.10$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section : Left Head Section

Probe: ES3DV3 - SN3292; ConvF(5.21, 5.21, 5.21); Calibrated: 24/02/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 27/02/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (81x101x1):** Measurement grid:  $dx=1.50$  mm,  $dy=1.50$  mm

Maximum value of SAR (interpolated) = 0.351 W/kg


**Zoom Scan (5x5x5)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 8.554 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.514 W/Kg

**SAR(1 g) = 0.307 W/Kg; SAR(10 g) = 0.181 W/Kg**

Maximum value of SAR (measured) = 0.390 W/kg

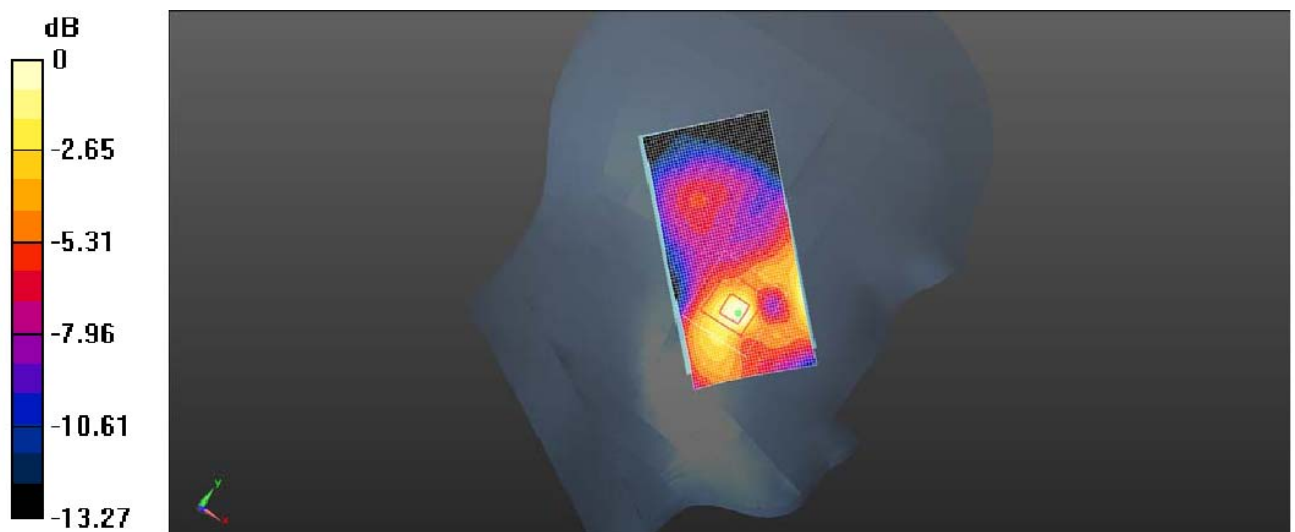

0dB = 0.390 W/kg = -4.01 dBW/kg

Plot 25: Left Head Touch (GSM1900 GPRS 4TS High Channel)

**GSM1900 Left Head Tilt Low Channel**

Communication System: Customer System; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.42$  S/m;  $\epsilon_r = 39.90$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section : Left Head Section

Probe: ES3DV3 - SN3292; ConvF(5.21, 5.21, 5.21); Calibrated: 24/02/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 27/02/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (81x101x1):** Measurement grid:  $dx=1.50$  mm,  $dy=1.50$  mm

Maximum value of SAR (interpolated) = 0.345 W/kg


**Zoom Scan (5x5x5)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 8.565 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.565 W/Kg

**SAR(1 g) = 0.310 W/Kg; SAR(10 g) = 0.175 W/Kg**

Maximum value of SAR (measured) = 0.367 W/kg

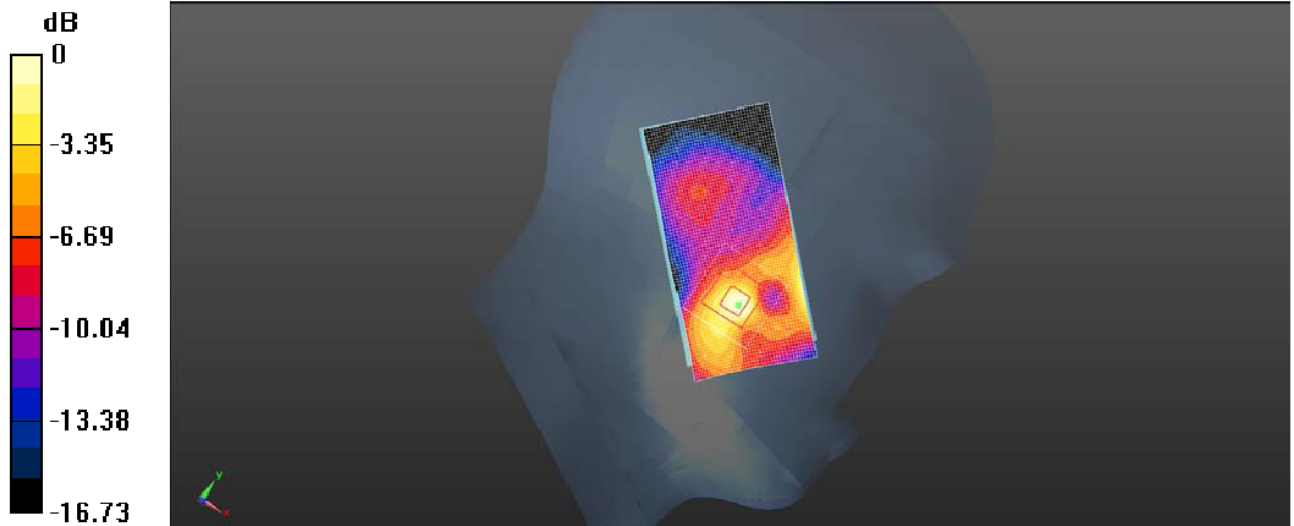

0dB = 0.367 W/kg = -4.24 dBW/kg

Plot 26: Left Head Tilt (GSM1900 Low Channel)

**GSM1900 Left Head Tilt Middle Channel**

Communication System: Customer System; Frequency: 1880.0 MHz;Duty Cycle:1:8.3

Medium parameters used (interpolated):  $f = 1880.0$  MHz;  $\sigma = 1.43$  S/m;  $\epsilon_r = 41.30$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section : Left Head Section

Probe: ES3DV3 - SN3292; ConvF(5.21, 5.21, 5.21); Calibrated: 24/02/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 27/02/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (81x101x1):** Measurement grid: dx=1.50 mm, dy=1.50 mm

Maximum value of SAR (interpolated) = 0.358 W/kg


**Zoom Scan (5x5x5)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.574 V/m; Power Drift =-0.10 dB

Peak SAR (extrapolated) = 0.573 W/Kg

**SAR(1 g) = 0.321 W/Kg; SAR(10 g) = 0.184 W/Kg**

Maximum value of SAR (measured) = 0.375 W/kg

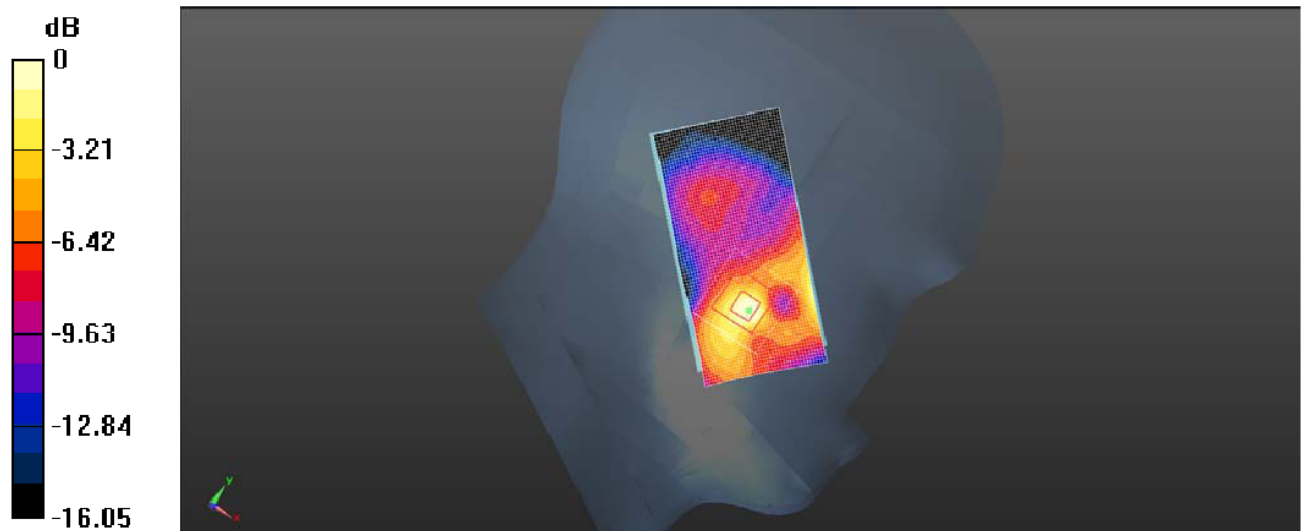

0dB = 0.376 W/kg = -4.10 dBW/kg

Plot 27: Left Head Tilt (GSM1900 Middle Channel)

**GSM1900 Left Head Tilt High Channel**

Communication System: Customer System; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 1909.8$  MHz;  $\sigma = 1.38$  S/m;  $\epsilon_r = 41.10$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section : Left Head Section

Probe: ES3DV3 - SN3292; ConvF(5.21, 5.21, 5.21); Calibrated: 24/02/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 27/02/2013

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (81x101x1):** Measurement grid:  $dx=1.50$  mm,  $dy=1.50$  mm

Maximum value of SAR (interpolated) = 0.358 W/kg


**Zoom Scan (5x5x5)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 8.963 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.574 W/Kg

**SAR(1 g) = 0.301 W/Kg; SAR(10 g) = 0.154 W/Kg**

Maximum value of SAR (measured) = 0.357 W/kg

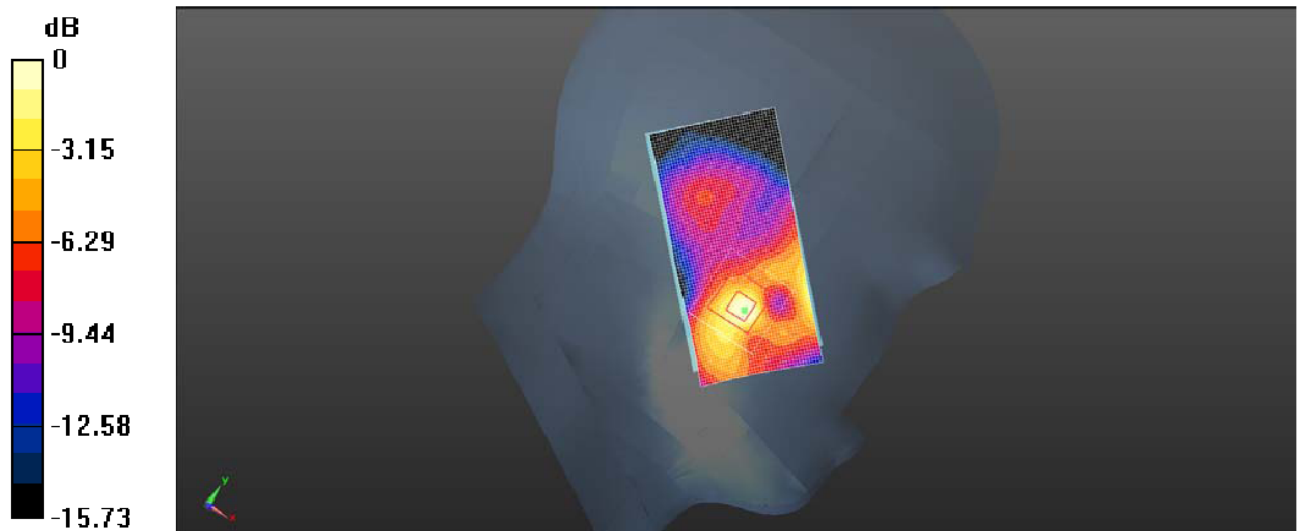

0dB = 0.357 W/kg = -4.28 dBW/kg

Plot 28: Left Head Tilt (GSM1900 High Channel)