



FCC TEST REPORT

REPORT NO.: RF920404H01

MODEL NO.: FMTX1

RECEIVED: Apr. 04, 2003

TESTED: Apr. 04, 2003

APPLICANT: GoDot Technology Inc.

ADDRESS: 11F-1, No. 6, Ln. 99, Pu Ting Rd., Hsinchu,
Taiwan, R.O.C

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chia Pau Tsuen, Linkou Hsiang,
Taipei, Taiwan, R.O.C.

This test report consists of 21 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by NVLAP or any U.S. government agencies. The test results in the report only apply to the tested sample.



Lab Code: 200376-0



Table of Contents

1	CERTIFICATION.....	3
2	SUMMARY OF TEST RESULTS	4
3	GENERAL INFORMATION	5
3.1	GENERAL DESCRIPTION OF EUT.....	5
3.2	DESCRIPTION OF TEST MODES.....	6
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	6
3.4	DESCRIPTION OF SUPPORT UNITS	7
4	TEST PROCEDURE AND RESULT	8
4.1	CONDUCTED EMISSION MEASUREMENT	8
4.2	RADIATED EMISSION MEASUREMENT	8
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	8
4.2.2	TEST INSTRUMENT	9
4.2.3	TEST PROCEDURE	10
4.2.4	DEVIATION FROM TEST STANDARD.....	10
4.2.5	TEST SETUP	11
4.2.6	EUT OPERATING CONDITION.....	11
4.2.7	TEST RESULT	12
4.3	BANDWIDTH MEASUREMENT	14
4.3.1	LIMITS OF BANDWIDTH MEASUREMENT.....	14
4.3.2	TEST INSTRUMENTS.....	14
4.3.3	TEST PROCEDURE	15
4.3.4	DEVIATION FROM TEST STANDARD.....	15
4.3.5	TEST SETUP	15
4.3.6	EUT OPERATING CONDITIONS	15
4.3.7	TEST RESULTS	16
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	20
6	INFORMATION ON THE TESTING LABORATORIES.....	21



1 CERTIFICATION

PRODUCT : FM transmitter
BRAND NAME : Godot
MODEL NO : FMTX1
APPLICANT : GoDot Technology Inc.
STANDARDS : 47 CFR Part 15, Subpart C (15.239)
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility on Apr. 04, 2003. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

CHECKED BY: Amanda Chu, **DATE:** Apr. 30, 2003
(Amanda Chu)

APPROVED BY: Eric Lin, **DATE:** Apr. 30, 2003
(Eric Lin, Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
STANDARD PARAGRAPH	TEST TYPE	RESULT	REMARK
15.207	Conducted Emission Test	N/A	Power supply is 3VDC from batteries
15.239	Radiated Emission Test	PASS	Minimum passing margin is -6.9dBuV at 533.40 MHz

NOTE: The receiver part to communicate with the EUT has been verified to comply with FCC Part 15, Subpart B, Class B (DoC). The test report can be provided upon request.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	FM transmitter
MODEL NO.	FMTX1
POWER SUPPLY	3VDC from battery
MODULATION TYPE	FSK
CARRIER FREQUENCY OF EACH CHANNEL	88.5MHz & 88.7MHz & 88.9 MHz
NUMBER OF CHANNEL	3
ANTENNA TYPE	Soldering wire
DATA CABLE	Stereo ear phone cable (unshielded, 150mm)
I/O PORTS	Ear phone port x 1
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT is the transmitter part of FM transmitter.
2. For more detailed features description of the EUT, please refer to the manufacturer's specifications or the User's Manual.

3.2 DESCRIPTION OF TEST MODES

Three channels were provided to this EUT.

Channel	Frequency
1	88.5MHz
2	88.7MHz
3	88.9MHz

NOTE: Channel 2, the worst case, was chosen for final test.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is the transmitter part of a FM transmitter. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR 47 Part 15, Subpart C (15.239)

ANSI C63.4-1992

All tests have been performed and recorded as per the above standards.




3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1	CASSETTE RECORDER	PANASONIC	RQ-L307	BD7AE75657	NA

No.	Signal cable description
1	NA

Note: 1. The power cords of the above support units were unshielded (1.8m).

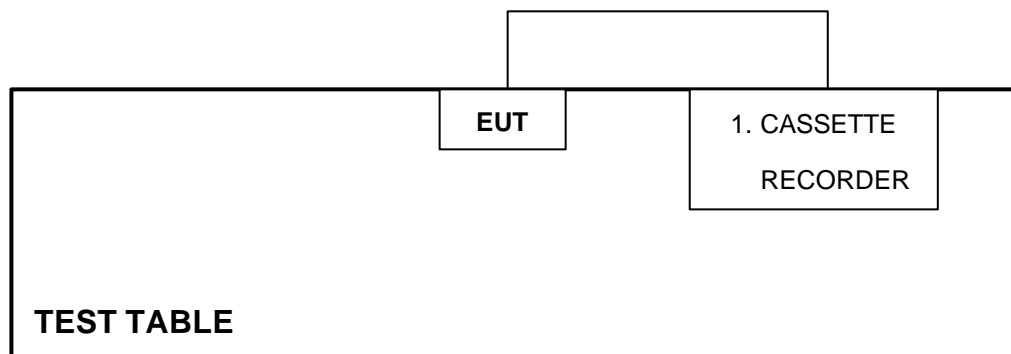

NOTE: 1. Please refer to the photos of test configuration in Item 6 also.

4 TEST PROCEDURE AND RESULT

4.1 CONDUCTED EMISSION MEASUREMENT

NA

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

According to 15.239 the field strength of emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBuV/m)	
	Peak	Average
88 to 108	67.96	47.96

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENT

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Spectrum Analyzer	8590L	3467U00646	Aug. 28, 2003
*ADVANTEST Spectrum Analyzer	R3271A	85060311	May 21, 2003
CHASE RF Pre_Amplifier	CPA9232	1010	Feb. 22, 2004
*HP Pre_Amplifier	8449B	3008A01281	Jun. 27, 2003
*ROHDE & SCHWARZ Test Receiver	ESVS 30	841977/002	Jan. 14, 2004
*CHASE Broadband Antenna	CBL6112B	2798	May 17, 2003
*Schwarzbeck Horn_Antenna	BBHA9120-D1	D123	Jul. 31, 2003
SCHWARZBECK Tunable Dipole Antenna	UHAP	897	Mar. 07, 2005
SCHWARZBECK Tunable Dipole Antenna	VHAP	880	Mar. 07, 2005
*RF Switches	MP59B	1-5161-28698	Jul. 29, 2003
*RF Cable(CHASE)	CH A9525	Cable_OB_01	Jul. 29, 2003
*Software	AS60P8	NA	NA
*CHANCE MOST Antenna Tower	AT-100	CM-A007	NA
*CHANCE MOST Turn Table	TC-008	CM-T007	NA
*CORCOM AC Filter	MRI2030	024/019	NA

- Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Tunable Dipole Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.
2. * = These equipment are used for the final measurement.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The test was performed in ADT Open Site No. B.
 5. The VCCI Site Registration No. is R-847.
 6. The FCC Site Registration No. is 92753.



4.2.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

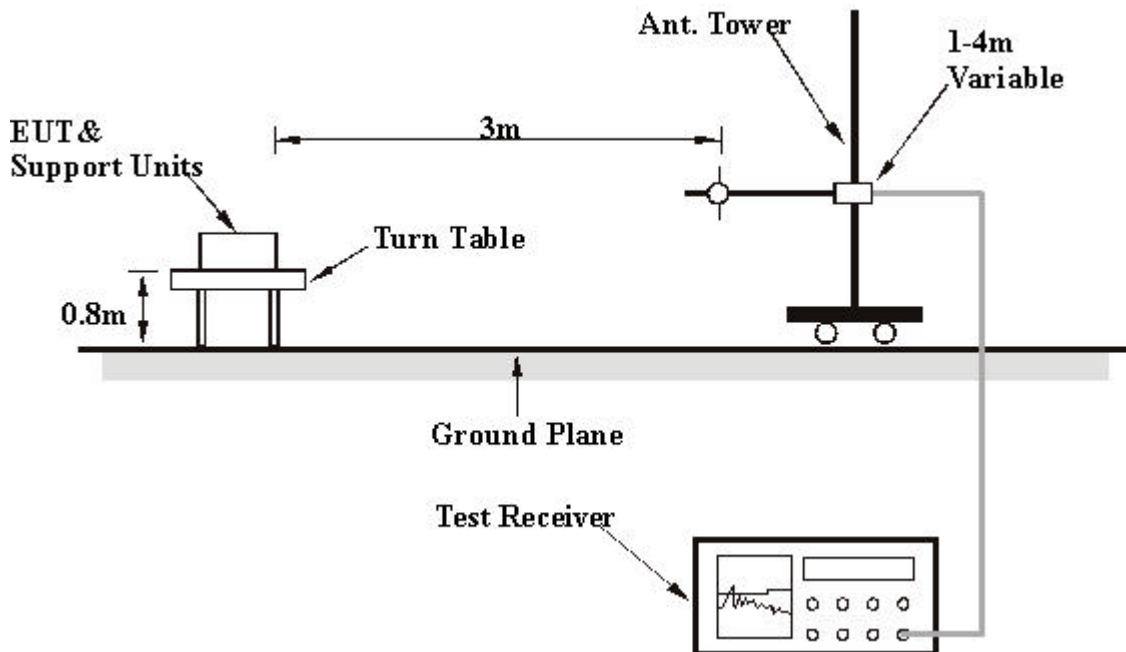

For the actual test configuration, please refer to the related item in this test report - Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITION

Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.

4.2.7 TEST RESULT

EUT	FM transmitter	MODEL	FMTX1
MODE	Channel 2	INPUT POWER	3VDC
FREQUENCY RANGE	Below 1000 MHz	DETECTOR FUNCTION	Peak / Quasi-Peak / Average
ENVIRONMENTAL CONDITIONS	21 deg. C, 63 % RH, 987 hPa	TEST BY	Larry Peng

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*88.70	61.3 PK	67.96	-6.66	4.00 H	125	50.1	11.20
1	*88.70	43.5 AV	47.96	-4.46	2.87 H	125	32.30	11.20
2	177.80	19.6 QP	43.50	-23.90	2.69 H	5	9.20	10.40
3	266.70	21.7 QP	46.00	-24.30	2.77 H	145	7.10	14.60
4	355.60	23.1 QP	46.00	-22.90	2.94 H	336	6.30	16.80
5	444.50	25.0 QP	46.00	-21.00	2.41 H	296	6.20	18.90
6	533.40	39.1 QP	46.00	-6.90	1.85 H	132	18.00	21.10
7	622.30	29.0 QP	46.00	-17.00	1.78 H	7	7.10	22.00
8	711.20	28.5 QP	46.00	-17.50	1.24 H	135	6.30	22.20
9	800.10	29.6 QP	46.00	-16.40	1.07 H	272	6.40	23.20
10	977.90	33.3 QP	54.00	-20.70	1.00 H	22	8.40	24.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. "*" = Fundamental frequency.



EUT	FM transmitter	MODEL	FMTX1
MODE	Channel 2	INPUT POWER	3VDC
FREQUENCY RANGE	Below 1000 MHz	DETECTOR FUNCTION	Peak / Quasi-Peak / Average
ENVIRONMENTAL CONDITIONS	17 deg. C, 65 % RH, 987 hPa	TEST BY	Larry Peng

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*88.70	60.2 PK	67.96	-7.76	1.00 V	243	49.0	11.20
1	*88.70	41.9 AV	47.96	-6.06	1.00 V	216	30.70	11.20
2	177.80	17.5 QP	43.50	-26.00	1.00 V	20	7.10	10.40
3	266.70	19.5 QP	46.00	-26.50	1.00 V	255	4.90	14.60
4	355.60	23.4 QP	46.00	-22.60	1.00 V	168	6.50	16.80
5	444.50	25.6 QP	46.00	-20.40	1.00 V	47	6.80	18.90
6	533.40	28.0 QP	46.00	-18.00	1.54 V	73	6.80	21.10
7	622.30	28.4 QP	46.00	-17.60	2.13 V	190	6.50	22.00
8	711.20	27.0 QP	46.00	-19.00	2.25 V	325	4.90	22.20
9	800.10	30.8 QP	46.00	-15.20	1.27 V	263	7.50	23.20
10	889.00	33.5 QP	46.00	-12.50	1.00 V	115	9.50	24.00
11	977.90	33.7 QP	54.00	-20.30	1.00 V	114	8.80	24.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. "*" = Fundamental frequency.

4.3 EMISSION BAND MEASUREMENT

4.3.1 LIMITS OF EMISSION BAND MEASUREMENT

Emissions from the intentional radiator shall be confined within a bands 200kHz wide centered on the operating frequency. The 200 kHz band shall lie wholly within the frequency range of 88 to 108MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP	1093.4495.30	Dec. 19, 2003

NOTE:

1The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 10 kHz RBW and 10 kHz VBW. Measured the 20dBc bandwidth and plotted the graph.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.


4.3.7 TEST RESULTS

EUT	FM transmitter	MODEL	FMTX1
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 978 hPa
TEST BY	Eric Lee		

CHANNEL	CHANNEL FREQUENCY (MHz)	20 dB BANDWIDTH (MHz)	MAXIMUM LIMIT (MHz)	PASS/FAIL
1	88.5	0.195	0.2	PASS
2	88.7	0.180	0.2	PASS
3	88.9	0.191	0.2	PASS




CH1

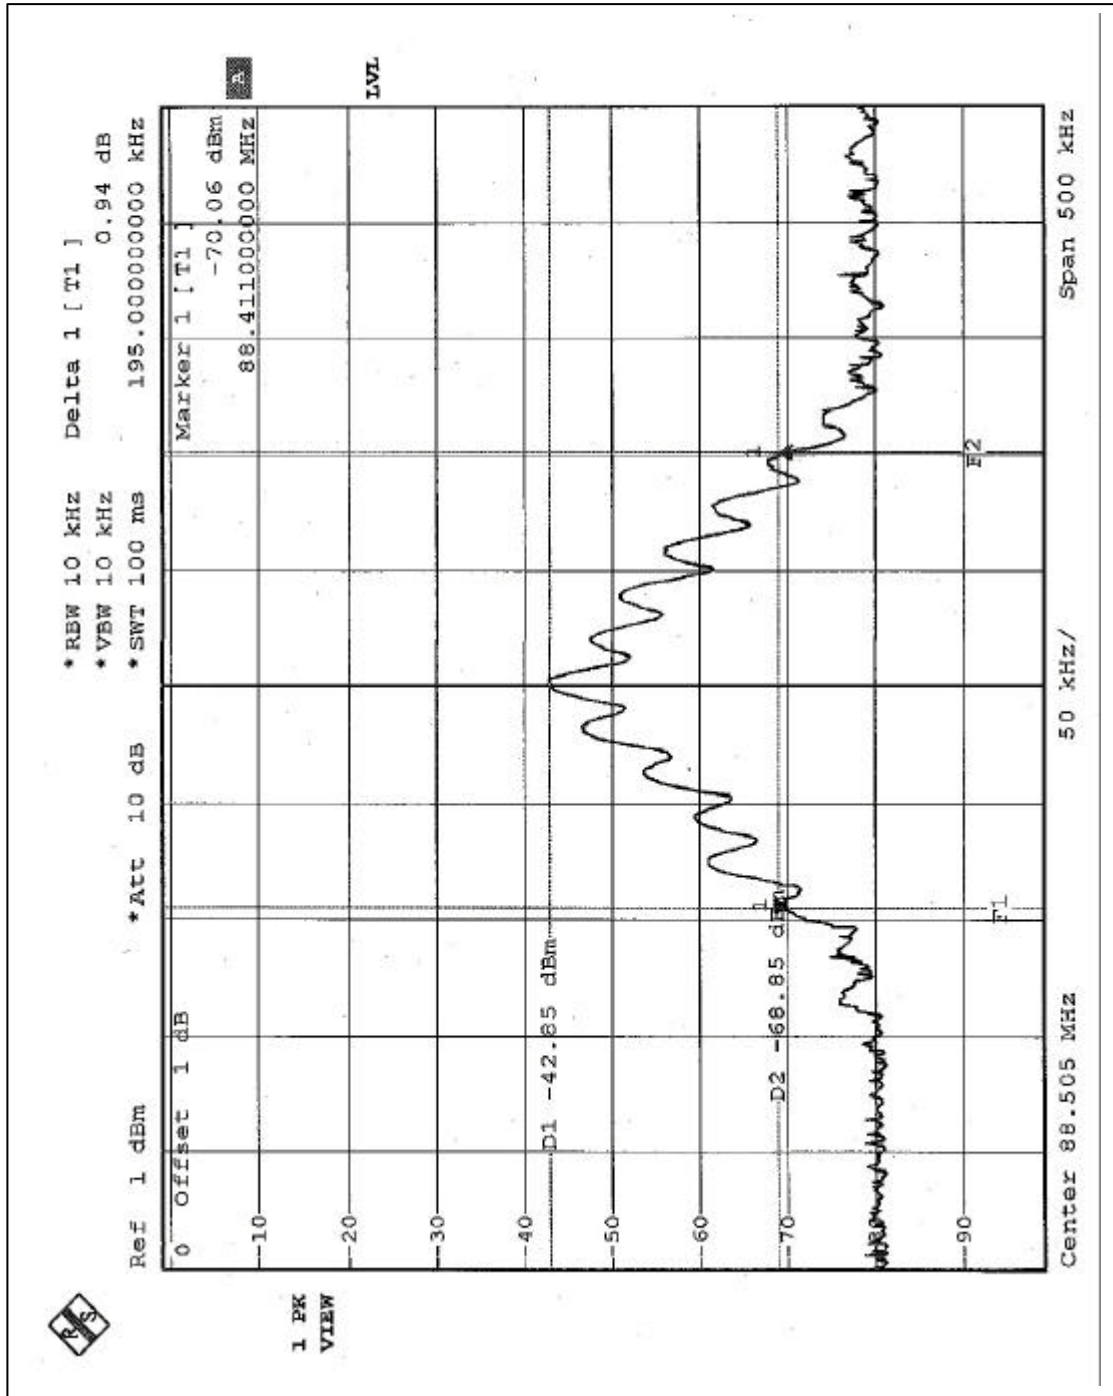




CH2

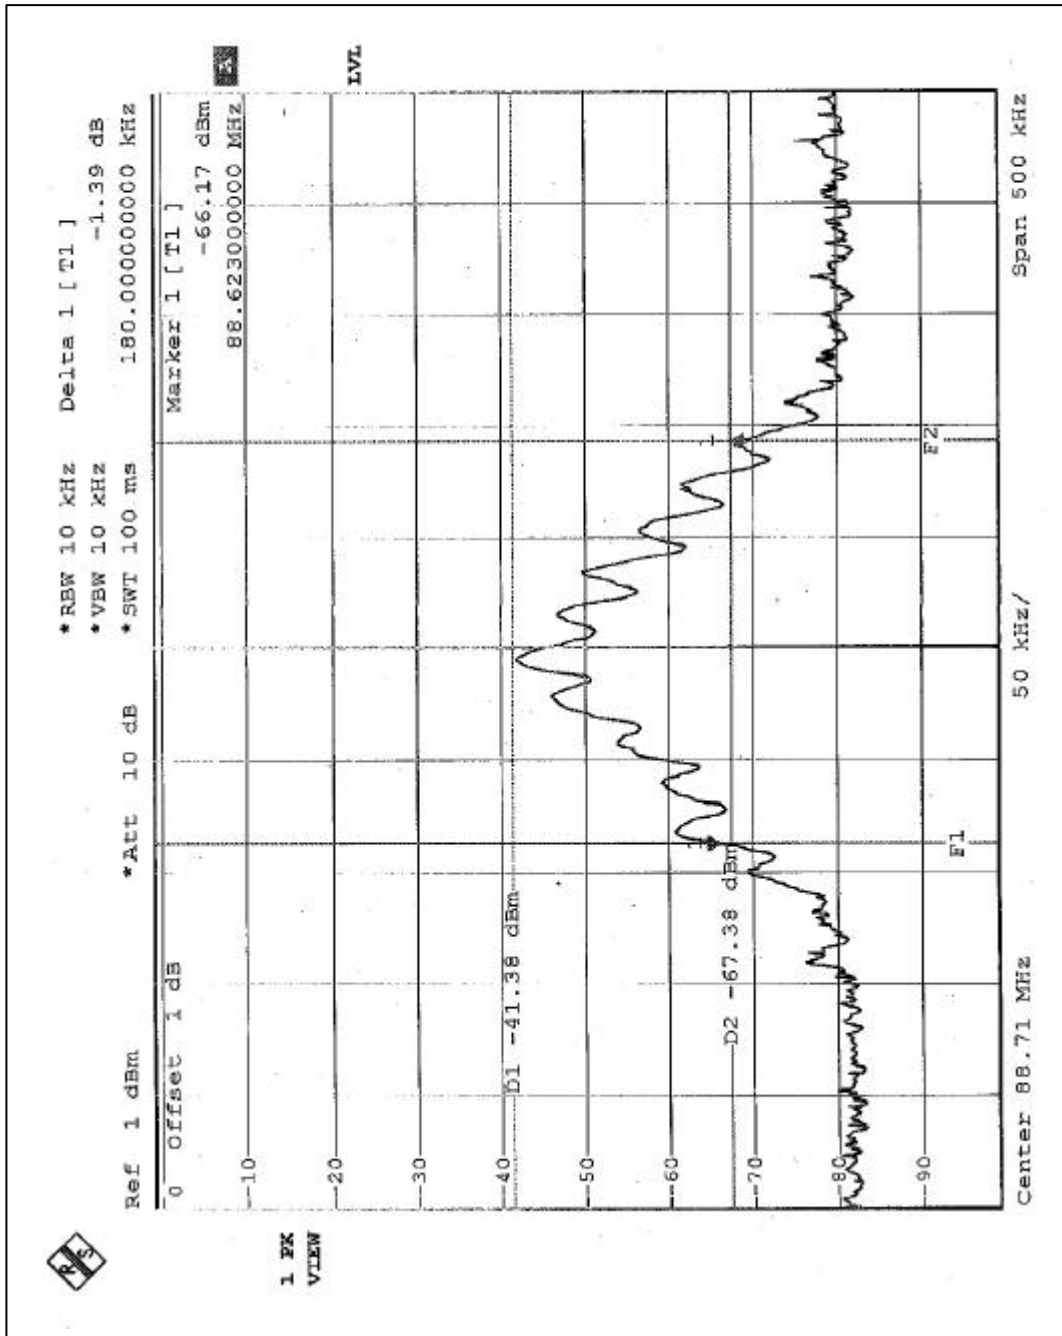



CH3

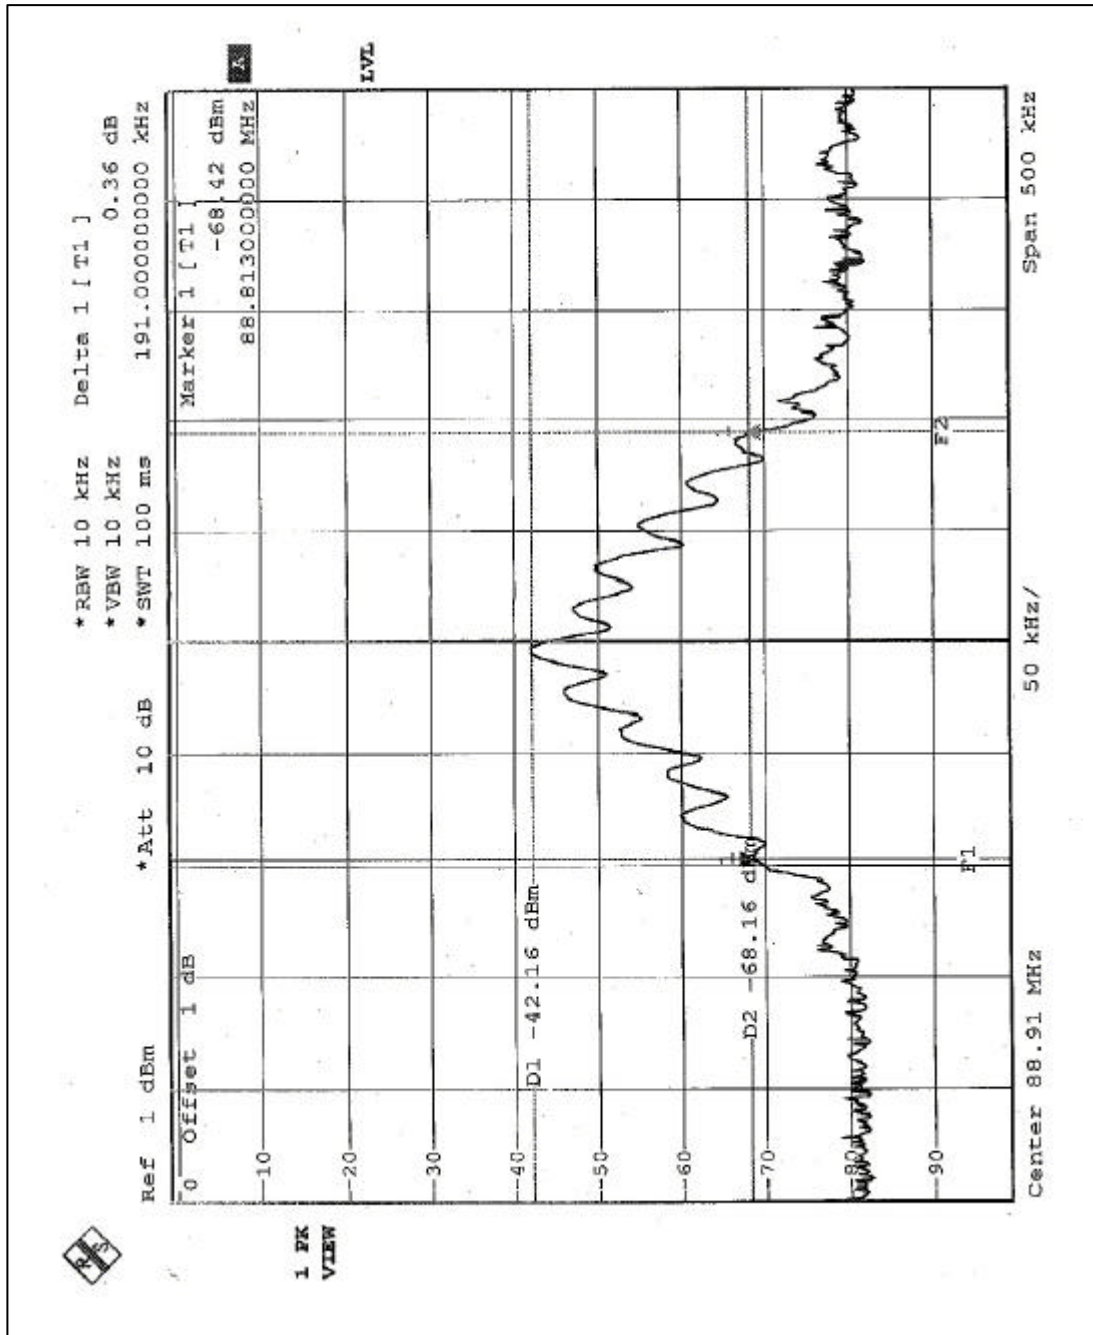

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

RADIATED EMISSION TEST





6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
R.O.C.	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343
Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195
Fax: 886-2-26093184

Lin Kou RF&Telecom Lab:

Tel: 886-3-3270910
Fax: 886-3-3270892

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.