



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Terminal

Model: 8330 Terminal

Trade Name: CIPHERLAB

Issued to

Cipherlab Co., Ltd.

12F, 333 Dunhua S. Rd., Sec. 2 Taipei, Taiwan 106, Taiwan R.O.C.

Issued by

Compliance Certification Services Inc.

**No. 81-1, Lane 210, Pa-De 2nd Rd., Luchu Hsiang,
Taoyuan Shien, (338) Taiwan, R.O.C.**

TEL: 886-3-324-0332

FAX: 886-3-324-5235

<http://www.ccsemc.com.tw>

service@tw.ccsemc.com



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	November 4, 2008	Initial Issue	ALL	Jill Shiau



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	4
2. EUT DESCRIPTION	5
3. TEST METHODOLOGY.....	6
3.1 EUT CONFIGURATION.....	6
3.2 EUT EXERCISE	6
3.3 GENERAL TEST PROCEDURES	6
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	7
3.5 DESCRIPTION OF TEST MODES	8
4. INSTRUMENT CALIBRATION	9
4.1 MEASURING INSTRUMENT CALIBRATION.....	9
4.2 MEASUREMENT EQUIPMENT USED	9
5. FACILITIES AND ACCREDITATIONS.....	11
5.1 FACILITIES	11
5.2 EQUIPMENT.....	11
5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....	12
6. SETUP OF EQUIPMENT UNDER TEST.....	13
6.1 SETUP CONFIGURATION OF EUT	13
6.2 SUPPORT EQUIPMENT	13
7. FCC PART 15.247 REQUIREMENTS	14
7.1 6dB BANDWIDTH	14
7.2 PEAK POWER.....	18
7.3 AVERAGE POWER	22
7.4 BAND EDGES MEASUREMENT.....	26
7.5 PEAK POWER SPECTRAL DENSITY	35
7.6 SPURIOUS EMISSIONS	39
7.7 POWERLINE CONDUCTED EMISSIONS.....	54
APPENDIX I RADIO FREQUENCY EXPOSURE	57
APPENDIX II PHOTOGRAPHS OF TEST SETUP.....	59



1. TEST RESULT CERTIFICATION

Applicant: Cipherlab Co., Ltd.
 12F, 333 Dunhua S. Rd., Sec. 2 Taipei, Taiwan 106, Taiwan R.O.C.

Equipment Under Test: Terminal

Trade Name: CIPHERLAB

Model: 8330 Terminal

Date of Test: October 25~ 30, 2008

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Robert Huang
 Section Manager
 Compliance Certification Services Inc.

Julia Wei
 Senior Specialist
 Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	Terminal		
Trade Name	CIPHERLAB		
Model Number	8330 Terminal		
Power Supply	3.7VDC, 1800mA		
Power Adapter	Balance / GPSA-0500255 I/P: 100-240VAC, 50-60Hz, 0.5A O/P: 5VDC, 1A		
Frequency Range	2412 ~ 2462 MHz		
RF Module	SAMSUNG	Model	SWL-2460
Transmit Power	IEEE 802.11b: 14.26 dBm (26.67mW) IEEE 802.11g: 9.61 dBm (9.14mW)		
Modulation Technique	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: DSSS (CCK, DQPSK, DBPSK) + OFDM (QPSK, BPSK, 16-QAM, 64-QAM)		
Transmit Data Rate	IEEE 802.11b: 11, 5.5, 2, 1 Mbps IEEE 802.11g: 54, 48, 36, 24, 18, 12, 11, 9, 6, 5.5, 2, 1 Mbps		
Number of Channels	11 Channels		
Channels Spacing	5MHz		
Antenna Specification	Chip Antenna		

Remark:

1. The sample selected for test was production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for **FCC ID: Q3N-8300WB2** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.
3. The EUT has two types for sale. (Type 1: CCD; Type 2: Laser)



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

There are two types (CCD & Laser) of EUT for sale. After verified, the EUT with CCD has been reported as worst case on this test report.

The EUT (model: 8330 Terminal with type 1) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode was programmed.

After verification, all tests carried out were with the worst-case test modes as shown below except radiated spurious emission worst case was in normal link mode with cradle.

IEEE802.11b: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 11Mbps data rate were chosen for full testing.

IEEE802.11g: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510268	10/07/2009
Spectrum Analyzer	R&S	FSP30	100112	10/16/2009

Open Area Test Site # 3				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510268	10/07/2009
Spectrum Analyzer	R&S	FSP30	100112	10/16/2009
EMI Test Receiver	R&S	ESVS30	828488/004	03/20/2009
Pre-Amplifier	Mini-Circuits	ZKL-2R5	83153007374	04/02/2009
Pre-Amplifier	Agilent	8449B	3008A01738	03/28/2009
Bilog Antenna	Sunol Sciences	JB1	A031905	10/03/2009
Horn Antenna	EMCO	3115	00022250	05/08/2009
Loop Antenna	EMCO	6502	2356	05/28/2010
Turn Table	Chance Most	CM-T003-1	T807-6	N.C.R
Antenna Tower	Chance Most	CM-A003-1	A807-6	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
RF Switch	ANRITSU	MP59B	M53867	N.C.R
Site NSA	CCS	N/A	N/A	05/09/2009
Test S/W	LabVIEW 6.1 (CCS OATS EMI SW V2.6)			

Remark: The measurement uncertainty is less than +/-4.0235dB (30MHz ~ 1GHz), +/-3.0958dB (Above 1GHz) which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.



Powerline Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCS30	845552/030	04/08/2009
LISN	R&S	ENV216	100074	12/03/2008
LISN	FCC	FCC-LISN-50/ 250-16-2-07	06013	10/12/2009
Test S/W	LabVIEW 6.1 (CCS Conduction Test SW Version_01)			

Remark: The measurement uncertainty is less than +/- 1.7806dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILTIES

All measurement facilities used to collect the measurement data are located at

No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No. 81-1, Lane 210, Pa-De 2nd Rd., Luchu Hsiang, Taoyuan Shien, (338) Taiwan, R.O.C.

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT





Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	CFR 47, FCC Part15/18, CISPR 22, EN 55022, ICES-003, AS/NZS CISPR 22, VCCI V-3, EN 55011, CISPR 11, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 61000-6-1/2/3/4, EN 55024, CISPR 24, AS/NZS CISPR 24, AS/NZS 61000.6.2, EN 55014-1/-2, ETSI EN 300 386 v1.3.2/v1.3.3, IEC/EN 61000-3-2, AS/NZS 61000.3.2, IEC/EN 61000-3-3, AS/NZS 61000.3.3	 ACCREDITED No. 0824-01
USA	FCC MRA	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 FC TW1026
Japan	VCCI	3/10 meter Open Area Test Sites and conducted test sites to perform radiated/conducted measurements	VCCI R-2882/2541/2798/725/1868 C-402/747/912 T-321/325
Taiwan	TAF	EN 55014-1, CISPR 14, CNS 13781-1, EN 55013, CISPR 13, CNS 13439, EN 55011, CISPR 11, CNS 13803, PLMN09, IS2045-0, LP0002 FCC Part 27/90, Part 15B/C/D/E, RSS-192/193/210/310 ETSI EN 300 328/ 300 220-1/ 300 220-2/ 301 893/ 301 489-01/ 301 489-03/ 301 489-07 / 301 489-17/ 300 440-1/ 300 440-2 AS/NZS 4268, AS/NZS 4771 CISPR 22, EN 55022, CNS 13438, AS/NZS CISPR 22, VCCI, IEC/EN 61000-4-2/3/4/5/6/8/11, CNS 14676-2/3/4/5/6/8, CNS 14934-2/3, CNS 13783-1, CNS 13439, CNS 13803	 IAC-MRA TAF Testing Laboratory 0363
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	SL2-IS-E-0014 / IN-E-0014 /A1-E-0014 /R1-E-0014 /R2-E-0014 /L1-E-0014
Canada	Industry Canada	RSS212, Issue 1	 IC 2324C-3 IC 2324C-5

Note: No part of this report may be used to claim or imply product endorsement by A2LA, TAF or other government agency.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

For Conducted and Radiated Measurement

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
	N/A						

****No any support equipment during the test.**

For Powerline Measurement

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	Notebook PC	IBM	1706-A78	LV-L1870 06/09	FCC DoC	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
2.	LCD Monitor	DELL	2407WFPb	CN-0FC255-46633- 675-22TJS	FCC DoC	D-SUB Cable; Shielded, 1.8m with two cores	Unshielded, 1.8m
3.	USB Mouse	DELL	MO56UOA	F0Q01BKU	FCC DoC	Unshielded, 1.8m	N/A

Remark: Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




7. FCC PART 15.247 REQUIREMENTS

7.1 6dB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST CONFIGURATION

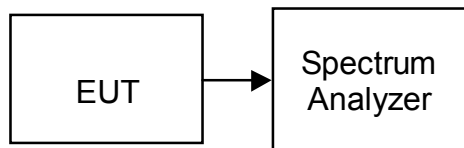

TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = 300kHz, Span = 30MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted

TEST DATA

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Margin (kHz)
Low	2412	10050	>500	PASS
Mid	2437	9825		PASS
High	2462	10050		PASS


Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Margin (kHz)
Low	2412	16500	>500	PASS
Mid	2437	16500		PASS
High	2462	16500		PASS




Test Plot

6dB Bandwidth (IEEE 802.11b / CH Low)

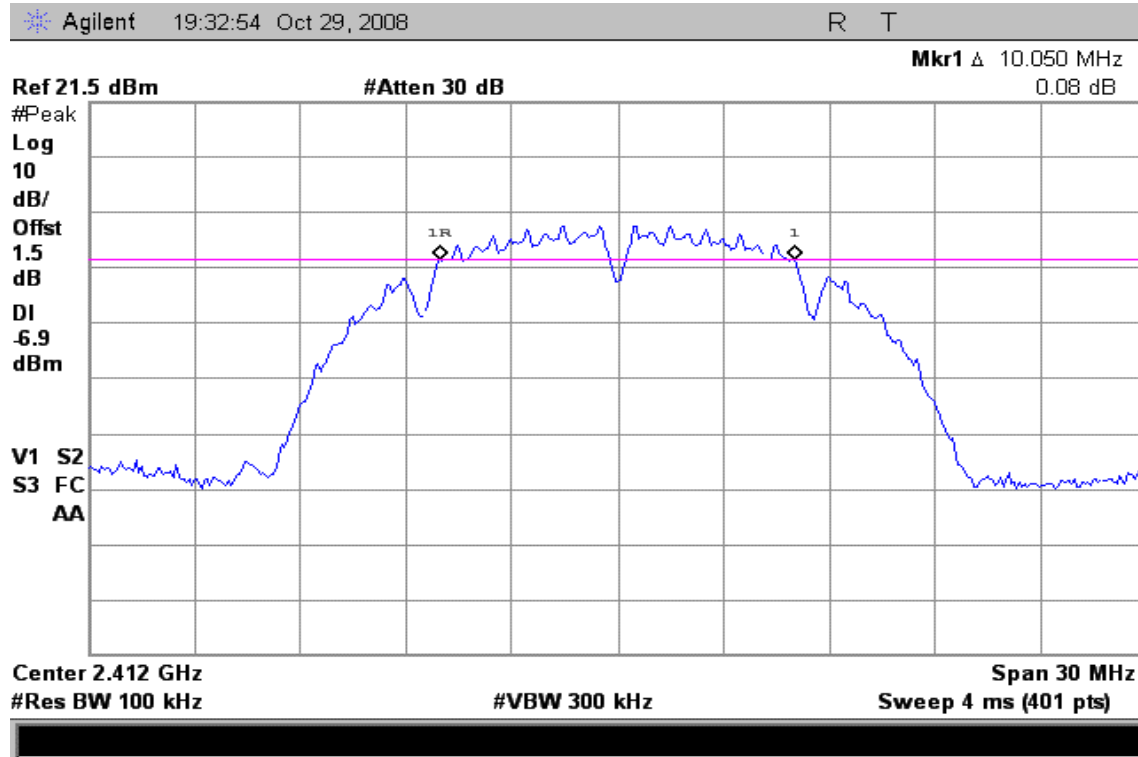


6dB Bandwidth (IEEE 802.11b / CH Mid)

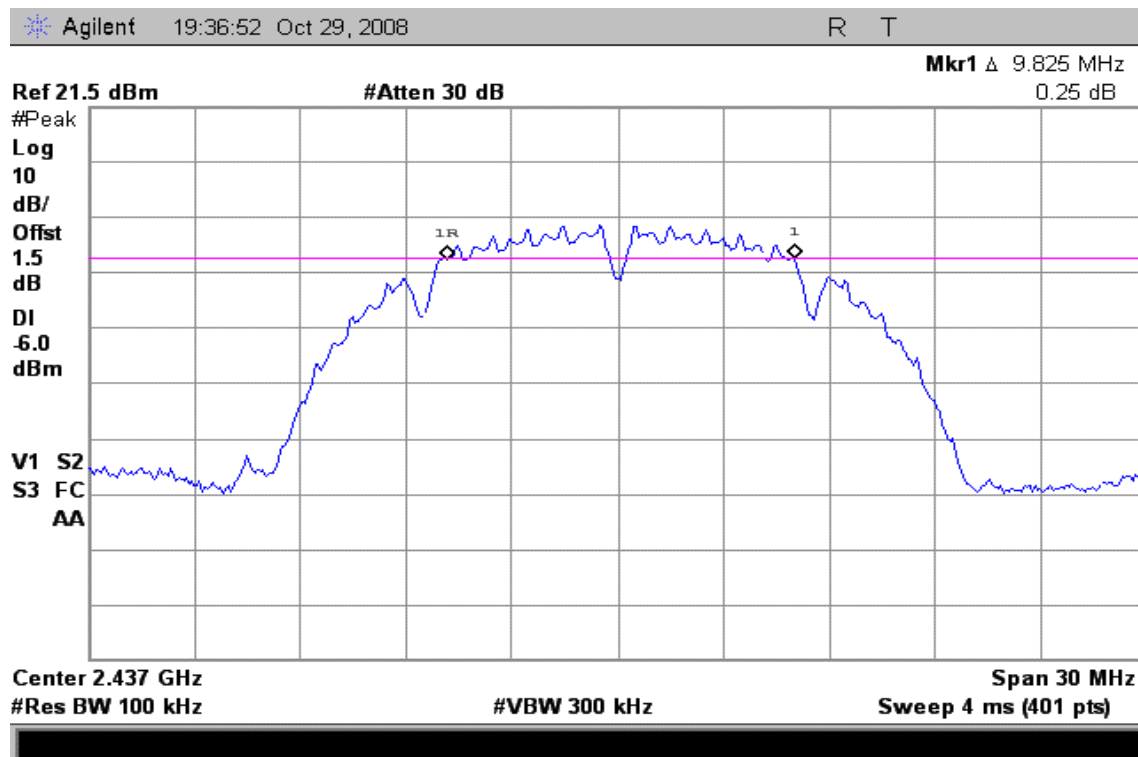




6dB Bandwidth (IEEE 802.11b / CH High)

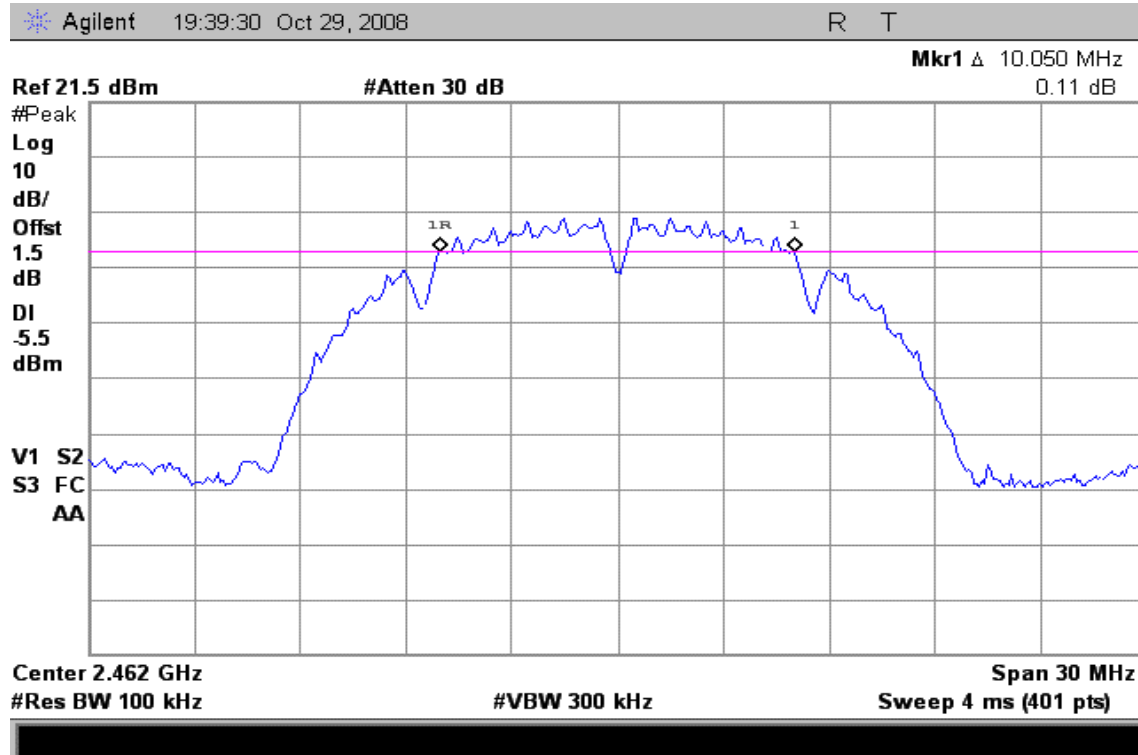


6dB Bandwidth (IEEE 802.11g / CH Low)

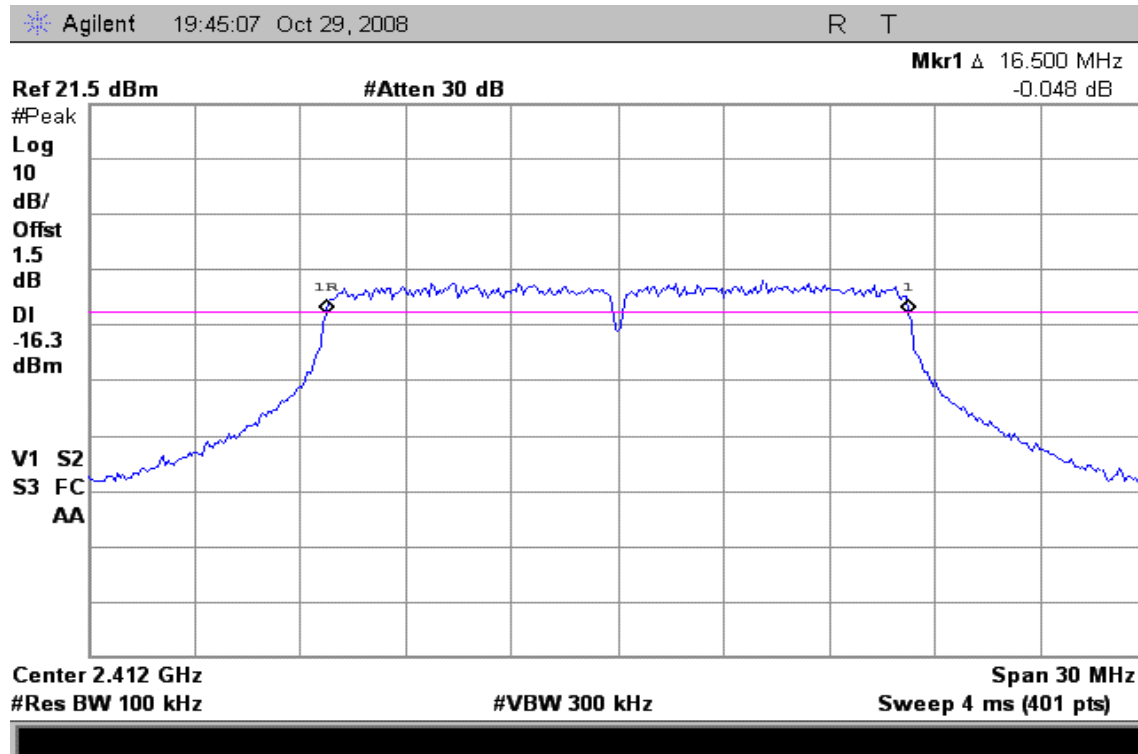




6dB Bandwidth (IEEE 802.11g / CH Mid)

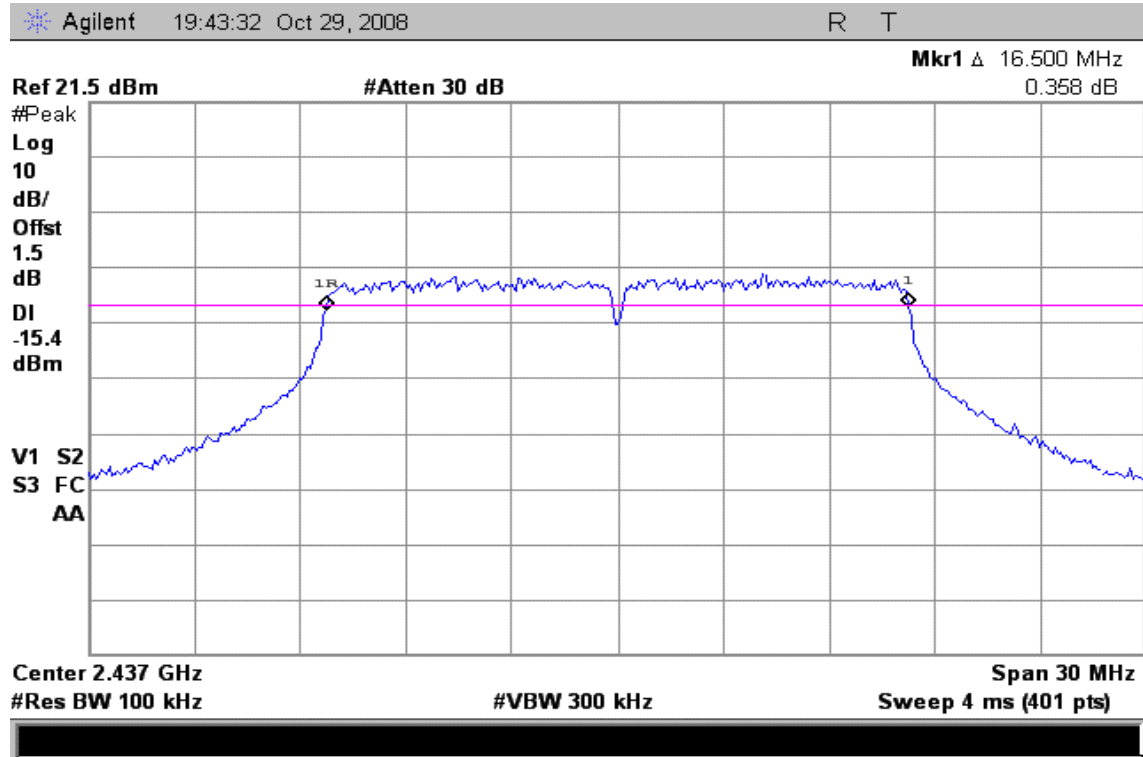

6dB Bandwidth (IEEE 802.11g / CH High)

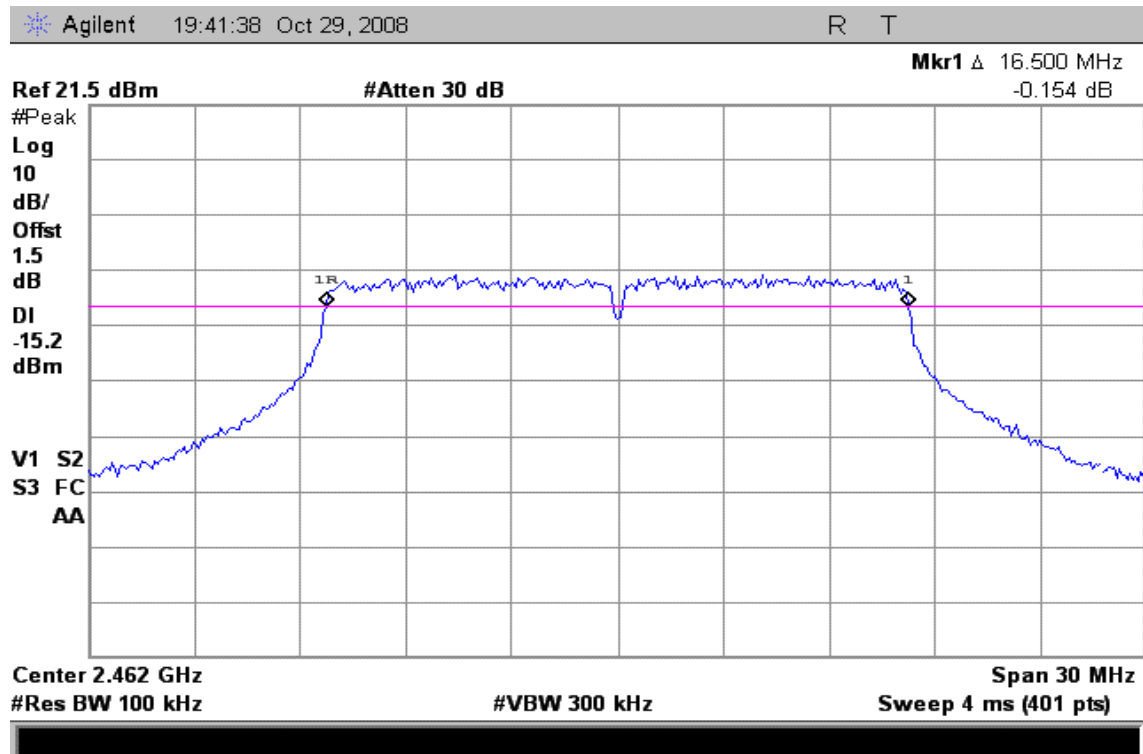




7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST CONFIGURATION

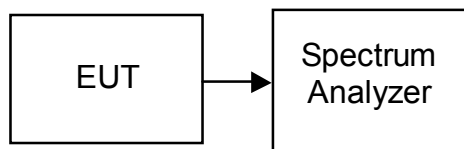

TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.

TEST RESULTS

No non-compliance noted

TEST DATA

IEEE 802.11b

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Test Result
Low	2412	12.57	0.0181	1	PASS
Mid	2437	13.62	0.0230		PASS
High	2462	14.26	0.0267		PASS

IEEE 802.11g


Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Test Result
Low	2412	8.28	0.0067	1	PASS
Mid	2437	9.00	0.0079		PASS
High	2462	9.61	0.0091		PASS



Test Plot

Peak Power (IEEE 802.11b / CH Low)

Agilent 19:58:22 Oct 29, 2008 R T

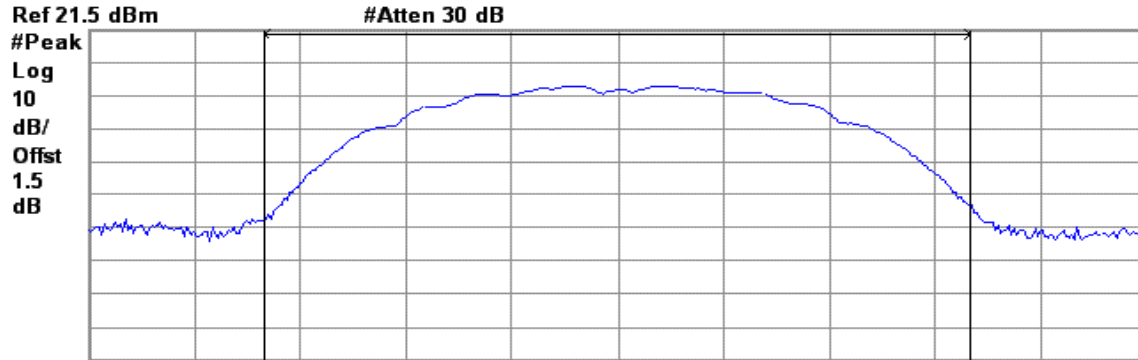

Center 2.412 GHz Span 30 MHz
 #Res BW 1 MHz #VBW 3 MHz Sweep 4 ms (401 pts)

Channel Power


12.57 dBm / 20.0000 MHz

Power Spectral Density

-60.44 dBm/Hz

Peak Power (IEEE 802.11b / CH Mid)

Agilent 20:03:32 Oct 29, 2008 R T

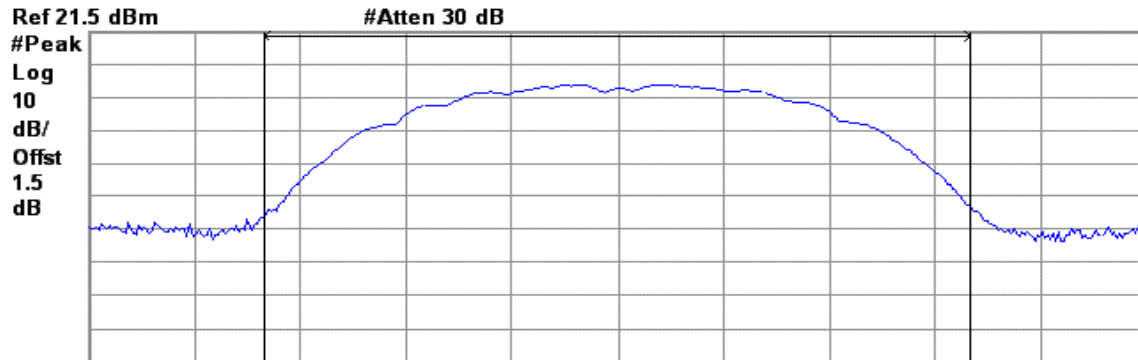

Center 2.437 GHz Span 30 MHz
 #Res BW 1 MHz #VBW 3 MHz Sweep 4 ms (401 pts)

Channel Power

13.62 dBm / 20.0000 MHz

Power Spectral Density


-59.40 dBm/Hz



Peak Power (IEEE 802.11b / CH High)

Agilent 20:07:23 Oct 29, 2008

R T

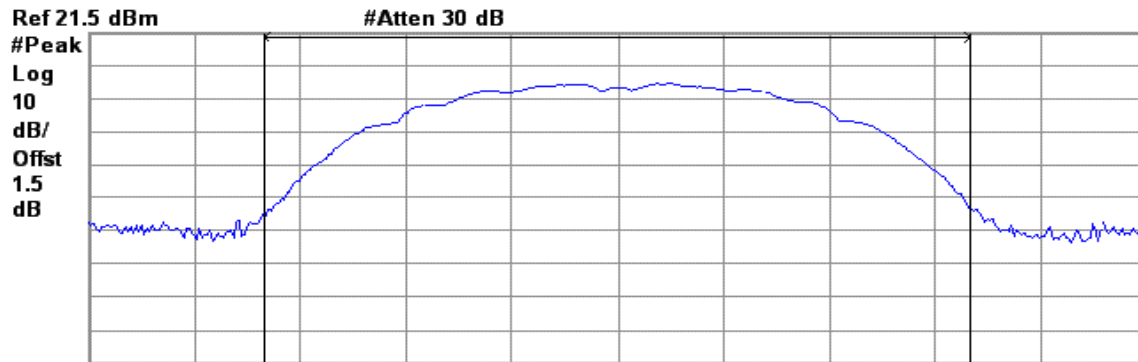

Center 2.462 GHz
#Res BW 1 MHz

#VBW 3 MHz

Span 30 MHz
Sweep 4 ms (401 pts)

Channel Power

14.26 dBm / 20.0000 MHz


Power Spectral Density

-58.76 dBm/Hz

Peak Power (IEEE 802.11g / CH Low)

Agilent 20:17:50 Oct 29, 2008

R T

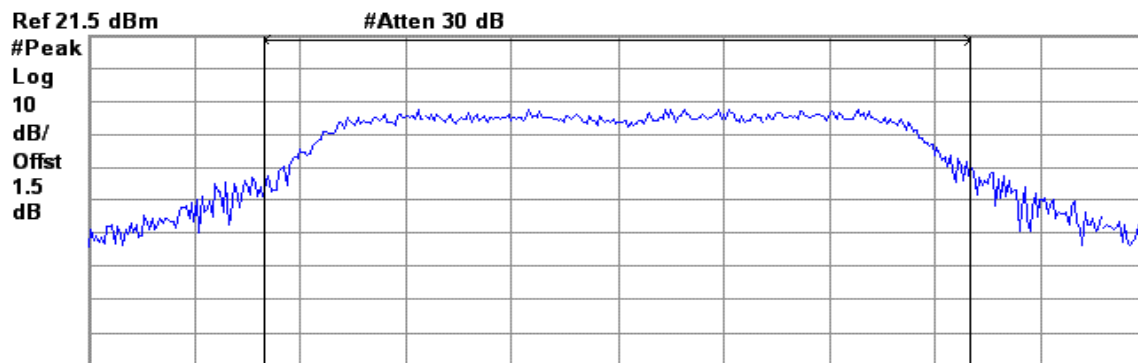

Center 2.412 GHz
#Res BW 1 MHz

#VBW 3 MHz

Span 30 MHz
Sweep 4 ms (401 pts)

Channel Power

8.28 dBm / 20.0000 MHz

Power Spectral Density


-64.73 dBm/Hz



Peak Power (IEEE 802.11g / CH Mid)

Agilent 20:13:20 Oct 29, 2008

R T

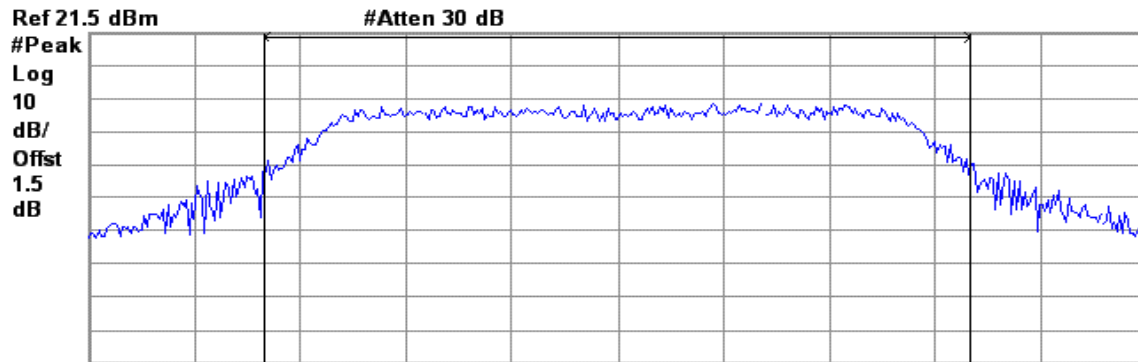

Center 2.437 GHz
#Res BW 1 MHz

#VBW 3 MHz

Span 30 MHz
Sweep 4 ms (401 pts)

Channel Power

9.00 dBm / 20.0000 MHz


Power Spectral Density

-64.01 dBm/Hz

Peak Power (IEEE 802.11g / CH High)

Agilent 20:10:24 Oct 29, 2008

R T

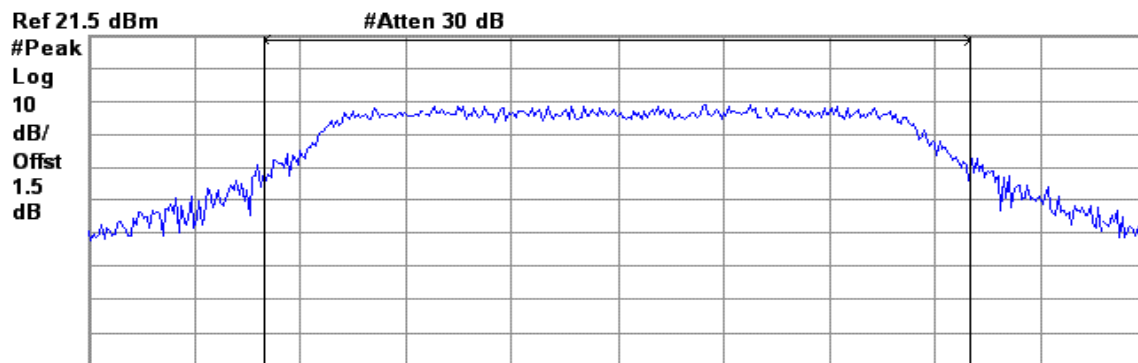

Center 2.462 GHz
#Res BW 1 MHz

#VBW 3 MHz

Span 30 MHz
Sweep 4 ms (401 pts)

Channel Power

9.61 dBm / 20.0000 MHz

Power Spectral Density

-63.40 dBm/Hz




7.3 AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST CONFIGURATION

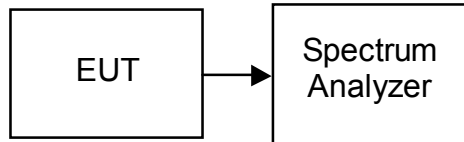

TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. The Spectrum Analyzer is set to the average power detection.

TEST RESULTS

No non-compliance noted

TEST DATA

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	8.82	0.0076
Mid	2437	9.66	0.0092
High	2462	10.37	0.0109

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	2.28	0.0017
Mid	2437	3.14	0.0021
High	2462	3.68	0.0023




Test Plot

IEEE 802.11b

Average Power (CH Low)

Agilent 19:59:48 Oct 29, 2008 R T

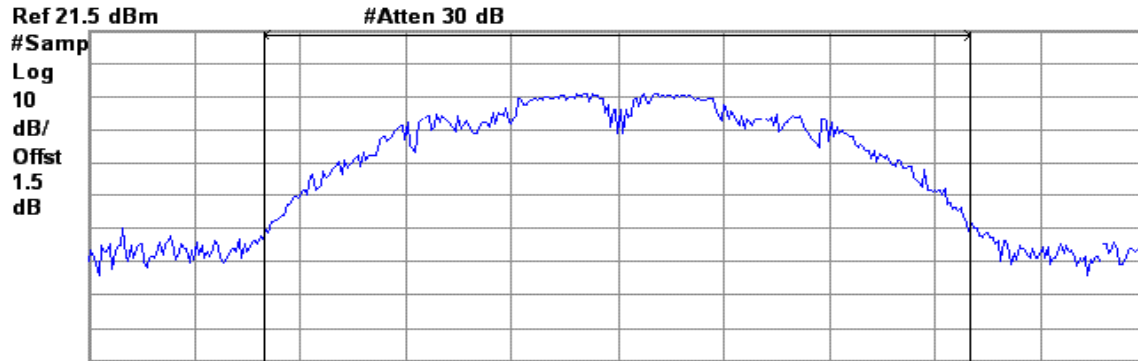

Center 2.412 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 4 ms (401 pts) Span 30 MHz

Channel Power


8.82 dBm / 20.0000 MHz

Power Spectral Density

-64.19 dBm/Hz

Average Power (CH Mid)

Agilent 20:05:38 Oct 29, 2008 R T

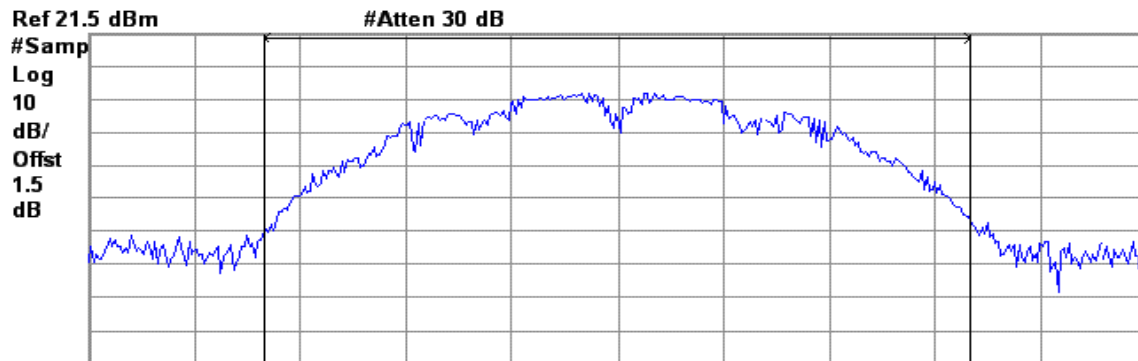

Center 2.437 GHz #Res BW 1 MHz #VBW 3 MHz Sweep 4 ms (401 pts) Span 30 MHz

Channel Power

9.66 dBm / 20.0000 MHz


Power Spectral Density

-63.35 dBm/Hz



Average Power (CH High)

Agilent 20:08:21 Oct 29, 2008 R T

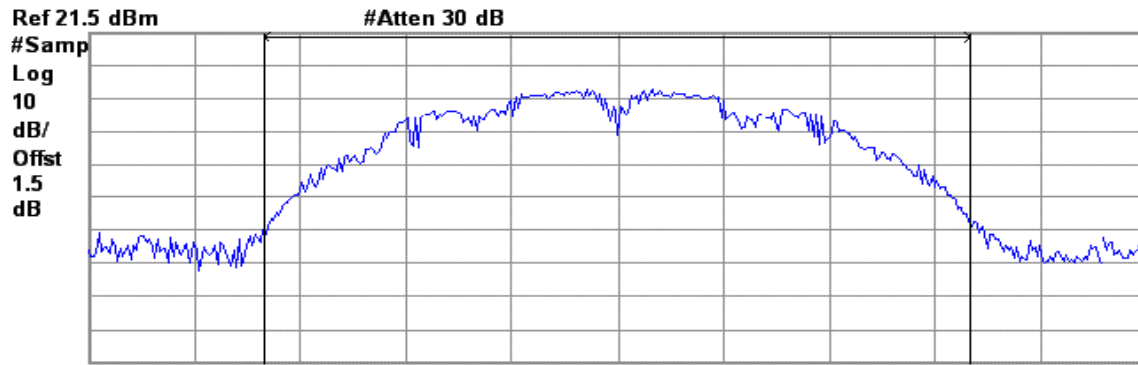

Center 2.462 GHz Span 30 MHz
 #Res BW 1 MHz #VBW 3 MHz Sweep 4 ms (401 pts)

Channel Power

10.37 dBm / 20.0000 MHz


Power Spectral Density

-62.64 dBm/Hz

IEEE 802.11g

Average Power (CH Low)

Agilent 20:21:03 Oct 29, 2008 R T

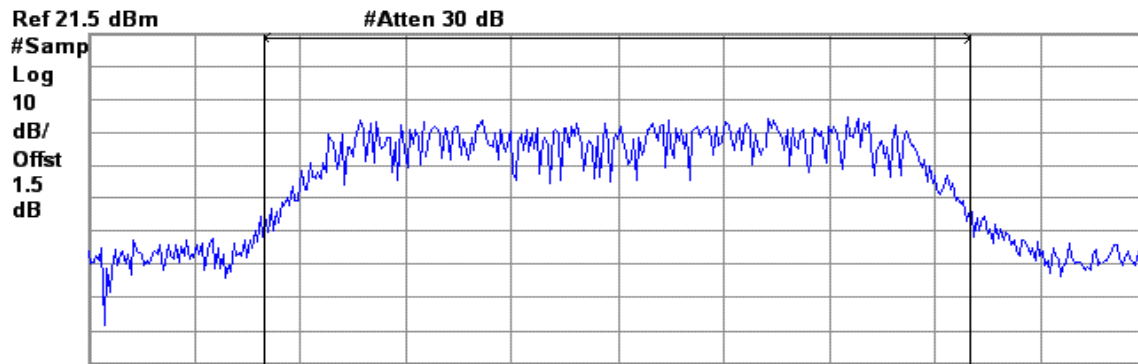

Center 2.412 GHz Span 30 MHz
 #Res BW 1 MHz #VBW 3 MHz Sweep 4 ms (401 pts)

Channel Power

2.28 dBm / 20.0000 MHz


Power Spectral Density

-70.73 dBm/Hz



Average Power (CH Mid)

Agilent 20:16:12 Oct 29, 2008 R T

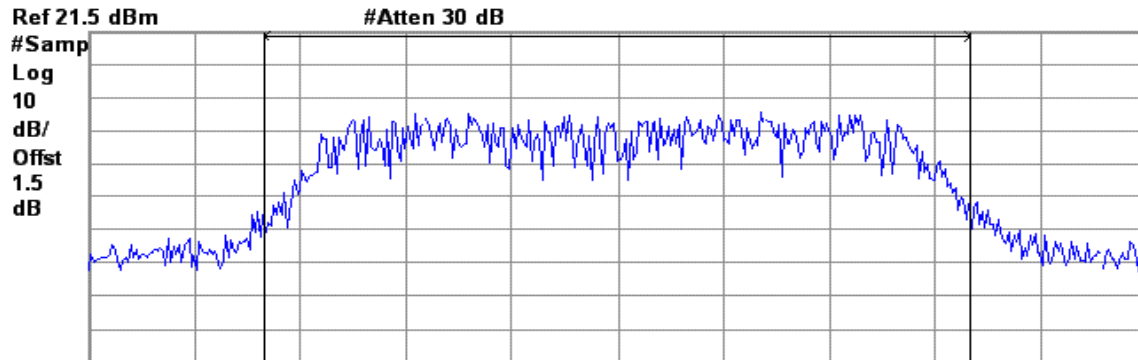

Center 2.437 GHz #Res BW 1 MHz #VBW 3 MHz Span 30 MHz Sweep 4 ms (401 pts)

Channel Power

3.14 dBm / 20.0000 MHz


Power Spectral Density

-69.87 dBm/Hz



Average Power (CH High)

Agilent 20:11:30 Oct 29, 2008 R T

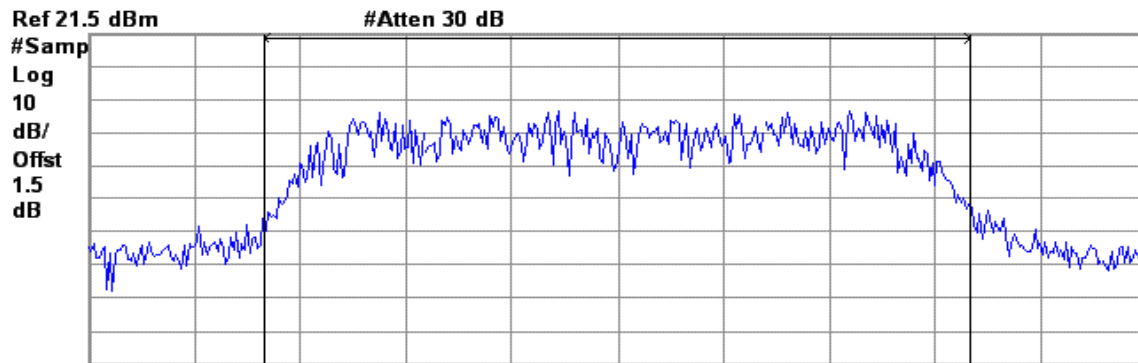

Center 2.462 GHz #Res BW 1 MHz #VBW 3 MHz Span 30 MHz Sweep 4 ms (401 pts)

Channel Power

3.68 dBm / 20.0000 MHz

Power Spectral Density

-69.33 dBm/Hz




7.4 BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

TEST CONFIGURATION

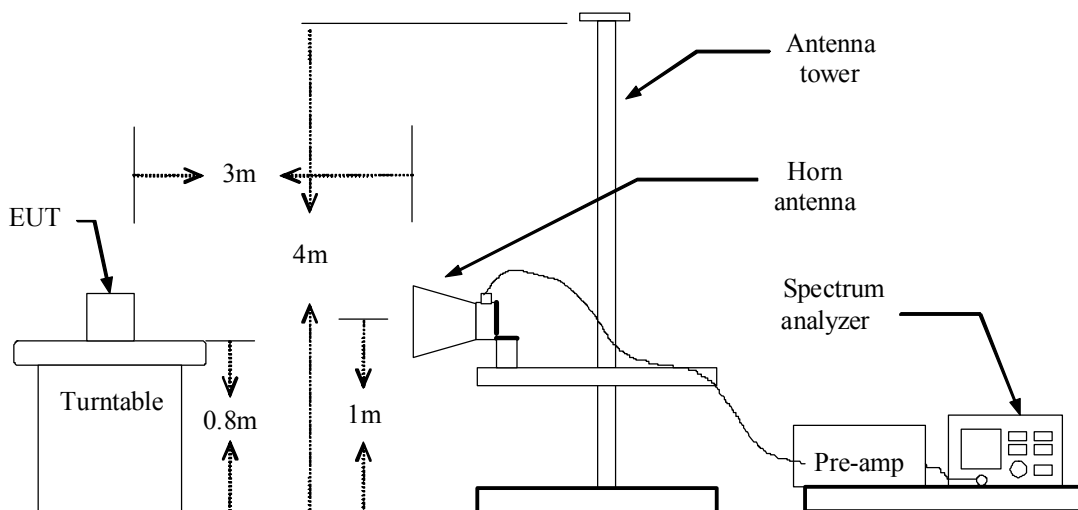

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.




Test Plot

Band Edges (IEEE 802.11b / CH Low)

Detector mode: Peak


Polarity: Vertical

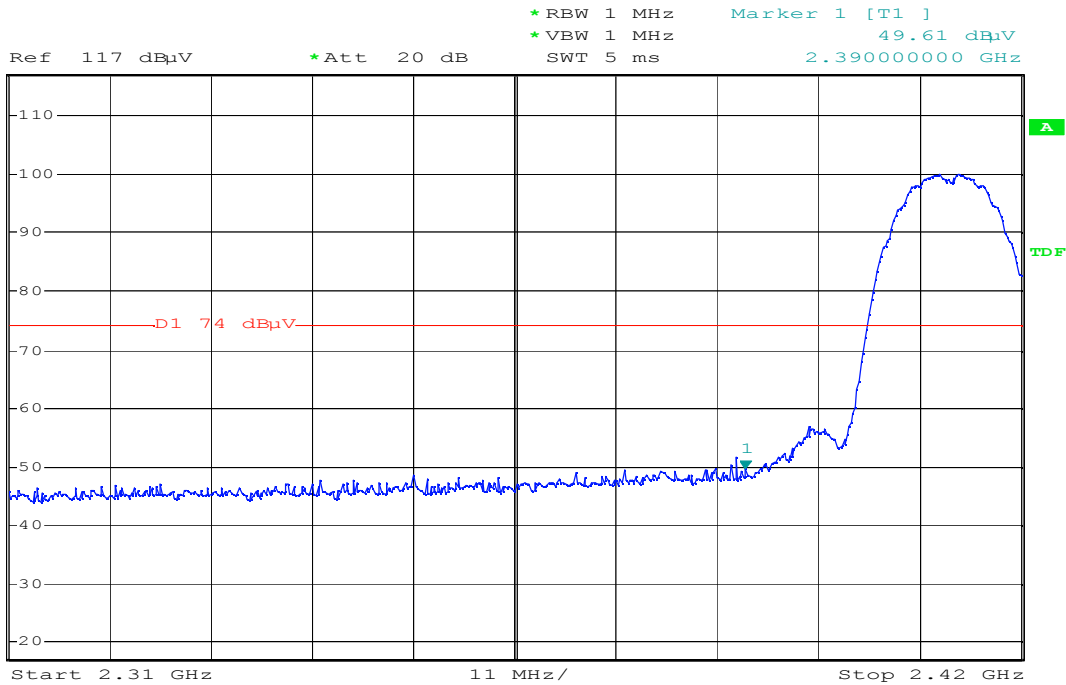

Date: 29.OCT.2008 09:21:04

Detector mode: Average

Polarity: Vertical

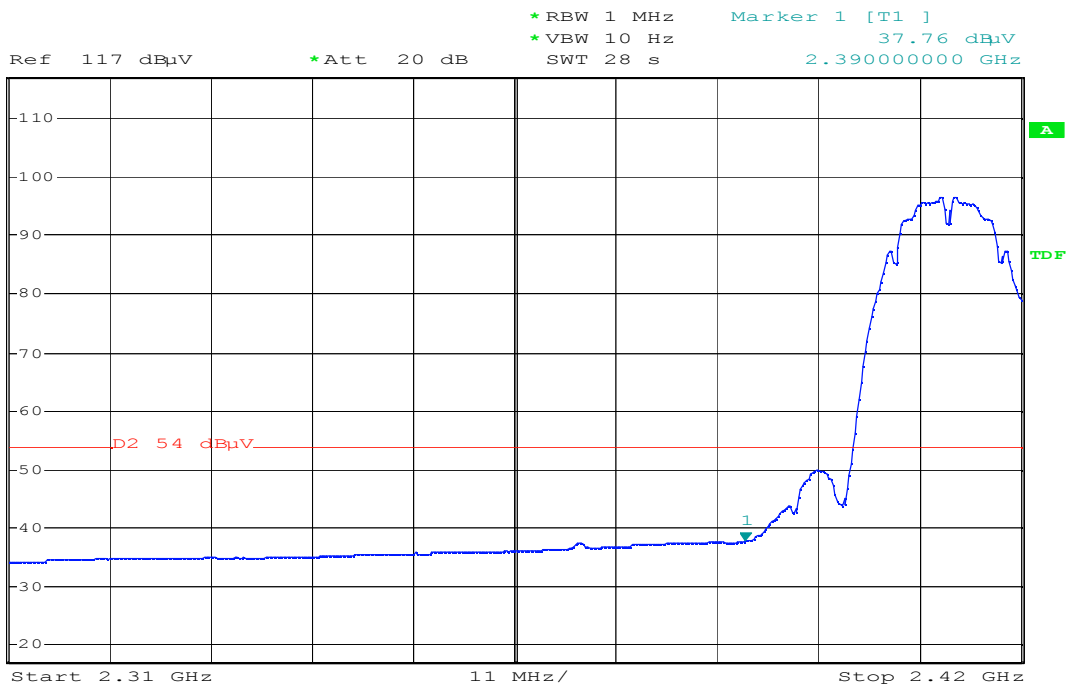


Date: 29.OCT.2008 09:21:54



Detector mode: Peak


Polarity: Horizontal

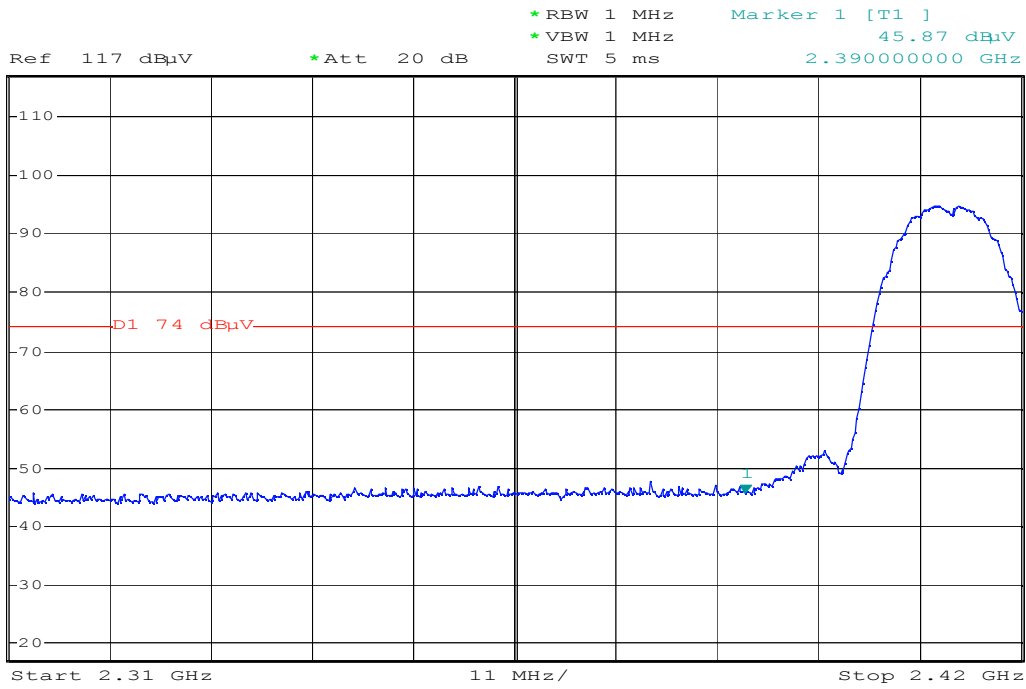

Date: 29.OCT.2008 09:15:32

Detector mode: Average

Polarity: Horizontal

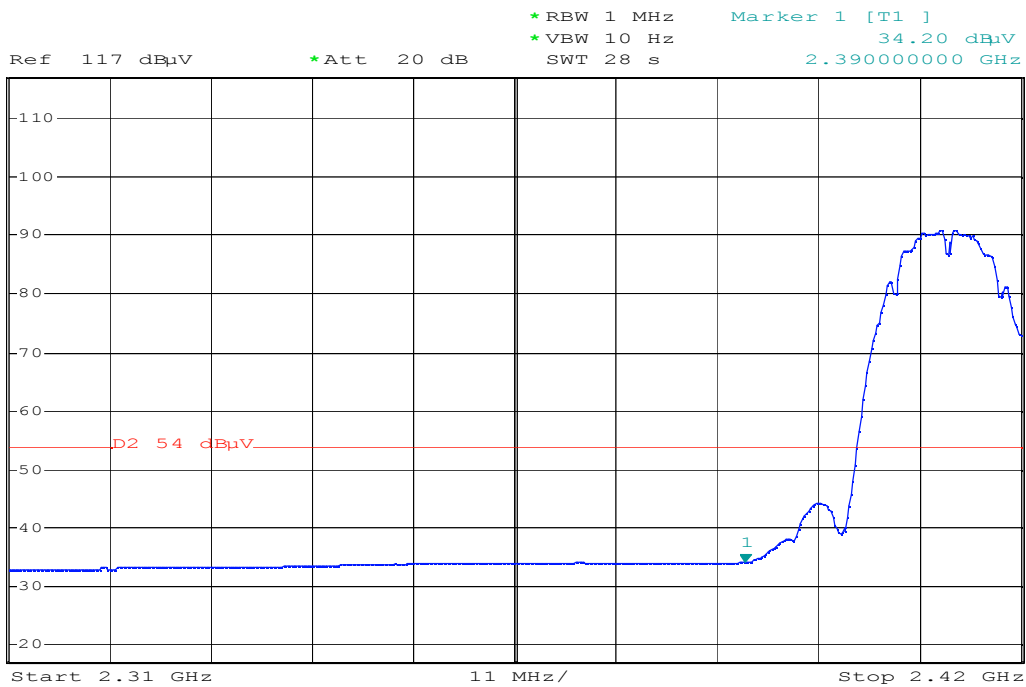

Date: 29.OCT.2008 09:18:32




Band Edges (IEEE 802.11b / CH High)

Detector mode: Peak

Polarity: Vertical



Ref 117 dB μ V *Att 20 dB *RBW 1 MHz Marker 1 [T1] 49.97 dB μ V
*VSW 1 MHz 2.483500000 GHz
SWT 2.5 ms

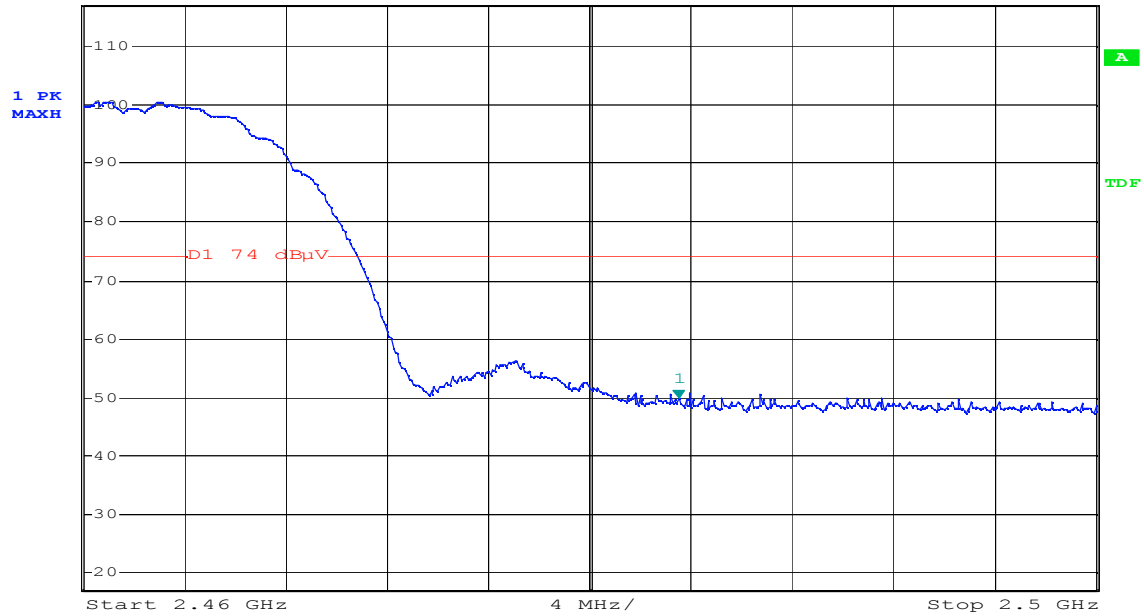


Date: 29.OCT.2008 09:39:16

Detector mode: Average

Polarity: Vertical



Ref 117 dB μ V *Att 20 dB *RBW 1 MHz Marker 1 [T1] 37.68 dB μ V
*VSW 10 Hz 2.483500000 GHz
SWT 10 s

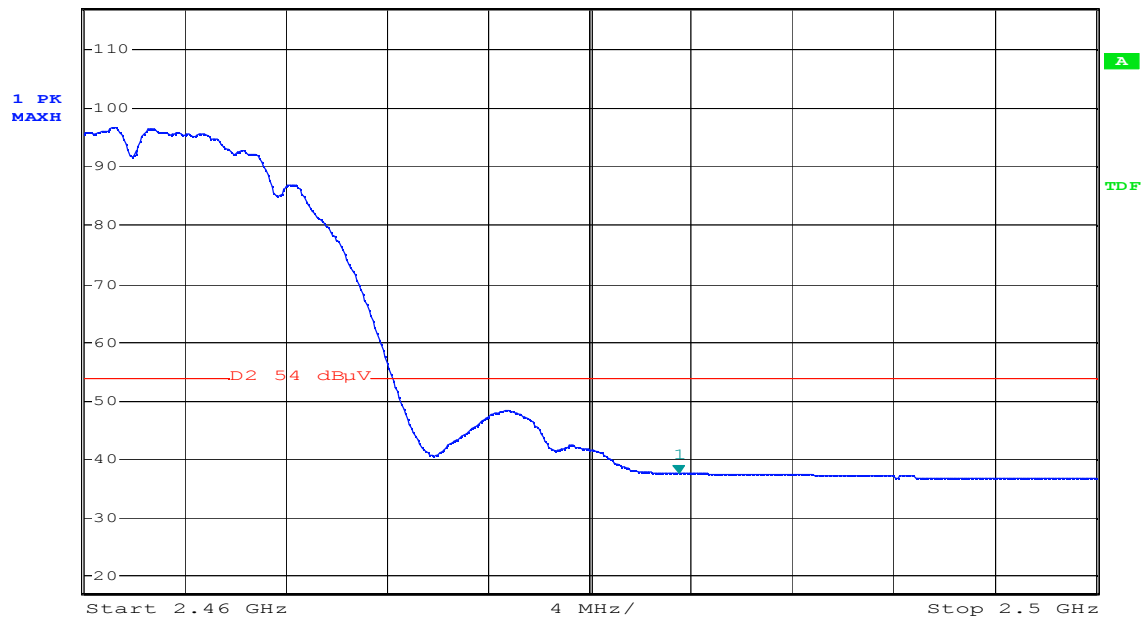


Date: 29.OCT.2008 09:39:43



Detector mode: Peak


Polarity: Horizontal

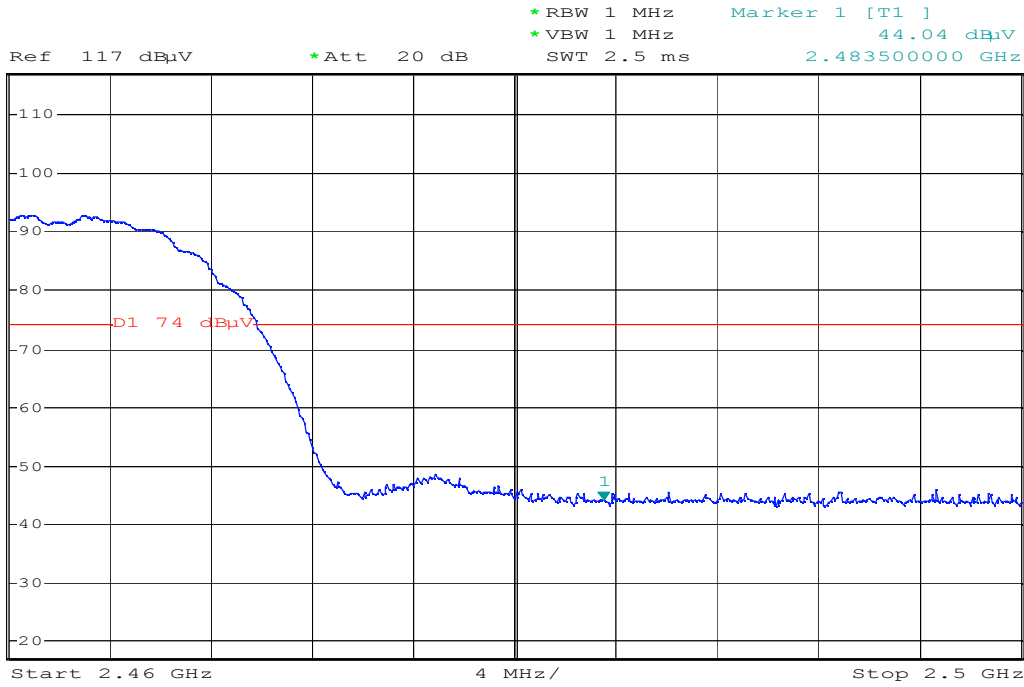

Date: 29.OCT.2008 09:41:46

Detector mode: Average

Polarity: Horizontal

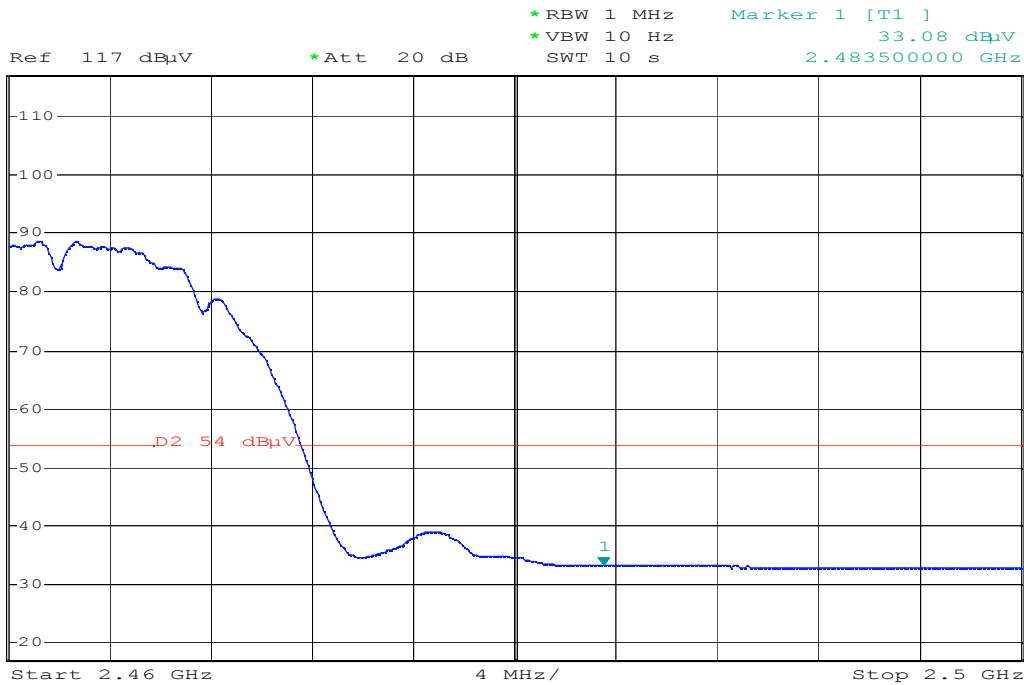


Date: 29.OCT.2008 09:42:20



Band Edges (IEEE 802.11g / CH Low)

Detector mode: Peak


Polarity: Vertical

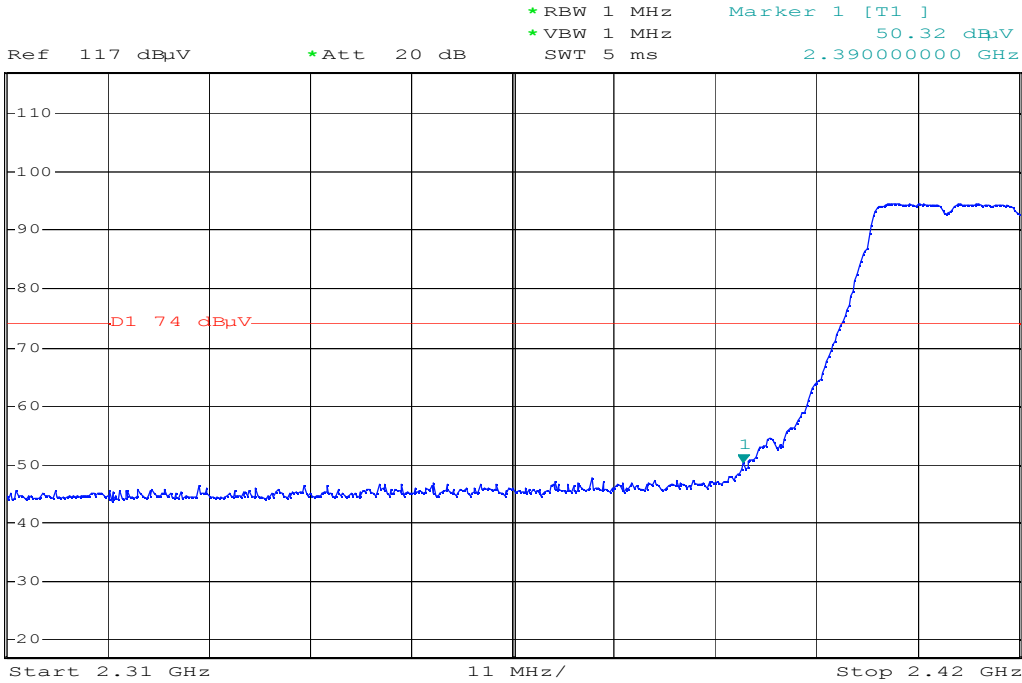

Date: 29.OCT.2008 09:05:27

Detector mode: Average

Polarity: Vertical

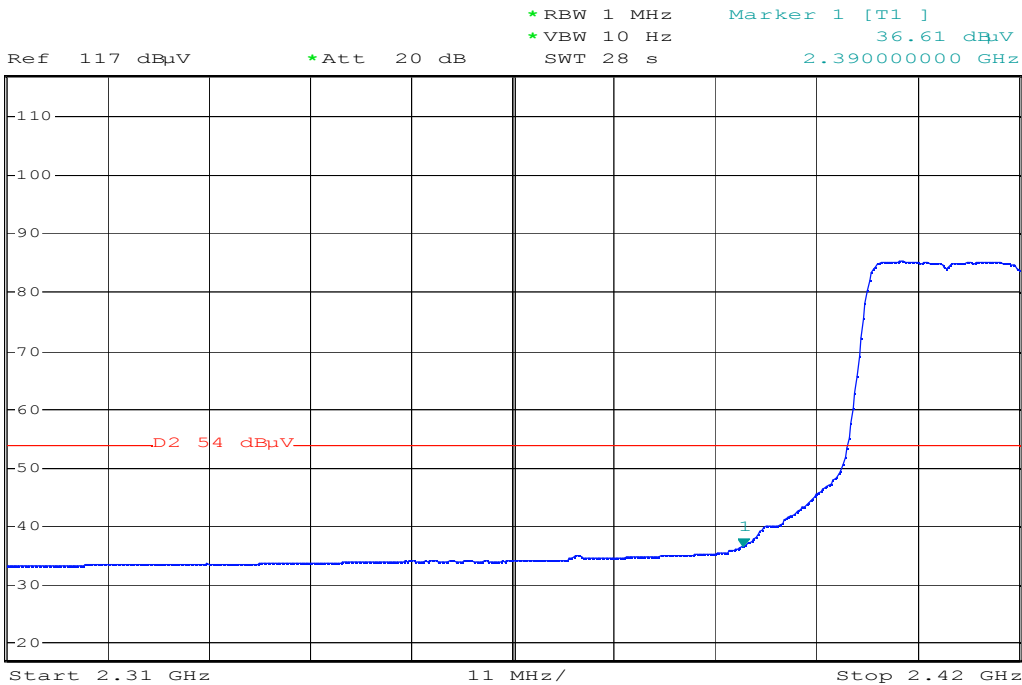


Date: 29.OCT.2008 09:06:26



Detector mode: Peak


Polarity: Horizontal

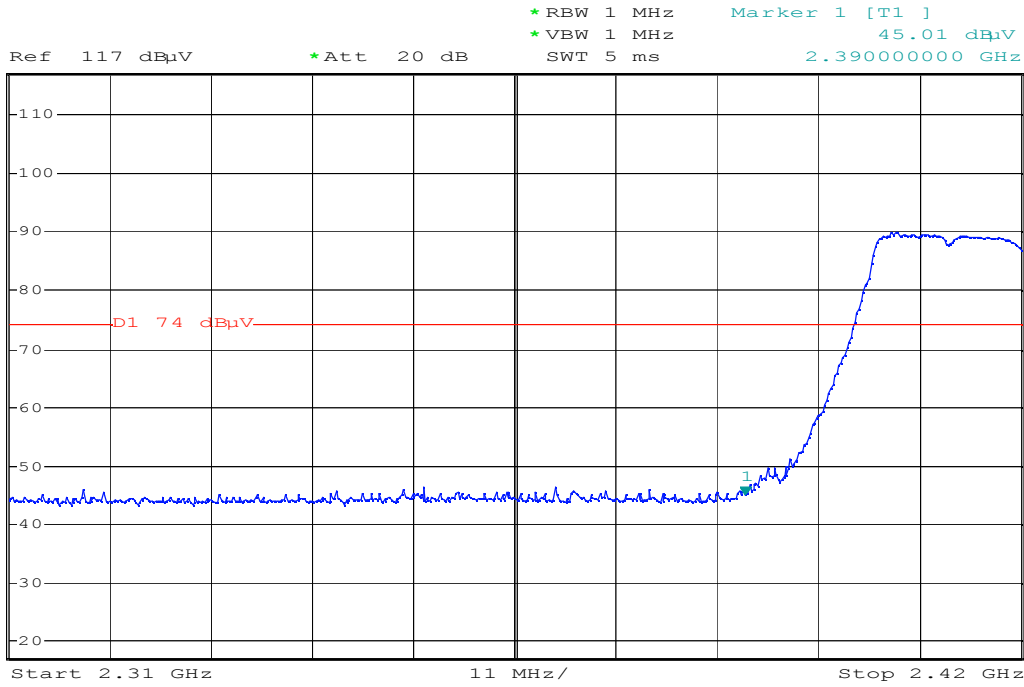

Date: 29.OCT.2008 09:09:13

Detector mode: Average

Polarity: Horizontal

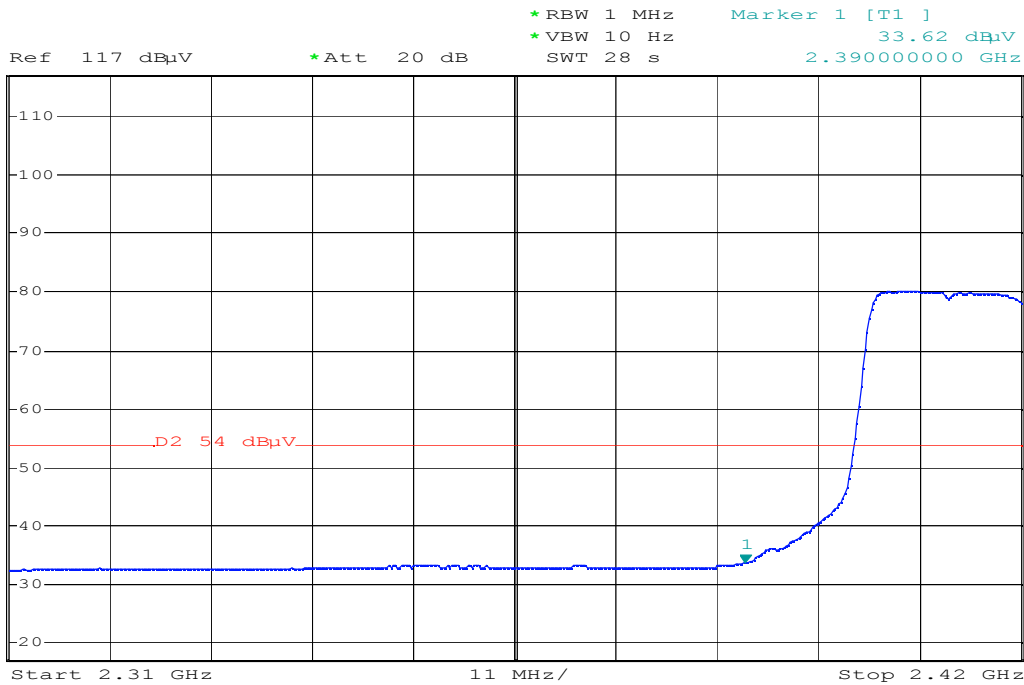


Date: 29.OCT.2008 09:10:51



Band Edges (IEEE 802.11g / CH High)

Detector mode: Peak


Polarity: Vertical

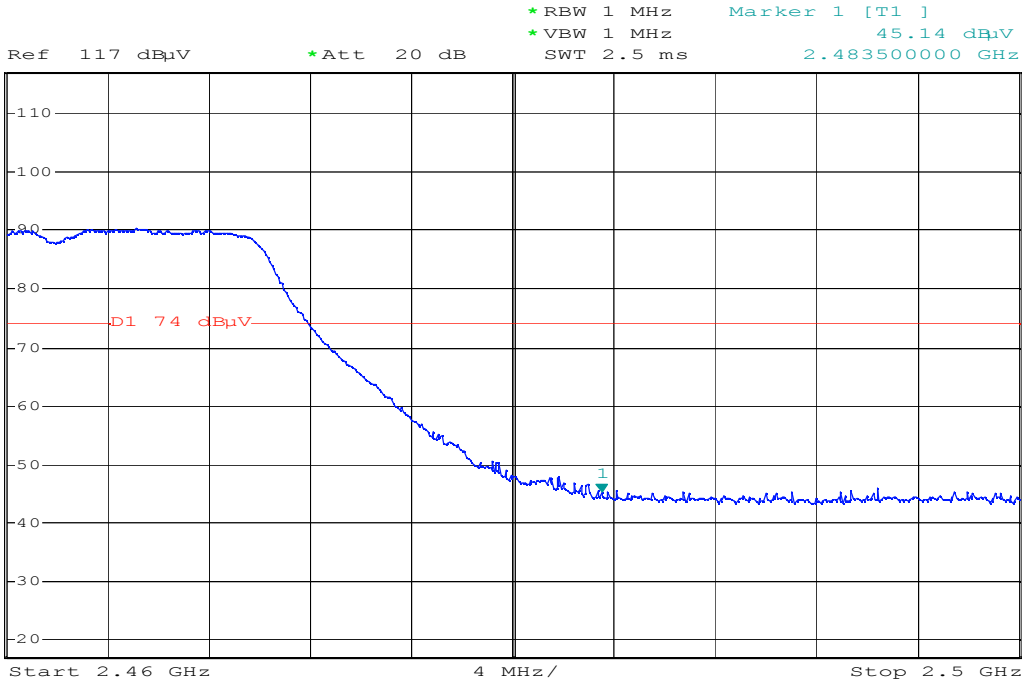

Date: 29.OCT.2008 09:49:20

Detector mode: Average

Polarity: Vertical

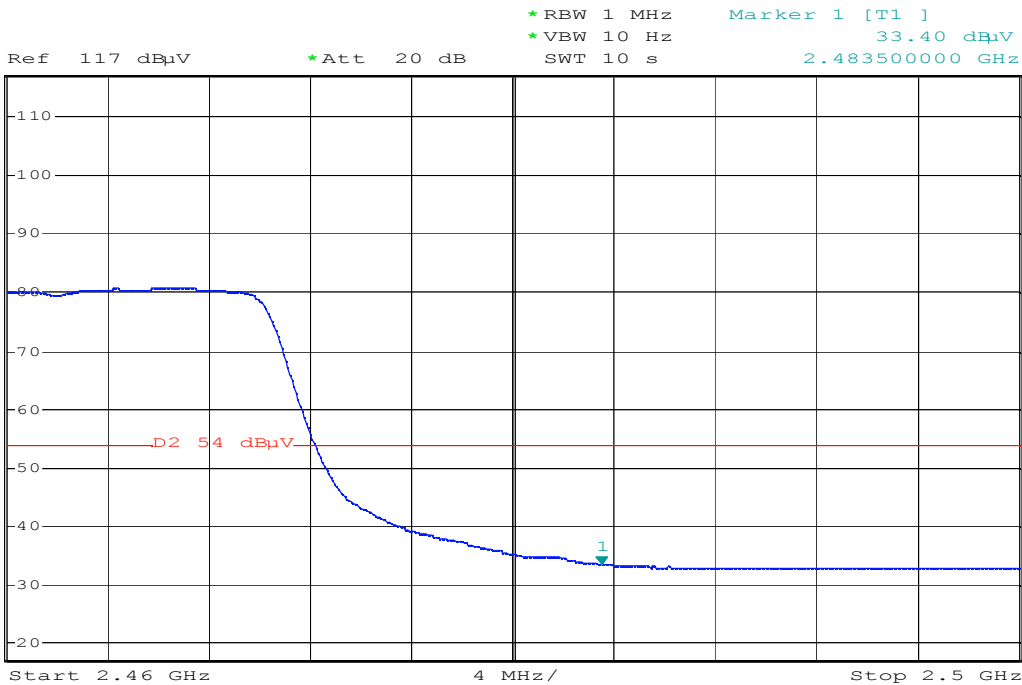


Date: 29.OCT.2008 09:49:56



Detector mode: Peak


Polarity: Horizontal

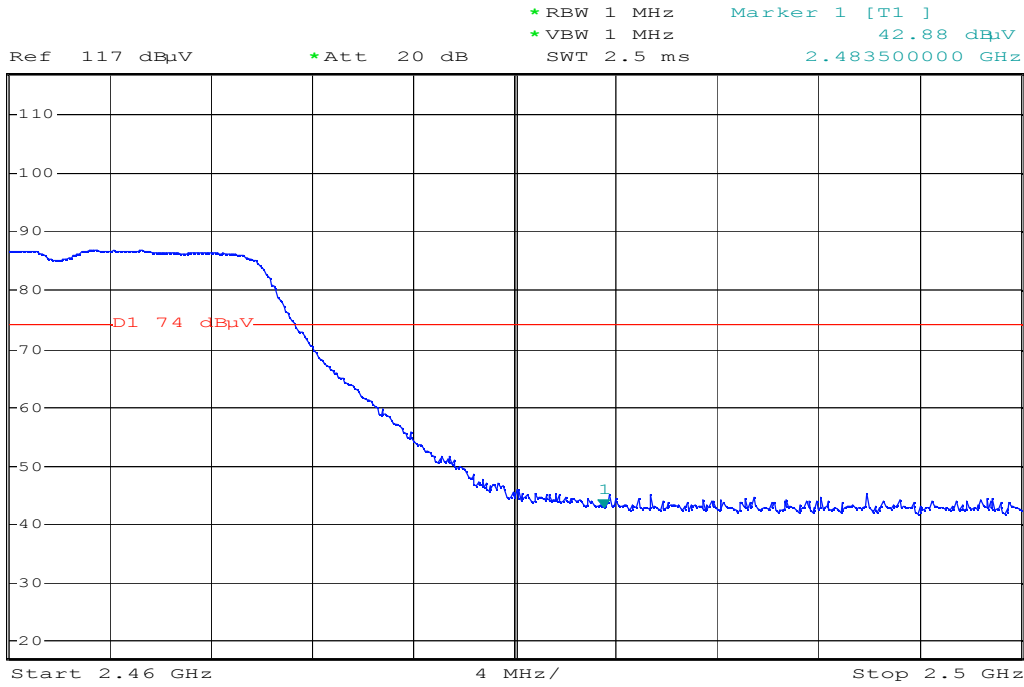

Date: 29.OCT.2008 09:45:37

Detector mode: Average

Polarity: Horizontal

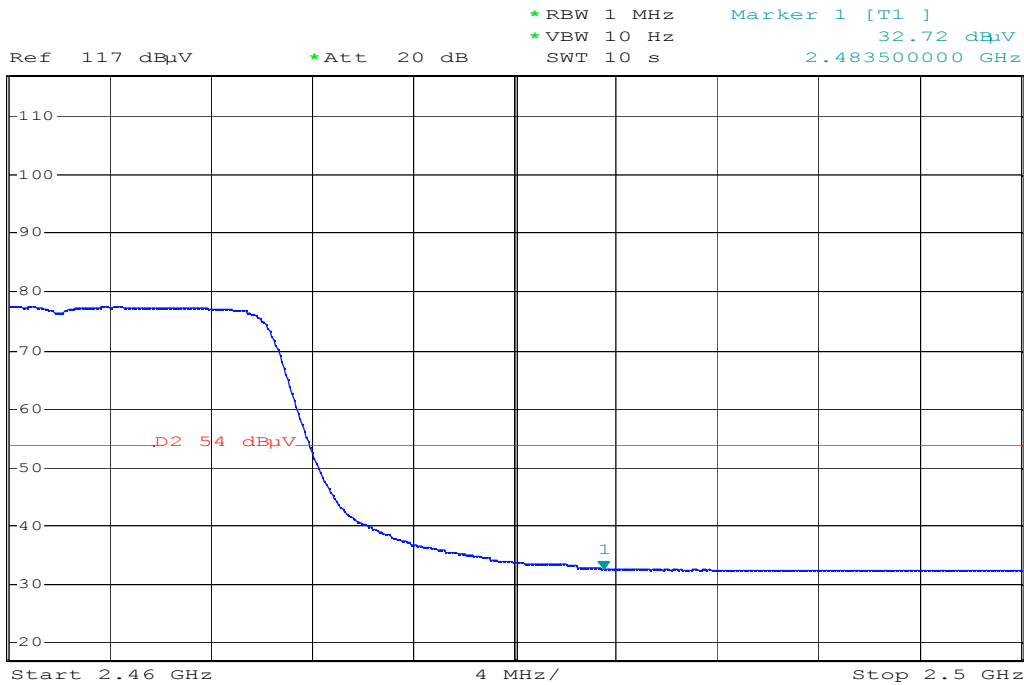

Date: 29.OCT.2008 09:46:04




7.5 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

TEST CONFIGURATION

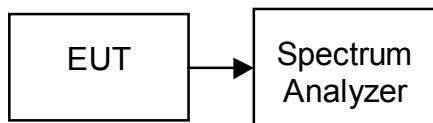

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted

TEST DATA

IEEE 802.11b

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-19.05	8.00	PASS
Mid	2437	18.53		PASS
High	2462	-17.83		PASS

IEEE 802.11g


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-25.16	8.00	PASS
Mid	2437	-24.48		PASS
High	2462	-24.01		PASS




Test Plot

IEEE 802.11b

PPSD (CH Low)

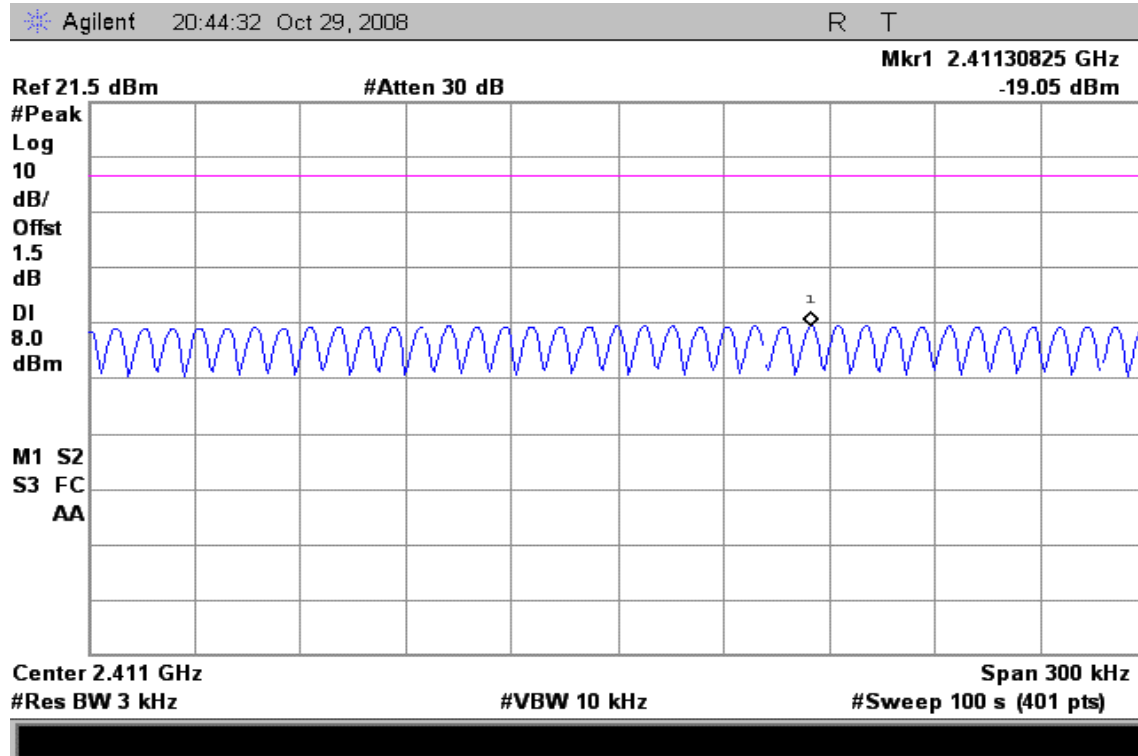


PPSD (CH Mid)

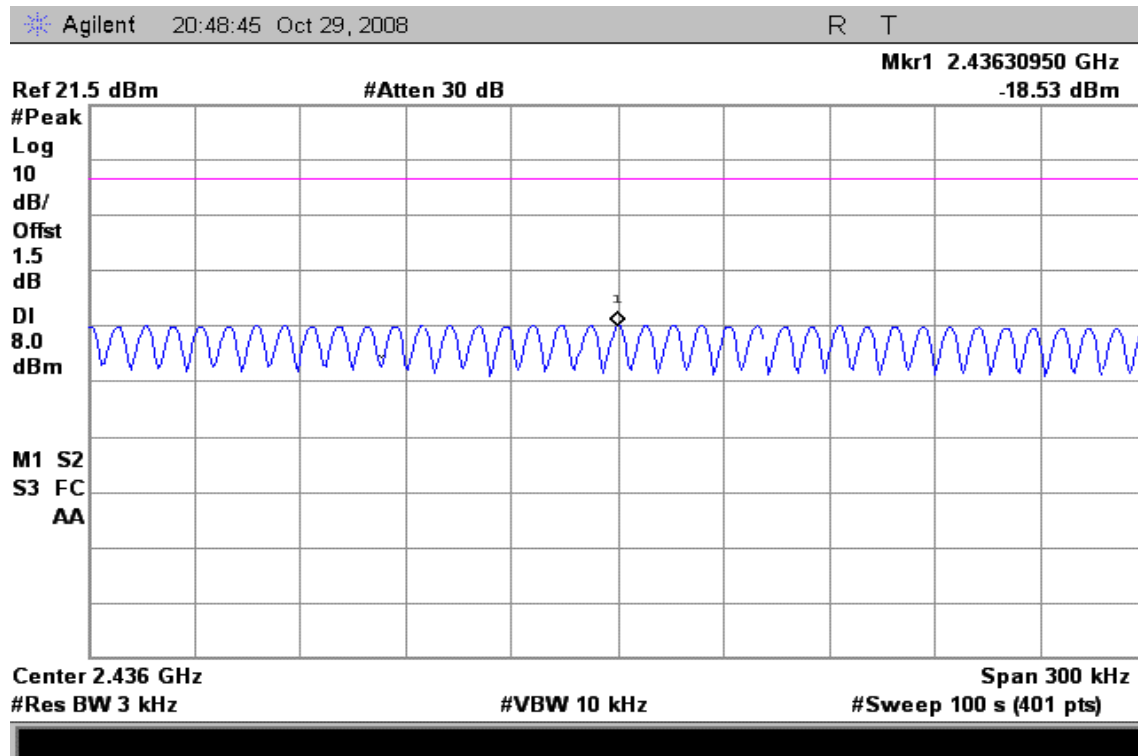




PPSD (CH High)

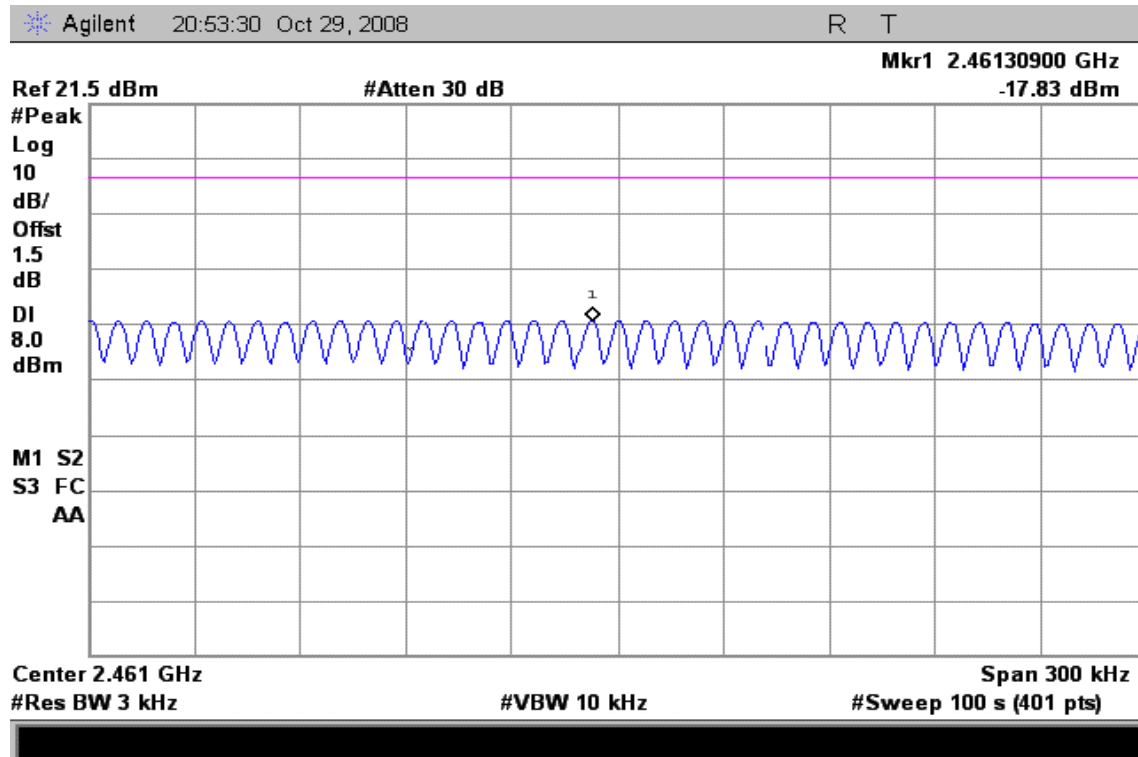


IEEE 802.11g

PPSD (CH Low)

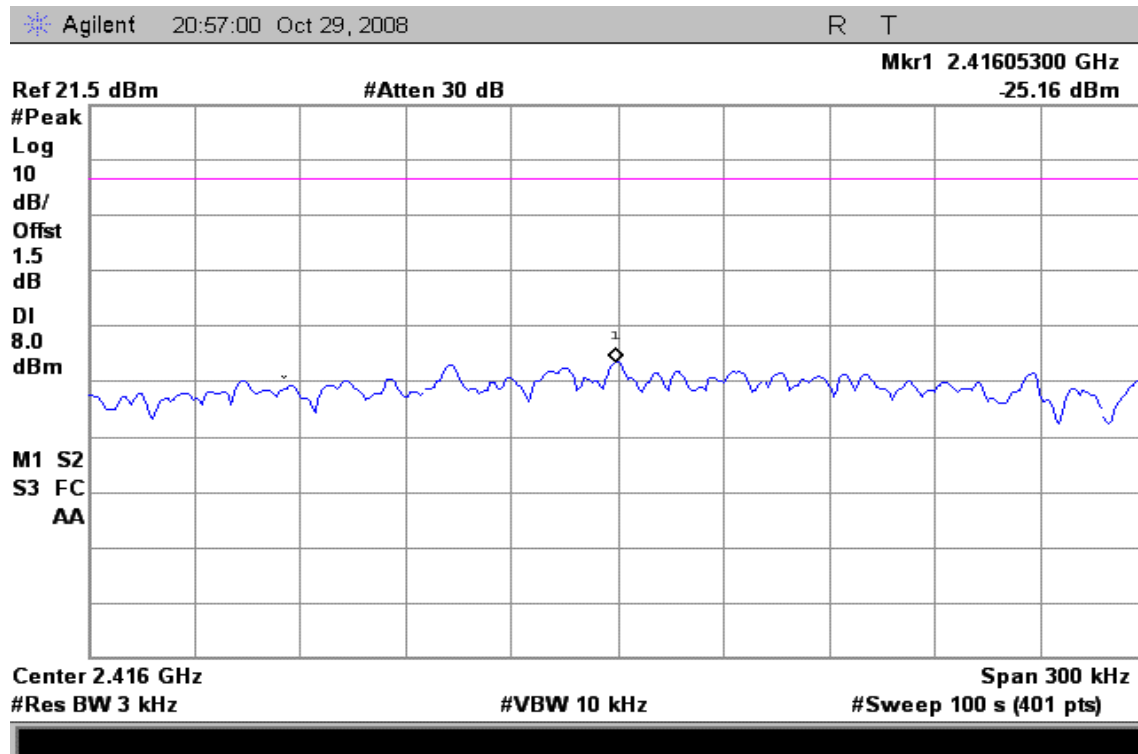




PPSD (CH Mid)

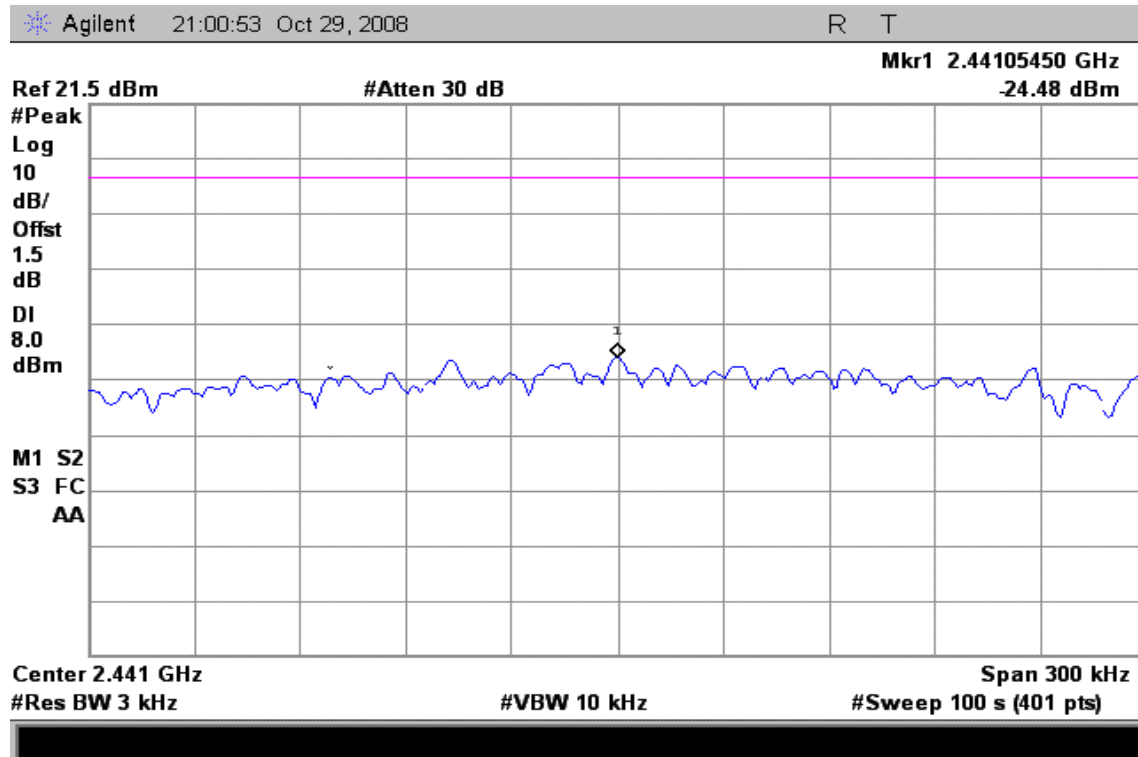

PPSD (CH High)

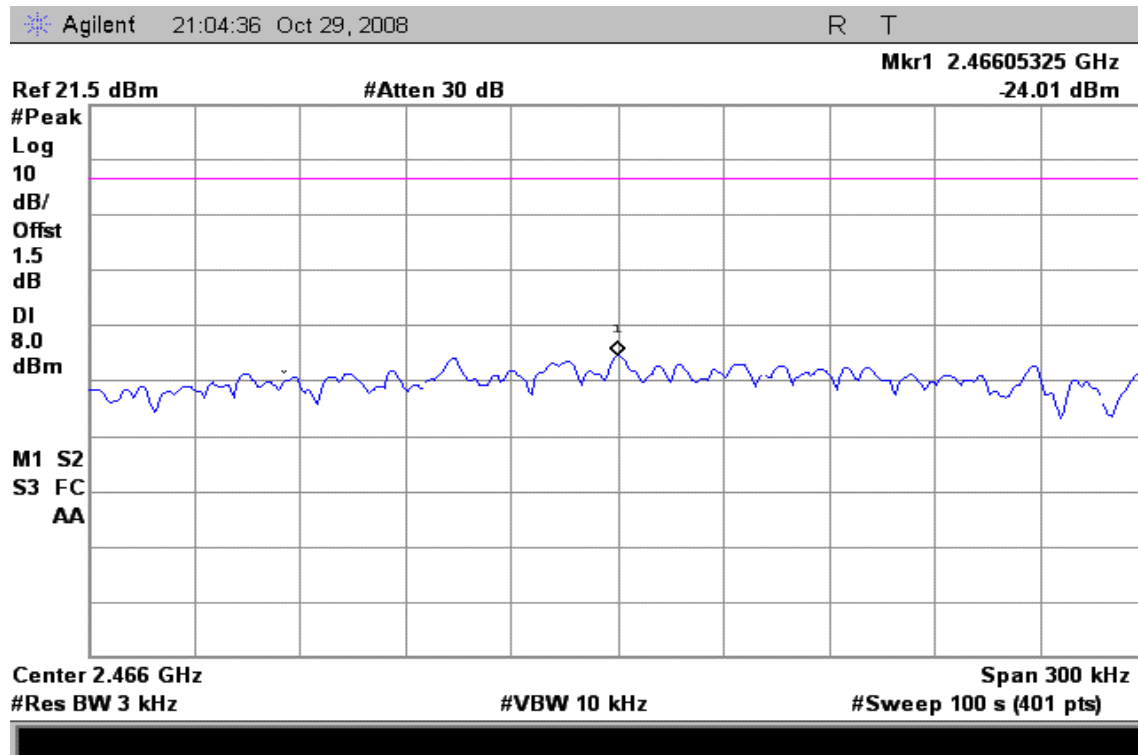




7.6 SPURIOUS EMISSIONS

7.6.1 CONDUCTED MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

TEST CONFIGURATION

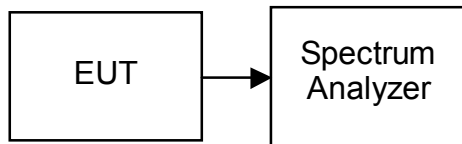

TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26.5GHz range with the transmitter set to the lowest, middle, and highest channels.


TEST RESULTS

No non-compliance noted.




Test Plot

IEEE 802.11b / CH Low

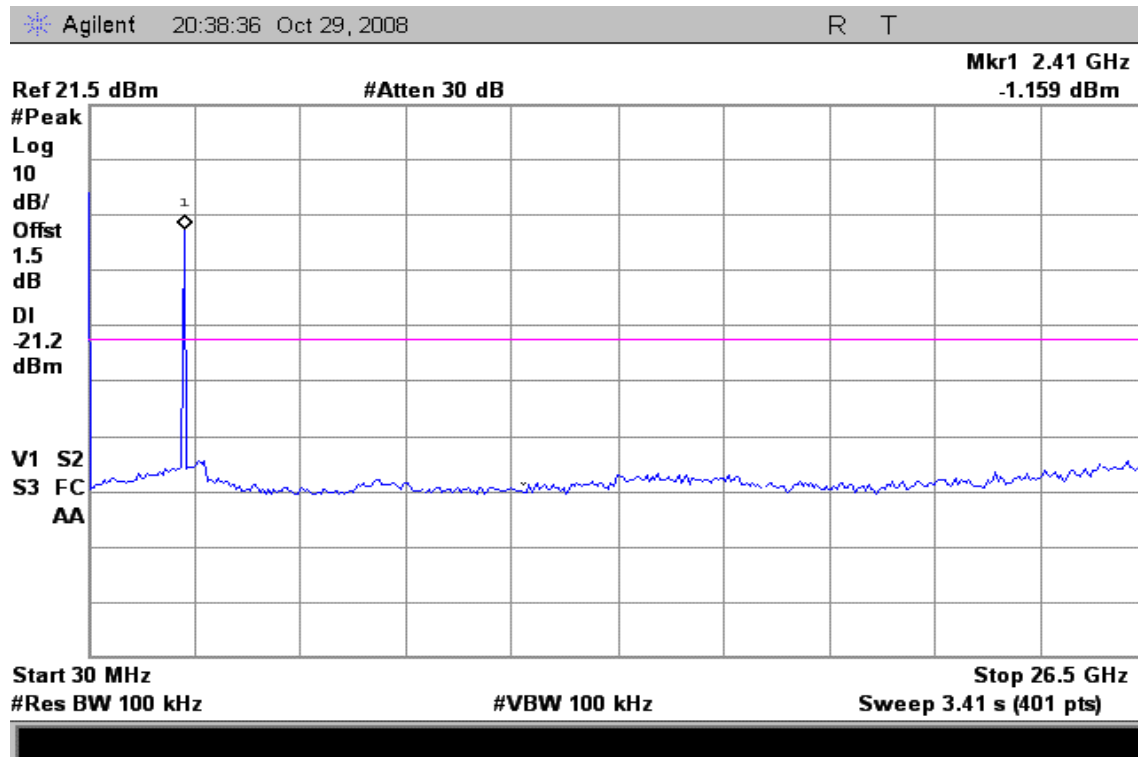


IEEE 802.11b / CH Mid

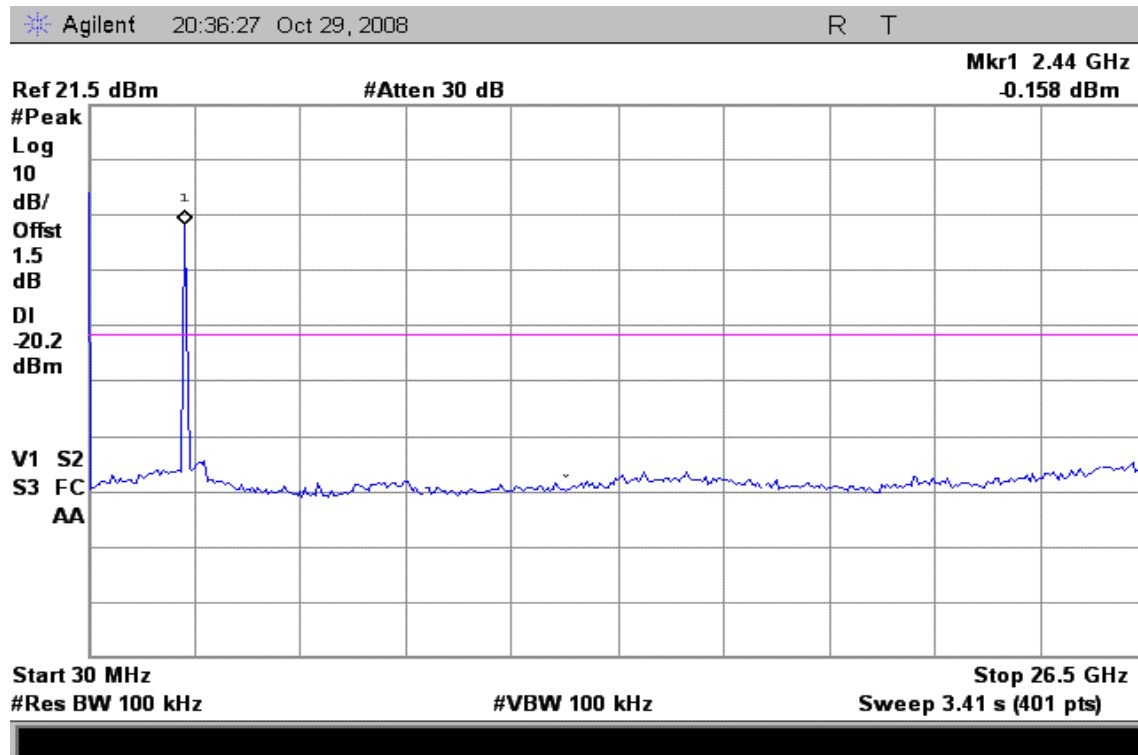




IEEE 802.11b / CH High

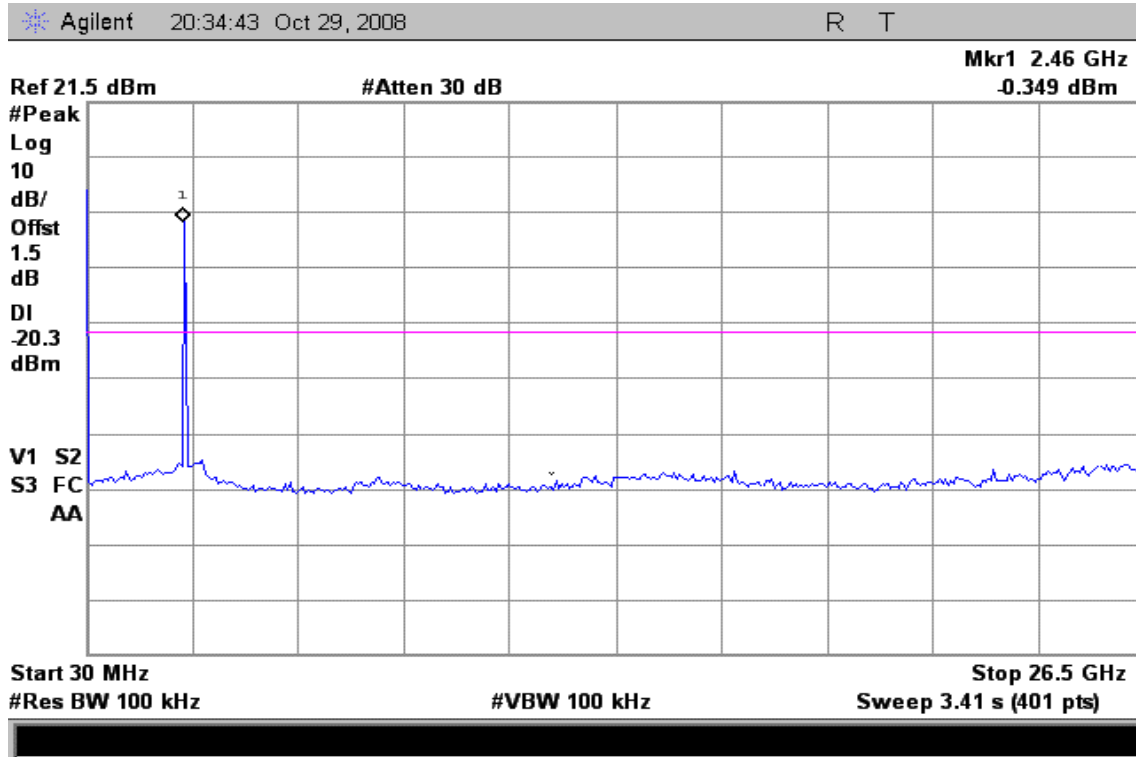


IEEE 802.11g / CH Low

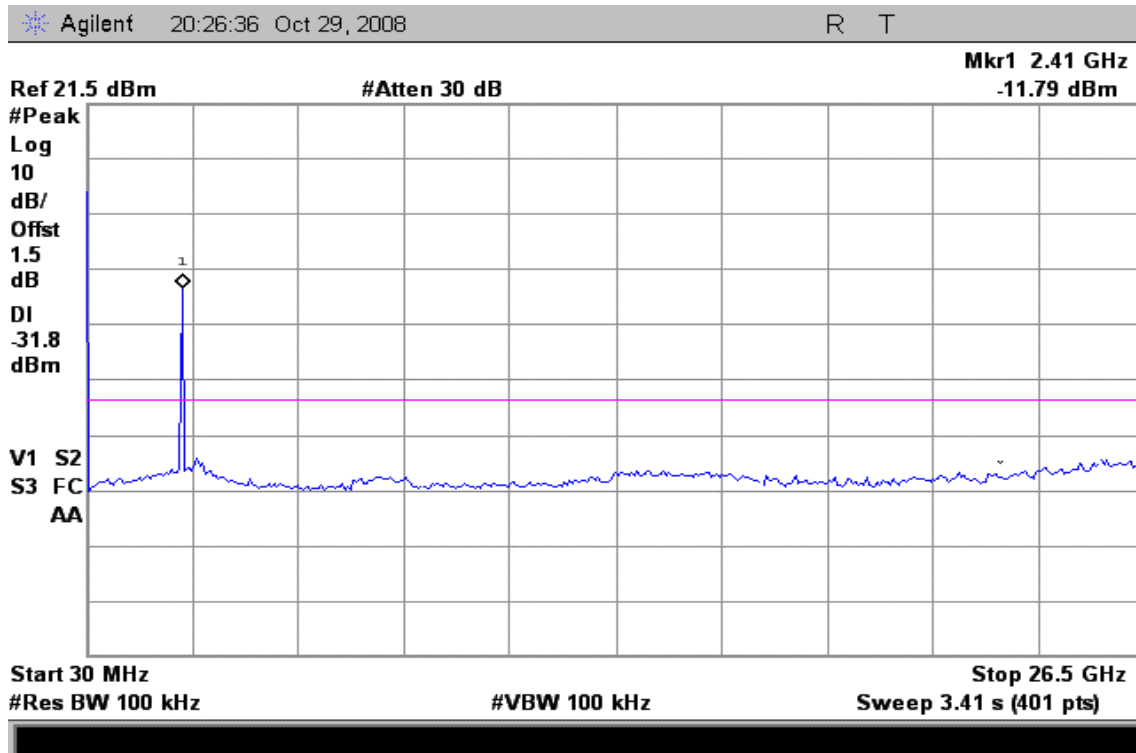




IEEE 802.11g / CH Mid

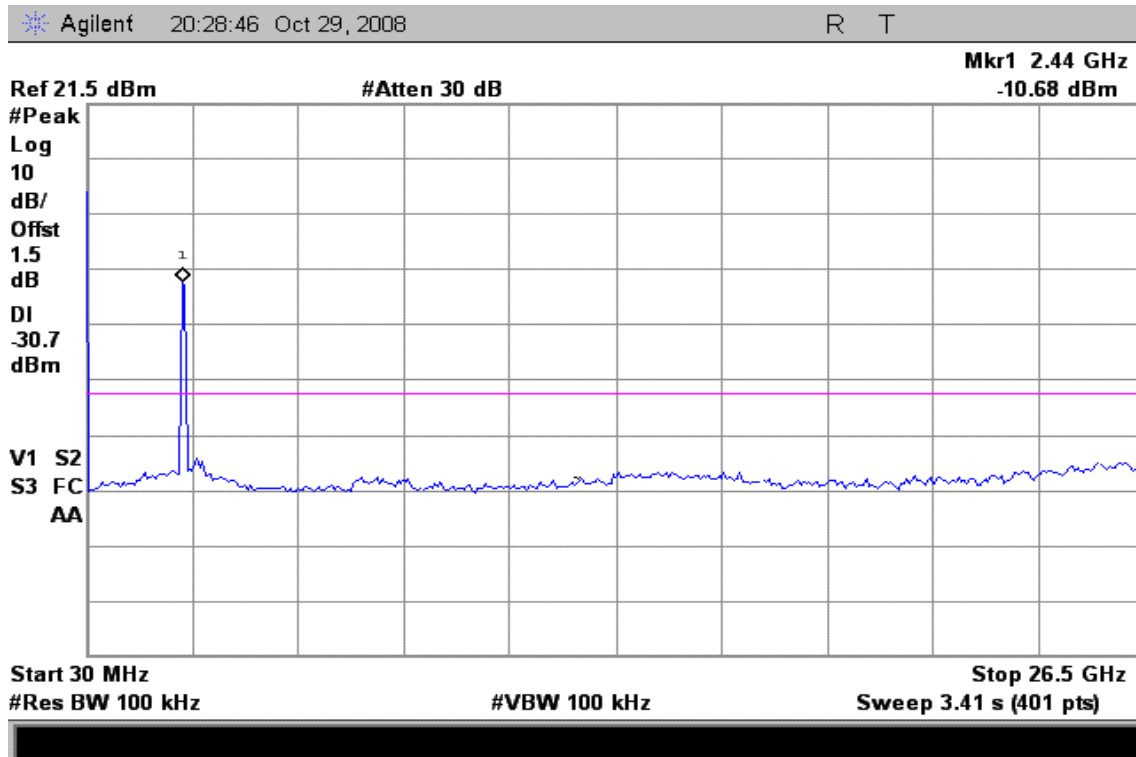

IEEE 802.11g / CH High

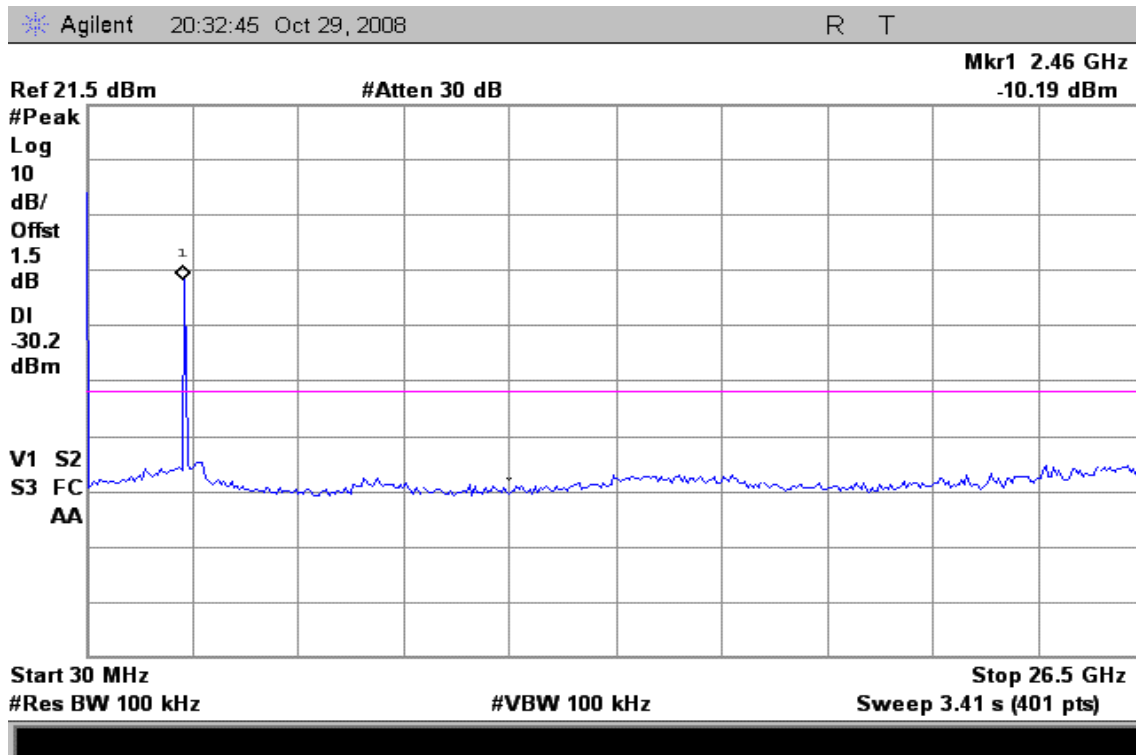



7.6.2 RADIATED EMISSIONS

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at 3-meter)	Field Strength ($\text{dB}\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

TEST CONFIGURATION

Below 1 GHz

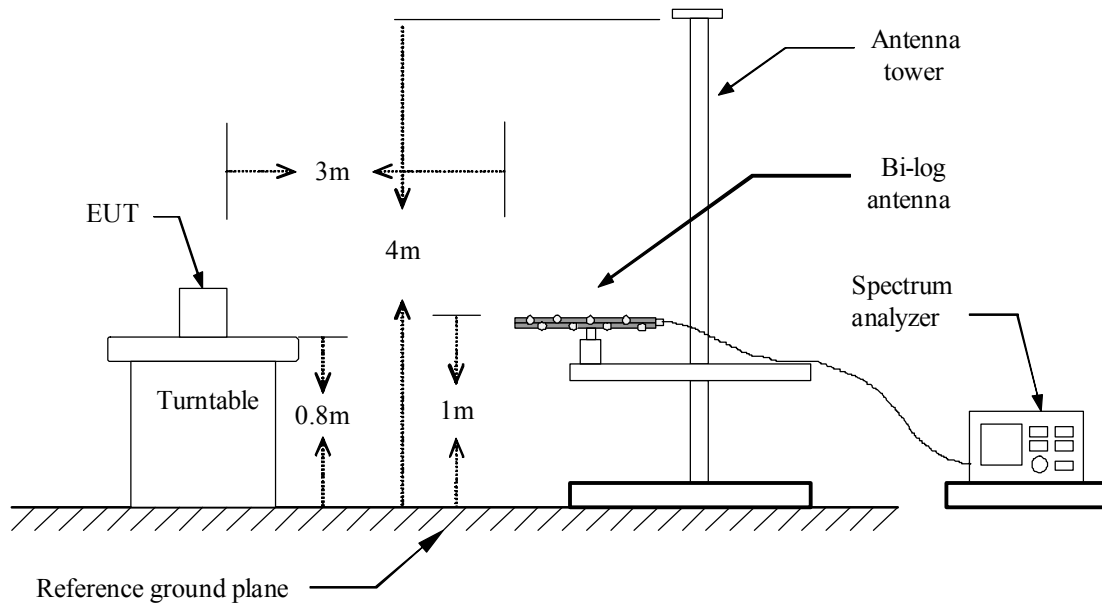

Above 1 GHz

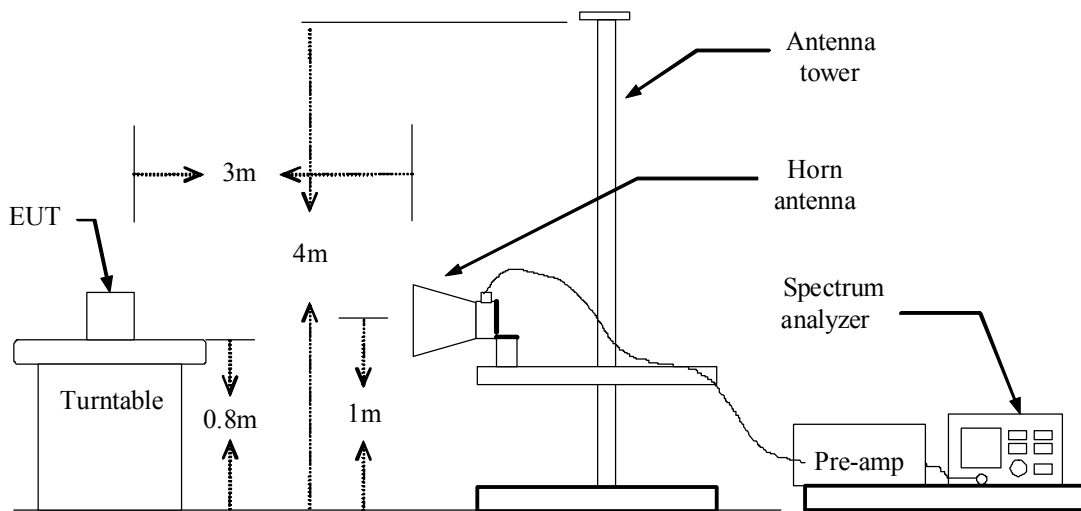



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

TEST RESULTS

No non-compliance noted.



TEST DATA

Below 1 GHz

Operation Mode: Normal Link

Test Date: October 25, 2008

Temperature: 26°C

Tested by: Stan Lin

Humidity: 60% RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
35.5705	V	QP	45.25	-15.18	30.07	40.00	-9.93
63.2571	V	QP	40.80	-15.36	25.44	40.00	-14.56
99.2857	V	QP	38.20	-16.61	21.59	43.50	-21.91
132.5429	V	QP	37.48	-13.61	23.87	43.50	-19.63
221.2286	V	QP	38.96	-14.57	24.39	46.00	-21.61
343.1714	V	QP	37.49	-10.87	26.62	46.00	-19.38
739.4857	V	QP	32.91	-3.31	29.60	46.00	-16.40
952.8857	V	QP	31.98	0.01	31.99	53.90	-21.91
36.9286	H	QP	41.73	-15.01	26.72	40.00	-13.28
50.7857	H	QP	45.50	-14.80	30.70	40.00	-9.30
66.0286	H	QP	47.52	-15.83	31.69	40.00	-8.31
71.5714	H	QP	43.04	-16.76	26.28	40.00	-13.72
110.3714	H	QP	40.25	-15.45	24.80	43.50	-18.70
149.1714	H	QP	38.99	-12.69	26.30	43.50	-17.20
243.4000	H	QP	43.45	-13.74	29.71	46.00	-16.29
343.1714	H	QP	50.24	-10.87	39.37	46.00	-6.63
372.2714	H	QP	43.97	-10.26	33.71	46.00	-12.29

Remark:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



Above 1 GHz

Operation Mode: IEEE 802.11b / TX / CH Low

Test Date: October 28, 2008

Temperature: 22°C

Tested by: Alonso Lu

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2036.00	V	47.19	---	-5.45	41.74	---	74.00	54.00	-12.26	Peak
4820.00	V	42.57	---	1.87	44.44	---	74.00	54.00	-9.56	Peak
N/A										
1508.00	H	47.71	---	-8.34	39.37	---	74.00	54.00	-14.63	Peak
4820.00	H	44.59	---	1.87	46.46	---	74.00	54.00	-7.54	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: IEEE 802.11b / TX / CH Mid

Test Date: October 28, 2008

Temperature: 22°C

Tested by: Alonso Lu

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1476.00	V	48.72	---	-8.50	40.22	---	74.00	54.00	-13.78	Peak
4870.00	V	43.82	---	2.02	45.84	---	74.00	54.00	-8.16	Peak
N/A										
2136.00	H	48.68	---	-5.22	43.45	---	74.00	54.00	-10.55	Peak
4870.00	H	45.83	---	2.02	47.85	---	74.00	54.00	-6.15	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: IEEE 802.11b / TX / CH High

Test Date: October 28, 2008

Temperature: 22°C

Tested by: Alonso Lu

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1668.00	V	48.07	---	-7.43	40.64	---	74.00	54.00	-13.36	Peak
2044.00	V	47.61	---	-5.43	42.18	---	74.00	54.00	-11.82	Peak
4920.00	V	43.88	---	2.16	46.05	---	74.00	54.00	-7.95	Peak
N/A										
1684.00	H	47.81	---	-7.34	40.47	---	74.00	54.00	-13.53	Peak
2352.00	H	49.89	---	-4.73	45.16	---	74.00	54.00	-8.84	Peak
4920.00	H	45.61	---	2.16	47.77	---	74.00	54.00	-6.23	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: IEEE 802.11g / TX / CH Low

Test Date: October 28, 2008

Temperature: 22°C

Tested by: Alonso Lu

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2040.00	V	47.68	---	-5.44	42.24	---	74.00	54.00	-11.76	Peak
2704.00	V	47.52	---	-3.46	44.05	---	74.00	54.00	-9.95	Peak
3320.00	V	43.92	---	-1.16	42.76	---	74.00	54.00	-11.24	Peak
N/A										
2716.00	H	47.65	---	-3.41	44.24	---	74.00	54.00	-9.76	Peak
4460.00	H	43.09	---	0.95	44.05	---	74.00	54.00	-9.95	Peak
6740.00	H	41.33	---	5.05	46.38	---	74.00	54.00	-7.62	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m)



Operation Mode: IEEE 802.11g / TX / CH Mid

Test Date: October 28, 2008

Temperature: 22°C

Tested by: Alonso Lu

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1816.00	V	47.58	---	-6.58	41.00	---	74.00	54.00	-13.00	Peak
2212.00	V	48.74	---	-5.05	43.68	---	74.00	54.00	-10.32	Peak
4370.00	V	42.70	---	1.01	43.71	---	74.00	54.00	-10.29	Peak
5860.00	V	40.78	---	4.00	44.77	---	74.00	54.00	-9.23	Peak
N/A										
1932.00	H	47.47	---	-5.92	41.55	---	74.00	54.00	-12.45	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: IEEE 802.11g / TX / CH High

Test Date: October 28, 2008

Temperature: 22°C

Tested by: Alonso Lu

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1960.00	V	47.47	---	-5.76	41.71	---	74.00	54.00	-12.29	Peak
4970.00	V	41.55	---	2.31	43.86	---	74.00	54.00	-10.14	Peak
6310.00	V	40.52	---	4.31	44.83	---	74.00	54.00	-9.17	Peak
N/A										
1756.00	H	47.54	---	-6.93	40.61	---	74.00	54.00	-13.39	Peak
5370.00	H	41.12	---	3.12	44.24	---	74.00	54.00	-9.76	Peak
6570.00	H	40.35	---	4.56	44.91	---	74.00	54.00	-9.09	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: IEEE 802.11g / RX / CH Mid

Test Date: October 28, 2008

Temperature: 22°C

Tested by: Alonso Lu

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1832.00	V	44.34	---	-6.49	37.85	---	74.00	54.00	-16.15	Peak
2656.00	V	42.65	---	-3.68	38.97	---	74.00	54.00	-15.03	Peak
5830.00	V	42.00	---	3.94	45.95	---	74.00	54.00	-8.05	Peak
7670.00	V	43.02	---	7.10	50.12	---	74.00	54.00	-3.88	Peak
N/A										
1956.00	H	43.76	---	-5.78	37.97	---	74.00	54.00	-16.03	Peak
2168.00	H	44.12	---	-5.15	38.97	---	74.00	54.00	-15.03	Peak
6840.00	H	41.13	---	5.33	46.46	---	74.00	54.00	-7.54	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.7 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.



TEST DATA

Operation Mode: Normal Link

Test Date: October 30, 2008

Temperature: 25°C

Tested by: Alonso Lu

Humidity: 57% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB)	QP Result (dBuV)	AV Result (dBuV)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.1891	38.30	34.80	9.70	48.00	44.50	64.08	54.08	-16.08	-9.58	L1
0.2477	34.90	33.00	9.70	44.60	42.70	61.83	51.83	-17.23	-9.13	L1
0.4977	30.99	29.69	9.61	40.60	39.30	56.04	46.04	-15.44	-6.74	L1
0.5602	30.99	29.49	9.61	40.60	39.10	56.00	46.00	-15.40	-6.90	L1
0.8102	26.59	24.99	9.61	36.20	34.60	56.00	46.00	-19.80	-11.40	L1
3.9820	27.06	21.76	9.74	36.80	31.50	56.00	46.00	-19.20	-14.50	L1
6.2203	27.84	22.04	9.86	37.70	31.90	60.00	50.00	-22.30	-18.10	L1
0.1852	37.01	33.41	9.19	46.20	42.60	64.24	54.25	-18.04	-11.65	L2
0.2477	33.86	32.06	9.24	43.10	41.30	61.83	51.83	-18.73	-10.53	L2
0.3727	29.19	28.79	9.61	38.80	38.40	58.44	48.44	-19.64	-10.04	L2
0.4352	28.75	28.15	9.65	38.40	37.80	57.15	47.15	-18.75	-9.35	L2
3.8609	25.47	22.27	9.73	35.20	32.00	56.00	46.00	-20.80	-14.00	L2
5.6655	24.45	20.55	9.85	34.30	30.40	60.00	50.00	-25.70	-19.60	L2
12.2008	23.62	19.12	10.28	33.90	29.40	60.00	50.00	-26.10	-20.60	L2


Remark:

1. The measuring frequencies range between 0.15 MHz and 30 MHz.
2. The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10kHz. The IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz.
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)




Test Plot

Conducted emissions (Line 1)

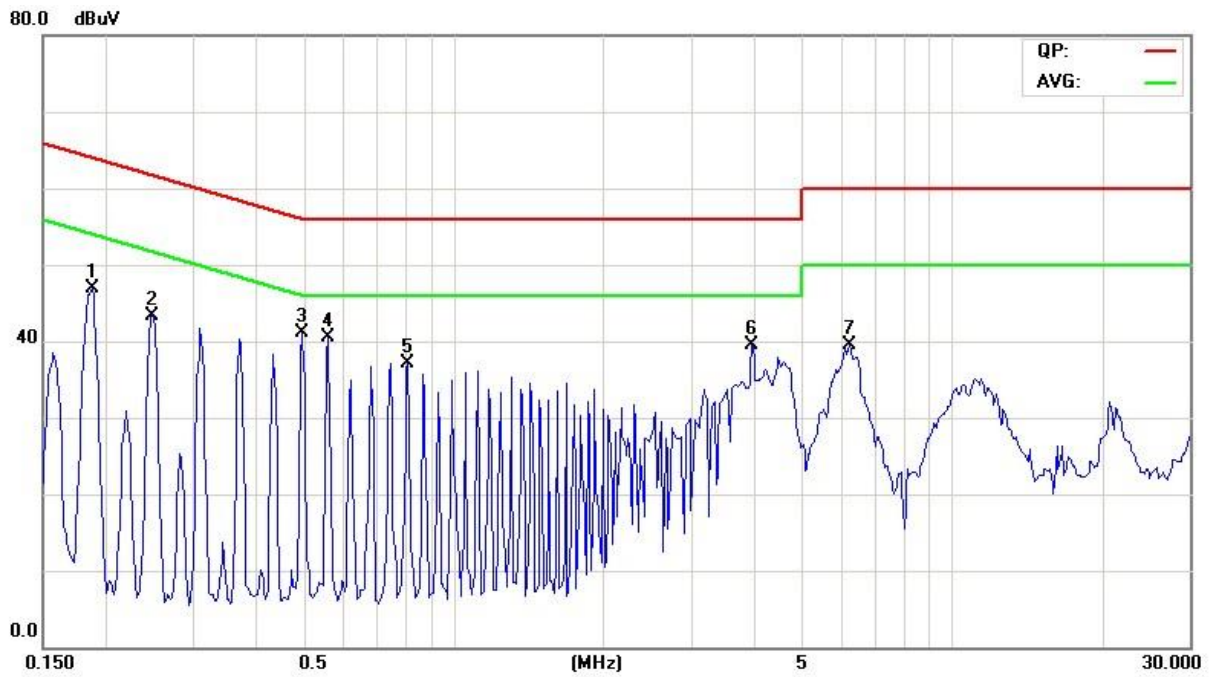

Conducted emissions (Line 2)

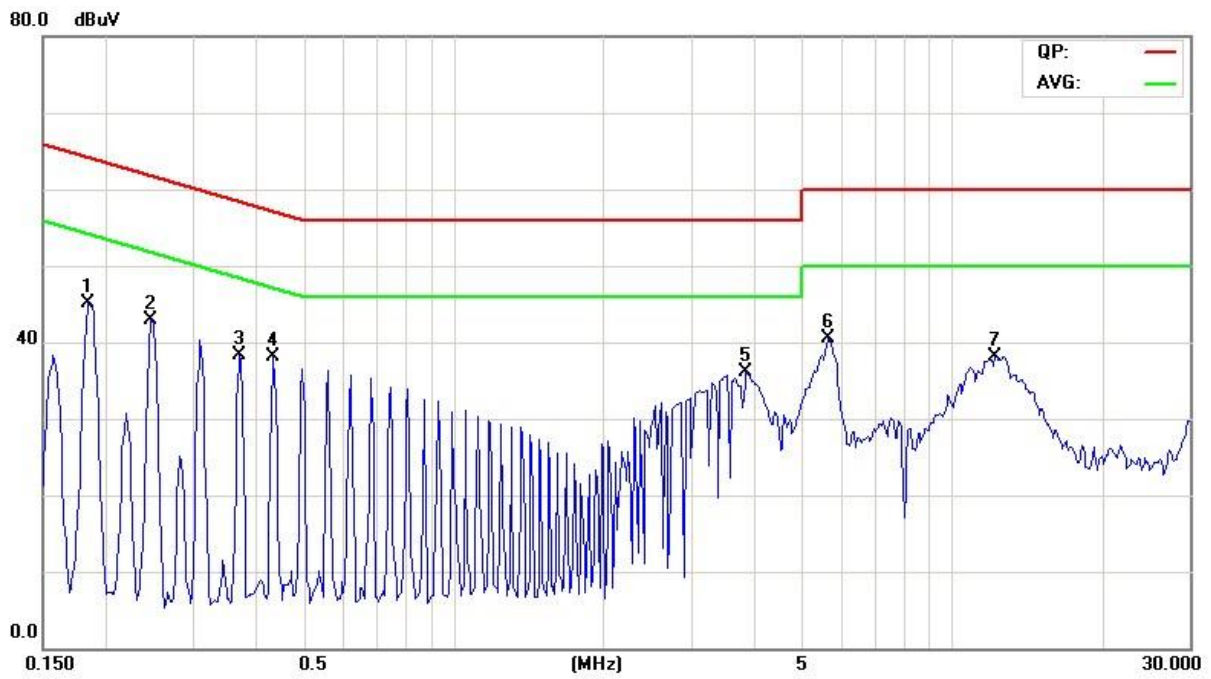



APPENDIX I RADIO FREQUENCY EXPOSURE

LIMIT

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this chapter.

EUT Specification

EUT	Terminal
Frequency band (Operating)	<input checked="" type="checkbox"/> WLAN: 2.412GHz ~ 2.462GHz <input type="checkbox"/> WLAN: 5.18GHz ~ 5.32GHz / 5.50GHz ~ 5.70GHz <input type="checkbox"/> WLAN: 5.745GHz ~ 5.825GHz <input type="checkbox"/> Others
Device category	<input type="checkbox"/> Portable (<20cm separation) <input checked="" type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others
Exposure classification	<input type="checkbox"/> Occupational/Controlled exposure (S = 5mW/cm ²) <input checked="" type="checkbox"/> General Population/Uncontrolled exposure (S=1mW/cm ²)
Antenna diversity	<input checked="" type="checkbox"/> Single antenna <input type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input type="checkbox"/> Tx/Rx diversity
Max. output power	IEEE 802.11b: 14.26 dBm (26.67mW) IEEE 802.11g: 9.61 dBm (9.14mW)
Antenna gain (Max)	3.00 dBi (Numeric gain: 2.00)
Evaluation applied	<input checked="" type="checkbox"/> MPE Evaluation <input type="checkbox"/> SAR Evaluation <input type="checkbox"/> N/A

Remark:

- The maximum output power is 14.26dBm (26.67mW) at 2462MHz (with 2.00numeric antenna gain.)
- DTS device is not subject to routine RF evaluation; MPE estimate is used to justify the compliance.
- For mobile or fixed location transmitters, no SAR consideration applied. The maximum power density is 1.0 mW/cm² even if the calculation indicates that the power density would be larger.

TEST RESULTS

No non-compliance noted.



MPE EVALUATION

Calculation

Given $E = \frac{\sqrt{30 \times P \times G}}{d}$ & $S = \frac{E^2}{3770}$

Where $E =$ Field strength in Volts / meter

$P =$ Power in Watts

$G =$ Numeric antenna gain

$d =$ Distance in meters

$S =$ Power density in milliwatts / square centimeter

Combining equations and re-arranging the terms to express the distance as a function of the remaining variables yields:

$$S = \frac{30 \times P \times G}{3770 d^2}$$

Changing to units of mW and cm, using:

$$P (mW) = P (W) / 1000 \text{ and}$$

$$d (cm) = d(m) / 100$$

Yields

$$S = \frac{30 \times (P/1000) \times G}{3770 \times (d/100)^2} = 0.0796 \times \frac{P \times G}{d^2} \quad \text{Equation 1}$$

Where $d =$ Distance in cm

$P =$ Power in mW

$G =$ Numeric antenna gain

$S =$ Power density in mW / cm²

Maximum Permissible Exposure

EUT output power = 26.67mW

Numeric Antenna gain = 2.00

Substituting the MPE safe distance using $d = 20$ cm into Equation 1:

Yields

$$S = 0.000199 \times P \times G$$

Where $P =$ Power in mW

$G =$ Numeric antenna gain

$S =$ Power density in mW / cm²

→ Power density = 0.0106 mW / cm²

(For mobile or fixed location transmitters, the maximum power density is 1.0 mW/cm² even if the calculation indicates that the power density would be larger.)