



SAR EVALUATION REPORT



For

Motion Computing, Inc.

8601 Ranch Road 2222, Building 2,

Austin, TX 78730, USA

FCC ID: Q3QHSWEM7355
IC: 4587A-SWEM7355

Report Type: CIIPC Report	Product Type: WWAN Module
Prepared By: <u>Simon Ma</u>	
Report Number: <u>R1410132-SAR Rev A</u>	
Report Date: <u>2015-02-06</u>	
Reviewed By: <u>Bo Li</u>	
Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732 9164	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "*" (Rev.3)

Summary of Test Results			
Rule Part(s):	FCC §2.1093, IC RSS-102, Issue 4		
Test Procedure(s):	IEEE 1528: 2013, KDB 248227, KDB 447498 KDB 865664, KDB 616217, KDB 941225		
Device Category: Exposure Category:	Portable Device General Population/Uncontrolled Exposure		
Device Type:	Portable Device		
Modulation Type:	GMSK, 8PSK, QPSK, 16QAM, 64QAM		
TX Frequency Range:	GSM850: 824-849 MHz GSM1900: 1850-1910 MHz LTE Band 2: 1850-1910 MHz LTE Band 4: 1710-1755 MHz LTE Band 5: 824-849 MHz LTE Band 13: 777-787 MHz LTE Band 17: 704-716 MHz LTE Band 25: 1850-1915 MHz UMTS Band 2: 1850-1910 MHz UMTS Band 4: 1710-1755 MHz UMTS Band 5: 824-849 MHz CDMA BC0: 824-849 MHz CDMA BC1: 1850-1910 MHz CDMA BC10: 816.0-823.975 MHz		
Maximum Conducted Power*:	GSM850: 28.13 dBm GSM1900: 27.83 dBm LTE Band 2: 19.77 dBm, LTE Band 4: 18.43 dBm LTE Band 5: 22.64 dBm, LTE Band 13: 22.5 dBm LTE Band 17: 22.49 dBm, LTE Band 25: 20.19 dBm UMTS Band 2: 21.8 dBm UMTS Band 4: 17.53 dBm UMTS Band 5: 21.92 dBm CDMA BC0: 20.57 dBm CDMA BC10: 21.34 dBm CDMA BC1: 18.99 dBm		
Antenna Type(s) Tested:	Internal Antennas		
Body-Worn Accessories:	None		
Face-Head Accessories:	None		
Battery Type (s) Tested:	Li-ion: Battery Pack, MC5450BP 11.1Vdc, 4000mAh, 42Wh		
Max. SAR Level (s) Measured:	Level (W/Kg)	Position	Operational Band/Mode
	0.511	Back Side Touch	UMTS Band 4
	0.861	Top Edge Touch	LTE Band 4
	0.184	Left Edge Touch	GSM850
	2.35 (PLSR = 0.04)	-	Simultaneous TX

Note: The conducted power of WWAN module is reduced by the manufacturer due to simultaneous transmission consideration with WLAN module installed in the host device. Please refer to Annex F for power reduction details.

TABLE OF CONTENTS

1	GENERAL DESCRIPTION	6
1.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	6
1.2	EUT TECHNICAL SPECIFICATION.....	6
2	TEST FACILITY	7
3	REFERENCE, STANDARDS AND GUIDELINES	8
3.1	SAR LIMITS.....	9
4	EQUIPMENT LIST AND CALIBRATION	10
4.1	EQUIPMENT LIST & CALIBRATION INFO.....	10
5	EUT TEST STRATEGY AND METHODOLOGY	11
5.1	TEST POSITIONS FOR BODY-SUPPORTED DEVICE AND OTHER CONFIGURATIONS.....	11
5.2	CHEEK/TOUCH POSITION.....	12
5.3	EAR/TILT POSITION.....	12
5.4	TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS.....	13
5.5	SAR EVALUATION PROCEDURE.....	14
5.6	TEST METHODOLOGY.....	14
6	DASY4 SAR EVALUATION PROCEDURE	15
6.1	POWER REFERENCE MEASUREMENT.....	15
6.2	AREA SCAN.....	15
6.3	ZOOM SCAN.....	16
6.4	POWER DRIFT MEASUREMENT.....	16
6.5	Z-SCAN.....	16
7	DESCRIPTION OF TEST SYSTEM	17
7.1	TISSUE DIELECTRIC PARAMETERS.....	18
7.2	MEASUREMENT SYSTEM DIAGRAM.....	18
7.3	SYSTEM COMPONENTS.....	19
8	SAR MEASUREMENT SYSTEM VERIFICATION	27
8.1	SYSTEM ACCURACY VERIFICATION.....	27
8.2	SAR SYSTEM VERIFICATION SETUP AND PROCEDURE.....	27
8.3	LIQUID AND SYSTEM VALIDATION.....	28
9	SAR MEASUREMENT REDUCTION	29
10	SAR MEASUREMENT RESULTS	34
10.1	TEST ENVIRONMENTAL CONDITIONS.....	34
10.2	TEST RESULTS.....	34
11	APPENDIX A – MEASUREMENT UNCERTAINTY	62
12	APPENDIX B – PROBE CALIBRATION CERTIFICATES	63
13	APPENDIX C – DIPOLE CALIBRATION CERTIFICATES	82
14	APPENDIX D - TEST SYSTEM VERIFICATIONS SCANS	113
15	APPENDIX E – EUT SCAN RESULTS	117
16	APPENDIX F– OUTPUT POWER MEASUREMENT	131
17	APPENDIX G – TEST SETUP PHOTOS	152

17.1 TABLET BACK SIDE TOUCHES TO THE FLAT PHANTOM152
17.2 TABLET TOP EDGE TOUCHES TO THE FLAT PHANTOM.....152
17.3 TABLET RIGHT EDGE TOUCHES TO THE FLAT PHANTOM153
18 APPENDIX H – EUT PHOTOS.....154
18.1 TABLET – FRONT VIEW154
18.2 TABLET – BACK VIEW154
18.3 TABLET – TOP EDGE AND RIGHT EDGE VIEW155
18.4 TABLET – BOTTOM EDGE AND LEFT EDGE VIEW155
18.5 TABLET – OPEN CASE VIEW156
19 APPENDIX I - INFORMATIVE REFERENCES157

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R1410132-SAR	Initial	2015-01-22
1	R1410132-SAR Rev A	Revised Report	2015-02-06

1 General Description

1.1 Product Description for Equipment under Test (EUT)

This test and measurement report was prepared on behalf of *Motion Computing, Inc.*, and their product, WWAN module, model: EM7355. Motion Computing Inc. implemented 4G WWAN module (FCC ID: Q3QHSWEM7355, IC: 4587A-SWEM7355) into the tablet PC (model: CFT-004). The tablet PC also contains a WLAN+BT Combo module (FCC ID: Q3QHI7265NG and IC: 4587A-HI7265NG).

1.2 EUT Technical Specification

Item	Description
Modulation	GMSK, 8PSK, QPSK, 16QAM, 64QAM
Frequency Range	GSM850: 824-849 MHz GSM1900: 1850-1910 MHz LTE Band 2: 1850-1910 MHz LTE Band 4: 1710-1755 MHz LTE Band 5: 824-849 MHz LTE Band 13: 777-787 MHz LTE Band 17: 704-716 MHz LTE Band 25: 1850-1915 MHz UMTS Band 2: 1850-1910 MHz UMTS Band 4: 1710-1755 MHz UMTS Band 5: 824-849 MHz CDMA BC0: 824-849 MHz CDMA BC1: 1850-1910 MHz CDMA BC10: 816.0-823.975 MHz
Maximum Conducted Power Measured	GSM850: 28.13 dBm GSM1900: 27.83 dBm LTE Band 2: 19.77 dBm, LTE Band 4: 18.43 dBm LTE Band 5: 22.64 dBm, LTE Band 13: 22.5 dBm LTE Band 17: 22.49 dBm, LTE Band 25: 20.19 dBm UMTS Band 2: 21.8 dBm UMTS Band 4: 17.53 dBm UMTS Band 5: 21.92 dBm CDMA BC0: 20.57 dBm CDMA BC10: 21.34 dBm CDMA BC1: 18.99 dBm
Dimensions (L*W*H)	Tablet: 256 (L) x 256 mm (W) x 15 mm (H)
Power Source	Li-ion: Battery Pack, MC5450BP 11.1Vdc, 4000mAh, 42 Wh
Weight	1500 g
Normal Operation	Body-supported

The test data gathered are from typical production sample, Sample ID: 505 provided by the manufacturer.

2 Test Facility

Bay area compliance Laboratories Corp. (BACL) is:

1- An independent Commercial Test Laboratory accredited to **ISO 17025: 2005** by **A2LA**, in the fields of: Electromagnetic Compatibility & Telecommunications covering Emissions, Immunity, Radio, RF Exposure, Safety and Telecom. This includes NEBS (Network Equipment Building System), Wireless RF, Telecommunications Terminal Equipment (TTE); Network Equipment; Information Technology Equipment (ITE); Medical Electrical Equipment; Industrial, Commercial, and Medical Test Equipment; Professional Audio and Video Equipment; Electronic (Digital) Products; Industrial and Scientific Instruments; Cabled Distribution Systems and Energy Efficiency Lighting.

2- An ENERGY STAR Recognized Laboratory, for the LM80 Testing, a wide variety of Luminaires and Computers.

3- A NIST Designated Phase-I and Phase-II CAB including: ACMA (Australian Communication and Media Authority), BSMI (Bureau of Standards, Metrology and Inspection of Taiwan), IDA (Infocomm Development Authority of Singapore), IC(Industry Canada), Korea (Ministry of Communications Radio Research Laboratory), NCC (Formerly DGT; Directorate General of Telecommunication of Chinese Taipei) OFTA (Office of the Telecommunications Authority of Hong Kong), Vietnam, VCCI - Voluntary Control Council for Interference of Japan and a designated EU CAB (Conformity Assessment Body) (Notified Body) for the EMC and R&TTE Directives.

4- A Product Certification Body accredited to **ISO Guide 65:1996** by **A2LA** to certify:

- 1- Unlicensed, Licensed radio frequency devices and Telephone Terminal Equipment for the FCC. Scope A1, A2, A3, A4, B1, B2, B3, B4 & C.
2. Radio Standards Specifications (RSS) in the Category I Equipment Standards List and All Broadcasting Technical Standards (BETS) in Category I Equipment Standards List for Industry Canada.
3. Radio Communication Equipment for Singapore.
4. Radio Equipment Specifications, GMDSS Marine Radio Equipment Specifications, and Fixed Network Equipment Specifications for Hong Kong.
5. Japan MIC Telecommunication Business Law (A1, A2) and Radio Law (B1, B2 and B3).
6. Audio/Video, Battery Charging Systems, Computers, Displays, Enterprise Servers, Imaging Equipment, Set-Top Boxes, Telephony, Televisions, Ceiling Fans, CFLs (Including GU24s),Decorative Light Strings, Integral LED Lamps, Luminaires, Residential Ventilating Fans.

The test site used by BACL Corp. to collect radiated and conducted emissions measurement data is located at its facility in Sunnyvale, California, USA.

The test site at BACL Corp. has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997, and Article 8 of the VCCI regulations on December 25, 1997. The test site also complies with the test methods and procedures set forth in CISPR 22:2008 §10.4 for measurements below 1 GHz and §10.6 for measurements above 1 GHz as well as ANSI C63.4-2009, ANSI C63.4-2009, TIA/EIA-603 & CISPR 24:2010.

The Federal Communications Commission and Voluntary Control Council for Interference have the reports on file and they are listed under FCC registration number: 90464 and VCCI Registration No.: A-0027. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL Corp. is an American Association for Laboratory Accreditation (A2LA) accredited laboratory (Lab Code 3297-02). The current scope of accreditations can be found at

<http://www.a2la.org/scopepdf/3297-02.pdf?CFID=1132286&CFTOKEN=e42a3240dac3f6ba-6DE17DCB-1851-9E57-477422F667031258&jsessionid=8430d44f1f47cf2996124343c704b367816b>

3 Reference, Standards and Guidelines

FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

CE:

The CE requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 2 mW/g as recommended by the EN50360 for an uncontrolled environment. According to the Standard, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits? SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in Europe is 2 mW/g average over 10 gram of tissue mass.

The test configurations were laid out on a specially designed test fixture to ensure the reproducibility of measurements. Each configuration was scanned for SAR. Analysis of each scan was carried out to characterize the above effects in the device.

3.1 SAR Limits

FCC Limit (1g Tissue)

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

CE Limit (10g Tissue)

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 10 g of tissue)	2.0	10
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6 W/kg (FCC) & 2 W/kg (CE) applied to the EUT.

4 Equipment List and Calibration

4.1 Equipment List & Calibration Info


Type/Model	Cal. Due Date	S/N
DASY4 Professional Dosimetric System	N/A	N/A
Robot RX60L	N/A	CS7MBSP / 467
Robot Controller	N/A	F01/5J72A1/A/01
Dell Computer Dimension 3000	N/A	N/A
SPEAG EDC3	N/A	N/A
SPEAG DAE3	2015-08-13	456
DASY4 Measurement Server	N/A	1176
SPEAG Probe, SAR Sensor ET3DV6	2015-08-19	1604
SPEAG Probe, SAR Sensor ES3DV2	2014-12-17	3019
Antenna, Dipole, D750V3	2016-12-06	1102
Antenna, Dipole, ALS-D-835-S-2	2016-10-27	180-00564
Antenna, Dipole, ALS-D-1750-S-2	2016-10-08	198-00304
Antenna, Dipole, ALS-D-1900-S-2	2017-10-27	210-00715
SPEAG Twin SAM Phantom	N/A	TP-1032
Muscle Equivalent Matter (750 MHz)	Each Time	N/A
Muscle Equivalent Matter (835 MHz)	Each Time	N/A
Muscle Equivalent Matter (1750 MHz)	Each Time	N/A
Muscle Equivalent Matter (1900 MHz)	Each Time	N/A
Rohde & Schwarz, Signal Analyzer FSQ26	2015-02-24	200749
Mini Circuits, Amplifier	2015-10-17	N605601404
Power Meter Agilent E4419B	2015-07-11	MY4121511
Power Sensor HP 8481A	2015-04-18	2702A72334
Dielectric Probe Kit HP85070C	2015-03-07	US99360201
HP, Signal Generator, 83650B	2015-08-06	3614A00276
Mini Circuits, AMPLIFIER ZVE-8G+	2015-10-17	N605601404
HP, Analyzer, Network, 8753D	2015-10-28	3410A04346
HP, Directional Coupler 779D	N/A	1144A05102
HP, Directional Coupler 778D	N/A	17442
Antenna, Horn DRH-118	2015-03-28	A052704
R & S Communication Tester, CMW500	2015-08-26	120503
Agilent, Communications Analyzer, E5515C	2016-08-16	GB44051221

5 EUT Test Strategy and Methodology

5.1 Test positions for body-supported device and other configurations

This category includes most wireless handsets with fixed, retractable or internal antennas located toward the top half of the device, with or without a foldout, sliding or similar keypad cover. The handset should have its earpiece located within the upper ¼ of the device, either along the centerline or off-centered, as perceived by its users. This type of handset should be positioned in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point”. The “test device reference point” should be located at the same level as the center of the earpiece region. The “vertical centerline” should bisect the front surface of the handset at its top and bottom edges. An “ear reference point” is located on the outer surface of the head phantom on each ear spacer. It is located 1.5 cm above the center of the ear canal entrance in the “phantom reference plane” defined by the three lines joining the center of each “ear reference point” (left and right) and the tip of the mouth.

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom. For the SCC-34/SC-2 head phantom, the device should be positioned parallel to the “N-F” line defined along the base of the ear spacer that contains the “ear reference point”. For interim head phantoms, the device should be positioned parallel to the cheek for maximum RF energy coupling. The “test device reference point” is aligned to the “ear reference point” on the head phantom and the “vertical centerline” is aligned to the “phantom reference plane”. This is called the “initial ear position”. While maintaining these three alignments, the body of the handset is gradually adjusted to each of the following positions for evaluating SAR:

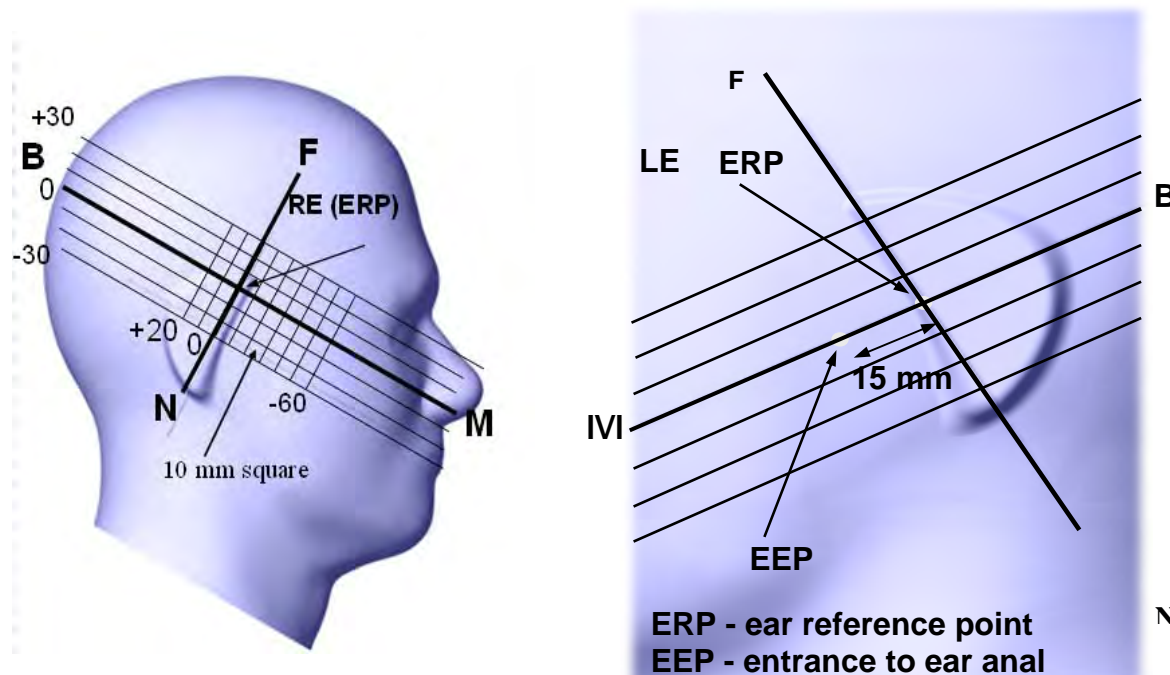

5.2 Cheek/Touch Position


The device is brought toward the mouth of the head phantom by pivoting against the “ear reference point” or along the “N-F” line for the SCC-34/SC-2 head phantom.

This test position is established:

- When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.
- (or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

For existing head phantoms – when the handset loses contact with the phantom at the pivoting point, rotation should continue until the device touches the cheek of the phantom or breaks its last contact from the ear spacer.

Cheek /Touch Position

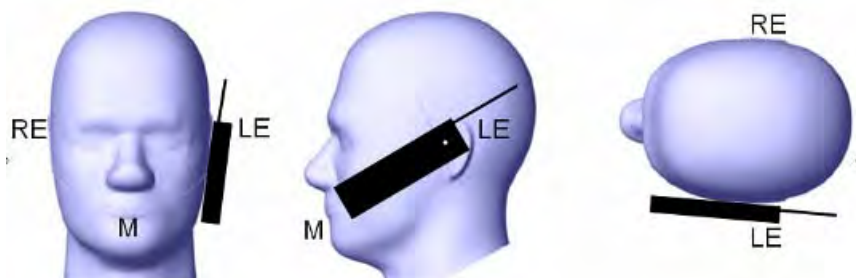

5.3 Ear/Tilt Position


1) If the earpiece of the handset is not in full contact with the phantom’s ear spacer (in the “Cheek/Touch position”) and the peak SAR location for the “Cheek/Touch” position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the “initial ear position” by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.

2) (otherwise) The handset should be moved (translated) away from the cheek perpendicular to the line passes through both “ear reference points” (note: one of these ear reference points may not physically exist on a split head model) for approximate 2-3 cm. While it is in this position, the device handset is tilted away from the mouth with respect to the “test device reference point” until the inside angle between the vertical centerline on the front surface of the phone and the horizontal line passing through the ear reference point is by 15 80°. After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both “ear reference points” until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously. This test position may require a device holder or positioner to achieve the translation and tilting with acceptable positioning repeatability.

If a device is also designed to transmit with its keypad cover closed for operating in the head position, such positions should also be considered in the SAR evaluation. The device should be tested on the left and right side of the head phantom in the “Cheek/Touch” and “Ear/Tilt” positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tile/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).

If the transmission band of the test device is less than 10 MHz, testing at the high and low frequency channels is optional.


Ear /Tilt 15° Position

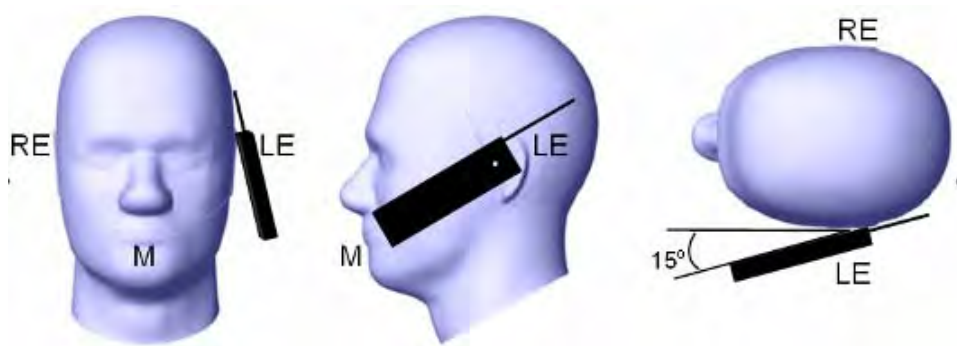

5.4 Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

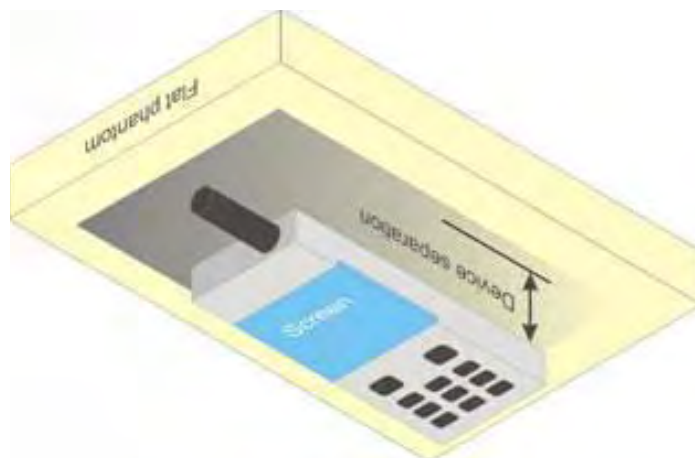

5.5 SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or EUT and the horizontal grid spacing was 15 mm x 15 mm. Based on these data, the area of the maximum absorption was determined by line interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

Step 3: Around this point, a volume of 30 mm x 30 mm x 21 mm was assessed by measuring 5 x 5 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

1. The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
2. The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.
3. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.

5.6 Test Methodology

- KDB 447498 D01 (General SAR Guidance)
- KDB 648474 D01 SAR Handsets Multi Xmitter and Ant)
- KDB 248227 D01 (SAR Consideration for 802.11 Devices)
- KDB 865664 D01 (SAR Measurements up to 6 GHz)
- KDB 616217 D04 (Tablet SAR Considerations)

6 DASY4 SAR Evaluation Procedure

6.1 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurement jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. By default, the Minimum distance of probe sensors to surface is 4mm. This distance can be modified by the user, but cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties (for example, 2.7mm for an ET3DV6 probe type).


6.2 Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in DASY4 software can find the maximum locations even in relatively coarse grids.

The scanning area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the Area Scan's property sheet is brought-up, grid settings can be edited by a user.

When an Area Scan has measured all reachable points, it computes the field maxima found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE 1528-2003, EN 50361 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

After measurement is completed, all maxima and their coordinates are listed in the Results property page. The maximum selected in the list is highlighted in the 3-D view. For the secondary maxima returned from an Area Scan, the user can specify a lower limit (peak SAR value), in addition to the Find secondary maxima within x dB condition. Only the primary maximum and any secondary maxima within x dB from the primary maximum and above this limit will be measured.

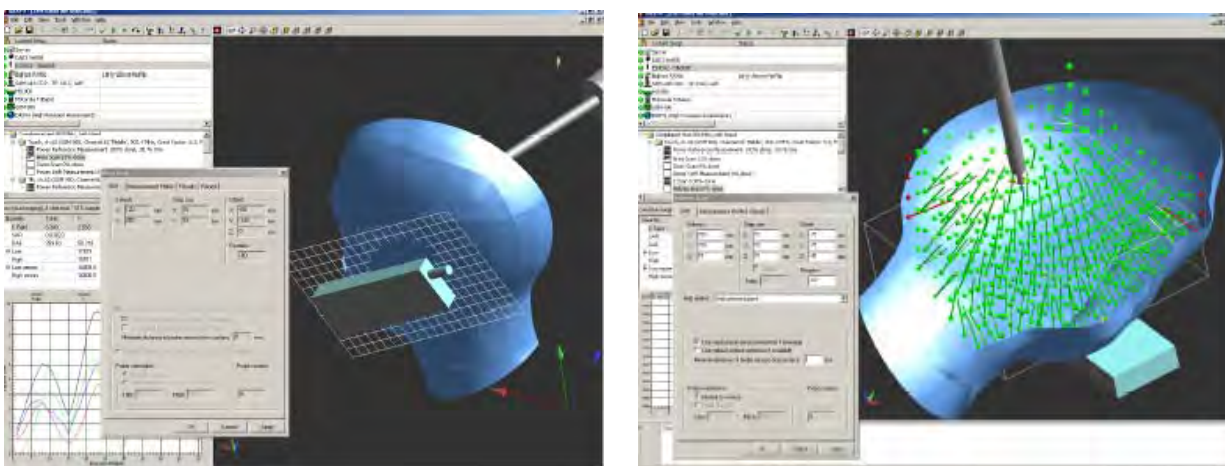

6.3 Zoom Scan


Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan measures 5 x 5 x 7 points within a cube whose base faces are centered around the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

6.4 Power drift measurement

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

6.5 Z-Scan

The Z Scan job measures points along a vertical straight line. The line runs along the Z axis of a one-dimensional grid. A user can anchor the grid to the section reference point, to any defined user point or to the current probe location. As with any other grids, the local Z axis of the anchor location establishes the Z axis of the grid.

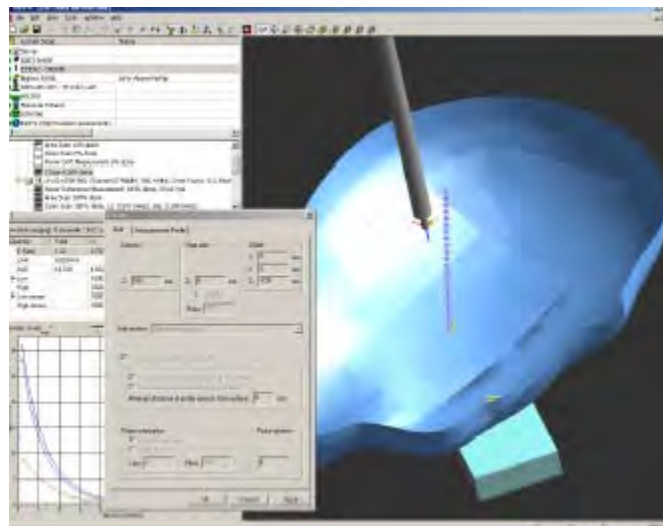

7 Description of Test System

These measurements were performed with the automated near-field scanning system DASY4 from Schmid & Partner Engineering AG (SPEAG) which is the fourth generation of the system shown in the figure hereinafter:



The system is based on a high precision robot (working range greater than 0.9m), which positions the probes with a positional repeatability of better than $\pm 0.02\text{mm}$. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit.


The SAR measurements were conducted with the dosimetric probe ET3DV6 SN: 1604 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure with accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated with the procedure and found to be better than $\pm 0.25\text{dB}$.

7.1 Tissue Dielectric Parameters

IEEE SCC-34/SC-2 P1528 Recommended Tissue Dielectric Parameters

Frequency (MHz)	Head Tissue		Body Tissue	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

7.2 Measurement System Diagram

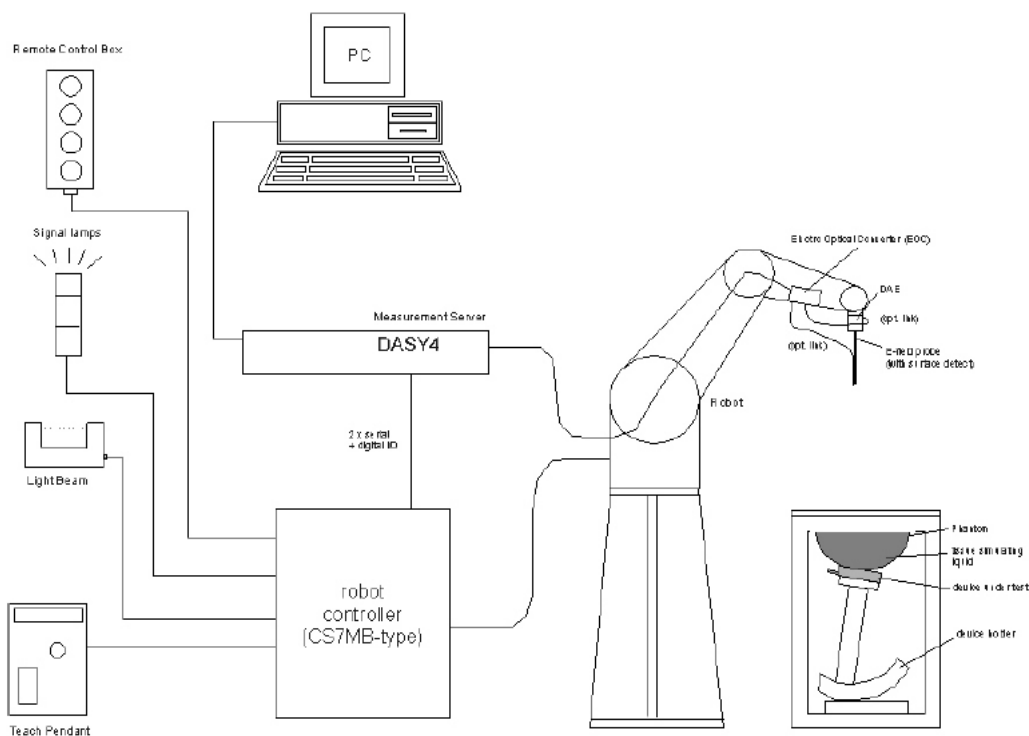

The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000 or Windows XP.

- DASY4 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing system validation.

7.3 System Components

- DASY4 Measurement Server
- Data Acquisition Electronics
- Probes
- Light Beam Unit
- Medium
- SAM Twin Phantom
- Device Holder for SAM Twin Phantom
- System Validation Kits
- Robot

DASY4 Measurement Server

The DASY4 measurement server is based on a PC/104 CPU board with a 166MHz low-power Pentium, 32MB chip disk and 64MB RAM. The necessary circuits for communication with either the DAE4 (or DAE3) electronic box as well as the 16-bit AD-converter system for optical detection and digital I/O interface are contained on the DASY4 I/O-board, which is directly connected to the PC/104 bus of the CPU board.



The measurement server performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. The PC-operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with two expansion slots which are reserved for future applications. Please note that the expansion slots do not have a standardized pin out and therefore only the expansion cards provided by SPEAG can be inserted. Expansion cards from any other supplier could seriously damage the measurement server.

Data Acquisition Electronics

The data acquisition electronics DAE3 consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.



Probes

The DASY system can support many different probe types.

Dosimetric Probes: These probes are specially designed and calibrated for use in liquids with high permittivities. They should not be used in air, since the spherical isotropy in air is poor (± 2 dB). The dosimetric probes have special calibrations in various liquids at different frequencies.

Free Space Probes: These are electric and magnetic field probes specially designed for measurements in free space. The z-sensor is aligned to the probe axis and the rotation angle of the x-sensor is specified. This allows the DASY system to automatically align the probe to the measurement grid for field component measurement. The free space probes are generally not calibrated in liquid. (The H-field probes can be used in liquids without any change of parameters.)


Temperature Probes: Small and sensitive temperature probes for general use. They use a completely different parameter set and different evaluation procedures. Temperature rise features allow direct SAR evaluations with these probes.

ET3DV6 Probe Specification


Construction Symmetrical design with triangular core
 Built-in optical fiber for surface detection System
 Built-in shielding against static charges
 Calibration In air from 10 MHz to 2.5 GHz
 In brain and muscle simulating tissue at
 Frequencies of 450 MHz, 900 MHz and
 1.8 GHz (accuracy $\pm 8\%$)
 Frequency 10 MHz to > 6 GHz; Linearity: ± 0.2 dB
 (30 MHz to 3 GHz)
 Directivity ± 0.2 dB in brain tissue (rotation around
 probe axis)
 ± 0.4 dB in brain tissue (rotation normal probe axis)
 Dynamic 5 mW/g to > 100 mW/g;
 Range Linearity: ± 0.2 dB
 Surface ± 0.2 mm repeatability in air and clear liquids
 Detection over diffuse reflecting surfaces.
 Dimensions Overall length: 330 mm
 Tip length: 16 mm

Body diameter: 12 mm
 Tip diameter: 6.8 mm
 Distance from probe tip to dipole centers: 2.7 mm
 Application General dosimetric up to 3 GHz
 Compliance tests of mobile phones
 Fast automatic scanning in arbitrary phantoms

The SAR measurements were conducted with the dosimetric probe ET3DV6 designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi-fiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY3 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped when reaching the maximum.

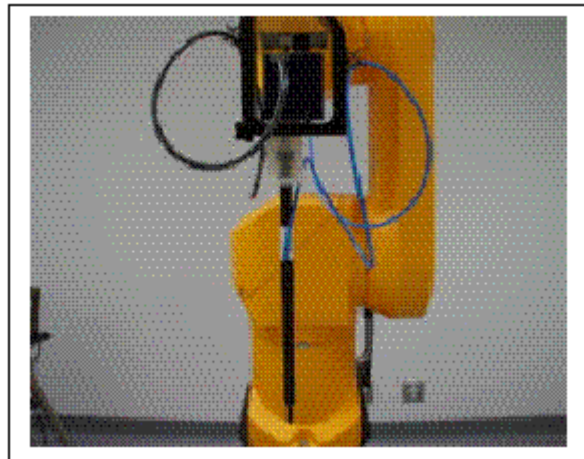

Photograph of the probe

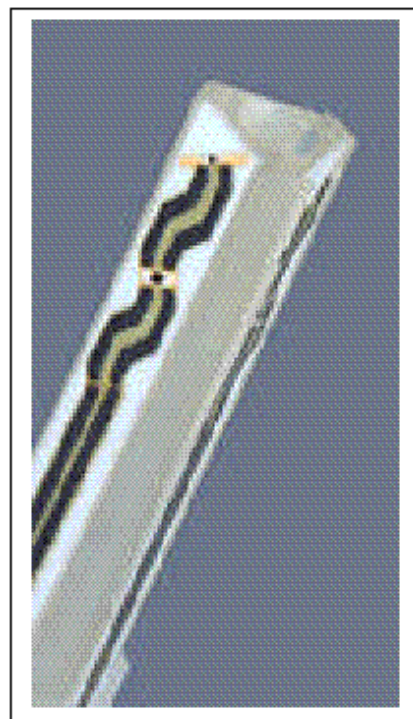

Inside view of
ET3DV6 E-field Probe

E-Field Probe Calibration Process

Each probe is calibrated according to a dosimetric assessment procedure described in [6] with accuracy better than +/- 10%. The spherical isotropy was evaluated with the procedure described in [7] and found to be better than +/-0.25dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a waveguide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Data Evaluation

The DASY4 post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
	- Conversion factor	ConvFi
	- Diode compression point	dcp _i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

With V_i = compensated signal of channel i (i =x, y, z)
 U_i = input signal of channel i (i =x, y, z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E - fieldprobes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConuF}}}$$

$$\text{H - fieldprobes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

With V_i = compensated signal of channel i (i=x, y, z)
 Norm_i = sensor sensitivity of channel i (i=x, y, z)
 $\mu\text{V}/(\text{V/m})^2$ for E-field probes
 ConF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strenggy of channel i in V/m
 H_i = diode compression point (DASY parameter)

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

With SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/meter] or [Siemens/meter]
 ρ = equivalent tissue density in g/cm^3

Note that the density is normally set to 1, to account for actual brain density rather than the density of the simulation liquid.

Light Beam Unit

The light beam switch allows automatic “tooling” of the probe. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, so that the robot coordinates are valid for the probe tip. The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.

Medium

The parameters of the tissue simulating liquid strongly influence the SAR in the liquid. The parameters for the different frequencies are defined in the corresponding compliance standards (e.g., EN 50361, IEEE 1528-2003).

Parameter measurements

Several measurement systems are available for measuring the dielectric parameters of liquids:

- The open coax test method (e.g., HP85070 dielectric probe kit) is easy to use, but has only moderate accuracy. It is calibrated with open, short, and deionized water and the calibrations a critical process.
- The transmission line method (e.g., model 1500T from DAMASKOS, INC.) measures the transmission and reflection in a liquid filled high precision line. It needs standard two port calibration and is probably more accurate than the open coax method.
- The reflection line method measures the reflection in a liquid filled shorted precision lined. The method is not suitable for these liquids because of its low sensitivity.
- The slotted line method scans the field magnitude and phase along a liquid filled line. The evaluation is straight forward and only needs a simple response calibration. The method is very accurate, but can only be used in high loss liquids and at frequencies above 100 to 200MHz. Cleaning the line can be tedious.

SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

- Left hand
- Right hand
- Flat phantom

The phantom table comes in two sizes: A 100 x 50 x 85 cm (L x W x H) table for use with free standing robots (DASY4 professional system option) or as a second phantom and a 100 x 75 x 85 cm (L x W x H) table with reinforcements for table mounted robots (DASY4 compact system option).

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. Only one device holder is necessary if two phantoms are used (e.g., for different liquids) A white cover is provided to tap the phantom during o₂-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on the cover are possible. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.




The phantom can be used with the following tissue simulating liquids:

- Water-sugar based liquids can be left permanently in the phantom. Always cover the liquid if the system is not used, otherwise the parameters will change due to water evaporation.
- Glycol based liquids should be used with care. As glycol is a softener for most plastics, the liquid should be taken out of the phantom and the phantom should be dried when the system is not used (desirable at least once a week).
- Do not use other organic solvents without previously testing the phantom's compatibility.

Device Holder for SAM Twin Phantom

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source in 5mm distance, a positioning uncertainty of $\pm 0.5\text{mm}$ would produce a SAR uncertainty of $\pm 20\%$. An accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions, in which the devices must be measured, are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point ERP). Thus the device needs no repositioning when changing the angles.

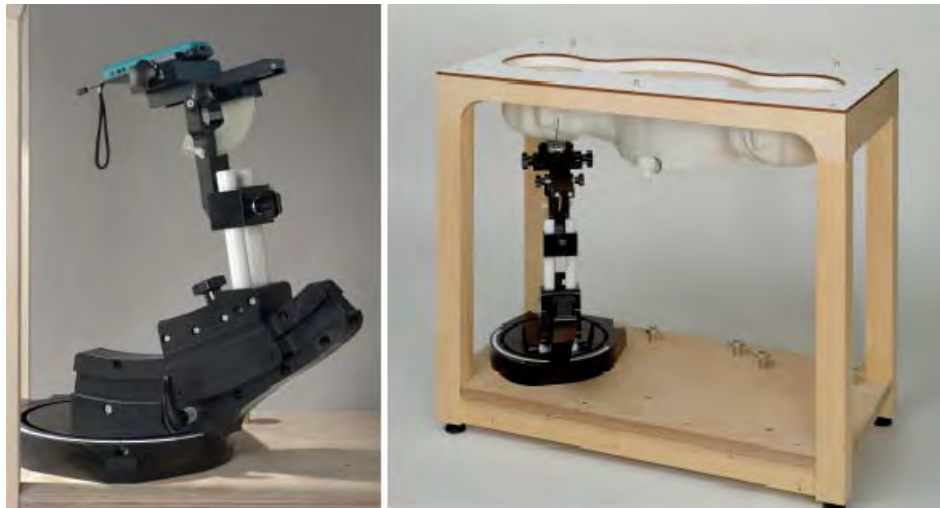

The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon_r=3$ and loss tangent $\tan \delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

System Validation Kits

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. For that purpose a well defined SAR distribution in the flat section of the SAM twin phantom is produced.

System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder. Dipoles are available for the variety of frequencies between 300MHz and 6 GHz (dipoles for other frequencies or media and other calibration conditions are available upon request).

The dipoles are highly symmetric and matched at the center frequency for the specified liquid and distance to the flat phantom (or flat section of the SAM-twin phantom). The accurate distance between the liquid surface and the dipole center is achieved with a distance holder that snaps on the dipole.

Robot

The DASY4 system uses the high precision industrial robots RX60L, RX90 and RX90L, as well as the RX60BL and RX90BL types out of the newer series from Stäubli SA (France). The RX robot series offers many features that are important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance-free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchronous motors; no stepper motors)
- Low ELF interference (the closed metallic construction shields against motor control fields)

For the newly delivered DASY4 systems as well as for the older DASY3 systems delivered since 1999, the CS7MB robot controller version from Stäubli is used. Previously delivered systems have either a CS7 or CS7M controller; the differences to the CS7MB are mainly in the hardware, but some procedures in the robot software from Stäubli are also not completely the same. The following descriptions about robot hard- and software correspond to CS7MB controller with software version 13.1 (edit S5). The actual commands, procedures and configurations, also including details in hardware, might differ if an older robot controller is in use. In this case please also refer to the Stäubli manuals for further information.



8.3 Liquid and System Validation

Date	Simulant	Freq. [MHz]	Parameters	Liquid Temp [°C]	Target Value	Measured Value	Deviation [%]	Limits [%]
2014-10-27	Body	750	ϵ_r	22	55.5	54	-2.7	± 5
			σ	22	0.96	0.96	0	± 5
			1g SAR	22	8.68	8.92	2.76	± 10

Date	Simulant	Freq. [MHz]	Parameters	Liquid Temp [°C]	Target Value	Measured Value	Deviation [%]	Limits [%]
2014-11-03	Body	835	ϵ_r	22	55.2	55.9	1.27	± 5
			σ	22	0.97	0.96	-1.03	± 5
			1g SAR	22	9.59	9.2	-5.74	± 10


Date	Simulant	Freq. [MHz]	Parameters	Liquid Temp [°C]	Target Value	Measured Value	Deviation [%]	Limits [%]
2014-11-17	Body	1750	ϵ_r	22	53.5	51.6	-3.6	± 5
			σ	22	1.44	1.4	-2.78	± 5
			1g SAR	22	36.65	33.2	-9.41	± 10

Date	Simulant	Freq. [MHz]	Parameters	Liquid Temp [°C]	Target Value	Measured Value	Deviation [%]	Limits [%]
2014-11-24	Body	1900	ϵ_r	22	53.3	52.4	-1.69	± 5
			σ	22	1.52	1.5	-1.32	± 5
			1g SAR	22	40.03	39	-2.57	± 10


ϵ_r = relative permittivity, σ = conductivity and $\rho=1000 \text{ kg/m}^3$

9 SAR Measurement Reduction

Back Side View of Antenna Placement in the EUT

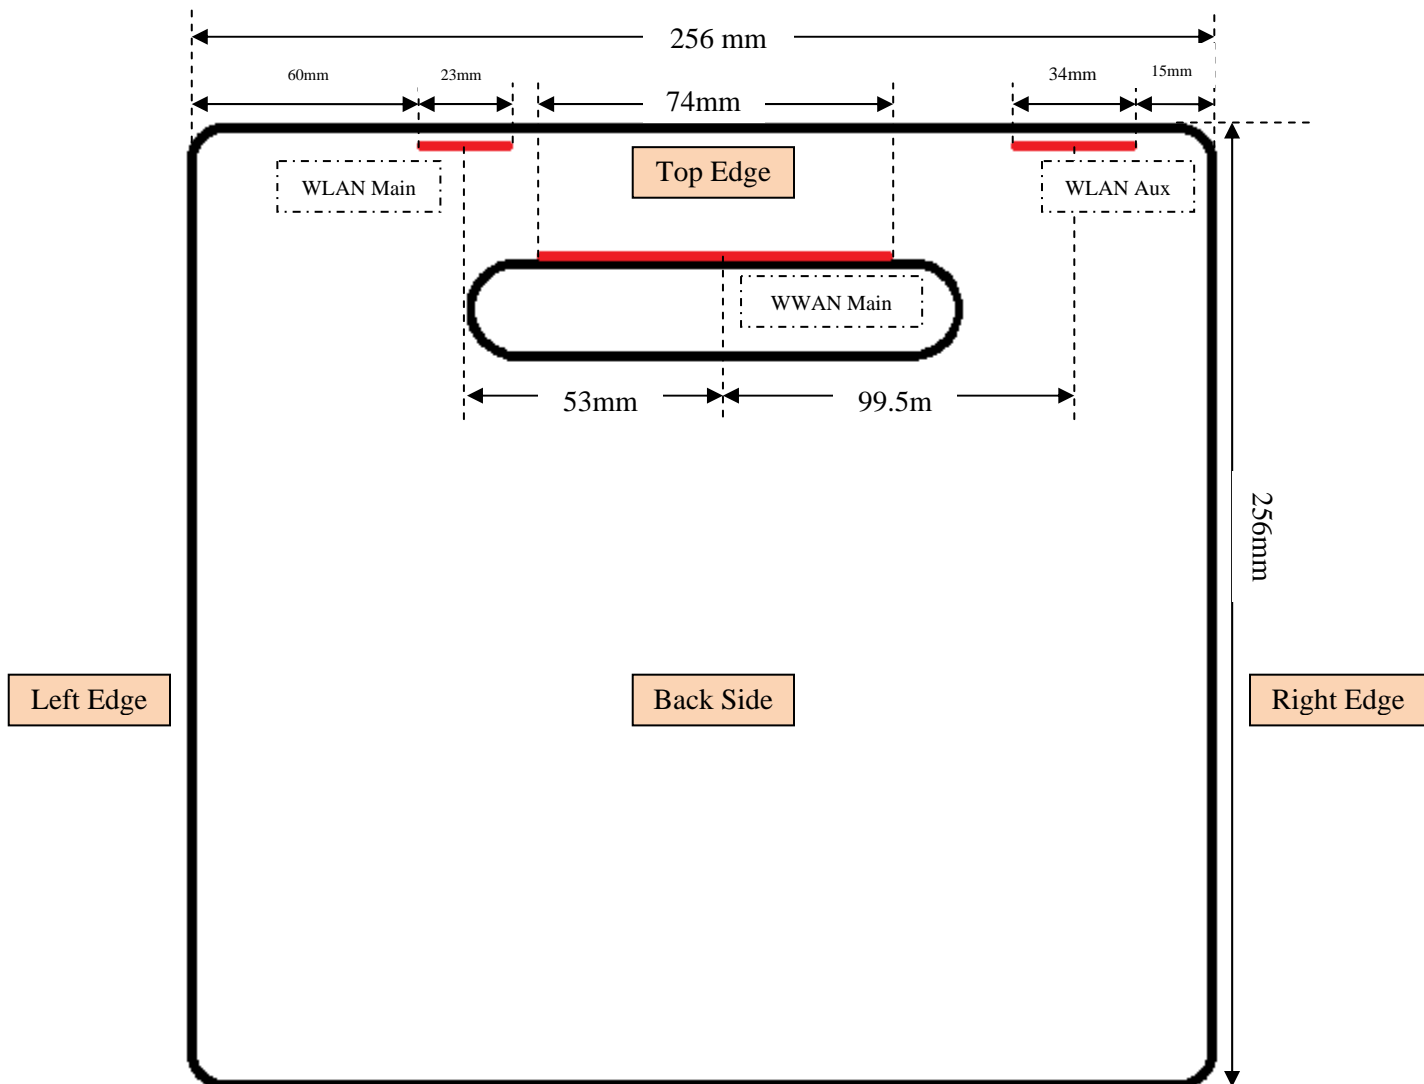

Side View of Antenna Placement in EUT

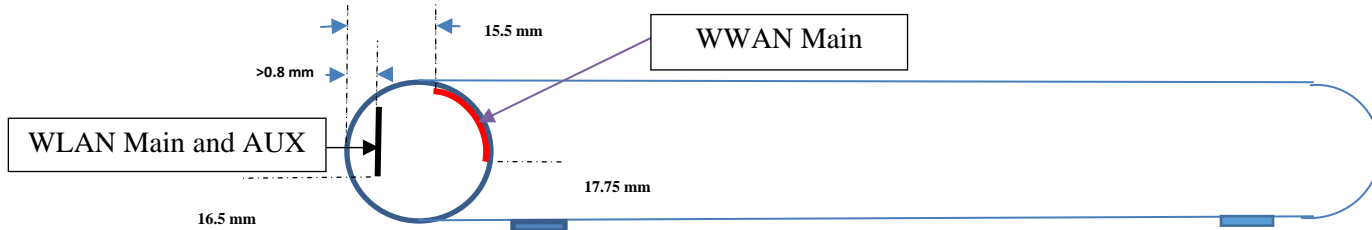

Separation Distances (mm)	Top Side	Bottom Side	Right Side	Left Side	WLAN Main Ant	WLAN Aux Ant	WWAN Ant
WLAN Main Ant	>0.8	255	173	60	-	140	72
WLAN Aux Ant	>0.8	255	15	207	140	-	74
WWAN Ant	15.5	240.5	94.5	87.5	72	74	-

Note: Distances between antennas and EUT surface is measured from the closet edge of antenna to the EUT outer surface; distances between antenna and antenna is measured from feed point to feed point.

SAR test exclusion table distance is ≤ 50 mm

Exposure Position	Wireless Interface	GSM850	GSM1900	LTE	LTE	LTE	LTE	LTE	LTE
		2 TX slots	2 TX slots	Band 2	Band 4	Band 5	Band 13	Band 17	Band 25
	Tune-up Target power (dBm)	28	27.83	19.77	18.43	22.64	22.5	22.49	20.19
Back	Antenna to user (mm)	5	5	5	5	5	5	5	5
	SAR exclusion threshold (dBm)	20.6	22.2	14.1	12.6	15.2	15	14.8	14.5
	SAR Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Top	Antenna to user (mm)	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.5
	SAR exclusion threshold (dBm)	15.7	17.3	9.2	7.7	10.3	10.1	9.8	9.6
	SAR Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Exposure Position	Wireless Interface	CDMA	CDMA	CDMA	UMTS	UMTS	UMTS
		BC0	BC1	BC10	Band 2	Band 4	Band 5
	Tune-up Target power (dBm)	20.57	18.99	21.34	21.8	17.53	21.92
Back	Antenna to user (mm)	5	5	5	5	5	5
	SAR exclusion threshold (dBm)	13.2	13.3	13.9	16.2	11.8	14.5
	SAR Testing required?	Yes	Yes	Yes	Yes	Yes	Yes
Top	Antenna to user (mm)	15.5	15.5	15.5	15.5	15.5	15.5
	SAR exclusion threshold (dBm)	8.3	8.4	9.0	11.3	6.8	9.6
	SAR Testing required?	Yes	Yes	Yes	Yes	Yes	Yes

SAR test exclusion table distance is > 50 mm

Exposure Position	Wireless Interface	GSM850 2 TX slots	GSM1900 2 TX slots	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 13	LTE Band 17	LTE Band 25
	Tune-up Target power (dBm)	28	27.83	19.77	18.43	22.64	22.5	22.49	20.19
Bottom	Antenna to user (mm)	240.5	240.5	240.5	240.5	240.5	240.5	240.5	240.5
	SAR exclusion threshold (dBm)	32.7	33.9	33.9	33.9	32.7	32.6	32.5	33.9
	SAR Testing required?	No	No	No	No	No	No	No	No
Right	Antenna to user (mm)	94.5	94.5	94.5	94.5	94.5	94.5	94.5	94.5
	SAR exclusion threshold (dBm)	27.5	28.2	28.1	28.2	27.5	27.4	27.4	28.1
	SAR Testing required?	Yes	No	No	No	No	No	No	No
Left	Antenna to user (mm)	87.5	87.5	87.5	87.5	87.5	87.5	87.5	87.5
	SAR exclusion threshold (dBm)	26.9	27.5	27.5	27.6	27	26.9	26.9	27.5
	SAR Testing required?	Yes	Yes	No	No	No	No	No	No

Exposure Position	Wireless Interface	UMTS Band 2	UMTS Band 4	UMTS Band 5	CDMA BC 0	CDMA BC 1	CDMA BC 10
	Tune-up Target power (dBm)	20.57	18.99	21.34	21.8	17.53	21.92
Bottom	Antenna to user (mm)	240.5	240.5	240.5	240.5	240.5	240.5
	SAR exclusion threshold (dBm)	32.7	33.9	32.6	33.9	34.4	32.7
	SAR Testing required?	No	No	No	No	No	No
Right	Antenna to user (mm)	94.5	94.5	94.5	94.5	94.5	94.5
	SAR exclusion threshold (dBm)	27.5	28.2	27.5	28.1	28.7	27.5
	SAR Testing required?	No	No	No	No	No	No
Left	Antenna to user (mm)	87.5	87.5	87.5	87.5	87.5	87.5
	SAR exclusion threshold (dBm)	27	27.5	26.9	27.5	28.0	27
	SAR Testing required?	No	No	No	No	No	No

Note:

1. Maximum power is the source-based time-average power and represents the maximum RF output power among production units.

2. Per KDB 447498 D01 v05r02, standalone SAR test exclusion threshold is applied; if the distance of the antenna to the user is < 5mm, 5mm is used to determine SAR exclusion threshold.

3. Per KDB 447498 D01 v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

(Max. power of channel, including tune-up tolerance, mW)/(Min. test distance, mm) $[\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity ,where

* f(GHz) is the RF channel transmit frequency in GHz

*Power and distance are rounded to the nearest mW and mm before calculation

*The result is rounded to one decimal place for comparison

4. Per KDB 447498 D01 v05r02, at 100 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following:

a). [Power allowed at numeric threshold for 50 mm in step 1) + (test separation distance - 50 mm)· (f(MHz)/150)] mW, at 100 MHz to 1500 MHz

b). [Power allowed at numeric threshold for 50 mm in step 1) + (test separation distance - 50 mm)· 10] mW at > 1500 MHz and ≤ 6 GHz

5. According to the WWAN modular report, the max average output power of the GPRS mode is more than 2 dB higher than the EGPRS measured in the same frequency band, according to IEEE1528, the SAR of EGPRS mode is not required.

6. KDB 941225 D01-Body SAR is not required for HSDPA when the maximum average output of each RF channel with HSDPA active is less than $\frac{1}{4}$ dB higher than measured without HSDPA using 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is $< 75\%$ of SAR limit.

7. KDB 941225 D01-Body SAR is not required for HSUPA when the maximum average output of each RF Channel with HSUPA active is less than $\frac{1}{4}$ dB higher than measured without HSUPA using 12.2kbps RMC and the maximum SAR for 12.2kbps RMC is $< 75\%$ of SAR limit.

10 SAR Measurement Results

This page summarizes the results of the performed dosimetric evaluation. The plots with the corresponding SAR distributions, which reveal information about the location of the maximum SAR with respect to the device, could be found in Appendix E.

10.1 Test Environmental Conditions

Temperature:	20-24 °C
Relative Humidity:	27-34 %
ATM Pressure:	101.6-102.9 kPa

Testing was performed by Simon Ma from 2014-10-27 to 2014-12-04 in SAR chamber.

10.2 Test results

GSM 850									
EUT Position	Channel	Frequency (MHz)	Uplink Slots	Measured SAR Value (W/kg)	Scaling Factor	Scaled SAR Value (W/kg)	Correct SAR Value (W/kg)	Limit (W/kg) 1g Tissue	Plot #
Back Side Touch	Middle	836.6	2	0.358	1	0.358	0.36	1.6	
Top Edge Touch	Middle	836.6	2	0.542	1	0.542	0.55	1.6	1
Left Edge Touch	Middle	836.6	2	0.184	1	0.184	0.19	1.6	
Right Edge Touch	Middle	836.6	2	0.0755	1	0.0755	0.08	1.6	

GSM 1900									
EUT Position	Channel	Frequency (MHz)	Uplink Slots	Measured SAR Value (W/kg)	Scaling Factor	Scaled SAR Value (W/kg)	Correct SAR Value (W/kg)	Limit (W/kg) 1g Tissue	Plot #
Back Side Touch	Middle	1880	2	0.389	1	0.389	0.39	1.6	
Top Edge Touch	Middle	1880	2	0.63	1	0.63	0.63	1.6	2
Left Edge Touch	Middle	1880	2	0.124	1	0.124	0.12	1.6	

LTE Band 2										
EUT Position	Channel	Frequency (MHz)	RB	RB Offset	Measured SAR Value (W/kg)	Scaling Factor	Scaled SAR Value (W/kg)	Correct SAR Value (W/kg)	Limit (W/kg) 1g Tissue	Plot #
Back Side Touch	Middle	1880	1	0	0.365	1	0.365	0.37	1.6	
Top Edge Touch	Middle	1880	1	0	0.706	1	0.706	0.71	1.6	3
Left Edge Touch	Middle	1880	1	0	0.0955	1	0.0955	0.1	1.6	

LTE Band 4										
EUT Position	Channel	Frequency (MHz)	RB	RB Offset	Measured SAR Value (W/kg)	Scaling Factor	Scaled SAR Value (W/kg)	Correct SAR Value (W/kg)	Limit (W/kg) 1g Tissue	Plot #
Back Side Touch	Middle	1732.5	1	99	0.5	1	0.5	0.5	1.6	
Top Edge Touch	Middle	1732.5	1	99	0.861	1	0.861	0.87	1.6	4
Left Edge Touch	Middle	1732.5	1	99	0.0358	1	0.0358	0.04	1.6	

LTE Band 5										
EUT Position	Channel	Frequency (MHz)	RB	RB Offset	Measured SAR Value (W/kg)	Scaling Factor	Scaled SAR Value (W/kg)	Correct SAR Value (W/kg)	Limit (W/kg) 1g Tissue	Plot #
Back Side Touch	Middle	836.5	1	0	0.395	1	0.395	0.40	1.6	
Top Edge Touch	Middle	836.5	1	0	0.557	1	0.557	0.56	1.6	5
Left Edge Touch	Middle	836.5	1	0	0.151	1	0.151	0.15	1.6	

LTE Band 13										
EUT Position	Channel	Frequency (MHz)	RB	RB Offset	Measured SAR Value (W/kg)	Scaling Factor	Scaled SAR Value (W/kg)	Correct SAR Value (W/kg)	Limit (W/kg) 1g Tissue	Plot #
Back Side Touch	Middle	782	1	25	0.353	1	0.353	0.35	1.6	
Top Edge Touch	Middle	782	1	25	0.564	1	0.564	0.56	1.6	6
Left Edge Touch	Middle	782	1	25	0.093	1	0.093	0.09	1.6	

LTE Band 17										
EUT Position	Channel	Frequency (MHz)	RB	RB Offset	Measured SAR Value (W/kg)	Scaling Factor	Scaled SAR Value (W/kg)	Correct SAR Value (W/kg)	Limit (W/kg) 1g Tissue	Plot #
Back Side Touch	Middle	710	1	49	0.233	1	0.233	0.23	1.6	
Top Edge Touch	Middle	710	1	49	0.324	1	0.324	0.32	1.6	7
Left Edge Touch	Middle	710	1	49	0.0484	1	0.0484	0.05	1.6	

LTE Band 25										
EUT Position	Channel	Frequency (MHz)	RB	RB Offset	Measured SAR Value (W/kg)	Scaling Factor	Scaled SAR Value (W/kg)	Correct SAR Value (W/kg)	Limit (W/kg) 1g Tissue	Plot #
Back Side Touch	Middle	1882.5	1	0	0.263	1	0.263	0.26	1.6	
Top Edge Touch	Middle	1882.5	1	0	0.656	1	0.656	0.66	1.6	8
Left Edge Touch	Middle	1882.5	1	0	0.0539	1	0.0539	0.05	1.6	

UMTS Band 2								
EUT Position	Channel	Frequency (MHz)	Measured SAR Value (W/kg)	Scaling Factor	Scaled SAR Value (W/kg)	Correct SAR Value (W/kg)	Limit (W/kg) 1g Tissue	Plot #
Back Side Touch	Middle	1880	0.13	1	0.13	0.13	1.6	
Top Edge Touch	Middle	1880	0.69	1	0.69	0.69	1.6	9
Left Edge Touch	Middle	1880	0.113	1	0.113	0.11	1.6	

UMTS Band 4								
EUT Position	Channel	Frequency (MHz)	Measured SAR Value (W/kg)	Scaling Factor	Scaled SAR Value (W/kg)	Correct SAR Value (W/kg)	Limit (W/kg) 1g Tissue	Plot #
Back Side Touch	Middle	1732.6	0.511	1	0.511	0.52	1.6	
Top Edge Touch	Middle	1732.6	0.796	1	0.796	0.8	1.6	10
Left Edge Touch	Middle	1732.6	0.0412	1	0.0412	0.04	1.6	

UMTS Band 5								
EUT Position	Channel	Frequency (MHz)	Measured SAR Value (W/kg)	Scaling Factor	Scaled SAR Value (W/kg)	Correct SAR Value (W/kg)	Limit (W/kg) 1g Tissue	Plot #
Back Side Touch	Middle	836.6	0.347	1	0.347	0.35	1.6	
Top Edge Touch	Middle	836.6	0.482	1	0.482	0.49	1.6	11
Left Edge Touch	Middle	836.6	0.135	1	0.135	0.14	1.6	

CDMA BC0								
EUT Position	Channel	Frequency (MHz)	Measured SAR Value (W/kg)	Scaling Factor	Scaled SAR Value (W/kg)	Correct SAR Value (W/kg)	Limit (W/kg) 1g Tissue	Plot #
Back Side Touch	Middle	836.52	0.304	1	0.304	0.31	1.6	
Top Edge Touch	Middle	836.52	0.514	1	0.514	0.52	1.6	12
Left Edge Touch	Middle	836.52	0.153	1	0.153	0.15	1.6	

CDMA BC1								
EUT Position	Channel	Frequency (MHz)	Measured SAR Value (W/kg)	Scaling Factor	Scaled SAR Value (W/kg)	Correct SAR Value (W/kg)	Limit (W/kg) 1g Tissue	Plot #
Back Side Touch	Middle	1880	0.388	1	0.388	0.39	1.6	
Top Edge Touch	Middle	1880	0.686	1	0.686	0.69	1.6	13
Left Edge Touch	Middle	1880	0.0391	1	0.0391	0.04	1.6	

CDMA BC10								
EUT Position	Channel	Frequency (MHz)	Measured SAR Value (W/kg)	Scaling Factor	Scaled SAR Value (W/kg)	Correct SAR Value (W/kg)	Limit (W/kg) 1g Tissue	Plot #
Back Side Touch	Middle	820.5	0.292	1	0.292	0.30	1.6	
Top Edge Touch	Middle	820.5	0.49	1	0.49	0.50	1.6	14
Left Edge Touch	Middle	820.5	0.14	1	0.14	0.14	1.6	

Corrected SAR Evaluation Table

Tissue Type	Frequency (MHz)	Liquid Type	C_ϵ	$\Delta\epsilon_r$	C_δ	$\Delta\delta$	ΔSAR
Body Tissue	709	Body	-0.22	-2.7	0.76	0	0.59
	710	Body	-0.22	-2.7	0.76	0	0.59
	711	Body	-0.22	-2.7	0.76	0	0.59
	782	Body	-0.22	-2.7	0.76	0	0.59
	820.5	Body	-0.22	1.27	0.75	-1.03	-1.06
	824.2	Body	-0.22	1.27	0.75	-1.03	-1.05
	826.4	Body	-0.22	1.27	0.75	-1.03	-1.05
	829	Body	-0.22	1.27	0.75	-1.03	-1.05
	836.5	Body	-0.22	1.27	0.75	-1.03	-1.05
	836.6	Body	-0.22	1.27	0.75	-1.03	-1.05
	844	Body	-0.22	1.27	0.75	-1.03	-1.05
	846.6	Body	-0.22	1.27	0.75	-1.03	-1.05
	848.8	Body	-0.22	1.27	0.75	-1.03	-1.05
	1712.4	Body	-0.23	-3.6	0.63	-2.78	-0.93
	1720	Body	-0.23	-3.6	0.62	-2.78	-0.92
	1732.5	Body	-0.23	-3.6	0.62	-2.78	-0.92
	1732.6	Body	-0.23	-3.6	0.62	-2.78	-0.92
	1745	Body	-0.23	-3.6	0.62	-2.78	-0.91
	1752.6	Body	-0.23	-3.6	0.62	-2.78	-0.90
	1850.2	Body	-0.23	-1.69	0.60	-1.32	-0.41
	1852.4	Body	-0.23	-1.69	0.60	-1.32	-0.41
	1860	Body	-0.23	-1.69	0.60	-1.32	-0.41
	1880	Body	-0.23	-1.69	0.59	-1.32	-0.40
	1882.5	Body	-0.23	-1.69	0.59	-1.32	-0.40
1900	Body	-0.23	-1.69	0.59	-1.32	-0.40	
1907.6	Body	-0.23	-1.69	0.59	-1.32	-0.39	
1909.8	Body	-0.23	-1.69	0.59	-1.32	-0.39	

$$\Delta\text{SAR} = c_\epsilon \Delta\epsilon_r + c_\sigma \Delta\sigma$$

$$c_\epsilon = -7,854 \times 10^{-4} f^3 + 9,402 \times 10^{-3} f^2 - 2,742 \times 10^{-2} f - 0,2026$$

$$c_\sigma = 9,804 \times 10^{-3} f^3 - 8,661 \times 10^{-2} f^2 + 2,981 \times 10^{-2} f + 0,7829$$

where

f is the frequency in GHz.

Note: According NOTICE 2012-DRS0529, if the correction ΔSAR has a negative sign, the measured SAR result should be corrected, and has a positive sign, the measured SAR result shall not be corrected.

Multi-TX and Antenna SAR Considerations

The Motion Tablet (Model: CFT-004) contains two radio modules inside, namely WLAN+BT Combo and WWAN radios, each internal radio has individual registration identifiers.

Note 1: According To KDB 447498, SAR is not required for other channels when the SAR value of middle channel is less than 0.8 W/kg.

Note 2: Simultaneous Transmission:

Bluetooth and 2.4 GHz WLAN radios, Bluetooth and 5 GHz WLAN, only occurs on antenna port 0. KDB447498 D01v05, $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm}) \leq 0.04$, and the peak separation distance is computed by the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where $(x1, y1, z1)$ and $(x2, y2, z2)$ are the coordinates of the area scans or extrapolated peak SAR locations in the zoom scans. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary

Note 3: WLAN standalone SAR data refers to Report: R141013-SAR. Δ SAR has positive sign in all frequency, thus no correction is needed.

Note 4: WWAN standalone SAR value listed in the following tables are based on the IC corrected SAR results rounded to two decimal digits, which is higher than or equal to FCC reported SAR values.

*: 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm

Table 1: Simultaneous Transmission Scenario of WWAN Antenna & 5.2 GHz WLAN Main Antenna

Position	SAR (W/kg)									Ri (mm)	PLSR
	GSM 850	GSM 1900	CDMA BC0	CDMA BC1	CDMA BC10	UMTS Band 2	UMTS Band 4	5.2 G WLAN Main	Sum SAR		
Back	0.36	-	-	-	-	-	-	0.0884	0.45	-	-
	-	0.39	-	-	-	-	-	0.0884	0.48	-	-
	-	-	0.31	-	-	-	-	0.0884	0.40	-	-
	-	-	-	0.39	-	-	-	0.0884	0.49	-	-
	-	-	-	-	0.3	-	-	0.0884	0.39	-	-
	-	-	-	-	-	0.13	-	0.0884	0.22	-	-
	-	-	-	-	-	-	0.52	0.0884	0.61	-	-
Top	0.55	-	-	-	-	-	-	0.638	1.19	-	-
	-	0.63	-	-	-	-	-	0.638	1.27	-	-
	-	-	0.52	-	-	-	-	0.638	1.16	-	-
	-	-	-	0.69	-	-	-	0.638	1.33	-	-
	-	-	-	-	0.5	-	-	0.638	1.14	-	-
	-	-	-	-	-	0.69	-	0.638	1.33	-	-
	-	-	-	-	-	-	0.8	0.638	1.44	-	-
Right	0.08	-	-	-	-	-	-	0.4*	0.48	-	-
	-	0.4*	-	-	-	-	-	0.4*	0.8	-	-
	-	-	0.4*	-	-	-	-	0.4*	0.8	-	-
	-	-	-	0.4*	-	-	-	0.4*	0.8	-	-
	-	-	-	-	0.4*	-	-	0.4*	0.8	-	-
	-	-	-	-	-	0.4*	-	0.4*	0.8	-	-
	-	-	-	-	-	-	0.4*	0.4*	0.8	-	-
Left	0.19	-	-	-	-	-	-	0.4*	0.59	-	-
	-	0.12	-	-	-	-	-	0.4*	0.52	-	-
	-	-	0.15	-	-	-	-	0.4*	0.55	-	-
	-	-	-	0.04	-	-	-	0.4*	0.44	-	-
	-	-	-	-	0.14	-	-	0.4*	0.54	-	-
	-	-	-	-	-	0.11	-	0.4*	0.51	-	-
	-	-	-	-	-	-	0.04	0.4*	0.44	-	-

Table 1 (continued): Simultaneous Transmission Scenario of WWAN Antenna & 5.2 GHz WLAN Main Antenna

Position	SAR (W/kg)									Ri (mm)	PLSR
	UMTS Band 5	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 13	LTE Band 17	LTE Band 25	5.2 G WLAN Main	Sum SAR		
Back	0.35	-	-	-	-	-	-	0.0884	0.44	-	-
	-	0.37	-	-	-	-	-	0.0884	0.46	-	-
	-	-	0.5	-	-	-	-	0.0884	0.59	-	-
	-	-	-	0.4	-	-	-	0.0884	0.49	-	-
	-	-	-	-	0.35	-	-	0.0884	0.44	-	-
	-	-	-	-	-	0.23	-	0.0884	0.32	-	-
	-	-	-	-	-	-	0.26	0.0884	0.35	-	-
Top	0.49	-	-	-	-	-	-	0.638	1.13	-	-
	-	0.71	-	-	-	-	-	0.638	1.35	-	-
	-	-	0.87	-	-	-	-	0.638	1.51	-	-
	-	-	-	0.56	-	-	-	0.638	1.20	-	-
	-	-	-	-	0.56	-	-	0.638	1.20	-	-
	-	-	-	-	-	0.32	-	0.638	0.96	-	-
	-	-	-	-	-	-	0.66	0.638	1.30	-	-
Right	0.4*	-	-	-	-	-	-	0.4*	0.8	-	-
	-	0.4*	-	-	-	-	-	0.4*	0.8	-	-
	-	-	0.4*	-	-	-	-	0.4*	0.8	-	-
	-	-	-	0.4*	-	-	-	0.4*	0.8	-	-
	-	-	-	-	0.4*	-	-	0.4*	0.8	-	-
	-	-	-	-	-	0.4*	-	0.4*	0.8	-	-
	-	-	-	-	-	-	0.4*	0.4*	0.8	-	-
Left	0.14	-	-	-	-	-	-	0.4*	0.54	-	-
	-	0.1	-	-	-	-	-	0.4*	0.50	-	-
	-	-	0.04	-	-	-	-	0.4*	0.44	-	-
	-	-	-	0.15	-	-	-	0.4*	0.55	-	-
	-	-	-	-	0.09	-	-	0.4*	0.49	-	-
	-	-	-	-	-	0.05	-	0.4*	0.45	-	-
	-	-	-	-	-	-	0.05	0.4*	0.45	-	-

Table 2: Simultaneous Transmission Scenario of WWAN Antenna & 5.2 GHz WLAN Aux Antenna

Position	SAR (W/kg)									Ri (mm)	PLSR
	GSM 850	GSM 1900	CDMA BC0	CDMA BC1	CDMA BC10	UMTS Band 2	UMTS Band 4	5.2 G WLAN Aux	Sum SAR		
Back	0.36	-	-	-	-	-	-	0.112	0.47	-	-
	-	0.39	-	-	-	-	-	0.112	0.50	-	-
	-	-	0.31	-	-	-	-	0.112	0.42	-	-
	-	-	-	0.39	-	-	-	0.112	0.50	-	-
	-	-	-	-	0.3	-	-	0.112	0.41	-	-
	-	-	-	-	-	0.13	-	0.112	0.24	-	-
	-	-	-	-	-	-	0.52	0.112	0.63	-	-
Top	0.55	-	-	-	-	-	-	1.48	2.03	64.3	0.04
	-	0.63	-	-	-	-	-	1.48	2.11	77.4	0.04
	-	-	0.52	-	-	-	-	1.48	2.00	63.7	0.04
	-	-	-	0.69	-	-	-	1.48	2.17	78.4	0.04
	-	-	-	-	0.5	-	-	1.48	1.98	62.8	0.04
	-	-	-	-	-	0.69	-	1.48	2.17	77.5	0.04
	-	-	-	-	-	-	0.8	1.48	2.28	85.3	0.04
Right	0.08	-	-	-	-	-	-	0.138	0.21	-	-
	-	0.4*	-	-	-	-	-	0.138	0.54	-	-
	-	-	0.4*	-	-	-	-	0.138	0.54	-	-
	-	-	-	0.4*	-	-	-	0.138	0.54	-	-
	-	-	-	-	0.4*	-	-	0.138	0.54	-	-
	-	-	-	-	-	0.4*	-	0.138	0.54	-	-
	-	-	-	-	-	-	0.4*	0.138	0.54	-	-
Left	0.19	-	-	-	-	-	-	0.4*	0.59	-	-
	-	0.12	-	-	-	-	-	0.4*	0.52	-	-
	-	-	0.15	-	-	-	-	0.4*	0.55	-	-
	-	-	-	0.04	-	-	-	0.4*	0.44	-	-
	-	-	-	-	0.14	-	-	0.4*	0.54	-	-
	-	-	-	-	-	0.11	-	0.4*	0.51	-	-
	-	-	-	-	-	-	0.04	0.4*	0.44	-	-

Table 2 (continued): Simultaneous Transmission Scenario of WWAN Antenna & 5.2 GHz WLAN Aux Antenna

Position	SAR (W/kg)									Ri (mm)	PLSR
	UMTS Band 5	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 13	LTE Band 17	LTE Band 25	5.2 G WLAN Aux	Sum SAR		
Back	0.35	-	-	-	-	-	-	0.112	0.46	-	-
	-	0.37	-	-	-	-	-	0.112	0.48	-	-
	-	-	0.5	-	-	-	-	0.112	0.61	-	-
	-	-	-	0.4	-	-	-	0.112	0.51	-	-
	-	-	-	-	0.35	-	-	0.112	0.46	-	-
	-	-	-	-	-	0.23	-	0.112	0.34	-	-
	-	-	-	-	-	-	0.26	0.112	0.37	-	-
Top	0.49	-	-	-	-	-	-	1.48	1.97	61.7	0.04
	-	0.71	-	-	-	-	-	1.48	2.19	86.6	0.04
	-	-	0.87	-	-	-	-	1.48	2.35	85.7	0.04
	-	-	-	0.56	-	-	-	1.48	2.04	68.3	0.04
	-	-	-	-	0.56	-	-	1.48	2.04	66.9	0.04
	-	-	-	-	-	0.32	-	1.48	1.80	63.6	0.04
	-	-	-	-	-	-	0.66	1.48	2.14	78.4	0.04
Right	0.4*	-	-	-	-	-	-	0.138	0.54	-	-
	-	0.4*	-	-	-	-	-	0.138	0.54	-	-
	-	-	0.4*	-	-	-	-	0.138	0.54	-	-
	-	-	-	0.4*	-	-	-	0.138	0.54	-	-
	-	-	-	-	0.4*	-	-	0.138	0.54	-	-
	-	-	-	-	-	0.4*	-	0.138	0.54	-	-
	-	-	-	-	-	-	0.4*	0.138	0.54	-	-
Left	0.14	-	-	-	-	-	-	0.4*	0.54	-	-
	-	0.1	-	-	-	-	-	0.4*	0.50	-	-
	-	-	0.04	-	-	-	-	0.4*	0.44	-	-
	-	-	-	0.15	-	-	-	0.4*	0.55	-	-
	-	-	-	-	0.09	-	-	0.4*	0.49	-	-
	-	-	-	-	-	0.05	-	0.4*	0.45	-	-
	-	-	-	-	-	-	0.05	0.4*	0.45	-	-

Table 3: Simultaneous Transmission Scenario of WWAN Antenna & 5.3 GHz WLAN Main Antenna

Position	SAR (W/kg)									Ri (mm)	PLSR
	GSM 850	GSM 1900	CDMA BC0	CDMA BC1	CDMA BC10	UMTS Band 2	UMTS Band 4	5.3 G WLAN Main	Sum SAR		
Back	0.36	-	-	-	-	-	-	0.093	0.45	-	-
	-	0.39	-	-	-	-	-	0.093	0.48	-	-
	-	-	0.31	-	-	-	-	0.093	0.40	-	-
	-	-	-	0.39	-	-	-	0.093	0.48	-	-
	-	-	-	-	0.3	-	-	0.093	0.39	-	-
	-	-	-	-	-	0.13	-	0.093	0.22	-	-
	-	-	-	-	-	-	0.52	0.093	0.61	-	-
Top	0.55	-	-	-	-	-	-	0.65	1.2	-	-
	-	0.63	-	-	-	-	-	0.65	1.28	-	-
	-	-	0.52	-	-	-	-	0.65	1.17	-	-
	-	-	-	0.69	-	-	-	0.65	1.34	-	-
	-	-	-	-	0.5	-	-	0.65	1.15	-	-
	-	-	-	-	-	0.69	-	0.65	1.34	-	-
	-	-	-	-	-	-	0.8	0.65	1.45	-	-
Right	0.08	-	-	-	-	-	-	0.4*	0.48	-	-
	-	0.4*	-	-	-	-	-	0.4*	0.8	-	-
	-	-	0.4*	-	-	-	-	0.4*	0.8	-	-
	-	-	-	0.4*	-	-	-	0.4*	0.8	-	-
	-	-	-	-	0.4*	-	-	0.4*	0.8	-	-
	-	-	-	-	-	0.4*	-	0.4*	0.8	-	-
	-	-	-	-	-	-	0.4*	0.4*	0.8	-	-
Left	0.19	-	-	-	-	-	-	0.4*	0.59	-	-
	-	0.12	-	-	-	-	-	0.4*	0.52	-	-
	-	-	0.15	-	-	-	-	0.4*	0.55	-	-
	-	-	-	0.04	-	-	-	0.4*	0.44	-	-
	-	-	-	-	0.14	-	-	0.4*	0.54	-	-
	-	-	-	-	-	0.11	-	0.4*	0.51	-	-
	-	-	-	-	-	-	0.04	0.4*	0.44	-	-

Table 3 (continued): Simultaneous Transmission Scenario of WWAN Antenna & 5.3 GHz WLAN Main Antenna

Position	SAR (W/kg)									Ri (mm)	PLSR
	UMTS Band 5	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 13	LTE Band 17	LTE Band 25	5.3 G WLAN Main	Sum SAR		
Back	0.35	-	-	-	-	-	-	0.093	0.44	-	-
	-	0.37	-	-	-	-	-	0.093	0.46	-	-
	-	-	0.5	-	-	-	-	0.093	0.59	-	-
	-	-	-	0.4	-	-	-	0.093	0.49	-	-
	-	-	-	-	0.35	-	-	0.093	0.44	-	-
	-	-	-	-	-	0.23	-	0.093	0.32	-	-
	-	-	-	-	-	-	0.26	0.093	0.35	-	-
Top	0.49	-	-	-	-	-	-	0.65	1.14	-	-
	-	0.71	-	-	-	-	-	0.65	1.36	-	-
	-	-	0.87	-	-	-	-	0.65	1.52	-	-
	-	-	-	0.56	-	-	-	0.65	1.21	-	-
	-	-	-	-	0.56	-	-	0.65	1.21	-	-
	-	-	-	-	-	0.32	-	0.65	0.97	-	-
	-	-	-	-	-	-	0.66	0.65	1.31	-	-
Right	0.4*	-	-	-	-	-	-	0.4*	0.8	-	-
	-	0.4*	-	-	-	-	-	0.4*	0.8	-	-
	-	-	0.4*	-	-	-	-	0.4*	0.8	-	-
	-	-	-	0.4*	-	-	-	0.4*	0.8	-	-
	-	-	-	-	0.4*	-	-	0.4*	0.8	-	-
	-	-	-	-	-	0.4*	-	0.4*	0.8	-	-
	-	-	-	-	-	-	0.4*	0.4*	0.8	-	-
Left	0.14	-	-	-	-	-	-	0.4*	0.54	-	-
	-	0.1	-	-	-	-	-	0.4*	0.50	-	-
	-	-	0.04	-	-	-	-	0.4*	0.44	-	-
	-	-	-	0.15	-	-	-	0.4*	0.55	-	-
	-	-	-	-	0.09	-	-	0.4*	0.49	-	-
	-	-	-	-	-	0.05	-	0.4*	0.45	-	-
	-	-	-	-	-	-	0.05	0.4*	0.45	-	-

Table 4: Simultaneous Transmission Scenario of WWAN Antenna & 5.3 GHz WLAN Aux Antenna

Position	SAR (W/kg)									Ri (mm)	PLSR
	GSM 850	GSM 1900	CDMA BC0	CDMA BC1	CDMA BC10	UMTS Band 2	UMTS Band 4	5.3 G WLAN Aux	Sum SAR		
Back	0.36	-	-	-	-	-	-	0.124	0.48	-	-
	-	0.39	-	-	-	-	-	0.124	0.51	-	-
	-	-	0.31	-	-	-	-	0.124	0.43	-	-
	-	-	-	0.39	-	-	-	0.124	0.51	-	-
	-	-	-	-	0.3	-	-	0.124	0.42	-	-
	-	-	-	-	-	0.13	-	0.124	0.25	-	-
	-	-	-	-	-	-	0.52	0.124	0.64	-	-
Top	0.55	-	-	-	-	-	-	1.32	1.87	62.4	0.04
	-	0.63	-	-	-	-	-	1.32	1.95	75.6	0.04
	-	-	0.52	-	-	-	-	1.32	1.84	61.8	0.04
	-	-	-	0.69	-	-	-	1.32	2.01	76.6	0.04
	-	-	-	-	0.5	-	-	1.32	1.82	61.0	0.04
	-	-	-	-	-	0.69	-	1.32	2.01	75.6	0.04
	-	-	-	-	-	-	0.8	1.32	2.12	83.4	0.04
Right	0.08	-	-	-	-	-	-	0.135	0.21	-	-
	-	0.4*	-	-	-	-	-	0.135	0.54	-	-
	-	-	0.4*	-	-	-	-	0.135	0.54	-	-
	-	-	-	0.4*	-	-	-	0.135	0.54	-	-
	-	-	-	-	0.4*	-	-	0.135	0.54	-	-
	-	-	-	-	-	0.4*	-	0.135	0.54	-	-
	-	-	-	-	-	-	0.4*	0.135	0.54	-	-
Left	0.19	-	-	-	-	-	-	0.4*	0.59	-	-
	-	0.12	-	-	-	-	-	0.4*	0.52	-	-
	-	-	0.15	-	-	-	-	0.4*	0.55	-	-
	-	-	-	0.04	-	-	-	0.4*	0.44	-	-
	-	-	-	-	0.14	-	-	0.4*	0.54	-	-
	-	-	-	-	-	0.11	-	0.4*	0.51	-	-
	-	-	-	-	-	-	0.04	0.4*	0.44	-	-

Table 4 (continued): Simultaneous Transmission Scenario of WWAN Antenna & 5.3 GHz WLAN Aux Antenna

Position	SAR (W/kg)									Ri (mm)	PLSR
	UMTS Band 5	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 13	LTE Band 17	LTE Band 25	5.3 G WLAN Aux	Sum SAR		
Back	0.35	-	-	-	-	-	-	0.124	0.47	-	-
	-	0.37	-	-	-	-	-	0.124	0.49	-	-
	-	-	0.5	-	-	-	-	0.124	0.62	-	-
	-	-	-	0.4	-	-	-	0.124	0.52	-	-
	-	-	-	-	0.35	-	-	0.124	0.47	-	-
	-	-	-	-	-	0.23	-	0.124	0.35	-	-
	-	-	-	-	-	-	0.26	0.124	0.38	-	-
Top	0.49	-	-	-	-	-	-	1.32	1.81	59.8	0.04
	-	0.71	-	-	-	-	-	1.32	2.03	84.7	0.03
	-	-	0.87	-	-	-	-	1.32	2.19	83.9	0.04
	-	-	-	0.56	-	-	-	1.32	1.88	66.5	0.04
	-	-	-	-	0.56	-	-	1.32	1.88	65.1	0.04
	-	-	-	-	-	0.32	-	1.32	1.64	61.8	0.03
	-	-	-	-	-	-	0.66	1.32	1.98	76.6	0.04
Right	0.4*	-	-	-	-	-	-	0.135	0.54	-	-
	-	0.4*	-	-	-	-	-	0.135	0.54	-	-
	-	-	0.4*	-	-	-	-	0.135	0.54	-	-
	-	-	-	0.4*	-	-	-	0.135	0.54	-	-
	-	-	-	-	0.4*	-	-	0.135	0.54	-	-
	-	-	-	-	-	0.4*	-	0.135	0.54	-	-
	-	-	-	-	-	-	0.4*	0.135	0.54	-	-
Left	0.14	-	-	-	-	-	-	0.4*	0.54	-	-
	-	0.1	-	-	-	-	-	0.4*	0.50	-	-
	-	-	0.04	-	-	-	-	0.4*	0.44	-	-
	-	-	-	0.15	-	-	-	0.4*	0.55	-	-
	-	-	-	-	0.09	-	-	0.4*	0.49	-	-
	-	-	-	-	-	0.05	-	0.4*	0.45	-	-
	-	-	-	-	-	-	0.05	0.4*	0.45	-	-

Table 5: Simultaneous Transmission Scenario of WWAN Antenna & 5.6 GHz WLAN Main Antenna

Position	SAR (W/kg)									Ri (mm)	PLSR
	GSM 850	GSM 1900	CDMA BC0	CDMA BC1	CDMA BC10	UMTS Band 2	UMTS Band 4	5.6 G WLAN Main	Sum SAR		
Back	0.36	-	-	-	-	-	-	0.112	0.47	-	-
	-	0.39	-	-	-	-	-	0.112	0.50	-	-
	-	-	0.31	-	-	-	-	0.112	0.42	-	-
	-	-	-	0.39	-	-	-	0.112	0.50	-	-
	-	-	-	-	0.3	-	-	0.112	0.41	-	-
	-	-	-	-	-	0.13	-	0.112	0.24	-	-
	-	-	-	-	-	-	0.52	0.112	0.63	-	-
Top	0.55	-	-	-	-	-	-	0.717	1.27	-	-
	-	0.63	-	-	-	-	-	0.717	1.35	-	-
	-	-	0.52	-	-	-	-	0.717	1.24	-	-
	-	-	-	0.69	-	-	-	0.717	1.41	-	-
	-	-	-	-	0.5	-	-	0.717	1.22	-	-
	-	-	-	-	-	0.69	-	0.717	1.41	-	-
	-	-	-	-	-	-	0.8	0.717	1.52	-	-
Right	0.08	-	-	-	-	-	-	0.4*	0.48	-	-
	-	0.4*	-	-	-	-	-	0.4*	0.8	-	-
	-	-	0.4*	-	-	-	-	0.4*	0.8	-	-
	-	-	-	0.4*	-	-	-	0.4*	0.8	-	-
	-	-	-	-	0.4*	-	-	0.4*	0.8	-	-
	-	-	-	-	-	0.4*	-	0.4*	0.8	-	-
	-	-	-	-	-	-	0.4*	0.4*	0.8	-	-
Left	0.19	-	-	-	-	-	-	0.4*	0.59	-	-
	-	0.12	-	-	-	-	-	0.4*	0.52	-	-
	-	-	0.15	-	-	-	-	0.4*	0.55	-	-
	-	-	-	0.04	-	-	-	0.4*	0.44	-	-
	-	-	-	-	0.14	-	-	0.4*	0.54	-	-
	-	-	-	-	-	0.11	-	0.4*	0.51	-	-
	-	-	-	-	-	-	0.04	0.4*	0.44	-	-

Table 5 (continued): Simultaneous Transmission Scenario of WWAN Antenna & 5.6 GHz WLAN Main Antenna

Position	SAR (W/kg)									Ri (mm)	PLSR
	UMTS Band 5	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 13	LTE Band 17	LTE Band 25	5.6 G WLAN Main	Sum SAR		
Back	0.35	-	-	-	-	-	-	0.112	0.46	-	-
	-	0.37	-	-	-	-	-	0.112	0.48	-	-
	-	-	0.5	-	-	-	-	0.112	0.61	-	-
	-	-	-	0.4	-	-	-	0.112	0.51	-	-
	-	-	-	-	0.35	-	-	0.112	0.46	-	-
	-	-	-	-	-	0.23	-	0.112	0.34	-	-
	-	-	-	-	-	-	0.26	0.112	0.37	-	-
Top	0.49	-	-	-	-	-	-	0.717	1.21	-	-
	-	0.71	-	-	-	-	-	0.717	1.43	-	-
	-	-	0.87	-	-	-	-	0.717	1.59	-	-
	-	-	-	0.56	-	-	-	0.717	1.28	-	-
	-	-	-	-	0.56	-	-	0.717	1.28	-	-
	-	-	-	-	-	0.32	-	0.717	1.04	-	-
	-	-	-	-	-	-	0.66	0.717	1.38	-	-
Right	0.4*	-	-	-	-	-	-	0.4*	0.8	-	-
	-	0.4*	-	-	-	-	-	0.4*	0.8	-	-
	-	-	0.4*	-	-	-	-	0.4*	0.8	-	-
	-	-	-	0.4*	-	-	-	0.4*	0.8	-	-
	-	-	-	-	0.4*	-	-	0.4*	0.8	-	-
	-	-	-	-	-	0.4*	-	0.4*	0.8	-	-
	-	-	-	-	-	-	0.4*	0.4*	0.8	-	-
Left	0.14	-	-	-	-	-	-	0.4*	0.54	-	-
	-	0.1	-	-	-	-	-	0.4*	0.50	-	-
	-	-	0.04	-	-	-	-	0.4*	0.44	-	-
	-	-	-	0.15	-	-	-	0.4*	0.55	-	-
	-	-	-	-	0.09	-	-	0.4*	0.49	-	-
	-	-	-	-	-	0.05	-	0.4*	0.45	-	-
	-	-	-	-	-	-	0.05	0.4*	0.45	-	-

Table 6: Simultaneous Transmission Scenario of WWAN Antenna & 5.6 GHz WLAN Aux Antenna

Position	SAR (W/kg)									Ri (mm)	PLSR
	GSM 850	GSM 1900	CDMA BC0	CDMA BC1	CDMA BC10	UMTS Band 2	UMTS Band 4	5.6 G WLAN Aux	Sum SAR		
Back	0.36	-	-	-	-	-	-	0.143	0.50	-	-
	-	0.39	-	-	-	-	-	0.143	0.53	-	-
	-	-	0.31	-	-	-	-	0.143	0.45	-	-
	-	-	-	0.39	-	-	-	0.143	0.53	-	-
	-	-	-	-	0.3	-	-	0.143	0.44	-	-
	-	-	-	-	-	0.13	-	0.143	0.27	-	-
	-	-	-	-	-	-	0.52	0.143	0.66	-	-
Top	0.55	-	-	-	-	-	-	1.44	1.99	63.2	0.04
	-	0.63	-	-	-	-	-	1.44	2.07	76.4	0.09
	-	-	0.52	-	-	-	-	1.44	1.96	62.6	0.04
	-	-	-	0.69	-	-	-	1.44	2.13	77.4	0.04
	-	-	-	-	0.5	-	-	1.44	1.94	61.7	0.04
	-	-	-	-	-	0.69	-	1.44	2.13	76.4	0.04
	-	-	-	-	-	-	0.8	1.44	2.24	84.2	0.04
Right	0.08	-	-	-	-	-	-	0.109	0.18	-	-
	-	0.4*	-	-	-	-	-	0.109	0.51	-	-
	-	-	0.4*	-	-	-	-	0.109	0.51	-	-
	-	-	-	0.4*	-	-	-	0.109	0.51	-	-
	-	-	-	-	0.4*	-	-	0.109	0.51	-	-
	-	-	-	-	-	0.4*	-	0.109	0.51	-	-
	-	-	-	-	-	-	0.4*	0.109	0.51	-	-
Left	0.19	-	-	-	-	-	-	0.4*	0.59	-	-
	-	0.12	-	-	-	-	-	0.4*	0.52	-	-
	-	-	0.15	-	-	-	-	0.4*	0.55	-	-
	-	-	-	0.04	-	-	-	0.4*	0.44	-	-
	-	-	-	-	0.14	-	-	0.4*	0.54	-	-
	-	-	-	-	-	0.11	-	0.4*	0.51	-	-
	-	-	-	-	-	-	0.04	0.4*	0.44	-	-

Table 6 (continued): Simultaneous Transmission Scenario of WWAN Antenna & 5.6 GHz WLAN Aux Antenna

Position	SAR (W/kg)									Ri (mm)	PLSR
	UMTS Band 5	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 13	LTE Band 17	LTE Band 25	5.6 G WLAN Aux	Sum SAR		
Back	0.35	-	-	-	-	-	-	0.143	0.49	-	-
	-	0.37	-	-	-	-	-	0.143	0.51	-	-
	-	-	0.5	-	-	-	-	0.143	0.64	-	-
	-	-	-	0.4	-	-	-	0.143	0.54	-	-
	-	-	-	-	0.35	-	-	0.143	0.49	-	-
	-	-	-	-	-	0.23	-	0.143	0.37	-	-
	-	-	-	-	-	-	0.26	0.143	0.40	-	-
Top	0.49	-	-	-	-	-	-	1.44	1.93	60.6	0.04
	-	0.71	-	-	-	-	-	1.44	2.15	85.5	0.04
	-	-	0.87	-	-	-	-	1.44	2.31	84.6	0.04
	-	-	-	0.56	-	-	-	1.44	2.00	67.1	0.04
	-	-	-	-	0.56	-	-	1.44	2.00	65.8	0.04
	-	-	-	-	-	0.32	-	1.44	1.76	62.5	0.04
	-	-	-	-	-	-	0.66	1.44	2.10	77.4	0.04
Right	0.4*	-	-	-	-	-	-	0.109	0.51	-	-
	-	0.4*	-	-	-	-	-	0.109	0.51	-	-
	-	-	0.4*	-	-	-	-	0.109	0.51	-	-
	-	-	-	0.4*	-	-	-	0.109	0.51	-	-
	-	-	-	-	0.4*	-	-	0.109	0.51	-	-
	-	-	-	-	-	0.4*	-	0.109	0.51	-	-
	-	-	-	-	-	-	0.4*	0.109	0.51	-	-
Left	0.14	-	-	-	-	-	-	0.4*	0.54	-	-
	-	0.1	-	-	-	-	-	0.4*	0.50	-	-
	-	-	0.04	-	-	-	-	0.4*	0.44	-	-
	-	-	-	0.15	-	-	-	0.4*	0.55	-	-
	-	-	-	-	0.09	-	-	0.4*	0.49	-	-
	-	-	-	-	-	0.05	-	0.4*	0.45	-	-
	-	-	-	-	-	-	0.05	0.4*	0.45	-	-

Table 7: Simultaneous Transmission Scenario of WWAN Antenna & 5.8 GHz WLAN Main Antenna

Position	SAR (W/kg)									Ri (mm)	PLSR
	GSM 850	GSM 1900	CDMA BC0	CDMA BC1	CDMA BC10	UMTS Band 2	UMTS Band 4	5.8 G WLAN Main	Sum SAR		
Back	0.36	-	-	-	-	-	-	0.162	0.52	-	-
	-	0.39	-	-	-	-	-	0.162	0.55	-	-
	-	-	0.31	-	-	-	-	0.162	0.47	-	-
	-	-	-	0.39	-	-	-	0.162	0.55	-	-
	-	-	-	-	0.3	-	-	0.162	0.46	-	-
	-	-	-	-	-	0.13	-	0.162	0.29	-	-
	-	-	-	-	-	-	0.52	0.162	0.68	-	-
Top	0.55	-	-	-	-	-	-	0.985	1.54	-	-
	-	0.63	-	-	-	-	-	0.985	1.62	64	0.03
	-	-	0.52	-	-	-	-	0.985	1.51	-	-
	-	-	-	0.69	-	-	-	0.985	1.68	63	0.03
	-	-	-	-	0.5	-	-	0.985	1.49	-	-
	-	-	-	-	-	0.69	-	0.985	1.68	64	0.03
	-	-	-	-	-	-	0.8	0.985	1.79	56	0.04
Right	0.08	-	-	-	-	-	-	0.4*	0.48	-	-
	-	0.4*	-	-	-	-	-	0.4*	0.8	-	-
	-	-	0.4*	-	-	-	-	0.4*	0.8	-	-
	-	-	-	0.4*	-	-	-	0.4*	0.8	-	-
	-	-	-	-	0.4*	-	-	0.4*	0.8	-	-
	-	-	-	-	-	0.4*	-	0.4*	0.8	-	-
	-	-	-	-	-	-	0.4*	0.4*	0.8	-	-
Left	0.19	-	-	-	-	-	-	0.4*	0.59	-	-
	-	0.12	-	-	-	-	-	0.4*	0.52	-	-
	-	-	0.15	-	-	-	-	0.4*	0.55	-	-
	-	-	-	0.04	-	-	-	0.4*	0.44	-	-
	-	-	-	-	0.14	-	-	0.4*	0.54	-	-
	-	-	-	-	-	0.11	-	0.4*	0.51	-	-
	-	-	-	-	-	-	0.04	0.4*	0.44	-	-

Table 7 (continued): Simultaneous Transmission Scenario of WWAN Antenna & 5.8 GHz WLAN Main Antenna

Position	SAR (W/kg)									Ri (mm)	PLSR
	UMTS Band 5	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 13	LTE Band 17	LTE Band 25	5.8 G WLAN Main	Sum SAR		
Back	0.35	-	-	-	-	-	-	0.162	0.51	-	-
	-	0.37	-	-	-	-	-	0.162	0.53	-	-
	-	-	0.5	-	-	-	-	0.162	0.66	-	-
	-	-	-	0.4	-	-	-	0.162	0.56	-	-
	-	-	-	-	0.35	-	-	0.162	0.51	-	-
	-	-	-	-	-	0.23	-	0.162	0.39	-	-
	-	-	-	-	-	-	0.26	0.162	0.42	-	-
Top	0.49	-	-	-	-	-	-	0.985	1.48	-	-
	-	0.71	-	-	-	-	-	0.985	1.70	55	0.04
	-	-	0.87	-	-	-	-	0.985	1.86	57	0.04
	-	-	-	0.56	-	-	-	0.985	1.55	-	-
	-	-	-	-	0.56	-	-	0.985	1.55	-	-
	-	-	-	-	-	0.32	-	0.985	1.31	-	-
	-	-	-	-	-	-	0.66	0.985	1.65	63	0.03
Right	0.4*	-	-	-	-	-	-	0.4*	0.8	-	-
	-	0.4*	-	-	-	-	-	0.4*	0.8	-	-
	-	-	0.4*	-	-	-	-	0.4*	0.8	-	-
	-	-	-	0.4*	-	-	-	0.4*	0.8	-	-
	-	-	-	-	0.4*	-	-	0.4*	0.8	-	-
	-	-	-	-	-	0.4*	-	0.4*	0.8	-	-
	-	-	-	-	-	-	0.4*	0.4*	0.8	-	-
Left	0.14	-	-	-	-	-	-	0.4*	0.54	-	-
	-	0.1	-	-	-	-	-	0.4*	0.50	-	-
	-	-	0.04	-	-	-	-	0.4*	0.44	-	-
	-	-	-	0.15	-	-	-	0.4*	0.55	-	-
	-	-	-	-	0.09	-	-	0.4*	0.49	-	-
	-	-	-	-	-	0.05	-	0.4*	0.45	-	-
	-	-	-	-	-	-	0.05	0.4*	0.45	-	-

Table 8: Simultaneous Transmission Scenario of WWAN Antenna & 5.8 GHz WLAN Aux Antenna

Position	SAR (W/kg)									Ri (mm)	PLSR
	GSM 850	GSM 1900	CDMA BC0	CDMA BC1	CDMA BC10	UMTS Band 2	UMTS Band 4	5.8 G WLAN Aux	Sum SAR		
Back	0.36	-	-	-	-	-	-	0.17	0.53	-	-
	-	0.39	-	-	-	-	-	0.17	0.56	-	-
	-	-	0.31	-	-	-	-	0.17	0.48	-	-
	-	-	-	0.39	-	-	-	0.17	0.56	-	-
	-	-	-	-	0.3	-	-	0.17	0.47	-	-
	-	-	-	-	-	0.13	-	0.17	0.30	-	-
	-	-	-	-	-	-	0.52	0.17	0.69	-	-
Top	0.55	-	-	-	-	-	-	1.18	1.73	63.2	0.04
	-	0.63	-	-	-	-	-	1.18	1.81	76.4	0.03
	-	-	0.52	-	-	-	-	1.18	1.70	62.6	0.04
	-	-	-	0.69	-	-	-	1.18	1.87	77.4	0.03
	-	-	-	-	0.5	-	-	1.18	1.68	61.7	0.04
	-	-	-	-	-	0.69	-	1.18	1.87	76.4	0.03
	-	-	-	-	-	-	0.8	1.18	1.98	84.2	0.03
Right	0.08	-	-	-	-	-	-	0.1	0.18	-	-
	-	0.4*	-	-	-	-	-	0.1	0.5	-	-
	-	-	0.4*	-	-	-	-	0.1	0.5	-	-
	-	-	-	0.4*	-	-	-	0.1	0.5	-	-
	-	-	-	-	0.4*	-	-	0.1	0.5	-	-
	-	-	-	-	-	0.4*	-	0.1	0.5	-	-
	-	-	-	-	-	-	0.4*	0.1	0.5	-	-
Left	0.19	-	-	-	-	-	-	0.4*	0.59	-	-
	-	0.12	-	-	-	-	-	0.4*	0.52	-	-
	-	-	0.15	-	-	-	-	0.4*	0.55	-	-
	-	-	-	0.04	-	-	-	0.4*	0.44	-	-
	-	-	-	-	0.14	-	-	0.4*	0.54	-	-
	-	-	-	-	-	0.11	-	0.4*	0.51	-	-
	-	-	-	-	-	-	0.04	0.4*	0.44	-	-

Table 8 (continued): Simultaneous Transmission Scenario of WWAN Antenna & 5.8 GHz WLAN Aux Antenna

Position	SAR (W/kg)									Ri (mm)	PLSR
	UMTS Band 5	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 13	LTE Band 17	LTE Band 25	5.8 G WLAN Aux	Sum SAR		
Back	0.35	-	-	-	-	-	-	0.17	0.52	-	-
	-	0.37	-	-	-	-	-	0.17	0.54	-	-
	-	-	0.5	-	-	-	-	0.17	0.67	-	-
	-	-	-	0.4	-	-	-	0.17	0.57	-	-
	-	-	-	-	0.35	-	-	0.17	0.52	-	-
	-	-	-	-	-	0.23	-	0.17	0.40	-	-
	-	-	-	-	-	-	0.26	0.17	0.43	-	-
Top	0.49	-	-	-	-	-	-	1.18	1.67	60.6	0.04
	-	0.71	-	-	-	-	-	1.18	1.89	85.5	0.03
	-	-	0.87	-	-	-	-	1.18	2.05	84.6	0.03
	-	-	-	0.56	-	-	-	1.18	1.74	67.1	0.03
	-	-	-	-	0.56	-	-	1.18	1.74	65.8	0.03
	-	-	-	-	-	0.32	-	1.18	1.50	-	-
	-	-	-	-	-	-	0.66	1.18	1.84	77.4	0.03
Right	0.4*	-	-	-	-	-	-	0.1	0.5	-	-
	-	0.4*	-	-	-	-	-	0.1	0.5	-	-
	-	-	0.4*	-	-	-	-	0.1	0.5	-	-
	-	-	-	0.4*	-	-	-	0.1	0.5	-	-
	-	-	-	-	0.4*	-	-	0.1	0.5	-	-
	-	-	-	-	-	0.4*	-	0.1	0.5	-	-
	-	-	-	-	-	-	0.4*	0.1	0.5	-	-
Left	0.14	-	-	-	-	-	-	0.4*	0.54	-	-
	-	0.1	-	-	-	-	-	0.4*	0.50	-	-
	-	-	0.04	-	-	-	-	0.4*	0.44	-	-
	-	-	-	0.15	-	-	-	0.4*	0.55	-	-
	-	-	-	-	0.09	-	-	0.4*	0.49	-	-
	-	-	-	-	-	0.05	-	0.4*	0.45	-	-
	-	-	-	-	-	-	0.05	0.4*	0.45	-	-

Table 9: Simultaneous Transmission Scenario of WWAN Antenna & 2.4 GHz WLAN Main Antenna

Position	SAR (W/kg)									Ri (mm)	PLSR
	GSM 850	GSM 1900	CDMA BC0	CDMA BC1	CDMA BC10	UMTS Band 2	UMTS Band 4	2.4 G WLAN Main	Sum SAR		
Back	0.36	-	-	-	-	-	-	0.12	0.48	-	-
	-	0.39	-	-	-	-	-	0.12	0.51	-	-
	-	-	0.31	-	-	-	-	0.12	0.43	-	-
	-	-	-	0.39	-	-	-	0.12	0.51	-	-
	-	-	-	-	0.3	-	-	0.12	0.42	-	-
	-	-	-	-	-	0.13	-	0.12	0.25	-	-
	-	-	-	-	-	-	0.52	0.12	0.64	-	-
Top	0.55	-	-	-	-	-	-	0.666	1.22	-	-
	-	0.63	-	-	-	-	-	0.666	1.30	-	-
	-	-	0.52	-	-	-	-	0.666	1.19	-	-
	-	-	-	0.69	-	-	-	0.666	1.36	-	-
	-	-	-	-	0.5	-	-	0.666	1.17	-	-
	-	-	-	-	-	0.69	-	0.666	1.36	-	-
	-	-	-	-	-	-	0.8	0.666	1.47	-	-
Right	0.08	-	-	-	-	-	-	0.4*	0.48	-	-
	-	0.4*	-	-	-	-	-	0.4*	0.8	-	-
	-	-	0.4*	-	-	-	-	0.4*	0.8	-	-
	-	-	-	0.4*	-	-	-	0.4*	0.8	-	-
	-	-	-	-	0.4*	-	-	0.4*	0.8	-	-
	-	-	-	-	-	0.4*	-	0.4*	0.8	-	-
	-	-	-	-	-	-	0.4*	0.4*	0.8	-	-
Left	0.19	-	-	-	-	-	-	0.4*	0.59	-	-
	-	0.12	-	-	-	-	-	0.4*	0.52	-	-
	-	-	0.15	-	-	-	-	0.4*	0.55	-	-
	-	-	-	0.04	-	-	-	0.4*	0.44	-	-
	-	-	-	-	0.14	-	-	0.4*	0.54	-	-
	-	-	-	-	-	0.11	-	0.4*	0.51	-	-
	-	-	-	-	-	-	0.04	0.4*	0.44	-	-

Table 9 (continued): Simultaneous Transmission Scenario of WWAN Antenna & 2.4 GHz WLAN Main Antenna

Position	SAR (W/kg)									Ri (mm)	PLSR
	UMTS Band 5	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 13	LTE Band 17	LTE Band 25	2.4 G WLAN Main	Sum SAR		
Back	0.35	-	-	-	-	-	-	0.12	0.47	-	-
	-	0.37	-	-	-	-	-	0.12	0.49	-	-
	-	-	0.5	-	-	-	-	0.12	0.62	-	-
	-	-	-	0.4	-	-	-	0.12	0.52	-	-
	-	-	-	-	0.35	-	-	0.12	0.47	-	-
	-	-	-	-	-	0.23	-	0.12	0.35	-	-
	-	-	-	-	-	-	0.26	0.12	0.38	-	-
Top	0.49	-	-	-	-	-	-	0.666	1.16	-	-
	-	0.71	-	-	-	-	-	0.666	1.38	-	-
	-	-	0.87	-	-	-	-	0.666	1.54	-	-
	-	-	-	0.56	-	-	-	0.666	1.23	-	-
	-	-	-	-	0.56	-	-	0.666	1.23	-	-
	-	-	-	-	-	0.32	-	0.666	0.99	-	-
	-	-	-	-	-	-	0.66	0.666	1.33	-	-
Right	0.4*	-	-	-	-	-	-	0.4*	0.8	-	-
	-	0.4*	-	-	-	-	-	0.4*	0.8	-	-
	-	-	0.4*	-	-	-	-	0.4*	0.8	-	-
	-	-	-	0.4*	-	-	-	0.4*	0.8	-	-
	-	-	-	-	0.4*	-	-	0.4*	0.8	-	-
	-	-	-	-	-	0.4*	-	0.4*	0.8	-	-
	-	-	-	-	-	-	0.4*	0.4*	0.8	-	-
Left	0.14	-	-	-	-	-	-	0.4*	0.54	-	-
	-	0.1	-	-	-	-	-	0.4*	0.50	-	-
	-	-	0.04	-	-	-	-	0.4*	0.44	-	-
	-	-	-	0.15	-	-	-	0.4*	0.55	-	-
	-	-	-	-	0.09	-	-	0.4*	0.49	-	-
	-	-	-	-	-	0.05	-	0.4*	0.45	-	-
	-	-	-	-	-	-	0.05	0.4*	0.45	-	-

Table 10: Simultaneous Transmission Scenario of WWAN Antenna & 2.4 GHz WLAN Aux Antenna

Position	SAR (W/kg)									Ri (mm)	PLSR
	GSM 850	GSM 1900	CDMA BC0	CDMA BC1	CDMA BC10	UMTS Band 2	UMTS Band 4	2.4 G WLAN Aux	Sum SAR		
Back	0.36	-	-	-	-	-	-	0.059	0.42	-	-
	-	0.39	-	-	-	-	-	0.059	0.45	-	-
	-	-	0.31	-	-	-	-	0.059	0.37	-	-
	-	-	-	0.39	-	-	-	0.059	0.45	-	-
	-	-	-	-	0.3	-	-	0.059	0.36	-	-
	-	-	-	-	-	0.13	-	0.059	0.19	-	-
	-	-	-	-	-	-	0.52	0.059	0.58	-	-
Top	0.55	-	-	-	-	-	-	0.227	0.78	-	-
	-	0.63	-	-	-	-	-	0.227	0.86	-	-
	-	-	0.52	-	-	-	-	0.227	0.75	-	-
	-	-	-	0.69	-	-	-	0.227	0.92	-	-
	-	-	-	-	0.5	-	-	0.227	0.73	-	-
	-	-	-	-	-	0.69	-	0.227	0.92	-	-
	-	-	-	-	-	-	0.8	0.227	1.03	-	-
Right	0.08	-	-	-	-	-	-	0.056	0.13	-	-
	-	0.4*	-	-	-	-	-	0.056	0.46	-	-
	-	-	0.4*	-	-	-	-	0.056	0.46	-	-
	-	-	-	0.4*	-	-	-	0.056	0.46	-	-
	-	-	-	-	0.4*	-	-	0.056	0.46	-	-
	-	-	-	-	-	0.4*	-	0.056	0.46	-	-
	-	-	-	-	-	-	0.4*	0.056	0.46	-	-
Left	0.19	-	-	-	-	-	-	0.4*	0.59	-	-
	-	0.12	-	-	-	-	-	0.4*	0.52	-	-
	-	-	0.15	-	-	-	-	0.4*	0.55	-	-
	-	-	-	0.04	-	-	-	0.4*	0.44	-	-
	-	-	-	-	0.14	-	-	0.4*	0.54	-	-
	-	-	-	-	-	0.11	-	0.4*	0.51	-	-
	-	-	-	-	-	-	0.04	0.4*	0.44	-	-

Table 10 (continued): Simultaneous Transmission Scenario of WWAN Antenna & 2.4 GHz WLAN Aux Antenna

Position	SAR (W/kg)									Ri (mm)	PLSR
	UMTS Band 5	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 13	LTE Band 17	LTE Band 25	2.4 G WLAN Aux	Sum SAR		
Back	0.35	-	-	-	-	-	-	0.059	0.41	-	-
	-	0.37	-	-	-	-	-	0.059	0.43	-	-
	-	-	0.5	-	-	-	-	0.059	0.56	-	-
	-	-	-	0.4	-	-	-	0.059	0.46	-	-
	-	-	-	-	0.35	-	-	0.059	0.41	-	-
	-	-	-	-	-	0.23	-	0.059	0.29	-	-
	-	-	-	-	-	-	0.26	0.059	0.32	-	-
Top	0.49	-	-	-	-	-	-	0.227	0.72	-	-
	-	0.71	-	-	-	-	-	0.227	0.94	-	-
	-	-	0.87	-	-	-	-	0.227	1.10	-	-
	-	-	-	0.56	-	-	-	0.227	0.79	-	-
	-	-	-	-	0.56	-	-	0.227	0.79	-	-
	-	-	-	-	-	0.32	-	0.227	0.55	-	-
	-	-	-	-	-	-	0.66	0.227	0.89	-	-
Right	0.4*	-	-	-	-	-	-	0.056	0.46	-	-
	-	0.4*	-	-	-	-	-	0.056	0.46	-	-
	-	-	0.4*	-	-	-	-	0.056	0.46	-	-
	-	-	-	0.4*	-	-	-	0.056	0.46	-	-
	-	-	-	-	0.4*	-	-	0.056	0.46	-	-
	-	-	-	-	-	0.4*	-	0.056	0.46	-	-
	-	-	-	-	-	-	0.4*	0.056	0.46	-	-
Left	0.14	-	-	-	-	-	-	0.4*	0.54	-	-
	-	0.1	-	-	-	-	-	0.4*	0.50	-	-
	-	-	0.04	-	-	-	-	0.4*	0.44	-	-
	-	-	-	0.15	-	-	-	0.4*	0.55	-	-
	-	-	-	-	0.09	-	-	0.4*	0.49	-	-
	-	-	-	-	-	0.05	-	0.4*	0.45	-	-
	-	-	-	-	-	-	0.05	0.4*	0.45	-	-

Table 11: Simultaneous Transmission Scenario of WWAN Antenna & 2.4 GHz Bluetooth Aux Antenna

Position	SAR (W/kg)									Ri (mm)	PLSR
	GSM 850	GSM 1900	CDMA BC0	CDMA BC1	CDMA BC10	UMTS Band 2	UMTS Band 4	2.4 G BT Aux	Sum SAR		
Back	0.36	-	-	-	-	-	-	0.0003	0.36	-	-
	-	0.39	-	-	-	-	-	0.0003	0.39	-	-
	-	-	0.31	-	-	-	-	0.0003	0.31	-	-
	-	-	-	0.39	-	-	-	0.0003	0.39	-	-
	-	-	-	-	0.3	-	-	0.0003	0.30	-	-
	-	-	-	-	-	0.13	-	0.0003	0.13	-	-
	-	-	-	-	-	-	0.52	0.0003	0.52	-	-
Top	0.55	-	-	-	-	-	-	0.00759	0.56	-	-
	-	0.63	-	-	-	-	-	0.00759	0.64	-	-
	-	-	0.52	-	-	-	-	0.00759	0.53	-	-
	-	-	-	0.69	-	-	-	0.00759	0.70	-	-
	-	-	-	-	0.5	-	-	0.00759	0.51	-	-
	-	-	-	-	-	0.69	-	0.00759	0.70	-	-
	-	-	-	-	-	-	0.8	0.00759	0.81	-	-
Right	0.08	-	-	-	-	-	-	<0.0001	<0.09	-	-
	-	0.4*	-	-	-	-	-	<0.0001	<0.5	-	-
	-	-	0.4*	-	-	-	-	<0.0001	<0.5	-	-
	-	-	-	0.4*	-	-	-	<0.0001	<0.5	-	-
	-	-	-	-	0.4*	-	-	<0.0001	<0.5	-	-
	-	-	-	-	-	0.4*	-	<0.0001	<0.5	-	-
	-	-	-	-	-	-	0.4*	<0.0001	<0.5	-	-
Left	0.19	-	-	-	-	-	-	0.4*	0.59	-	-
	-	0.12	-	-	-	-	-	0.4*	0.52	-	-
	-	-	0.15	-	-	-	-	0.4*	0.55	-	-
	-	-	-	0.04	-	-	-	0.4*	0.44	-	-
	-	-	-	-	0.14	-	-	0.4*	0.54	-	-
	-	-	-	-	-	0.11	-	0.4*	0.51	-	-
	-	-	-	-	-	-	0.04	0.4*	0.44	-	-

Table 11 (continued): Simultaneous Transmission Scenario of WWAN Antenna & 2.4 GHz Bluetooth Aux Antenna

Position	SAR (W/kg)									Ri (mm)	PLSR
	UMTS Band 5	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 13	LTE Band 17	LTE Band 25	2.4 G BT Aux	Sum SAR		
Back	0.35	-	-	-	-	-	-	0.0003	0.35	-	-
	-	0.37	-	-	-	-	-	0.0003	0.37	-	-
	-	-	0.5	-	-	-	-	0.0003	0.50	-	-
	-	-	-	0.4	-	-	-	0.0003	0.40	-	-
	-	-	-	-	0.35	-	-	0.0003	0.35	-	-
	-	-	-	-	-	0.23	-	0.0003	0.23	-	-
	-	-	-	-	-	-	0.26	0.0003	0.26	-	-
Top	0.49	-	-	-	-	-	-	0.00759	0.50	-	-
	-	0.71	-	-	-	-	-	0.00759	0.72	-	-
	-	-	0.87	-	-	-	-	0.00759	0.88	-	-
	-	-	-	0.56	-	-	-	0.00759	0.57	-	-
	-	-	-	-	0.56	-	-	0.00759	0.57	-	-
	-	-	-	-	-	0.32	-	0.00759	0.33	-	-
	-	-	-	-	-	-	0.66	0.00759	0.67	-	-
Right	0.4*	-	-	-	-	-	-	<0.0001	<0.5	-	-
	-	0.4*	-	-	-	-	-	<0.0001	<0.5	-	-
	-	-	0.4*	-	-	-	-	<0.0001	<0.5	-	-
	-	-	-	0.4*	-	-	-	<0.0001	<0.5	-	-
	-	-	-	-	0.4*	-	-	<0.0001	<0.5	-	-
	-	-	-	-	-	0.4*	-	<0.0001	<0.5	-	-
	-	-	-	-	-	-	0.4*	<0.0001	<0.5	-	-
Left	0.14	-	-	-	-	-	-	0.4*	0.54	-	-
	-	0.1	-	-	-	-	-	0.4*	0.50	-	-
	-	-	0.04	-	-	-	-	0.4*	0.44	-	-
	-	-	-	0.15	-	-	-	0.4*	0.55	-	-
	-	-	-	-	0.09	-	-	0.4*	0.49	-	-
	-	-	-	-	-	0.05	-	0.4*	0.45	-	-
	-	-	-	-	-	-	0.05	0.4*	0.45	-	-

11 Appendix A – Measurement Uncertainty

The uncertainty budget has been determined for the DASY4 measurement system and is given in the following Table.

Below 3 GHz

SASY4 Uncertainty Budget								
Error Description	Uncertainty Value	Prob. Dist.	Div.	(c i) 1g	(c i) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(v i) veff
Measurement System								
Probe Calibration	± 6.0 %	N	1	1	1	± 6.0 %	± 6.0 %	∞
Axial Isotropy	± 4.7 %	R	$\sqrt{3}$	0.7	0.7	± 1.9 %	± 1.9 %	∞
Hemispherical Isotropy	± 9.6 %	R	$\sqrt{3}$	0.7	0.7	± 3.9 %	± 3.9 %	∞
Boundary Effects	± 1.0 %	R	$\sqrt{3}$	1	1	± 0.6 %	± 0.6 %	∞
Linearity	± 4.7 %	R	$\sqrt{3}$	1	1	± 2.7 %	± 2.7 %	∞
System Detection Limits	± 1.0 %	R	$\sqrt{3}$	1	1	± 0.6 %	± 0.6 %	∞
Readout Electronics	± 0.3 %	N	1	1	1	± 0.3 %	± 0.3 %	∞
Response Time	± 0.8 %	R	$\sqrt{3}$	1	1	± 0.5 %	± 0.5 %	∞
Integration Time	± 2.6 %	R	$\sqrt{3}$	1	1	± 1.5 %	± 1.5 %	∞
RF Ambient Noise	± 3.0 %	R	$\sqrt{3}$	1	1	± 1.7 %	± 1.7 %	∞
RF Ambient Conditions	± 3.0 %	R	$\sqrt{3}$	1	1	± 1.7 %	± 1.7 %	∞
Probe Positioner	± 0.4 %	R	$\sqrt{3}$	1	1	± 0.2 %	± 0.2 %	∞
Probe Positioning	± 2.9 %	R	$\sqrt{3}$	1	1	± 1.7 %	± 1.7 %	∞
Max. SAR Eval.	± 1.0 %	R	$\sqrt{3}$	1	1	± 0.6 %	± 0.6 %	∞
Test Sample Related								
Device Positioning	± 2.9 %	N	1	1	1	± 2.9 %	± 2.9 %	145
Device Holder	± 3.6 %	N	1	1	1	± 3.6 %	± 2.6 %	5
Power Drift	± 5.0 %	R		1	1	± 2.9 %	± 2.9 %	∞
Phantom and Setup								
Phantom Uncertainty	± 4.0 %	R	$\sqrt{3}$	1	1	± 2.3 %	± 2.3 %	∞
Liquid Conductivity (Target)	± 5.0 %	R	$\sqrt{3}$	0.64	0.43	± 1.8 %	± 1.2 %	∞
Liquid Conductivity (meas.)	± 2.5 %	N	1	0.64	0.43	± 1.6 %	± 1.1 %	∞
Liquid Permittivity (Target)	± 5.0 %	R	$\sqrt{3}$	0.6	0.49	± 1.7 %	± 1.4 %	∞
Liquid Permittivity (Target)	± 2.5 %	N	1	0.6	0.49	± 1.5 %	± 1.0 %	∞
Combined Std. Uncertainty	-	-	-	-	-	± 10.7 %	± 10.4 %	330
Expanded STD Uncertainty	-	-	-	-	-	± 21.4 %	± 20.8 %	-

12 Appendix B – Probe Calibration Certificates

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **BACL**

Certificate No: **ET3-1604_Aug14**

CALIBRATION CERTIFICATE	
Object	ET3DV6 - SN:1604
Calibration procedure(s)	QA CAL-01.v9, QA CAL-12.v9, QA CAL-23.v5, QA CAL-25.v6 Calibration procedure for dosimetric E-field probes
Calibration date:	August 19, 2014
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity < 70%.</p> <p>Calibration Equipment used (M&TE critical for calibration)</p>	

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	03-Apr-14 (No. 217-01911)	Apr-15
Power sensor E4412A	MY41498057	03-Apr-14 (No. 217-01911)	Apr-15
Reference 3 dB Attenuator	SN: S5054 (3c)	03-Apr-14 (No. 217-01915)	Apr-15
Reference 20 dB Attenuator	SN: S5277 (20x)	03-Apr-14 (No. 217-01919)	Apr-15
Reference 30 dB Attenuator	SN: S5129 (30b)	03-Apr-14 (No. 217-01920)	Apr-15
Reference Probe ES3DV2	SN: 3013	30-Dec-13 (No. ES3-3013_Dec13)	Dec-14
DAE4	SN: 660	13-Dec-13 (No. DAE4-660_Dec13)	Dec-14
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

Calibrated by:	Name Jeton Kastrali	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature
			Issued: August 20, 2014
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

Certificate No: ET3-1604_Aug14

Page 1 of 11

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Certificate No: ET3-1604_Aug14

Page 2 of 11

ET3DV6 – SN:1604

August 19, 2014

Probe ET3DV6

SN:1604

Manufactured: July 30, 2001
Calibrated: August 19, 2014

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

ET3DV6- SN:1604

August 19, 2014

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1604**Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	1.89	1.80	1.82	$\pm 10.1\%$
DCP (mV) ^B	98.2	97.9	97.5	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	262.1	$\pm 3.5\%$
		Y	0.0	0.0	1.0		265.6	
		Z	0.0	0.0	1.0		252.9	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

ET3DV6- SN:1604

August 19, 2014

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1604

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^f	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth ^g (mm)	Unct. (k=2)
450	43.5	0.87	7.42	7.42	7.42	0.24	2.71	± 13.3 %
600	42.7	0.88	7.16	7.16	7.16	0.19	2.18	± 13.3 %
835	41.5	0.90	6.55	6.55	6.55	0.29	2.74	± 12.0 %
900	41.5	0.97	6.40	6.40	6.40	0.27	2.91	± 12.0 %
1750	40.1	1.37	5.38	5.38	5.38	0.80	2.04	± 12.0 %
1900	40.0	1.40	5.13	5.13	5.13	0.80	1.96	± 12.0 %
2450	39.2	1.80	4.56	4.56	4.56	0.80	1.71	± 12.0 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^f At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

ET3DV6- SN:1604

August 19, 2014

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1604

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
450	56.7	0.94	7.73	7.73	7.73	0.16	1.96	± 13.3 %
600	56.1	0.95	7.20	7.20	7.20	0.07	1.20	± 13.3 %
835	55.2	0.97	6.27	6.27	6.27	0.29	3.00	± 12.0 %
900	55.0	1.05	6.18	6.18	6.18	0.63	1.82	± 12.0 %
1750	53.4	1.49	4.89	4.89	4.89	0.80	2.37	± 12.0 %
1900	53.3	1.52	4.68	4.68	4.68	0.80	2.45	± 12.0 %
2450	52.7	1.95	4.24	4.24	4.24	0.60	1.17	± 12.0 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

ET3DV6- SN:1604

August 19, 2014

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)


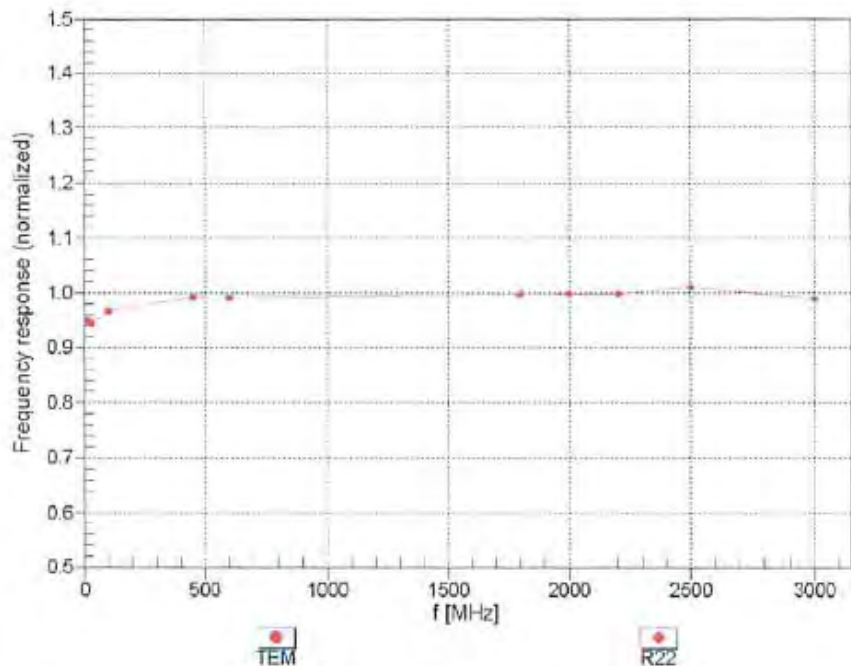


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

ET3DV6-SN:1604

August 19, 2014

Receiving Pattern (ϕ), $\theta = 0^\circ$

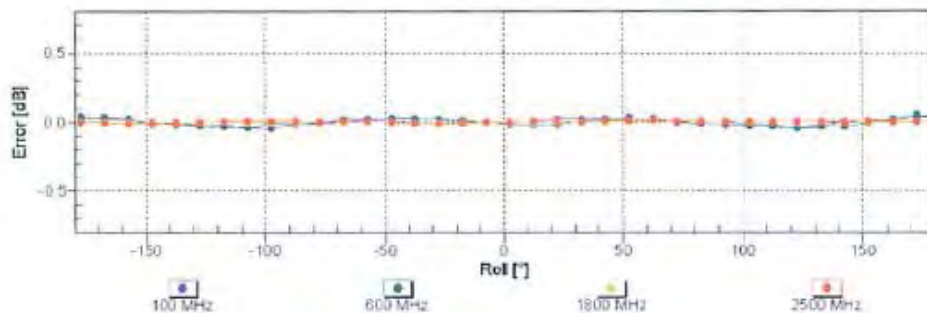
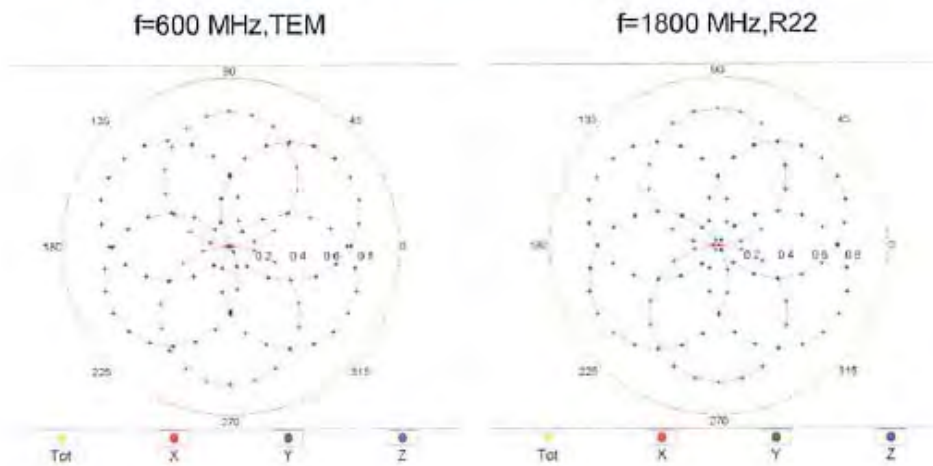


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

ET3DV6- SN:1604

August 19, 2014

Dynamic Range f(SAR_{head}) (TEM cell , f_{eval}= 1900 MHz)

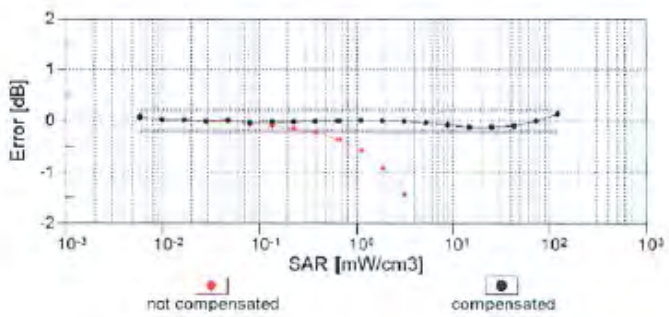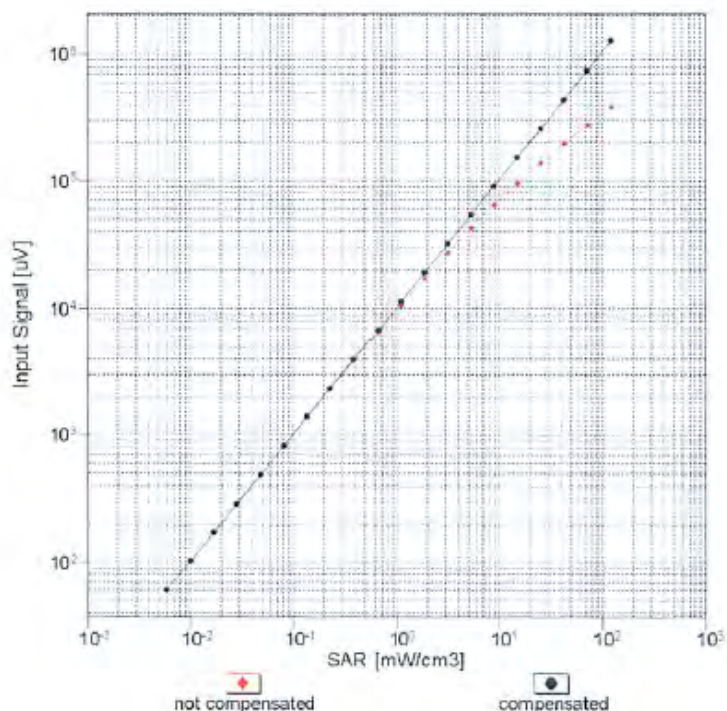


Uncertainty of Linearity Assessment: ± 0.6% (k=2)


ET3DV6- SN:1604

August 19, 2014

Conversion Factor Assessment

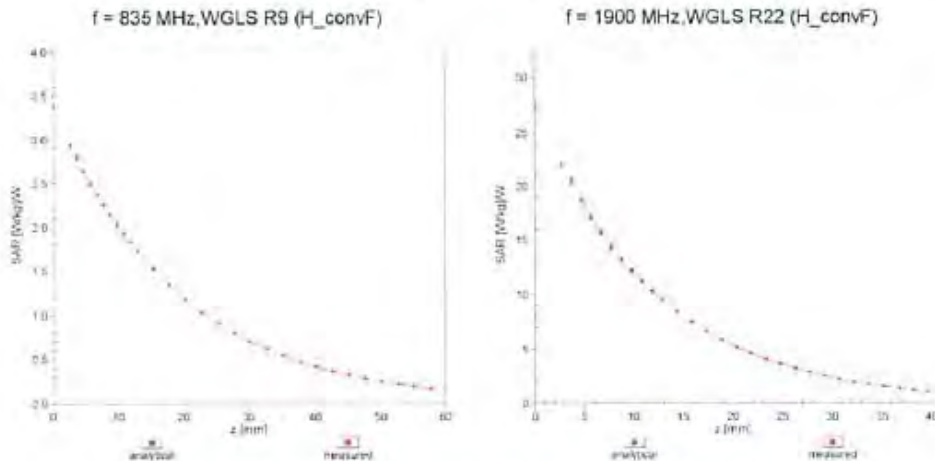

Deviation from Isotropy in Liquid Error (ϕ , θ), f = 900 MHz

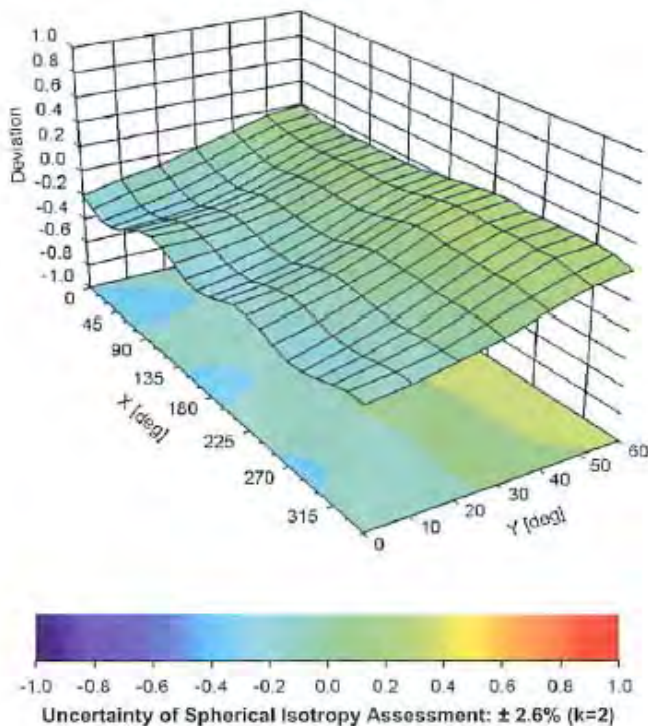

ET3DV6- SN:1604

August 19, 2014

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1604

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-117.4
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	enabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	6.8 mm
Probe Tip to Sensor X Calibration Point	2.7 mm
Probe Tip to Sensor Y Calibration Point	2.7 mm
Probe Tip to Sensor Z Calibration Point	2.7 mm
Recommended Measurement Distance from Surface	4 mm

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **BACL**

Certificate No: **ES3-3019_Dec13**

CALIBRATION CERTIFICATE

Object **ES3DV2 - SN:3019**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6
Calibration procedure for dosimetric E-field probes**

Calibration date: **December 17, 2013 (Additional Conversion Factors)**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	04-Apr-13 (No. 217-01733)	Apr-14
Power sensor E4412A	MY41498087	04-Apr-13 (No. 217-01733)	Apr-14
Reference 3 dB Attenuator	SN: S5054 (3c)	04-Apr-13 (No. 217-01737)	Apr-14
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-13 (No. 217-01735)	Apr-14
Reference 30 dB Attenuator	SN: S5129 (30b)	04-Apr-13 (No. 217-01738)	Apr-14
Reference Probe ES3DV2	SN: 3013	28-Dec-12 (No. ES3-3013_Dec12)	Dec-13
DAE4	SN: 660	13-Dec-13 (No. DAE4-660_Dec13)	Dec-14
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-15
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: December 17, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zaughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

ES3DV2 – SN:3019

December 17, 2013

Probe ES3DV2

SN:3019

Additional Conversion Factors

Manufactured: December 5, 2002
Calibrated: December 17, 2013

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

ES3DV2- SN:3019

December 17, 2013

DASY/EASY - Parameters of Probe: ES3DV2 - SN:3019**Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	1.04	1.15	0.96	$\pm 10.1 \%$
DCP (mV) ^B	105.4	98.8	105.2	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	193.2	$\pm 3.0 \%$
		Y	0.0	0.0	1.0		148.8	
		Z	0.0	0.0	1.0		187.1	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

ES3DV2- SN:3019

December 17, 2013

DASY/EASY - Parameters of Probe: ES3DV2 - SN:3019

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^f	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth ^g (mm)	Unct. (k=2)
750	41.9	0.89	6.63	6.63	6.63	0.22	1.96	± 12.0 %
2600	39.0	1.96	3.89	3.89	3.89	0.62	1.44	± 12.0 %

^c Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^f At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

ES3DV2- SN:3019

December 17, 2013

DASY/EASY - Parameters of Probe: ES3DV2- SN:3019

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^f	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth ^g (mm)	Unct. (k=2)
750	55.5	0.96	6.18	6.18	6.18	0.18	2.31	± 12.0 %
2600	52.5	2.16	3.76	3.76	3.76	0.61	0.95	± 12.0 %

^c Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.


^f At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to $\pm 10\%$ if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to $\pm 5\%$. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than $\pm 1\%$ for frequencies below 3 GHz and below $\pm 2\%$ for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

ES3DV2- SN:3019



December 17, 2013

Conversion Factor Assessment

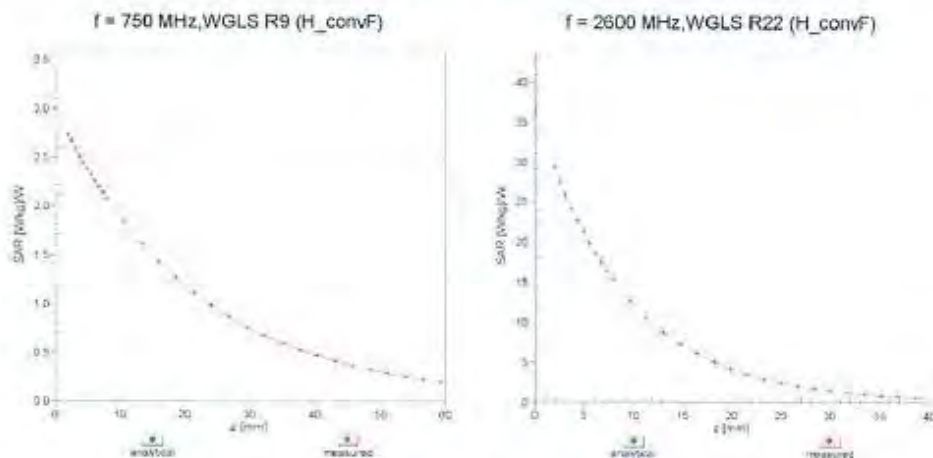

Deviation from Isotropy in Liquid

Error (ϕ, θ), f = 900 MHz

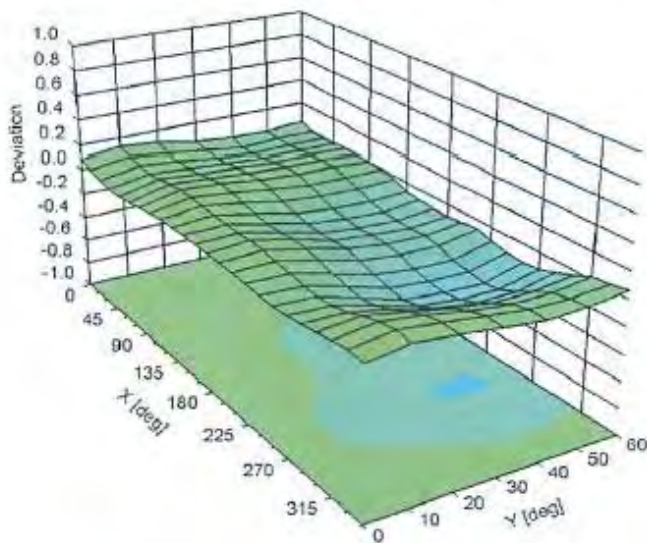

ES3DV2- SN:3019

December 17, 2013

DASY/EASY - Parameters of Probe: ES3DV2 - SN:3019

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-60.1
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm

13 Appendix C – Dipole Calibration Certificates

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **BACL**

Certificate No: **D750V3-1102_Dec13**

CALIBRATION CERTIFICATE

Object **D750V3 - SN: 1102**

Calibration procedure(s) **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **December 06, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	US37292783	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	MY41092317	09-Oct-13 (No. 217-01826)	Oct-14
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-13 (No. 217-01736)	Apr-14
Type-N mismatch combination	SN: 5047.3 / 66327	04-Apr-13 (No. 217-01739)	Apr-14
Reference Probe ES3DV3	SN: 3205	28-Dec-12 (No. ES3-3205_Dec12)	Dec-13
DAE4	SN: 601	25-Apr-13 (No. DAE4-601_Apr13)	Apr-14
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-15
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

Calibrated by: **Name** Claudio Leubler **Function** Laboratory Technician **Signature**

Approved by: **Name** Katja Pokovic **Function** Technical Manager **Signature**

Issued: December 6, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.7
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	41.0 \pm 6 %	0.92 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.17 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.42 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.41 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.51 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	56.9 \pm 6 %	0.99 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.21 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.68 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.46 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.75 W/kg \pm 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.0 Ω - 3.8 jΩ
Return Loss	- 26.6 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.4 Ω - 5.4 jΩ
Return Loss	- 24.2 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.028 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	October 25, 2013

DASY5 Validation Report for Head TSL

Date: 04.12.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1102

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.28, 6.28, 6.28); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.730 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.32 W/kg


SAR(1 g) = 2.17 W/kg; SAR(10 g) = 1.41 W/kg

Maximum value of SAR (measured) = 2.54 W/kg

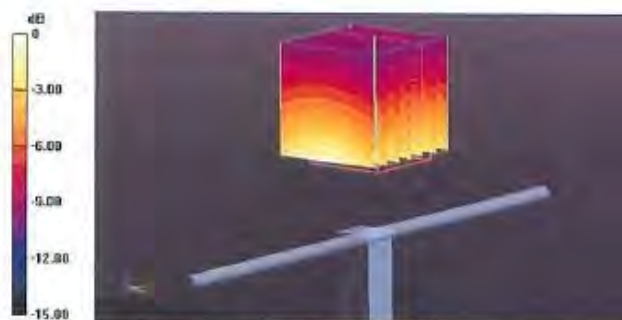

0 dB = 2.54 W/kg = 4.05 dBW/kg

Impedance Measurement Plot for Head TSL

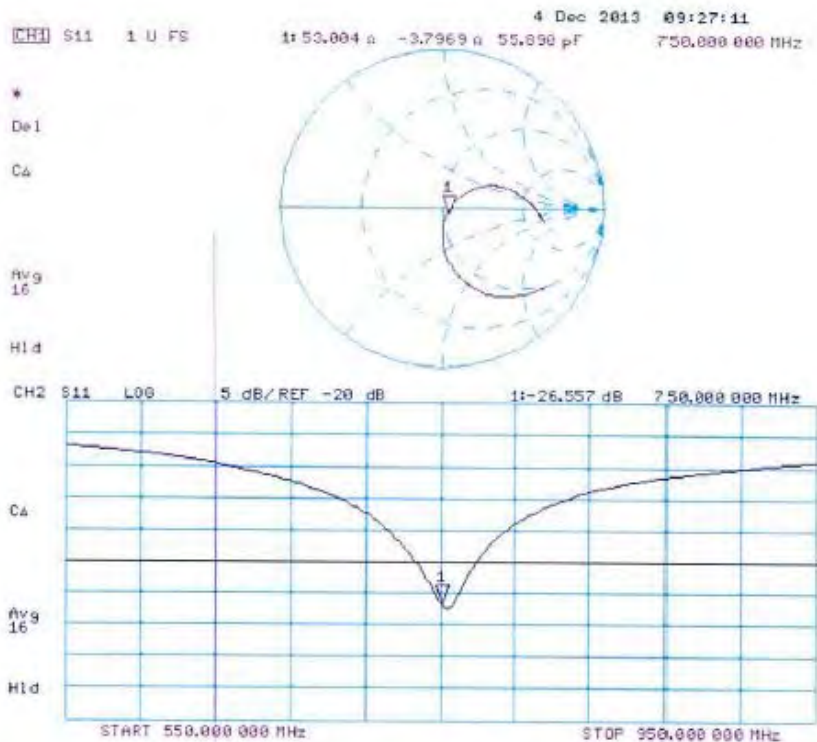

DASY5 Validation Report for Body TSL

Date: 06.12.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1102

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 56.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.11, 6.11, 6.11); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.641 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.28 W/kg


SAR(1 g) = 2.21 W/kg; SAR(10 g) = 1.46 W/kg

Maximum value of SAR (measured) = 2.56 W/kg

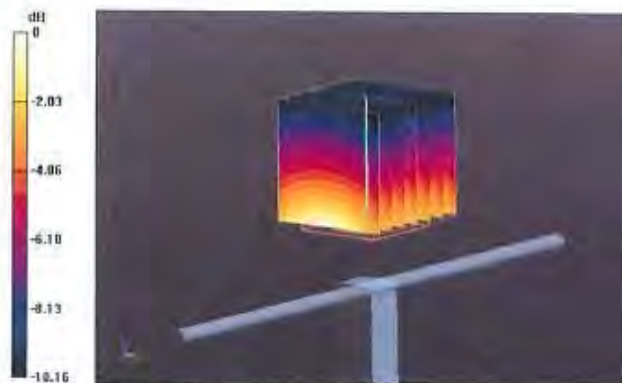

0 dB = 2.56 W/kg = 4.08 dBW/kg

Impedance Measurement Plot for Body TSL

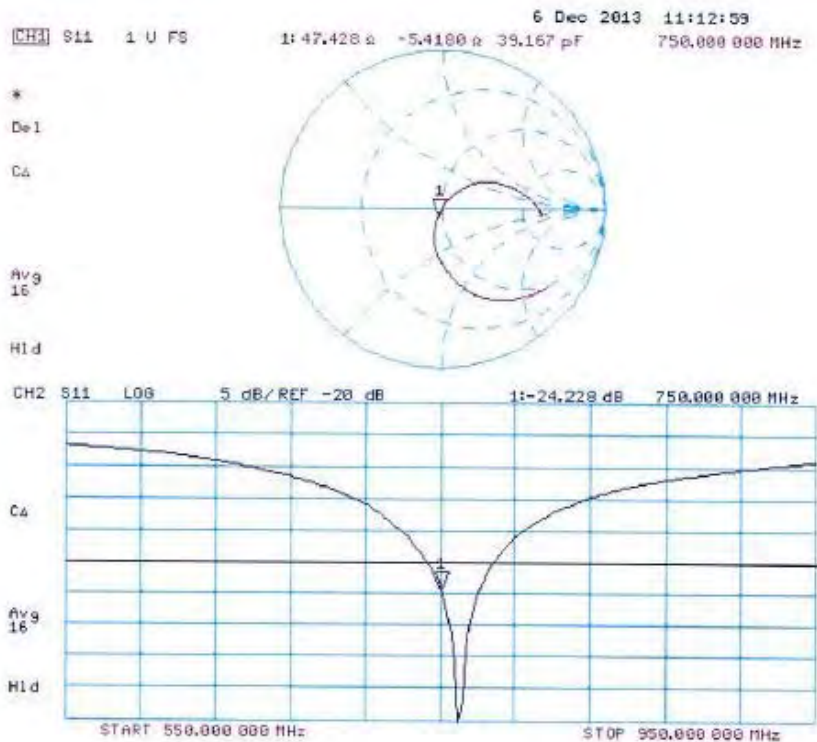

NCL CALIBRATION LABORATORIES

Calibration File No: DC-1604
Project Number: BACL-dipole cal-5780

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the
NCL CALIBRATION LABORATORIES by qualified personnel following recognized
procedures and using transfer standards traceable to NRC/NIST.

Validation Dipole
835MHz Head & Body


Manufacturer: APREL Laboratories
Part number: ALS-D-835-S-2
Frequency: 835MHz
Serial No: 180-00564

Customer: Bay Area Compliance (USA)

Calibrated: 27th October 2014
Released on: 30th October 2014

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By:



Art Brennan, Quality Manager

NCL CALIBRATION LABORATORIES

303 Terry Fox Drive, Suite 102
Kanata, Ontario
CANADA K2K 3J1

Division of APREL
TEL: (613) 435-8300
FAX: (613) 435-8306

NCL Calibration Laboratories

Division of APREL Inc.

Conditions

Dipole 180-00565 was a recalibration.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C

Temperature of the Tissue: 21 °C +/- 0.5°C


Attestation

The below named signatories have conducted the calibration and review of the data which is presented in this calibration report.

We the undersigned attest that to the best of our knowledge the calibration of this subject has been accurately conducted and that all information contained within the results pages have been reviewed for accuracy.



Art Brennan, Quality Manager



Maryna Nesterova Calibration Engineer

Primary Measurement Standards

Instrument	Serial Number	Cal due date
Tektronix USB Power Meter	11C940	May 14, 2015
Network Analyzer Anritsu 37347C	002106	Feb. 20, 2015

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Inc.

Calibration Results Summary

The following results relate the Calibrated Dipole and should be used as a quick reference for the user.

Mechanical Dimensions and Mechanical Verification

APREL Length	APREL Height	Measured Length	Measured Height
161.0 mm	89.8 mm	161.0 mm	89.8 mm

Electrical Specification 835MHz


Tissue Type	Return Loss:	Impedance:	SWR:
Head	-28.171 dB	53.551 Ω	1.084 U
Body	-22.838 dB	57.573 Ω	1.1206 U

System Validation Results


Tissue	Frequency	1 Gram	10 Gram
Head	835 MHz	9.78	6.21
Body	835 MHz	9.76	6.27

Tissue Type	Measured Epsilon (permittivity)	Measured Sigma (conductivity)
Head	43.35	0.94
Body	55.46	1.00

**835MHz
Head**



Body



This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Inc.

Introduction

This Calibration Report has been produced in line with the SSI Dipole Calibration Procedure SSI-TP-018-ALSAS. The results contained within this report are for Validation Dipole 180-00565. The calibration routine consisted of a three-step process. Step 1 was a mechanical verification of the dipole to ensure that it meets the mechanical specifications. Step 2 was an Electrical Calibration for the Validation Dipole, where the SWR, Impedance, and the Return loss were assessed. Step 3 involved a System Validation using the ALSAS-10U, along with APREL E-020 30 MHz to 6 GHz E-Field Probe Serial Number 225.

References

- SSI-TP-018-ALSAS Dipole Calibration Procedure
- SSI-TP-016 Tissue Calibration Procedure
- IEEE 1528:2013 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques"
- IEC-62209-1:2006 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures"
Part 1: "Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 300 MHz to 3 GHz)"
- IEC-62209-2:2010 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures"
Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 30 MHz to 6 GHz)"
- D28-002 Procedure for validation of SAR system using a dipole

Conditions

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C
Temperature of the Tissue: 21 °C +/- 0.5°C

Dipole Calibration uncertainty

The calibration uncertainty for the dipole is made up of various parameters presented below.

Mechanical	1%
Positioning Error	1.22%
Electrical	1.7%
Tissue	2.2%
Dipole Validation	2.2%
TOTAL	8.32% (16.64% K=2)

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories


Division of APREL Inc.

Electrical Calibration


Electrical Specification 835MHz

Forward Reflection

Head Tissue: Frequency Range 0.823 to 0.851 GHz

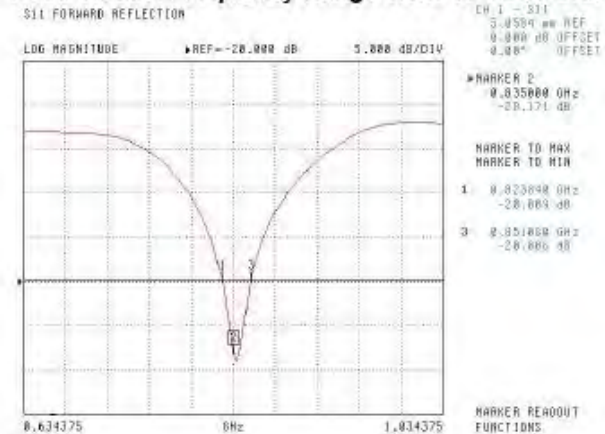

Body Tissue: Frequency Range 0.829 to 0.853 GHz

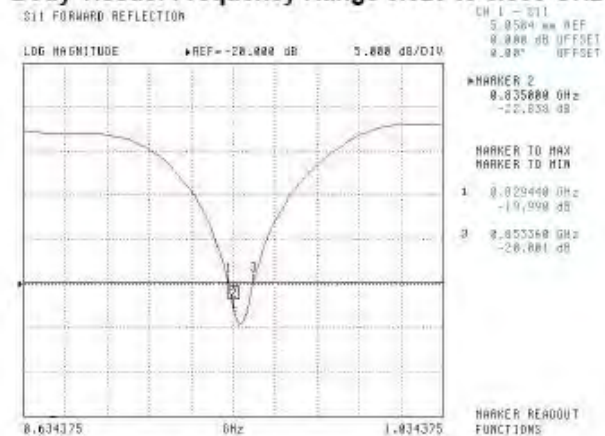

This page has been reviewed for content and attested to by signature within this document.


NCL Calibration Laboratories

Division of APREL Inc.

**Electrical Specification 835MHz
Impedance**

Head Tissue

S11 FORWARD REFLECTION
IMPEDANCE

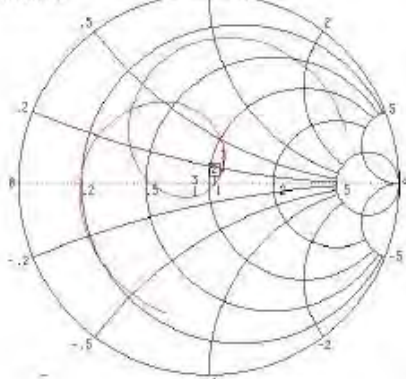

CH 1 - S11
5.0504 mm REF
0.000 dB OFFSET
0.00° OFFSET

*MARKER 2
0.835000 GHz
53.551 Ω
-311.901 jΩ


MARKER TO MAX
MARKER TO MIN

- 1 0.829448 GHz
57.573 Ω
7.349 jΩ
- 3 0.851008 GHz
42.528 Ω
-5.824 jΩ

MARKER READOUT
FUNCTIONS

Body Tissue

S11 FORWARD REFLECTION
IMPEDANCE

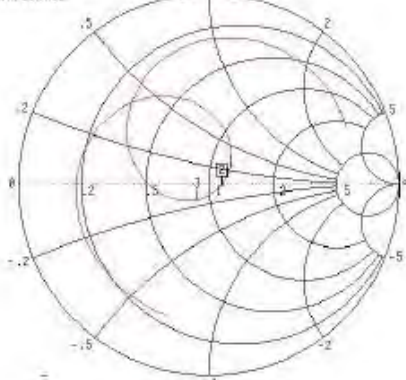

CH 1 - S11
5.0504 mm REF
0.000 dB OFFSET
0.00° OFFSET

*MARKER 2
0.835000 GHz
37.573 Ω
-913.625 jΩ

MARKER TO MAX
MARKER TO MIN

- 1 0.829448 GHz
66.458 Ω
5.856 jΩ
- 3 0.853368 GHz
44.122 Ω
-7.473 jΩ

MARKER READOUT
FUNCTIONS


This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories


Division of APREL Inc.

**Electrical Specification 835MHz
Standing Wave Ratio**

Head Tissue

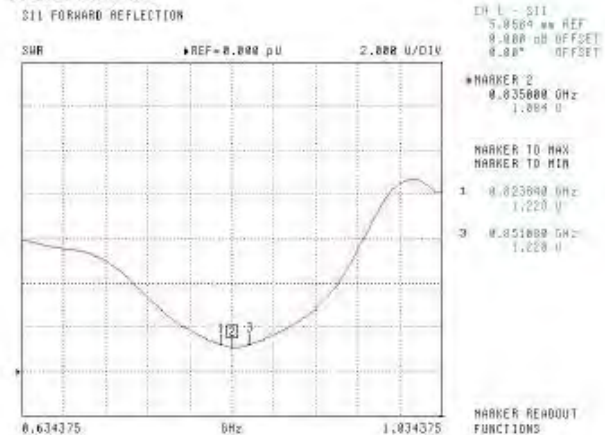

Body Tissue

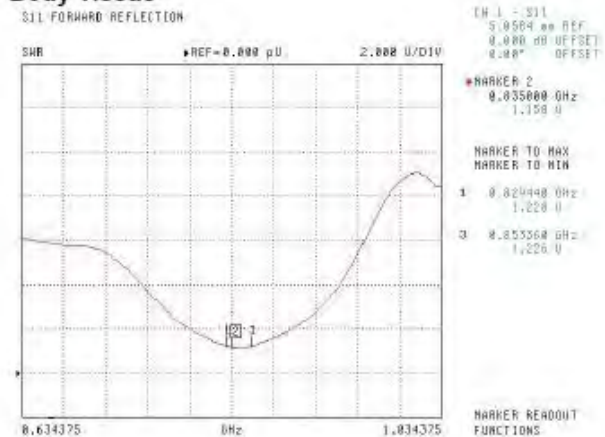

This page has been reviewed for content and attested to by signature within this document.

NCL CALIBRATION LABORATORIES

Calibration File No: DC-1531
Project Number: BACL-5745

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the
NCL CALIBRATION LABORATORIES by qualified personnel following recognized
procedures and using transfer standards traceable to NRC/NIST.

BACL Head & Body Validation Dipole

Manufacturer: APREL Laboratories
Part number: ALS-D-1750-S-2
Frequency: 1750 MHz
Serial No: 198-00304

Calibrated: 8th October, 2013
Released on: 8th October, 2013

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By: _____



Art Brennan, Quality Manager

***NCL* CALIBRATION LABORATORIES**

Suite 102, 303 Terry Fox Dr,
OTTAWA, ONTARIO
CANADA K2K 3J1

Division of APREL Lab
TEL: (613) 435-8300
FAX: (613) 435-8306

NCL Calibration Laboratories


Division of APREL Laboratories.

Conditions

Dipole 198-00304 was an original calibration.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C
Temperature of the Tissue: 21 °C +/- 0.5°C

We the undersigned attest that to the best of our knowledge the calibration of this subject has been accurately conducted and that all information contained within the results pages have been reviewed for accuracy.

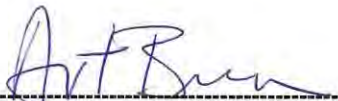

Art Brennan, Quality Manager



Constantin Teodorian, Test Engineer

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Laboratories.

Calibration Results Summary

The following results relate the Calibrated Dipole and should be used as a quick reference for the user.

Mechanical Dimensions

Length: 75 mm
Height: 42 mm


Electrical Calibration

Test	Result Head	Result Body
S11 R/L	-25.567	-20.548 dB
SWR	1.111U	1.207 U
Impedance	53.637Ω	55.929 Ω


System Validation Results, 1750 MHz

Frequency 1750 MHz	1 Gram	10 Gram
Head	37.02	18.99
Body	36.65	18.85

Head

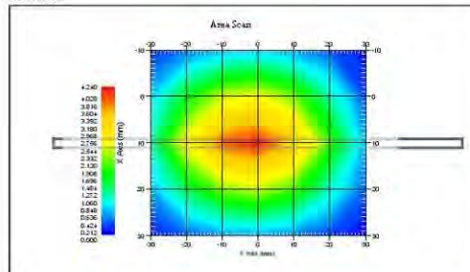

Body



This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Laboratories.

Introduction

This Calibration Report has been produced in line with the SSI Dipole Calibration Procedure SSI-TP-018-ALSAS. The results contained within this report are for Validation Dipole. The calibration routine consisted of a three-step process. Step 1 was a mechanical verification of the dipole to ensure that it meets the mechanical specifications. Step 2 was an Electrical Calibration for the Validation Dipole, where the SWR, Impedance, and the Return loss were assessed. Step 3 involved a System Validation using the ALSAS-10U, along with APREL E-030 130 MHz to 26 GHz E-Field Probe Serial Number 215.

References

- SSI-TP-018-ALSAS Dipole Calibration Procedure
- SSI-TP-016 Tissue Calibration Procedure
- IEEE 1528 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques"
- IEC-62209 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures"
- Part 1: "Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 300 MHz to 3 GHz)"
- IEC-62209 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures"
- Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 30 MHz to 6 GHz)"
- TP-D01-032-E020-V2 E-Field probe calibration procedure
- D22-012-Tissue dielectric tissue calibration procedure
- D28-002-Dipole procedure for validation of SAR system using a dipole
- IEEE 1309 Draft Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas, from 9kHz to 40GHz

Conditions**Ambient Temperature of the Laboratory:** 22 °C +/- 0.5°C**Temperature of the Tissue:** 20 °C +/- 0.5°C

This was an original calibration taken from stock.

This page has been reviewed for content and attested to by signature within this document.

4

NCL Calibration Laboratories

Division of APREL Laboratories.

Dipole Calibration Results

Mechanical Verification

APREL Dimensions Length	APREL Dimensions Height	Measured Length	Measured Height
75 mm	42.86	75 mm	42 mm

Tissue Validation

Tissue 1750 MHz	Measured Head	Measured Body
Dielectric constant, ϵ_r	38.51	51.79
Conductivity, σ [S/m]	1.36	1.53

Dipole Calibration uncertainty

The calibration uncertainty for the dipole is made up of various parameters presented below.

Mechanical	1%
Positioning Error	1.22%
Electrical	1.7%
Tissue	2.2%
Dipole Validation	2.2%
TOTAL	8.32% (16.64% K=2)

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Laboratories.


Electrical Calibration

Test	Result Head	Result Body
S11 R/L	-25.567	-20.548 dB
SWR	1.111U	1.207 U
Impedance	53.637Ω	55.929 Ω

The Following Graphs are the results as displayed on the Vector Network Analyzer.


S11 Parameter Return Loss

Head

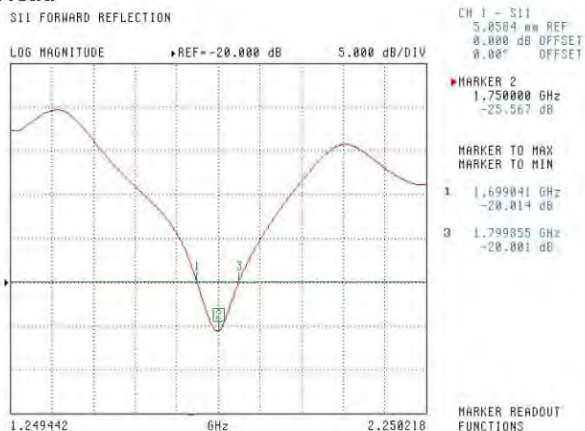

Frequency range 1.699 GHz to 1.799 GHz

Body

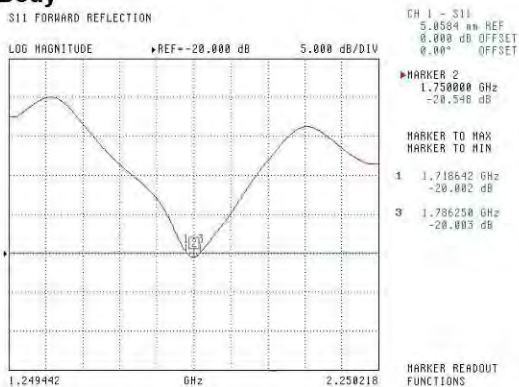

Frequency range 1.718 GHz to 1.786 GHz

This page has been reviewed for content and attested to by signature within this document.


NCL Calibration Laboratories

Division of APREL Laboratories.

SWR

Head

S11 FORWARD REFLECTION

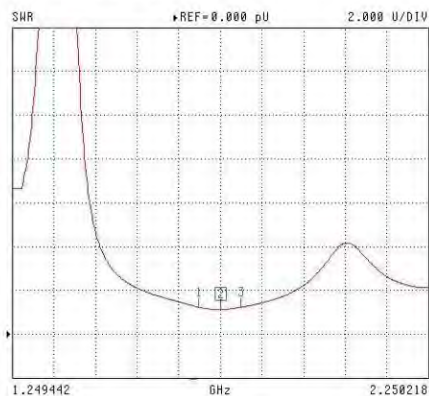

CH 1 - S11
5.0584 mm REF
0.000 dB OFFSET
0.00° OFFSET


MARKER 2
1.750000 GHz
1.111 U

MARKER TO MAX
MARKER TO MIN
1 1.699041 GHz
1.225 U
3 1.799855 GHz
1.225 U

MARKER READOUT
FUNCTIONS

Body

S11 FORWARD REFLECTION

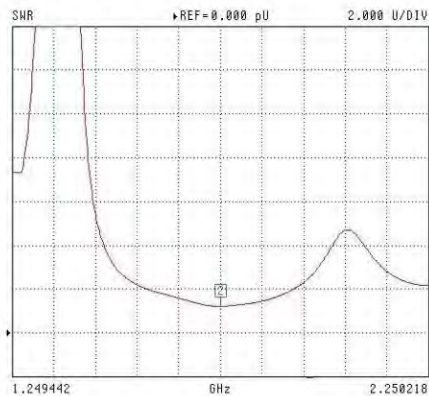

CH 1 - S11
5.0584 mm REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 2
1.750000 GHz
1.207 U

MARKER TO MAX
MARKER TO MIN

MARKER READOUT
FUNCTIONS

This page has been reviewed for content and attested to by signature within this document.

7


NCL Calibration Laboratories

Division of APREL Laboratories.

Smith Chart Dipole Impedance

Head

S11 FORWARD REFLECTION
IMPEDANCE

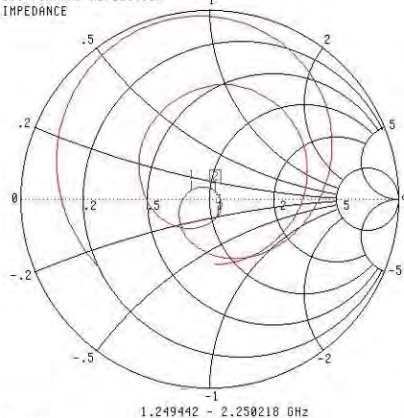

CH 1 - S11
5.0584 dB REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 2
1.750000 GHz
53.637 Ω
3.752 j Ω


MARKER TO MAX
MARKER TO MIN

1 1.699041 GHz
41.539 Ω
3.499 j Ω
3 1.799855 GHz
54.266 Ω
-9.601 j Ω

MARKER READOUT
FUNCTIONS

Body

S11 FORWARD REFLECTION
IMPEDANCE

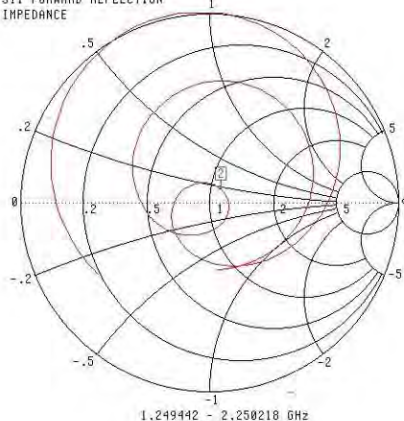

CH 1 - S11
5.0584 dB REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 2
1.750000 GHz
55.929 Ω
7.816 j Ω

MARKER TO MAX
MARKER TO MIN

MARKER READOUT
FUNCTIONS

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Laboratories.

Test Equipment

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List May 2013

This page has been reviewed for content and attested to by signature within this document.

9

NCL CALIBRATION LABORATORIES

Calibration File No: DC-1606
Project Number: BACL-dipole-cal-5780

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the
NCL CALIBRATION LABORATORIES by qualified personnel following recognized
procedures and using transfer standards traceable to NRC/NIST.

Validation Dipole
1900MHz Head & Body


Manufacturer: APREL Laboratories
Part number: ALS-D-1900-S-2
Frequency: 1900MHz
Serial No: 210-00715

Customer: Bay Area Compliance (USA)

Calibrated: 27th October 2014
Released on: 30th October 2014

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By:

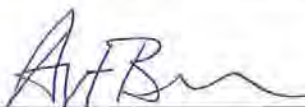

Art Brennan, Quality Manager

NCL CALIBRATION LABORATORIES

303 Terry Fox Drive, Suite 102
Kanata, Ontario
CANADA K2K 3J1

Division of APREL
TEL: (613) 435-8300
FAX: (613) 435-8308

NCL Calibration Laboratories

Division of APREL Inc.

Conditions

Dipole 210-00715 was a recalibration.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C
Temperature of the Tissue: 21 °C +/- 0.5°C


Attestation

The below named signatories have conducted the calibration and review of the data which is presented in this calibration report.

We the undersigned attest that to the best of our knowledge the calibration of this subject has been accurately conducted and that all information contained within the results pages have been reviewed for accuracy.



Art Brennan, Quality Manager

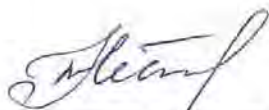

Maryna Nesterova Calibration Engineer

Primary Measurement Standards

Instrument	Serial Number	Cal due date
Tektronix USB Power Meter	11C940	May 14, 2015
Network Analyzer Anritsu 37347C	002106	Feb. 20, 2015

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Inc.

Calibration Results Summary

The following results relate the Calibrated Dipole and should be used as a quick reference for the user.

Mechanical Dimensions and Mechanical Verification

APREL Length	APREL Height	Measured Length	Measured Height
68.0 mm	39.5 mm	67.1 mm	38.9 mm

Electrical Specification 1900MHz


Tissue Type	Return Loss:	Impedance:	SWR:
Head	-29.341 dB	51.897 Ω	1.071 U
Body	-23.129 dB	54.275 Ω	1.139 U

System Validation Results


Tissue	Frequency	1 Gram	10 Gram
Head	1900 MHz	41.28	20.9
Body	1900 MHz	40.03	20.41

Tissue Type	Measured Epsilon (permittivity)	Measured Sigma (conductivity)
Head	40.27	1.44
Body	52.63	1.46

**1900 MHz
Head**



Body



This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories

Division of APREL Inc.

Introduction

This Calibration Report has been produced in line with the SSI Dipole Calibration Procedure SSI-TP-018-ALSAS. The results contained within this report are for Validation Dipole 210-00715. The calibration routine consisted of a three-step process. Step 1 was a mechanical verification of the dipole to ensure that it meets the mechanical specifications. Step 2 was an Electrical Calibration for the Validation Dipole, where the SWR, Impedance, and the Return loss were assessed. Step 3 involved a System Validation using the ALSAS-10U, along with APREL E-020 30 MHz to 6 GHz E-Field Probe Serial Number 225.

References

- SSI-TP-018-ALSAS Dipole Calibration Procedure
- SSI-TP-016 Tissue Calibration Procedure
- IEEE 1528:2013 "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques"
- IEC-62209-1:2006 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures"
Part 1: "Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 300 MHz to 3 GHz)"
- IEC-62209-2:2010 "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures"
Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range of 30 MHz to 6 GHz)"
- D28-002 Procedure for validation of SAR system using a dipole

Conditions

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C
Temperature of the Tissue: 21 °C +/- 0.5°C

Dipole Calibration uncertainty

The calibration uncertainty for the dipole is made up of various parameters presented below.

Mechanical	1%
Positioning Error	1.22%
Electrical	1.7%
Tissue	2.2%
Dipole Validation	2.2%
TOTAL	8.32% (16.64% K=2)

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories


Division of APREL Inc.

Electrical Calibration


Electrical Specification 1900MHz

Forward Reflection

Head Tissue: Frequency Range 1.856 to 1.940 GHz

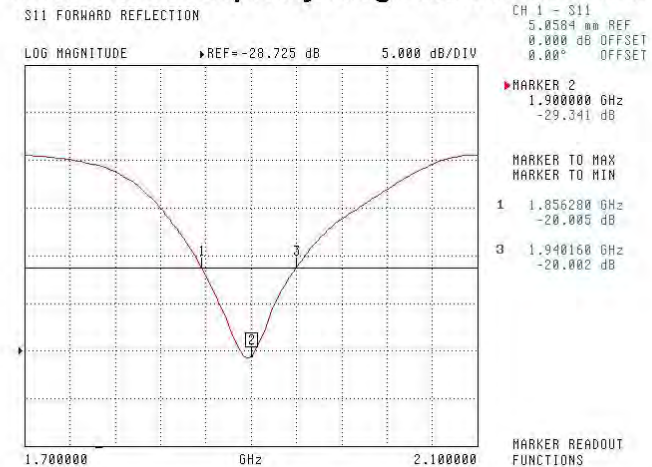

Body Tissue: Frequency Range 1.867 to 1.931 GHz

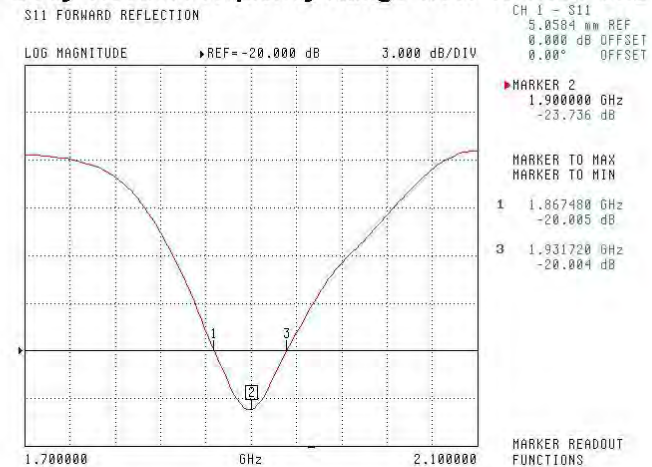

This page has been reviewed for content and attested to by signature within this document.


NCL Calibration Laboratories

Division of APREL Inc.

**Electrical Specification 1900MHz
Impedance**

Head Tissue

S11 FORWARD REFLECTION
IMPEDANCE

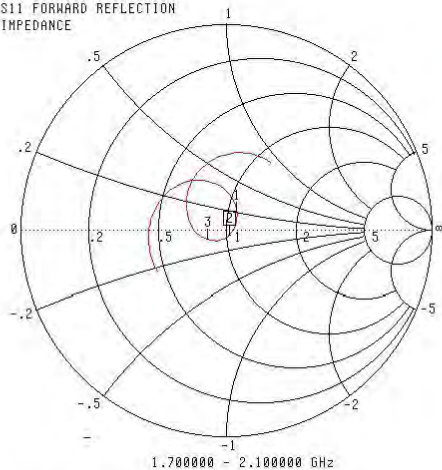

CH 1 - S11
5.0584 mm REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 2
1.900000 GHz
51.897 Ω
-2.847 jΩ


MARKER TO MAX
MARKER TO MIN

1 1.856280 GHz
55.876 Ω
9.248 jΩ
3 1.940160 GHz
41.753 Ω
-4.838 jΩ

MARKER READOUT
FUNCTIONS

Body Tissue

S11 FORWARD REFLECTION
IMPEDANCE

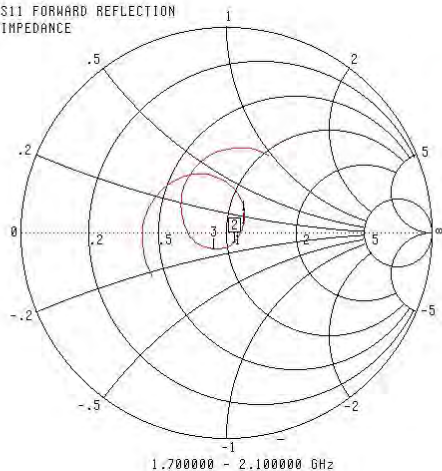

CH 1 - S11
5.0584 mm REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 2
1.900000 GHz
54.275 Ω
-5.222 jΩ

MARKER TO MAX
MARKER TO MIN

1 1.867480 GHz
59.473 Ω
5.466 jΩ
3 1.931720 GHz
44.123 Ω
-7.394 jΩ

MARKER READOUT
FUNCTIONS

This page has been reviewed for content and attested to by signature within this document.

NCL Calibration Laboratories


Division of APREL Inc.

**Electrical Specification 1900MHz
Standing Wave Ratio**

Head Tissue

S11 FORWARD REFLECTION

SWR REF=876.088 mU 300.000 mU/DIV

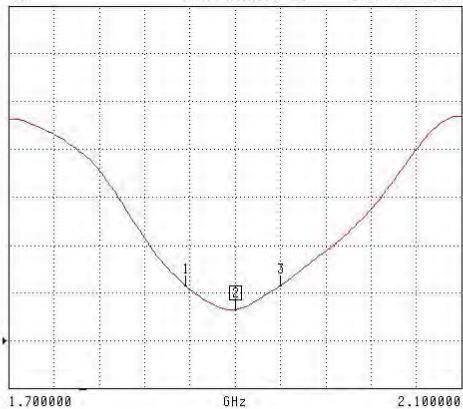

CH 1 - S11
5.0584 mm REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 2
1.900000 GHz
1.071 U

MARKER TO MAX
MARKER TO MIN


1 1.856280 GHz
1.223 U
3 1.940160 GHz
1.223 U

MARKER READOUT
FUNCTIONS

Body Tissue

S11 FORWARD REFLECTION

SWR REF=876.088 mU 300.000 mU/DIV

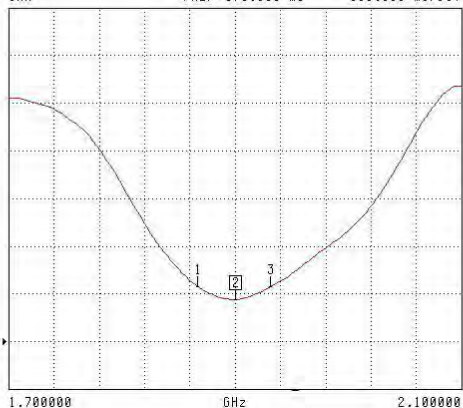

CH 1 - S11
5.0584 mm REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 2
1.900000 GHz
1.139 U

MARKER TO MAX
MARKER TO MIN

1 1.867480 GHz
1.223 U
3 1.931720 GHz
1.222 U

MARKER READOUT
FUNCTIONS

This page has been reviewed for content and attested to by signature within this document.

14 Appendix D - Test System Verifications Scans

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)

750_MHz body validation

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1102

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 750$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 54$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DAS4 (High Precision Assessment)


DASY4 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.18, 6.18, 6.18); Calibrated: 12/17/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 8/13/2014
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DAS4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d =15 mm, Pin = 250 mW/Area Scan (81x151x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 2.39 mW/g

d =15 mm, Pin = 250 mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 50.5 V/m; Power Drift = 0.033 dB
 Peak SAR (extrapolated) = 3.14 W/kg

SAR (1 g) = 2.23 mW/g; SAR (10 g) = 1.53 mW/g
 Maximum value of SAR (measured) = 2.39 mW/g

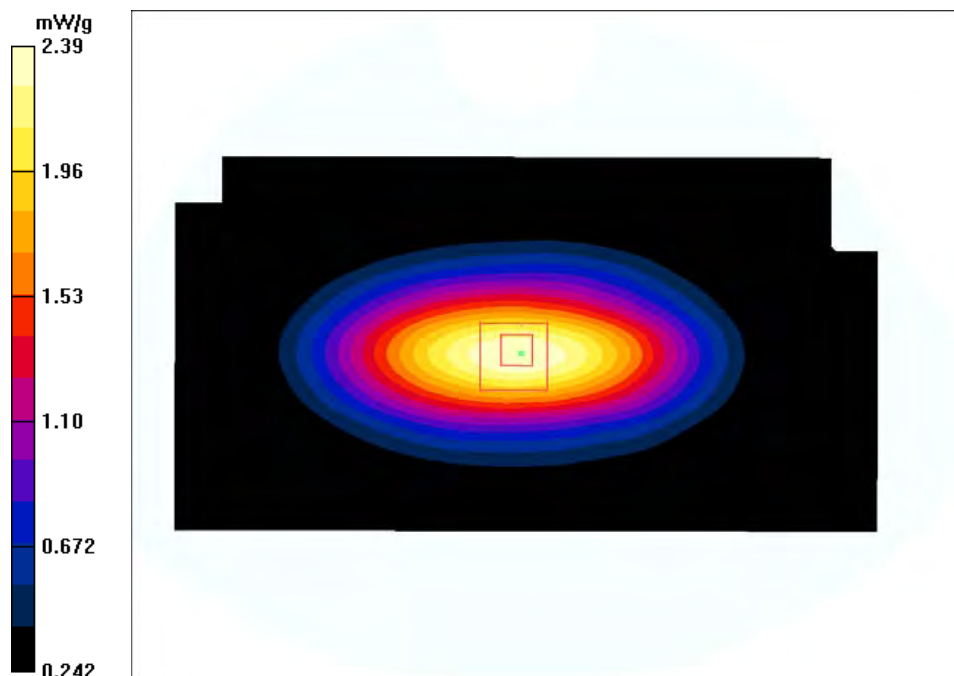

Test Laboratory: Bay Area Compliance Lab Corp.(BACL)**System Performance Test (835 MHz Body)****DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 180-00564**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1604; ConvF(6.27, 6.27, 6.27); Calibrated: 8/19/2014
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 8/13/2014
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASYS4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d =15 mm, Pin = 250 mW/Area Scan (81x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.47 mW/g


d =15 mm, Pin = 250 mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.6 V/m; Power Drift = 0.140 dB

Peak SAR (extrapolated) = 3.34 W/kg

SAR (1 g) = 2.3 mW/g; SAR (10 g) = 1.53 mW/g

Maximum value of SAR (measured) = 2.47 mW/g

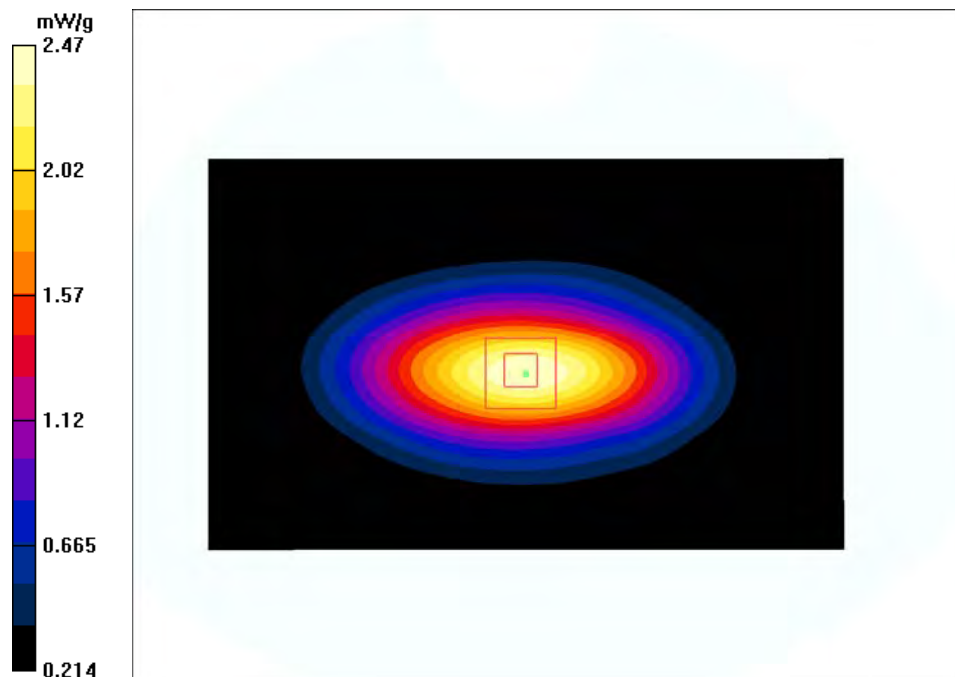

Test Laboratory: Bay Area Compliance Lab Corp. (BACL)**System Performance Test (1750 MHz Body)****DUT: Dipole 1750 MHz; Type: 1750 MHz Dipole; Serial: ALS-D-1750-S-2**

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1604; ConvF(4.89, 4.89, 4.89); Calibrated: 8/19/2014
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 8/13/2014
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DAS4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d =10 mm, Pin = 100 mW/Area Scan (81x131x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 3.74 mW/g


d =10 mm, Pin = 100 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.6 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 5.54 W/kg

SAR (1 g) = 3.32 mW/g; SAR (10 g) = 1.84 mW/g

Maximum value of SAR (measured) = 3.69 mW/g

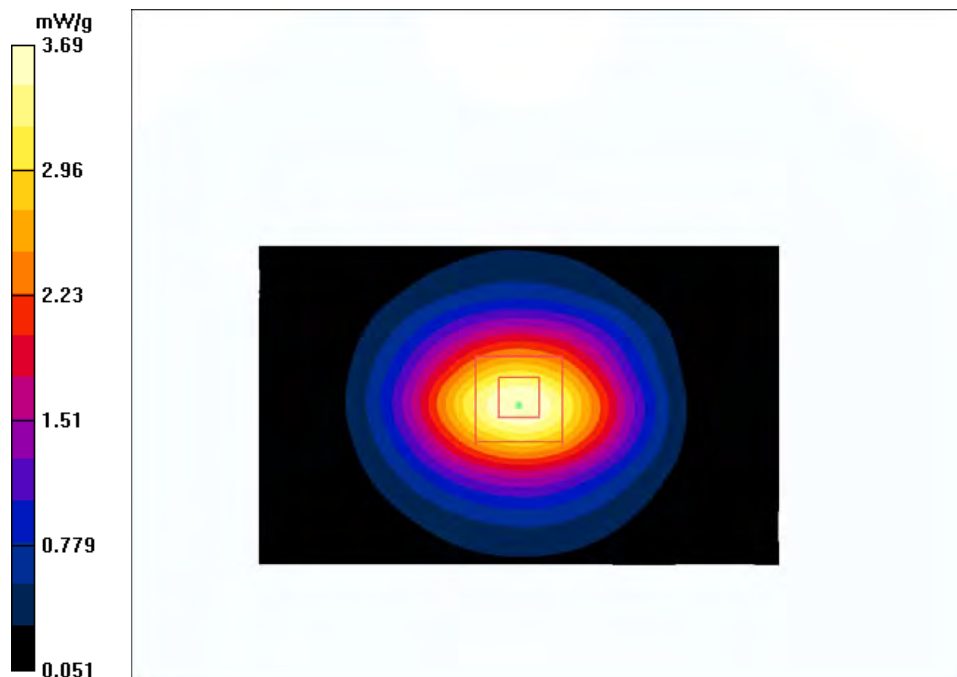

Test Laboratory: Bay Area Compliance Lab Corp. (BACL)**System Performance Test (1900 MHz Body)****DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 210-00715**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1604; ConvF(4.68, 4.68, 4.68); Calibrated: 8/19/2014
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 8/13/2014
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASYS4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d =10 mm, Pin = 100 mW/Area Scan (81x131x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 4.35 mW/g


d =10 mm, Pin =100 mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.4 V/m; Power Drift = 0.014 dB

Peak SAR (extrapolated) = 6.50 W/kg

SAR (1 g) = 3.9 mW/g; SAR (10 g) = 2.13 mW/g

Maximum value of SAR (measured) = 4.37 mW/g

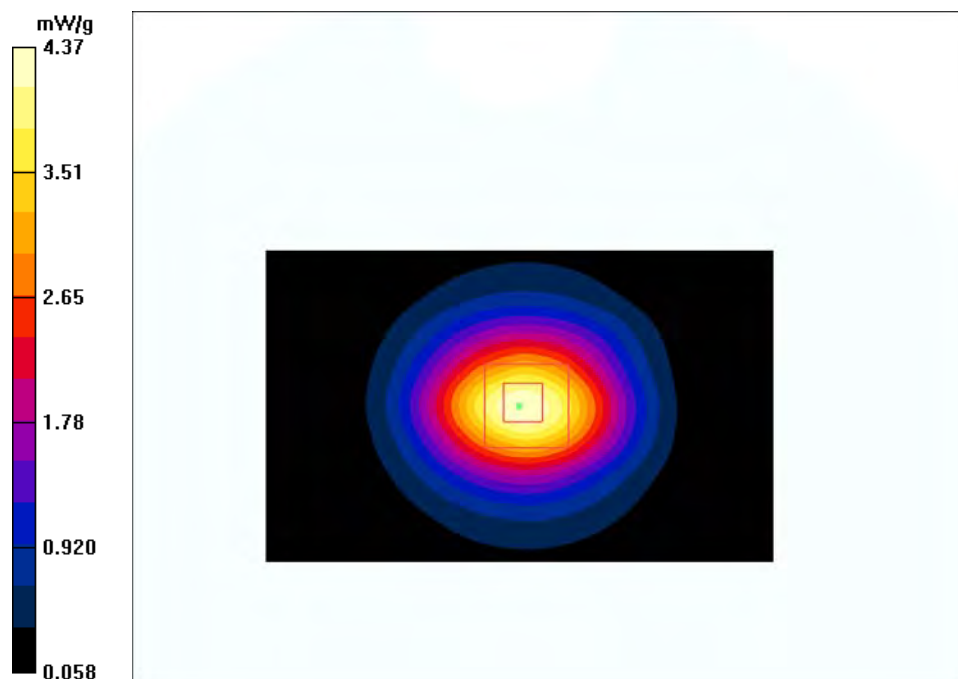

15 Appendix E – EUT Scan Results

Test Laboratory: Bay Area Compliance Lab Corp. (BACL)

GSM850 Top touch to the Phantom - (Mid Channel)

DUT: Motion; Type: Tablet; Serial: Edinburg

Communication System: GSM 850 2 Slot; Frequency: 836.6 MHz; Duty Cycle: 1:4.15
 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DAS4 (High Precision Assessment)


DASY4 Configuration:

- Probe: ET3DV6 - SN1604; ConvF(6.27, 6.27, 6.27); Calibrated: 8/19/2014
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 8/13/2014
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DAS4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Top Touch to the Phantom/Area Scan (101x201x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.622 mW/g

Top Touch to the Phantom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 16.1 V/m; Power Drift = -0.197 dB
 Peak SAR (extrapolated) = 0.879 W/kg

SAR (1 g) = 0.542 mW/g; SAR (10 g) = 0.335 mW/g
 Maximum value of SAR (measured) = 0.594 mW/g

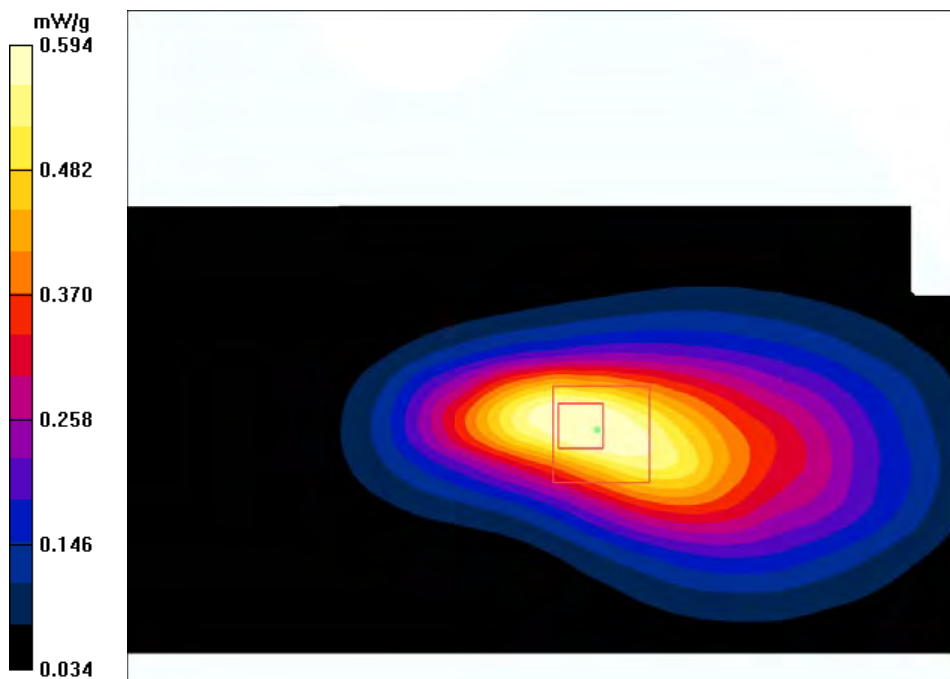

#1

Test Laboratory: Bay Area Compliance Lab Corp. (BACL)**GSM1900 Top touch to the Phantom - (Mid Channel)****DUT: Motion; Type: Tablet; Serial: Edinburg**

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.15
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.6$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DAS4 (High Precision Assessment)


DASY4 Configuration:

- Probe: ET3DV6 - SN1604; ConvF(4.68, 4.68, 4.68); Calibrated: 8/19/2014
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 8/13/2014
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DAS4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Top Touch to the Phantom/Area Scan (101x141x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.717 mW/g

Top Touch to the Phantom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 19.3 V/m; Power Drift = 0.145 dB
Peak SAR (extrapolated) = 1.16 W/kg

SAR (1 g) = 0.630 mW/g; SAR (10 g) = 0.325 mW/g
Maximum value of SAR (measured) = 0.700 mW/g

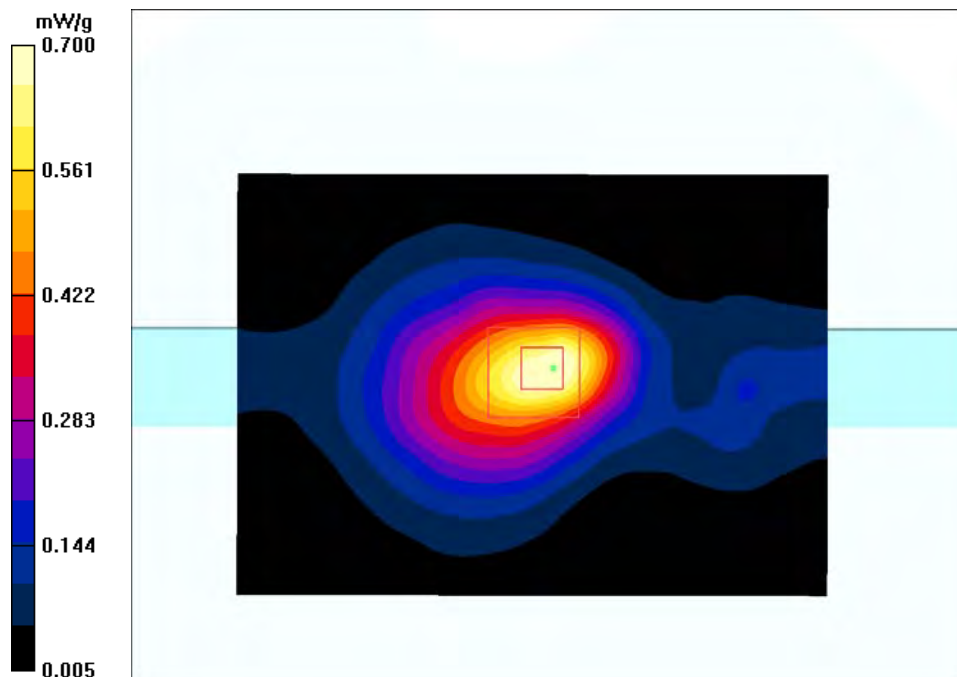

#2

Test Laboratory: Bay Area Compliance Lab Corp. (BACL)**LTE Band 2 Top touch to the Phantom - (Mid Channel)****DUT: Motion; Type: Tablet; Serial: Edinburg**

Communication System: LTE band 2; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.6$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DAS4 (High Precision Assessment)


DASY4 Configuration:

- Probe: ET3DV6 - SN1604; ConvF(4.68, 4.68, 4.68); Calibrated: 8/19/2014
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 8/13/2014
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DAS4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Top Touch to the Phantom/Area Scan (101x151x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.823 mW/g

Top Touch to the Phantom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 22.8 V/m; Power Drift = -0.039 dB
 Peak SAR (extrapolated) = 1.31 W/kg

SAR (1 g) = 0.706 mW/g; SAR (10 g) = 0.366 mW/g
 Maximum value of SAR (measured) = 0.791 mW/g

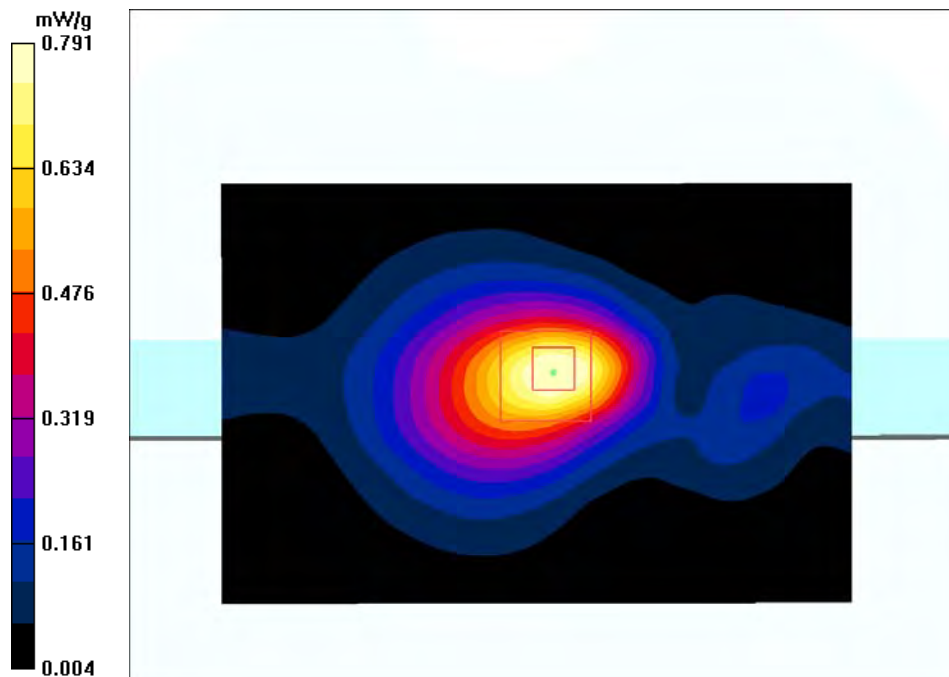

#3

Test Laboratory: Bay Area Compliance Lab Corp. (BACL)**LTE Band 4 Top touch to the Phantom - (Mid Channel)****DUT: Motion; Type: Tablet; Serial: Edinburg**

Communication System: LTE-Band 4 @20MHz; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1604; ConvF(4.89, 4.89, 4.89); Calibrated: 8/19/2014
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 8/13/2014
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DAS4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Top Touch to the Phantom/Area Scan (101x151x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.953 mW/g


Top Touch to the Phantom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.6 V/m; Power Drift = 0.0405 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR (1 g) = 0.861 mW/g; SAR (10 g) = 0.474 mW/g

Maximum value of SAR (measured) = 0.959 mW/g

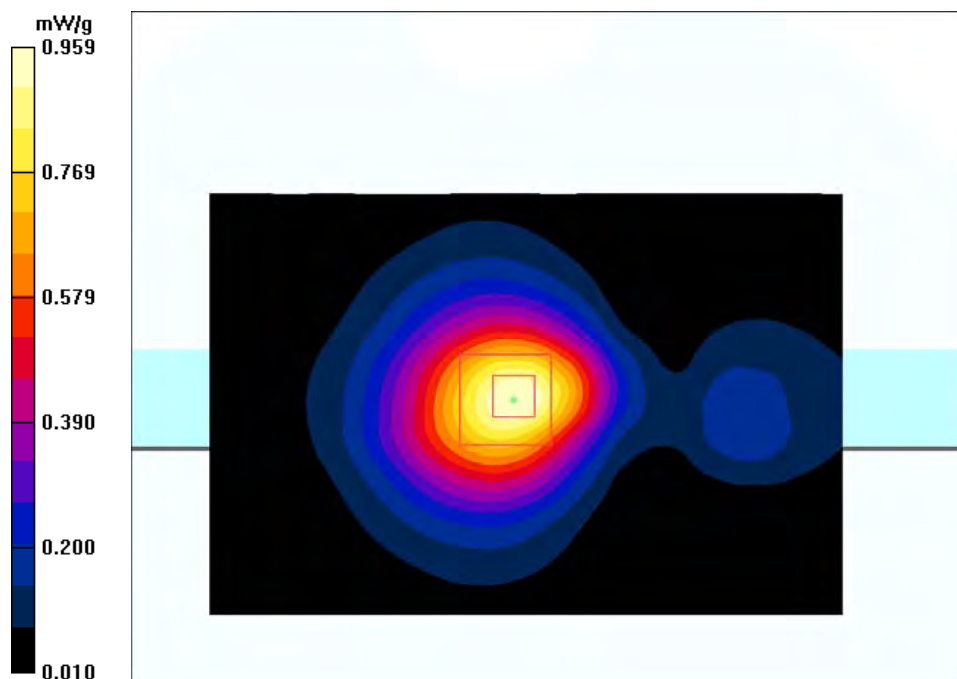

#4

Test Laboratory: Bay Area Compliance Lab Corp. (BACL)**LTE Band 5 Top touch to the Phantom - (Mid Channel)****DUT: Motion; Type: Tablet; Serial: Edinburg**

Communication System: LTE-Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1604; ConvF(6.27, 6.27, 6.27); Calibrated: 8/19/2014
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 8/13/2014
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DAS4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Top Touch to the Phantom/Area Scan (101x201x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.653 mW/g


Top Touch to the Phantom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.7 V/m; Power Drift = -0.0207 dB

Peak SAR (extrapolated) = 0.915 W/kg

SAR (1 g) = 0.557 mW/g; SAR (10 g) = 0.336 mW/g

Maximum value of SAR (measured) = 0.613 mW/g

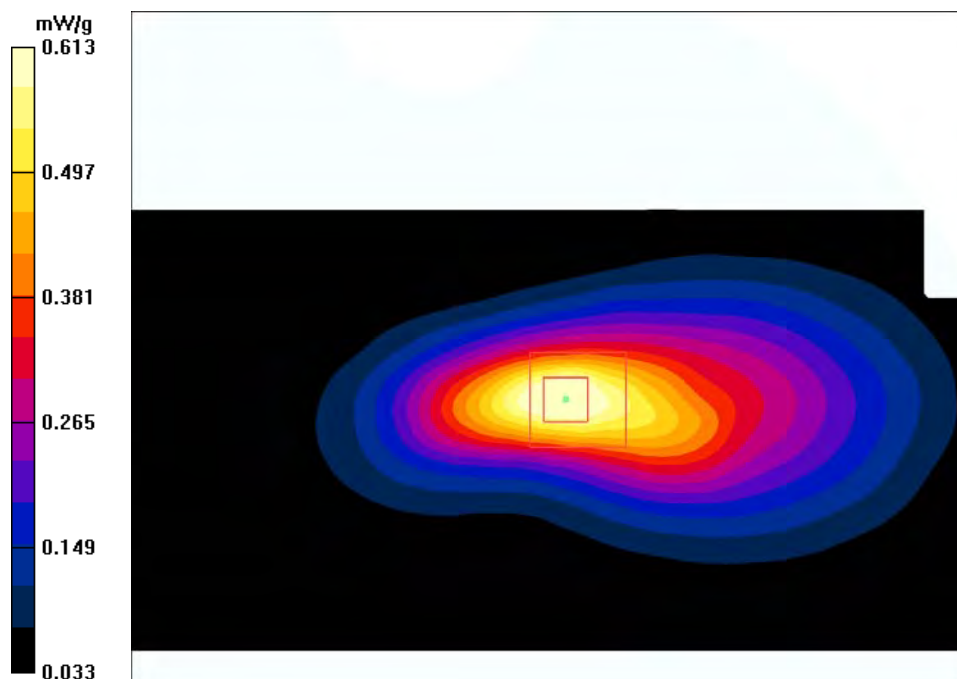

#5

Test Laboratory: Bay Area Compliance Lab Corp. (BACL)

LTE Band 13 Top touch to the Phantom - (Mid Channel)

DUT: Motion; Type: Tablet; Serial: Edinburg

Communication System: LTE Band13; Frequency: 782 MHz;Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 782 \text{ MHz}$; $\sigma = 0.96 \text{ mho/m}$; $\epsilon_r = 52.4$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DAS4 (High Precision Assessment)


DASY4 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.18, 6.18, 6.18); Calibrated: 12/17/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 8/13/2014
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DAS4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Top Touch to the Phantom/Area Scan (101x201x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.639 mW/g

Top Touch to the Phantom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 18.5 V/m; Power Drift = 0.0391 dB
 Peak SAR (extrapolated) = 0.865 W/kg

SAR (1 g) = 0.564 mW/g; SAR (10 g) = 0.366 mW/g
 Maximum value of SAR (measured) = 0.617 mW/g

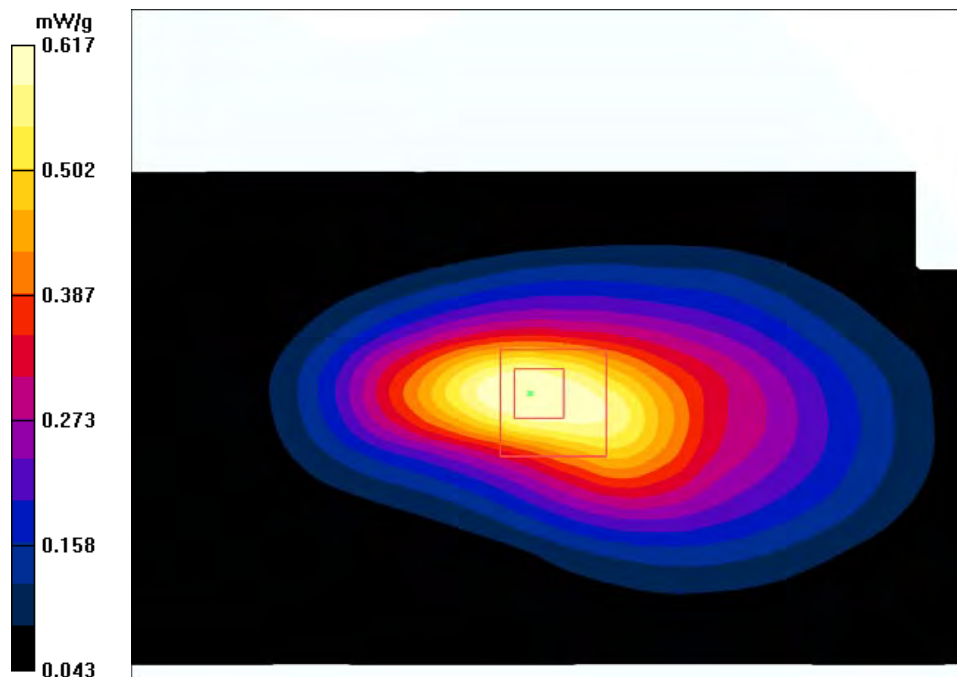

#6

Test Laboratory: Bay Area Compliance Lab Corp. (BACL)

LTE Band 17 Top touch to the Phantom - (Mid Channel)

DUT: Motion; Type: Tablet; Serial: Edinburg

Communication System: LTE-Band 17; Frequency: 710 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 710 \text{ MHz}$; $\sigma = 0.971 \text{ mho/m}$; $\epsilon_r = 55.8$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DAS4 (High Precision Assessment)


DASY4 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.18, 6.18, 6.18); Calibrated: 12/17/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 8/13/2014
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DAS4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Top Touch to the Phantom/Area Scan (101x201x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.354 mW/g

Top Touch to the Phantom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 14.3 V/m; Power Drift = 0.0456 dB
 Peak SAR (extrapolated) = 0.463 W/kg

SAR (1 g) = 0.324 mW/g; SAR (10 g) = 0.219 mW/g
 Maximum value of SAR (measured) = 0.349 mW/g

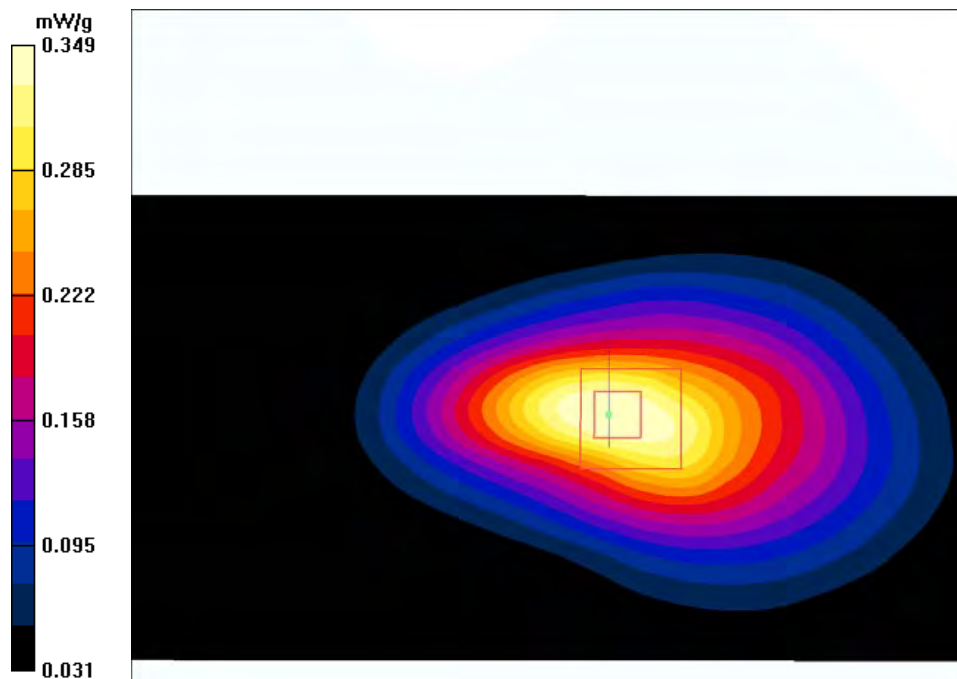

#7

Test Laboratory: Bay Area Compliance Lab Corp. (BACL)**LTE Band 25 Top touch to the Phantom - (Mid Channel)****DUT: Motion; Type: Tablet; Serial: Edinburg**

Communication System: LTE Band 25; Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.6$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DAS4 (High Precision Assessment)


DASY4 Configuration:

- Probe: ET3DV6 - SN1604; ConvF(4.68, 4.68, 4.68); Calibrated: 8/19/2014
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 8/13/2014
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DAS4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Top Touch to the Phantom/Area Scan (101x201x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.725 mW/g

Top Touch to the Phantom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 23.6 V/m; Power Drift = -0.0263 dB
Peak SAR (extrapolated) = 1.26 W/kg

SAR (1 g) = 0.656 mW/g; SAR (10 g) = 0.338 mW/g
Maximum value of SAR (measured) = 0.728 mW/g

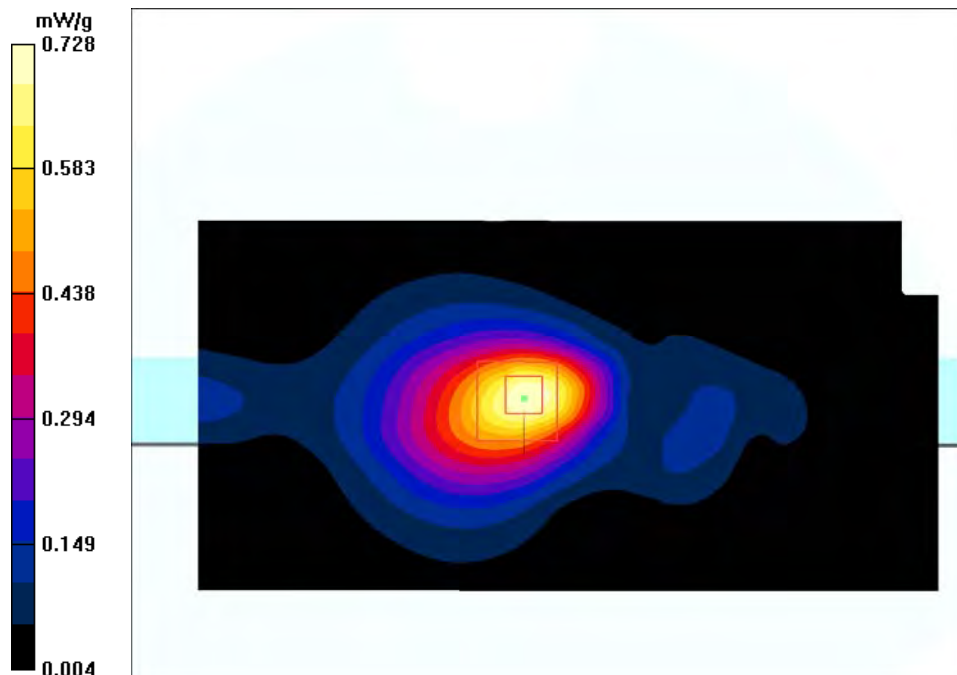

#8

Test Laboratory: Bay Area Compliance Lab Corp. (BACL)

WCDMA Band 2 Top touch to the Phantom - (Mid Channel)

DUT: Motion; Type: Tablet; Serial: Edinburg

Communication System: WCDMA 1900; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.6$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DAS4 (High Precision Assessment)


DASY4 Configuration:

- Probe: ET3DV6 - SN1604; ConvF(4.68, 4.68, 4.68); Calibrated: 8/19/2014
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 8/13/2014
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DAS4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Top Touch to the Phantom/Area Scan (101x171x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.772 mW/g

Top Touch to the Phantom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 22.1 V/m; Power Drift = -0.0354 dB
 Peak SAR (extrapolated) = 1.35 W/kg

SAR (1 g) = 0.690 mW/g; SAR (10 g) = 0.349 mW/g
 Maximum value of SAR (measured) = 0.775 mW/g

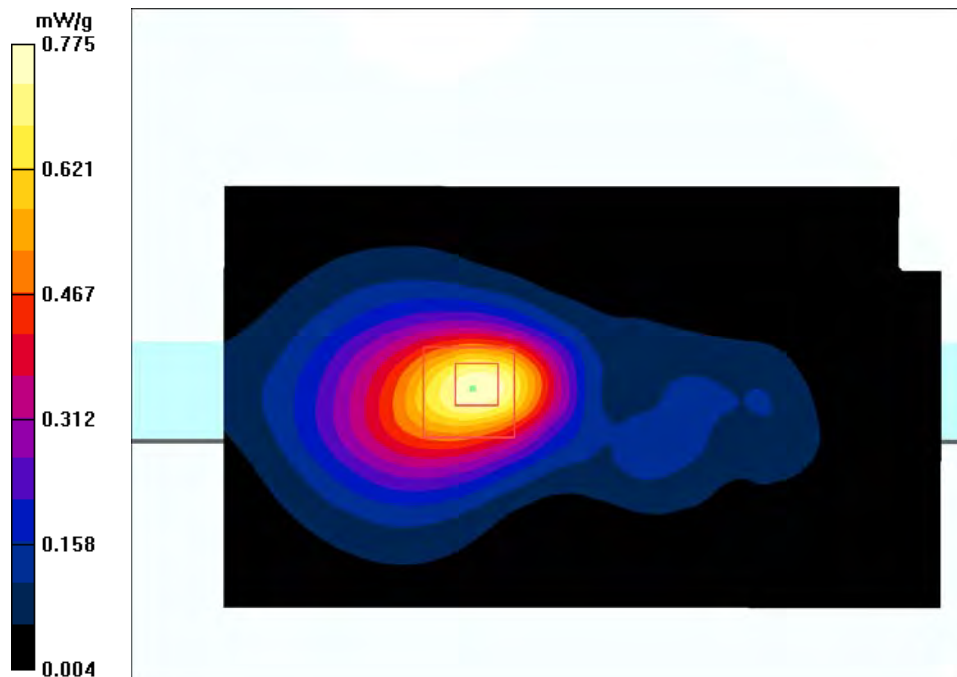

#9

Test Laboratory: Bay Area Compliance Lab Corp. (BACL)

WCDMA Band 4 Top touch to the Phantom - (Mid Channel)

DUT: Motion; Type: Tablet; Serial: Edinburg

Communication System: WCDMA Band 4; Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASY4 (High Precision Assessment)


DASY4 Configuration:

- Probe: ET3DV6 - SN1604; ConvF(4.89, 4.89, 4.89); Calibrated: 8/19/2014
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 8/13/2014
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Top Touch to the Phantom/Area Scan (101x141x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.868 mW/g

Top Touch to the Phantom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 26.5 V/m; Power Drift = -0.065 dB
 Peak SAR (extrapolated) = 1.32 W/kg

SAR (1 g) = 0.796 mW/g; SAR (10 g) = 0.438 mW/g
 Maximum value of SAR (measured) = 0.887 mW/g

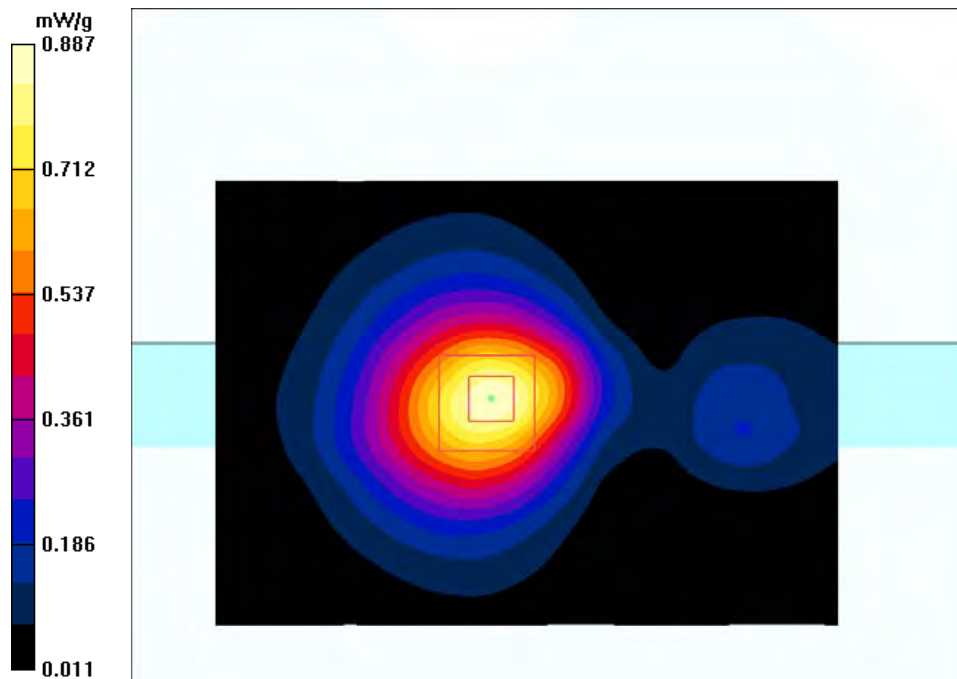

#10

Test Laboratory: Bay Area Compliance Lab Corp. (BACL)

WCDMA Band 5 Top touch to the Phantom - (Mid Channel)

DUT: Motion; Type: Tablet; Serial: Edinburg

Communication System: WCDMA Band_5; Frequency: 836.4 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.41$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DAS4 (High Precision Assessment)


DASY4 Configuration:

- Probe: ET3DV6 - SN1604; ConvF(6.27, 6.27, 6.27); Calibrated: 8/19/2014
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 8/13/2014
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DAS4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Top Touch to the Phantom/Area Scan (101x201x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.546 mW/g

Top Touch to the Phantom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 18.1 V/m; Power Drift = -0.0933 dB
 Peak SAR (extrapolated) = 0.798 W/kg

SAR (1 g) = 0.482 mW/g; SAR (10 g) = 0.292 mW/g
 Maximum value of SAR (measured) = 0.541 mW/g

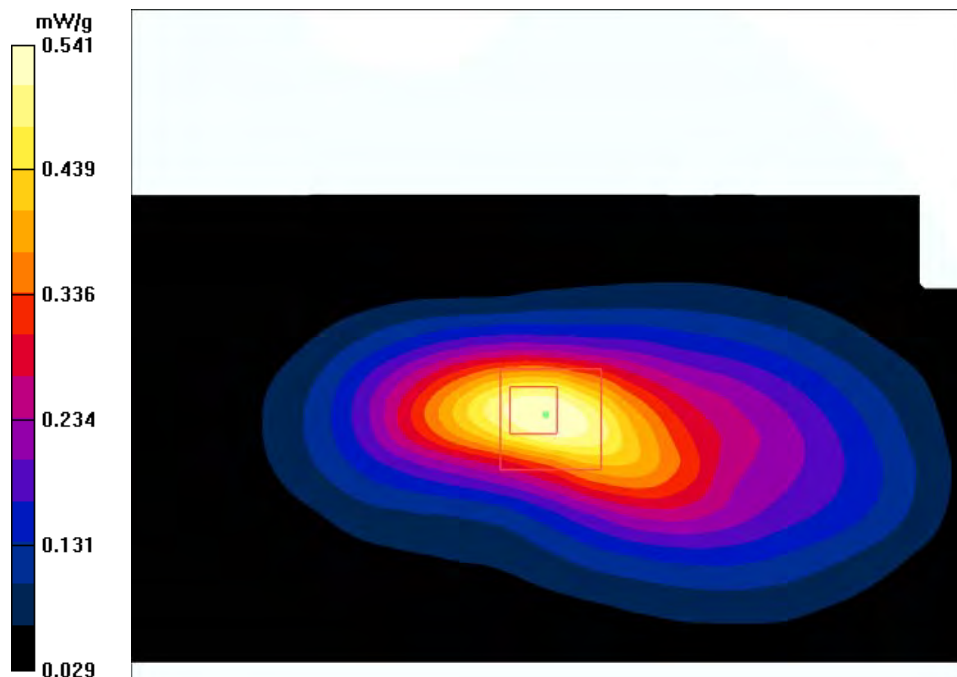

#11

Test Laboratory: Bay Area Compliance Lab Corp. (BACL)

CDMA BC0 Top touch to the Phantom - (Mid Channel)

DUT: Motion; Type: Tablet; Serial: Edinburg

Communication System: CDMA 835; Frequency: 836.52 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.52 \text{ MHz}$; $\sigma = 0.96 \text{ mho/m}$; $\epsilon_r = 55.9$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASY4 (High Precision Assessment)


DASY4 Configuration:

- Probe: ET3DV6 - SN1604; ConvF(6.27, 6.27, 6.27); Calibrated: 8/19/2014
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 8/13/2014
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Top Touch to the Phantom/Area Scan (101x201x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.593 mW/g

Top Touch to the Phantom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 16.1 V/m; Power Drift = -0.131 dB
 Peak SAR (extrapolated) = 0.814 W/kg

SAR (1 g) = 0.514 mW/g; SAR (10 g) = 0.322 mW/g
 Maximum value of SAR (measured) = 0.566 mW/g

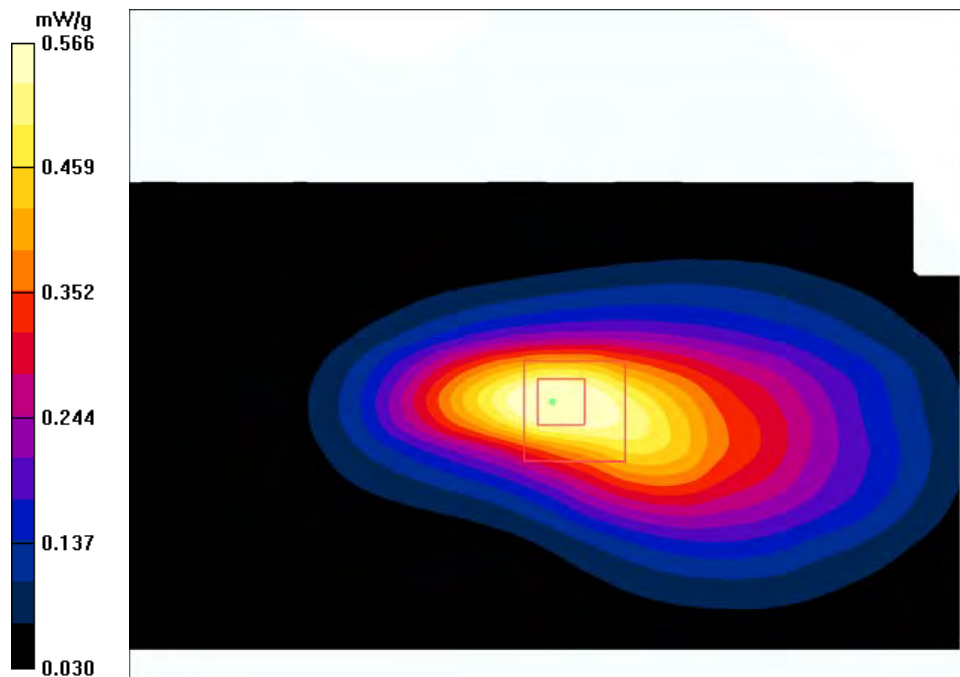

#12

Test Laboratory: Bay Area Compliance Lab Corp. (BACL)

CDMA BC1 Top touch to the Phantom - (Middle Channel)

DUT: Motion; Type: Tablet; Serial: Edinburg

Communication System: CDMA 1900; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DAS4 (High Precision Assessment)


DASY4 Configuration:

- Probe: ET3DV6 - SN1604; ConvF(4.68, 4.68, 4.68); Calibrated: 8/19/2014
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 8/13/2014
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DAS4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Top Touch to the Phantom/Area Scan (101x131x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.773 mW/g

Top Touch to the Phantom/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 21.2 V/m; Power Drift = -0.0595 dB
 Peak SAR (extrapolated) = 1.33 W/kg

SAR (1 g) = 0.686 mW/g; SAR (10 g) = 0.349 mW/g
 Maximum value of SAR (measured) = 0.762 mW/g

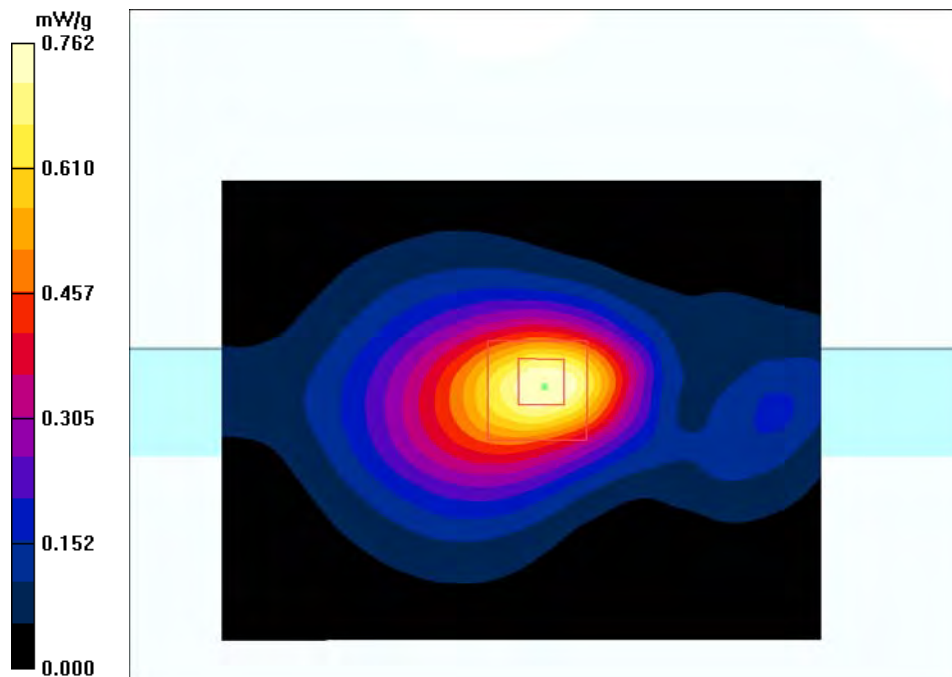

#13

Test Laboratory: Bay Area Compliance Lab Corp. (BACL)**CDMA BC10 Top touch to the Phantom - (Middle Channel)****DUT: Motion; Type: Tablet; Serial: Edinburg**

Communication System: CDMA BC10; Frequency: 820 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 820$ MHz; $\sigma = 0.95$ mho/m; $\epsilon_r = 56$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1604; ConvF(6.27, 6.27, 6.27); Calibrated: 8/19/2014
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 8/13/2014
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DAS4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Top Touch to the Phantom/Area Scan (101x201x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.573 mW/g


Top Touch to the Phantom/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.4 V/m; Power Drift = 0.157 dB

Peak SAR (extrapolated) = 0.797 W/kg

SAR (1 g) = 0.490 mW/g; SAR (10 g) = 0.304 mW/g

Maximum value of SAR (measured) = 0.539 mW/g

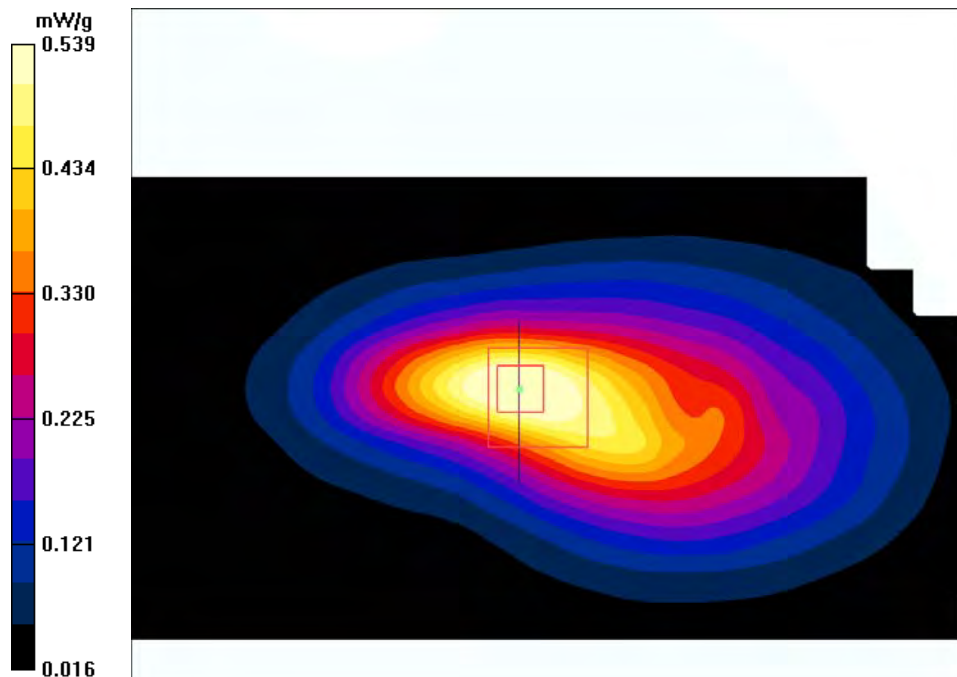

#14

16 Appendix F– Output Power Measurement

Conducted Output Power Measurement Results

GSM (GMSK):

Radio	Frequency (MHz)	Output Average Power (dBm)			
		1 slot		2 slots	
		Measured Power	Target Power	Measured Power	Target Power
GSM 850	824.2	28.13	28	28	27.5
	836.6	28.04	28	27.89	27.5
	848.8	28.02	28	27.87	27.5
GSM 1900	1850.2	25.31	25	25.54	25
	1880	25.42	25	25.33	25
	1909.8	25.24	25	25.47	25

EDGE (8PSK):

Radio	Frequency (MHz)	Output Average Power (dBm)							
		1 slot		2 slots		3 slots		4 slots	
		Measured Power	Target Power	Measured Power	Target Power	Measured Power	Target Power	Measured Power	Target Power
GSM 850	824.2	26.63	27	26.70	27	26.70	27	26.69	27
	836.6	26.72	27	26.66	27	26.76	27	26.77	27
	848.8	26.63	27	26.55	27	26.55	27	26.57	27
GSM 1900	1850.2	25.11	25	25	25	24.99	25	25.08	25
	1880	24.97	25	24.95	25	24.93	25	24.96	25
	1909.8	25.28	25	25.26	25	25.24	25	25.36	25

WCDMA R99:

Radio	Frequency (MHz)	Output Average Power (dBm)	
		Measured Power	Target Power
Band 2	1852.4	22.83	22.5
	1880	22.85	22.5
	1907.6	22.90	22.5
Band 4	1712.4	17.48	17
	1732.6	17.51	17
	1752.6	17.53	17
Band 5	826.4	23.18	23
	836.6	23.09	23
	846.6	23.1	23

R7 HSDPA:

Band	Mode	UL Ch No.	Frequency (MHz)	Average Power (dBm)
Band 2	Subtest 1	9262	1852.4	21.69
		9400	1880	21.84
		9538	1907.6	21.96
	Subtest 2	9262	1852.4	20.89
		9400	1880	21.15
		9538	1907.6	20.95
	Subtest 3	9262	1852.4	21.39
		9400	1880	21.74
		9538	1907.6	21.64
	Subtest 4	9262	1852.4	21.34
		9400	1880	21.68
		9538	1907.6	21.61
Band 4	Subtest 1	1312	1712.4	17.43
		1413	1732.6	17.42
		1513	1752.6	17.18
	Subtest 2	1312	1712.4	16.99
		1413	1732.6	17.05
		1513	1752.6	16.76
	Subtest 3	1312	1712.4	16.95
		1413	1732.6	17.04
		1513	1752.6	16.72
	Subtest 4	1312	1712.4	16.94
		1413	1732.6	16.99
		1513	1752.6	16.69
Band 5	Subtest 1	4132	826.4	22.02
		4183	836.6	22.05
		4233	846.6	22.04
	Subtest 2	4132	826.4	21.7
		4183	836.6	21.69
		4233	846.6	21.64
	Subtest 3	4132	826.4	21.64
		4183	836.6	21.66
		4233	846.6	21.62
	Subtest 4	4132	826.4	21.62
		4183	836.6	21.6
		4233	846.6	21.57

R6 HSUPA:

Band	Mode	UL Ch No.	Frequency (MHz)	Average Power (dBm)
Band 2	Subtest 1	9262	1852.4	21.11
		9400	1880	21.54
		9538	1907.6	21.26
	Subtest 2	9262	1852.4	20.05
		9400	1880	20.28
		9538	1907.6	20.48
	Subtest 3	9262	1852.4	20.55
		9400	1880	20.42
		9538	1907.6	20.2
	Subtest 4	9262	1852.4	20.01
		9400	1880	20.61
		9538	1907.6	20.1
	Subtest 5	9262	1852.4	21.8
		9400	1880	21.72
		9538	1907.6	21.78
Band 4	Subtest 1	1312	1712.4	16.51
		1413	1732.6	16.46
		1513	1752.6	16.58
	Subtest 2	1312	1712.4	15.68
		1413	1732.6	15.35
		1513	1752.6	15.31
	Subtest 3	1312	1712.4	15.84
		1413	1732.6	15.6
		1513	1752.6	15.56
	Subtest 4	1312	1712.4	16.16
		1413	1732.6	15.63
		1513	1752.6	15.03
	Subtest 5	1312	1712.4	17.14
		1413	1732.6	16.92
		1513	1752.6	16.56
Band 5	Subtest 1	4132	826.4	20.93
		4183	836.6	21.18
		4233	846.6	20.45
	Subtest 2	4132	826.4	20.18
		4183	836.6	20.07
		4233	846.6	20.71
	Subtest 3	4132	826.4	20.42
		4183	836.6	20.41
		4233	846.6	20.73
	Subtest 4	4132	826.4	20.53
		4183	836.6	20.33
		4233	846.6	20.48
	Subtest 5	4132	826.4	21.47
		4183	836.6	21.63
		4233	846.6	21.85

CDMA:

Radio	Frequency (MHz)	Output Average Power (dBm)	
		Measured Power	Target Power
BC 0	824.7	20.46	20
	836.52	20.87	20
	848.31	19.98	20
BC 1	1851.25	18.99	18.5
	1880	18.72	18.5
	1908.75	18.81	18.5
BC 10	817.9	21.1	21
	820.5	21.14	21
	823.1	21.34	21

1xEVDO Rev 0:

Radio	Frequency (MHz)	Output Average Power (dBm)	
		Measured Power	Target Power
BC 0	824.7	20.46	20
	836.52	20.52	20
	848.31	19.97	20
BC 1	1851.25	18.99	18.5
	1880	18.66	18.5
	1908.75	18.83	18.5
BC 10	817.9	21.19	21
	820.5	21.17	21
	823.1	21.33	21

1xEVDO Rev A:

Radio	Frequency (MHz)	Output Average Power (dBm)	
		Measured Power	Target Power
BC 0	824.7	20.36	20
	836.52	20.52	20
	848.31	19.87	20
BC 1	1851.25	18.99	18.5
	1880	18.61	18.5
	1908.75	18.83	18.5
BC 10	817.9	21.18	21
	820.5	21.17	21
	823.1	21.33	21

LTE:

Radio	Bandwidth (MHz)	Frequency (MHz)	Modulation	RB Size	RB Offset	Measured Power (dBm)	Target Power (dBm)	
LTE Band 2	5	1852.5	QPSK	1	0	19.64	19.5	
				1	13	19.71	19.5	
				1	24	19.75	19.5	
				12	0	18.52	19.5	
				25	0	18.39	19.5	
			16QAM	1	0	18.78	19.5	
				1	24	19.09	19.5	
				25	0	17.5	19.5	
			1880	QPSK	1	0	19.42	19.5
					1	13	19.54	19.5
		1			24	19.39	19.5	
		12			0	18.62	19.5	
		25			0	18.32	19.5	
		16QAM		1	0	18.5	19.5	
				1	24	18.33	19.5	
				25	0	17.27	19.5	
		1907.5		QPSK	1	0	19.33	19.5
					1	13	19.5	19.5
			1		24	19.42	19.5	
			12		0	18.5	19.5	
			25		0	18.44	19.5	
			16QAM	1	0	18.42	19.5	
				1	24	18.64	19.5	
				25	0	17.47	19.5	

Radio	Bandwidth (MHz)	Frequency (MHz)	Modulation	RB Size	RB Offset	Measured Power (dBm)	Target Power (dBm)
LTE Band 2	10	1855	QPSK	1	0	19.73	19.5
				1	25	19.83	19.5
				1	49	19.9	19.5
				25	0	18.56	19.5
				50	0	18.45	19.5
			16QAM	1	0	18.63	19.5
				1	49	18.67	19.5
				50	0	17.44	19.5
			1880	QPSK	1	0	19.46
		1			25	19.39	19.5
		1			49	19.2	19.5
		25			0	18.39	19.5
		50			0	18.24	19.5
		16QAM		1	0	18.4	19.5
				1	49	18.28	19.5
				50	0	17.16	19.5
		1905		QPSK	1	0	19.22
			1		25	19.48	19.5
			1		49	19.72	19.5
			25		0	18.33	19.5
			50		0	18.32	19.5
			16QAM	1	0	18.84	19.5
				1	49	18.27	19.5
				50	0	17.37	19.5

Radio	Bandwidth (MHz)	Frequency (MHz)	Modulation	RB Size	RB Offset	Measured Power (dBm)	Target Power (dBm)
LTE Band 2	15	1857.5	QPSK	1	0	19.7	19.5
				1	38	19.92	19.5
				1	74	19.6	19.5
				36	0	18.52	19.5
				75	0	18.28	19.5
			16QAM	1	0	18.54	19.5
				1	74	18.17	19.5
				75	0	17.3	19.5
			1880	QPSK	1	0	19.46
		1			38	19.47	19.5
		1			74	19.25	19.5
		36			0	18.25	19.5
		75			0	18.14	19.5
		16QAM		1	0	18.93	19.5
				1	74	18.09	19.5
				75	0	17.18	19.5
		1902.5		QPSK	1	0	19.46
			1		38	19.24	19.5
			1		74	19.33	19.5
			36		0	17.93	19.5
			75		0	18.16	19.5
			16QAM	1	0	19.04	19.5
				1	74	19.12	19.5
				75	0	17.19	19.5

Radio	Bandwidth (MHz)	Frequency (MHz)	Modulation	RB Size	RB Offset	Measured Power (dBm)	Target Power (dBm)
LTE Band 2	20	1860	QPSK	1	0	19.58	19.5
				1	50	19.77	19.5
				1	99	19.6	19.5
				50	0	18.43	19.5
				100	0	18.38	19.5
			16QAM	1	0	18.72	19.5
				1	99	18.69	19.5
				100	0	17.44	19.5
			1880	QPSK	1	0	19.76
		1			50	19.69	19.5
		1			99	19.71	19.5
		50			0	18.24	19.5
		100			0	18.46	19.5
		16QAM		1	0	18.89	19.5
				1	99	18.83	19.5
				100	0	17.34	19.5
		1900		QPSK	1	0	19.41
			1		50	19.5	19.5
			1		99	19.67	19.5
			50		0	18.19	19.5
			100		0	18.47	19.5
			16QAM	1	0	19.1	19.5
				1	99	19.51	19.5
				100	0	17.42	19.5

Radio	Bandwidth (MHz)	Frequency (MHz)	Modulation	RB Size	RB Offset	Measured Power (dBm)	Target Power (dBm)
LTE Band 4	5	1712.5	QPSK	1	0	17	17.5
				1	13	17.43	17.5
				1	24	17.42	17.5
				12	0	16.39	17.5
				25	0	16.26	17.5
			16 QAM	1	0	16.39	17.5
				1	24	16.35	17.5
				25	0	15.32	17.5
			1732.5	QPSK	1	0	17.67
		1			13	17.72	17.5
		1			24	17.88	17.5
		12			0	16.43	17.5
		25			0	16.28	17.5
		16 QAM		1	0	16.93	17.5
				1	24	17.13	17.5
				25	0	16.87	17.5
		1752.5		QPSK	1	0	17.9
			1		13	17.12	17.5
			1		24	17.81	17.5
			12		0	17.02	17.5
			25		0	16.42	17.5
			16 QAM	1	0	17.01	17.5
				1	24	16.37	17.5
				25	0	15.51	17.5

Radio	Bandwidth (MHz)	Frequency (MHz)	Modulation	RB Size	RB Offset	Measured Power (dBm)	Target Power (dBm)
LTE Band 4	10	1715	QPSK	1	0	17.22	17.5
				1	25	17.48	17.5
				1	49	17.5	17.5
				25	0	16.36	17.5
				50	0	16.11	17.5
			16 QAM	1	0	16.37	17.5
				1	49	16.45	17.5
				50	0	15.36	17.5
			1732.5	QPSK	1	0	17.35
		1			25	17.36	17.5
		1			49	17.39	17.5
		25			0	16.17	17.5
		50			0	16.65	17.5
		16 QAM		1	0	16.53	17.5
				1	49	16.91	17.5
				50	0	15.47	17.5
		1750		QPSK	1	0	17.73
			1		25	17.5	17.5
			1		49	17.67	17.5
			25		0	16.28	17.5
			50		0	16.51	17.5
			16 QAM	1	0	17.07	17.5
				1	49	17.47	17.5
				50	0	15.36	17.5

Radio	Bandwidth (MHz)	Frequency (MHz)	Modulation	RB Size	RB Offset	Measured Power (dBm)	Target Power (dBm)
LTE Band 4	15	1717.5	QPSK	1	0	17.86	17.5
				1	38	17.14	17.5
				1	74	17.59	17.5
				36	0	16.17	17.5
				75	0	16.06	17.5
			16 QAM	1	0	16.4	17.5
				1	74	16.5	17.5
				75	0	15.04	17.5
			1732.5	QPSK	1	0	17.62
		1			38	17.68	17.5
		1			74	17.92	17.5
		36			0	16.18	17.5
		75			0	16.5	17.5
		16 QAM		1	0	17	17.5
				1	74	16	17.5
				75	0	15.37	17.5
		1747.5		QPSK	1	0	17.88
			1		38	17.89	17.5
			1		74	17.65	17.5
			36		0	16.22	17.5
			75		0	16.25	17.5
			16 QAM	1	0	17.02	17.5
				1	74	17.33	17.5
				75	0	15.3	17.5

Radio	Bandwidth (MHz)	Frequency (MHz)	Modulation	RB Size	RB Offset	Measured Power (dBm)	Target Power (dBm)
LTE Band 4	20	1720	QPSK	1	0	17.63	17.5
				1	50	18.43	17.5
				1	99	17.66	17.5
				50	0	16.22	17.5
				100	0	16.16	17.5
			16 QAM	1	0	16.56	17.5
		1	99	16.99	17.5		
		100	0	15.22	17.5		
		1732.5	QPSK	1	0	17.52	17.5
				1	50	17.99	17.5
				1	99	18.15	17.5
				50	0	16.03	17.5
				100	0	16.59	17.5
			16 QAM	1	0	16.9	17.5
		1	99	17.23	17.5		
		100	0	15.57	17.5		
		1745	QPSK	1	0	17.8	17.5
				1	50	17.79	17.5
				1	99	17.69	17.5
				50	0	16.48	17.5
				100	0	16.58	17.5
			16 QAM	1	0	17.52	17.5
			1	99	17.23	17.5	
			100	0	15.59	17.5	

Radio	Bandwidth (MHz)	Frequency (MHz)	Modulation	RB Size	RB Offset	Measured Power (dBm)	Target Power (dBm)
LTE Band 5	5	826.5	QPSK	1	0	22.29	22.5
				1	13	22.27	22.5
				1	24	22.32	22.5
				12	0	21.15	22.5
				25	0	21.28	22.5
			16 QAM	1	0	21.76	22.5
				1	24	21.57	22.5
				25	0	20.22	22.5
			836.5	QPSK	1	0	22.34
		1			13	22.5	22.5
		1			24	21.99	22.5
		12			0	20.95	22.5
		25			0	20.98	22.5
		16 QAM		1	0	21.22	22.5
				1	24	21.37	22.5
				25	0	20.2	22.5
		846.5		QPSK	1	0	22.27
			1		13	22.11	22.5
			1		24	21.85	22.5
			12		0	21.25	22.5
			25		0	20.98	22.5
			16 QAM	1	0	20.42	22.5
				1	24	21.22	22.5
				25	0	20.51	22.5

Radio	Bandwidth (MHz)	Frequency (MHz)	Modulation	RB Size	RB Offset	Measured Power (dBm)	Target Power (dBm)
LTE Band 5	10	829	QPSK	1	0	22.64	22.5
				1	25	22.41	22.5
				1	49	22.58	22.5
				25	0	21.09	22.5
				50	0	21.15	22.5
			16 QAM	1	0	21.37	22.5
		1	49	21.34	22.5		
		50	0	20.12	22.5		
		836.5	QPSK	1	0	22.51	22.5
				1	25	22.09	22.5
				1	49	22.5	22.5
				25	0	21.01	22.5
				50	0	20.95	22.5
			16 QAM	1	0	22.08	22.5
			1	49	22.29	22.5	
			50	0	20.24	22.5	
		844	QPSK	1	0	22.18	22.5
				1	25	22.21	22.5
				1	49	22.24	22.5
				25	0	21.31	22.5
				50	0	21.33	22.5
			16 QAM	1	0	22.09	22.5
			1	49	21.89	22.5	
			50	0	20.07	22.5	

Radio	Bandwidth (MHz)	Frequency (MHz)	Modulation	RB Size	RB Offset	Measured Power (dBm)	Target Power (dBm)	
LTE Band 13	5	779.5	QPSK	1	0	22.09	22	
				1	13	22.41	22	
				1	24	22.45	22	
				12	0	21.53	22	
				25	0	21.41	22	
			16 QAM	1	0	21.58	22	
				1	24	21.67	22	
				25	0	20.47	22	
			782	QPSK	1	0	22.68	22
					1	13	22.55	22
		1			24	22.49	22	
		12			0	21.6	22	
		25			0	21.32	22	
		16 QAM		1	0	21.44	22	
				1	24	21.52	22	
				25	0	20.33	22	
		784.5		QPSK	1	0	22.43	22
					1	13	22.46	22
			1		24	22.16	22	
			12		0	21.38	22	
			25		0	21.21	22	
			16 QAM	1	0	21.51	22	
				1	24	21.5	22	
				25	0	20.33	22	
LTE Band 13	10		782	QPSK	1	0	22.26	22
					1	25	22.5	22
		1			49	22.44	22	
		25			0	21.34	22	
		50			0	21.32	22	
		16 QAM		1	0	21.18	22	
				1	49	20.8	22	
				50	0	20.44	22	

Radio	Bandwidth (MHz)	Frequency (MHz)	Modulation	RB Size	RB Offset	Measured Power (dBm)	Target Power (dBm)	
LTE Band 17	5	706.5	QPSK	1	0	22.15	22	
				1	13	22.17	22	
				1	24	22.72	22	
				12	0	21.32	22	
				25	0	21.57	22	
			16 QAM	1	0	21.25	22	
				1	24	21.68	22	
				25	0	20.11	22	
			710	QPSK	1	0	22.52	22
					1	13	22.23	22
		1			24	22.27	22	
		12			0	21.68	22	
		25			0	21.44	22	
		16 QAM		1	0	21.2	22	
				1	24	21.34	22	
				25	0	20.23	22	
		713.5		QPSK	1	0	22.15	22
					1	13	22.14	22
			1		24	21.95	22	
			12		0	21.28	22	
			25		0	21.17	22	
			16 QAM	1	0	20.61	22	
				1	24	20.96	22	
				25	0	20.31	22	
LTE Band 17	10		710	QPSK	1	0	22.31	22
					1	25	22.45	22
		1			49	22.49	22	
		25			0	21.2	22	
		50			0	21.22	22	
		16 QAM		1	0	21.67	22	
				1	49	21.54	22	
				50	0	20.27	22	

Radio	Bandwidth (MHz)	Frequency (MHz)	Modulation	RB Size	RB Offset	Measured Power (dBm)	Target Power (dBm)
LTE Band 25	5	1852.5	QPSK	1	0	19.85	19.5
				1	13	19.93	19.5
				1	24	19.83	19.5
				12	0	18.84	19.5
				25	0	18.67	19.5
			16 QAM	1	0	18.11	19.5
		1	24	18.56	19.5		
		25	0	17.67	19.5		
		1882.5	QPSK	1	0	19.75	19.5
				1	13	19.58	19.5
				1	24	19.54	19.5
				12	0	18.78	19.5
				25	0	18.47	19.5
			16 QAM	1	0	18.11	19.5
		1	24	18.55	19.5		
		25	0	17.68	19.5		
		1912.5	QPSK	1	0	19.48	19.5
				1	13	19.39	19.5
				1	24	19.74	19.5
				12	0	18.48	19.5
				25	0	18.62	19.5
			16 QAM	1	0	18.77	19.5
			1	24	18.71	19.5	
			25	0	17.47	19.5	

Radio	Bandwidth (MHz)	Frequency (MHz)	Modulation	RB Size	RB Offset	Measured Power (dBm)	Target Power (dBm)		
LTE Band 25	10	1855	QPSK	1	0	19.87	19.5		
				1	25	20.03	19.5		
				1	49	20.03	19.5		
				25	0	18.84	19.5		
				50	0	18.71	19.5		
			16 QAM	1	0	18.78	19.5		
				1	49	18.69	19.5		
				50	0	17.83	19.5		
			1882.5	QPSK	1	0	19.6	19.5	
		1			25	19.53	19.5		
		1			49	19.58	19.5		
		25			0	18.67	19.5		
		50			0	18.42	19.5		
		16 QAM			1	0	18.68	19.5	
				1	49	17.97	19.5		
				50	0	18.19	19.5		
				1910	QPSK	1	0	20.64	19.5
						1	25	19.49	19.5
						1	49	19.33	19.5
		25				0	18.77	19.5	
		50	0			18.74	19.5		
		16 QAM	1		0	20.43	19.5		
			1		49	18.9	19.5		
			50		0	17.63	19.5		

Radio	Bandwidth (MHz)	Frequency (MHz)	Modulation	RB Size	RB Offset	Measured Power (dBm)	Target Power (dBm)
LTE Band 25	15	1857.5	QPSK	1	0	19.63	19.5
				1	38	19.65	19.5
				1	74	20.12	19.5
				36	0	18.66	19.5
				75	0	18.67	19.5
			16 QAM	1	0	18.66	19.5
				1	74	18.58	19.5
				75	0	17.55	19.5
			1882.5	QPSK	1	0	19.73
		1			38	19.55	19.5
		1			74	19.58	19.5
		36			0	18.48	19.5
		75			0	18.36	19.5
		16 QAM		1	0	18.41	19.5
				1	74	19.08	19.5
				75	0	17.37	19.5
		1907.5		QPSK	1	0	19.41
			1		38	19.84	19.5
			1		74	19.54	19.5
			36		0	18.56	19.5
			75		0	18.56	19.5
			16 QAM	1	0	19.21	19.5
				1	74	18.76	19.5
				75	0	17.56	19.5

Radio	Bandwidth (MHz)	Frequency (MHz)	Modulation	RB Size	RB Offset	Measured Power (dBm)	Target Power (dBm)
LTE Band 25	20	1860	QPSK	1	0	20.14	19.5
				1	50	20.69	19.5
				1	99	19.77	19.5
				50	0	18.58	19.5
				100	0	18.8	19.5
			16 QAM	1	0	18.97	19.5
				1	99	18.75	19.5
				100	0	17.68	19.5
		1882.5	QPSK	1	0	19.71	19.5
				1	50	19.54	19.5
				1	99	19.4	19.5
				50	0	18.46	19.5
				100	0	18.47	19.5
			16 QAM	1	0	19.34	19.5
				1	99	19.08	19.5
				100	0	17.36	19.5
		1905	QPSK	1	0	19.37	19.5
				1	50	19.79	19.5
				1	99	19.6	19.5
				50	0	18.26	19.5
				100	0	18.38	19.5
			16 QAM	1	0	18.53	19.5
				1	99	18.83	19.5
				100	0	17.4	19.5

Power reduction

Radio	Modulation	Slot	Reduced Power (dB)
GSM 850	GMSK	1	5
	GMSK	2	5
GSM 1900	GMSK	1	4
	GMSK	2	4


Radio	Band	Reduced Power (dB)
WCDMA	4	5

Radio	Band	Reduced Power (dB)
CDMA	BC 0	3.1
	BC 1	5
	BC 10	2.5


Radio	Bandwidth (MHz)	Modulation	Reduced Power (dB)
LTE Band 2	5	QPSK	3
		16 QAM	3
	10	QPSK	3
		16 QAM	3
	15	QPSK	3
		16 QAM	3
10	QPSK	3	
	16 QAM	3	
LTE Band 4	5	QPSK	5
		16 QAM	5
	10	QPSK	5
		16 QAM	5
	15	QPSK	5
		16 QAM	5
	10	QPSK	5
		16 QAM	5
LTE Band 25	5	QPSK	2.4
		16 QAM	2.4
	10	QPSK	2.4
		16 QAM	2.4
	15	QPSK	2.4
		16 QAM	2.4
	10	QPSK	2.4
		16 QAM	2.4

17 Appendix G – Test Setup Photos

17.1 Tablet Back Side Touches to the Flat Phantom

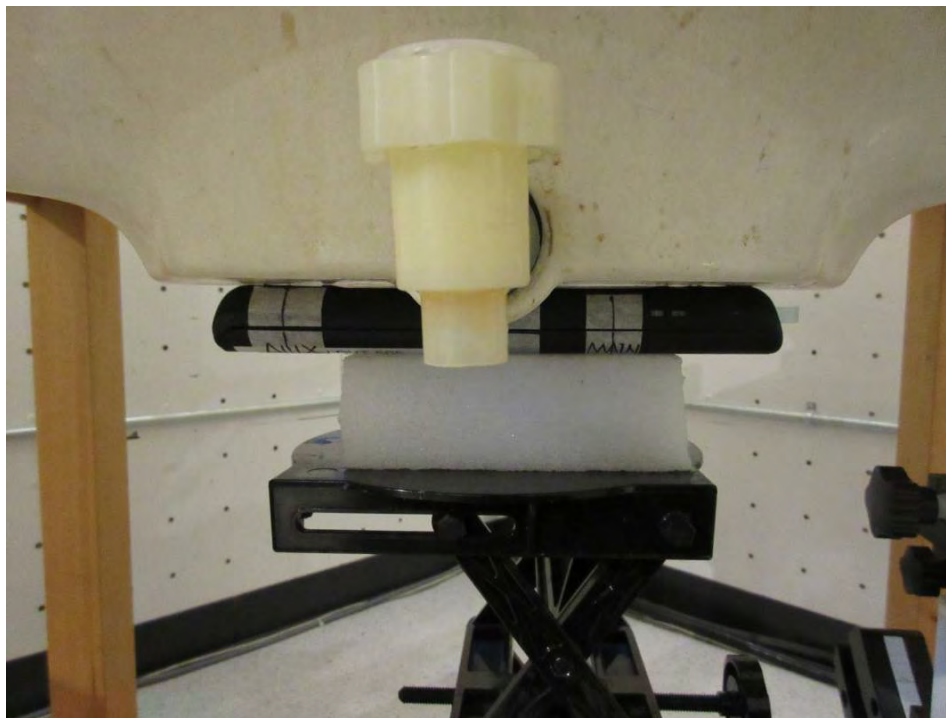

17.2 Tablet Top Edge Touches to the Flat Phantom

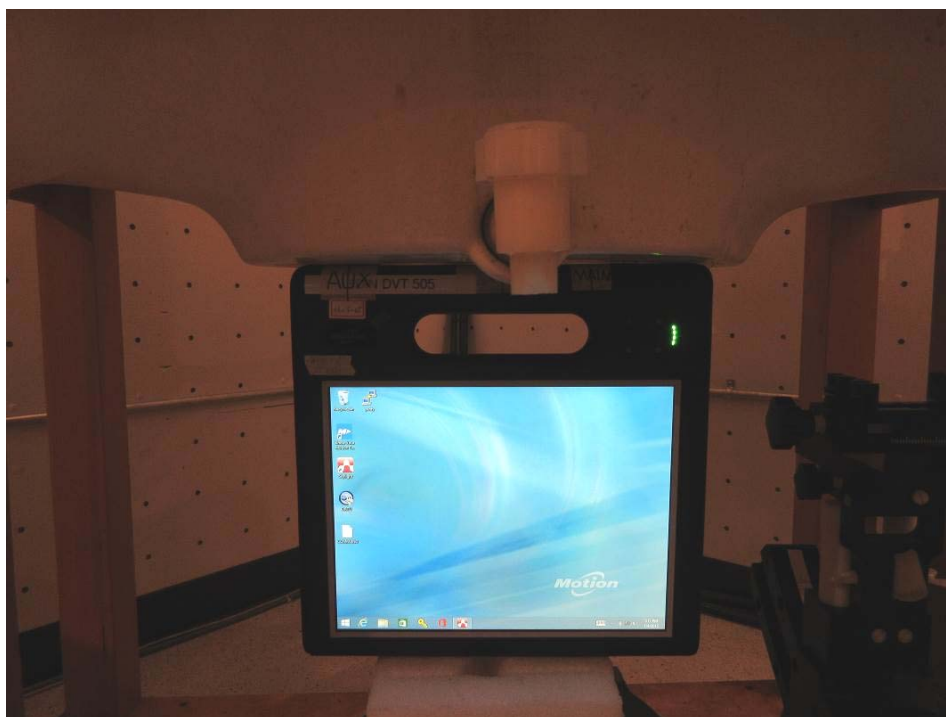

17.3 Tablet Right Edge Touches to the Flat Phantom



18 Appendix H – EUT Photos

18.1 Tablet – Front View



18.2 Tablet – Back View



18.3 Tablet – Top Edge and Right Edge View



18.4 Tablet – Bottom Edge and Left Edge View



18.5 Tablet – Open Case View



19 Appendix I - Informative References

- [1] Federal Communications Commission, \Report and order: Guidelines for evaluating the environmental effects of radiofrequency radiation", Tech. Rep. FCC 96-326, FCC, Washington, D.C. 20554, 1996.
- [2] David L. Means Kwok Chan, Robert F. Cleveland, \Evaluating compliance with FCC guidelines for human exposure to radiofrequency electromagnetic fields", Tech. Rep., Federal Communication Commission, Office of Engineering & Technology, Washington, DC, 1997.
- [3] Thomas Schmid, Oliver Egger, and Niels Kuster, \Automated E-field scanning system for dosimetric assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp. 105{113, Jan. 1996.
- [4] Niels Kuster, Ralph Kastle, and Thomas Schmid, \Dosimetric evaluation of mobile communications equipment with known precision", IEICE Transactions on Communications, vol. E80-B, no. 5, pp. 645{652, May 1997.
- [5] CENELEC, \Considerations for evaluating of human exposure to electromagnetic fields (EMFs) from mobile telecommunication equipment (MTE) in the frequency range 30MHz - 6GHz", Tech. Rep., CENELEC, European Committee for Electrotechnical Standardization, Brussels, 1997.
- [6] ANSI, ANSI/IEEE C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.
- [7] Katja Pokovic, Thomas Schmid, and Niels Kuster, \Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies", in ICECOM _ 97, Dubrovnik, October 15{17, 1997, pp. 120-24.
- [8] Katja Pokovic, Thomas Schmid, and Niels Kuster, \E-field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23{25 June, 1996, pp. 172-175.
- [9] Volker Hombach, Klaus Meier, Michael Burkhardt, Eberhard Kuhn, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 900 MHz", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1865-1873, Oct. 1996.
- [10] Klaus Meier, Ralf Kastle, Volker Hombach, Roger Tay, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 1800 MHz", IEEE Transactions on Microwave Theory and Techniques, Oct. 1997, in press.
- [11] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [12] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992. Dosimetric Evaluation of Sample device, month 1998 9
- [13] NIS81 NAMAS, \The treatment of uncertainty in EMC measurement", Tech. Rep., NAMAS Executive, National Physical Laboratory, Teddington, Middlesex, England, 1994.
- [14] Barry N. Taylor and Christ E. Kuyatt, \Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994. Dosimetric Evaluation of Sample device, month 1998 10.

--- END OF REPORT ---