



No. 1 Workshop, M-10, Middle Section, Science & Technology
Park, District Shenzhen, China 518057
Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: sgs_internet_operations@sgs.com
FEDERAL COMMUNICATIONS COMMISSION
Registration number: 556682

Report No.: SZEMO080301028ETF
Page: 1 of 10

TEST REPORT

Application No.: SZEMO080301028ETF(SZ SGS NO.:SZTYR080300957/EL)
Applicant: NEW-RAY TOYS CO., LTD.
FCC ID: Q4S87695
Fundamental Frequency : 27.145MHz
Equipment Under Test (EUT):
Name: Radio Remote Control Watch Vehicles Series(SUV)
Item No.: 87695
Assortment No.: 80000-99999
Labelled Age Grading: 5 year& up
Country of Destination: USA
Standards: FCC PART 15, SUBPART C
Section 15.227:2007
Date of Receipt: 31 March 2008
Date of Test: 31 March to 10 April 2008
Date of Issue: 11 April 2008

| | |
|----------------------|---------------|
| Test Result : | PASS * |
|----------------------|---------------|

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Robinson Lo
Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



2 Test Summary

| Test | Test Requirement | Standard Paragraph | Result |
|---|-------------------|--------------------|--------|
| Radiated Emission (25MHz to 1000MHz) | FCC PART 15 :2007 | Section 15.227 | PASS |
| Occupied Bandwidth | FCC PART 15 :2007 | Section 15.215 | PASS |

Tx: In this whole report Tx (or tx) means Transmitter.

RF: In this whole report RF means Radiated Frequency.



3 Contents

| | Page |
|--|------|
| 1 COVER PAGE | 1 |
| 2 TEST SUMMARY | 2 |
| 3 CONTENTS | 3 |
| 4 GENERAL INFORMATION..... | 4 |
| 4.1 CLIENT INFORMATION | 4 |
| 4.2 DETAILS OF E.U.T. | 4 |
| 4.3 DESCRIPTION OF SUPPORT UNITS..... | 4 |
| 4.4 TEST LOCATION | 4 |
| 4.5 OTHER INFORMATION REQUESTED BY THE CUSTOMER..... | 4 |
| 4.6 TEST FACILITY | 5 |
| 5 TEST RESULTS | 6 |
| 5.1 TEST INSTRUMENTS..... | 6 |
| 5.2 E.U.T. OPERATION..... | 7 |
| 5.3 TEST PROCEDURE & MEASUREMENT DATA | 7 |
| 5.3.1 <i>Radiated Emissions</i> | 7 |
| 5.3.2 <i>Occupied Bandwidth</i> | 10 |

4 General Information

4.1 Client Information

Applicant: NEW-RAY TOYS CO., LTD
Address of Applicant: UNIT 9, 12/ F., HOUSTON CENTRE, 63 MODY ROAD, TSIMSHATSUI EAST, KOWLOON, H.K

4.2 Details of E.U.T.

Power Supply: 6.0V DC(4*1.5V'LR44')+1.5V DC(1*1.5V'XLR41')for Tx ;
Power Cord: N/A-

4.3 Description of Support Units

The EUT was tested as an independent unit: 27MHz radio transmitter.

4.4 Test Location

All tests were performed at:

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, District Shenzhen, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

No tests were sub-contracted.

4.5 Other Information Requested by the Customer

None.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **VCCI**

The 3m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197 and C-2383 respectively. Date of Registration: September 29, 2008. Valid until September 28, 2011.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 556682, June 27, 2008.

- **Industry Canada (IC)**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

5 Test Results

5.1 Test Instruments

| RE in Chamber | | | | | | |
|---------------|--------------------------------|----------------------|-----------------------------|---------------|---------------------|-------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (dd-mm-yy) | Cal.Due date (dd-mm-yy) |
| 1 | 3m Semi-Anechoic Chamber | ETS-LINDGREN | N/A | SEL0017 | 16-06-2007 | 15-06-2009 |
| 2 | EMI Test Receiver | Rohde & Schwarz | ESIB26 | SEL0023 | 12-12-2008 | 11-12-2009 |
| 3 | EMI Test software | AUDIX | E3 | SEL0050 | N/A | N/A |
| 4 | Coaxial cable | SGS | N/A | SEL0028 | 18-06-2008 | 17-06-2009 |
| 5 | BiConiLog Antenna (26-3000MHz) | ETS-LINDGREN | 3142C | SEL0014 | 12-08-2008 | 11-08-2009 |
| 6 | Pre-amplifier (0.1-1300MHz) | Agilent Technologies | 8447D | SEL0053 | 18-06-2008 | 17-06-2009 |
| 7 | Double-ridged horn (1-18GHz) | ETS-LINDGREN | 3117 | SEL0005 | 12-08-2008 | 11-08-2009 |
| 8 | Horn Antenna (18-26GHz) | ETS-LINDGREN | 3160 | SEL0076 | 12-08-2008 | 11-08-2009 |
| 9 | Pre-amplifier (1-18GHz) | Rohde & Schwarz | AFS42-00101 800-25-S-42 | SEL0081 | 18-06-2008 | 17-06-2009 |
| 10 | Pre-amplifier (18-26GHz) | Rohde & Schwarz | AFS33-18002 650-30-8P-44 | SEL0080 | 18-06-2008 | 17-06-2009 |
| 11 | Band filter | Amindeon | 82346 | SEL0094 | 18-06-2008 | 17-06-2009 |
| 12 | Active Loop Antenna | Beijing Daze | ZN30900A | SEL0097 | 15-06-2008 | 14-06-2009 |

5.2 E.U.T. Operation

| | |
|------------------------|------------------------------------|
| Operating Environment: | |
| Temperature: | 26.0 °C |
| Humidity: | 51% RH |
| Atmospheric Pressure: | 1020mbar |
| EUT Operation: | Test the EUT in transmitting mode. |

5.3 Test Procedure & Measurement Data

5.3.1 Radiated Emissions

| | |
|------------------------------|--|
| Test Requirement: | FCC Part15 C Section 15.227 |
| Test Method: | ANSI C63.4: 2003 |
| Measurement Distance: | 3m (Semi-Anechoic Chamber) |
| Requirements: | Carrier frequency will not exceed 80dBuV/m AT 3m. Out of band emissions shall not exceed: 40.0 dB μ V/m between 30MHz & 88MHz 43.5 dB μ V/m between 88MHz & 216MHz 46.0 dB μ V/m between 216MHz & 960MHz 54.0 dB μ V/m above 960MHz |
| Detector: | Peak Scan (9kHz resolution bandwidth for 9kHz to 30MHz; 120kHz resolution bandwidth for 30MHz to 1000MHz) |

Test Procedure:

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

27.145MHz Mode.

Test Procedure: For testing performed with the loop antenna, testing was performed in accordance to ANSI C63.4 section 8.2.1. The center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

Horizontal.

| Test Frequency (MHz) | Peak (dBµV/m) | Limits (dBµV/m) | Margin (dB) |
|----------------------|---------------|-----------------|-------------|
| | X | | X |
| 27.145 | 57.4 | 100.0 | 42.6 |

| Test Frequency (MHz) | Average (dBµV/m) | Limits (dBµV/m) | Margin (dB) |
|----------------------|------------------|-----------------|-------------|
| | X | | X |
| 27.145 | 53.2 | 80.0 | 46.8 |

Vertical.

| Test Frequency (MHz) | Peak (dBµV/m) | Limits (dBµV/m) | Margin (dB) |
|----------------------|---------------|-----------------|-------------|
| | X | | X |
| 27.145 | 65.7 | 100.0 | 34.3 |

| Test Frequency (MHz) | Average (dBµV/m) | Limits (dBµV/m) | Margin (dB) |
|----------------------|------------------|-----------------|-------------|
| | X | | X |
| 27.145 | 62.5 | 80.0 | 17.5 |

Y: EUT as per photograph in section 5.3.3 of this report.

X: As Y, but rotate EUT by 90° clockwise.

Z: As X, but rotate EUT by 90° vertically.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Other emissions

Horizontal.

| Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Read Level (dBuV) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) |
|-----------------|-----------------------|-----------------|--------------------|-------------------|----------------|---------------------|-----------------|
| 54.250 | 7.92 | 0.80 | 28.08 | 39.03 | 19.67 | 40.00 | -20.33 |
| 78.625 | 7.61 | 1.06 | 28.00 | 32.01 | 12.68 | 40.00 | -27.32 |
| 134.200 | 7.88 | 1.29 | 27.57 | 30.06 | 11.66 | 43.50 | -31.84 |
| 186.850 | 10.03 | 1.38 | 27.22 | 29.50 | 13.69 | 43.50 | -29.81 |
| 232.675 | 11.76 | 1.59 | 26.99 | 28.42 | 14.78 | 46.00 | -31.22 |
| 281.425 | 13.07 | 1.82 | 26.79 | 29.80 | 17.90 | 46.00 | -28.10 |

Vertical.

| Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Read Level (dBuV) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) |
|-----------------|-----------------------|-----------------|--------------------|-------------------|----------------|---------------------|-----------------|
| 54.250 | 7.64 | 0.80 | 28.08 | 44.49 | 24.85 | 40.00 | -15.15 |
| 78.625 | 7.61 | 1.06 | 28.00 | 37.03 | 17.70 | 40.00 | -22.30 |
| 93.250 | 8.84 | 1.13 | 27.92 | 32.94 | 14.99 | 43.50 | -28.51 |
| 105.925 | 8.81 | 1.22 | 27.82 | 33.20 | 15.41 | 43.50 | -28.09 |
| 133.225 | 7.84 | 1.29 | 27.58 | 33.60 | 15.15 | 43.50 | -28.35 |
| 188.800 | 10.07 | 1.38 | 27.21 | 30.73 | 14.97 | 43.50 | -28.53 |

Remark:

According to 15.35 (b) When average radiated emission measurements are specified in the regulations, including emission measurements below 1000 MHz, there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules, e.g., see Section 15.255.

Test Results: The unit does meet the FCC Part 15 C Section 15.227 requirements.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."


5.3.2 Occupied Bandwidth

Test Requirement: FCC Part 15 C Section 15.215 (C) and Section 15.227.
Test Method: ANSI C63.4: 2003
Operation within the band 26.960 – 27.280 MHz .

26.960–27.280MHz Mode.

Requirements: Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the 20 dB bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Method of measurement: The useful radiated emission from the EUT was detected by the spectrum analyser with peak detector. The vertical Scale is set to 10dB per division. The horizontal scale is set to 32KHz per division.

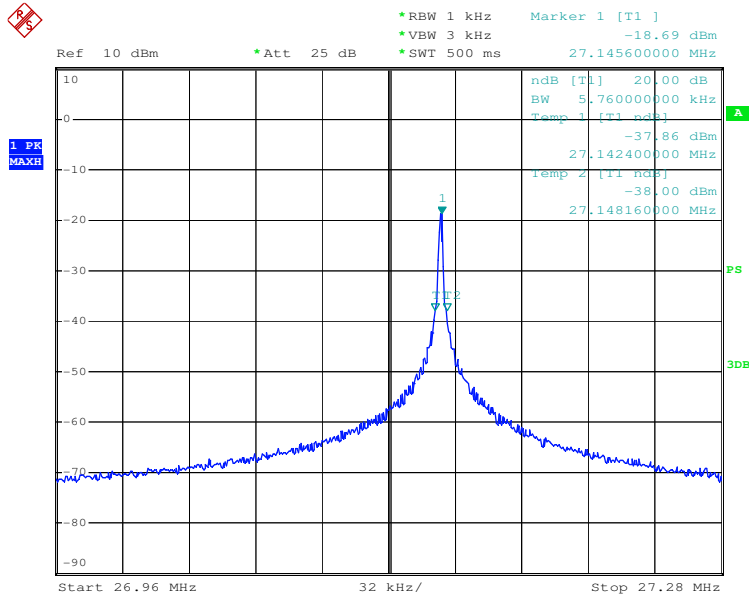

Date: 1.APR.2008 14:37:26

The results: The unit does meet the FCC Part 15 C Section 15.215 requirements

“This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company’s findings at the time of its intervention only and within the limits of Client’s instructions, if any. The Company’s sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.”