



No. 1 Workshop, M-10, Middle Section, Science & Technology
Park, District Shenzhen, China 518057
Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: sgs_internet_operations@sgs.com
FEDERAL COMMUNICATIONS COMMISSION
Registration number: 556682

Report No.: SZEMO080300888ETF
Page: 1 of 10

TEST REPORT

Application No. : SZEMO080300888ET(SGS SZ NO.: SZTYR080300832/EL)
Applicant: NEW-RAY TOYS CO., LTD
FCC ID: Q4S89933
Fundamental Frequency : 27.145MHz
Equipment Under Test (EUT):
EUT Name: RADIO REMOTE CONTROL SCALE 1:18 FORMULA ONE
Model No.: 89933(Assortment No. 80000-89999)
Country of Origin: CHINA
Country of Destination: U.S.A. & EU
Standards: FCC PART 15, SUBPART C : 2007
Section 15.227
Date of Receipt: 24 March 2008
Date of Test: 25 to 27 March 2008
Date of Issue: 02 April 2008

Test Result :	PASS *
----------------------	---------------

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Robinson Lo
Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

2 Test Summary

Test	Test Requirement	Standard Paragraph	Result
Radiated Emission (25MHz to 1000MHz)	FCC PART 15 :2007	Section 15.227	PASS
Occupied Bandwidth	FCC PART 15 :2007	Section 15.215	PASS

Tx: In this whole report Tx (or tx) means Transmitter.

RF: In this whole report RF means Radiated Frequency.



3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 GENERAL INFORMATION.....	4
4.1 CLIENT INFORMATION.....	4
4.2 DETAILS OF E.U.T.	4
4.3 DESCRIPTION OF SUPPORT UNITS.....	4
4.4 TEST LOCATION	4
4.5 OTHER INFORMATION REQUESTED BY THE CUSTOMER	4
4.6 TEST FACILITY	5
5 TEST RESULTS	6
5.1 TEST INSTRUMENTS	6
5.2 E.U.T. OPERATION	7
5.3 TEST PROCEDURE & MEASUREMENT DATA	7
5.3.1 <i>Radiated Emissions</i>	7
5.3.2 <i>Occupied Bandwidth</i>	10



4 General Information

4.1 Client Information

Applicant Name: NEW-RAY TOYS CO., LTD
Applicant Address: UNIT 9, 12/F., HOUSTON CENTRE, 63 MODY ROAD, TSIMSHATSUI EAST, KOWLOON, HONG KONG.

4.2 Details of E.U.T.

EUT Name: RADIO REMOTE CONTROL SCALE 1:18 FORMULA ONE
Item No.: 89933(Assortment No. 80000-89999)
Power Supply: 9.0V DC (1*9.0V '6F22' Size Battery) for Tx.
Power Cord: N/A-

4.3 Description of Support Units

The EUT was tested as an independent unit: 27MHz radio transmitter.

4.4 Test Location

All tests were performed at:

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, District Shenzhen, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

No tests were sub-contracted.

4.5 Other Information Requested by the Customer

None.



4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations

- **CNAS (No. CNAS L2929)**
CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.
- **VCCI**
The 3m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197 and C-2383 respectively. Date of Registration: September 29, 2008. Valid until September 28, 2011.
- **FCC – Registration No.: 556682**
SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 556682, June 27, 2008.
- **Industry Canada (IC)**
The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.



5 Test Results

5.1 Test Instruments

RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	16-06-2007	15-06-2009
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	12-12-2008	11-12-2009
3	EMI Test software	AUDIX	E3	SEL0050	N/A	N/A
4	Coaxial cable	SGS	N/A	SEL0028	18-06-2008	17-06-2009
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0014	12-08-2008	11-08-2009
6	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	18-06-2008	17-06-2009
7	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0005	12-08-2008	11-08-2009
8	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	12-08-2008	11-08-2009
9	Pre-amplifier (1-18GHz)	Rohde & Schwarz	AFS42-00101 800-25-S-42	SEL0081	18-06-2008	17-06-2009
10	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	SEL0080	18-06-2008	17-06-2009
11	Band filter	Amindeon	82346	SEL0094	18-06-2008	17-06-2009
12	Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	15-06-2008	14-06-2009



5.2 E.U.T. Operation

Input voltage:	9.0V DC (1* 9.0V '6F22' Size Battery) for Tx
Operating Environment:	
Temperature:	26.0 °C
Humidity:	51% RH
Atmospheric Pressure:	1020mbar
EUT Operation:	Test the EUT in transmitting mode.

5.3 Test Procedure & Measurement Data

5.3.1 Radiated Emissions

Test Requirement:	FCC Part15 C Section 15.227
Test Method:	ANSI C63.4: 2003
Measurement Distance:	3m (Semi-Anechoic Chamber)
Requirements:	Carrier frequency will not exceed 80dBuV/m AT 3m. Out of band emissions shall not exceed: 40.0 dB μ V/m between 30MHz & 88MHz 43.5 dB μ V/m between 88MHz & 216MHz 46.0 dB μ V/m between 216MHz & 960MHz 54.0 dB μ V/m above 960MHz
Detector:	Peak Scan (9kHz resolution bandwidth for 9kHz to 30MHz; 120kHz resolution bandwidth for 25MHz to 1000MHz)



27.145MHz Mode.

Test Procedure: For testing performed with the loop antenna, testing was performed in accordance to ANSI C63.4 section 8.2.1. The The center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specied distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

Horizontal.

Test Frequency (MHz)	Peak (dBµV/m)	Limits (dBµV/m)	Margin (dB)
	X		X
27.145	62.9	100.0	37.1

Test Frequency (MHz)	Average (dBµV/m)	Limits (dBµV/m)	Margin (dB)
	X		X
27.145	58.0	80.0	22.0

Vertical.

Test Frequency (MHz)	Peak (dBµV/m)	Limits (dBµV/m)	Margin (dB)
	X		X
27.145	53.6	100.0	46.4

Test Frequency (MHz)	Average (dBµV/m)	Limits (dBµV/m)	Margin (dB)
	X		X
27.145	49.1	80.0	30.9

Y: EUT as per photograph in section 5.3.3 of this report.

X: As Y, but rotate EUT by 90° clockwise.

Z: As X, but rotate EUT by 90° vertically.

Other emissions

Test Procedure: The procedure used was ANSI Standard C63.4-2003. The receive was scanned from 30MHz to 1000MHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. The worst case emissions were reported.

An initial pre-scan was performed in the 3m chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bilog antenna with 2 orthogonal polarities

Test the EUT in transmitting mode.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEMO080300888ETF

Page: 9 of 10

Horizontal.

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)
43.525	0.68	10.58	28.10	29.20	12.36	40.00	-27.64
164.425	1.35	9.55	27.36	29.25	12.79	43.50	-30.71
558.325	2.66	18.97	27.66	29.33	23.30	46.00	-22.70
763.075	3.10	21.87	27.06	29.23	27.14	46.00	-18.86

Vertical.

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)
54.250	0.80	7.64	28.08	34.21	14.57	40.00	-25.43
86.425	1.10	8.36	27.97	33.00	14.49	40.00	-25.51
307.750	1.93	14.20	26.79	28.60	17.94	46.00	-28.06
433.525	2.35	16.56	27.52	28.86	20.25	46.00	-25.75
696.775	2.89	21.58	27.29	30.28	27.46	46.00	-18.54

Remark:

According to 15.35 (b) When average radiated emission measurements are specified in the regulations, including emission measurements below 1000 MHz, there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules, e.g., see Section 15.255.

Test Results: The unit does meet the FCC Part 15 C Section 15.227 requirements.



5.3.2 Occupied Bandwidth

Test Requirement: FCC Part 15 C Section 15.215 (C) and Section 15.227.

Test Method: ANSI C63.4: 2003

Operation within the band 26.960 – 27.280 MHz .


26.960–27.280MHz Mode.

Requirements:

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the 20 dB bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Method of measurement:

The useful radiated emission from the EUT was detected by the spectrum analyser with peak detector. The vertical Scale is set to 10dB per division. The horizontal scale is set to 32KHz per division.

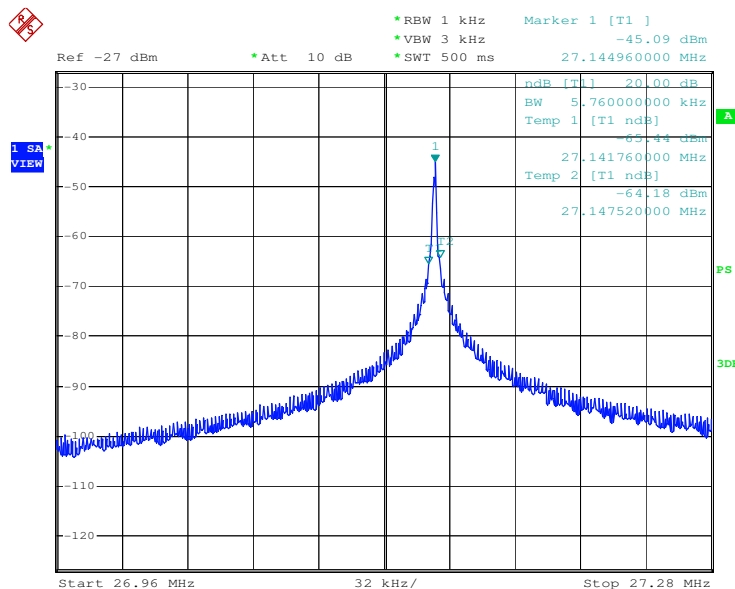

Date: 25.MAR.2008 08:53:43

The results: The unit does meet the FCC Part 15 C Section 15.215 requirements

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."