



# RADIO TEST REPORT

**Test Report No. : 13280770H-A**

**Applicant** : OMRON HEALTHCARE Co., Ltd.  
**Type of EUT** : WheezeScan  
**Model Number of EUT** : RE-W100  
**FCC ID** : Q6ZHWZ1000T  
**Test regulation** : FCC Part 15 Subpart C: 2019  
**Test Result** : Complied (Refer to SECTION 3.2)


1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report covers Radio technical requirements.

It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)

6. The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
7. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.
8. The information provided from the customer for this report is identified in SECTION 1.

**Date of test:** March 23 and April 2, 2020

**Representative test engineer:**

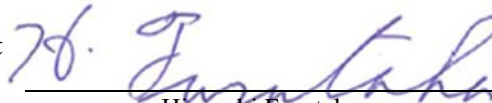

Hiroyuki Furutaka  
Engineer

Consumer Technology Division

**Approved by:**



Takayuki Shimada  
Leader

Consumer Technology Division



This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.  
\*As for the range of Accreditation in NVLAP, you may refer to the WEB address,  
[http://japan.ul.com/resources/emc\\_accredited/](http://japan.ul.com/resources/emc_accredited/)

- This report contains data that are not covered by the NVLAP accreditation.  
 There is no testing item of "Non-accreditation".

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## REVISION HISTORY

**Original Test Report No.: 13280770H-A**

Revision	Test report No.	Date	Page revised	Contents
- (Original)	13280770H-A	April 22, 2020	-	-

---

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	MCS	Modulation and Coding Scheme
AC	Alternating Current	MRA	Mutual Recognition Arrangement
AFH	Adaptive Frequency Hopping	N/A	Not Applicable
AM	Amplitude Modulation	NIST	National Institute of Standards and Technology
Amp, AMP	Amplifier	NS	No signal detect.
ANSI	American National Standards Institute	NSA	Normalized Site Attenuation
Ant, ANT	Antenna	NVLAP	National Voluntary Laboratory Accreditation Program
AP	Access Point	OBW	Occupied Band Width
ASK	Amplitude Shift Keying	OFDM	Orthogonal Frequency Division Multiplexing
Atten., ATT	Attenuator	P/M	Power meter
AV	Average	PCB	Printed Circuit Board
BPSK	Binary Phase-Shift Keying	PER	Packet Error Rate
BR	Bluetooth Basic Rate	PHY	Physical Layer
BT	Bluetooth	PK	Peak
BT LE	Bluetooth Low Energy	PN	Pseudo random Noise
BW	BandWidth	PRBS	Pseudo-Random Bit Sequence
Cal Int	Calibration Interval	PSD	Power Spectral Density
CCK	Complementary Code Keying	QAM	Quadrature Amplitude Modulation
Ch., CH	Channel	QP	Quasi-Peak
CISPR	Comite International Special des Perturbations Radioelectriques	QPSK	Quadri-Phase Shift Keying
CW	Continuous Wave	RBW	Resolution Band Width
DBPSK	Differential BPSK	RDS	Radio Data System
DC	Direct Current	RE	Radio Equipment
D-factor	Distance factor	RF	Radio Frequency
DFS	Dynamic Frequency Selection	RMS	Root Mean Square
DQPSK	Differential QPSK	RSS	Radio Standards Specifications
DSSS	Direct Sequence Spread Spectrum	Rx	Receiving
EDR	Enhanced Data Rate	SA, S/A	Spectrum Analyzer
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	SG	Signal Generator
EMC	ElectroMagnetic Compatibility	SVSWR	Site-Voltage Standing Wave Ratio
EMI	ElectroMagnetic Interference	TR	Test Receiver
EN	European Norm	Tx	Transmitting
ERP, e.r.p.	Effective Radiated Power	VBW	Video BandWidth
EU	European Union	Vert.	Vertical
EUT	Equipment Under Test	WLAN	Wireless LAN
Fac.	Factor		
FCC	Federal Communications Commission		
FHSS	Frequency Hopping Spread Spectrum		
FM	Frequency Modulation		
Freq.	Frequency		
FSK	Frequency Shift Keying		
GFSK	Gaussian Frequency-Shift Keying		
GNSS	Global Navigation Satellite System		
GPS	Global Positioning System		
Hori.	Horizontal		
ICES	Interference-Causing Equipment Standard		
IEC	International Electrotechnical Commission		
IEEE	Institute of Electrical and Electronics Engineers		
IF	Intermediate Frequency		
ILAC	International Laboratory Accreditation Conference		
ISED	Innovation, Science and Economic Development Canada		
ISO	International Organization for Standardization		
JAB	Japan Accreditation Board		
LAN	Local Area Network		
LIMS	Laboratory Information Management System		

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

<b>CONTENTS</b>	<b>PAGE</b>
<b>SECTION 1: Customer information.....</b>	<b>5</b>
<b>SECTION 2: Equipment under test (EUT).....</b>	<b>5</b>
<b>SECTION 3: Test specification, procedures &amp; results.....</b>	<b>6</b>
<b>SECTION 4: Operation of EUT during testing.....</b>	<b>9</b>
<b>SECTION 5: Radiated Spurious Emission .....</b>	<b>11</b>
<b>SECTION 6: Antenna Terminal Conducted Tests.....</b>	<b>13</b>
<b>APPENDIX 1: Test data .....</b>	<b>14</b>
6 dB Bandwidth and 99 % Occupied Bandwidth.....	14
Maximum Peak Output Power.....	17
Average Output Power.....	18
Radiated Spurious Emission .....	20
Conducted Spurious Emission .....	26
Power Density .....	29
<b>APPENDIX 2: Test instruments .....</b>	<b>31</b>
<b>APPENDIX 3: Photographs of test setup .....</b>	<b>32</b>
Radiated Spurious Emission .....	32
Worst Case Position (Horizontal: X-axis/ Vertical:Z-axis) .....	33

## **SECTION 1: Customer information**

Company Name : OMRON HEALTHCARE Co., Ltd.  
Address : 53, Kunotsubo, Terado-cho, Muko, KYOTO, 617-0002 Japan  
Telephone Number : +81-75-925-2045  
Facsimile Number : +81-75-925-2046  
Contact Person : Yoshinori Tsurumi

The information provided from the customer is as follows;

- Applicant, Type of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer information
- SECTION 2: Equipment under test (EUT) other than the Receipt Date
- SECTION 4: Operation of EUT during testing

\* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

## **SECTION 2: Equipment under test (EUT)**

### **2.1 Identification of EUT**

Type : WheezeScan  
Model Number : RE-W100  
Serial Number : Refer to SECTION 4.2  
Rating : DC 3.0 V  
Receipt Date : March 23, 2020  
Country of Mass-production : China  
Condition : Production prototype  
(Not for Sale: This sample is equivalent to mass-produced items.)  
Modification of EUT : No Modification by the test lab.

### **2.2 Product Description**

Model: RE-W100 (referred to as the EUT in this report) is a WheezeScan.

### **Radio Specification**

Radio Type : Transceiver  
Frequency of Operation : 2402 MHz - 2480 MHz  
Modulation : GFSK  
Antenna type : Chip Antenna  
Antenna Gain : 5.05 dBi  
Clock frequency (Maximum) : 26 MHz

## **SECTION 3: Test specification, procedures & results**

### **3.1 Test Specification**

Test Specification : FCC Part 15 Subpart C  
FCC Part 15 final revised on July 19, 2019 and effective August 19, 2019 except 15.258

Title : FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators  
Section 15.207 Conducted limits  
Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz,  
and 5725-5850 MHz

\* Also the EUT complies with FCC Part 15 Subpart B.

### **3.2 Procedures and results**

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 6. Standard test methods ISED: RSS-Gen 8.8	FCC: Section 15.207 ISED: RSS-Gen 8.8	N/A	N/A	*1)
6dB Bandwidth	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(a)(2) ISED: RSS-247 5.2(a)	See data.	Complied a)	Conducted
Maximum Peak Output Power	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.12	FCC: Section 15.247(b)(3) ISED: RSS-247 5.4(d)		Complied b)	Conducted
Power Density	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(e) ISED: RSS-247 5.2(b)		Complied c)	Conducted
Spurious Emission Restricted Band Edges	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.13	FCC: Section 15.247(d) ISED: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10	5.4 dB 4804.000 MHz, Vertical, AV	Complied d), e)	Conducted (below 30 MHz)/ Radiated (above 30 MHz) *2)
Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422. *1) The test is not applicable since the EUT is not the device that is designed to be connected to the public utility (AC) power line. *2) Radiated test was selected over 30 MHz based on section 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02 8.5 and 8.6. a) Refer to APPENDIX 1 (data of 6 dB Bandwidth and 99 % Occupied Bandwidth) b) Refer to APPENDIX 1 (data of Maximum Peak Output Power) c) Refer to APPENDIX 1 (data of Power Density) d) Refer to APPENDIX 1 (data of Conducted Spurious Emission) e) Refer to APPENDIX 1 (data of Radiated Spurious Emission) Symbols: Complied The data of this test item has enough margin, more than the measurement uncertainty. Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration.					

\* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

#### **FCC Part 15.31 (e)**

The test was performed with the New Battery and the stable voltage was supplied to the EUT RF module during the tests. Therefore, the EUT complies with the requirement.

#### **FCC Part 15.203 Antenna requirement**

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

### 3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99% Occupied Bandwidth	ISED: RSS-Gen 6.7	ISED: -	N/A	-	Conducted

Other than above, no addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

There is no applicable rule of uncertainty in this applied standard. Therefore, the results are derived depending on whether or not laboratory uncertainty is applied.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor  $k=2$ .  
Ise EMC Lab.

#### Antenna Terminal test

Test Item	Uncertainty (+/-)
20 dB Bandwidth / 99 % Occupied Bandwidth	0.96 %
Maximum Peak Output Power / Average Output Power	1.4 dB
Carrier Frequency Separation	0.42 %
Dwell time / Burst rate	0.10 %
Conducted Spurious Emission	2.6 dB

#### Radiated emission

Measurement distance	Frequency range	Uncertainty (+/-)
3 m	9 kHz to 30 MHz	3.3 dB
10 m		3.2 dB
3 m	30 MHz to 200 MHz (Horizontal) (Vertical)	4.8 dB
		5.0 dB
	200 MHz to 1000 MHz (Horizontal) (Vertical)	5.2 dB
		6.3 dB
10 m	30 MHz to 200 MHz (Horizontal) (Vertical)	4.8 dB
		4.8 dB
	200 MHz to 1000 MHz (Horizontal) (Vertical)	5.0 dB
		5.0 dB
3 m	1 GHz to 6 GHz	4.9 dB
	6 GHz to 18 GHz	5.2 dB
1 m	10 GHz to 26.5 GHz	5.5 dB
	26.5 GHz to 40 GHz	5.5 dB
10 m	1 GHz to 18 GHz	5.2 dB

### 3.5 Test Location

UL Japan, Inc. Ise EMC Lab.

\*NVLAP Lab. code: 200572-0 / FCC Test Firm Registration Number: 199967 / ISED Lab Company Number: 2973C  
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.5 measurement room	6.4 x 6.4 x 3.0	6.4 x 6.4	-	-
No.6 shielded room	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.11 measurement room	6.2 x 4.7 x 3.0	4.8 x 4.6	-	-

\* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0 m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

### 3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.



## **SECTION 4: Operation of EUT during testing**

### **4.1 Operating Mode(s)**


Mode	Remarks*
Bluetooth Low Energy (BT LE)	Payload: PRBS9 Uncoded 1M-PHY
<p>*Power of the EUT was set by the software as follows;  Power settings: 0dBm  Software: Lanmei Ver. F.00.7GA-07  (Date: 2019.10.10, Storage location: TC3567C)</p> <p>*This setting of software is the worst case.  Any conditions under the normal use do not exceed the condition of setting.  In addition, end users cannot change the settings of the output power of the product.</p>	

\*The details of Operating mode(s)

Test Item	Operating Mode	Tested frequency
6dB Bandwidth and 99% Occupied Bandwidth Maximum Peak Output Power Spurious Emission (Radiated / Conducted) Power Density	Tx BT LE	2402 MHz 2440 MHz 2480 MHz

### **4.2 Configuration and peripherals**

[Radiated emission test]

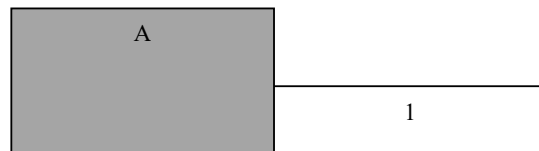

#### **Description of EUT**

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	WheezeScan	RE-W100	286	OMRON HEALTHCARE Co., Ltd.	EUT

#### **List of cables used**

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	Signal Cable	0.05	Unshielded	Unshielded	-

**UL Japan, Inc.**


**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

[Antenna Terminal conducted test]

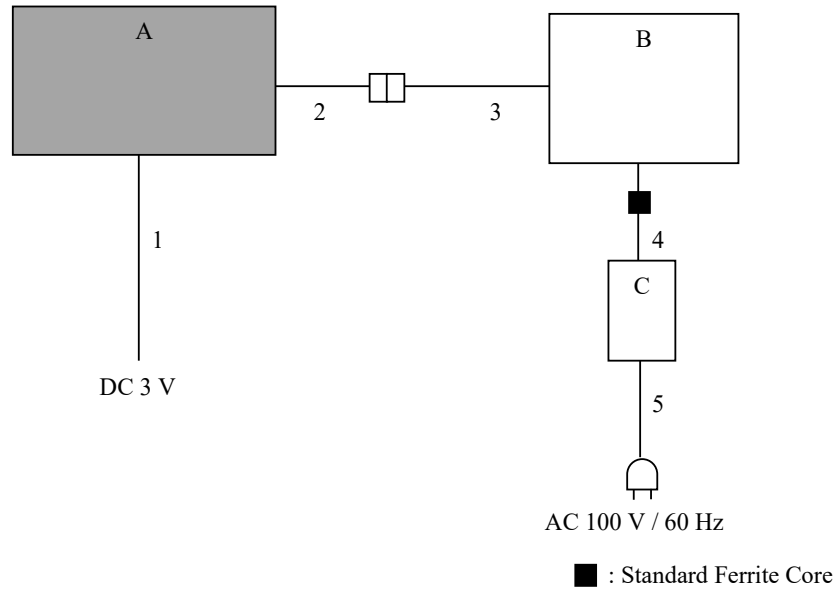

\* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

**Description of EUT and Support equipment**

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	WheezeScan	RE-W100	285	OMRON HEALTHCARE Co., Ltd.	EUT
B	Laptop PC	P24T	4S7GLT2	DELL	-
C	AC Adaptor	LA45NM140	CN-0KXTTW-LOC00-967-6828-A09	DELL	-

**List of cables used**

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC Cable	1.50	Unshielded	Unshielded	-
2	Signal Cable	0.07	Unshielded	Unshielded	-
3	USB Cable	1.50	Shielded	Shielded	-
4	DC Cable	1.80	Unshielded	Unshielded	-
5	AC Cable	0.30	Unshielded	Unshielded	-

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## **SECTION 5: Radiated Spurious Emission**

### **Test Procedure**

It was measured based on "8.5 and 8.6 of KDB 558074 D01 15.247 Meas Guidance v05r02".

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

### **Test Antennas are used as below;**

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

### **20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9(ISED) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (ISED).**

Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV *1)	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	<u>11.12.2.5.1</u> RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (RMS) Trace: 100 traces <u>11.12.2.5.2</u> The duty cycle was less than 98% for detected noise, a duty factor was added to the 11.12.2.5.1 results.	RBW: 100 kHz VBW: 300 kHz

\*1) Average Power Measurement was performed based on ANSI C63.10-2013.

**UL Japan, Inc.**

**Ise EMC Lab.**


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

**Figure 2: Test Setup**


Below 1 GHz

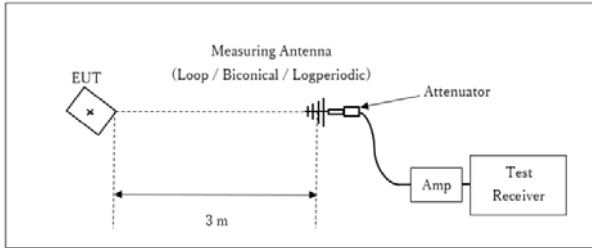

× : Center of turn table

Test Distance: 3 m

1 GHz - 10 GHz

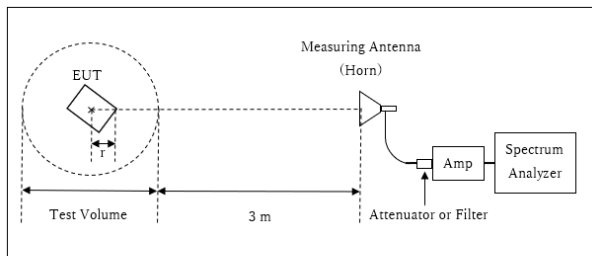

r : Radius of an outer periphery of EUT  
× : Center of turn table

Distance Factor:  $20 \times \log(3.75 \text{ m} / 3.0 \text{ m}) = 1.94 \text{ dB}$

\* Test Distance:  $(3 + \text{Test Volume} / 2) - r = 3.75 \text{ m}$


Test Volume : 1.5 m

(Test Volume has been calibrated based on CISPR 16-1-4.)

r = 0.0 m

\* The test was performed with r = 0.0 m since EUT is small and it was the rather conservative condition.

10 GHz - 26.5 GHz

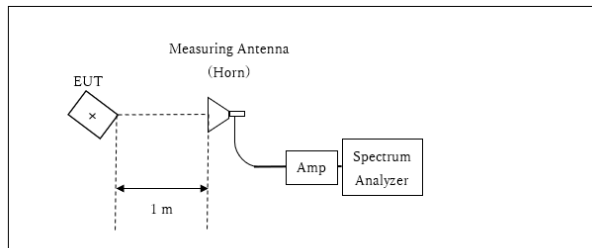

× : Center of turn table

Distance Factor:  $20 \times \log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

\*Test Distance: 1 m

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

**Measurement range** : 30 MHz - 26.5 GHz  
**Test data** : APPENDIX  
**Test result** : Pass

## **SECTION 6: Antenna Terminal Conducted Tests**

### **Test Procedure**

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument used
6dB Bandwidth	3 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak/Average *2)	-	Power Meter (Sensor: 50 MHz BW)
Peak Power Density	1.5 times the 6dB Bandwidth	3 kHz	10 kHz	Auto	Peak	Max Hold	Spectrum Analyzer *3)
Conducted Spurious Emission *4) *5)	9kHz to 150kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150kHz to 30MHz	9.1 kHz	27 kHz				

\*1) Peak hold was applied as Worst-case measurement.  
\*2) Reference data  
\*3) Section 11.10.2 Method PKPSD (peak PSD) of "ANSI C63.10-2013".  
\*4) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.  
Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart.  
(9 kHz - 150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 9.1 kHz)  
\*5) The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to  $45.5 - 51.5 = -6.0$  dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

The test results and limit are rounded off to two decimals place, so some differences might be observed.  
The equipment and cables were not used for factor 0 dB of the data sheets.

**Test data : APPENDIX**  
**Test result : Pass**

## APPENDIX 1: Test data

### 6 dB Bandwidth and 99 % Occupied Bandwidth


Report No. 13280770H  
Test place Ise EMC Lab. No.6 Measurement Room  
Date March 23, 2020  
Temperature / Humidity 23 deg. C / 41 % RH  
Engineer Hiroyuki Furutaka  
Mode Tx BT LE

Mode	Frequency [MHz]	99% Occupied Bandwidth [kHz]	6dB Bandwidth [MHz]	Limit for 6dB Bandwidth [MHz]
BT LE	2402	1036.0	0.713	> 0.5000
	2440	1034.1	0.705	> 0.5000
	2480	1033.7	0.707	> 0.5000


## 99% Occupied Bandwidth

BT LE


**2402 MHz**

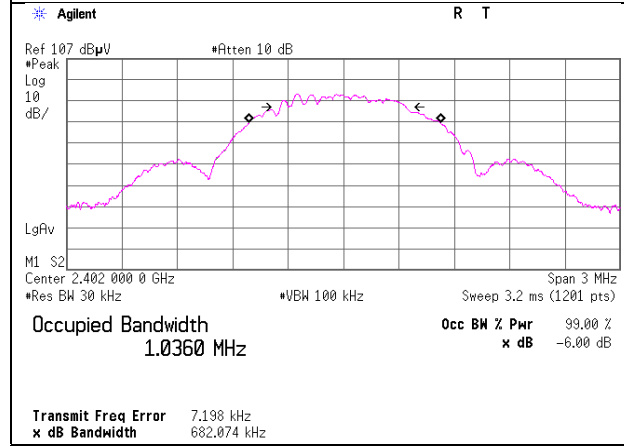

**2440 MHz**

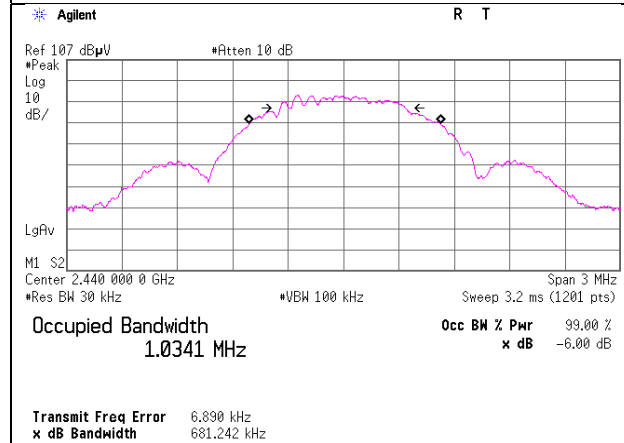

**2480 MHz**

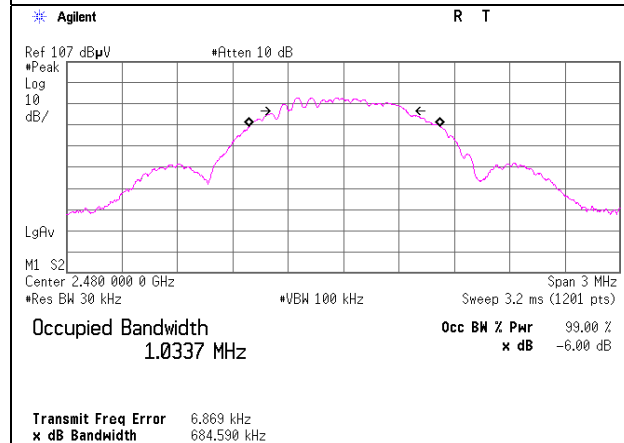

**UL Japan, Inc.**

**Ise EMC Lab.**


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## 6dB Bandwidth

### BT LE

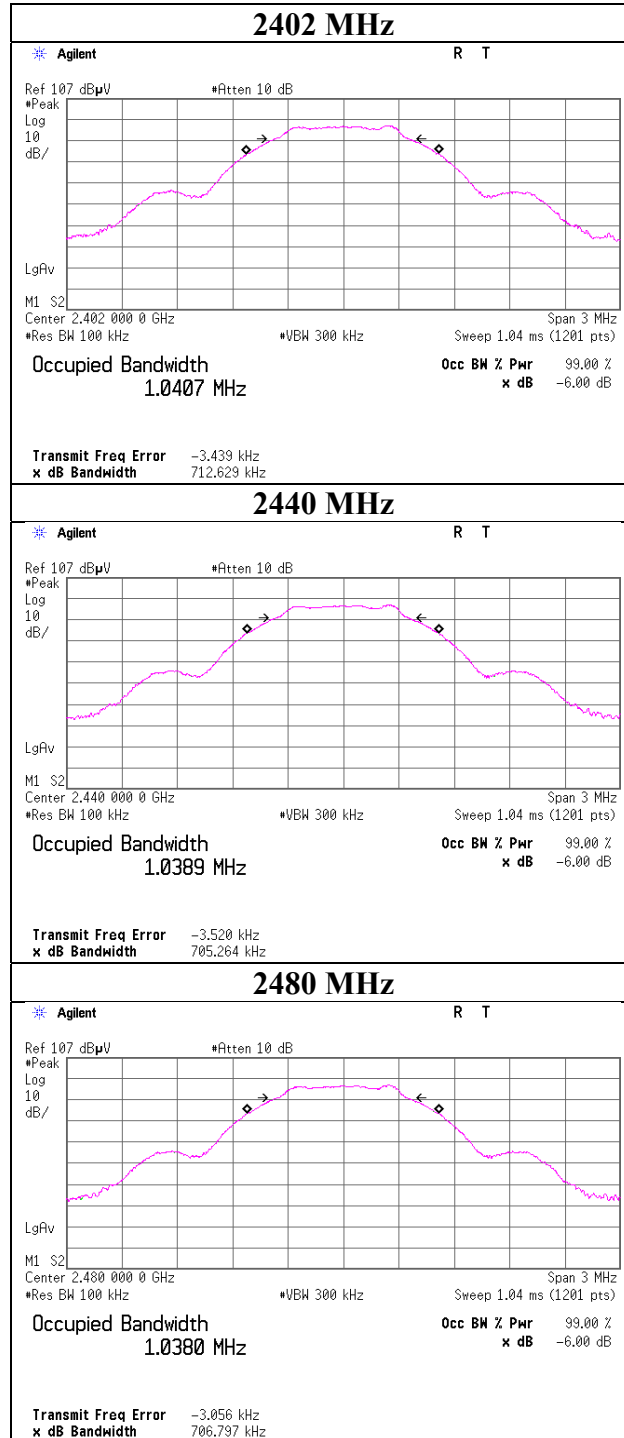

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124



## Maximum Peak Output Power

Report No. 13280770H  
Test place Ise EMC Lab. No.6 Measurement Room  
Date March 23, 2020  
Temperature / Humidity 23 deg. C / 41 % RH  
Engineer Hiroyuki Furutaka  
Mode Tx BT LE

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Conducted Power					e.i.r.p. for RSS-247					
				Result		Limit		Margin [dB]	Antenna Gain [dBi]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]			[dBm]	[mW]	[dBm]	[mW]	
2402	-11.94	1.07	10.06	-0.81	0.83	30.00	1000	30.81	5.05	4.24	2.65	36.02	4000	31.78
2440	-11.99	1.07	10.06	-0.86	0.82	30.00	1000	30.86	5.05	4.19	2.62	36.02	4000	31.83
2480	-12.14	1.08	10.06	-1.00	0.79	30.00	1000	31.00	5.05	4.05	2.54	36.02	4000	31.97

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

e.i.r.p. Result = Conducted Power Result + Antenna Gain

\*The equipment and cables were not used for factor 0 dB of the data sheets.

**Average Output Power**  
**(Reference data for RF Exposure)**

Report No. 13280770H  
Test place Ise EMC Lab. No.6 Measurement Room  
Date March 23, 2020  
Temperature / Humidity 23 deg. C / 41 % RH  
Engineer Hiroyuki Furutaka  
Mode Tx BT LE

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Burst power average)	
				[dBm]	[mW]
2402	-12.24	1.07	10.06	-1.11	0.77
2440	-12.31	1.07	10.06	-1.18	0.76
2480	-12.48	1.08	10.06	-1.34	0.73


Sample Calculation:

Result (Burst power average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

\*The equipment and cables were not used for factor 0 dB of the data sheets.

### Burst rate confirmation

Report No. 13280770H  
Test place Ise EMC Lab. No.6 Measurement Room  
Date March 23, 2020  
Temperature / Humidity 23 deg. C / 41 % RH  
Engineer Hiroyuki Furutaka  
Mode Tx BT LE

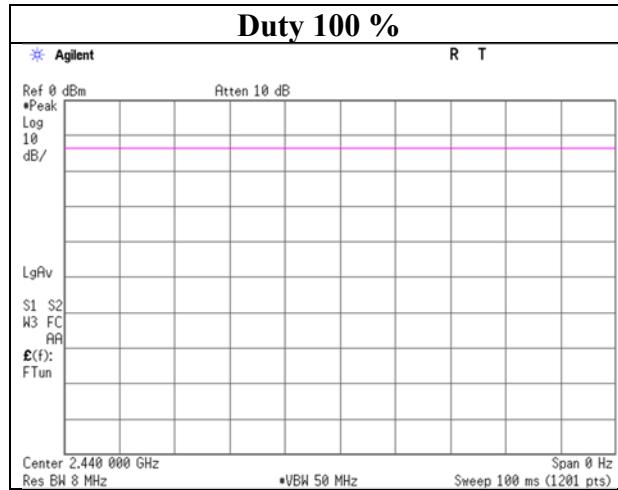

\* Since the burst rate is not different between the channels, the data has been obtained on the representative channel.

## Radiated Spurious Emission

Report No. 13280770H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.2  
Date April 2, 2020  
Temperature / Humidity 26 deg. C / 23 % RH  
Engineer Tomohisa Nakagawa  
Mode Tx BT LE 2402 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	40.000	QP	26.3	14.9	7.2	30.4	-	17.9	40.0	22.1	Floor noise
Hori.	115.000	QP	26.3	12.4	8.2	30.1	-	16.7	43.5	26.8	Floor noise
Hori.	135.000	QP	25.0	14.1	8.4	30.0	-	17.5	43.5	26.0	Floor noise
Hori.	330.000	QP	23.7	14.4	10.0	29.3	-	18.8	46.0	27.2	Floor noise
Hori.	450.000	QP	23.5	16.5	10.8	29.9	-	20.9	46.0	25.1	Floor noise
Hori.	750.000	QP	21.5	20.0	12.3	29.1	-	24.6	46.0	21.4	Floor noise
Hori.	2390.000	PK	43.6	27.6	4.9	35.2	-	40.9	73.9	33.0	
Hori.	4804.000	PK	46.5	31.6	7.1	34.4	-	50.8	73.9	23.1	
Hori.	7206.000	PK	42.1	36.1	8.4	34.3	-	52.4	73.9	21.6	Floor noise
Hori.	9608.000	PK	42.0	38.6	9.0	34.9	-	54.7	73.9	19.2	Floor noise
Hori.	2390.000	AV	35.7	27.6	4.9	35.2	-	32.9	53.9	21.0	
Hori.	4804.000	AV	41.4	31.6	7.1	34.4	-	45.7	53.9	8.2	
Hori.	7206.000	AV	34.7	36.1	8.4	34.3	-	44.9	53.9	9.0	Floor noise
Hori.	9608.000	AV	34.6	38.6	9.0	34.9	-	47.4	53.9	6.5	Floor noise
Vert.	40.000	QP	26.3	14.9	7.2	30.4	-	17.9	40.0	22.1	Floor noise
Vert.	115.000	QP	26.3	12.4	8.2	30.1	-	16.7	43.5	26.8	Floor noise
Vert.	135.000	QP	25.0	14.1	8.4	30.0	-	17.5	43.5	26.0	Floor noise
Vert.	330.000	QP	23.8	14.4	10.0	29.3	-	18.9	46.0	27.1	Floor noise
Vert.	450.000	QP	23.5	16.5	10.8	29.9	-	20.9	46.0	25.1	Floor noise
Vert.	750.000	QP	21.5	20.0	12.3	29.1	-	24.6	46.0	21.4	Floor noise
Vert.	2390.000	PK	44.2	27.6	4.9	35.2	-	41.5	73.9	32.4	
Vert.	4804.000	PK	48.8	31.6	7.1	34.4	-	53.1	73.9	20.8	
Vert.	7206.000	PK	42.2	36.1	8.4	34.3	-	52.4	73.9	21.5	Floor noise
Vert.	9608.000	PK	42.2	38.6	9.0	34.9	-	54.9	73.9	19.0	Floor noise
Vert.	2390.000	AV	35.2	27.6	4.9	35.2	-	32.5	53.9	21.4	
Vert.	4804.000	AV	44.2	31.6	7.1	34.4	-	48.5	53.9	5.4	
Vert.	7206.000	AV	34.6	36.1	8.4	34.3	-	44.8	53.9	9.1	Floor noise
Vert.	9608.000	AV	34.4	38.6	9.0	34.9	-	47.1	53.9	6.8	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz  $20\log(3.75 \text{ m} / 3.0 \text{ m}) = 1.94 \text{ dB}$   
10 GHz - 26.5 GHz  $20\log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

### 20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	95.9	27.6	4.9	35.2	93.2	-	-	Carrier
Hori.	2400.000	PK	40.2	27.6	4.9	35.2	37.5	73.2	35.7	
Vert.	2402.000	PK	93.6	27.6	4.9	35.2	90.9	-	-	Carrier
Vert.	2400.000	PK	39.7	27.6	4.9	35.2	37.0	70.9	33.9	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

**UL Japan, Inc.**

**Ise EMC Lab.**



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**

Report No. 13280770H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.2  
Date April 2, 2020  
Temperature / Humidity 26 deg. C / 23 % RH  
Engineer Tomohisa Nakagawa  
Mode Tx BT LE 2402 MHz

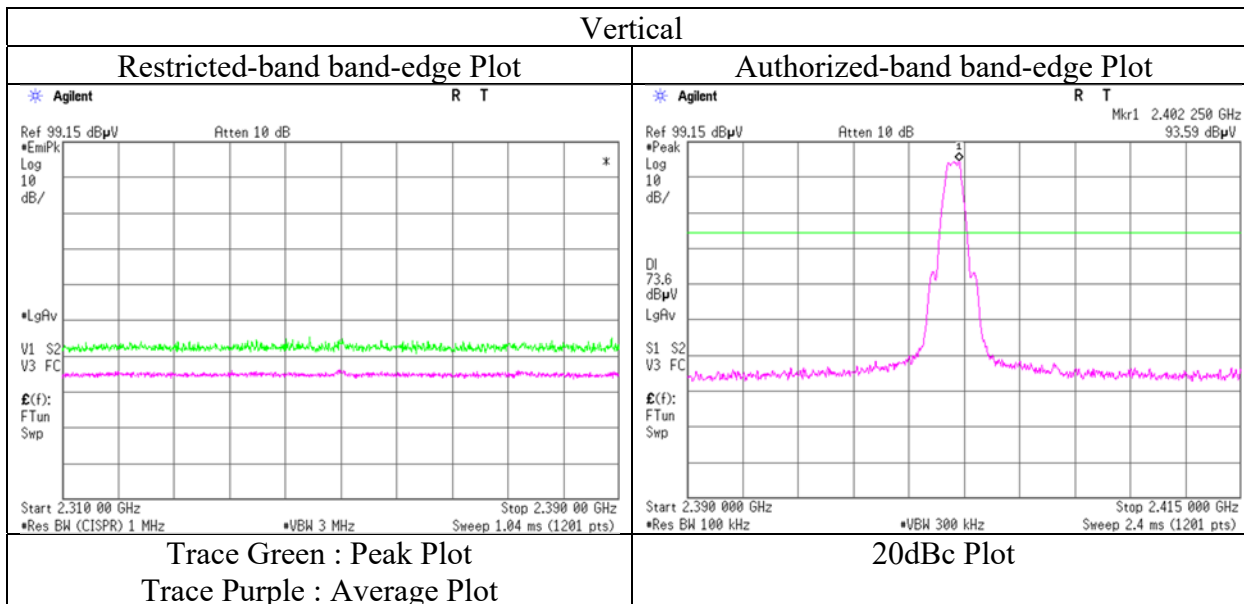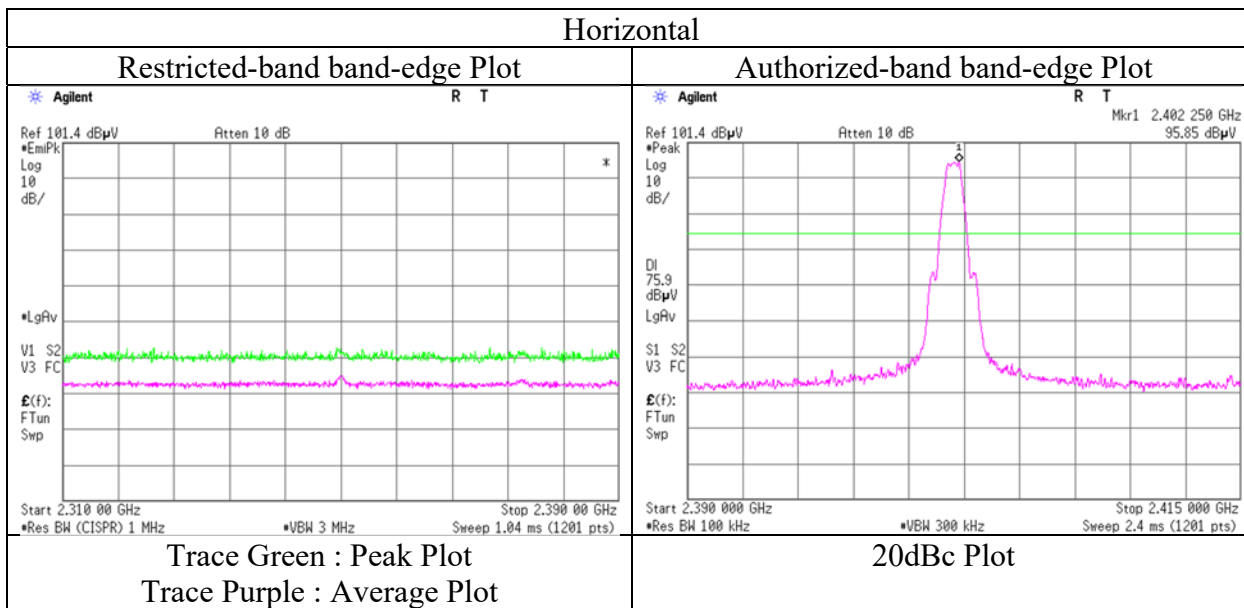

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Report No. 13280770H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.2  
Date April 2, 2020  
Temperature / Humidity 26 deg. C / 23 % RH  
Engineer Tomohisa Nakagawa  
Mode Tx BT LE 2440 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	40.000	QP	26.3	14.9	7.2	30.4	-	17.9	40.0	22.1	Floor noise
Hori.	115.000	QP	26.3	12.4	8.2	30.1	-	16.7	43.5	26.8	Floor noise
Hori.	135.000	QP	25.0	14.1	8.4	30.0	-	17.5	43.5	26.0	Floor noise
Hori.	330.000	QP	23.7	14.4	10.0	29.3	-	18.8	46.0	27.2	Floor noise
Hori.	450.000	QP	23.5	16.5	10.8	29.9	-	20.9	46.0	25.1	Floor noise
Hori.	750.000	QP	21.6	20.0	12.3	29.1	-	24.7	46.0	21.3	Floor noise
Hori.	4880.000	PK	45.0	31.6	7.1	34.4	-	49.2	73.9	24.7	
Hori.	7320.000	PK	42.7	36.1	8.4	34.4	-	52.8	73.9	21.1	Floor noise
Hori.	9760.000	PK	43.0	39.2	9.1	34.9	-	56.4	73.9	17.5	Floor noise
Hori.	4880.000	AV	38.4	31.6	7.1	34.4	-	42.6	53.9	11.3	
Hori.	7320.000	AV	35.3	36.1	8.4	34.4	-	45.5	53.9	8.4	Floor noise
Hori.	9760.000	AV	34.7	39.2	9.1	34.9	-	48.1	53.9	5.8	Floor noise
Vert.	40.000	QP	26.3	14.9	7.2	30.4	-	17.9	40.0	22.1	Floor noise
Vert.	115.000	QP	26.3	12.4	8.2	30.1	-	16.7	43.5	26.8	Floor noise
Vert.	135.000	QP	25.0	14.1	8.4	30.0	-	17.5	43.5	26.0	Floor noise
Vert.	330.000	QP	23.7	14.4	10.0	29.3	-	18.8	46.0	27.2	Floor noise
Vert.	450.000	QP	23.5	16.5	10.8	29.9	-	20.9	46.0	25.1	Floor noise
Vert.	750.000	QP	21.5	20.0	12.3	29.1	-	24.6	46.0	21.4	Floor noise
Vert.	4880.000	PK	44.4	31.6	7.1	34.4	-	48.6	73.9	25.3	
Vert.	7320.000	PK	42.9	36.1	8.4	34.4	-	53.0	73.9	20.9	Floor noise
Vert.	9760.000	PK	42.5	39.2	9.1	34.9	-	55.9	73.9	18.1	Floor noise
Vert.	4880.000	AV	37.8	31.6	7.1	34.4	-	42.0	53.9	11.9	
Vert.	7320.000	AV	34.9	36.1	8.4	34.4	-	45.0	53.9	8.9	Floor noise
Vert.	9760.000	AV	34.7	39.2	9.1	34.9	-	48.1	53.9	5.8	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz  $20\log(3.75\text{ m} / 3.0\text{ m}) = 1.94\text{ dB}$

10 GHz - 26.5 GHz  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

## Radiated Spurious Emission

Report No. 13280770H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.2  
Date April 2, 2020  
Temperature / Humidity 26 deg. C / 23 % RH  
Engineer Tomohisa Nakagawa  
Mode Tx BT LE 2480 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	40.000	QP	26.3	14.9	7.2	30.4	-	17.9	40.0	22.1	Floor noise
Hori.	115.000	QP	26.3	12.4	8.2	30.1	-	16.7	43.5	26.8	Floor noise
Hori.	135.000	QP	25.0	14.1	8.4	30.0	-	17.5	43.5	26.0	Floor noise
Hori.	330.000	QP	23.7	14.4	10.0	29.3	-	18.8	46.0	27.2	Floor noise
Hori.	450.000	QP	23.5	16.5	10.8	29.9	-	20.9	46.0	25.1	Floor noise
Hori.	750.000	QP	21.5	20.0	12.3	29.1	-	24.6	46.0	21.4	Floor noise
Hori.	2483.500	PK	44.9	27.5	5.0	35.2	-	42.1	73.9	31.8	
Hori.	4960.000	PK	41.9	31.6	7.1	34.5	-	46.1	73.9	27.8	
Hori.	7440.000	PK	42.8	36.3	8.4	34.4	-	53.0	73.9	20.9	Floor noise
Hori.	9920.000	PK	42.6	38.9	9.1	34.9	-	55.8	73.9	18.1	Floor noise
Hori.	2483.500	AV	36.8	27.5	5.0	35.2	-	34.0	53.9	19.9	
Hori.	4960.000	AV	32.2	31.6	7.1	34.5	-	36.4	53.9	17.5	
Hori.	7440.000	AV	32.5	36.3	8.4	34.4	-	42.7	53.9	11.2	Floor noise
Hori.	9920.000	AV	33.2	38.9	9.1	34.9	-	46.4	53.9	7.5	Floor noise
Vert.	40.000	QP	26.3	14.9	7.2	30.4	-	17.9	40.0	22.1	Floor noise
Vert.	115.000	QP	26.3	12.4	8.2	30.1	-	16.7	43.5	26.8	Floor noise
Vert.	135.000	QP	25.0	14.1	8.4	30.0	-	17.5	43.5	26.0	Floor noise
Vert.	330.000	QP	23.7	14.4	10.0	29.3	-	18.8	46.0	27.2	Floor noise
Vert.	450.000	QP	23.5	16.5	10.8	29.9	-	20.9	46.0	25.1	Floor noise
Vert.	750.000	QP	21.5	20.0	12.3	29.1	-	24.6	46.0	21.4	Floor noise
Vert.	2483.500	PK	44.3	27.5	5.0	35.2	-	41.6	73.9	32.3	
Vert.	4960.000	PK	42.9	31.6	7.1	34.5	-	47.1	73.9	26.8	
Vert.	7440.000	PK	42.7	36.3	8.4	34.4	-	52.9	73.9	21.0	Floor noise
Vert.	9920.000	PK	42.8	38.9	9.1	34.9	-	55.9	73.9	18.0	Floor noise
Vert.	2483.500	AV	36.4	27.5	5.0	35.2	-	33.7	53.9	20.2	
Vert.	4960.000	AV	32.2	31.6	7.1	34.5	-	36.5	53.9	17.5	
Vert.	7440.000	AV	33.2	36.3	8.4	34.4	-	43.5	53.9	10.5	Floor noise
Vert.	9920.000	AV	32.6	38.9	9.1	34.9	-	45.8	53.9	8.1	Floor noise



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz  $20\log(3.75\text{ m} / 3.0\text{ m}) = 1.94\text{ dB}$   
10 GHz - 26.5 GHz  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

## Radiated Spurious Emission (Reference Plot for band-edge)

Report No. 13280770H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.2  
Date April 2, 2020  
Temperature / Humidity 26 deg. C / 23 % RH  
Engineer Tomohisa Nakagawa  
Mode Tx BT LE 2480 MHz

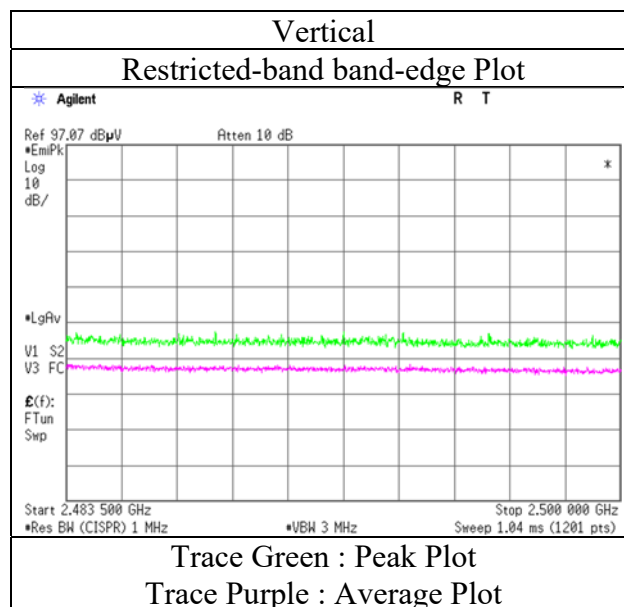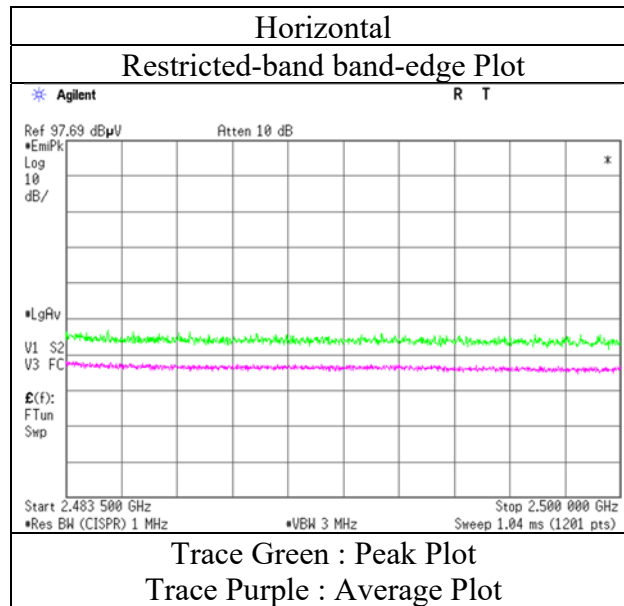

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN



Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124



**Radiated Spurious Emission**  
**(Plot data, Worst case)**


Report No. 13280770H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.2  
Date April 2, 2020  
Temperature / Humidity 26 deg. C / 23 % RH  
Engineer Tomohisa Nakagawa  
Mode Tx BT LE 2402 MHz

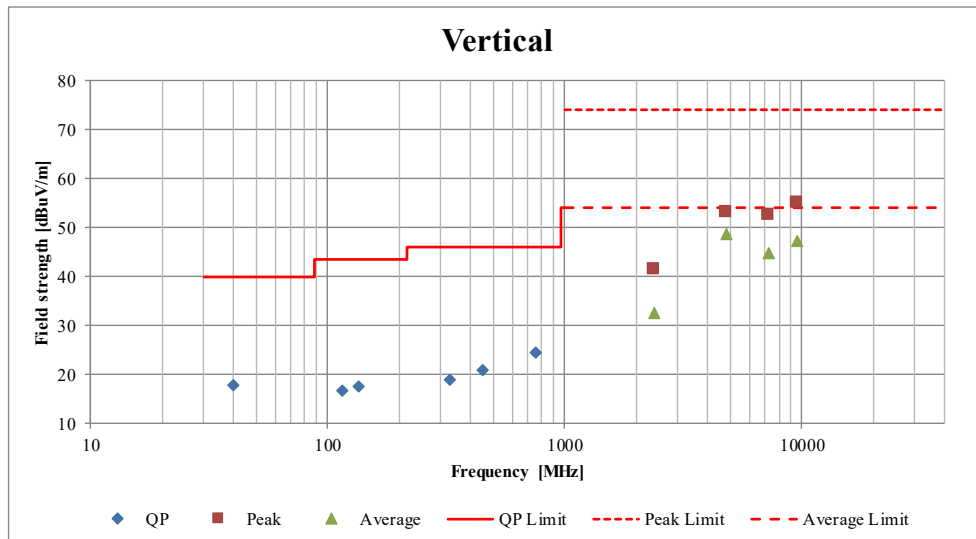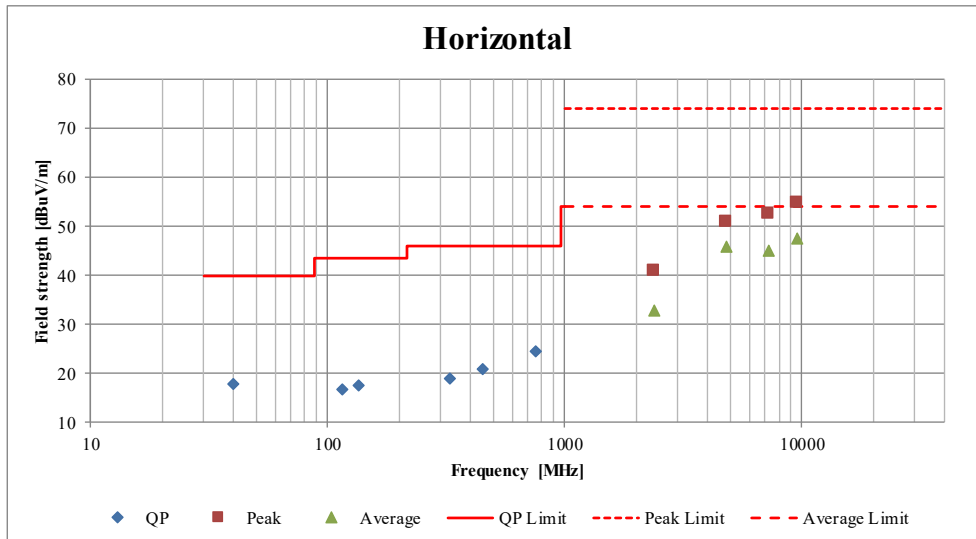

\*These plots data contains sufficient number to show the trend of characteristic features for EUT.

## Conducted Spurious Emission

Report No. 13280770H  
 Test place Ise EMC Lab. No.6 Measurement Room  
 Date March 23, 2020  
 Temperature / Humidity 23 deg. C / 41 % RH  
 Engineer Hiroyuki Furutaka  
 Mode Tx BT LE 2402MHz

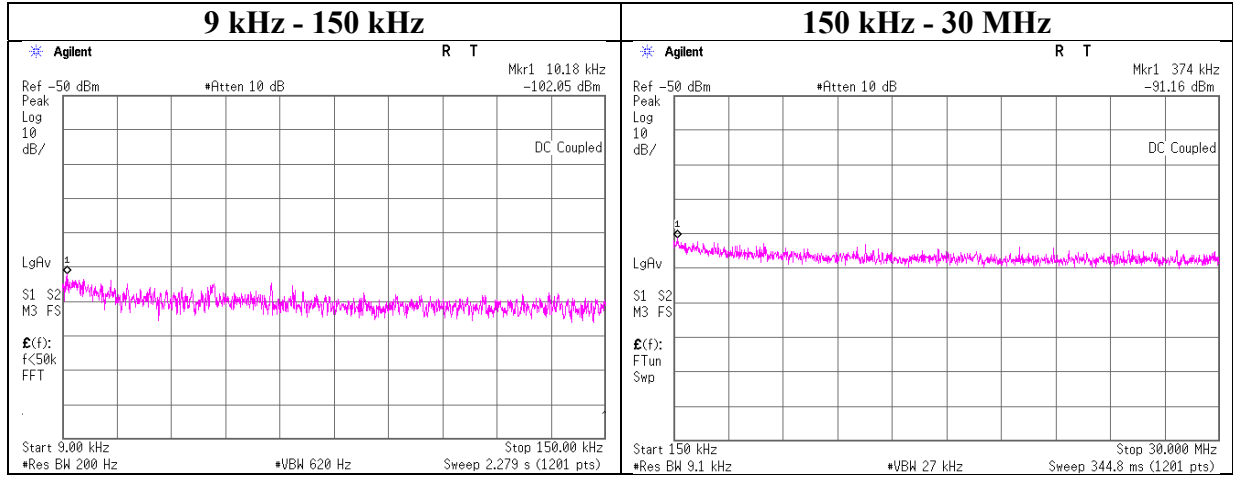

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
10.18	-102.1	0.10	9.9	5.05	1	-87.0	300	6.0	-25.8	47.4	73.2	
374.00	-91.2	0.10	9.9	5.05	1	-76.2	300	6.0	-14.9	16.1	31.0	

$$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log (\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$$

$$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log (N)$$

N: Number of output

**UL Japan, Inc.**

**Ise EMC Lab.**


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Conducted Spurious Emission

Report No. 13280770H  
 Test place Ise EMC Lab. No.6 Measurement Room  
 Date March 23, 2020  
 Temperature / Humidity 23 deg. C / 41 % RH  
 Engineer Hiroyuki Furutaka  
 Mode Tx BT LE 2440MHz

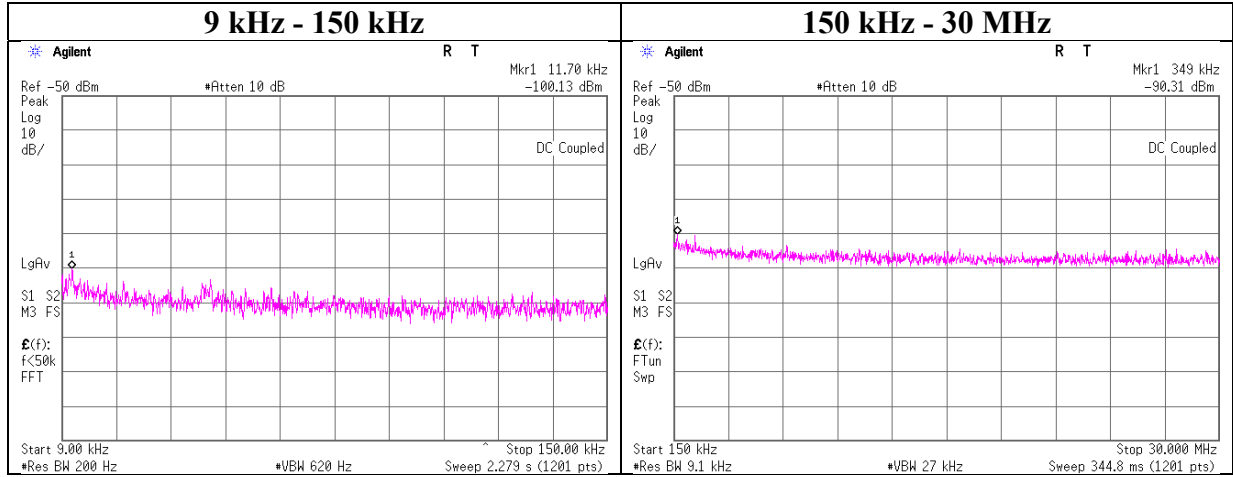

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
11.70	-100.1	0.10	9.9	5.05	1	-85.1	300	6.0	-23.9	46.2	70.1	
349.00	-90.3	0.10	9.9	5.05	1	-75.3	300	6.0	-14.1	16.7	30.8	

$$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log(\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$$

$$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log(N)$$

N: Number of output

**UL Japan, Inc.**

**Ise EMC Lab.**


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Conducted Spurious Emission

Report No. 13280770H  
 Test place Ise EMC Lab. No.6 Measurement Room  
 Date March 23, 2020  
 Temperature / Humidity 23 deg. C / 41 % RH  
 Engineer Hiroyuki Furutaka  
 Mode Tx BT LE 2480MHz

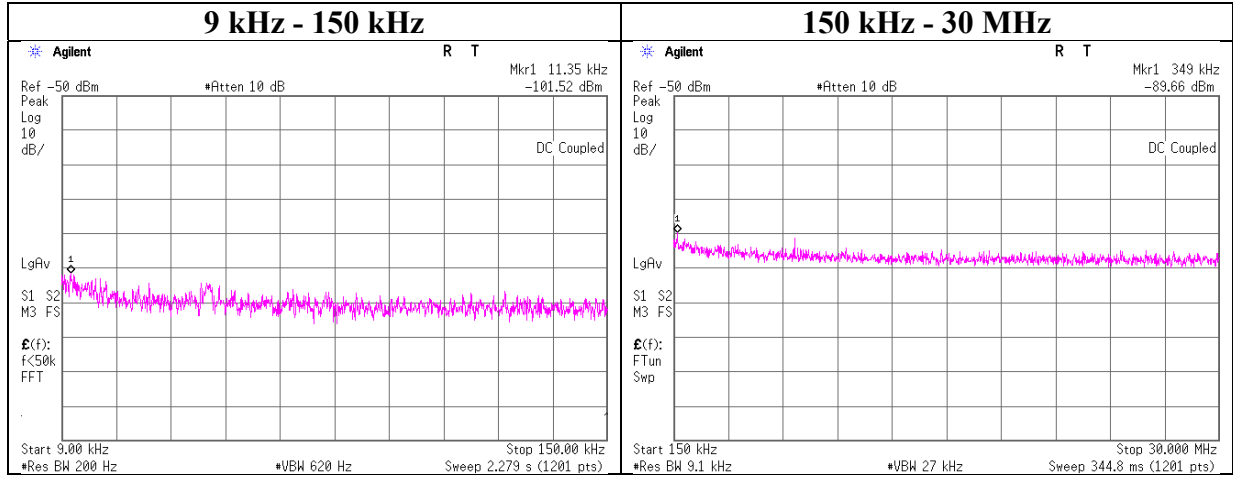

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
11.35	-101.5	0.10	9.9	5.05	1	-86.5	300	6.0	-25.2	46.5	71.7	
349.00	-89.7	0.10	9.9	5.05	1	-74.7	300	6.0	-13.4	16.7	30.1	

$$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log(\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$$

$$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log(N)$$

N: Number of output

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

### Power Density

Report No. 13280770H  
Test place Ise EMC Lab. No.6 Measurement Room  
Date March 23, 2020  
Temperature / Humidity 23 deg. C / 41 % RH  
Engineer Hiroyuki Furutaka  
Mode Tx BT LE

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result [dBm]	Limit [dBm]	Margin [dB]
2402	-28.32	1.07	10.06	-17.19	8.00	25.19
2440	-28.32	1.07	10.06	-17.19	8.00	25.19
2480	-28.44	1.08	10.06	-17.30	8.00	25.30

Sample Calculation:


Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

\*The equipment and cables were not used for factor 0 dB of the data sheets.


## Power Density

### BT LE


#### 2402 MHz

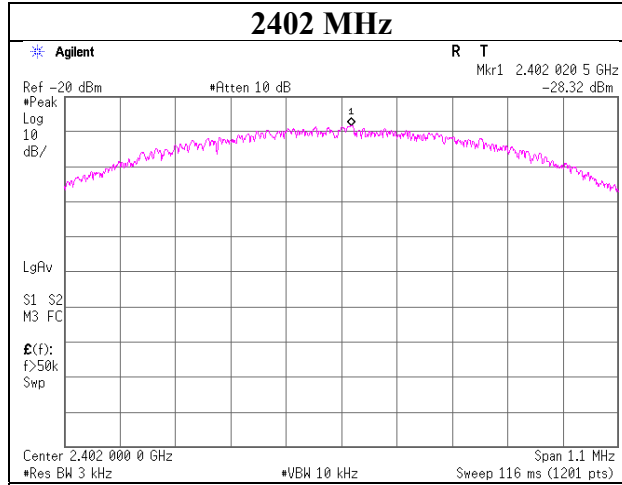

#### 2440 MHz

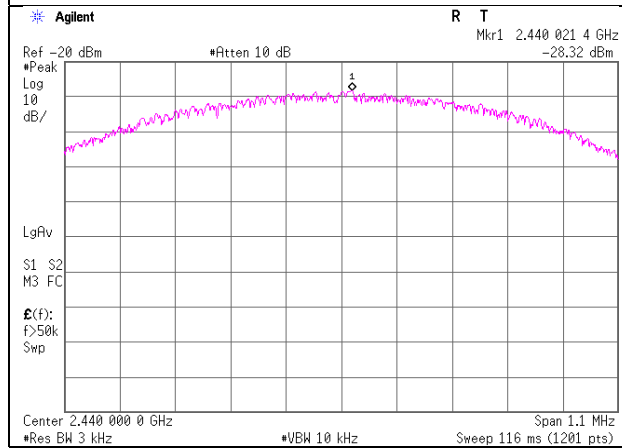

#### 2480 MHz

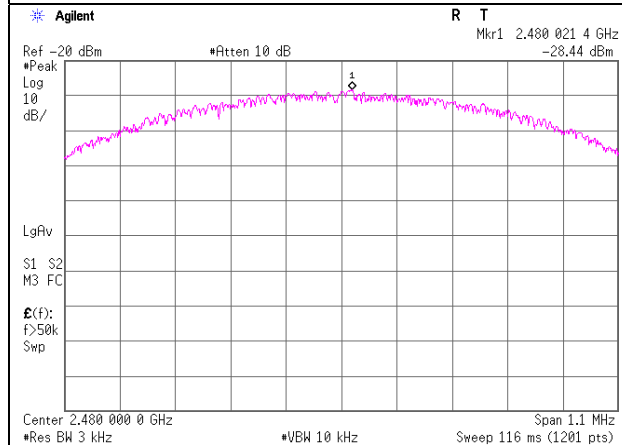

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## **APPENDIX 2: Test instruments**

### **Test equipment**

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	MAT-07	141203	Attenuator(6dB)	Weinschel Corp	2	BK7970	11/07/2019	12
RE	MBA-08	141427	Biconical Antenna	Schwarzbeck Mess - Elektronik	VHA9103B+ BBA9106	8031	08/23/2019	12
RE	MCC-12	141317	Coaxial Cable	Fujikura/Agilent	-	-	09/03/2019	12
RE	MLA-21	141265	Logperiodic Antenna (200-1000MHz)	Schwarzbeck Mess - Elektronik	VUSLP9111B	9111B-190	08/23/2019	12
RE	MPA-09	141578	Pre Amplifier	Keysight Technologies Inc	8447D	2944A10845	09/06/2019	12
RE	MTR-03	141942	Test Receiver	Rohde & Schwarz	ESCI	100300	08/08/2019	12
RE	MAEC-02	142004	AC2_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-06902	06/29/2018	24
RE	MOS-41	192300	Thermo-Hygrometer	CUSTOM	CTH-201	0013	12/19/2019	12
RE	MMM-01	141542	Digital Tester	Fluke Corporation	FLUKE 26-3	78030611	08/20/2019	12
RE	MJM-27	142228	Measure	KOMELON	KMC-36	-	-	-
RE	COTS-MEMI-02	178648	EMI measurement program	TSJ	TEPTO-DV	-	-	-
RE	MAEC-02-SVSWR	142006	AC2_Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 3m	DA-06902	04/01/2019	24
RE	MHA-06	141512	Horn Antenna 1-18GHz	Schwarzbeck Mess - Elektronik	BBHA9120D	254	09/03/2019	12
RE	MCC-216	141392	Microwave Cable	Junkosha	MWX221	1604S253(1 m) / 537073/126E(5 m)	02/18/2020	12
RE	MPA-10	141579	Pre Amplifier	Keysight Technologies Inc	8449B	3008A02142	01/07/2020	12
RE	MHA-02	141503	Horn Antenna 18-26.5GHz	EMCO	3160-09	1265	10/08/2019	12
AT	MOS-14	141561	Thermo-Hygrometer	CUSTOM	CTH-201	1401	01/07/2020	12
AT	MMM-12	141547	DIGITAL HiTESTER	Hioki	3805	60500120	02/03/2020	12
AT	MSA-14	141901	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY48250080	10/06/2019	12
AT	MPM-08	141805	Power Meter	ANRITSU	ML2495A	6K00003338	10/03/2019	12
AT	MPSE-11	141840	Power sensor	ANRITSU	MA2411B	11737	10/03/2019	12
AT	MAT-10	141156	Attenuator(10dB)	Weinschel Corp	2	BL1173	11/07/2019	12
AT	MCC-38	141395	Coaxial Cable	UL Japan	-	-	11/12/2019	12
AT	MCC-170	141321	Microwave Cable	Junkosha	MWX221	1409S493	-	-
AT	MAT-58	141334	Attenuator(10dB)	Suhner	6810.19.A	-	12/09/2019	12

\*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:

**RE: Radiated Emission test**

**AT: Antenna Terminal Conducted test**

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124