

FCC Test Report (WLAN)

Report No.: RF200131E01

FCC ID: Q87-03457

Test Model: WSP080

Received Date: Jan. 31, 2020

Test Date: Feb. 15 to 20, 2020

Issued Date: Mar. 02, 2020

Applicant: LINKYSYS LLC

Address: 121 Theory Drive Irvine California 92617 United States

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	8
3.2.1 Test Mode Applicability and Tested Channel Detail	9
3.3 Duty Cycle of Test Signal	11
3.4 Description of Support Units	12
3.4.1 Configuration of System under Test	12
3.5 General Description of Applied Standards and references	13
4 Test Types and Results	14
4.1 Radiated Emission and Bandedge Measurement	14
4.1.1 Limits of Radiated Emission and Bandedge Measurement	14
4.1.2 Test Instruments	15
4.1.3 Test Procedures	16
4.1.4 Deviation from Test Standard	16
4.1.5 Test Setup	17
4.1.6 EUT Operating Conditions	18
4.1.7 Test Results	19
4.2 Conducted Emission Measurement	30
4.2.1 Limits of Conducted Emission Measurement	30
4.2.2 Test Instruments	30
4.2.3 Test Procedures	31
4.2.4 Deviation from Test Standard	31
4.2.5 Test Setup	31
4.2.6 EUT Operating Conditions	31
4.2.7 Test Results	32
4.3 6dB Bandwidth Measurement	34
4.3.1 Limits of 6dB Bandwidth Measurement	34
4.3.2 Test Setup	34
4.3.3 Test Instruments	34
4.3.4 Test Procedure	34
4.3.5 Deviation from Test Standard	34
4.3.6 EUT Operating Conditions	34
4.3.7 Test Result	35
4.4 Conducted Output Power Measurement	37
4.4.1 Limits of Conducted Output Power Measurement	37
4.4.2 Test Setup	37
4.4.3 Test Instruments	37
4.4.4 Test Procedures	37
4.4.5 Deviation from Test Standard	37
4.4.6 EUT Operating Conditions	37
4.4.7 Test Results	38
4.5 Power Spectral Density Measurement	39
4.5.1 Limits of Power Spectral Density Measurement	39
4.5.2 Test Setup	39
4.5.3 Test Instruments	39
4.5.4 Test Procedure	39
4.5.5 Deviation from Test Standard	39
4.5.6 EUT Operating Condition	39

4.5.7 Test Results	40
4.6 Conducted Out of Band Emission Measurement	42
4.6.1 Limits of Conducted Out of Band Emission Measurement.....	42
4.6.2 Test Setup.....	42
4.6.3 Test Instruments	42
4.6.4 Test Procedure	42
4.6.5 Deviation from Test Standard	42
4.6.6 EUT Operating Condition	42
4.6.7 Test Results	42
5 Pictures of Test Arrangements.....	46
Appendix – Information of the Testing Laboratories	47

Release Control Record

Issue No.	Description	Date Issued
RF200131E01	Original release.	Mar. 02, 2020

1 Certificate of Conformity

Product: WEMO Smart Plug

Brand: WeMo

Test Model: WSP080

Sample Status: ENGINEERING SAMPLE

Applicant: LINKYSYS LLC

Test Date: Feb. 15 to 20, 2020

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Joyce Kuo , **Date:** Mar. 02, 2020
Joyce Kuo / Specialist

Approved by : Clark Lin , **Date:** Mar. 02, 2020
Clark Lin / Technical Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -11.41dB at 0.38047MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 4824.00MHz & 4874.00MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

Note:

Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.8 dB
Conducted Emissions	-	3.1 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.0 dB
	30MHz ~ 1GHz	4.9 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.1 dB
	6GHz ~ 18GHz	4.9 dB
	18GHz ~ 40GHz	5.2 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	WEMO Smart Plug
Brand	WeMo
Test Model	WSP080
Status of EUT	ENGINEERING SAMPLE
Driver Version	User mode - WEMO_4.00.20020704.DVT-RTOS-SNSV4_patch_wemo_(v25)
Power Supply Rating	120Vac
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11g: up to 54Mbps 802.11n: up to 72.2Mbps
Operating Frequency Band	2412 ~ 2462 MHz
Number of Channel	802.11b, 802.11g, 802.11n (HT20): 11
Output Power	240.436 mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	NA
Data Cable Supplied	NA

Note:

1. The antenna provided to the EUT, please refer to the following table:

Antenna No.	Ant. Net Gain (dBi)	Frequency range (GHz)	Antenna Type	Connector Type
1	0	2.4~2.4835	PIFA	none

2. The EUT incorporates a SISO function.

2.4GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11b	1TX	1RX
802.11g	1TX	1RX
802.11n (HT20)	1TX	1RX

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE $<$ 1G	PLC	APCM	
-	√	√	√	√	-

Where **RE \geq 1G**: Radiated Emission above 1GHz & Bandedge Measurement **RE $<$ 1G**: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Note: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, configurations (Header pin and FFC), antenna types (integrated and external antennas of different vendor and different length), antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, configurations (Header pin and FFC), antenna types (integrated and external antennas of different vendor and different length), antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, configurations (Header pin and FFC), antenna types (integrated and external antennas of different vendor and different length), antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, configurations (Header pin and FFC), antenna types (integrated and external antennas of different vendor and different length), antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE \geq 1G	21deg. C, 69%RH	120Vac, 60Hz	Ryan Du
RE $<$ 1G	22deg. C, 67%RH	120Vac, 60Hz	Kevin Ko
PLC	25deg. C, 75%RH	120Vac, 60Hz	Kevin Ko
APCM	25deg. C, 60%RH	120Vac, 60Hz	Anderson Chen

3.3 Duty Cycle of Test Signal


If duty cycle of test signal is $\geq 98\%$, duty factor is not required.

If duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11b: Duty cycle = $12.469 \text{ ms} / 12.607 \text{ ms} = 0.989$

802.11g: Duty cycle = $2.063 \text{ ms} / 2.211 \text{ ms} = 0.933$, Duty factor = $10 * \log(1/\text{Duty cycle}) = 0.30$

802.11n (HT20): Duty cycle = $1.919 \text{ ms} / 2.076 \text{ ms} = 0.924$, Duty factor = $10 * \log(1/\text{Duty cycle}) = 0.34$

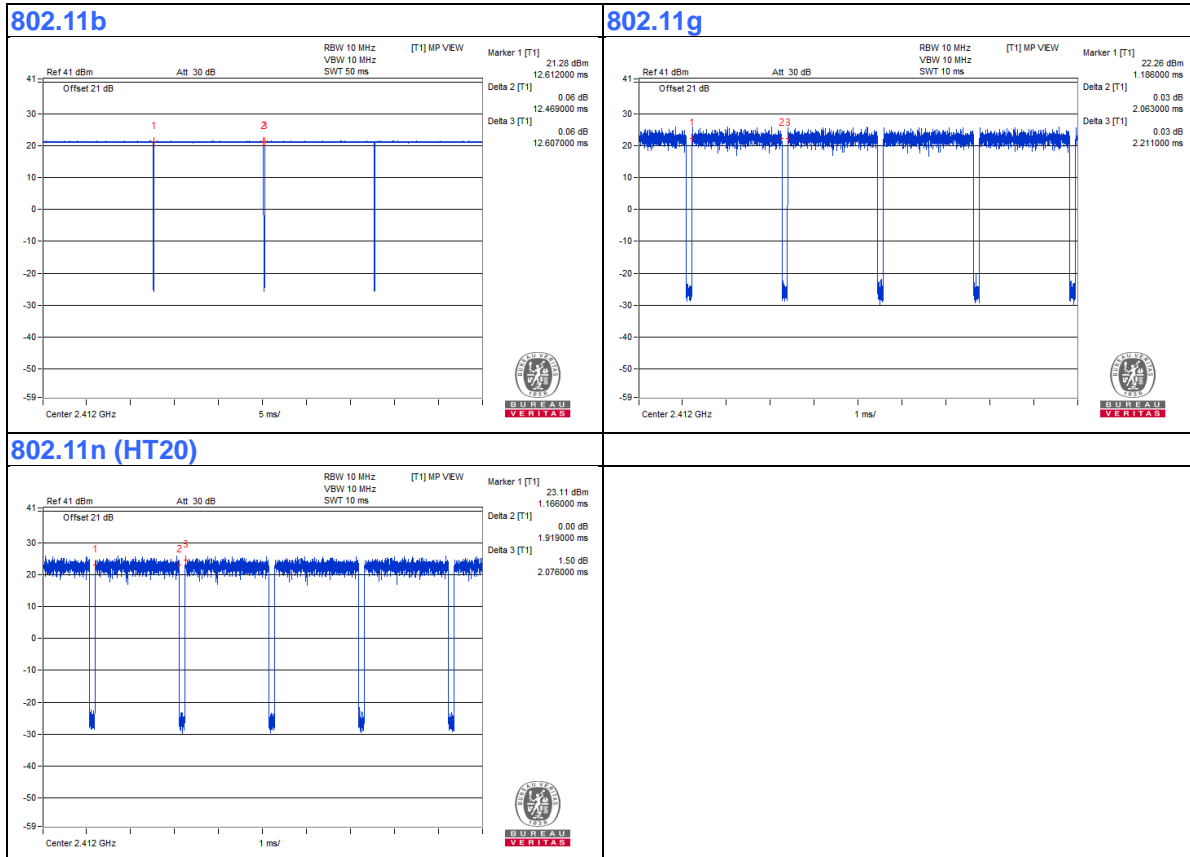


3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Lamp *8	NICHIA	NA	NA	NA	Provided by Lab
B.	Lamp Stand	NA	NA	NA	NA	Provided by Lab

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	AC Power cable	1	1.8	No	0	Provided by Lab

3.4.1 Configuration of System under Test

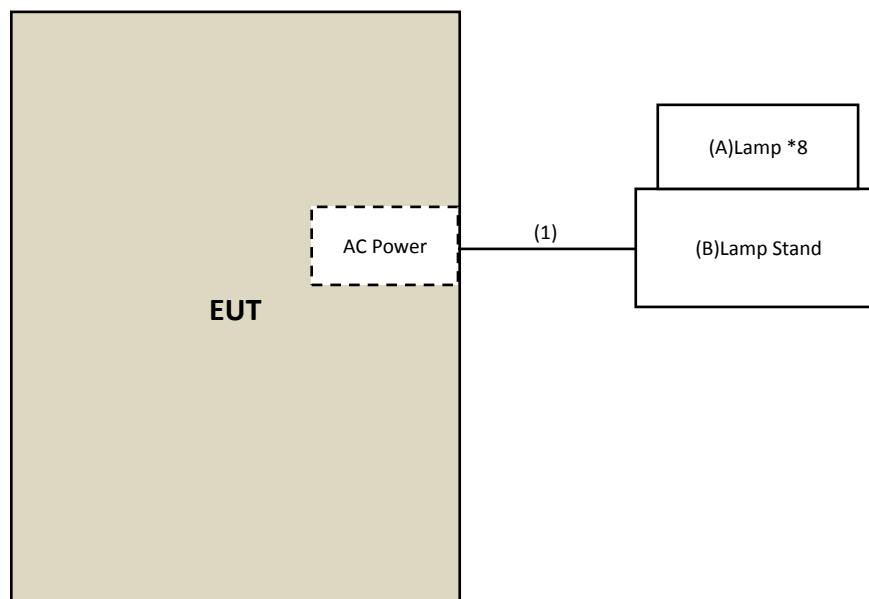

3.5 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test standard:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 558074 D01 15.247 Meas Guidance v05r02

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY51210202	Dec. 13, 2019	Dec. 12, 2020
Pre-Amplifier EMCI	EMC001340	980142	May 30, 2019	May 29, 2020
Loop Antenna Electro-Metrics	EM-6879	269	Sep. 16, 2019	Sep. 15, 2020
RF Cable	NA	LOOPCAB-001	Jan. 08, 2020	Jan. 07, 2021
RF Cable	NA	LOOPCAB-002	Jan. 08, 2020	Jan. 07, 2021
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-01	Oct. 23, 2019	Oct. 22, 2020
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Nov. 11, 2019	Nov. 10, 2020
RF Cable	8D	966-4-1	Mar. 19, 2019	Mar. 18, 2020
RF Cable	8D	966-4-2	Mar. 19, 2019	Mar. 18, 2020
RF Cable	8D	966-4-3	Mar. 19, 2019	Mar. 18, 2020
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Sep. 26, 2019	Sep. 25, 2020
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Nov. 24, 2019	Nov. 23, 2020
Pre-Amplifier EMCI	EMC12630SE	980385	Aug. 15, 2019	Aug. 14, 2020
RF Cable	EMC104-SM-SM-1200	160923	Jan. 15, 2020	Jan. 14, 2021
RF Cable	104 RF cable	131215	Jan. 09, 2020	Jan. 08, 2021
RF Cable	EMC104-SM-SM-6000	180418	May 03, 2019	May 02, 2020
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 15, 2020	Jan. 14, 2021
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
RF Cable	EMC102-KM-KM-1200	160924	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC102-KM-KM-4500	181205	Aug. 26, 2019	Aug. 25, 2020
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA
Spectrum Analyzer R&S	FSV40	100964	June 04, 2019	June 03, 2020
Power meter Anritsu	ML2495A	1014008	May 13, 2019	May 12, 2020
Power sensor Anritsu	MA2411B	0917122	May 13, 2019	May 12, 2020
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 15, 2019	Apr. 14, 2020

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. Loop antenna was used for all emissions below 30 MHz.
4. Tested Date: Feb. 15 to 20, 2020

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

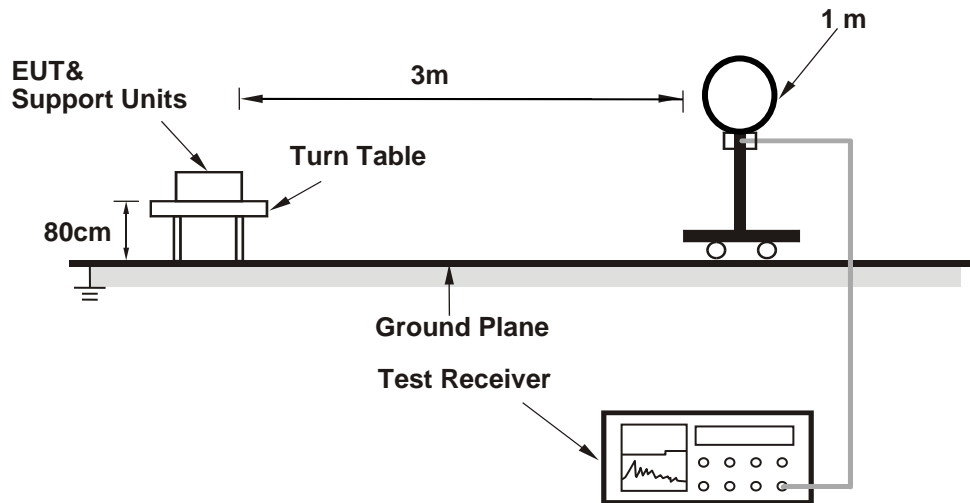

For Radiated emission 30MHz to 1GHz

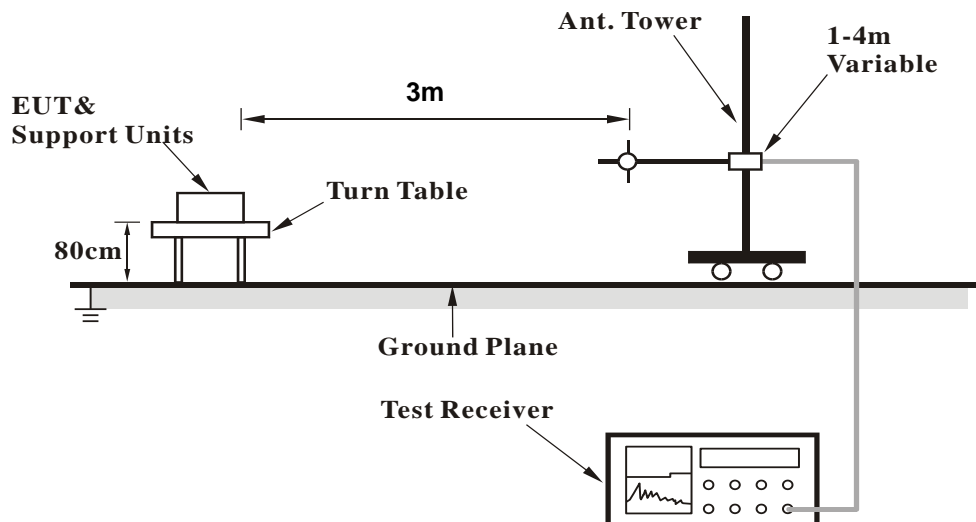

For Radiated emission above 1GHz

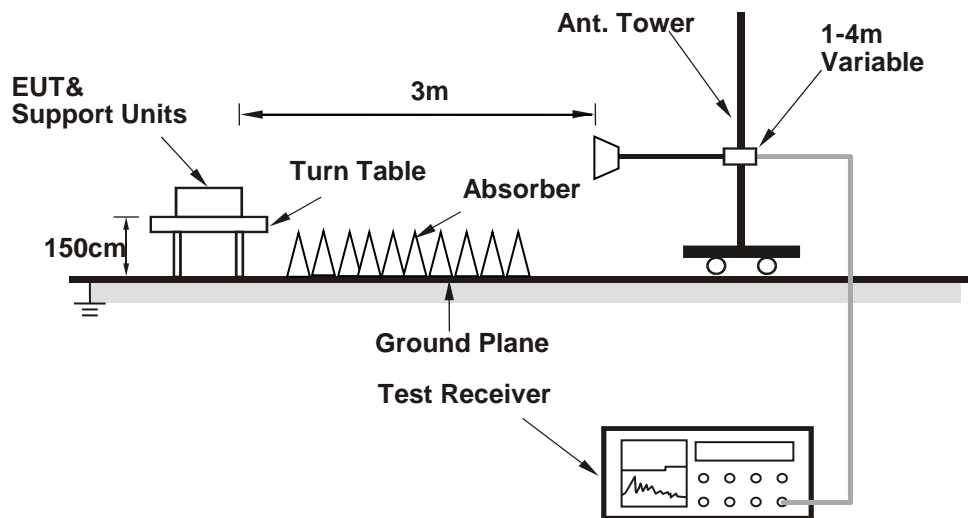

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Placed the EUT on the testing table.
- b. Controlling software (UI_mptool) has been activated to set the EUT under transmission condition continuously.

4.1.7 Test Results

ABOVE 1GHz DATA

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.3 PK	74.0	-18.7	2.86 H	138	57.0	-1.7
2	2390.00	42.0 AV	54.0	-12.0	2.86 H	138	43.7	-1.7
3	*2412.00	98.5 PK			2.86 H	138	100.3	-1.8
4	*2412.00	96.2 AV			2.86 H	138	98.0	-1.8
5	4824.00	55.4 PK	74.0	-18.6	2.56 H	99	53.1	2.3
6	4824.00	53.9 AV	54.0	-0.1	2.56 H	99	51.6	2.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.2 PK	74.0	-18.8	1.36 V	346	56.9	-1.7
2	2390.00	41.8 AV	54.0	-12.2	1.36 V	346	43.5	-1.7
3	*2412.00	97.6 PK			1.36 V	346	99.4	-1.8
4	*2412.00	95.2 AV			1.36 V	346	97.0	-1.8
5	4824.00	49.2 PK	74.0	-24.8	2.42 V	300	46.9	2.3
6	4824.00	46.9 AV	54.0	-7.1	2.42 V	300	44.6	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.0 PK	74.0	-19.0	3.11 H	127	56.7	-1.7
2	2390.00	41.6 AV	54.0	-12.4	3.11 H	127	43.3	-1.7
3	*2437.00	98.3 PK			3.11 H	127	100.0	-1.7
4	*2437.00	96.0 AV			3.11 H	127	97.7	-1.7
5	2483.50	54.8 PK	74.0	-19.2	3.11 H	127	56.5	-1.7
6	2483.50	41.6 AV	54.0	-12.4	3.11 H	127	43.3	-1.7
7	4874.00	55.2 PK	74.0	-18.8	2.45 H	90	53.0	2.2
8	4874.00	53.9 AV	54.0	-0.1	2.45 H	90	51.7	2.2
9	7311.00	44.3 PK	74.0	-29.7	1.67 H	24	35.2	9.1
10	7311.00	32.0 AV	54.0	-22.0	1.67 H	24	22.9	9.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.9 PK	74.0	-19.1	1.37 V	341	56.6	-1.7
2	2390.00	41.4 AV	54.0	-12.6	1.37 V	341	43.1	-1.7
3	*2437.00	97.3 PK			1.37 V	341	99.0	-1.7
4	*2437.00	94.9 AV			1.37 V	341	96.6	-1.7
5	2483.50	54.7 PK	74.0	-19.3	1.37 V	341	56.4	-1.7
6	2483.50	41.3 AV	54.0	-12.7	1.37 V	341	43.0	-1.7
7	4874.00	49.3 PK	74.0	-24.7	2.40 V	304	47.1	2.2
8	4874.00	47.0 AV	54.0	-7.0	2.40 V	304	44.8	2.2
9	7311.00	44.1 PK	74.0	-29.9	2.03 V	88	35.0	9.1
10	7311.00	31.8 AV	54.0	-22.2	2.03 V	88	22.7	9.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	96.7 PK			3.26 H	110	98.4	-1.7
2	*2462.00	94.2 AV			3.26 H	110	95.9	-1.7
3	2483.50	55.1 PK	74.0	-18.9	3.26 H	110	56.8	-1.7
4	2483.50	41.8 AV	54.0	-12.2	3.26 H	110	43.5	-1.7
5	4924.00	54.6 PK	74.0	-19.4	2.28 H	93	52.2	2.4
6	4924.00	53.7 AV	54.0	-0.3	2.28 H	93	51.3	2.4
7	7386.00	44.0 PK	74.0	-30.0	1.72 H	31	34.5	9.5
8	7386.00	31.7 AV	54.0	-22.3	1.72 H	31	22.2	9.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	95.6 PK			1.38 V	332	97.3	-1.7
2	*2462.00	93.0 AV			1.38 V	332	94.7	-1.7
3	2483.50	55.0 PK	74.0	-19.0	1.38 V	332	56.7	-1.7
4	2483.50	41.5 AV	54.0	-12.5	1.38 V	332	43.2	-1.7
5	4924.00	49.5 PK	74.0	-24.5	2.35 V	296	47.1	2.4
6	4924.00	47.2 AV	54.0	-6.8	2.35 V	296	44.8	2.4
7	7386.00	44.3 PK	74.0	-29.7	2.21 V	96	34.8	9.5
8	7386.00	31.9 AV	54.0	-22.1	2.21 V	96	22.4	9.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.3 PK	74.0	-10.7	2.60 H	108	65.0	-1.7
2	2390.00	46.0 AV	54.0	-8.0	2.60 H	108	47.7	-1.7
3	*2412.00	106.3 PK			2.60 H	108	108.1	-1.8
4	*2412.00	96.6 AV			2.60 H	108	98.4	-1.8
5	4824.00	61.3 PK	74.0	-12.7	2.46 H	102	59.0	2.3
6	4824.00	47.9 AV	54.0	-6.1	2.46 H	102	45.6	2.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.6 PK	74.0	-18.4	1.35 V	354	57.3	-1.7
2	2390.00	42.2 AV	54.0	-11.8	1.35 V	354	43.9	-1.7
3	*2412.00	105.4 PK			1.35 V	354	107.2	-1.8
4	*2412.00	95.4 AV			1.35 V	354	97.2	-1.8
5	4824.00	56.2 PK	74.0	-17.8	2.41 V	301	53.9	2.3
6	4824.00	41.2 AV	54.0	-12.8	2.41 V	301	38.9	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.5 PK	74.0	-18.5	1.10 H	133	57.2	-1.7
2	2390.00	43.3 AV	54.0	-10.7	1.10 H	133	45.0	-1.7
3	*2437.00	106.1 PK			1.10 H	133	107.8	-1.7
4	*2437.00	96.4 AV			1.10 H	133	98.1	-1.7
5	2483.50	55.3 PK	74.0	-18.7	1.10 H	133	57.0	-1.7
6	2483.50	42.8 AV	54.0	-11.2	1.10 H	133	44.5	-1.7
7	4874.00	61.6 PK	74.0	-12.4	2.47 H	92	59.4	2.2
8	4874.00	48.1 AV	54.0	-5.9	2.47 H	92	45.9	2.2
9	7311.00	43.6 PK	74.0	-30.4	1.72 H	37	34.5	9.1
10	7311.00	31.5 AV	54.0	-22.5	1.72 H	37	22.4	9.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.1 PK	74.0	-18.9	1.35 V	345	56.8	-1.7
2	2390.00	41.6 AV	54.0	-12.4	1.35 V	345	43.3	-1.7
3	*2437.00	104.9 PK			1.35 V	345	106.6	-1.7
4	*2437.00	95.1 AV			1.35 V	345	96.8	-1.7
5	2483.50	54.8 PK	74.0	-19.2	1.35 V	345	56.5	-1.7
6	2483.50	41.6 AV	54.0	-12.4	1.35 V	345	43.3	-1.7
7	4874.00	56.5 PK	74.0	-17.5	2.35 V	296	54.3	2.2
8	4874.00	42.0 AV	54.0	-12.0	2.35 V	296	39.8	2.2
9	7311.00	45.0 PK	74.0	-29.0	2.07 V	103	35.9	9.1
10	7311.00	32.6 AV	54.0	-21.4	2.07 V	103	23.5	9.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.0 PK			3.28 H	113	108.7	-1.7
2	*2462.00	97.3 AV			3.28 H	113	99.0	-1.7
3	2483.50	66.5 PK	74.0	-7.5	3.28 H	113	68.2	-1.7
4	2483.50	47.7 AV	54.0	-6.3	3.28 H	113	49.4	-1.7
5	4924.00	62.9 PK	74.0	-11.1	2.54 H	90	60.5	2.4
6	4924.00	49.6 AV	54.0	-4.4	2.54 H	90	47.2	2.4
7	7386.00	44.7 PK	74.0	-29.3	1.70 H	45	35.2	9.5
8	7386.00	32.5 AV	54.0	-21.5	1.70 H	45	23.0	9.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.0 PK			1.40 V	349	107.7	-1.7
2	*2462.00	96.1 AV			1.40 V	349	97.8	-1.7
3	2483.50	56.2 PK	74.0	-17.8	1.40 V	349	57.9	-1.7
4	2483.50	42.5 AV	54.0	-11.5	1.40 V	349	44.2	-1.7
5	4924.00	57.4 PK	74.0	-16.6	2.39 V	315	55.0	2.4
6	4924.00	43.3 AV	54.0	-10.7	2.39 V	315	40.9	2.4
7	7386.00	45.0 PK	74.0	-29.0	2.08 V	98	35.5	9.5
8	7386.00	32.8 AV	54.0	-21.2	2.08 V	98	23.3	9.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.8 PK	74.0	-12.2	1.11 H	135	63.5	-1.7
2	2390.00	47.3 AV	54.0	-6.7	1.11 H	135	49.0	-1.7
3	*2412.00	106.4 PK			1.11 H	135	108.2	-1.8
4	*2412.00	96.4 AV			1.11 H	135	98.2	-1.8
5	4824.00	59.0 PK	74.0	-15.0	2.52 H	92	56.7	2.3
6	4824.00	45.8 AV	54.0	-8.2	2.52 H	92	43.5	2.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.3 PK	74.0	-18.7	1.32 V	357	57.0	-1.7
2	2390.00	42.1 AV	54.0	-11.9	1.32 V	357	43.8	-1.7
3	*2412.00	105.8 PK			1.32 V	357	107.6	-1.8
4	*2412.00	95.6 AV			1.32 V	357	97.4	-1.8
5	4824.00	52.0 PK	74.0	-22.0	2.37 V	325	49.7	2.3
6	4824.00	38.2 AV	54.0	-15.8	2.37 V	325	35.9	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.5 PK	74.0	-19.5	1.09 H	137	56.2	-1.7
2	2390.00	42.8 AV	54.0	-11.2	1.09 H	137	44.5	-1.7
3	*2437.00	106.0 PK			1.09 H	137	107.7	-1.7
4	*2437.00	96.2 AV			1.09 H	137	97.9	-1.7
5	2483.50	54.3 PK	74.0	-19.7	1.09 H	137	56.0	-1.7
6	2483.50	42.8 AV	54.0	-11.2	1.09 H	137	44.5	-1.7
7	4874.00	59.6 PK	74.0	-14.4	2.46 H	84	57.4	2.2
8	4874.00	45.9 AV	54.0	-8.1	2.46 H	84	43.7	2.2
9	7311.00	43.0 PK	74.0	-31.0	1.71 H	41	33.9	9.1
10	7311.00	31.2 AV	54.0	-22.8	1.71 H	41	22.1	9.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.7 PK	74.0	-19.3	1.37 V	331	56.4	-1.7
2	2390.00	41.5 AV	54.0	-12.5	1.37 V	331	43.2	-1.7
3	*2437.00	104.8 PK			1.37 V	331	106.5	-1.7
4	*2437.00	95.2 AV			1.37 V	331	96.9	-1.7
5	2483.50	54.7 PK	74.0	-19.3	1.37 V	331	56.4	-1.7
6	2483.50	41.6 AV	54.0	-12.4	1.37 V	331	43.3	-1.7
7	4874.00	53.2 PK	74.0	-20.8	2.41 V	314	51.0	2.2
8	4874.00	39.8 AV	54.0	-14.2	2.41 V	314	37.6	2.2
9	7311.00	44.5 PK	74.0	-29.5	2.07 V	94	35.4	9.1
10	7311.00	32.6 AV	54.0	-21.4	2.07 V	94	23.5	9.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.8 PK			3.27 H	114	108.5	-1.7
2	*2462.00	97.1 AV			3.27 H	114	98.8	-1.7
3	2483.50	68.8 PK	74.0	-5.2	3.27 H	114	70.5	-1.7
4	2483.50	49.3 AV	54.0	-4.7	3.27 H	114	51.0	-1.7
5	4924.00	61.1 PK	74.0	-12.9	2.51 H	89	58.7	2.4
6	4924.00	47.8 AV	54.0	-6.2	2.51 H	89	45.4	2.4
7	7386.00	44.4 PK	74.0	-29.6	1.73 H	58	34.9	9.5
8	7386.00	32.4 AV	54.0	-21.6	1.73 H	58	22.9	9.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.4 PK			1.31 V	357	107.1	-1.7
2	*2462.00	95.7 AV			1.31 V	357	97.4	-1.7
3	2483.50	55.3 PK	74.0	-18.7	1.31 V	357	57.0	-1.7
4	2483.50	42.0 AV	54.0	-12.0	1.31 V	357	43.7	-1.7
5	4924.00	55.8 PK	74.0	-18.2	2.36 V	303	53.4	2.4
6	4924.00	41.9 AV	54.0	-12.1	2.36 V	303	39.5	2.4
7	7386.00	44.9 PK	74.0	-29.1	2.07 V	106	35.4	9.5
8	7386.00	32.6 AV	54.0	-21.4	2.07 V	106	23.1	9.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Below 1GHz Data:

802.11g


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	104.81	29.4 QP	43.5	-14.1	1.00 H	186	40.6	-11.2
2	150.01	33.0 QP	43.5	-10.5	2.00 H	70	40.6	-7.6
3	272.60	26.2 QP	46.0	-19.8	1.00 H	209	33.9	-7.7
4	381.48	25.9 QP	46.0	-20.1	2.00 H	123	30.6	-4.7
5	528.80	29.3 QP	46.0	-16.7	2.00 H	146	30.3	-1.0
6	671.61	33.1 QP	46.0	-12.9	1.50 H	274	31.3	1.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

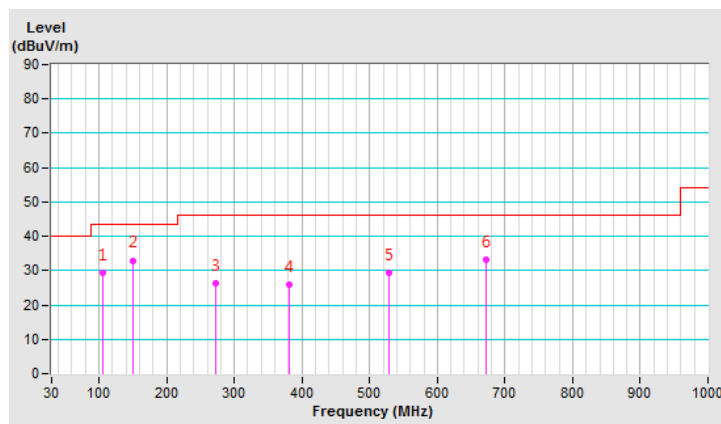


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	49.98	32.1 QP	40.0	-7.9	2.00 V	264	39.8	-7.7
2	94.63	31.2 QP	43.5	-12.3	2.00 V	12	44.3	-13.1
3	149.14	29.5 QP	43.5	-14.0	1.00 V	129	37.2	-7.7
4	350.05	27.2 QP	46.0	-18.8	1.50 V	1	33.0	-5.8
5	508.04	29.1 QP	46.0	-16.9	1.00 V	360	30.4	-1.3
6	652.74	32.9 QP	46.0	-13.1	1.50 V	100	31.3	1.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

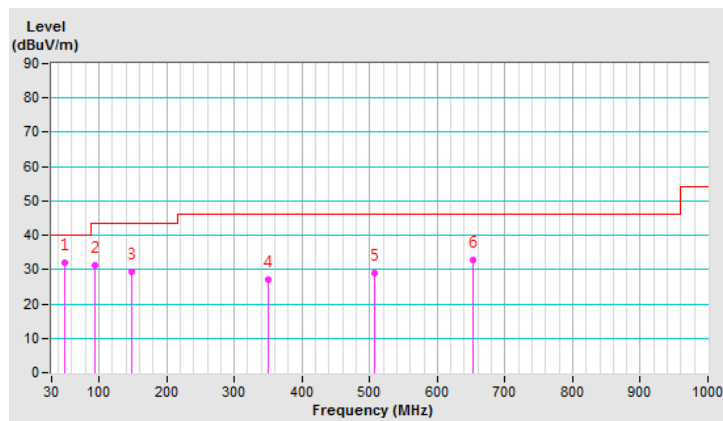

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	835239/001	Mar. 17, 2019	Mar. 16, 2020
50 ohms Terminator	50	3	Oct. 23, 2019	Oct. 22, 2020
RF Cable	5D-FB	COCCAB-001	Sep. 27, 2019	Sep. 26, 2020
Fixed attenuator EMCI	STI02-2200-10	003	Mar. 14, 2019	Mar. 13, 2020
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
- 3 Tested Date: Feb.15, 2020

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

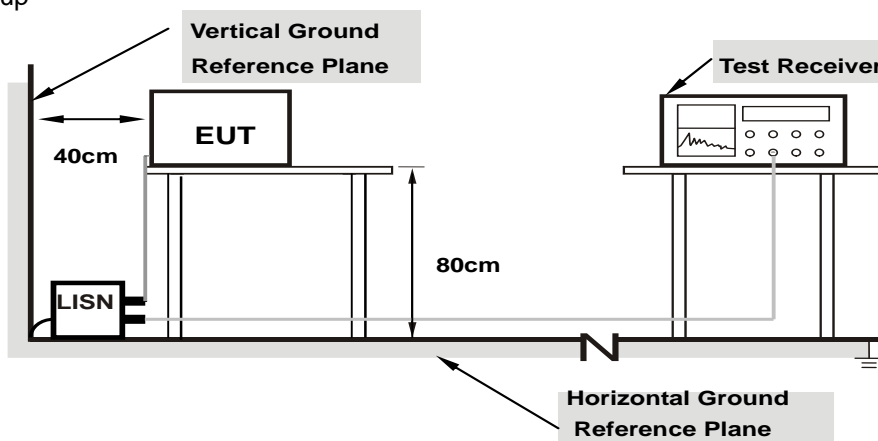

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.97	16.40	9.53	26.37	19.50	66.00	56.00	-39.63	-36.50
2	0.38047	9.98	28.50	26.88	38.48	36.86	58.27	48.27	-19.79	-11.41
3	0.97813	10.02	19.17	15.48	29.19	25.50	56.00	46.00	-26.81	-20.50
4	1.46094	10.04	23.93	19.95	33.97	29.99	56.00	46.00	-22.03	-16.01
5	2.31641	10.08	23.92	18.44	34.00	28.52	56.00	46.00	-22.00	-17.48
6	2.46094	10.09	22.71	17.12	32.80	27.21	56.00	46.00	-23.20	-18.79

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

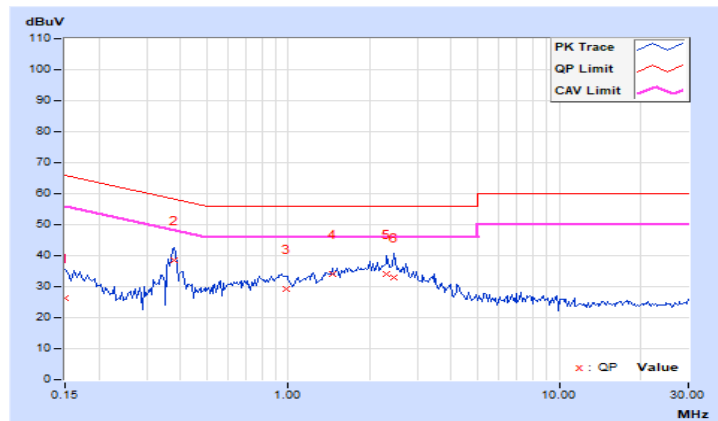


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.20078	9.97	17.98	11.55	27.95	21.52	63.58	53.58	-35.63	-32.06
2	0.36875	9.98	22.10	5.63	32.08	15.61	58.53	48.53	-26.45	-32.92
3	0.40781	9.98	16.20	4.85	26.18	14.83	57.69	47.69	-31.51	-32.86
4	0.90781	10.01	23.29	14.70	33.30	24.71	56.00	46.00	-22.70	-21.29
5	2.09375	10.06	22.35	17.24	32.41	27.30	56.00	46.00	-23.59	-18.70
6	2.44531	10.08	20.98	14.27	31.06	24.35	56.00	46.00	-24.94	-21.65

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

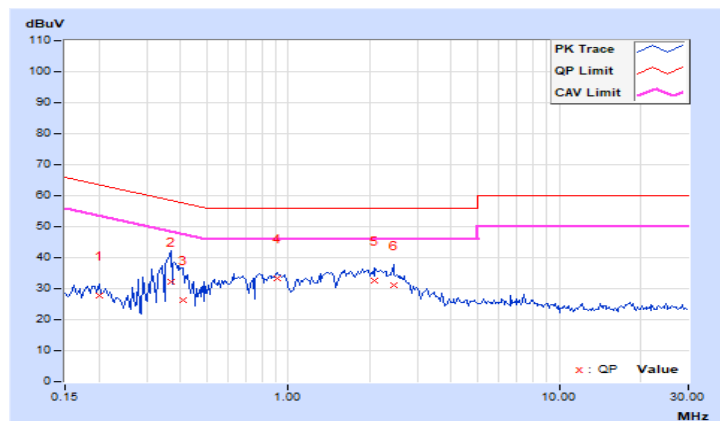


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup

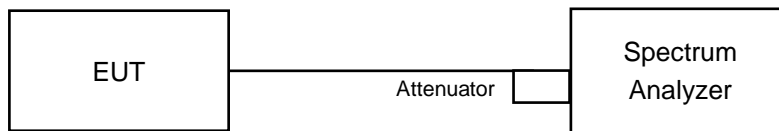

4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Pass / Fail
			Minimum	
1	2412	9.09	0.5	PASS
6	2437	9.09	0.5	PASS
11	2462	9.08	0.5	PASS

802.11g


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Pass / Fail
			Minimum	
1	2412	16.42	0.5	PASS
6	2437	16.42	0.5	PASS
11	2462	16.42	0.5	PASS

802.11n (HT20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Pass / Fail
			Minimum	
1	2412	17.6	0.5	PASS
6	2437	17.36	0.5	PASS
11	2462	17.6	0.5	PASS

Spectrum Plot of Worst Value


802.11b / CH1

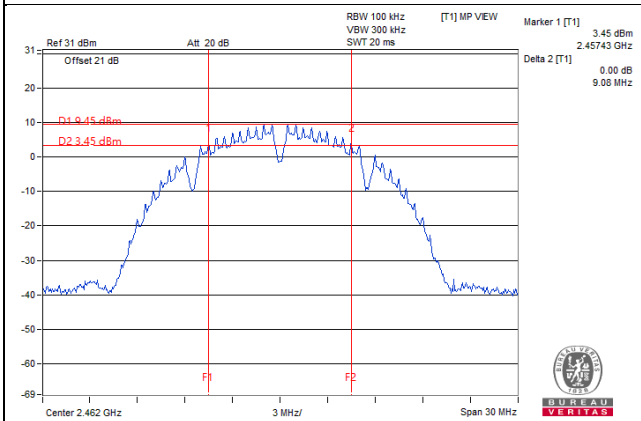

802.11g / CH1

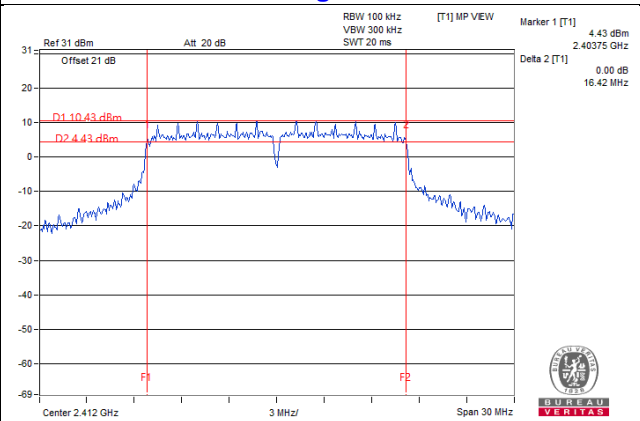

802.11n (HT20) / CH6

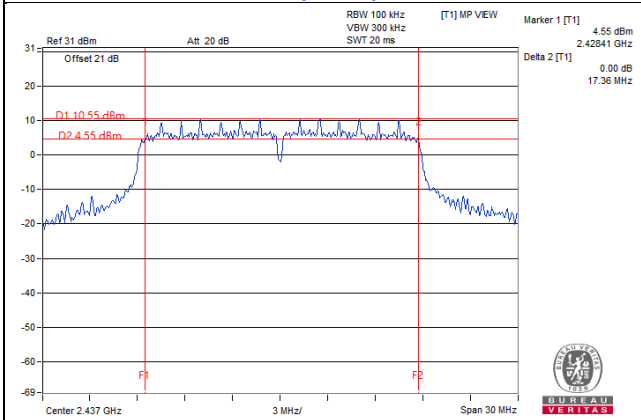


4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.4.2 Test Setup

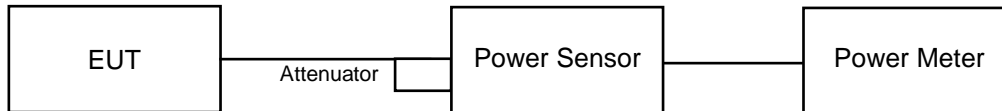

4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

802.11b

Chan.	Chan. Freq. (MHz)	Average Power (dBm)	Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	19.86	96.828	19.86	30.00	PASS
6	2437	19.48	88.716	19.48	30.00	PASS
11	2462	17.72	59.156	17.72	30.00	PASS

802.11g

Chan.	Chan. Freq. (MHz)	Average Power (dBm)	Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	23.53	225.424	23.53	30.00	PASS
6	2437	23.81	240.436	23.81	30.00	PASS
11	2462	23.78	238.781	23.78	30.00	PASS

802.11n (HT20)


Chan.	Chan. Freq. (MHz)	Average Power (dBm)	Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	23.55	226.464	23.55	30.00	PASS
6	2437	23.67	232.809	23.67	30.00	PASS
11	2462	23.79	239.332	23.79	30.00	PASS

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.5.2 Test Setup

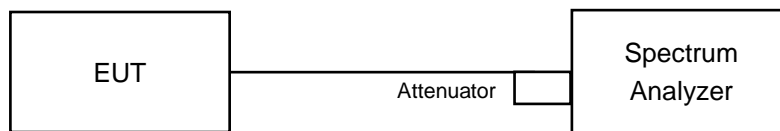

4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

For 802.11b

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.

For 802.11g, 802.11n (HT20)

- a) Measure the duty cycle (x).
- b) Set instrument center frequency to DTS channel center frequency.
- c) Set span to at least 1.5 times the OBW.
- d) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- e) Set VBW $\geq 3 \times \text{RBW}$.
- f) Detector = power averaging (RMS) or sample detector (when RMS not available).
- g) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- h) Sweep time = auto couple.
- i) Do not use sweep triggering. Allow sweep to "free run".
- j) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- k) Use the peak marker function to determine the maximum amplitude level.
- l) Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)	Total PSD (mW/3kHz)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
1	2412	-11.86	0.06516	-11.86	8.00	PASS
6	2437	-11.99	0.06324	-11.99	8.00	PASS
11	2462	-13.22	0.04764	-13.22	8.00	PASS

802.11g

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/3kHz)	Duty Factor (dB)	Total PSD (mW/3kHz)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
1	2412	-10.68	0.30	0.09164	-10.38	8.00	PASS
6	2437	-10.00	0.30	0.1072	-9.70	8.00	PASS
11	2462	-10.31	0.30	0.09979	-10.01	8.00	PASS

Note: 1. Refer to section 3.3 for duty cycle spectrum plot.


802.11n (HT20)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/3kHz)	Duty Factor (dB)	Total PSD (mW/3kHz)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
1	2412	-10.48	0.34	0.09686	-10.14	8.00	PASS
6	2437	-10.67	0.34	0.09272	-10.33	8.00	PASS
11	2462	-10.84	0.34	0.08916	-10.50	8.00	PASS


Note: 1. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11b / CH1

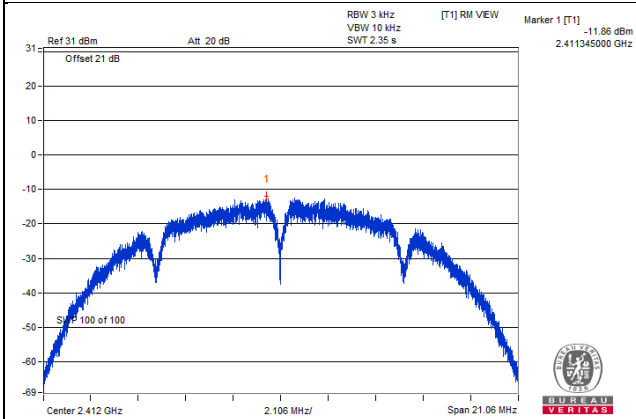

802.11g / CH6

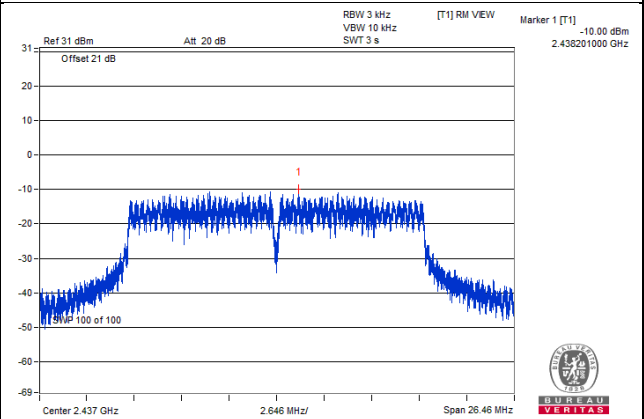

802.11n (HT20) / CH1

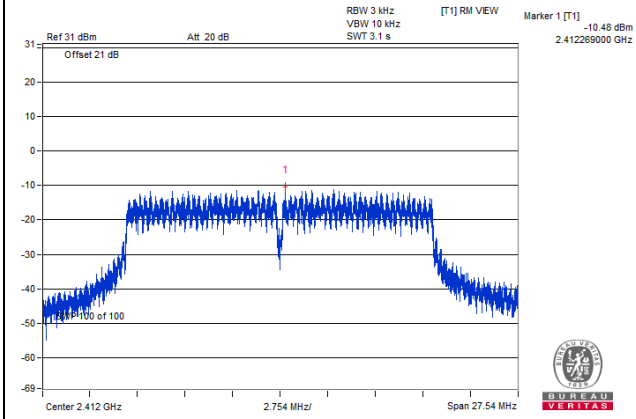


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below -30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup

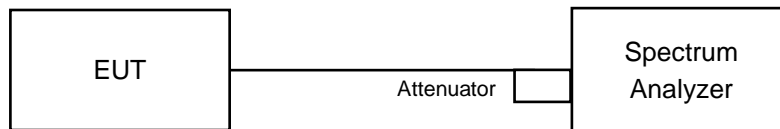

4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition


Same as Item 4.3.6

4.6.7 Test Results


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

802.11b


Maximum REF

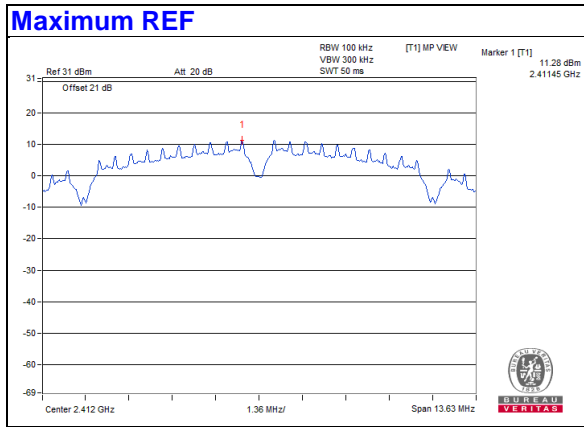


CH 1

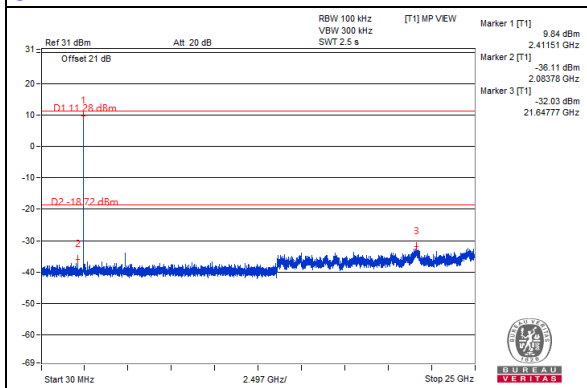


CH 6

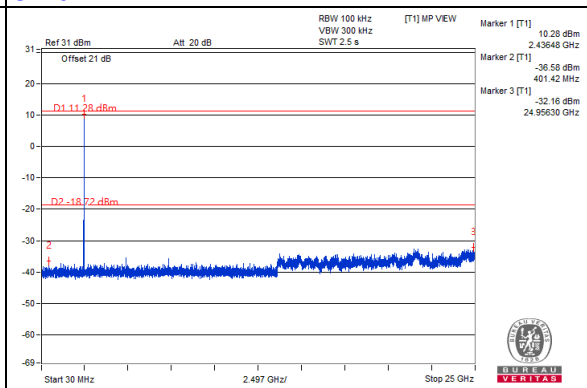


CH 11

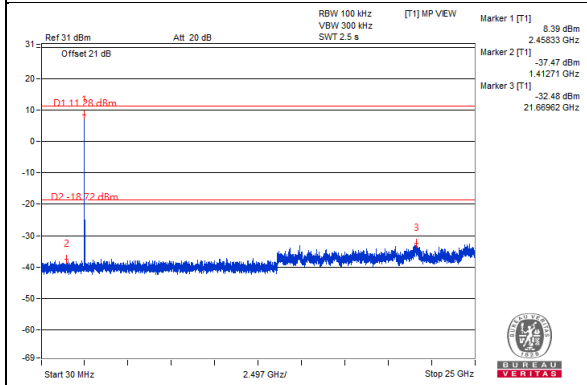







CH 1 Band edge

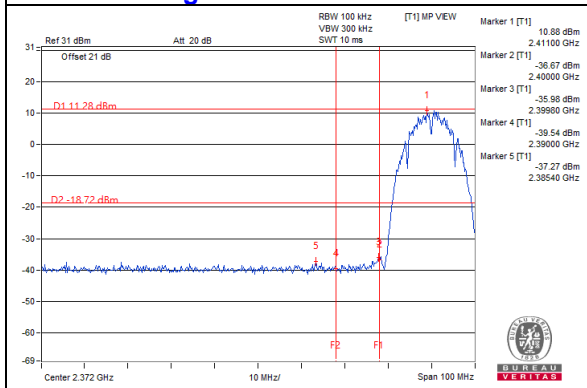


CH 11 Band edge

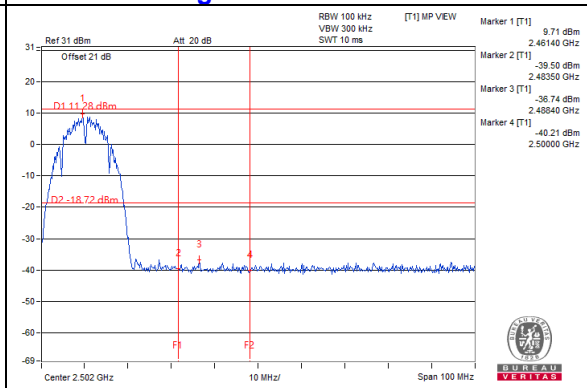


802.11g

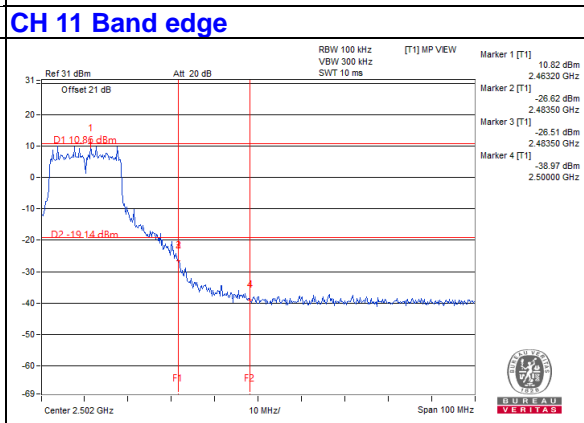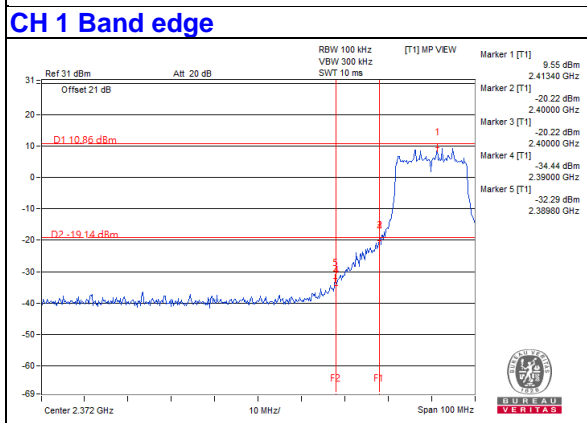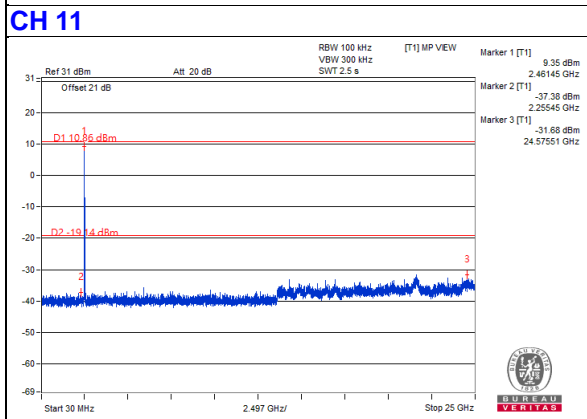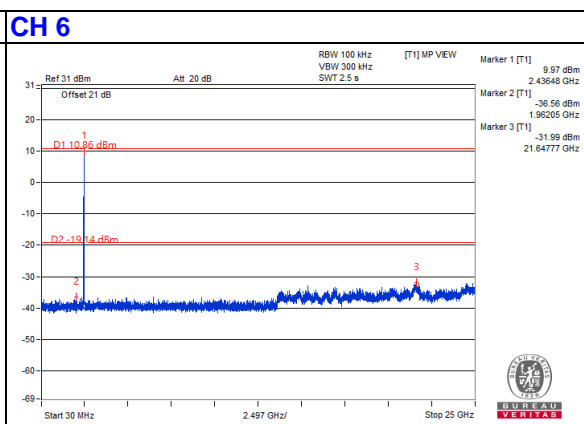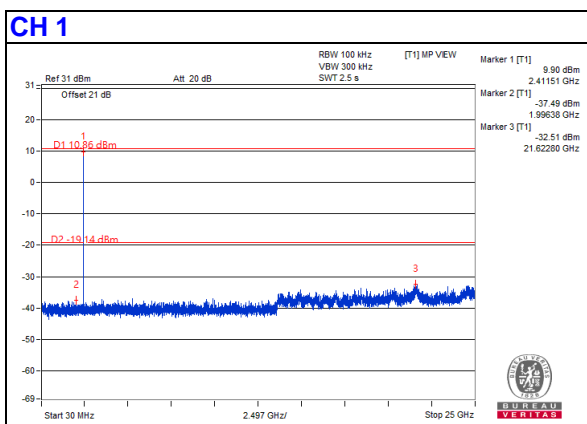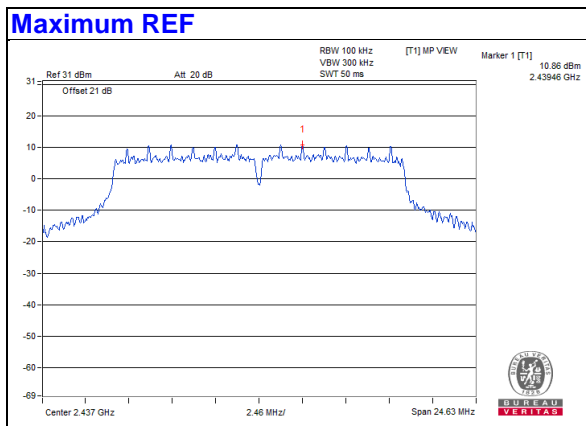


802.11n (HT20)

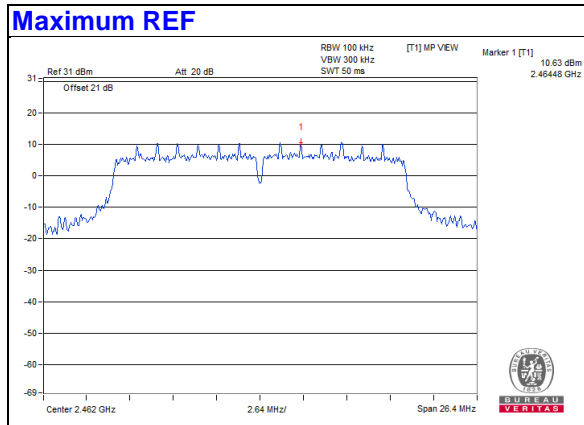


CH 1

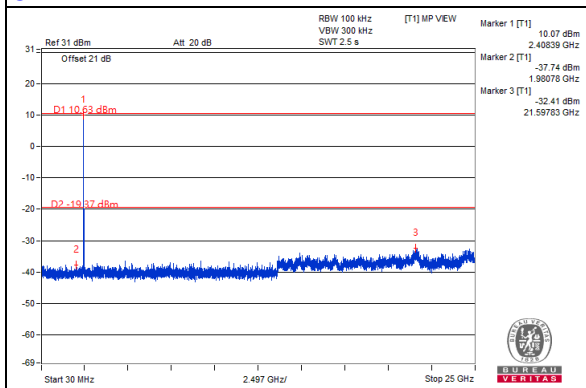


CH 6

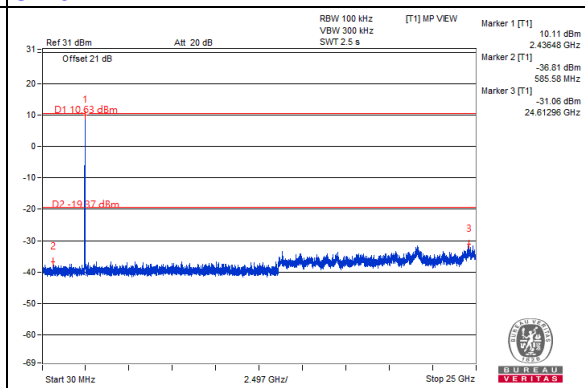


CH 11

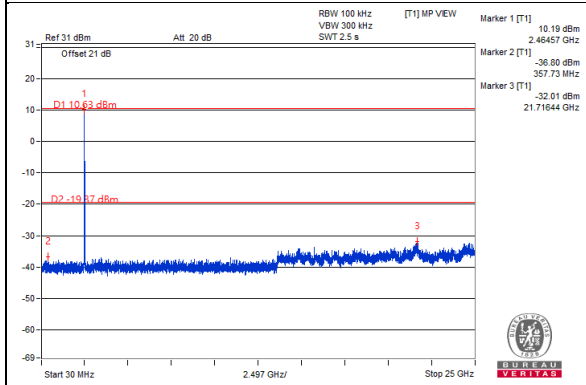

CH 1 Band edge

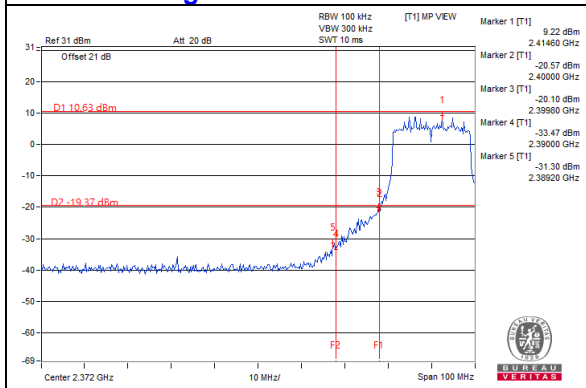

CH 11 Band edge

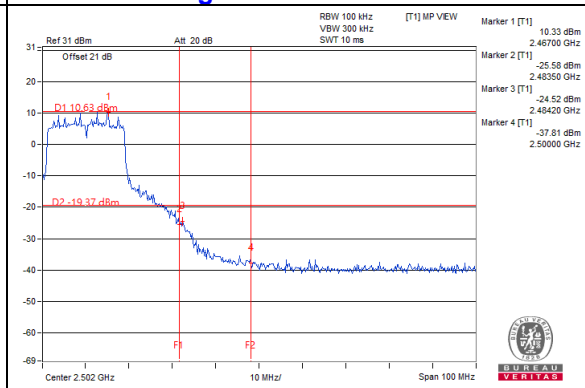

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---