



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	Linksys LLC
Applicant Address	121 Theory Drive, Irvine, CA 92617, USA
FCC ID	Q87-EA6350V2

Product Name	Linksys Smart Wi-Fi Router AC1200
Brand Name	Linksys
Model No.	EA6350 V2
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Jun. 16, 2015
Final Test Date	Aug. 23, 2015
Submission Type	Original Equipment

### Statement

**Test result included in this report is for the IEEE 802.11n and IEEE 802.11b/g of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart C, KDB558074 D01 v03r03 and KDB 662911 D01 v02r01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. VERIFICATION OF COMPLIANCE</b> .....	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT</b> .....	<b>2</b>
<b>3. GENERAL INFORMATION</b> .....	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies .....	6
3.5. Table for Test Modes.....	7
3.6. Table for Testing Locations.....	8
3.7. Table for Supporting Units .....	8
3.8. Table for Parameters of Test Software Setting .....	9
3.9. EUT Operation during Test .....	9
3.10. Duty Cycle.....	9
3.11. Test Configurations .....	10
<b>4. TEST RESULT</b> .....	<b>13</b>
4.1. AC Power Line Conducted Emissions Measurement.....	13
4.2. Maximum Conducted Output Power Measurement.....	17
4.3. Power Spectral Density Measurement .....	19
4.4. 6dB Spectrum Bandwidth Measurement .....	26
4.5. Radiated Emissions Measurement .....	33
4.6. Emissions Measurement .....	52
4.7. Antenna Requirements .....	70
<b>5. LIST OF MEASURING EQUIPMENTS</b> .....	<b>71</b>
<b>6. MEASUREMENT UNCERTAINTY</b> .....	<b>72</b>
<b>APPENDIX A. PHOTOGRAPHS OF EUT</b> .....	<b>A1 ~ A22</b>
<b>APPENDIX B. TEST PHOTOS</b> .....	<b>B1 ~ B5</b>
<b>APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE</b> .....	<b>C1 ~ C3</b>
<b>APPENDIX D. RADIATED EMISSION CO-LOCATION REPORT</b> .....	<b>D1 ~ D3</b>



## 1. VERIFICATION OF COMPLIANCE

Product Name : Linksys Smart Wi-Fi Router AC1200  
Brand Name : Linksys  
Model No. : EA6350 V2  
Applicant : Linksys LLC  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jun. 16, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	9.56 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	1.78 dB
4.3	15.247(e)	Power Spectral Density	Complies	7.46 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	4.37 dB
4.6	15.247(d)	Band Edge Emissions	Complies	1.02 dB
4.7	15.203	Antenna Requirements	Complies	-

### 3. GENERAL INFORMATION

#### 3.1. Product Details

Items	Description
Product Type	IEEE 802.11b: WLAN (1TX, 1RX) IEEE 802.11g: WLAN (2TX, 2RX) IEEE 802.11n: WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: see the below table
Data Modulation	IEEE 802.11b: DSSS (BPSK / QPSK / CCK) IEEE 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	IEEE 802.11b: DSSS (1/ 2/ 5.5/11) IEEE 802.11g: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n: see the below table
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	IEEE 802.11b: 11.72 MHz IEEE 802.11g: 22.92 MHz IEEE 802.11n MCS0 (HT20): 23.44 MHz IEEE 802.11n MCS0 (HT40): 36.18 MHz
Maximum Conducted Output Power	IEEE 802.11b: 27.49 dBm IEEE 802.11g: 28.22 dBm IEEE 802.11n MCS0 (HT20): 27.84 dBm IEEE 802.11n MCS0 (HT40): 22.30 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description
Beamforming Function	<input type="checkbox"/> With beamforming <input checked="" type="checkbox"/> Without beamforming

**Antenna and Band width**

Antenna	Single (TX)		Two (TX)	
	20 MHz	40 MHz	20 MHz	40 MHz
Band width Mode				
IEEE 802.11b	V	X	X	X
IEEE 802.11g	X	X	V	X
IEEE 802.11n	X	X	V	V

**IEEE 11n Spec.**

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	2	MCS 0-15
802.11n (HT40)	2	MCS 0-15

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).  
Then EUT supports HT20 and HT40.

Note 2: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n

**3.2. Accessories**

Power	Brand	Model	Rating
Adapter 1 (Non-switchable Adapter)	APD	WA-24E12FU	Input: 100-240V~50-60Hz, 0.65A Max Output: 12V, 2A
Adapter 2 (Switchable Adapter)	APD	WA-24E12	Input: 100-240V~50-60Hz, 0.65A Max Output: 12V, 2A
Adapter 3 (Non-switchable Adapter)	APD	WA-24Q12FU	Input: 100-240V~50-60Hz, 0.7A Max Output: 12V, 2A
Others			
US Plug*1 (Only for Adapter 2)			

### 3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	ARISTOTLE	RFA-25-F70-70B-320	Dipole Antenna	I-PEX	1.7	4
2	ARISTOTLE	RFA-25-F70-70-60	Dipole Antenna	I-PEX	2	5

Note: The EUT has two antennas.

**For 2.4GHz:**

**For IEEE 802.11b mode (1TX, 1RX):**

Only Chain 1 can be used as transmitting antenna and receiving antenna.

**For IEEE 802.11g/n mode (2TX, 2RX):**

Chain 1 and Chain 2 will transmit/receive the same signal simultaneously.


Chain 1 and Chain 2 can be used as transmitting/receiving antennas.

**For 5GHz:**

**For IEEE 802.11a/n/ac mode (2TX, 2RX):**

Chain 1 and Chain 2 will transmit/receive the same signal simultaneously.

Chain 1 and Chain 2 can be used as transmitting/receiving antennas.

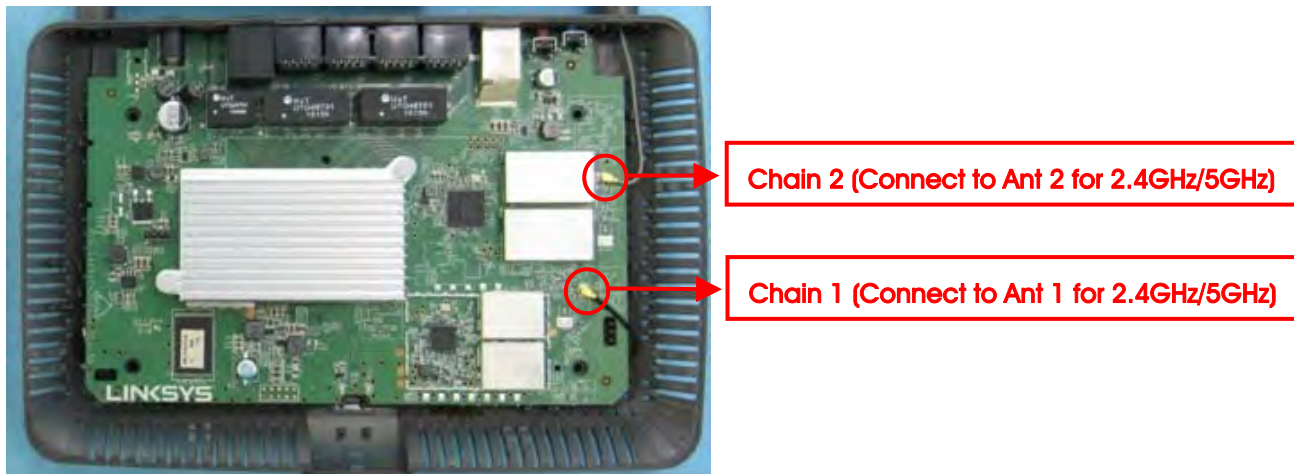



### 3.4. Table for Carrier Frequencies

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1+2
	11n HT20	MCS0	1/6/11	1+2
	11n HT40	MCS0	3/6/9	1+2
Power Spectral Density	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1+2
	11n HT20	MCS0	1/6/11	1+2
	11n HT40	MCS0	3/6/9	1+2
6dB Spectrum Bandwidth	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1+2
	11n HT20	MCS0	1/6/11	1+2
	11n HT40	MCS0	3/6/9	1+2
Radiated Emissions 9kHz~1GHz	Normal Link	-	-	-
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1+2
	11n HT20	MCS0	1/6/11	1+2
	11n HT40	MCS0	3/6/9	1+2
Band Edge Emissions	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1+2
	11n HT20	MCS0	1/6/11	1+2
	11n HT40	MCS0	3/6/9	1+2

The following test modes were performed for all tests:

**For Conducted Emission test:**

Mode 1. Normal Link - EUT with Adapter 1

Mode 2. Normal Link - EUT with Adapter 2

Mode 3. Normal Link - EUT with Adapter 3

Mode 3 is the worst case, so it was selected to record in this test report.

**For Radiated Emission below 1GHz test:**

Mode 1. Normal Link - EUT with Adapter 1 in z-axis

Mode 2. Normal Link - EUT with Adapter 2-US plug in z-axis

Mode 3. Normal Link - EUT with Adapter 3 in z-axis

Mode 1 is the worst case, so it was selected to record in this test report.

**For Radiated Emission above 1GHz test:**

Mode 1. CTX - EUT in z-axis

**For Co-location MPE and Radiated Emission Co-location Test:**

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to Appendix C) and Radiated Emission Co-location (please refer to Appendix D) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

### 3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.7. Table for Supporting Units

**For Test Site No: 03CH01-CB (For Below 1GHz)**

Support Unit	Brand	Model	FCC ID
Notebook*4	DELL	E4300	DoC
Flash disk3.0	Silicon Power	B06	DoC

**For Test Site No: 03CH01-CB (For Above 1GHz)**

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC

**For Test Site No: CO01-CB**

Support Unit	Brand	Model	FCC ID
Notebook*4	DELL	E6430	DoC
Flash disk3.0	Transcend	JetFlash-700	DoC

**For Test Site No: TH01-CB**

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Software Version	Mtool 2.0.2.6					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11b	100	100	100	-	-	-
802.11g	68	100	72	-	-	-
802.11n MCS0 HT20	69	100	73	-	-	-
802.11n MCS0 HT40	-	-	-	59	73	66

### 3.9. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

### 3.10. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11b	1.00	1.00	100%	0.00	0.01
802.11g	1.00	1.00	100%	0.00	0.01
802.11n MCS0 HT20	1.00	1.00	100%	0.00	0.01
802.11n MCS0 HT40	1.00	1.00	100%	0.00	0.01

### 3.11. Test Configurations


#### 3.11.1. AC Power Line Conduction Emissions Test Configuration

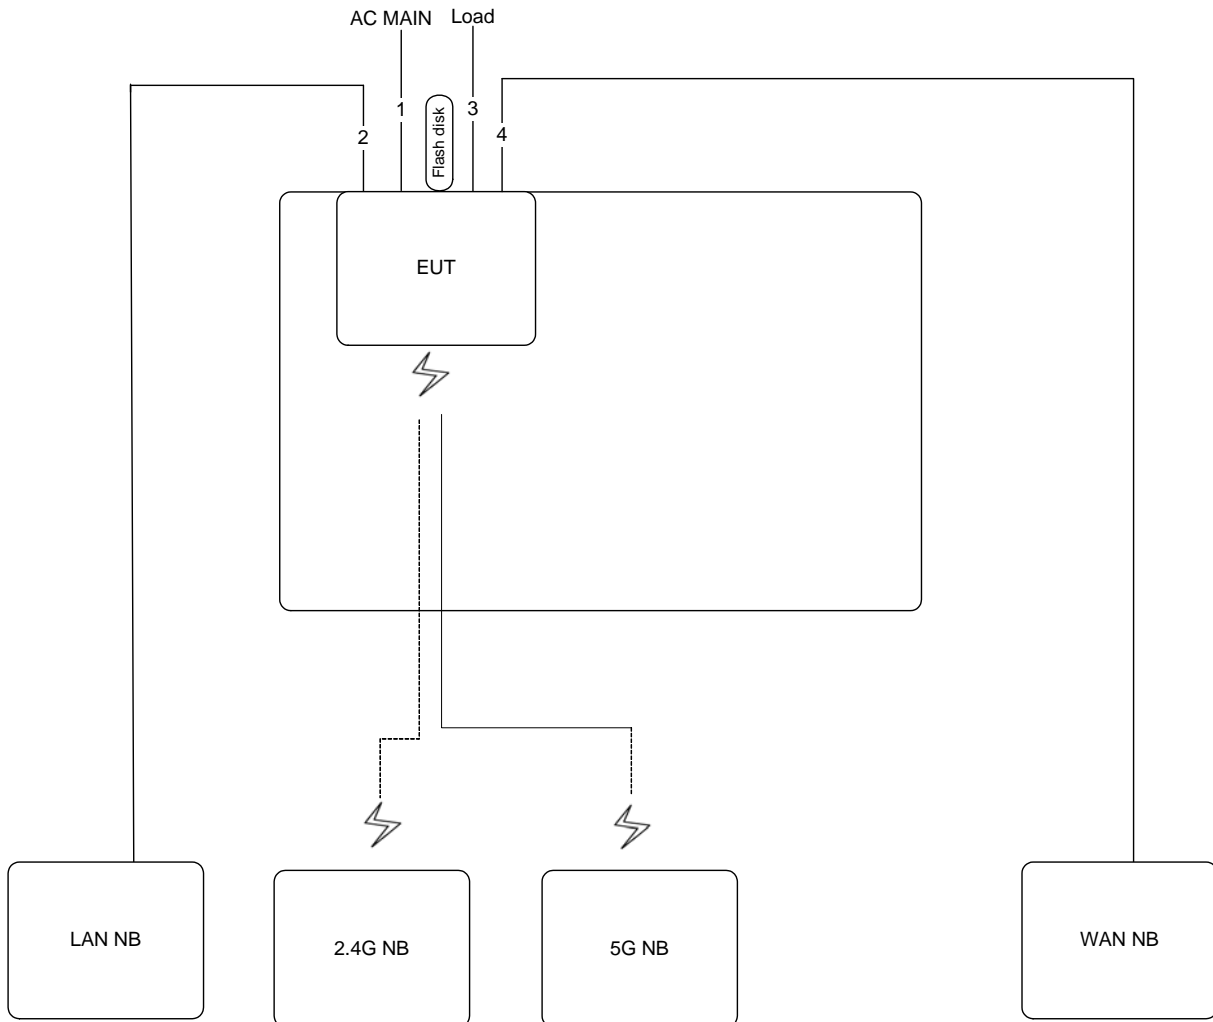

Item	Connection	Shielded	Length	Remark
1	Power cable	No	1.5m	-
2	RJ-45 cable	No	10m	-
3	RJ-45 cable*3	No	1.5m	Load
4	RJ-45 cable	No	10m	-


### 3.11.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

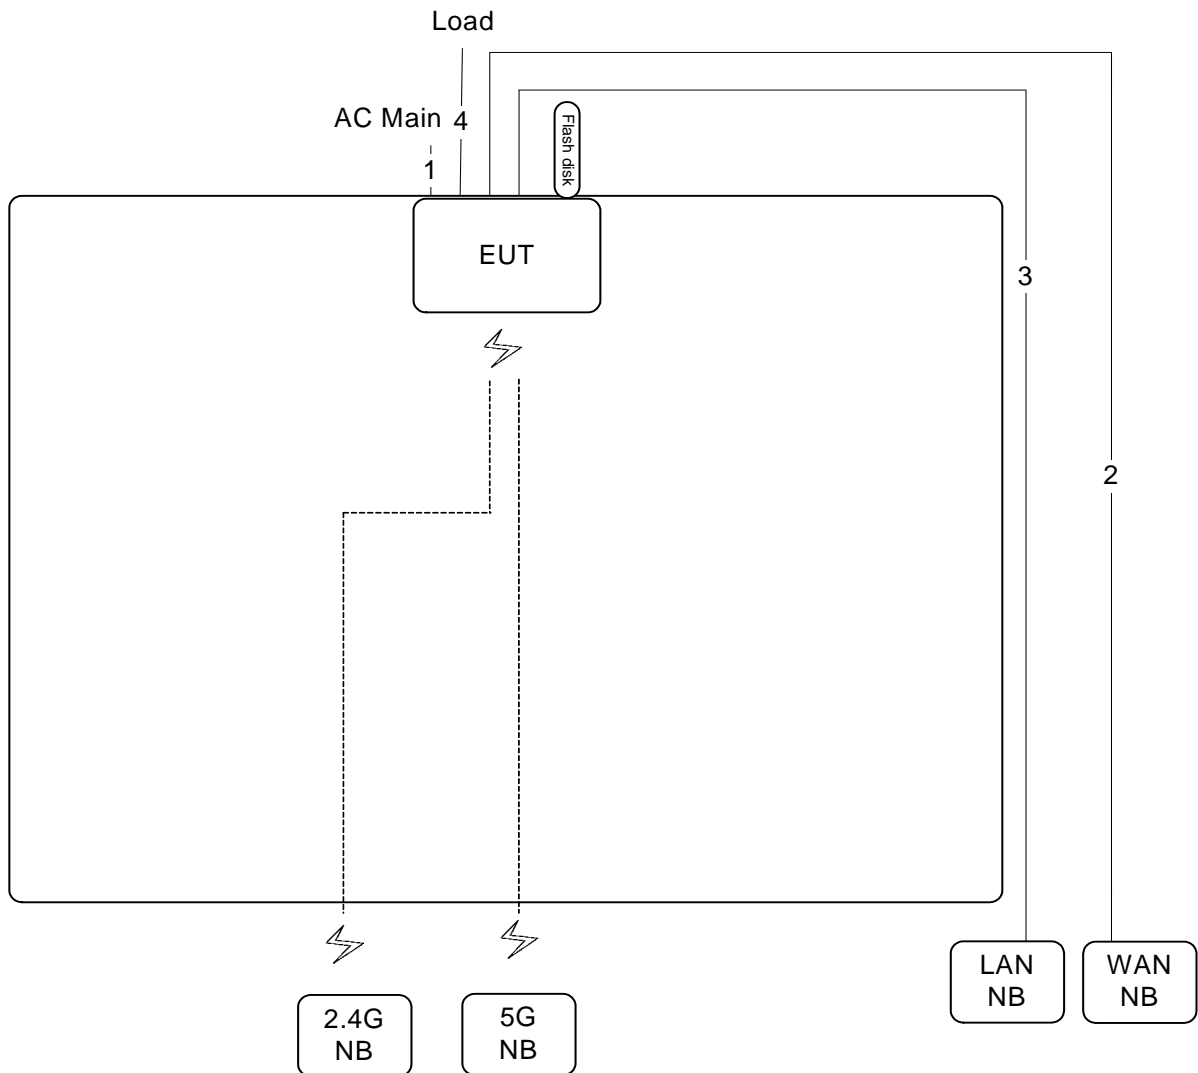

Item	Connection	Shielded	Length	Remark
1	Power cable	No	1.5m	-
2	RJ-45 cable	No	10m	-
3	RJ-45 cable	No	10m	-
4	RJ-45 cable*3	No	3m	Load

Test Configuration: above 1GHz

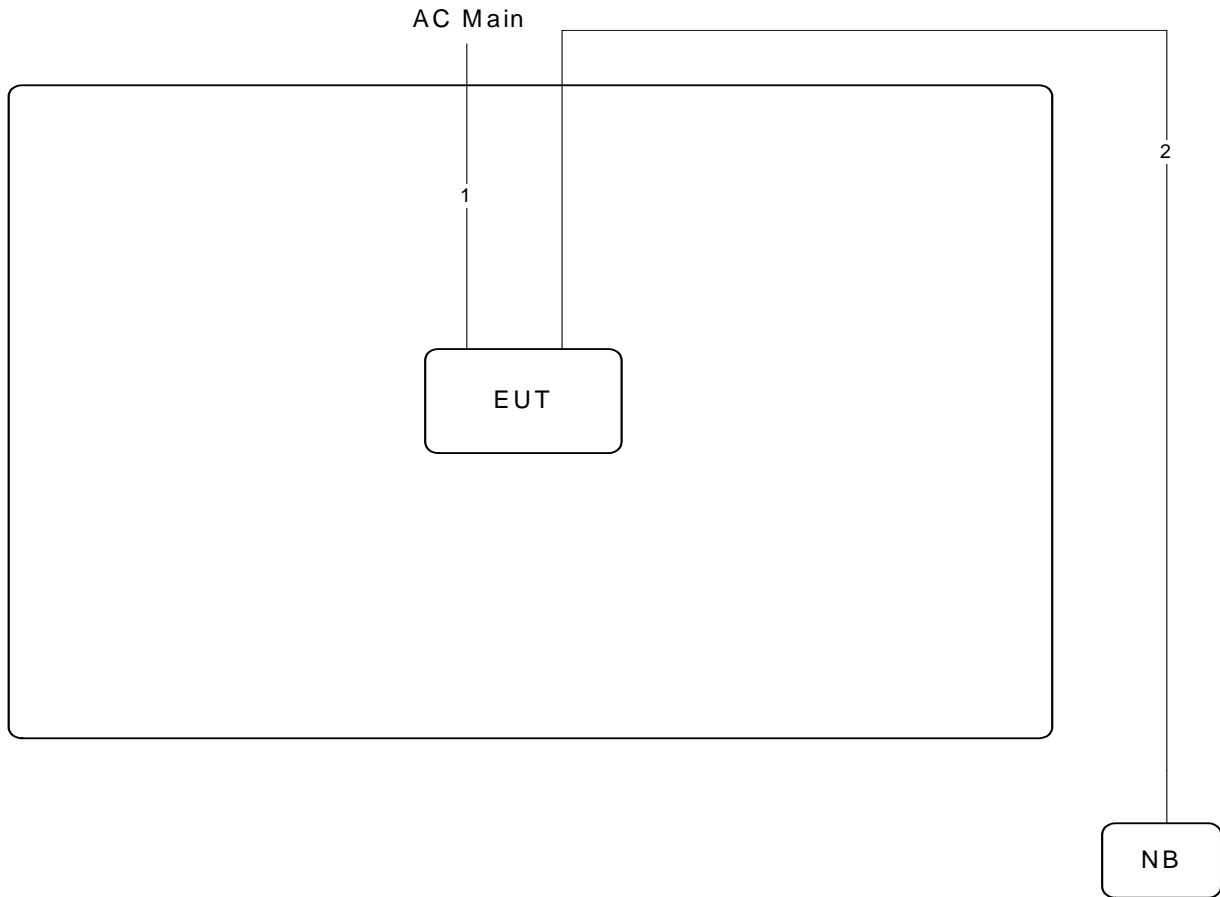

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 4.1.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.






4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	22°C	Humidity	58%
Test Engineer	Deven Huang	Phase	Line
Configuration	Normal Link	Test Mode	Mode 3

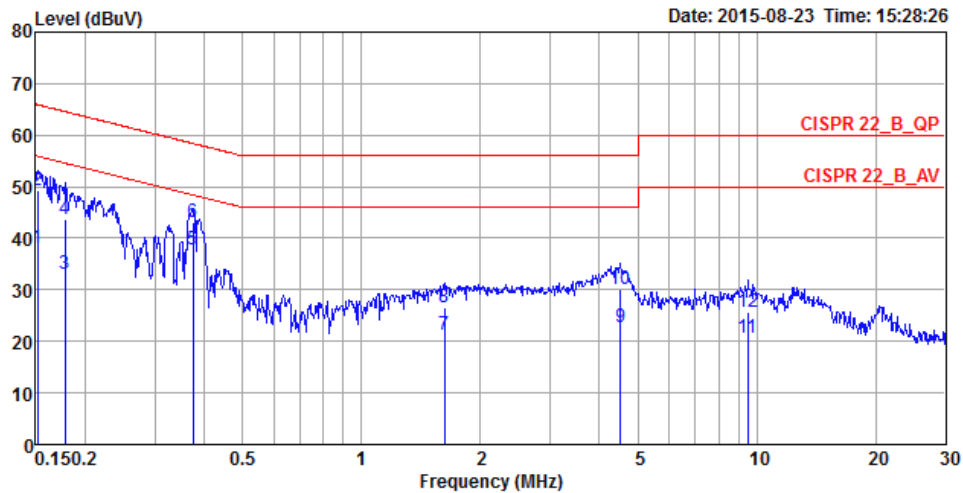

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1516	38.06	-17.85	55.91	28.11	9.93	0.02	LINE	Average
2	0.1516	49.18	-16.73	65.91	39.23	9.93	0.02	LINE	QP
3	0.1777	33.01	-21.58	54.59	23.06	9.93	0.02	LINE	Average
4	0.1777	43.66	-20.93	64.59	33.71	9.93	0.02	LINE	QP
5	0.3751	37.70	-10.69	48.39	27.73	9.93	0.04	LINE	Average
6	0.3751	43.01	-15.38	58.39	33.04	9.93	0.04	LINE	QP
7	1.6190	21.22	-24.78	46.00	11.18	9.98	0.06	LINE	Average
8	1.6190	26.70	-29.30	56.00	16.66	9.98	0.06	LINE	QP
9	4.5254	22.87	-23.13	46.00	12.74	10.04	0.09	LINE	Average
10	4.5254	30.05	-25.95	56.00	19.92	10.04	0.09	LINE	QP
11	9.5016	20.68	-29.32	50.00	10.29	10.17	0.22	LINE	Average
12	9.5016	25.80	-34.20	60.00	15.41	10.17	0.22	LINE	QP

Temperature	22°C	Humidity	58%
Test Engineer	Deven Huang	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 3

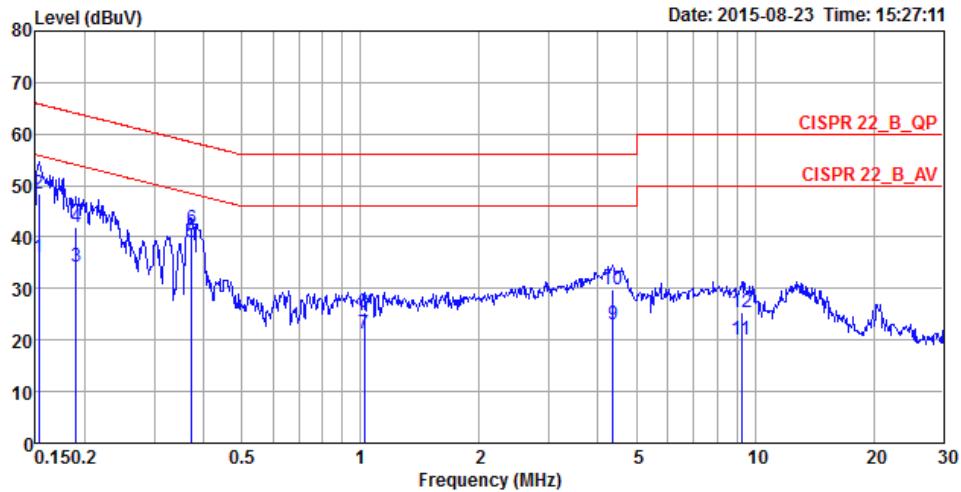

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1532	35.91	-19.91	55.82	26.11	9.78	0.02	NEUTRAL	Average
2	0.1532	48.39	-17.43	65.82	38.59	9.78	0.02	NEUTRAL	QP
3	0.1904	34.12	-19.90	54.02	24.31	9.79	0.02	NEUTRAL	Average
4	0.1904	41.90	-22.12	64.02	32.09	9.79	0.02	NEUTRAL	QP
5	0.3731	38.87	-9.56	48.43	29.04	9.79	0.04	NEUTRAL	Average
6	0.3731	41.77	-16.66	58.43	31.94	9.79	0.04	NEUTRAL	QP
7	1.0211	21.15	-24.85	46.00	11.29	9.81	0.05	NEUTRAL	Average
8	1.0211	25.44	-30.56	56.00	15.58	9.81	0.05	NEUTRAL	QP
9	4.3606	23.02	-22.98	46.00	13.06	9.88	0.08	NEUTRAL	Average
10	4.3606	29.82	-26.18	56.00	19.86	9.88	0.08	NEUTRAL	QP
11	9.2532	20.19	-29.81	50.00	9.97	10.00	0.22	NEUTRAL	Average
12	9.2532	25.28	-34.72	60.00	15.06	10.00	0.22	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. Maximum Conducted Output Power Measurement

### 4.2.1. Limit

The limit for output power is 30dBm.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

### 4.2.3. Test Procedures

1. Test procedures refer KDB558074 D01 v03r03 section 9.2.3.2 Measurement using a power meter (PM).
2. Multiple antenna systems was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

### 4.2.4. Test Setup Layout

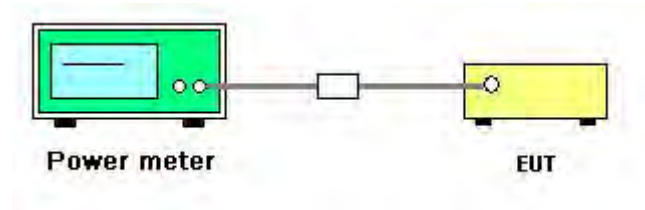

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Maximum Conducted Output Power

<b>Temperature</b>	25°C	<b>Humidity</b>	45%
<b>Test Engineer</b>	Lucas Huang	<b>Test Date</b>	Jul. 06, 2015

Mode	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Chain 1				
802.11b	2412 MHz	27.42			30.00	Complies
	2437 MHz	27.38			30.00	Complies
	2462 MHz	27.49			30.00	Complies

Mode	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Chain 1	Chain 2	Total		
802.11g	2412 MHz	18.53	17.79	21.19	30.00	Complies
	2437 MHz	24.22	26.02	28.22	30.00	Complies
	2462 MHz	19.27	19.36	22.33	30.00	Complies
802.11n MCS0 HT20	2412 MHz	19.14	18.21	21.71	30.00	Complies
	2437 MHz	24.02	25.52	27.84	30.00	Complies
	2462 MHz	19.99	19.51	22.77	30.00	Complies
802.11n MCS0 HT40	2422 MHz	15.88	15.22	18.57	30.00	Complies
	2437 MHz	19.31	19.26	22.30	30.00	Complies
	2452 MHz	17.71	17.38	20.56	30.00	Complies

### 4.3. Power Spectral Density Measurement

#### 4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

#### 4.3.3. Test Procedures

1. Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$  (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be  $\leq 8 \text{ dBm}$ .

#### 4.3.4. Test Setup Layout

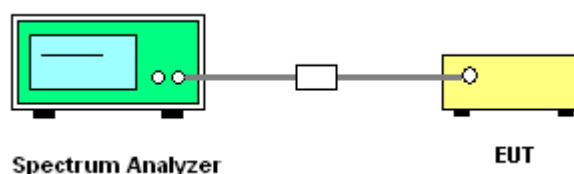

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	45%
Test Engineer	Lucas Huang		

Mode	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
		Chain 1		
802.11b	2412 MHz	0.32	8.00	Complies
	2437 MHz	-0.80	8.00	Complies
	2462 MHz	0.54	8.00	Complies

Mode	Frequency	Power Density (dBm/3kHz)			Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Total		
802.11g	2412 MHz	-12.56	-13.01	-9.77	8.00	Complies
	2437 MHz	-5.46	-2.21	-0.53	8.00	Complies
	2462 MHz	-8.97	-10.34	-6.59	8.00	Complies
802.11n MCS0 HT20	2412 MHz	-11.66	-13.32	-9.40	8.00	Complies
	2437 MHz	-5.25	-3.00	-0.97	8.00	Complies
	2462 MHz	-10.05	-9.98	-7.00	8.00	Complies
802.11n MCS0 HT40	2422 MHz	-17.63	-17.67	-14.64	8.00	Complies
	2437 MHz	-14.35	-12.43	-10.27	8.00	Complies
	2452 MHz	-14.81	-15.06	-11.92	8.00	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 4.86\text{dBi} < 6\text{dBi}$ , so the limit doesn't reduce.

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.




**Power Density Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 1**




Date: 6 JUL 2015 15:52:33

**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1**

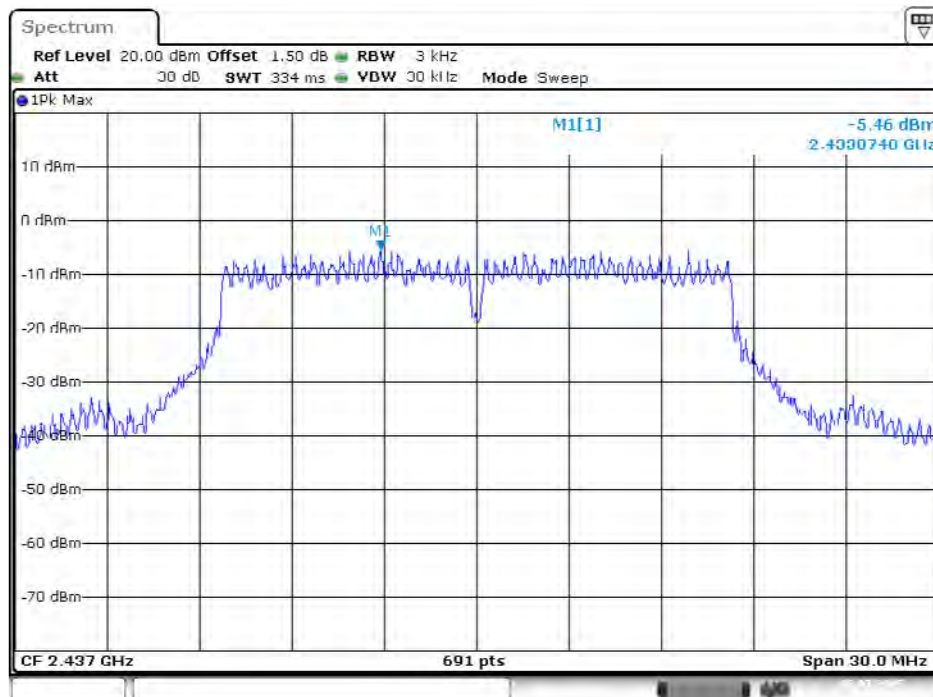


Date: 6 JUL 2015 15:56:39

**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2**

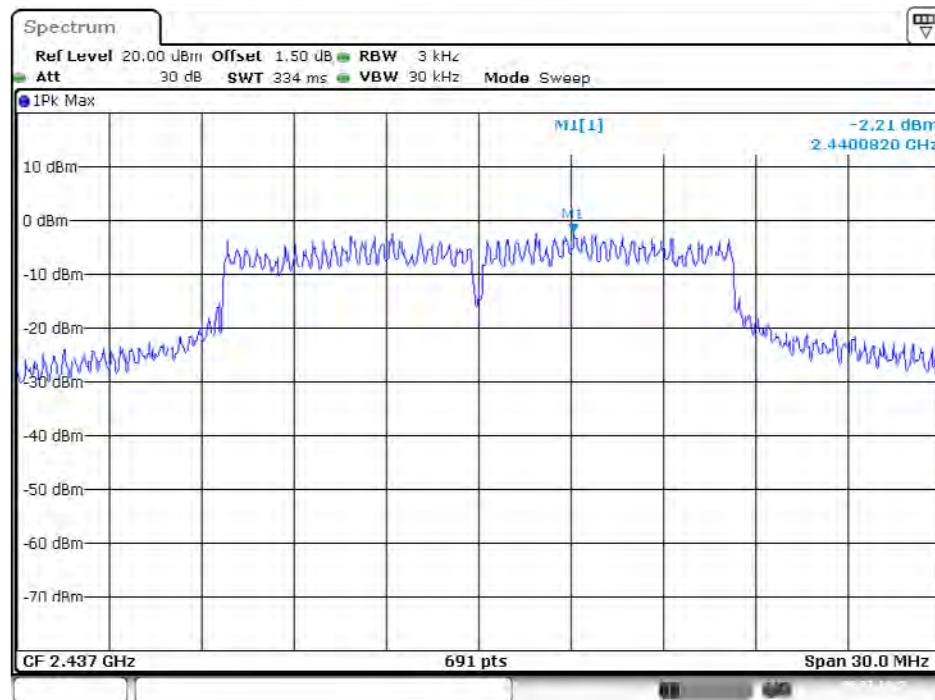


Date: 6 JUL 2015 15:55:48

**Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1**

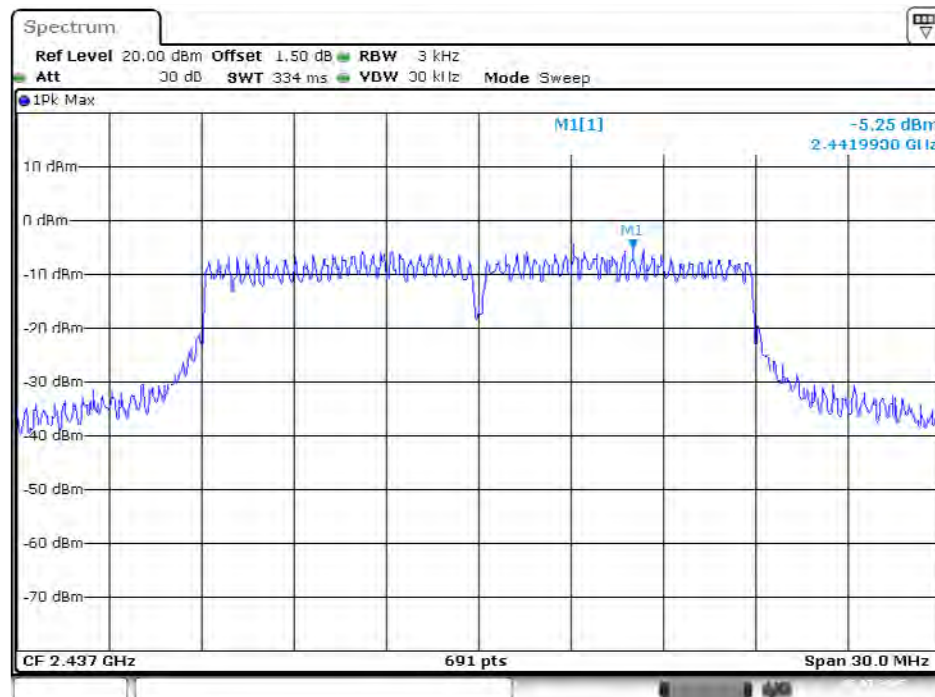


Date: 6 JUL 2015 16:12:31

**Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 2**

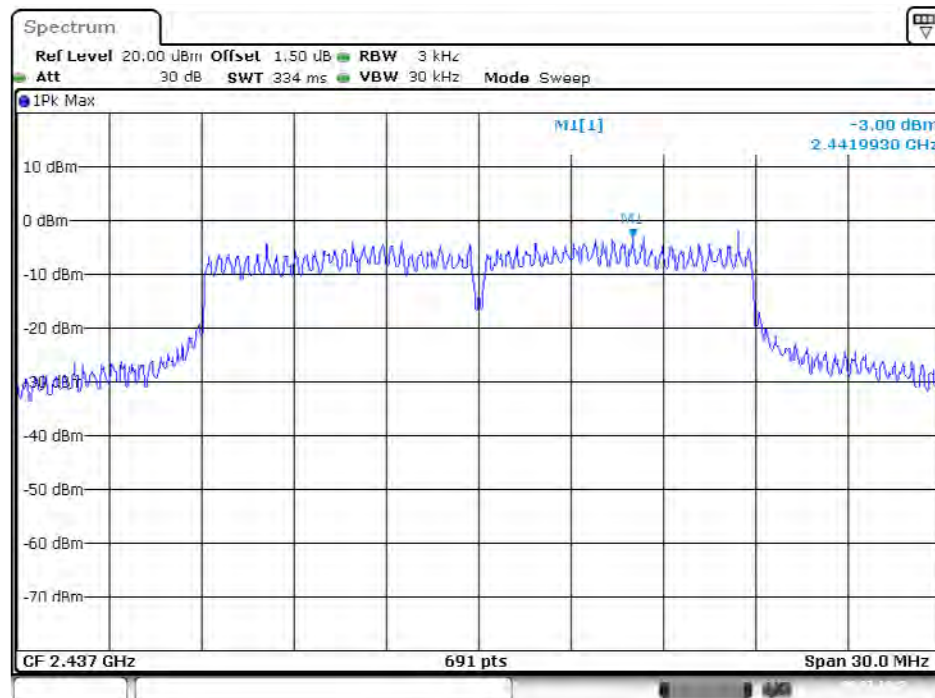


Date: 6 JUL 2015 16:13:09

**Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1**

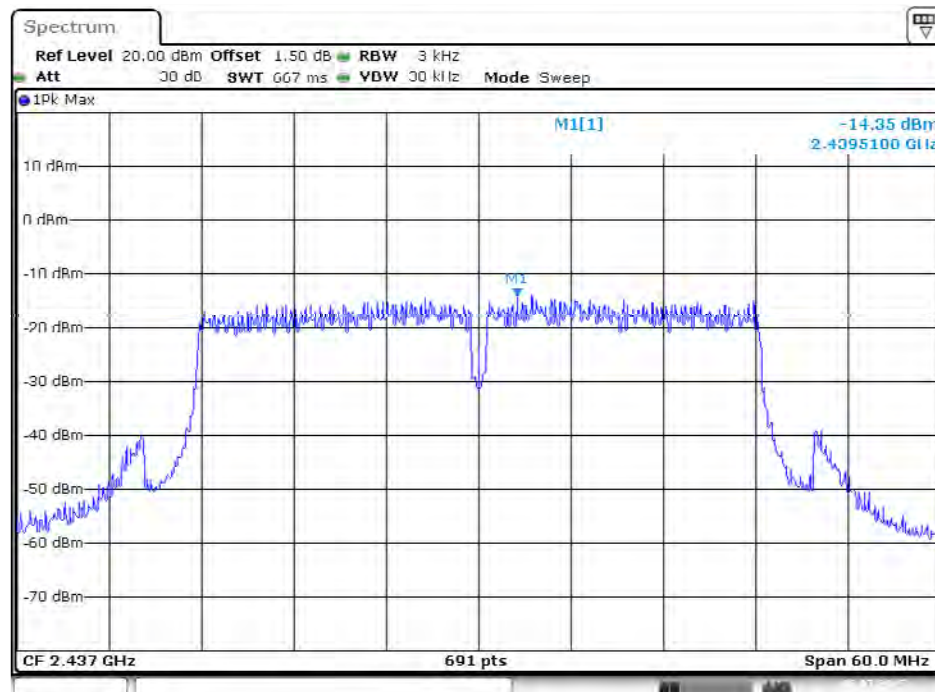

Date: 6 JUL 2015 16:20:27

### Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 2

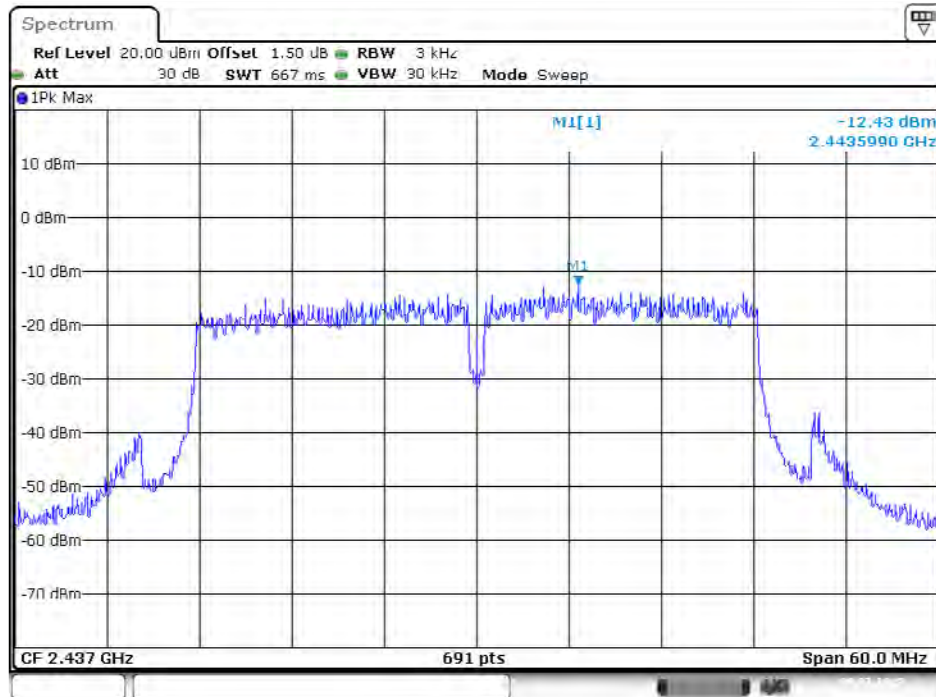

Date: 6 JUL 2015 16:19:40

## 4.4. 6dB Spectrum Bandwidth Measurement

### 4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

### 4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

### 4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth = > 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

### 4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	25°C	Humidity	45%
Test Engineer	Lucas Huang		

##### Configuration IEEE 802.11b / Chain 1

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	8.06	11.72	500	Complies
	2437 MHz	8.00	11.03	500	Complies
	2462 MHz	8.11	10.85	500	Complies

##### Configuration IEEE 802.11g / Chain 1 + Chain 2

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11g	2412 MHz	16.35	16.93	500	Complies
	2437 MHz	16.35	22.92	500	Complies
	2462 MHz	16.35	17.19	500	Complies

##### Configuration IEEE 802.11n / Chain 1 + Chain 2


Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11n MCS0 HT20	2412 MHz	17.62	18.06	500	Complies
	2437 MHz	17.57	23.44	500	Complies
	2462 MHz	17.62	18.06	500	Complies
802.11n MCS0 HT40	2422 MHz	33.04	35.89	500	Complies
	2437 MHz	35.01	36.18	500	Complies
	2452 MHz	33.28	36.18	500	Complies

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.




6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1

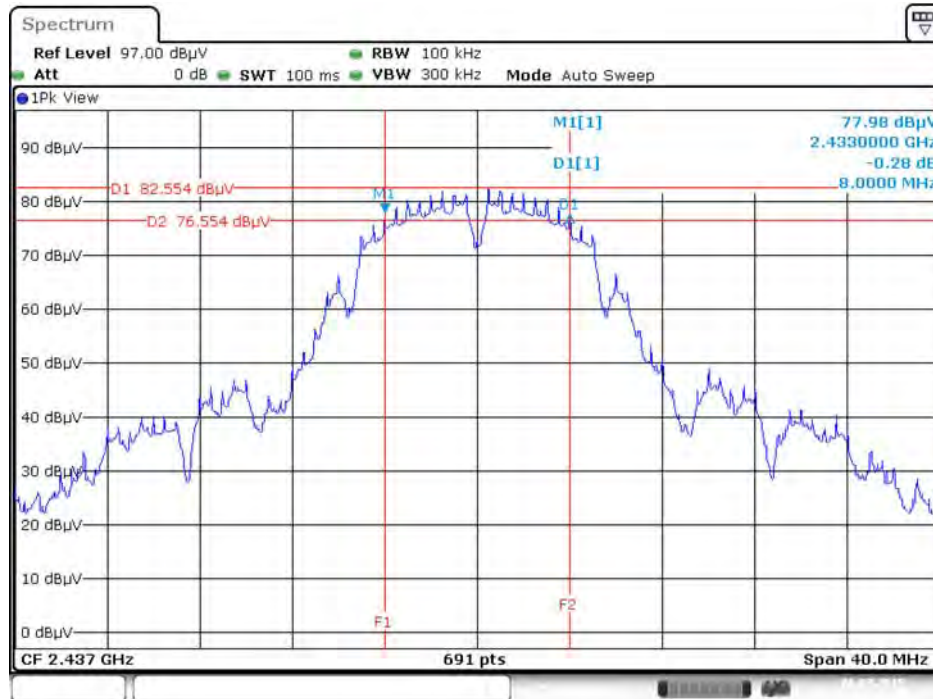

Date: 6 JUL 2015 15:36:05


99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1

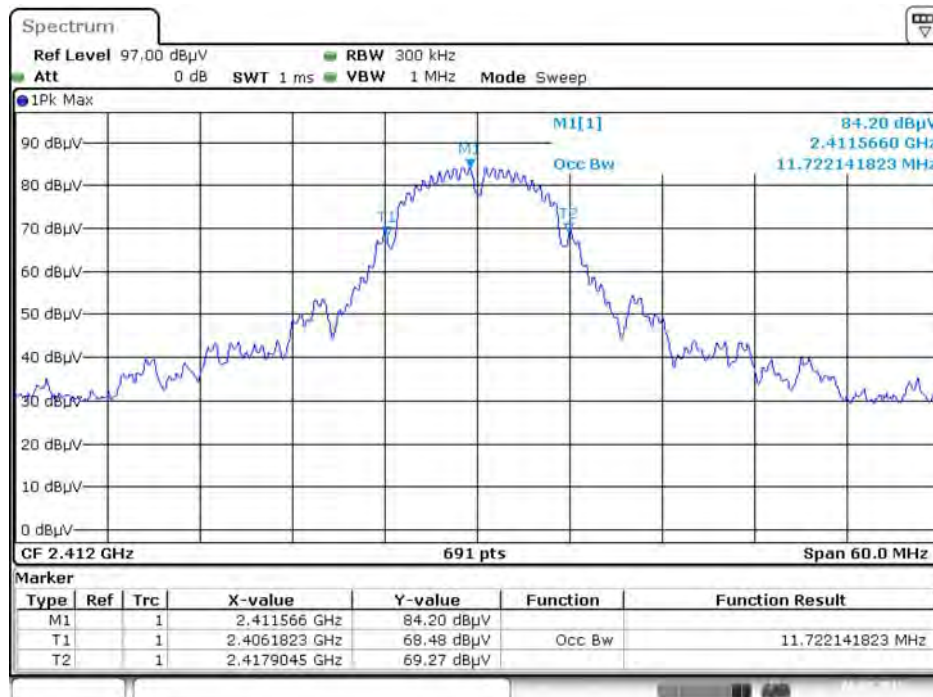

Date: 6 JUL 2015 15:09:13



6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz / Chain 1 + Chain 2

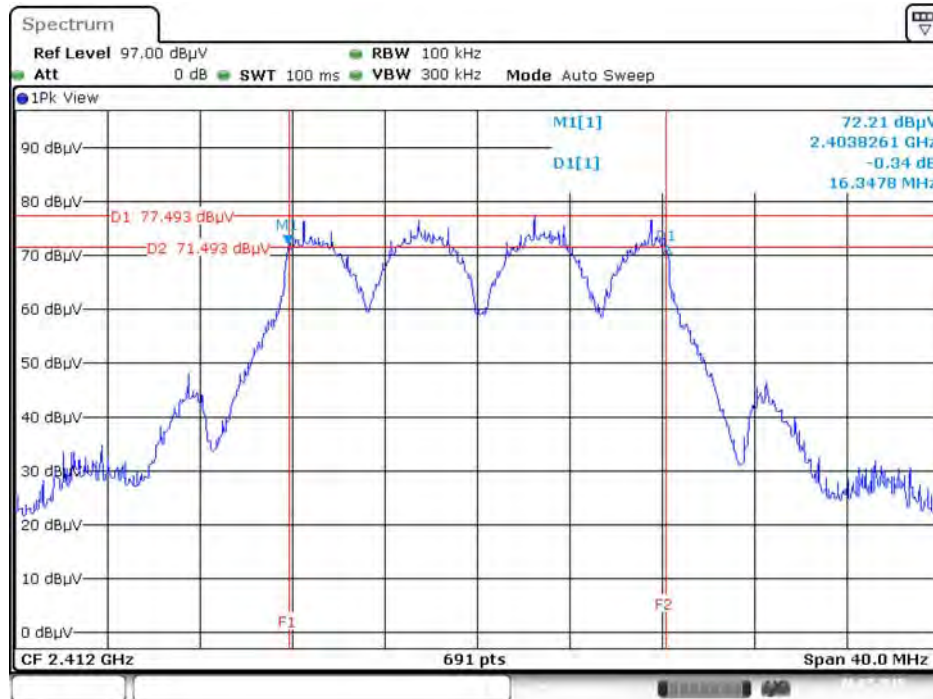


Date: 6 JUL 2015 15:37:16

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2




Date: 6 JUL 2015 15:15:02

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1 + Chain 2

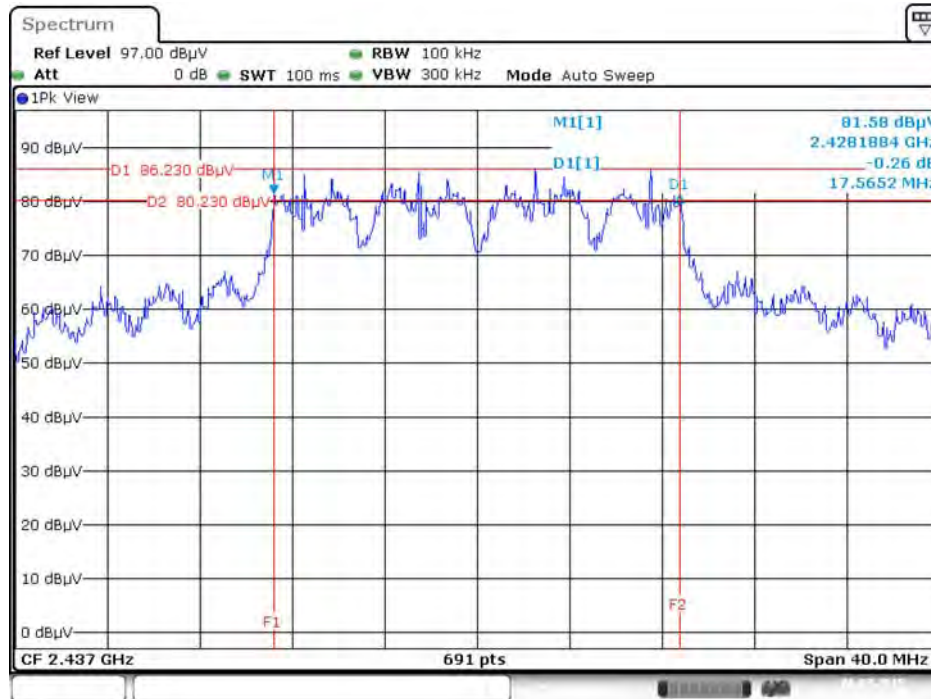


Date: 6 JUL 2015 15:38:55

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1 + Chain 2

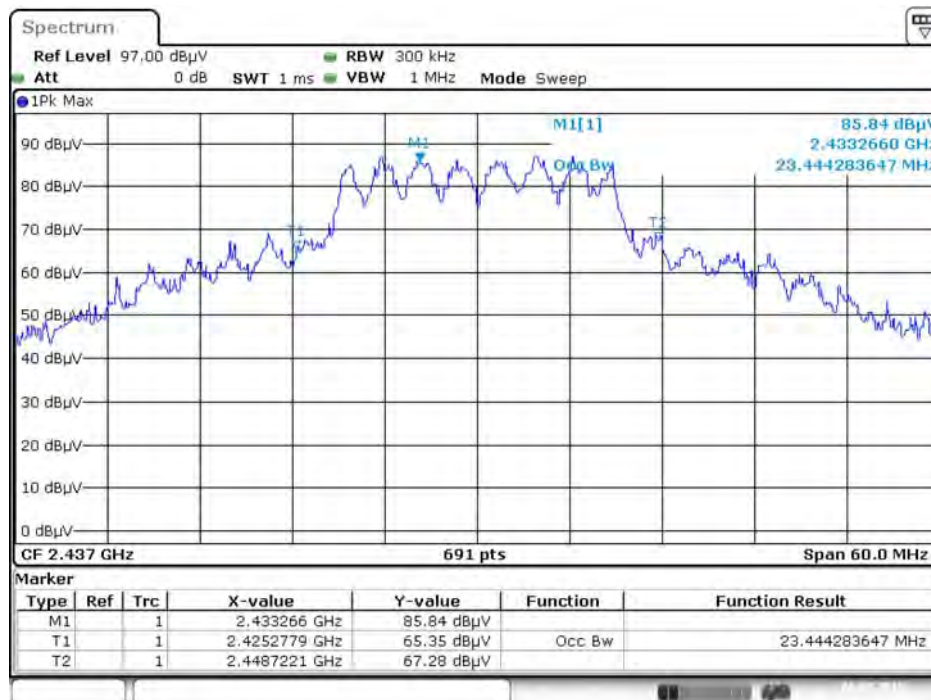


Date: 6 JUL 2015 15:18:09

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2422 MHz / Chain 1 + Chain 2

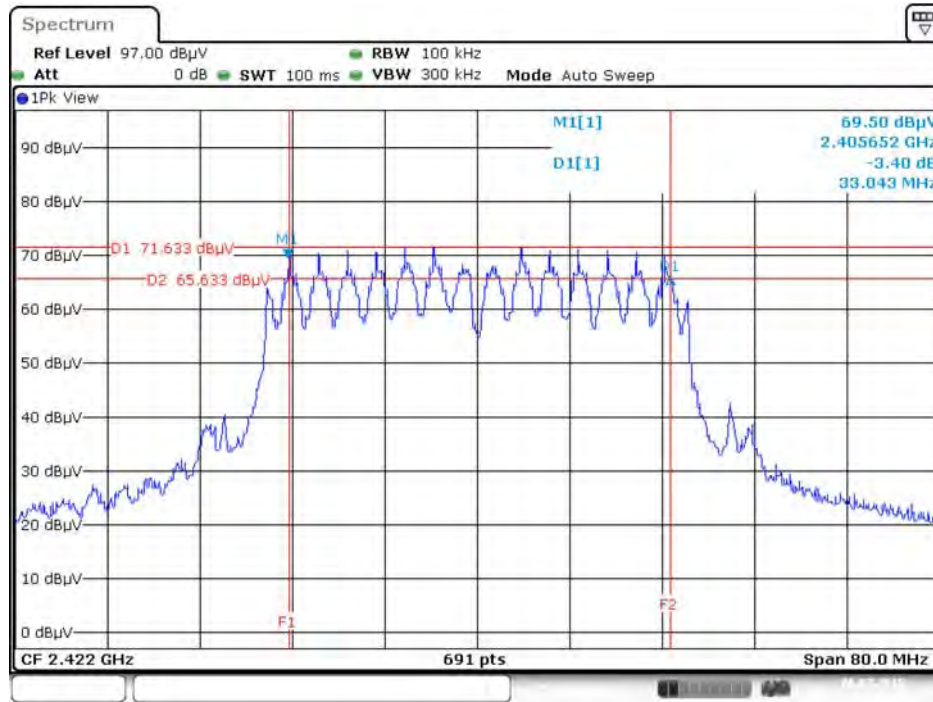

Date: 6 JUL 2015 15:40:21

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1 + Chain 2

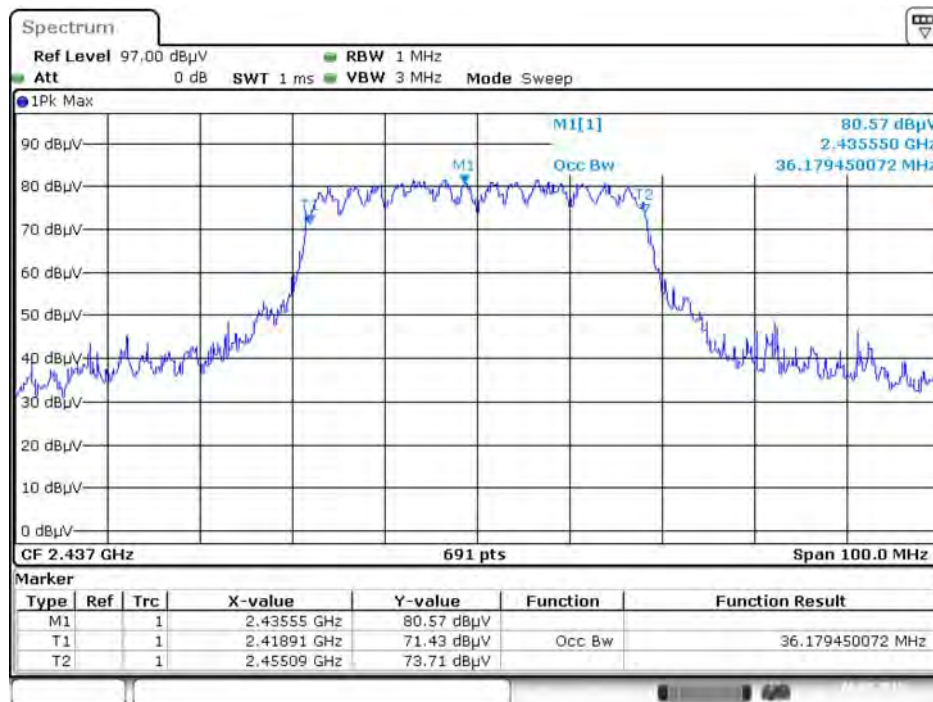

Date: 6 JUL 2015 15:26:38

## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP


#### 4.5.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.




#### 4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

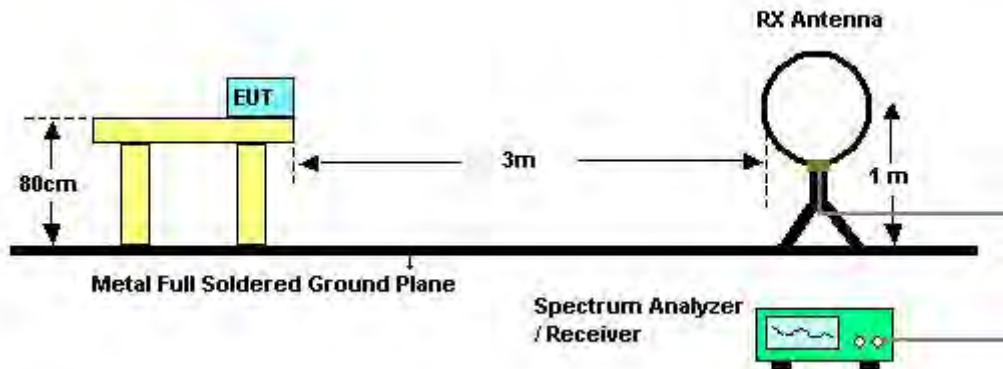

For Radiated Emissions: 30MHz~1GHz

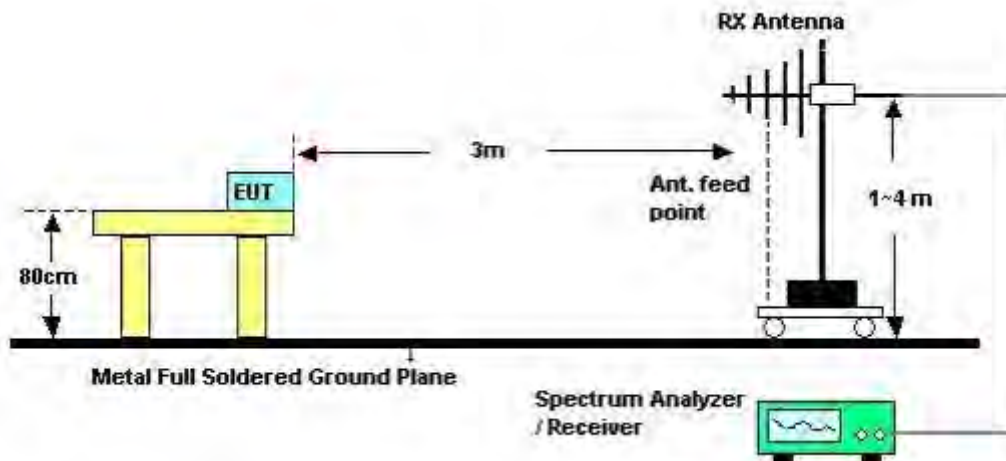

For Radiated Emissions: Above 1GHz

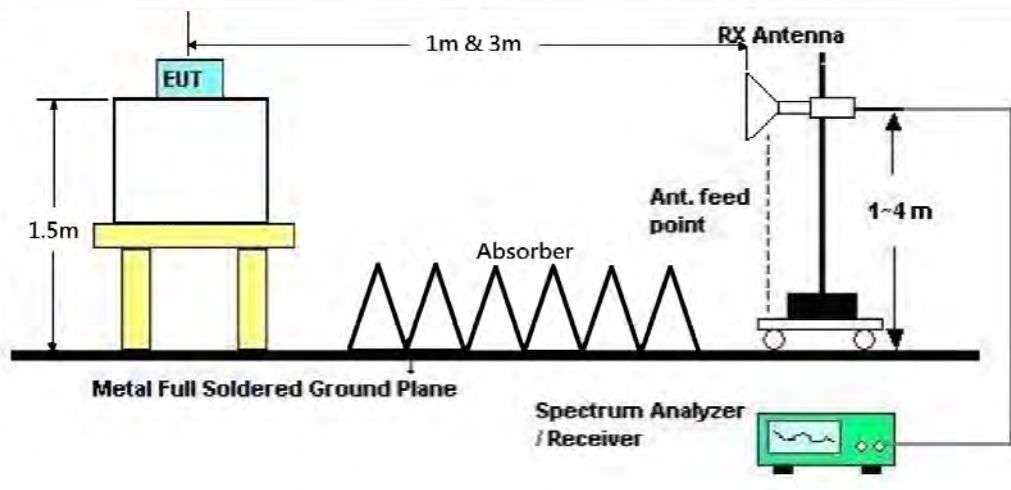

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	28°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	Normal Link
Test Date	Jul. 07, 2015	Test Mode	Mode 1

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.



4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	28°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	Normal Link
Test Mode	Mode 1		

Horizontal

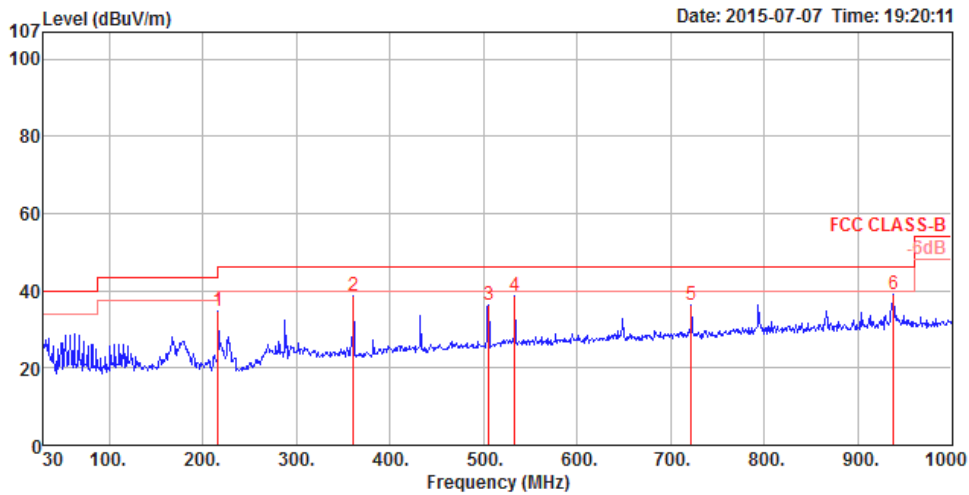

	Freq	Level	Limit Line	Over Limit	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Po1/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	216.24	34.90	46.00	-11.10	55.35	10.64	1.45	32.54	150	122	HORIZONTAL	Peak
2	360.77	38.68	46.00	-7.32	53.77	15.55	1.89	32.53	125	136	HORIZONTAL	Peak
3	505.30	36.17	46.00	-9.83	48.67	17.89	2.22	32.61	100	129	HORIZONTAL	Peak
4	533.43	38.58	46.00	-7.42	50.60	18.34	2.28	32.64	125	356	HORIZONTAL	Peak
5	721.61	36.18	46.00	-9.82	46.13	19.93	2.66	32.54	125	122	HORIZONTAL	Peak
6	937.92	39.29	46.00	-6.71	45.95	21.84	3.04	31.54	200	86	HORIZONTAL	Peak

**Vertical**

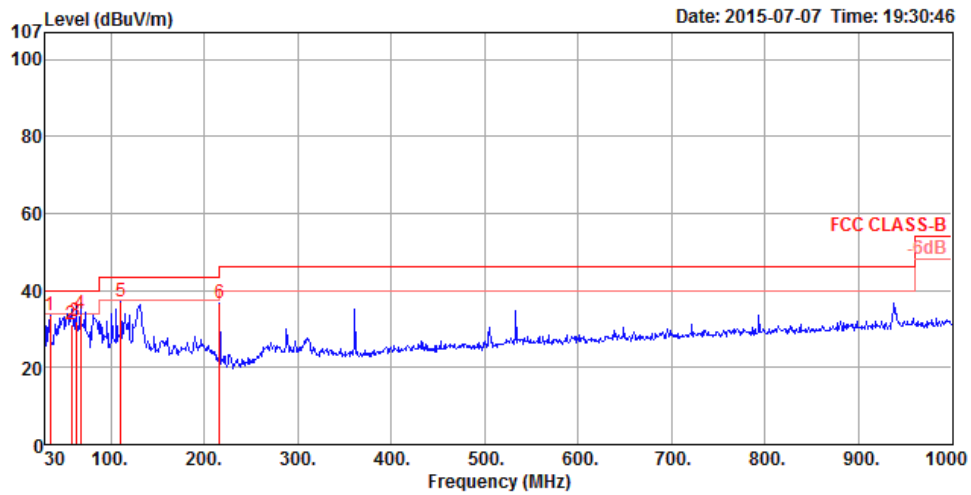

	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	34.85	33.66	40.00	-6.34	48.61	17.07	0.62	32.64	125	166 VERTICAL	Peak
2	58.13	31.29	40.00	-8.71	55.96	7.18	0.77	32.62	100	38 VERTICAL	QP
3	62.98	31.84	40.00	-8.16	56.85	6.80	0.80	32.61	100	137 VERTICAL	QP
4	67.83	33.99	40.00	-6.01	58.95	6.80	0.84	32.60	100	255 VERTICAL	QP
5	110.51	37.17	43.50	-6.33	56.37	12.32	1.05	32.57	100	295 VERTICAL	Peak
6	216.00	36.74	43.50	-6.76	57.19	10.64	1.45	32.54	125	119 VERTICAL	Peak

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

**4.5.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)**

<b>Temperature</b>	28°C	<b>Humidity</b>	57%
<b>Test Engineer</b>	Alvin Li	<b>Configurations</b>	IEEE 802.11b CH 1 / Chain 1
<b>Test Date</b>	Jun. 16, 2015		

**Horizontal**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	4823.95	52.54	74.00	-21.46	50.46	4.10	32.56	34.58	294	135 Peak	HORIZONTAL
2	4824.13	42.14	54.00	-11.86	40.06	4.10	32.56	34.58	294	135 Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	4824.06	47.49	54.00	-6.51	45.41	4.10	32.56	34.58	61	118 Average	VERTICAL
2	4824.17	51.41	74.00	-22.59	49.33	4.10	32.56	34.58	61	118 Peak	VERTICAL

<b>Temperature</b>	28°C	<b>Humidity</b>	57%
<b>Test Engineer</b>	Alvin Li	<b>Configurations</b>	IEEE 802.11b CH 6 / Chain 1
<b>Test Date</b>	Jun. 16, 2015		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4874.12	55.38	74.00	-18.62	53.16	4.13	32.66	34.57	303	151	Peak	HORIZONTAL
2	4874.17	40.66	54.00	-13.34	38.44	4.13	32.66	34.57	303	151	Average	HORIZONTAL
3	7310.24	50.13	74.00	-23.87	42.79	5.09	37.07	34.82	358	113	Peak	HORIZONTAL
4	7310.36	38.30	54.00	-15.70	30.96	5.09	37.07	34.82	358	113	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4874.13	46.63	54.00	-7.37	44.41	4.13	32.66	34.57	53	118	Average	VERTICAL
2	4874.14	50.98	74.00	-23.02	48.76	4.13	32.66	34.57	53	118	Peak	VERTICAL
3	7311.44	52.05	74.00	-21.95	44.72	5.09	37.07	34.83	278	109	Peak	VERTICAL
4	7311.96	41.27	54.00	-12.73	33.94	5.09	37.07	34.83	278	109	Average	VERTICAL

<b>Temperature</b>	28°C	<b>Humidity</b>	57%
<b>Test Engineer</b>	Alvin Li	<b>Configurations</b>	IEEE 802.11b CH 11 / Chain 1
<b>Test Date</b>	Jun. 17, 2015		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4924.04	43.30	54.00	-10.70	40.94	4.15	32.76	34.55	296	139	Average	HORIZONTAL
2	4924.06	49.16	74.00	-24.84	46.80	4.15	32.76	34.55	296	139	Peak	HORIZONTAL
3	7385.33	52.76	74.00	-21.24	45.30	5.12	37.18	34.84	360	103	Peak	HORIZONTAL
4	7386.70	43.59	54.00	-10.41	36.13	5.12	37.18	34.84	360	103	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4923.99	53.07	74.00	-20.93	50.71	4.15	32.76	34.55	69	120	Peak	VERTICAL
2	4924.00	49.63	54.00	-4.37	47.27	4.15	32.76	34.55	69	120	Average	VERTICAL
3	7386.25	55.42	74.00	-18.58	47.96	5.12	37.18	34.84	118	119	Peak	VERTICAL
4	7386.80	48.60	54.00	-5.40	41.14	5.12	37.18	34.84	118	119	Average	VERTICAL

<b>Temperature</b>	28°C	<b>Humidity</b>	57%
<b>Test Engineer</b>	Alvin Li	<b>Configurations</b>	IEEE 802.11g CH 1 / Chain 1 + Chain 2
<b>Test Date</b>	Jun. 17, 2015		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4822.87	45.96	74.00	-28.04	43.88	4.10	32.56	34.58	359	154	Peak	HORIZONTAL
2	4823.13	31.16	54.00	-22.84	29.08	4.10	32.56	34.58	359	154	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4823.80	32.91	54.00	-21.09	30.83	4.10	32.56	34.58	68	115	Average	VERTICAL
2	4825.16	48.55	74.00	-25.45	46.47	4.10	32.56	34.58	68	115	Peak	VERTICAL

<b>Temperature</b>	28°C	<b>Humidity</b>	57%
<b>Test Engineer</b>	Alvin Li	<b>Configurations</b>	IEEE 802.11g CH 6 / Chain 1 + Chain 2
<b>Test Date</b>	Jun. 17, 2015		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4872.96	51.08	74.00	-22.92	48.86	4.13	32.66	34.57	135	117	Peak	HORIZONTAL
2	4873.94	35.87	54.00	-18.13	33.65	4.13	32.66	34.57	135	117	Average	HORIZONTAL
3	7313.55	53.60	74.00	-20.40	46.27	5.09	37.07	34.83	15	116	Peak	HORIZONTAL
4	7313.78	40.68	54.00	-13.32	33.35	5.09	37.07	34.83	15	116	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4873.65	40.46	54.00	-13.54	38.24	4.13	32.66	34.57	72	112	Average	VERTICAL
2	4874.06	53.57	74.00	-20.43	51.35	4.13	32.66	34.57	72	112	Peak	VERTICAL
3	7311.35	48.35	54.00	-5.65	41.02	5.09	37.07	34.83	132	109	Average	VERTICAL
4	7311.87	62.09	74.00	-11.91	54.76	5.09	37.07	34.83	132	109	Peak	VERTICAL

<b>Temperature</b>	28°C	<b>Humidity</b>	57%
<b>Test Engineer</b>	Alvin Li	<b>Configurations</b>	IEEE 802.11g CH 11 / Chain 1 + Chain 2
<b>Test Date</b>	Jun. 17, 2015		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4922.90	48.31	74.00	-25.69	45.95	4.15	32.76	34.55	61	129	Peak	HORIZONTAL
2	4923.31	32.25	54.00	-21.75	29.89	4.15	32.76	34.55	61	129	Average	HORIZONTAL
3	7381.14	49.68	74.00	-24.32	42.25	5.11	37.16	34.84	343	146	Peak	HORIZONTAL
4	7402.27	36.82	54.00	-17.18	29.34	5.12	37.20	34.84	343	146	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4923.60	33.99	54.00	-20.01	31.63	4.15	32.76	34.55	53	122	Average	VERTICAL
2	4928.17	46.11	74.00	-27.89	43.75	4.15	32.76	34.55	53	122	Peak	VERTICAL
3	7383.05	53.89	74.00	-20.11	46.46	5.11	37.16	34.84	139	120	Peak	VERTICAL
4	7387.10	38.73	54.00	-15.27	31.27	5.12	37.18	34.84	139	120	Average	VERTICAL



<b>Temperature</b>	28°C	<b>Humidity</b>	57%
<b>Test Engineer</b>	Alvin Li	<b>Configurations</b>	IEEE 802.11n MCS0 HT20 CH 1 / Chain 1 + Chain 2
<b>Test Date</b>	Jun. 17, 2015		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4811.73	45.74	74.00	-28.26	43.72	4.09	32.52	34.59	296	209	Peak	HORIZONTAL
2	4824.00	31.57	54.00	-22.43	29.49	4.10	32.56	34.58	296	209	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4826.32	32.98	54.00	-21.02	30.90	4.10	32.56	34.58	67	100	Average	VERTICAL
2	4827.01	46.24	74.00	-27.76	44.16	4.10	32.56	34.58	67	100	Peak	VERTICAL

<b>Temperature</b>	28°C	<b>Humidity</b>	57%
<b>Test Engineer</b>	Alvin Li	<b>Configurations</b>	IEEE 802.11n MCS0 HT20 CH 6 / Chain 1 + Chain 2
<b>Test Date</b>	Jun. 17, 2015		

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4871.57	35.49	54.00	-18.51	33.27	4.13	32.66	34.57	290	151	Average	HORIZONTAL
2	4881.76	50.12	74.00	-23.88	47.90	4.13	32.66	34.57	290	151	Peak	HORIZONTAL
3	7313.78	40.18	54.00	-13.82	32.85	5.09	37.07	34.83	98	102	Average	HORIZONTAL
4	7324.84	53.42	74.00	-20.58	46.06	5.10	37.09	34.83	98	102	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4871.57	39.46	54.00	-14.54	37.24	4.13	32.66	34.57	93	100	Average	VERTICAL
2	4874.06	53.68	74.00	-20.32	51.46	4.13	32.66	34.57	93	100	Peak	VERTICAL
3	7312.62	59.00	74.00	-15.00	51.67	5.09	37.07	34.83	56	104	Peak	VERTICAL
4	7313.03	44.71	54.00	-9.29	37.38	5.09	37.07	34.83	56	104	Average	VERTICAL



<b>Temperature</b>	28°C	<b>Humidity</b>	57%
<b>Test Engineer</b>	Alvin Li	<b>Configurations</b>	IEEE 802.11n MCS0 HT20 CH 11 / Chain 1 + Chain 2
<b>Test Date</b>	Jun. 17, 2015		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4923.36	44.64	74.00	-29.36	42.28	4.15	32.76	34.55	69	155	Peak	HORIZONTAL
2	4923.83	31.82	54.00	-22.18	29.46	4.15	32.76	34.55	69	155	Average	HORIZONTAL
3	7395.84	49.86	74.00	-24.14	42.40	5.12	37.18	34.84	288	155	Peak	HORIZONTAL
4	7404.06	36.70	54.00	-17.30	29.22	5.12	37.20	34.84	288	155	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4926.32	33.67	54.00	-20.33	31.31	4.15	32.76	34.55	74	133	Average	VERTICAL
2	4936.97	47.52	74.00	-26.48	45.11	4.16	32.80	34.55	74	133	Peak	VERTICAL
3	7384.44	52.85	74.00	-21.15	45.39	5.12	37.18	34.84	128	100	Peak	VERTICAL
4	7386.98	38.88	54.00	-15.12	31.42	5.12	37.18	34.84	128	100	Average	VERTICAL

<b>Temperature</b>	28°C	<b>Humidity</b>	57%
<b>Test Engineer</b>	Alvin Li	<b>Configurations</b>	IEEE 802.11n MCS0 HT40 CH 3 / Chain 1 + Chain 2
<b>Test Date</b>	Jun. 17, 2015		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4831.79	46.09	74.00	-27.91	44.01	4.10	32.56	34.58	266	103 Peak	HORIZONTAL
2	4843.60	30.84	54.00	-23.16	28.72	4.11	32.59	34.58	266	103 Average	HORIZONTAL
3	7251.93	35.66	54.00	-18.34	28.39	5.08	37.01	34.82	324	101 Average	HORIZONTAL
4	7278.74	48.59	74.00	-25.41	41.30	5.08	37.03	34.82	324	101 Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4831.79	45.96	74.00	-28.04	43.88	4.10	32.56	34.58	346	114 Peak	VERTICAL
2	4847.42	30.92	54.00	-23.08	28.80	4.11	32.59	34.58	346	114 Average	VERTICAL
3	7261.43	35.58	54.00	-18.42	28.31	5.08	37.01	34.82	324	120 Average	VERTICAL
4	7278.33	48.49	74.00	-25.51	41.20	5.08	37.03	34.82	324	120 Peak	VERTICAL

<b>Temperature</b>	28°C	<b>Humidity</b>	57%
<b>Test Engineer</b>	Alvin Li	<b>Configurations</b>	IEEE 802.11n MCS0 HT40 CH 6 / Chain 1 + Chain 2
<b>Test Date</b>	Jun. 17, 2015		

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4883.61	30.83	54.00	-23.17	28.61	4.13	32.66	34.57	214	125	Average	HORIZONTAL
2	4886.74	46.91	74.00	-27.09	44.66	4.13	32.69	34.57	214	125	Peak	HORIZONTAL
3	7320.55	35.99	54.00	-18.01	28.63	5.10	37.09	34.83	182	100	Average	HORIZONTAL
4	7329.47	49.88	74.00	-24.12	42.52	5.10	37.09	34.83	182	100	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4881.53	30.95	54.00	-23.05	28.73	4.13	32.66	34.57	317	102	Average	VERTICAL
2	4886.79	52.34	74.00	-21.66	50.09	4.13	32.69	34.57	317	102	Peak	VERTICAL
3	7318.18	36.29	54.00	-17.71	28.93	5.10	37.09	34.83	333	121	Average	VERTICAL
4	7326.75	49.20	74.00	-24.80	41.84	5.10	37.09	34.83	333	121	Peak	VERTICAL

<b>Temperature</b>	28°C	<b>Humidity</b>	57%
<b>Test Engineer</b>	Alvin Li	<b>Configurations</b>	IEEE 802.11n MCS0 HT40 CH 9 / Chain 1 + Chain 2
<b>Test Date</b>	Jun. 17, 2015		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4896.71	31.10	54.00	-22.90	28.84	4.13	32.69	34.56	170	131 Average	HORIZONTAL
2	4916.68	48.55	74.00	-25.45	46.23	4.14	32.73	34.55	170	131 Peak	HORIZONTAL
3	7363.18	36.61	54.00	-17.39	29.21	5.11	37.13	34.84	214	149 Average	HORIZONTAL
4	7371.17	49.57	74.00	-24.43	42.14	5.11	37.16	34.84	214	149 Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4909.50	31.24	54.00	-22.76	28.93	4.14	32.73	34.56	276	116 Average	VERTICAL
2	4916.68	50.81	74.00	-23.19	48.49	4.14	32.73	34.55	276	116 Peak	VERTICAL
3	7360.17	36.65	54.00	-17.35	29.24	5.11	37.13	34.83	232	167 Average	VERTICAL
4	7361.44	49.92	74.00	-24.08	42.51	5.11	37.13	34.83	232	167 Peak	VERTICAL

### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.6. Emissions Measurement

### 4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (30dBc in any 100 kHz bandwidth emission)	100 kHz / 300 kHz for Peak

### 4.6.3. Test Procedures

For Radiated band edges Measurement:

1. The test procedure is the same as section 4.5.3.

For Radiated Out of Band Emission Measurement:

1. Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure.

#### **4.6.4. Test Setup Layout**

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

#### **4.6.5. Test Deviation**

There is no deviation with the original standard.

#### **4.6.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.



#### 4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	28°C	Humidity	57%
Test Engineer	Alvin Li	Configurations	IEEE 802.11b CH 1, 6, 11 / Chain 1
Test Date	Jun. 16, 2015 ~ Jun. 17, 2015		

##### Channel 1

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2389.80	61.51	74.00	-12.49	30.73	2.86	27.92	0.00	254	169	Peak	VERTICAL
2	2390.00	49.38	54.00	-4.62	18.60	2.86	27.92	0.00	254	169	Average	VERTICAL
3	2411.40	110.58			79.81	2.87	27.90	0.00	254	169	Average	VERTICAL
4	2413.00	114.18			83.41	2.87	27.90	0.00	254	169	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

##### Channel 6

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2387.97	61.00	74.00	-13.00	30.22	2.86	27.92	0.00	244	168	Peak	VERTICAL
2	2390.00	47.71	54.00	-6.29	16.93	2.86	27.92	0.00	244	168	Average	VERTICAL
3	2437.87	111.68			80.93	2.89	27.86	0.00	244	168	Average	VERTICAL
4	2438.16	114.34			83.59	2.89	27.86	0.00	244	168	Peak	VERTICAL
5	2483.50	60.46	74.00	-13.54	29.73	2.91	27.82	0.00	244	168	Peak	VERTICAL
6	2483.50	48.03	54.00	-5.97	17.30	2.91	27.82	0.00	244	168	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

##### Channel 11

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2461.86	112.65			81.91	2.90	27.84	0.00	243	121	Peak	VERTICAL
2	2462.87	110.06			79.32	2.90	27.84	0.00	243	121	Average	VERTICAL
3	2483.50	49.09	54.00	-4.91	18.36	2.91	27.82	0.00	243	121	Average	VERTICAL
4	2485.38	61.54	74.00	-12.46	30.81	2.91	27.82	0.00	243	121	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	28°C	<b>Humidity</b>	57%
<b>Test Engineer</b>	Alvin Li	<b>Configurations</b>	IEEE 802.11g CH 1, 6, 11 / Chain 1 + Chain 2
<b>Test Date</b>	Jun. 16, 2015		

**Channel 1**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	2389.40	50.61	54.00	-3.39	19.83	2.86	27.92	0.00	159	138 Average	VERTICAL
2	2389.80	72.33	74.00	-1.67	41.55	2.86	27.92	0.00	159	138 Peak	VERTICAL
3	2408.20	113.25			82.48	2.87	27.90	0.00	159	138 Peak	VERTICAL
4	2408.40	102.83			72.06	2.87	27.90	0.00	159	138 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	2387.20	65.46	74.00	-8.54	34.68	2.86	27.92	0.00	161	163 Peak	VERTICAL
2	2390.00	52.07	54.00	-1.93	21.29	2.86	27.92	0.00	161	163 Average	VERTICAL
3	2433.40	119.24			88.48	2.88	27.88	0.00	161	163 Peak	VERTICAL
4	2433.40	109.36			78.60	2.88	27.88	0.00	161	163 Average	VERTICAL
5	2485.10	66.46	74.00	-7.54	35.73	2.91	27.82	0.00	161	163 Peak	VERTICAL
6	2485.10	52.00	54.00	-2.00	21.27	2.91	27.82	0.00	161	163 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

**Channel 11**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	2458.40	103.66			72.92	2.90	27.84	0.00	162	136 Average	VERTICAL
2	2458.60	114.48			83.74	2.90	27.84	0.00	162	136 Peak	VERTICAL
3	2483.50	51.75	54.00	-2.25	21.02	2.91	27.82	0.00	162	136 Average	VERTICAL
4	2487.50	72.33	74.00	-1.67	41.61	2.92	27.80	0.00	162	136 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	28°C	<b>Humidity</b>	57%
<b>Test Engineer</b>	Alvin Li	<b>Configurations</b>	IEEE 802.11n MCS0 HT20 CH 1, 6, 11 / Chain 1 + Chain 2
<b>Test Date</b>	Jun. 16, 2015		

**Channel 1**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2388.20	70.65	74.00	-3.35	39.87	2.86	27.92	0.00	160	154 Peak	VERTICAL
2	2390.00	52.83	54.00	-1.17	22.05	2.86	27.92	0.00	160	154 Average	VERTICAL
3	2409.80	112.70			81.93	2.87	27.90	0.00	160	154 Peak	VERTICAL
4	2415.20	101.94			71.17	2.87	27.90	0.00	160	154 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2383.20	66.81	74.00	-7.19	36.02	2.85	27.94	0.00	159	149 Peak	VERTICAL
2	2388.80	51.43	54.00	-2.57	20.65	2.86	27.92	0.00	159	149 Average	VERTICAL
3	2435.40	118.16			87.40	2.88	27.88	0.00	159	149 Peak	VERTICAL
4	2440.20	107.50			76.75	2.89	27.86	0.00	159	149 Average	VERTICAL
5	2483.90	51.26	54.00	-2.74	20.53	2.91	27.82	0.00	159	149 Average	VERTICAL
6	2488.70	65.33	74.00	-8.67	34.61	2.92	27.80	0.00	159	149 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

**Channel 11**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2458.40	112.90			82.16	2.90	27.84	0.00	212	152 Peak	VERTICAL
2	2465.80	102.26			71.52	2.90	27.84	0.00	212	152 Average	VERTICAL
3	2483.50	52.86	54.00	-1.14	22.13	2.91	27.82	0.00	212	152 Average	VERTICAL
4	2485.60	71.13	74.00	-2.87	40.40	2.91	27.82	0.00	212	152 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	28°C	<b>Humidity</b>	57%
<b>Test Engineer</b>	Alvin Li	<b>Configurations</b>	IEEE 802.11n MCS0 HT40 CH 3, 6, 9 / Chain 1 + Chain 2
<b>Test Date</b>	Jun. 16, 2015		

**Channel 3**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2390.00	66.30	74.00	-7.70	35.52	2.86	27.92	0.00	160	151	Peak	VERTICAL
2	2390.00	52.98	54.00	-1.02	22.20	2.86	27.92	0.00	160	151	Average	VERTICAL
3	2425.20	107.34			76.58	2.88	27.88	0.00	160	151	Peak	VERTICAL
4	2427.60	95.98			65.22	2.88	27.88	0.00	160	151	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

**Channel 6**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2390.00	67.74	74.00	-6.26	36.96	2.86	27.92	0.00	159	148	Peak	VERTICAL
2	2390.00	52.77	54.00	-1.23	21.99	2.86	27.92	0.00	159	148	Average	VERTICAL
3	2443.00	110.84			80.09	2.89	27.86	0.00	159	148	Peak	VERTICAL
4	2443.00	99.49			68.74	2.89	27.86	0.00	159	148	Average	VERTICAL
5	2484.70	67.18	74.00	-6.82	36.45	2.91	27.82	0.00	159	148	Peak	VERTICAL
6	2484.70	50.66	54.00	-3.34	19.93	2.91	27.82	0.00	159	148	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

**Channel 9**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2447.60	109.78			79.03	2.89	27.86	0.00	160	120	Peak	VERTICAL
2	2447.60	98.28			67.53	2.89	27.86	0.00	160	120	Average	VERTICAL
3	2483.50	52.97	54.00	-1.03	22.24	2.91	27.82	0.00	160	120	Average	VERTICAL
4	2485.10	67.65	74.00	-6.35	36.92	2.91	27.82	0.00	160	120	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2452 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

**For Emission not in Restricted Band**


**Plot on Configuration IEEE 802.11b / Reference Level**

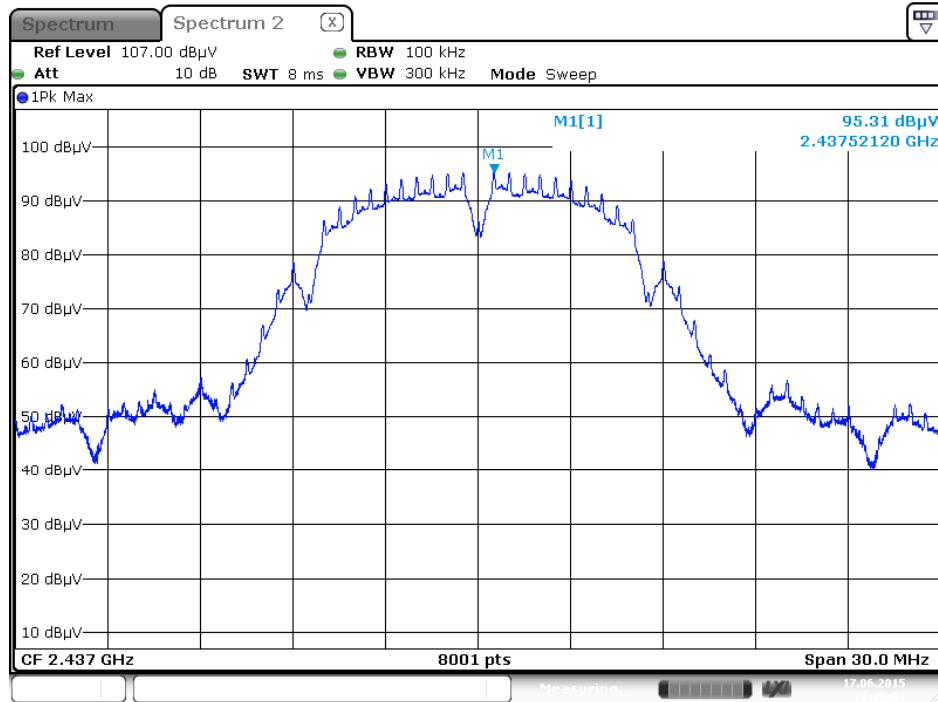


**Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)**

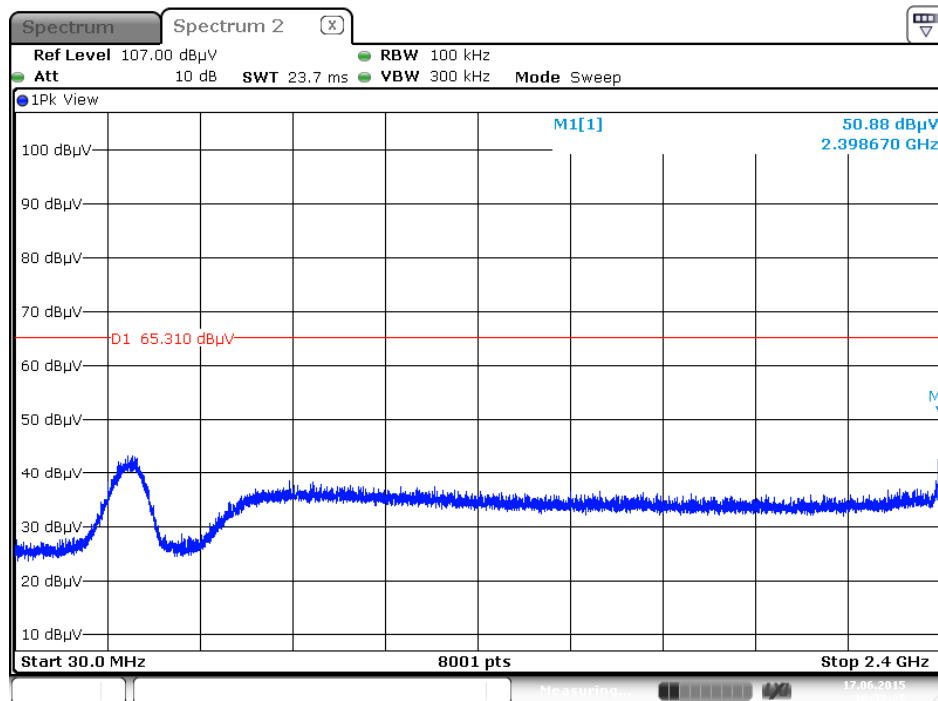


Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

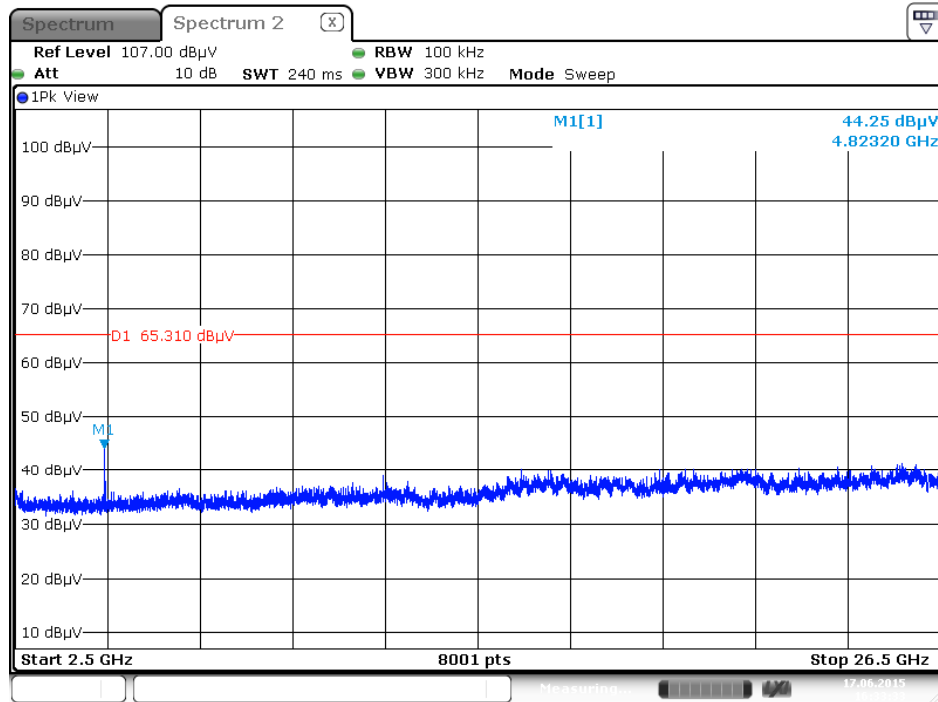

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

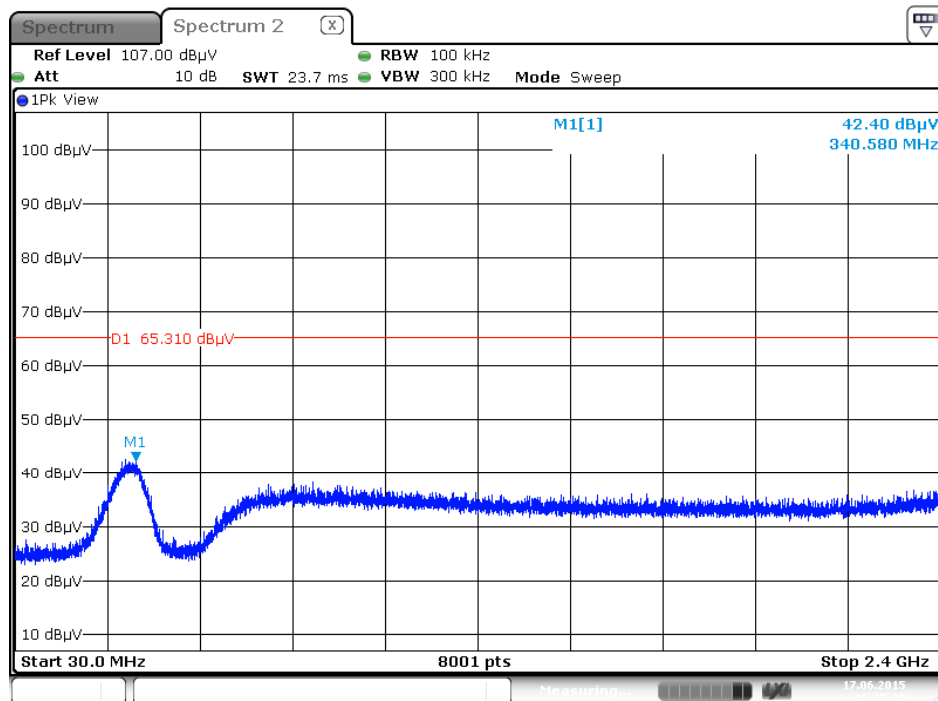


Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)

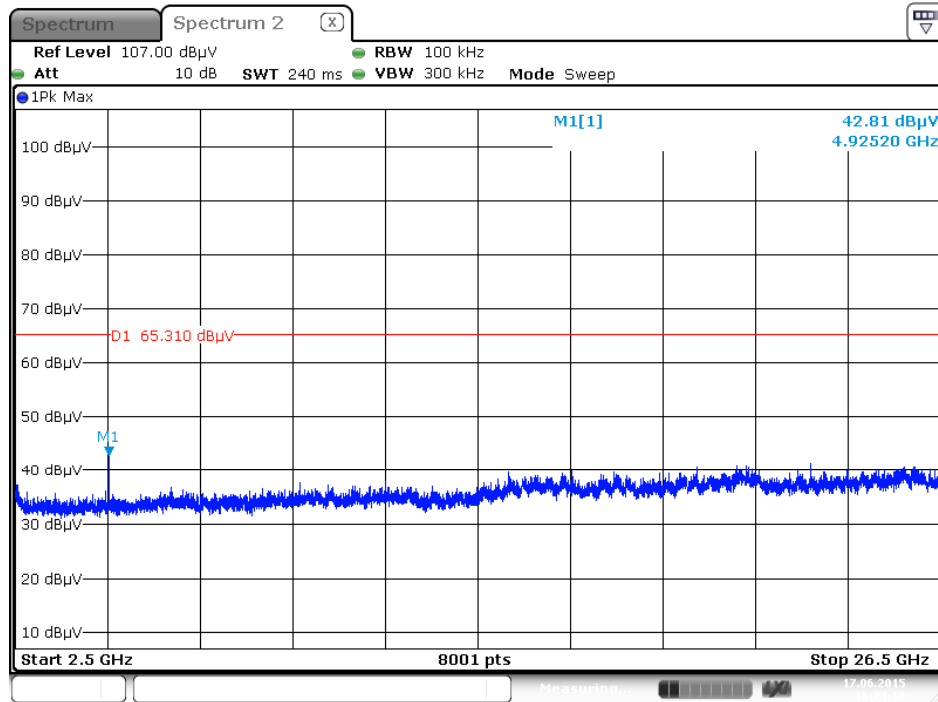


Date: 17 JUN 2015 16:34:17

Plot on Configuration IEEE 802.11g / Reference Level

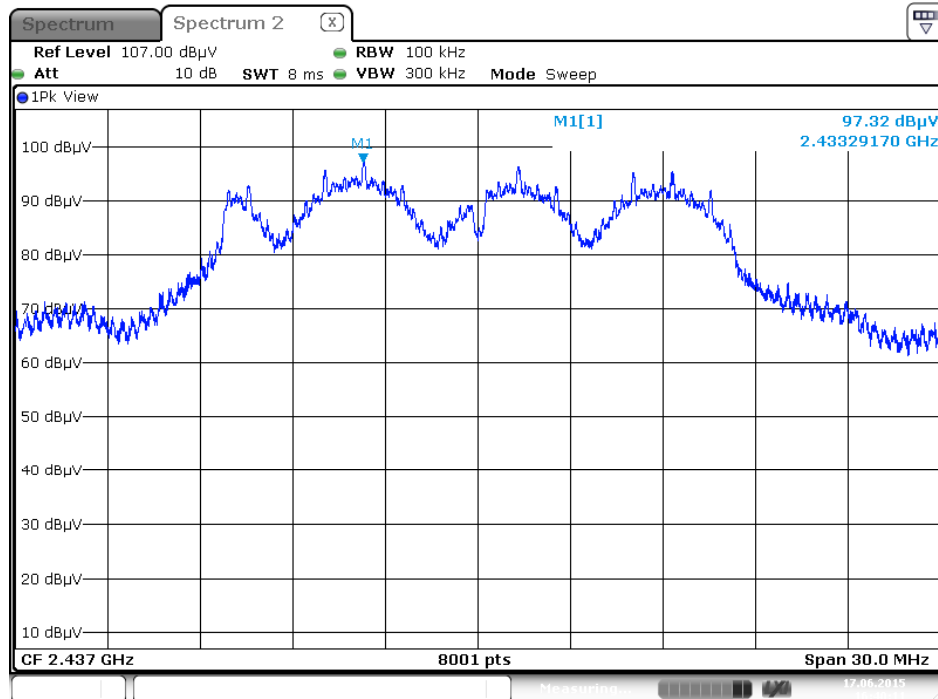


Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

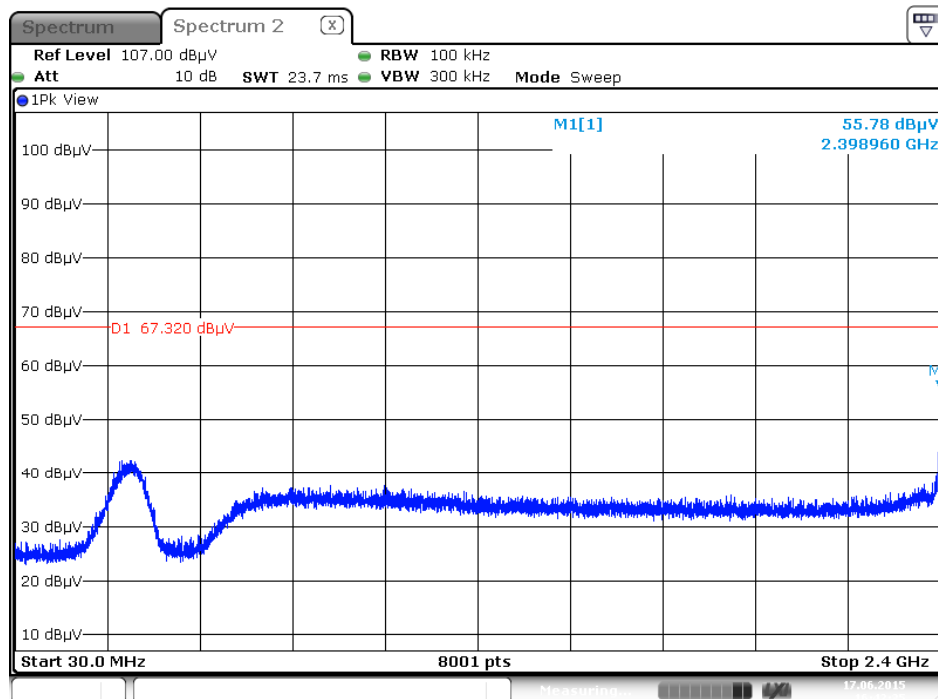





Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)

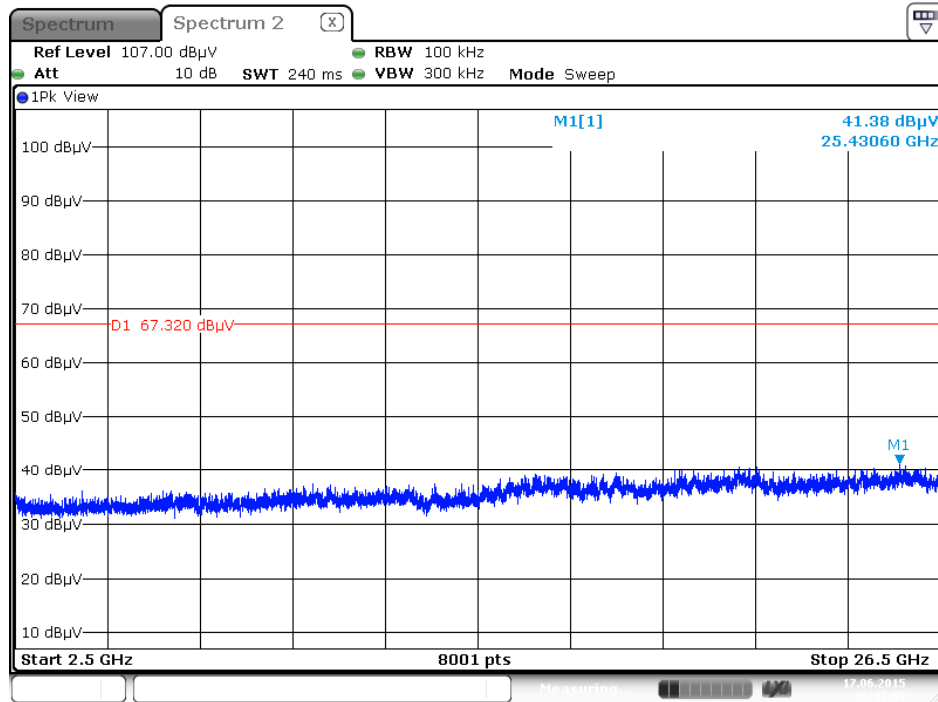

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

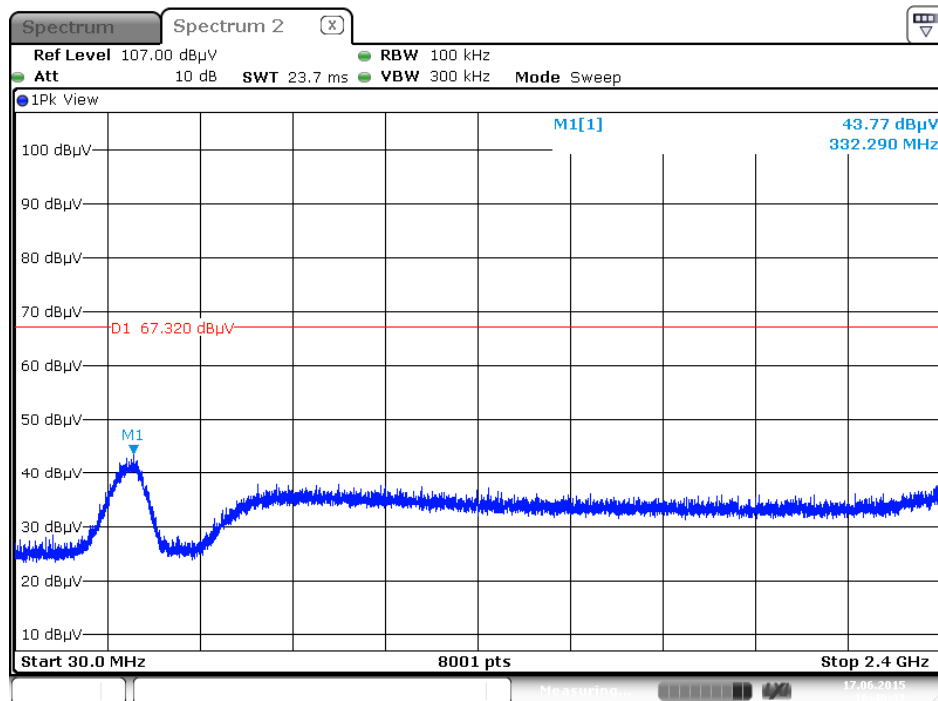


Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)

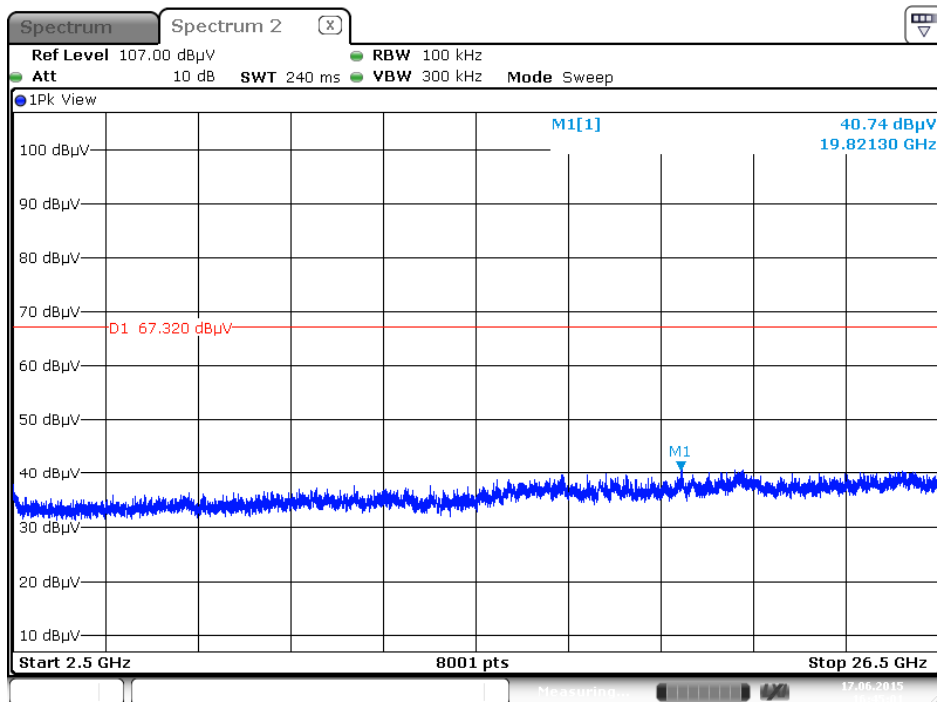


Date: 17 JUN 2015 16:45:01


Plot on Configuration IEEE 802.11n MCS0 HT20 / Reference Level

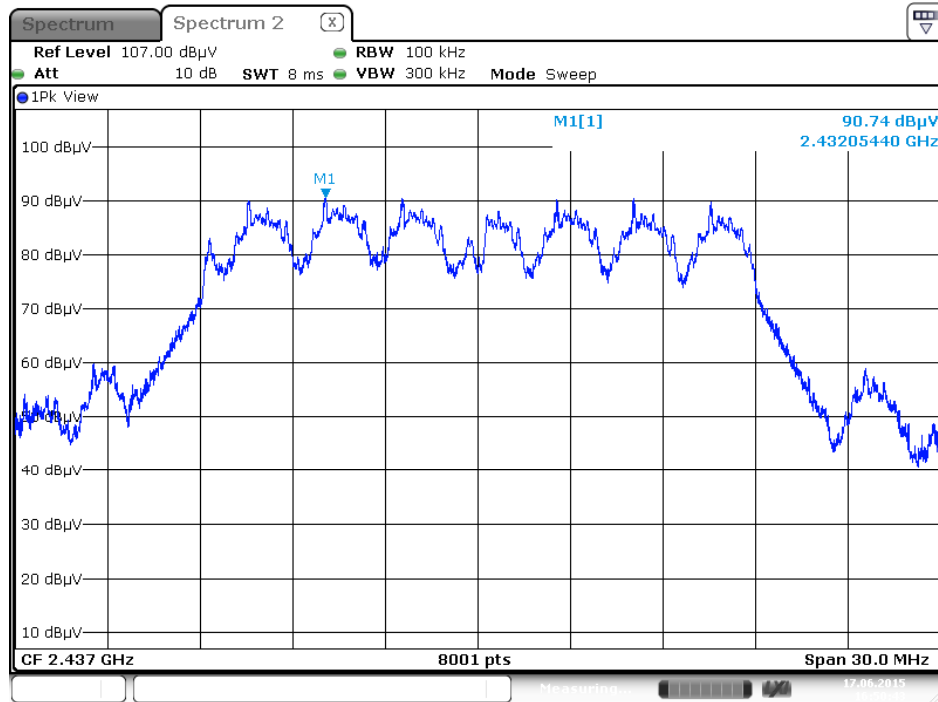


Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

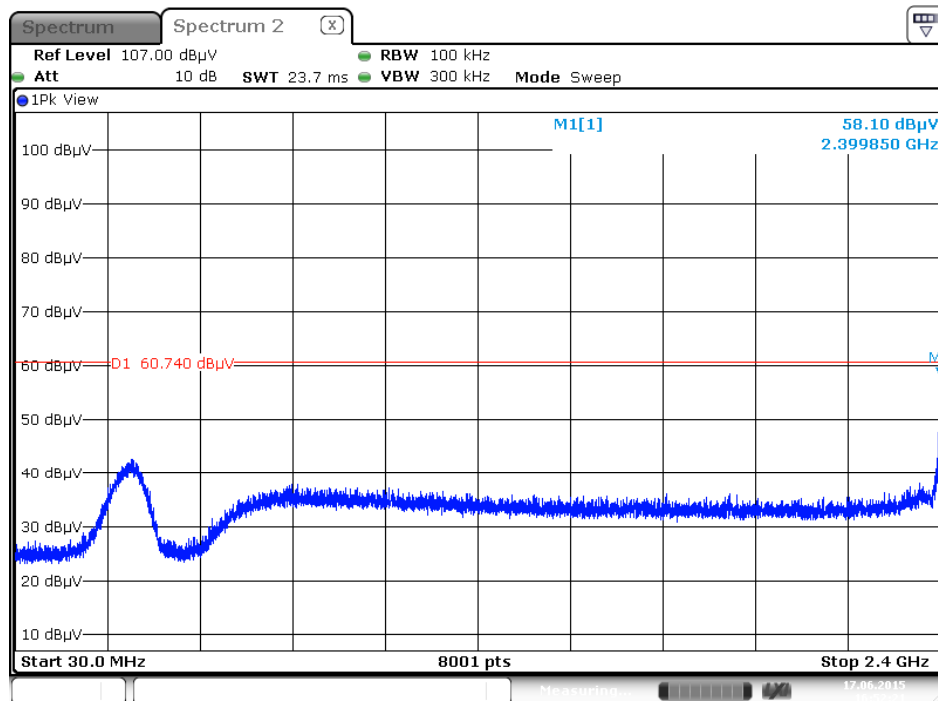


Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

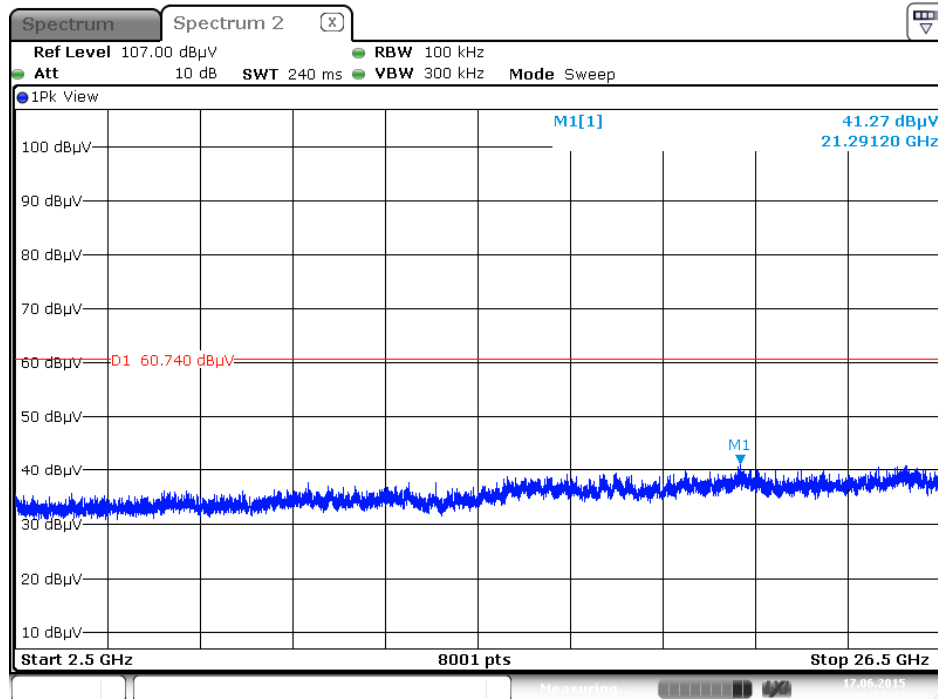

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

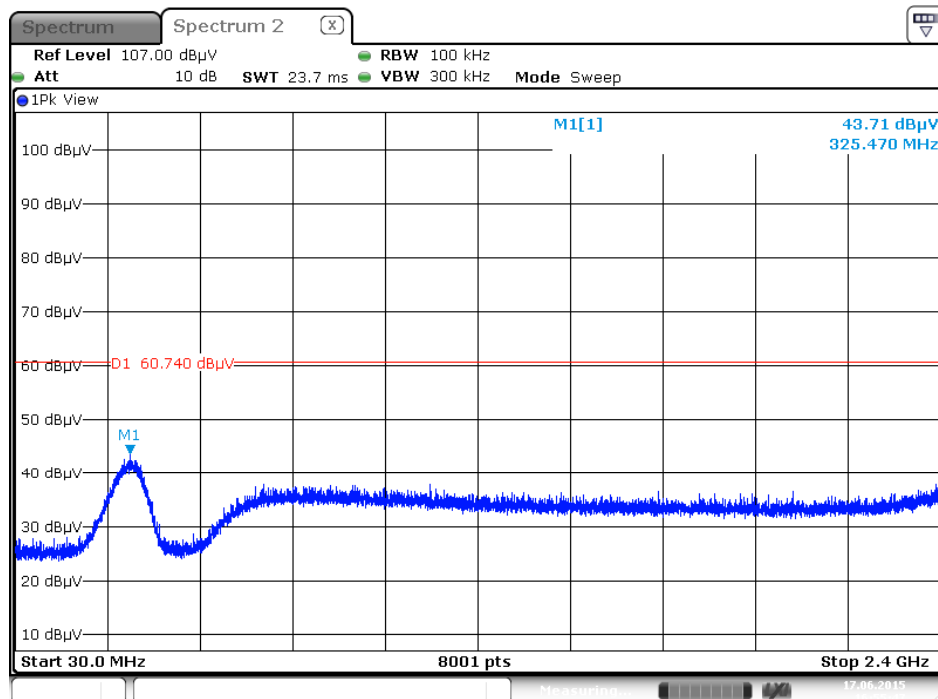


Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

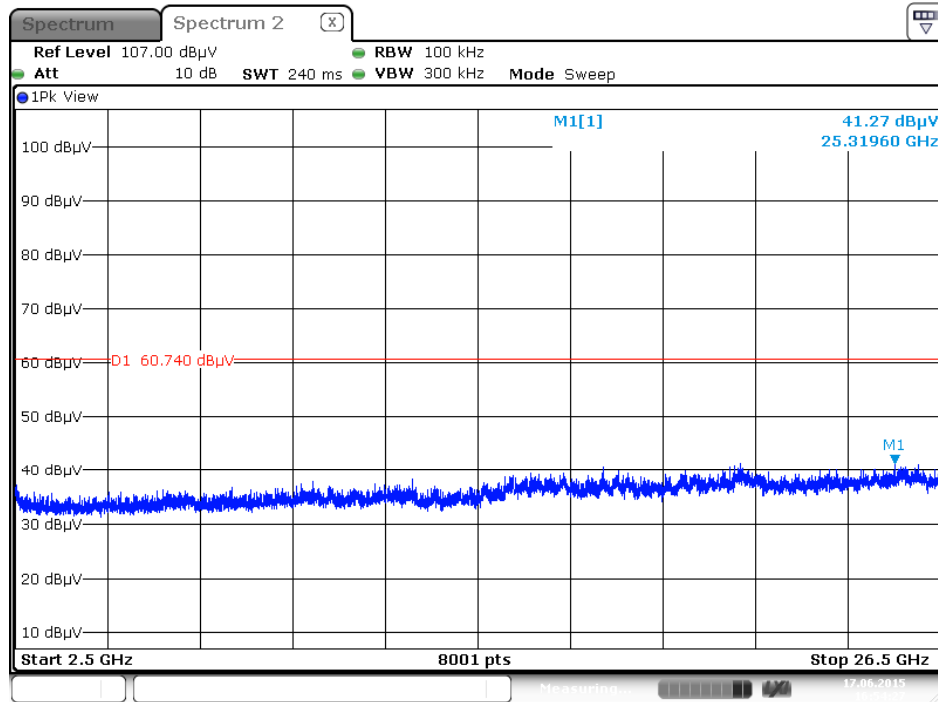


Date: 17 JUN 2015 16:54:28


Plot on Configuration IEEE 802.11n MCS0 HT40 / Reference Level

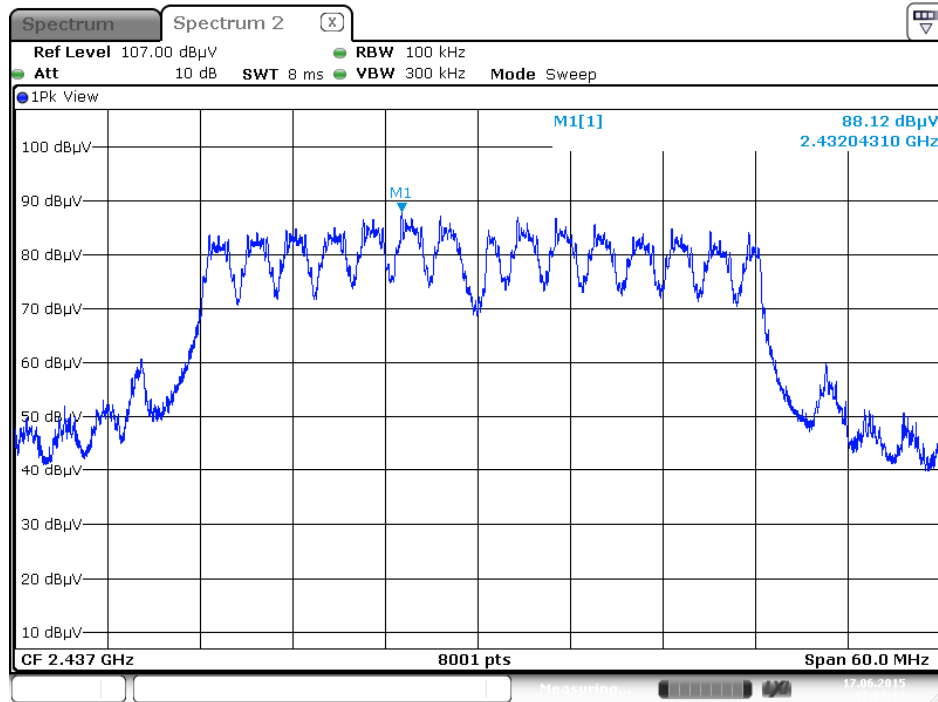

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

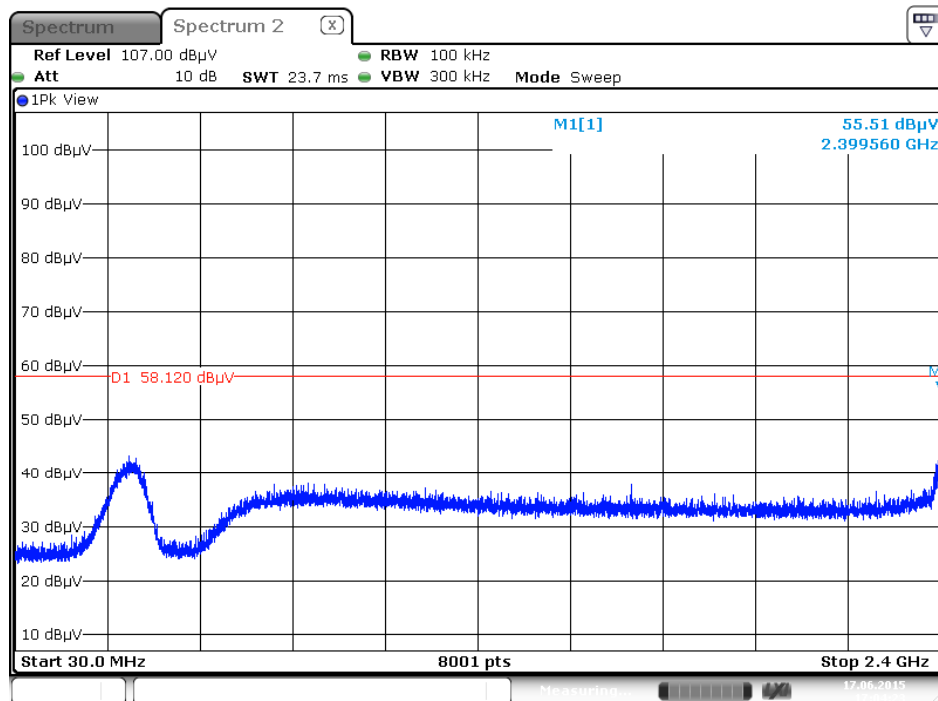


Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

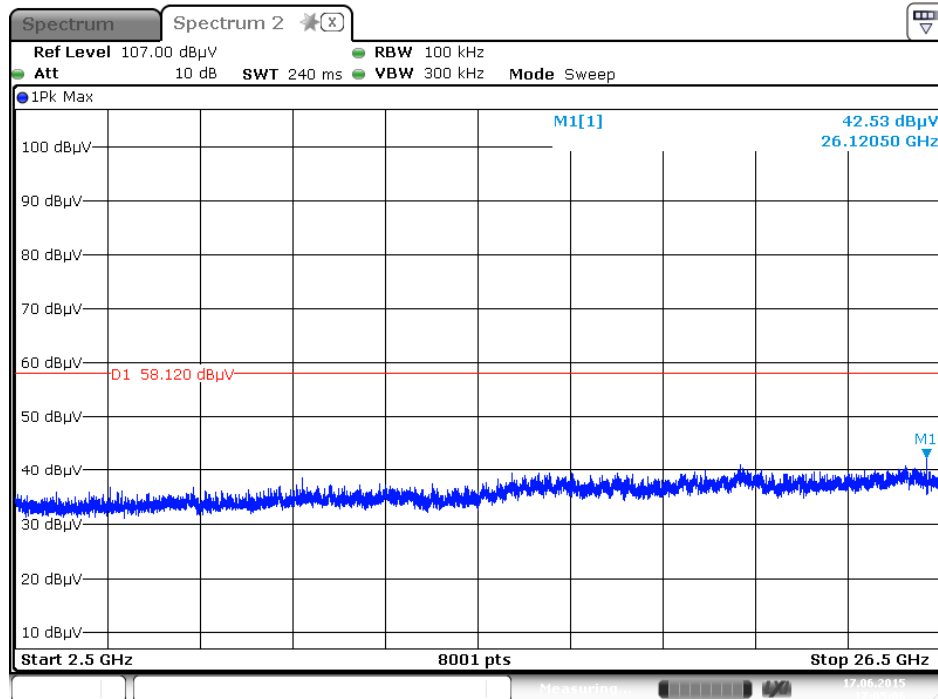


Date: 17 JUN 2015 17:05:06

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

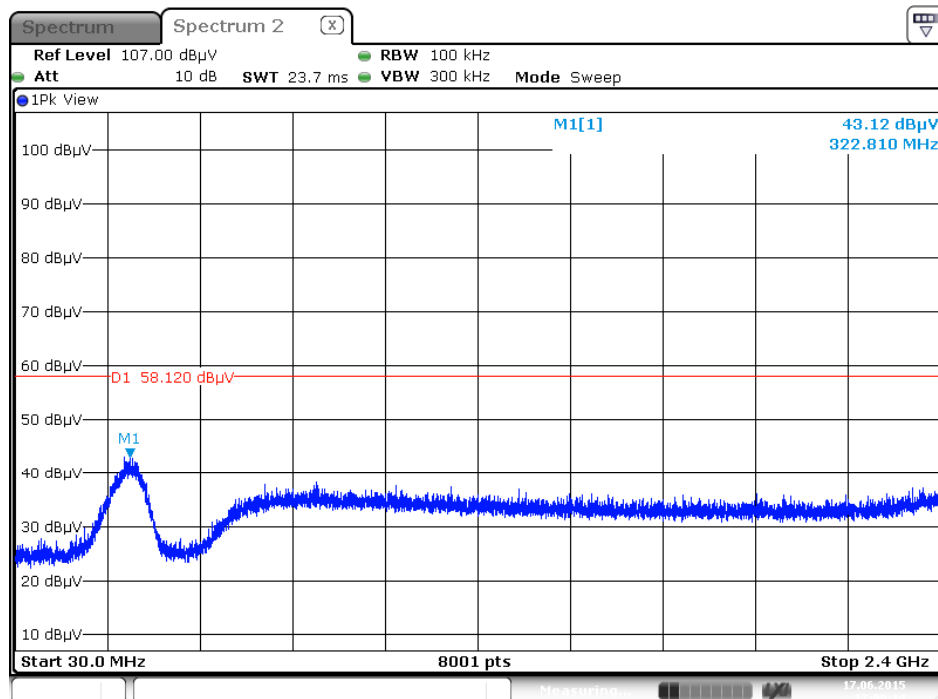

Date: 17 JUN 2015 17:09:14

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)

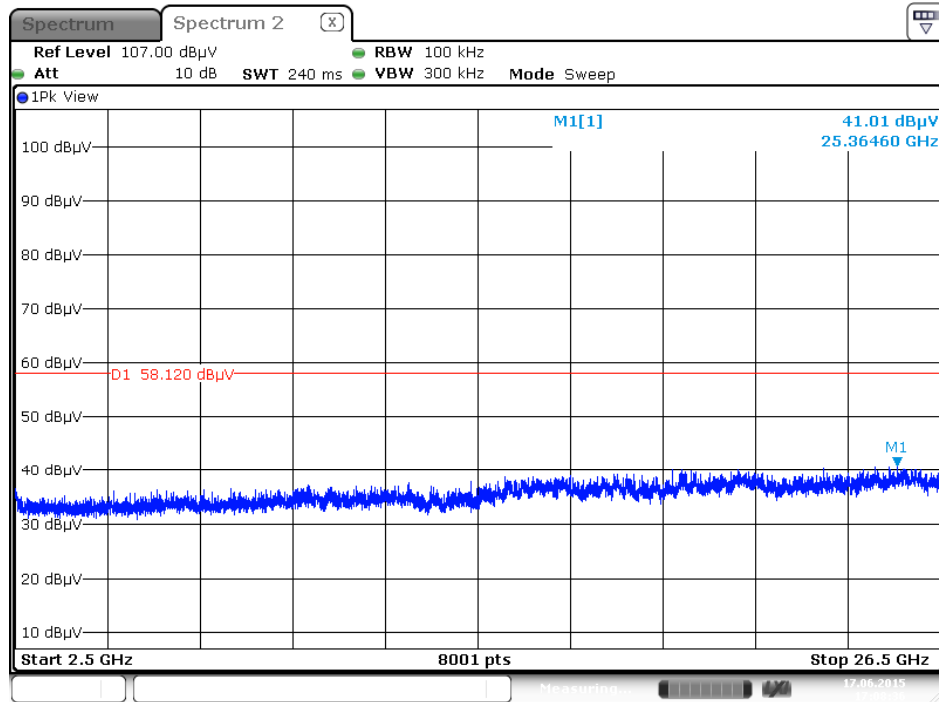

Date: 17 JUN 2015 17:08:37



## 4.7. Antenna Requirements

### 4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 22, 2015	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 02, 2014	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 02, 2014	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 03, 2014	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 06, 2015	Radiation (O3CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 12, 2015	Radiation (O3CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 28, 2014	Radiation (O3CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 22, 2014	Radiation (O3CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Feb. 24, 2015	Radiation (O3CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 12, 2015	Radiation (O3CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Nov. 06, 2014	Radiation (O3CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Jan. 21, 2015	Radiation (O3CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 15, 2014	Radiation (O3CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 15, 2014	Radiation (O3CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 15, 2014	Radiation (O3CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (O3CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (O3CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 12, 2014	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 03, 2014	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.

## 6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%