


Appendix C. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


| | | | |
|---------------|------------|----------------|-----------|
| Temperature | 24°C | Humidity | 55% |
| Test Engineer | James Chou | Configurations | 2.4G + 5G |

Horizontal

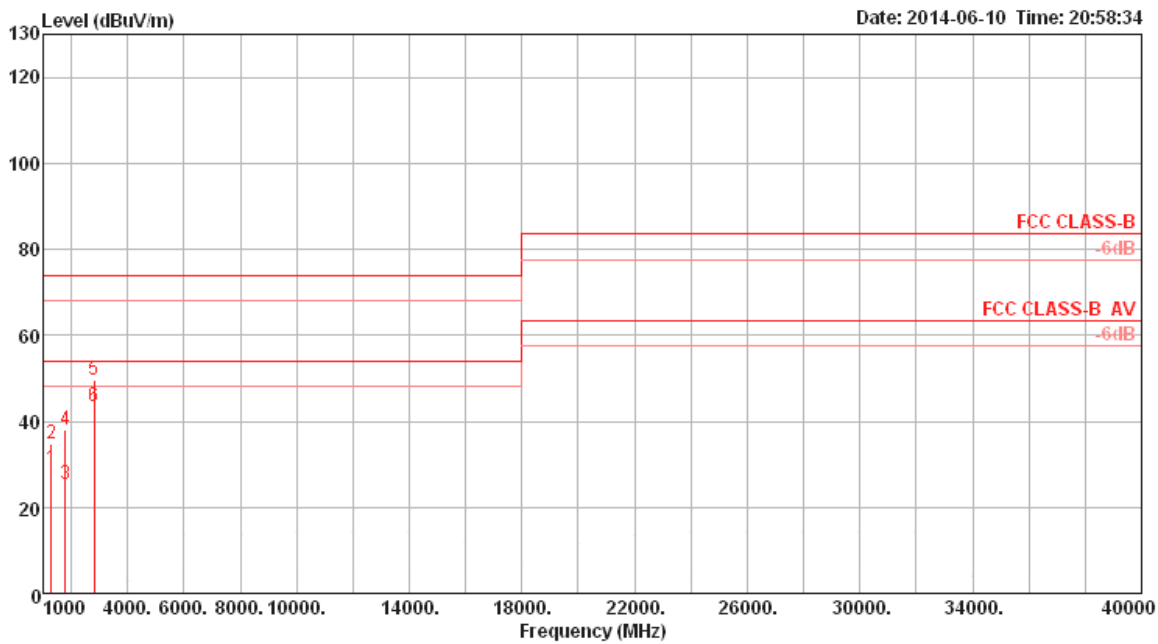

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | | A/Pos | T/Pos | |
|---|---------|--------|--------|--------|-------|--------------|--------|--------|---------|-------|----------------|
| | MHz | dBuV/m | Line | Limit | Level | Loss | Factor | Factor | Remark | cm | deg |
| | | | dBuV/m | dB | dBuV | dB | dB/m | dB | | | |
| 1 | 1279.96 | 28.86 | 54.00 | -25.14 | 35.70 | 2.90 | 24.91 | 34.65 | Average | 100 | 72 HORIZONTAL |
| 2 | 1280.20 | 34.88 | 74.00 | -39.12 | 41.72 | 2.90 | 24.91 | 34.65 | Peak | 100 | 72 HORIZONTAL |
| 3 | 1800.04 | 25.31 | 54.00 | -28.69 | 30.19 | 3.54 | 26.48 | 34.90 | Average | 100 | 288 HORIZONTAL |
| 4 | 1800.21 | 37.95 | 74.00 | -36.05 | 42.83 | 3.54 | 26.48 | 34.90 | Peak | 100 | 288 HORIZONTAL |
| 5 | 2799.89 | 49.44 | 74.00 | -24.56 | 50.81 | 4.49 | 29.26 | 35.12 | Peak | 100 | 97 HORIZONTAL |
| 6 | 2800.00 | 43.36 | 54.00 | -10.64 | 44.73 | 4.49 | 29.26 | 35.12 | Average | 100 | 97 HORIZONTAL |

Vertical

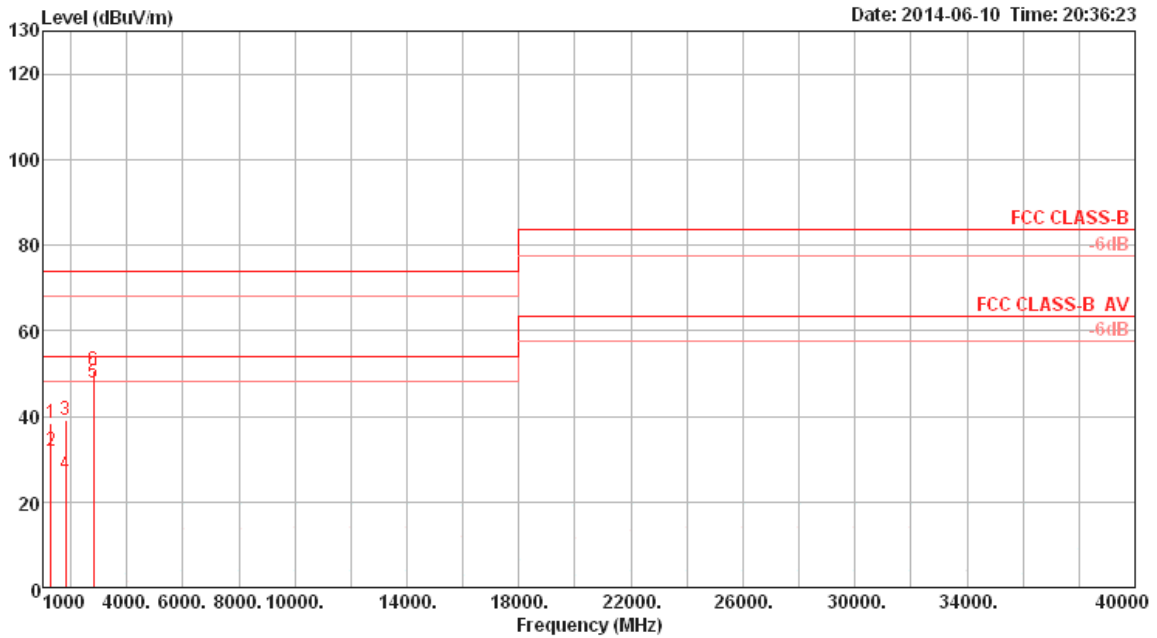

| | Freq | Level | Limit | Over | Read | CableAntenna | Preamp | | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|--------|--------|-------|--------------|--------|-------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | cm | deg | |
| 1 | 1279.89 | 38.28 | 74.00 | -35.72 | 45.12 | 2.90 | 24.91 | 34.65 | 100 | 217 | VERTICAL |
| 2 | 1280.90 | 31.83 | 54.00 | -22.17 | 38.65 | 2.92 | 24.91 | 34.65 | 100 | 217 | VERTICAL |
| 3 | 1815.14 | 38.95 | 74.00 | -35.05 | 43.75 | 3.57 | 26.53 | 34.90 | 100 | 334 | VERTICAL |
| 4 | 1815.35 | 26.30 | 54.00 | -27.70 | 31.10 | 3.57 | 26.53 | 34.90 | 100 | 334 | VERTICAL |
| 5 | 2800.04 | 47.72 | 54.00 | -6.28 | 49.09 | 4.49 | 29.26 | 35.12 | 100 | 233 | VERTICAL |
| 6 | 2800.04 | 50.75 | 74.00 | -23.25 | 52.12 | 4.49 | 29.26 | 35.12 | 100 | 233 | VERTICAL |