


FCC Radio Test Report

FCC ID: Q87-RE9000


This report concerns (check one): Original Grant Class I Change Class II Change

Project No. : 1708107
Equipment : WiFi Tri band repeater
Test Model : RE9000
Series Model : N/A
Applicant : Linksys LLC
Address : 121 Theory Drive, Irvine, CA, 92617, USA

Date of Receipt : Aug. 28, 2017
Date of Test : Aug. 28, 2017 ~ Sep. 25, 2017
Issued Date : Sep. 27, 2017
Tested by : BTL Inc.

Testing Engineer : 
(Kehji Lin)

Technical Manager : 
(James Chiu)

Authorized Signatory : 
(Andy Chiu)

B T L I N C .

B1, No.37, Lane 365, Yang Guang St.,
Nei-Hu District, Taipei City 114, Taiwan.
TEL:+886-2-2657-3299 FAX: +886-2-2657-3331



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents

Page

1 .	CERTIFICATION	6
2 .	SUMMARY OF TEST RESULTS	7
2.1	TEST FACILITY	8
2.2	MEASUREMENT UNCERTAINTY	8
3 .	GENERAL INFORMATION	10
3.1	GENERAL DESCRIPTION OF EUT	10
3.2	DESCRIPTION OF TEST MODES	12
3.3	TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	13
3.4	BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	14
3.5	DESCRIPTION OF SUPPORT UNITS	14
4 .	EMC EMISSION TEST	15
4.1	CONDUCTED EMISSION MEASUREMENT	15
4.1.1	POWER LINE CONDUCTED EMISSION LIMITS	15
4.1.2	TEST PROCEDURE	15
4.1.3	DEVIATION FROM TEST STANDARD	15
4.1.4	TEST SETUP	16
4.1.5	EUT OPERATING CONDITIONS	16
4.1.6	EUT TEST CONDITIONS	16
4.1.7	TEST RESULTS	16
4.2	RADIATED EMISSION MEASUREMENT	17
4.2.1	RADIATED EMISSION LIMITS	17
4.2.2	TEST PROCEDURE	18
4.2.3	DEVIATION FROM TEST STANDARD	18
4.2.4	TEST SETUP	19
4.2.5	EUT OPERATING CONDITIONS	20
4.2.6	EUT TEST CONDITIONS	20
4.2.7	TEST RESULTS (9KHZ TO 30MHZ)	20
4.2.8	TEST RESULTS (30MHZ TO 1000 MHZ)	20
4.2.9	TEST RESULTS (ABOVE 1000 MHZ)	20
5 .	BANDWIDTH TEST	21
5.1	APPLIED PROCEDURES	21
5.1.1	TEST PROCEDURE	21
5.1.2	DEVIATION FROM STANDARD	21
5.1.3	TEST SETUP	21
5.1.4	EUT OPERATION CONDITIONS	21
5.1.5	EUT TEST CONDITIONS	21
5.1.6	TEST RESULTS	21
6 .	MAXIMUM PEAK CONDUCTED OUTPUT POWER TEST	22

Table of Contents	Page
6.1 APPLIED PROCEDURES / LIMIT	22
6.1.1 TEST PROCEDURE	22
6.1.2 DEVIATION FROM STANDARD	22
6.1.3 TEST SETUP	22
6.1.4 EUT OPERATION CONDITIONS	22
6.1.5 EUT TEST CONDITIONS	22
6.1.6 TEST RESULTS	22
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	23
7.1 APPLIED PROCEDURES / LIMIT	23
7.1.1 TEST PROCEDURE	23
7.1.2 DEVIATION FROM STANDARD	23
7.1.3 TEST SETUP	23
7.1.4 EUT OPERATION CONDITIONS	23
7.1.5 EUT TEST CONDITIONS	23
7.1.6 TEST RESULTS	23
8 . POWER SPECTRAL DENSITY TEST	24
8.1 APPLIED PROCEDURES / LIMIT	24
8.1.1 TEST PROCEDURE	24
8.1.2 DEVIATION FROM STANDARD	24
8.1.3 TEST SETUP	24
8.1.4 EUT OPERATION CONDITIONS	24
8.1.5 EUT TEST CONDITIONS	24
8.1.6 TEST RESULTS	24
9 . MEASUREMENT INSTRUMENTS LIST	25
10 . EUT TEST PHOTO	27
APPENDIX A - CONDUCTED EMISSION	31
APPENDIX B - RADIATED EMISSION (9KHZ TO 30MHZ)	34
APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)	39
APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)	42
APPENDIX E - BANDWIDTH	97
APPENDIX F - MAXIMUM PEAK CONDUCTED OUTPUT POWER	106
APPENDIX G - ANTENNA CONDUCTED SPURIOUS EMISSION	111
APPENDIX H - POWER SPECTRAL DENSITY	160

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1708107	Original Issue.	Sep. 27, 2017

1. CERTIFICATION

Equipment : WiFi Tri band repeater
Brand Name : Linksys
Test Model : RE9000
Series Model : N/A
Applicant : Linksys LLC
Manufacturer : U-MEDIA Communications, Inc.
Address : No. 90, Kuang Fu Nth.Rd., Hsinchu Industrial Park, Hu Kou, Hsinchu, 303,
Taiwan
Factory : U-MEDIA Communications, Inc.
Address : No. 90, Kuang Fu Nth.Rd., Hsinchu Industrial Park, Hu Kou, Hsinchu, 303,
Taiwan
Date of Test : Aug. 28, 2017 ~ Sep. 25, 2017
Test Sample : Engineering Sample
Standard(s) : FCC Part15, Subpart C:(15.247) / ANSI C63.10-2013

The above equipment has been tested and found in compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1708107) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test results included in this report is only for the WIFI 2.4GHz part.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C				
Standard(s)	Section	Test Item	Judgment	Remark
15.207		Conducted Emission	PASS	
15.247(d)		Antenna conducted Spurious Emission	PASS	
15.247(a)(2)		6dB Bandwidth	PASS	
15.247(b)(3)		Peak Output Power	PASS	
15.247(e)		Power Spectral Density	PASS	
15.203		Antenna Requirement	PASS	
15.247(d)/ 15.205/ 15.209		Transmitter Radiated Emissions	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

Conducted emission Test:

C05: (VCCI RN: C-4742; FCC RN:965108; FCC DN:TW1082)

No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

Radiated emission Test (Below 1 GHz):

CB15: (FCC RN:674415; FCC DN:TW0659)

No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

Radiated emission Test (Above 1 GHz):

CB15: (FCC RN:674415; FCC DN:TW0659)

No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted emission test:

Test Site	Method	Measurement Frequency Range	U,(dB)
C05	CISPR	150 kHz ~ 30MHz	2.68

B. Radiated emission test:

Test Site	Method	Measurement Frequency Range	U,(dB)
CB15 (3m)	CISPR	9kHz ~ 150kHz	2.82
		150kHz ~ 30MHz	2.58

Test Site	Method	Measurement Frequency Range	Ant.	U,(dB)
CB15 (3m)	CISPR	30MHz ~ 200MHz	V	4.20
		30MHz ~ 200MHz	H	3.64
		200MHz ~ 1,000MHz	V	4.56
		200MHz ~ 1,000MHz	H	3.90

Test Site	Method	Measurement Frequency Range	Ant.	U,(dB)
CB15 (3m)	CISPR	1GHz ~ 6GHz	V	4.46
		1GHz ~ 6GHz	H	4.40
		6GHz ~ 18GHz	V	3.88
		6GHz ~ 18GHz	H	4.00

Test Site	Method	Measurement Frequency Range	U,(dB)
CB15 (1m)	CISPR	18 ~ 26.5 GHz	4.62
		26.5 ~ 40 GHz	5.12

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above. These are our U_{lab} values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called U_{CISPR} , as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz: 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz: 5.2 dB

It can be seen that our U_{lab} values are smaller than U_{CISPR} .

Note: unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	WiFi Tri band repeater	
Brand Name	Linksys	
Test Model	RE9000	
Series Model	N/A	
Model Difference	N/A	
Output Power (Max.)	Operation Frequency	2412~2462 MHz
	Modulation Technology	802.11b:DSSS 802.11g:OFDM 802.11n:OFDM
	Bit Rate of Transmitter	802.11b: 11/5.5/2/1 Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps 802.11n up to 300 Mbps
	Output Power (Max.)	802.11b: 25.61dBm 802.11g: 27.16dBm 802.11n(20MHz): 26.26dBm 802.11n(40MHz): 26.35dBm
Power Source	DC Voltage supplied from external power supply.	
Power Rating	(1) KTEC / KSA-24W-120200HU I/P: 100-240V~50/60Hz, 0.6A O/P: 12V---2.0A (2) UMEC / UP0251M-12PA I/P: 100-240V~50/60Hz, 0.6A O/P: 12V---2A (3) I.T.E. POWER SUPPLY / MU24AY120200-A1 I/P: 100-240V~50/60Hz, 0.7A O/P: 12V---2A	
Products Covered	3 * Adapter: (1) KTEC / KSA-24W-120200HU (2) UMEC / UP0251M-12PA (3) I.T.E. POWER SUPPLY / MU24AY120200-A1	

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- Channel List:

CH01 – CH11 for 802.11b, 802.11g, 802.11n(20MHz) CH03 – CH09 for 802.11n(40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Table for Filed Antenna

Ant.	Brand	Test Model	Antenna Type	Connector	Gain (dBi)
1	Aristotle	RFA-TR-F90-A-9719	Dipole	iPEX	1.43
2	Aristotle	RFA-TR-F90-B-9719	Dipole	iPEX	1.93

Note:

(1) The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and receivers (2T2R). 2.4G and 5G can transmit simultaneously.

(2) For Power Spectral Density (CDD mode)

Directional Gain =

$$10 \cdot \log\{[10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(Gn/20)}]^2 / N_{ANT}\} = 4.70 \text{ dBi} < 6\text{dBi}$$

(3) For Conducted Output Power (CDD mode)

$$\text{Gain} = 1.93 \text{ dBi} < 6\text{dBi}$$

4.

Operating Mode	2TX
TX Mode	
802.11b	V (ANT 1+ANT 2)
802.11g	V (ANT 1+ANT 2)
802.11n(20MHz)	V (ANT 1+ANT 2)
802.11n(40MHz)	V (ANT 1+ANT 2)

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09
Mode 5	Normal Link

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 5	Normal Link

For Radiated Test	
Final Test Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09

Note:


- (1) The measurements are performed at the high, middle, low available channels.
- (2) 802.11b mode: DBPSK (1Mbps)
 802.11g mode: OFDM (6Mbps)
 802.11n HT20 mode : BPSK (13Mbps)
 802.11n HT40 mode : BPSK (27Mbps)
 For radiated emission tests, the highest output powers were set for final test.
- (3) For radiated below 1G test, the 802.11n(40MHz) is found to be the worst case and recorded.
- (4) The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN

Test software version	MT7615 QA 0.0.1.85		
Frequency (MHz)	2412	2437	2462
802.11b	21	22	1F
802.11g	1F	21	1D
802.11n (20MHz)	1E	1E	1D
Frequency	2422	2437	2452
802.11n (40MHz)	19	20	1D

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

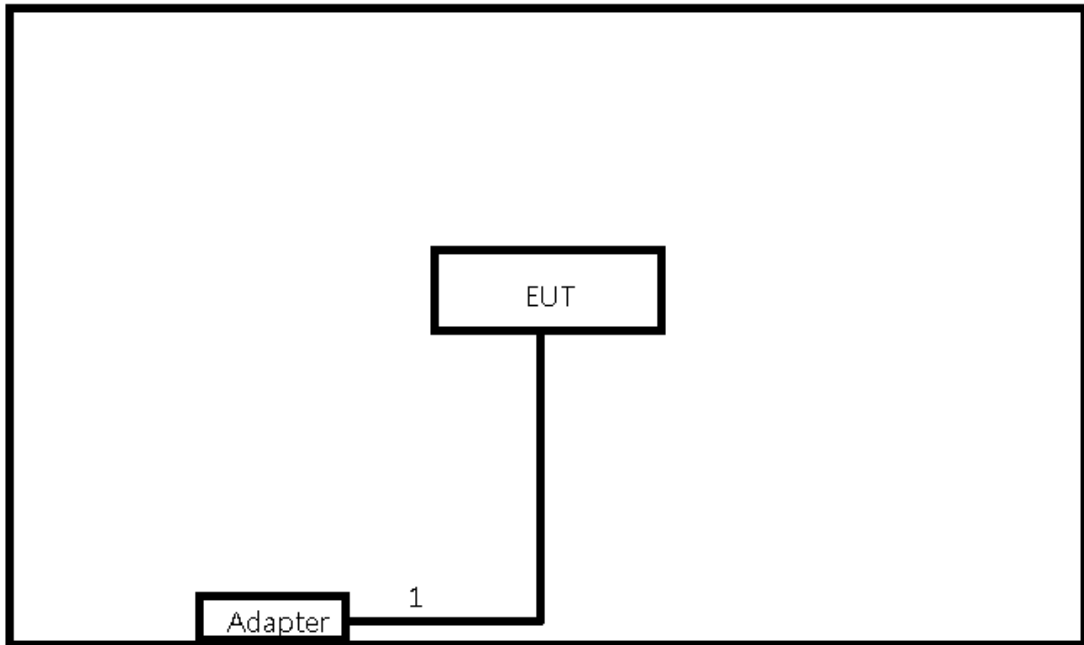

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.5m	Power Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 -0.50	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

Note:

- (1) The limit of " * " decreases with the logarithm of the frequency
- (2) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

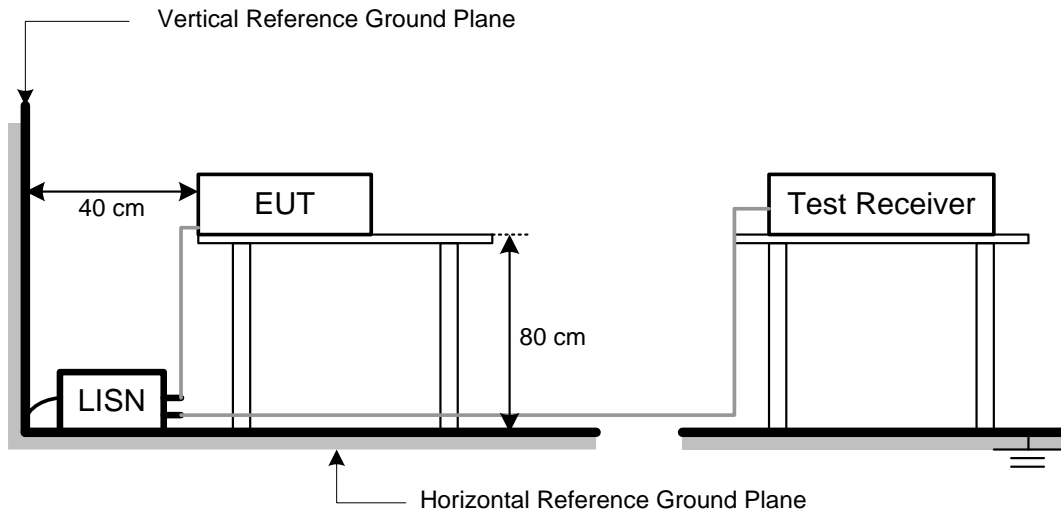

4.1.5 EUT OPERATING CONDITIONS

The EUT was placed on the test table and programmed in normal function.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Appendix A.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

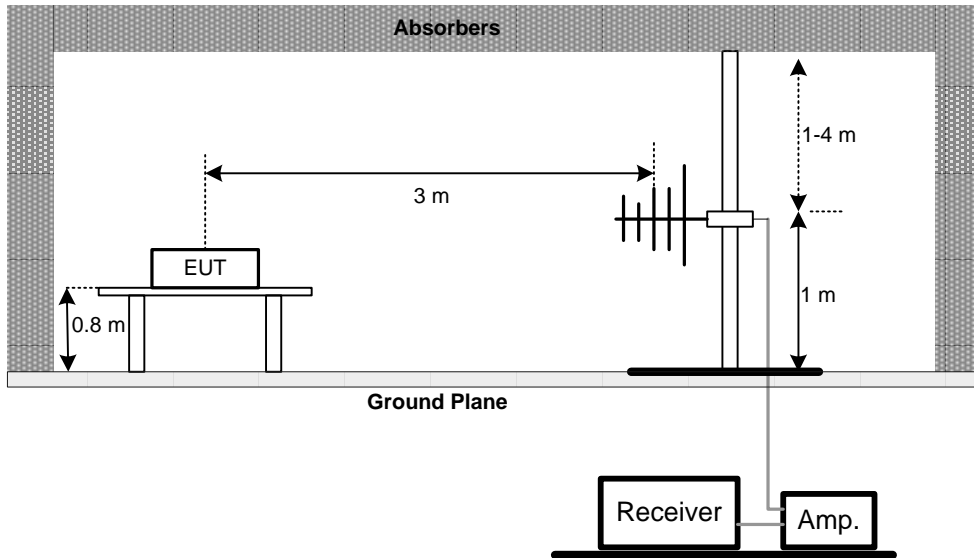

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz
Band edge

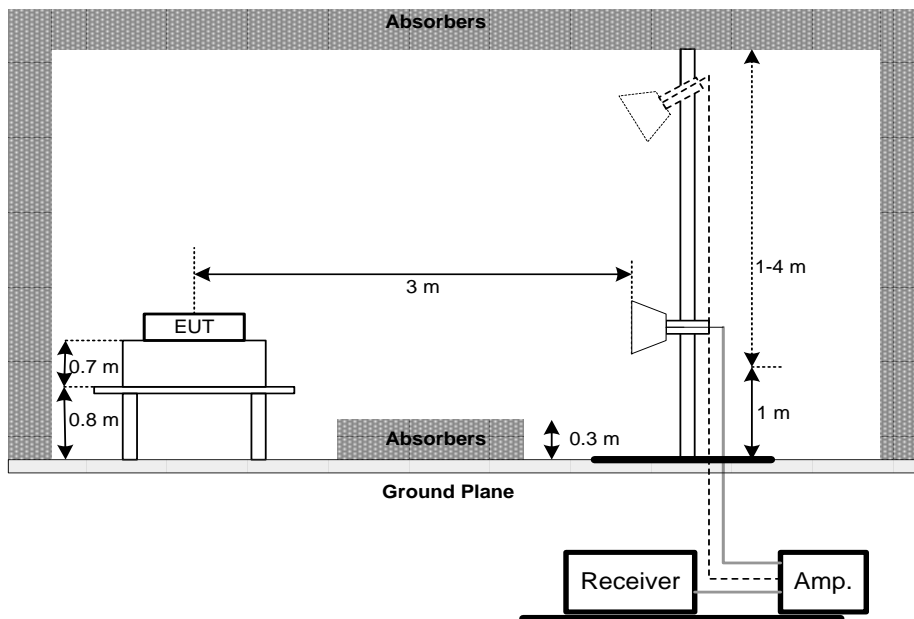

(C) For Radiated Emissions Below 30MHz

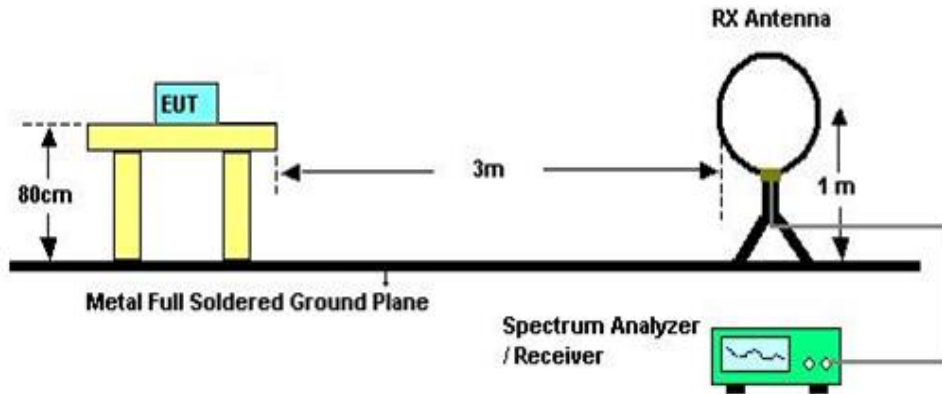

4.2.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Appendix B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)

Please refer to the Appendix C.

4.2.9 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Appendix D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable. For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Appendix E.

6. MAXIMUM PEAK CONDUCTED OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Output Power	1 Watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b. The maximum peak conducted output power was performed in accordance with method 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Appendix F.

7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto.
- c. Offset=antenna gain+cable loss

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

7.1.6 TEST RESULTS

Please refer to the Appendix G.

8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW=3KHz, VBW=10KHz, Sweep time = Auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP



8.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

8.1.6 TEST RESULTS

Please refer to the Appendix H.

9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	101050	Jan. 25, 2018
2	Test Cable	TIMES	CFD300-NL	C02	Jun. 14, 2018
3	EMI Test Receiver	R&S	ESR7	101433	Dec. 09, 2017
4	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Preamplifier	EMCI	012645B	980267	Feb. 28, 2018
2	Preamplifier	EMCI	EMC02325	980217	Dec. 29, 2017
3	Preamplifier	EMCI	EMC2654045	980030	Feb. 14, 2018
4	Test Cable	EMCI	EMC104-SM-S M-8000	8m	Jan. 04, 2018
5	Test Cable	EMCI	EMC104-SM-S M-800	150207	Jan. 04, 2018
6	Test Cable	EMCI	EEMC104-SM-S M-3000	151205	Jan. 04, 2018
7	MXE EMI Receiver	Agilent	N9038A	MY55420127	Jan. 09, 2018
8	Signal Analyzer	Agilent	N9010A	MY52220990	Feb. 22, 2018
9	Loop Ant	EMCO	6502	42960	Nov. 24, 2017
10	Horn Ant	SCHWARZBECK	BBHA 9120D	9120D-1342	Feb. 28, 2018
11	Horn Ant	Schwarzbeck	BBHA 9170	187	Dec. 07, 2017
12	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-548	Jan. 16, 2018
13	5dB Attenuator	EMCI	EMCI-N-6-05	AT-N0623	Jan. 16, 2018

6dB Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	R&S/FSP30	100854	May 25, 2018

Peak Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2495A	1128008	Aug. 17, 2017
2	Power Sensor	Anritsu	MA2411B	1126001	Aug. 17, 2017

Antenna Conducted Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	R&S/FSP30	100854	May 25, 2018


Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	R&S/FSP30	100854	May 25, 2018

Remark: "N/A" denotes no model name, serial no. or calibration specified.
 All calibration period of equipment list is one year.

APPENDIX A - CONDUCTED EMISSION

Test Mode : Normal Link


Line

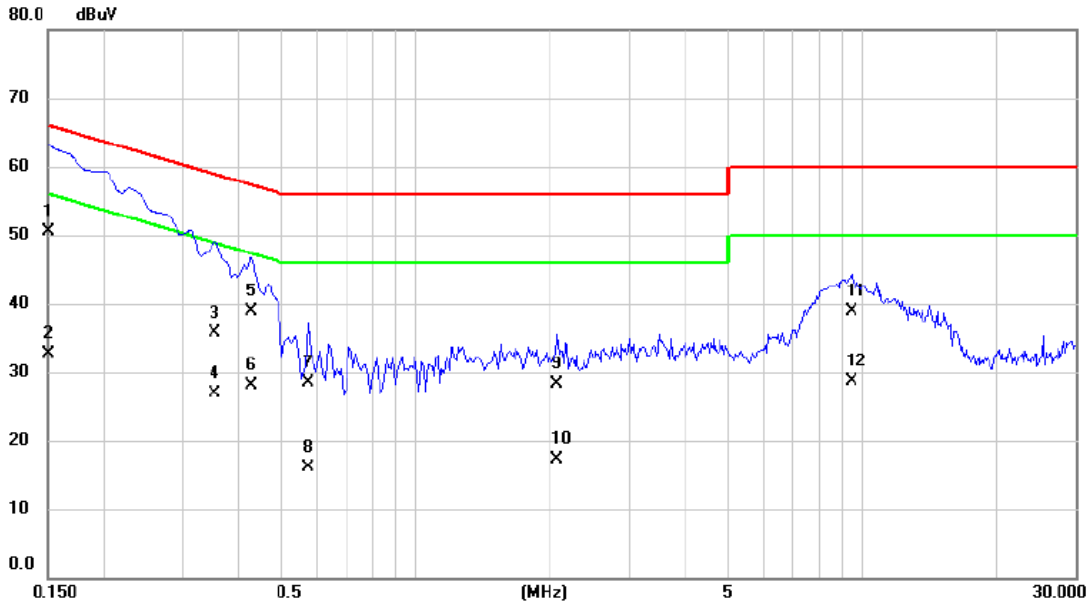

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1500	40.70	9.73	50.43	66.00	-15.57	QP	
2		0.1500	22.90	9.73	32.63	56.00	-23.37	AVG	
3		0.3543	25.90	9.73	35.63	58.86	-23.23	QP	
4		0.3543	17.10	9.73	26.83	48.86	-22.03	AVG	
5		0.4272	29.20	9.74	38.94	57.31	-18.37	QP	
6		0.4272	18.30	9.74	28.04	47.31	-19.27	AVG	
7		0.5720	18.80	9.74	28.54	56.00	-27.46	QP	
8		0.5720	6.30	9.74	16.04	46.00	-29.96	AVG	
9		2.0750	18.60	9.77	28.37	56.00	-27.63	QP	
10		2.0750	7.60	9.77	17.37	46.00	-28.63	AVG	
11		9.4500	28.90	9.97	38.87	60.00	-21.13	QP	
12		9.4500	18.80	9.97	28.77	50.00	-21.23	AVG	

Test Mode : Normal Link

Neutral

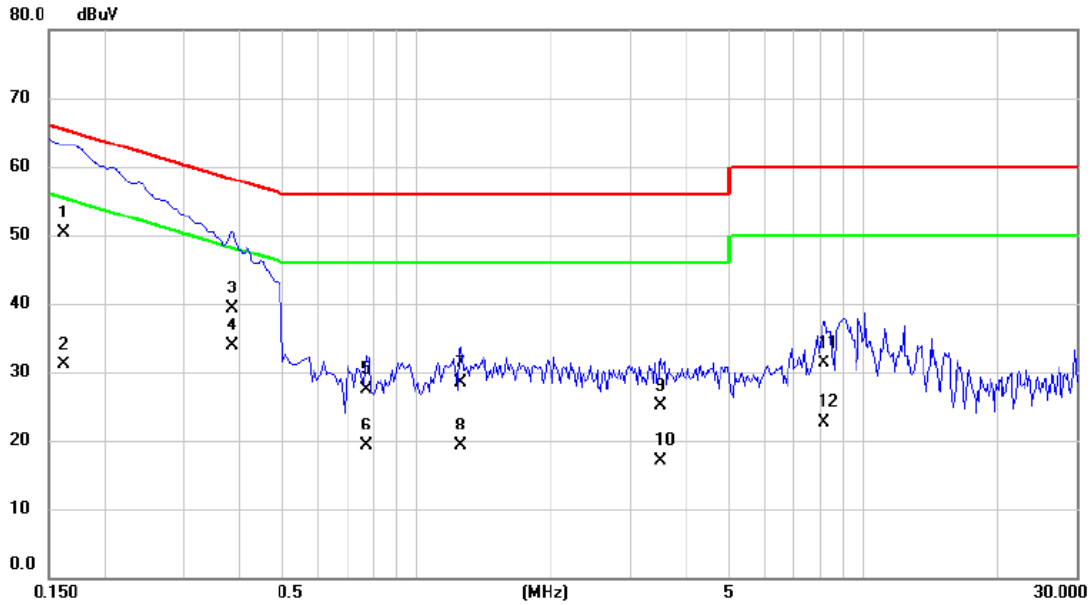


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1612	40.60	9.65	50.25	65.40	-15.15	QP	
2		0.1612	21.50	9.65	31.15	55.40	-24.25	AVG	
3		0.3844	29.70	9.67	39.37	58.18	-18.81	QP	
4	*	0.3844	24.20	9.67	33.87	48.18	-14.31	AVG	
5		0.7700	17.90	9.69	27.59	56.00	-28.41	QP	
6		0.7700	9.60	9.69	19.29	46.00	-26.71	AVG	
7		1.2560	18.90	9.69	28.59	56.00	-27.41	QP	
8		1.2560	9.60	9.69	19.29	46.00	-26.71	AVG	
9		3.5060	15.40	9.75	25.15	56.00	-30.85	QP	
10		3.5060	7.40	9.75	17.15	46.00	-28.85	AVG	
11		8.1500	21.40	9.90	31.30	60.00	-28.70	QP	
12		8.1500	12.90	9.90	22.80	50.00	-27.20	AVG	

APPENDIX B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode: TX B MODE CHANNEL 01


Ant 0°

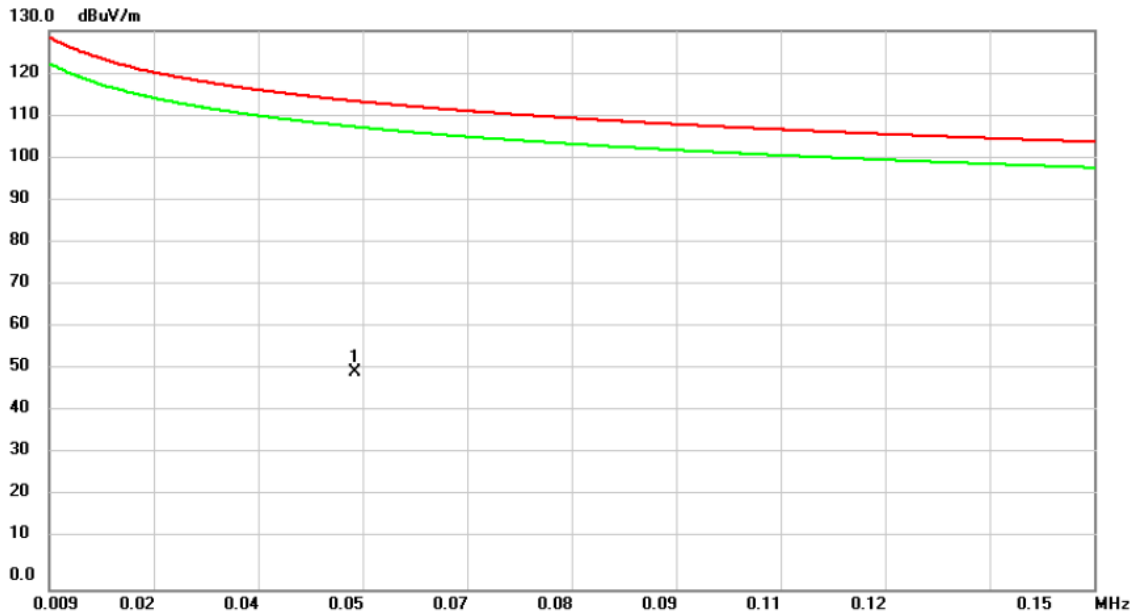

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	0.0502	37.41	13.00	50.41	113.59	-63.18	peak	

Test Mode: TX B MODE CHANNEL 01


Ant 0°

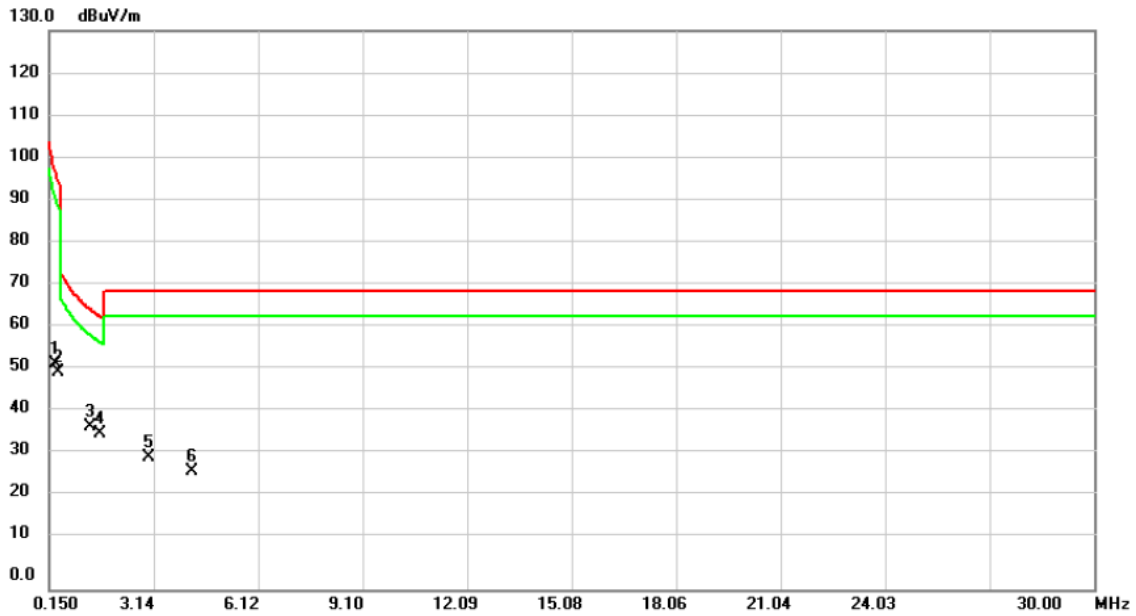

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.3092	40.72	11.80	52.52	97.80	-45.28	peak	
2		0.3888	38.80	11.80	50.60	95.81	-45.21	peak	
3	*	1.3042	26.08	11.86	37.94	65.30	-27.36	peak	
4		1.5828	24.51	11.74	36.25	63.61	-27.36	peak	
5		2.9758	19.51	11.11	30.62	69.54	-38.92	peak	
6		4.2096	16.32	11.28	27.60	69.54	-41.94	peak	

Test Mode: TX B MODE CHANNEL 01


Ant 90°

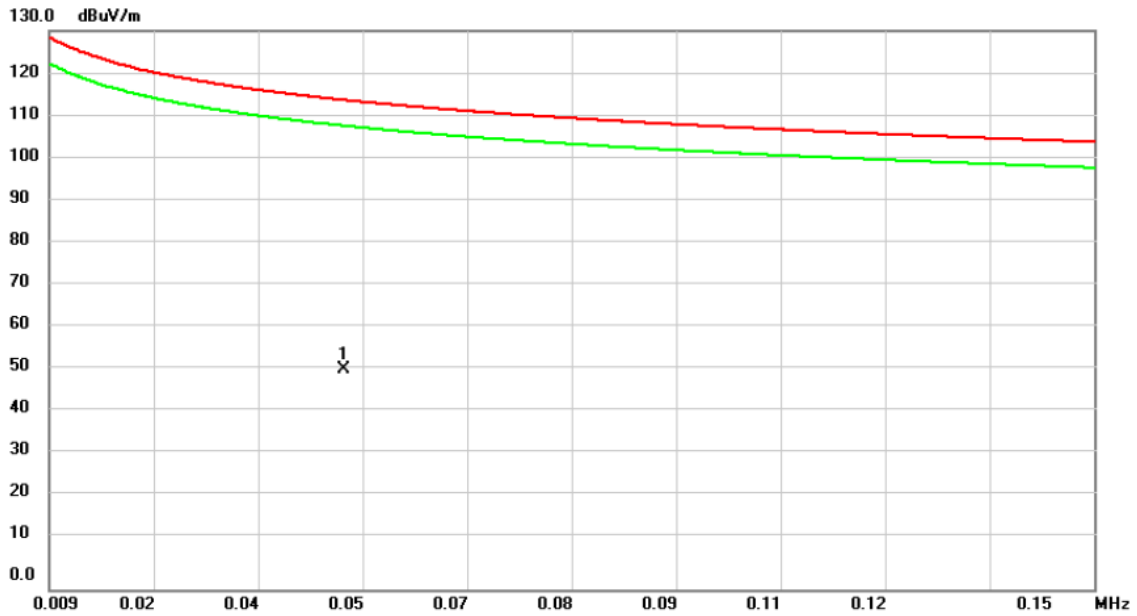

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	0.0487	38.21	13.13	51.34	113.85	-62.51	peak	

Test Mode: TX B MODE CHANNEL 01

Ant 90°

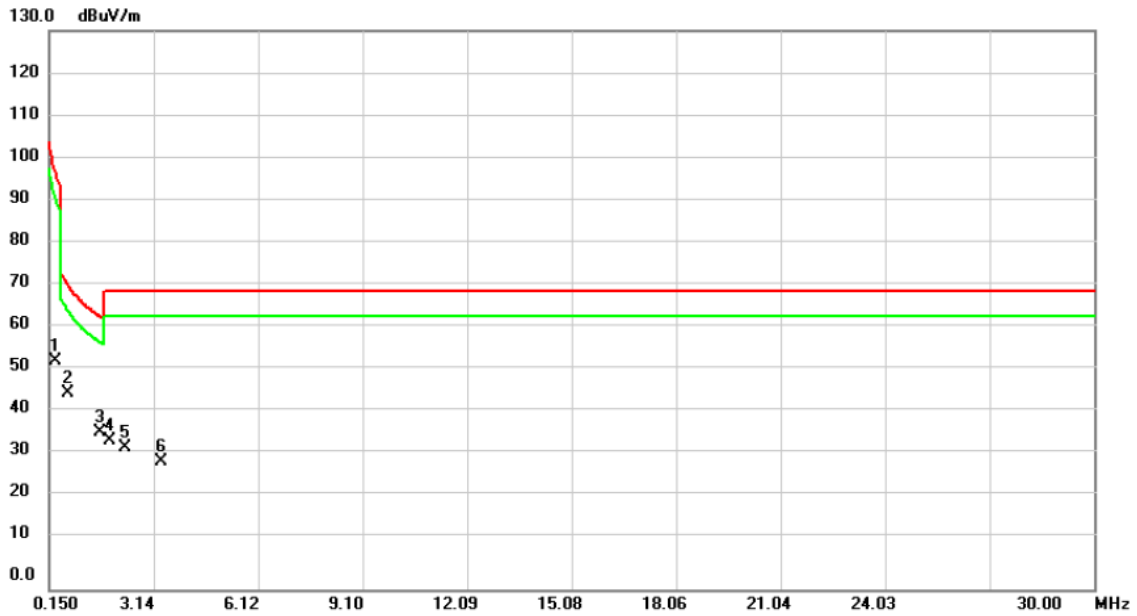


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.3092	41.29	11.80	53.09	97.80	-44.71	peak	
2	*	0.6674	33.71	11.87	45.58	71.12	-25.54	peak	
3		1.5828	24.93	11.74	36.67	63.61	-26.94	peak	
4		1.8614	23.02	11.61	34.63	69.54	-34.91	peak	
5		2.2992	21.63	11.42	33.05	69.54	-36.49	peak	
6		3.3340	18.43	11.15	29.58	69.54	-39.96	peak	

APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode: TX N-40M MODE 2452MHz


Vertical

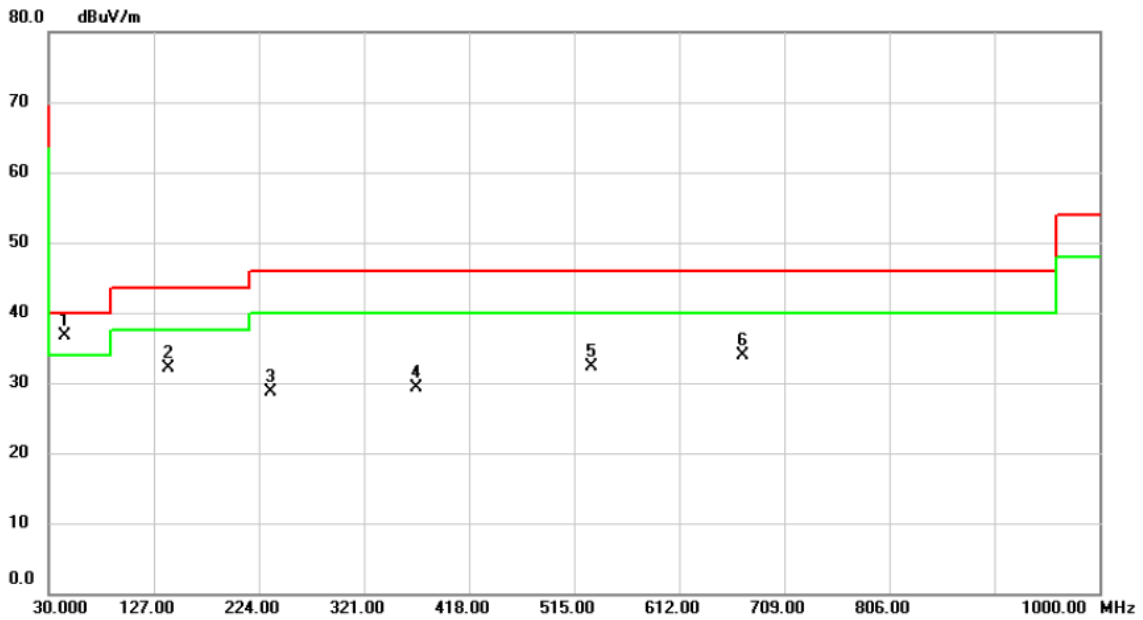

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	44.5500	45.22	-8.58	36.64	40.00	-3.36	peak	
2		140.5800	41.33	-9.15	32.18	43.50	-11.32	peak	
3		234.6700	38.52	-9.78	28.74	46.00	-17.26	peak	
4		369.5000	34.98	-5.73	29.25	46.00	-16.75	peak	
5		531.4900	34.38	-2.10	32.28	46.00	-13.72	peak	
6		670.2000	33.48	0.33	33.81	46.00	-12.19	peak	

Test Mode: TX N-40M MODE 2452MHz


Horizontal

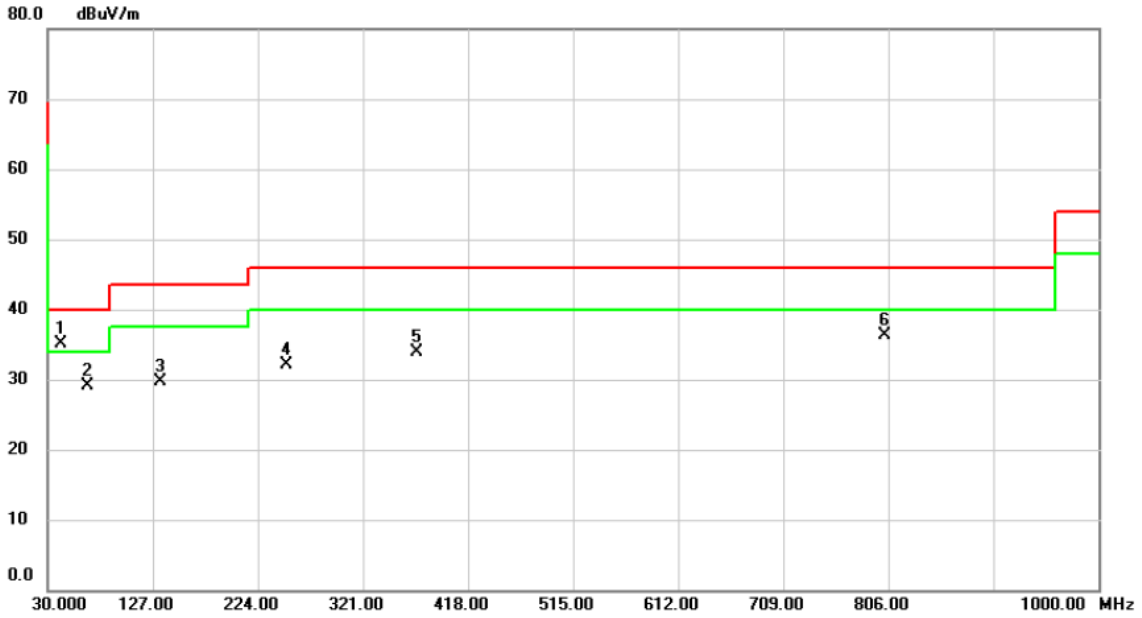

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	41.6400	43.62	-8.53	35.09	40.00	-4.91	peak	
2		66.8600	38.80	-9.68	29.12	40.00	-10.88	peak	
3		133.7900	39.09	-9.42	29.67	43.50	-13.83	peak	
4		250.1900	41.15	-9.07	32.08	46.00	-13.92	peak	
5		370.4700	39.62	-5.71	33.91	46.00	-12.09	peak	
6		802.1200	33.72	2.65	36.37	46.00	-9.63	peak	

APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)


Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz

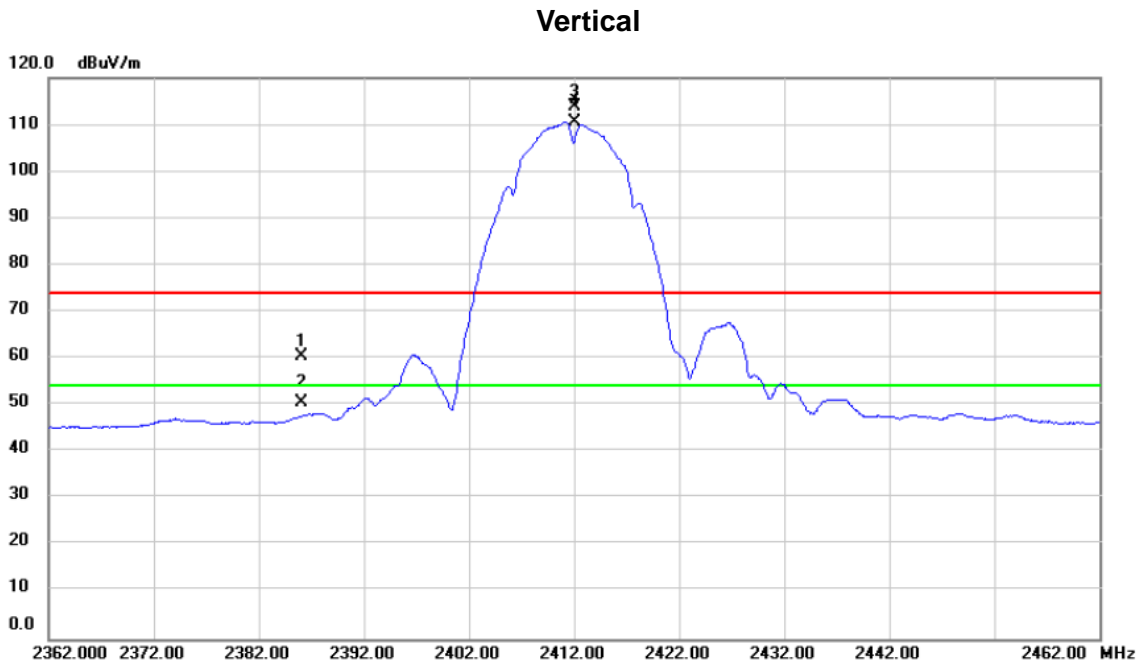

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2386.080	29.38	31.05	60.43	74.00	-13.57	peak	
2		2386.080	19.43	31.05	50.48	54.00	-3.52	AVG	
3	X	2412.000	82.69	31.14	113.83	74.00	39.83	peak	No Limit
4	*	2412.000	79.50	31.14	110.64	54.00	56.64	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz


Vertical

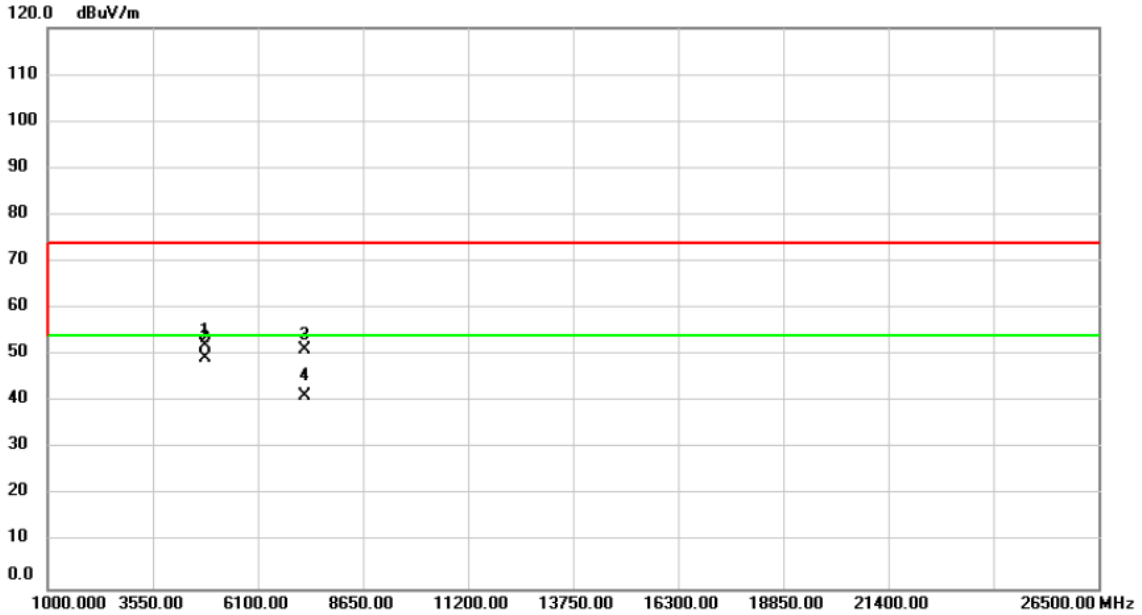

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4824.000	63.43	-11.37	52.06	74.00	-21.94	peak	
2 *	4824.000	60.86	-11.37	49.49	54.00	-4.51	AVG	
3	7236.000	56.56	-5.40	51.16	74.00	-22.84	peak	
4	7236.000	46.77	-5.40	41.37	54.00	-12.63	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz


Horizontal

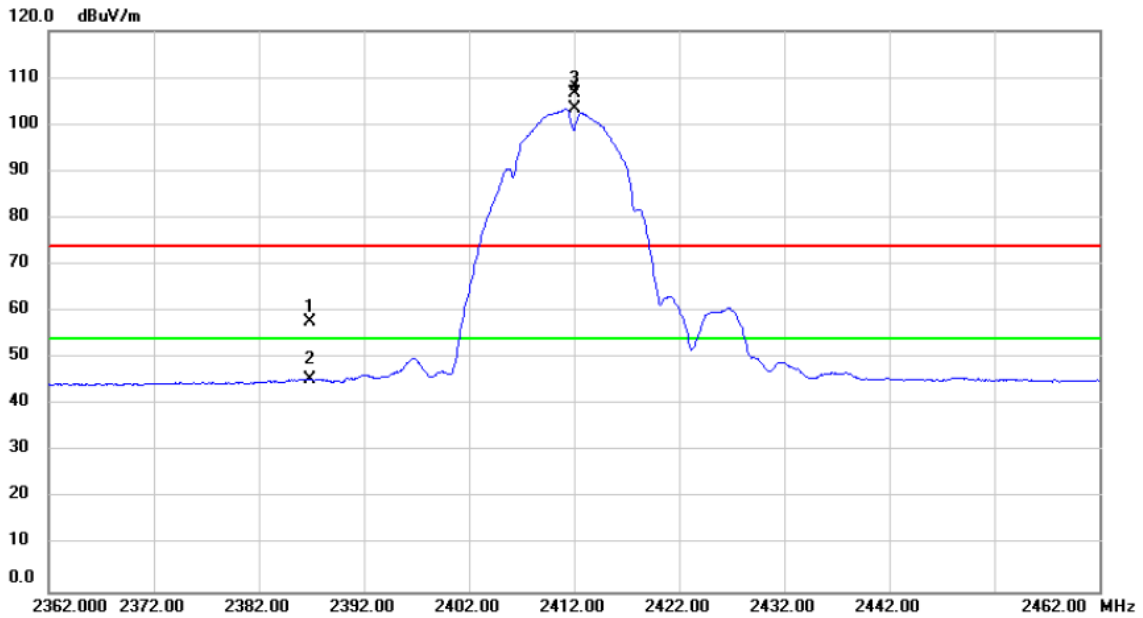

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2386.808	26.62	31.05	57.67	74.00	-16.33	peak	
2	2386.808	14.36	31.05	45.41	54.00	-8.59	AVG	
3 X	2412.000	75.43	31.14	106.57	74.00	32.57	peak	No Limit
4 *	2412.000	72.16	31.14	103.30	54.00	49.30	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	TX B MODE 2412MHz

Horizontal

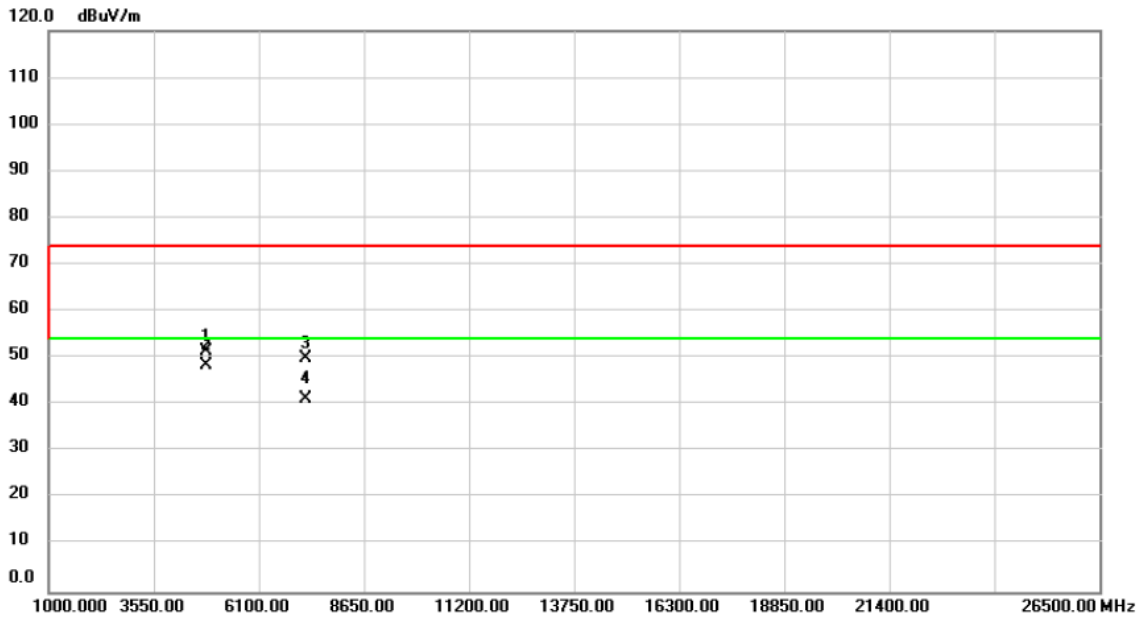

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4824.000	62.77	-11.37	51.40	74.00	-22.60	peak	
2 *	4824.000	59.90	-11.37	48.53	54.00	-5.47	AVG	
3	7236.000	55.29	-5.40	49.89	74.00	-24.11	peak	
4	7236.000	46.63	-5.40	41.23	54.00	-12.77	AVG	


Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz

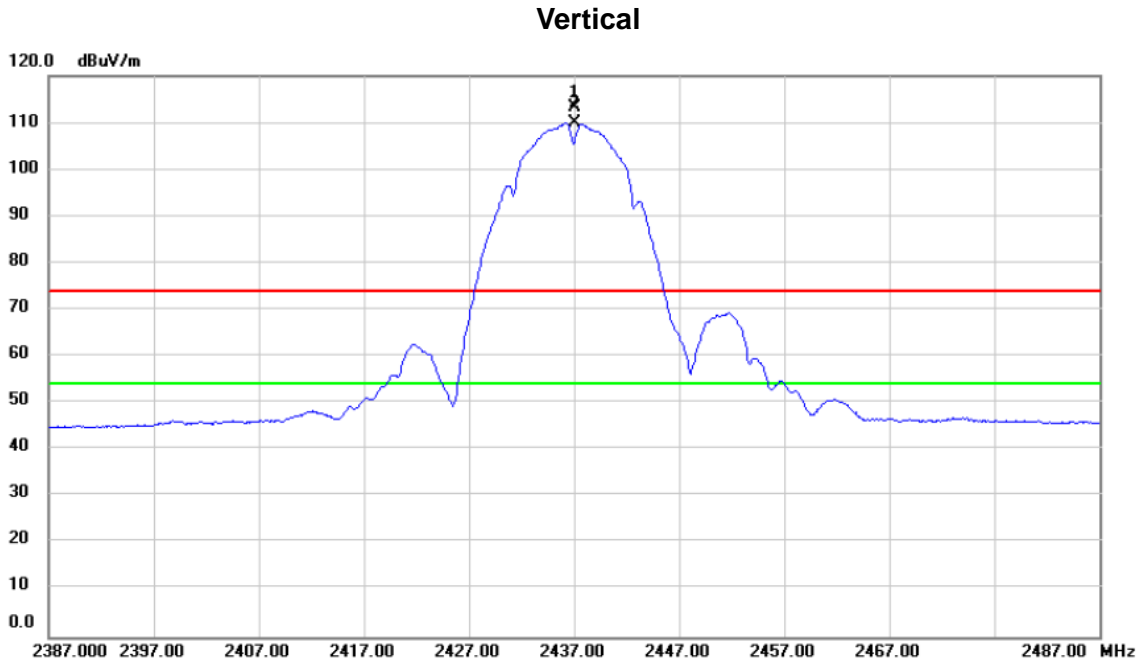

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2437.000	82.13	31.23	113.36	74.00	39.36	peak	No Limit
2	*	2437.000	78.75	31.23	109.98	54.00	55.98	A/VG	No Limit

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz


Vertical

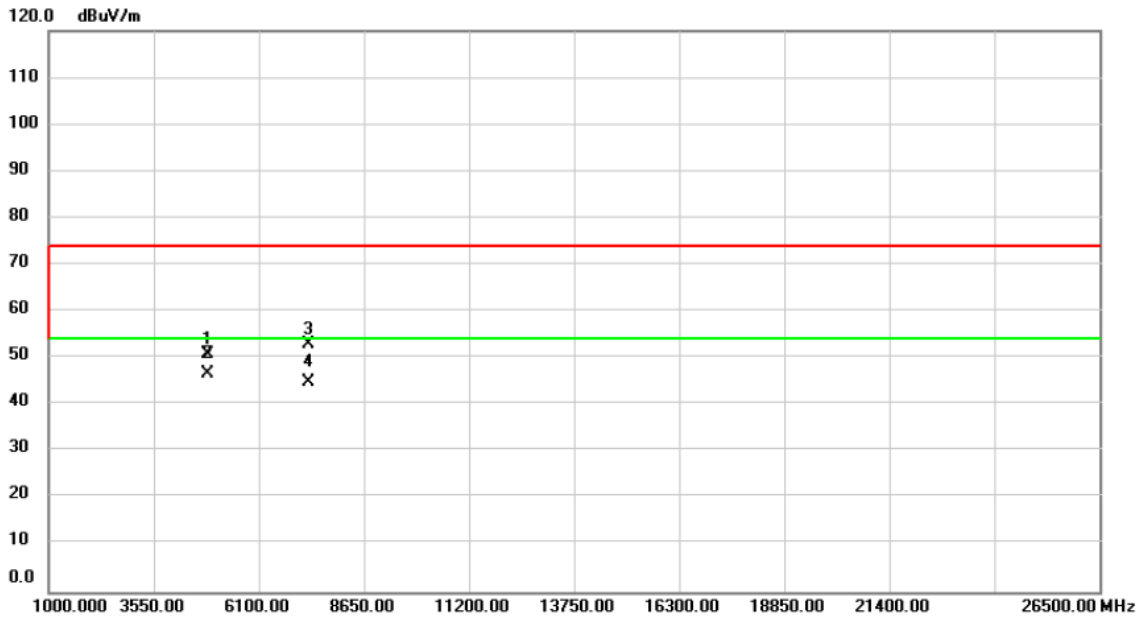

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4874.000	62.17	-11.29	50.88	74.00	-23.12	peak	
2 *	4874.000	57.97	-11.29	46.68	54.00	-7.32	AVG	
3	7311.000	58.12	-5.13	52.99	74.00	-21.01	peak	
4	7311.000	49.99	-5.13	44.86	54.00	-9.14	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz


Horizontal

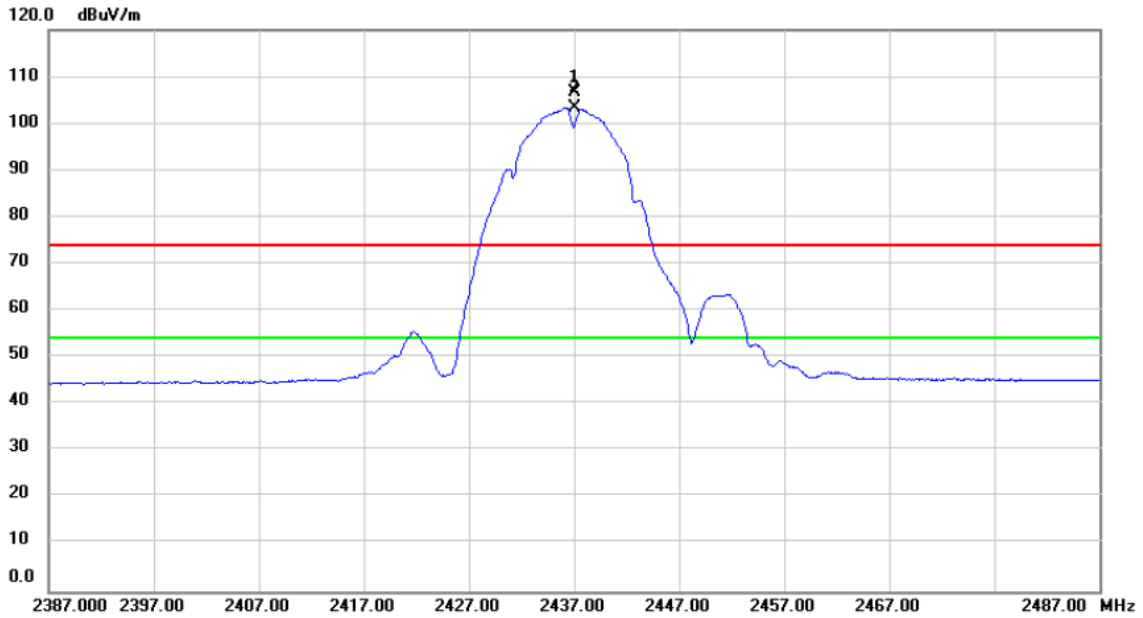

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2437.000	75.42	31.23	106.65	74.00	32.65	peak	No Limit
2	*	2437.000	72.25	31.23	103.48	54.00	49.48	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	TX B MODE 2437MHz

Horizontal

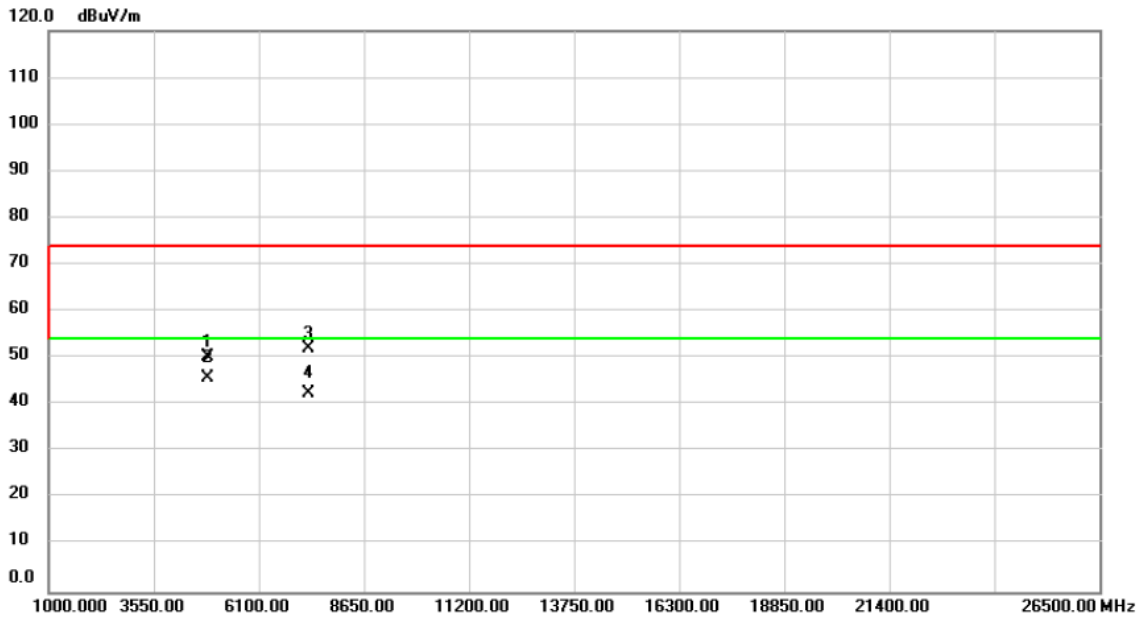

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4874.000	61.42	-11.29	50.13	74.00	-23.87	peak	
2 *	4874.000	57.03	-11.29	45.74	54.00	-8.26	AVG	
3	7311.000	57.17	-5.13	52.04	74.00	-21.96	peak	
4	7311.000	47.69	-5.13	42.56	54.00	-11.44	AVG	


Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz

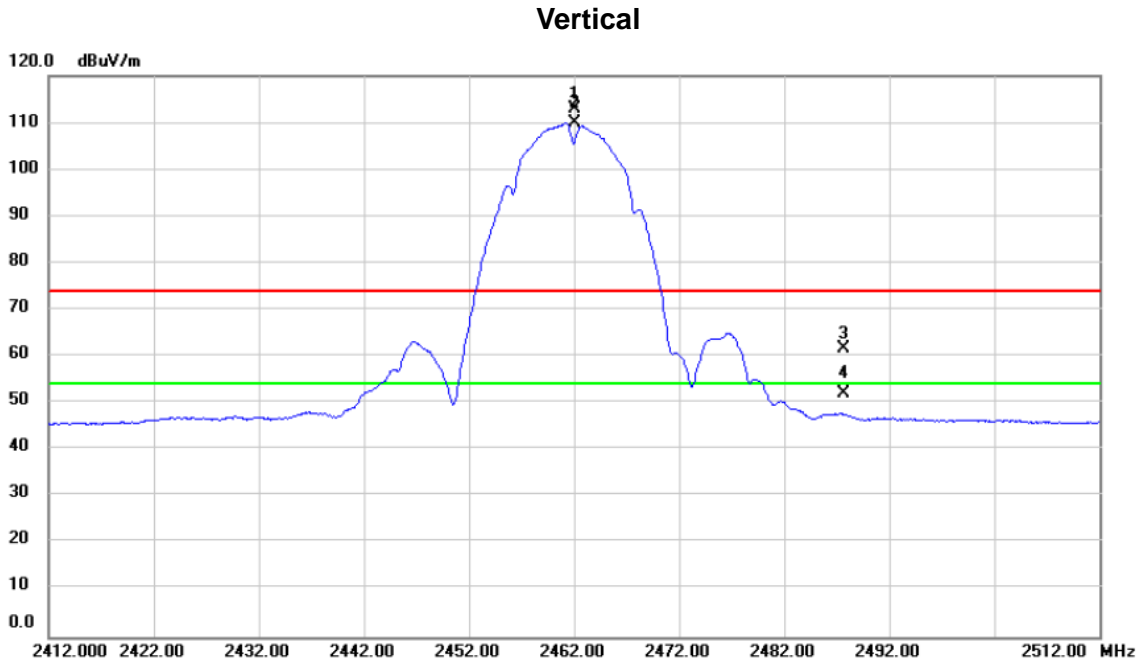

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2462.000	81.72	31.33	113.05	74.00	39.05	peak	No Limit
2	*	2462.000	78.58	31.33	109.91	54.00	55.91	AVG	No Limit
3		2487.610	30.36	31.43	61.79	74.00	-12.21	peak	
4		2487.610	20.69	31.43	52.12	54.00	-1.88	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz


Vertical

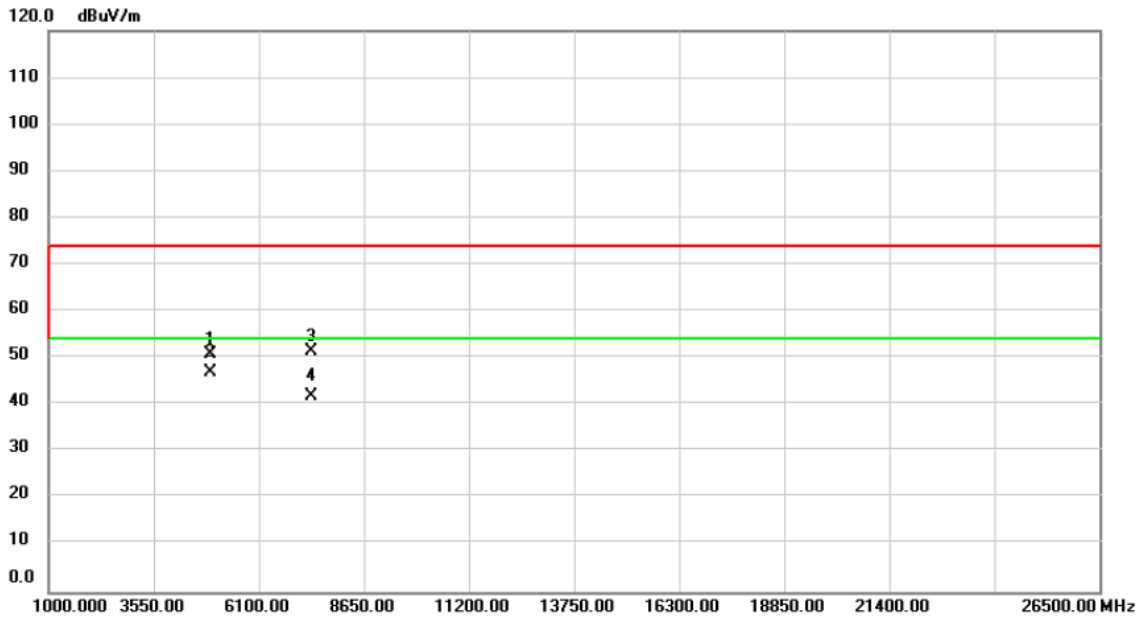

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4924.000	61.96	-11.22	50.74	74.00	-23.26	peak	
2 *	4924.000	58.24	-11.22	47.02	54.00	-6.98	AVG	
3	7386.000	56.24	-4.87	51.37	74.00	-22.63	peak	
4	7386.000	46.87	-4.87	42.00	54.00	-12.00	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz


Horizontal

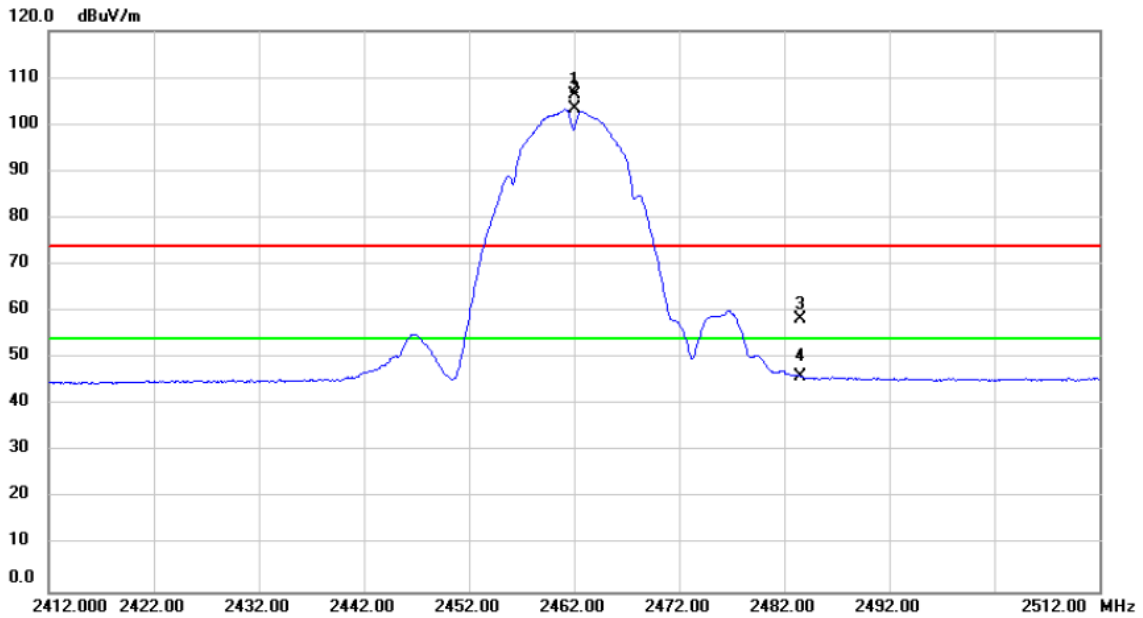

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2462.000	75.02	31.33	106.35	74.00	32.35	peak	No Limit
2	*	2462.000	71.90	31.33	103.23	54.00	49.23	AVG	No Limit
3		2483.528	26.98	31.41	58.39	74.00	-15.61	peak	
4		2483.528	14.76	31.41	46.17	54.00	-7.83	AVG	

Orthogonal Axis :	X
Test Mode :	TX B MODE 2462MHz


Horizontal

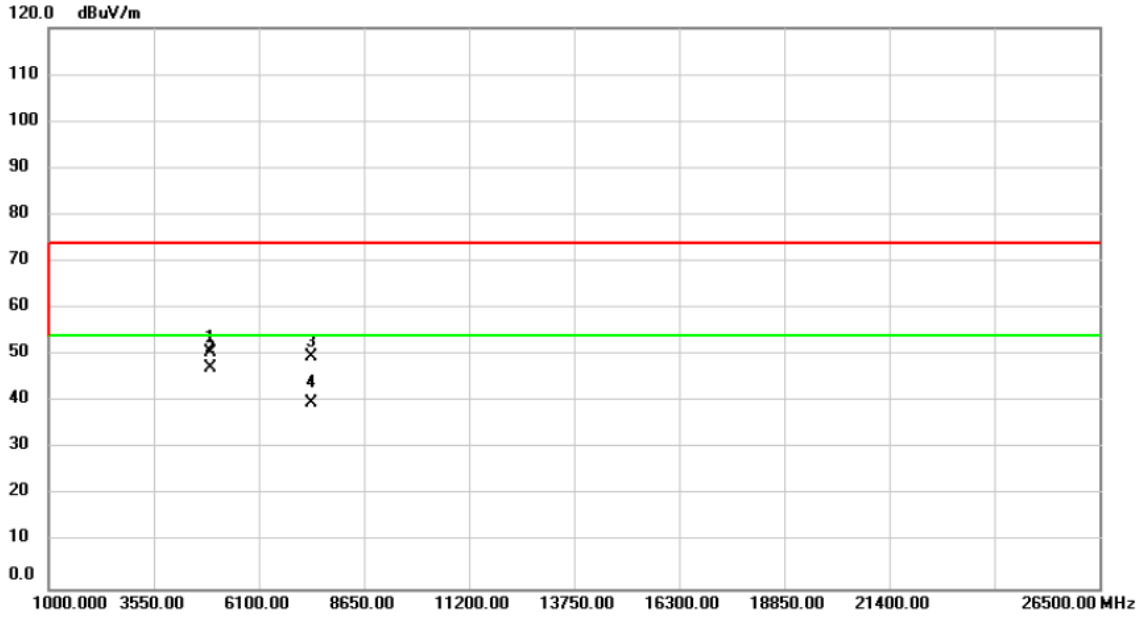

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4924.000	61.78	-11.22	50.56	74.00	-23.44	peak	
2 *	4924.000	58.42	-11.22	47.20	54.00	-6.80	AVG	
3	7386.000	54.61	-4.87	49.74	74.00	-24.26	peak	
4	7386.000	44.66	-4.87	39.79	54.00	-14.21	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz


Vertical

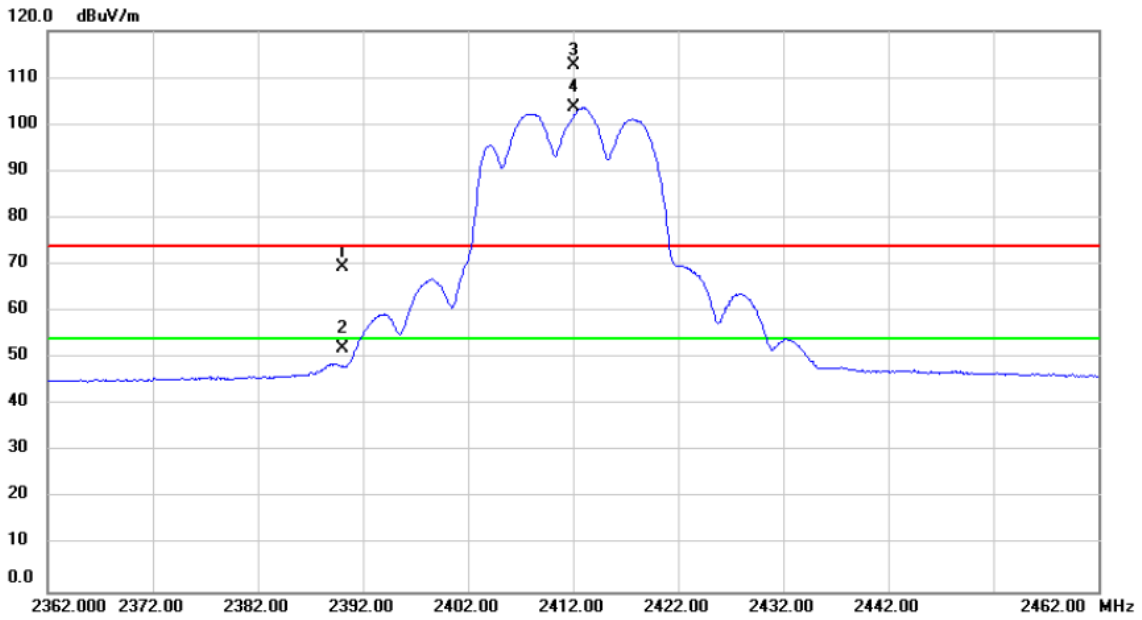

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	38.35	31.06	69.41	74.00	-4.59	peak	
2		2390.000	21.11	31.06	52.17	54.00	-1.83	AVG	
3	X	2412.000	81.41	31.14	112.55	74.00	38.55	peak	No Limit
4	*	2412.000	72.43	31.14	103.57	54.00	49.57	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz


Vertical

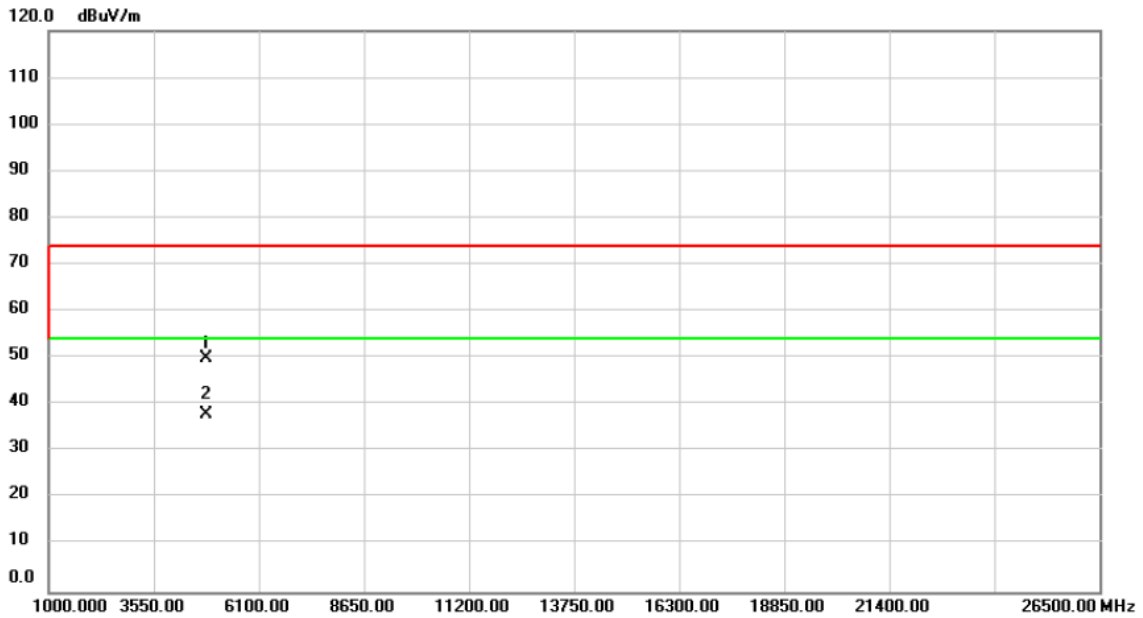

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4824.000	61.29	-11.37	49.92	74.00	-24.08	peak	
2 *	4824.000	49.45	-11.37	38.08	54.00	-15.92	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz


Horizontal

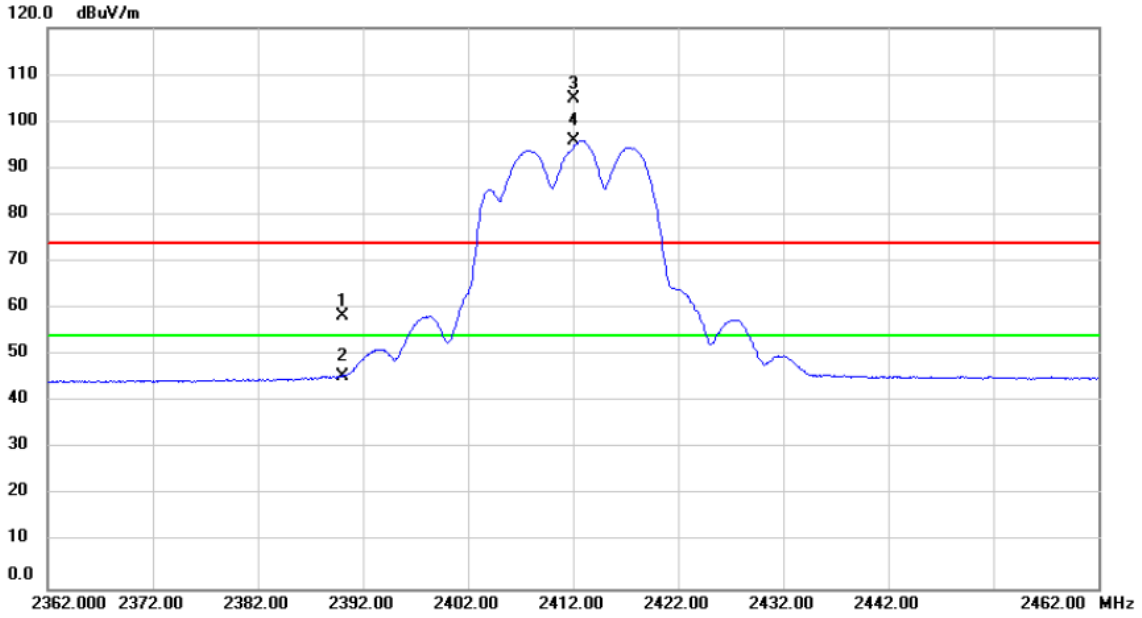

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.000	27.44	31.06	58.50	74.00	-15.50	peak	
2	2390.000	14.29	31.06	45.35	54.00	-8.65	AVG	
3 X	2412.000	73.59	31.14	104.73	74.00	30.73	peak	No Limit
4 *	2412.000	64.76	31.14	95.90	54.00	41.90	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2412MHz


Horizontal

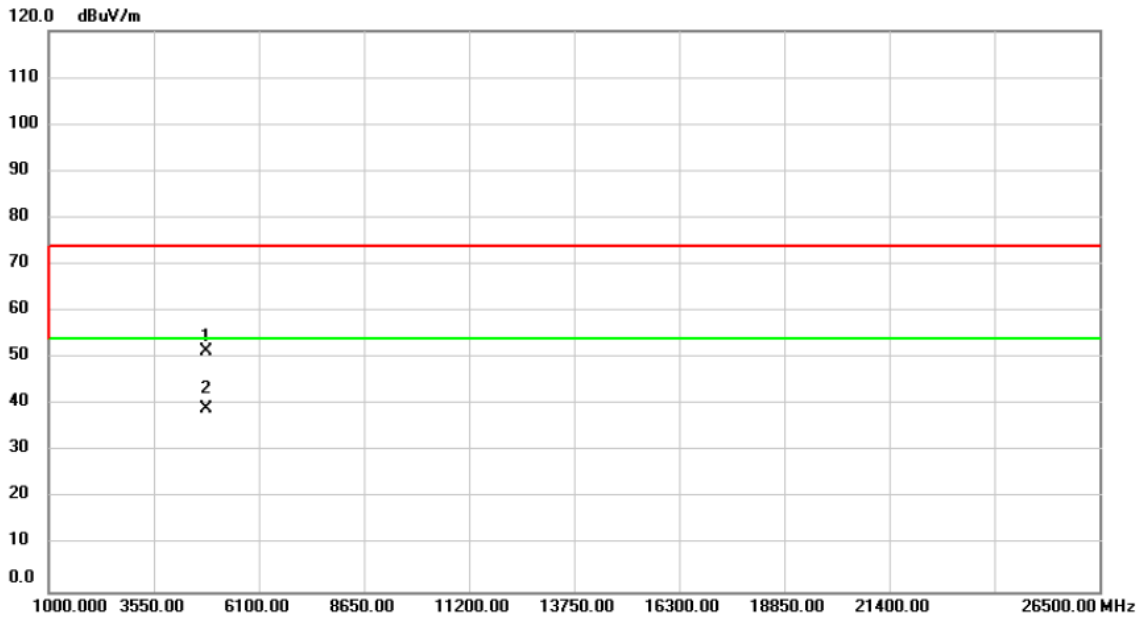

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4824.000	62.73	-11.37	51.36	74.00	-22.64	peak	
2 *	4824.000	50.41	-11.37	39.04	54.00	-14.96	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz


Vertical

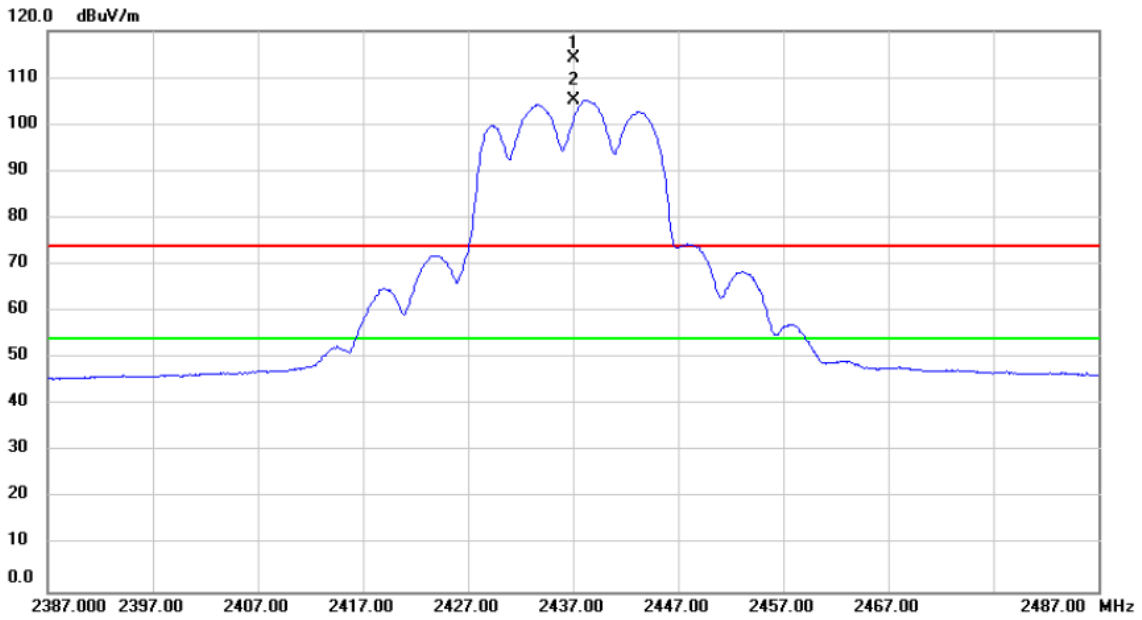

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2437.000	83.06	31.23	114.29	74.00	40.29	peak	No Limit
2	*	2437.000	73.86	31.23	105.09	54.00	51.09	A/VG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz


Vertical

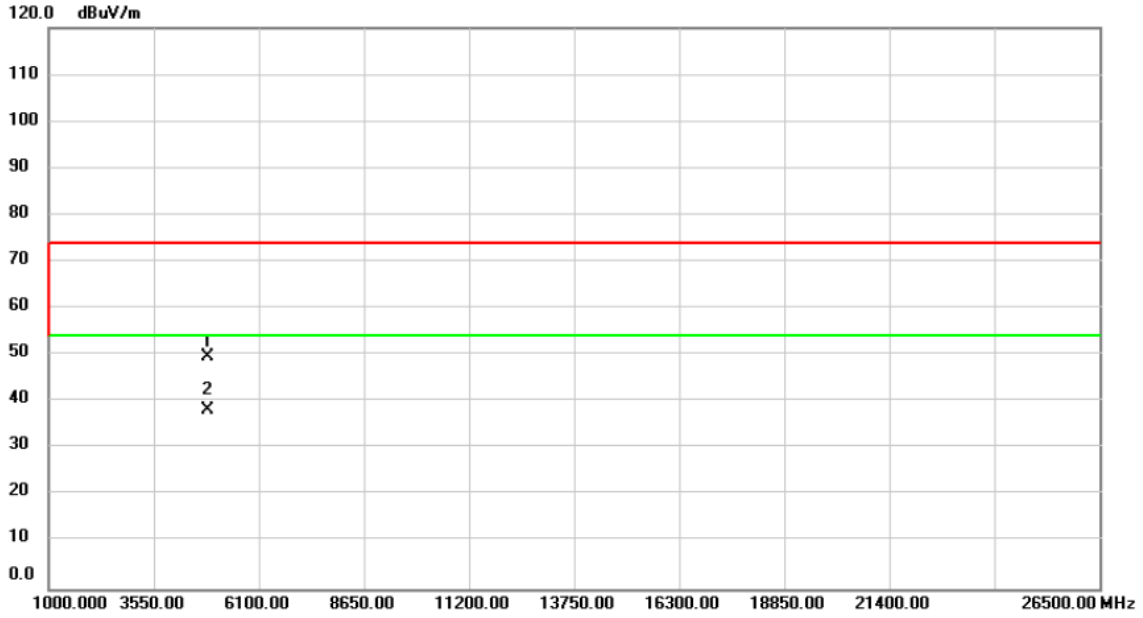

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4874.000	60.80	-11.29	49.51	74.00	-24.49	peak	
2 *	4874.000	49.52	-11.29	38.23	54.00	-15.77	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz


Horizontal

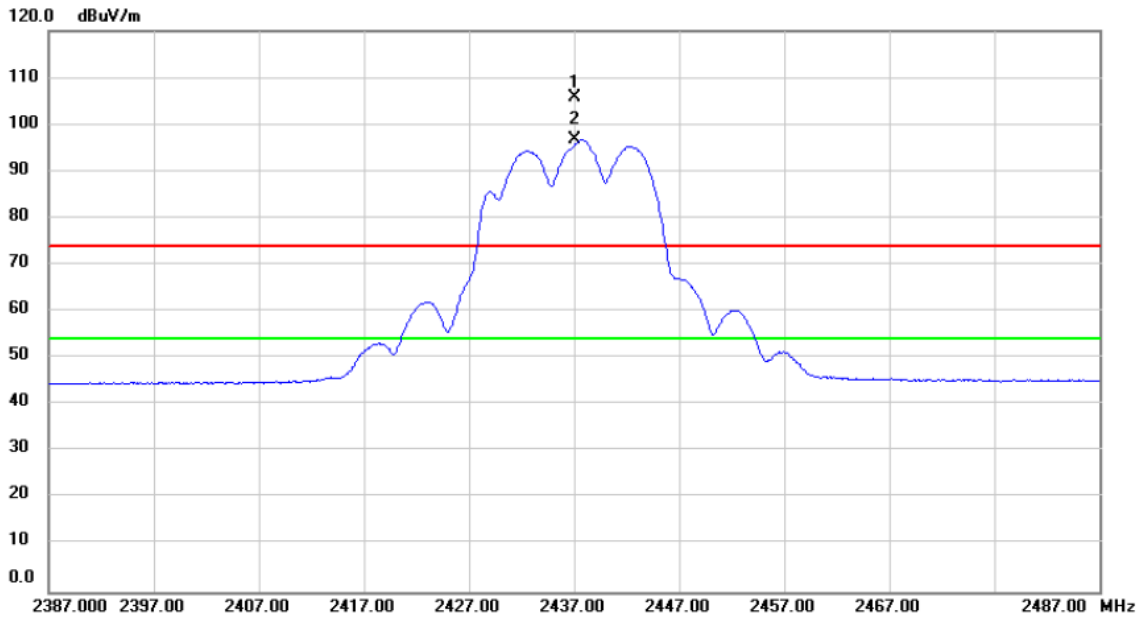

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2437.000	74.52	31.23	105.75	74.00	31.75	peak	No Limit
2	*	2437.000	65.44	31.23	96.67	54.00	42.67	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX G MODE 2437MHz


Horizontal

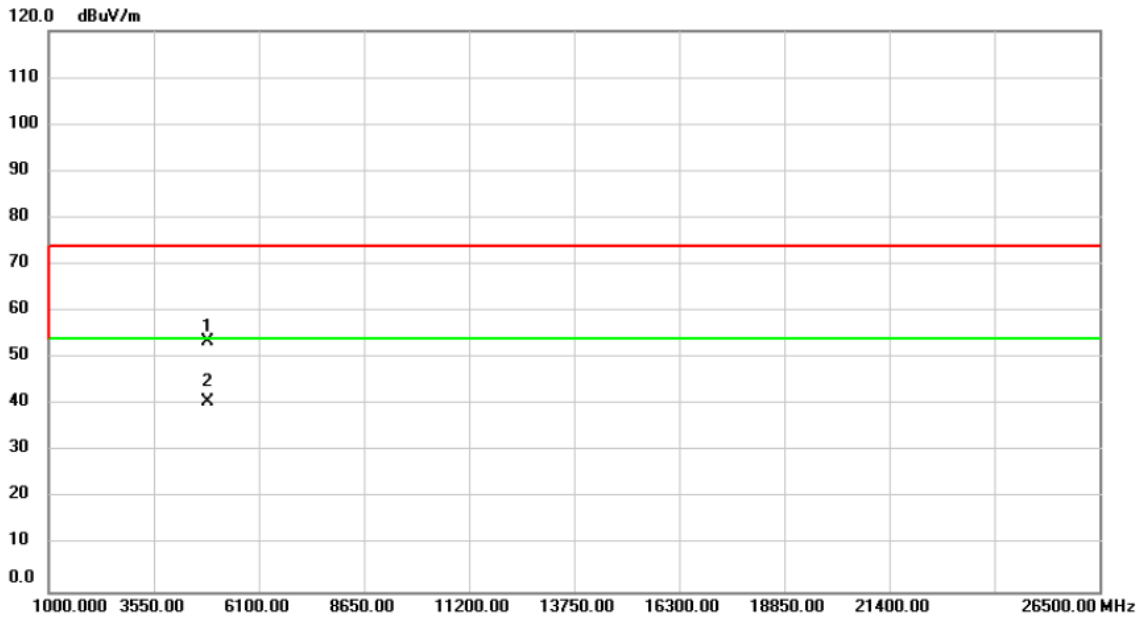

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4874.000	64.76	-11.29	53.47	74.00	-20.53	peak	
2	*	4874.000	51.98	-11.29	40.69	54.00	-13.31	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz


Vertical

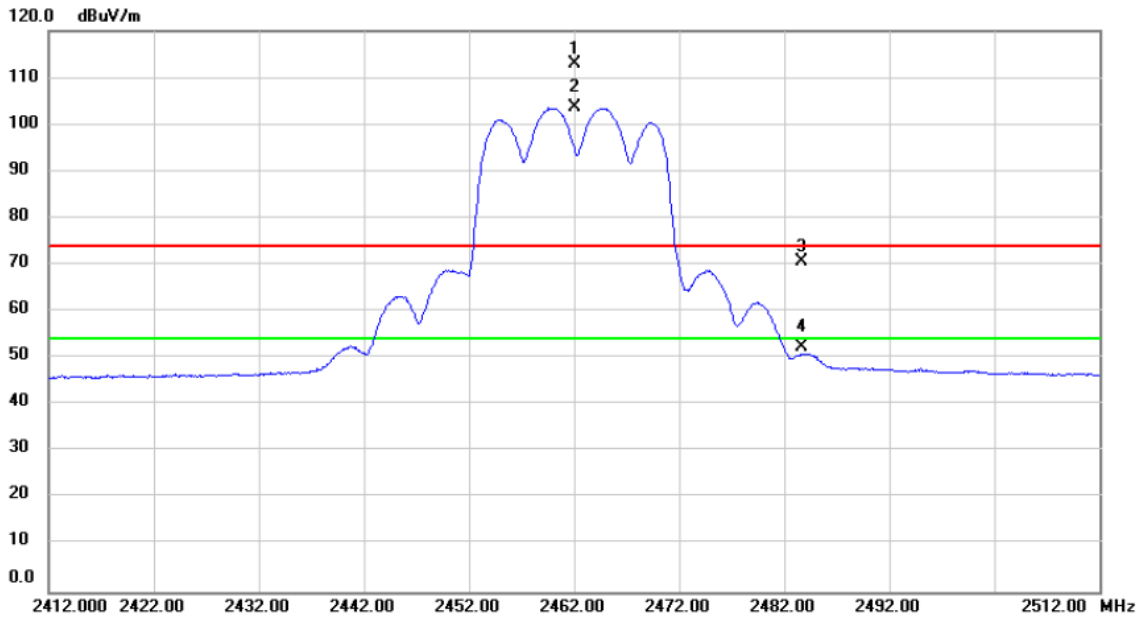

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2462.000	81.58	31.33	112.91	74.00	38.91	peak	No Limit
2	*	2462.000	72.19	31.33	103.52	54.00	49.52	AVG	No Limit
3		2483.642	39.14	31.41	70.55	74.00	-3.45	peak	
4		2483.642	20.81	31.41	52.22	54.00	-1.78	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz


Vertical

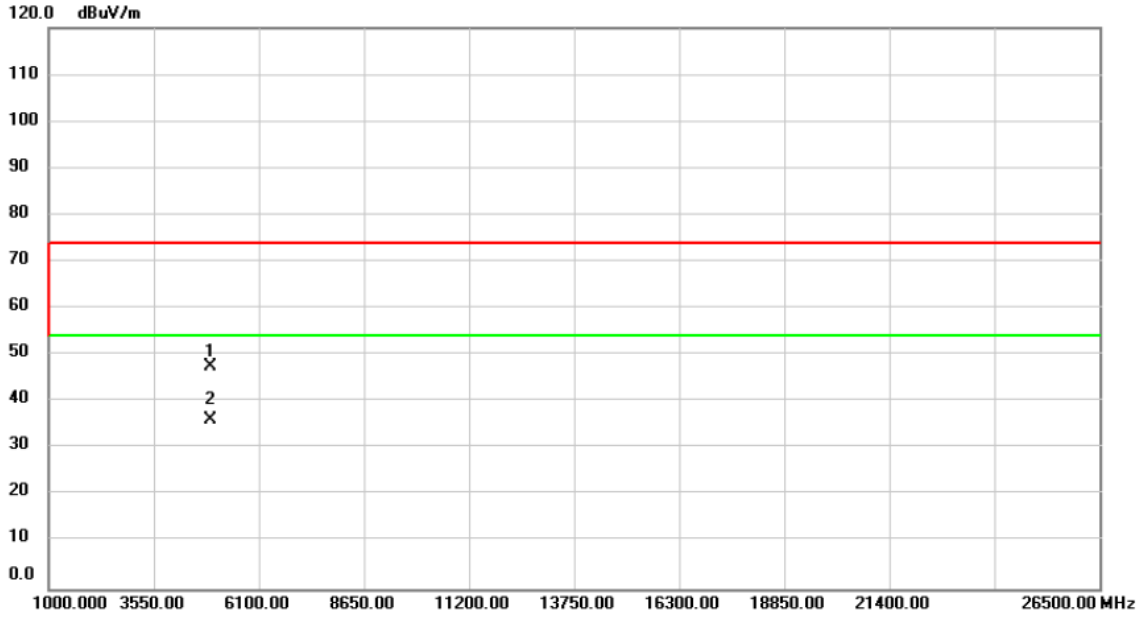

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4924.000	58.82	-11.22	47.60	74.00	-26.40	peak	
2 *	4924.000	47.37	-11.22	36.15	54.00	-17.85	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz


Horizontal

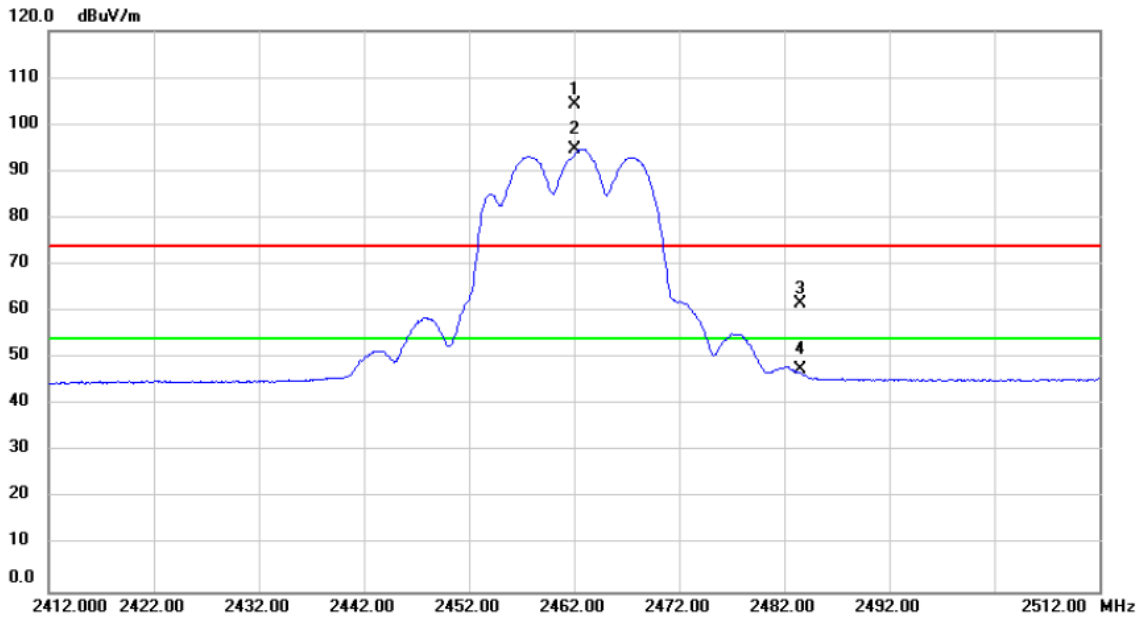

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2462.000	72.81	31.33	104.14	74.00	30.14	peak	No Limit
2	*	2462.000	63.45	31.33	94.78	54.00	40.78	AVG	No Limit
3		2483.557	30.39	31.41	61.80	74.00	-12.20	peak	
4		2483.557	16.05	31.41	47.46	54.00	-6.54	AVG	

Orthogonal Axis :	X
Test Mode :	TX G MODE 2462MHz


Horizontal

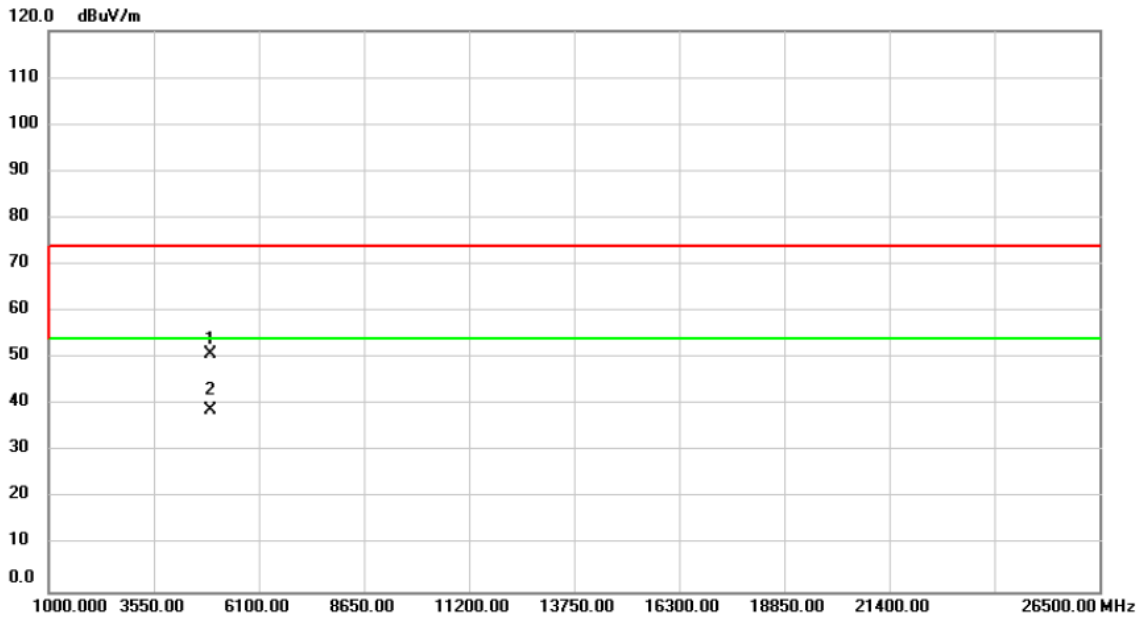

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4924.000	62.13	-11.22	50.91	74.00	-23.09	peak	
2	*	4924.000	50.00	-11.22	38.78	54.00	-15.22	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz


Vertical

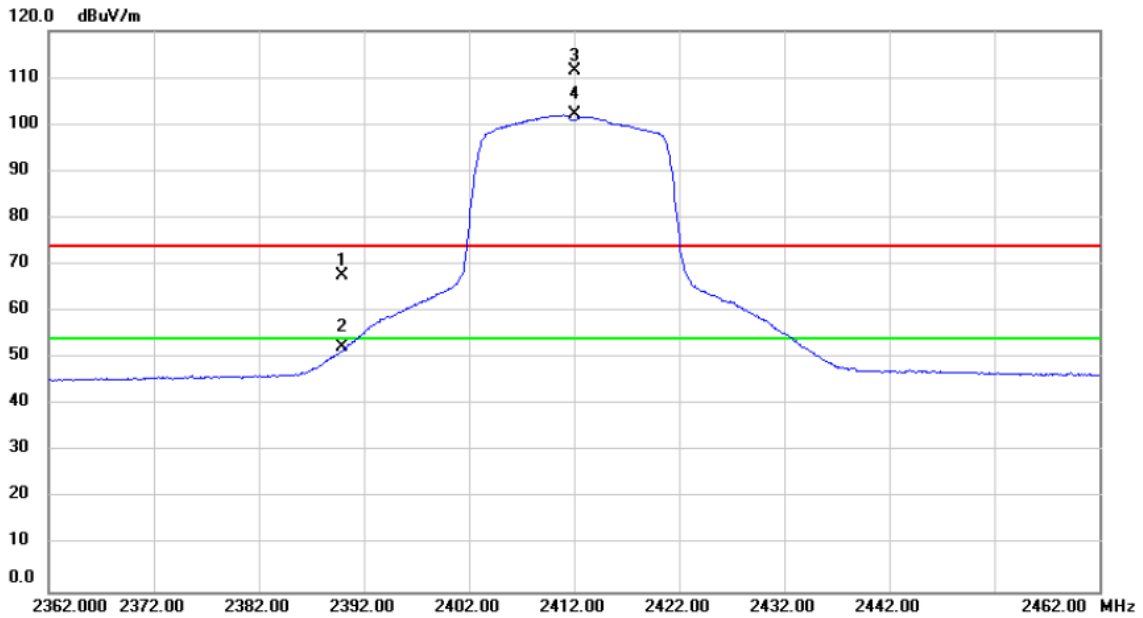

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2389.972	36.49	31.06	67.55	74.00	-6.45	peak	
2		2389.972	21.33	31.06	52.39	54.00	-1.61	AVG	
3	X	2412.000	80.45	31.14	111.59	74.00	37.59	peak	No Limit
4	*	2412.000	70.87	31.14	102.01	54.00	48.01	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz


Vertical

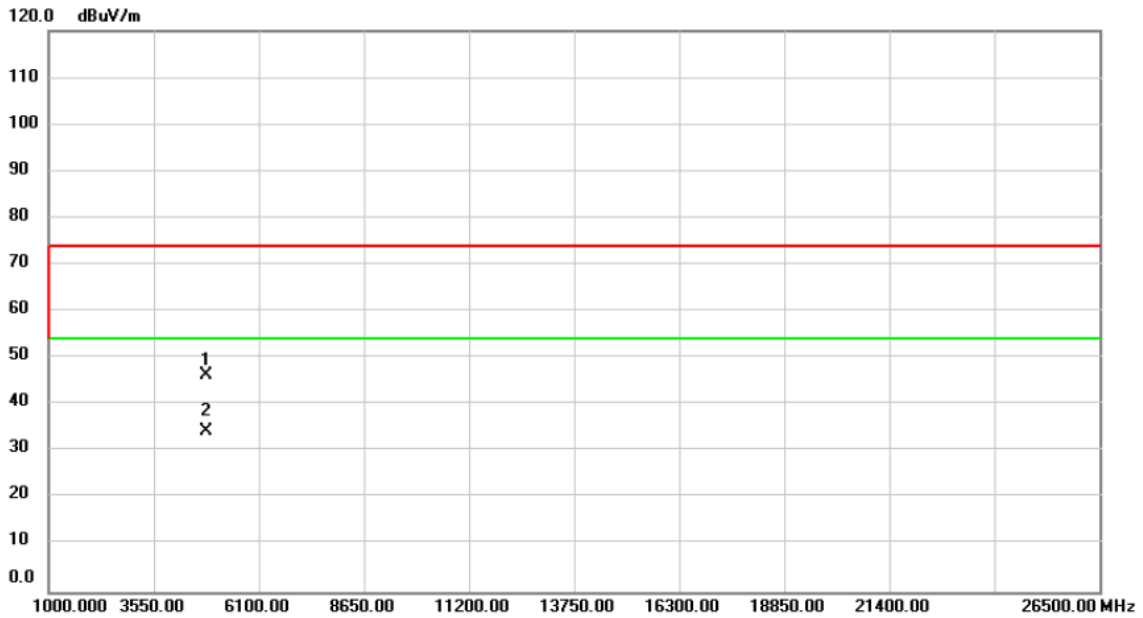

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4824.000	57.80	-11.37	46.43	74.00	-27.57	peak	
2	*	4824.000	45.71	-11.37	34.34	54.00	-19.66	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz


Horizontal

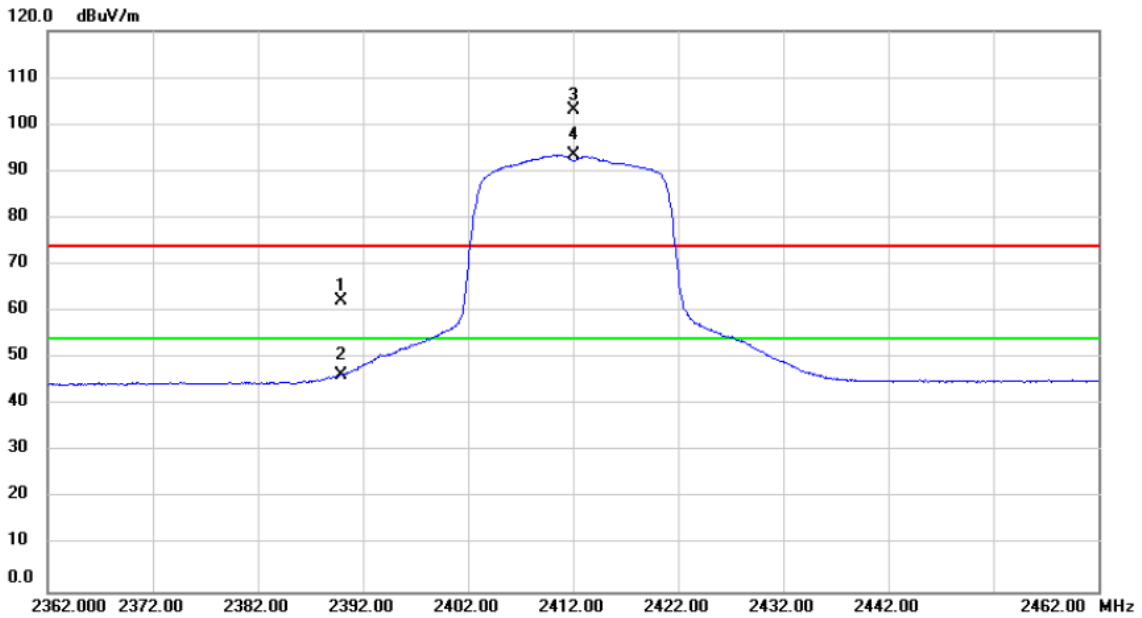

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2389.916	31.31	31.06	62.37	74.00	-11.63	peak	
2		2389.916	15.40	31.06	46.46	54.00	-7.54	AVG	
3	X	2412.000	71.78	31.14	102.92	74.00	28.92	peak	No Limit
4	*	2412.000	62.33	31.14	93.47	54.00	39.47	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2412MHz


Horizontal

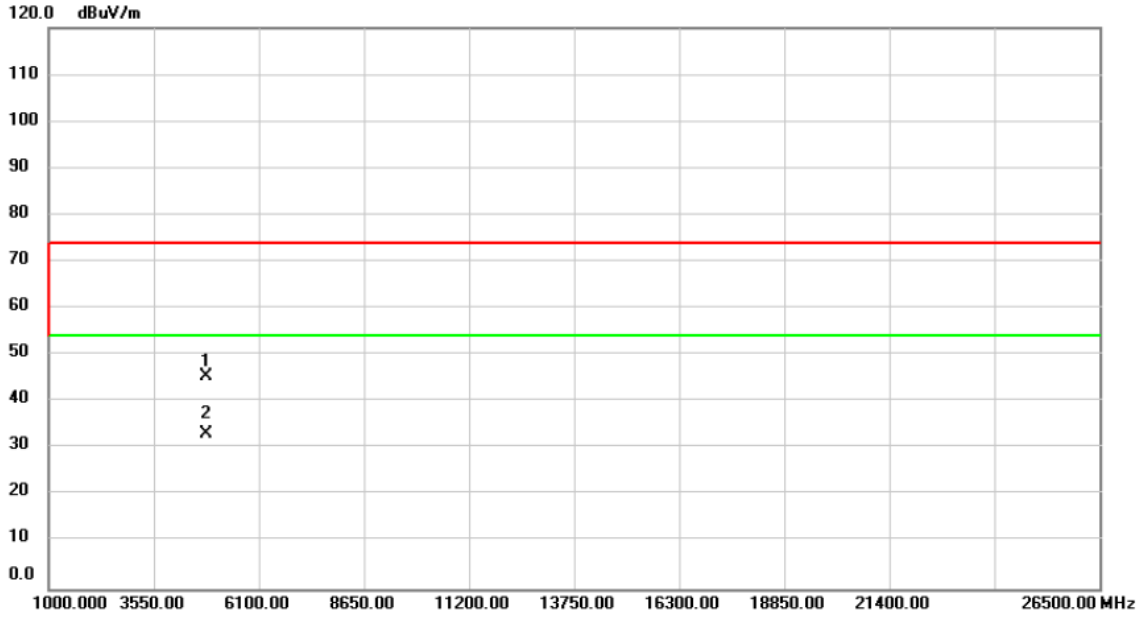

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4824.000	56.91	-11.37	45.54	74.00	-28.46	peak	
2	*	4824.000	44.47	-11.37	33.10	54.00	-20.90	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz


Vertical

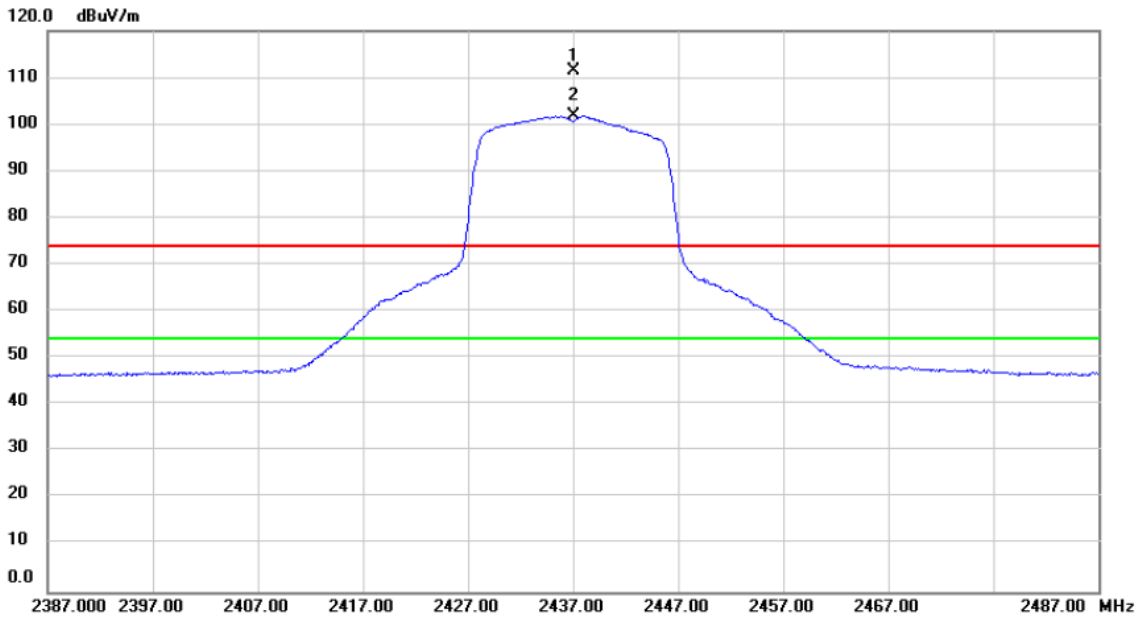

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2437.000	80.17	31.23	111.40	74.00	37.40	peak	No Limit
2	*	2437.000	70.56	31.23	101.79	54.00	47.79	A/VG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz


Vertical

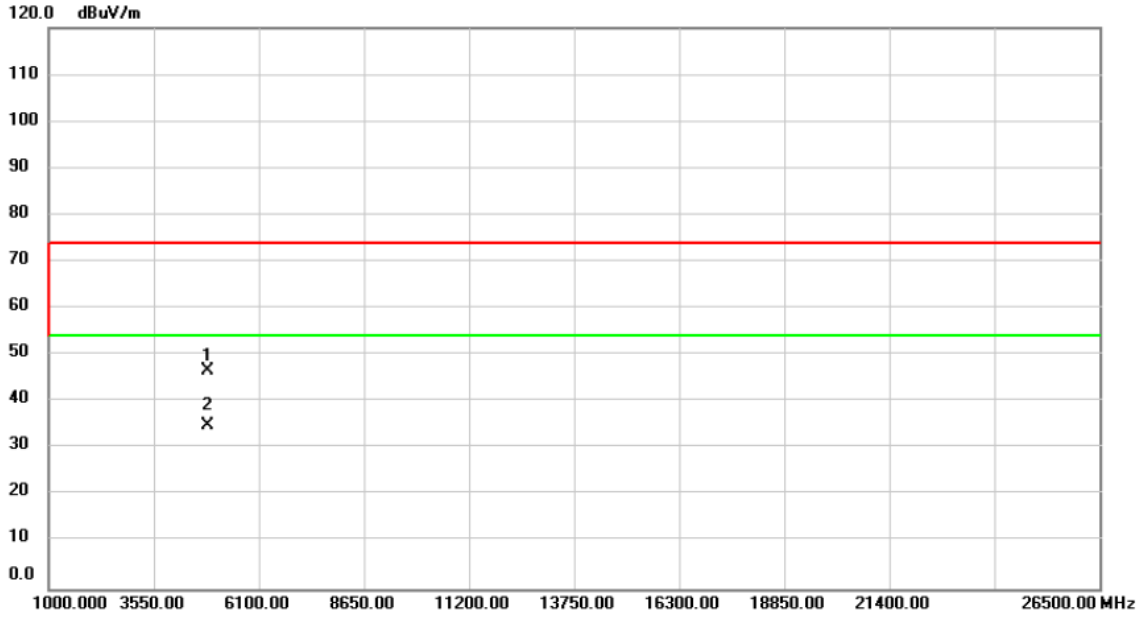

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4874.000	57.99	-11.29	46.70	74.00	-27.30	peak	
2 *	4874.000	46.31	-11.29	35.02	54.00	-18.98	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz


Horizontal

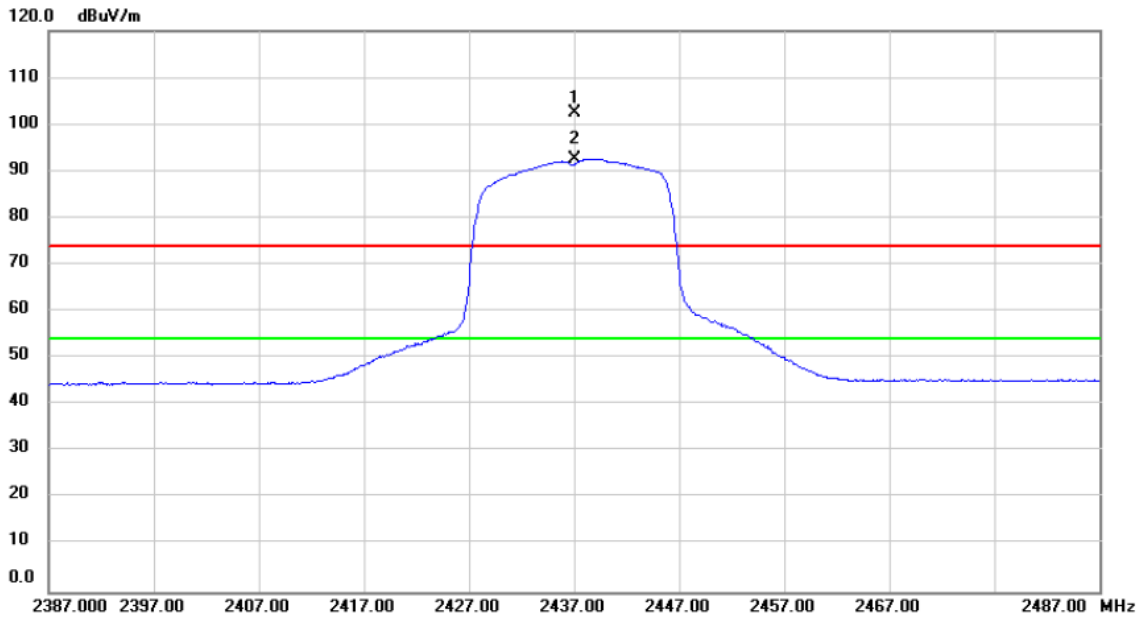

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2437.000	71.20	31.23	102.43	74.00	28.43	peak	No Limit
2	*	2437.000	61.42	31.23	92.65	54.00	38.65	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2437MHz


Horizontal

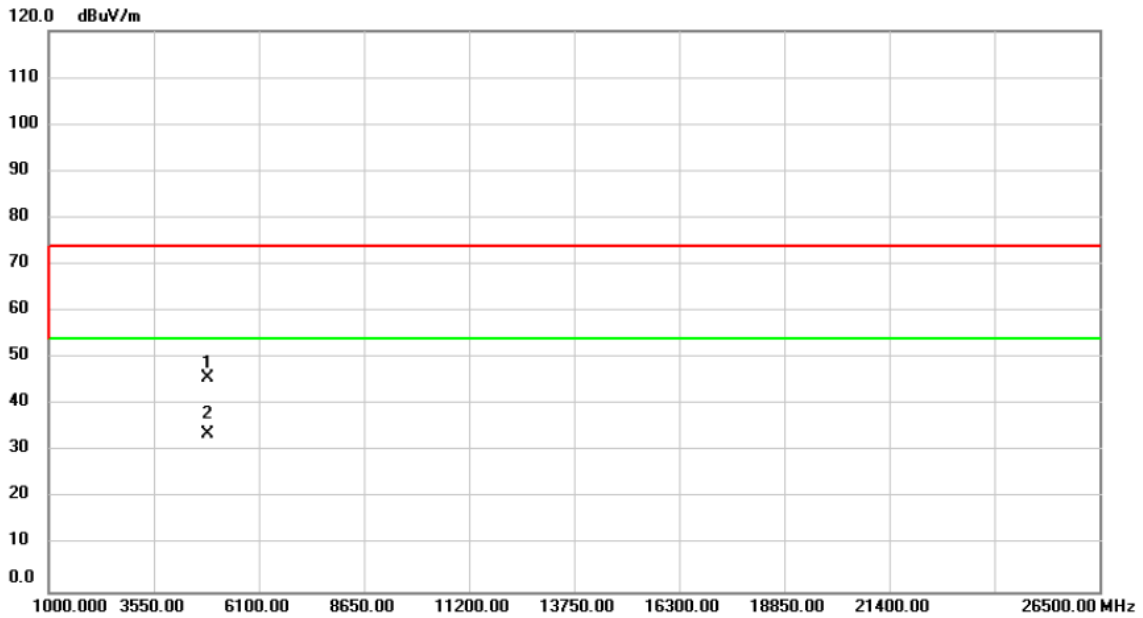

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4874.000	56.96	-11.29	45.67	74.00	-28.33	peak	
2	*	4874.000	44.91	-11.29	33.62	54.00	-20.38	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz


Vertical

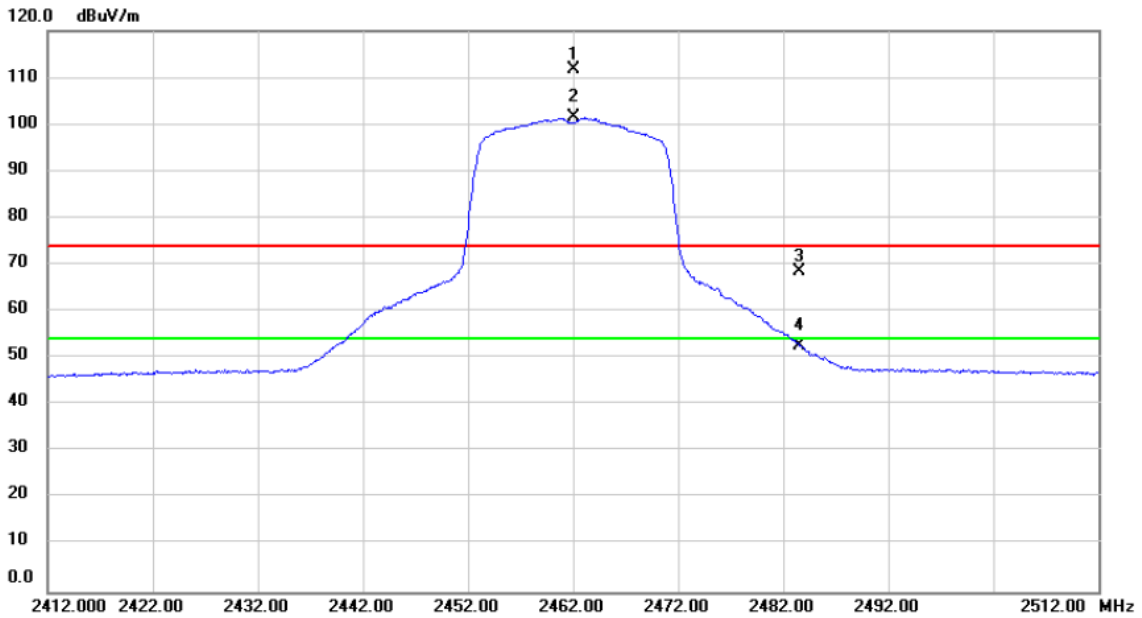

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2462.000	80.43	31.33	111.76	74.00	37.76	peak	No Limit
2	*	2462.000	70.09	31.33	101.42	54.00	47.42	AVG	No Limit
3		2483.500	37.07	31.41	68.48	74.00	-5.52	peak	
4		2483.500	21.31	31.41	52.72	54.00	-1.28	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz


Vertical

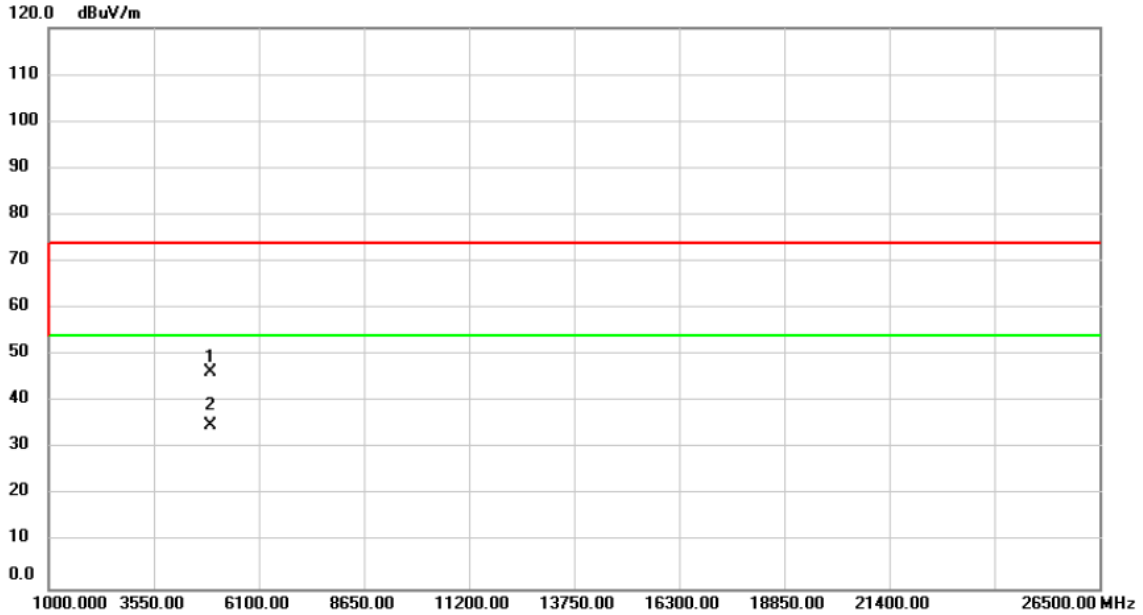

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4924.000	57.50	-11.22	46.28	74.00	-27.72	peak	
2 *	4924.000	46.11	-11.22	34.89	54.00	-19.11	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz


Horizontal

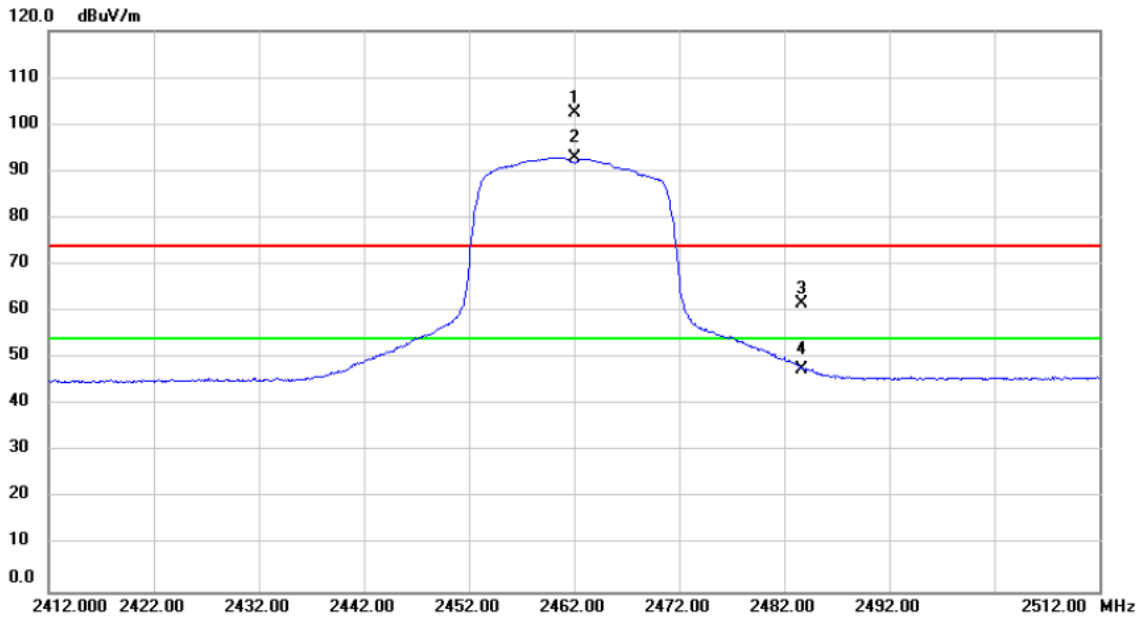

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2462.000	71.23	31.33	102.56	74.00	28.56	peak	No Limit
2	*	2462.000	61.61	31.33	92.94	54.00	38.94	AVG	No Limit
3		2483.615	30.35	31.41	61.76	74.00	-12.24	peak	
4		2483.615	16.25	31.41	47.66	54.00	-6.34	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-20M MODE 2462MHz


Horizontal

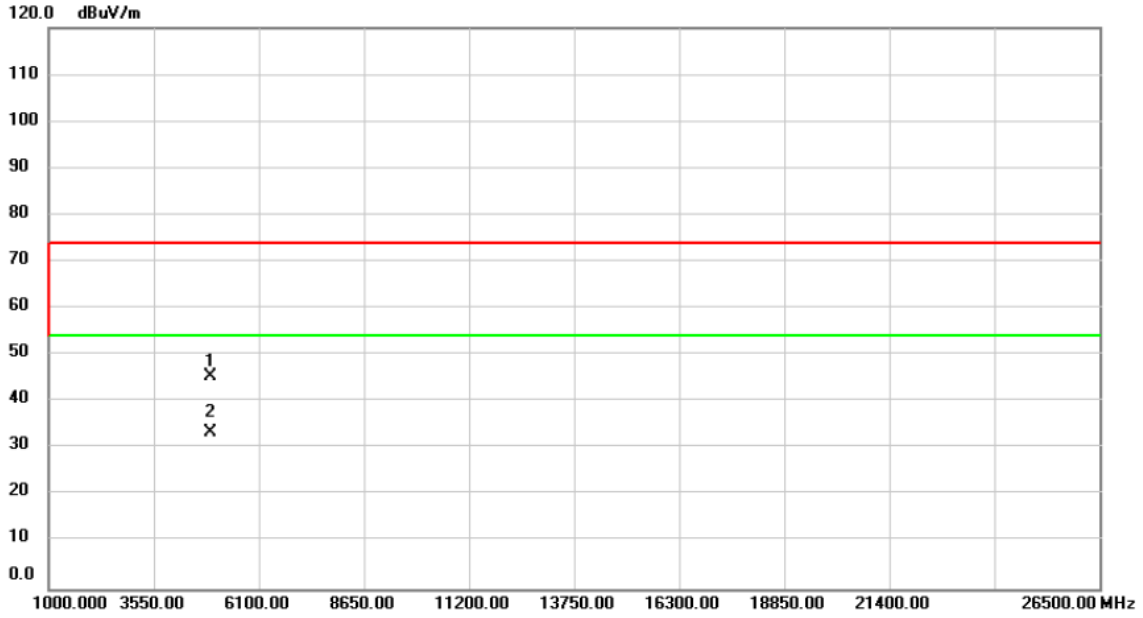

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4924.000	56.79	-11.22	45.57	74.00	-28.43	peak	
2 *	4924.000	44.73	-11.22	33.51	54.00	-20.49	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz


Vertical

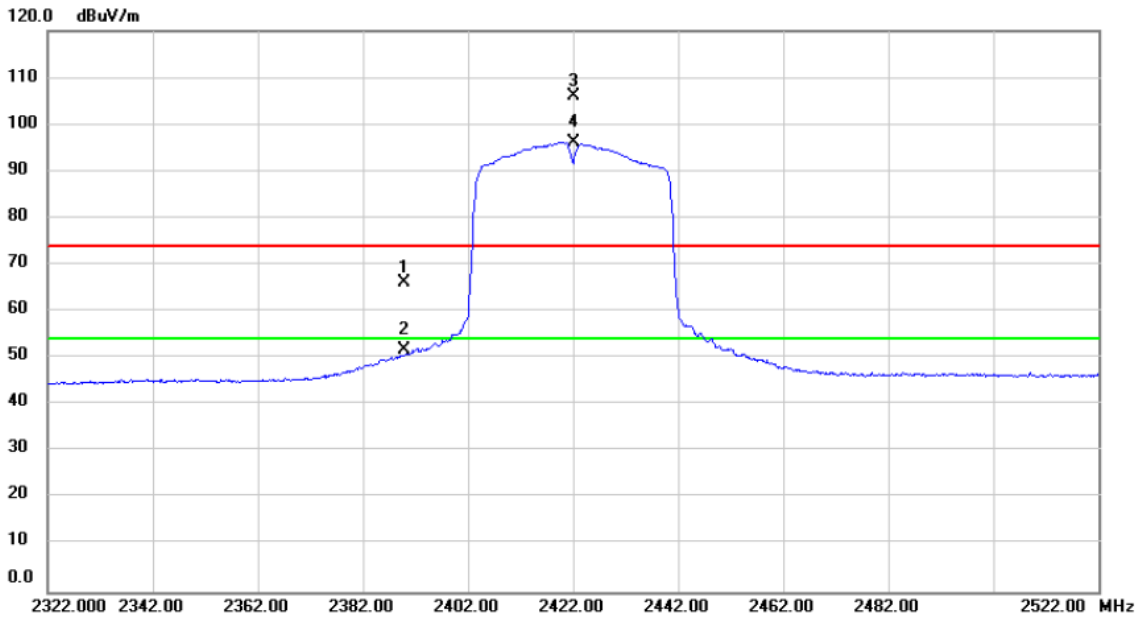

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2389.864	35.11	31.06	66.17	74.00	-7.83	peak	
2		2389.864	20.61	31.06	51.67	54.00	-2.33	AVG	
3	X	2422.000	74.81	31.18	105.99	74.00	31.99	peak	No Limit
4	*	2422.000	64.96	31.18	96.14	54.00	42.14	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz


Vertical

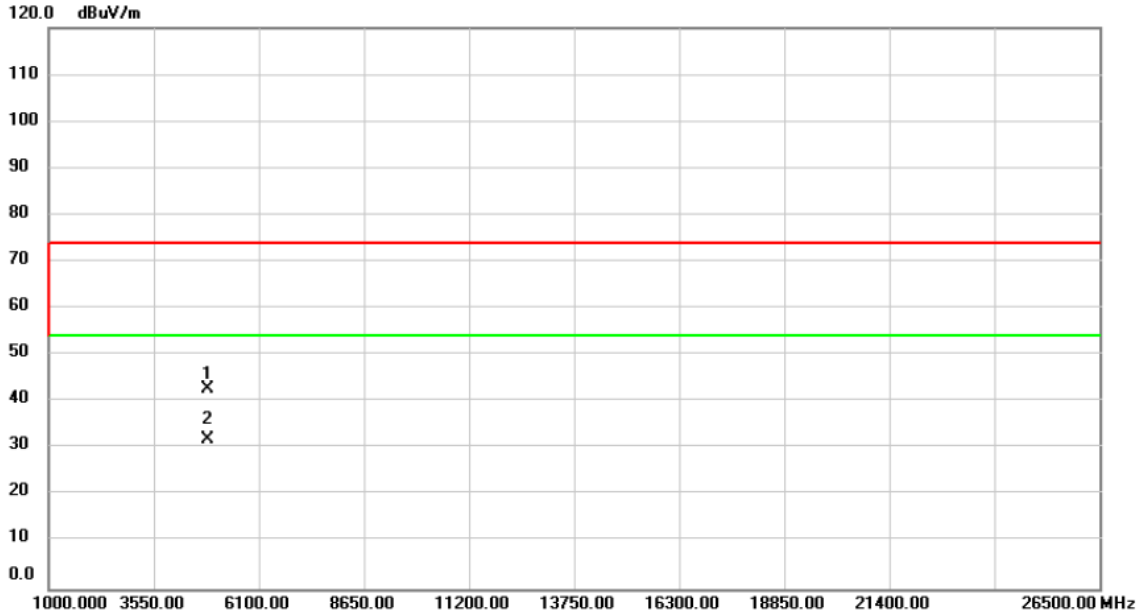

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4844.000	54.17	-11.34	42.83	74.00	-31.17	peak	
2 *	4844.000	43.23	-11.34	31.89	54.00	-22.11	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz


Horizontal

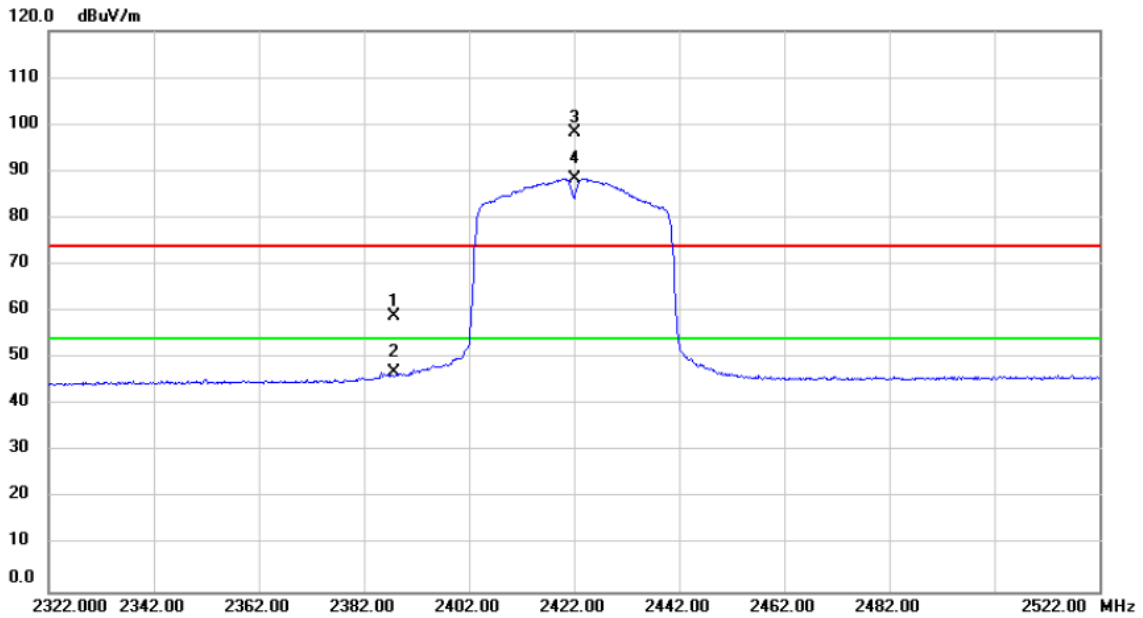

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2387.824	27.97	31.06	59.03	74.00	-14.97	peak	
2		2387.824	15.75	31.06	46.81	54.00	-7.19	AVG	
3	X	2422.000	67.10	31.18	98.28	74.00	24.28	peak	No Limit
4	*	2422.000	57.23	31.18	88.41	54.00	34.41	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2422MHz


Horizontal

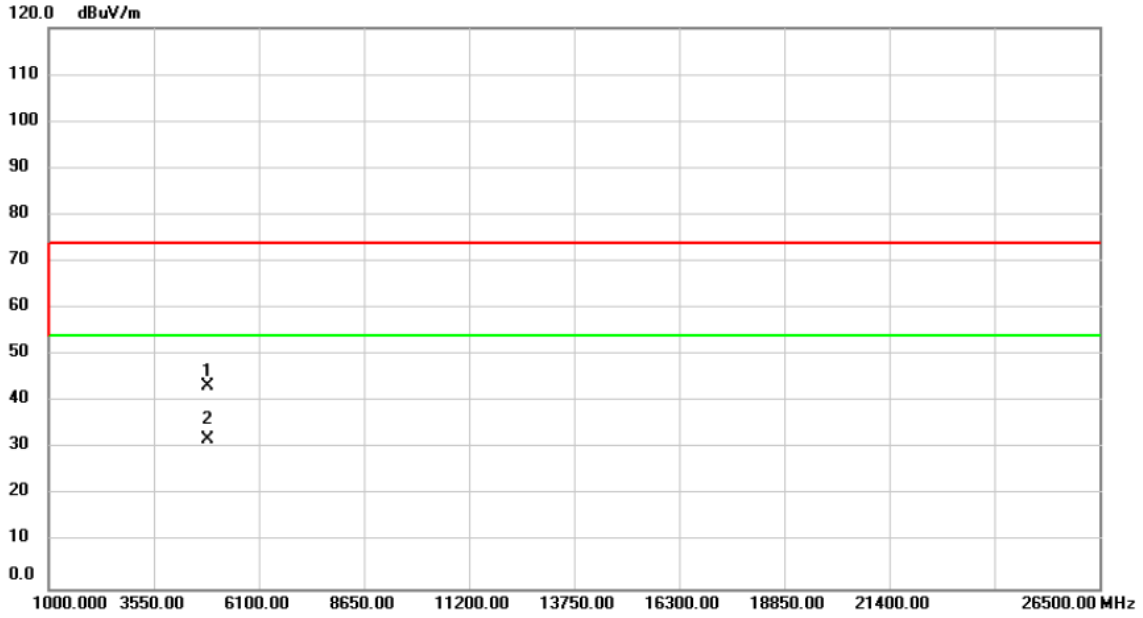

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4844.000	54.66	-11.34	43.32	74.00	-30.68	peak	
2 *	4844.000	43.33	-11.34	31.99	54.00	-22.01	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz


Vertical

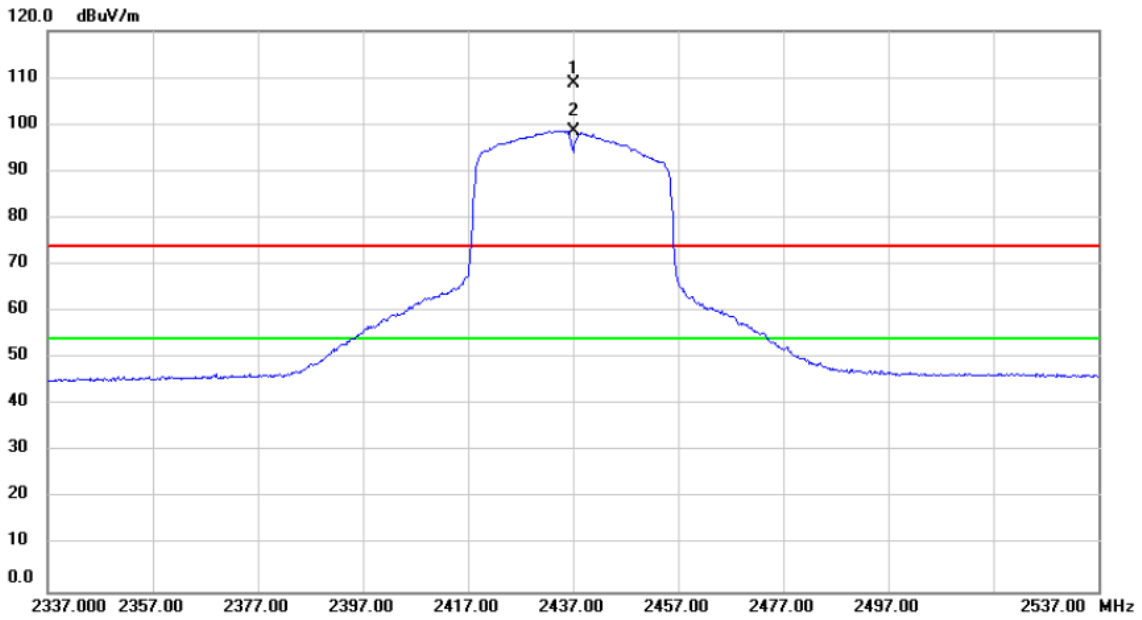

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2437.000	77.55	31.23	108.78	74.00	34.78	peak	No Limit
2	*	2437.000	67.41	31.23	98.64	54.00	44.64	A/VG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz


Vertical

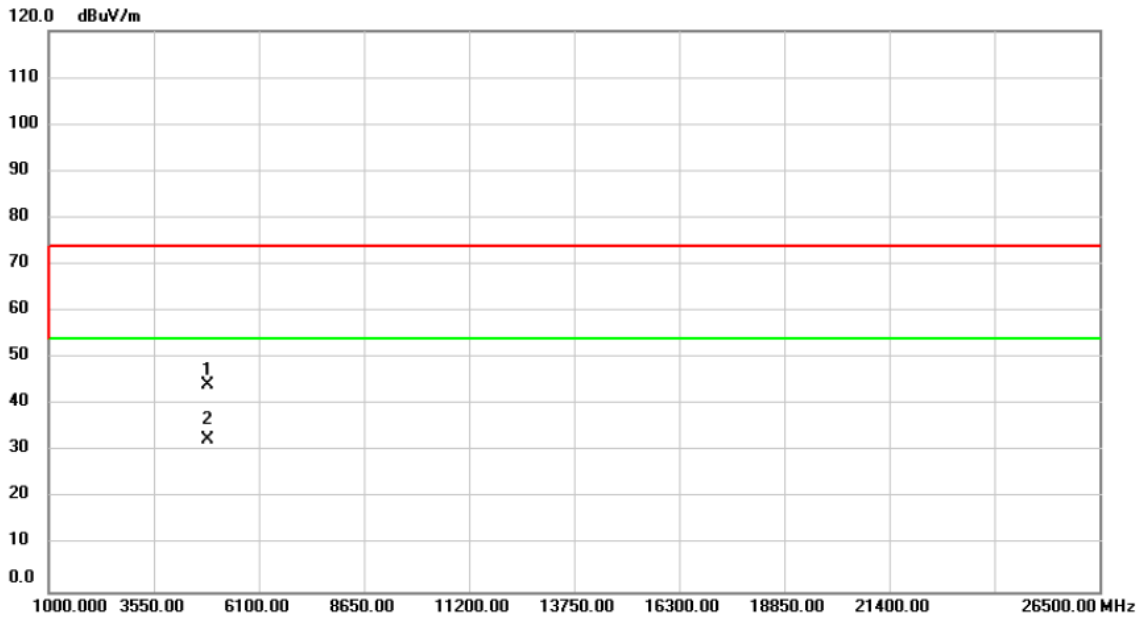

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4874.000	55.41	-11.29	44.12	74.00	-29.88	peak	
2 *	4874.000	43.83	-11.29	32.54	54.00	-21.46	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz


Horizontal

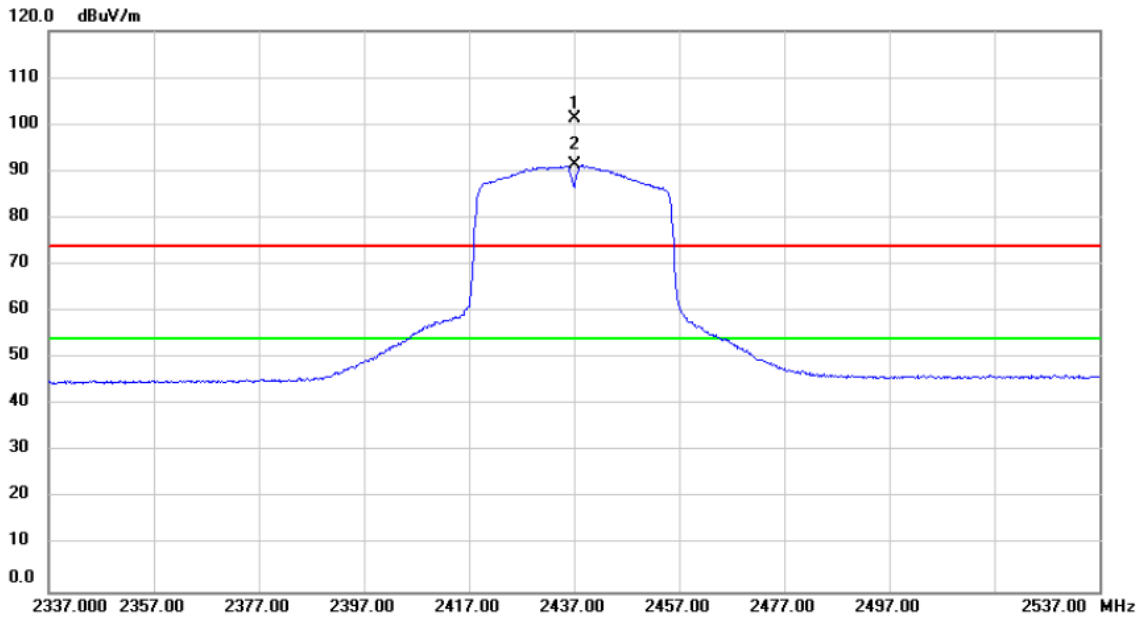

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2437.000	70.03	31.23	101.26	74.00	27.26	peak	No Limit
2	*	2437.000	60.03	31.23	91.26	54.00	37.26	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2437MHz


Horizontal

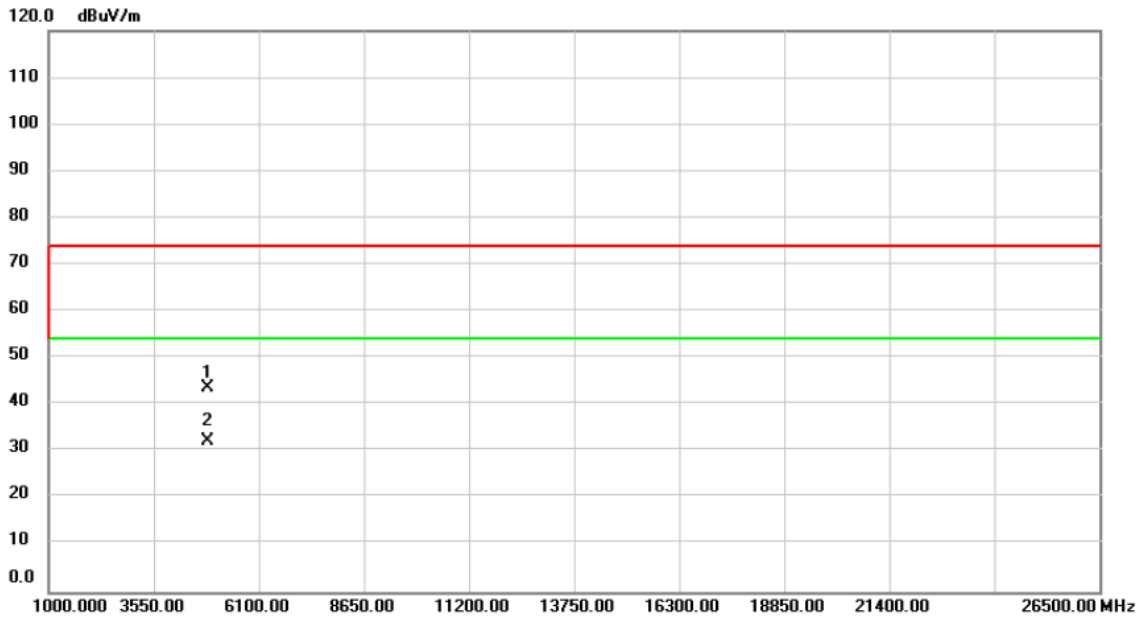

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4874.000	54.90	-11.29	43.61	74.00	-30.39	peak	
2	*	4874.000	43.68	-11.29	32.39	54.00	-21.61	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz


Vertical

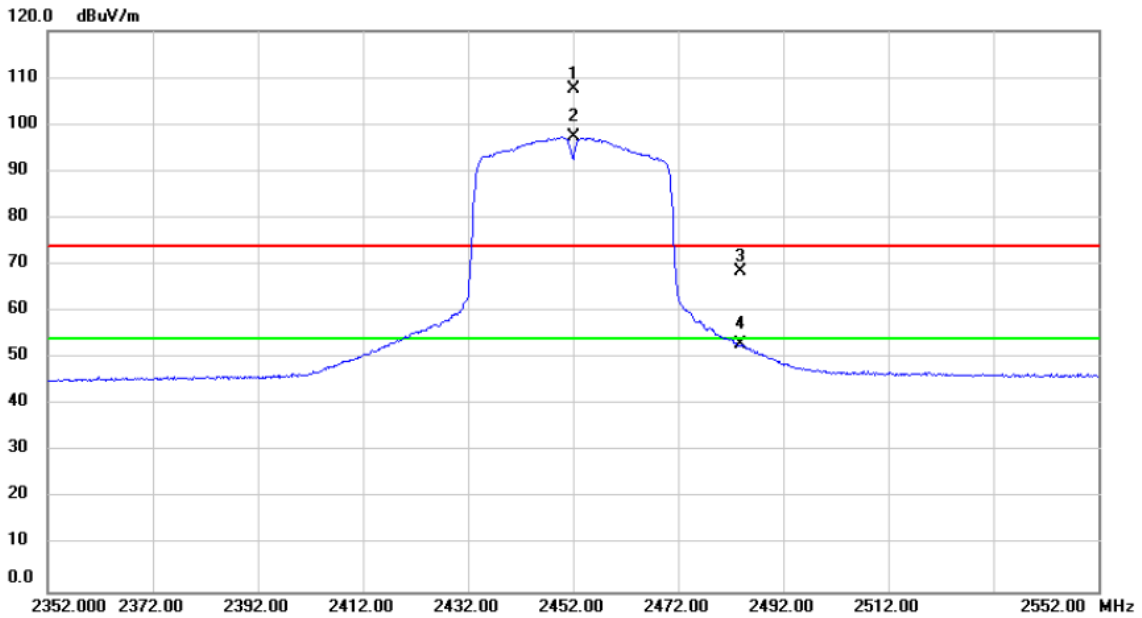

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2452.000	76.17	31.30	107.47	74.00	33.47	peak	No Limit
2	*	2452.000	65.93	31.30	97.23	54.00	43.23	AVG	No Limit
3		2483.863	37.28	31.41	68.69	74.00	-5.31	peak	
4		2483.863	21.41	31.41	52.82	54.00	-1.18	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz


Vertical

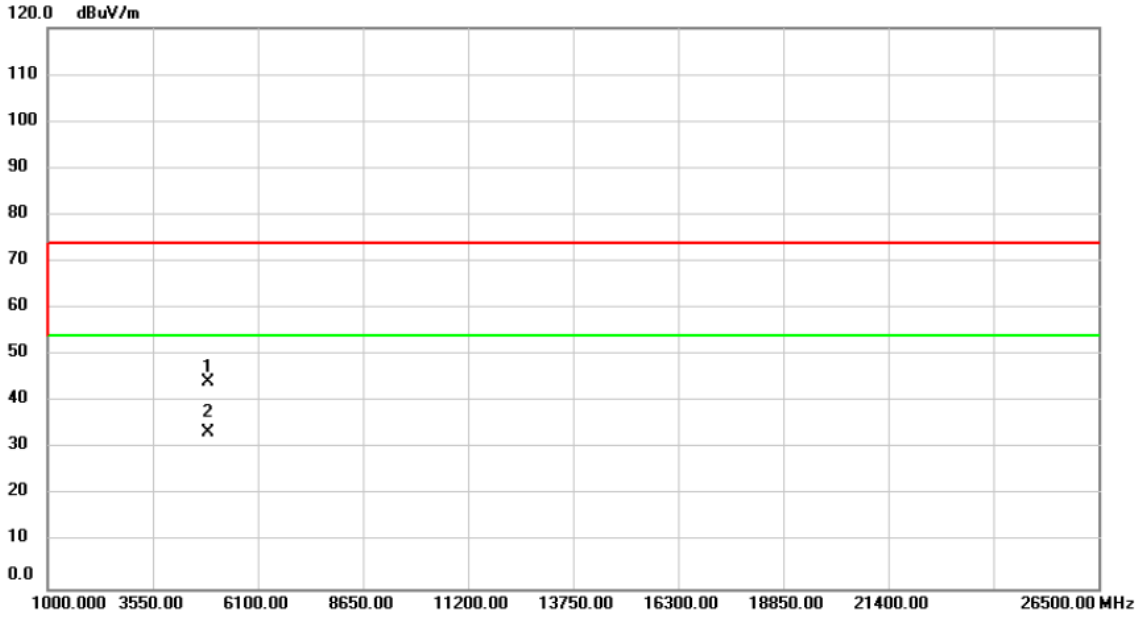

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	4904.000	55.35	-11.24	44.11	74.00	-29.89	peak	
2 *	4904.000	44.58	-11.24	33.34	54.00	-20.66	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz


Horizontal

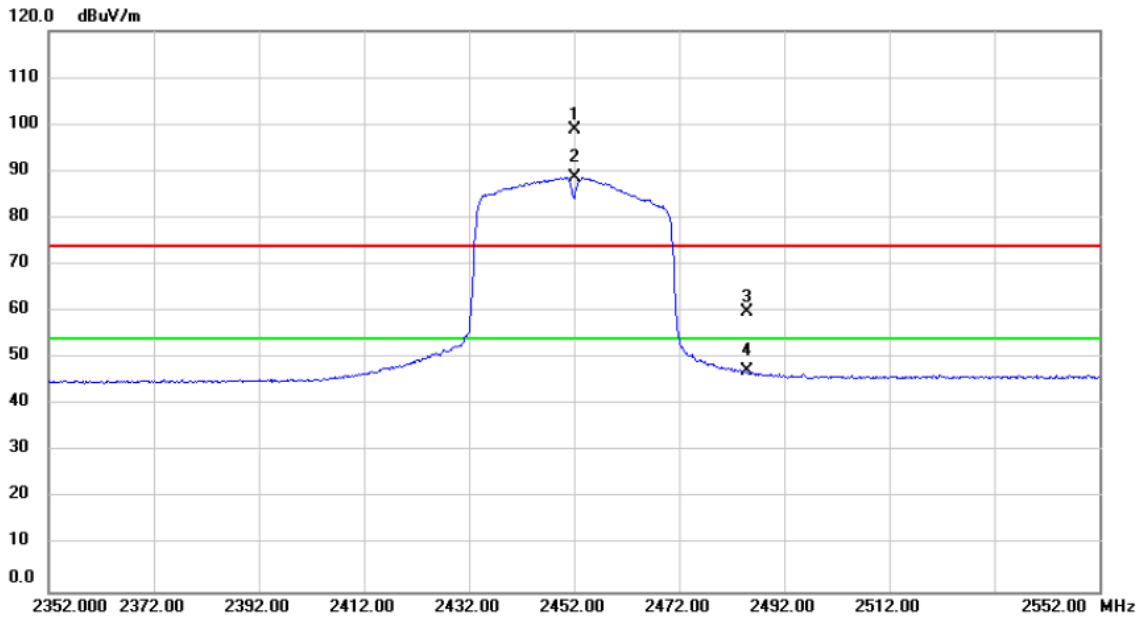

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2452.000	67.46	31.30	98.76	74.00	24.76	peak	No Limit
2	*	2452.000	57.33	31.30	88.63	54.00	34.63	AVG	No Limit
3		2484.938	28.33	31.42	59.75	74.00	-14.25	peak	
4		2484.938	15.83	31.42	47.25	54.00	-6.75	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz


Horizontal

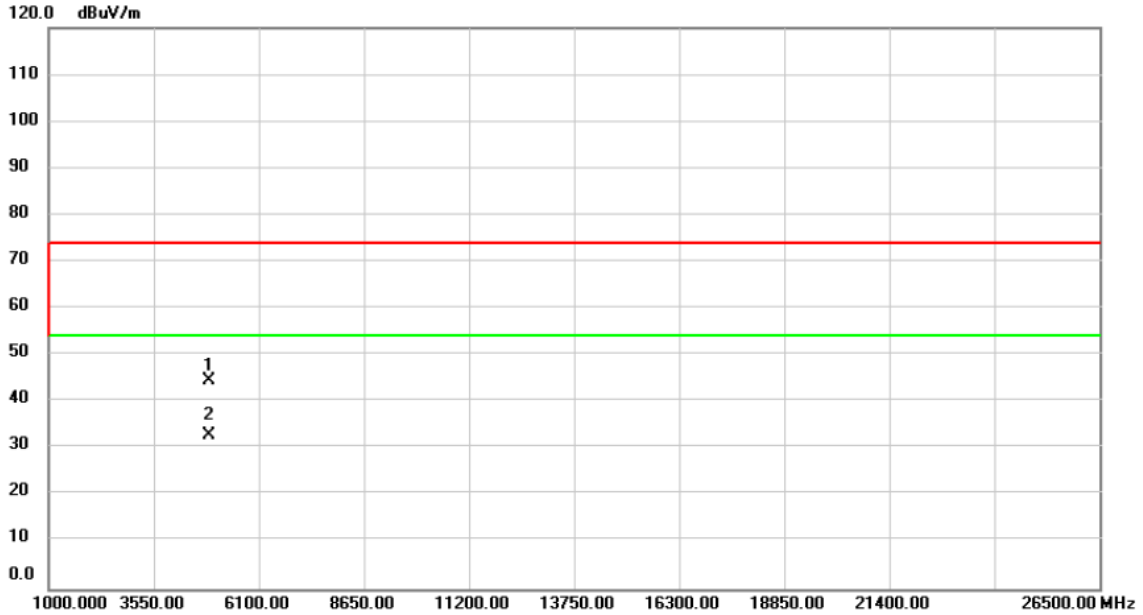

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4904.000	55.71	-11.24	44.47	74.00	-29.53	peak	
2 *	4904.000	44.24	-11.24	33.00	54.00	-21.00	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz_Co-location


Vertical

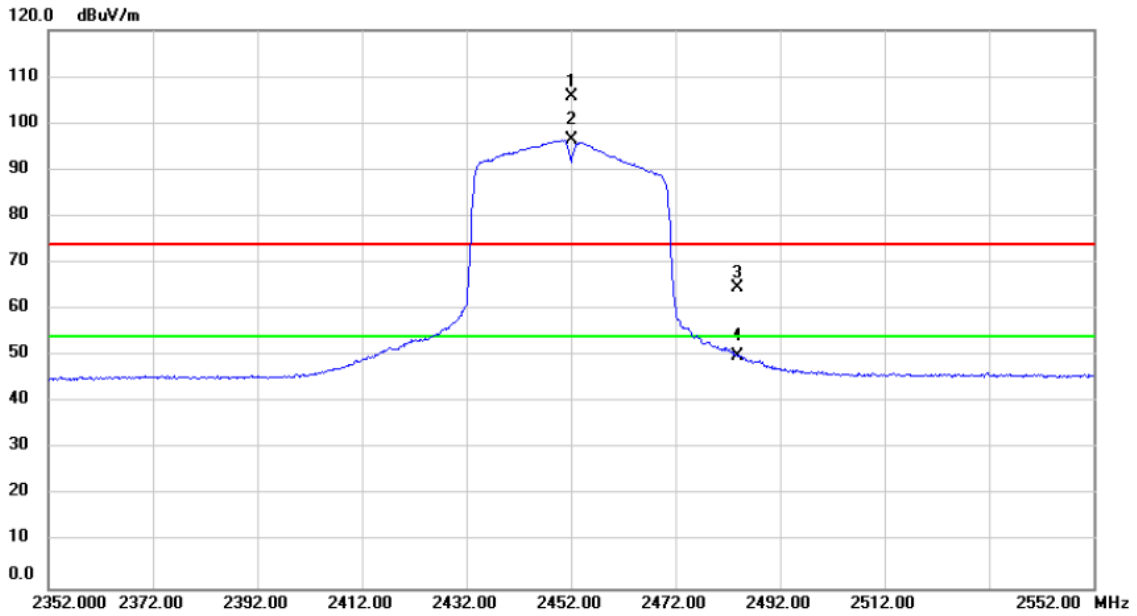

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2452.000	74.55	31.30	105.85	74.00	31.85	peak	No Limit
2	*	2452.000	65.03	31.30	96.33	54.00	42.33	AVG	No Limit
3		2483.830	33.20	31.41	64.61	74.00	-9.39	peak	
4		2483.830	18.47	31.41	49.88	54.00	-4.12	AVG	

Orthogonal Axis :	X
Test Mode :	TX AC80 Mode 5210MHz_Co-location


Vertical

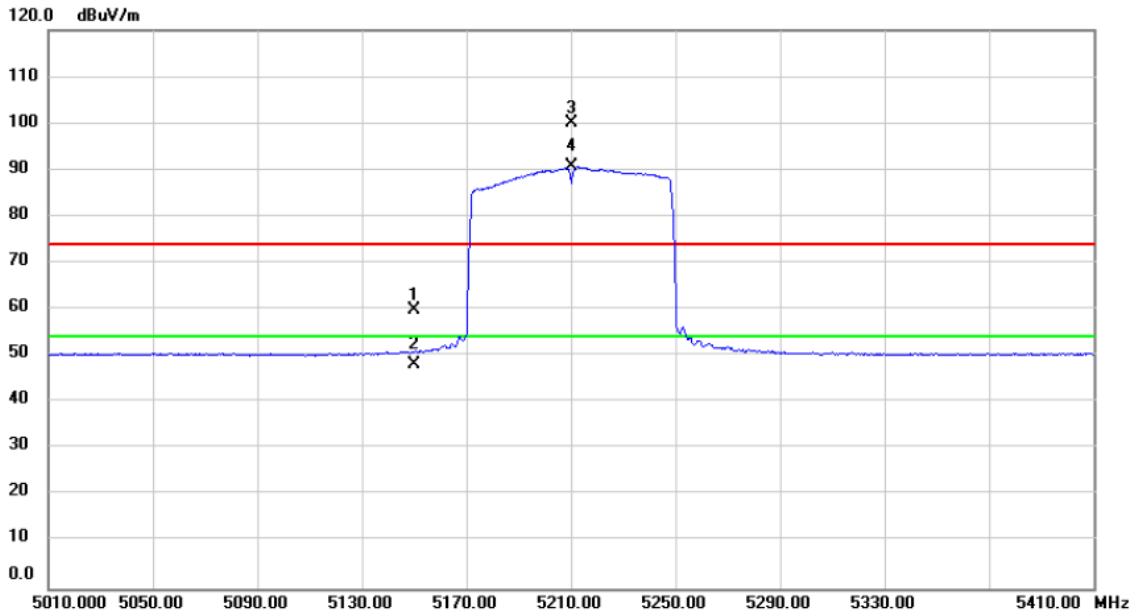

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5150.000	22.36	37.54	59.90	74.00	-14.10	peak	
2		5150.000	10.48	37.54	48.02	54.00	-5.98	AVG	
3	X	5210.000	62.39	37.61	100.00	74.00	26.00	peak	No Limit
4	*	5210.000	53.22	37.61	90.83	54.00	36.83	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz & TX AC80 Mode 5210MHz_Co-location


Vertical

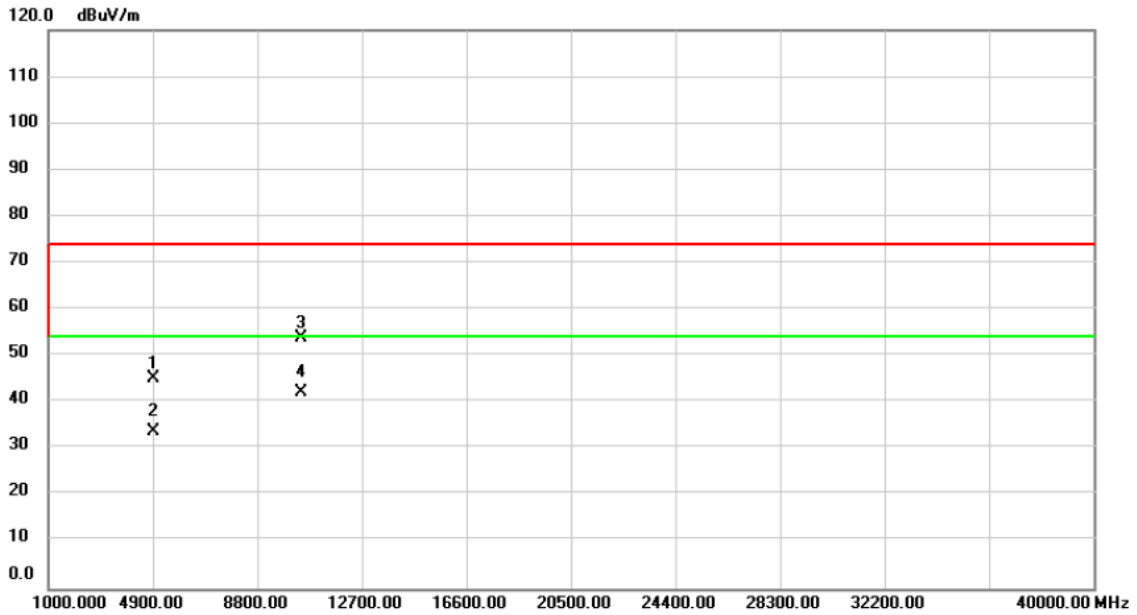

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	4904.000	56.31	-11.24	45.07	74.00	-28.93	peak	
2	4904.000	45.14	-11.24	33.90	54.00	-20.10	AVG	
3	10420.00	51.99	1.95	53.94	74.00	-20.06	peak	
4 *	10420.00	40.35	1.95	42.30	54.00	-11.70	AVG	

Orthogonal Axis :	X
Test Mode :	TX N-40M MODE 2452MHz_Co-location

Horizontal

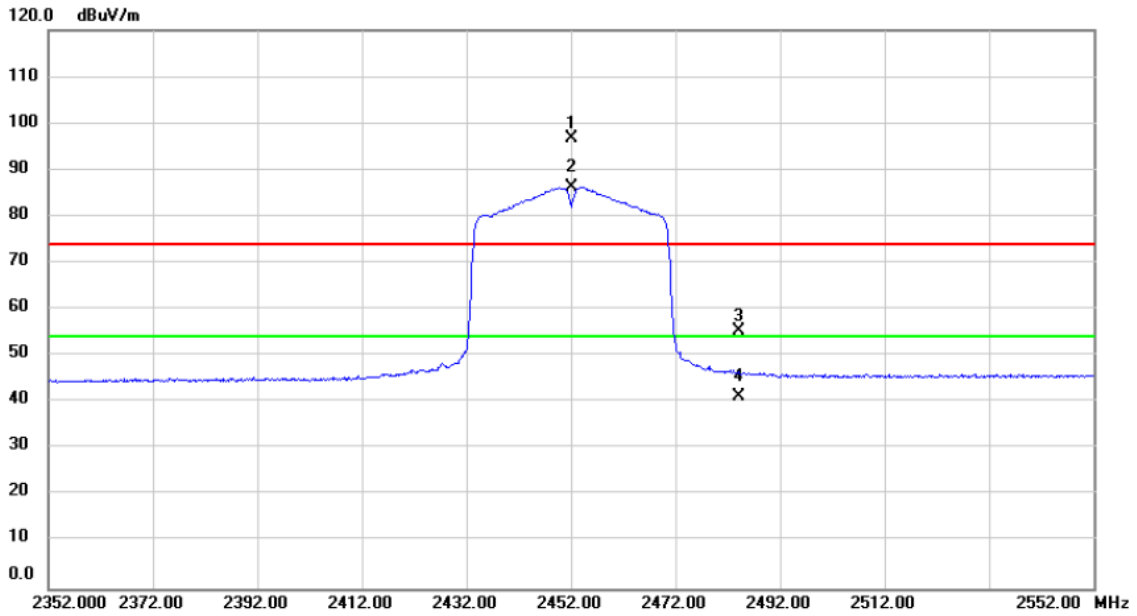

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2452.000	65.39	31.30	96.69	74.00	22.69	peak	No Limit
2	*	2452.000	55.04	31.30	86.34	54.00	32.34	AVG	No Limit
3		2484.048	23.78	31.42	55.20	74.00	-18.80	peak	
4		2484.048	9.74	31.42	41.16	54.00	-12.84	AVG	