



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Wireless-N Home ADSL2 + Modem Router

Model: WAG120N

Trade Name: Cisco Linksys

Issued to

**Cisco-Cisco Linksys LLC
121 Theory Drive Irvine CA92617 USA**

Issued by

**Compliance Certification Services Inc.
No. 11, Wu-Gong 6th Rd., Wugu Industrial Park,
Taipei Hsien 248, Taiwan (R.O.C.)
<http://www.ccsemc.com.tw>
service@ccsrf.com**



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS

- 1. TEST RESULT CERTIFICATION.....3**
- 2. EUT DESCRIPTION4**
- 3. TEST METHODOLOGY5**
 - 3.1 EUT CONFIGURATION5
 - 3.2 EUT EXERCISE.....5
 - 3.3 GENERAL TEST PROCEDURES.....5
 - 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....6
 - 3.5 DESCRIPTION OF TEST MODES7
- 4. INSTRUMENT CALIBRATION.....8**
 - 4.1 MEASURING INSTRUMENT CALIBRATION8
 - 4.2 MEASUREMENT EQUIPMENT USED8
 - 4.3 MEASUREMENT UNCERTAINTY9
- 5. FACILITIES AND ACCREDITATIONS10**
 - 5.1 FACILITIES10
 - 5.2 EQUIPMENT.....10
 - 5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....10
- 6. SETUP OF EQUIPMENT UNDER TEST10**
 - 6.1 SETUP CONFIGURATION OF EUT.....10
 - 6.2 SUPPORT EQUIPMENT10
- 7. FCC PART 15.247 REQUIREMENTS.....10**
 - 7.1 6DB BANDWIDTH.....10
 - 7.2 PEAK POWER.....10
 - 7.3 AVERAGE POWER10
 - 7.4 BAND EDGES MEASUREMENT10
 - 7.5 PEAK POWER SPECTRAL DENSITY.....10
 - 7.6 SPURIOUS EMISSIONS.....10
 - 7.7 RADIATED EMISSIONS10
 - 7.8 POWERLINE CONDUCTED EMISSIONS.....10
- APPENDIX I RADIO FREQUENCY EXPOSURE10**
- APPENDIX II PHOTOGRAPHS OF TEST SETUP10**



1. TEST RESULT CERTIFICATION

Applicant: Cisco-Cisco Linksys LLC
 121 Theory Drive Irvine CA92617 USA

Equipment Under Test: Wireless-N Home ADSL2 + Modem Router

Trade Name: Cisco Linksys

Model Number: WAG120N

Date of Test: June 26 ~ August 12, 2009

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Rex Lai
 Section Manager
 Compliance Certification Services Inc.

Gina Lo
 Section Manager
 Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	Wireless-N Home ADSL2 + Modem Router
Trade Name	Cisco Linksys
Model Number	WAG120N
Model Discrepancy	N/A
Power Adapter	<p>1. LEADER / MU12-G120100-A1 INPUT:100-240V, 50-60Hz, 0.5A OUTPUT:12V, 1A</p> <p>2. Bestec / EA0121WAA INPUT:100-240V, 50/60Hz, 0.5A OUTPUT:12V, 1A</p> <p>3. PHIHONG / PSA12R-120 INPUT:AC100-240V, 50-60Hz, 0.5A OUTPUT:DC12V, 1A</p>
Frequency Range	2412 ~ 2462 MHz
Transmit Power	<p>IEEE 802.11b mode: 19.83 dBm IEEE 802.11g mode: 17.45 dBm draft 802.11n Standard-20 MHz Channel mode: 18.70 dBm draft 802.11n Wide-40 MHz Channel mode: 15.47 dBm</p>
Modulation Technique	<p>IEEE 802.11b mode: DSSS (1, 2, 5.5 and 11 Mbps) IEEE 802.11g mode: OFDM (6, 9, 12, 18, 24, 36, 48 and 54 Mbps) draft 802.11n Standard-20 MHz Channel mode: OFDM (6.5, 7.2, 13, 14.4, 14.44, 19.5, 21.7, 26, 28.89, 28.9, 39, 43.3, 43.33 52, 57.78, 57.8, 58.5, 65.0, 72.2, 78, 86.67, 104, 115.56, 117, 130, 144.44 Mbps) draft 802.11n Wide-40 MHz Channel mode: OFDM (13.5, 15, 27, 30, 40.5, 45, 54, 60, 81, 90, 108, 120, 121.5, 135, 150, 162, 180, 216, 240, 243, 270, 300 Mbps)</p>
Number of Channels	<p>IEEE 802.11b/g mode: 11 Channels draft 802.11n Standard-20 MHz Channel mode: 11 Channels draft 802.11n Wide-40 MHz Channel mode: 7 Channels</p>
Antenna Specification	<p>PCB Antenna / Gain: 1.5 dBi PIFA Antenna / Gain: 2 dBi</p>

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **Q87-WAG120N** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT (model: WAG120N) comes with three types of power adapter (MU12-G120100-A1 & EA0121WAA & PSA12R-120) for sale. After the preliminary test, the EUT with power adapter (Model: PSA12R-120) was found to emit the worst emissions and therefore had been tested under operating condition.

The EUT (model: WAG120N) comes with two type antennas (PIFA antenna & PCB antenna) for sales that cannot be simultaneous transmitter. After the preliminary test, the worst case of RF conducted emission is PIFA antenna and Radiation emission is PIFA antenna & PCB antenna.

Software used to control the EUT for staying in continuous transmitting and receiving mode was programmed.

After verification, all tests carried out are with the worst-case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode and receiving radiated spurious emission above 1GHz, which worst case was in CH Mid mode only.

IEEE 802.11b mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE 802.11g mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

draft 802.11n Standard-20 MHz Channel mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

draft 802.11n Wide-40 MHz Channel mode:

Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	02/23/2010

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	09/10/2009
Test Receiver	Rohde&Schwarz	ESCI	100064	11/30/2009
Switch Controller	TRC	Switch Controller	SC94050010	05/02/2010
4 Port Switch	TRC	4 Port Switch	SC94050020	05/02/2010
Loop Antenna	EMCO	6502	8905/2356	05/29/2010
Horn-Antenna	TRC	HA-0502	06	06/03/2010
Horn-Antenna	TRC	HA-0801	04	06/17/2010
Horn-Antenna	TRC	HA-1201A	01	08/09/2010
Horn-Antenna	TRC	HA-1301A	01	08/10/2010
Bilog- Antenna	Sunol Sciences	JB3	A030205	03/28/2010
Turn Table	Max-Full	MFT-120S	T120S940302	N.C.R.
Antenna Tower	Max-Full	MFA-430	A440940302	N.C.R.
Controller	Max-Full	MF-CM886	CC-C-1F-13	N.C.R.
Site NSA	CCS	N/A	FCC MRA: TW1039 IC: 2324G-1 / -2	10/17/2010 11/04/2010
Test S/W	LABVIEW (V 6.1)			

Conducted Emission room # B				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
TEST RECEIVER	R&S	ESHS10	843743/015	03/29/2010
LISN (EUT)	FCC	FCC-LISN-50-32-2	08009	03/29/2010
LISN	EMCO	3825/2	1382	01/05/2010
BNC CABLE	Huber+Suhner	RG 223/U	BNC B2	01/12/2010
Pulse Limiter	R&S	ESH3-Z2	100374	08/22/2009
THERMO-HYGRO METER	TOP	HA-202	9303-3	02/04/2010
Test S/W	EMI 32.exe			



4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.73
3M Semi Anechoic Chamber / 30MHz ~ 1GHz	+/-3.7046
3M Semi Anechoic Chamber / Above 1GHz	+/-3.0958

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

*Remark: The radiated emissions test items was tested at Compliance Certification Services Inc. (Hsintien Lab.)
The test equipments were listed in page 8 and the test data, please refer page 114-115.*

No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT




Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No	Equipment	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1	Notebook PC	DELL	PP19L	GK102 A00	QDS-BRCM1021	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
2	PS/2 Mouse	DELL	M071KC	443029525	DOC BSMI: R41108	Shielded, 1.8m	N/A
3	PS/2 Keyboard	DELL	SK-8110	N/A	DOC BSMI: T3A002	Shielded, 1.8m	N/A
4	Printer	EPSON	EPSON C60	DR3K039417	BSMI ID: 3902E006	Shielded, 1.8m	Unshielded, 1.8m
5	Monitor	SAMSUNG	710V	N/A	DOC / R33475	Shielded, 1.8m with two cores	Unshielded, 1.8m
6	Host PC	HP	xw4400	N/A	DOC BSMI: R33001	Unshielded, 1.8m	Unshielded, 1.8m
7	Modem	TOP- SOLUTION	5JEG4033MKO	N/A	5RJTAI-35500-M5-E	Shielded, 1.8m	Unshielded, 1.8m
8	Server Notebook	HP	2210B	CNV7472KG5	DoC BSMI: R33001	Unshielded, 20m	Unshielded, 1.8m
9	ADSL	ZYXEL	IES-1000	N/A	N/A	Unshielded, 20m	Unshielded, 1.8m
10	LAN Cable x2	N/A	N/A	N/A	N/A	Unshielded, 3.0m x2	N/A
11	Notebook PC (Remote)	IBM	2672 (X31)	99KPZYN	WLAN: ANO20030400LEG Bluetooth: ANO20020100MTN	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.


7. FCC PART 15.247 REQUIREMENTS

7.1 6DB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100 kHz, VBW = RBW, Span = 50 MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted.



Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	12080	>500	PASS
Mid	2437	11080		PASS
High	2462	11080		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	16500	>500	PASS
Mid	2437	16500		PASS
High	2462	16500		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	17170	>500	PASS
Mid	2437	17330		PASS
High	2462	17580		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode

Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
Low	2422	35330	>500	PASS
Mid	2437	34500		PASS
High	2452	35500		PASS



Test Plot

IEEE 802.11b mode

6dB Bandwidth (CH Low)

Agilent 16:25:42 Aug 12, 2009

R T


6dB BW, b Mode Low Ch.

Δ Mkr1 12.08 MHz

Ref 20 dBm

Atten 10 dB

0.31 dB

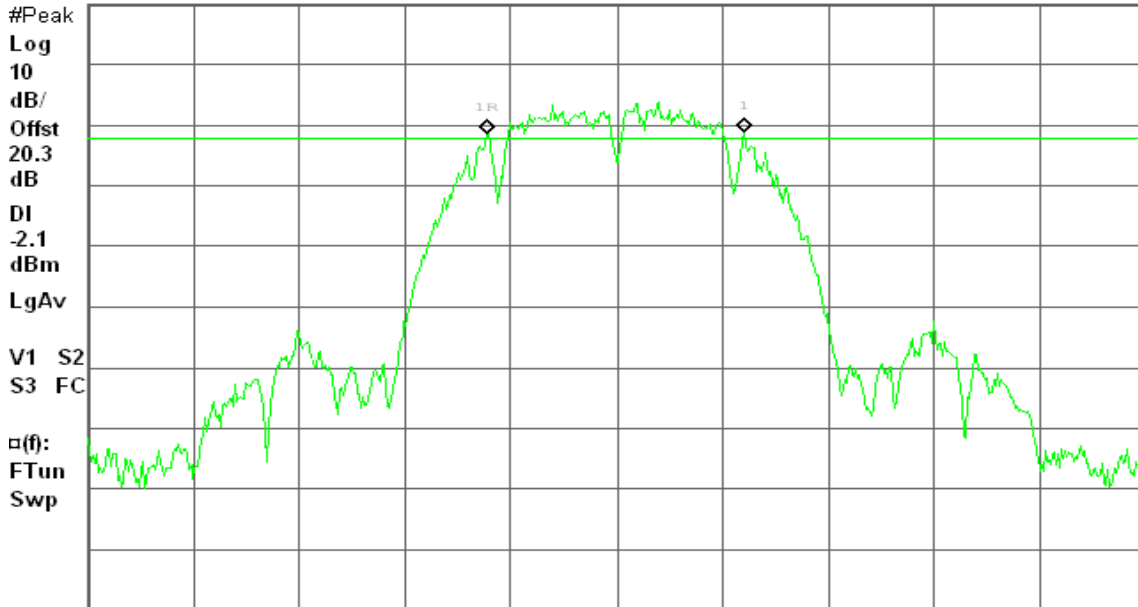

Center 2.412 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH Mid)

Agilent 16:31:19 Aug 12, 2009

R T


6dB BW, b Mode Mid Ch.

Δ Mkr1 11.08 MHz

Ref 20 dBm

Atten 10 dB

-0.12 dB

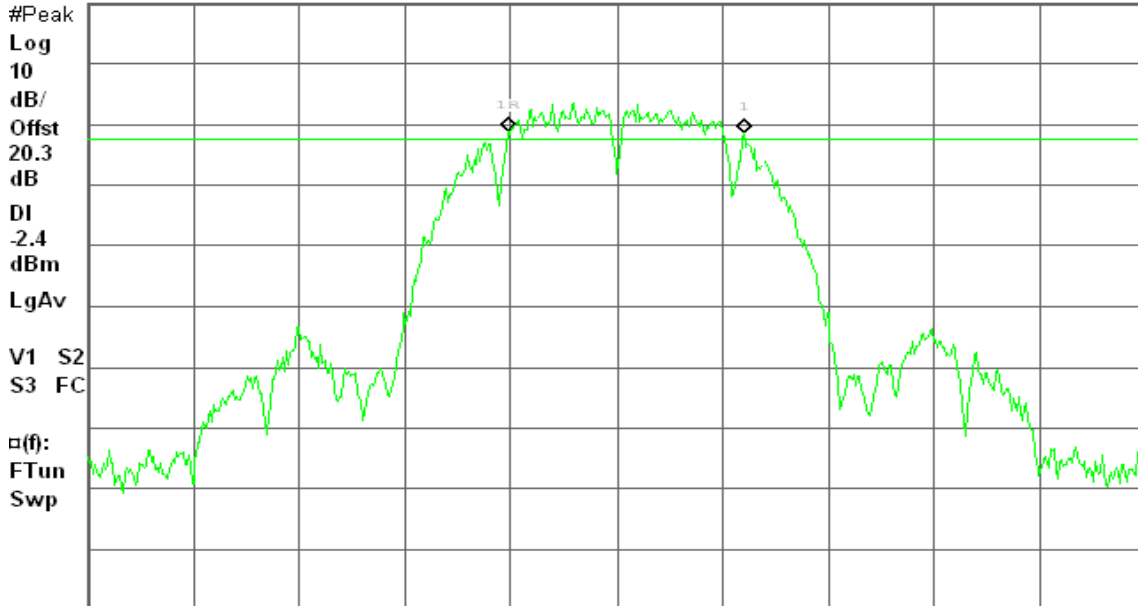

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



6dB Bandwidth (CH High)

Agilent 16:37:16 Aug 12, 2009

R T


6dB BW, b Mode High Ch.

Δ Mkr1 11.08 MHz

Ref 20 dBm

Atten 10 dB

0.21 dB

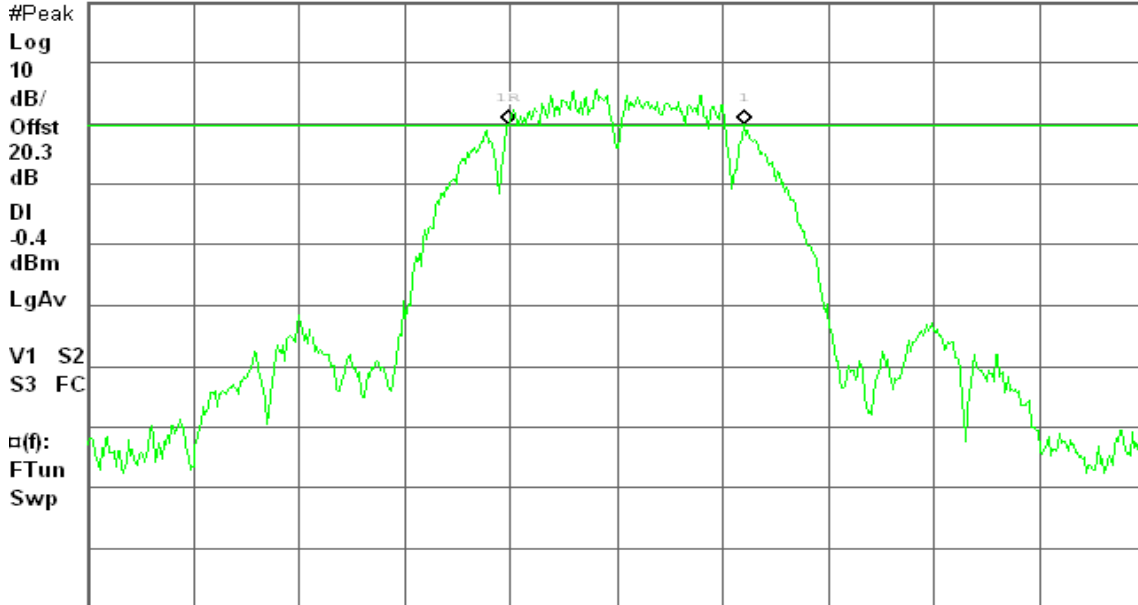

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

IEEE 802.11g mode

6dB Bandwidth (CH Low)

Agilent 16:45:03 Aug 12, 2009

R T


6dB BW, g Mode Low Ch.

Δ Mkr1 16.50 MHz

Ref 20 dBm

Atten 10 dB

1.07 dB

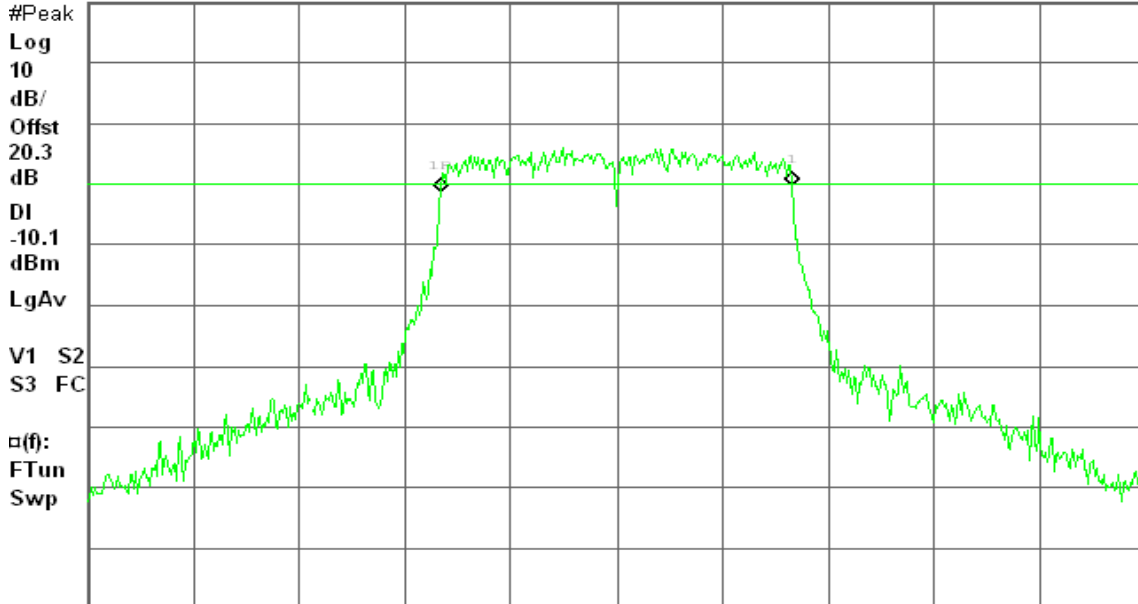

Center 2.412 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



6dB Bandwidth (CH Mid)

Agilent 16:53:25 Aug 12, 2009

R T


6dB BW, g Mode Mid Ch.

Δ Mkr1 16.50 MHz

Ref 20 dBm

Atten 10 dB

0.22 dB

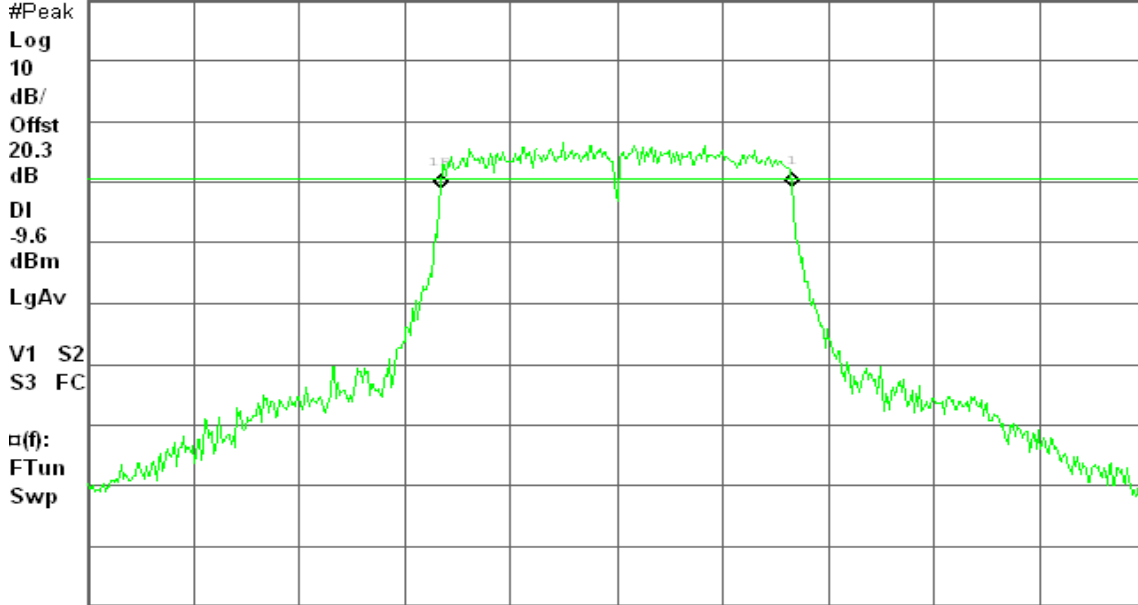

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH High)

Agilent 16:57:49 Aug 12, 2009

R T


6dB BW, g Mode High Ch.

Δ Mkr1 16.50 MHz

Ref 20 dBm

Atten 10 dB

0.68 dB

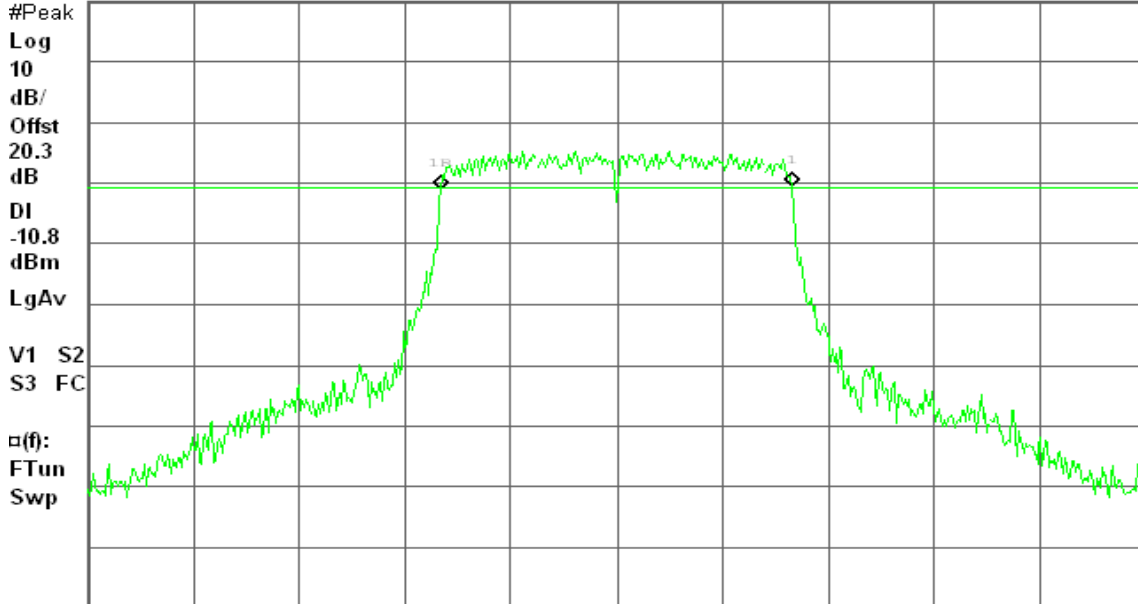

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



draft 802.11n Standard-20 MHz Channel mode

6dB Bandwidth (CH Low)

Agilent 17:15:35 Aug 12, 2009

R T


6dB BW, g Mode Low Ch.

Δ Mkr1 17.17 MHz

Ref 20 dBm

Atten 10 dB

-1.11 dB

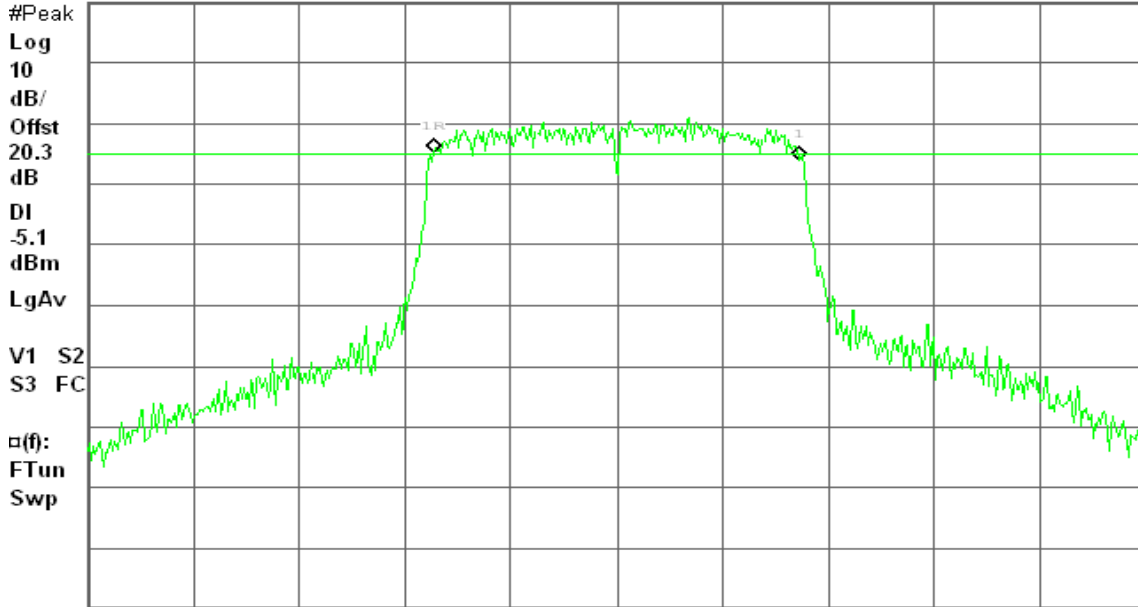

Center 2.412 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH Mid)

Agilent 17:19:32 Aug 12, 2009

R T


6dB BW, g Mode Mid Ch.

Δ Mkr1 17.33 MHz

Ref 20 dBm

Atten 10 dB

-1.09 dB

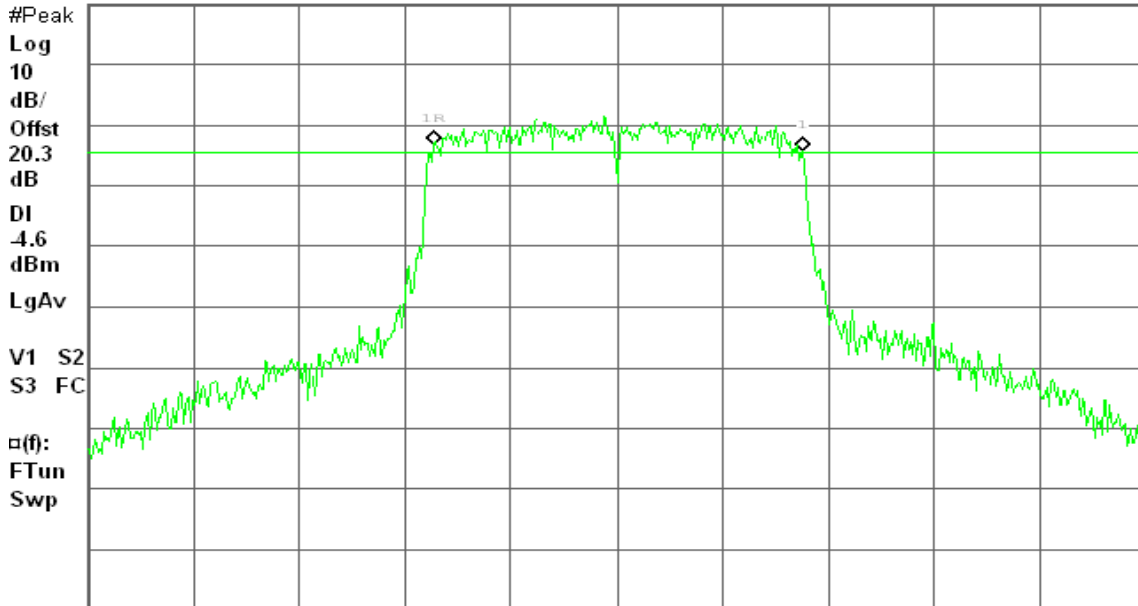

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



6dB Bandwidth (CH High)

Agilent 17:25:22 Aug 12, 2009

R T


6dB BW, g Mode High Ch.

Δ Mkr1 17.58 MHz

Ref 20 dBm

Atten 10 dB

0.86 dB

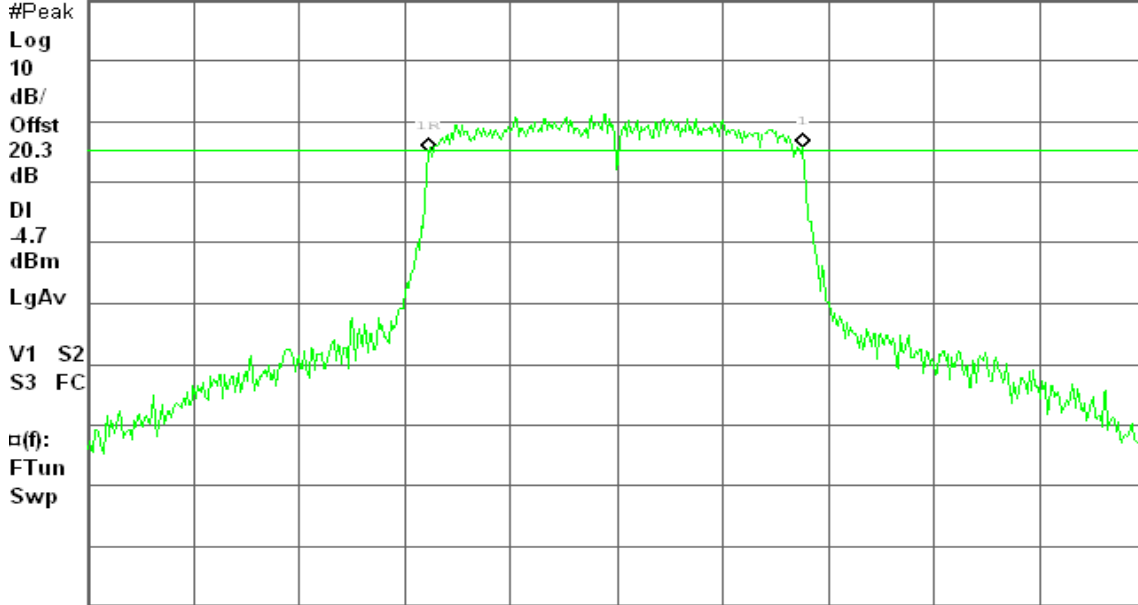

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

draft 802.11n Wide-40 MHz Channel mode

6dB Bandwidth (CH Low)

Agilent 17:29:46 Aug 12, 2009

R T


6dB BW, g Mode Low Ch.

Δ Mkr1 35.33 MHz

Ref 20 dBm

Atten 10 dB

-0.83 dB

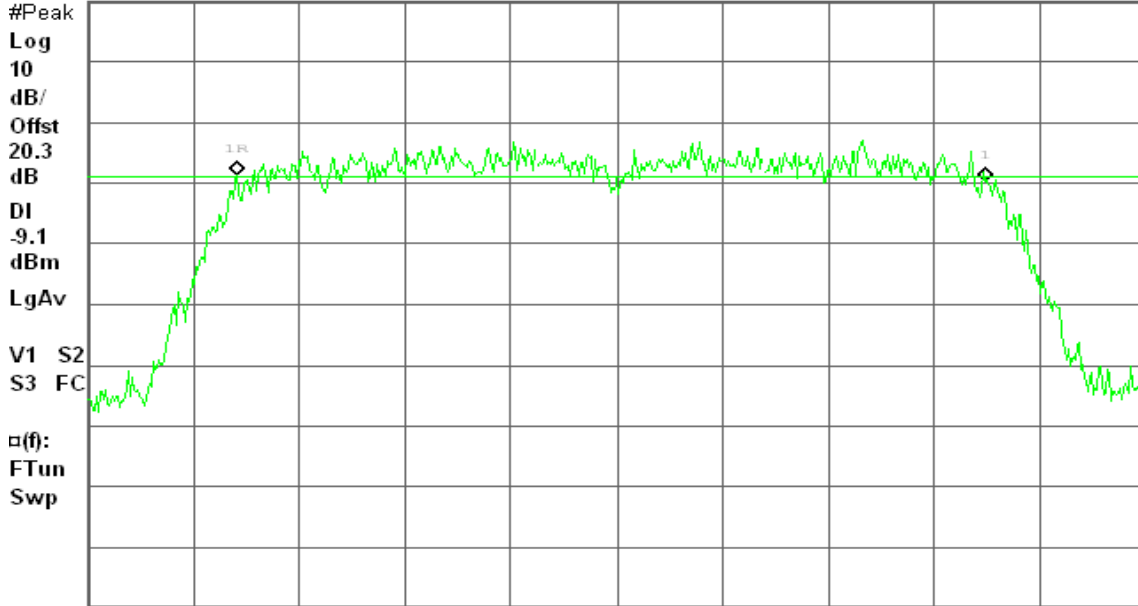

Center 2.422 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



6dB Bandwidth (CH Mid)

Agilent 17:34:02 Aug 12, 2009

R T


6dB BW, g Mode Mid Ch.

Δ Mkr1 34.50 MHz

Ref 20 dBm

Atten 10 dB

-1.12 dB

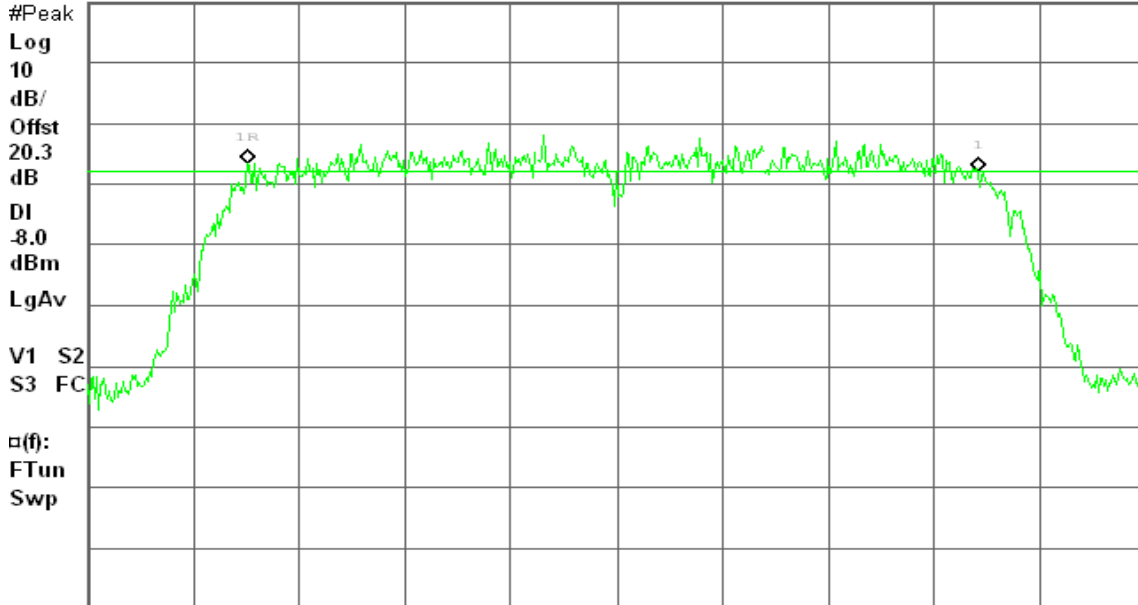

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH High)

Agilent 17:38:06 Aug 12, 2009

R T


6dB BW, g Mode High Ch.

Δ Mkr1 35.50 MHz

Ref 20 dBm

Atten 10 dB

-0.31 dB

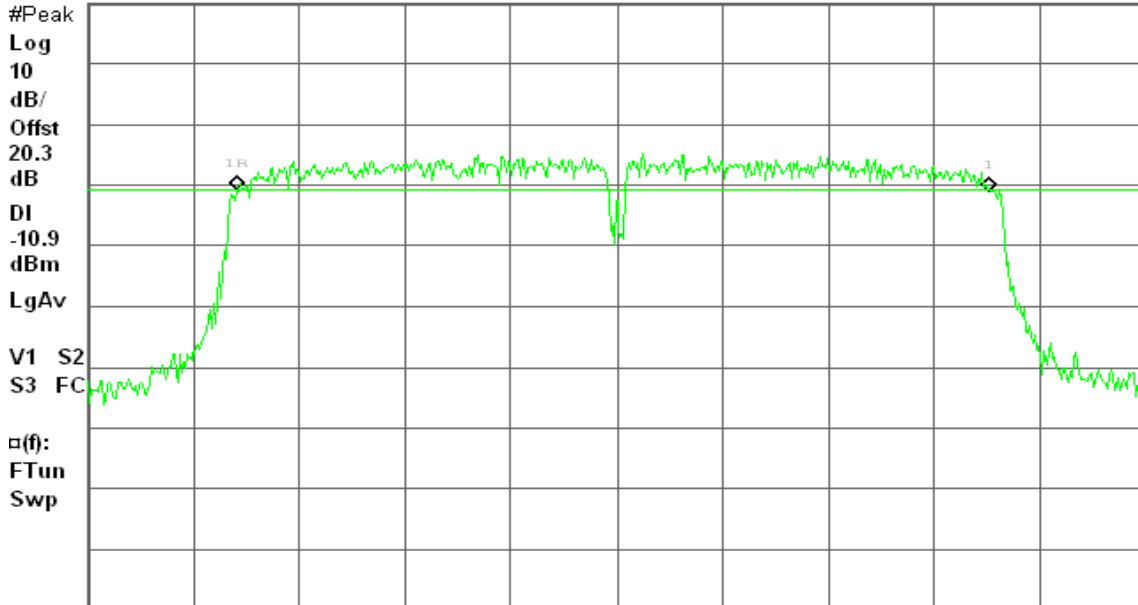

Center 2.452 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)


7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration

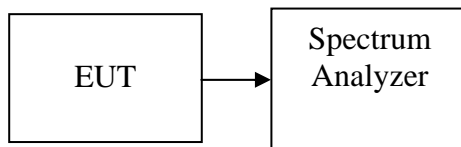

TEST PROCEDURE

1. Peak power is measured using the spectrum analyzer's internal channel power integration function.
2. Power is integrated over a bandwidth greater than or equal to the 99% bandwidth.

TEST RESULTS

No non-compliance noted.

**Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	16.68	0.0466	1.00	PASS
Mid	2437	17.93	0.0621		PASS
High	2462	19.83	0.0962		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	17.28	0.0535	1.00	PASS
Mid	2437	17.45	0.0556		PASS
High	2462	17.27	0.0533		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	17.85	0.0609	1.00	PASS
Mid	2437	18.70	0.0741		PASS
High	2462	18.23	0.0665		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2422	14.87	0.0307	1.00	PASS
Mid	2437	15.47	0.0352		PASS
High	2452	15.21	0.0332		PASS




Test Plot

IEEE 802.11b mode

Peak Power (CH Low)

Agilent 17:08:55 Aug 12, 2009


R T

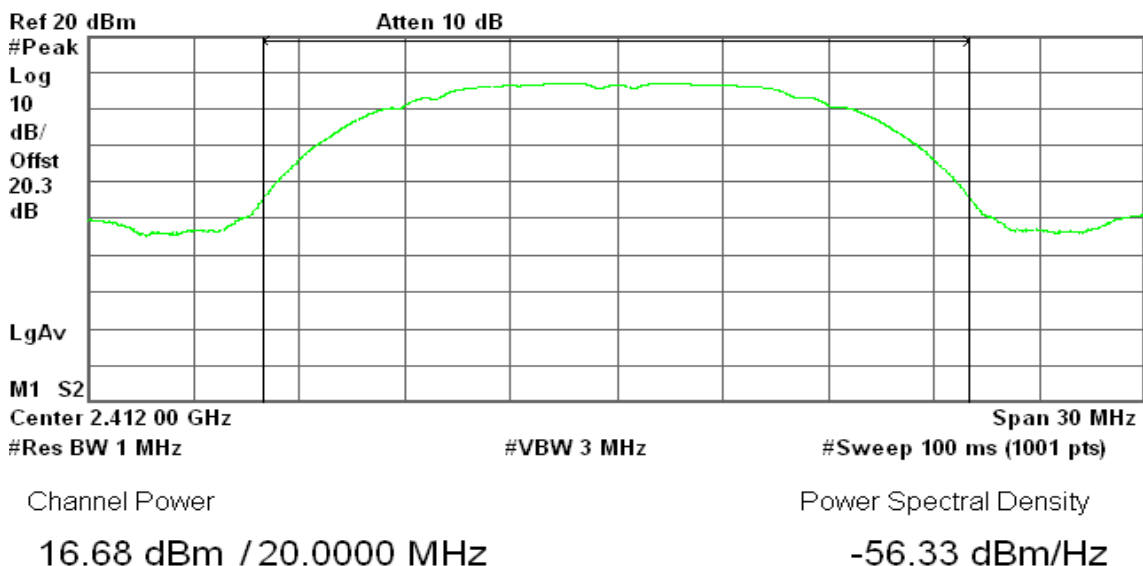

Peak Power (CH Mid)

Agilent 17:10:15 Aug 12, 2009

R T

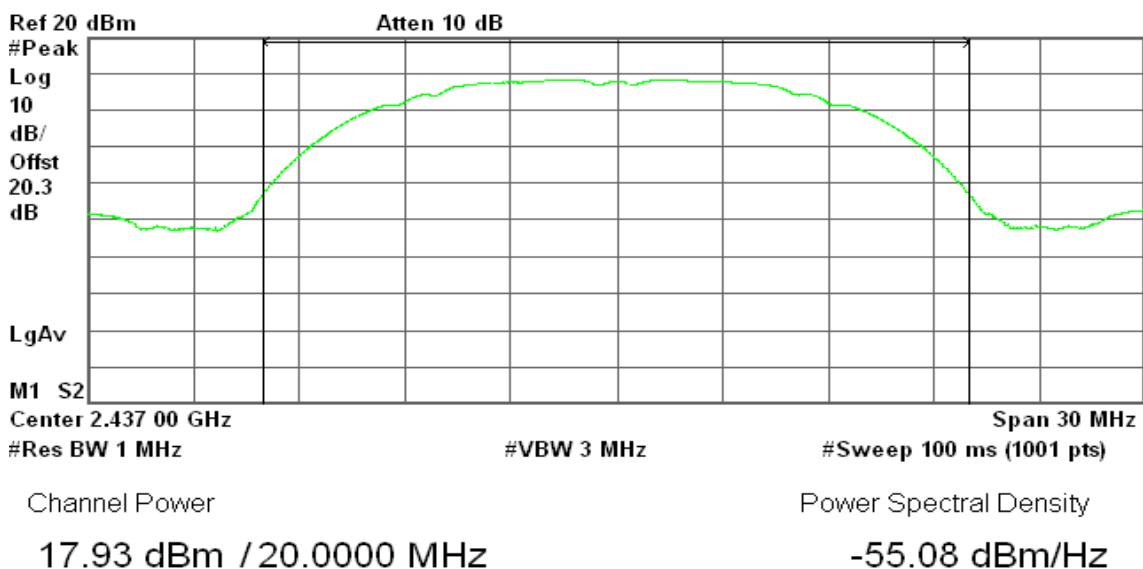




Peak Power (CH High)

Agilent 17:11:40 Aug 12, 2009

R T

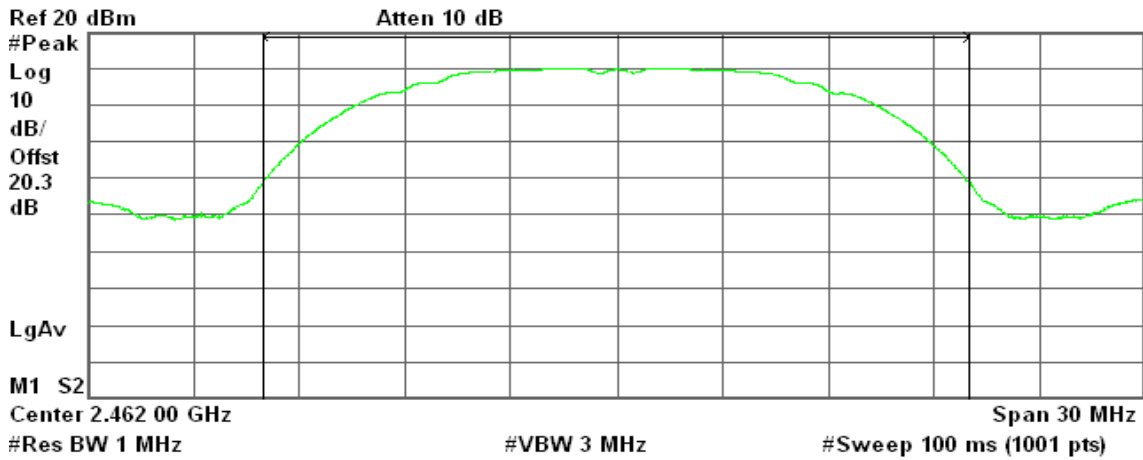

Channel Power

19.83 dBm / 20.0000 MHz

Power Spectral Density


-53.18 dBm/Hz

IEEE 802.11g mode

Peak Power (CH Low)

Agilent 17:06:24 Aug 12, 2009

R T

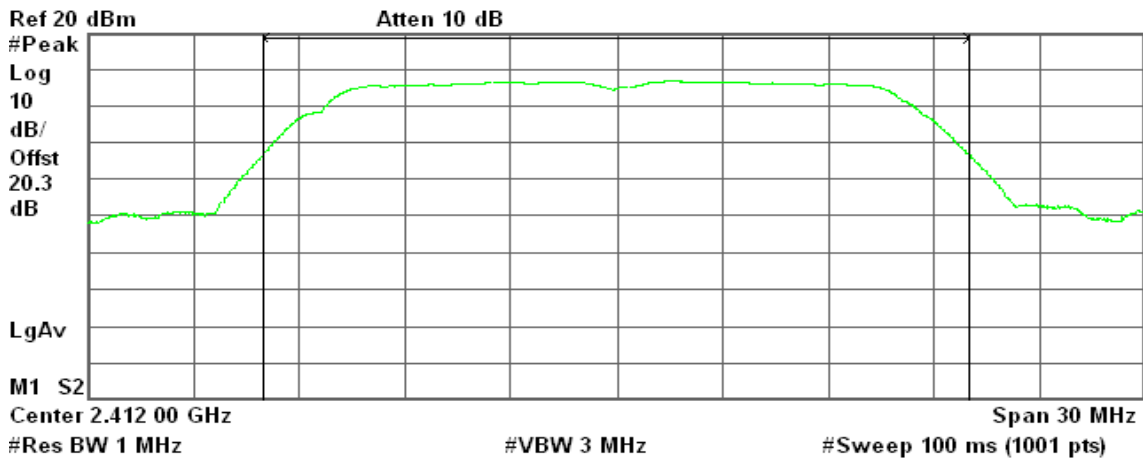

Channel Power

17.28 dBm / 20.0000 MHz

Power Spectral Density


-55.73 dBm/Hz



Peak Power (CH Mid)

Agilent 17:05:15 Aug 12, 2009

R T

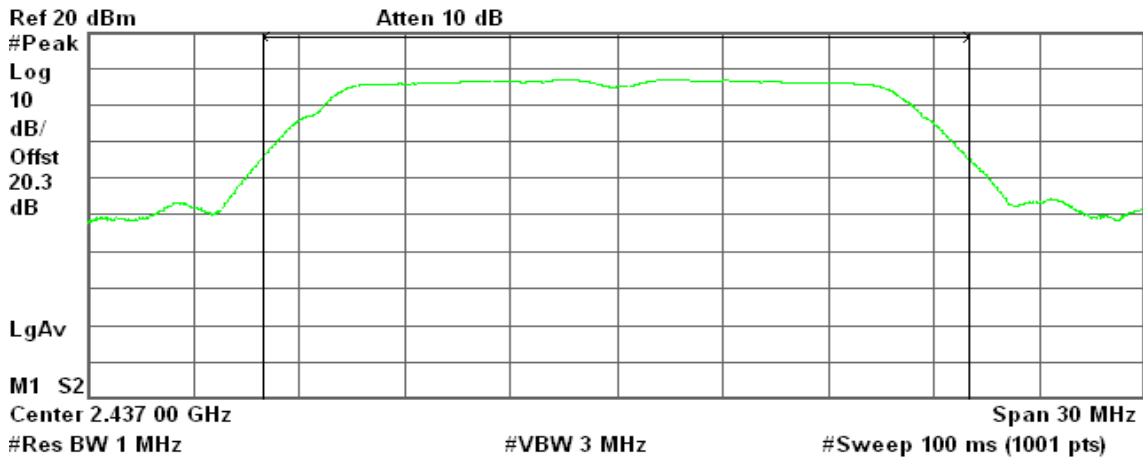

Channel Power

17.45 dBm / 20.0000 MHz


Power Spectral Density

-55.56 dBm/Hz

Peak Power (CH High)

Agilent 17:07:27 Aug 12, 2009

R T

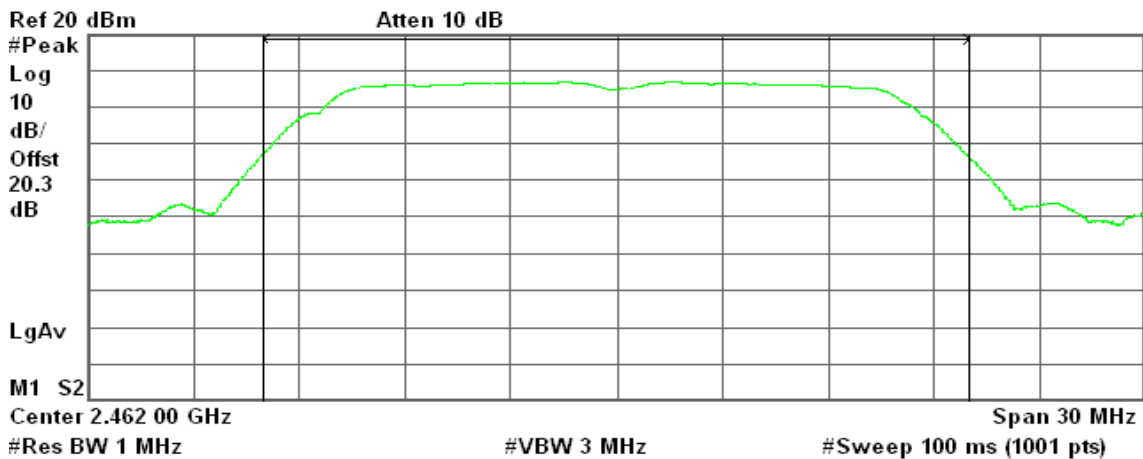

Channel Power

17.27 dBm / 20.0000 MHz

Power Spectral Density

-55.74 dBm/Hz




draft 802.11n Standard-20 MHz Channel mode

Peak Power (CH Low)

Agilent 17:46:56 Aug 12, 2009

R T

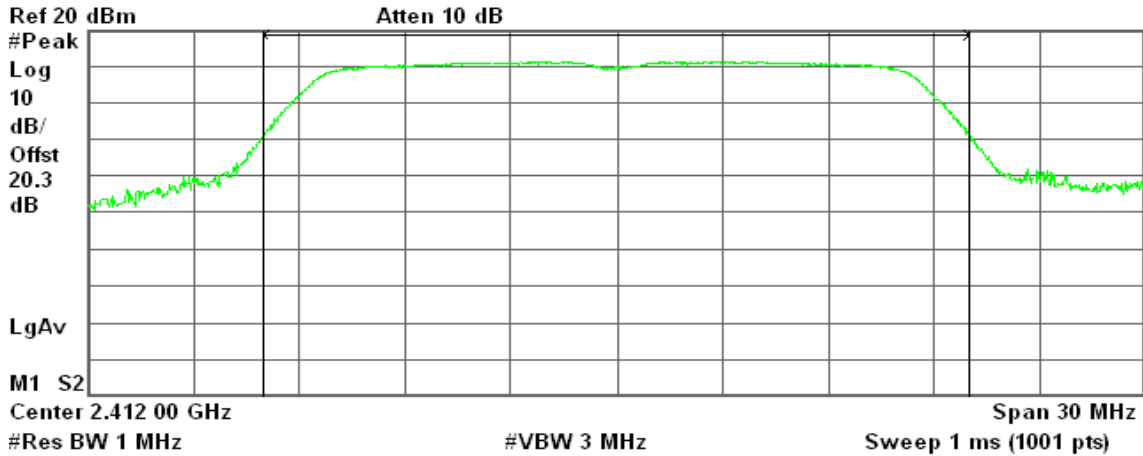

Channel Power

17.85 dBm / 20.0000 MHz

Power Spectral Density

-55.16 dBm/Hz

Peak Power (CH Mid)

Agilent 17:47:35 Aug 12, 2009

R T



Channel Power

18.70 dBm / 20.0000 MHz

Power Spectral Density


-54.31 dBm/Hz



Peak Power (CH High)

Agilent 17:48:33 Aug 12, 2009

R T

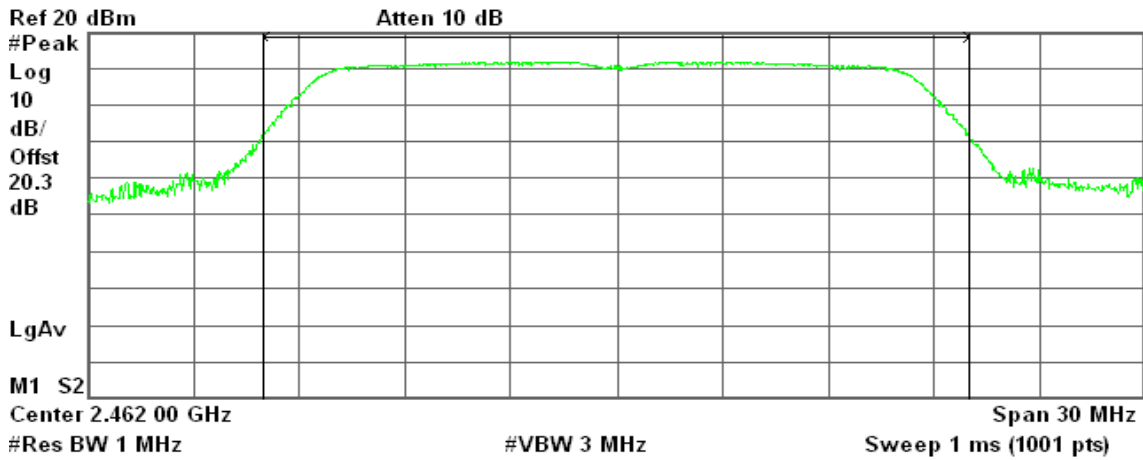

Channel Power

18.23 dBm / 20.0000 MHz

Power Spectral Density


-54.78 dBm/Hz

draft 802.11n Wide-40 MHz Channel mode

Peak Power (CH Low)

Agilent 17:45:04 Aug 12, 2009

R T

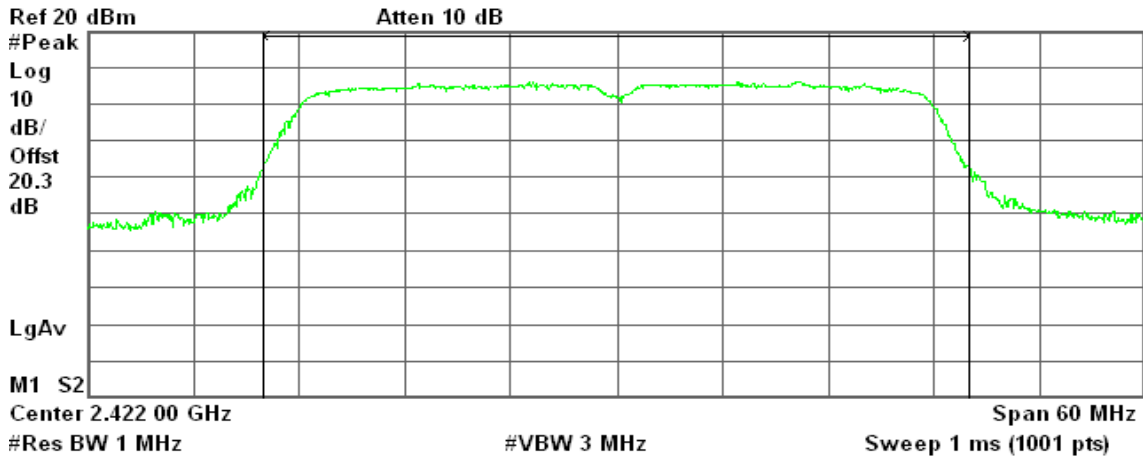

Channel Power

14.87 dBm / 40.0000 MHz

Power Spectral Density


-61.15 dBm/Hz



Peak Power (CH Mid)

Agilent 17:44:33 Aug 12, 2009

R T

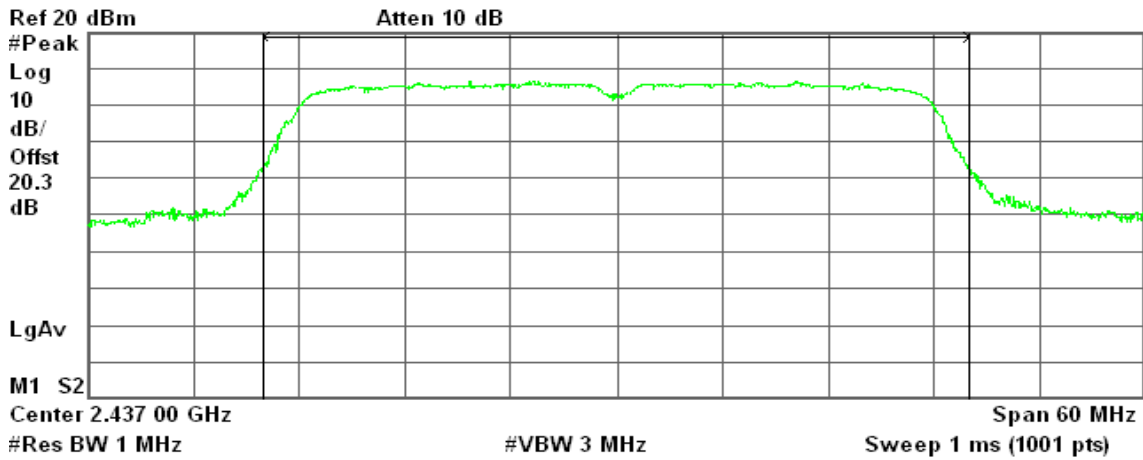

Channel Power

15.47 dBm / 40.0000 MHz


Power Spectral Density

-60.55 dBm/Hz

Peak Power (CH High)

Agilent 17:42:48 Aug 12, 2009

R T

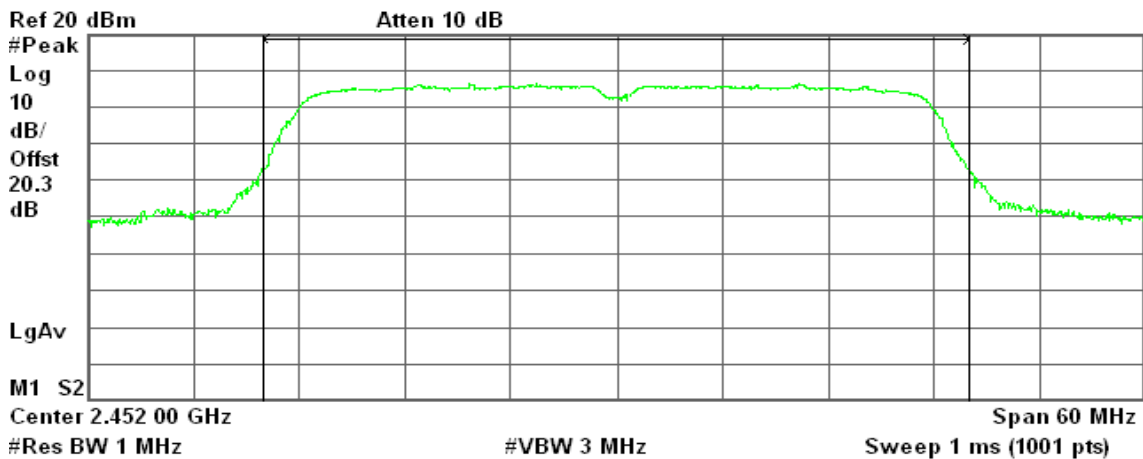

Channel Power

15.21 dBm / 40.0000 MHz

Power Spectral Density

-60.81 dBm/Hz




7.3 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the average power detection.

TEST RESULTS

No non-compliance noted.



Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	13.68	0.0233
Mid	2437	15.19	0.0330
High	2462	17.03	0.0505

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	10.17	0.0104
Mid	2437	10.58	0.0114
High	2462	10.24	0.0106

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	14.83	0.0304
Mid	2437	15.72	0.0373
High	2462	15.66	0.0368

Test mode: draft 802.11n Wide-40 MHz Channel mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2422	11.98	0.0158
Mid	2437	12.40	0.0174
High	2452	12.47	0.0177




Test Plot

IEEE 802.11b mode

Average Power (CH Low)

Agilent 17:09:13 Aug 12, 2009

R T

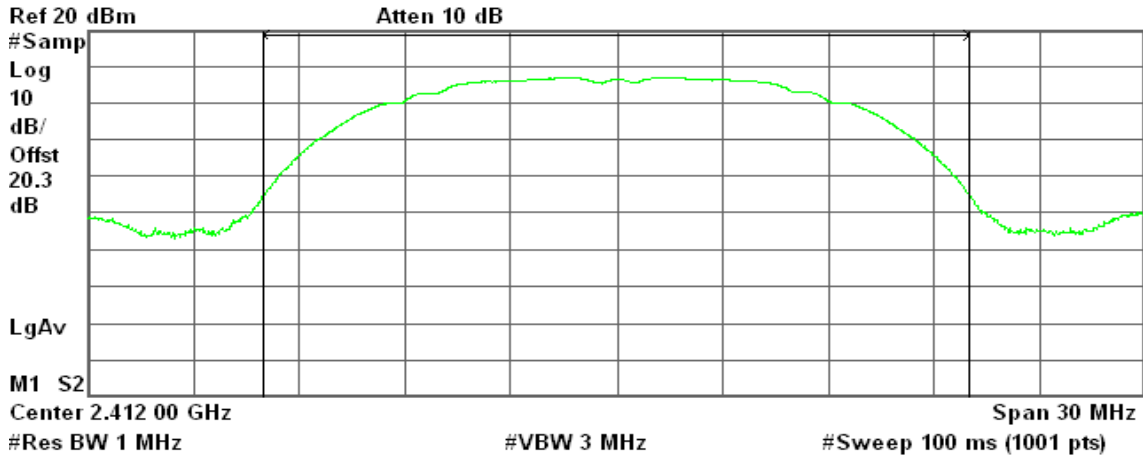

Channel Power

13.68 dBm / 20.0000 MHz


Power Spectral Density

-59.33 dBm/Hz

Average Power (CH Mid)

Agilent 17:10:00 Aug 12, 2009

R T

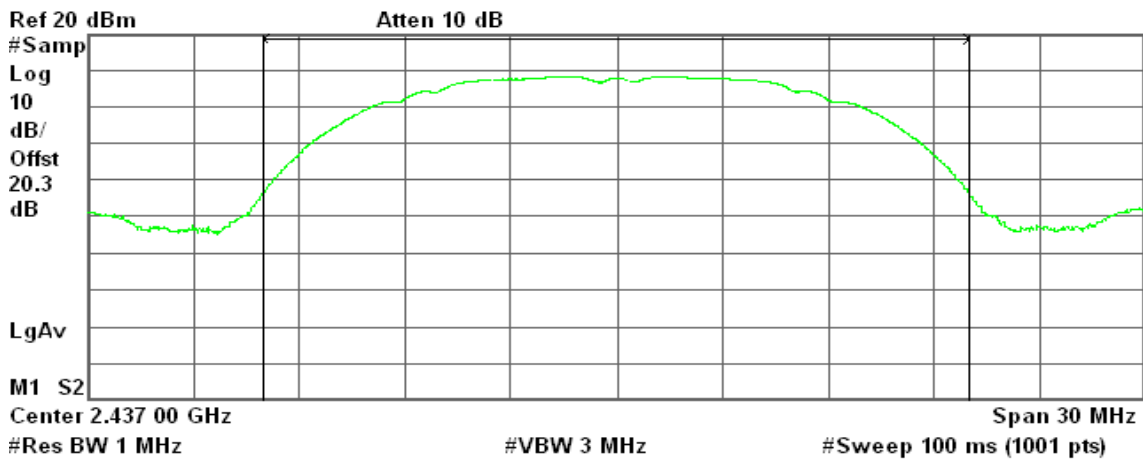

Channel Power

15.19 dBm / 20.0000 MHz

Power Spectral Density


-57.82 dBm/Hz



Average Power (CH High)

Agilent 17:12:14 Aug 12, 2009

R T

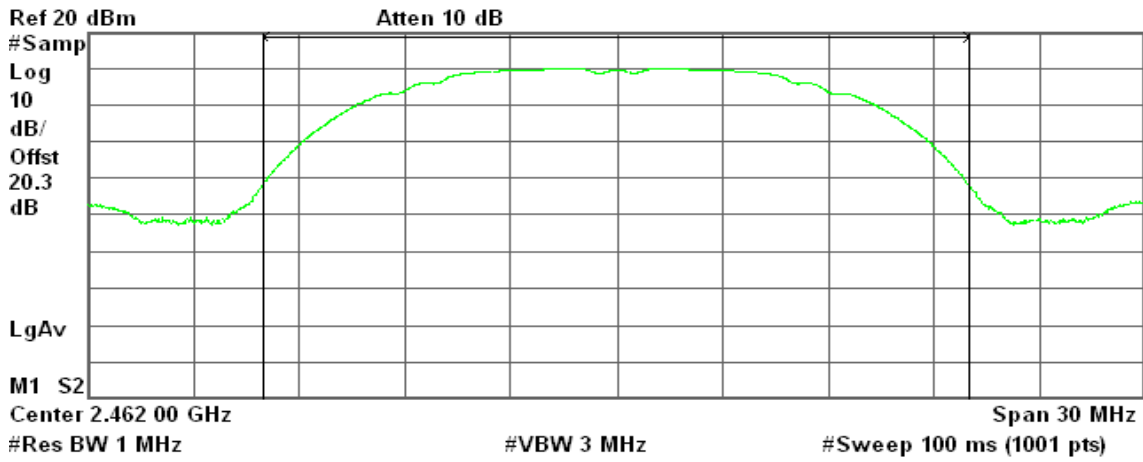

Channel Power

17.03 dBm / 20.0000 MHz

Power Spectral Density


-55.98 dBm/Hz

IEEE 802.11g mode

Average Power (CH Low)

Agilent 17:06:08 Aug 12, 2009

R T

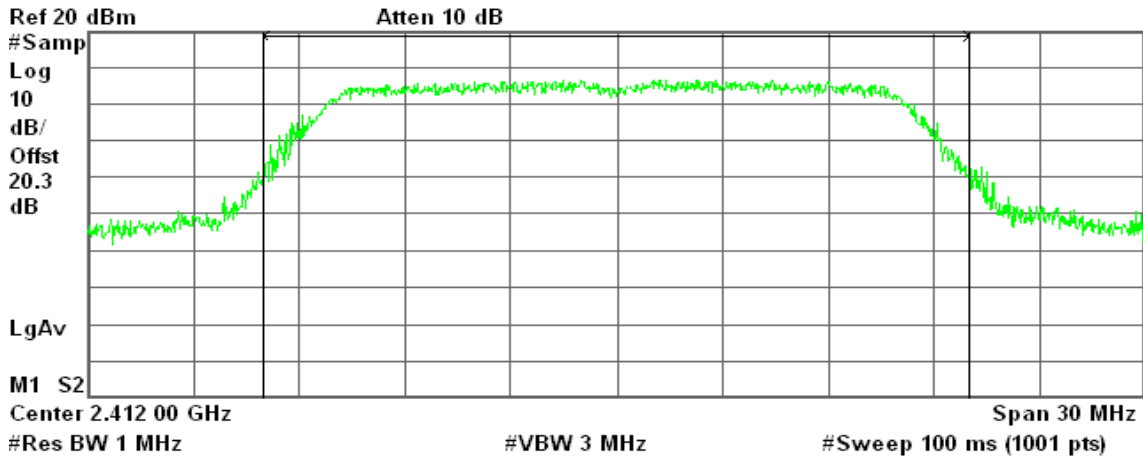

Channel Power

10.17 dBm / 20.0000 MHz

Power Spectral Density


-62.84 dBm/Hz



Average Power (CH Mid)

Agilent 17:05:31 Aug 12, 2009

R T

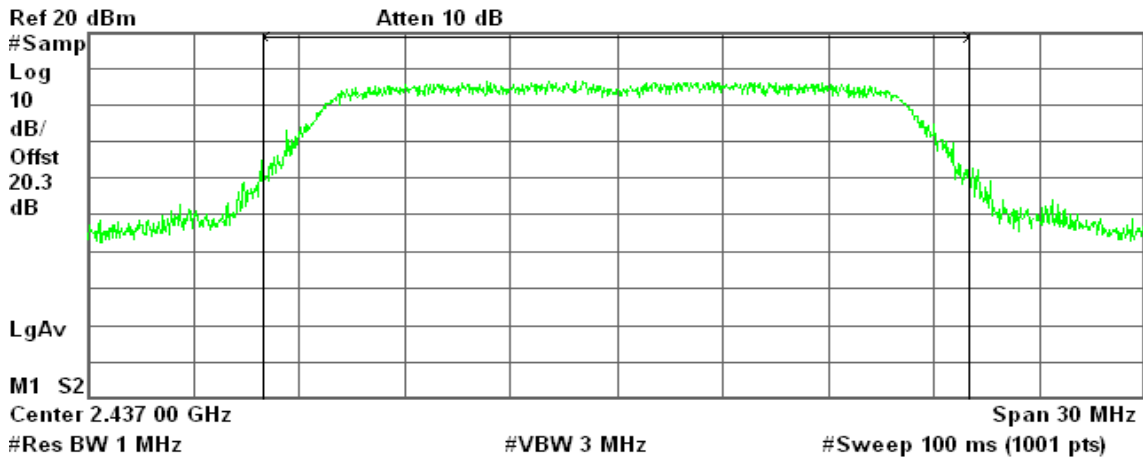

Channel Power

10.58 dBm / 20.0000 MHz


Power Spectral Density

-62.43 dBm/Hz

Average Power (CH High)

Agilent 17:04:09 Aug 12, 2009

R T

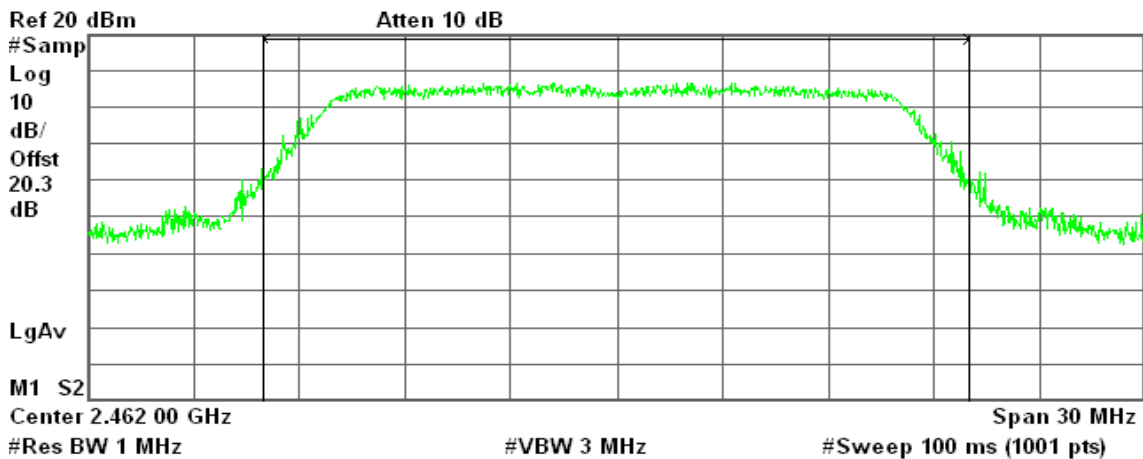

Channel Power

10.24 dBm / 20.0000 MHz

Power Spectral Density

-62.77 dBm/Hz




draft 802.11n Standard-20 MHz Channel mode

Average Power (CH Low)

Agilent 17:46:37 Aug 12, 2009

R T

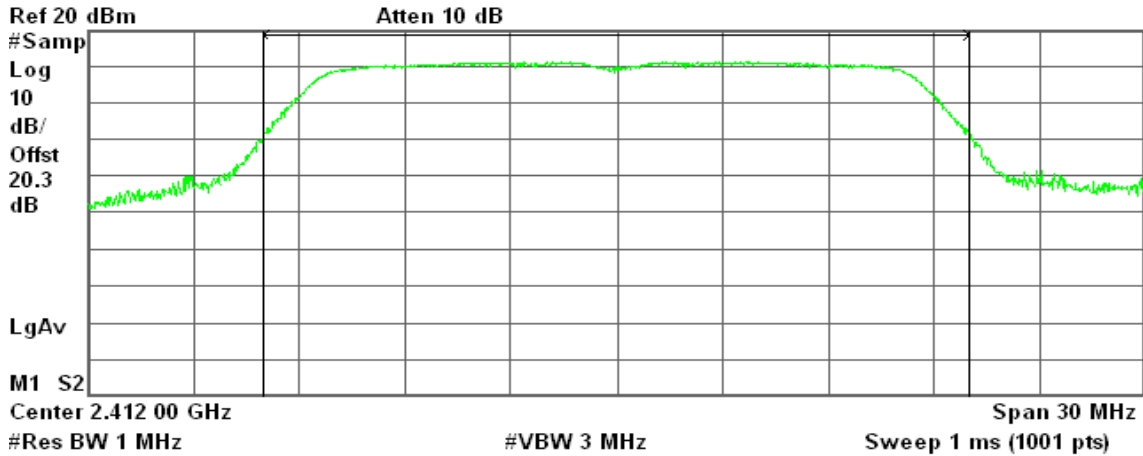

Channel Power

14.83 dBm / 20.0000 MHz


Power Spectral Density

-58.18 dBm/Hz

Average Power (CH Mid)

Agilent 17:47:51 Aug 12, 2009

R T

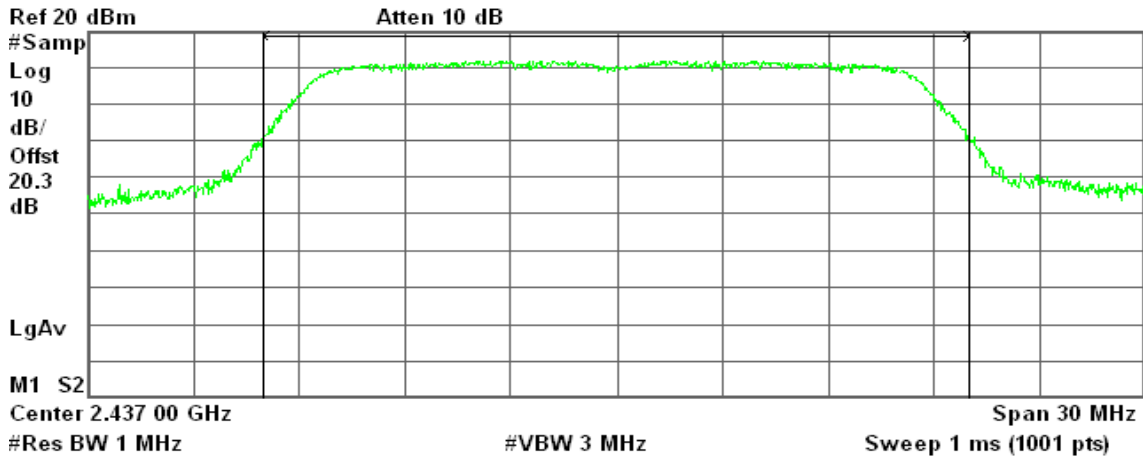

Channel Power

15.72 dBm / 20.0000 MHz

Power Spectral Density


-57.30 dBm/Hz



Average Power (CH High)

Agilent 17:48:19 Aug 12, 2009

R T

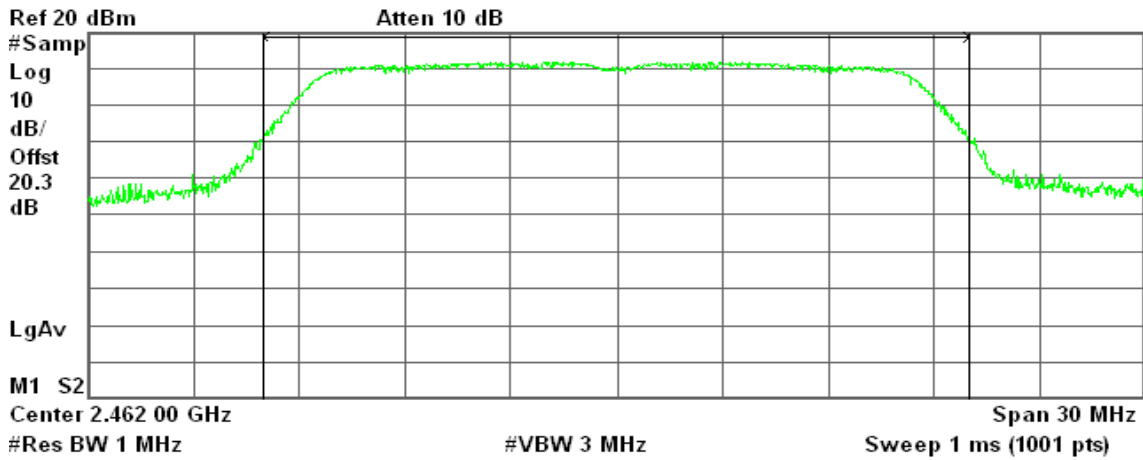

Channel Power

15.66 dBm / 20.0000 MHz

Power Spectral Density


-57.35 dBm/Hz

draft 802.11n Wide-40 MHz Channel mode

Average Power (CH Low)

Agilent 17:45:19 Aug 12, 2009

R T

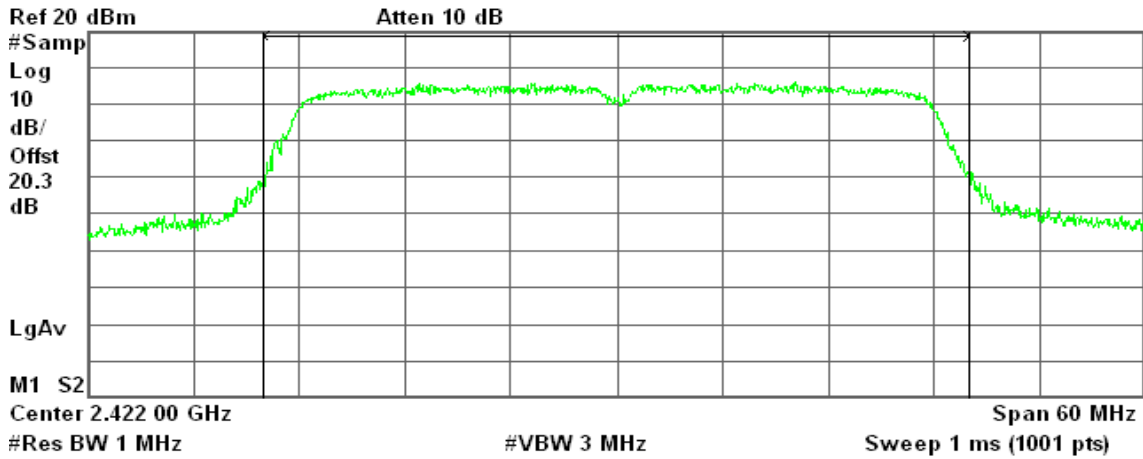

Channel Power

11.98 dBm / 40.0000 MHz

Power Spectral Density


-64.04 dBm/Hz



Average Power (CH Mid)

Agilent 17:44:14 Aug 12, 2009

R T

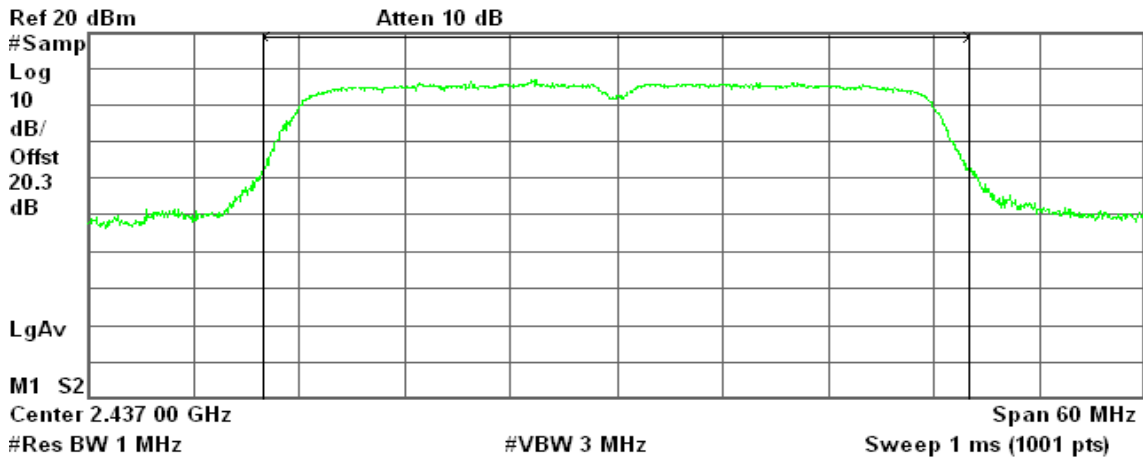

Channel Power

12.40 dBm / 40.0000 MHz


Power Spectral Density

-63.62 dBm/Hz

Average Power (CH High)

Agilent 17:43:05 Aug 12, 2009

R T

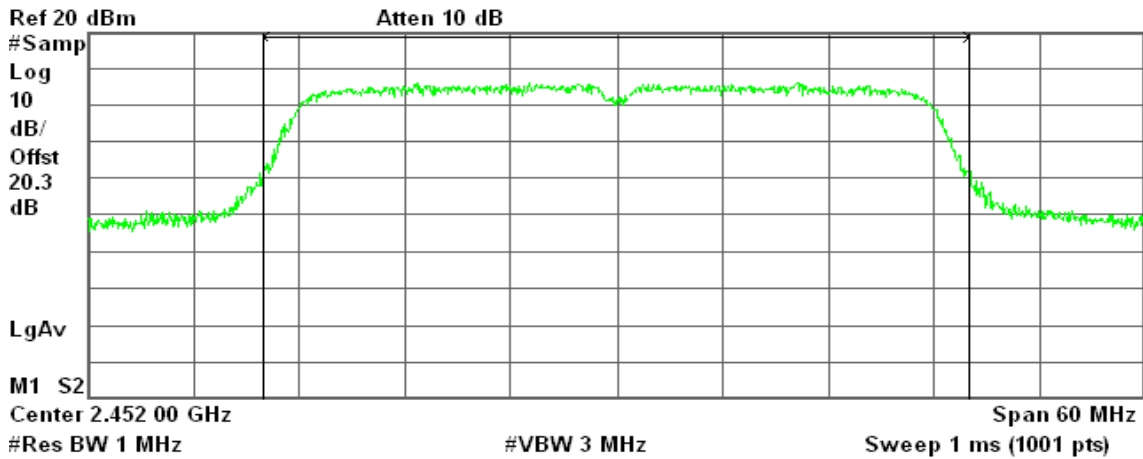

Channel Power

12.47 dBm / 40.0000 MHz

Power Spectral Density


-63.55 dBm/Hz

7.4 BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

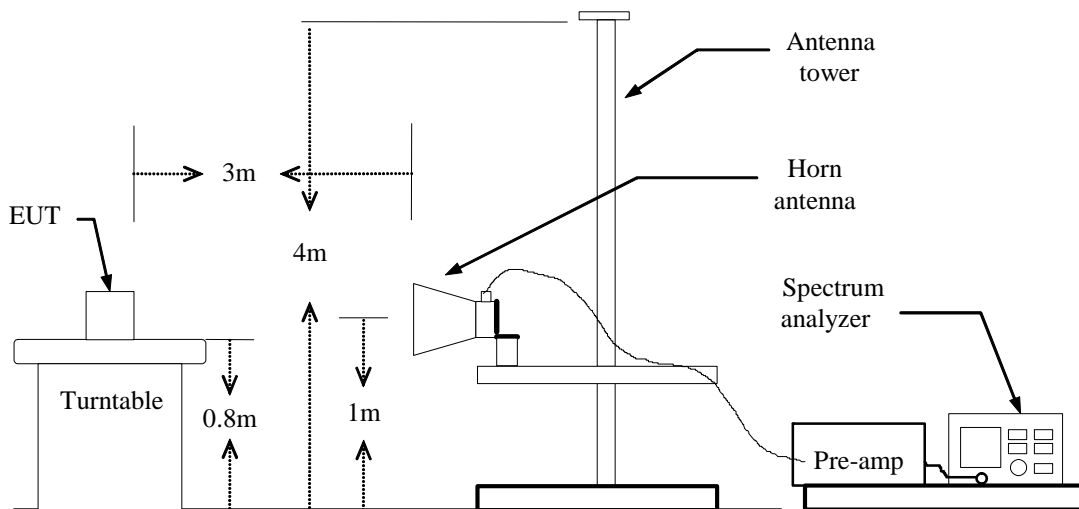

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.



For PCB Antenna


Band Edges (IEEE 802.11b mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent

R T

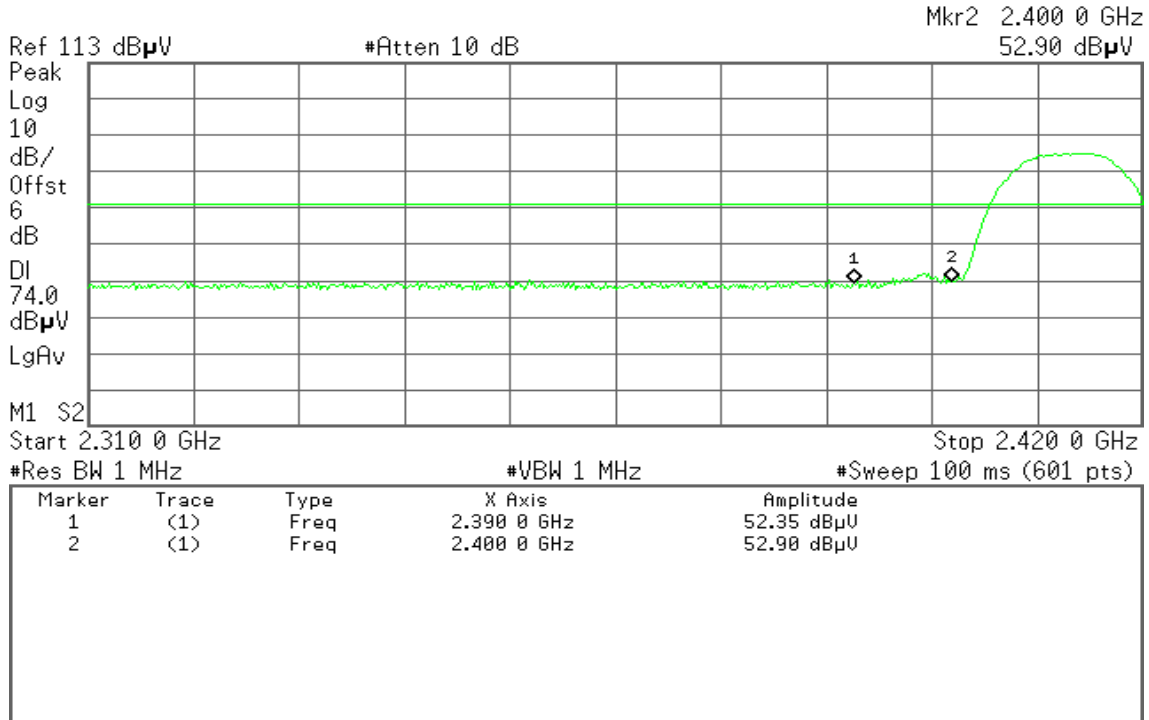


Detector mode: Average

Polarity: Vertical

Agilent

R T

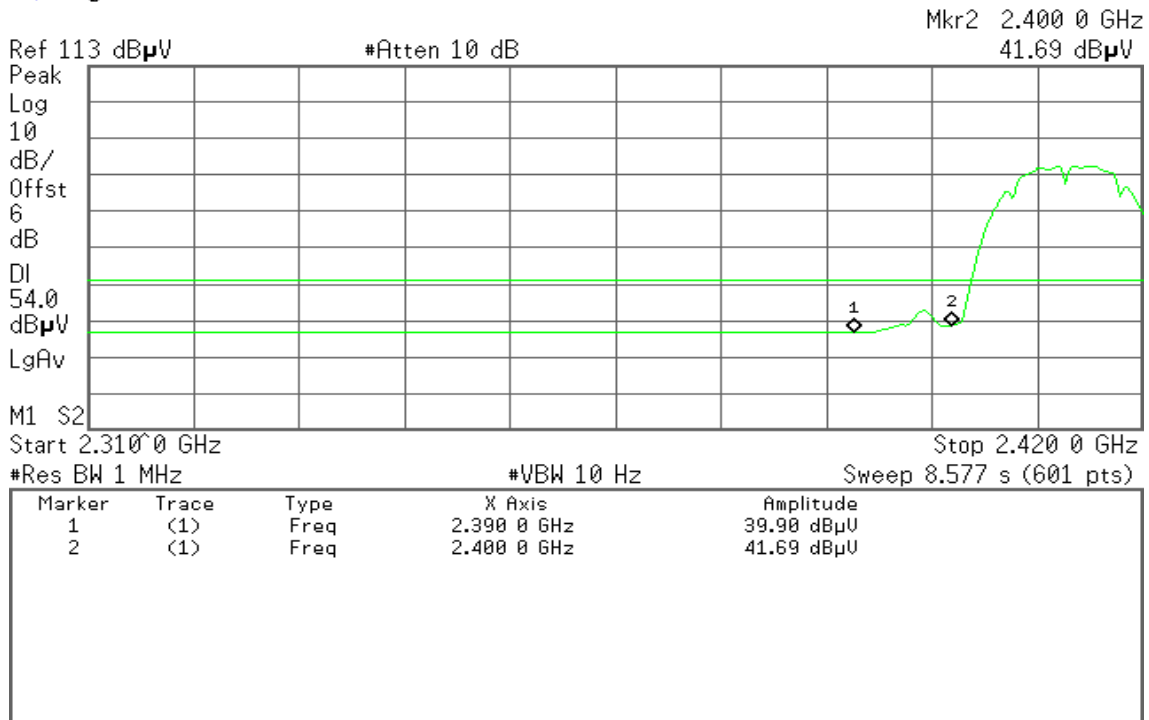




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

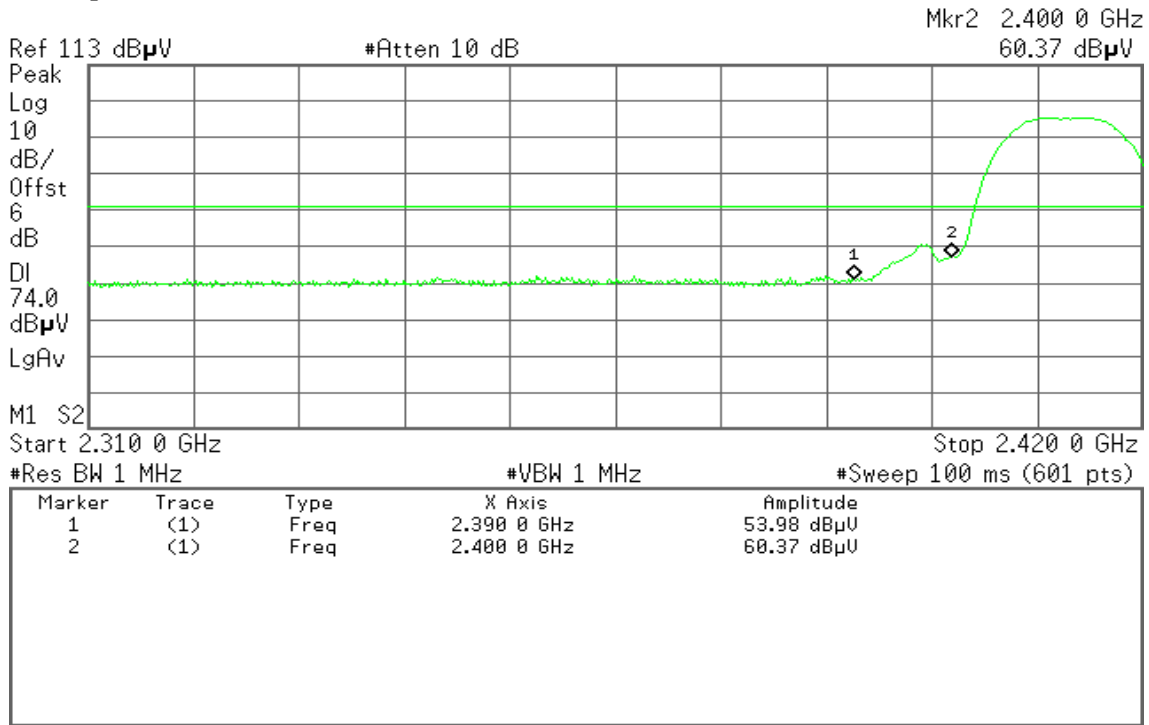


Detector mode: Average

Polarity: Horizontal

Agilent

R T

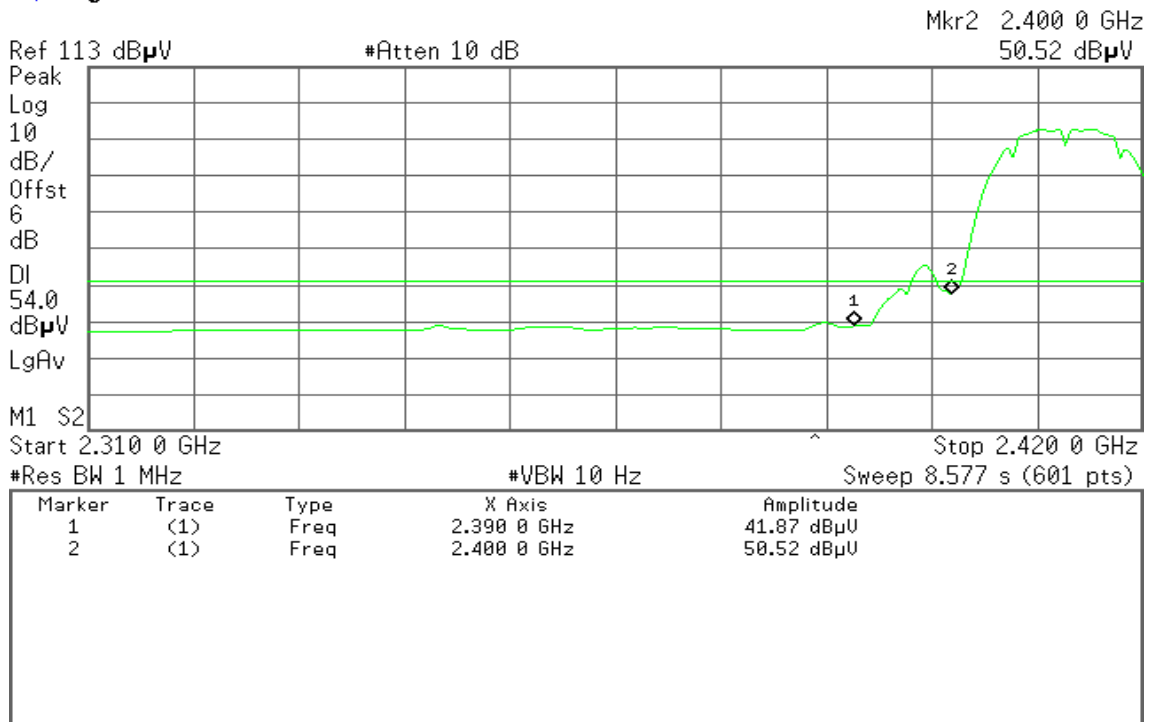



Band Edges (IEEE 802.11b mode / CH High)

Detector mode: Peak

Polarity: Vertical


Agilent

R T

Mkr1 2.483 50 GHz
51.39 dBμV

Ref 113 dBμV

#Atten 10 dB

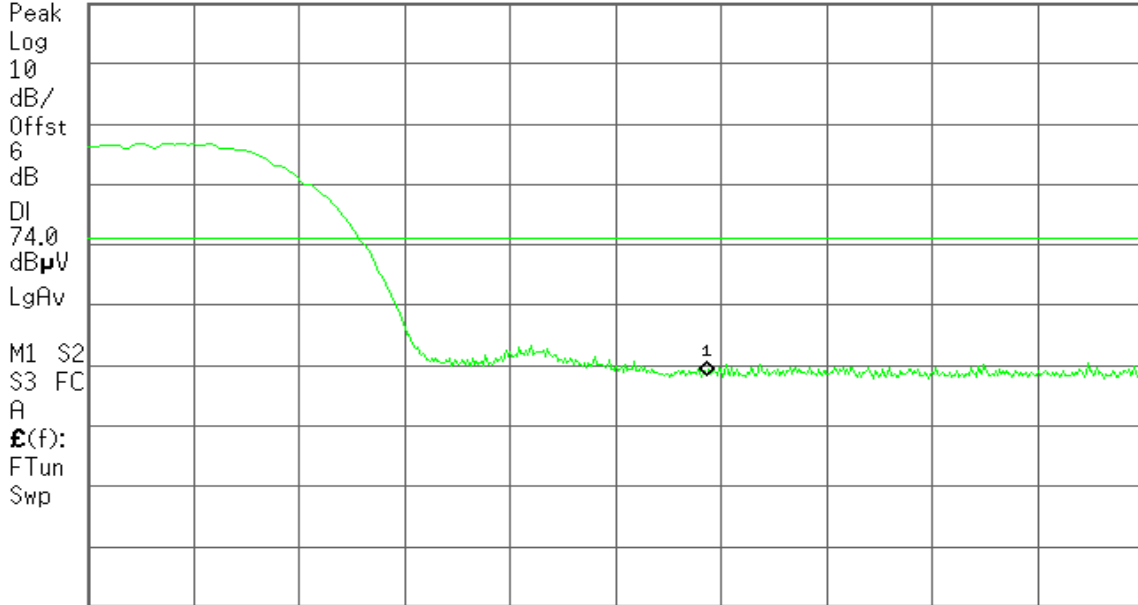

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Vertical


Agilent

R T

Mkr1 2.483 50 GHz
40.03 dBμV

Ref 113 dBμV

#Atten 10 dB

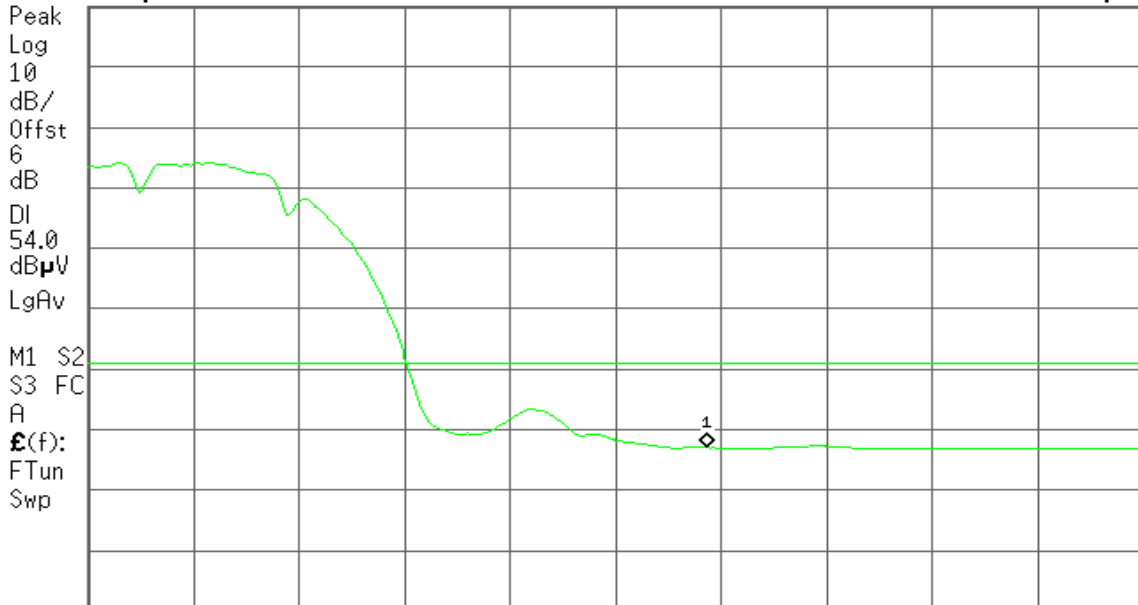

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)



Detector mode: Peak

Polarity: Horizontal


Agilent

R T

Mkr1 2.483 50 GHz
54.10 dBµV

Ref 113 dBµV

#Atten 10 dB

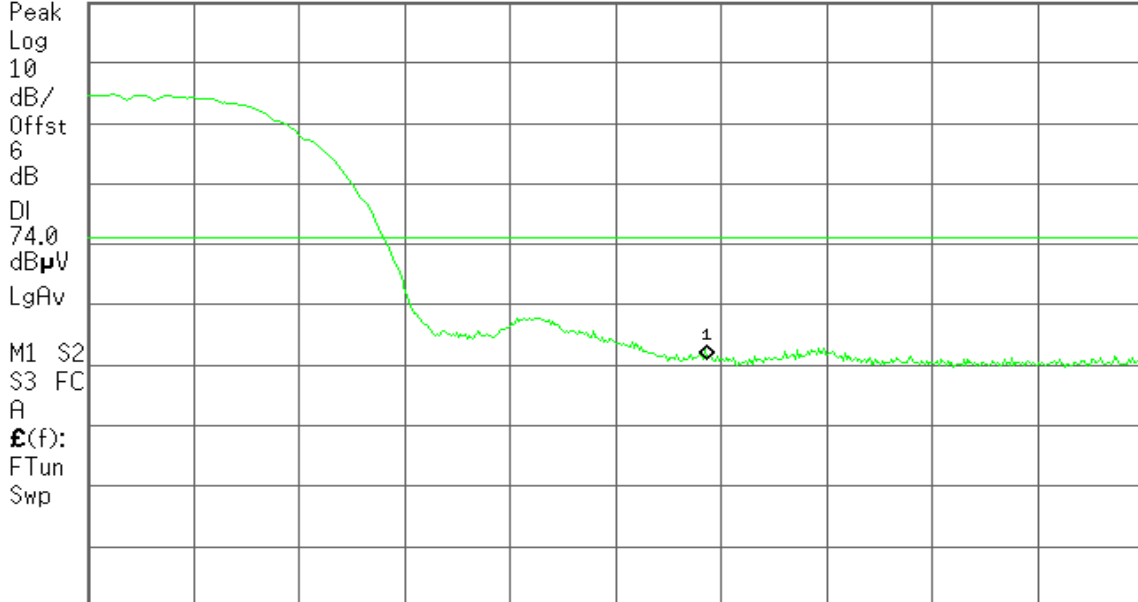

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal


Agilent

R T

Mkr1 2.483 50 GHz
41.90 dBµV

Ref 113 dBµV

#Atten 10 dB

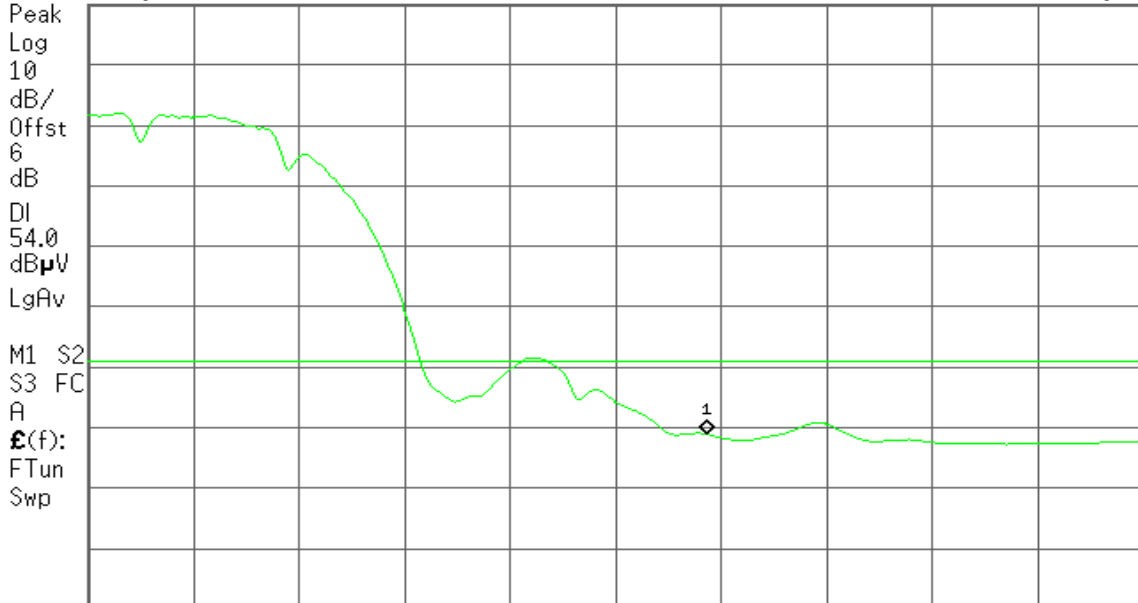

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)




Band Edges (IEEE 802.11g mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent

R T

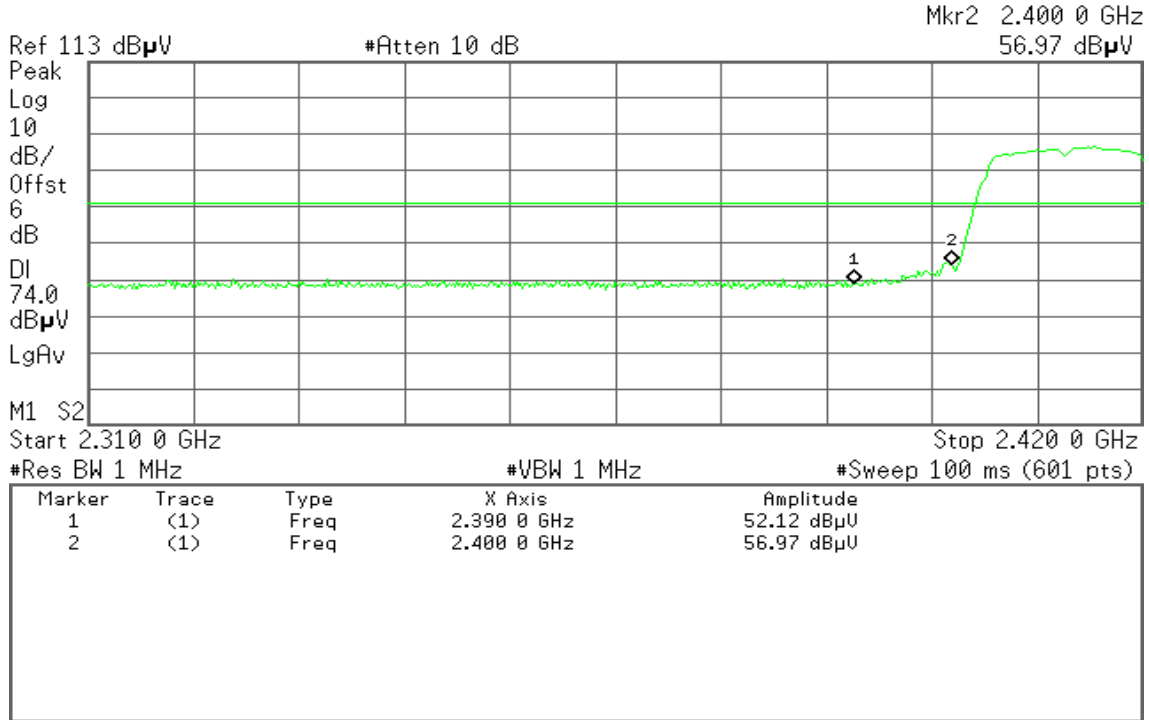


Detector mode: Average

Polarity: Vertical

Agilent

R T

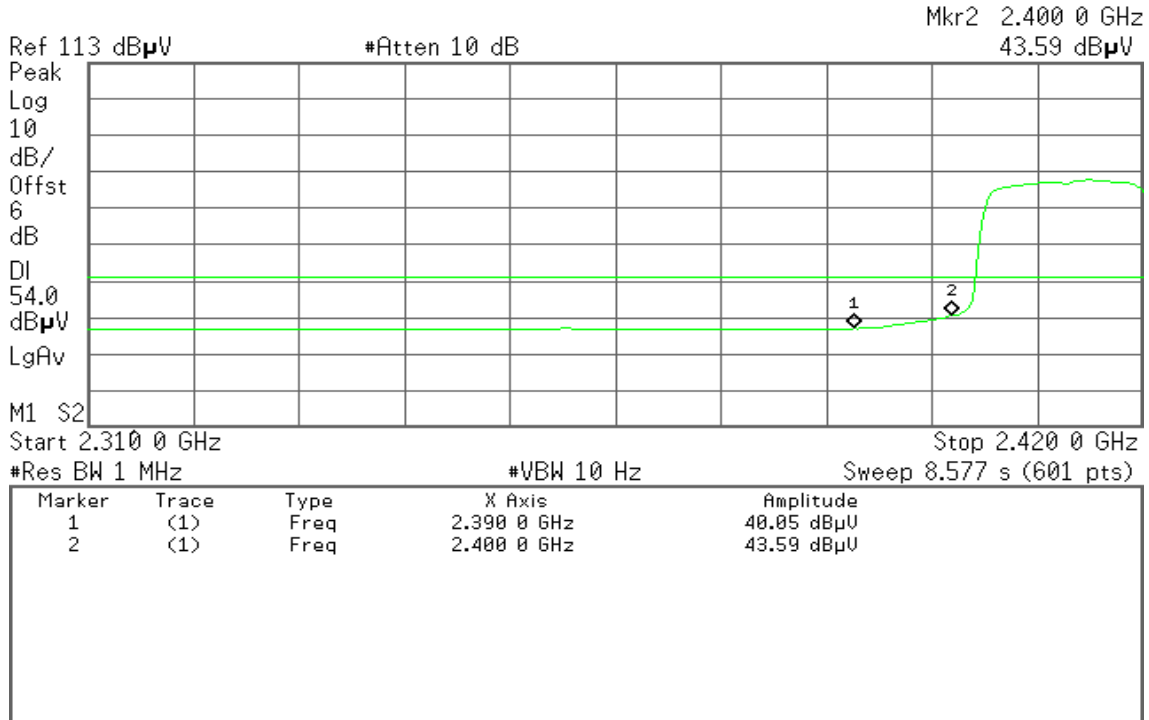




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

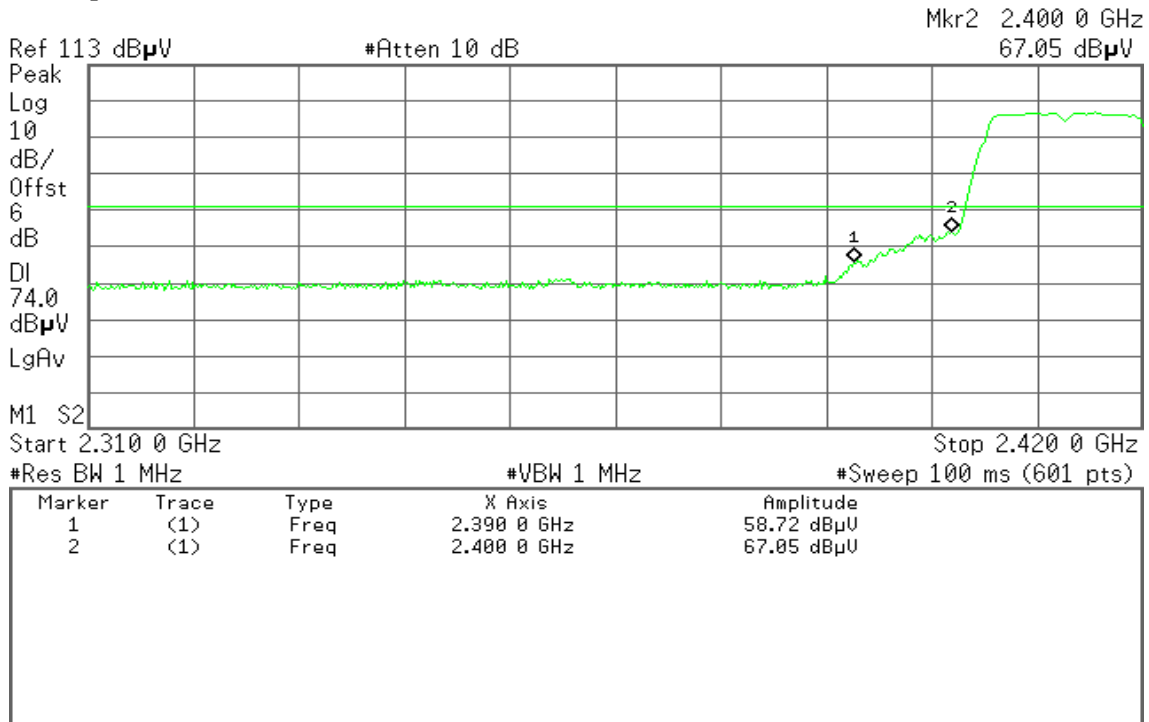


Detector mode: Average

Polarity: Horizontal

Agilent

R T

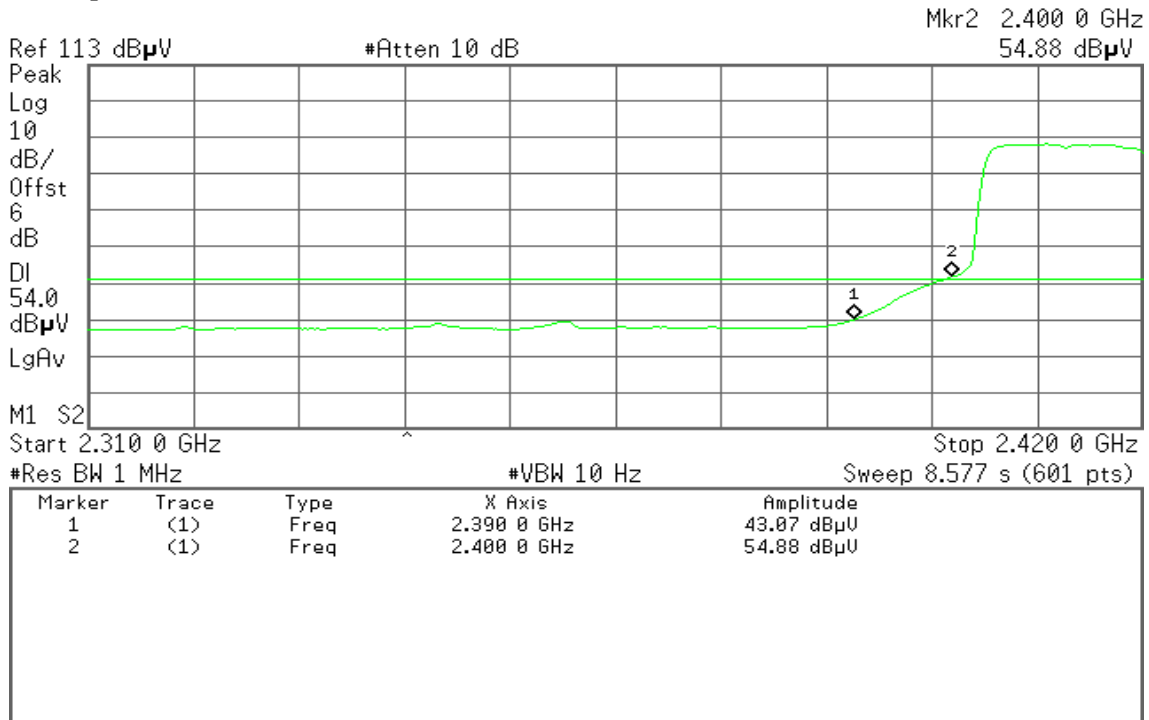



Band Edges (IEEE 802.11g mode / CH High)

Detector mode: Peak

Polarity: Vertical


Agilent

R T

Mkr1 2.483 50 GHz
52.17 dBμV

Ref 113 dBμV

#Atten 10 dB

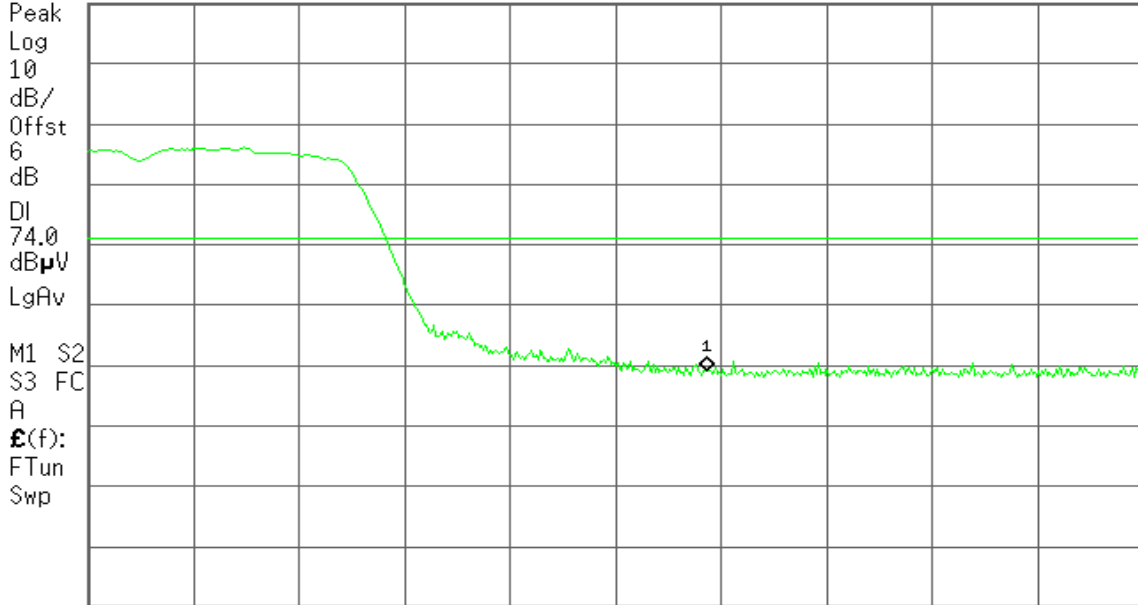

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Vertical


Agilent

R T

Mkr1 2.483 50 GHz
39.98 dBμV

Ref 113 dBμV

#Atten 10 dB

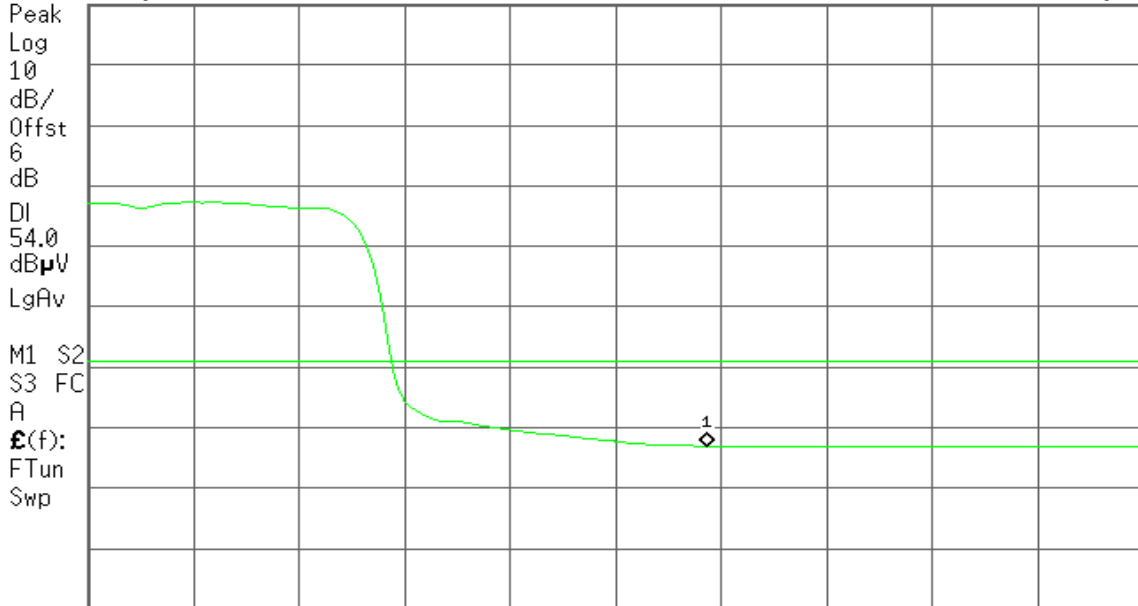

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)



Detector mode: Peak

Polarity: Horizontal


Agilent

R T

Mkr1 2.483 50 GHz
54.28 dBµV

Ref 113 dBµV

#Atten 10 dB

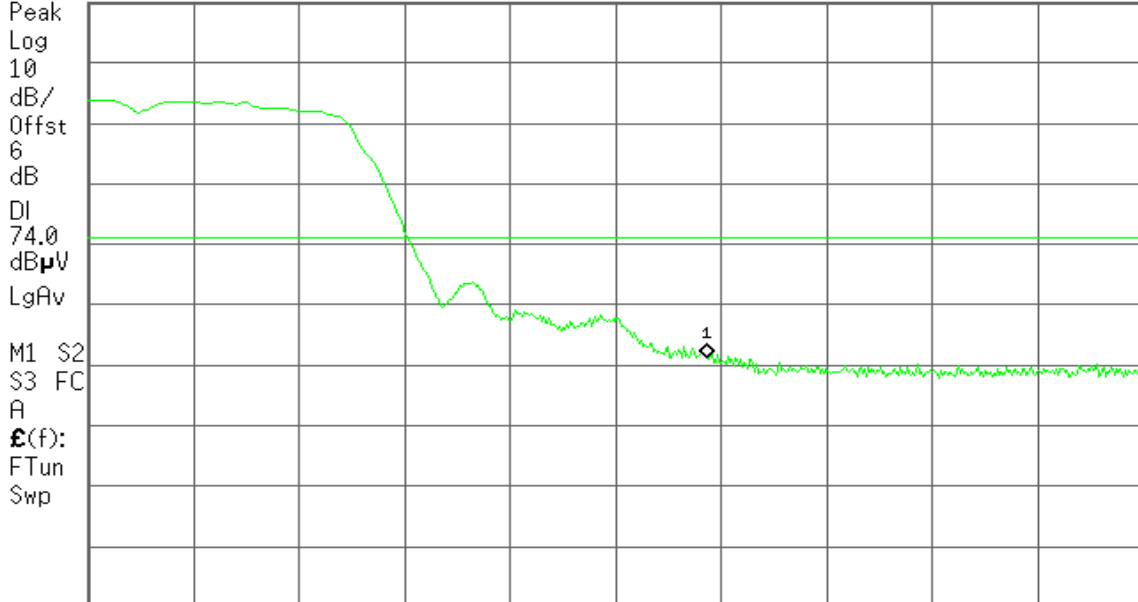

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal


Agilent

R T

Mkr1 2.483 50 GHz
41.60 dBµV

Ref 113 dBµV

#Atten 10 dB

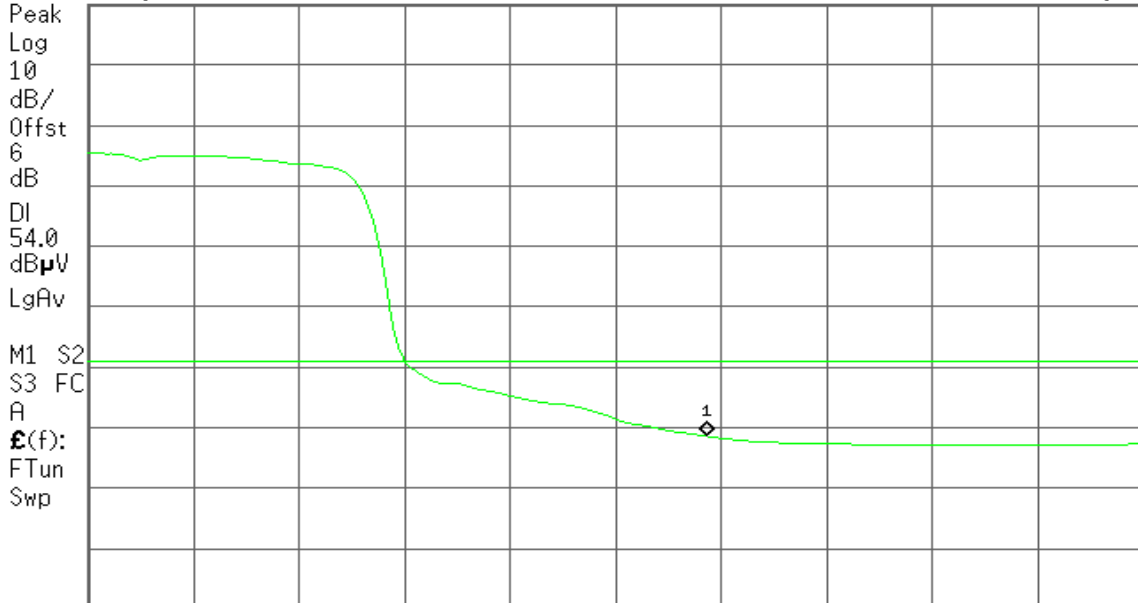

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)




Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent

R T

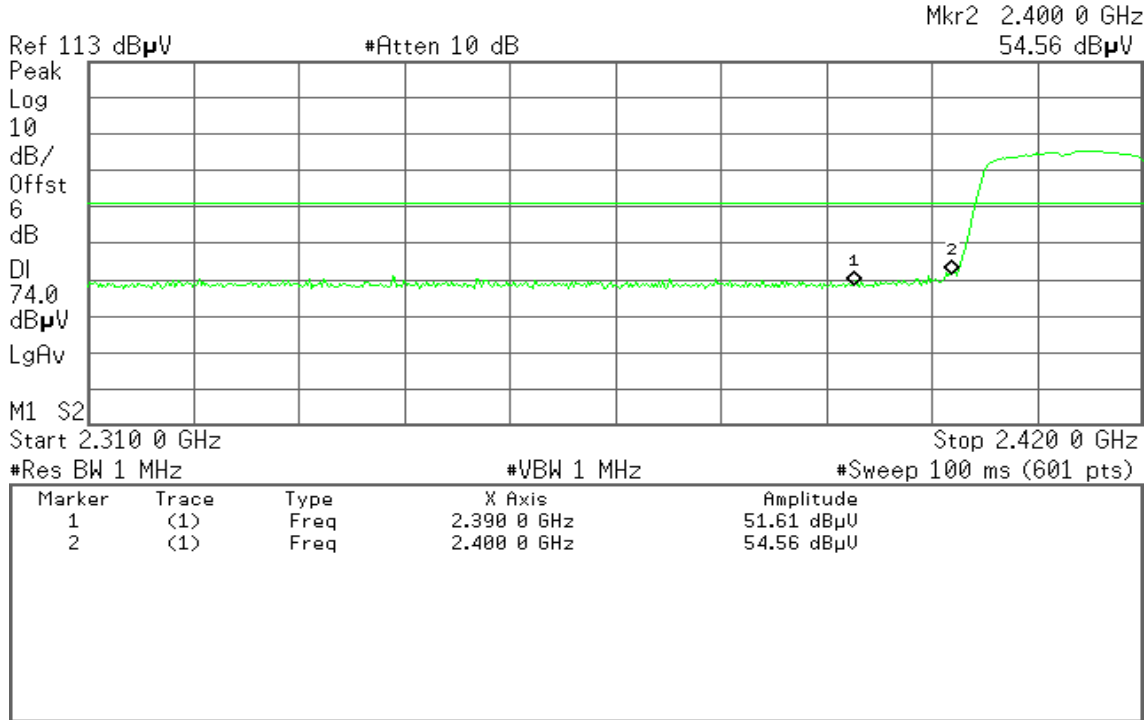


Detector mode: Average

Polarity: Vertical

Agilent

R T

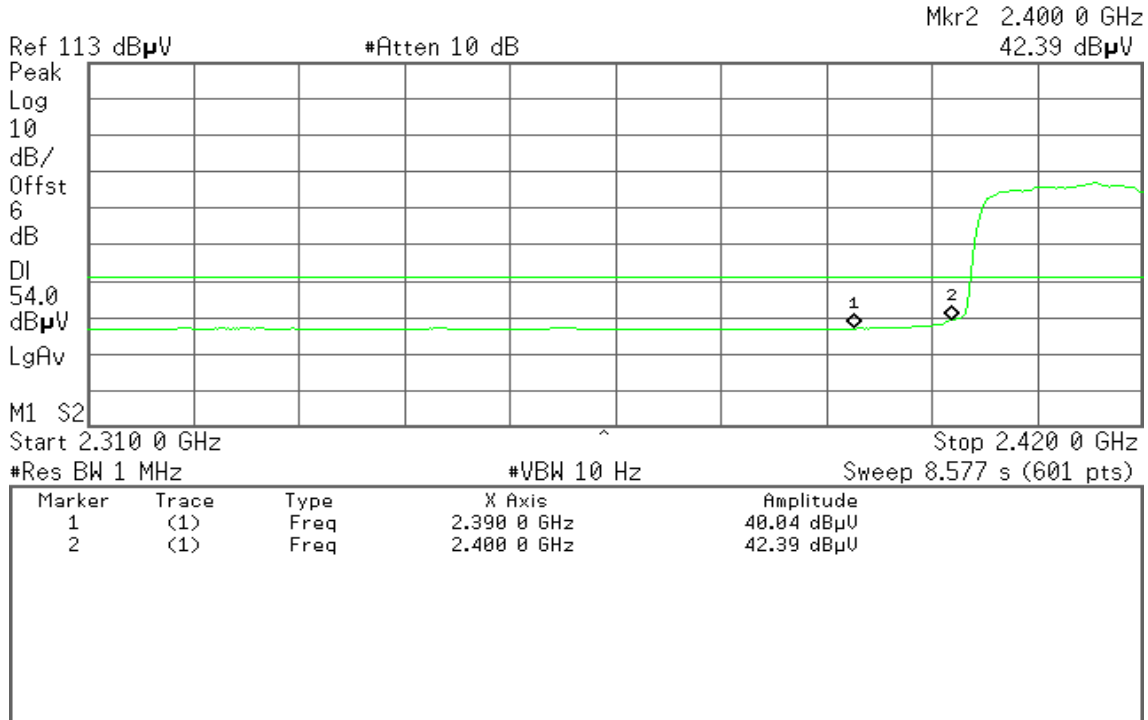




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

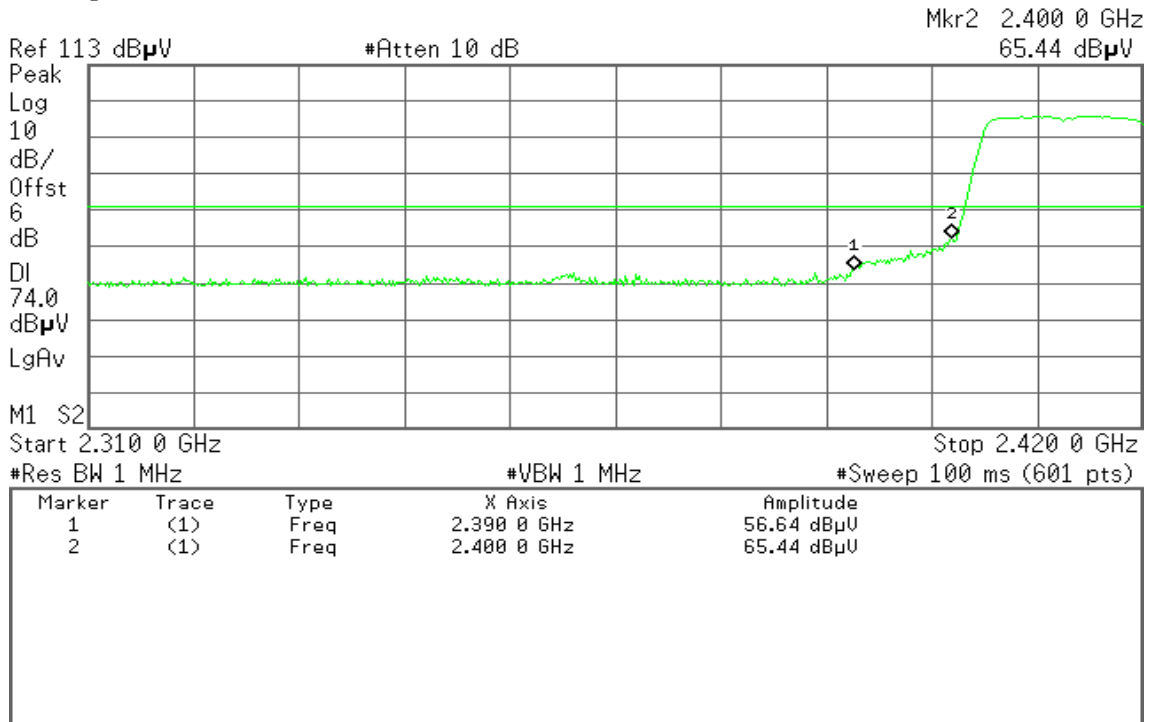


Detector mode: Average

Polarity: Horizontal

Agilent

R T

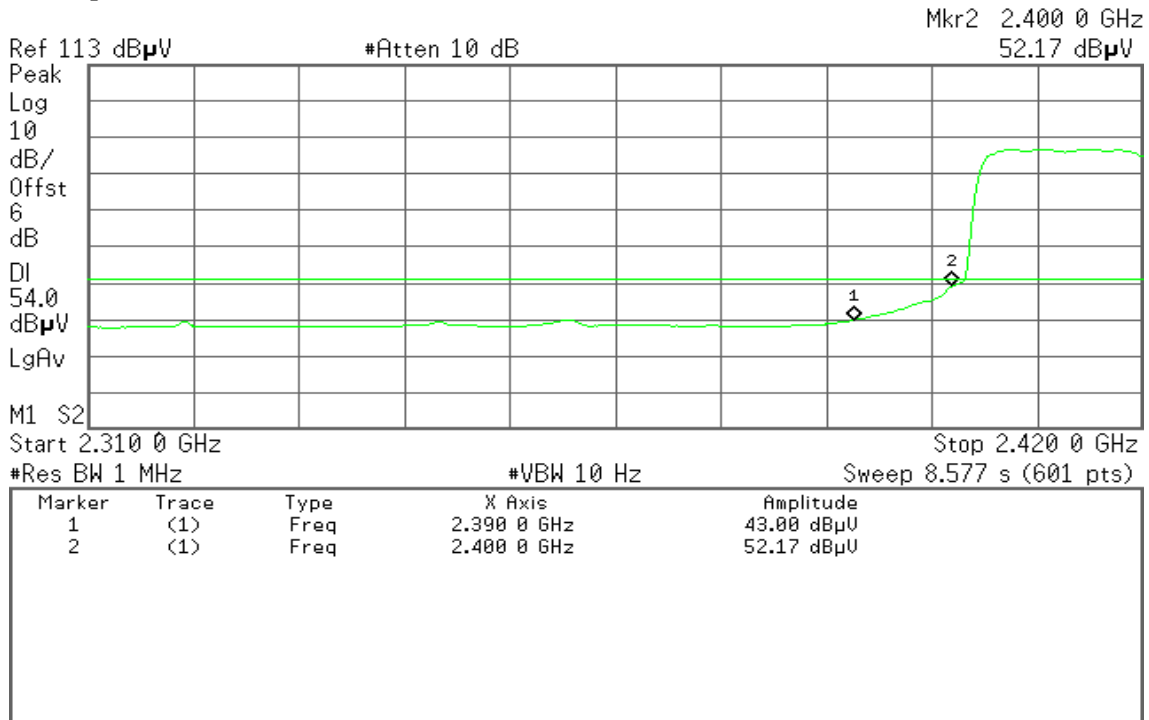



Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH High)

Detector mode: Peak

Polarity: Vertical


Agilent

R T

Mkr1 2.483 50 GHz
50.88 dB μ V

Ref 113 dB μ V

#Atten 10 dB

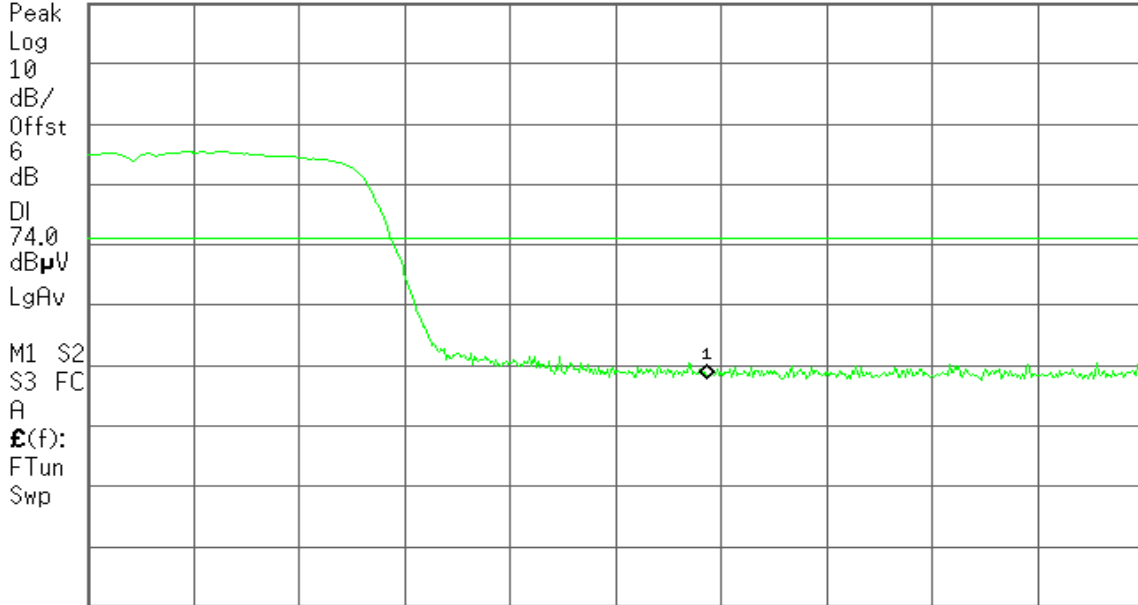

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Vertical


Agilent

R T

Mkr1 2.483 50 GHz
39.97 dB μ V

Ref 113 dB μ V

#Atten 10 dB

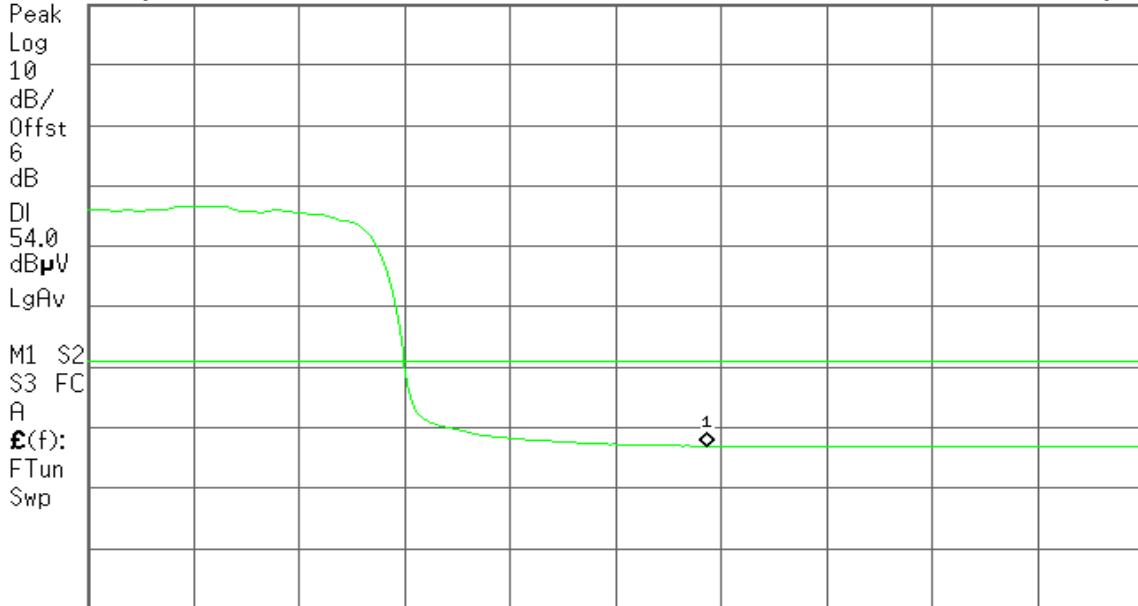

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

Mkr1 2.483 50 GHz
53.03 dBµV

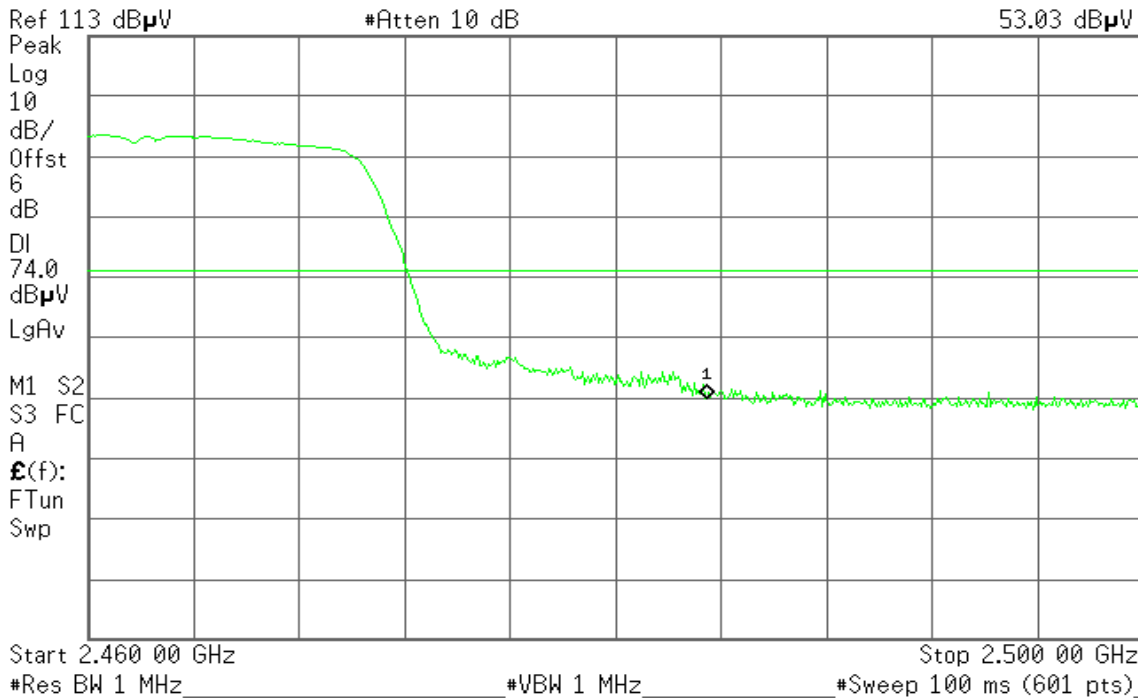


Detector mode: Average

Polarity: Horizontal

Agilent

R T

Mkr1 2.483 50 GHz
41.34 dBµV

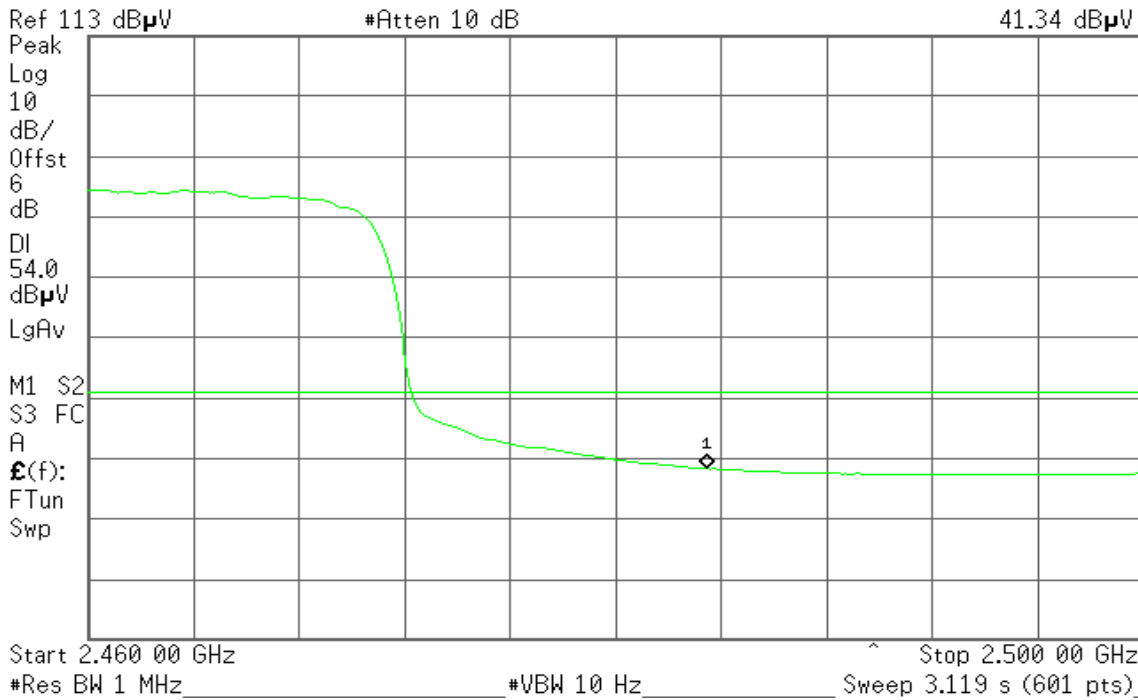




Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent

R T

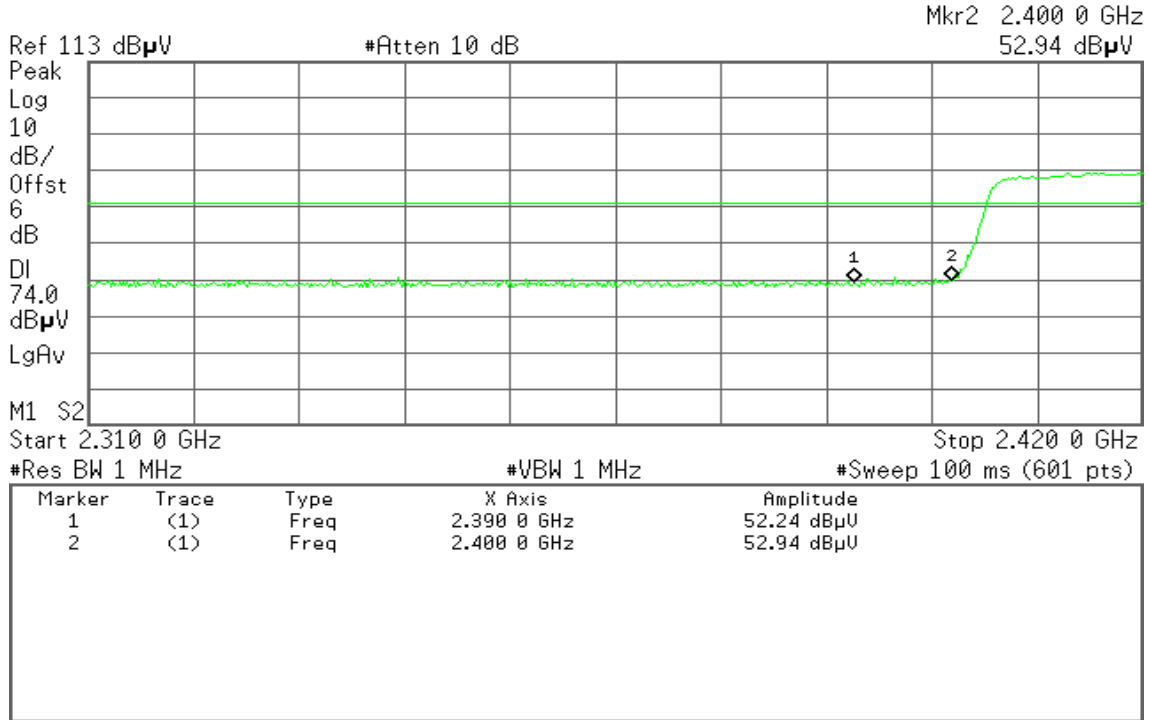


Detector mode: Average

Polarity: Vertical

Agilent

R T

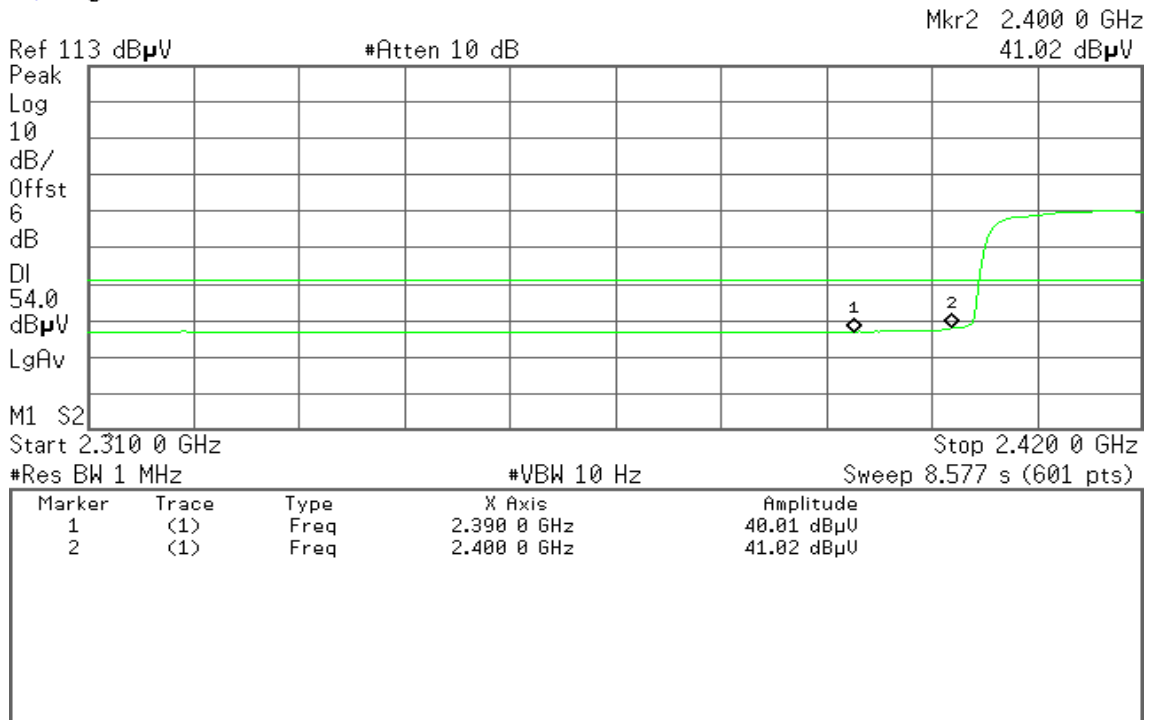




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

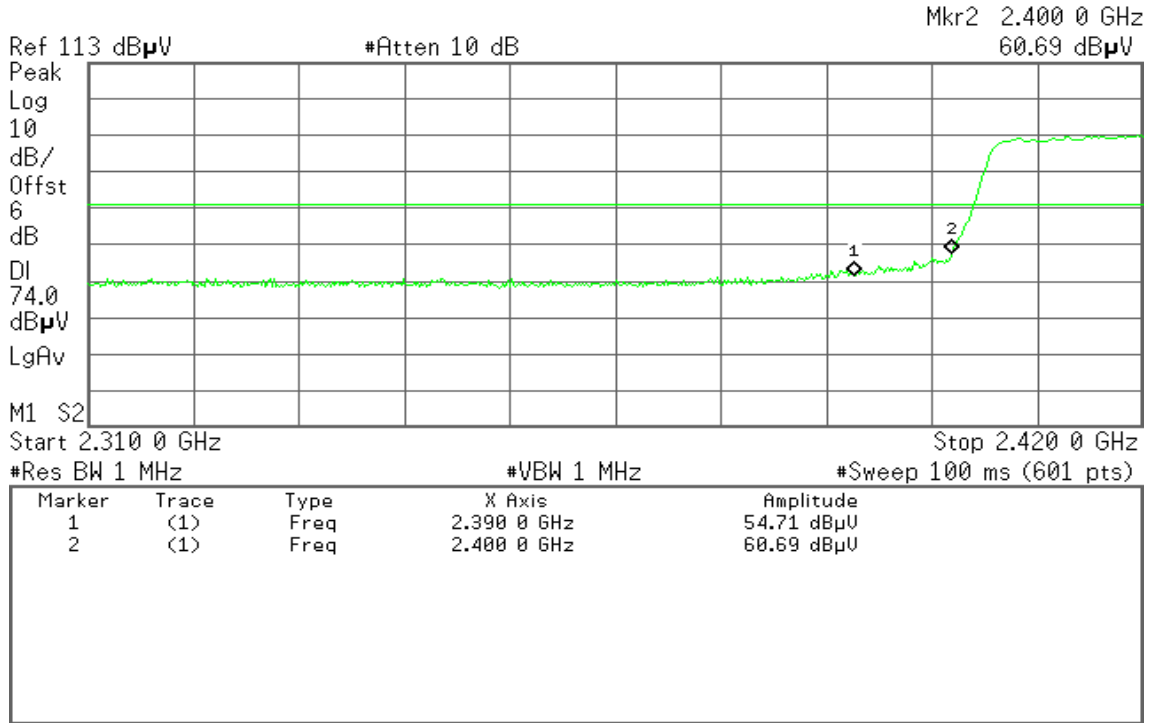


Detector mode: Average

Polarity: Horizontal

Agilent

R T

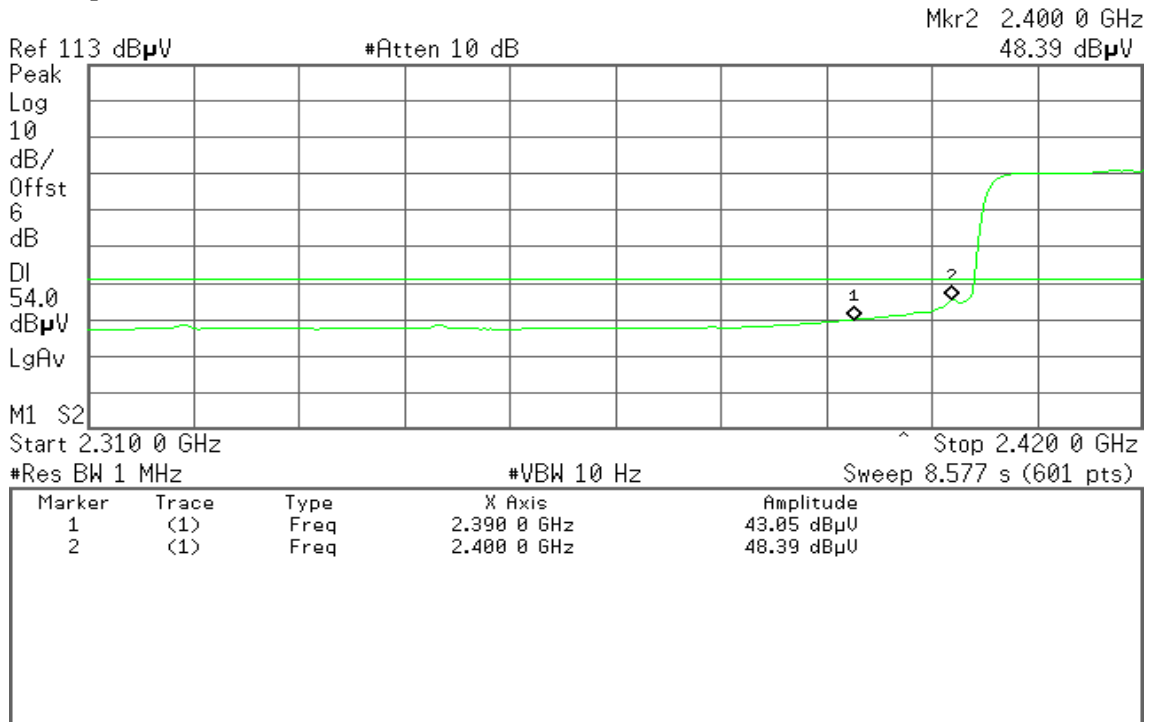



Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH High)

Detector mode: Peak

Polarity: Vertical


Agilent

R T

Mkr1 2.483 50 GHz
52.45 dBµV

Ref 113 dBµV

#Atten 10 dB

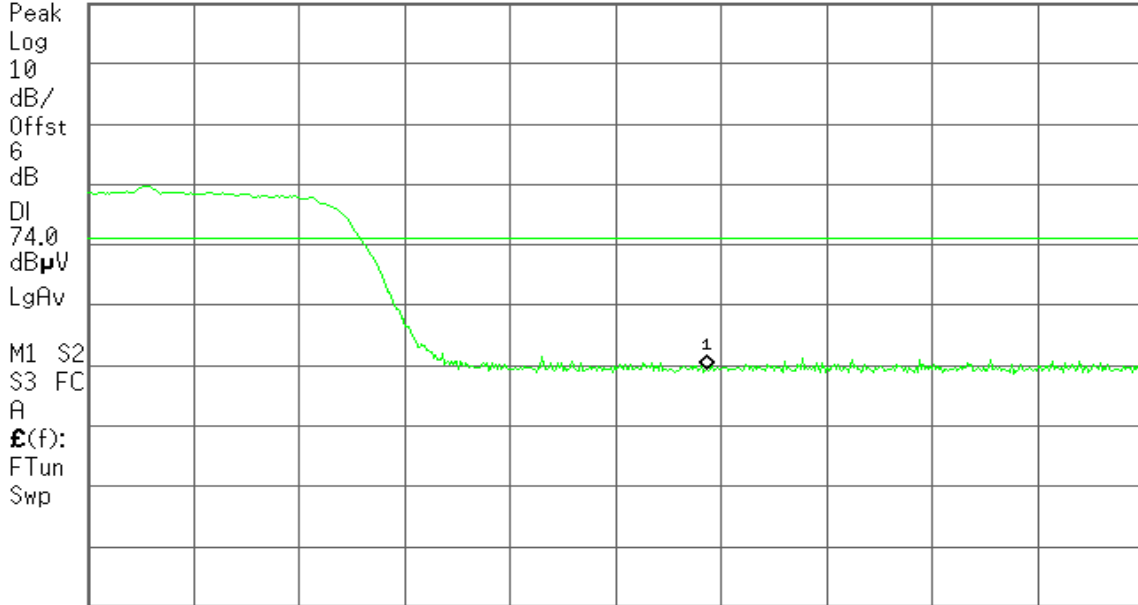

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Vertical


Agilent

R T

Mkr1 2.483 50 GHz
39.97 dBµV

Ref 113 dBµV

#Atten 10 dB

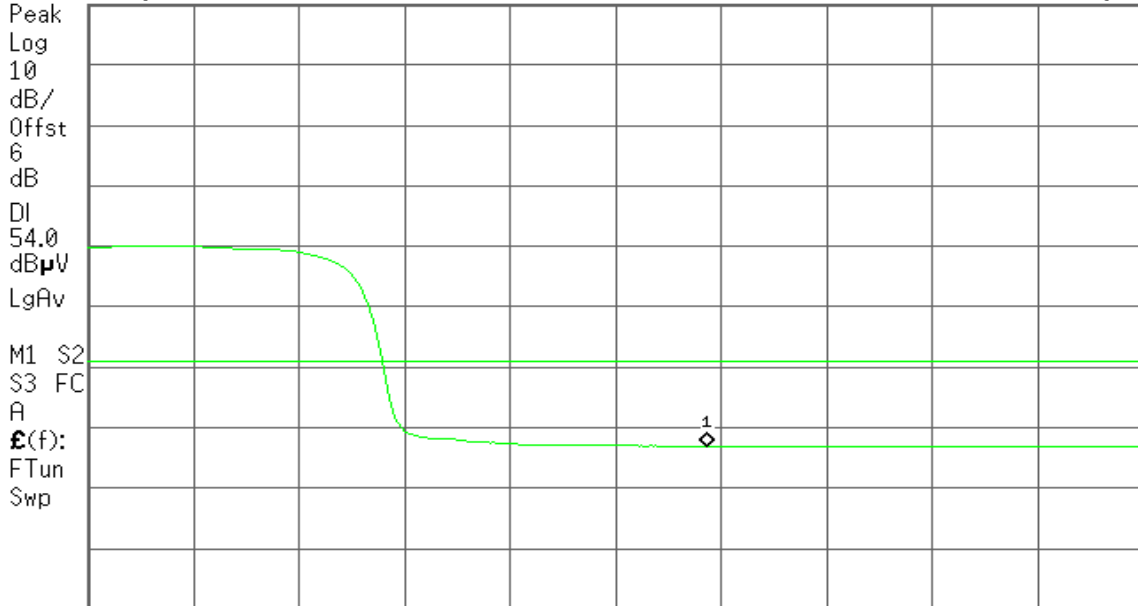

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)



Detector mode: Peak

Polarity: Horizontal


Agilent

R T

Mkr1 2.483 50 GHz
53.28 dBμV

Ref 113 dBμV

#Atten 10 dB

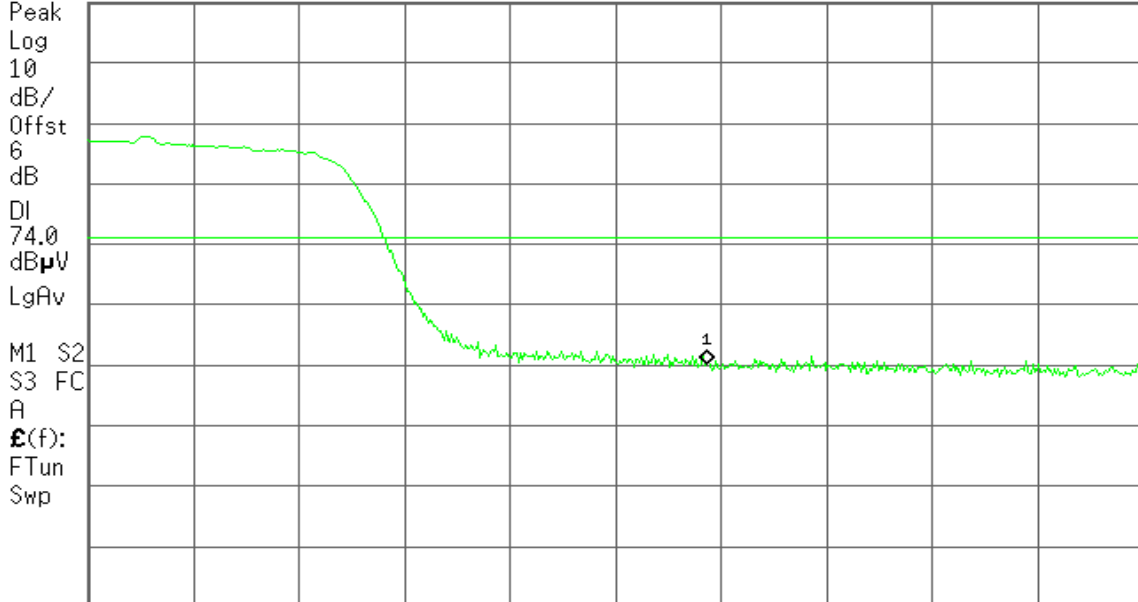

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal


Agilent

R T

Mkr1 2.483 50 GHz
41.49 dBμV

Ref 113 dBμV

#Atten 10 dB

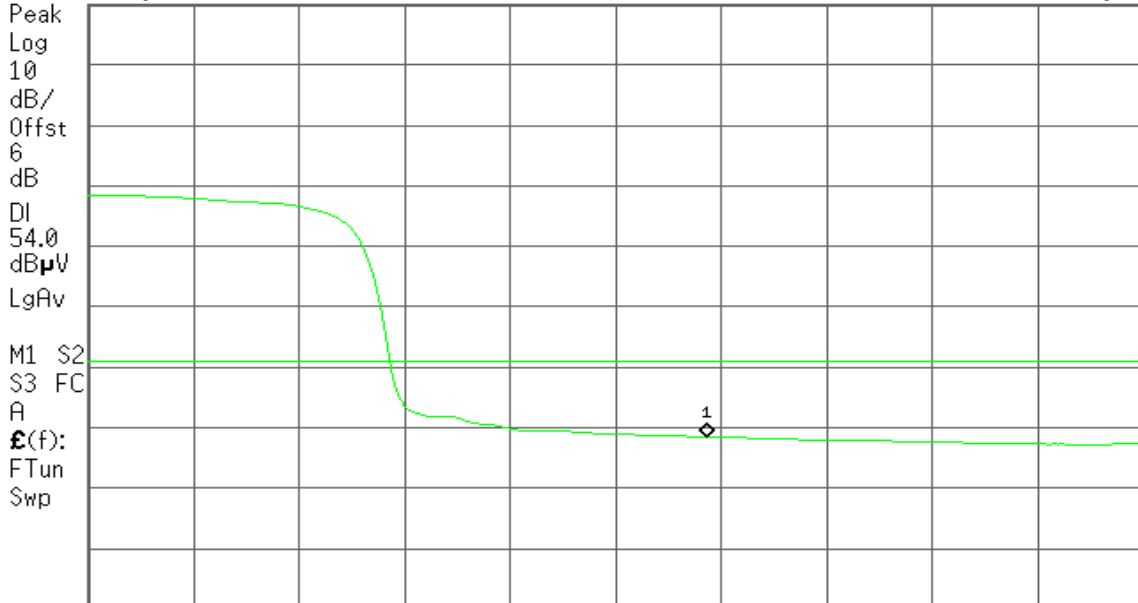

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)



For PIFA Antenna


Band Edges (IEEE 802.11b mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent

R T

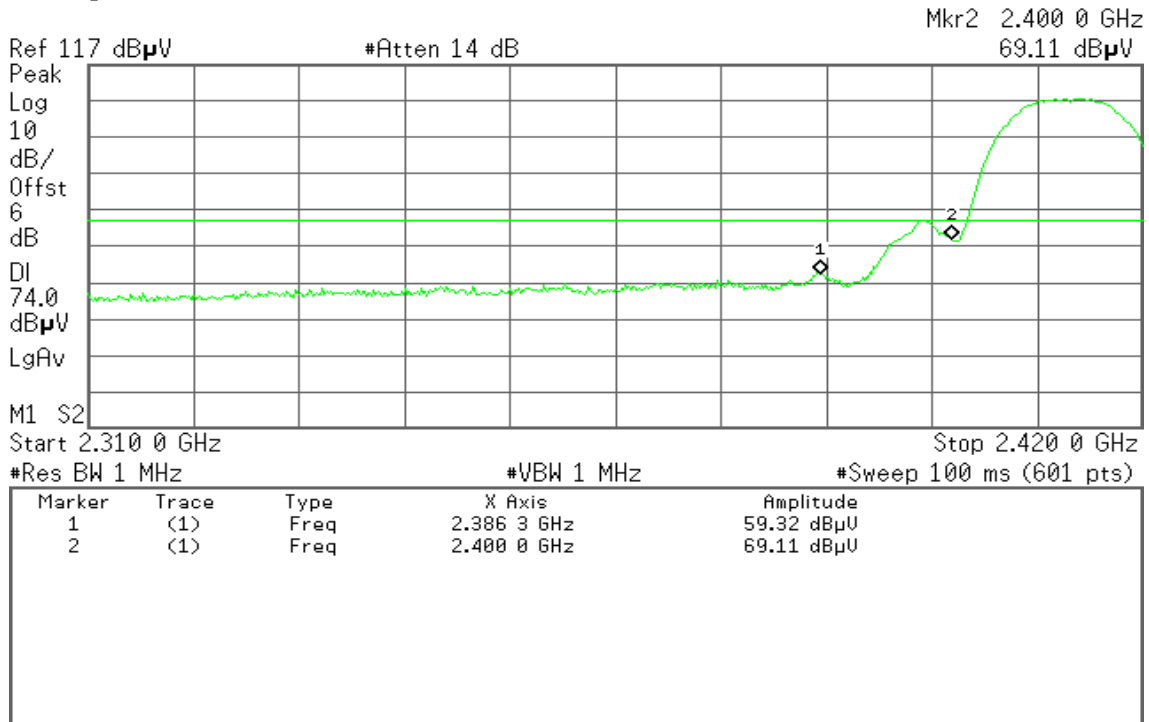


Detector mode: Average

Polarity: Vertical

Agilent

R T

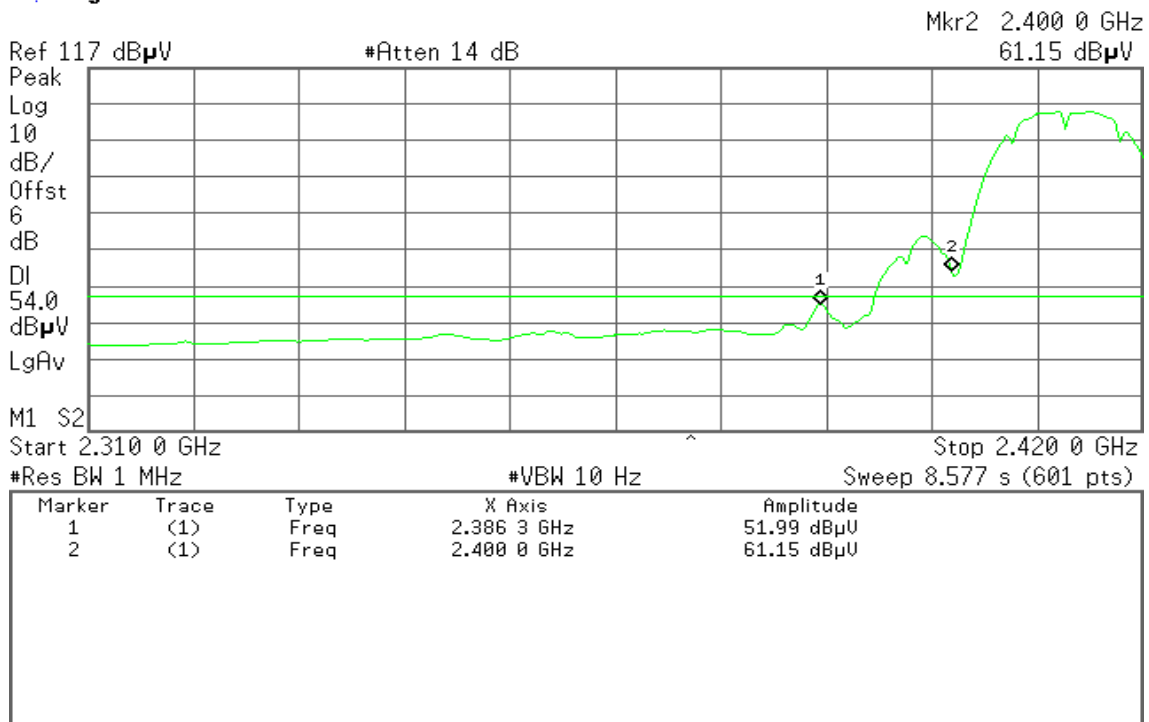



Detector mode: Peak

Polarity: Horizontal


Agilent

R T

Mkr2 2.400 0 GHz
59.36 dBµV

Ref 117 dBµV

#Atten 14 dB

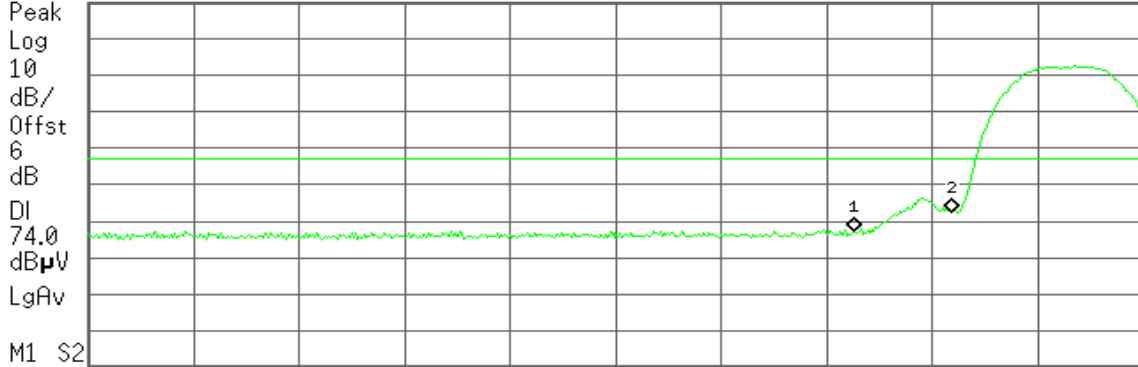

M1 S2
Start 2.310 0 GHz

Stop 2.420 0 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 0 GHz	54.24 dBµU
2	(1)	Freq	2.400 0 GHz	59.36 dBµU

Detector mode: Average

Polarity: Horizontal


Agilent

R T

Mkr2 2.400 0 GHz
49.69 dBµV

Ref 117 dBµV

#Atten 14 dB

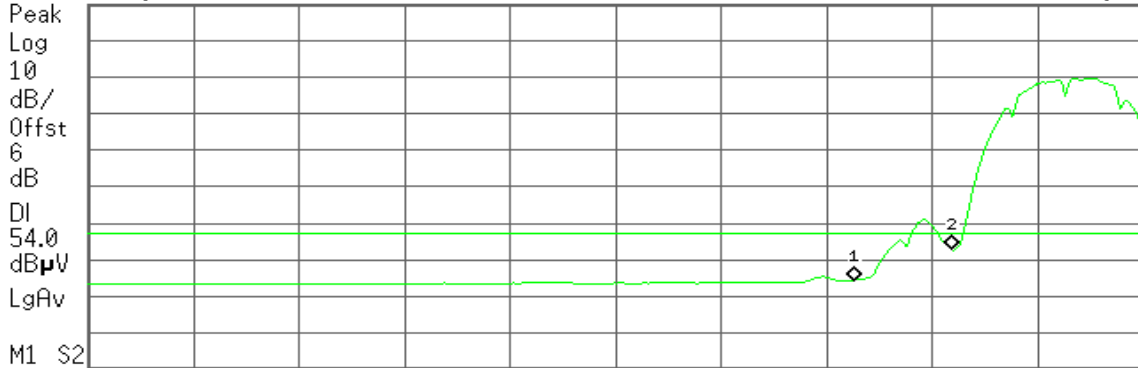

M1 S2
Start 2.310 0 GHz

Stop 2.420 0 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 8.577 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 0 GHz	41.43 dBµU
2	(1)	Freq	2.400 0 GHz	49.69 dBµU



Band Edges (IEEE 802.11b mode / CH High)

Detector mode: Peak

Polarity: Vertical


Agilent

R T

Mkr1 2.487 67 GHz
59.75 dBμV

Ref 117 dBμV

#Atten 14 dB

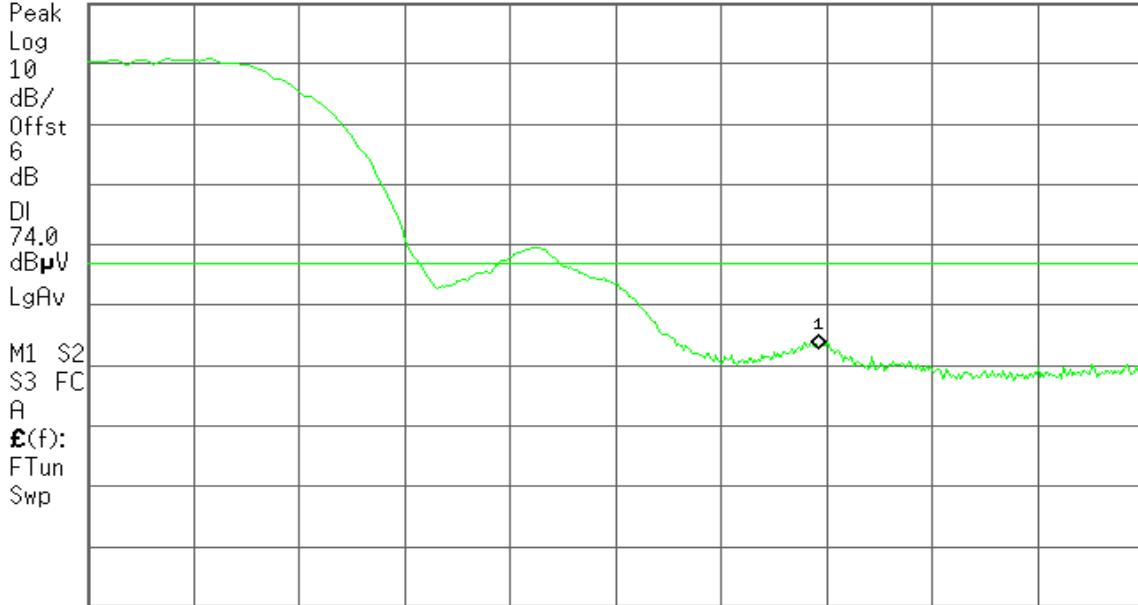

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Vertical


Agilent

R T

Mkr1 2.487 67 GHz
52.57 dBμV

Ref 117 dBμV

#Atten 14 dB

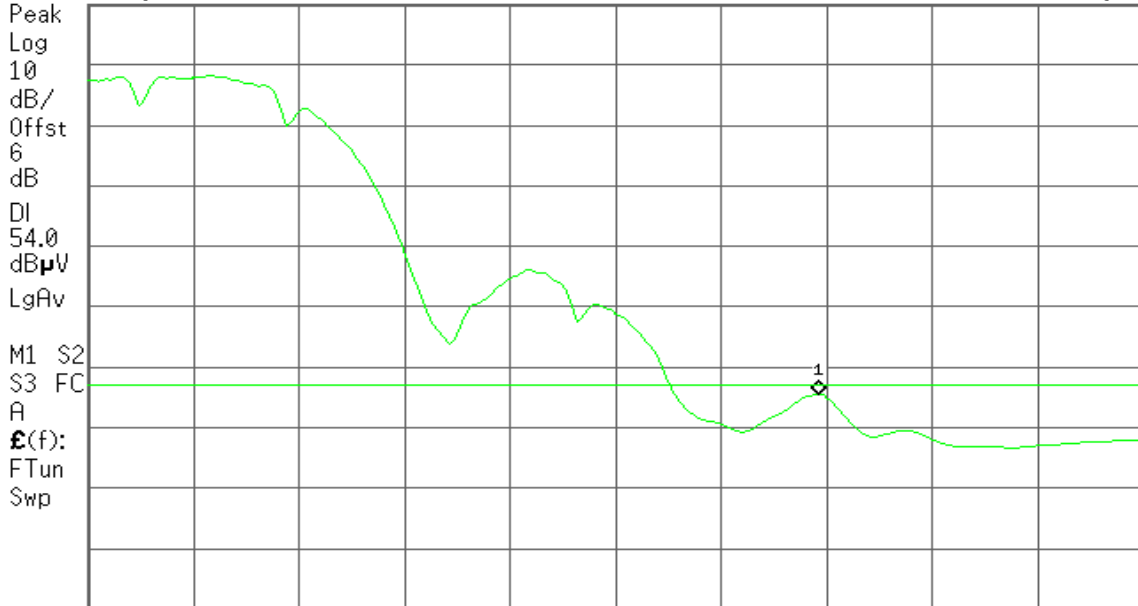

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)



Detector mode: Peak

Polarity: Horizontal


Agilent

R T

Mkr1 2.483 50 GHz
54.61 dBµV

Ref 117 dBµV

#Atten 14 dB

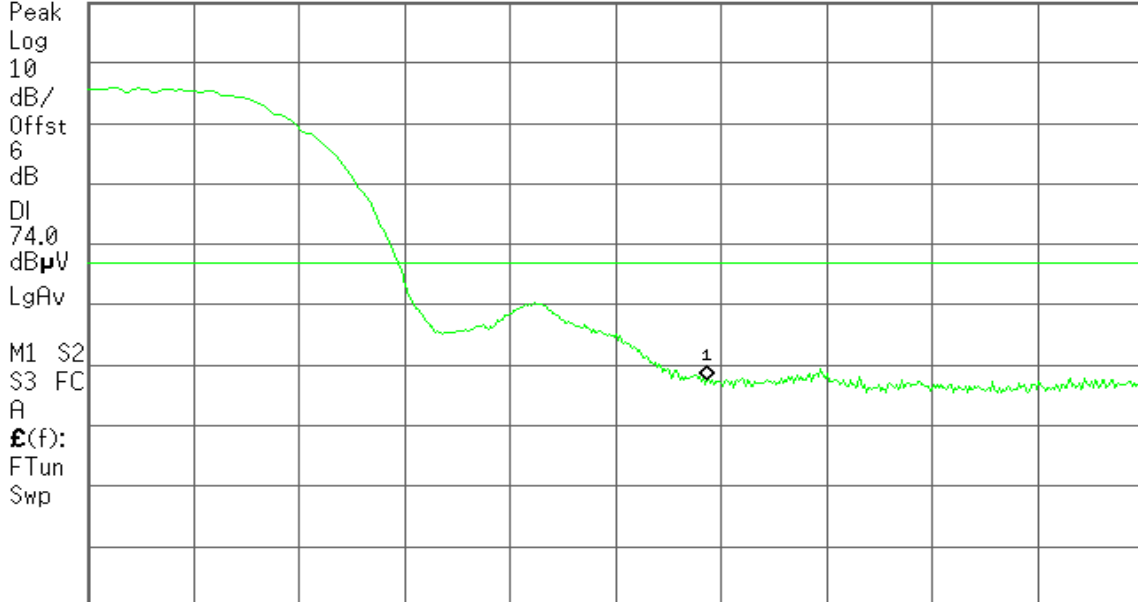

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal


Agilent

R T

Mkr1 2.483 50 GHz
43.30 dBµV

Ref 117 dBµV

#Atten 14 dB

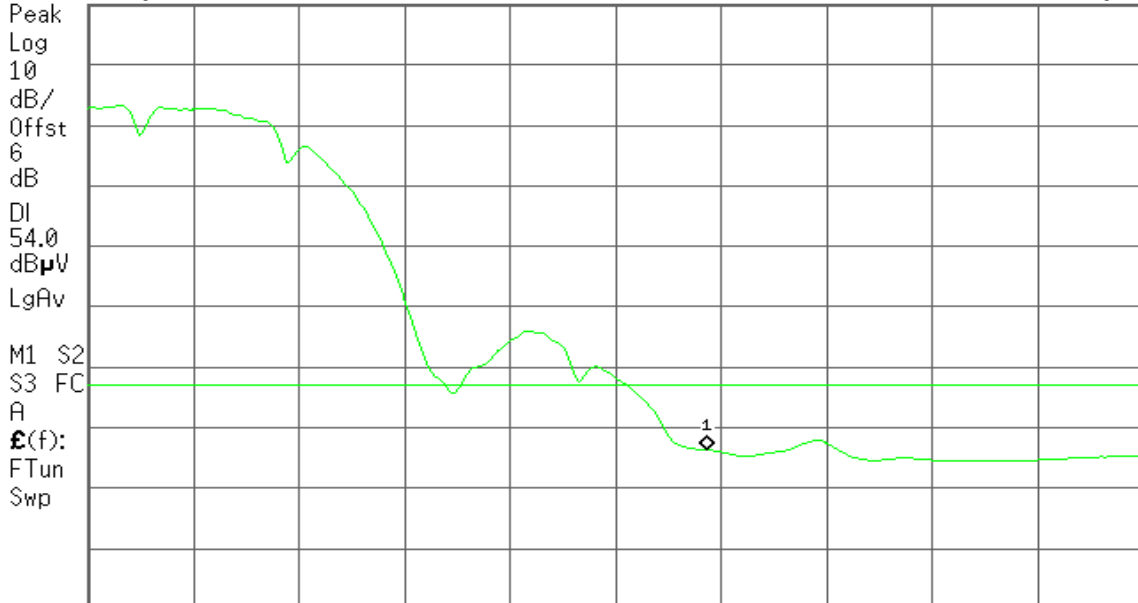

Start 2.460 00 GHz^

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)




Band Edges (IEEE 802.11g mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent

R T

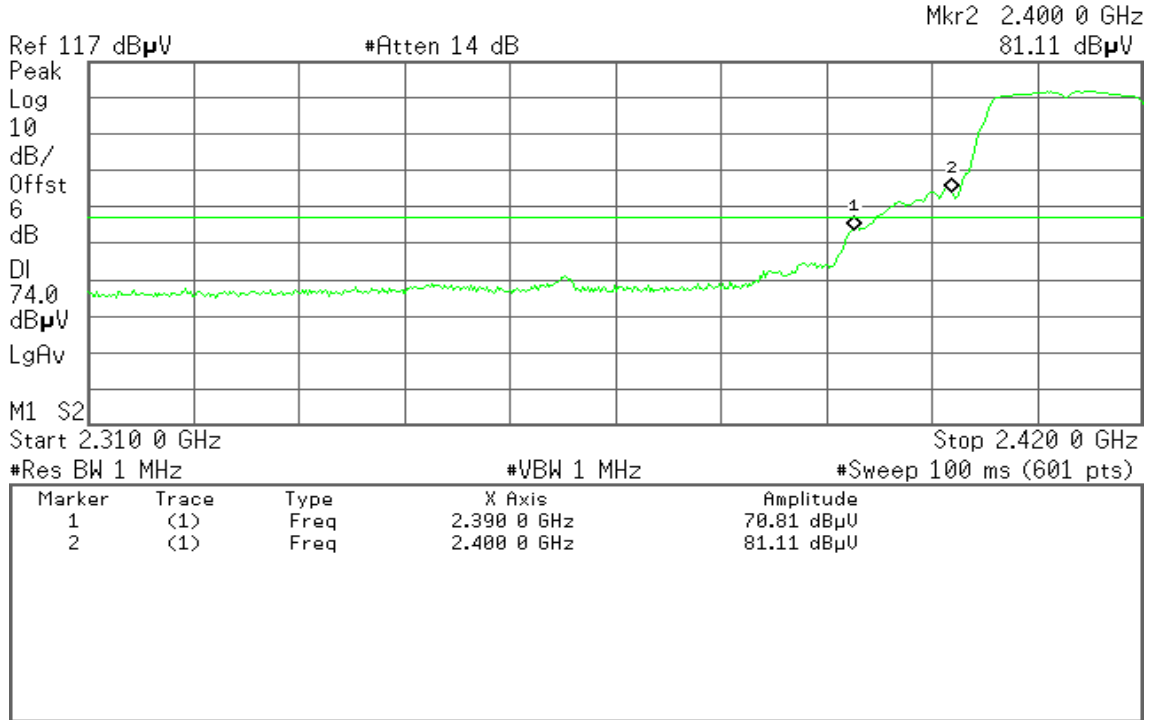


Detector mode: Average

Polarity: Vertical

Agilent

R T

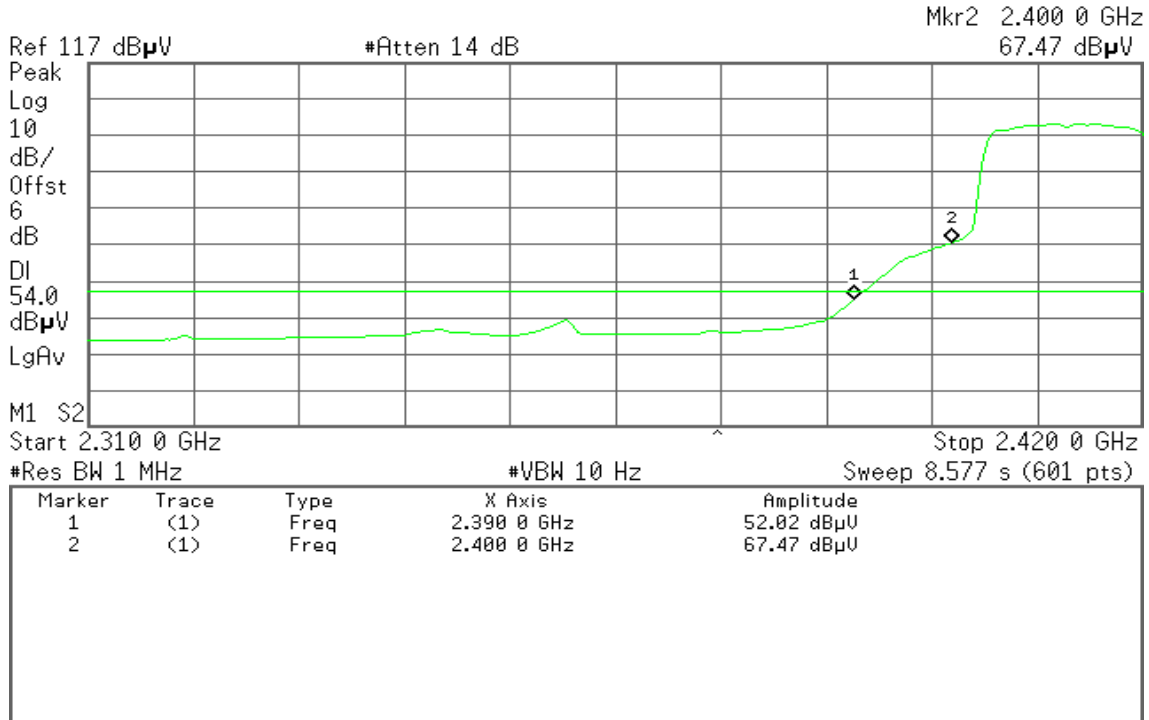




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

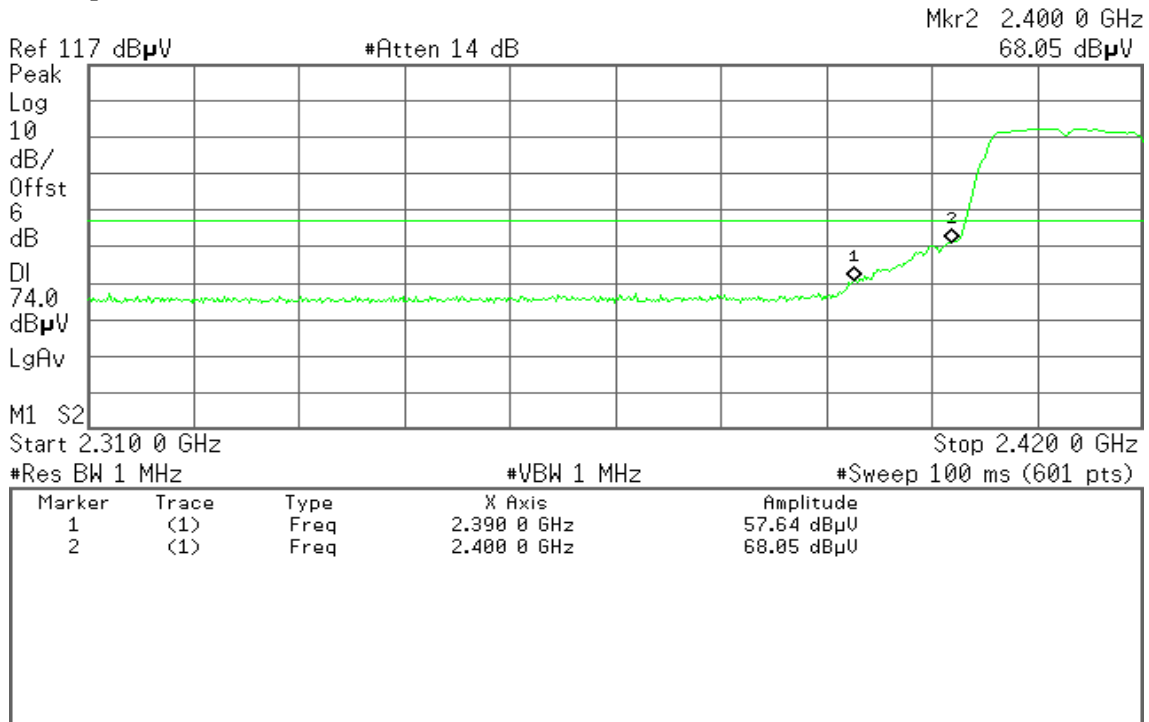


Detector mode: Average

Polarity: Horizontal

Agilent

R T

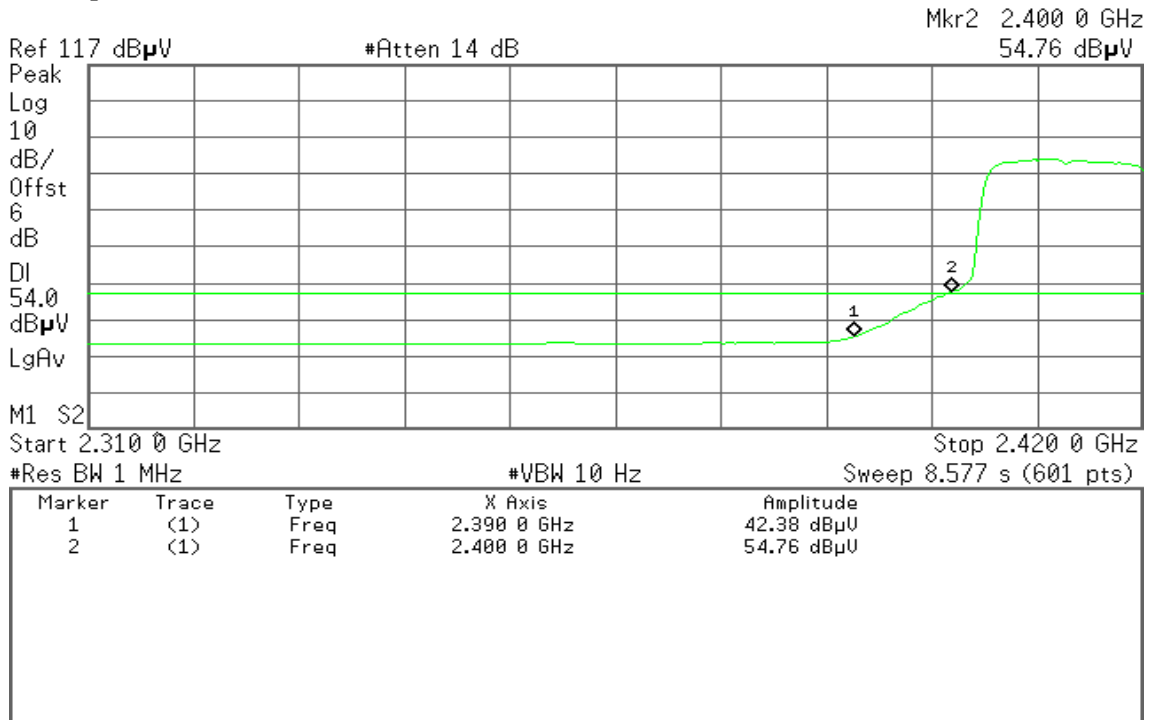



Band Edges (IEEE 802.11g mode / CH High)

Detector mode: Peak

Polarity: Vertical


Agilent

R T

Mkr1 2.483 50 GHz
69.14 dBμV

Ref 117 dBμV

#Atten 14 dB

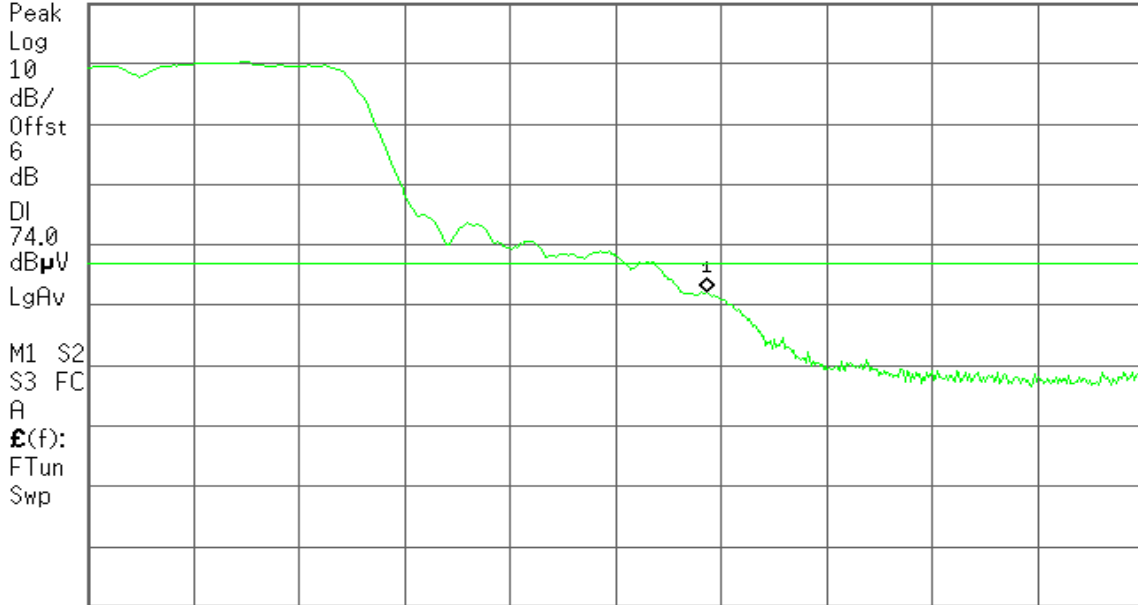

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Vertical


Agilent

R T

Mkr1 2.483 50 GHz
52.15 dBμV

Ref 117 dBμV

#Atten 14 dB

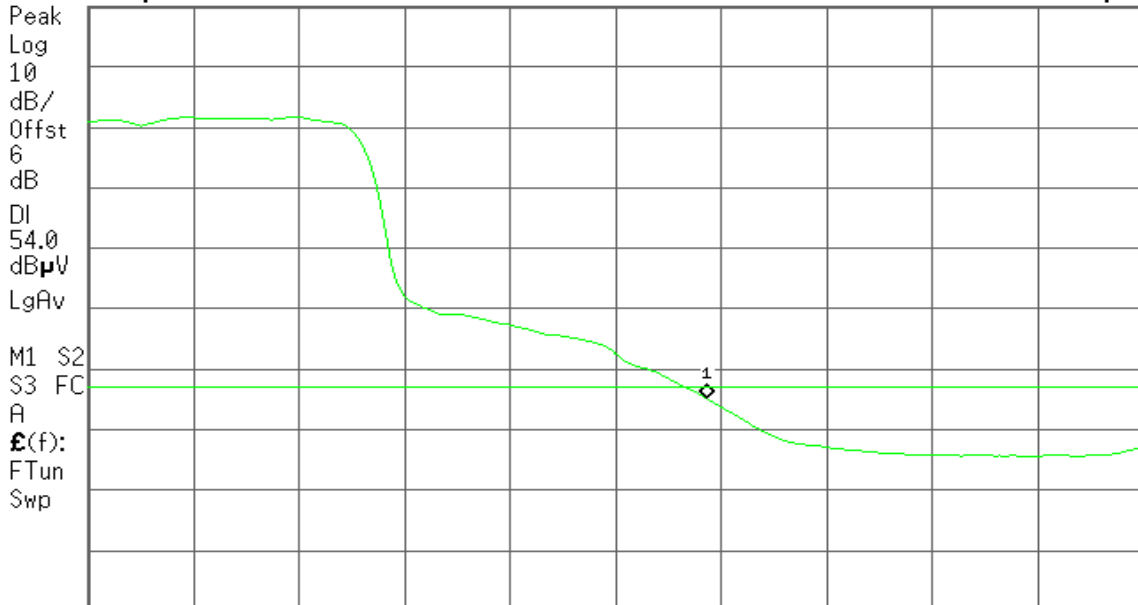

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)



Detector mode: Peak

Polarity: Horizontal


Agilent

R T

Mkr1 2.483 50 GHz
61.20 dBµV

Ref 117 dBµV

#Atten 14 dB

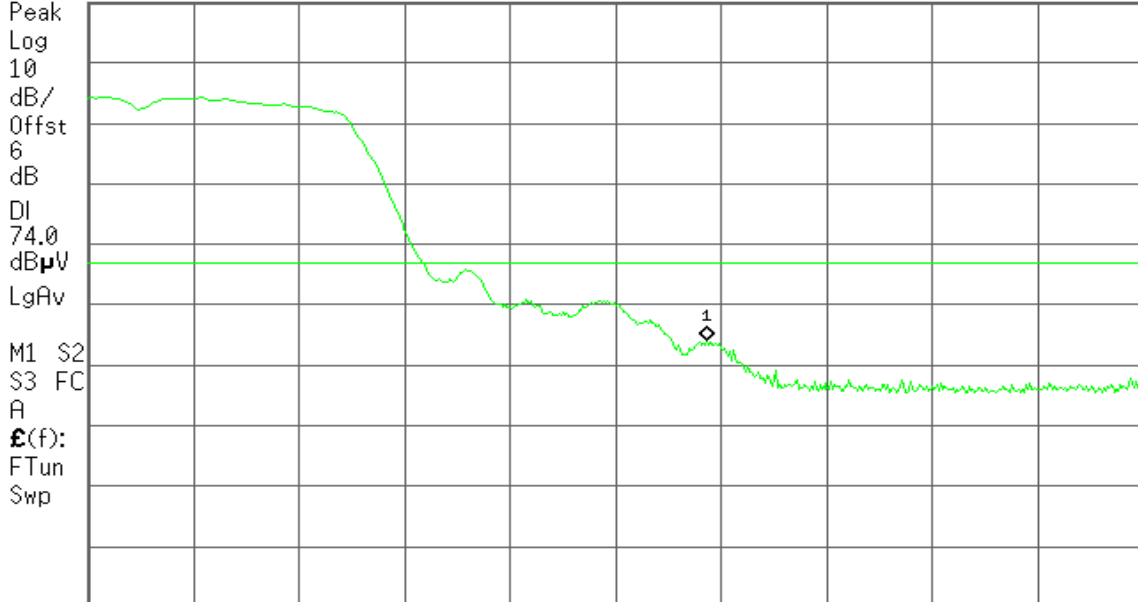

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal


Agilent

R T

Mkr1 2.483 50 GHz
44.22 dBµV

Ref 117 dBµV

#Atten 14 dB

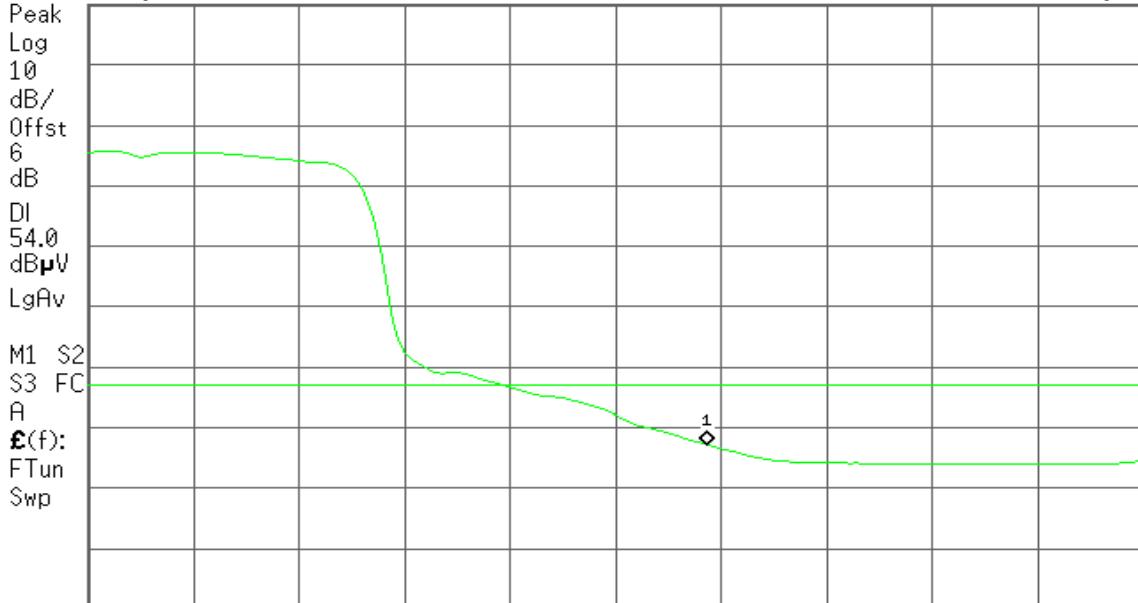

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)




Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent

R T

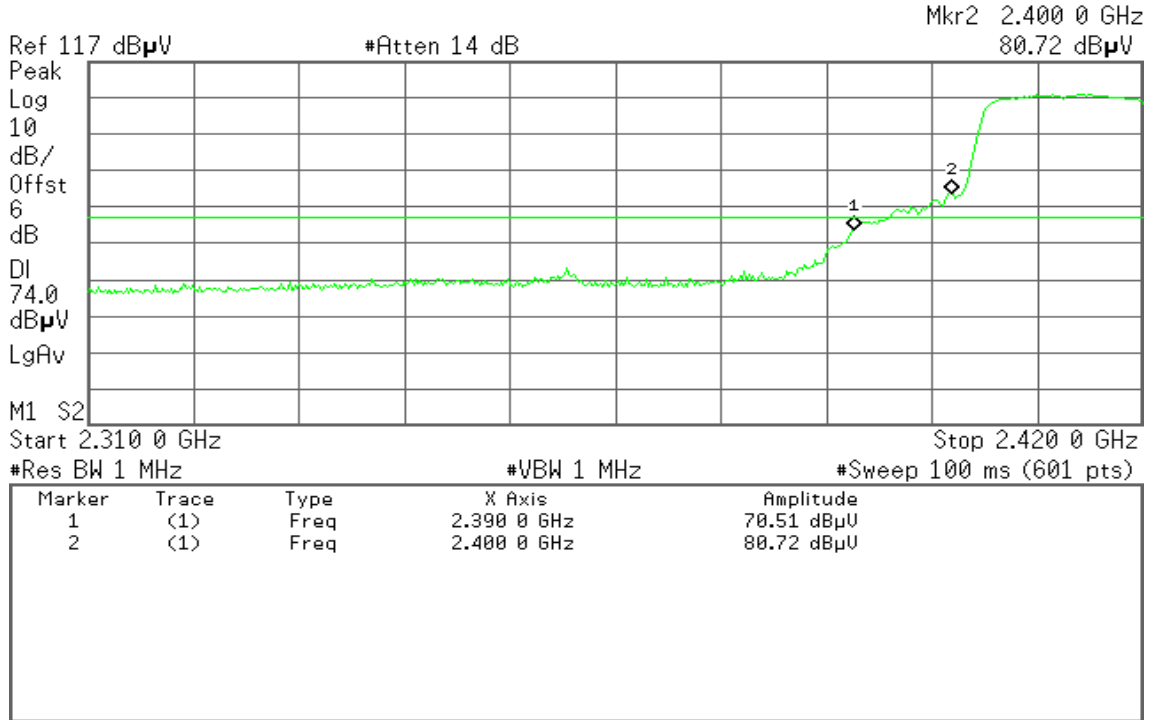


Detector mode: Average

Polarity: Vertical

Agilent

R T

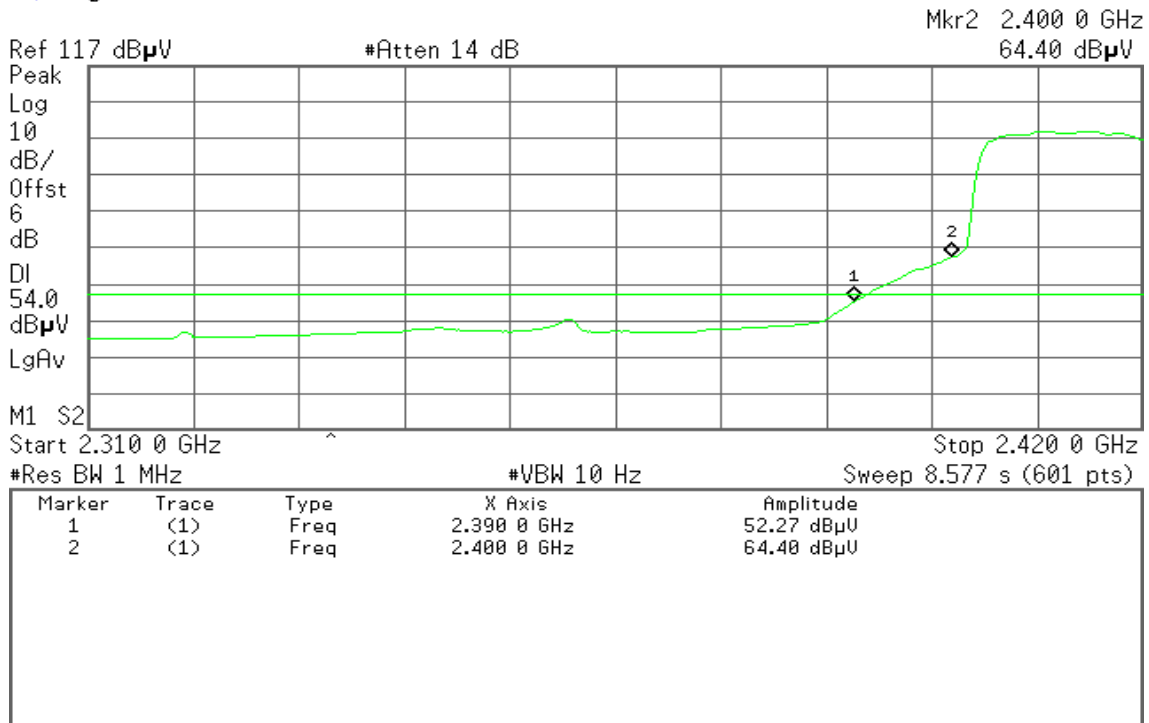




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

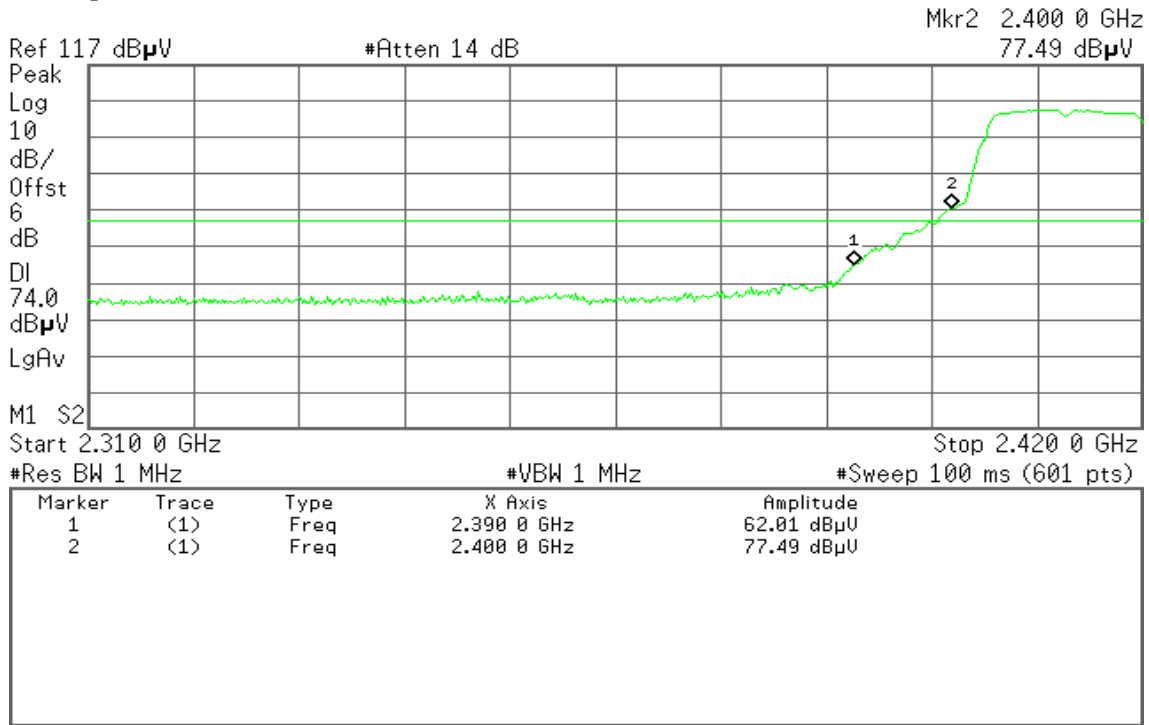


Detector mode: Average

Polarity: Horizontal

Agilent

R T

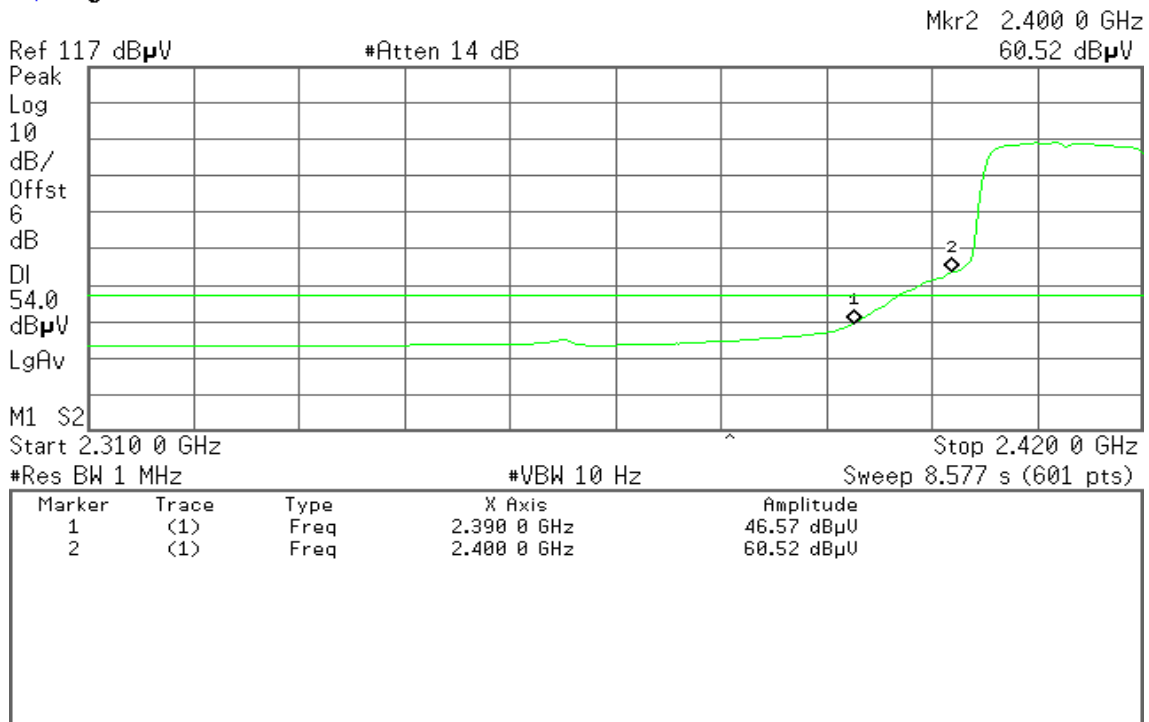



Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH High)

Detector mode: Peak

Polarity: Vertical


Agilent

R T

Mkr1 2.483 50 GHz
69.56 dBμV

Ref 117 dBμV

#Atten 14 dB

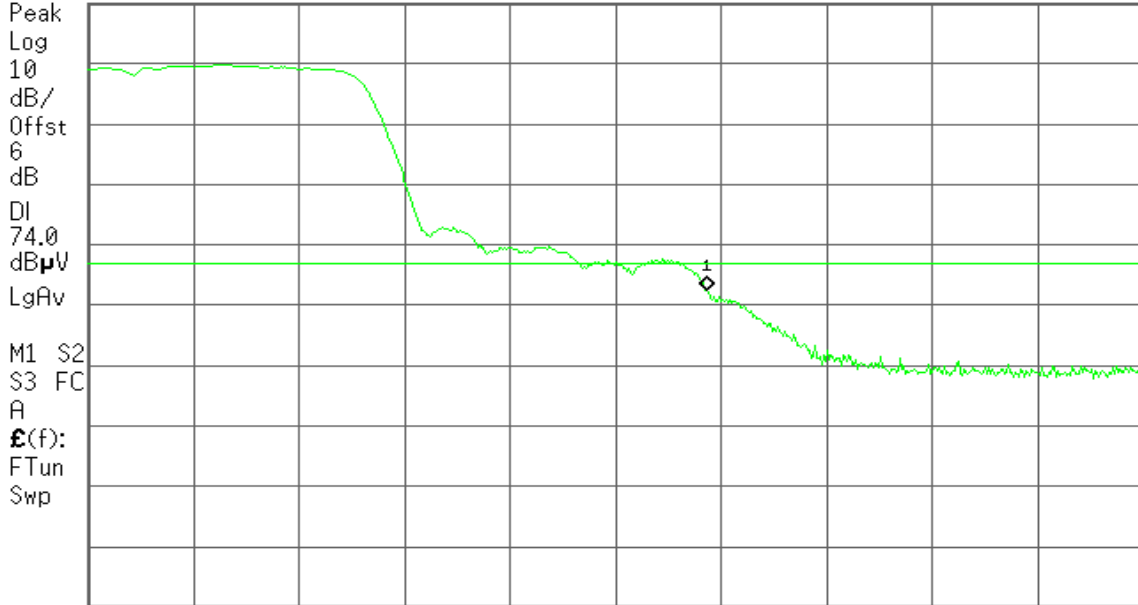

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Vertical


Agilent

R T

Mkr1 2.483 50 GHz
52.02 dBμV

Ref 117 dBμV

#Atten 14 dB

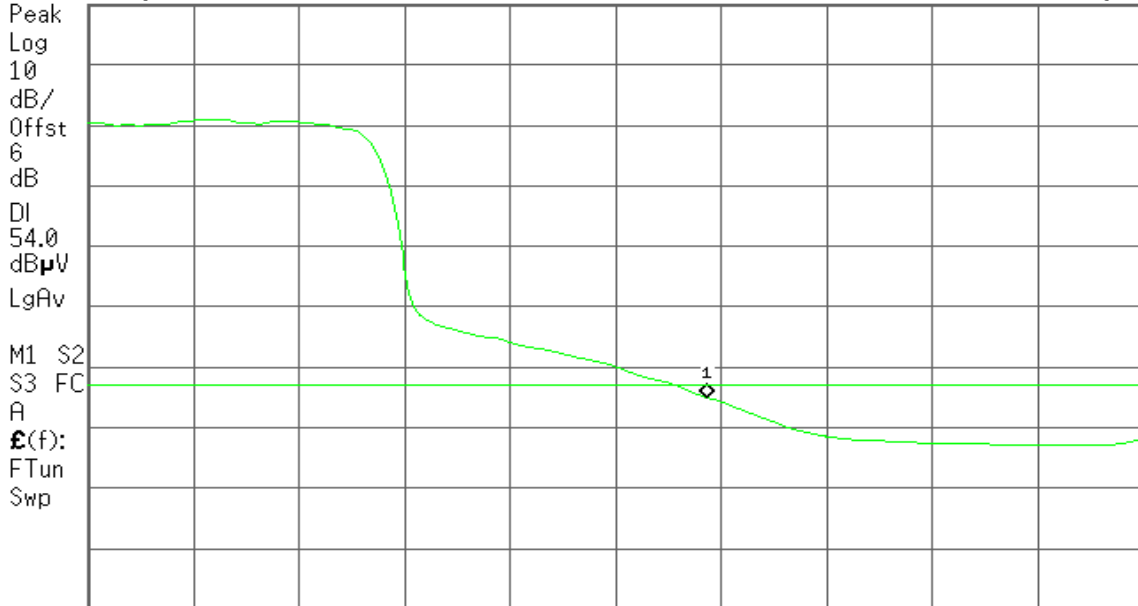

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)



Detector mode: Peak

Polarity: Horizontal


Agilent

R T

Mkr1 2.483 50 GHz
59.37 dBµV

Ref 117 dBµV

#Atten 14 dB

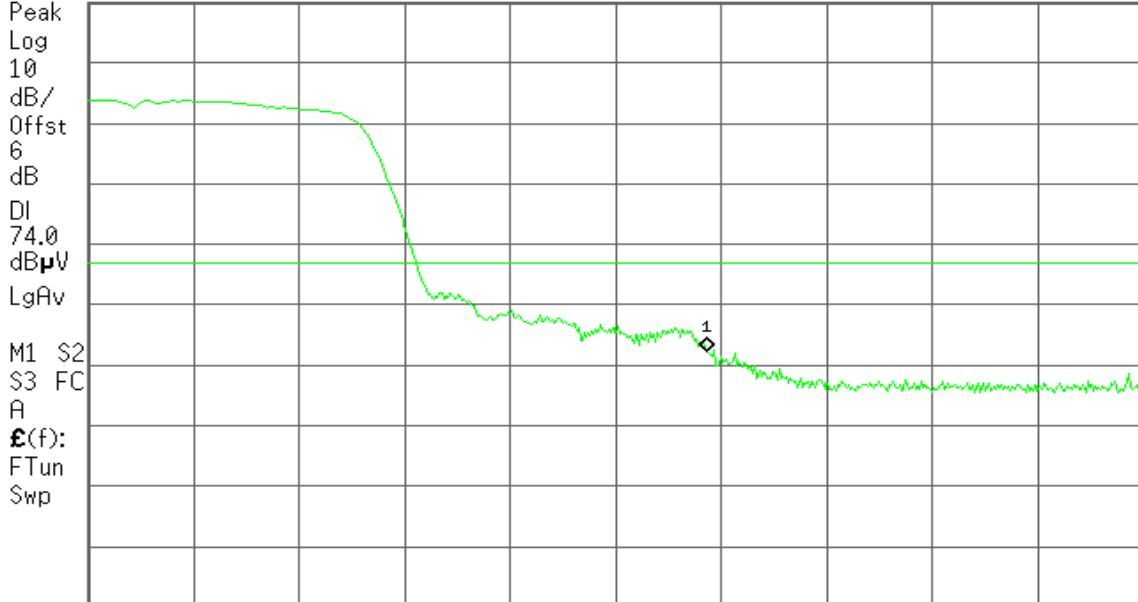

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal


Agilent

R T

Mkr1 2.483 50 GHz
43.97 dBµV

Ref 117 dBµV

#Atten 14 dB

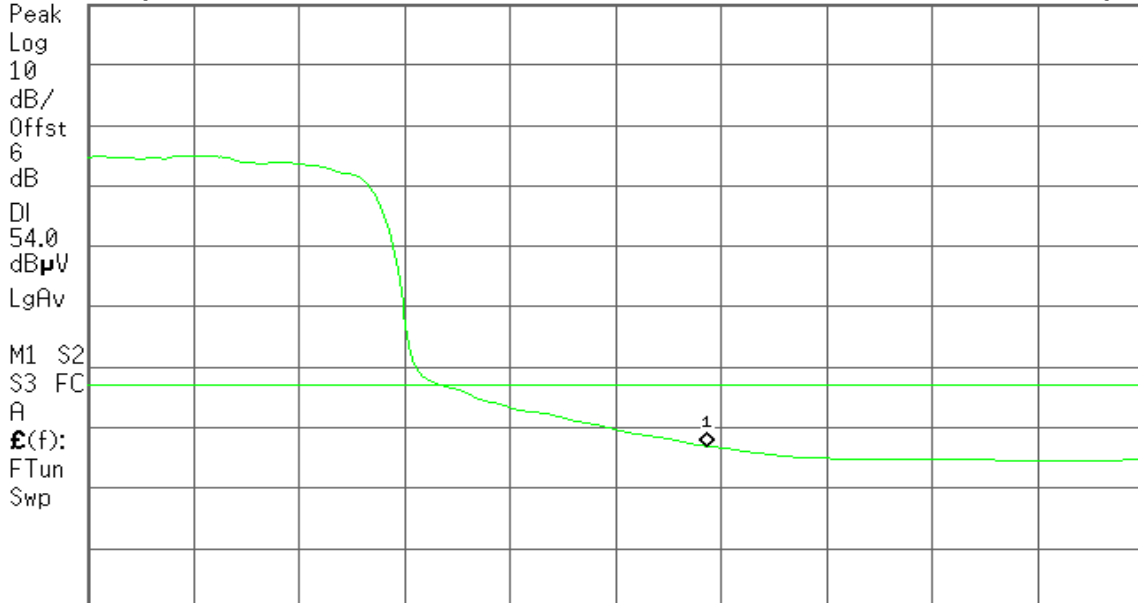

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)




Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent

R T

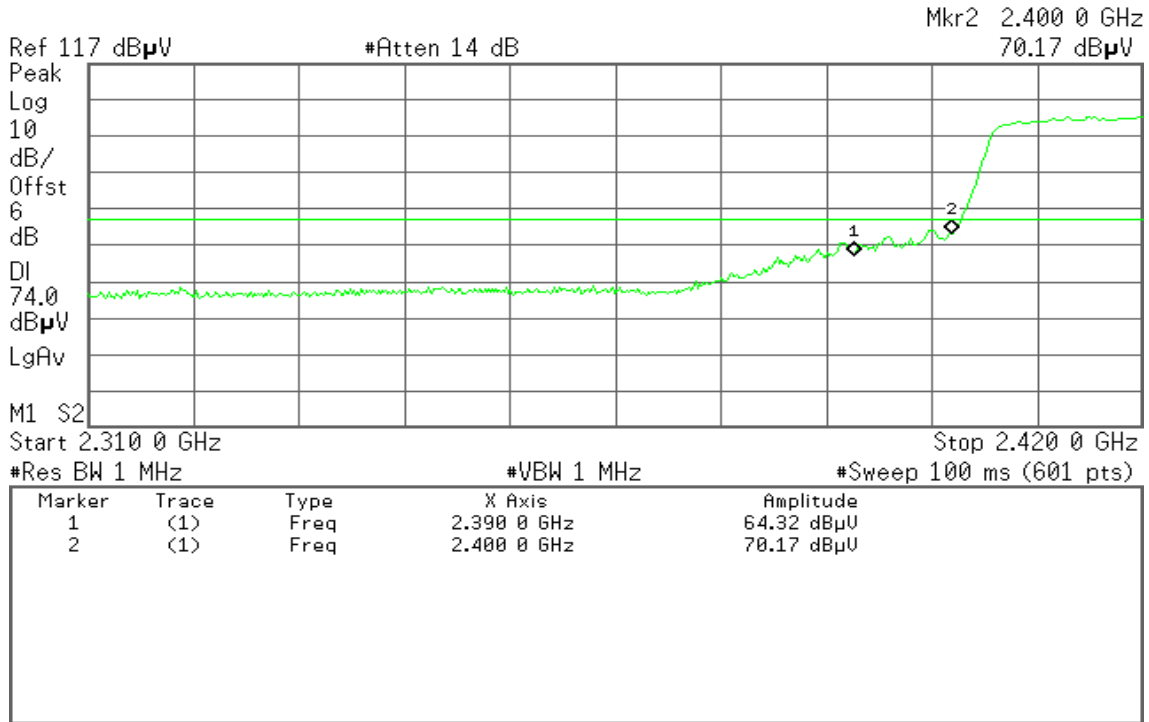


Detector mode: Average

Polarity: Vertical

Agilent

R T

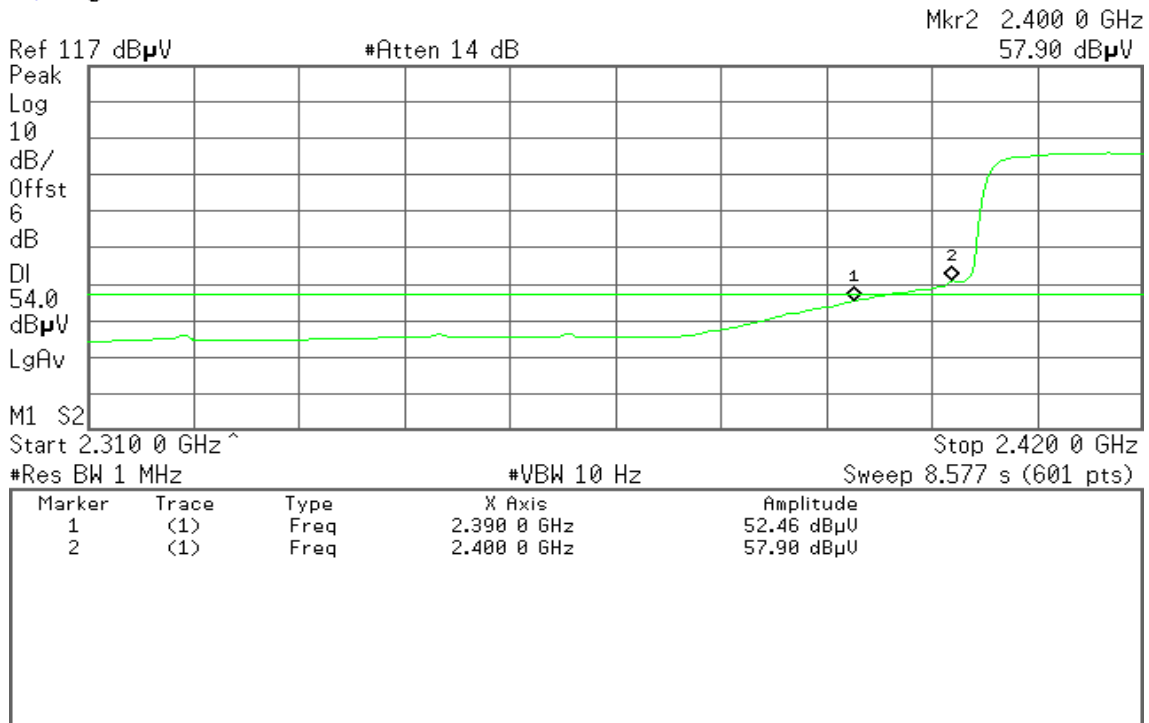




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

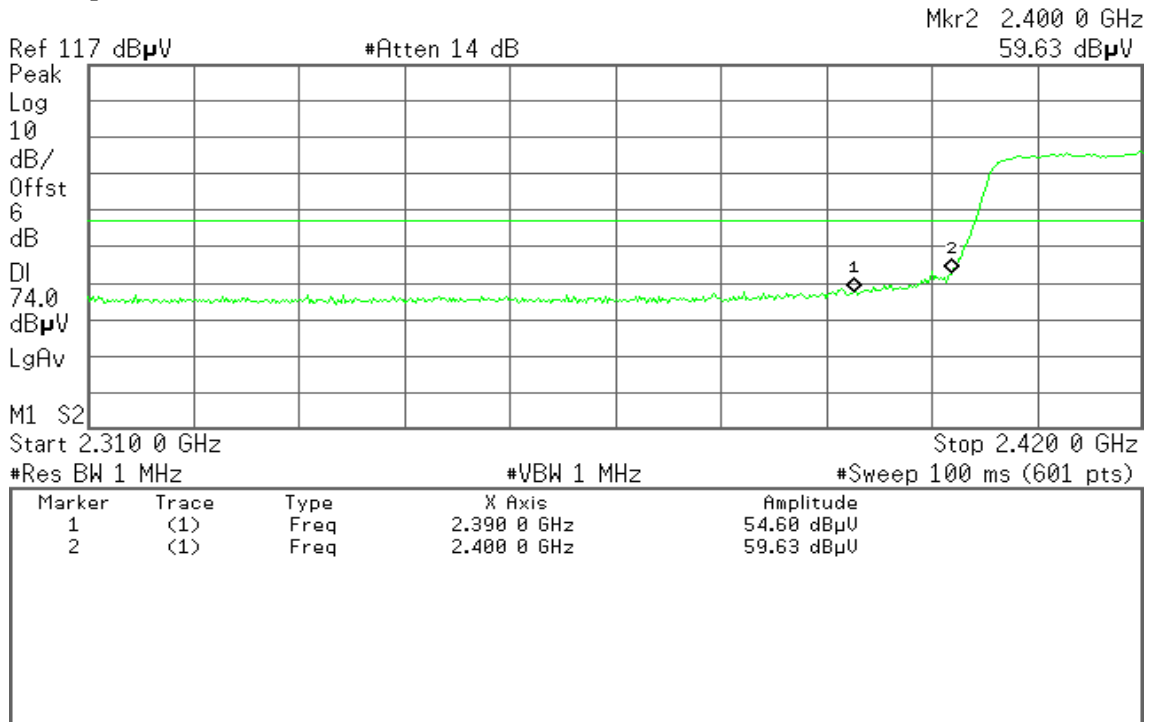


Detector mode: Average

Polarity: Horizontal

Agilent

R T

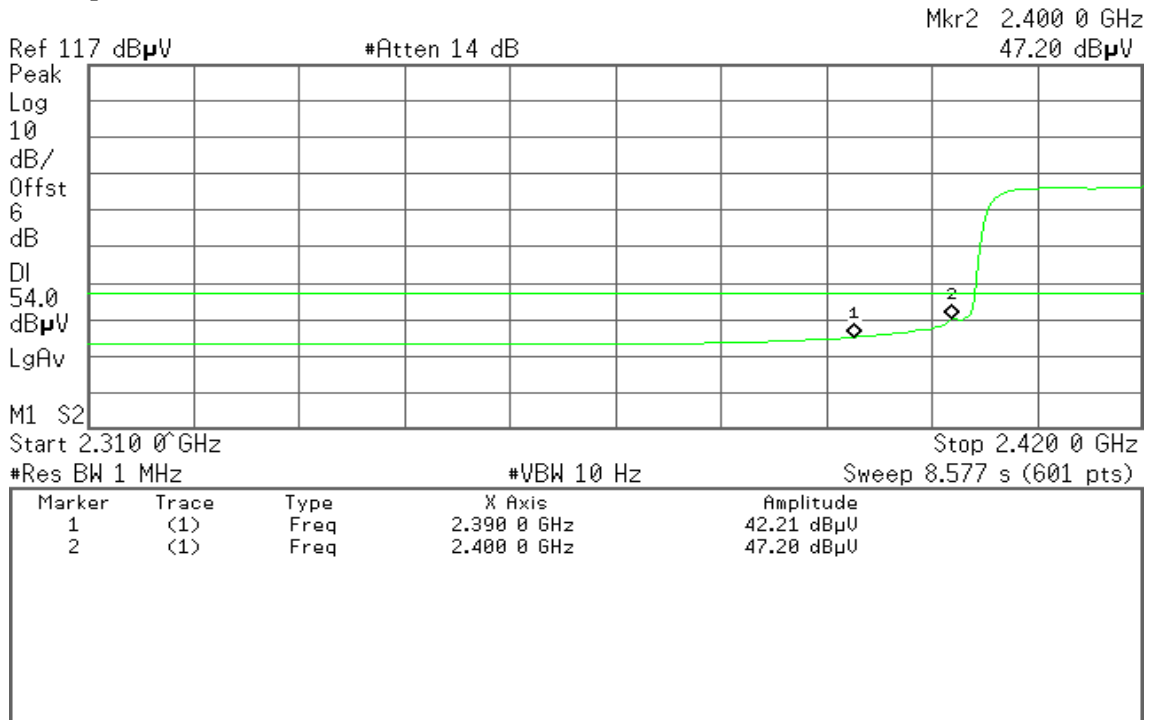



Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH High)

Detector mode: Peak

Polarity: Vertical


Agilent

R T

Mkr1 2.483 50 GHz
65.36 dB μ V

Ref 117 dB μ V

#Atten 14 dB

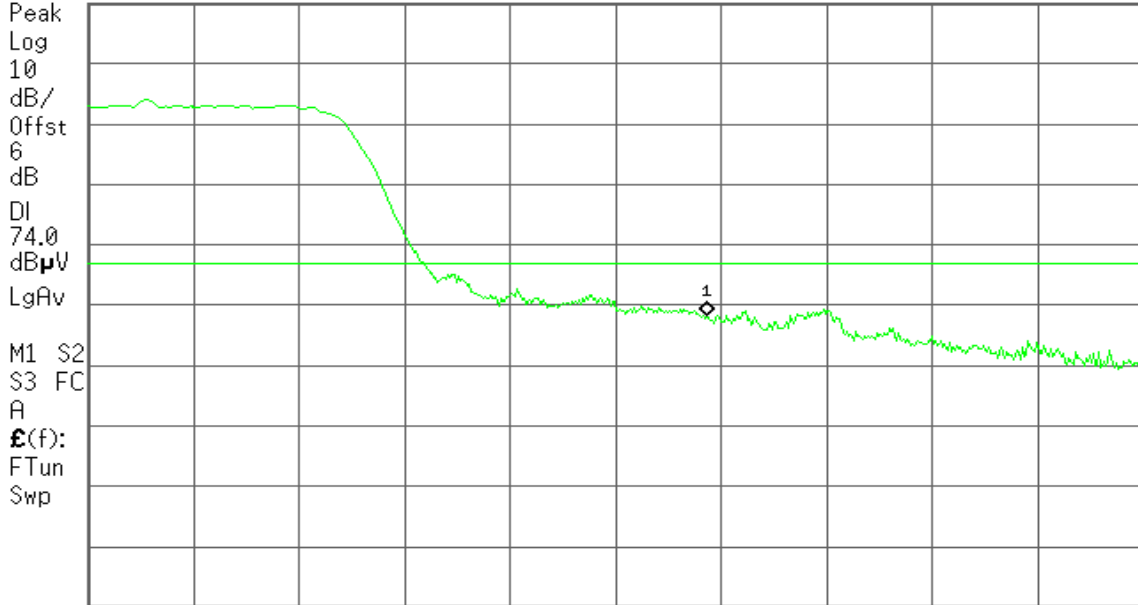

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Vertical


Agilent

R T

Mkr1 2.483 50 GHz
52.51 dB μ V

Ref 117 dB μ V

#Atten 14 dB

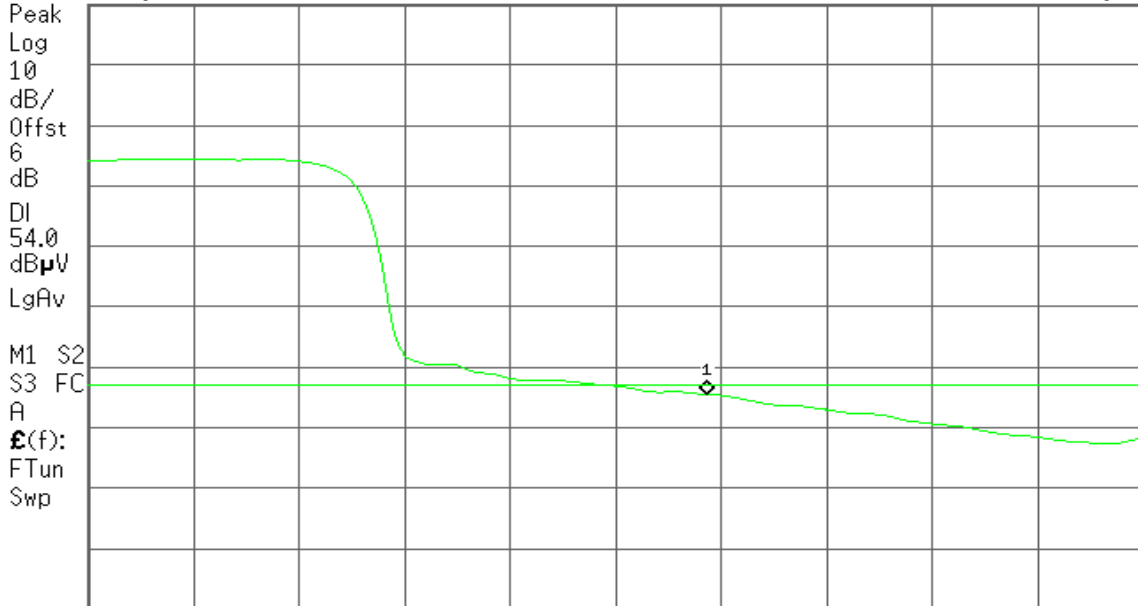

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)



Detector mode: Peak

Polarity: Horizontal


Agilent

R T

Mkr1 2.483 50 GHz
56.28 dBμV

Ref 117 dBμV

#Atten 14 dB

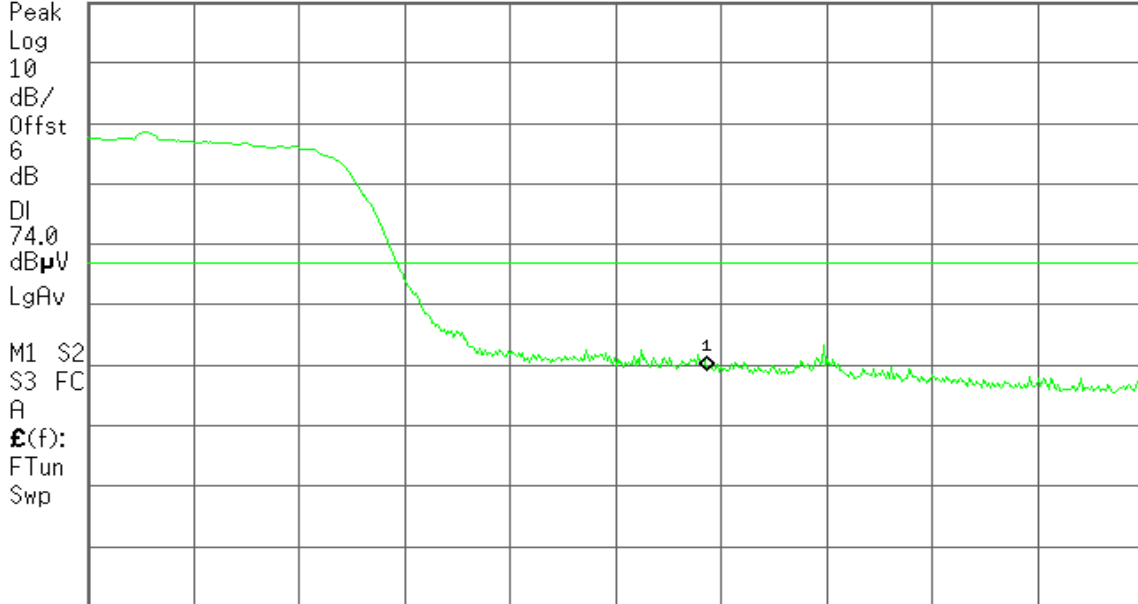

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal


Agilent

R T

Mkr1 2.483 50 GHz
44.36 dBμV

Ref 117 dBμV

#Atten 14 dB

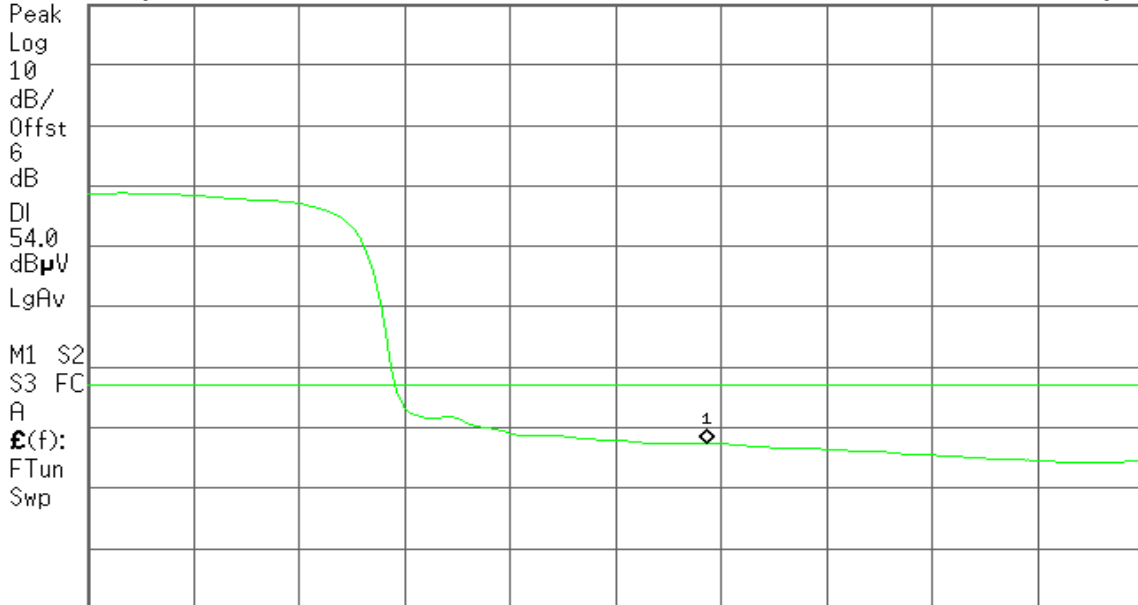

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz


Sweep 3.119 s (601 pts)

7.5 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 300 kHz, Sweep time = 100 s
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted.



Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-15.65	8.00	PASS
Mid	2437	-14.32		PASS
High	2462	-12.23		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-18.19	8.00	PASS
Mid	2437	-18.28		PASS
High	2462	-18.51		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-12.14	8.00	PASS
Mid	2437	-12.29		PASS
High	2462	-11.95		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2422	-16.16	8.00	PASS
Mid	2437	-16.92		PASS
High	2452	-17.47		PASS




Test Plot

IEEE 802.11b mode

PPSD (CH Low)

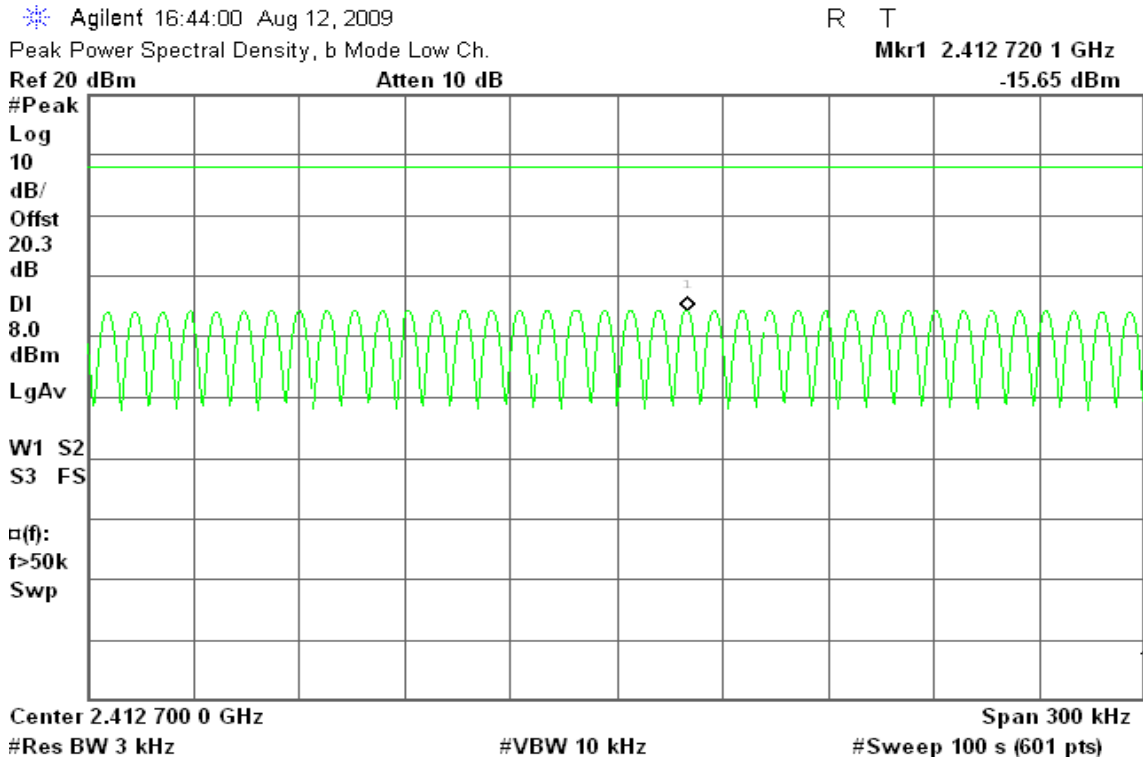

PPSD (CH Mid)

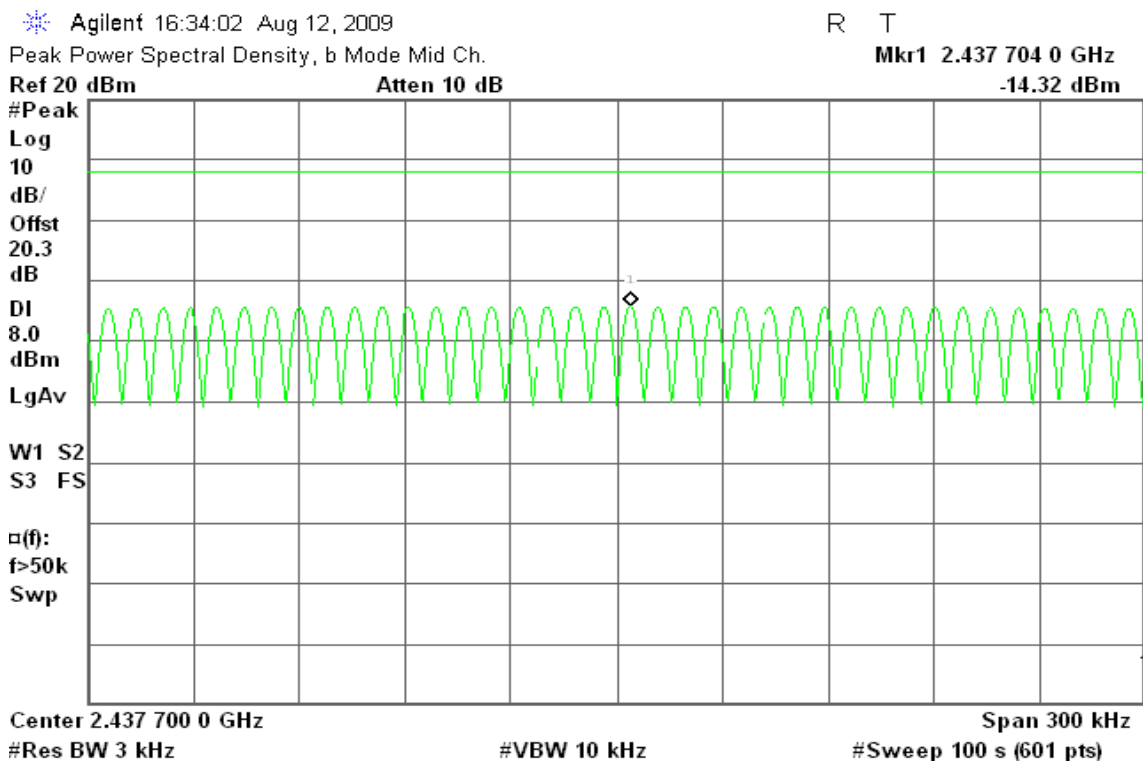



PPSD (CH High)

Agilent 16:40:15 Aug 12, 2009

R T


Peak Power Spectral Density, b Mode High Ch.

Mkr1 2.461 318 1 GHz

Ref 20 dBm

Atten 10 dB

-12.23 dBm

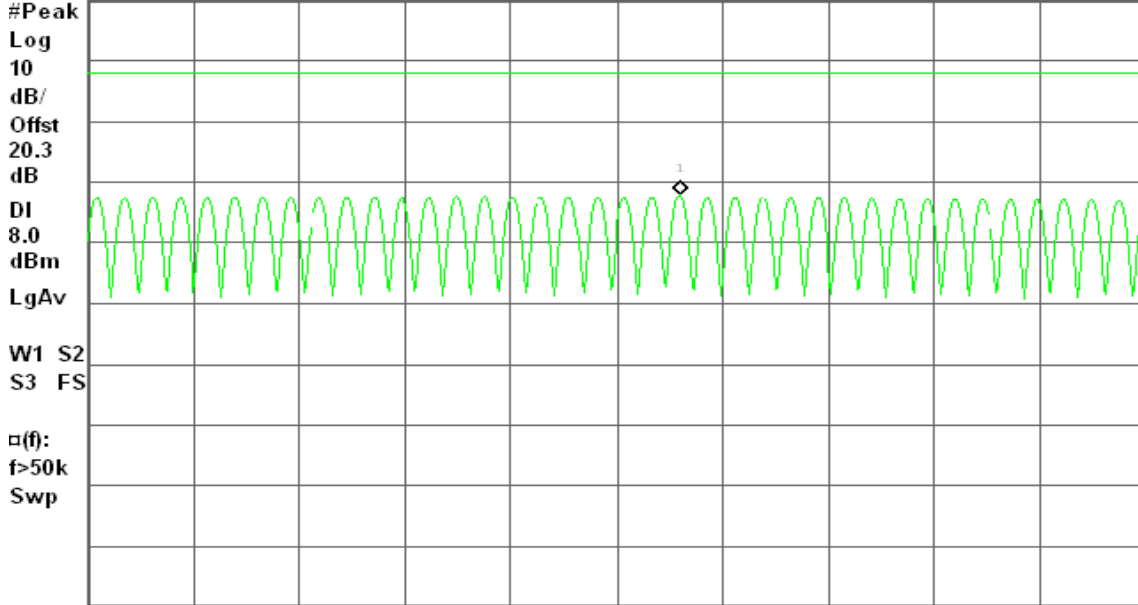

Center 2.461 300 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

IEEE 802.11g mode

PPSD (CH Low)

Agilent 16:49:17 Aug 12, 2009

R T


Peak Power Spectral Density, g Mode Low Ch.

Mkr1 2.411 048 5 GHz

Ref 20 dBm

Atten 10 dB

-18.19 dBm

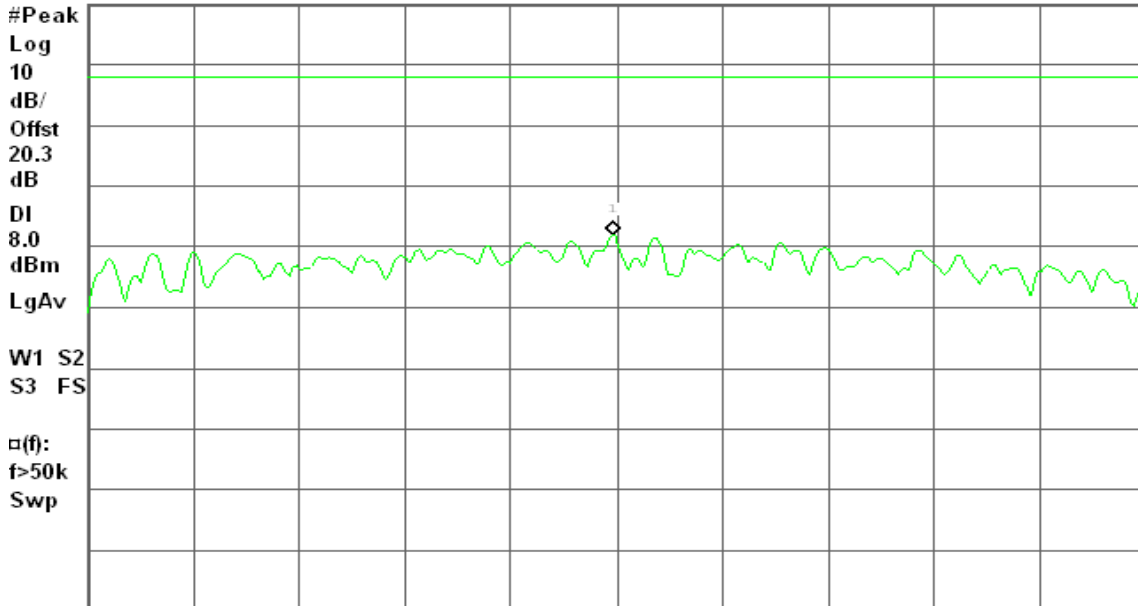

Center 2.411 050 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)



PPSD (CH Mid)

Agilent 16:56:26 Aug 12, 2009

R T


Peak Power Spectral Density, g Mode Mid Ch.

Mkr1 2.436 047 5 GHz

Ref 20 dBm

Atten 10 dB

-18.28 dBm

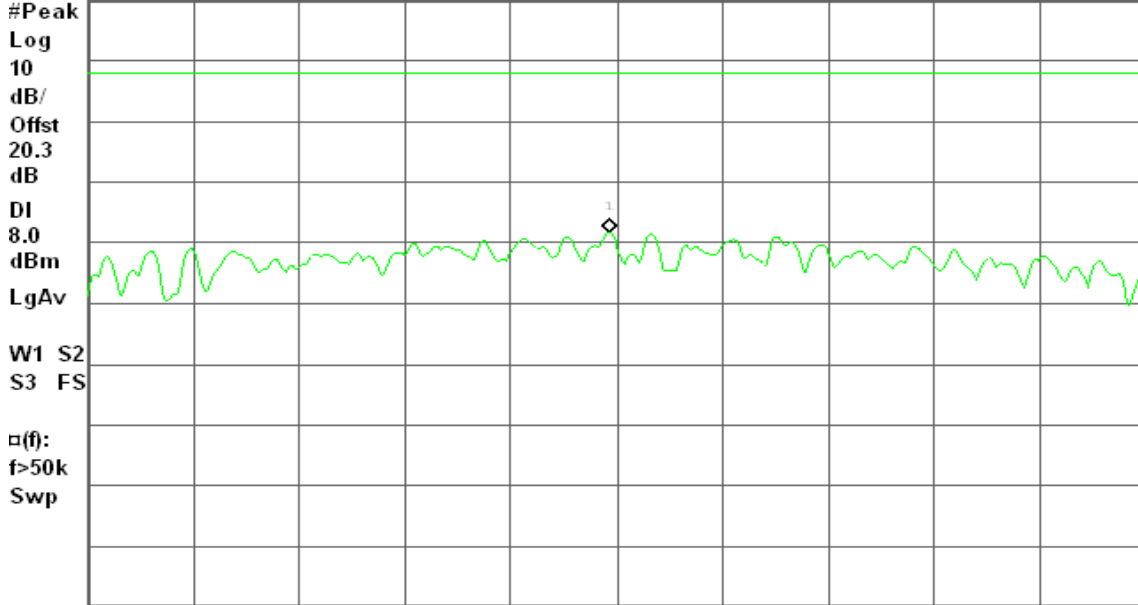

Center 2.436 050 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

PPSD (CH High)

Agilent 17:00:29 Aug 12, 2009

R T


Peak Power Spectral Density, g Mode High Ch.

Mkr1 2.464 148 0 GHz

Ref 20 dBm

Atten 10 dB

-18.51 dBm

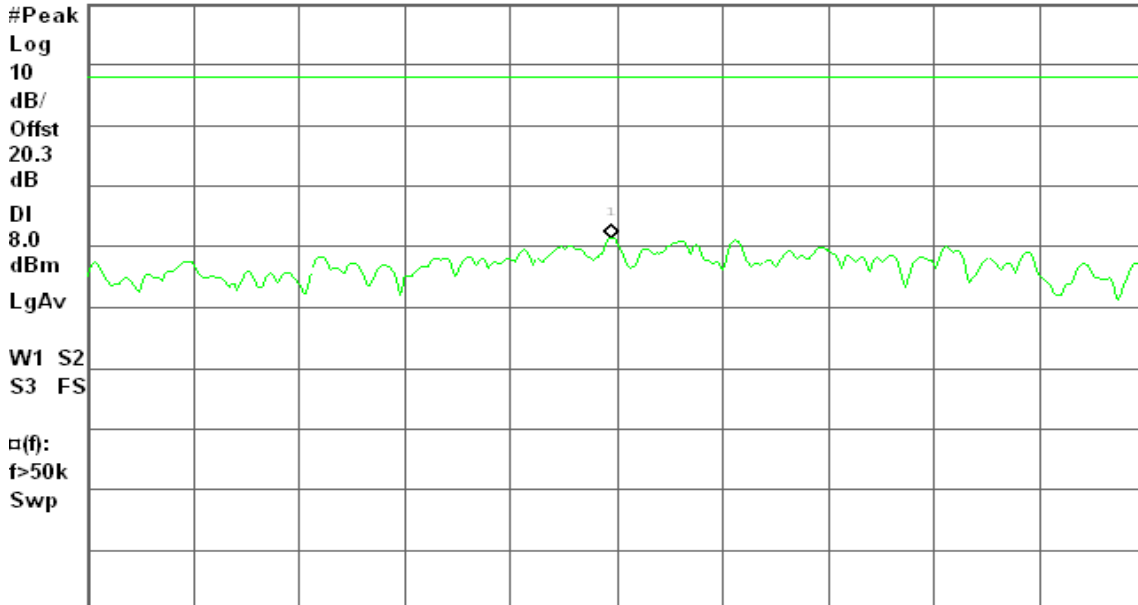

Center 2.464 150 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)



draft 802.11n Standard-20 MHz Channel mode

PPSD (CH Low)

Agilent 17:18:10 Aug 12, 2009

R T


Peak Power Spectral Density, g Mode Low Ch.

Mkr1 2.409 774 1 GHz

Ref 20 dBm

Atten 10 dB

-12.14 dBm

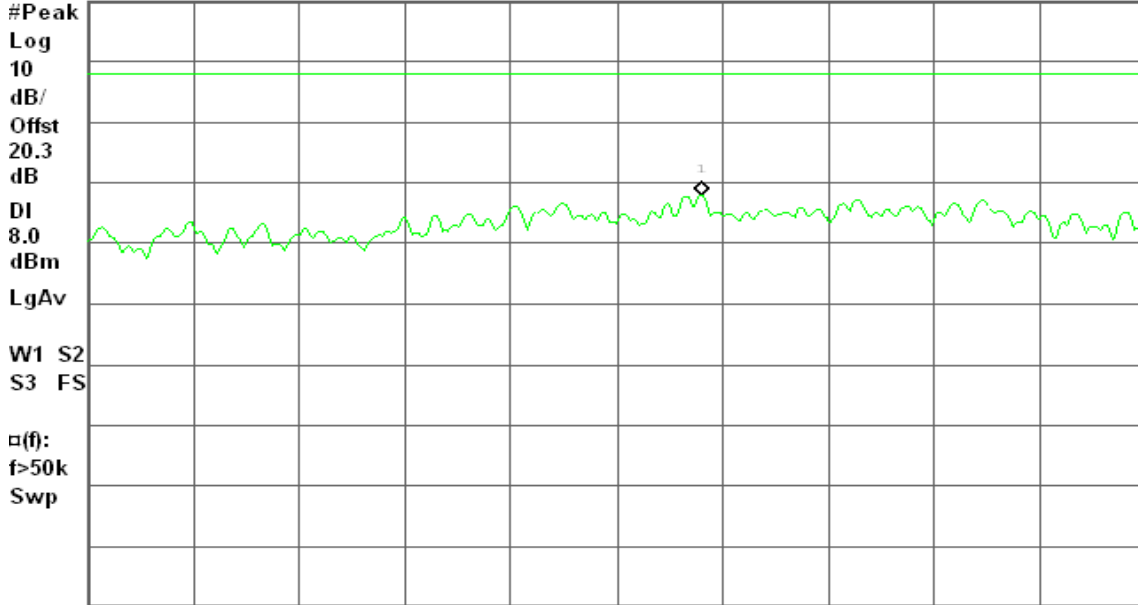

Center 2.409 750 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

PPSD (CH Mid)

Agilent 17:23:49 Aug 12, 2009

R T


Peak Power Spectral Density, g Mode Mid Ch.

Mkr1 2.434 728 1 GHz

Ref 20 dBm

Atten 10 dB

-12.29 dBm

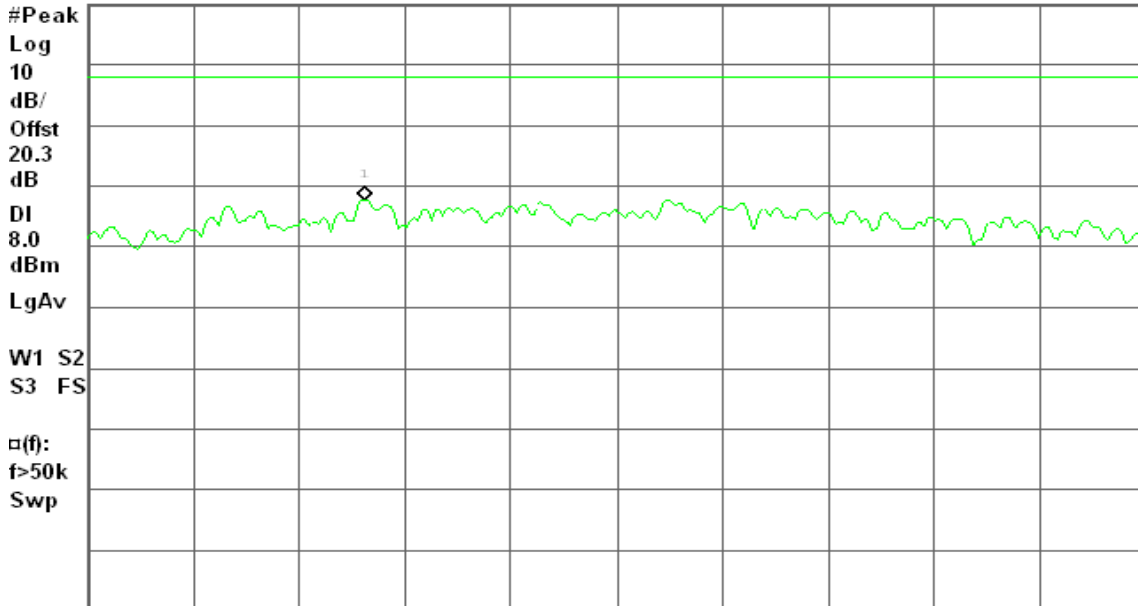

Center 2.434 800 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)



PPSD (CH High)

Agilent 17:27:59 Aug 12, 2009

R T


Peak Power Spectral Density, g Mode High Ch.

Mkr1 2.464 144 5 GHz

Ref 20 dBm

Atten 10 dB

-11.95 dBm

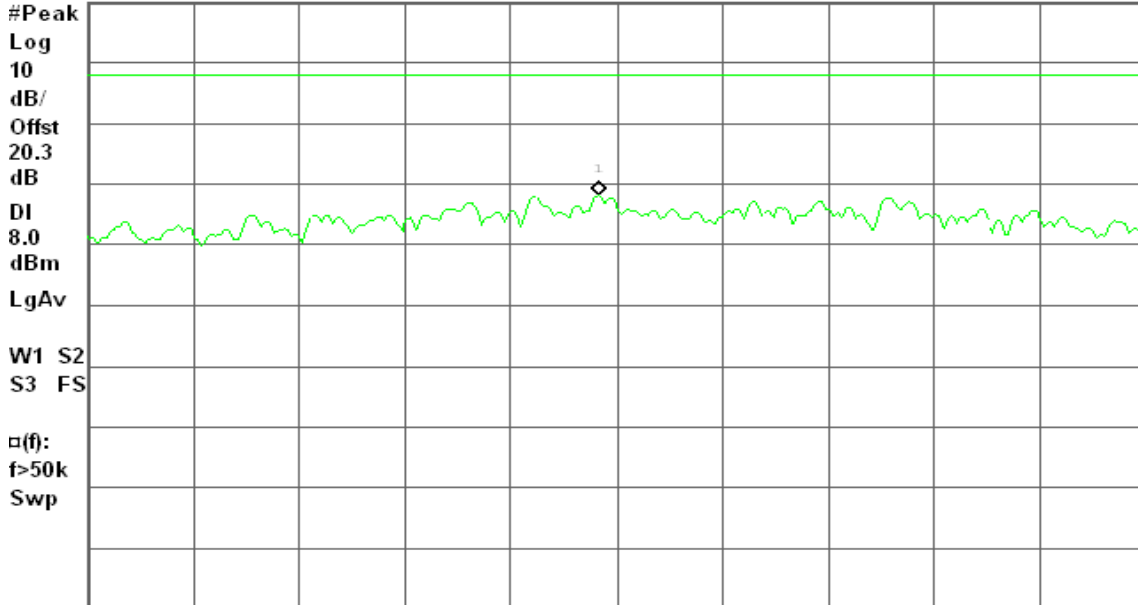

Center 2.464 150 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

draft 802.11n Wide-40 MHz Channel mode

PPSD (CH Low)

Agilent 17:32:15 Aug 12, 2009

R L


Peak Power Spectral Density, g Mode Low Ch.

Mkr1 2.414 087 9 GHz

Ref 20 dBm

Atten 10 dB

-16.16 dBm

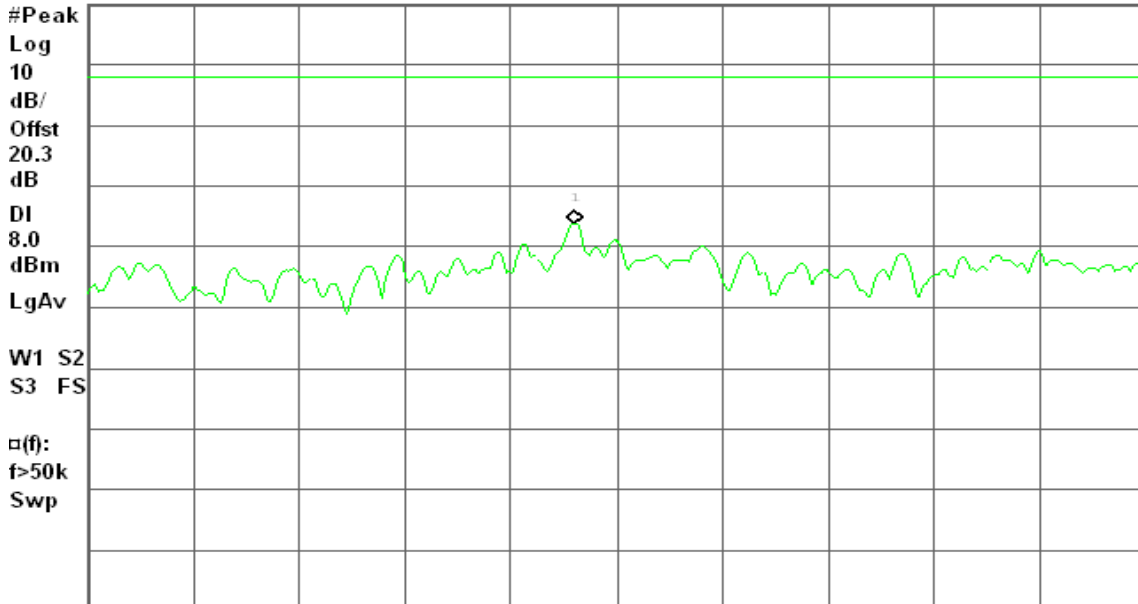

Center 2.414 100 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)



PPSD (CH Mid)

Agilent 17:36:33 Aug 12, 2009

R T


Peak Power Spectral Density, g Mode Mid Ch.

Mkr1 2.444 873 1 GHz

Ref 20 dBm

Atten 10 dB

-16.92 dBm

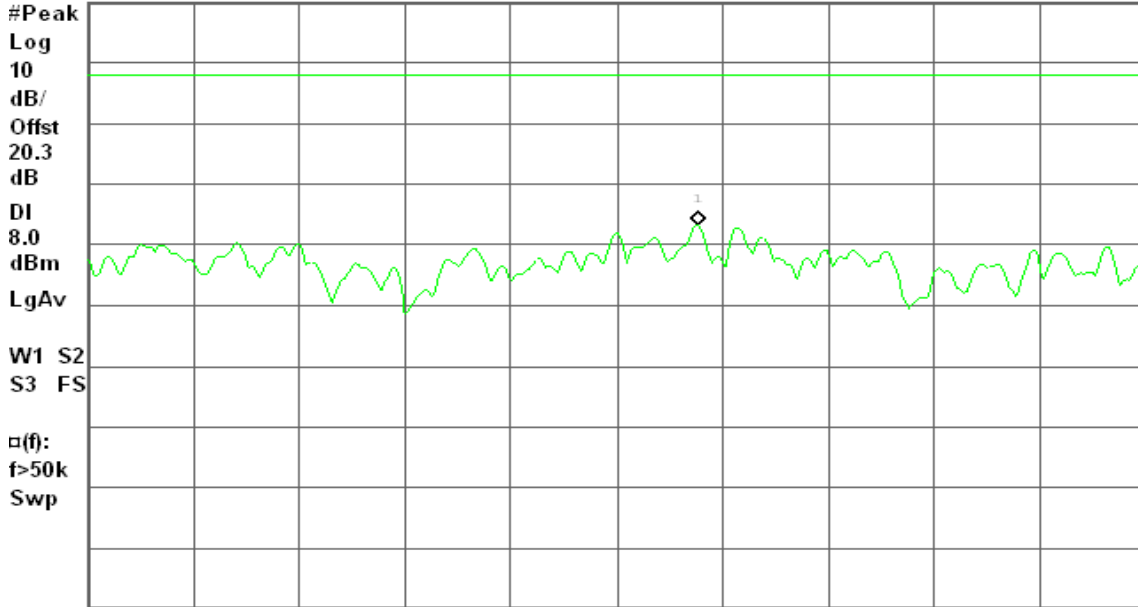

Center 2.444 850 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

PPSD (CH High)

Agilent 17:40:37 Aug 12, 2009

R T


Peak Power Spectral Density, g Mode High Ch.

Mkr1 2.459 801 0 GHz

Ref 20 dBm

Atten 10 dB

-17.47 dBm

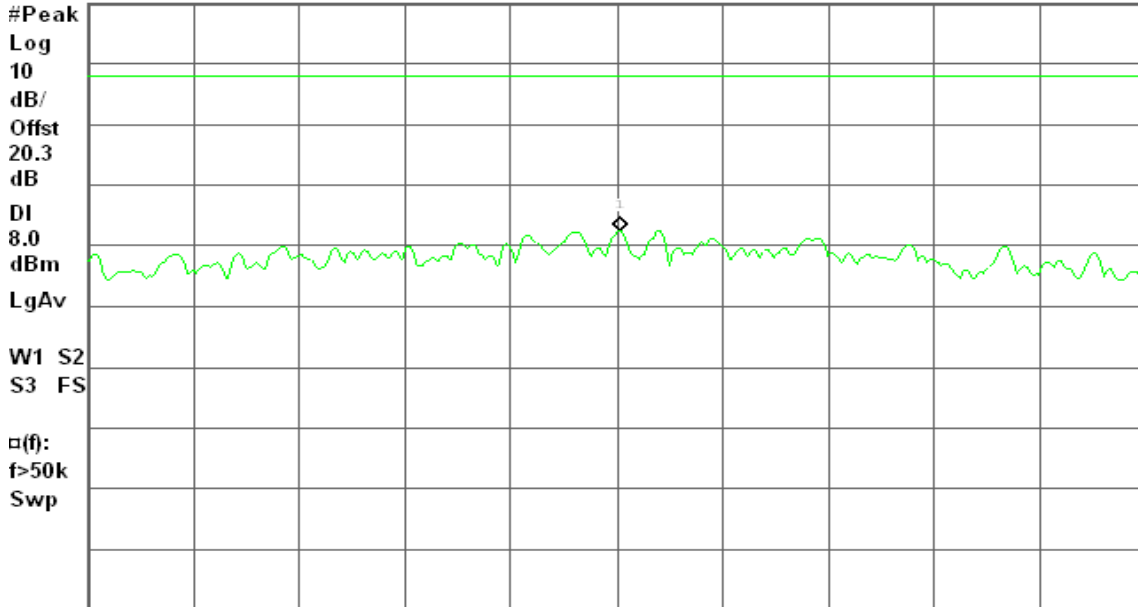

Center 2.459 800 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)


7.6 SPURIOUS EMISSIONS

7.6.1 Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

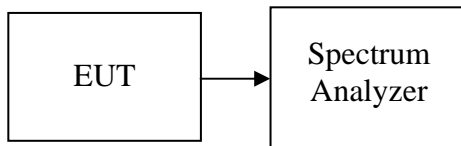

TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 13GHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted.



Test Plot

IEEE 802.11b mode

CH Low

Agilent 16:29:40 Aug 12, 2009

R T


Spurious, b Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 10 dB

3.61 dBm

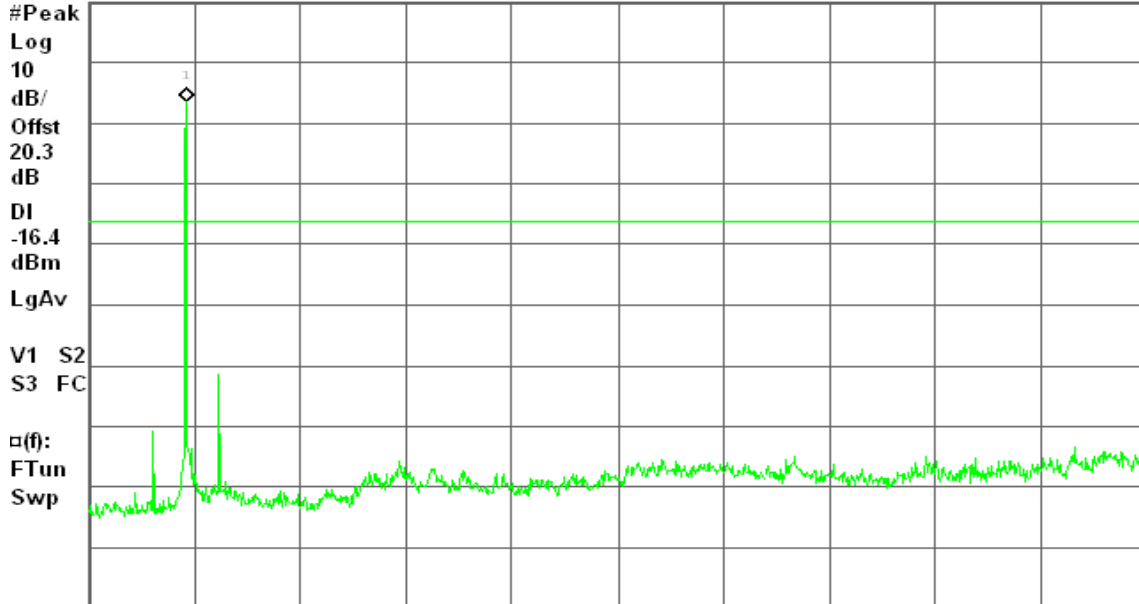

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

CH Mid

Agilent 16:35:22 Aug 12, 2009

R T


Spurious, b Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 10 dB

3.25 dBm

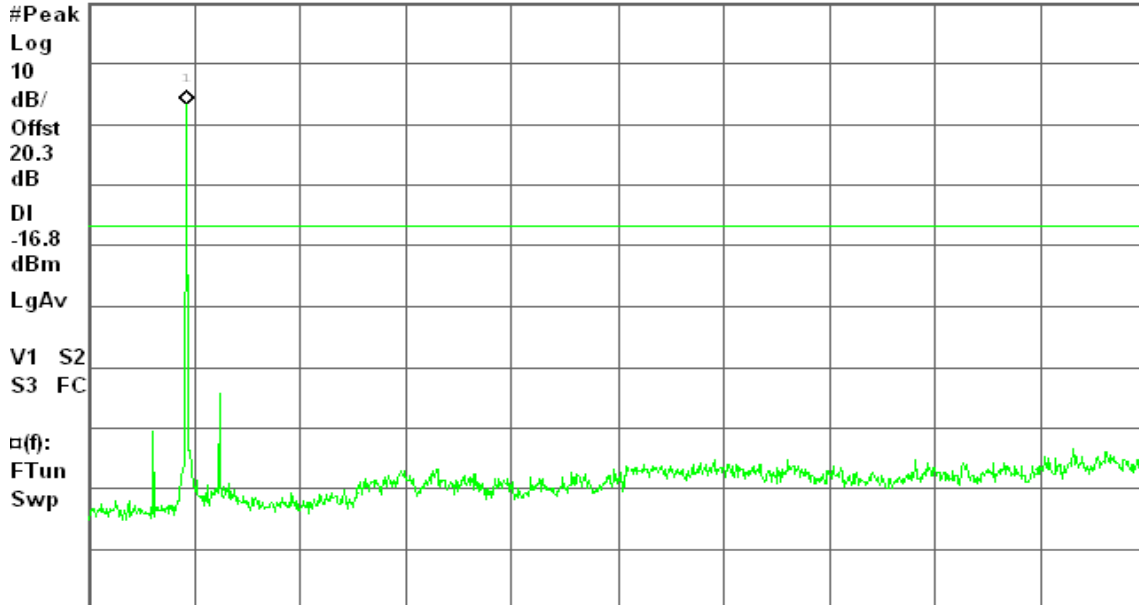

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



CH High

Agilent 16:40:55 Aug 12, 2009

R T


Spurious, b Mode High Ch.

Mkr1 2.47 GHz

Ref 20 dBm

Atten 10 dB

5.30 dBm

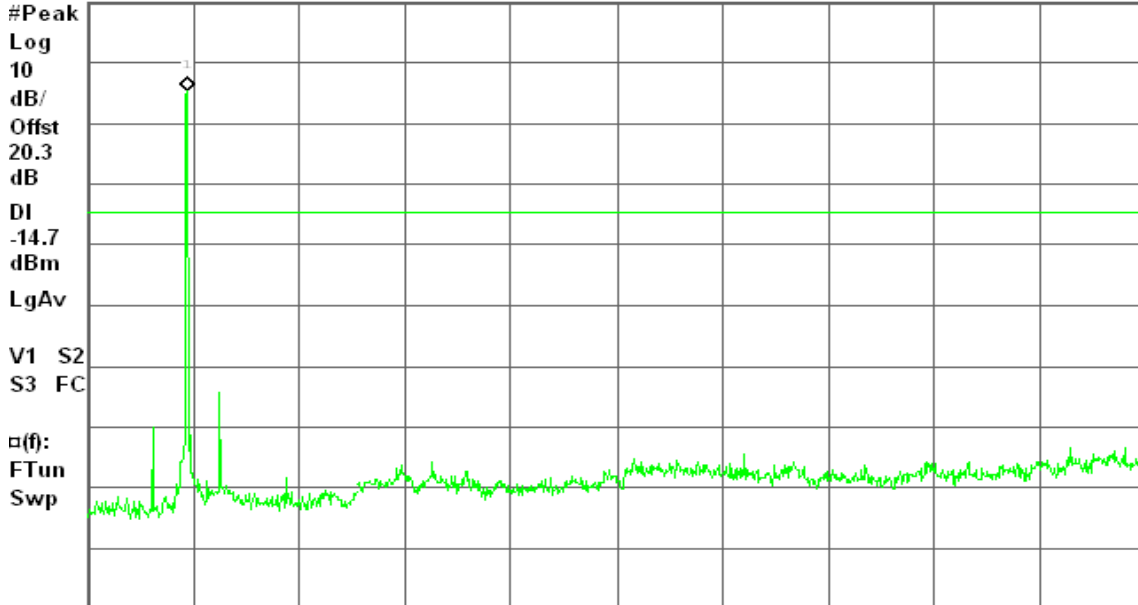

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

IEEE 802.11g mode

CH Low

Agilent 16:50:28 Aug 12, 2009

R T


Spurious, g Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 10 dB

-4.76 dBm

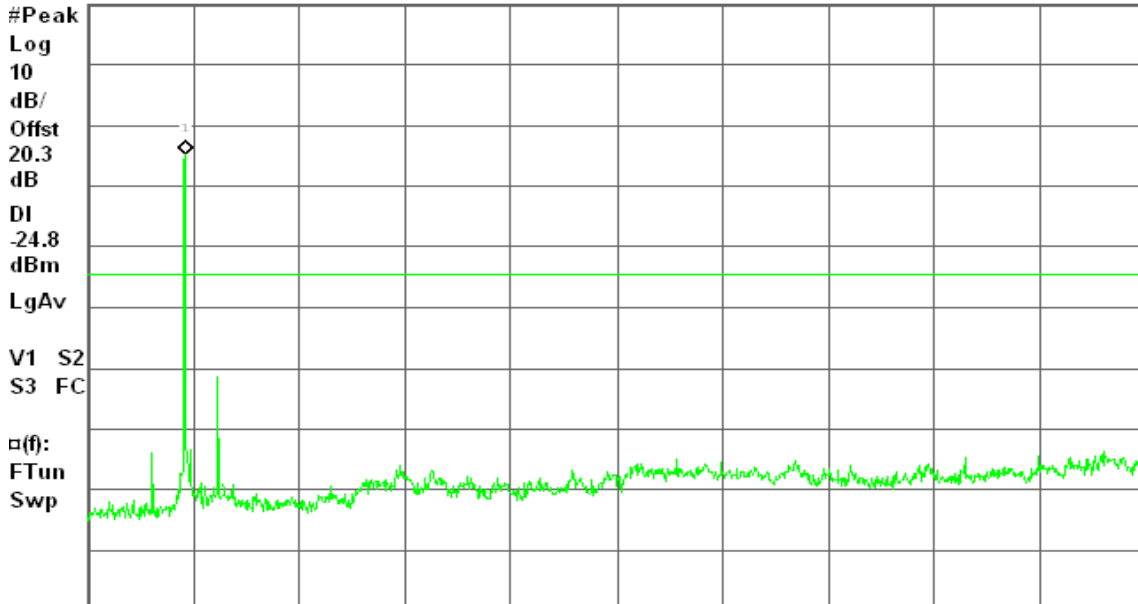

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



CH Mid

Agilent 16:57:13 Aug 12, 2009

R T


Spurious, g Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 10 dB

-4.14 dBm

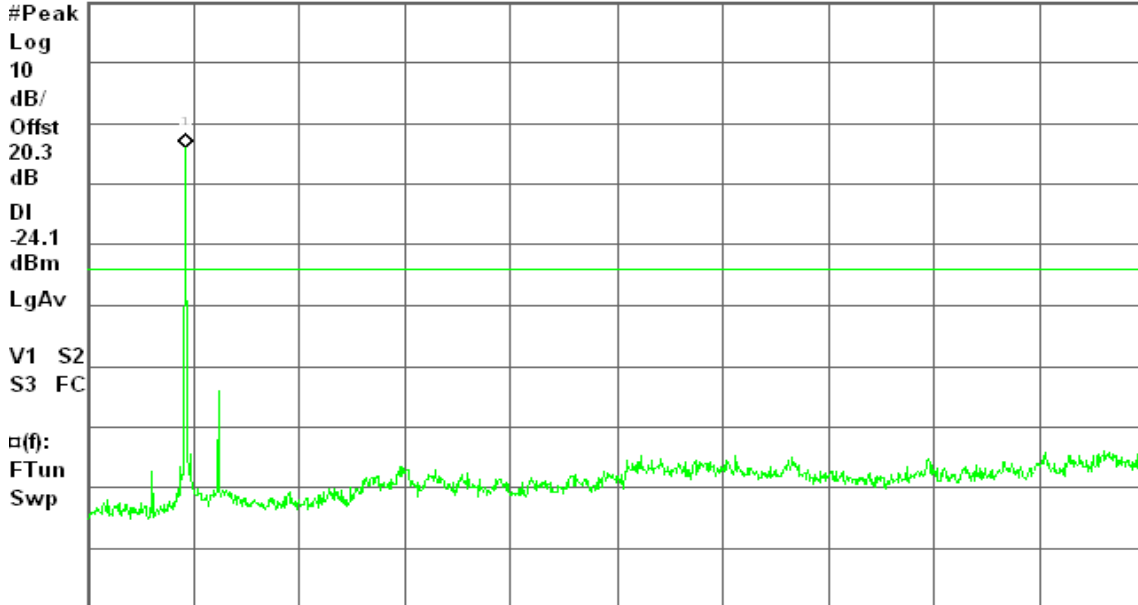

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

CH High

Agilent 17:01:09 Aug 12, 2009

R T


Spurious, g Mode High Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 10 dB

-4.37 dBm

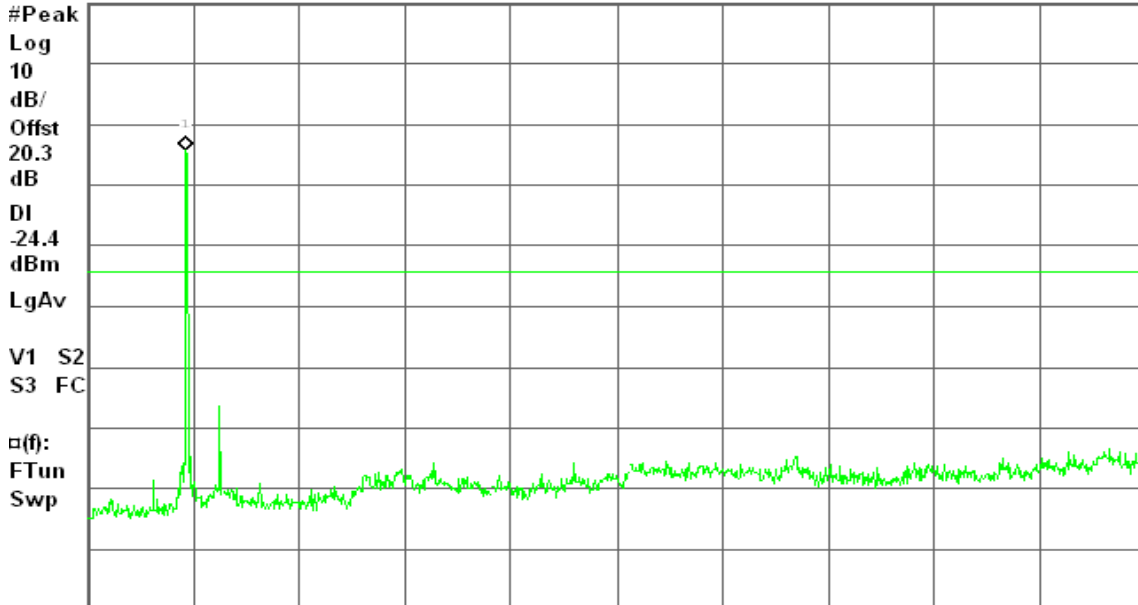

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



draft 802.11n Standard-20 MHz Channel mode

CH Low

Agilent 17:18:55 Aug 12, 2009

R L


Spurious, g Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 10 dB

0.00 dBm

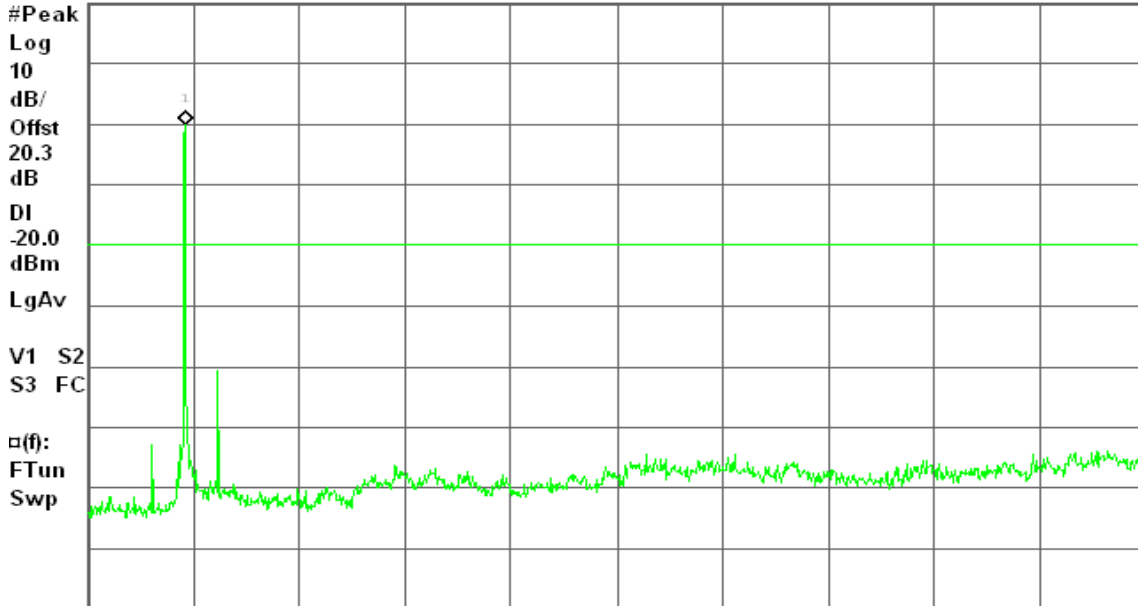

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

CH Mid

Agilent 17:24:29 Aug 12, 2009

R T


Spurious, g Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 10 dB

0.74 dBm

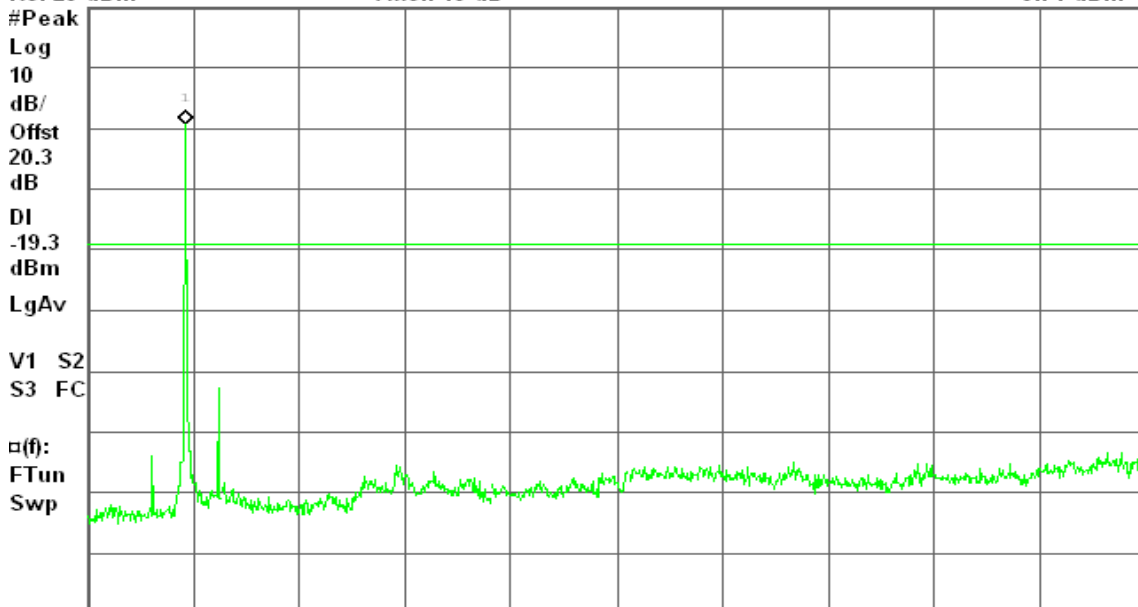

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



CH High

Agilent 17:28:38 Aug 12, 2009

R T


Spurious, g Mode High Ch.

Mkr1 2.47 GHz

Ref 20 dBm

Atten 10 dB

0.42 dBm

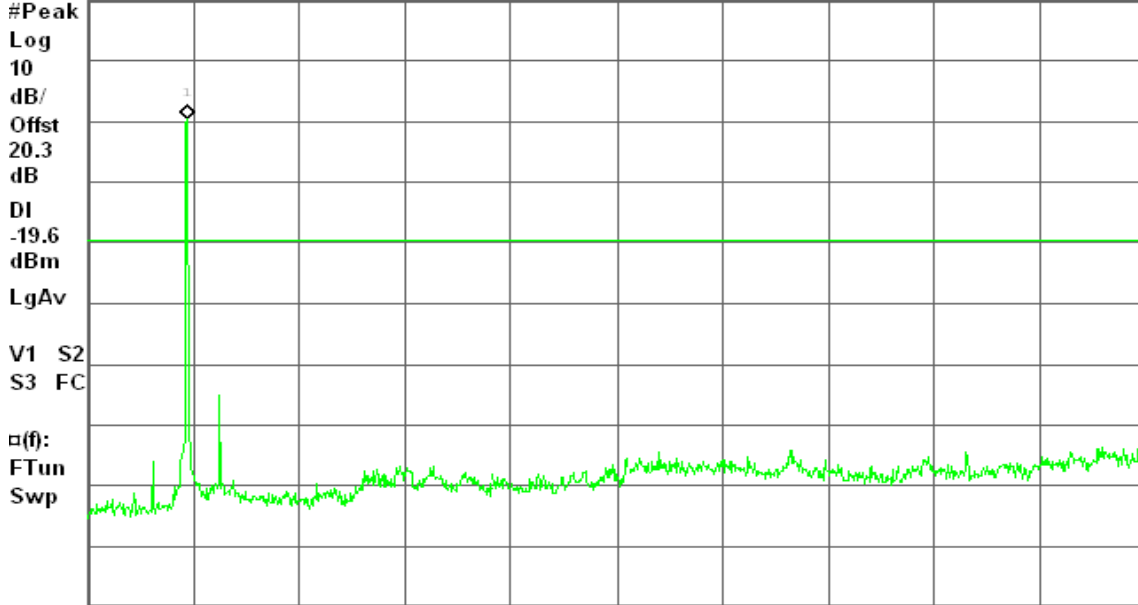

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

draft 802.11n Wide-40 MHz Channel mode

CH Low

Agilent 17:32:54 Aug 12, 2009

R T


Spurious, g Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 10 dB

-4.34 dBm

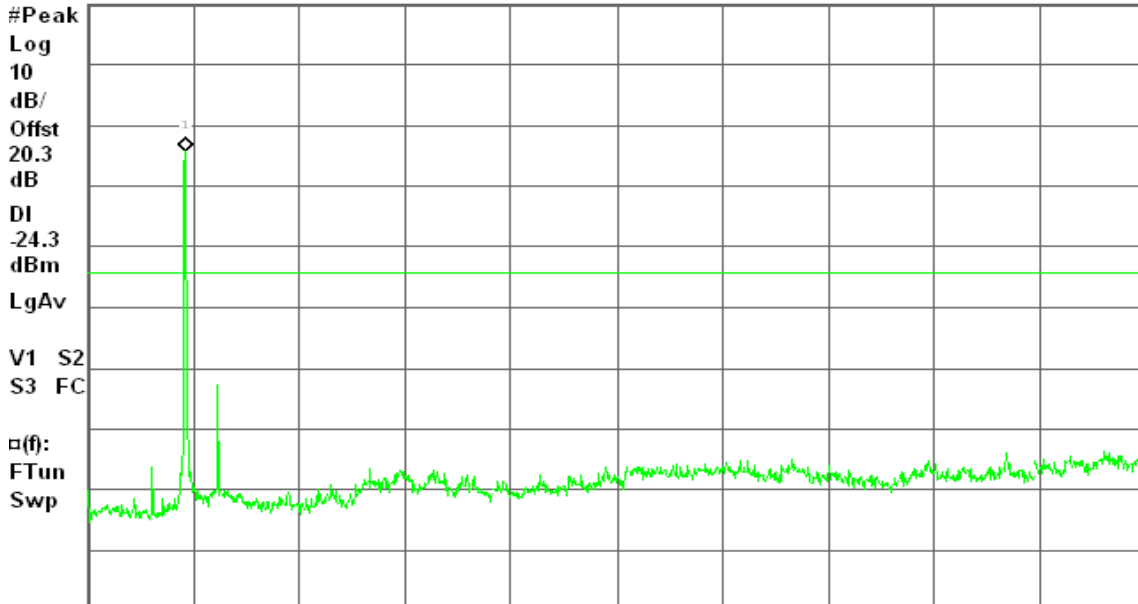

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



CH Mid

Agilent 17:37:09 Aug 12, 2009

R T


Spurious, g Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 10 dB

-2.13 dBm

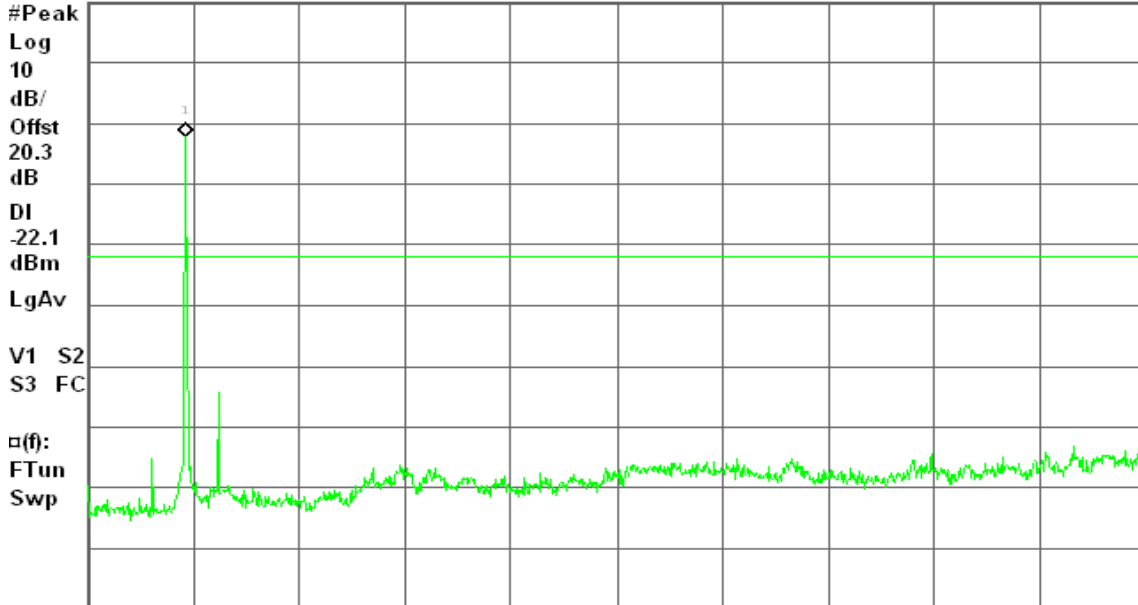

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

CH High

Agilent 17:41:14 Aug 12, 2009

R T


Spurious, g Mode High Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 10 dB

-4.92 dBm

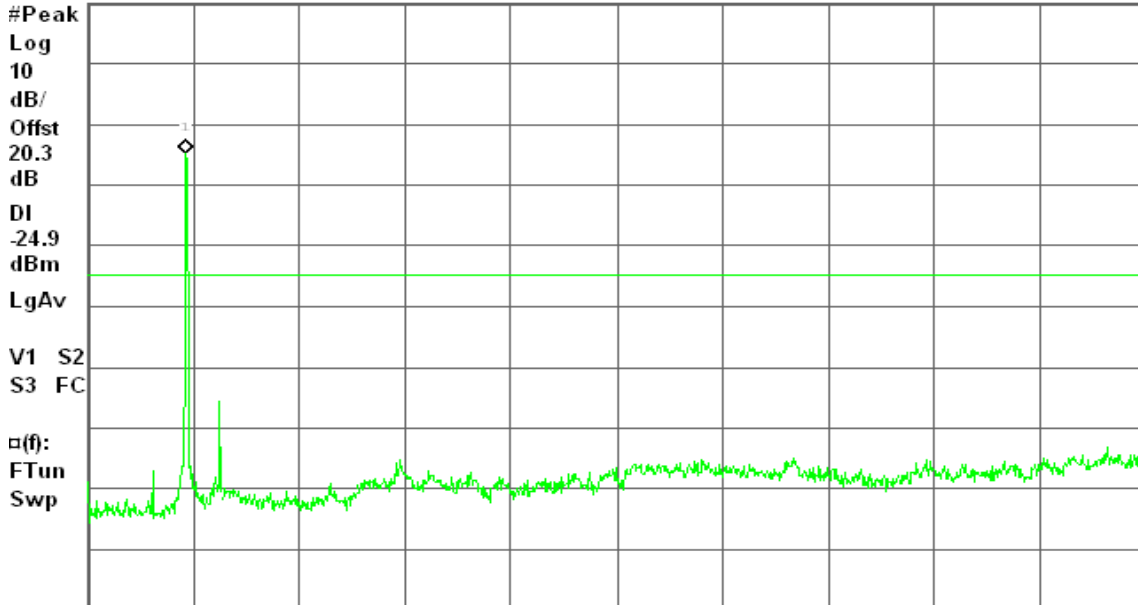

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



7.7 RADIATED EMISSIONS

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at 3-meter)	Field Strength (dB $\mu\text{V}/\text{m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Configuration

Below 1 GHz

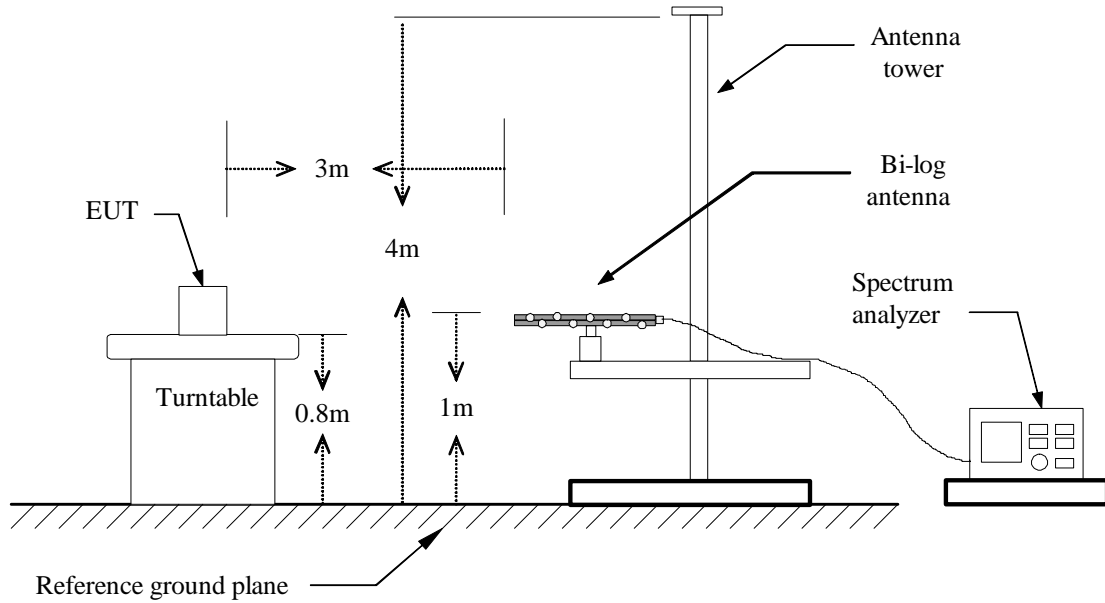

Above 1 GHz

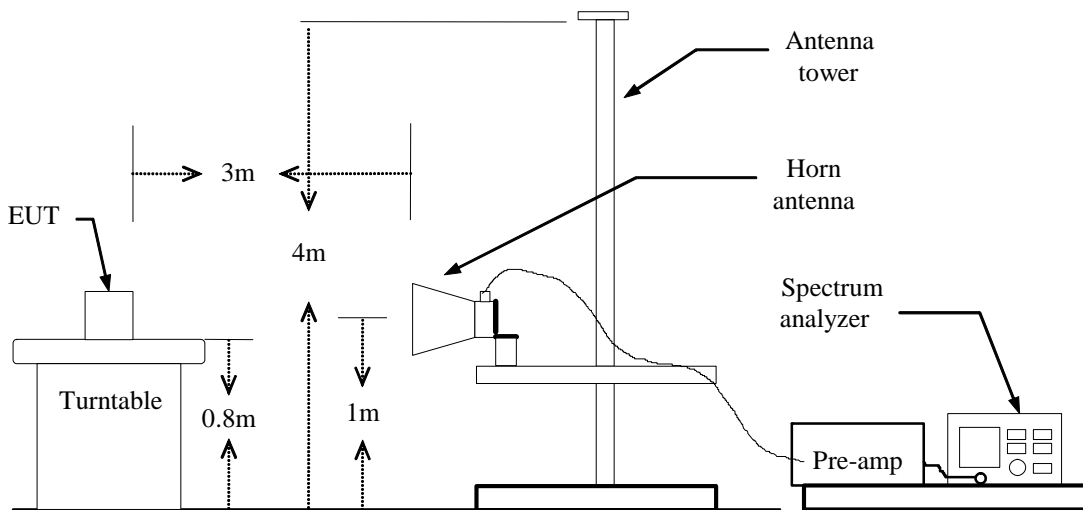



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

TEST RESULTS

No non-compliance noted.

**Below 1GHz****Operation Mode:** Normal Link**Test Date:** August 4, 2009**Temperature:** 23°C**Tested by:** Mimic Yang**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
65.57	V	49.52	-14.82	34.70	40.00	-5.30	Peak
105.98	V	45.28	-12.00	33.28	43.50	-10.22	Peak
133.47	V	42.14	-9.01	33.12	43.50	-10.38	Peak
400.22	V	43.04	-6.06	36.99	46.00	-9.01	Peak
532.78	V	37.96	-3.25	34.71	46.00	-11.29	Peak
852.88	V	35.39	0.31	35.70	46.00	-10.30	Peak
133.47	H	42.01	-9.01	33.00	43.50	-10.50	Peak
249.87	H	46.71	-9.66	37.04	46.00	-8.96	Peak
266.03	H	44.20	-9.18	35.02	46.00	-10.98	Peak
374.35	H	41.68	-6.97	34.71	46.00	-11.29	Peak
400.22	H	41.74	-6.06	35.68	46.00	-10.32	Peak
852.88	H	39.39	0.31	39.70	46.00	-6.30	Peak

Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).

**For PCB Antenna****Above 1 GHz****Operation Mode:** TX / IEEE 802.11b / CH Low**Test Date:** August 12, 2009**Temperature:** 23°C**Tested by:** Mimic Yang**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1316.67	V	55.66	---	-7.37	48.29	---	74.00	54.00	-5.71	Peak
4825.00	V	50.04	---	1.04	51.08	---	74.00	54.00	-2.92	Peak
N/A										
1330.00	H	54.97	---	-7.35	47.63	---	74.00	54.00	-6.37	Peak
4825.00	H	54.92	51.86	1.04	55.95	52.90	74.00	54.00	-1.10	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH Mid**Test Date:** August 12, 2009**Temperature:** 23°C**Tested by:** Mimic Yang**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1386.67	V	55.56	---	-7.24	48.32	---	74.00	54.00	-5.68	Peak
4875.00	V	53.06	42.27	1.02	54.08	43.29	74.00	54.00	-10.71	AVG
N/A										
1366.67	H	54.79	---	-7.28	47.51	---	74.00	54.00	-6.49	Peak
4875.00	H	55.89	51.76	1.02	56.91	52.78	74.00	54.00	-1.22	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH High**Test Date:** August 12, 2009**Temperature:** 23°C**Tested by:** Mimic Yang**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1360.00	V	55.24	---	-7.29	47.95	---	74.00	54.00	-6.05	Peak
4925.00	V	53.27	46.60	1.01	54.28	47.61	74.00	54.00	-6.39	AVG
N/A										
1366.67	H	54.94	---	-7.28	47.67	---	74.00	54.00	-6.33	Peak
4925.00	H	53.95	49.38	1.01	54.96	50.39	74.00	54.00	-3.61	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Low**Test Date:** August 12, 2009**Temperature:** 23°C**Tested by:** Mimic Yang**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1453.33	V	55.20	---	-7.12	48.09	---	74.00	54.00	-5.91	Peak
N/A										
1473.33	H	55.06	---	-7.08	47.98	---	74.00	54.00	-6.02	Peak
4825.00	H	53.44	40.66	1.04	54.48	41.70	74.00	54.00	-12.30	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Mid**Test Date:** August 12, 2009**Temperature:** 23°C**Tested by:** Mimic Yang**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1456.67	V	54.91	---	-7.11	47.80	---	74.00	54.00	-6.20	Peak
N/A										
1330.00	H	55.68	---	-7.35	48.34	---	74.00	54.00	-5.66	Peak
3250.00	H	49.42	---	-0.15	49.27	---	74.00	54.00	-4.73	Peak
4875.00	H	49.84	---	1.02	50.86	---	74.00	54.00	-3.14	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH High

Test Date: August 12, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1456.67	V	54.67	---	-7.11	47.56	---	74.00	54.00	-6.44	Peak
N/A										
1400.00	H	54.96	---	-7.22	47.74	---	74.00	54.00	-6.26	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Low

Test Date: August 12, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1376.67	V	54.92	---	-7.26	47.66	---	74.00	54.00	-6.34	Peak
3216.67	V	49.35	---	-0.19	49.16	---	74.00	54.00	-4.84	Peak
N/A										
1333.33	H	55.20	---	-7.34	47.86	---	74.00	54.00	-6.14	Peak
4825.00	H	49.65	---	1.04	50.69	---	74.00	54.00	-3.31	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Mid

Test Date: August 12, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1313.33	V	55.46	---	-7.38	48.08	---	74.00	54.00	-5.92	Peak
N/A										
1290.00	H	55.22	---	-7.42	47.80	---	74.00	54.00	-6.20	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH High

Test Date: August 12, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1333.33	V	55.32	---	-7.34	47.98	---	74.00	54.00	-6.02	Peak
N/A										
1383.33	H	55.05	---	-7.25	47.80	---	74.00	54.00	-6.20	Peak
3283.33	H	49.69	---	-0.11	49.58	---	74.00	54.00	-4.42	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH Low

Test Date: August 12, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1300.00	V	56.44	---	-7.40	49.04	---	74.00	54.00	-4.96	Peak
N/A										
1326.67	H	55.07	---	-7.35	47.72	---	74.00	54.00	-6.28	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH Mid

Test Date: August 12, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1270.00	V	55.43	---	-7.46	47.98	---	74.00	54.00	-6.02	Peak
3250.00	V	49.07	---	-0.15	48.92	---	74.00	54.00	-5.08	Peak
N/A										
1066.67	H	58.17	---	-7.84	50.33	---	74.00	54.00	-3.67	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH High

Test Date: August 12, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1066.67	V	57.22	---	-7.84	49.39	---	74.00	54.00	-4.61	Peak
N/A										
1066.67	H	57.36	---	-7.84	49.52	---	74.00	54.00	-4.48	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**For PIFA Antenna****Above 1 GHz****Operation Mode:** TX / IEEE 802.11b / CH Low**Test Date:** August 11, 2009**Temperature:** 23°C**Tested by:** Mimic Yang**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1320.00	V	55.52	---	-7.36	48.16	---	74.00	54.00	-5.84	Peak
3216.67	V	51.66	---	-0.19	51.48	---	74.00	54.00	-2.52	Peak
4825.00	V	49.95	---	1.04	50.99	---	74.00	54.00	-3.01	Peak
N/A										
1340.00	H	55.28	---	-7.33	47.95	---	74.00	54.00	-6.05	Peak
3216.67	H	49.09	---	-0.19	48.91	---	74.00	54.00	-5.09	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH Mid**Test Date:** August 11, 2009**Temperature:** 23°C**Tested by:** Mimic Yang**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1330.00	V	55.04	---	-7.35	47.69	---	74.00	54.00	-6.31	Peak
3250.00	V	52.11	---	-0.15	51.96	---	74.00	54.00	-2.04	Peak
4875.00	V	53.48	47.74	1.02	54.50	48.76	74.00	54.00	-5.24	AVG
N/A										
1386.67	H	55.28	---	-7.24	48.03	---	74.00	54.00	-5.97	Peak
3250.00	H	51.63	---	-0.15	51.48	---	74.00	54.00	-2.52	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH High**Test Date:** August 11, 2009**Temperature:** 23°C**Tested by:** Mimic Yang**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1300.00	V	55.38	---	-7.40	47.98	---	74.00	54.00	-6.02	Peak
3283.33	V	54.54	50.31	-0.11	54.43	50.20	74.00	54.00	-3.80	AVG
4925.00	V	53.51	47.55	1.01	54.52	48.56	74.00	54.00	-5.44	AVG
N/A										
1383.33	H	55.61	---	-7.25	48.36	---	74.00	54.00	-5.64	Peak
3283.33	H	54.65	53.12	-0.11	54.54	53.01	74.00	54.00	-0.99	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Low**Test Date:** August 11, 2009**Temperature:** 23°C**Tested by:** Mimic Yang**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1506.67	V	56.73	---	-6.97	49.77	---	74.00	54.00	-4.23	Peak
3216.67	V	54.65	50.84	-0.19	54.46	50.65	74.00	54.00	-3.35	AVG
N/A										
1350.00	H	56.00	---	-7.31	48.69	---	74.00	54.00	-5.31	Peak
3216.67	H	50.25	---	-0.19	50.07	---	74.00	54.00	-3.93	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Mid**Test Date:** August 12, 2009**Temperature:** 23°C**Tested by:** Mimic Yang**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1353.33	V	55.79	---	-7.30	48.49	---	74.00	54.00	-5.51	Peak
3250.00	V	51.86	---	-0.15	51.71	---	74.00	54.00	-2.29	Peak
N/A										
1400.00	H	55.70	---	-7.22	48.49	---	74.00	54.00	-5.51	Peak
3250.00	H	52.07	---	-0.15	51.92	---	74.00	54.00	-2.08	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH High**Test Date:** August 12, 2009**Temperature:** 23°C**Tested by:** Mimic Yang**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1340.00	V	55.65	---	-7.33	48.33	---	74.00	54.00	-5.67	Peak
3283.33	V	51.05	---	-0.11	50.94	---	74.00	54.00	-3.06	Peak
N/A										
1066.67	H	58.01	---	-7.84	50.18	---	74.00	54.00	-3.82	Peak
3283.33	H	54.87	49.45	-0.11	54.76	49.34	74.00	54.00	-4.66	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Low

Test Date: August 12, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1273.33	V	55.51	---	-7.45	48.06	---	74.00	54.00	-5.94	Peak
3216.67	V	54.87	50.18	-0.19	54.68	49.99	74.00	54.00	-4.01	AVG
N/A										
1266.67	H	54.72	---	-7.46	47.26	---	74.00	54.00	-6.74	Peak
3216.67	H	50.56	---	-0.19	50.37	---	74.00	54.00	-3.63	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Mid

Test Date: August 12, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1263.33	V	55.68	---	-7.47	48.21	---	74.00	54.00	-5.79	Peak
3250.00	V	54.96	51.98	-0.15	54.81	51.83	74.00	54.00	-2.17	AVG
N/A										
1253.33	H	55.60	---	-7.49	48.11	---	74.00	54.00	-5.89	Peak
3250.00	H	54.46	51.41	-0.15	54.31	51.26	74.00	54.00	-2.74	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH High

Test Date: August 12, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1273.33	V	55.37	---	-7.45	47.92	---	74.00	54.00	-6.08	Peak
3283.33	V	54.18	50.71	-0.11	54.07	50.60	74.00	54.00	-3.40	AVG
N/A										
1380.00	H	55.80	---	-7.25	48.55	---	74.00	54.00	-5.45	Peak
3283.33	H	55.08	53.40	-0.11	54.97	53.29	74.00	54.00	-0.71	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH Low

Test Date: August 12, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1280.00	V	55.15	---	-7.44	47.71	---	74.00	54.00	-6.29	Peak
3266.67	V	51.70	---	-0.13	51.57	---	74.00	54.00	-2.43	Peak
N/A										
1336.67	H	55.30	---	-7.33	47.97	---	74.00	54.00	-6.03	Peak
3266.67	H	54.15	49.91	-0.13	54.02	49.78	74.00	54.00	-4.22	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH Mid

Test Date: August 12, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1283.33	V	55.11	---	-7.43	47.67	---	74.00	54.00	-6.33	Peak
3266.67	V	54.62	50.08	-0.13	54.49	49.95	74.00	54.00	-4.05	AVG
N/A										
1333.33	H	55.44	---	-7.34	48.10	---	74.00	54.00	-5.90	Peak
3266.67	H	52.18	49.89	-0.13	52.05	49.76	74.00	54.00	-4.24	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode
/ CH High

Test Date: August 12, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1320.00	V	55.52	---	-7.36	48.15	---	74.00	54.00	-5.85	Peak
3266.67	V	51.93	---	-0.13	51.79	---	74.00	54.00	-2.21	Peak
N/A										
1303.33	H	55.07	---	-7.40	47.68	---	74.00	54.00	-6.32	Peak
3266.67	H	51.77	---	-0.13	51.64	---	74.00	54.00	-2.36	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.8 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode: Normal Link **Test Date:** June 26, 2009
Temperature: 26°C **Tested by:** Howard Pang
Humidity: 50% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB/m)	QP Result (dBuV/m)	AV Result (dBuV/m)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.393	45.08	--	10.57	55.65	--	58.00	--	-2.35	--	L1
0.400	--	36.85	10.56	--	47.41	--	47.86	--	-0.45	L1
0.464	43.20	32.30	10.55	53.75	42.85	56.62	46.63	-2.87	-3.78	L1
1.088	41.33	27.26	10.49	51.82	37.75	56.00	46.00	-4.18	-8.25	L1
3.759	43.85	31.88	10.53	54.38	42.41	56.00	46.00	-1.62	-3.59	L1
4.443	42.28	--	10.55	52.83	--	56.00	--	-3.17	--	L1
4.454	--	31.65	10.55	--	42.20	--	46.00	--	-3.80	L1
0.396	--	28.12	10.26	--	38.38	--	47.95	--	-9.57	L2
0.800	--	22.46	10.20	--	32.66	--	46.00	--	-13.34	L2
3.173	40.24	25.83	10.22	50.46	36.05	56.00	46.00	-5.54	-9.95	L2
3.491	43.12	28.06	10.23	53.35	38.29	56.00	46.00	-2.65	-7.71	L2
3.840	41.33	27.83	10.24	51.57	38.07	56.00	46.00	-4.43	-7.93	L2
4.292	41.46	27.38	10.24	51.70	37.62	56.00	46.00	-4.30	-8.38	L2


Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)




Test Plots

Conducted emissions (Line 1)

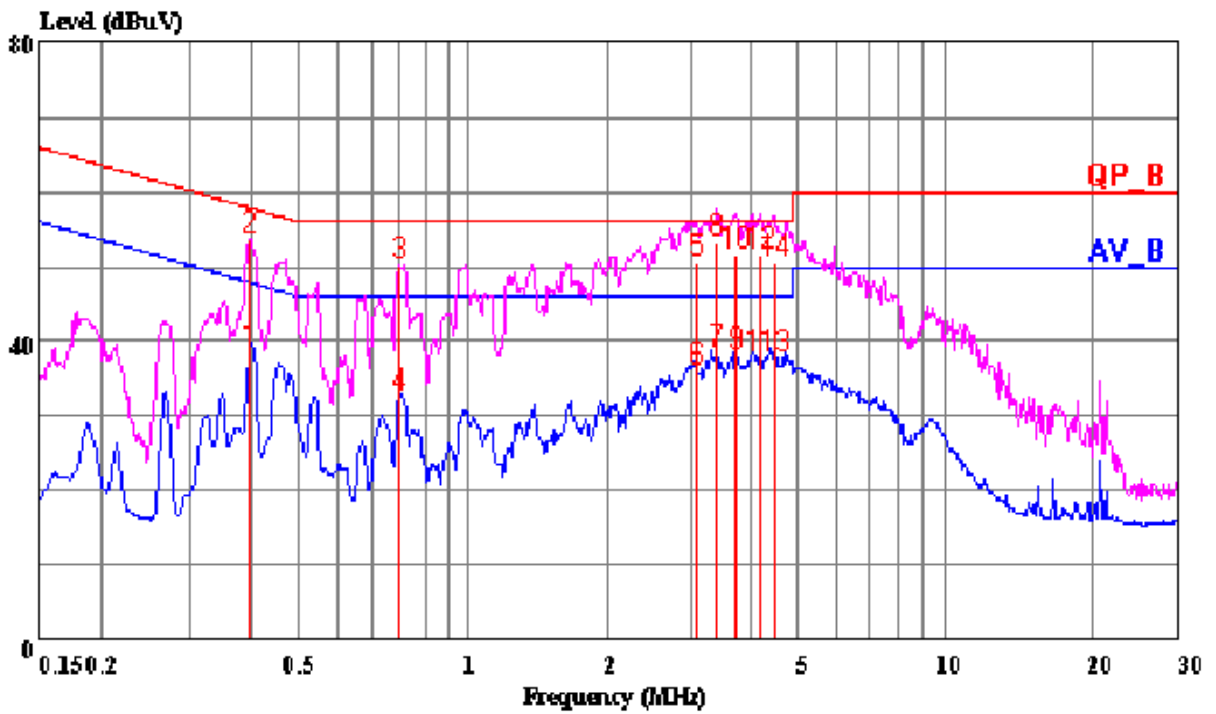

(Conducted B)

Conducted emissions (Line 2)

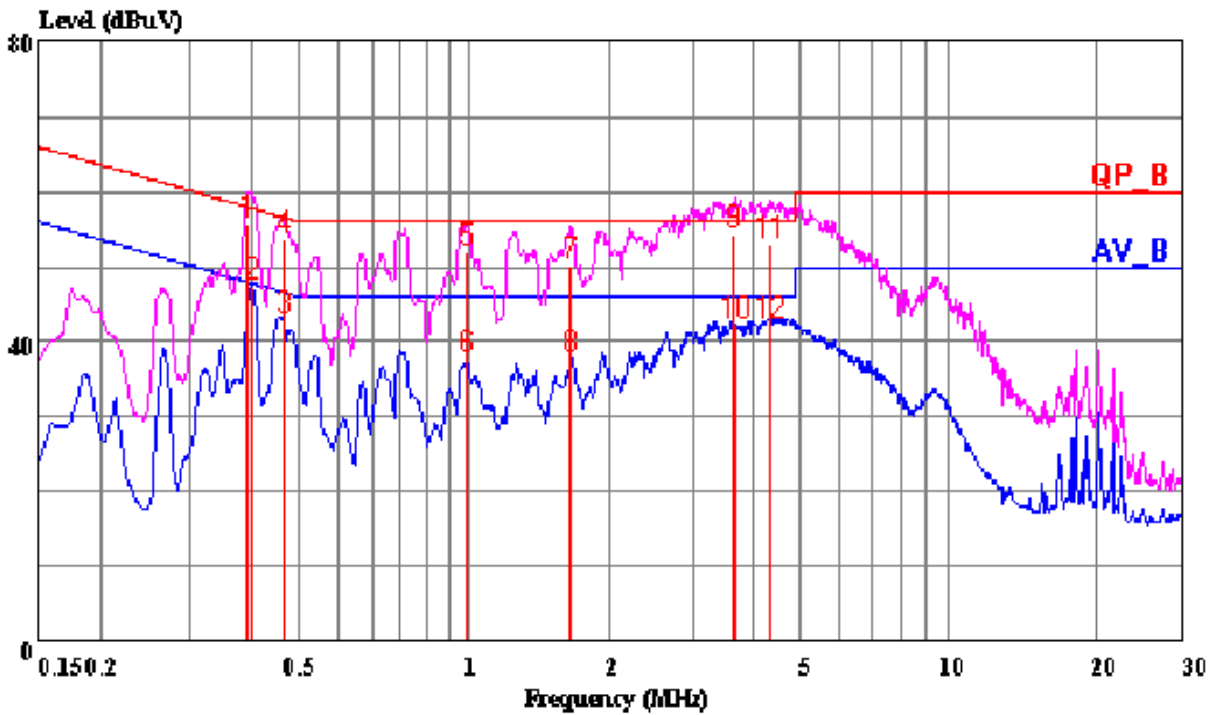

(Conducted B)