

FCC TEST REPORT

REPORT NO.: RF941024L01

MODEL NO.: WRT54GR

RECEIVED: Oct. 07, 2005

TESTED: Oct. 07 ~ Nov. 02, 2005

ISSUED: Nov. 03, 2005

APPLICANT : Cisco-Linksys LLC

ADDRESS : 121 Theory Drive Irvine, CA 92617 (USA)

ISSUED BY : Advance Data Technology Corporation

LAB ADDRESS : No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang
244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION : No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 73 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



Table of Contents

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT.....	6
3.2	DESCRIPTION OF TEST MODES.....	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	8
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	9
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	10
3.4	DESCRIPTION OF SUPPORT UNITS	11
4	TEST TYPES AND RESULTS	12
4.1	CONDUCTED EMISSION MEASUREMENT	12
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	12
4.1.2	TEST INSTRUMENTS.....	12
4.1.3	TEST PROCEDURES	13
4.1.4	DEVIATION FROM TEST STANDARD	13
4.1.5	TEST SETUP	14
4.1.6	EUT OPERATING CONDITIONS	15
4.1.7	TEST RESULTS	16
4.2	RADIATED EMISSION MEASUREMENT	28
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	28
4.2.2	TEST INSTRUMENTS.....	29
4.2.3	TEST PROCEDURES	30
4.2.4	DEVIATION FROM TEST STANDARD	30
4.2.5	TEST SETUP	31
4.2.6	EUT OPERATING CONDITIONS	31
4.2.7	TEST RESULTS	32
4.3	6dB BANDWIDTH MEASUREMENT	40
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	40
4.3.2	TEST INSTRUMENTS.....	40
4.3.3	TEST PROCEDURE.....	40
4.3.4	DEVIATION FROM TEST STANDARD	40
4.3.5	TEST SETUP	41

4.3.6	EUT OPERATING CONDITIONS	41
4.3.7	TEST RESULTS	42
4.4	MAXIMUM PEAK OUTPUT POWER	48
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	48
4.4.2	TEST INSTRUMENTS.....	48
4.4.3	TEST PROCEDURES	49
4.4.4	DEVIATION FROM TEST STANDARD	49
4.4.5	TEST SETUP	49
4.4.6	EUT OPERATING CONDITIONS	49
4.4.7	TEST RESULTS	50
4.5	POWER SPECTRAL DENSITY MEASUREMENT.....	51
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	51
4.5.2	TEST INSTRUMENTS.....	51
4.5.3	TEST PROCEDURE.....	51
4.5.4	DEVIATION FROM TEST STANDARD	51
4.5.5	TEST SETUP	51
4.5.6	EUT OPERATING CONDITIONS	51
4.5.7	TEST RESULTS	52
4.6	BAND EDGES MEASUREMENT	58
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	58
4.6.2	TEST INSTRUMENTS.....	58
4.6.3	TEST PROCEDURE.....	58
4.6.4	DEVIATION FROM TEST STANDARD	58
4.6.5	EUT OPERATING CONDITION	58
4.6.6	TEST RESULTS	59
4.7	ANTENNA REQUIREMENT	67
4.7.1	STANDARD APPLICABLE	67
4.7.2	ANTENNA CONNECTED CONSTRUCTION	67
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	68
6	INFORMATION ON THE TESTING LABORATORIES	72
	APPENDIX-A	A-1



1 CERTIFICATION

PRODUCT: Wireless-G Broadband Router with RangeBooster

MODEL: WRT54GR

BRAND: Linksys

APPLICANT: Cisco-Linksys LLC

TESTED: Oct. 07 ~ Nov. 02, 2005

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 15, Subpart C (Section 15.247)

ANSI C63.4-2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Jessie Wang , **DATE:** Nov. 03, 2005
Jessie Wang

TECHNICAL ACCEPTANCE : Gary Chang , **DATE:** Nov. 03, 2005
Responsible for RF Gary Chang

APPROVED BY : Cody Chang , **DATE:** Nov. 03, 2005
Cody Chang / Deputy Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -14.98dB at 0.228MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit : min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.18dB at 2483.50MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz ~ 30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.63 dB
	200MHz ~ 1000MHz	3.65 dB
	1GHz ~ 18GHz	2.20 dB
	18GHz ~ 40GHz	1.88 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless-G Broadband Router with RangeBooster
MODEL NO.	WRT54GR
POWER SUPPLY	12.0Vdc from power adapter
MODULATION TYPE	CCK, QPSK, BPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
MAXIMUM OUTPUT POWER	64.269mW
ANTENNA TYPE	Dipole antenna with 1.8 dBi gain
DATA CABLE	NA
I/O PORTS	RJ45

NOTE:

1. The EUT was powered by the following adapters:

For FCC Adapter with L. P. S.:

Brand:	Linksys
Model:	WD411200500
Input:	120Vac, 60Hz, 11W
Output:	12Vdc, 500mA
Power Line:	DC 1.8 m non-shielded cable without core

For FCC Adapter without L. P. S.:

Brand:	Linksys
Model:	411205003CT
Input:	120Vac, 60Hz, 14W
Output:	12Vdc, 500mA
Power Line:	DC 1.8 m non-shielded cable without core


2. The EUT complies with IEEE 802.11g standards and backwards compatible with IEEE 802.11b products.
3. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
4. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

11 channels are provided to this EUT for normal mode.

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

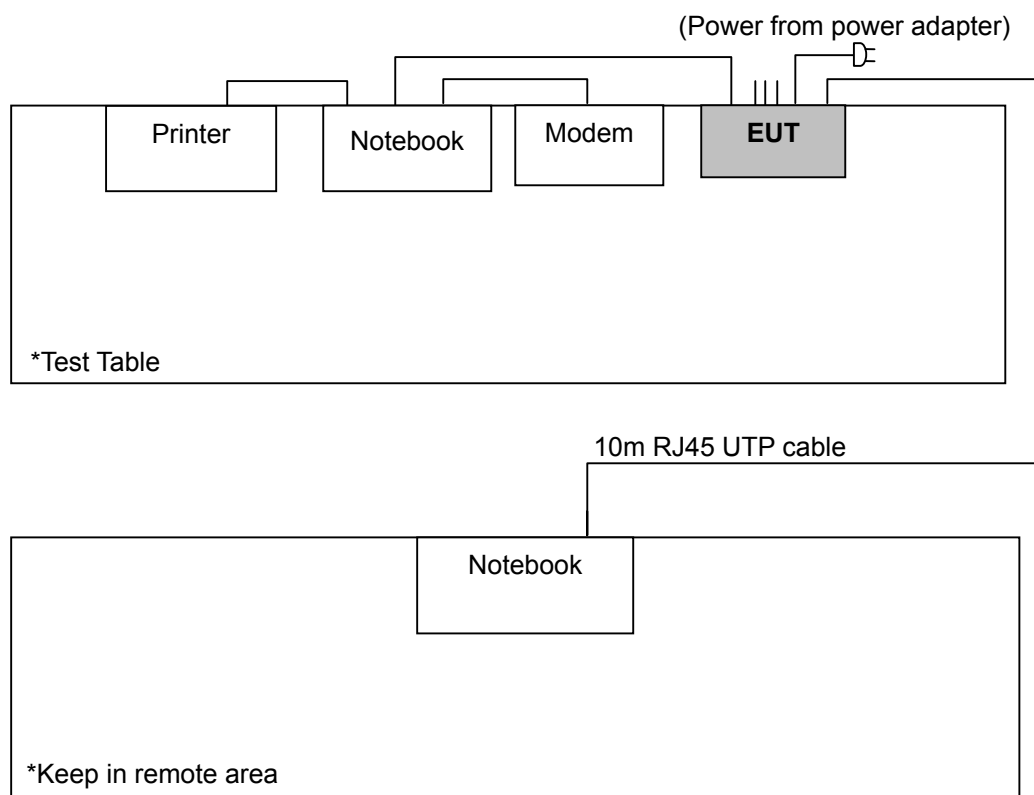

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT Configure Mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
A	√	√	√	√	Adapter: WD411200500
B	√	√	-	-	Adapter: 411205003CT

Where PLC: Power Line Conducted Emission RE<1G RE: Radiated Emission below 1GHz
 RE≥1G: Radiated Emission above 1GHz APCM: Antenna Port Conducted Measurement

NOTE: “-” means no effect

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
B	802.11b	1 to 11	1, 6, 11	DSSS	CCK	11

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11g	1 to 11	11	OFDM	BPSK	6
B	802.11g	1 to 11	11	OFDM	BPSK	6

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

**Bandedge Measurement:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 11	DSSS	CCK	11
802.11g	1 to 11	1, 11	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is an RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	12130898320	E2K24CLNS
2	PRINTER	EPSON	LQ-300+	DCGY047265	FCC DoC Approved
3	MODEM	ACEEX	1414V/3	0401008248	IFAXDM1414
4	NOTEBOOK COMPUTER	DELL	PP05L	20838027664	E2K24CLNS

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m shielded cable
3	1.2m shielded cable
4	NA

NOTE:

1. All power cords of the above support units are non shielded (1.8m).
2. Item 4 acted as communication partners to transfer data.

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Nov. 06, 2005
RF signal cable Woken	5D-FB	Cable-HyC02-01	Jan. 09, 2006
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Jan. 20, 2006
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Jan. 20, 2006
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 3.
 3. The VCCI Site Registration No. is C-2047.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

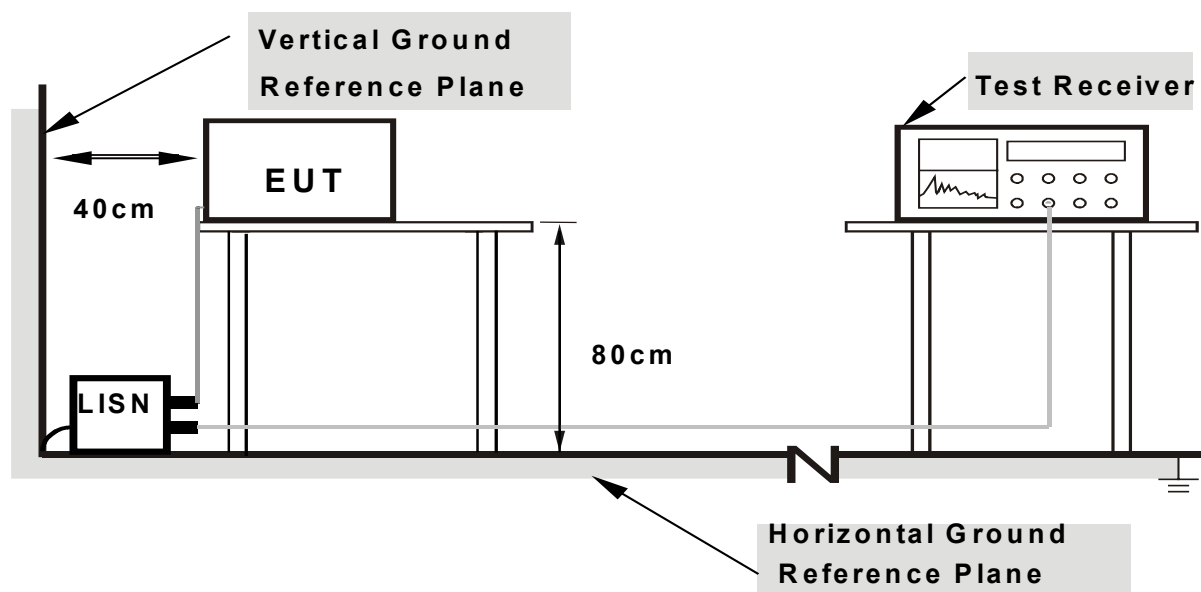

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.6 EUT OPERATING CONDITIONS

- a. EUT connected with Notebook PC and placed on the testing table.
- b. The Notebook PC ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The Notebook PC displayed "H" pattern to monitor and the monitor displayed it on its screen.
- d. The Notebook PC sent "H" messages to the printer, and the printer printed them out.
- e. Step c ~ d were repeated.


4.1.7 TEST RESULTS

Conducted Worst-Case Data

EUT	Wireless-G Broadband Router with RangeBooster	MEASUREMENT DETAIL	
MODEL	WRT54GR	PHASE	Line 1
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A	TESTED BY	Jay Hsu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.11	45.37	-	45.48	-	64.43	54.43	-18.95	-
2	0.322	0.12	38.23	-	38.35	-	59.66	49.66	-21.31	-
3	0.955	0.22	25.82	-	26.04	-	56.00	46.00	-29.96	-
4	1.402	0.24	24.33	-	24.57	-	56.00	46.00	-31.43	-
5	3.910	0.29	4.75	-	5.04	-	56.00	46.00	-50.96	-
6	18.246	0.83	30.37	-	31.20	-	60.00	50.00	-28.80	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

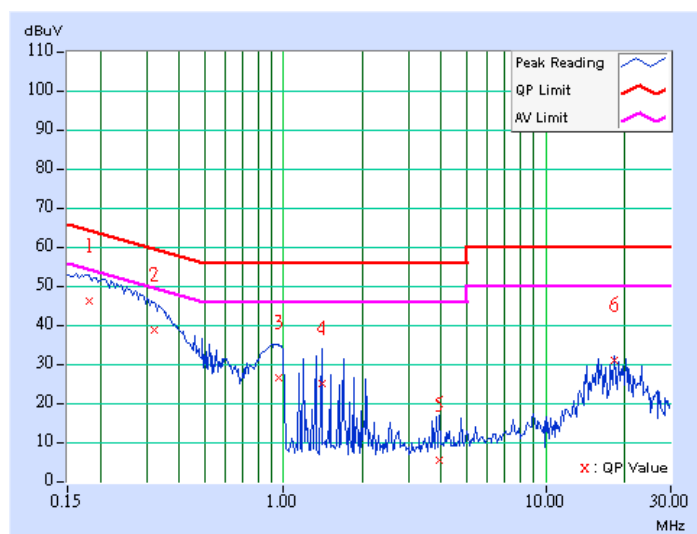

EUT	Wireless-G Broadband Router with RangeBooster	MEASUREMENT DETAIL	
MODEL	WRT54GR	PHASE	Line 2
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A	TESTED BY	Jay Hsu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.240	0.11	46.30	-	46.41	-	62.10	52.10	-15.69	-
2	0.423	0.12	41.68	-	41.80	-	57.38	47.38	-15.58	-
3	0.900	0.21	34.87	-	35.08	-	56.00	46.00	-20.92	-
4	1.645	0.24	26.08	-	26.32	-	56.00	46.00	-29.68	-
5	3.945	0.29	13.79	-	14.08	-	56.00	46.00	-41.92	-
6	18.242	0.86	33.50	-	34.36	-	60.00	50.00	-25.64	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

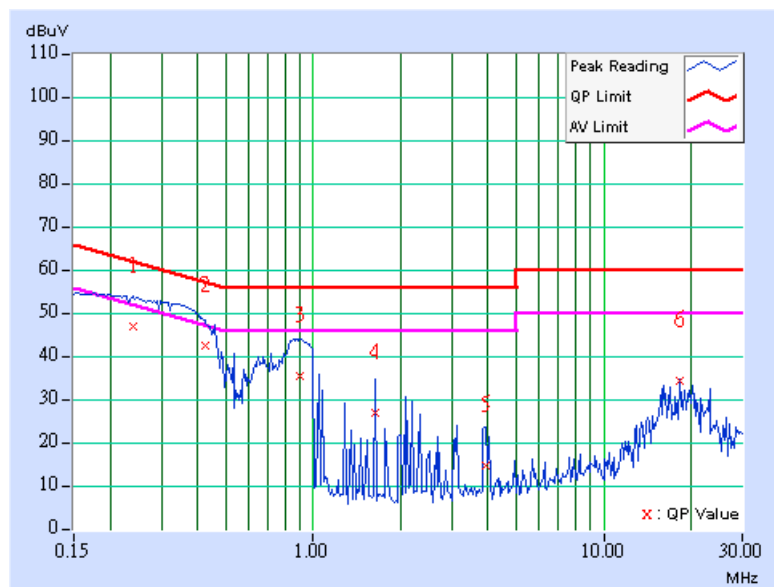

EUT	Wireless-G Broadband Router with RangeBooster	MEASUREMENT DETAIL	
MODEL	WRT54GR	PHASE	Line 1
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A	TESTED BY	Jay Hsu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.236	0.11	47.00	-	47.11	-	62.24	52.24	-15.13	-
2	0.412	0.12	41.57	-	41.69	-	57.61	47.61	-15.92	-
3	0.767	0.19	35.96	-	36.15	-	56.00	46.00	-19.85	-
4	1.895	0.25	24.47	-	24.72	-	56.00	46.00	-31.28	-
5	3.617	0.28	16.29	-	16.57	-	56.00	46.00	-39.43	-
6	20.258	1.00	31.84	-	32.84	-	60.00	50.00	-27.16	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

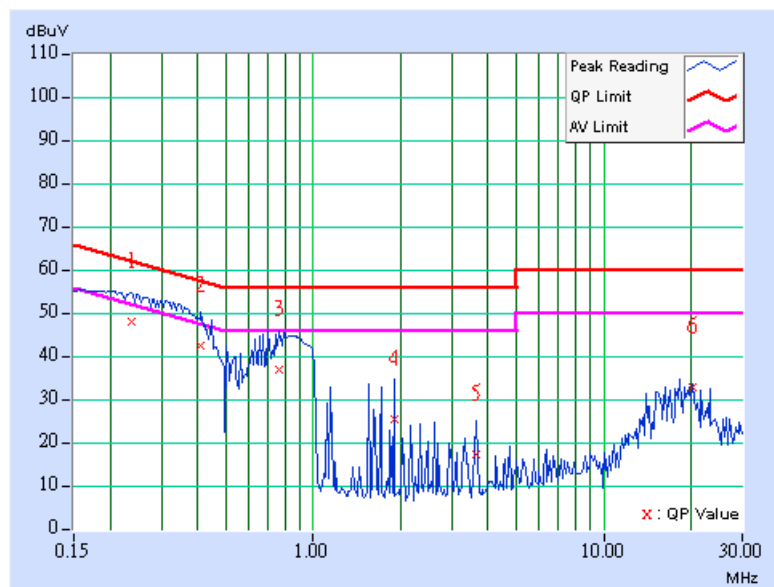

EUT	Wireless-G Broadband Router with RangeBooster	MEASUREMENT DETAIL	
MODEL	WRT54GR	PHASE	Line 2
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A	TESTED BY	Jay Hsu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.11	46.04	-	46.15	-	64.98	54.98	-18.84	-
2	0.255	0.11	41.79	-	41.90	-	61.58	51.58	-19.67	-
3	0.947	0.22	25.49	-	25.71	-	56.00	46.00	-30.29	-
4	1.387	0.24	25.00	-	25.24	-	56.00	46.00	-30.76	-
5	3.570	0.28	8.13	-	8.41	-	56.00	46.00	-47.59	-
6	18.242	0.86	30.51	-	31.37	-	60.00	50.00	-28.63	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

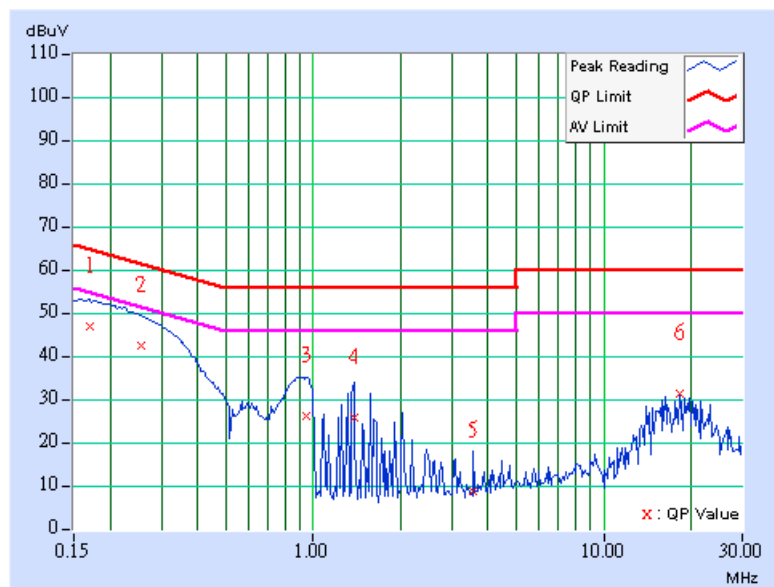

EUT	Wireless-G Broadband Router with RangeBooster	MEASUREMENT DETAIL	
MODEL	WRT54GR	PHASE	Line 1
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A	TESTED BY	Jay Hsu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.228	0.11	47.43	-	47.54	-	62.52	52.52	-14.98	-
2	0.795	0.19	37.40	-	37.59	-	56.00	46.00	-18.41	-
3	1.328	0.24	28.78	-	29.02	-	56.00	46.00	-26.98	-
4	1.910	0.25	25.01	-	25.26	-	56.00	46.00	-30.74	-
5	3.602	0.28	15.65	-	15.93	-	56.00	46.00	-40.07	-
6	18.242	0.83	33.56	-	34.39	-	60.00	50.00	-25.61	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

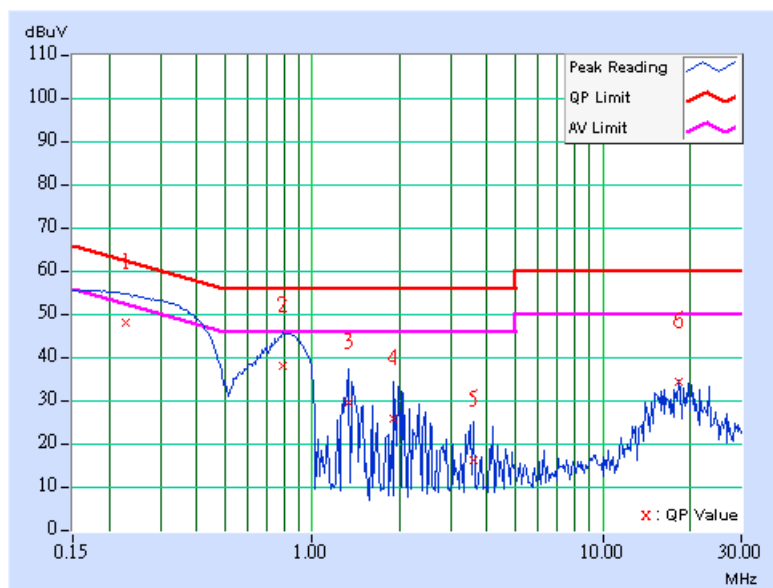

EUT	Wireless-G Broadband Router with RangeBooster	MEASUREMENT DETAIL	
MODEL	WRT54GR	PHASE	Line 2
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A	TESTED BY	Jay Hsu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.11	46.28	-	46.39	-	64.79	54.79	-18.41	-
2	0.252	0.11	42.62	-	42.73	-	61.71	51.71	-18.97	-
3	0.990	0.23	21.45	-	21.68	-	56.00	46.00	-34.32	-
4	1.746	0.24	19.98	-	20.22	-	56.00	46.00	-35.78	-
5	3.629	0.28	5.34	-	5.62	-	56.00	46.00	-50.38	-
6	18.246	0.86	30.39	-	31.25	-	60.00	50.00	-28.75	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

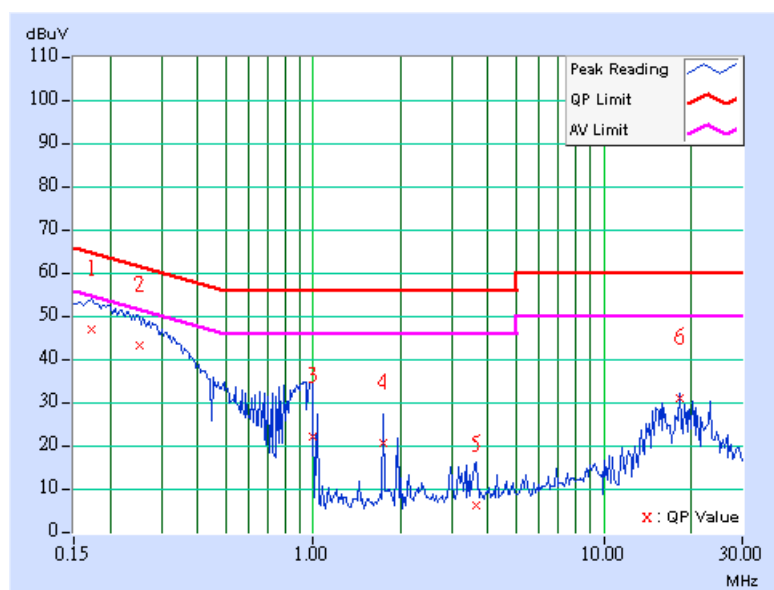

EUT	Wireless-G Broadband Router with RangeBooster	MEASUREMENT DETAIL	
MODEL	WRT54GR	PHASE	Line 1
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	B	TESTED BY	Jay Hsu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.180	0.11	38.22	-	38.33	-	64.49	54.49	-26.16	-
2	0.361	0.12	20.39	-	20.51	-	58.71	48.71	-38.20	-
3	0.716	0.18	16.89	-	17.07	-	56.00	46.00	-38.93	-
4	1.438	0.24	12.71	-	12.95	-	56.00	46.00	-43.05	-
5	9.344	0.42	14.90	-	15.32	-	60.00	50.00	-44.68	-
6	15.805	0.62	26.88	-	27.50	-	60.00	50.00	-32.50	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

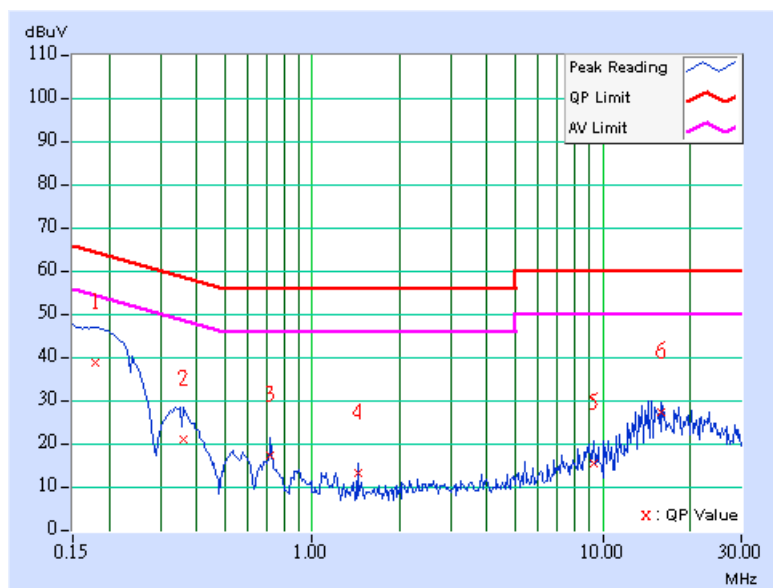

EUT	Wireless-G Broadband Router with RangeBooster	MEASUREMENT DETAIL	
MODEL	WRT54GR	PHASE	Line 2
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	B	TESTED BY	Jay Hsu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.193	0.11	37.66	-	37.77	-	63.91	53.91	-26.14	-
2	0.357	0.12	20.28	-	20.40	-	58.80	48.80	-38.40	-
3	0.716	0.18	15.77	-	15.95	-	56.00	46.00	-40.05	-
4	1.438	0.24	12.04	-	12.28	-	56.00	46.00	-43.72	-
5	6.465	0.39	9.39	-	9.78	-	60.00	50.00	-50.22	-
6	18.242	0.86	27.83	-	28.69	-	60.00	50.00	-31.31	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

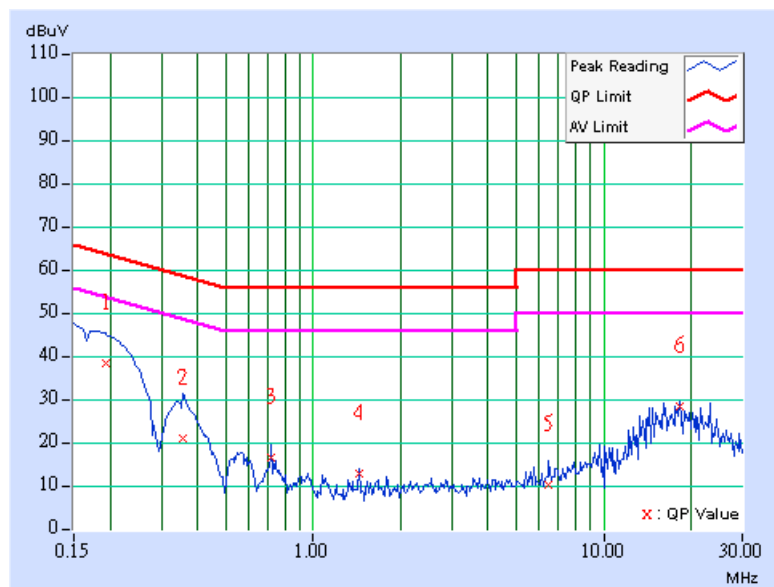

EUT	Wireless-G Broadband Router with RangeBooster	MEASUREMENT DETAIL	
MODEL	WRT54GR	PHASE	Line 1
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	B	TESTED BY	Jay Hsu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	0.11	38.83	-	38.94	-	64.25	54.25	-25.31	-
2	0.361	0.12	20.21	-	20.33	-	58.71	48.71	-38.38	-
3	0.720	0.18	16.87	-	17.05	-	56.00	46.00	-38.95	-
4	1.438	0.24	12.85	-	13.09	-	56.00	46.00	-42.91	-
5	10.418	0.45	18.23	-	18.68	-	60.00	50.00	-41.32	-
6	23.129	1.19	26.88	-	28.07	-	60.00	50.00	-31.93	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

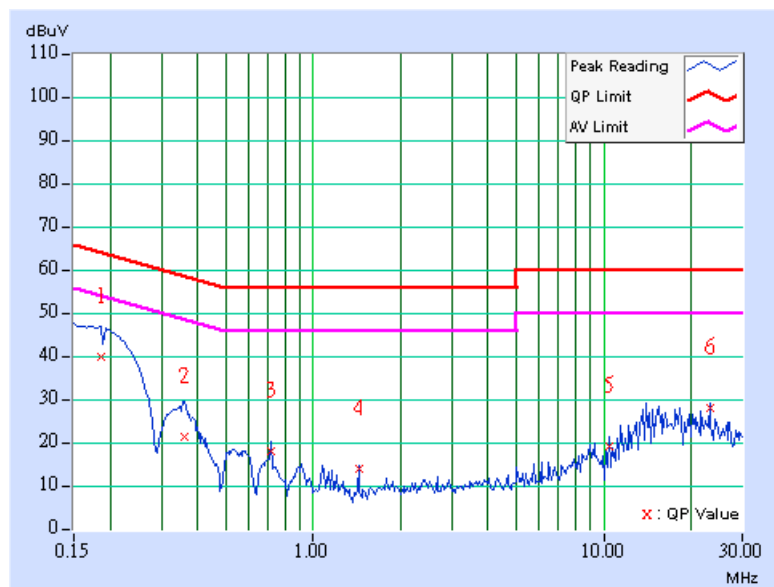

EUT	Wireless-G Broadband Router with RangeBooster	MEASUREMENT DETAIL	
MODEL	WRT54GR	PHASE	Line 2
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	B	TESTED BY	Jay Hsu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	0.11	37.30	-	37.41	-	64.25	54.25	-26.84	-
2	0.357	0.12	20.54	-	20.66	-	58.80	48.80	-38.14	-
3	0.720	0.18	15.85	-	16.03	-	56.00	46.00	-39.97	-
4	1.438	0.24	11.96	-	12.20	-	56.00	46.00	-43.80	-
5	10.059	0.54	16.44	-	16.98	-	60.00	50.00	-43.02	-
6	18.242	0.86	27.81	-	28.67	-	60.00	50.00	-31.33	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

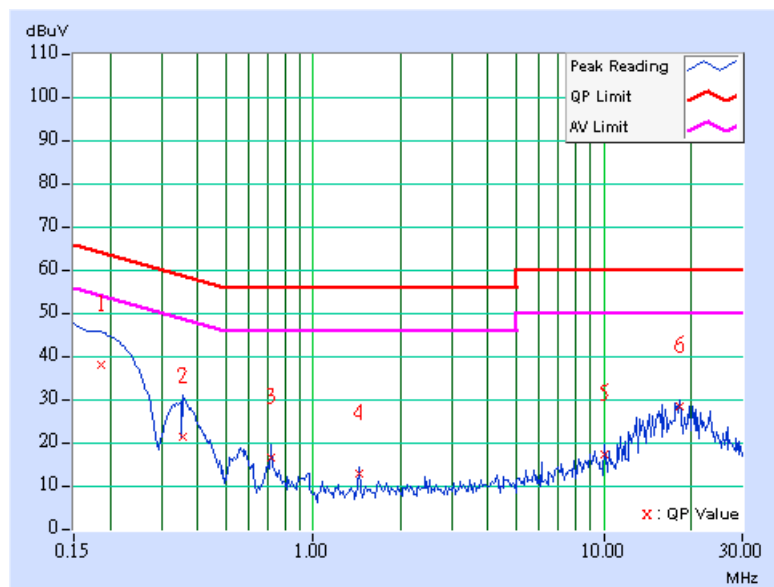

EUT	Wireless-G Broadband Router with RangeBooster	MEASUREMENT DETAIL	
MODEL	WRT54GR	PHASE	Line 1
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	B	TESTED BY	Jay Hsu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	0.11	38.73	-	38.84	-	64.25	54.25	-25.41	-
2	0.357	0.12	20.30	-	20.42	-	58.80	48.80	-38.38	-
3	0.720	0.18	16.89	-	17.07	-	56.00	46.00	-38.93	-
4	1.434	0.24	12.32	-	12.56	-	56.00	46.00	-43.44	-
5	5.387	0.32	10.88	-	11.20	-	60.00	50.00	-48.80	-
6	14.727	0.54	27.85	-	28.39	-	60.00	50.00	-31.61	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

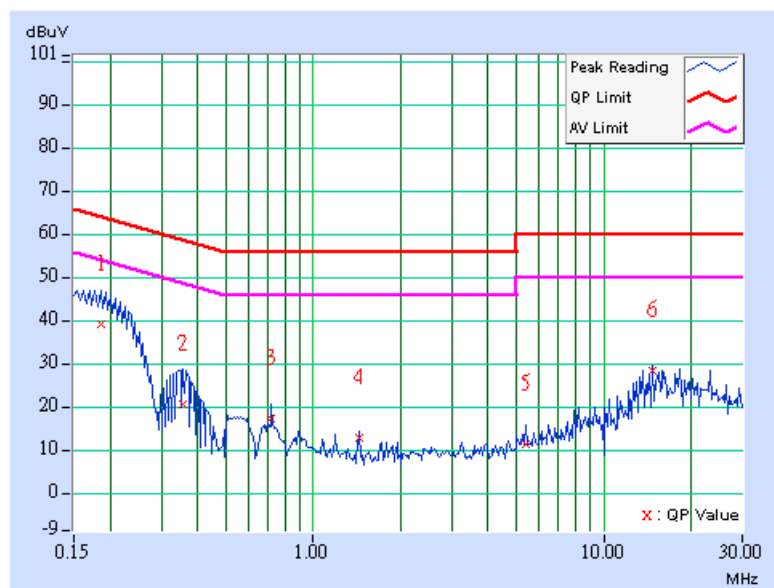

EUT	Wireless-G Broadband Router with RangeBooster	MEASUREMENT DETAIL	
MODEL	WRT54GR	PHASE	Line 2
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	B	TESTED BY	Jay Hsu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.11	37.59	-	37.70	-	64.79	54.79	-27.10	-
2	0.361	0.12	20.25	-	20.37	-	58.71	48.71	-38.34	-
3	0.716	0.18	15.91	-	16.09	-	56.00	46.00	-39.91	-
4	1.438	0.24	12.00	-	12.24	-	56.00	46.00	-43.76	-
5	10.055	0.54	16.16	-	16.70	-	60.00	50.00	-43.30	-
6	17.695	0.83	27.27	-	28.10	-	60.00	50.00	-31.90	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

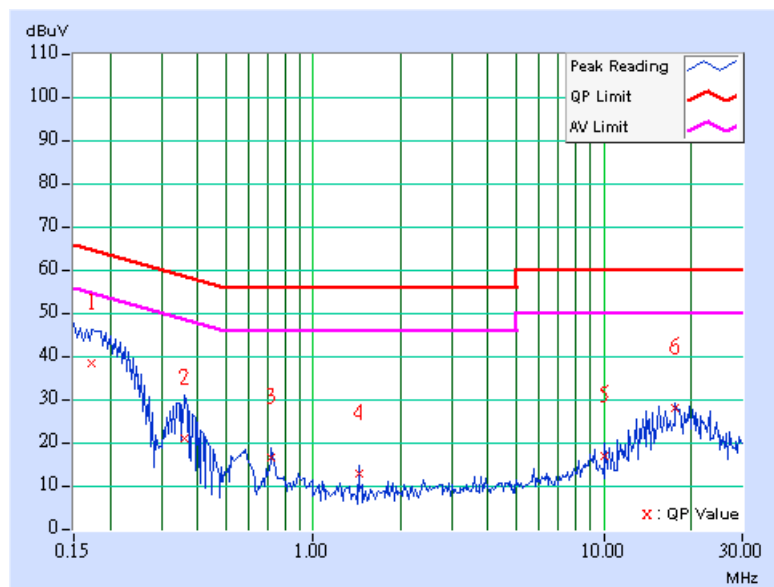

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Jan. 07, 2006
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Nov. 29, 2005
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Jan. 22, 2006
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-404	Jan. 05, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170242	Jan. 23, 2006
Preamplifier Agilent	8449B	3008A01960	Nov. 14, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219272/4	Jan. 26, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219275/4	Jan. 26, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA
Turn Table ADT.	TT100.	TT93021704	NA
Turn Table Controller ADT.	SC100.	SC93021704	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-4.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak method or average method as specified and then reported in data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

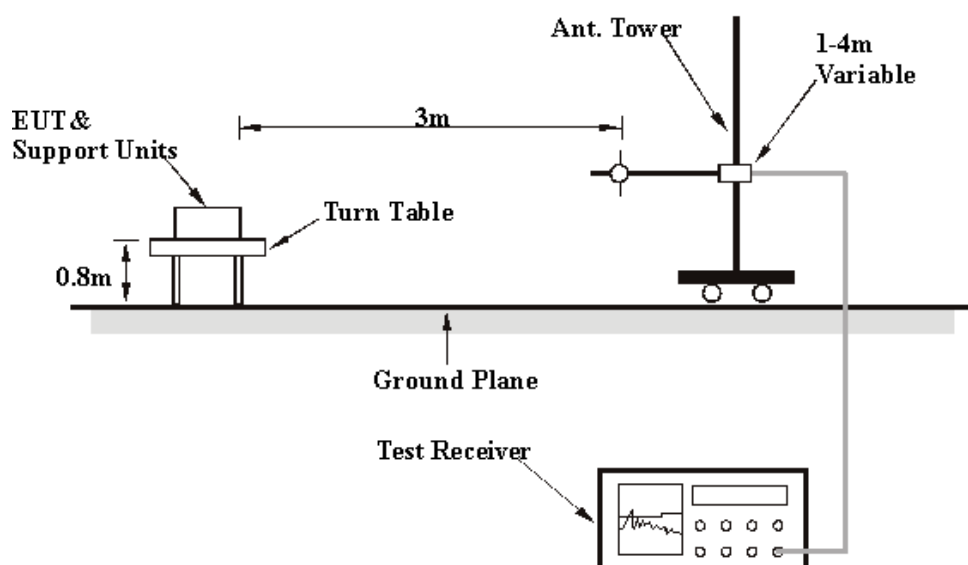

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

4.2.7 TEST RESULTS

Below 1GHz Worst-Case Data_antenna without extended cable

EUT	Wireless-G Broadband Router with RangeBooster	MEASUREMENT DETAIL	
MODEL	WRT54GR	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 64%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	300.20	36.52 QP	46.00	-9.48	1.00 H	202	22.10	14.41
2	374.07	38.04 QP	46.00	-7.96	1.00 H	196	21.94	16.10
3	412.95	34.99 QP	46.00	-11.01	2.00 H	202	17.93	17.06
4	486.81	32.68 QP	46.00	-13.32	2.00 H	40	14.26	18.42
5	599.56	33.56 QP	46.00	-12.44	1.50 H	103	12.74	20.82
6	751.18	36.18 QP	46.00	-9.82	1.00 H	181	12.94	23.25

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.83	33.37 QP	40.00	-6.63	1.00 V	184	18.71	14.67
2	107.76	36.46 QP	43.50	-7.04	1.00 V	298	24.80	11.67
3	500.42	43.34 QP	46.00	-2.66	2.00 V	247	24.77	18.58
4	562.63	37.45 QP	46.00	-8.55	1.75 V	217	17.64	19.81
5	599.56	37.26 QP	46.00	-8.74	1.25 V	190	16.44	20.82
6	751.18	38.11 QP	46.00	-7.89	1.25 V	196	14.87	23.25

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

Below 1GHz Worst-Case Data_antenna with extended cable

EUT	Wireless-G Broadband Router with RangeBooster	MEASUREMENT DETAIL	
MODEL	WRT54GR	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	B	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	142.75	34.10 QP	43.50	-9.40	1.00 H	208	19.59	14.51
2	249.66	34.87 QP	46.00	-11.13	1.00 H	250	21.76	13.11
3	300.20	35.79 QP	46.00	-10.21	1.25 H	247	21.38	14.41
4	599.56	37.74 QP	46.00	-8.26	1.50 H	277	16.92	20.82
5	751.18	39.94 QP	46.00	-6.06	1.00 H	235	16.70	23.25
6	815.33	40.35 QP	46.00	-5.65	1.00 H	277	16.75	23.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	107.76	38.79 QP	43.50	-4.72	1.00 V	73	27.12	11.67
2	146.63	39.86 QP	43.50	-3.64	1.00 V	280	25.25	14.61
3	300.20	35.77 QP	46.00	-10.22	1.25 V	352	21.36	14.41
4	599.56	39.91 QP	46.00	-6.10	1.00 V	232	19.09	20.82
5	751.18	43.31 QP	46.00	-2.69	1.00 V	229	20.06	23.25
6	815.33	42.45 QP	46.00	-3.55	1.00 V	337	18.85	23.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

802.11b DSSS modulation

EUT	Wireless-G Broadband Router with RangeBooster	MEASUREMENT DETAIL	
MODEL	WRT54GR	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	56.31 PK	74.00	-17.69	1.07 H	195	25.97	30.34
1	1608.00	44.37 AV	54.00	-9.63	1.07 H	195	14.03	30.34
2	2390.00	48.50 PK	74.00	-25.50	1.21 H	178	15.94	32.56
2	2390.00	40.85 AV	54.00	-13.15	1.21 H	178	8.29	32.56
3	*2412.00	102.36 PK			1.21 H	178	69.75	32.61
3	*2412.00	94.71 AV			1.21 H	178	62.10	32.61
4	4824.00	52.67 PK	74.00	-21.33	1.03 H	224	12.83	39.84
4	4824.00	39.24 AV	54.00	-14.76	1.03 H	224	-0.60	39.84

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	63.86 PK	74.00	-10.14	1.72 V	159	33.52	30.34
1	1608.00	51.68 AV	54.00	-2.32	1.72 V	159	21.34	30.34
2	2390.00	58.17 PK	74.00	-15.83	1.72 V	159	25.61	32.56
2	2390.00	50.70 AV	54.00	-3.30	1.72 V	159	18.14	32.56
3	*2412.00	112.03 PK			1.04 V	194	79.42	32.61
3	*2412.00	104.56 AV			1.04 V	194	71.95	32.61
4	4824.00	59.24 PK	74.00	-14.76	1.01 V	138	19.40	39.84
4	4824.00	45.47 AV	54.00	-8.53	1.01 V	138	5.63	39.84

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT	Wireless-G Broadband Router with RangeBooster	MEASUREMENT DETAIL	
MODEL	WRT54GR	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	56.24 PK	74.00	-17.76	1.02 H	176	25.85	30.39
1	1624.00	44.29 AV	54.00	-9.71	1.02 H	176	13.90	30.39
2	*2437.00	104.25 PK			1.23 H	177	71.58	32.67
2	*2437.00	96.55 AV			1.23 H	177	63.88	32.67
3	4874.00	52.73 PK	74.00	-21.27	1.07 H	216	12.68	40.05
3	4874.00	39.29 AV	54.00	-14.71	1.07 H	216	-0.76	40.05

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	64.73 PK	74.00	-9.27	1.15 V	31	34.34	30.39
1	1624.00	52.77 AV	54.00	-1.23	1.15 V	31	22.38	30.39
2	*2437.00	114.02 PK			1.02 V	168	81.35	32.67
2	*2437.00	106.49 AV			1.02 V	168	73.82	32.67
3	4874.00	57.37 PK	74.00	-16.63	1.02 V	161	17.32	40.05
3	4874.00	43.67 AV	54.00	-10.33	1.02 V	161	3.62	40.05

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT	Wireless-G Broadband Router with RangeBooster	MEASUREMENT DETAIL	
MODEL	WRT54GR	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	56.49 PK	74.00	-17.51	1.07 H	68	26.04	30.45
1	1641.00	44.41 AV	54.00	-9.59	1.07 H	68	13.96	30.45
2	*2462.00	102.89 PK			1.20 H	176	70.16	32.73
2	*2462.00	95.24 AV			1.20 H	176	62.50	32.73
3	2483.50	50.51 PK	74.00	-23.49	1.20 H	176	17.72	32.79
3	2483.50	42.86 AV	54.00	-11.14	1.20 H	176	10.07	32.79
4	4924.00	52.61 PK	74.00	-21.39	1.03 H	224	12.34	40.27
4	4924.00	39.15 AV	54.00	-14.85	1.03 H	224	-1.12	40.27

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	59.88 PK	74.00	-14.12	1.06 V	45	29.43	30.45
1	1641.00	47.82 AV	54.00	-6.18	1.06 V	45	17.37	30.45
2	*2462.00	112.80 PK			1.03 V	179	80.06	32.73
2	*2462.00	105.05 AV			1.03 V	179	72.32	32.73
3	2483.50	63.16 PK	74.00	-10.84	1.03 V	179	30.37	32.79
3	2483.50	52.62 AV	54.00	-1.38	1.03 V	179	19.83	32.79
4	4924.00	58.69 PK	74.00	-15.31	1.01 V	193	18.42	40.27
4	4924.00	44.85 AV	54.00	-9.15	1.01 V	193	4.58	40.27

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency.

802.11g OFDM modulation

EUT	Wireless-G Broadband Router with RangeBooster	MEASUREMENT DETAIL	
MODEL	WRT54GR	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	62.48 PK	74.00	-11.52	1.00 H	37	32.15	30.34
1	1608.00	48.53 AV	54.00	-5.47	1.00 H	37	18.20	30.34
2	2390.00	49.81 PK	74.00	-24.19	1.51 H	201	17.25	32.56
2	2390.00	40.94 AV	54.00	-13.06	1.51 H	201	8.38	32.56
3	*2412.00	100.08 PK			1.51 H	201	67.47	32.61
3	*2412.00	91.21 AV			1.51 H	201	58.60	32.61
4	4824.00	52.17 PK	74.00	-21.83	1.12 H	207	12.33	39.84
4	4824.00	38.76 AV	54.00	-15.24	1.12 H	207	-1.08	39.84

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	64.69 PK	74.00	-9.31	1.18 V	352	34.35	30.34
1	1608.00	50.65 AV	54.00	-3.35	1.18 V	352	20.31	30.34
2	2390.00	58.85 PK	74.00	-15.15	1.01 V	46	26.29	32.56
2	2390.00	49.98 AV	54.00	-4.02	1.01 V	46	17.42	32.56
3	*2412.00	108.12 PK			1.51 V	300	75.51	32.61
3	*2412.00	99.25 AV			1.51 V	300	66.64	32.61
4	4824.00	53.38 PK	74.00	-20.62	1.04 V	162	13.54	39.84
4	4824.00	39.93 AV	54.00	-14.07	1.04 V	162	0.09	39.84

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency.

EUT	Wireless-G Broadband Router with RangeBooster	MEASUREMENT DETAIL	
MODEL	WRT54GR	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	62.25 PK	74.00	-11.75	1.01 H	46	31.86	30.39
1	1624.00	48.32 AV	54.00	-5.68	1.01 H	46	17.93	30.39
2	*2437.00	100.24 PK			1.48 H	200	67.57	32.67
2	*2437.00	91.43 AV			1.48 H	200	58.76	32.67
3	4874.00	52.36 PK	74.00	-21.64	1.10 H	201	12.31	40.05
3	4874.00	38.91 AV	54.00	-15.09	1.10 H	201	-1.14	40.05

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	64.77 PK	74.00	-9.23	1.13 V	327	34.38	30.39
1	1624.00	50.81 AV	54.00	-3.19	1.13 V	327	20.42	30.39
2	*2437.00	108.95 PK			1.04 V	171	76.28	32.67
2	*2437.00	100.05 AV			1.04 V	171	67.38	32.67
3	4874.00	53.46 PK	74.00	-20.54	1.03 V	229	13.41	40.05
3	4874.00	40.12 AV	54.00	-13.88	1.03 V	229	0.07	40.05

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * " : Fundamental frequency.

EUT	Wireless-G Broadband Router with RangeBooster	MEASUREMENT DETAIL	
MODEL	WRT54GR	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	60.21 PK	74.00	-13.79	1.06 H	48	29.76	30.45
1	1641.00	46.27 AV	54.00	-7.73	1.06 H	48	15.82	30.45
2	*2462.00	99.13 PK			1.50 H	208	66.39	32.73
2	*2462.00	90.24 AV			1.50 H	208	57.50	32.73
3	2483.50	52.87 PK	74.00	-21.13	1.50 H	208	20.08	32.79
3	2483.50	43.98 AV	54.00	-10.02	1.50 H	208	11.19	32.79
4	4924.00	52.03 PK	74.00	-21.97	1.10 H	139	11.76	40.27
4	4924.00	38.64 AV	54.00	-15.36	1.10 H	139	-1.63	40.27

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	61.26 PK	74.00	-12.74	1.02 V	231	30.81	30.45
1	1641.00	47.58 AV	54.00	-6.42	1.02 V	231	17.13	30.45
2	*2462.00	107.34 PK			1.01 V	181	74.61	32.73
2	*2462.00	98.28 AV			1.01 V	181	65.55	32.73
3	2483.50	62.08 PK	74.00	-11.92	1.01 V	181	29.29	32.79
3	2483.50	52.82 AV	54.00	-1.18	1.01 V	181	20.03	32.79
4	4924.00	54.68 PK	74.00	-19.32	1.09 V	231	14.41	40.27
4	4924.00	40.21 AV	54.00	-13.79	1.09 V	231	-0.06	40.27

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS

802.11b DSSS modulation


EUT	Wireless-G Broadband Router with RangeBooster	MODEL	WRT54GR
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	12.12	0.5	PASS
6	2437	12.04	0.5	PASS
11	2462	12.12	0.5	PASS


CH1

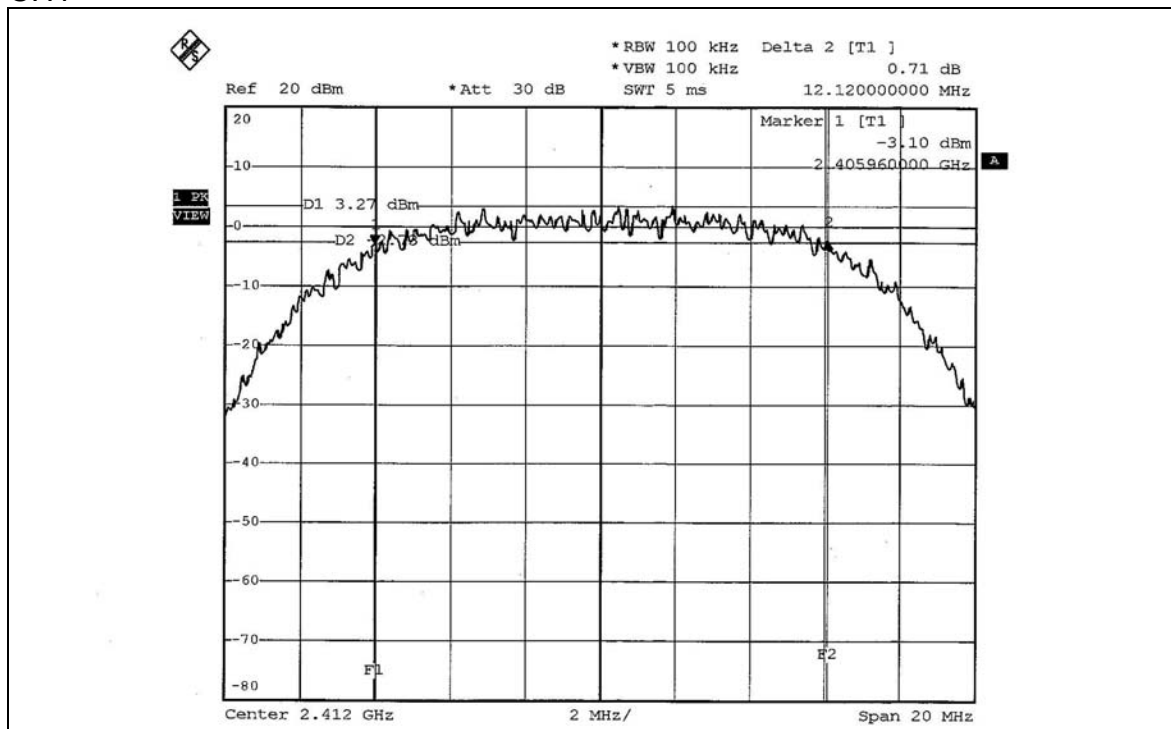

CH6

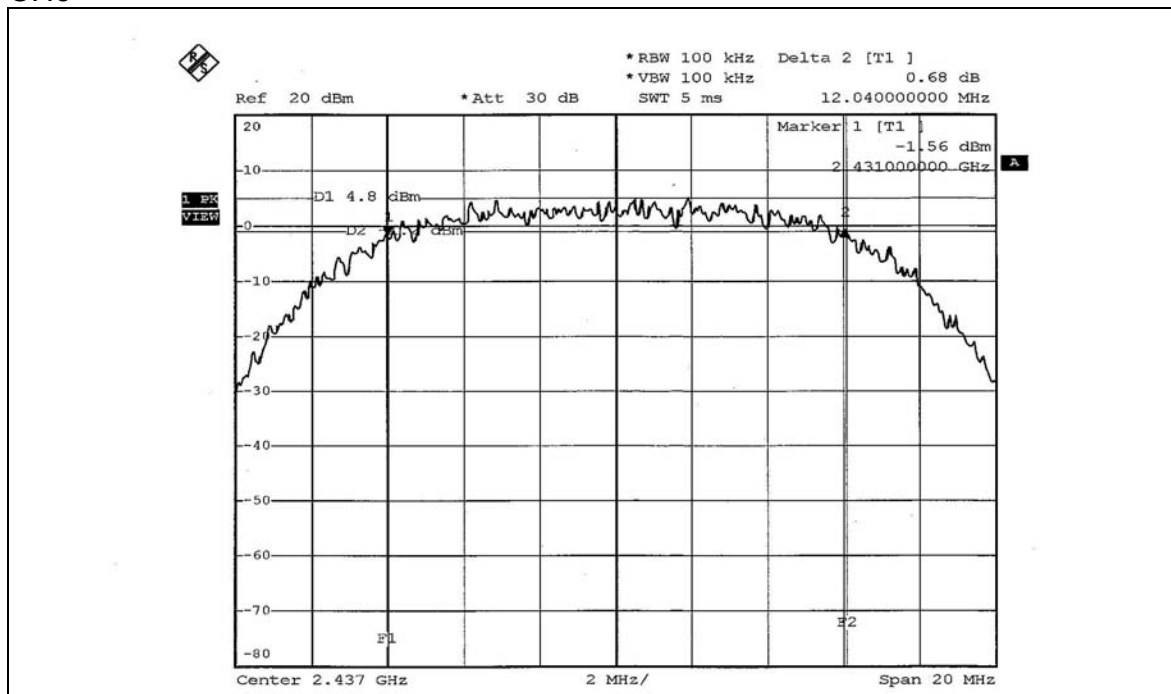

CH11

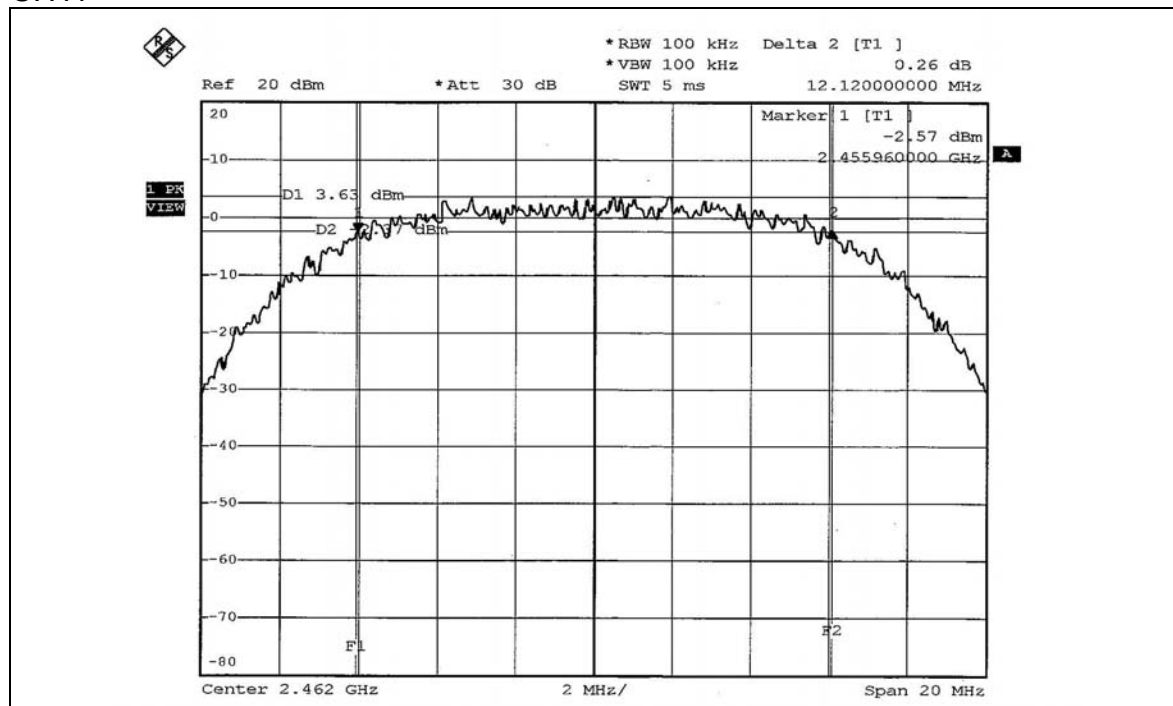


**802.11g OFDM modulation**


EUT	Wireless-G Broadband Router with RangeBooster	MODEL	WRT54GR
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.56	0.5	PASS
6	2437	16.52	0.5	PASS
11	2462	16.56	0.5	PASS


CH1

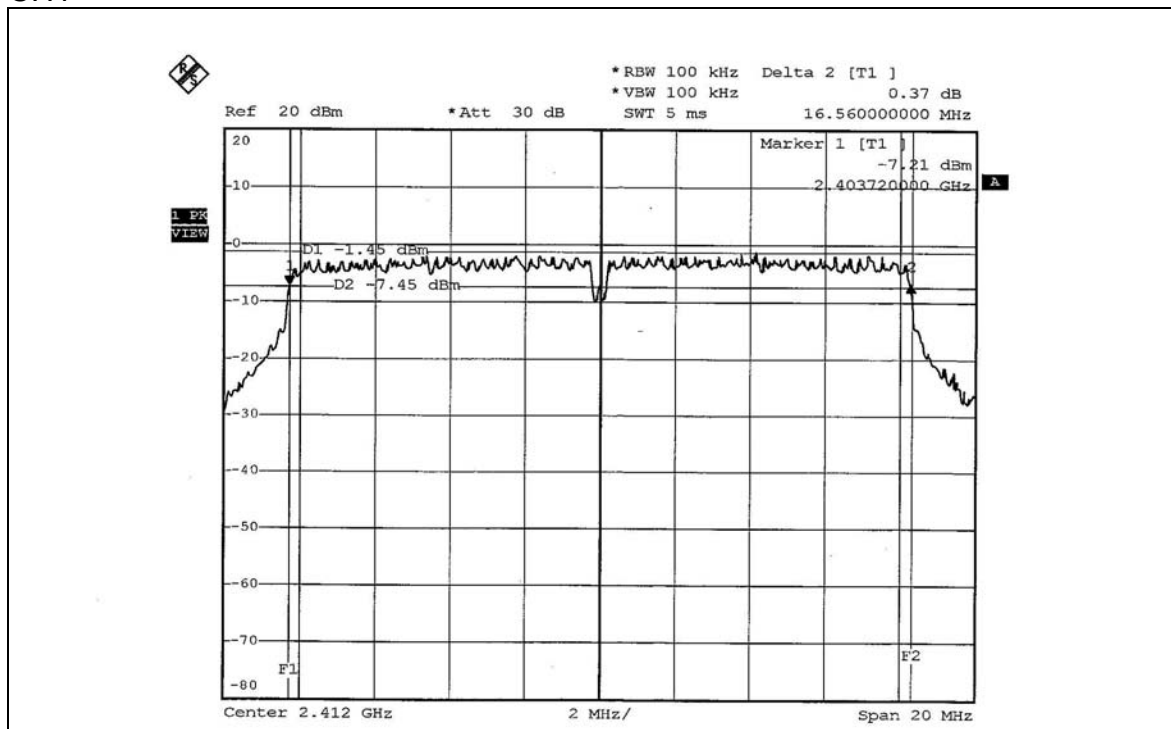

CH6

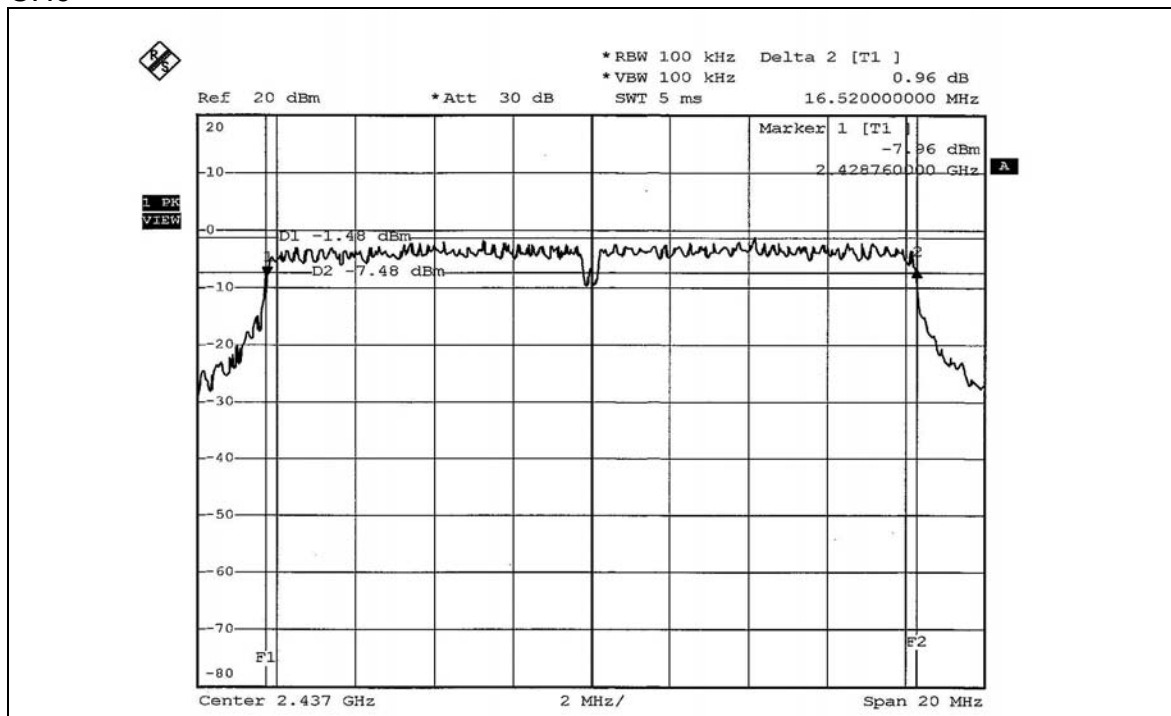

CH11

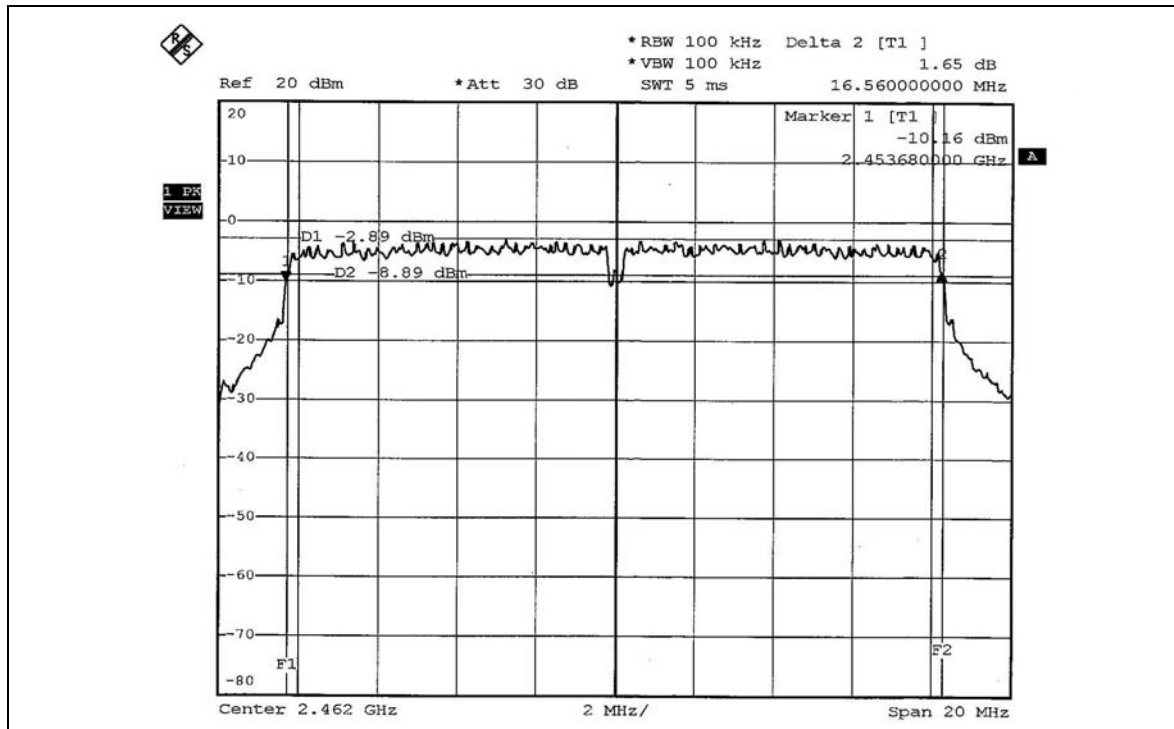

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 06, 2005
TEKTRONIX OSCILLOSCOPE	TDS 220	C019167	Feb. 01, 2006
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to peak the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.

4.4.7 TEST RESULTS

802.11b DSSS modulation

EUT	Wireless-G Broadband Router with RangeBooster	MODEL	WRT54GR
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	40.272	16.05	30	PASS
6	2437	64.269	18.08	30	PASS
11	2462	39.994	16.02	30	PASS

802.11g OFDM modulation_Normal Mode

EUT	Wireless-G Broadband Router with RangeBooster	MODEL	WRT54GR
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	50.699	17.05	30	PASS
6	2437	50.933	17.07	30	PASS
11	2462	38.019	15.80	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6.


4.5.7 TEST RESULTS

802.11b DSSS modulation


EUT	Wireless-G Broadband Router with RangeBooster	MODEL	WRT54GR
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-10.49	8	PASS
6	2437	-8.87	8	PASS
11	2462	-10.08	8	PASS


CH1

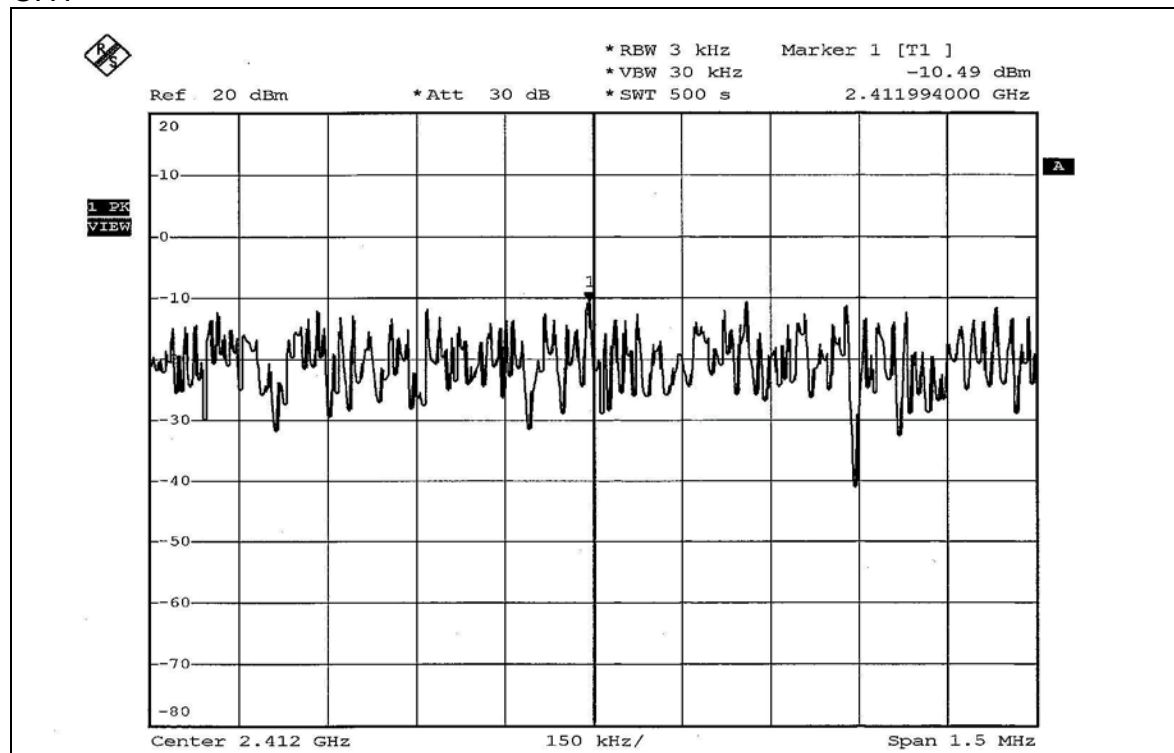

CH6

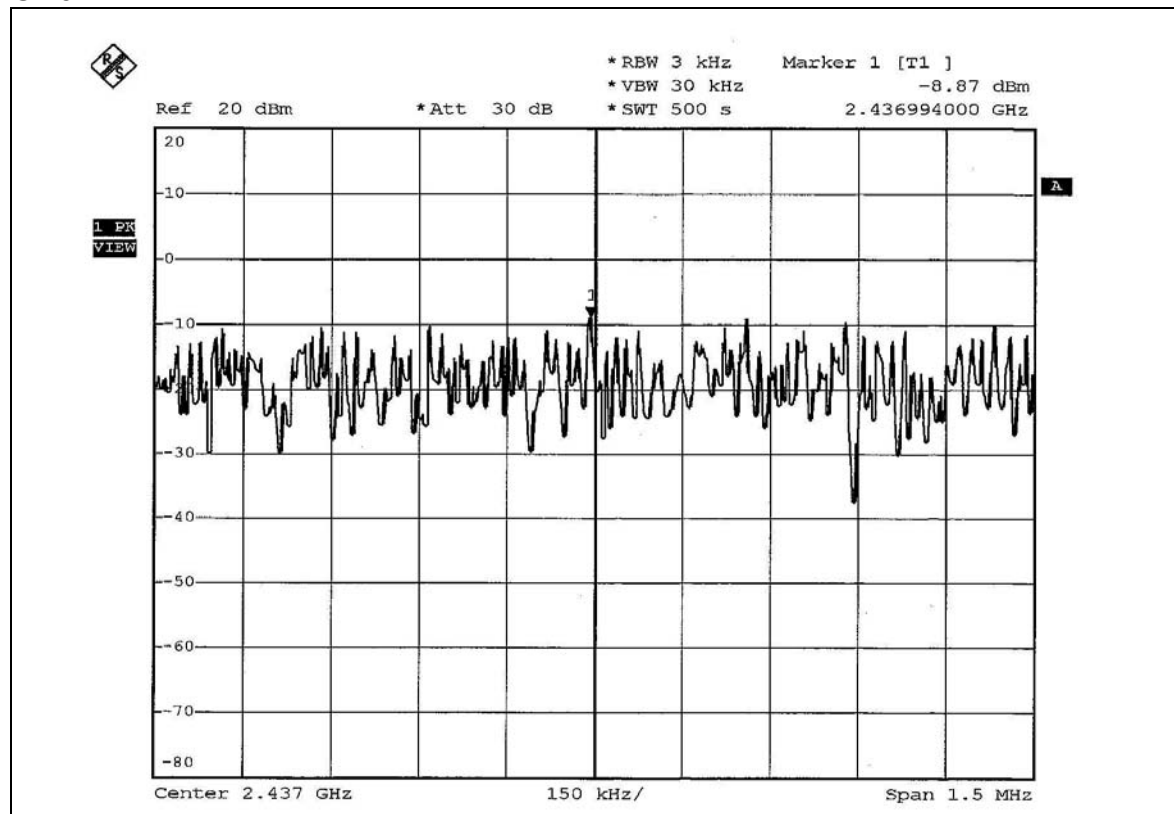

CH11

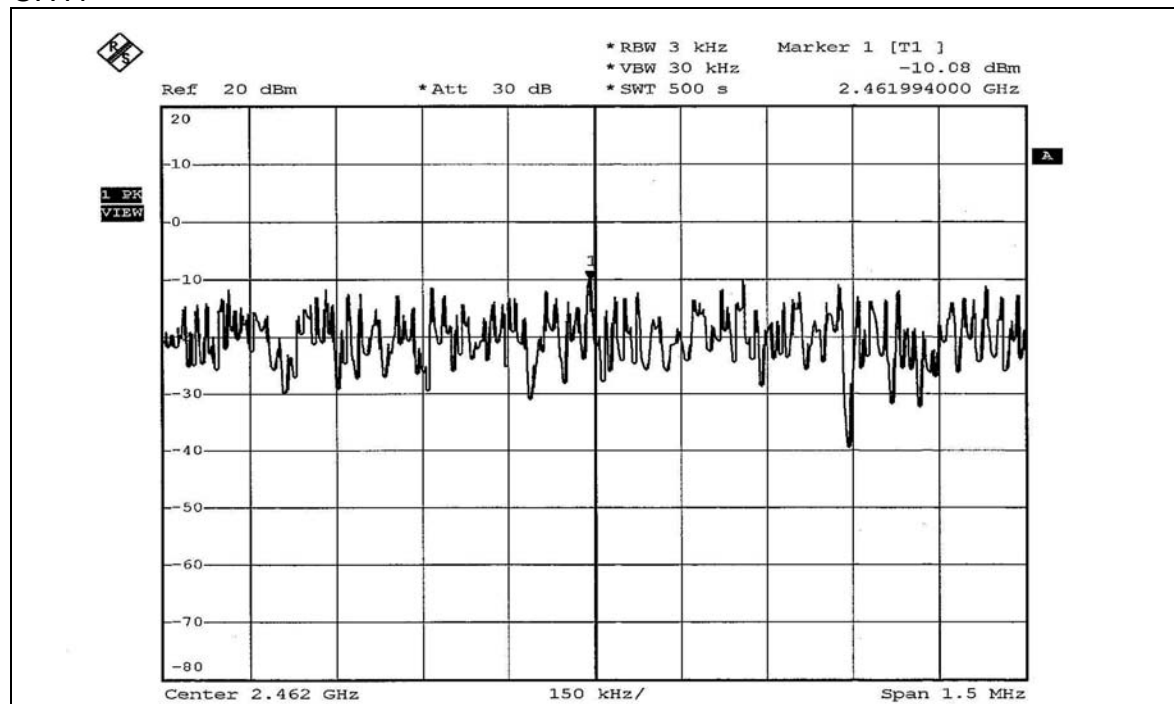


**802.11g OFDM modulation**


EUT	Wireless-G Broadband Router with RangeBooster	MODEL	WRT54GR
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-13.95	8	PASS
6	2437	-13.86	8	PASS
11	2462	-15.60	8	PASS


CH1

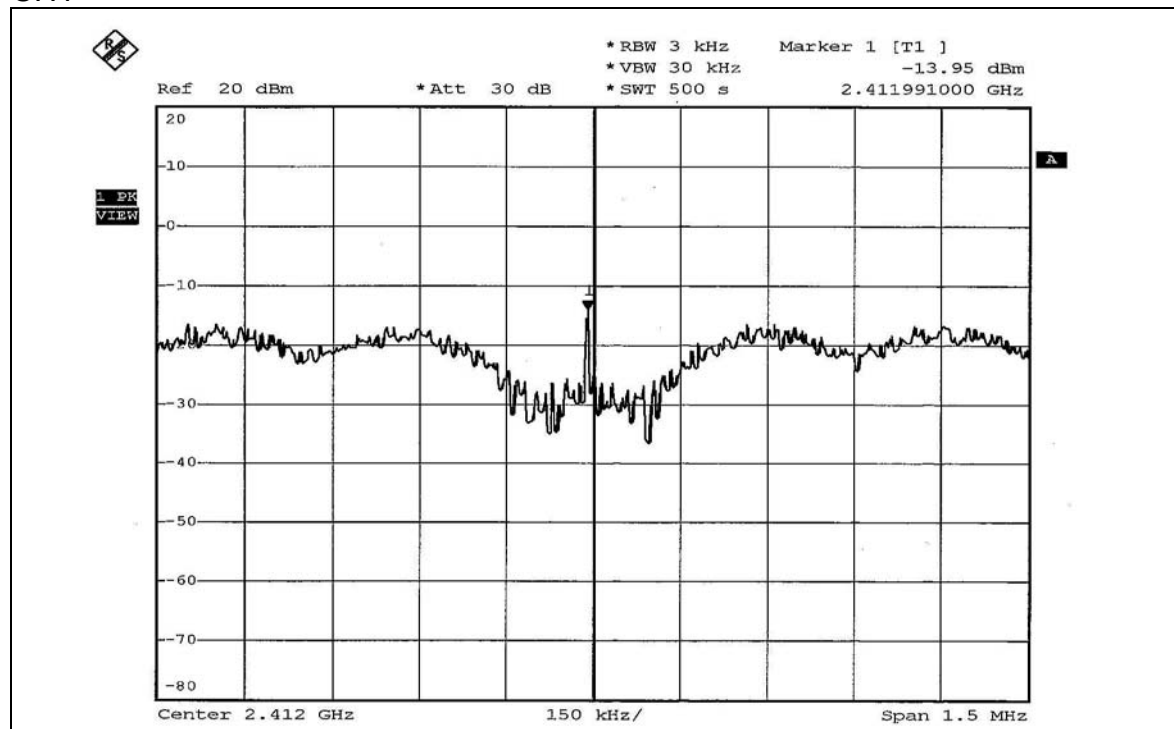

CH6

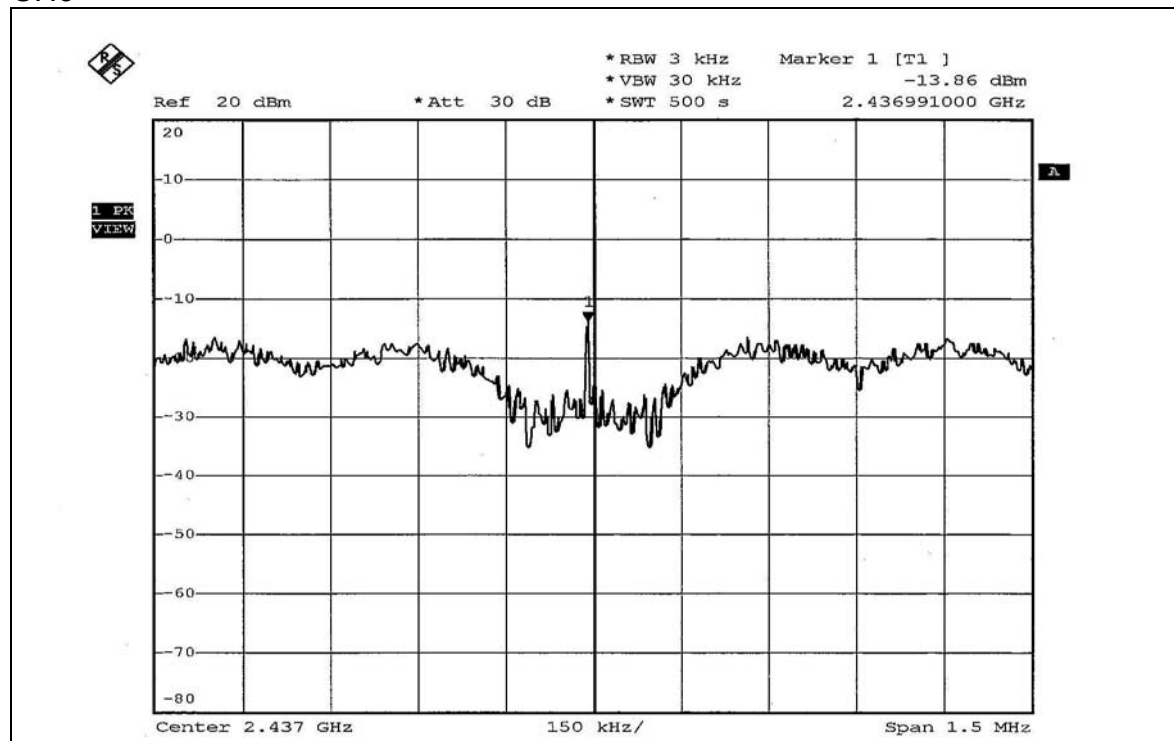

CH11

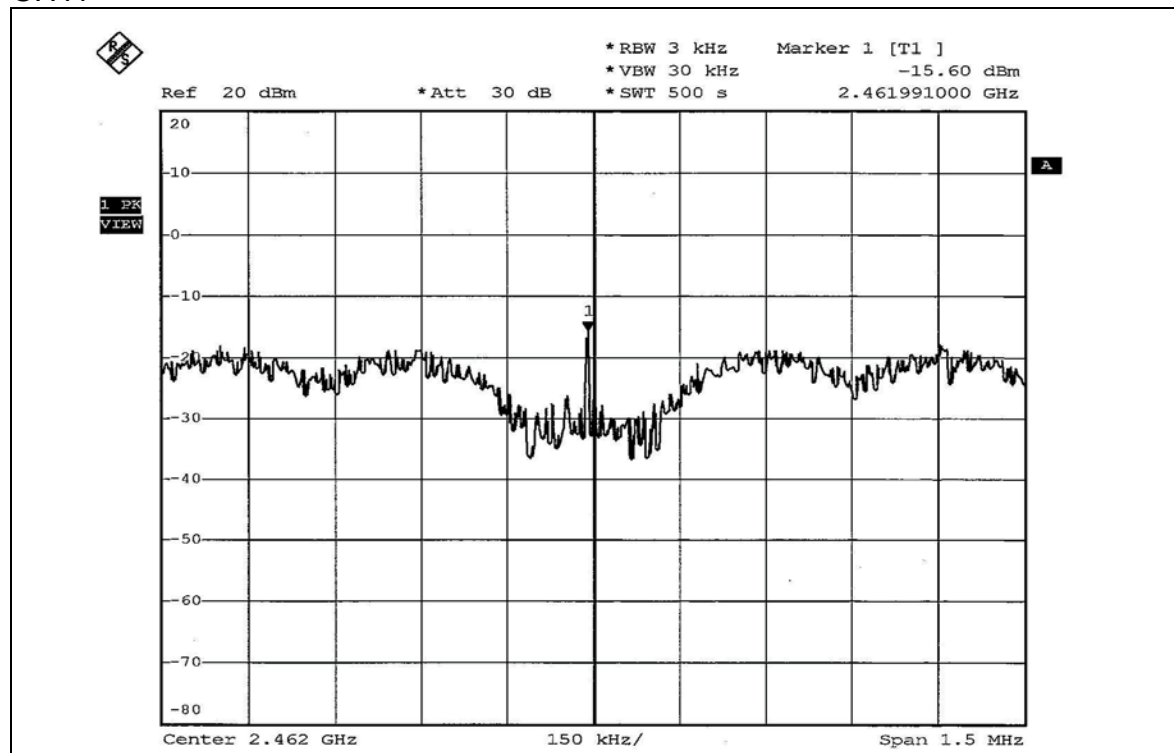

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded. The spectrum plots (Peak RBW=VBW=100kHz ; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6.



4.6.6 TEST RESULTS

The spectrum plots are attached on the following 12 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).



802.11b DSSS modulation



NOTE 1: The band edge emission plot on page 60 shows 50.61dBc between carrier maximum power and local maximum emission in restrict band (2.3644GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 112.03dBuV/m (Peak), so the maximum field strength in restrict band is $112.03 - 50.61 = 61.42$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on page 60 shows 54.74dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 104.56dBuV/m (Average), so the maximum field strength in restrict band is $104.56 - 54.74 = 49.82$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on page 61 shows 49.26dBc between carrier maximum power and local maximum emission in restrict band (2.4841GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 112.80dBuV/m (Peak), so the maximum field strength in restrict band is $112.80 - 49.26 = 63.54$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on page 62 shows 52.30dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 105.05dBuV/m (Average), so the maximum field strength in restrict band is $105.05 - 52.30 = 52.75$ dBuV/m which is under 54dBuV/m limit.

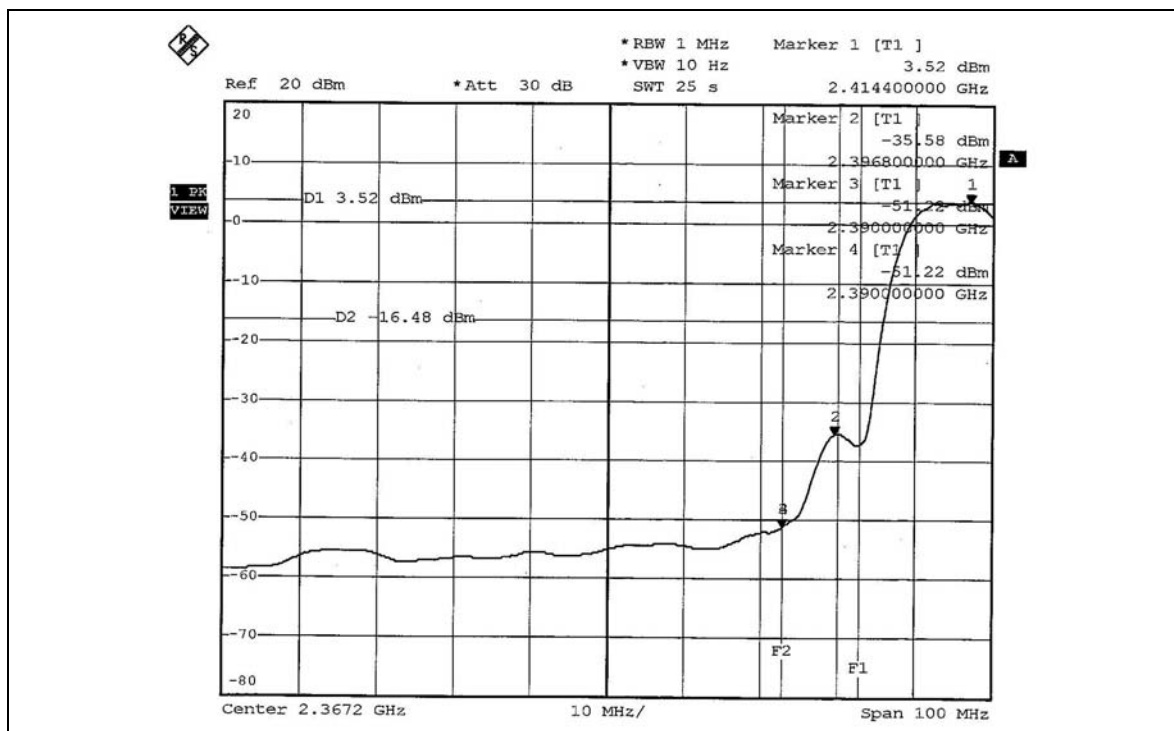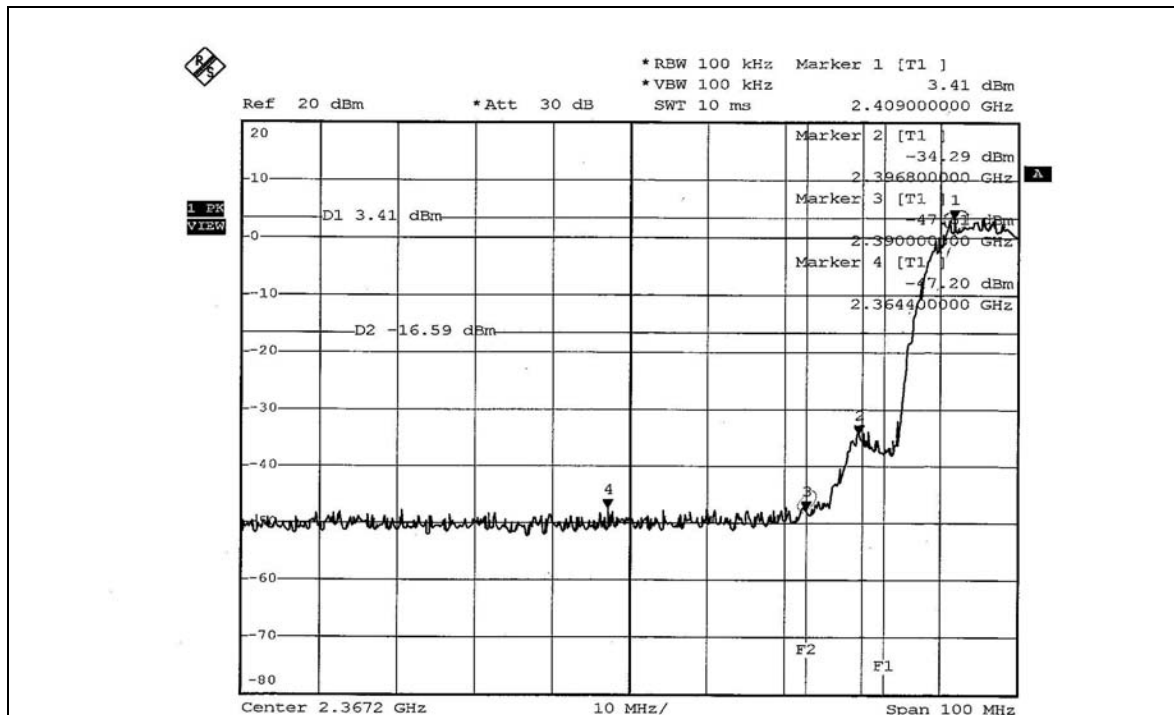

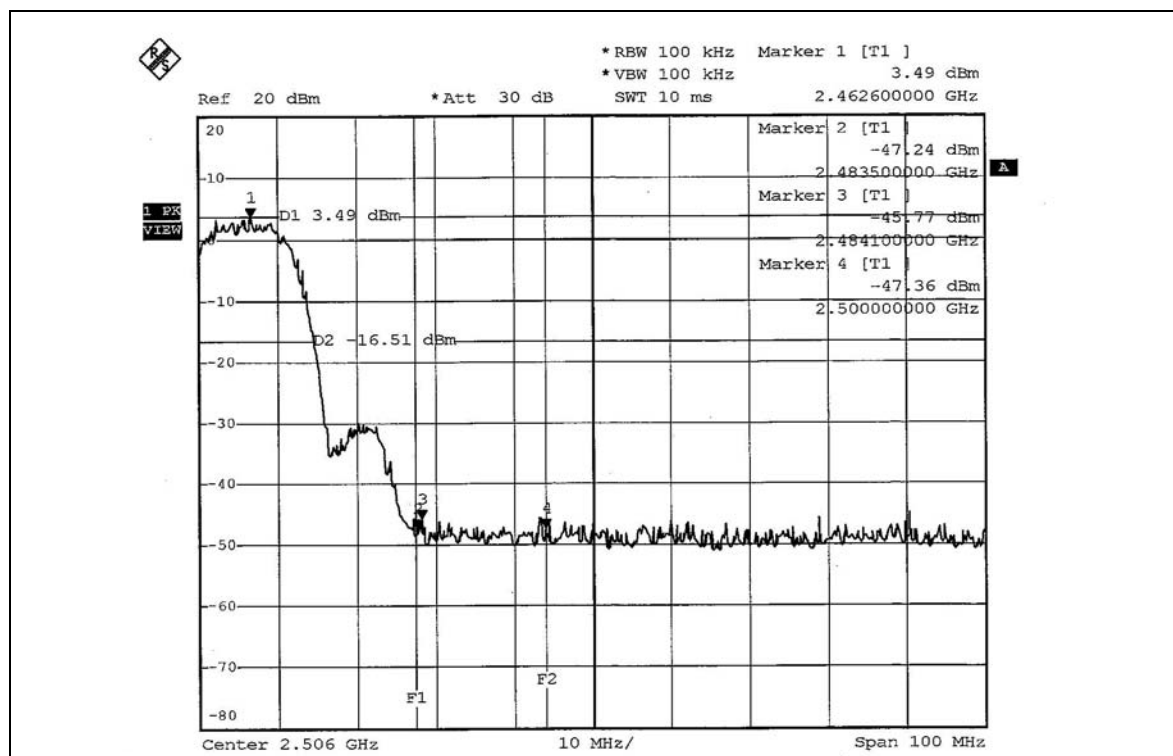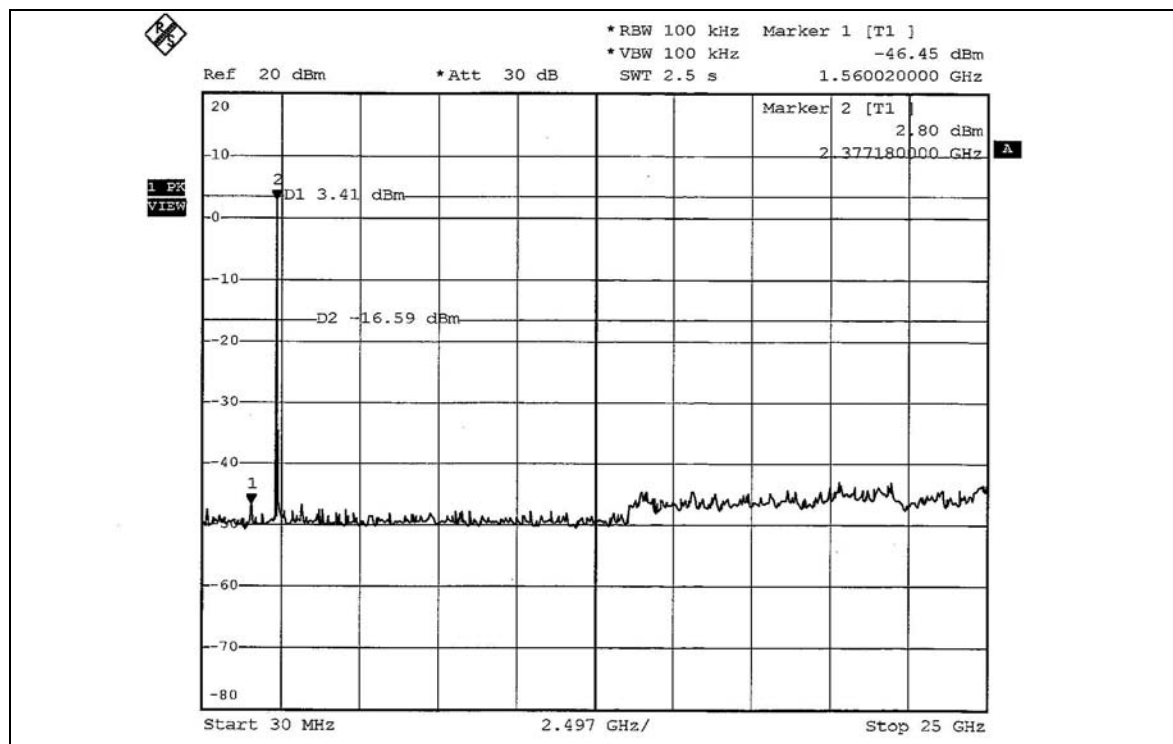

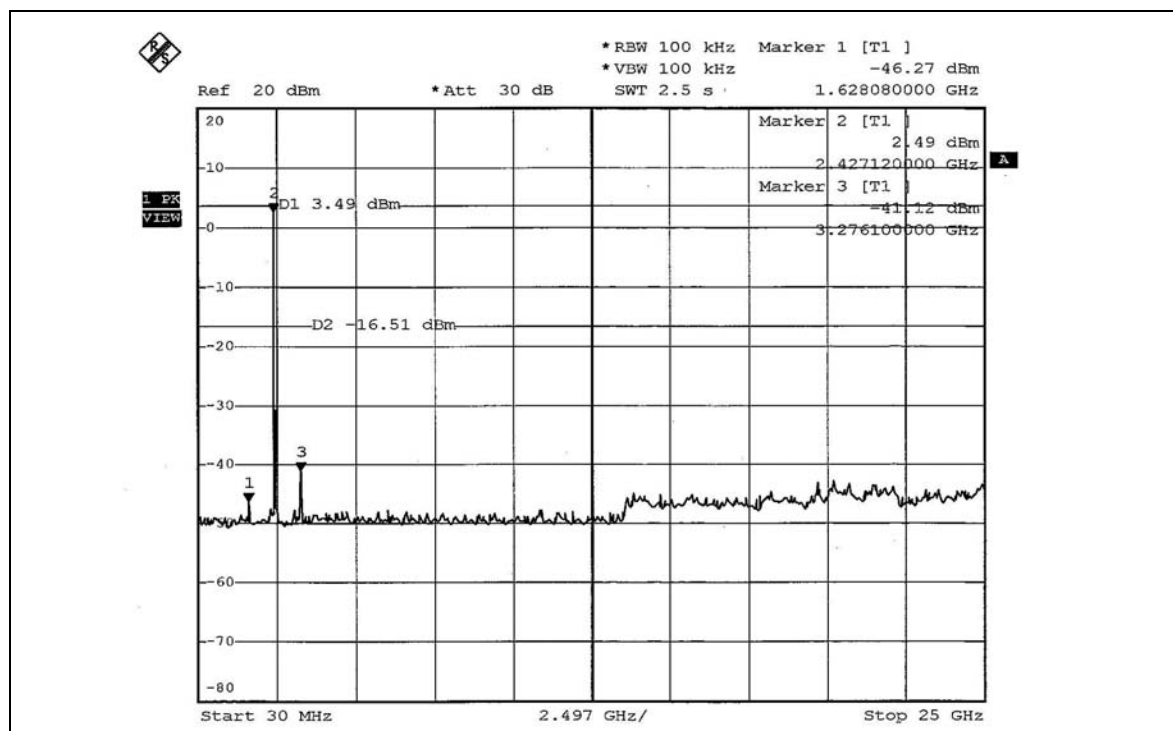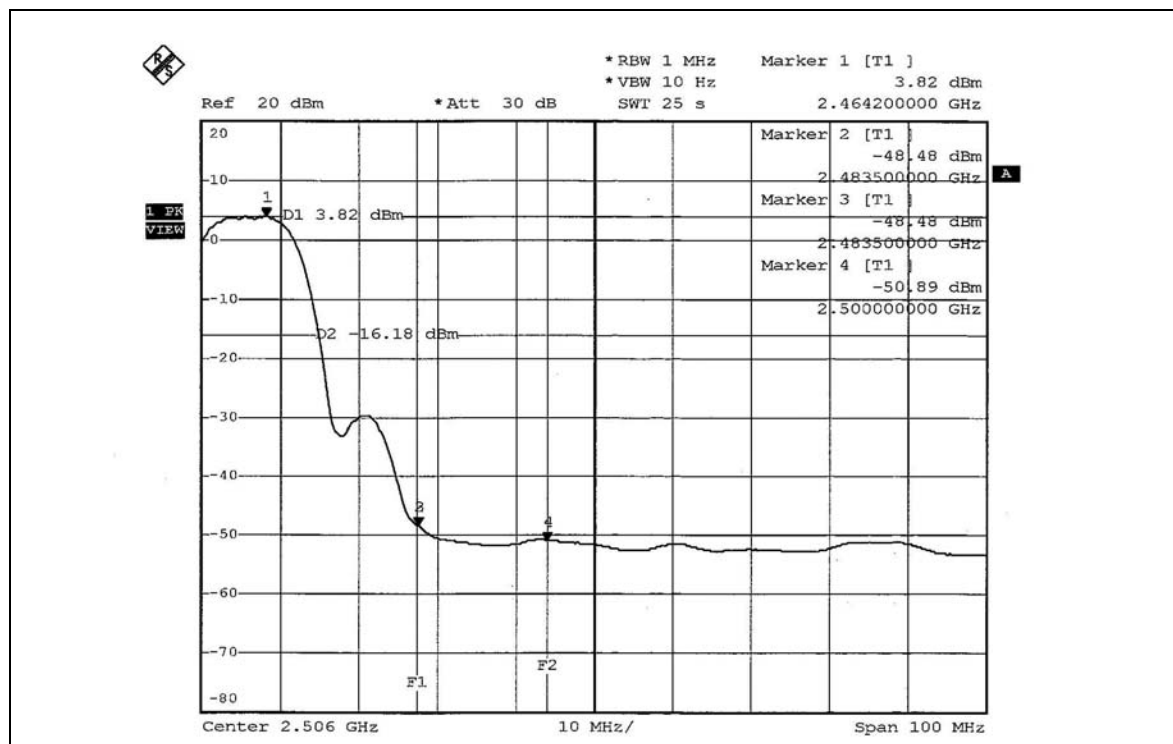



802.11g OFDM modulation



NOTE 1: The band edge emission plot on page 64 shows 43.49dBc between carrier maximum power and local maximum emission in restrict band (2.3878GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 108.12dBuV/m (Peak), so the maximum field strength in restrict band is $108.12 - 43.49 = 64.63$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on page 64 shows 48.23dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 99.25dBuV/m (Average), so the maximum field strength in restrict band is $99.25 - 48.23 = 51.02$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on page 65 shows 41.59dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 107.34dBuV/m (Peak), so the maximum field strength in restrict band is $107.34 - 41.59 = 65.75$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on page 66 shows 45.49dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 98.28dBuV/m (Average), so the maximum field strength in restrict band is $98.28 - 45.49 = 52.79$ dBuV/m which is under 54dBuV/m limit.

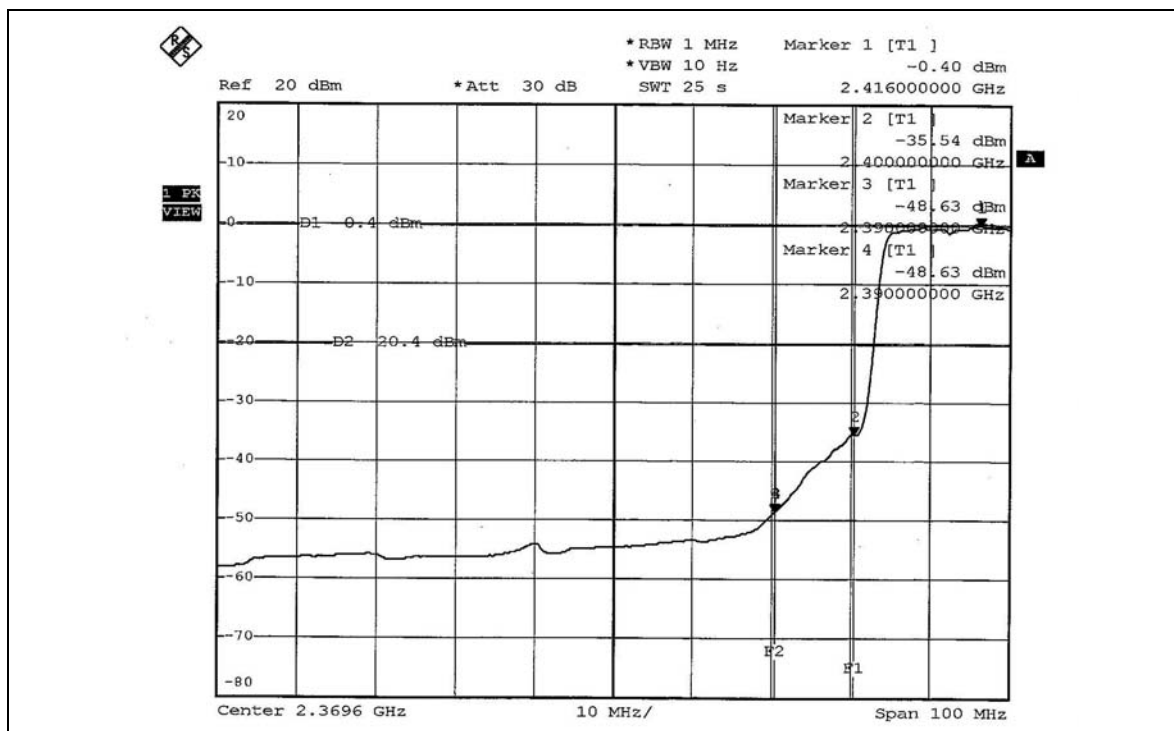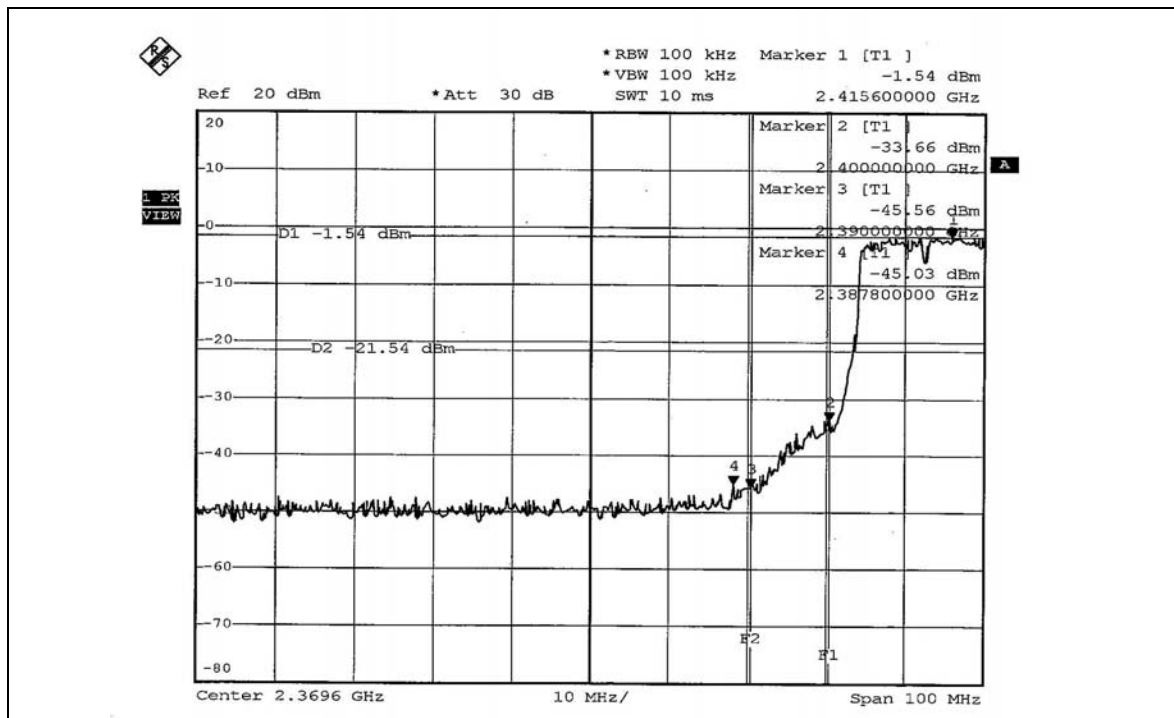

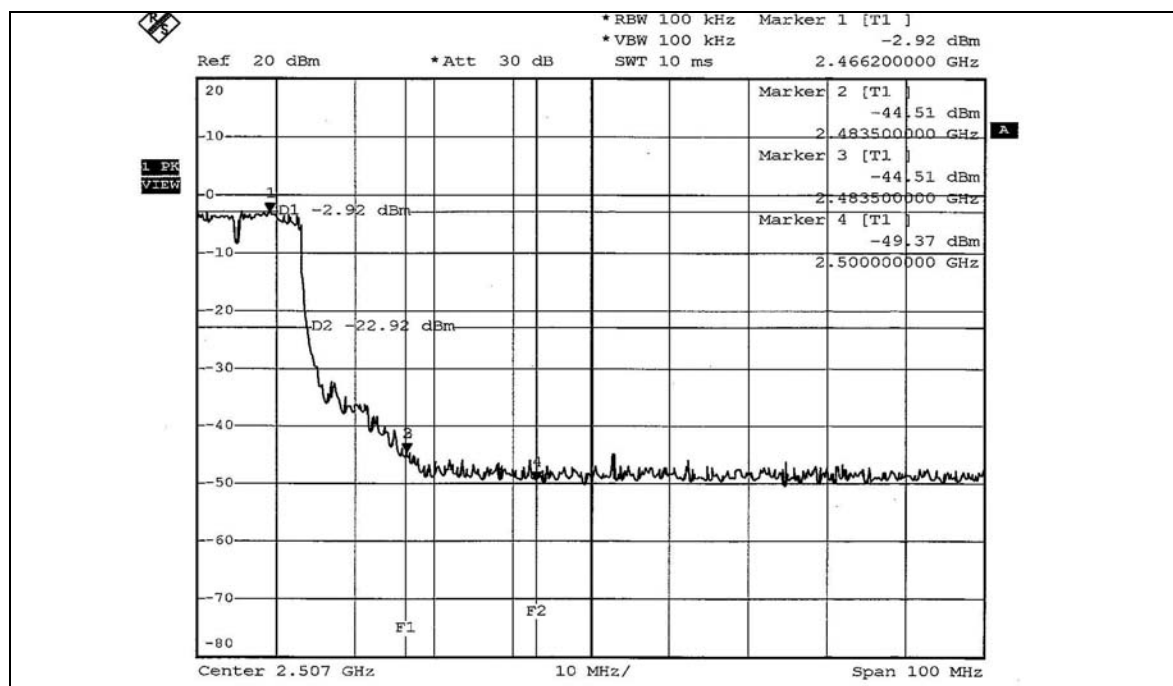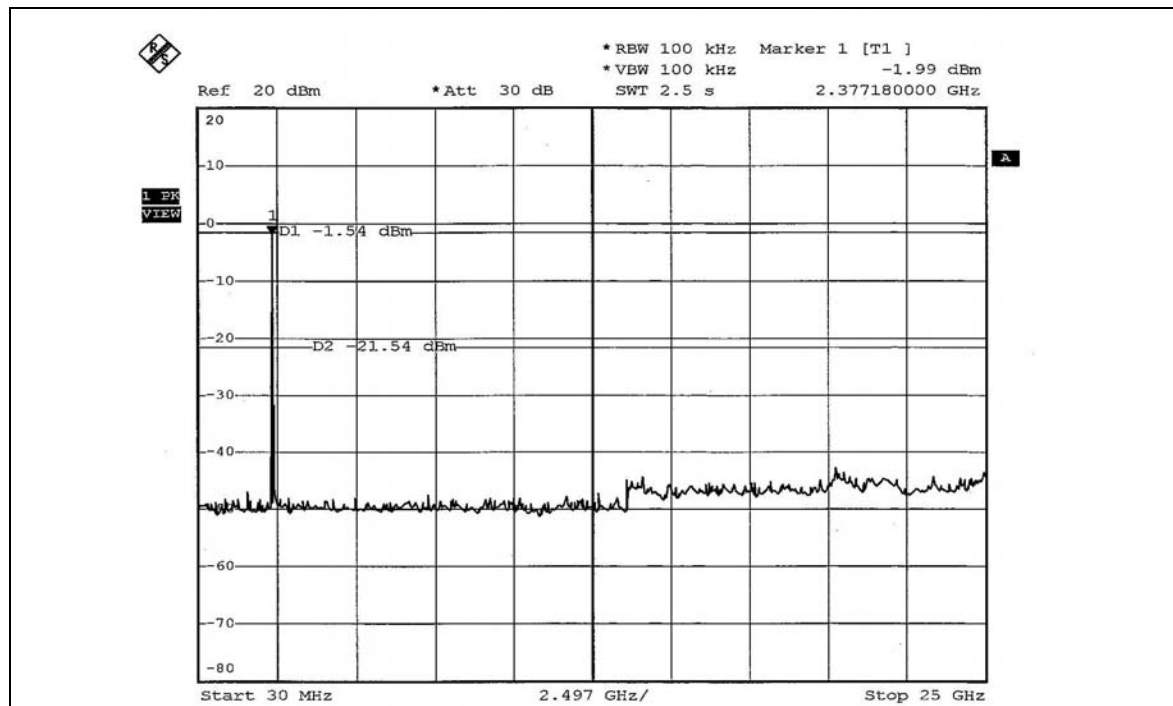

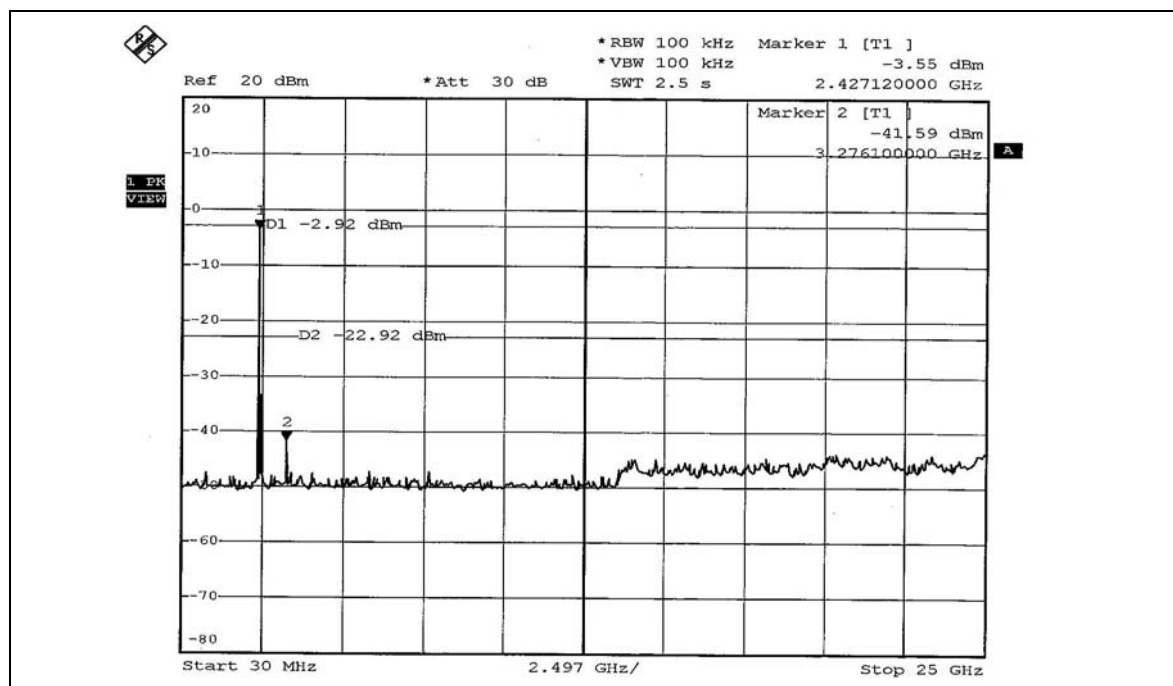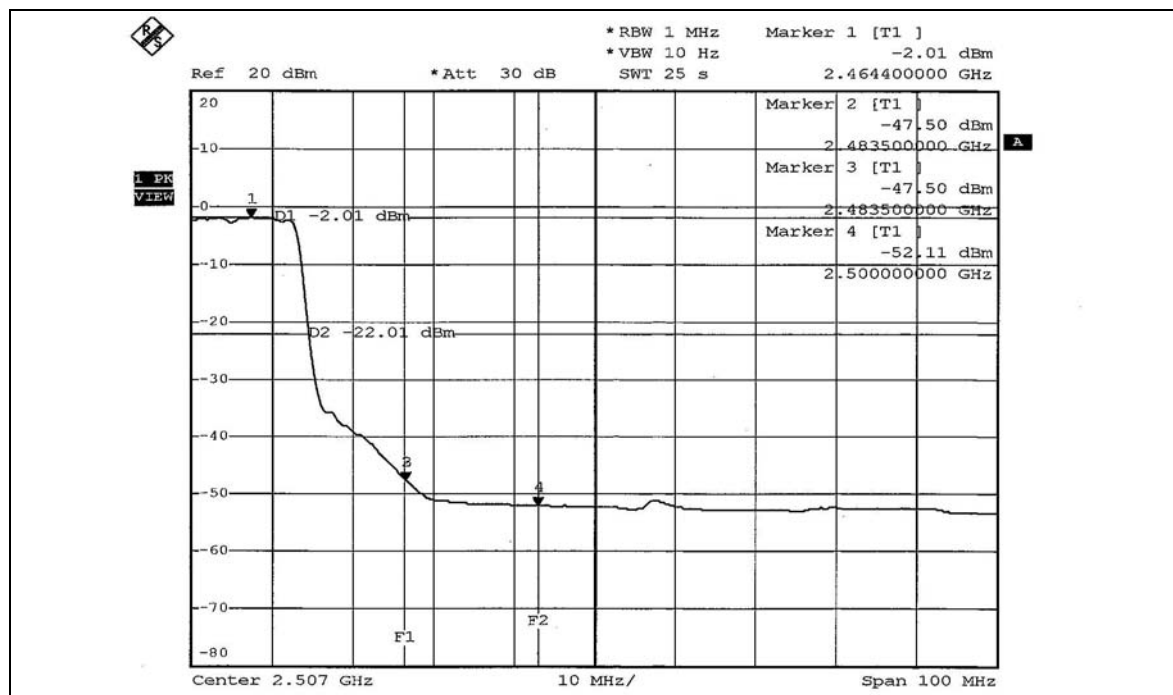



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION


The antenna type used in this product is Dipole antenna without antenna connector. The maximum Gain of the antenna is 1.8dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION



CONDUCTED EMISSION TEST (TEST MODE A)




CONDUCTED EMISSION TEST (TEST MODE B)

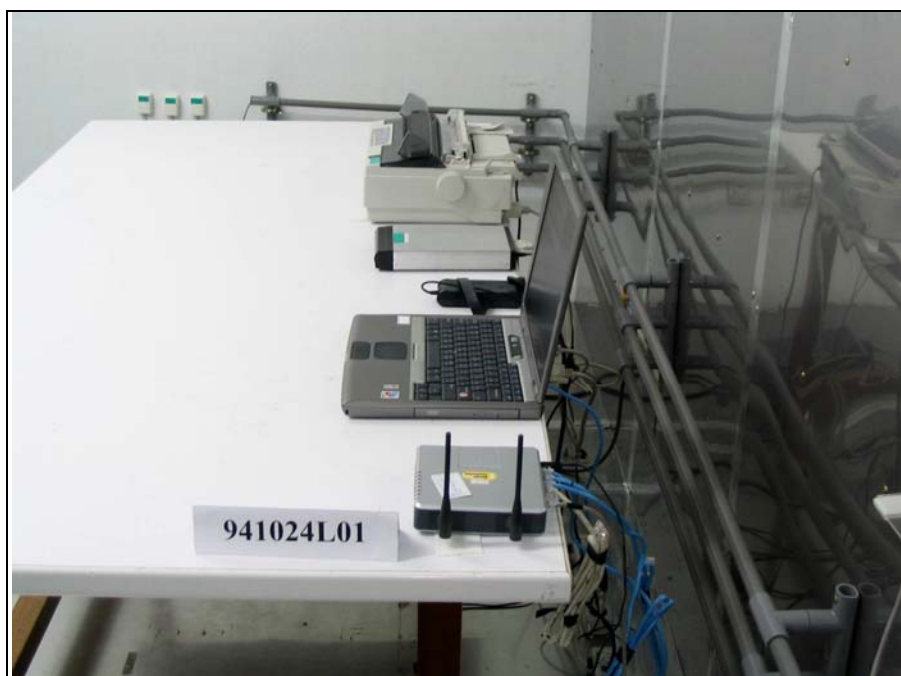

RADIATED EMISSION TEST (TEST MODE A)

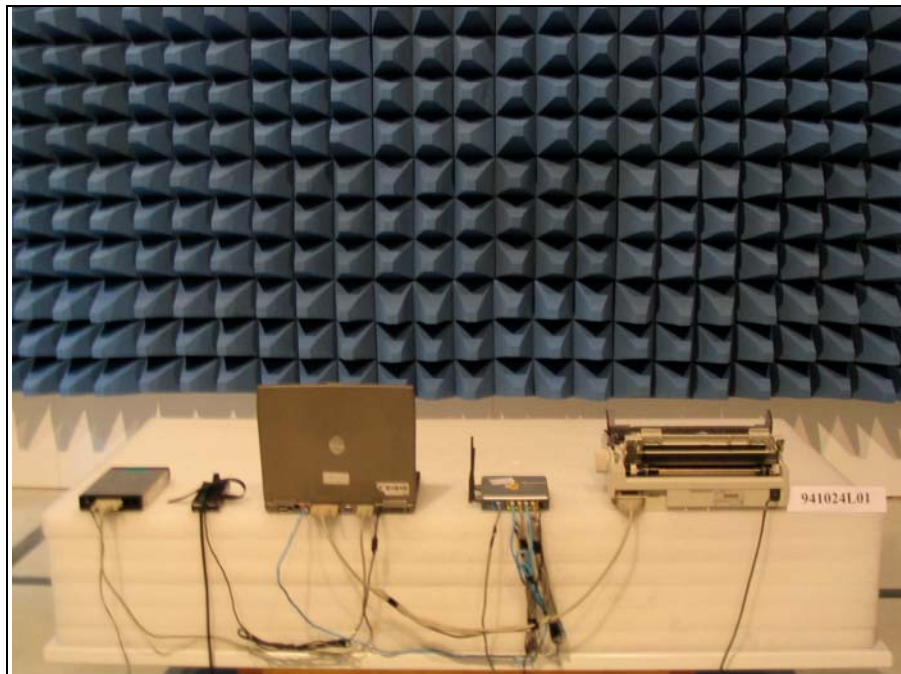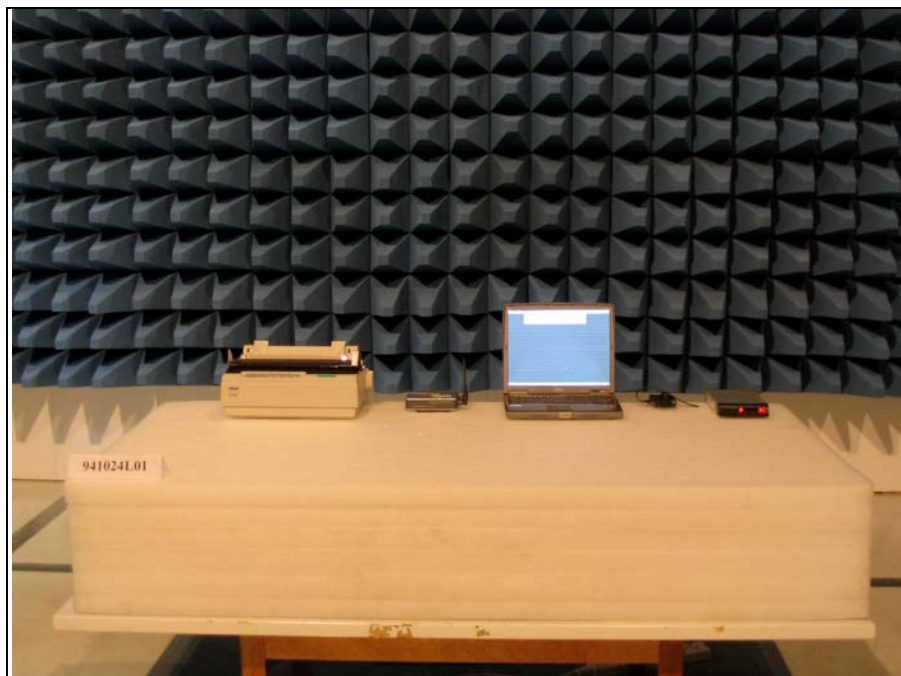

RADIATED EMISSION TEST (TEST MODE B)

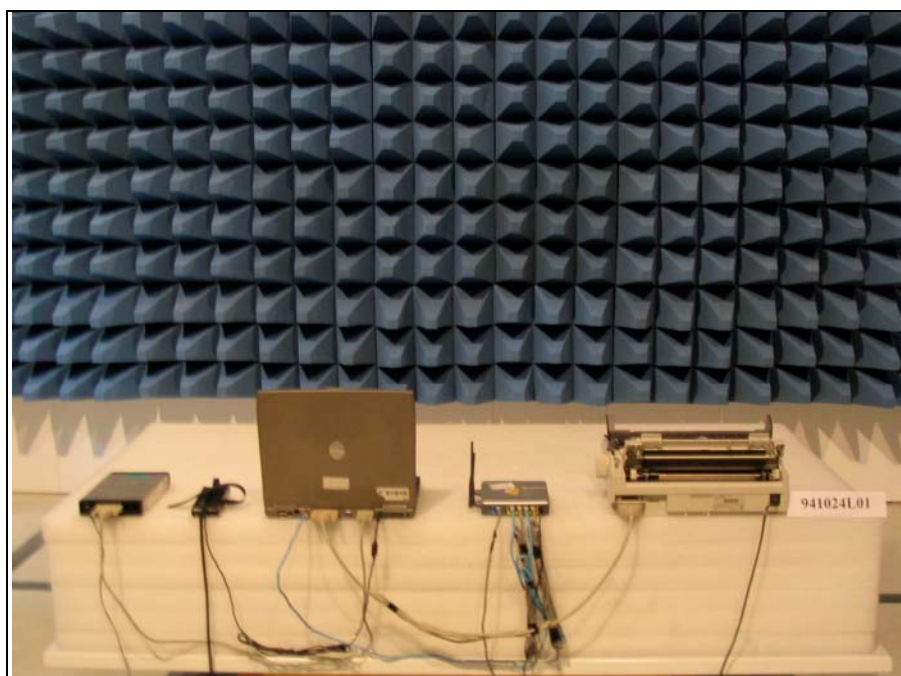



6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025

USA	FCC, NVLAP, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF Lab

Tel: 886-3-3270910

Fax: 886-3-3270892

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.