



FCC TEST REPORT

REPORT NO.: RF950302L10

MODEL NO.: WUSB54GX4

RECEIVED: Mar. 23, 2006

TESTED: Mar. 23 ~ Mar. 29, 2006

ISSUED: May 02, 2006

APPLICANT: Cisco-Linksys LLC

ADDRESS: 121 Theory Drive Irvine, CA 92617 (USA)

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Kueishan, Taoyuan,
Taiwan, R.O.C.

This test report consists of 94 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.





TABLE OF CONTENTS

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3.	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	7
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	8
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	10
3.4	DESCRIPTION OF SUPPORT UNITS	10
4.	TEST TYPES AND RESULTS.....	11
4.1	CONDUCTED EMISSION MEASUREMENT.....	11
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	11
4.1.2	TEST INSTRUMENTS	11
4.1.3	TEST PROCEDURES	12
4.1.4	DEVIATION FROM TEST STANDARD	12
4.1.5	TEST SETUP	13
4.1.6	EUT OPERATING CONDITIONS	13
4.1.7	TEST RESULTS.....	14
4.2	RADIATED EMISSION MEASUREMENT	26
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	26
4.2.2	TEST INSTRUMENTS	27
4.2.3	TEST PROCEDURES	28
4.2.4	DEVIATION FROM TEST STANDARD	29
4.2.5	TEST SETUP	29
4.2.6	EUT OPERATING CONDITIONS	29
4.2.7	TEST RESULTS.....	30
4.3	6dB BANDWIDTH MEASUREMENT	44
4.3.1	LIMITS OF 6DB BANDWIDTH MEASUREMENT	44
4.3.2	TEST INSTRUMENTS	44
4.3.3	TEST PROCEDURE	45
4.3.4	DEVIATION FROM TEST STANDARD	45
4.3.5	TEST SETUP	45
4.3.6	EUT OPERATING CONDITIONS	45
4.3.7	TEST RESULTS.....	46
4.4	MAXIMUM PEAK OUTPUT POWER	58
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	58
4.4.2	TEST INSTRUMENTS	58
4.4.3	TEST PROCEDURES	59
4.4.4	DEVIATION FROM TEST STANDARD	59
4.4.5	TEST SETUP	59
4.4.6	EUT OPERATING CONDITIONS	59



4.4.7	TEST RESULTS	60
4.5	POWER SPECTRAL DENSITY MEASUREMENT	62
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	62
4.5.2	TEST INSTRUMENTS	62
4.5.3	TEST PROCEDURE	63
4.5.4	DEVIATION FROM TEST STANDARD	63
4.5.5	TEST SETUP	63
4.5.6	EUT OPERATING CONDITIONS	63
4.5.7	TEST RESULTS.....	64
4.6	BAND EDGES MEASUREMENT	76
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	76
4.6.2	TEST INSTRUMENTS	76
4.6.3	TEST PROCEDURE	77
4.6.4	DEVIATION FROM TEST STANDARD	77
4.6.5	EUT OPERATING CONDITION	77
4.6.6	TEST RESULTS.....	78
4.7	ANTENNA REQUIREMENT	90
4.7.1	STANDARD APPLICABLE.....	90
4.7.2	ANTENNA CONNECTED CONSTRUCTION	90
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	91
6.	INFORMATION ON THE TESTING LABORATORIES	93
	APPENDIX-A.....	A-1



1. CERTIFICATION

PRODUCT : Wireless-G USB Network Adapter with SRX400
MODEL NO.: WUSB54GX4
BRAND: Linksys
APPLICANT : Cisco-Linksys LLC
TESTED: Mar. 23 ~ Mar. 29, 2006
TEST SAMPLE: ENGINEERING SAMPLE
STANDARDS : FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Andrea Hsia , **DATE:** May 02, 2006
Andrea Hsia

TECHNICAL
ACCEPTANCE : Long Chen , **DATE:** May 02, 2006
Responsible for RF Long Chen

APPROVED BY : Gary Chang , **DATE:** May 02, 2006
Gary Chang / Supervisor

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -8.76dB at 3.836MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit : min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.03dB at 2383.00MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.73 dB
	200MHz ~1000MHz	3.74 dB
	1GHz ~ 18GHz	2.20 dB
	18GHz ~ 40GHz	1.88 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless-G USB Network Adapter with SRX400
MODEL NO.	WUSB54GX4
FCC ID	Q87-WUSB54GX4
POWER SUPPLY	5.0Vdc from host equipment
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps (SIMO) 802.11g: 126/120/108/96/80/72/48/40/36/24Mbps (MIMO) ACE OFDM (see note 3, 4, 5): 126/120/108/96/80/72/48/40/36/24/18/12Mbps (SIMO) 240/216/192/168/160/144/96/80/72/48Mbps (MIMO)
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11 for normal / 7 for ACE OFDM
MAXIMUM OUTPUT POWER (DSSS)	60.013mW
MAXIMUM OUTPUT POWER (FOR OFDM)	62.433mW
MAXIMUM OUTPUT POWER (FOR ACE-OFDM)	35.304mW
ANTENNA TYPE	Dipole antenna with 1.8dBi gain
DATA CABLE	1.7m non-shielded USB cable without core
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT incorporates a MIMO function with IEEE 802.11b/g. Physically, the card provides two complete transmitters and two receivers.
2. The EUT is 2*2 spatial MIMO (2TX & 2RX) without beam forming function that only operate dual chain configuration (both chain 0 and chain 1 transceivers are operational).
3. When the EUT operates in OFDM (SIMO) mode, the transfer rate of transmitting is up to 54Mbps. When the EUT operates in OFDM (MIMO) mode, the transfer rate of transmitting is up to 126Mbps.
4. When the EUT operates in ACE-OFDM (SIMO) mode, the transfer rate of transmitting is up to 126Mbps. When the EUT operates in ACE-OFDM (MIMO) mode, the transfer rate of transmitting is up to 240Mbps. (ACET: Adaptive Channel Expansion Technology)
5. The "SIMO" mean both TX chains transfer same packet data during operating and " MIMO " mean both TX chains transfer different packet data.
6. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

For 802.11b/g: Eleven channels are provided to this EUT for normal mode.


CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

For Adaptive Channel Expansion technology (ACE):

Nine channels are provided to this EUT.

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2422 MHz	5	2442 MHz
2	2427 MHz	6	2447 MHz
3	2432 MHz	7	2452 MHz
4	2437 MHz		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

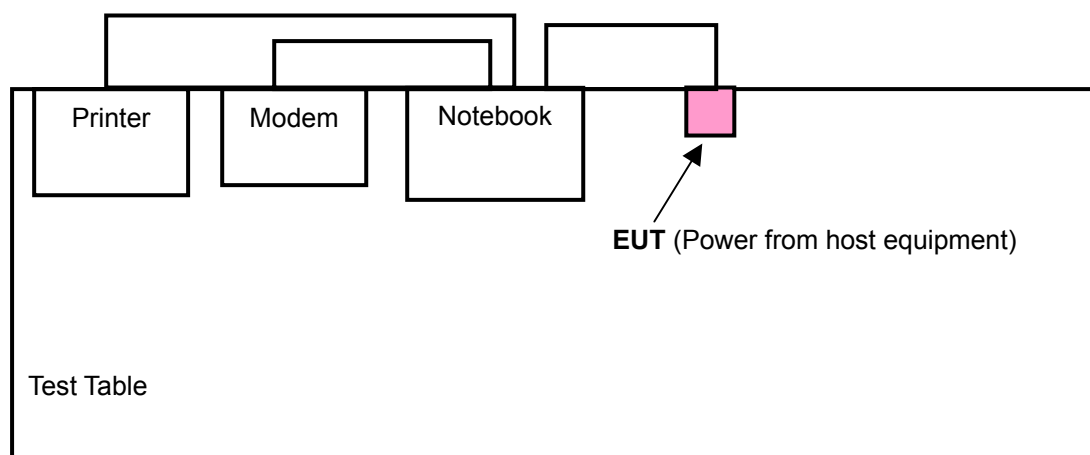

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

APPLICABLE TO				DESCRIPTION
PLC	RE<1G	RE≥1G	APCM	
v	v	v	v	NA

Where **PLC**: Power Line Conducted Emission **RE<1G RE**: Radiated Emission below 1GHz
RE≥1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
ACE OFDM	1 to 7	1, 4, 7	OFDM	QPSK	12

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	11	DSSS	DBPSK	1
ACE OFDM	1 to 7	1	OFDM	QPSK	12

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
ACE OFDM	1 to 7	1, 4, 7	OFDM	QPSK	12

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 11	OFDM	BPSK	6
ACE OFDM	1 to 7	1, 7	OFDM	QPSK	12

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
ACE OFDM	1 to 7	1, 4, 7	OFDM	QPSK	12



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	9954115984	E2K24CLNS
2	PRINTER	EPSON	LQ-300+	DCGY047265	FCC DoC Approved
3	MODEM	ACEEX	1414V/3	0401008248	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m shielded cable without core.
3	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.

NOTE: All power cords of the above support units are non shielded (1.8m).

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 11, 2006
RF signal cable Woken	5D-FB	Cable-HYC01-01	Jan. 06, 2007
LISN ROHDE & SCHWARZ	ESH3-Z5	100312	Feb. 15, 2007
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Feb. 07, 2007
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under Limit - 20dB was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

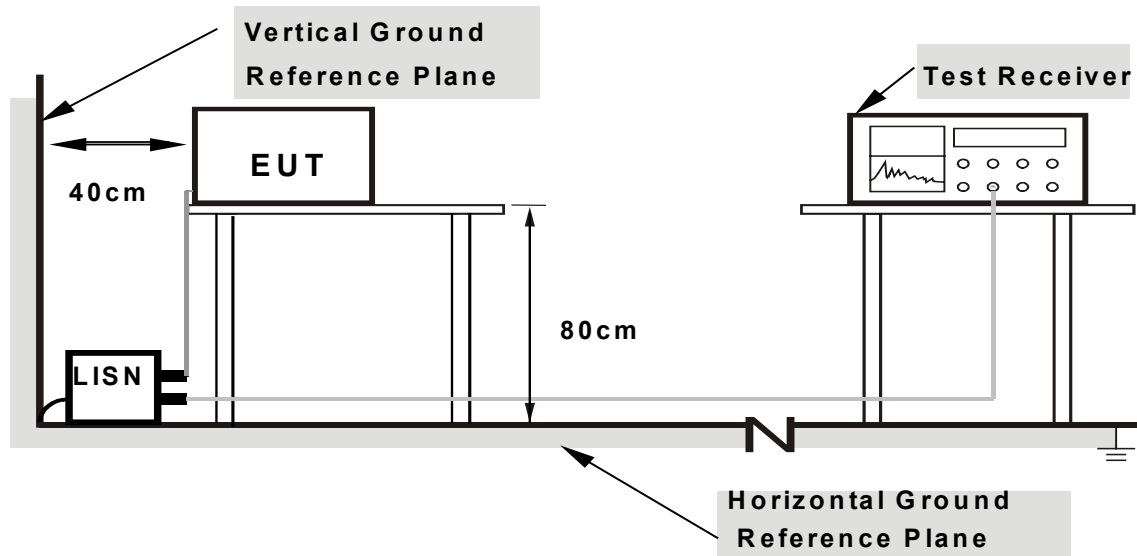

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Connected the EUT into the Notebook system and placed on a testing table.
- b. The Notebook system ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- c. The Notebook system sent "H" messages to its screen.
- d. The Notebook system show "H" messages to modem.
- e. The Notebook system sent "H" messages to printer and the printer prints them on paper.
- f. Repeated item c ~e.


4.1.7 TEST RESULTS

CONDUCTED WORST CASE DATA 802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
TRANSFER RATE	6Mbps	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	21deg. C, 70%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Jacky Lee

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.10	51.02	-	51.12	-	64.61	54.61	-13.49	-
2	0.236	0.10	42.76	-	42.86	-	62.24	52.24	-19.38	-
3	1.824	0.20	38.11	-	38.31	-	56.00	46.00	-17.69	-
4	2.531	0.27	37.18	-	37.45	-	56.00	46.00	-18.55	-
5	3.770	0.44	43.93	-	44.37	-	56.00	46.00	-11.63	-
6	11.965	0.53	39.43	-	39.96	-	60.00	50.00	-20.04	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

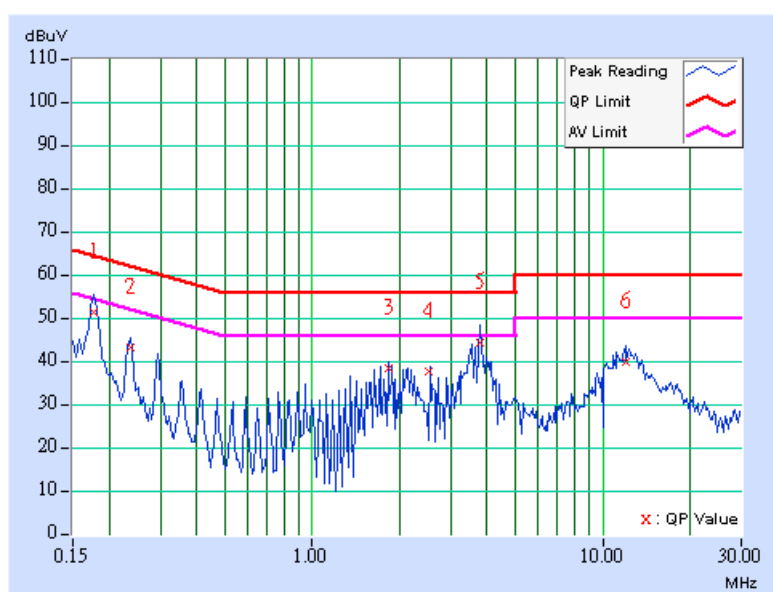

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
TRANSFER RATE	6Mbps	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	21deg. C, 70%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Jacky Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.10	53.64	-	53.74	-	64.61	54.61	-10.87	-
2	0.236	0.10	45.10	-	45.20	-	62.24	52.24	-17.04	-
3	1.418	0.14	36.33	-	36.47	-	56.00	46.00	-19.53	-
4	2.124	0.21	40.92	-	41.13	-	56.00	46.00	-14.87	-
5	3.836	0.36	46.88	32.83	47.24	33.19	56.00	46.00	-8.76	-12.81
6	12.397	0.49	36.97	-	37.46	-	60.00	50.00	-22.54	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

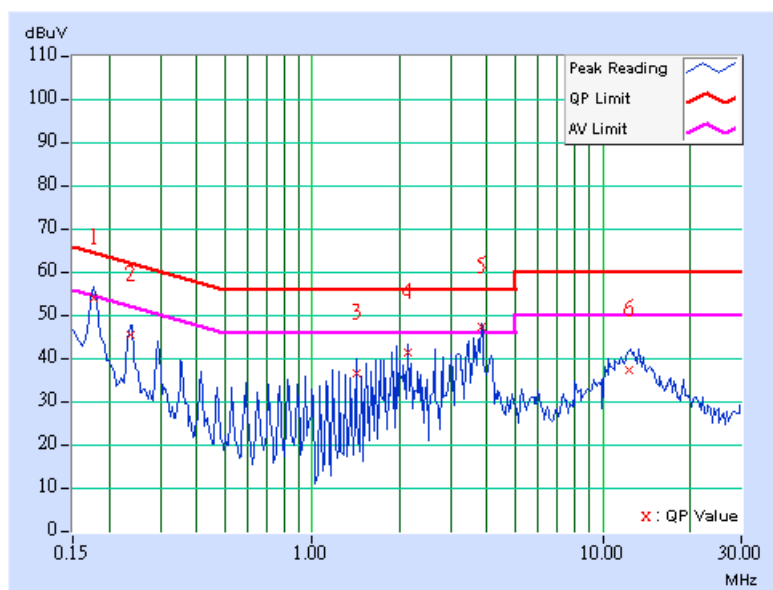

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
TRANSFER RATE	6Mbps	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	21deg. C, 70%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Jacky Lee

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.10	51.32	-	51.42	-	64.61	54.61	-13.19	-
2	0.236	0.10	41.21	-	41.31	-	62.24	52.24	-20.93	-
3	1.058	0.20	33.85	-	34.05	-	56.00	46.00	-21.95	-
4	1.820	0.20	38.82	-	39.02	-	56.00	46.00	-16.98	-
5	3.467	0.40	43.27	-	43.67	-	56.00	46.00	-12.33	-
6	12.451	0.54	40.04	-	40.58	-	60.00	50.00	-19.42	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

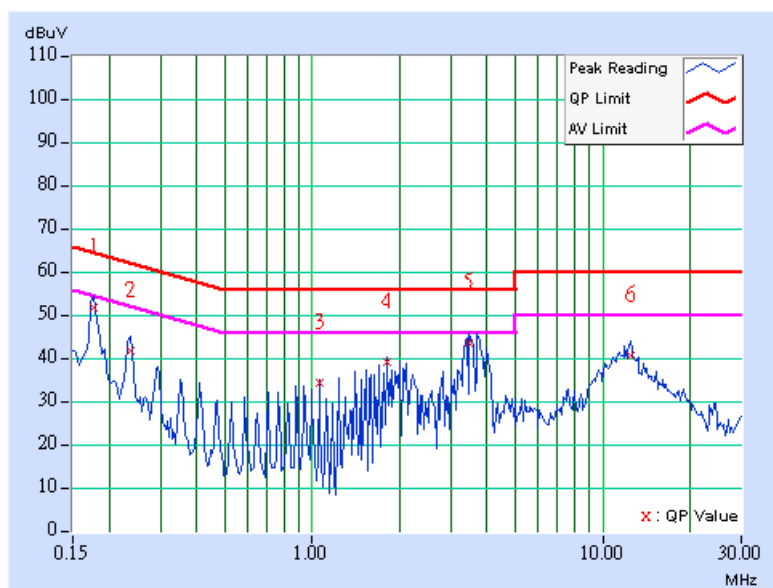

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
TRANSFER RATE	6Mbps	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	21deg. C, 70%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Jacky Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.10	50.07	-	50.17	-	64.61	54.61	-14.44	-
2	0.236	0.10	43.18	-	43.28	-	62.24	52.24	-18.96	-
3	1.410	0.14	37.00	-	37.14	-	56.00	46.00	-18.86	-
4	2.293	0.22	38.15	-	38.37	-	56.00	46.00	-17.63	-
5	3.645	0.34	46.43	33.97	46.77	34.31	56.00	46.00	-9.23	-11.69
6	12.517	0.50	37.65	-	38.15	-	60.00	50.00	-21.85	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

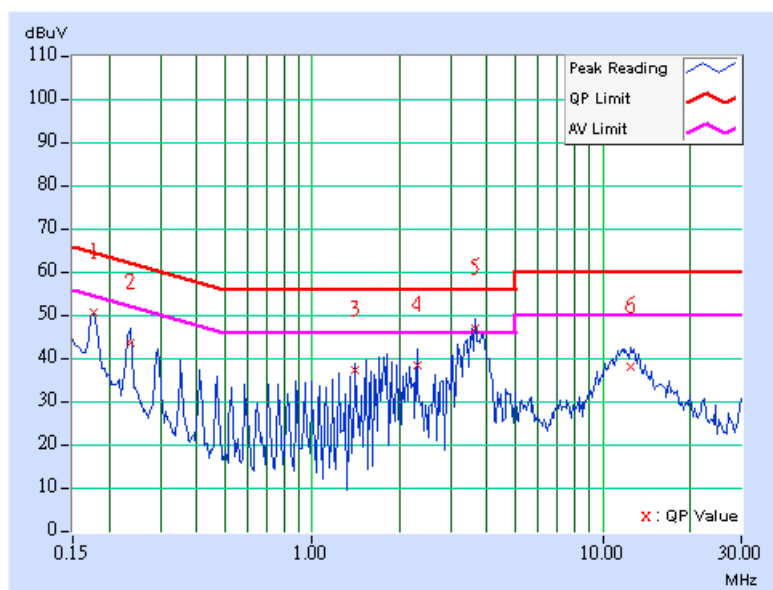

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 1
TRANSFER RATE	6Mbps	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	21deg. C, 70%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Jacky Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.177	0.10	48.12	-	48.22	-	64.61
2	0.232	0.10	41.58	-	41.68	-	62.37	52.37	-20.69	-
3	1.355	0.20	33.86	-	34.06	-	56.00	46.00	-21.94	-
4	1.828	0.20	36.41	-	36.61	-	56.00	46.00	-19.39	-
5	3.832	0.45	41.76	-	42.21	-	56.00	46.00	-13.79	-
6	13.254	0.57	34.56	-	35.13	-	60.00	50.00	-24.87	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

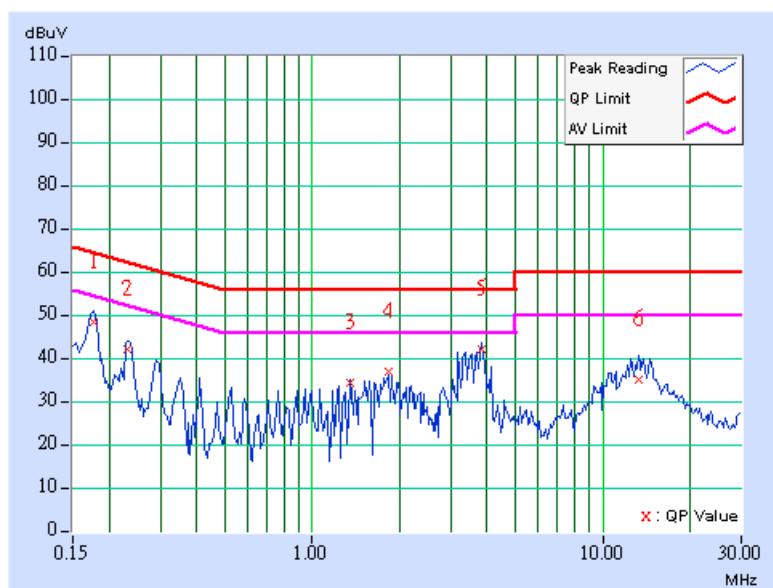

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 2
TRANSFER RATE	6Mbps	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	21deg. C, 70%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Jacky Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.177	0.10	49.36	-	49.46	-	64.61
2	0.236	0.10	42.70	-	42.80	-	62.24	52.24	-19.44	-
3	0.883	0.10	32.97	-	33.07	-	56.00	46.00	-22.93	-
4	1.827	0.18	38.96	-	39.14	-	56.00	46.00	-16.86	-
5	3.771	0.35	46.65	33.69	47.00	34.04	56.00	46.00	-9.00	-11.96
6	12.430	0.49	37.44	-	37.93	-	60.00	50.00	-22.07	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

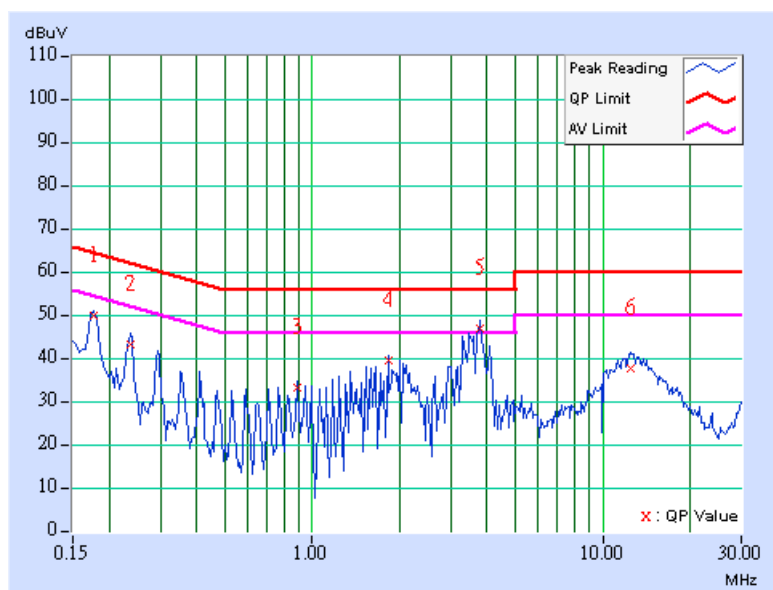


ACE OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
TRANSFER RATE	12Mbps	6dB BANDWIDTH	9 kHz
MODULATION TYPE	QPSK	ENVIRONMENTAL CONDITIONS	21deg. C, 70%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Jacky Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.10	48.81	-	48.91	-	64.61	54.61	-15.70	-
2	0.236	0.10	41.60	-	41.70	-	62.24	52.24	-20.54	-
3	0.884	0.18	30.31	-	30.49	-	56.00	46.00	-25.51	-
4	1.942	0.20	36.16	-	36.36	-	56.00	46.00	-19.64	-
5	3.531	0.41	42.54	-	42.95	-	56.00	46.00	-13.05	-
6	11.183	0.50	37.06	-	37.56	-	60.00	50.00	-22.44	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

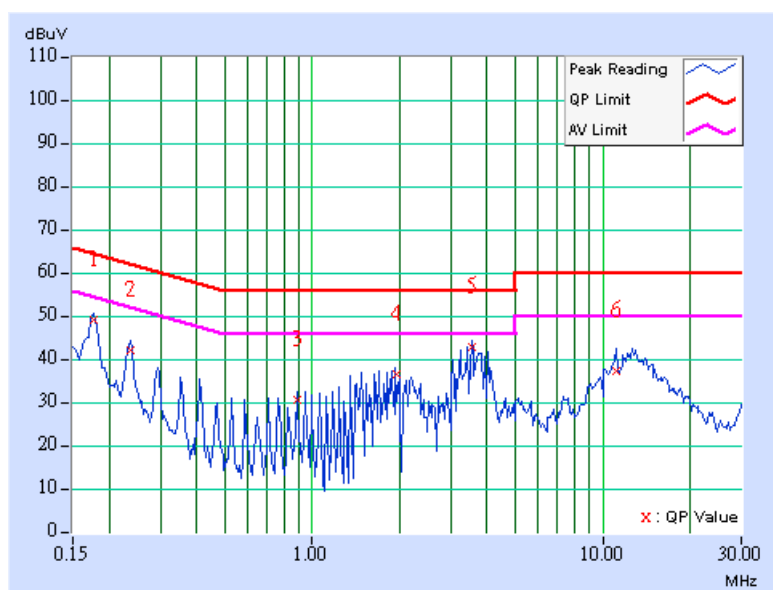

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
TRANSFER RATE	12Mbps	6dB BANDWIDTH	9 kHz
MODULATION TYPE	QPSK	ENVIRONMENTAL CONDITIONS	21deg. C, 70%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Jacky Lee

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.10	49.46	-	49.56	-	64.61	54.61	-15.05	-
2	0.236	0.10	42.70	-	42.80	-	62.24	52.24	-19.44	-
3	1.060	0.11	34.51	-	34.62	-	56.00	46.00	-21.38	-
4	1.826	0.18	38.82	-	39.00	-	56.00	46.00	-17.00	-
5	3.945	0.37	43.34	-	43.71	-	56.00	46.00	-12.29	-
6	12.840	0.50	38.96	-	39.46	-	60.00	50.00	-20.54	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

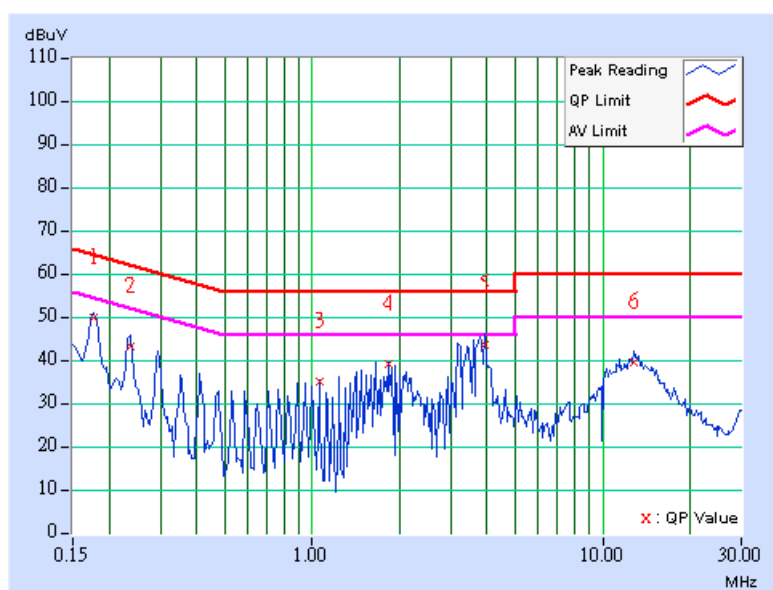

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	PHASE	Line 1
TRANSFER RATE	12Mbps	6dB BANDWIDTH	9 kHz
MODULATION TYPE	QPSK	ENVIRONMENTAL CONDITIONS	21deg. C, 70%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Jacky Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.10	48.81	-	48.91	-	64.65	54.65	-15.74	-
2	0.236	0.10	41.52	-	41.62	-	62.24	52.24	-20.62	-
3	1.824	0.20	38.03	-	38.23	-	56.00	46.00	-17.77	-
4	3.176	0.36	39.37	-	39.73	-	56.00	46.00	-16.27	-
5	3.709	0.43	43.58	-	44.01	-	56.00	46.00	-11.99	-
6	12.357	0.54	39.27	-	39.81	-	60.00	50.00	-20.19	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

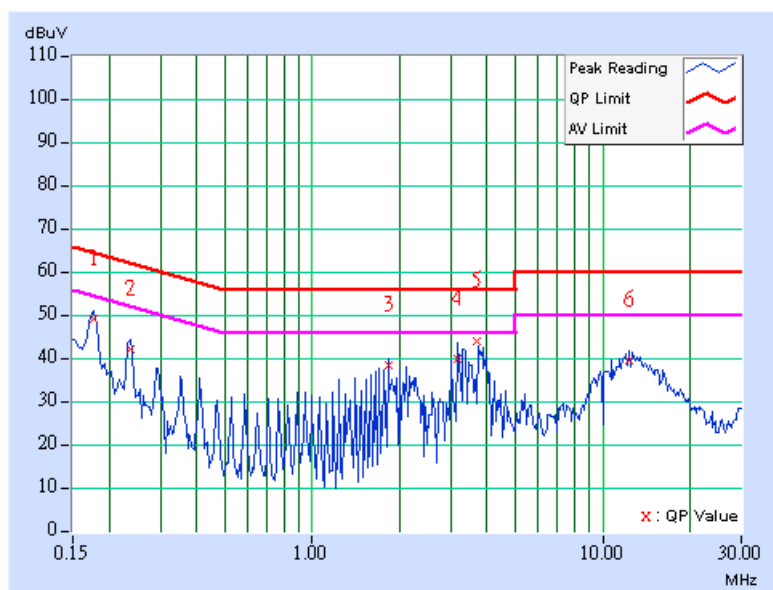

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	PHASE	Line 2
TRANSFER RATE	12Mbps	6dB BANDWIDTH	9 kHz
MODULATION TYPE	QPSK	ENVIRONMENTAL CONDITIONS	21deg. C, 70%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Jacky Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.10	49.28	-	49.38	-	64.61	54.61	-15.23	-
2	0.236	0.10	42.27	-	42.37	-	62.24	52.24	-19.87	-
3	1.352	0.14	36.02	-	36.16	-	56.00	46.00	-19.84	-
4	1.824	0.18	38.80	-	38.98	-	56.00	46.00	-17.02	-
5	3.824	0.36	46.52	33.70	46.88	34.06	56.00	46.00	-9.12	-11.94
6	13.765	0.51	37.75	-	38.26	-	60.00	50.00	-21.74	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

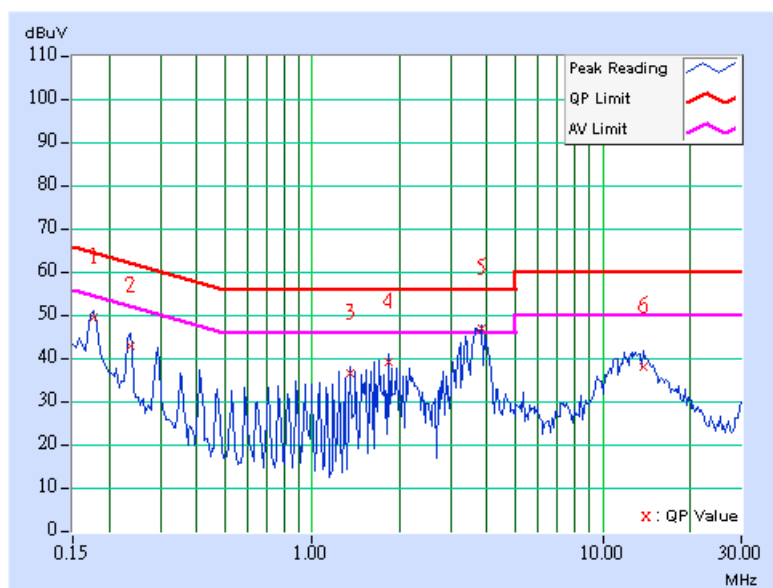

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	PHASE	Line 1
TRANSFER RATE	12Mbps	6dB BANDWIDTH	9 kHz
MODULATION TYPE	QPSK	ENVIRONMENTAL CONDITIONS	21deg. C, 70%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Jacky Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.10	48.51	-	48.61	-	64.61	54.61	-16.00	-
2	0.236	0.10	41.46	-	41.56	-	62.24	52.24	-20.68	-
3	1.529	0.20	36.85	-	37.05	-	56.00	46.00	-18.95	-
4	1.882	0.20	37.11	-	37.31	-	56.00	46.00	-18.69	-
5	3.647	0.42	42.63	-	43.05	-	56.00	46.00	-12.95	-
6	12.406	0.54	39.26	-	39.80	-	60.00	50.00	-20.20	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

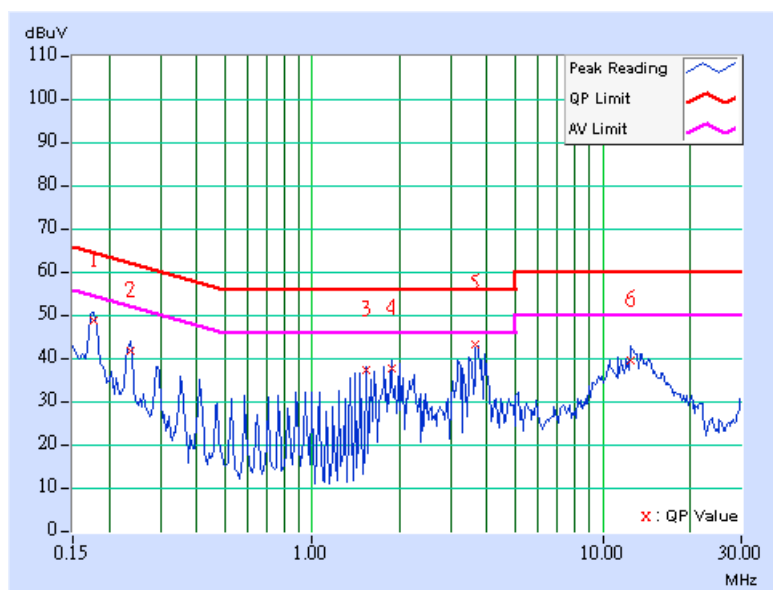

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	PHASE	Line 2
TRANSFER RATE	12Mbps	6dB BANDWIDTH	9 kHz
MODULATION TYPE	QPSK	ENVIRONMENTAL CONDITIONS	21deg. C, 70%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Jacky Lee

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.10	49.26	-	49.36	-	64.61	54.61	-15.25	-
2	0.236	0.10	42.21	-	42.31	-	62.24	52.24	-19.93	-
3	0.882	0.10	32.81	-	32.91	-	56.00	46.00	-23.09	-
4	1.765	0.18	38.87	-	39.05	-	56.00	46.00	-16.95	-
5	3.645	0.34	46.29	33.79	46.63	34.13	56.00	46.00	-9.37	-11.87
6	12.701	0.50	38.10	-	38.60	-	60.00	50.00	-21.40	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

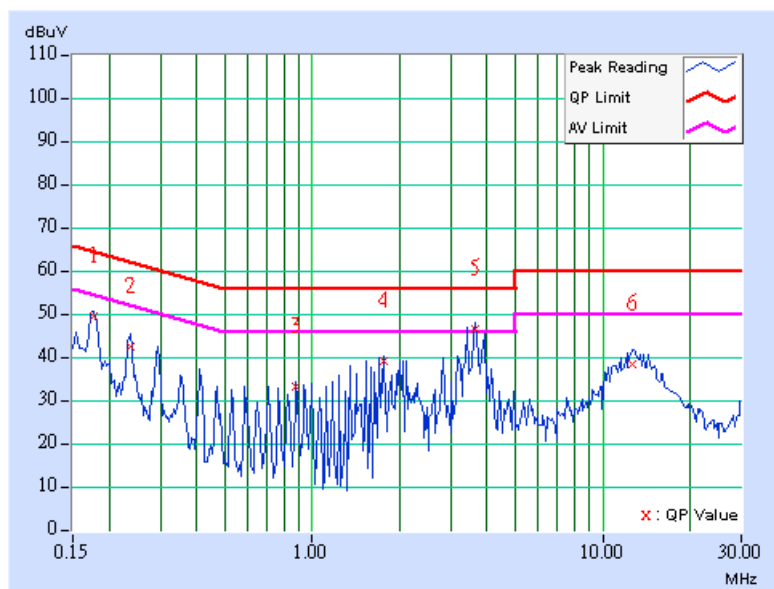

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	100033	May. 19, 2006
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100025	Dec. 05, 2006
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Jun. 01, 2006
HORN Antenna SCHWARZBECK	9120D	9120D-408	Jan. 08, 2007
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Jan. 19, 2007
Preamplifier Agilent	8447D	2944A10633	Nov. 04, 2006
Preamplifier Agilent	8449B	3008A01964	Oct. 30, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	214377/4	Dec. 13, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219272/4	Dec. 13, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA
Turn Table ADT.	TT100.	TT93021703	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 2.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The VCCI Site Registration No. is R-237.
 5. The IC Site Registration No. is IC4924-3.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1kHz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

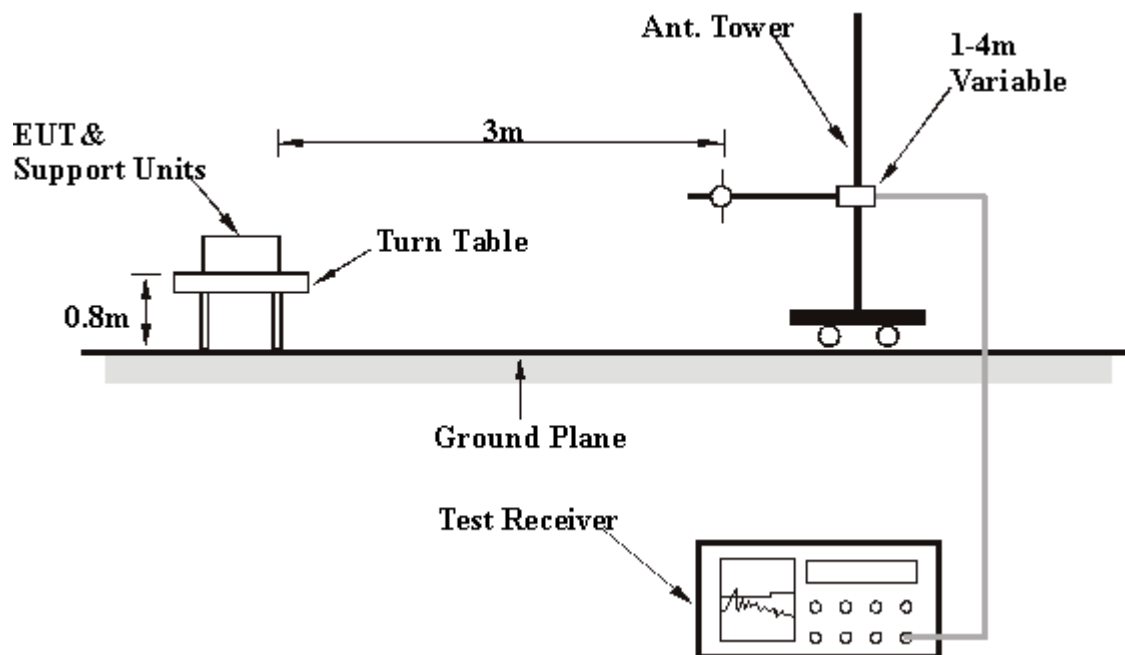

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



4.2.7 TEST RESULTS

RADIATED WORST CASE DATA: BELOW 1GHz 802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	DBPSK	DETECTOR FUNCTION	Quasi-Peak
TRANSFER RATE	1Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	22deg. C, 63%RH, 991hPa	TESTED BY	Jay Hsu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	160.24	37.36 QP	43.50	-6.14	2.00 H	238	24.11	13.24
2	239.94	40.67 QP	46.00	-5.33	1.75 H	157	28.57	12.10
3	342.97	33.29 QP	46.00	-12.71	1.00 H	187	17.27	16.02
4	399.34	34.19 QP	46.00	-11.81	1.00 H	223	16.41	17.78
5	599.56	28.63 QP	46.00	-17.37	1.25 H	253	6.09	22.54
6	720.08	38.13 QP	46.00	-7.87	1.00 H	229	13.33	24.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	51.38	38.90 QP	40.00	-1.10	1.00 V	268	24.67	14.23
2	160.24	37.99 QP	43.50	-5.51	1.25 V	262	24.75	13.24
3	239.94	33.90 QP	46.00	-12.10	1.50 V	181	21.80	12.10
4	401.28	30.62 QP	46.00	-15.38	1.50 V	121	12.80	17.82
5	720.08	39.24 QP	46.00	-6.76	1.50 V	295	14.44	24.80
6	799.78	31.82 QP	46.00	-14.18	1.50 V	337	5.71	26.11

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

ACE OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	QPSK	DETECTOR FUNCTION	Quasi-Peak
TRANSFER RATE	12Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	22deg. C, 63%RH, 991hPa	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	160.24	35.78 QP	43.50	-7.72	1.50 H	211	22.53	13.24
2	239.94	41.69 QP	46.00	-4.31	1.50 H	46	29.59	12.10
3	414.89	33.85 QP	46.00	-12.15	1.00 H	319	15.79	18.07
4	479.04	35.61 QP	46.00	-10.39	1.00 H	343	16.18	19.42
5	720.08	40.32 QP	46.00	-5.68	1.50 H	58	15.53	24.80
6	960.00	30.93 QP	46.00	-15.07	1.50 H	241	1.36	29.57

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	47.49	38.49 QP	40.00	-1.51	1.00 V	127	23.71	14.78
2	160.24	34.93 QP	43.50	-8.57	1.00 V	28	21.69	13.24
3	239.94	35.71 QP	46.00	-10.29	1.00 V	10	23.60	12.10
4	465.43	30.00 QP	46.00	-16.00	1.25 V	214	10.92	19.08
5	720.08	41.22 QP	46.00	-4.78	1.25 V	334	16.42	24.80
6	799.78	31.60 QP	46.00	-14.40	1.00 V	70	5.50	26.11

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



RADIATED WORST CASE DATA: ABOVE 1GHz
802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	DETECTOR FUNCTION	Peak (PK) Average (AV)
TRANSFER RATE	1Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	TESTED BY	Morgan Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2383.00	57.38 PK	74.00	-16.62	1.00 H	52	25.51	31.87
1	2383.00	48.82 AV	54.00	-5.18	1.00 H	52	16.95	31.87
2	*2412.00	102.15 PK			1.00 H	68	70.11	32.04
2	*2412.00	98.38 AV			1.00 H	68	66.34	32.04
3	3000.00	46.22 PK	74.00	-27.78	1.05 H	15	13.21	33.01
3	3000.00	41.85 AV	54.00	-12.15	1.05 H	15	8.84	33.01
4	3912.00	47.28 PK	74.00	-26.72	1.06 H	352	11.91	35.37
4	3912.00	40.61 AV	54.00	-13.39	1.06 H	352	5.24	35.37
5	4824.00	48.19 PK	74.00	-25.81	1.12 H	319	10.68	37.51
5	4824.00	40.89 AV	54.00	-13.11	1.12 H	319	3.38	37.51
6	7236.00	53.88 PK	74.00	-20.12	1.04 H	318	9.96	43.92
6	7236.00	44.57 AV	54.00	-9.43	1.04 H	318	0.65	43.92
7	7824.00	54.29 PK	74.00	-19.71	1.03 H	329	9.37	44.92
7	7824.00	45.02 AV	54.00	-8.98	1.03 H	329	0.10	44.92

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	DETECTOR FUNCTION	Peak (PK) Average (AV)
TRANSFER RATE	1Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	TESTED BY	Morgan Chen

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2383.00	61.56 PK	74.00	-12.44	1.08 V	6	29.69	31.87
1	2383.00	52.97 AV	54.00	-1.03	1.08 V	6	21.10	31.87
2	*2412.00	106.11 PK			1.08 V	6	74.07	32.04
2	*2412.00	102.63 AV			1.08 V	6	70.59	32.04
3	3000.00	46.72 PK	74.00	-27.28	1.11 V	311	13.71	33.01
3	3000.00	42.18 AV	54.00	-11.82	1.11 V	311	9.17	33.01
4	3912.00	47.56 PK	74.00	-26.44	1.10 V	311	12.18	35.37
4	3912.00	40.83 AV	54.00	-13.17	1.10 V	311	5.45	35.37
5	4824.00	49.14 PK	74.00	-24.86	1.52 V	307	11.63	37.51
5	4824.00	41.98 AV	54.00	-12.02	1.52 V	307	4.47	37.51
6	7236.00	54.71 PK	74.00	-19.29	1.04 V	51	10.78	43.92
6	7236.00	45.51 AV	54.00	-8.49	1.04 V	51	1.58	43.92
7	7824.00	54.76 PK	74.00	-19.24	1.00 V	256	9.84	44.92
7	7824.00	45.47 AV	54.00	-8.53	1.00 V	256	0.55	44.92

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	DETECTOR FUNCTION	Peak (PK) Average (AV)
TRANSFER RATE	1Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	TESTED BY	Morgan Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	105.53 PK			1.00 H	315	73.33	32.20
1	*2437.00	101.75 AV			1.00 H	315	69.55	32.20
2	3000.00	46.02 PK	74.00	-27.98	1.08 H	32	13.01	33.01
2	3000.00	41.45 AV	54.00	-12.55	1.08 H	32	8.44	33.01
3	3920.00	47.55 PK	74.00	-26.45	1.02 H	348	12.17	35.38
3	3920.00	40.65 AV	54.00	-13.35	1.02 H	348	5.27	35.38
4	4874.00	49.22 PK	74.00	-24.78	1.02 H	320	11.67	37.55
4	4874.00	43.32 AV	54.00	-10.68	1.02 H	320	5.77	37.55
5	7311.00	57.02 PK	74.00	-16.98	1.02 H	328	12.99	44.03
5	7311.00	50.62 AV	54.00	-3.38	1.02 H	328	6.59	44.03
6	7840.00	53.85 PK	74.00	-20.15	1.08 H	311	8.91	44.94
6	7840.00	44.56 AV	54.00	-9.44	1.08 H	311	-0.38	44.94

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	DETECTOR FUNCTION	Peak (PK) Average (AV)
TRANSFER RATE	1Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	TESTED BY	Morgan Chen

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2383.00	54.74 PK	74.00	-19.26	1.04 V	19	22.87	31.87
1	2383.00	47.66 AV	54.00	-6.34	1.04 V	19	15.79	31.87
2	*2437.00	109.82 PK			1.09 V	324	77.62	32.20
2	*2437.00	106.88 AV			1.09 V	324	74.68	32.20
3	2483.50	57.81 PK	74.00	-16.19	1.02 V	11	25.32	32.49
3	2483.50	49.29 AV	54.00	-4.71	1.02 V	11	16.80	32.49
4	3000.00	46.58 PK	74.00	-27.42	1.10 V	302	13.57	33.01
4	3000.00	42.02 AV	54.00	-11.98	1.10 V	302	9.01	33.01
5	3920.00	47.96 PK	74.00	-26.04	1.20 V	13	12.58	35.38
5	3920.00	41.02 AV	54.00	-12.98	1.20 V	13	5.64	35.38
6	4874.00	50.66 PK	74.00	-23.34	1.00 V	49	13.11	37.55
6	4874.00	44.91 AV	54.00	-9.09	1.00 V	49	7.36	37.55
7	7311.00	58.02 PK	74.00	-15.98	1.00 V	49	13.99	44.03
7	7311.00	51.70 AV	54.00	-2.30	1.00 V	49	7.67	44.03
8	7840.00	54.98 PK	74.00	-19.02	1.02 V	302	10.04	44.94
8	7840.00	45.72 AV	54.00	-8.28	1.02 V	30	0.78	44.94

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	DETECTOR FUNCTION	Peak (PK) Average (AV)
TRANSFER RATE	1Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	TESTED BY	Morgan Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	102.23 PK			1.00 H	52	69.88	32.35
1	*2462.00	98.48 AV			1.00 H	52	66.13	32.35
2	2483.50	57.22 PK	74.00	-16.78	1.00 H	38	24.73	32.49
2	2483.50	48.53 AV	54.00	-5.47	1.00 H	38	16.04	32.49
3	3000.00	46.33 PK	74.00	-27.67	1.08 H	22	13.32	33.01
3	3000.00	41.92 AV	54.00	-12.08	1.08 H	22	8.91	33.01
4	3960.00	47.35 PK	74.00	-26.65	1.05 H	345	11.92	35.43
4	3960.00	40.78 AV	54.00	-13.22	1.05 H	345	5.35	35.43
5	4924.00	48.26 PK	74.00	-25.74	1.03 H	328	10.68	37.58
5	4924.00	40.92 AV	54.00	-13.08	1.03 H	328	3.34	37.58
6	7386.00	53.95 PK	74.00	-20.05	1.03 H	325	9.97	43.98
6	7386.00	44.62 AV	54.00	-9.38	1.03 H	325	0.64	43.98
7	7920.00	54.35 PK	74.00	-19.65	1.08 H	320	9.28	45.07
7	7920.00	45.18 AV	54.00	-8.82	1.08 H	320	0.11	45.07

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	DETECTOR FUNCTION	Peak (PK) Average (AV)
TRANSFER RATE	1Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	TESTED BY	Morgan Chen

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2462.00	106.19 PK			1.00 V	0	73.84	32.35
1	2462.00	102.71 AV			1.00 V	0	70.36	32.35
2	2483.50	59.12 PK	74.00	-14.88	1.00 V	2	26.63	32.49
2	2483.50	52.79 AV	54.00	-1.21	1.00 V	2	20.30	32.49
3	3000.00	46.82 PK	74.00	-27.18	1.03 V	323	13.81	33.01
3	3000.00	42.23 AV	54.00	-11.77	1.03 V	323	9.22	33.01
4	3960.00	47.85 PK	74.00	-26.15	1.05 V	325	12.42	35.43
4	3960.00	41.22 AV	54.00	-12.78	1.05 V	325	5.79	35.43
5	4924.00	49.85 PK	74.00	-24.15	1.08 V	325	12.27	37.58
5	4924.00	42.32 AV	54.00	-11.68	1.08 V	325	4.74	37.58
6	7386.00	54.85 PK	74.00	-19.15	1.08 V	46	10.87	43.98
6	7386.00	45.63 AV	54.00	-8.37	1.08 V	46	1.65	43.98
7	7920.00	54.96 PK	74.00	-19.04	1.00 V	252	9.89	45.07
7	7920.00	45.68 AV	54.00	-8.32	1.00 V	252	0.61	45.07

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Peak (PK) Average (AV)
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	TESTED BY	Morgan Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.91 PK	74.00	-13.09	1.00 H	342	29.00	31.91
1	2390.00	49.37 AV	54.00	-4.62	1.00 H	342	17.46	31.91
2	*2412.00	103.10 PK			1.00 H	342	71.06	32.04
2	*2412.00	93.60 AV			1.00 H	342	61.56	32.04
3	3000.00	45.12 PK	74.00	-28.88	1.00 H	328	12.11	33.01
3	3000.00	41.02 AV	54.00	-12.98	1.00 H	328	8.01	33.01
4	3912.00	47.21 PK	74.00	-26.79	1.02 H	251	11.84	35.37
4	3912.00	40.32 AV	54.00	-13.68	1.02 H	251	4.95	35.37
5	7236.00	55.21 PK	74.00	-18.79	1.08 H	31	11.29	43.92
5	7236.00	42.45 AV	54.00	-11.55	1.08 H	31	-1.47	43.92
6	7824.00	53.75 PK	74.00	-20.25	1.03 H	311	8.83	44.92
6	7824.00	44.51 AV	54.00	-9.49	1.03 H	311	-0.41	44.92

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.04 PK	74.00	-4.96	1.10 V	324	37.13	31.91
1	2390.00	52.90 AV	54.00	-1.10	1.10 V	324	20.99	31.91
2	*2412.00	111.55 PK			1.09 V	323	79.51	32.04
2	*2412.00	101.50 AV			1.09 V	323	69.46	32.04
3	3000.00	46.85 PK	74.00	-27.15	1.12 V	328	13.84	33.01
3	3000.00	42.22 AV	54.00	-11.78	1.12 V	328	9.21	33.01
4	3912.00	47.68 PK	74.00	-26.32	1.22 V	325	12.31	35.37
4	3912.00	40.75 AV	54.00	-13.25	1.22 V	325	5.38	35.37
5	7236.00	56.37 PK	74.00	-17.63	1.08 V	16	12.44	43.92
5	7236.00	43.57 AV	54.00	-10.43	1.08 V	16	-0.36	43.92
6	7824.00	54.98 PK	74.00	-19.02	1.05 V	308	10.06	44.92
6	7824.00	45.62 AV	54.00	-8.38	1.05 V	308	0.70	44.92

- REMARKS:**
1. Emission level BuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Peak (PK) Average (AV)
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	TESTED BY	Morgan Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	103.42 PK			1.00 H	333	71.22	32.20
1	*2437.00	93.68 AV			1.00 H	333	61.48	32.20
2	3000.00	46.40 PK	74.00	-27.60	1.08 H	22	13.39	33.01
2	3000.00	41.82 AV	54.00	-12.18	1.08 H	22	8.81	33.01
3	3920.00	47.42 PK	74.00	-26.58	1.08 H	308	12.04	35.38
3	3920.00	40.26 AV	54.00	-13.74	1.08 H	308	4.88	35.38
4	7311.00	55.23 PK	74.00	-18.77	1.12 H	325	11.20	44.03
4	7311.00	42.71 AV	54.00	-11.29	1.12 H	325	-1.32	44.03
5	7840.00	54.08 PK	74.00	-19.92	1.24 H	308	9.14	44.94
5	7840.00	44.68 AV	54.00	-9.32	1.24 H	308	-0.26	44.94

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	112.00 PK			1.09 V	324	79.80	32.20
1	*2437.00	102.79 AV			1.09 V	324	70.59	32.20
2	3000.00	46.91 PK	74.00	-27.09	1.25 V	321	13.90	33.01
2	3000.00	42.28 AV	54.00	-11.72	1.25 V	321	9.27	33.01
3	3920.00	47.73 PK	74.00	-26.27	1.08 V	316	12.35	35.38
3	3920.00	40.81 AV	54.00	-13.19	1.08 V	316	5.43	35.38
4	7311.00	56.45 PK	74.00	-17.55	1.04 V	311	12.42	44.03
4	7311.00	43.62 AV	54.00	-10.38	1.04 V	311	-0.41	44.03
5	7840.00	55.12 PK	74.00	-18.88	1.08 V	312	10.18	44.94
5	7840.00	45.72 AV	54.00	-8.28	1.08 V	312	0.78	44.94

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Peak (PK) Average (AV)
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	TESTED BY	Morgan Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	102.62 PK			1.00 H	329	70.27	32.35
1	*2462.00	93.23 AV			1.00 H	329	60.88	32.35
2	2483.50	61.08 PK	74.00	-12.92	1.00 H	329	28.59	32.49
2	2483.50	49.53 AV	54.00	-4.47	1.00 H	329	17.04	32.49
3	3000.00	45.20 PK	74.00	-28.80	1.03 H	322	12.19	33.01
3	3000.00	41.08 AV	54.00	-12.92	1.03 H	322	8.07	33.01
4	3960.00	47.42 PK	74.00	-26.58	1.15 H	312	11.99	35.43
4	3960.00	40.89 AV	54.00	-13.11	1.15 H	312	5.46	35.43
5	7386.00	54.22 PK	74.00	-19.78	1.12 H	258	10.24	43.98
5	7386.00	44.65 AV	54.00	-9.35	1.12 H	258	0.67	43.98
6	7920.00	54.62 PK	74.00	-19.38	1.08 H	255	9.55	45.07
6	7920.00	45.09 AV	54.00	-8.91	1.08 H	255	0.02	45.07

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.09 PK			1.04 V	322	78.74	32.35
1	*2462.00	101.10 AV			1.04 V	322	68.75	32.35
2	2483.50	68.20 PK	74.00	-5.80	1.04 V	322	35.71	32.49
2	2483.50	52.65 AV	54.00	-1.35	1.04 V	322	20.16	32.49
3	3000.00	46.92 PK	74.00	-27.08	1.02 V	315	13.91	33.01
3	3000.00	42.37 AV	54.00	-11.63	1.02 V	315	9.36	33.01
4	3960.00	47.93 PK	74.00	-26.07	1.13 V	328	12.50	35.43
4	3960.00	41.32 AV	54.00	-12.68	1.13 V	328	5.89	35.43
5	7386.00	55.12 PK	74.00	-18.88	1.20 V	318	11.14	43.98
5	7386.00	45.76 AV	54.00	-8.24	1.20 V	318	1.78	43.98
6	7920.00	55.03 PK	74.00	-18.97	1.02 V	241	9.96	45.07
6	7920.00	45.72 AV	54.00	-8.28	1.02 V	241	0.65	45.07

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

ACE OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	QPSK	DETECTOR FUNCTION	Peak (PK) Average (AV)
TRANSFER RATE	12Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	22deg. C, 60%RH, 991hPa	TESTED BY	Morgan Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.12 PK	74.00	-15.88	1.38 H	315	26.73	31.39
1	2390.00	47.60 AV	54.00	-6.40	1.38 H	315	16.21	31.39
2	*2422.00	98.93 PK			1.38 H	298	67.44	31.49
2	*2422.00	90.59 AV			1.38 H	298	59.10	31.49
3	3896.00	46.67 PK	74.00	-27.33	1.00 H	218	11.80	34.87
3	3896.00	38.38 AV	54.00	-15.62	1.00 H	218	3.51	34.87
4	4844.00	45.75 PK	74.00	-28.25	1.52 H	257	8.56	37.19
4	4844.00	32.62 AV	54.00	-21.38	1.52 H	257	-4.57	37.19

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.29 PK	74.00	-10.71	1.20 V	139	31.90	31.39
1	2390.00	52.13 AV	54.00	-1.87	1.20 V	139	20.74	31.39
2	*2422.00	103.35 PK			1.15 V	207	71.86	31.49
2	*2422.00	93.81 AV			1.15 V	207	62.32	31.49
3	3896.00	46.16 PK	74.00	-27.84	1.13 V	264	11.29	34.87
3	3896.00	37.16 AV	54.00	-16.84	1.13 V	264	2.29	34.87
4	4844.00	46.75 PK	74.00	-27.25	1.15 V	214	9.56	37.19
4	4844.00	32.97 AV	54.00	-21.03	1.15 V	214	-4.22	37.19

- REMARKS:**
1. Emission level BuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	QPSK	DETECTOR FUNCTION	Peak (PK) Average (AV)
TRANSFER RATE	12Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	22deg. C, 60%RH, 991hPa	TESTED BY	Morgan Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	99.24 PK			1.37 H	311	67.04	32.20
1	*2437.00	91.11 AV			1.37 H	311	58.91	32.20
2	2966.00	42.37 PK	74.00	-31.63	1.00 H	247	9.38	32.99
2	2966.00	38.42 AV	54.00	-15.58	1.00 H	247	5.43	32.99
3	3920.00	44.58 PK	74.00	-29.42	1.12 H	244	9.20	35.38
3	3920.00	37.17 AV	54.00	-16.83	1.12 H	244	1.79	35.38
4	4874.00	44.60 PK	74.00	-29.40	1.33 H	222	7.05	37.55
4	4874.00	32.64 AV	54.00	-21.36	1.33 H	222	-4.91	37.55

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	104.05 PK			1.18 V	309	71.85	32.20
1	*2437.00	95.63 AV			1.18 V	309	63.43	32.20
2	2966.00	45.53 PK	74.00	-28.47	1.00 V	296	12.54	32.99
2	2966.00	41.16 AV	54.00	-12.84	1.00 V	296	8.17	32.99
3	3920.00	47.58 PK	74.00	-26.42	1.07 V	314	12.20	35.38
3	3920.00	40.35 AV	54.00	-13.65	1.07 V	314	4.97	35.38
4	4874.00	45.18 PK	74.00	-28.82	1.24 V	257	7.63	37.55
4	4874.00	33.72 AV	54.00	-20.28	1.24 V	257	-3.83	37.55

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	QPSK	DETECTOR FUNCTION	Peak (PK) Average (AV)
TRANSFER RATE	12Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	22deg. C, 60%RH, 991hPa	TESTED BY	Morgan Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	97.11 PK			1.29 H	51	64.82	32.29
1	*2452.00	89.80 AV			1.29 H	51	57.51	32.29
2	2483.50	55.23 PK	74.00	-18.77	1.38 H	49	22.74	32.49
2	2483.50	44.60 AV	54.00	-9.40	1.38 H	49	12.11	32.49
3	2984.00	45.42 PK	74.00	-28.58	1.15 H	345	12.42	33.00
3	2984.00	37.46 AV	54.00	-16.54	1.15 H	345	4.46	33.00
4	3944.00	44.65 PK	74.00	-29.35	1.77 H	43	9.24	35.41
4	3944.00	36.39 AV	54.00	-17.61	1.77 H	43	0.98	35.41
5	4904.00	44.91 PK	74.00	-29.09	1.21 H	248	7.34	37.57
5	4904.00	32.12 AV	54.00	-21.88	1.21 H	248	-5.45	37.57

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	103.18 PK			1.18 V	307	70.89	32.29
1	*2452.00	94.64 AV			1.18 V	307	62.35	32.29
2	2483.50	63.31 PK	74.00	-10.69	1.17 V	34	30.82	32.49
2	2483.50	52.25 AV	54.00	-1.75	1.17 V	34	19.76	32.49
3	2984.00	44.99 PK	74.00	-29.01	1.00 V	296	11.99	33.00
3	2984.00	40.72 AV	54.00	-13.28	1.00 V	296	7.72	33.00
4	3944.00	46.60 PK	74.00	-27.40	1.00 V	103	11.19	35.41
4	3944.00	39.50 AV	54.00	-14.50	1.00 V	103	4.09	35.41
5	4904.00	45.29 PK	74.00	-28.71	1.17 V	20	7.72	37.57
5	4904.00	33.02 AV	54.00	-20.98	1.17 V	20	-4.55	37.57

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

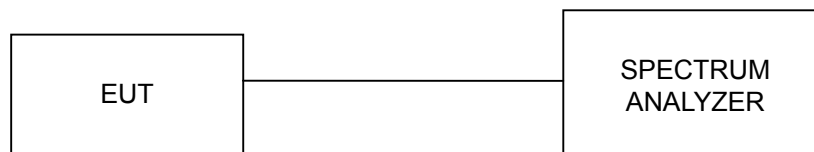

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS

802.11b DSSS MODULATION


MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 68% RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	11.08	12.00	0.5	PASS
6	2437	12.08	12.04	0.5	PASS
11	2462	12.04	12.04	0.5	PASS


FOR CHAIN 0: CH 1

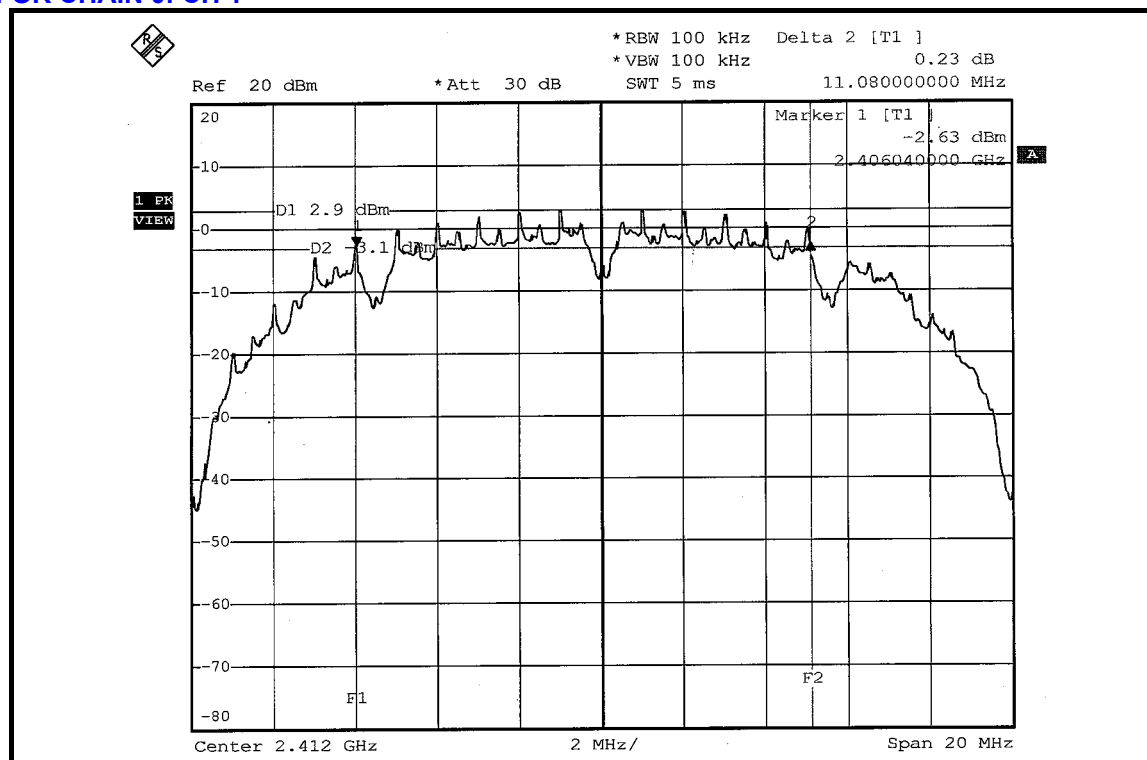


CH 6

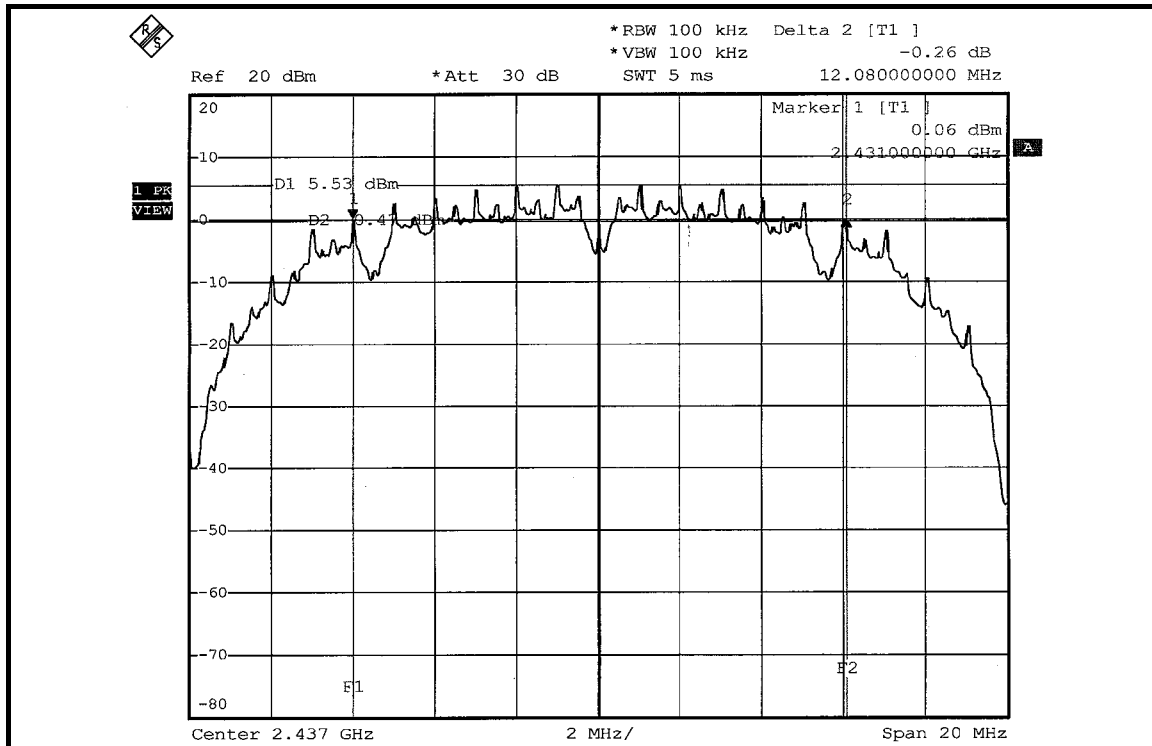


CH 11

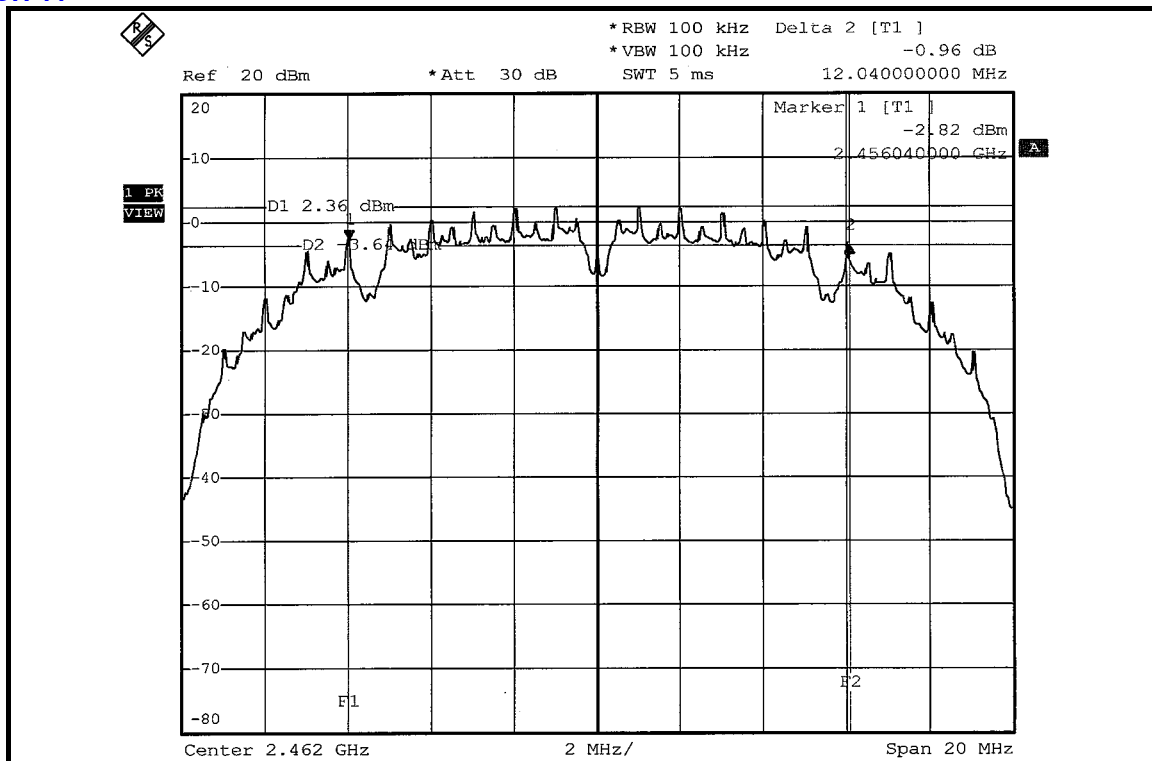


FOR CHAIN 1: CH 1

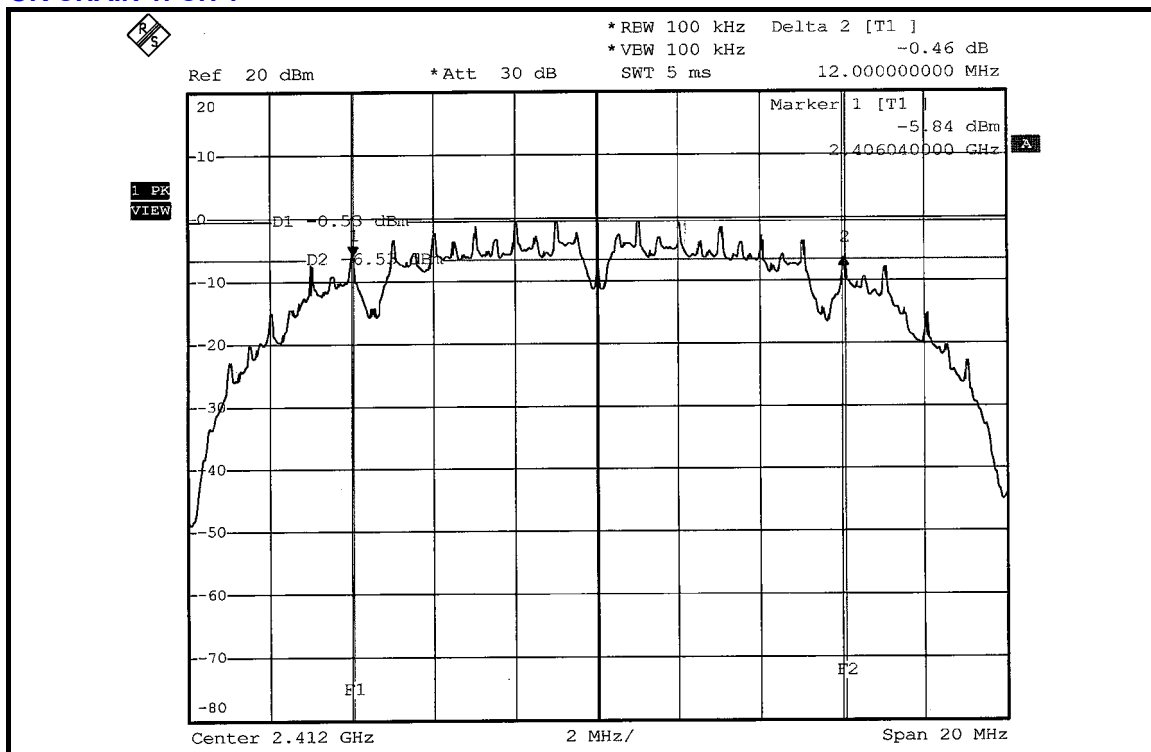

CH 6

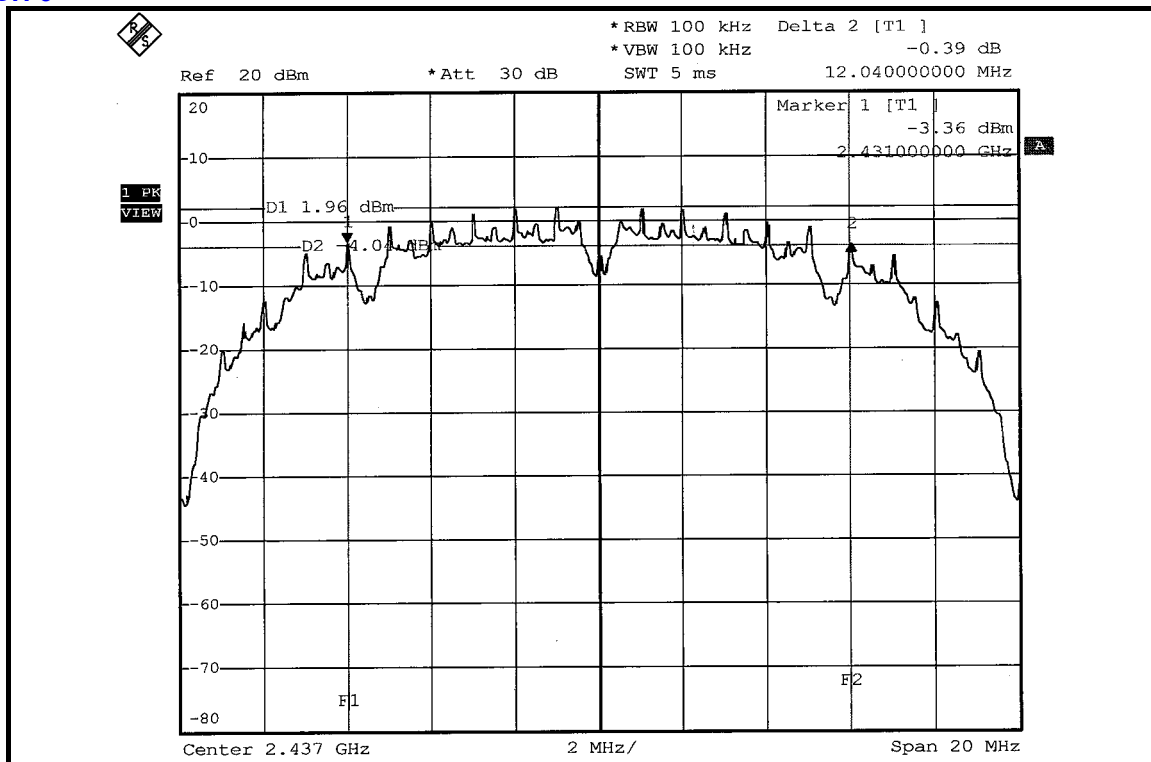

CH 11

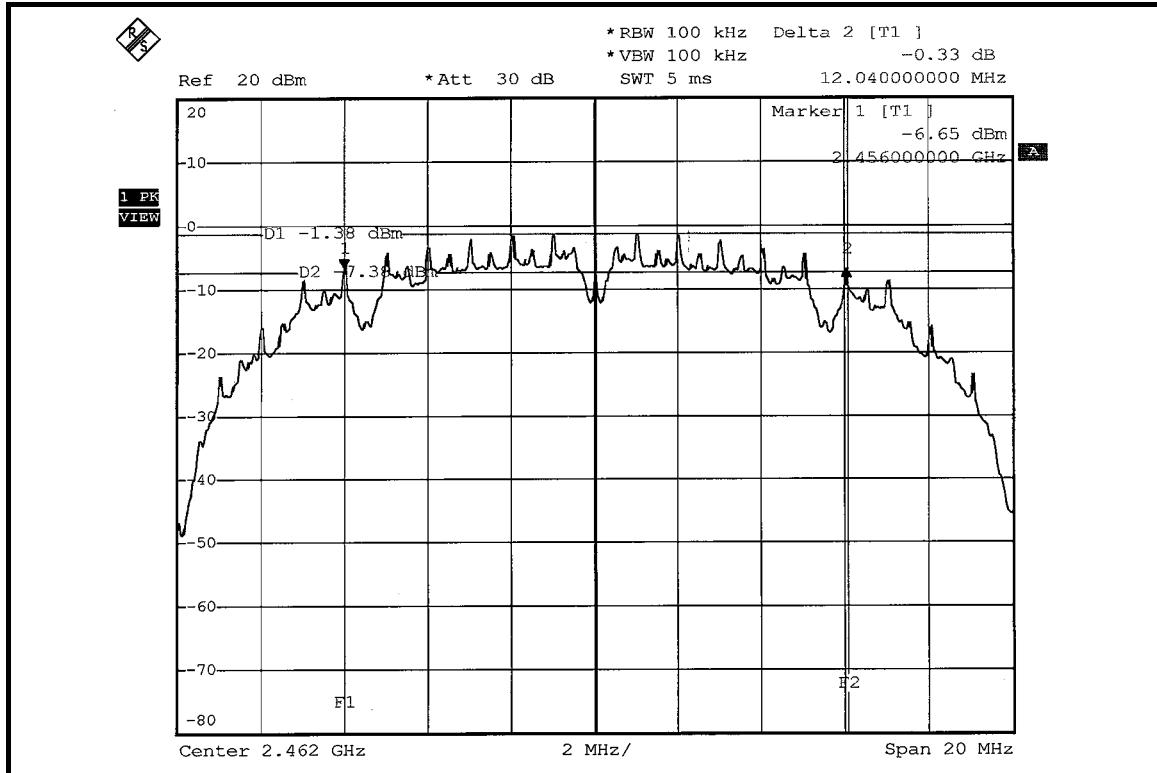


802.11g OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS/FAIL
		CHAIN 0	CHAIN 1		
1	2412	15.68	15.84	0.5	PASS
6	2437	15.92	15.52	0.5	PASS
11	2462	16.04	15.72	0.5	PASS


FOR CHAIN 0: CH1

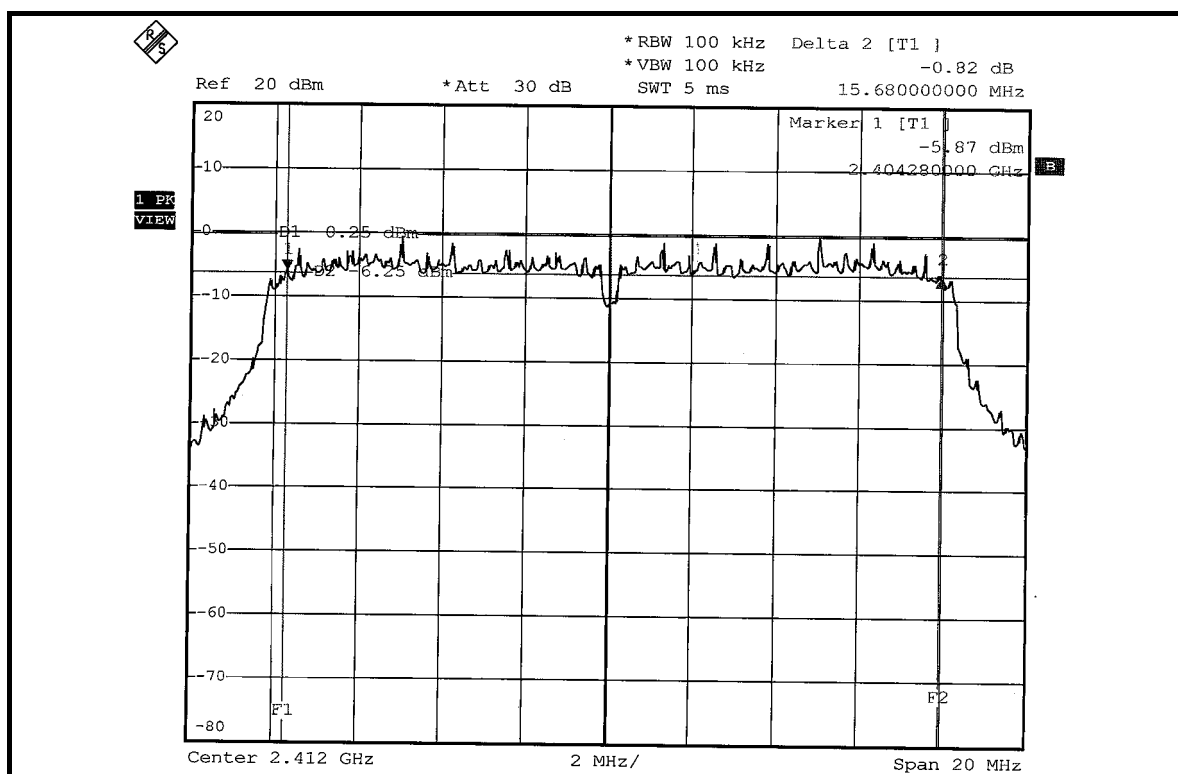


CH6

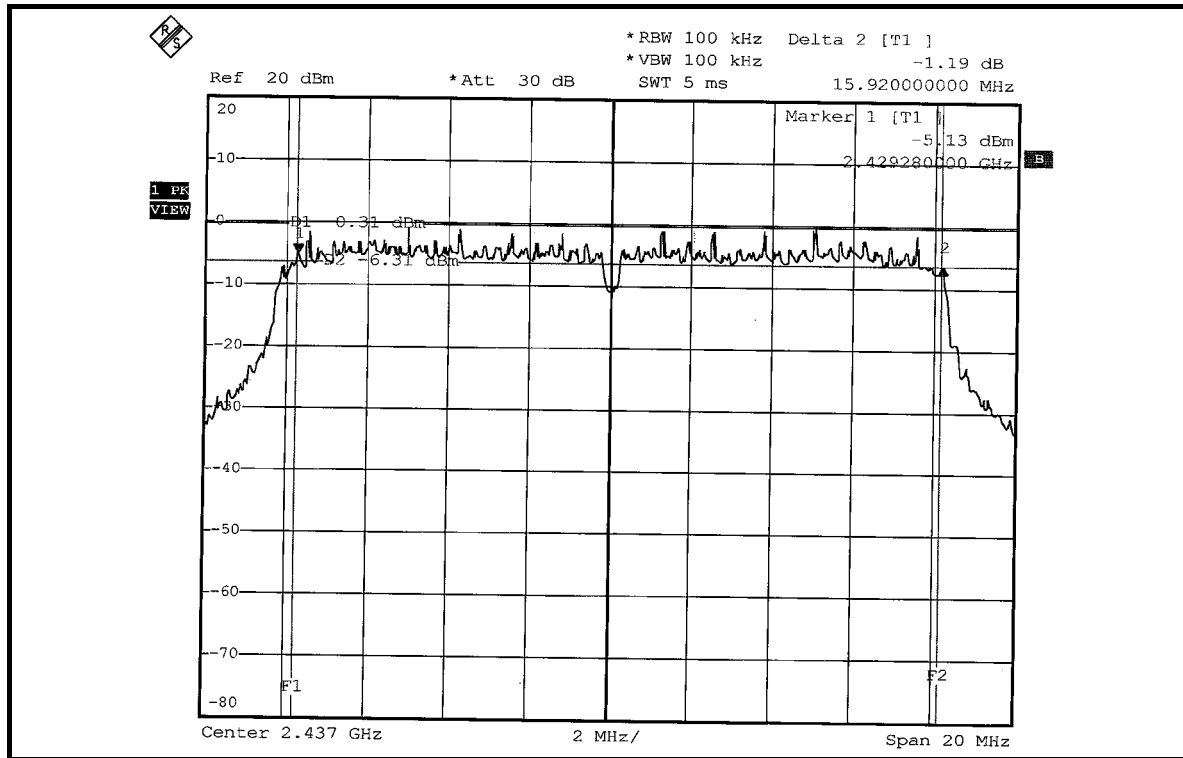


CH11

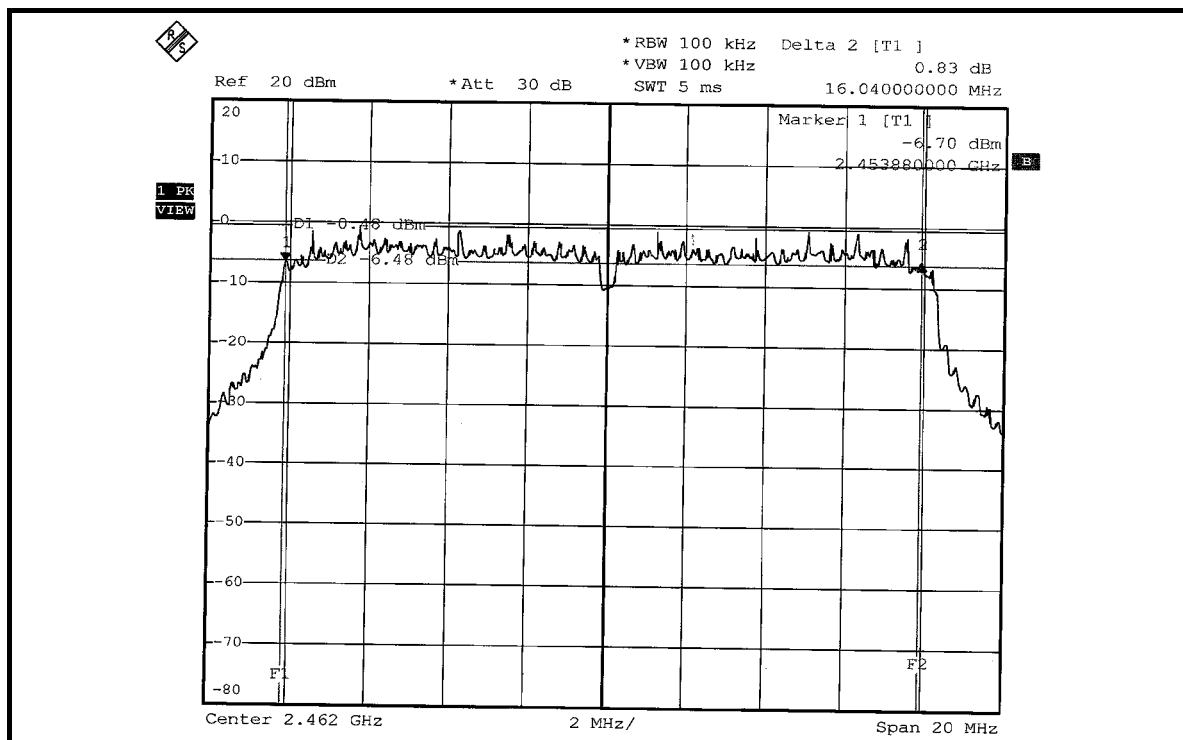


FOR CHAIN 1:
CH1

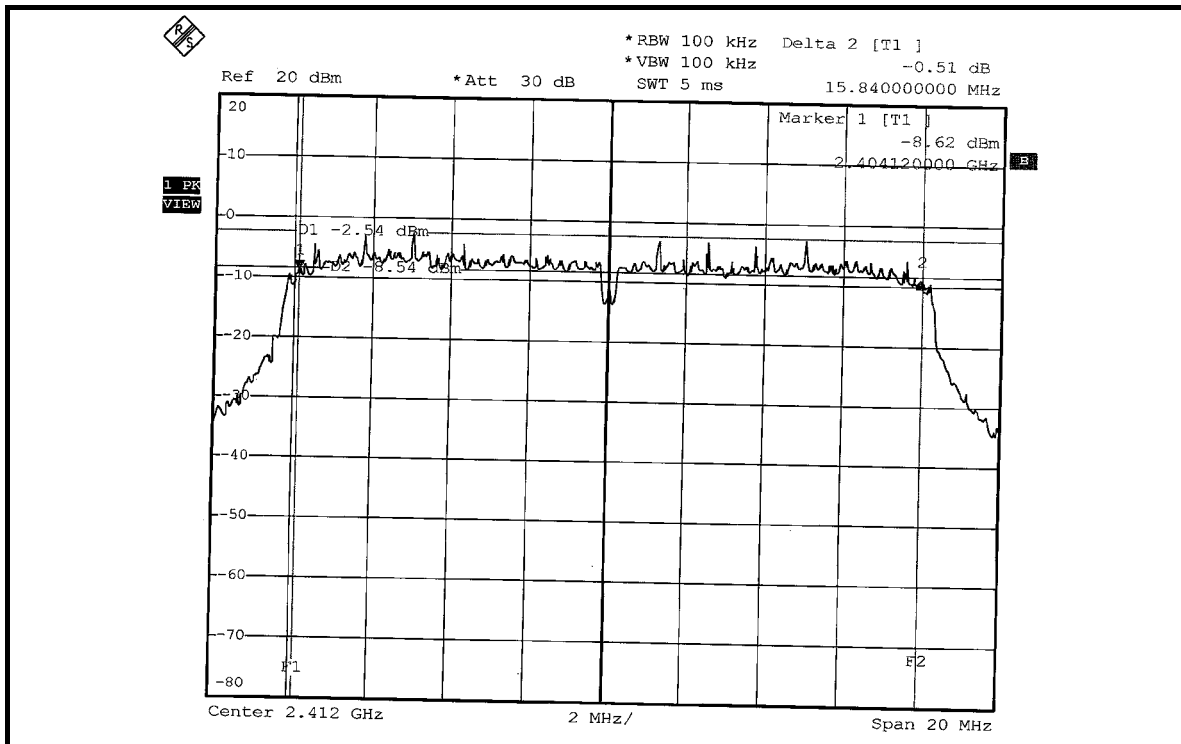

CH6

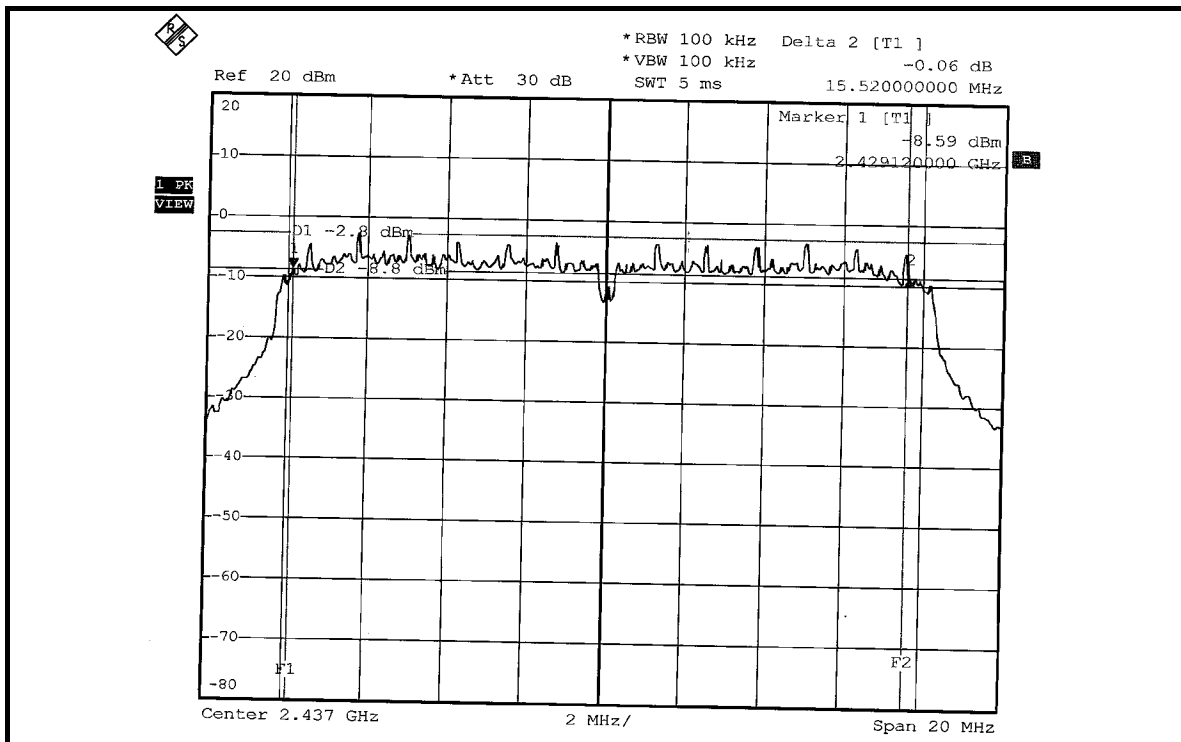

CH11

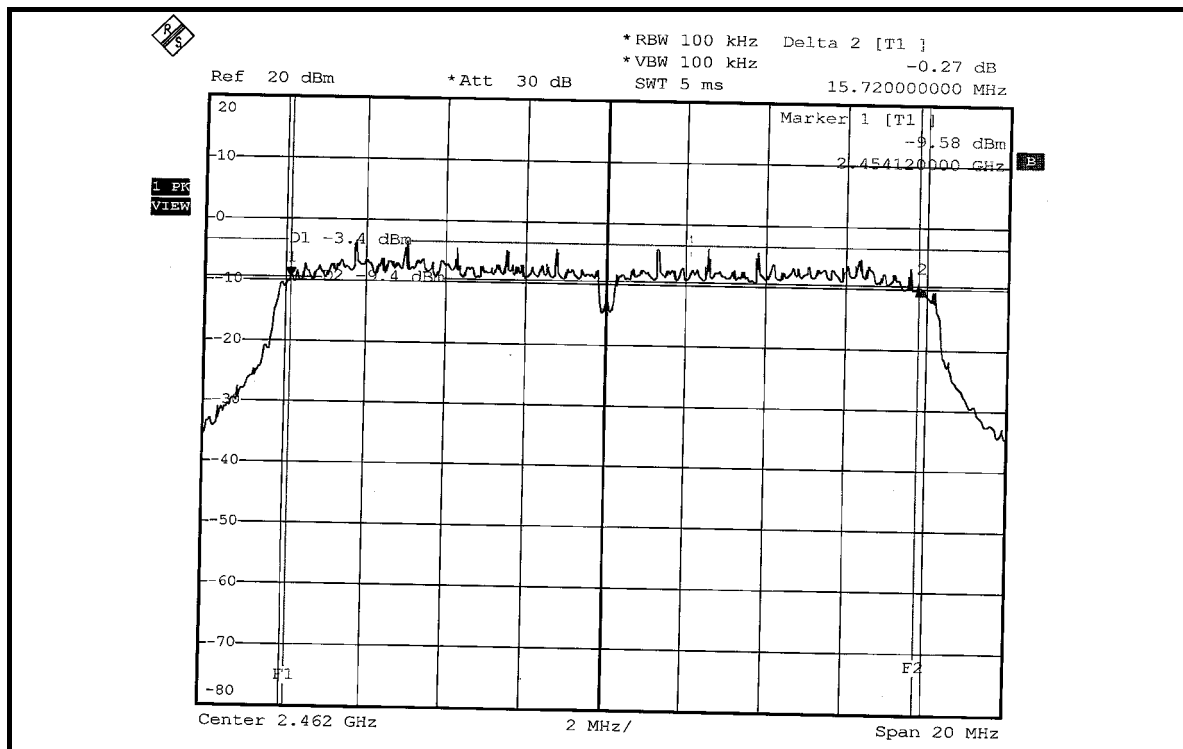


ACD OFDM MODULATION


MODULATION TYPE	QPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS/FAIL
		CHAIN 0	CHAIN 1		
1	2422	30.08	30.16	0.5	PASS
4	2437	30.16	30.08	0.5	PASS
7	2452	30.16	30.16	0.5	PASS


FOR CHAIN 0: CH1

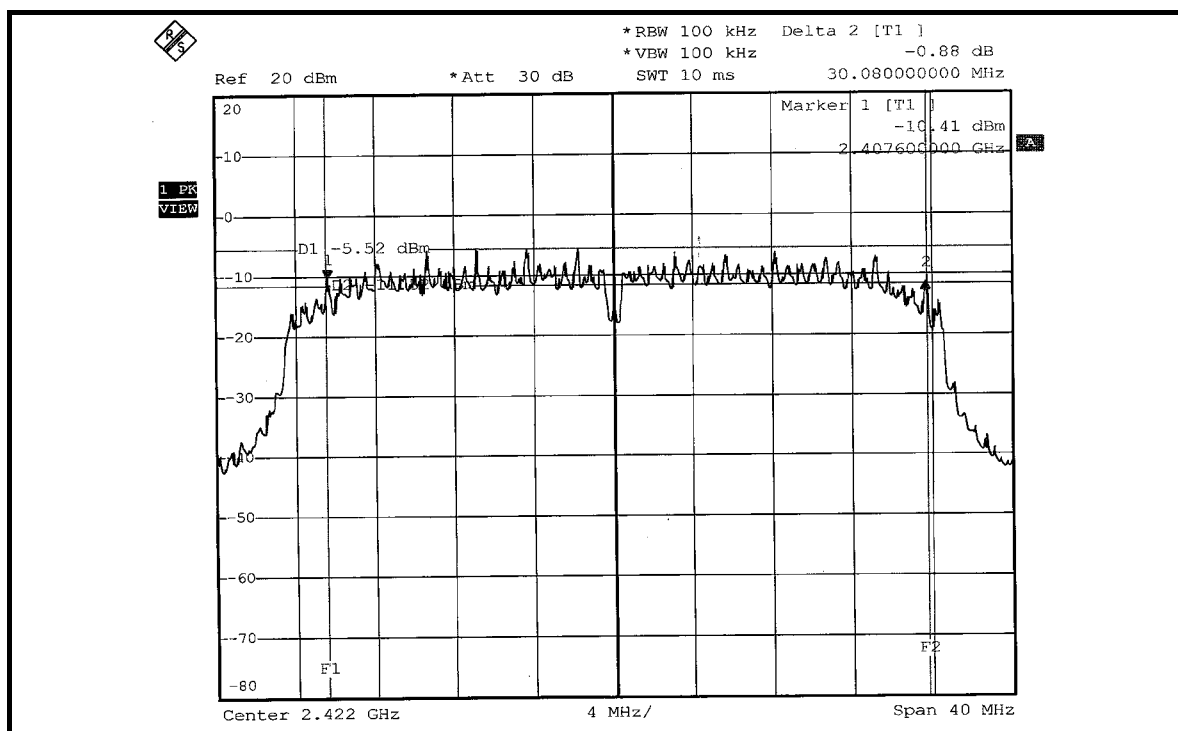


CH4

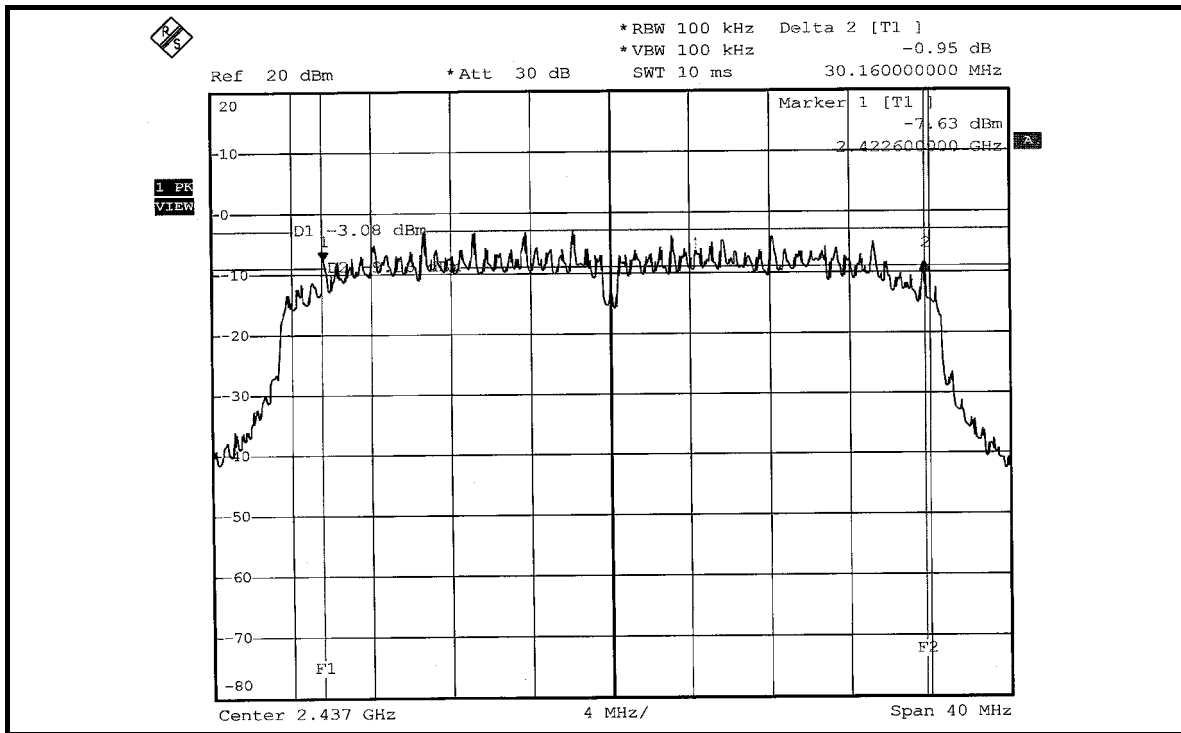


CH7

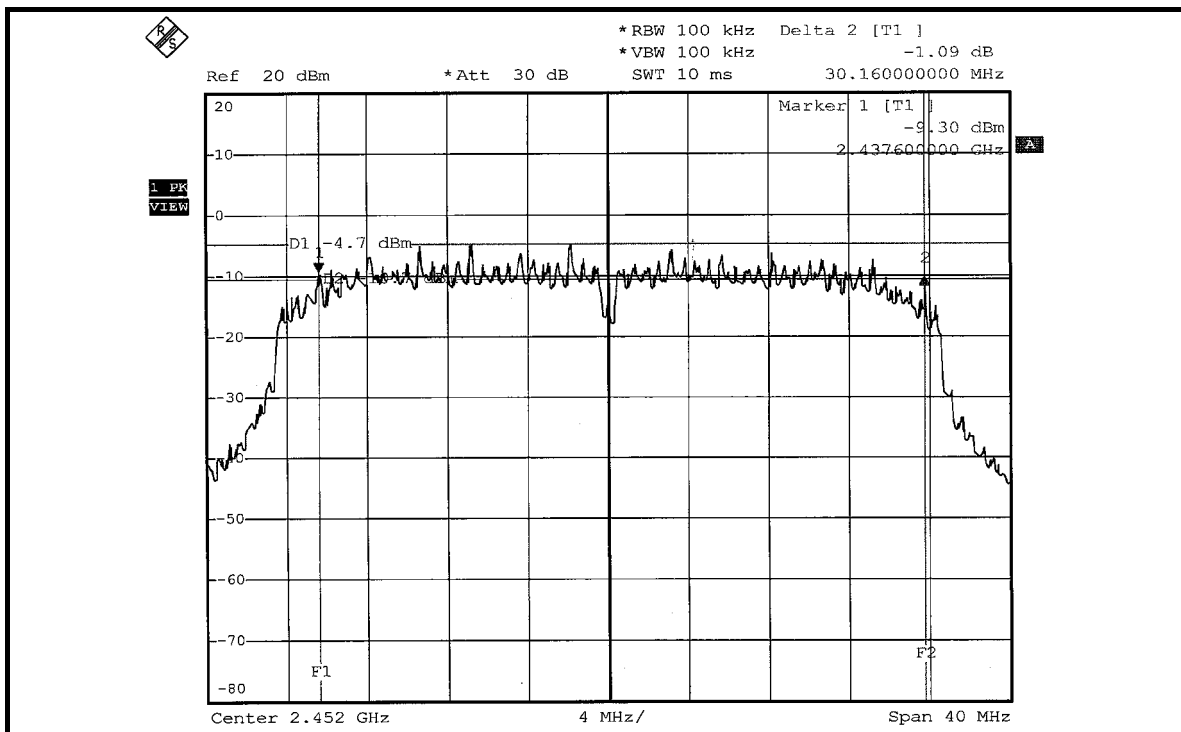


FOR CHAIN 1:
CH1

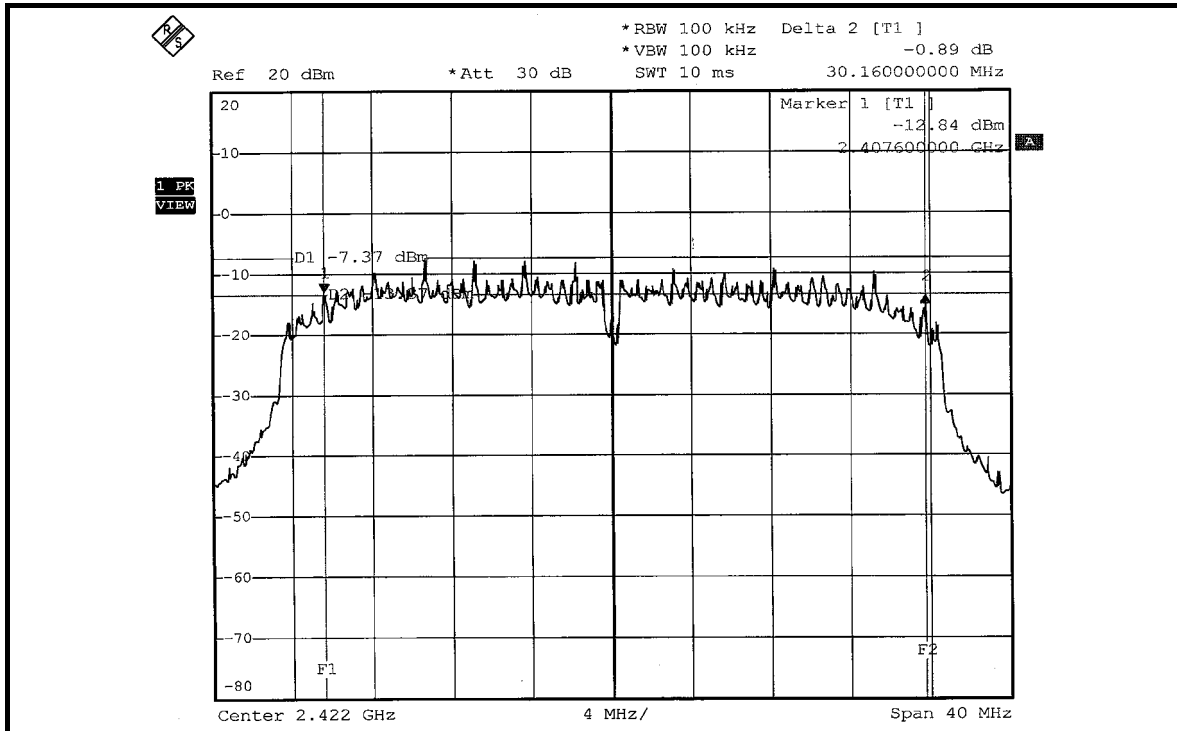

CH4

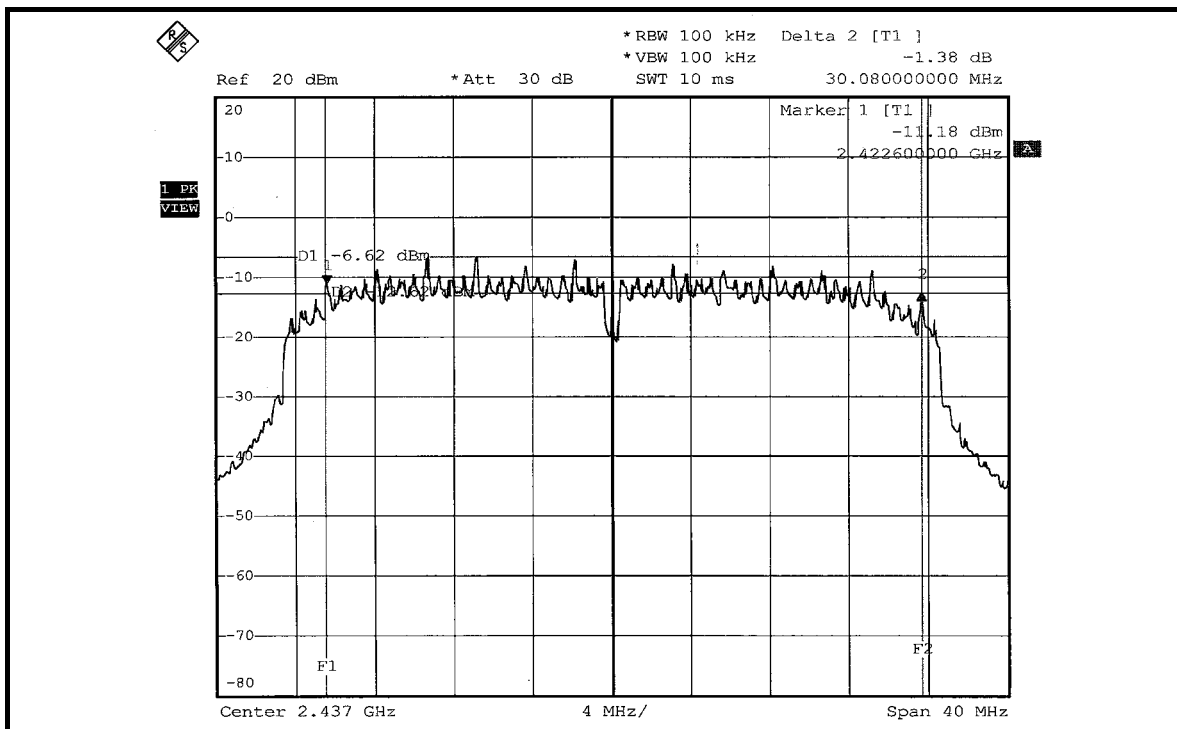

CH7

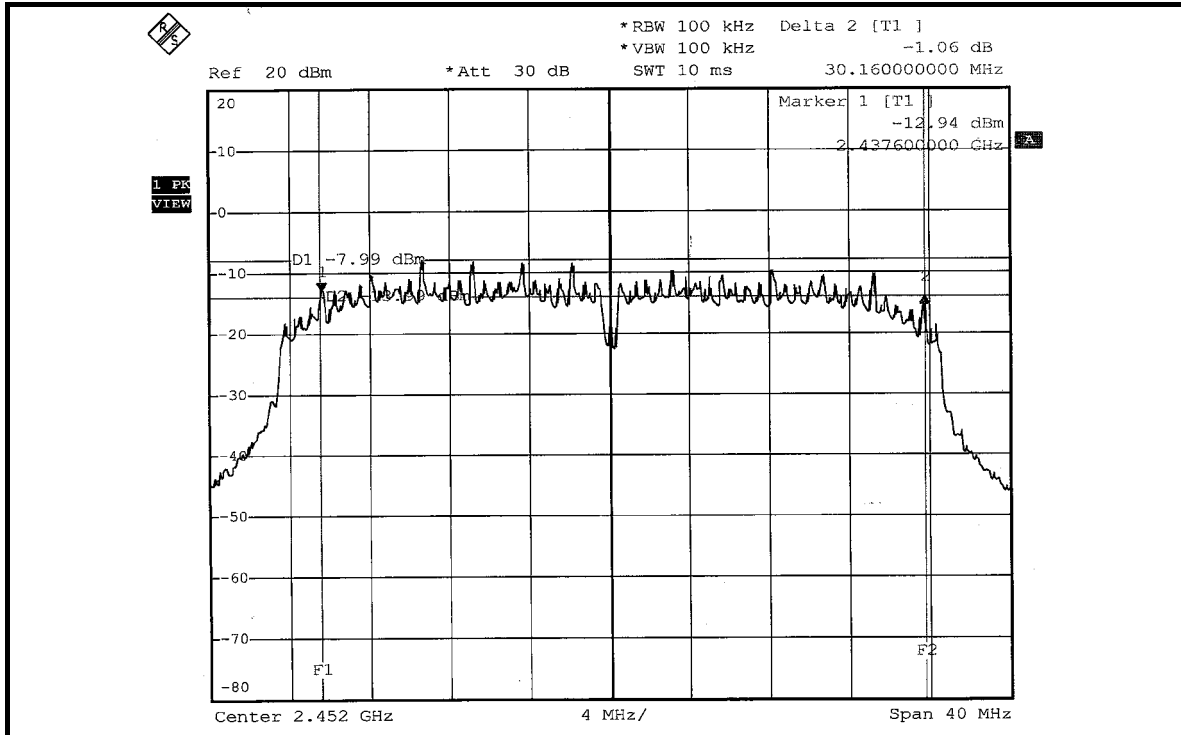



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 06, 2006
DIGITAL RT OSCILLOSCOPE	TDS1012	C037299	Dec. 07, 2006
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to peak the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 5.3.6



4.4.7 TEST RESULTS

802.11b DSSS MODULATION

MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)		PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1				
1	2412	21.232	21.135	13.27	13.25	42.367	16.27	30	PASS
6	2437	47.424	12.589	16.76	11.00	60.013	17.78	30	PASS
11	2462	21.135	10.471	13.25	10.20	31.606	15.00	30	PASS

802.11g OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)		PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1				
1	2412	39.902	22.439	16.01	13.51	62.341	17.95	30	PASS
6	2437	39.994	22.439	16.02	13.51	62.433	17.95	30	PASS
11	2462	39.892	15.959	15.55	12.03	55.851	17.47	30	PASS



ACE OFDM MODULATION

MODULATION TYPE	QPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)		PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1				
1	2422	20.370	11.220	13.09	10.50	31.590	15.00	30	PASS
4	2437	25.235	10.069	14.02	10.03	35.304	15.48	30	PASS
7	2452	20.091	8.933	13.03	9.51	29.024	14.63	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6



4.5.7 TEST RESULTS


802.11b DSSS MODULATION

MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TESTED BY	Long Chen		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)		MAXIMUM LIMIT (dBm)	PASS/FAIL
		CHAIN 0	CHAIN 1		
1	2412	1.90	-0.45	8	PASS
6	2437	5.54	1.84	8	PASS
11	2462	2.32	-1.20	8	PASS

FOR CHAIN 0:


CH1

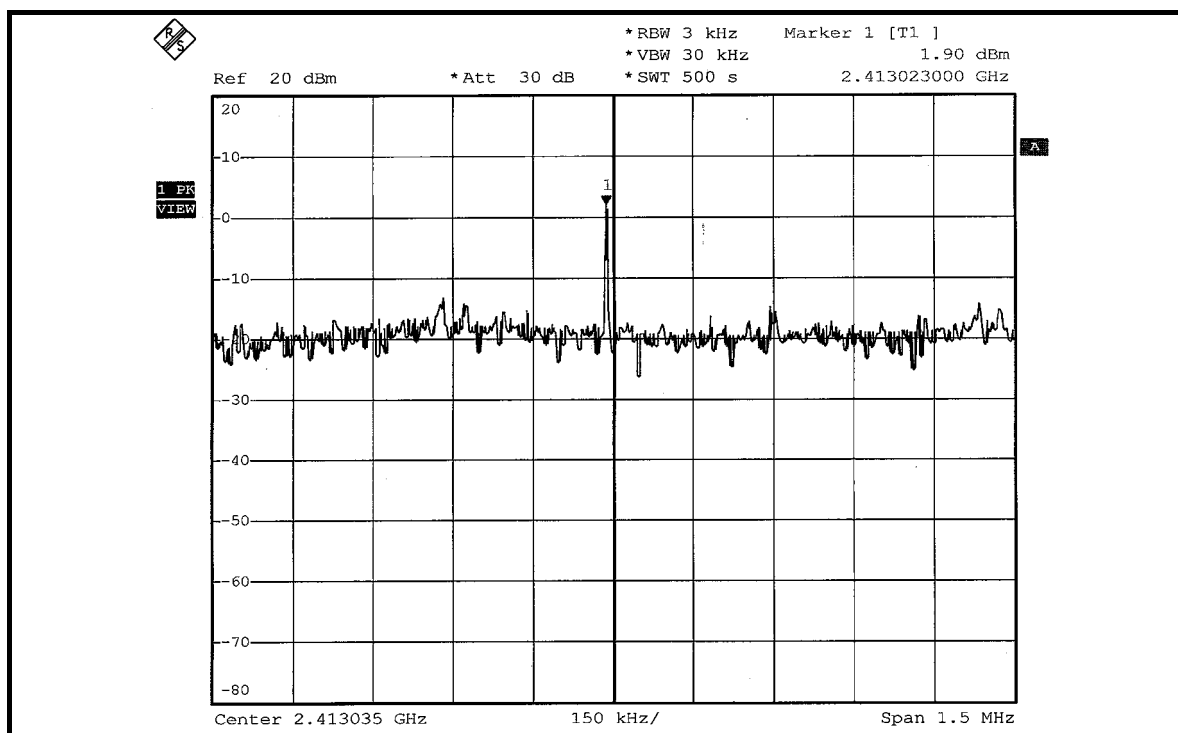

CH6

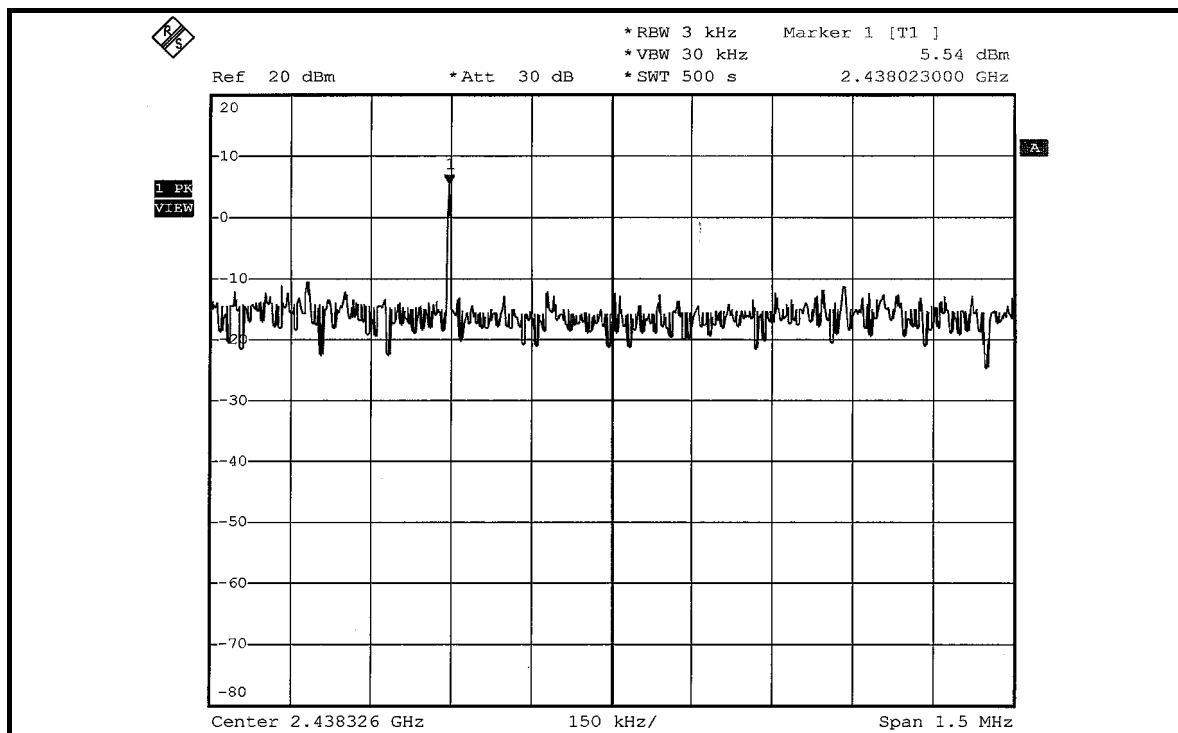


CH11

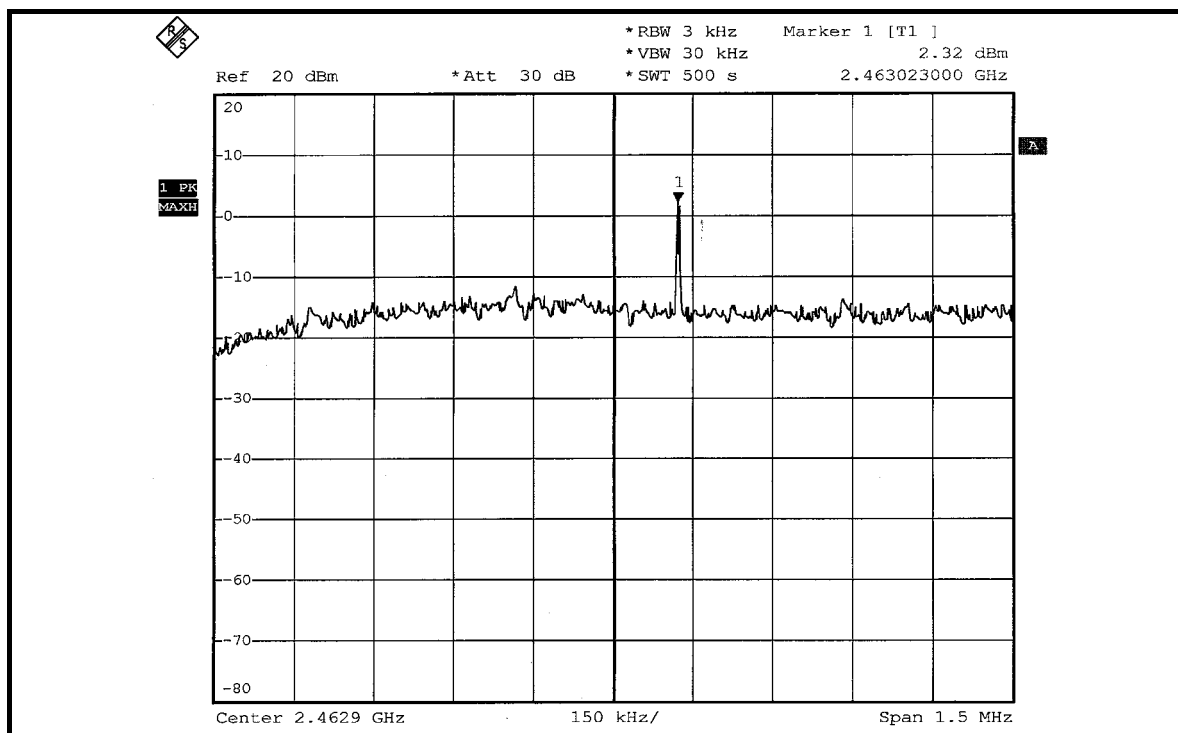


FOR CHAIN 1:


CH1

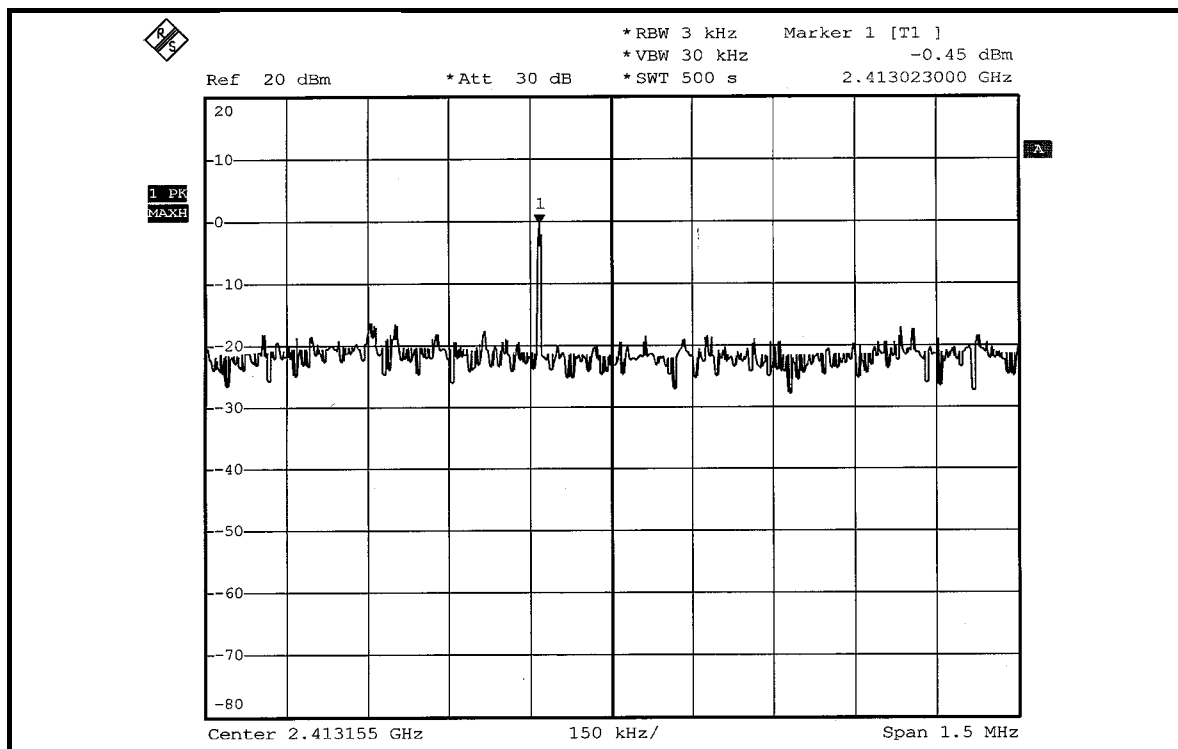

CH6

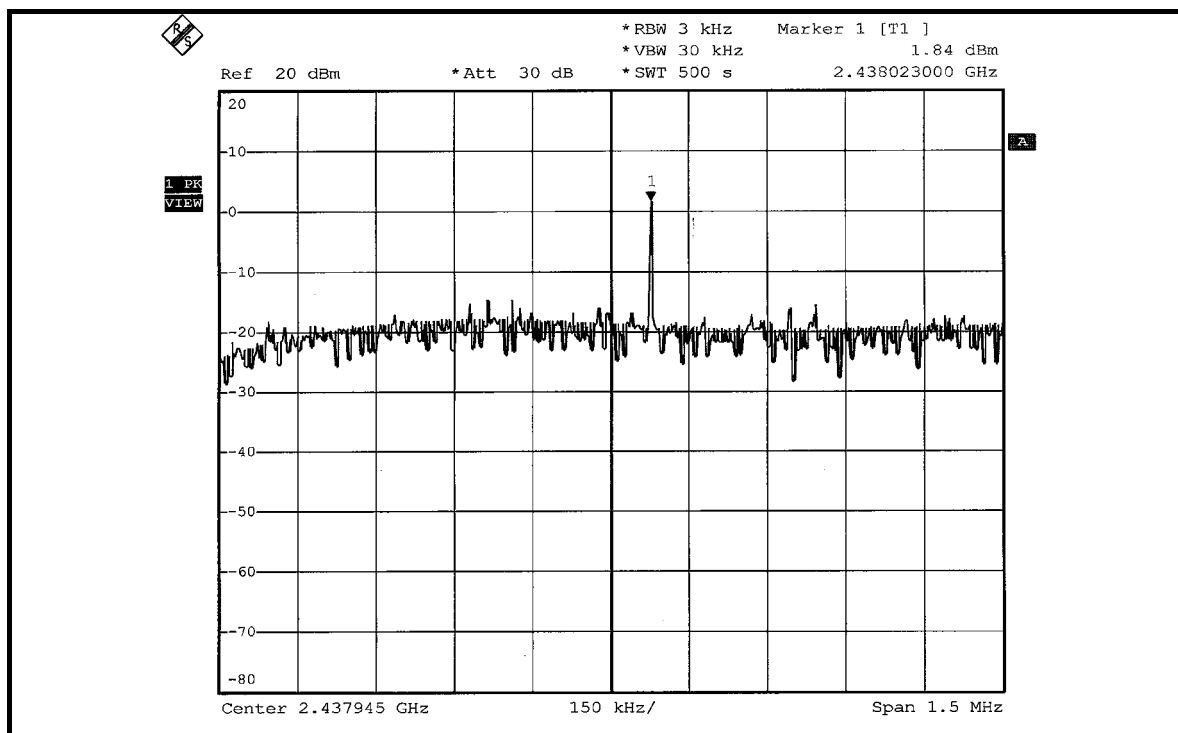

CH11

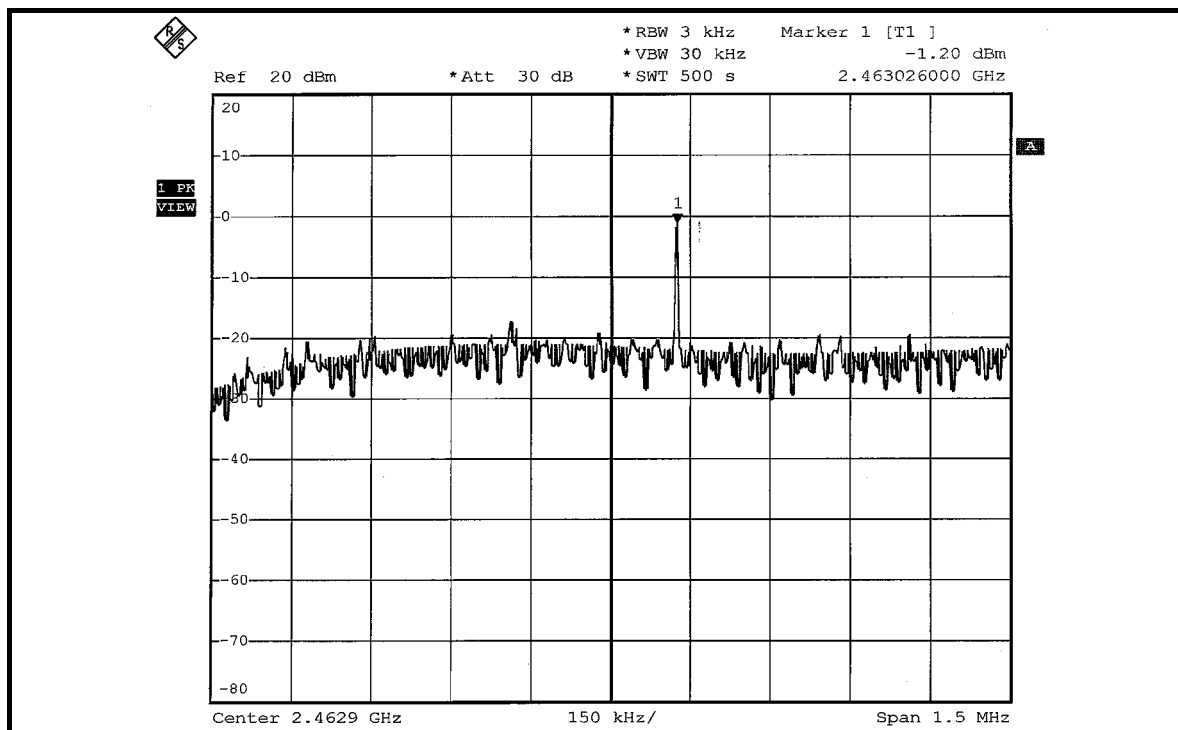




802.11g OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TESTED BY	Long Chen		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)		MAXIMUM LIMIT (dBm)	PASS/FAIL
		CHAIN 0	CHAIN 1		
1	2412	-14.31	-16.45	8	PASS
6	2437	-14.39	-16.71	8	PASS
11	2462	-14.77	-18.25	8	PASS

FOR CHAIN 0:

CH1

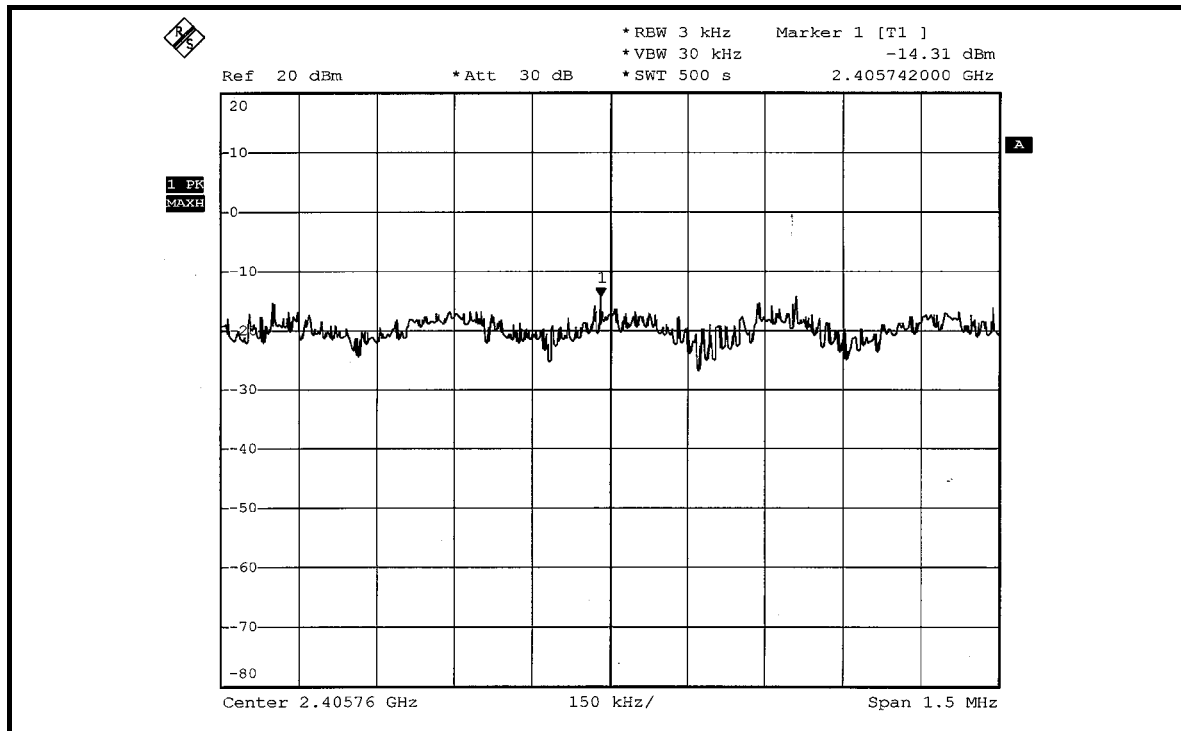


CH6

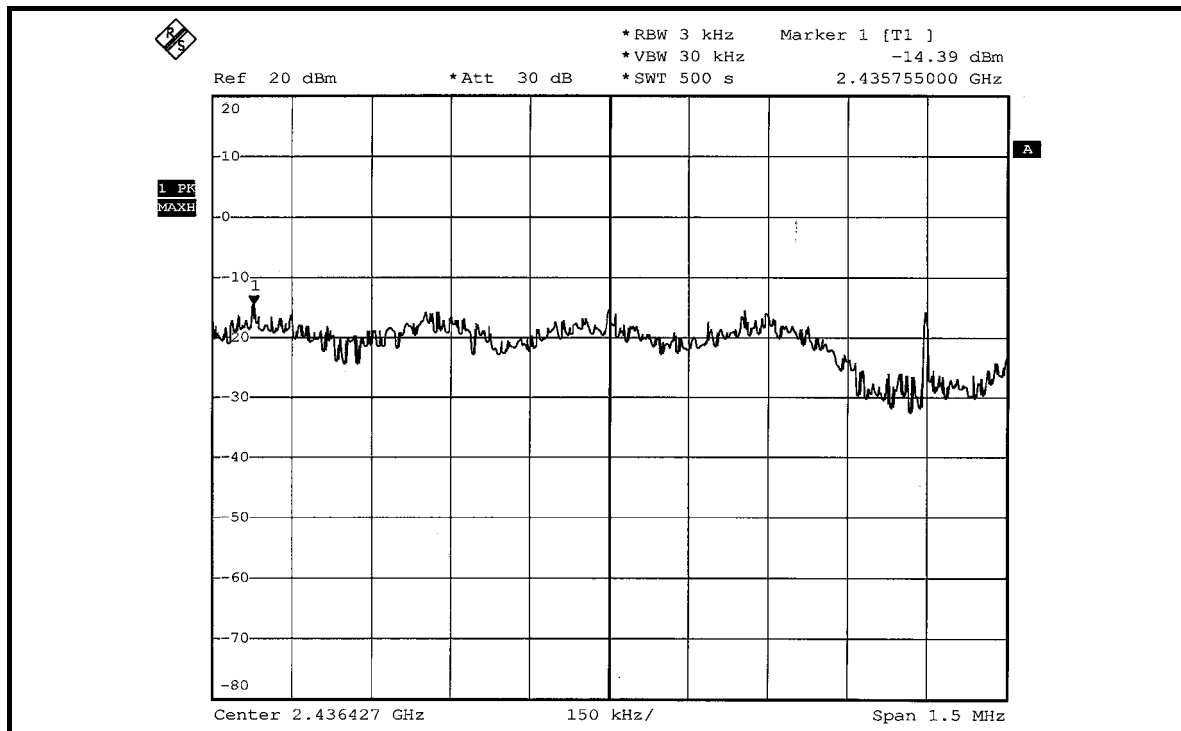




CH11

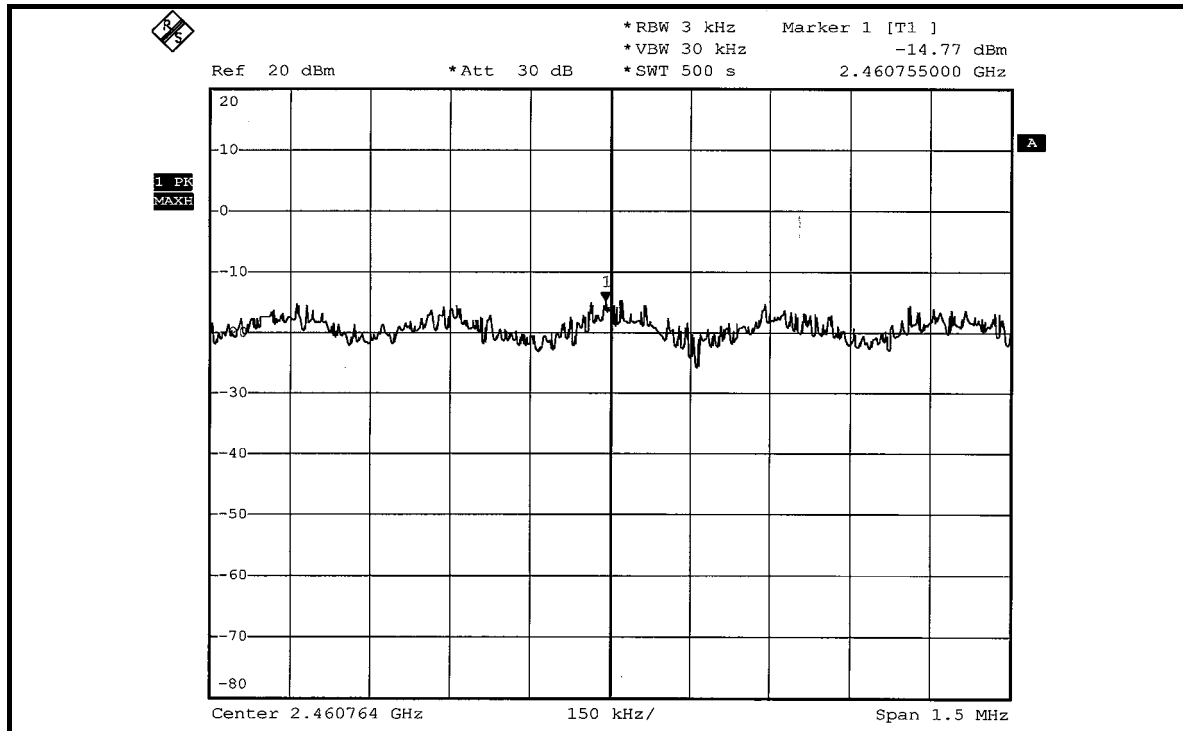


FOR CHAIN 1:


CH1

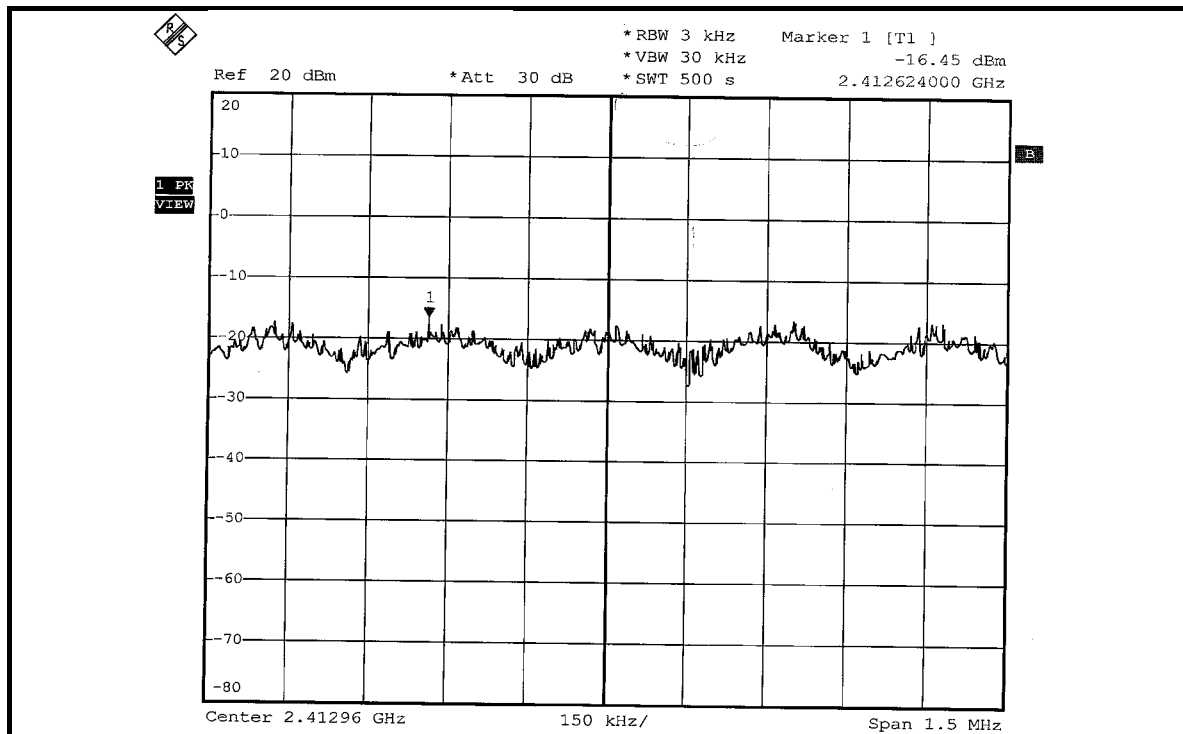

CH6

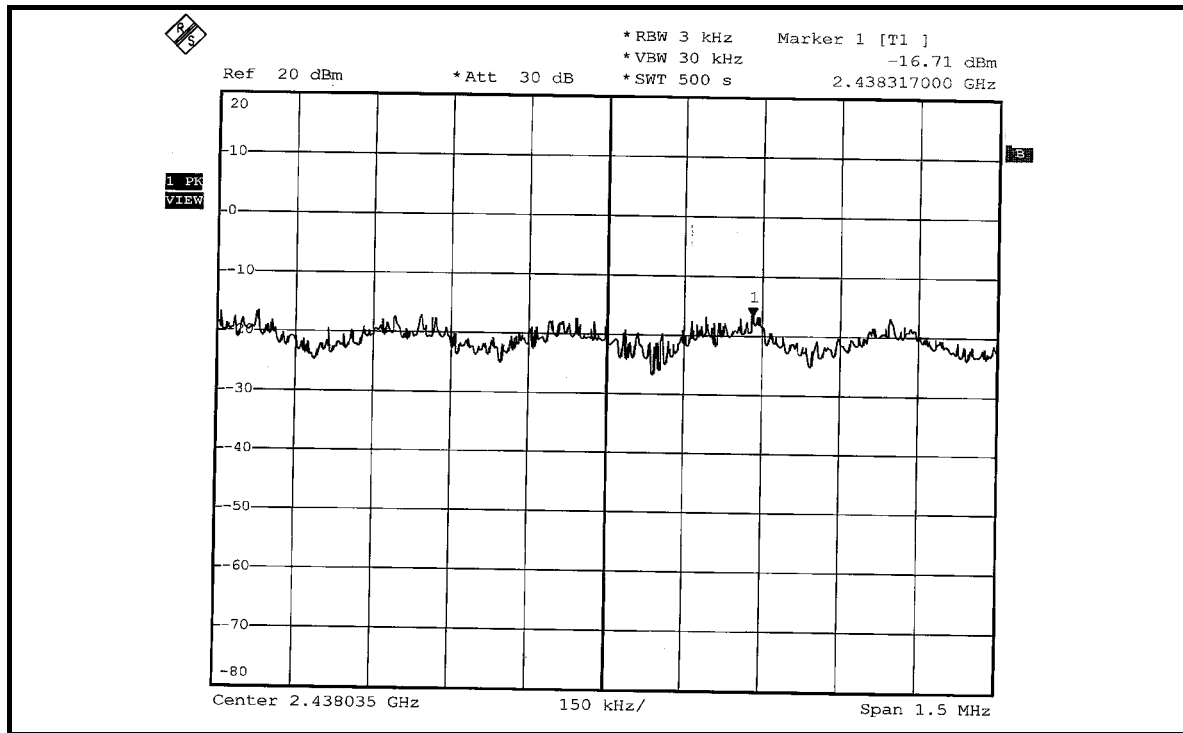

CH11

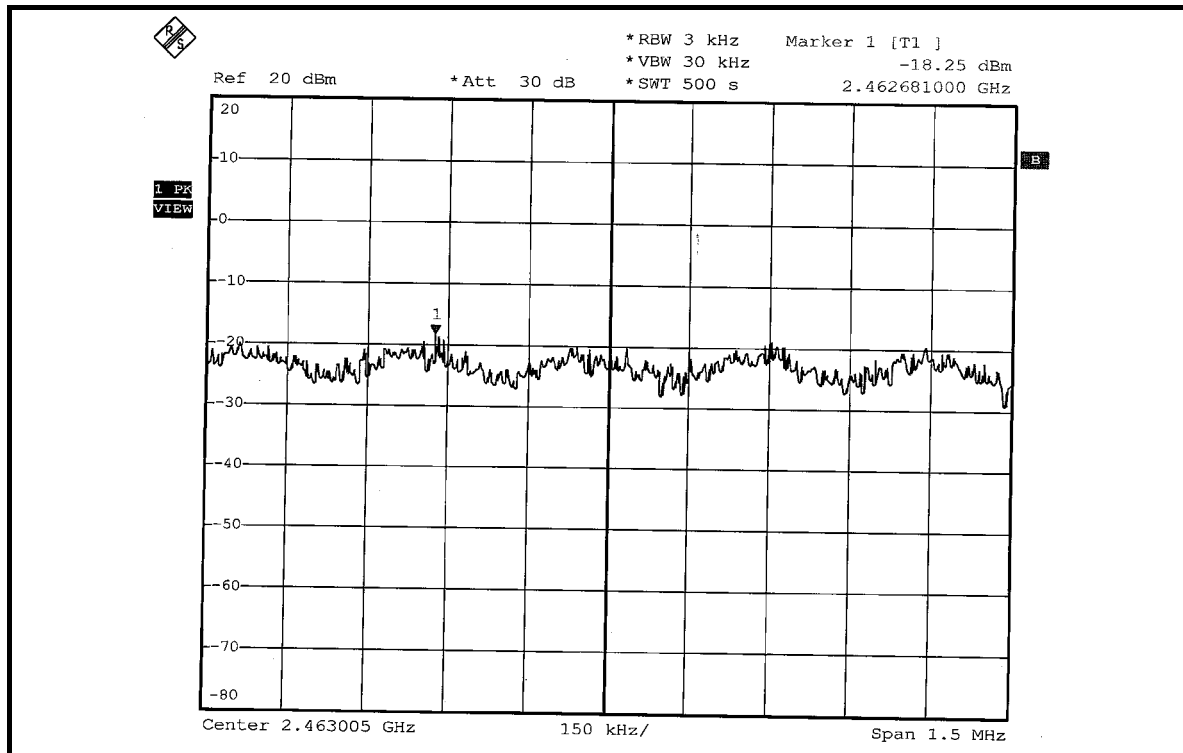




ACE OFDM MODULATION


MODULATION TYPE	QPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)		MAXIMUM LIMIT (dBm)	PASS/FAIL
		CHAIN 0	CHAIN 1		
1	2422	-21.21	-22.21	8	PASS
4	2437	-20.38	-23.67	8	PASS
7	2452	-21.36	-24.21	8	PASS


FOR CHAIN 0:
CH1

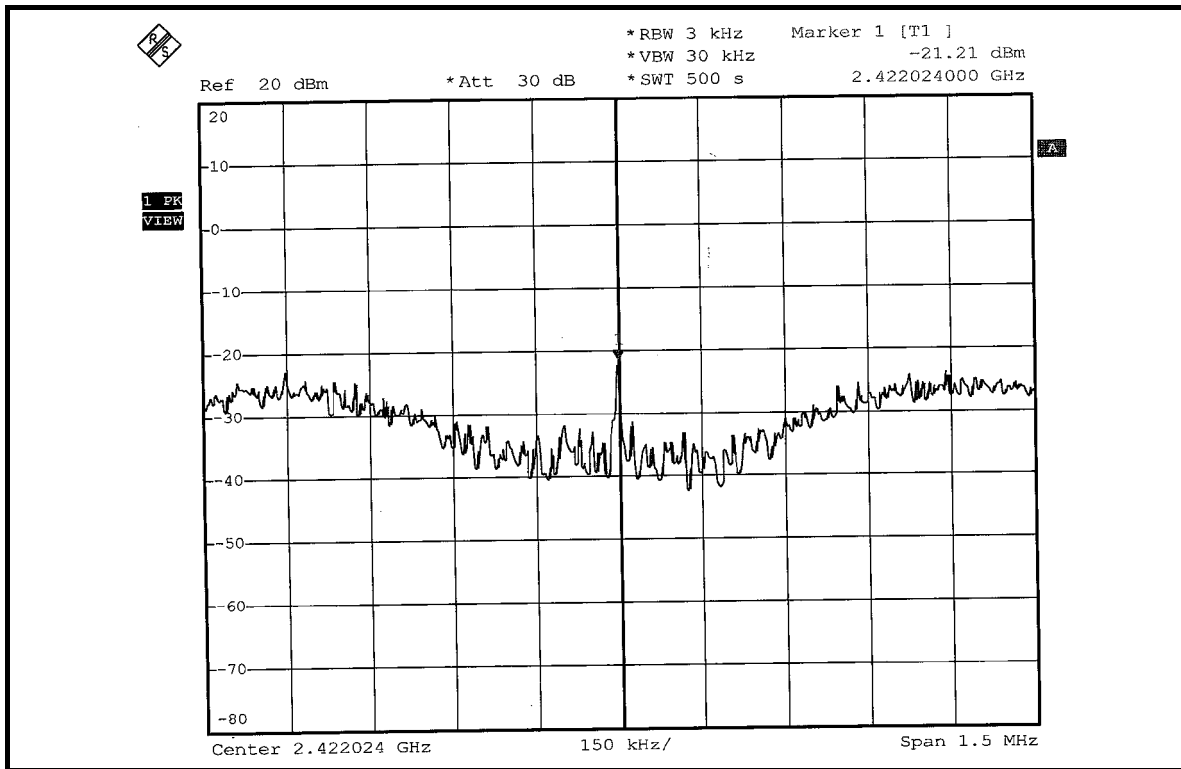

CH4

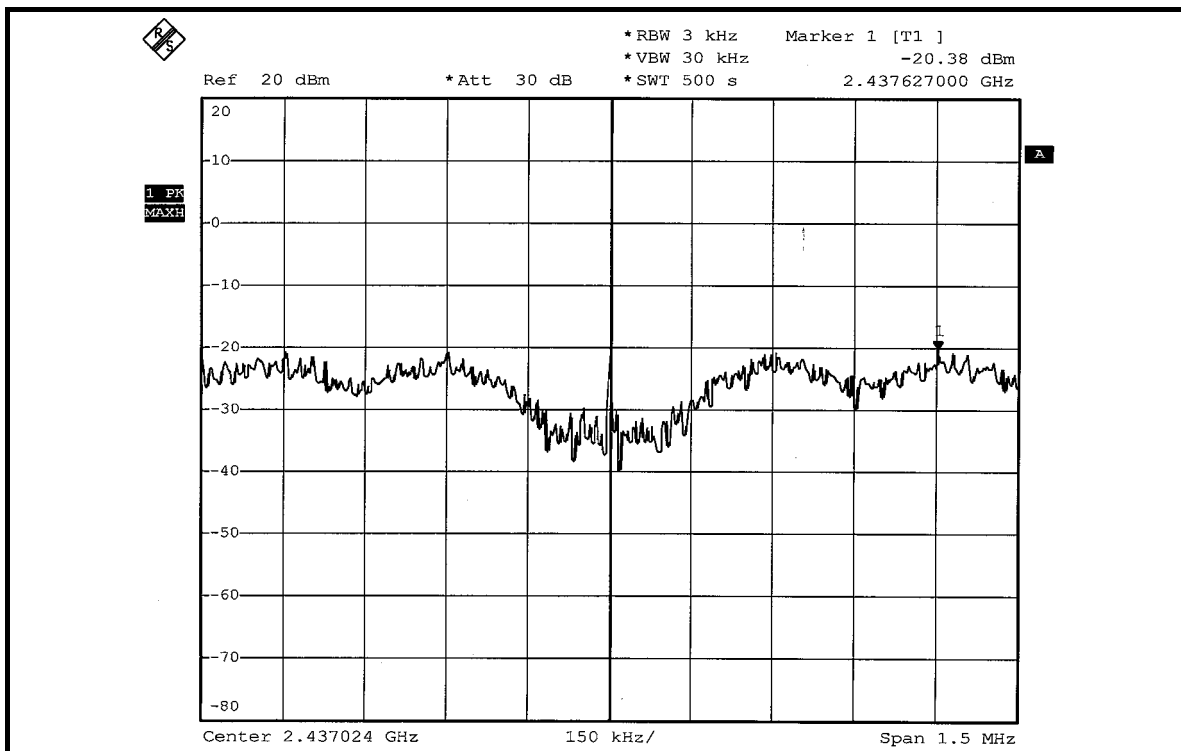


CH7

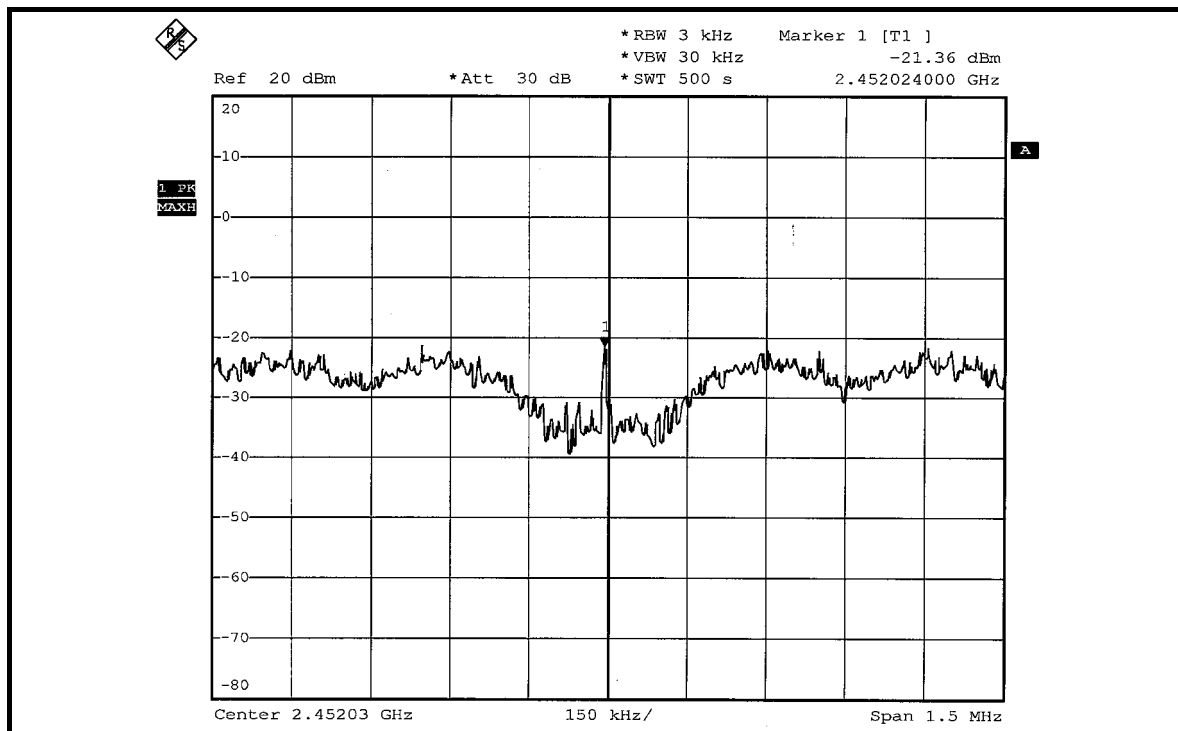


FOR CHAIN 1:


CH1

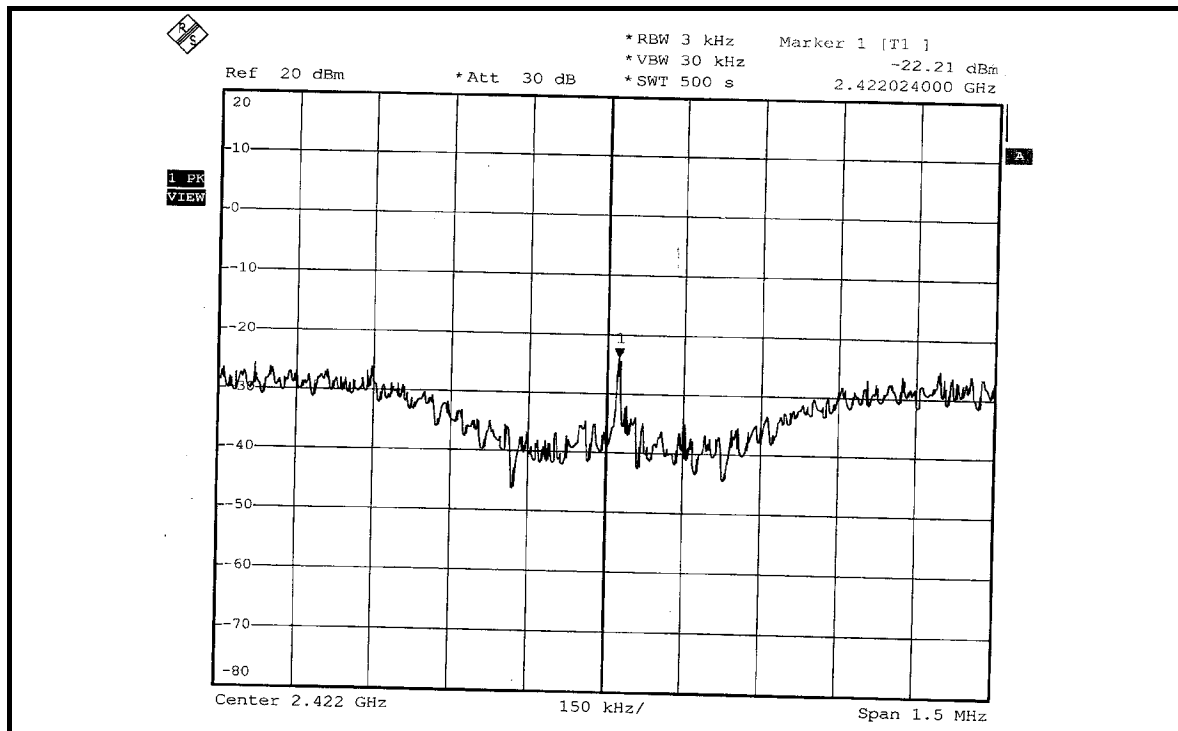

CH4

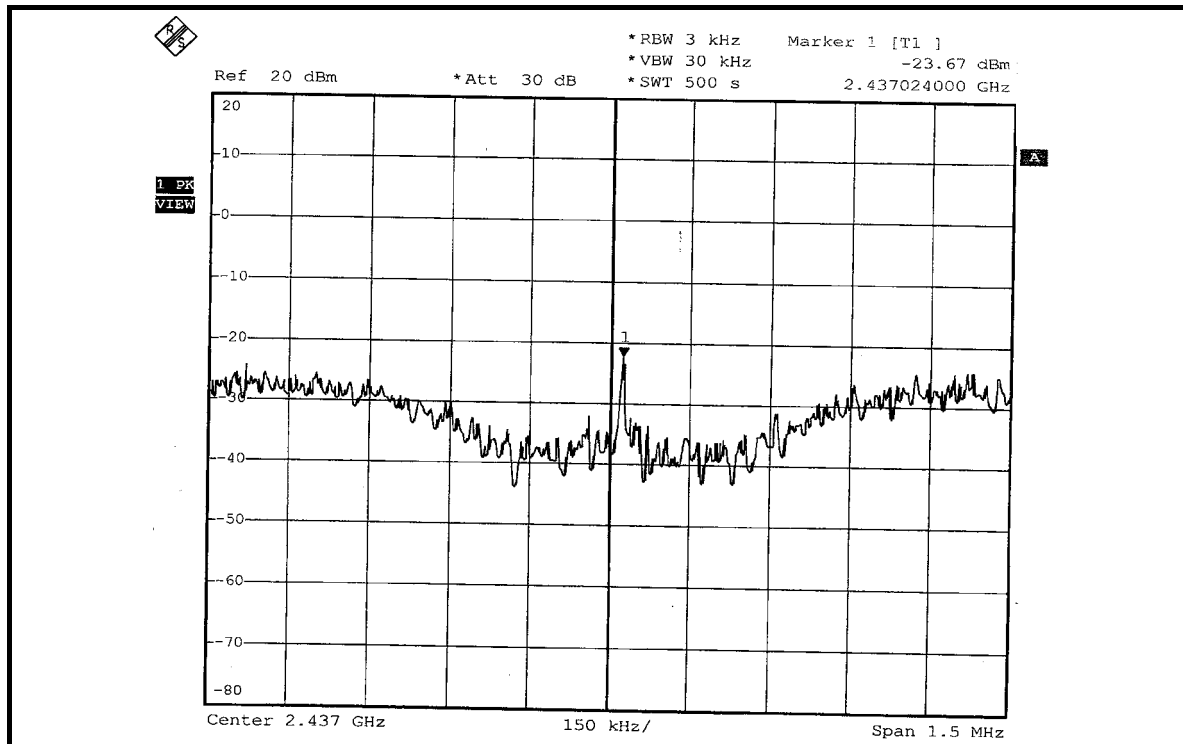

CH7

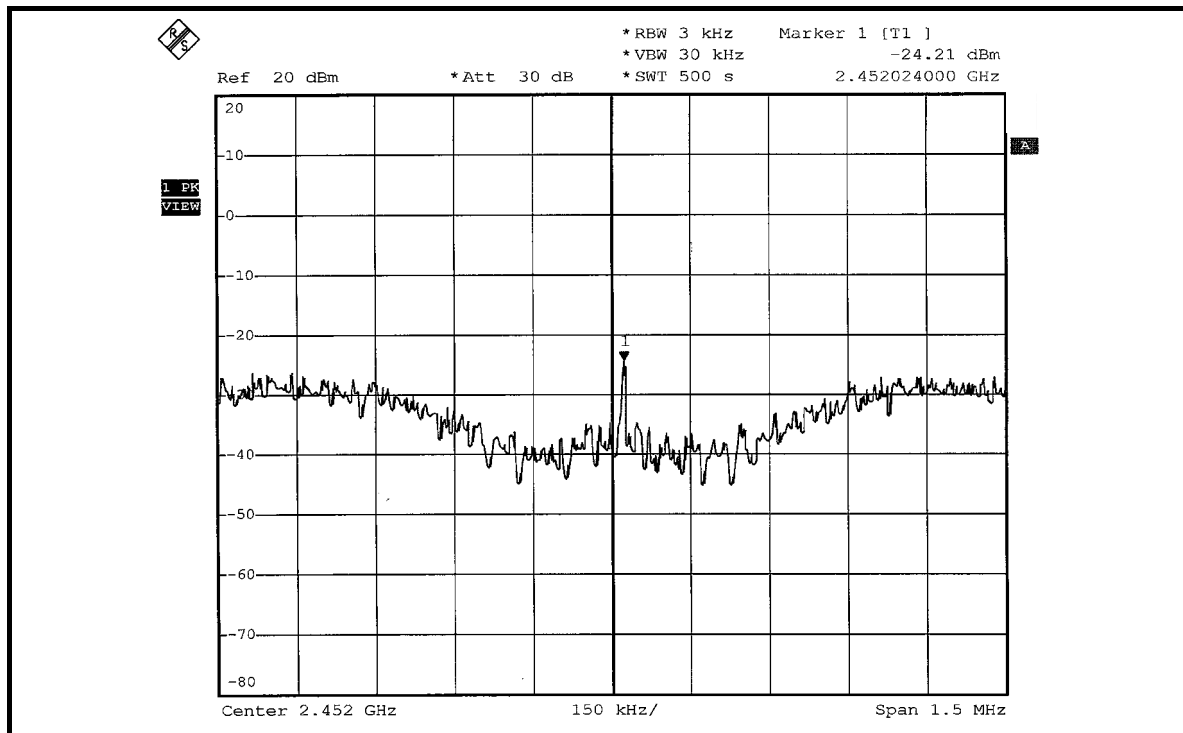



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW = VBW = 100kHz; Average RBW = 1MHz, VBW = 1kHz)

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.6 TEST RESULTS

The spectrum plots are attached on the following 18 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).



802.11b DSSS MODULATION



NOTE 1: The band edge emission plot on the next page shows 50.53dBc between carrier maximum power and local maximum emission in restrict band (2.3852GHz). The emission of carrier strength list in the test result of channel 1 at the item 5.2.7 is 106.11dBuV/m (Peak), so the maximum field strength in restrict band is $106.11 - 50.53 = 55.58$ dBuV/m, which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 53.25dBc between carrier maximum power and local maximum emission in restrict band (2.3850GHz). The emission of carrier strength list in the test result of channel 1 at the item 5.2.7 is 102.63dBuV/m (Average), so the maximum field strength in restrict band is $102.63 - 53.25 = 49.38$ dBuV/m, which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 51.63dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 5.2.7 is 106.19dBuV/m (Peak), so the maximum field strength in restrict band is $106.19 - 51.63 = 54.56$ dBuV/m, which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 55.97dBc between carrier maximum power and local maximum emission in restrict band (2.4880GHz). The emission of carrier strength list in the test result of channel 11 at the item 5.2.7 is 102.71dBuV/m (Average), so the maximum field strength in restrict band is $102.71 - 55.97 = 46.74$ dBuV/m, which is under 54dBuV/m limit.

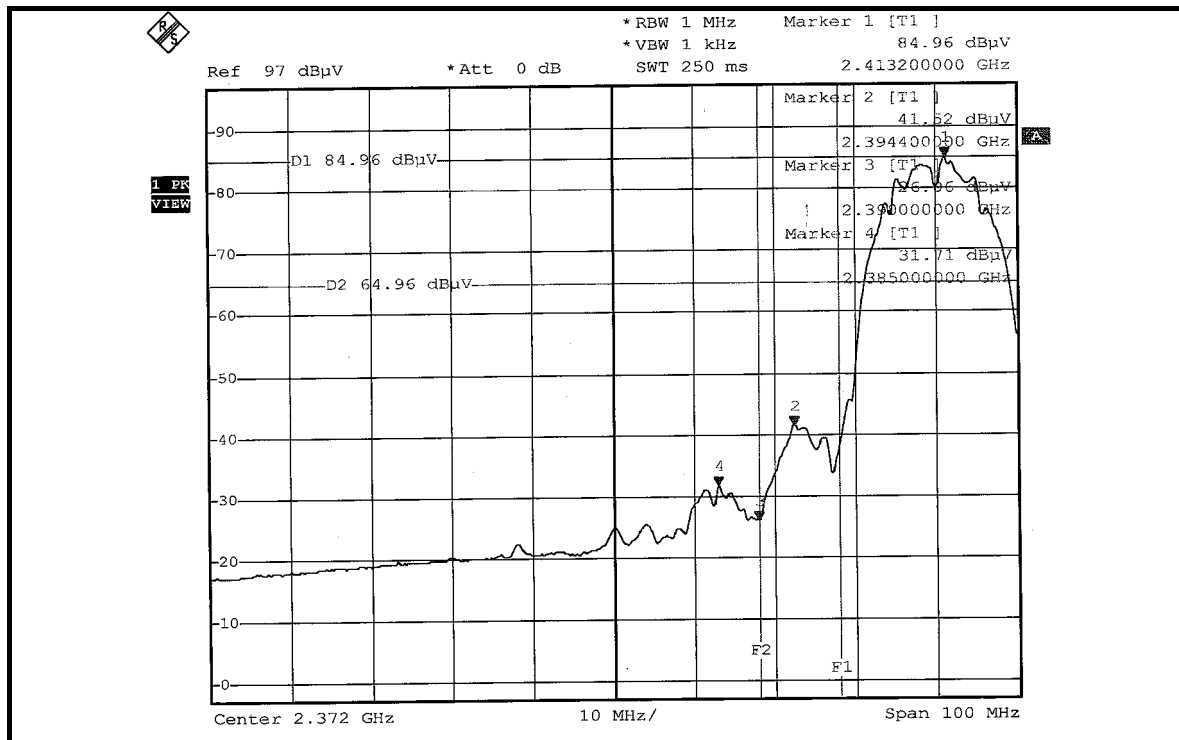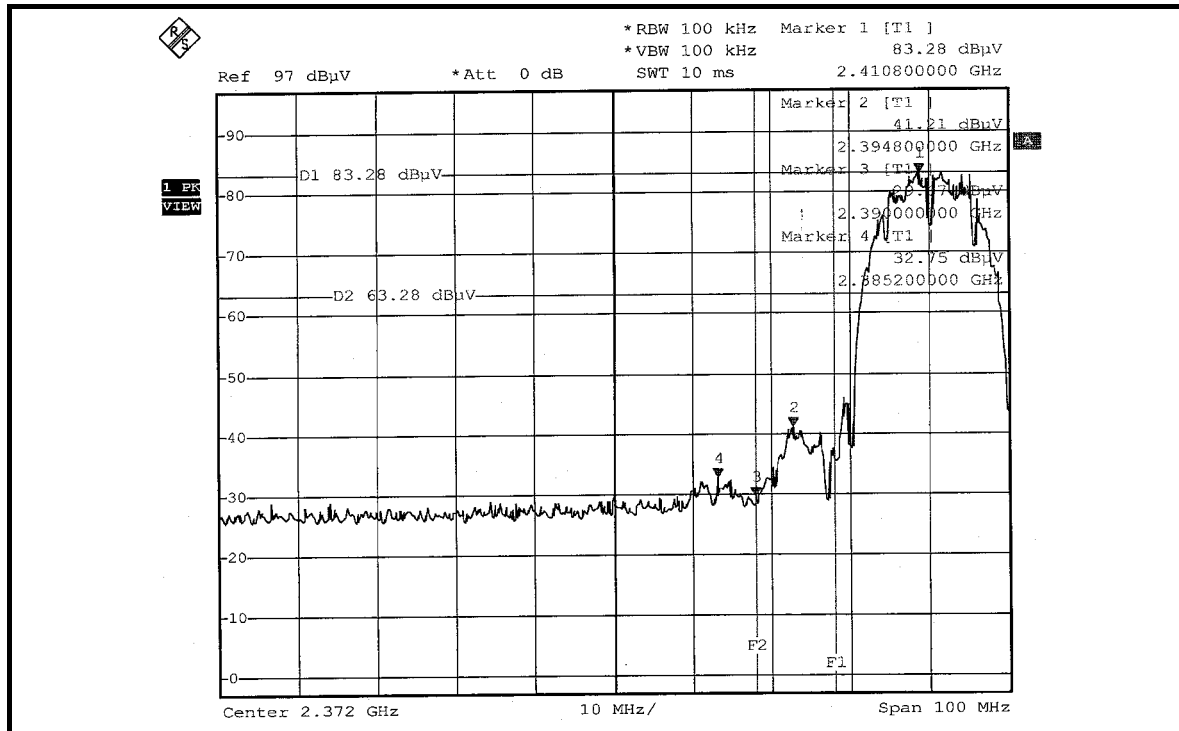

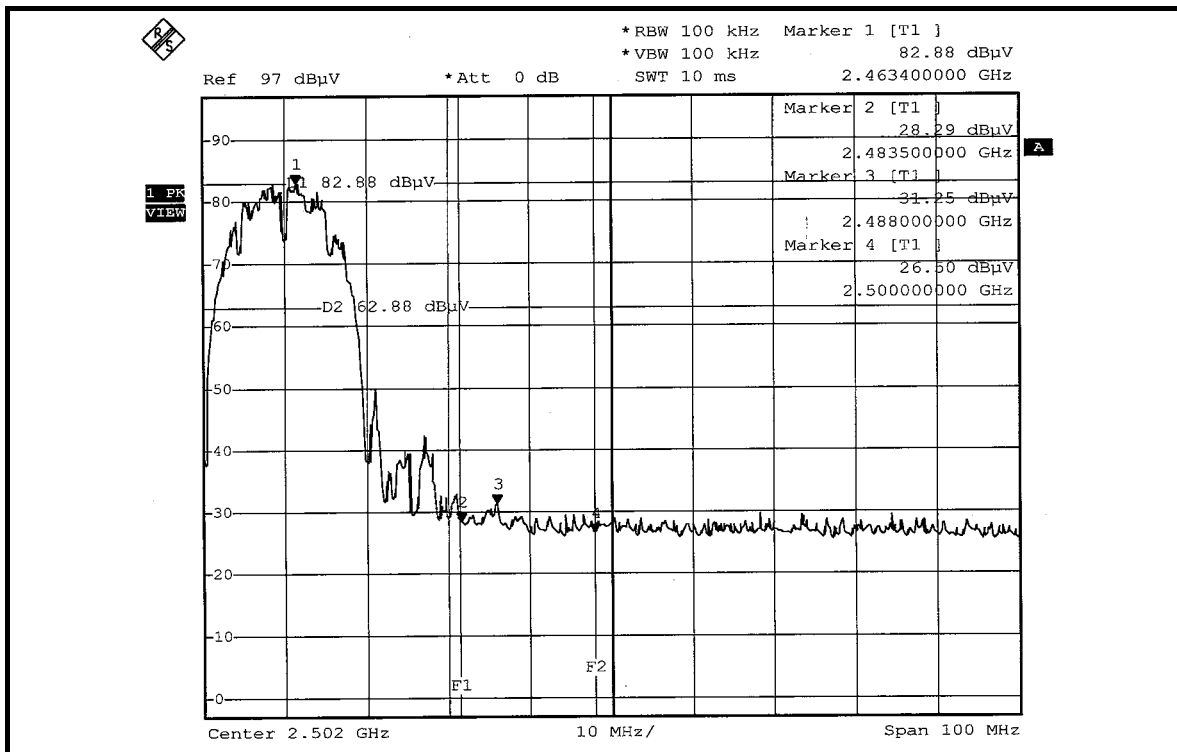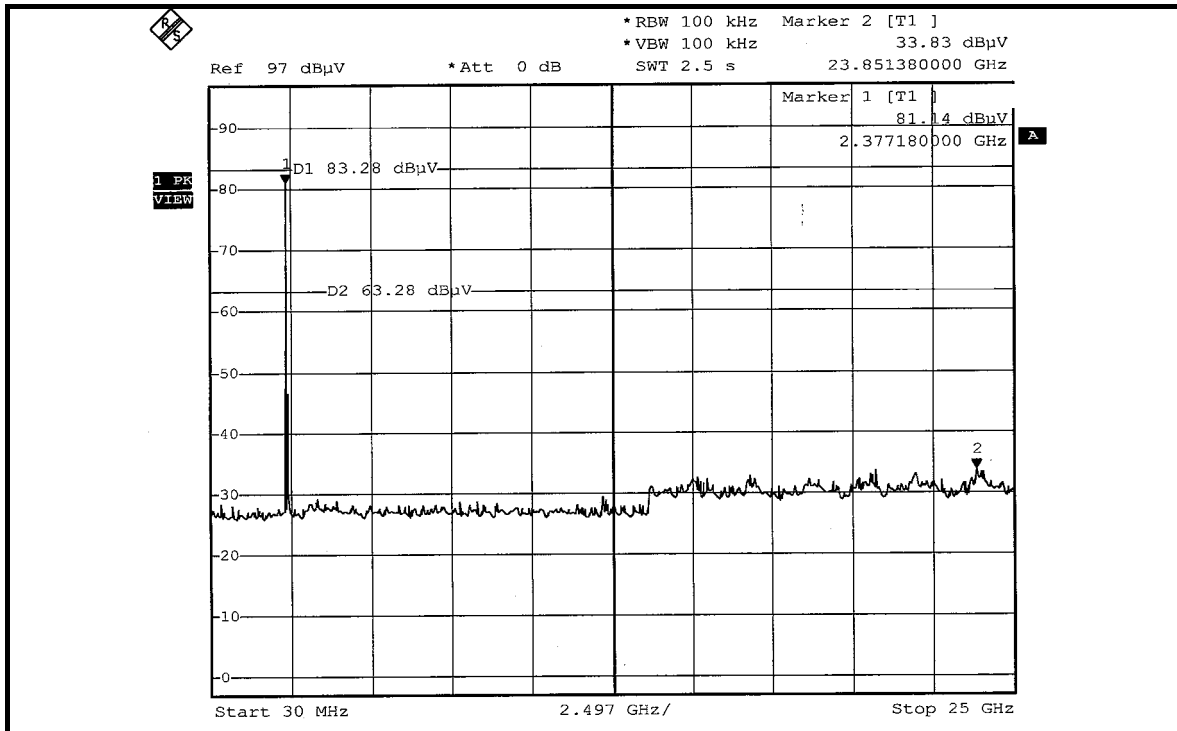

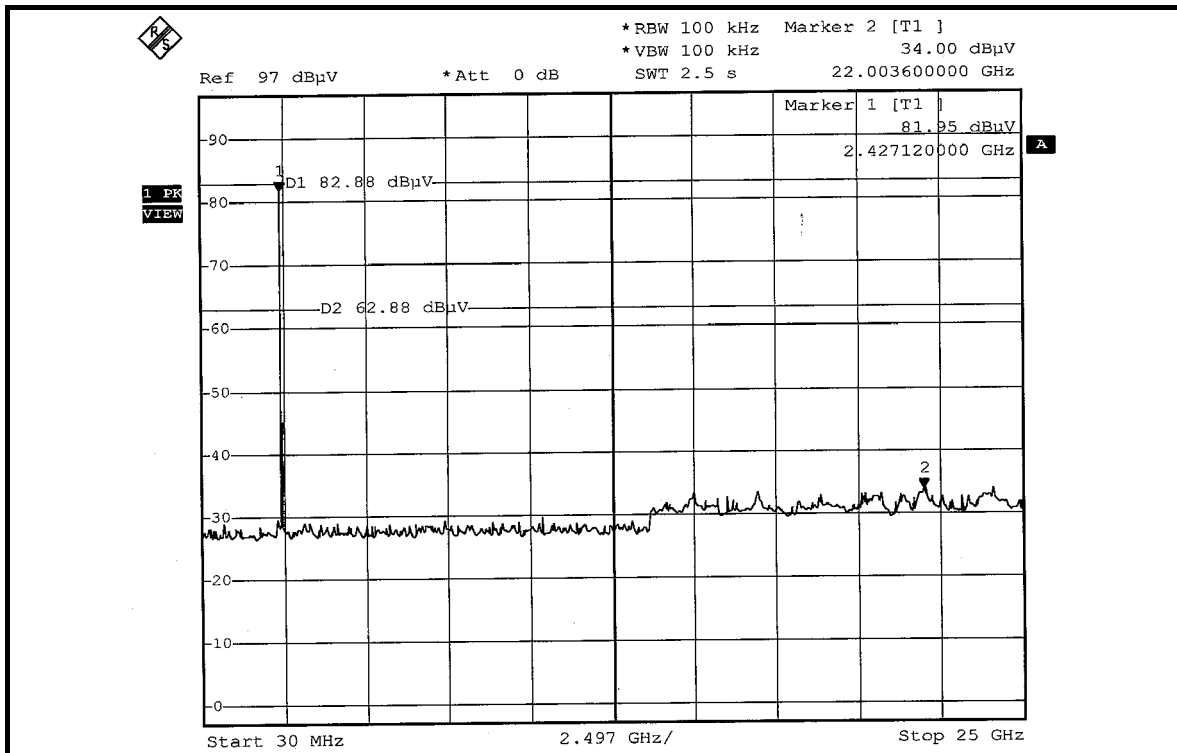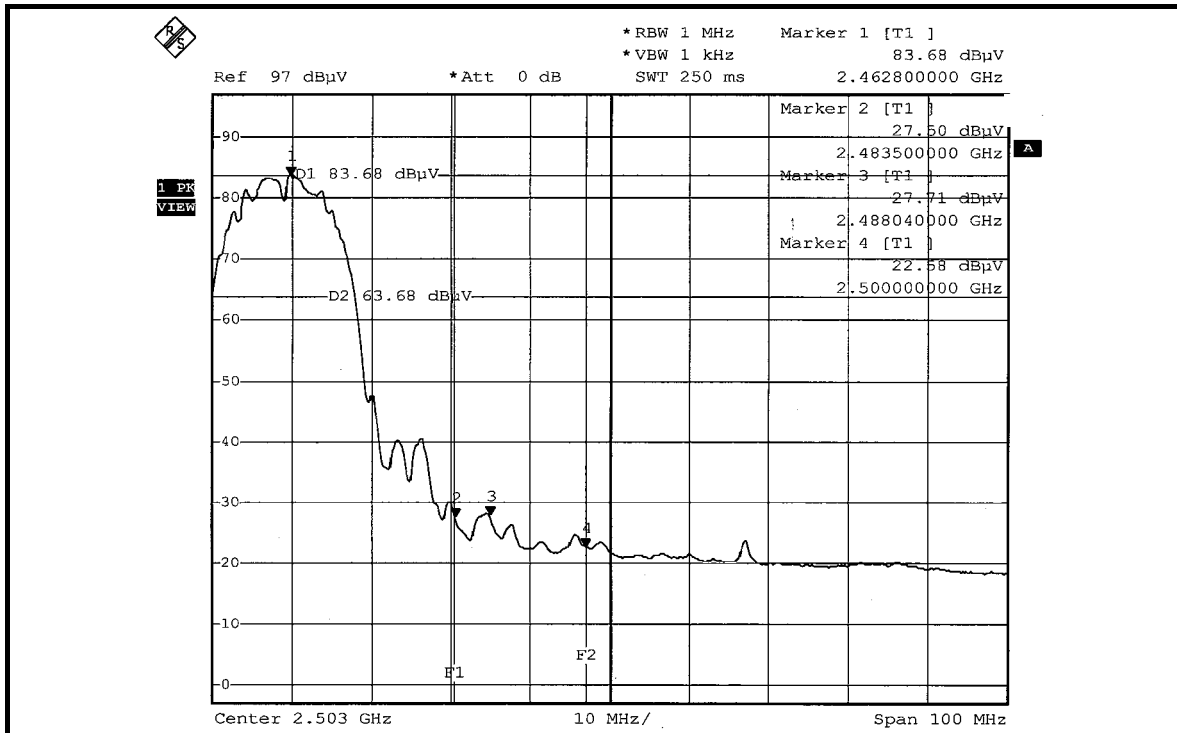



802.11g OFDM MODULATION



NOTE 1: The band edge emission plot on the next page shows 48.10dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 5.2.7 is 111.55dBuV/m (Peak), so the maximum field strength in restrict band is $111.55 - 48.10 = 63.46$ dBuV/m, which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 48.51dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 5.2.7 is 101.50dBuV/m (Average), so the maximum field strength in restrict band is $101.50 - 48.51 = 52.99$ dBuV/m, which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 47.97dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 5.2.7 is 111.09dBuV/m (Peak), so the maximum field strength in restrict band is $111.09 - 47.97 = 63.12$ dBuV/m, which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 50.80dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 5.2.7 is 101.10dBuV/m (Average), so the maximum field strength in restrict band is $101.10 - 50.80 = 50.30$ dBuV/m, which is under 54dBuV/m limit.

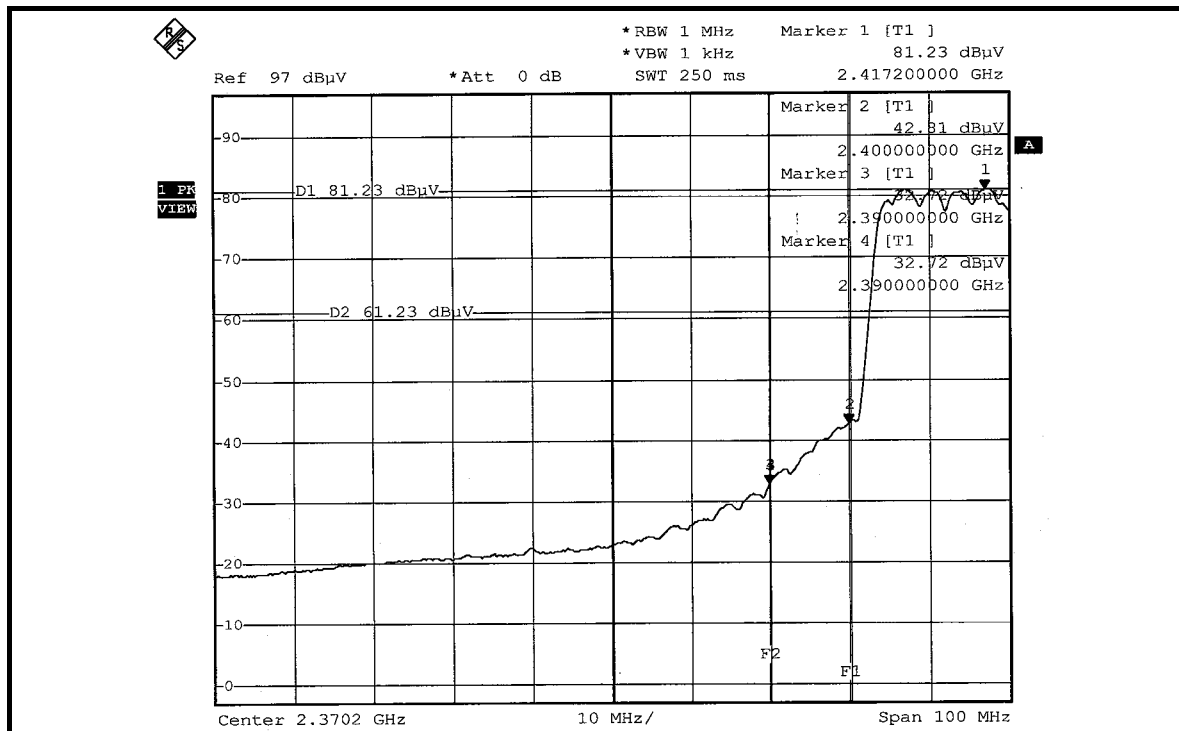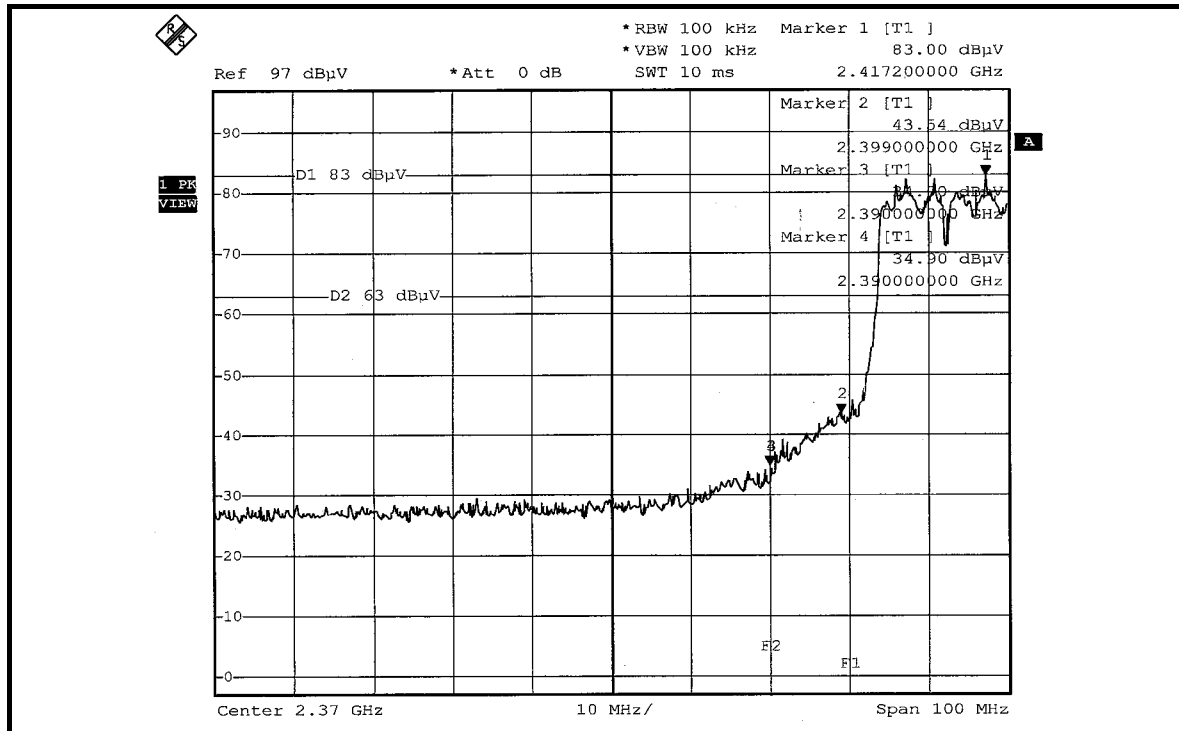

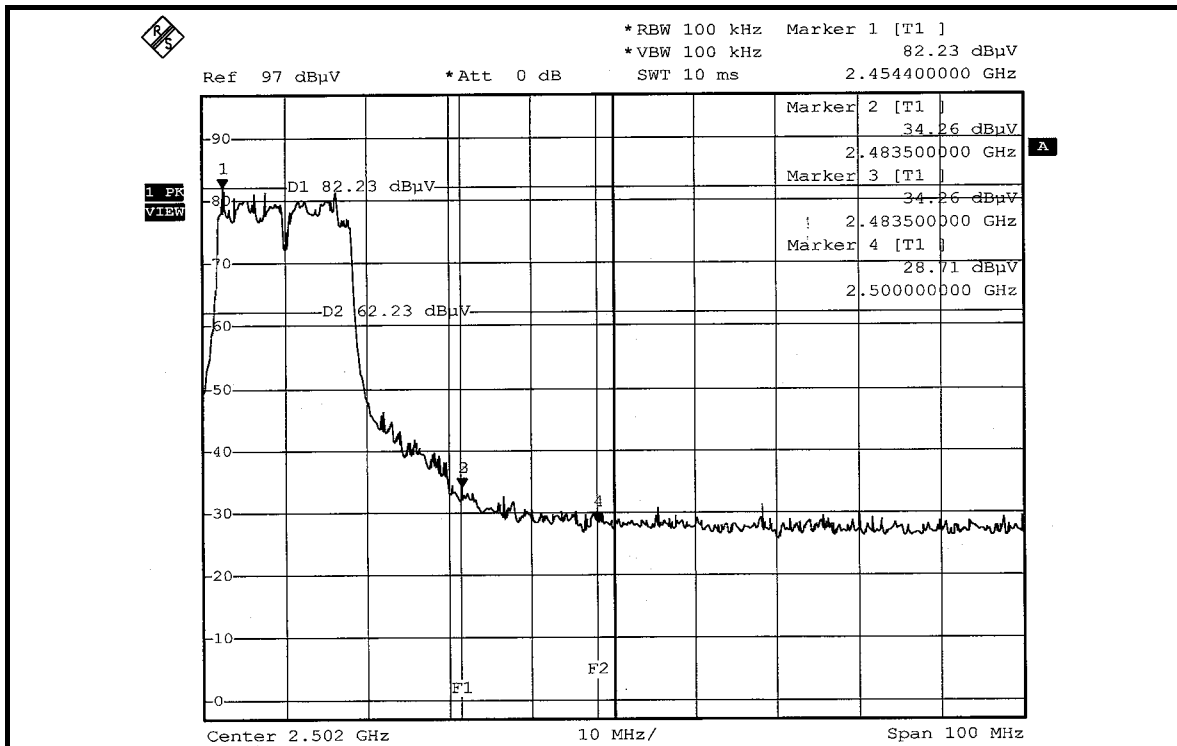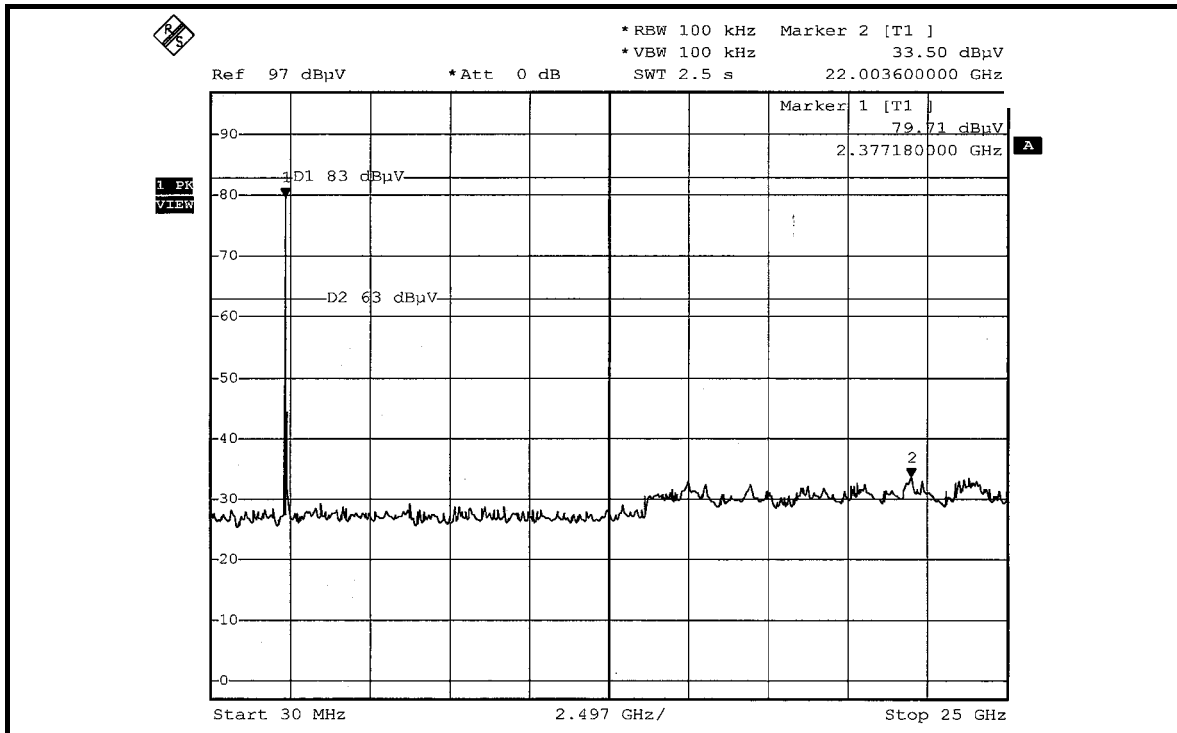

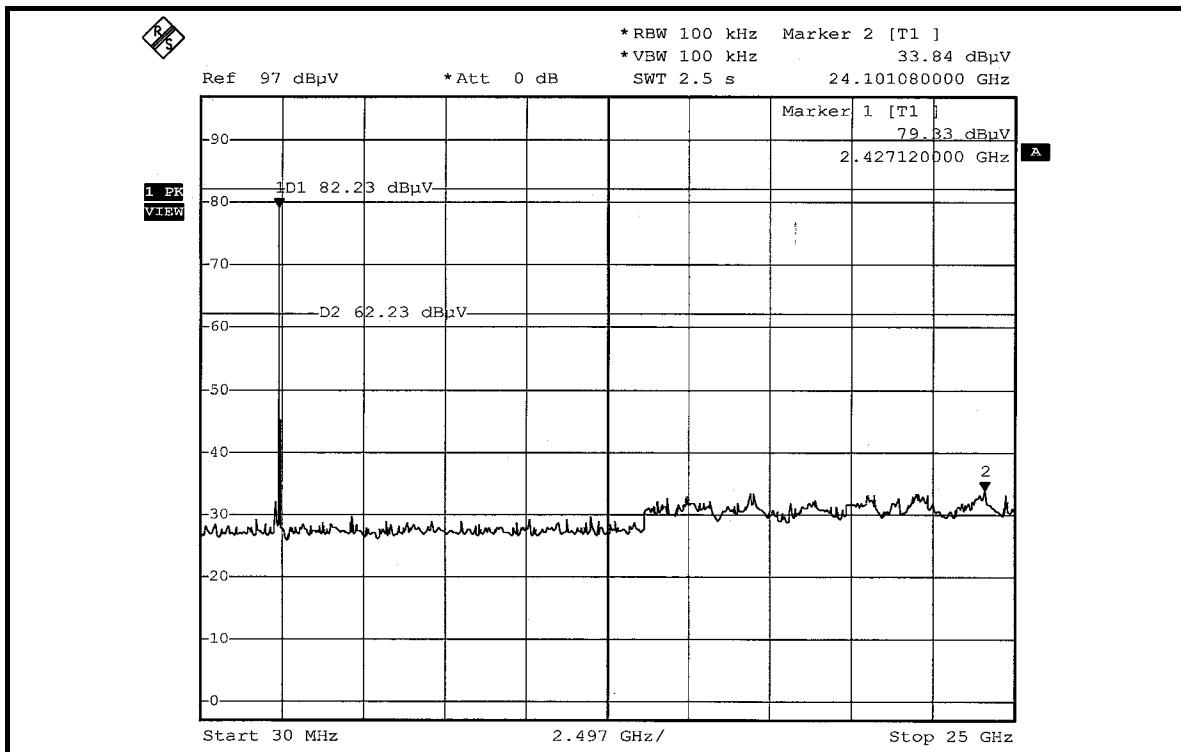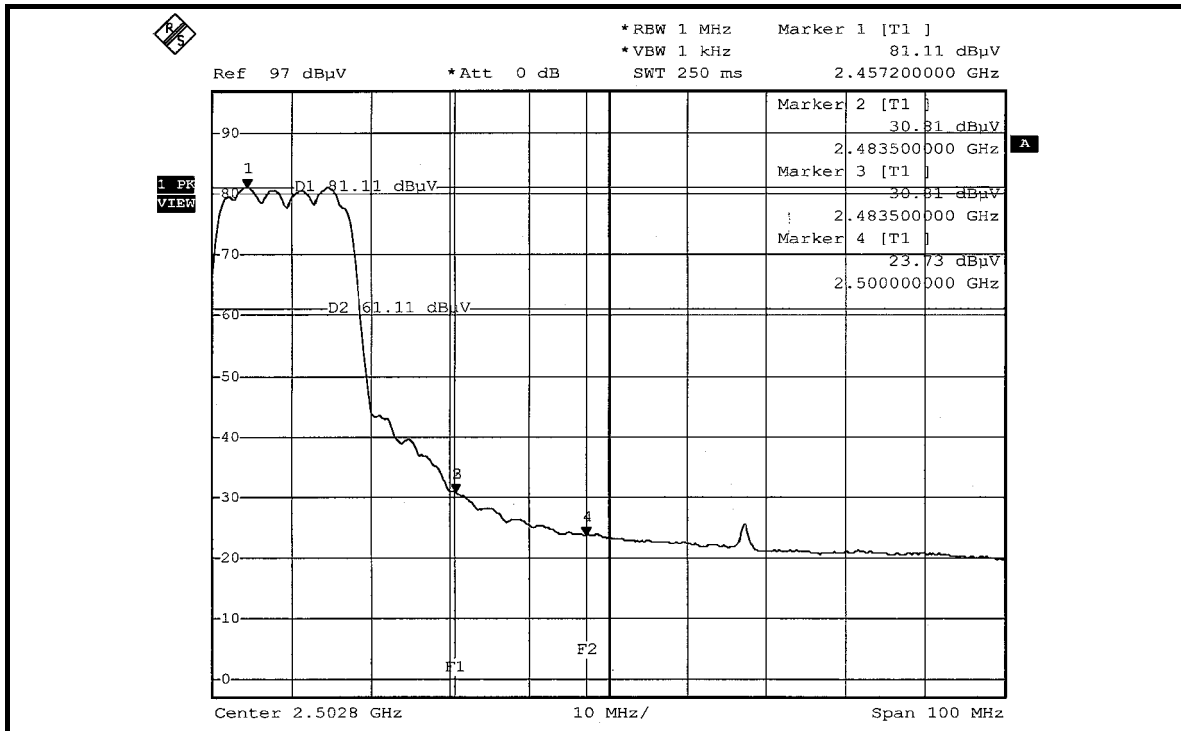



ACE OFDM MODULATION



NOTE 1: The band edge emission plot on the next page shows 43.41dBc between carrier maximum power and local maximum emission in restrict band (2.3896GHz). The emission of carrier strength list in the test result of channel 1 at the item 5.2.7 is 103.35dBuV/m (Peak), so the maximum field strength in restrict band is $103.35 - 43.41 = 59.94$ dBuV/m, which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 44.05dBc between carrier maximum power and local maximum emission in restrict band (2.3892GHz). The emission of carrier strength list in the test result of channel 1 at the item 5.2.7 is 93.81dBuV/m (Average), so the maximum field strength in restrict band is $93.81 - 44.05 = 49.76$ dBuV/m, which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 47.19dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 7 at the item 5.2.7 is 103.18dBuV/m (Peak), so the maximum field strength in restrict band is $103.18 - 47.19 = 55.99$ dBuV/m, which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 45.21dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 7 at the item 5.2.7 is 94.64dBuV/m (Average), so the maximum field strength in restrict band is $94.64 - 45.21 = 49.43$ dBuV/m, which is under 54dBuV/m limit.

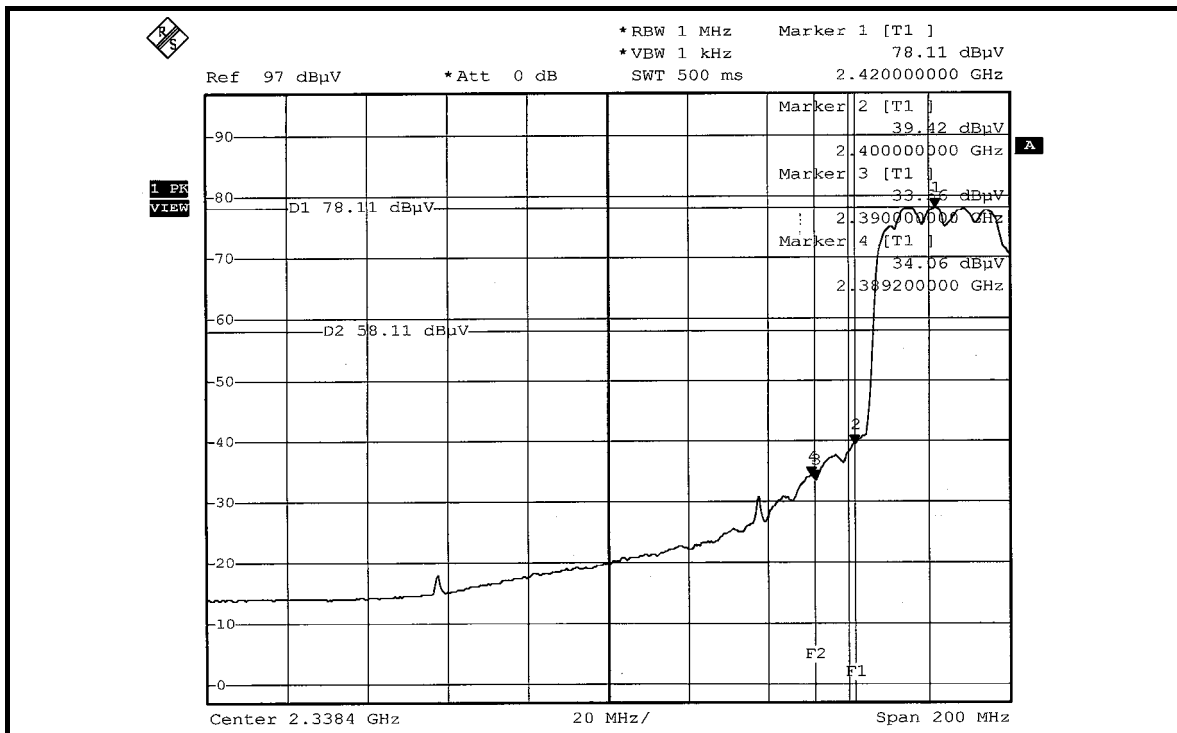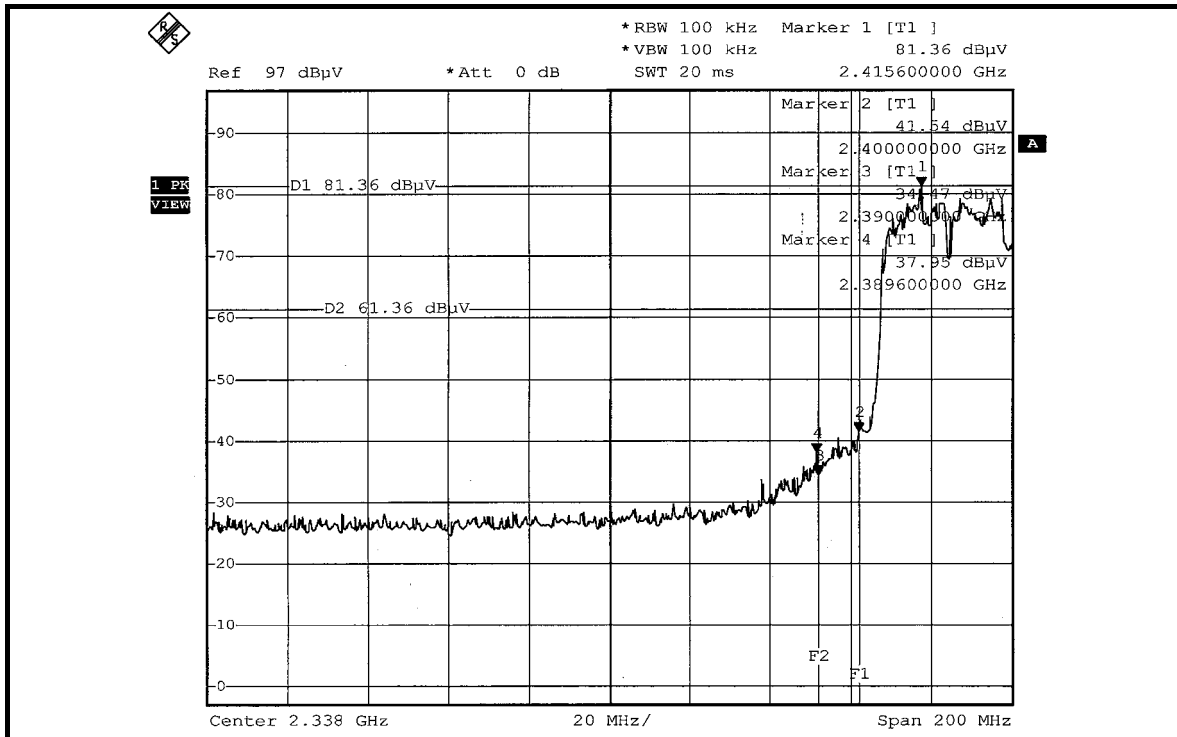

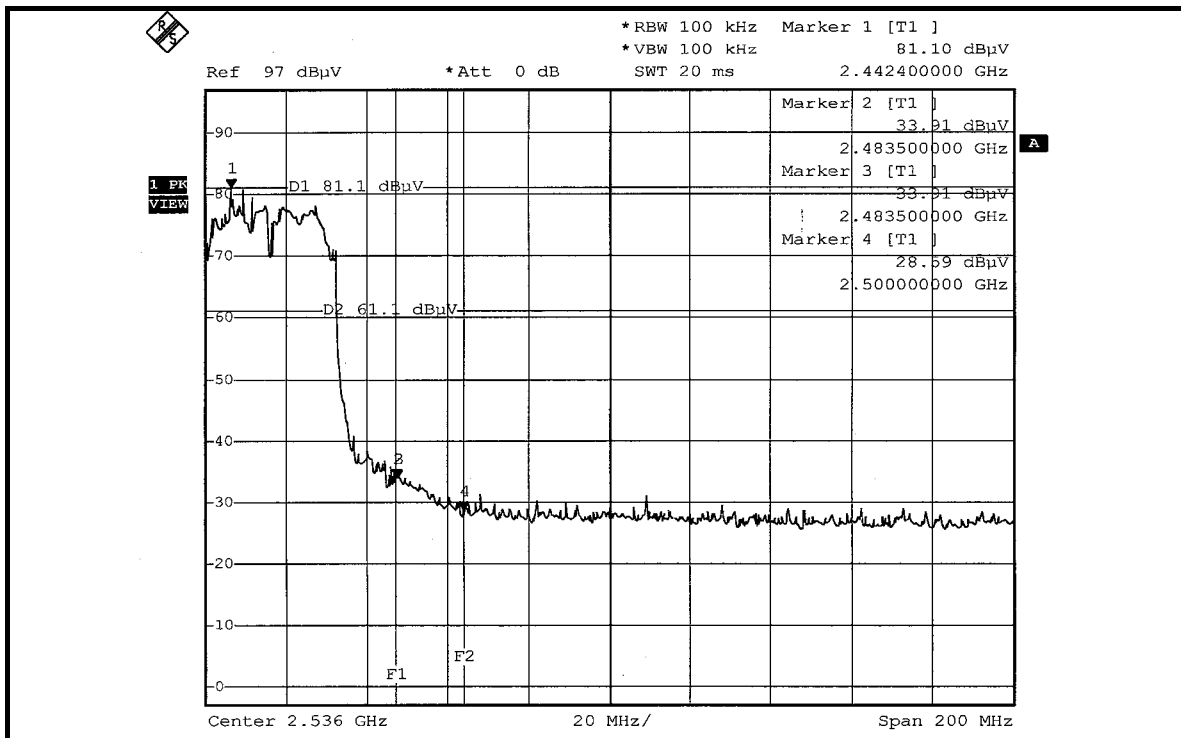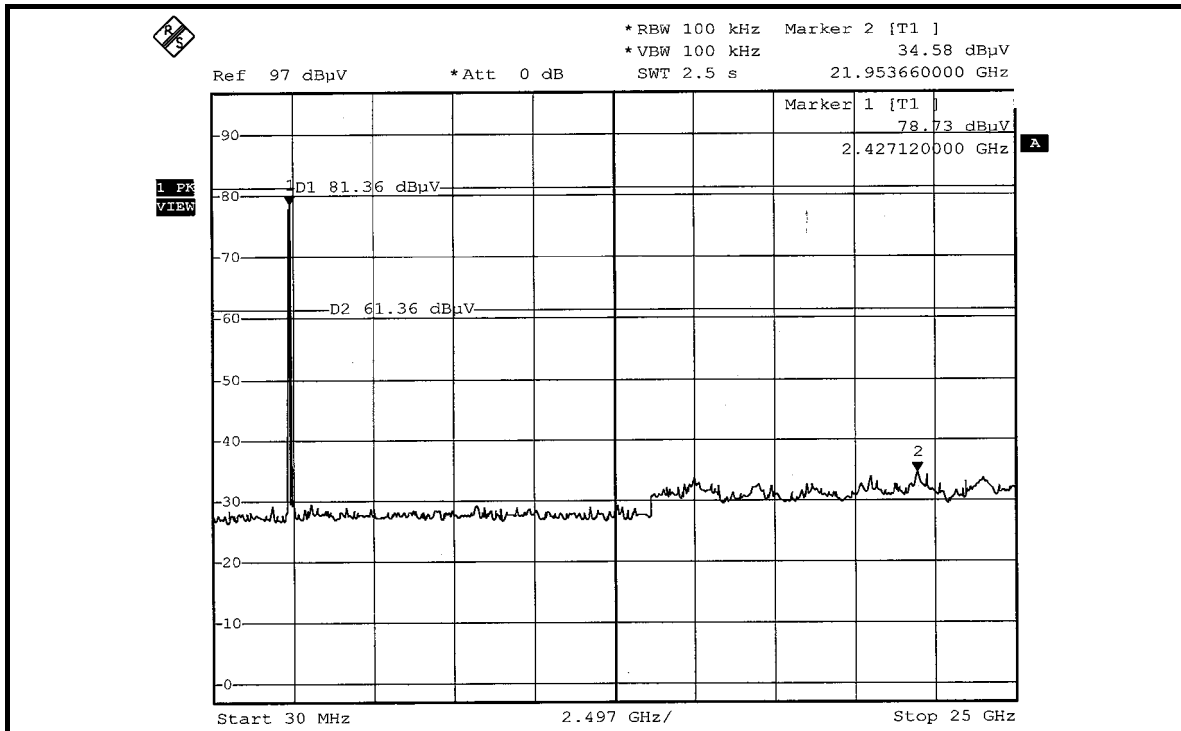

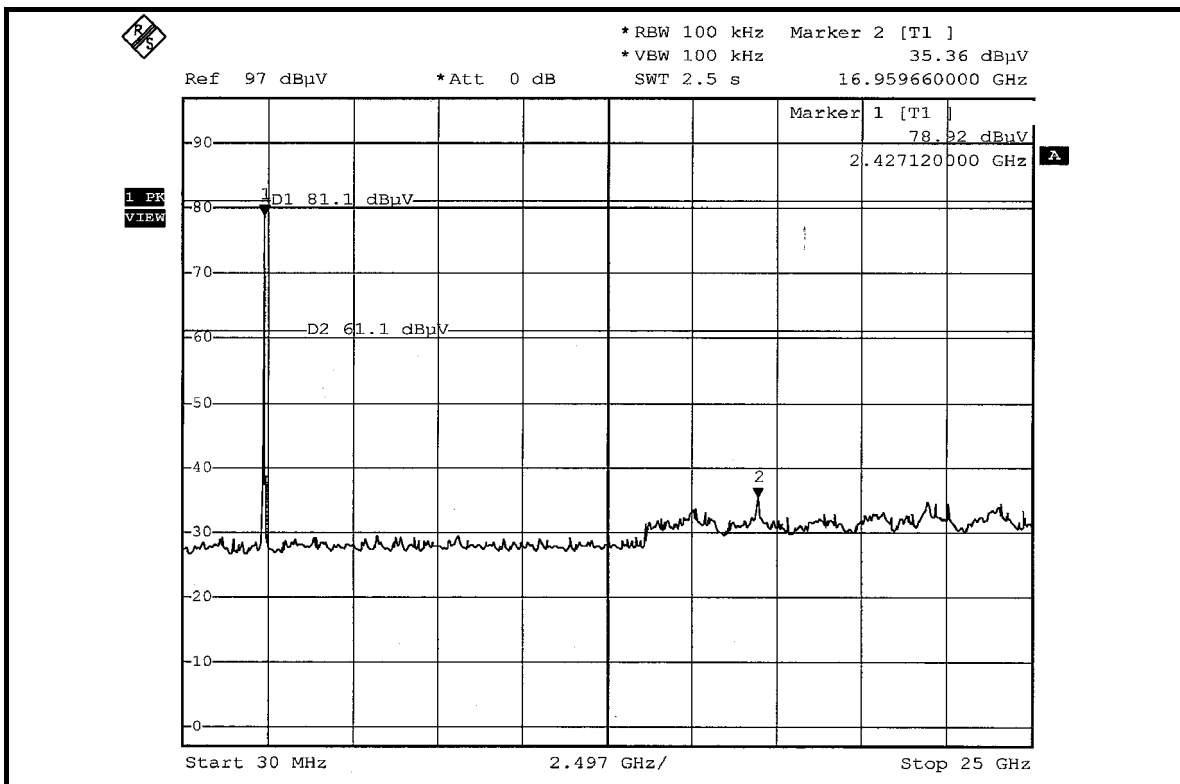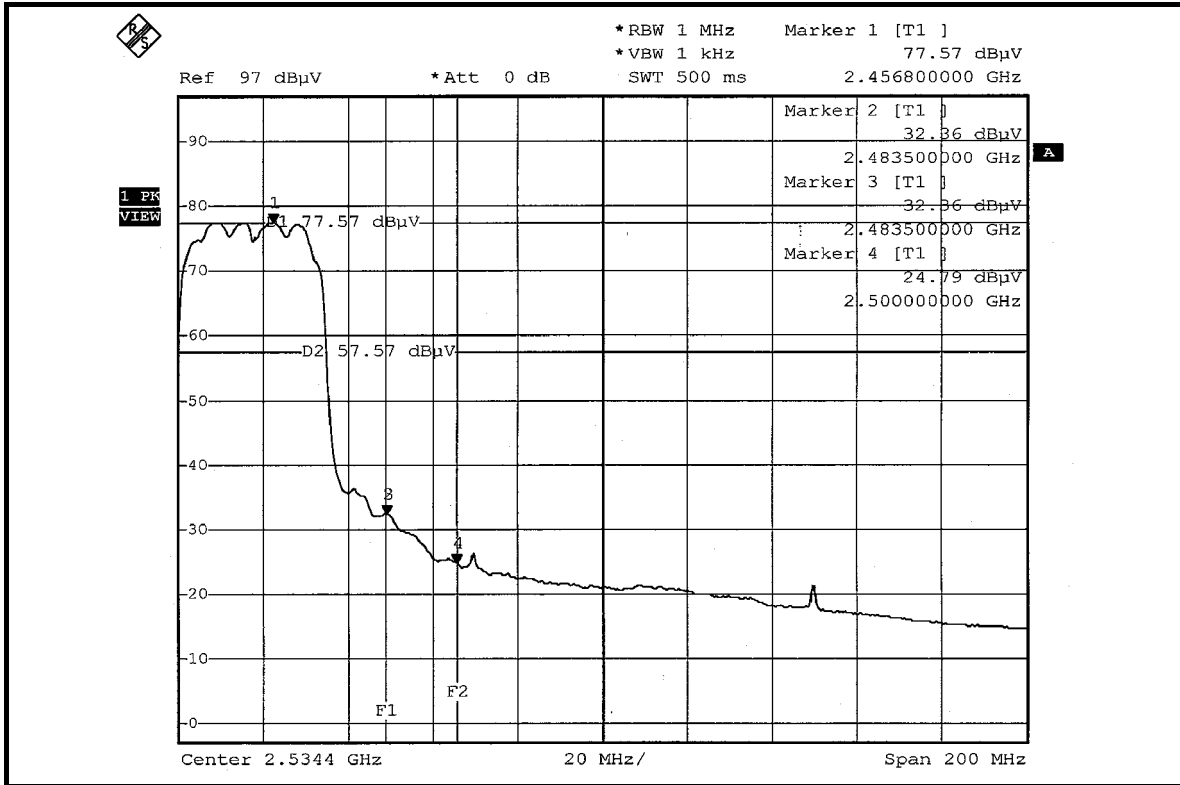



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION


The antenna type used in this product is Dipole antenna with UFL connector. The maximum Gain of this antenna is only 1.8dBi.

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST

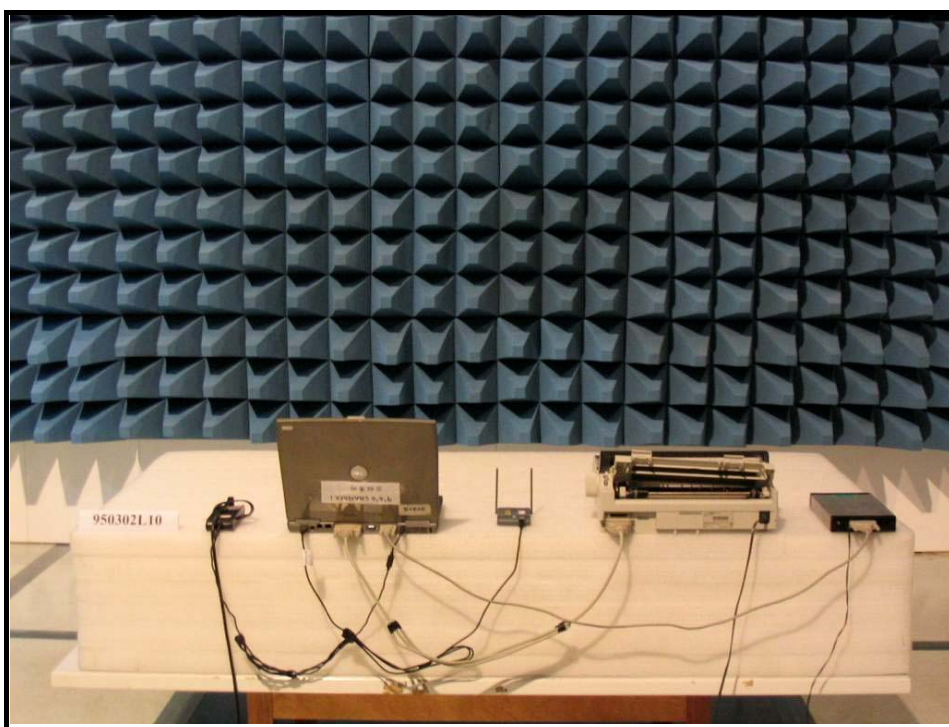



6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF Lab.

Tel: 886-3-3270910

Fax: 886-3-3270892

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.