



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	Linksys LLC
Applicant Address	131 Theory Drive, Irvine Ca., 92617
FCC ID	Q87-WUSB6300
Manufacturer's company	Linksys LLC
Manufacturer Address	131 Theory Drive, Irvine Ca., 92617

Product Name	Linksys Dual Band Wireless-AC USB Adapter
Brand Name	Linksys
Model Name	WUSB6300
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250MHz
Received Date	Nov. 01, 2012
Final Test Date	May 29, 2013
Submission Type	Original Equipment
Operating Mode	Client (without radar detection function)

### Statement

**Test result included is for the IEEE 802.11n and IEEE 802.11a/ac (5150 ~ 5250MHz) of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009,**

**47 CFR FCC Part 15 Subpart E, KDB 789033 D01 v01r03 and KDB 662911 D01 v01r02..**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.





## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE</b> .....	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT</b> .....	<b>2</b>
<b>3. GENERAL INFORMATION</b> .....	<b>3</b>
3.1. Product Details .....	3
3.2. Accessories .....	6
3.3. Table for Filed Antenna .....	7
3.4. Table for Carrier Frequencies .....	7
3.5. Table for Test Modes .....	8
3.6. Table for Testing Locations.....	9
3.7. Table for Supporting Units .....	9
3.8. Table for Parameters of Test Software Setting .....	10
3.9. Test Configurations.....	11
<b>4. TEST RESULT</b> .....	<b>13</b>
4.1. AC Power Line Conducted Emissions Measurement .....	13
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement .....	17
4.3. Maximum Conducted Output Power Measurement.....	26
4.4. Power Spectral Density Measurement.....	29
4.5. Peak Excursion Measurement .....	35
4.6. Radiated Emissions Measurement.....	40
4.7. Band Edge Emissions Measurement.....	55
4.8. Frequency Stability Measurement.....	62
4.9. Antenna Requirements .....	64
<b>5. LIST OF MEASURING EQUIPMENTS</b> .....	<b>65</b>
<b>6. TEST LOCATION</b> .....	<b>67</b>
<b>APPENDIX A. TEST PHOTOS</b> .....	<b>A1 ~ A5</b>





## 1. CERTIFICATE OF COMPLIANCE

**Product Name** : Linksys Dual Band Wireless-AC USB Adapter  
**Brand Name** : Linksys  
**Model Name** : WUSB6300  
**Applicant** : Linksys LLC  
**Test Rule Part(s)** : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Nov. 01, 2012 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads 'Sam Chen'. The signature is written in a cursive style and is positioned above a horizontal line.

**Sam Chen**

**SPORTON INTERNATIONAL INC.**

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	7.19 dB
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	1.03 dB
4.4	15.407(a)	Power Spectral Density	Complies	0.51 dB
4.5	15.407(a)	Peak Excursion	Complies	3.38 dB
4.6	15.407(b)	Radiated Emissions	Complies	7.17 dB
4.7	15.407(b)	Band Edge Emissions	Complies	1.01 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.5dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
Peak Excursion	±0.5dB	Confidence levels of 95%
26dB Spectrum Bandwidth / Frequency Stability	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

### 3. GENERAL INFORMATION

#### 3.1. Product Details

##### IEEE 802.11n/ac

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From Host System
Modulation	see the below table for IEEE 802.11n see the below table for IEEE 802.11ac
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11n OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) For 802.11ac
Data Rate (Mbps)	see the below table for IEEE 802.11n see the below table for IEEE 802.11ac
Frequency Range	5150 ~ 5250MHz
Channel Number	4 for 20MHz bandwidth ; 2 for 40MHz bandwidth 1 for 80MHz bandwidth
Channel Band Width (99%)	11ac MCS8 (VHT 20MHz): 17.92 MHz ; 11ac MCS8 (VHT 40MHz): 36.48 MHz ; 11ac MCS8 (VHT 80MHz): 75.52 MHz
Maximum Conducted Output Power	11ac MCS8 (VHT 20MHz): 15.97 dBm ; 11ac MCS8 (VHT 40MHz): 15.68 dBm ; 11ac MCS8 (VHT 80MHz): 14.50 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3



**IEEE 802.11a**

Items	Description
Product Type	WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From Host System
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5150 ~ 5250MHz
Channel Number	4
Channel Band Width (99%)	16.8 MHz
Maximum Conducted Output Power	15.97 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

**Antenna & Band width**

Antenna	Single (TX)			Two (TX)		
	20 MHz	40 MHz	80MHz	20 MHz	40 MHz	80MHz
IEEE 802.11a	V	X	X	X	X	X
IEEE 802.11n	X	X	X	V	V	X
IEEE 802.11ac	X	X	X	V	V	V

## IEEE 802.11n spec

MCS Index	Nss	Modulation	R	NBPS	NCBPS		NDBPS		Datarate(Mbps)			
					20MHz	40MHz	20MHz	40MHz	800nsGI		400nsGI	
									20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150
8	2	BPSK	1/2	1	104	216	52	108	13.0	27.0	14.444	30
9	2	QPSK	1/2	2	208	432	104	216	26.0	54.0	28.889	60
10	2	QPSK	3/4	2	208	432	156	324	39.0	81.0	43.333	90
11	2	16-QAM	1/2	4	416	864	208	432	52.0	108.0	57.778	120
12	2	16-QAM	3/4	4	416	864	312	648	78.0	162.0	86.667	180
13	2	64-QAM	2/3	6	624	1296	416	864	104.0	216.0	115.556	240
14	2	64-QAM	3/4	6	624	1296	468	972	117.0	243.0	130.000	270
15	2	64-QAM	5/6	6	624	1296	520	1080	130.0	270.0	144.444	300

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPS	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval



## IEEE 802. 11a, 11n and 11ac Spec.

<b>Worst Modulation Used for Conformance Testing</b>				
<b>IEEE 802.11 Protocol</b>	<b>Number of Transmit Chains (<math>N_{TX}</math>)</b>	<b>Data Rate / MCS</b>	<b>Worst Data Rate / MCS</b>	<b>Worst Modulation Mode</b>
a	1	6-54 Mbps	6Mbps	11A5.2G-20M
n (HT20)	2	MCS 0-15	MCS 8	11N5.2G-20M
n (HT40)	2	MCS 0-15	MCS 8	11N5.2G-40M
ac (VHT20)	2	MCS 0-9	MCS 0-Nss2	11AC5.2G-20M
ac (VHT40)	2	MCS 0-9	MCS 0-Nss2	11AC5.2G-40M
ac (VHT80)	2	MCS 0-9	MCS 0-Nss2	11AC5.2G-80M
Note 1: IEEE 802.11 modulation consists of IEEE 802.11a.				
Note 2: IEEE 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT support HT20 and HT40. Worst modulation mode of Guard Interval (GI) is 400ns.				
Note 3: IEEE 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160. Then EUT support VHT80. (VHT: Very High Throughput).				

### 3.2. Accessories

N/A

### 3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)		
					2.4GHz	5GHz	
1	SERCOMM	AC-950	Printed Antenna	I-PEX	2.31	Band 1	3.84
						Band 4	4.15
2	SERCOMM	AC-950	Printed Antenna	I-PEX	1.72	Band 1	4.29
						Band 4	3.07


Note: The EUT has two antennas

**For IEEE 802.11a mode (1TX/1RX):**

It fixed Ant. 2 as transmitting and receiving antenna.

**For IEEE 802.11n/ac mode (2TX/2RX):**

Ant. 1 and Ant. 2 could transmit / receive simultaneously.

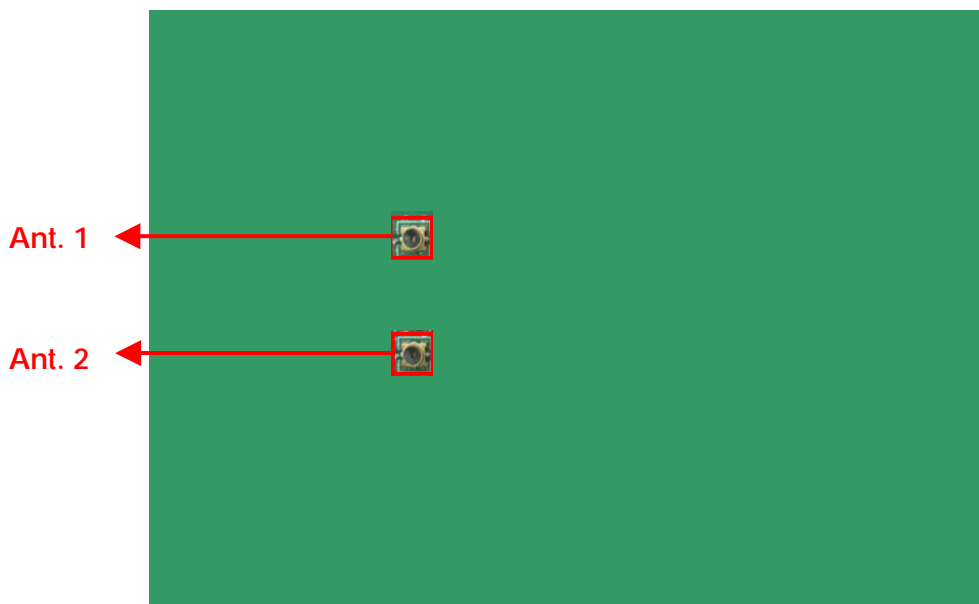

### 3.4. Table for Carrier Frequencies

The EUT has three bandwidth system.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48.

For 40MHz bandwidth systems, use Channel 38, 46.

For 80MHz bandwidth systems, use Channel 42.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item.

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Antenna
AC Power Conducted Emission	CTX		Auto	-	-
Max. Conducted Output Power	11ac 20MHz	Band 1	MCS8	36/40/48	1+2
	11ac 40MHz	Band 1	MCS8	38/46	1+2
	11ac 80MHz	Band 1	MCS8	42	1+2
	11a	Band 1	6Mbps	36/40/48	2
Power Spectral Density	11ac 20MHz	Band 1	MCS8	36/40/48	1+2
	11ac 40MHz	Band 1	MCS8	38/46	1+2
	11ac 80MHz	Band 1	MCS8	42	1+2
	11a	Band 1	6Mbps	36/40/48	2
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement	11ac 20MHz	Band 1	MCS8	36/40/48	1+2
	11ac 40MHz	Band 1	MCS8	38/46	1+2
	11ac 80MHz	Band 1	MCS8	42	1+2
	11a	Band 1	6Mbps	36/40/48	2
Peak Excursion	11ac 20MHz	Band 1	MCS8	36/40/48	1+2
	11ac 40MHz	Band 1	MCS8	38/46	1+2
	11ac 80MHz	Band 1	MCS8	42	1+2
	11a	Band 1	6Mbps	36/40/48	2
Radiated Emission Below 1GHz	CTX		Auto	-	-
Radiated Emission Above 1GHz	11ac 20MHz	Band 1	MCS8	36/40/48	1+2
	11ac 40MHz	Band 1	MCS8	38/46	1+2
	11ac 80MHz	Band 1	MCS8	42	1+2
	11a	Band 1	6Mbps	36/40/48	2
Band Edge Emission	11ac 20MHz	Band 1	MCS8	36/40/48	1+2
	11ac 40MHz	Band 1	MCS8	38/46	1+2
	11ac 80MHz	Band 1	MCS8	42	1+2
	11a	Band 1	6Mbps	36/40/48	2
Frequency Stability	Un-modulation		-	40	N/A

The following test modes were performed for all tests:

**For Radiated Emission test:**

Mode 1: EUT in X-axis

Mode 2: EUT in Y-axis

Mode 3: EUT in Z-axis

Mode 1 generated the worst test result, so it was recorded in this report.

### 3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

Please refer section 6 for Test Site Address.

### 3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	1340	E2K4965AGNM

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters of IEEE 802.11a

Test Software Version	Realtek 11ac 8812A USB WLAN MP Diagnostic Program 0.0027.20121102		
Frequency	5180 MHz	5200 MHz	5240 MHz
11a	35	34	33

#### Power Parameters of IEEE 802.11ac MCS8 VHT 20MHz

Test Software Version	Realtek 11ac 8812A USB WLAN MP Diagnostic Program 0.0027.20121102		
Frequency	5180 MHz	5200 MHz	5240 MHz
MCS8 20MHz	30/34	28/33	27/33

#### Power Parameters of IEEE 802.11ac MCS8 VHT 40MHz

Test Software Version	Realtek 11ac 8812A USB WLAN MP Diagnostic Program 0.0027.20121102	
Frequency	5190 MHz	5230 MHz
MCS8 40MHz	30/36	29/34


#### Power Parameters of IEEE 802.11ac MCS8 VHT 80MHz

Test Software Version	Realtek 11ac 8812A USB WLAN MP Diagnostic Program 0.0027.20121102
Frequency	5210 MHz
MCS8 80MHz	27/33

During the test, "Realtek 11ac 8812A USB WLAN MP Diagnostic Program 0.0027.20121102" under WIN XP was executed the test program to control the EUT continuously transmit RF signal.


### 3.9. Test Configurations

#### 3.9.1. Radiation Emissions Test Configuration

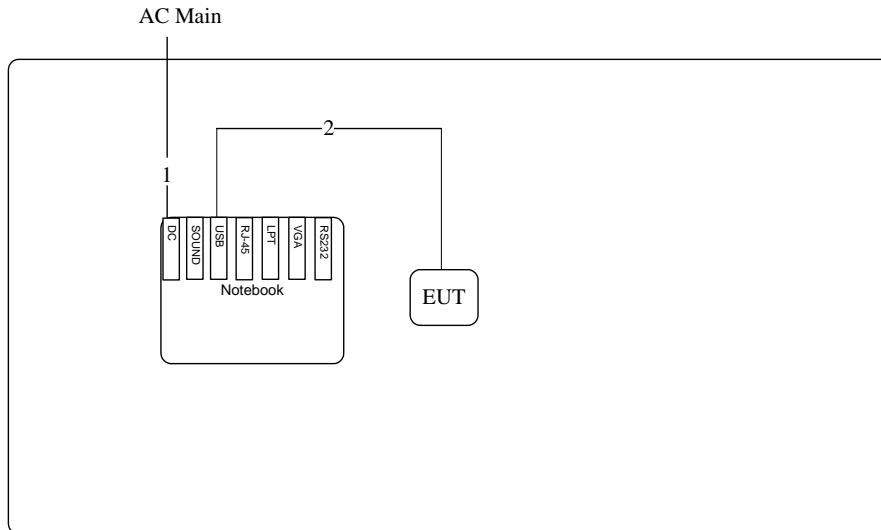

Item	Connection	Shield	Length	Remark
1	Power cable	No	2.6m	-
2	USB cable	No	1.8m	-

### 3.9.2. AC Power Line Conduction Emissions Test Configuration

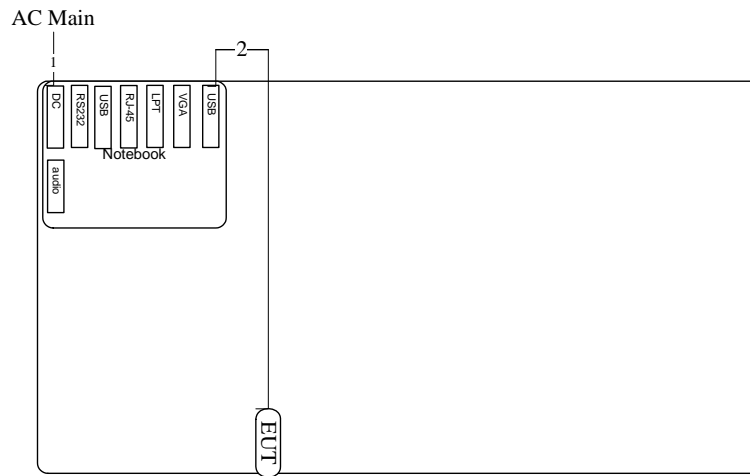

Item	Connection	Shield	Length	Remark
1	Power cable	No	2.6m	-
2	USB cable	No	1.8m	-

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.



#### 4.1.4. Test Setup Layout

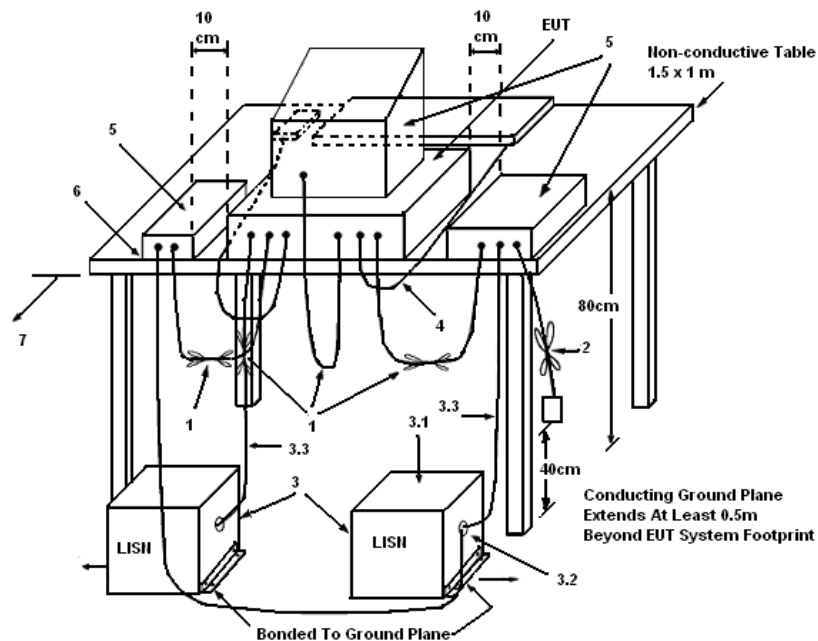

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	58%
Test Engineer	Sollo Luo	Phase	Line
Configuration	CTX		

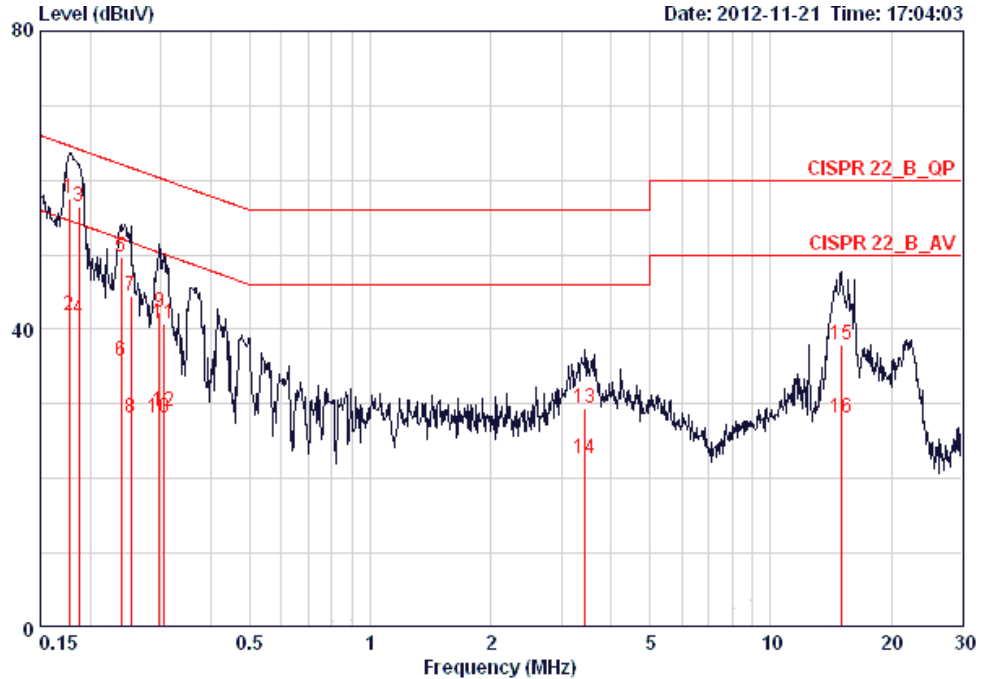

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.17678	57.45	-7.19	64.64	57.10	0.15	0.20	LINE	QP
2	0.17678	41.81	-12.83	54.64	41.46	0.15	0.20	LINE	AVERAGE
3	0.18739	56.49	-7.66	64.15	56.14	0.15	0.20	LINE	QP
4	0.18739	41.48	-12.67	54.15	41.13	0.15	0.20	LINE	AVERAGE
5	0.23910	49.66	-12.47	62.13	49.31	0.15	0.20	LINE	QP
6	0.23910	35.76	-16.37	52.13	35.41	0.15	0.20	LINE	AVERAGE
7	0.25211	44.50	-17.19	61.69	44.15	0.15	0.20	LINE	QP
8	0.25211	28.19	-23.50	51.69	27.84	0.15	0.20	LINE	AVERAGE
9	0.29712	42.23	-18.09	60.32	41.88	0.15	0.20	LINE	QP
10	0.29712	28.20	-22.12	50.32	27.85	0.15	0.20	LINE	AVERAGE
11	0.30509	40.73	-19.37	60.10	40.38	0.15	0.20	LINE	QP
12	0.30509	29.01	-21.09	50.10	28.66	0.15	0.20	LINE	AVERAGE
13	3.436	29.49	-26.51	56.00	28.99	0.21	0.29	LINE	QP
14	3.436	22.78	-23.22	46.00	22.28	0.21	0.29	LINE	AVERAGE
15	14.986	38.03	-21.97	60.00	37.22	0.41	0.40	LINE	QP
16	14.986	28.05	-21.95	50.00	27.24	0.41	0.40	LINE	AVERAGE

Temperature	24°C	Humidity	58%
Test Engineer	Sollo Luo	Phase	Neutral
Configuration	CTX		

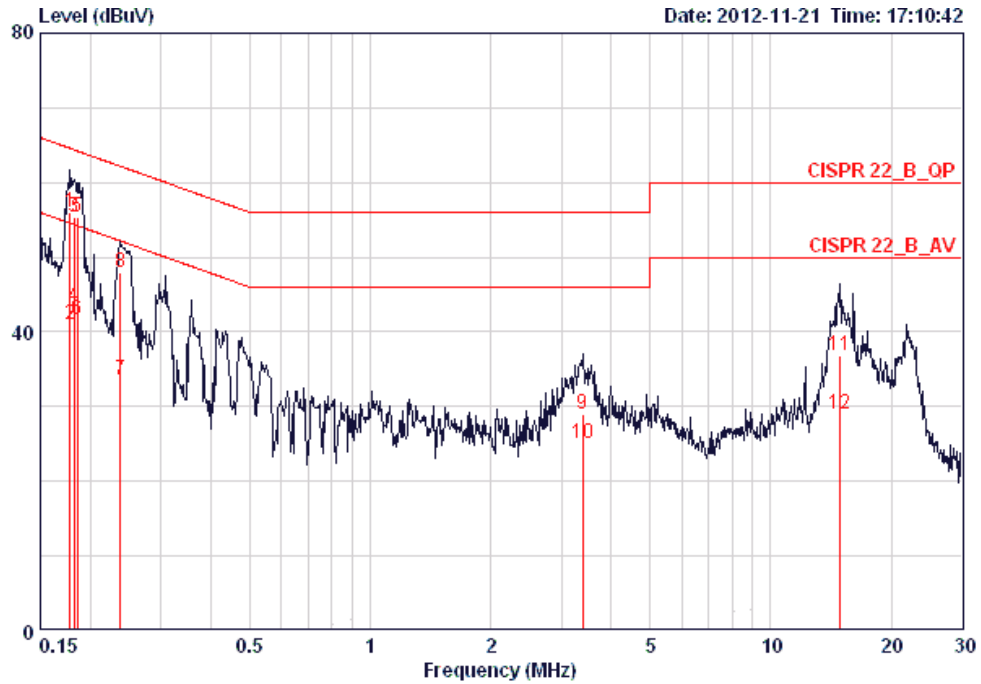

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.17772	56.02	-8.57	64.59	55.74	0.08	0.20	NEUTRAL	QP
2	0.17772	40.99	-13.60	54.59	40.71	0.08	0.20	NEUTRAL	AVERAGE
3	0.18249	55.47	-8.90	64.37	55.19	0.08	0.20	NEUTRAL	QP
4	0.18249	43.29	-11.08	54.37	43.01	0.08	0.20	NEUTRAL	AVERAGE
5	0.18541	55.37	-8.87	64.24	55.09	0.08	0.20	NEUTRAL	QP
6	0.18541	41.63	-12.61	54.24	41.35	0.08	0.20	NEUTRAL	AVERAGE
7	0.23784	33.63	-18.54	52.17	33.35	0.08	0.20	NEUTRAL	AVERAGE
8	0.23784	47.94	-14.23	62.17	47.66	0.08	0.20	NEUTRAL	QP
9	3.399	29.02	-26.98	56.00	28.61	0.12	0.28	NEUTRAL	QP
10	3.399	25.15	-20.85	46.00	24.74	0.12	0.28	NEUTRAL	AVERAGE
11	14.828	36.80	-23.20	60.00	36.09	0.31	0.40	NEUTRAL	QP
12	14.828	28.97	-21.03	50.00	28.26	0.31	0.40	NEUTRAL	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

### 4.2.1. Limit

No restriction limits.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

### 4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

#### 4.2.4. Test Setup Layout

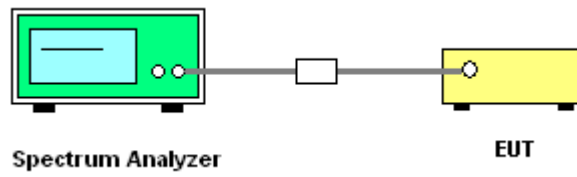

#### 4.2.5. Test Deviation

There is no deviation with the original standard.

#### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	23°C	Humidity	63%
Test Engineer	Robert Chang	Configurations	IEEE 802.11ac

##### Configuration IEEE 802.11n MCS8 VHT 20MHz / Ant. 1 + Ant. 2

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	20.16	17.76
40	5200 MHz	20.48	17.92
48	5240 MHz	20.32	17.76

##### Configuration IEEE 802.11n MCS8 VHT 40MHz / Ant. 1 + Ant. 2

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	40.00	36.48
46	5230 MHz	40.00	36.48

##### Configuration IEEE 802.11ac MCS8 VHT 80MHz / Ant. 1 + Ant. 2

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
42	5210 MHz	81.92	75.52




<b>Temperature</b>	23°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Robert Chang	<b>Configurations</b>	IEEE 802.11a

**Configuration IEEE 802.11a / Ant. 2**


<b>Channel</b>	<b>Frequency</b>	<b>26dB Bandwidth (MHz)</b>	<b>99% Occupied Bandwidth (MHz)</b>
36	5180 MHz	20.16	16.80
40	5200 MHz	20.16	16.80
48	5240 MHz	20.00	16.80

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS8  
VHT20MHz / Ant. 1 + Ant. 2 / 5180 MHz**

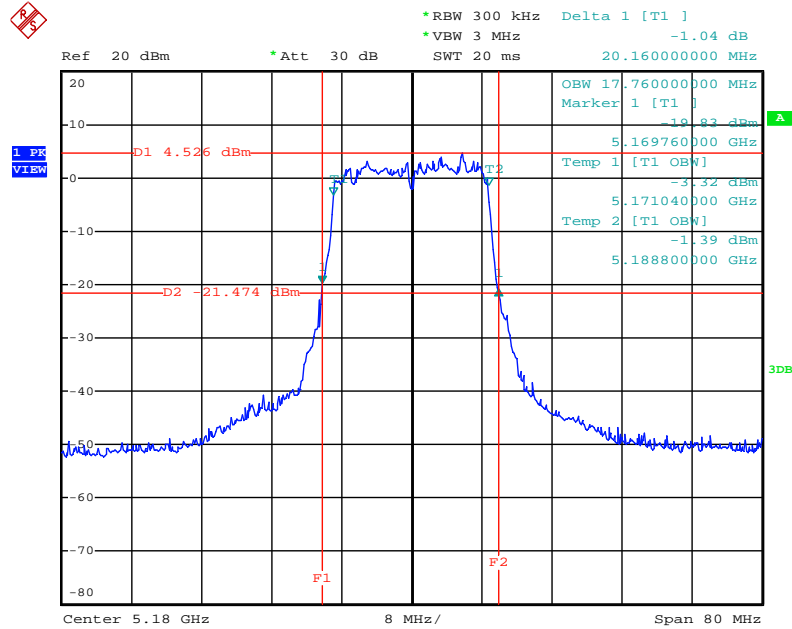

Date: 24.NOV.2012 15:10:33


**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS8  
VHT20MHz / Ant. 1 + Ant. 2 / 5200 MHz**

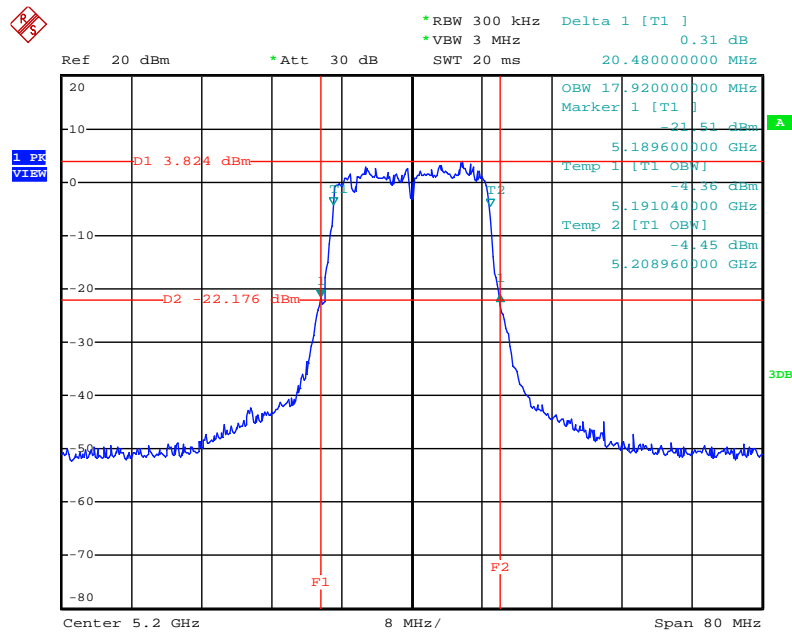

Date: 24.NOV.2012 15:11:37




**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS8  
VHT20MHz / Ant. 1 + Ant. 2 / 5240 MHz**

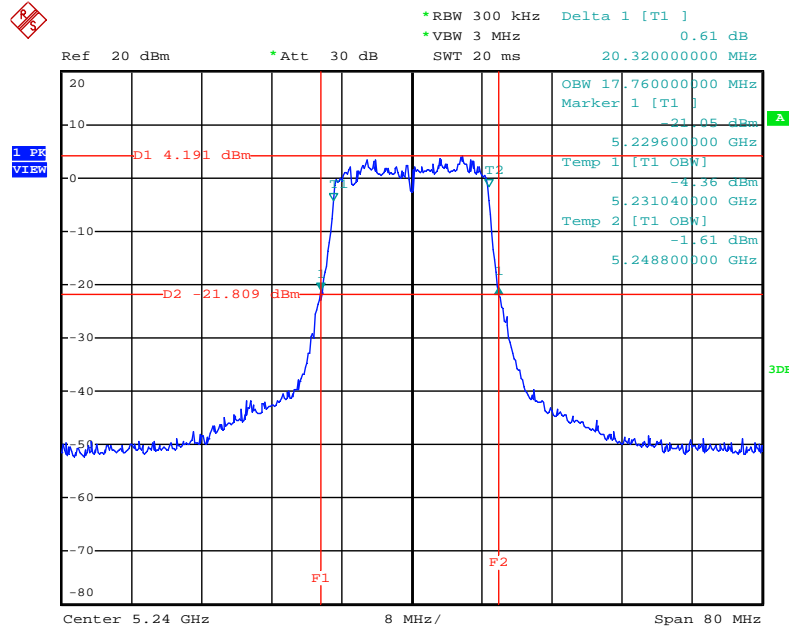


Date: 24.NOV.2012 15:13:21

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS8  
VHT40MHz / Ant. 1 + Ant. 2 / 5190 MHz**

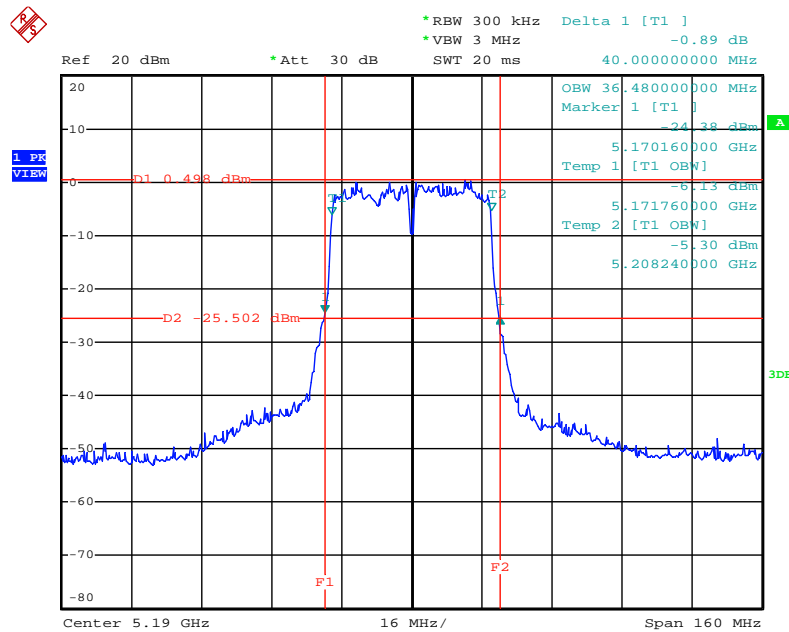


Date: 24.NOV.2012 15:14:52

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS8  
VHT40MHz / Ant. 1 + Ant. 2 / 5230 MHz**

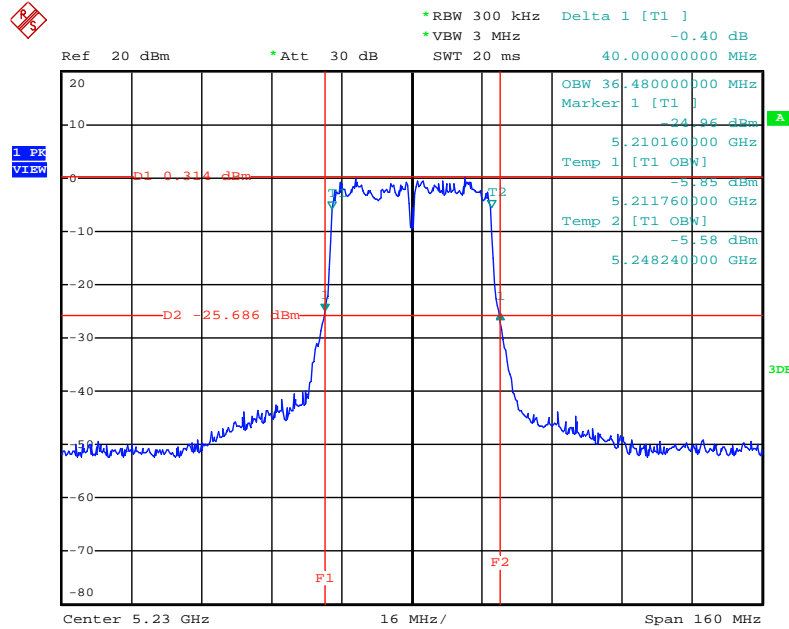


Date: 24.NOV.2012 15:17:05

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS8  
VHT80MHz / Ant. 1 + Ant. 2 / 5210 MHz**

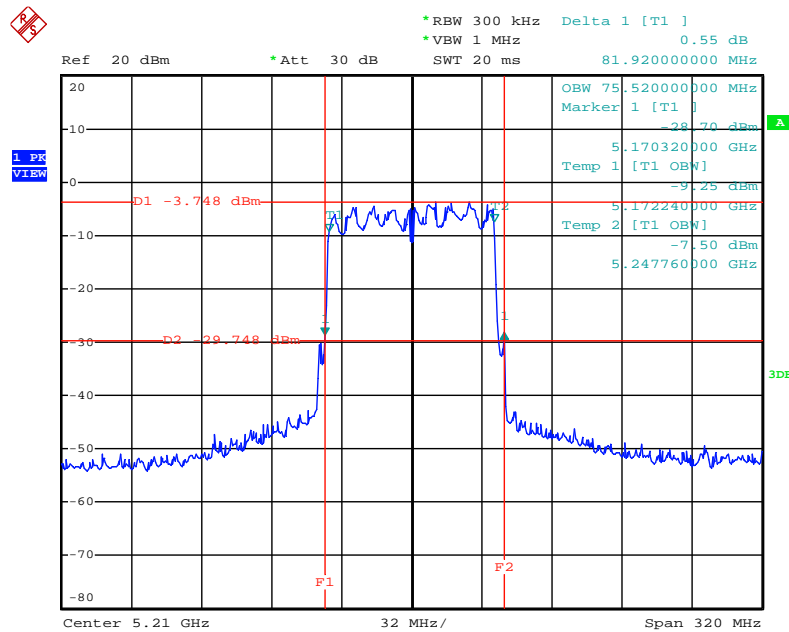


Date: 24.NOV.2012 15:19:06

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 2 / 5180 MHz

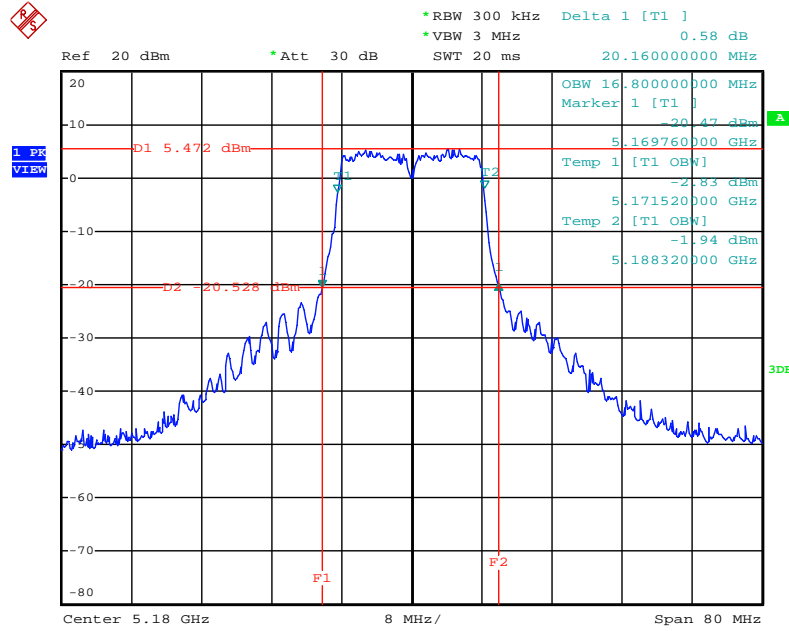


Date: 24.NOV.2012 14:55:01

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 2 / 5200 MHz

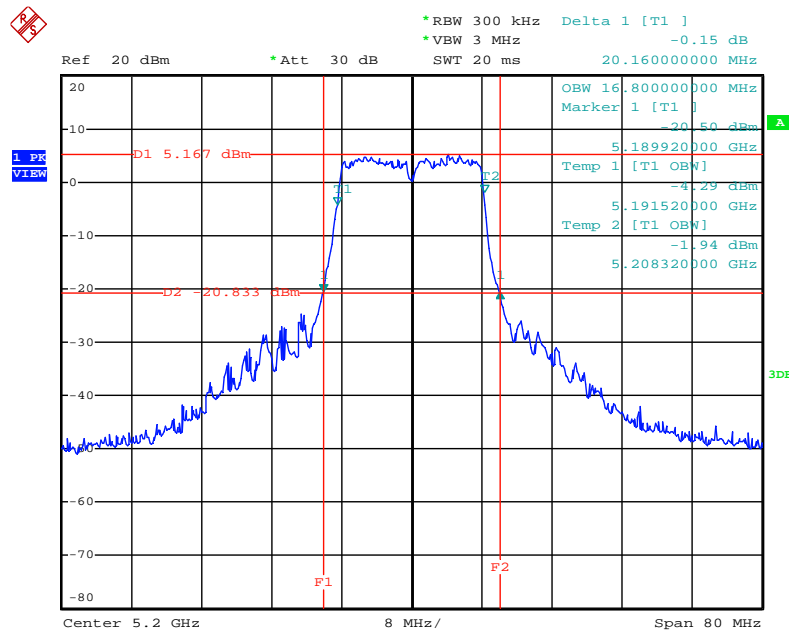

Date: 24.NOV.2012 14:56:54

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 2 / 5240 MHz

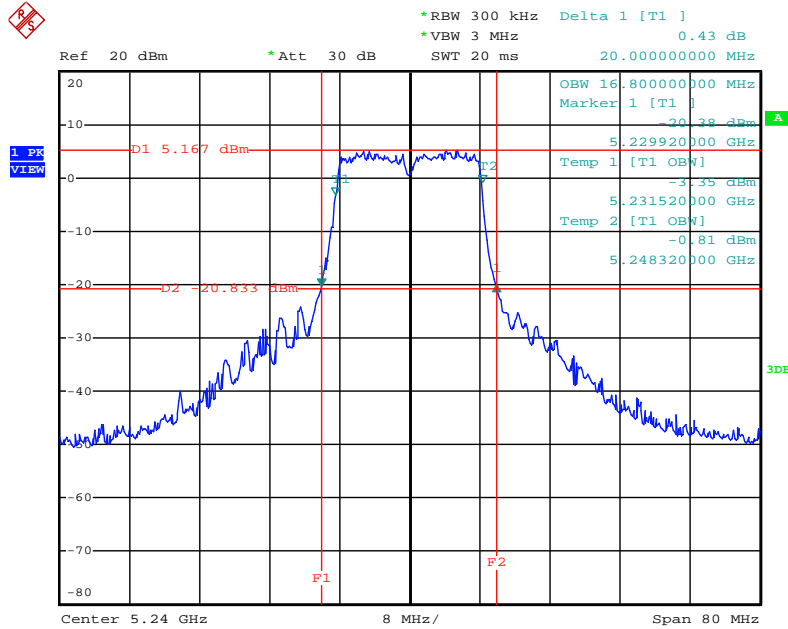

Date: 24.NOV.2012 14:58:09

### 4.3. Maximum Conducted Output Power Measurement

#### 4.3.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or  $4 \text{ dBm} + 10\log B$ , where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	Average

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (E) Maximum conducted output power =>(3) Method PM (Measurement using an RF average power meter) Multiple antenna systems was performed in accordance with KDB 662911 D01 v01r02 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

#### 4.3.4. Test Setup Layout

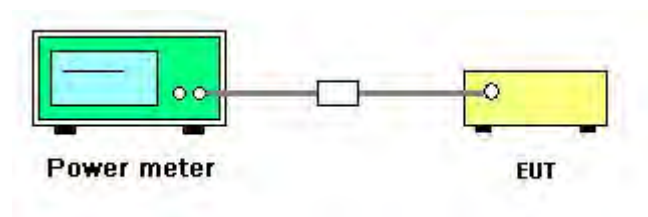

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Maximum Conducted Output Power

Temperature	23°C	Humidity	63%
Test Engineer	Robert Chang	Configurations	IEEE 802.11ac
Test Date	Nov. 24, 2012		

##### Configuration IEEE 802.11ac MCS8 VHT 20MHz / Ant. 1 + Ant. 2

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Total		
36	5180 MHz	12.91	13.00	15.97	17.00	Complies
40	5200 MHz	12.55	12.72	15.65	17.00	Complies
48	5240 MHz	12.58	12.77	15.69	17.00	Complies

##### Configuration IEEE 802.11ac MCS8 VHT 40MHz / Ant. 1 + Ant. 2

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Total		
38	5190 MHz	12.68	12.51	15.61	17.00	Complies
46	5230 MHz	12.88	12.45	15.68	17.00	Complies

##### Configuration IEEE 802.11ac MCS8 VHT 80MHz / Ant. 1 + Ant. 2

Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Total		
42	5210 MHz	11.55	11.42	14.50	17.00	Complies



Temperature	23°C	Humidity	63%
Test Engineer	Robert Chang	Configurations	IEEE 802.11a
Test Date	Nov. 24, 2012		

**Configuration IEEE 802.11a / Ant. 2**

Channel	Frequency	Conducted Output Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	15.92	17.00	Complies
40	5200 MHz	15.85	17.00	Complies
48	5240 MHz	15.97	17.00	Complies

## 4.4. Power Spectral Density Measurement

### 4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15~5.25 GHz	4

### 4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.


Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (C) Maximum conducted output power => (d) Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).
3. Multiple antenna systems was performed in accordance KDB 662911 D01 v01r02 in-Band Power Spectral Density (PSD) Measurements (1) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.



#### 4.4.4. Test Setup Layout

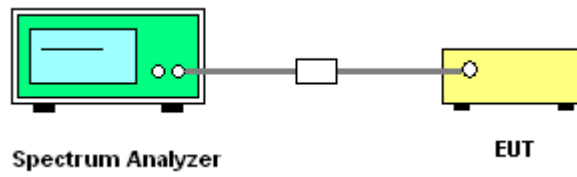

#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of Power Spectral Density

Temperature	23°C	Humidity	63%
Test Engineer	Robert Chang	Configurations	IEEE 802.11n / ac
Test Date	May 29, 2013		

##### Configuration IEEE 802.11ac MCS8 VHT20MHz / Ant. 1 + Ant. 2

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	2.41	2.92	Complies
40	5200 MHz	2.39	2.92	Complies
48	5240 MHz	2.17	2.92	Complies

Note: Directional gain =  $G_{Ant} + 10\log(N_{Ant} / N_{ss}) = 12.77\text{dBi} > 6\text{dBi}$ , So Band1 Limit =  $4 - (7.08 - 6) = 2.92\text{dBm/MHz}$ .

##### Configuration IEEE 802.11ac MCS8 VHT40MHz / Ant. 1 + Ant. 2

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	-1.13	2.92	Complies
46	5230 MHz	-1.10	2.92	Complies

Note: Directional gain =  $G_{Ant} + 10\log(N_{Ant} / N_{ss}) = 12.77\text{dBi} > 6\text{dBi}$ , So Band1 Limit =  $4 - (7.08 - 6) = 2.92\text{dBm/MHz}$ .

##### Configuration IEEE 802.11ac MCS8 VHT 80MHz / Ant. 1 + Ant. 2

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	-3.86	2.92	Complies

Note: Directional gain =  $G_{Ant} + 10\log(N_{Ant} / N_{ss}) = 12.77\text{dBi} > 6\text{dBi}$ , So Band1 Limit =  $4 - (7.08 - 6) = 2.92\text{dBm/MHz}$ .



Temperature	23°C	Humidity	63%
Test Engineer	Robert Chang	Configurations	IEEE 802.11a
Test Date	May 29, 2013		

**Configuration IEEE 802.11a / Ant. 2**


Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	2.65	4.00	Complies
40	5200 MHz	2.33	4.00	Complies
48	5240 MHz	2.70	4.00	Complies

Note: All the test values were listed in the report.


For plots, only the channel with maximum results was shown.



Power Density Plot on Configuration IEEE 802.11ac MCS8 VHT 80MHz / Ant. 1 + Ant. 2 / 5210 MHz

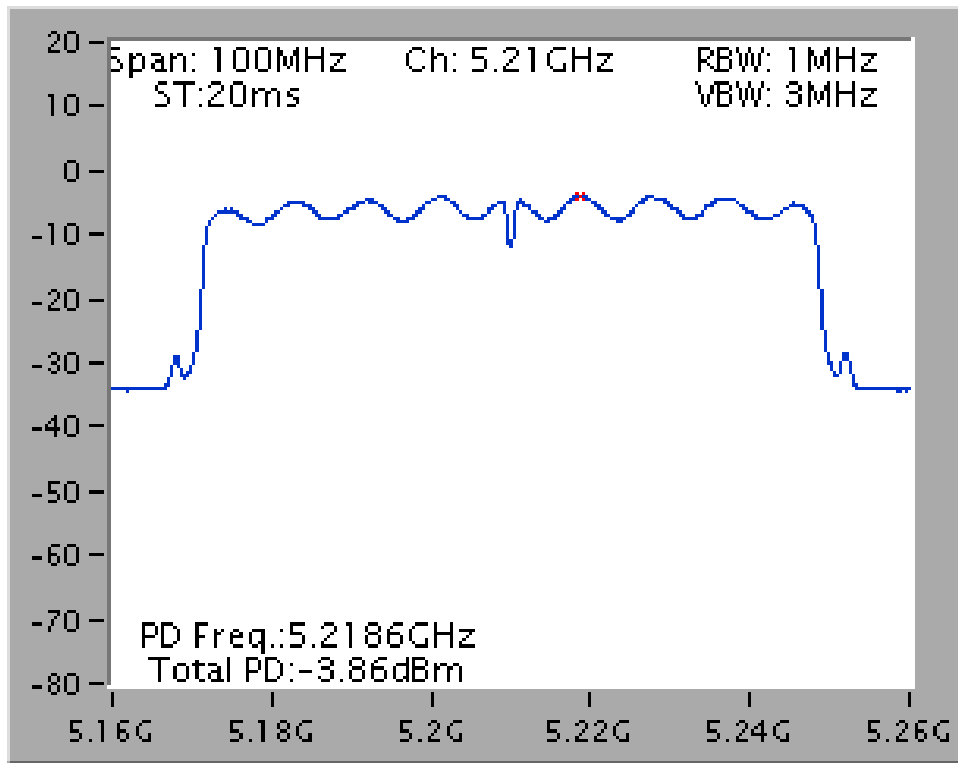

Power Density Plot on Configuration IEEE 802.11a / Ant. 2 / 5240 MHz

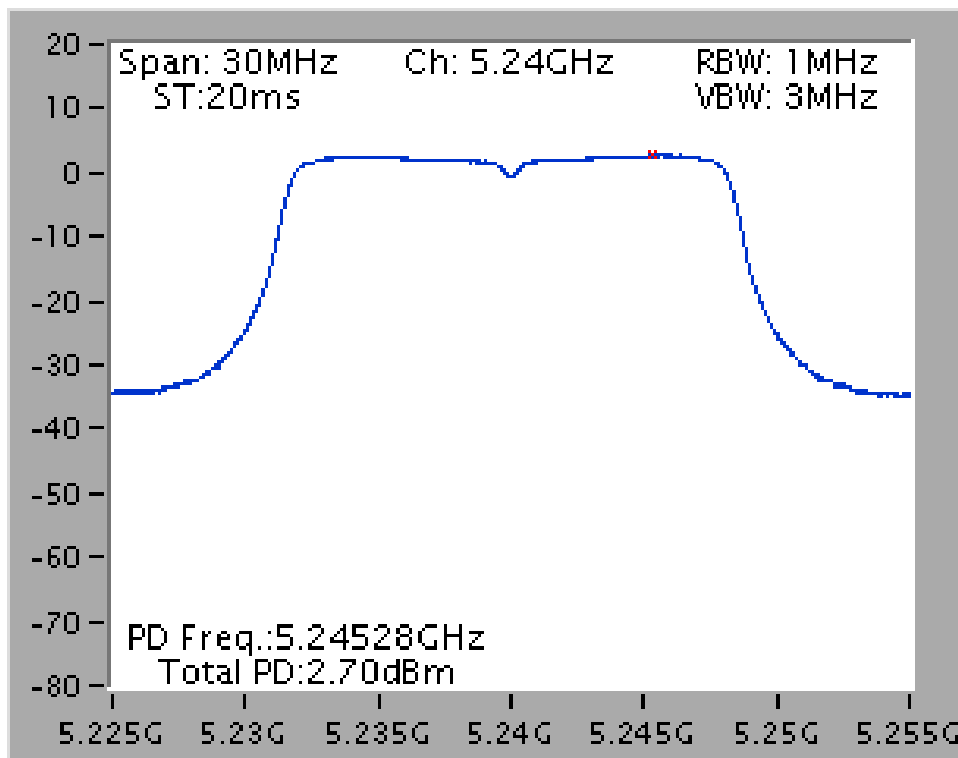

## 4.5. Peak Excursion Measurement

### 4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1MHz (Peak Trace) / 1MHz (Average Trace)
VBW	$\geq 3$ MHz (Peak Trace) / $\geq 3$ MHz (Average Trace)
Detector	Peak (Peak Trace) / RMS (Average Trace)
Trace	Trace: Max hold (Peak Trace) / Trace Average Sweep Count 100 (Average Trace)
Sweep Time	AUTO

### 4.5.3. Test Procedures

- Trace A, Set RBW =1MHz, VBW = 3MHz, Span >26dB bandwidth, Max. hold.
- Delta Mark trace A Maximum frequency and trace B same frequency.
- Repeat the above procedure until measurements for all frequencies were complete.
- Testing each modulation mode on a single channel in single operating band at single output port. All signal types need test (DSSS, OFDM). All modulation types need test (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM). All bandwidth modes need test.

### 4.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.4.4.

### 4.5.5. Test Deviation

There is no deviation with the original standard.

### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Test Result of Peak Excursion

Temperature	23°C	Humidity	63%
Test Engineer	Robert Chang	Configurations	IEEE 802.11n / ac

##### Configuration IEEE 802.11ac MCS8 VHT20MHz / Ant. 1 + Ant. 2

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BSPK (MCS0)	5180 MHz	8.94	13	Complies
QPSK (MCS1)	5180 MHz	9.48	13	Complies
16QAM (MCS3)	5180 MHz	9.05	13	Complies
64QAM (MCS5)	5180 MHz	8.97	13	Complies
256QAM (MCS8)	5180 MHz	8.60	13	Complies

##### Configuration IEEE 802.11ac MCS8 VHT40MHz / Ant. 1 + Ant. 2

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BSPK (MCS0)	5230 MHz	9.20	13	Complies
QPSK (MCS1)	5230 MHz	9.22	13	Complies
16QAM (MCS3)	5230 MHz	9.03	13	Complies
64QAM (MCS5)	5230 MHz	9.07	13	Complies
256QAM (MCS8)	5230 MHz	9.22	13	Complies

##### Configuration IEEE 802.11ac MCS8 VHT80MHz / Ant. 1 + Ant. 2

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BSPK (MCS0)	5210 MHz	8.74	13	Complies
QPSK (MCS1)	5210 MHz	8.40	13	Complies
16QAM (MCS3)	5210 MHz	9.62	13	Complies
64QAM (MCS5)	5210 MHz	9.36	13	Complies
256QAM (MCS8)	5210 MHz	8.61	13	Complies



<b>Temperature</b>	23°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Robert Chang	<b>Configurations</b>	IEEE 802.11a


**Configuration IEEE 802.11a / Ant. 2**

<b>Modulation</b>	<b>Frequency</b>	<b>Peak Excursion (dB)</b>	<b>Max. Limit (dB)</b>	<b>Result</b>
BSPK (6Mbps)	5240 MHz	8.15	13	<b>Complies</b>
QPSK (12Mbps)	5240 MHz	9.26	13	<b>Complies</b>
16QAM (24Mbps)	5240 MHz	8.95	13	<b>Complies</b>
64QAM (48Mbps)	5240 MHz	8.60	13	<b>Complies</b>

Note: Only the channel with maximum results was recorded in the report.




Peak Excursion Plot on Configuration IEEE 802.11ac MCS8 20MHz / Ant. 1 + Ant. 2 / QPSK (MCS1) / 5180 MHz

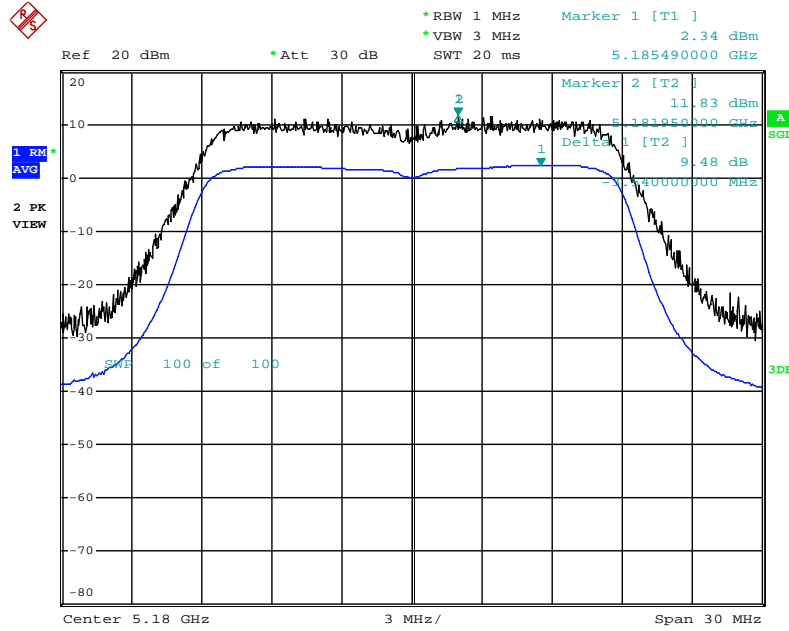


Date: 29.MAY.2013 04:57:15

Peak Excursion Plot on Configuration IEEE 802.11ac MCS8 40MHz / Ant. 1 + Ant. 2 / QPSK (MCS1) / 5230 MHz

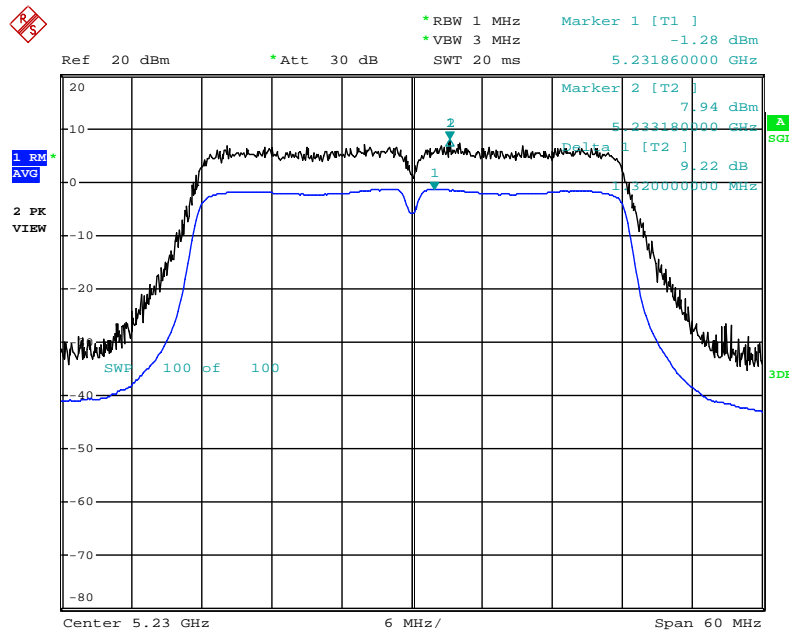


Date: 29.MAY.2013 05:07:52

Peak Excursion Plot on Configuration IEEE 802.11ac MCS8 80MHz / Ant. 1 + Ant. 2 / 16QAM (MCS3) / 5210 MHz

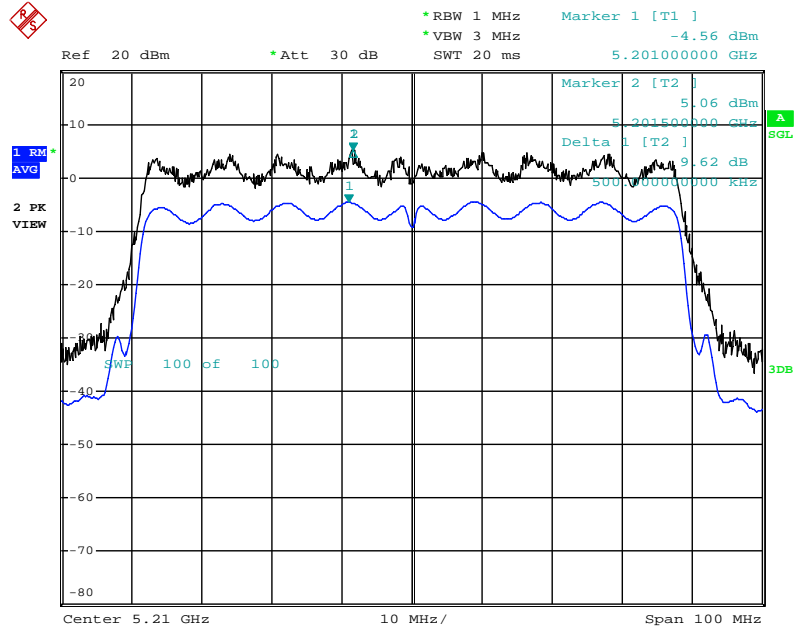

Date: 29.MAY.2013 05:12:49

Peak Excursion Plot on Configuration IEEE 802.11a / Ant. 2 / QPSK (12Mbps) / 5240 MHz

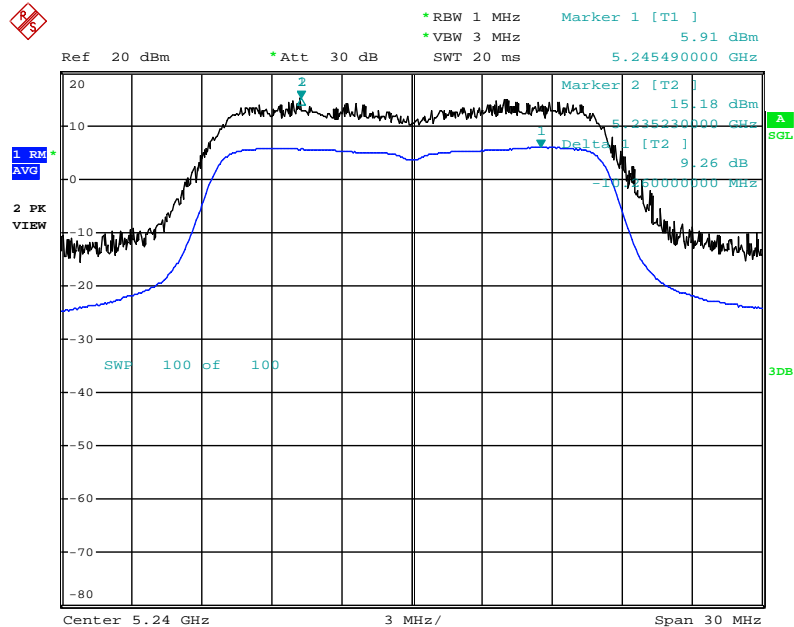

Date: 29.MAY.2013 04:53:07

## 4.6. Radiated Emissions Measurement

### 4.6.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	1MHz / 3MHz for peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

#### 4.6.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.6.4. Test Setup Layout

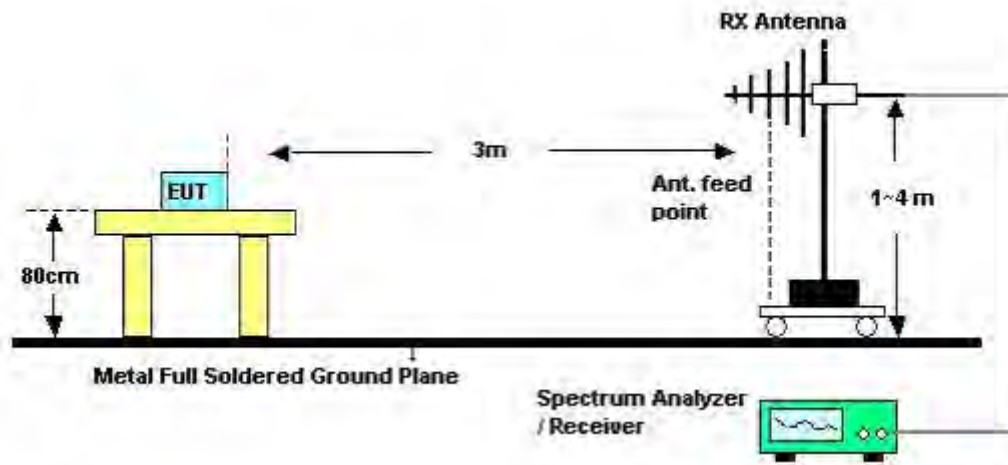

#### 4.6.5. Test Deviation

There is no deviation with the original standard.

#### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	CTX / Mode 1
Test Date	Nov. 23, 2012		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

## 4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	CTX / Mode 1

Horizontal

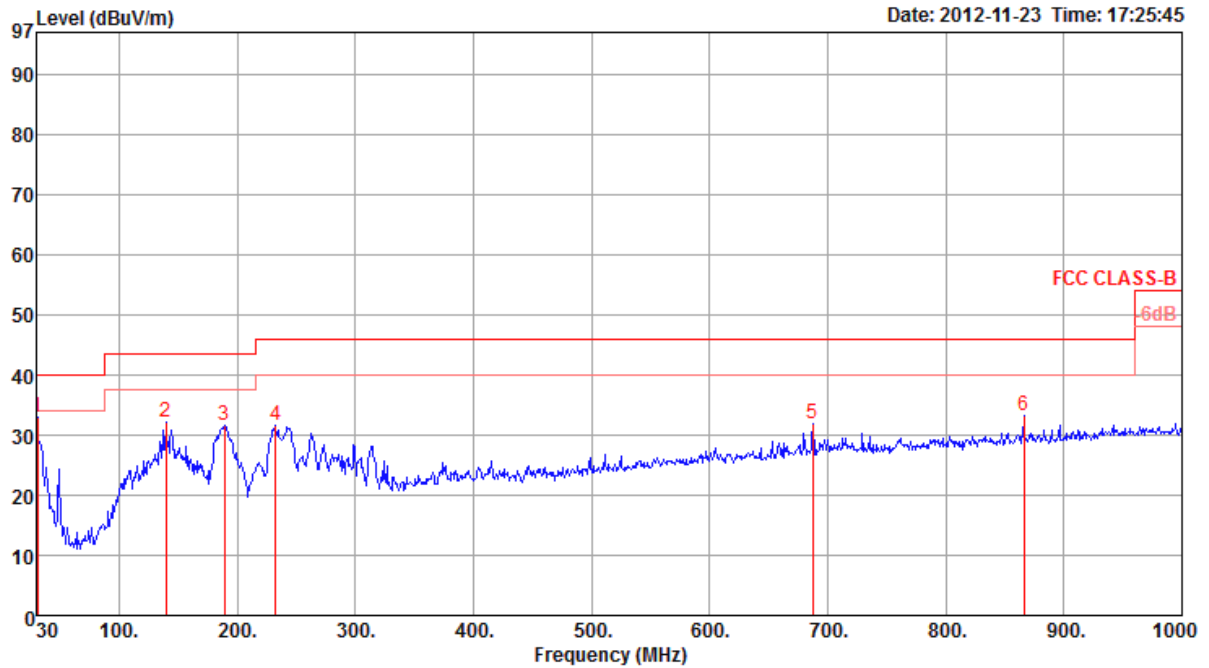

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	30.97	32.83	40.00	-7.17	40.66	0.85	27.98	19.30	Peak	0	400	HORIZONTAL
2	139.61	32.14	43.50	-11.36	45.89	1.71	27.56	12.10	Peak	0	400	HORIZONTAL
3	189.08	31.61	43.50	-11.89	47.07	2.05	27.32	9.81	Peak	0	400	HORIZONTAL
4	232.73	31.68	46.00	-14.32	44.86	2.29	27.01	11.54	Peak	0	400	HORIZONTAL
5	687.66	31.88	46.00	-14.12	35.08	4.10	27.20	19.90	Peak	0	400	HORIZONTAL
6	866.14	33.28	46.00	-12.72	34.38	4.48	26.88	21.30	Peak	0	400	HORIZONTAL

*Vertical*

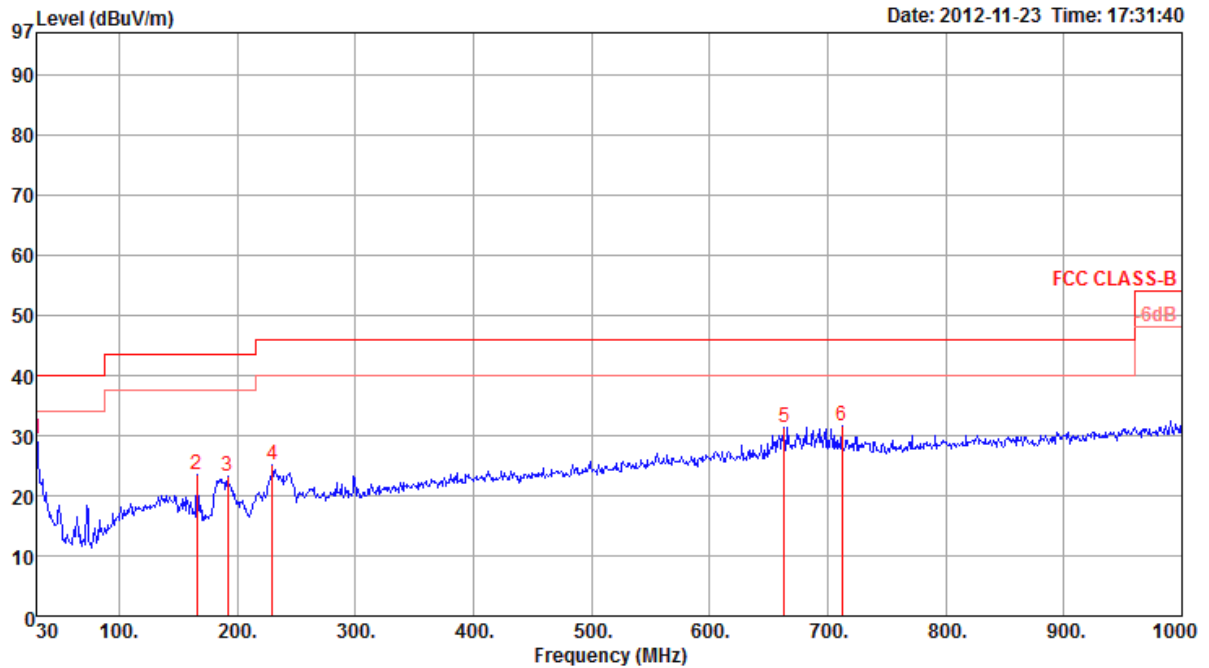

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	30.00	29.47	40.00	-10.53	36.71	0.83	27.97	19.90	Peak	0	100	VERTICAL
2	165.80	23.56	43.50	-19.94	38.63	1.92	27.41	10.42	Peak	0	100	VERTICAL
3	191.99	23.17	43.50	-20.33	38.49	2.06	27.30	9.92	Peak	0	100	VERTICAL
4	229.82	25.12	46.00	-20.88	38.57	2.28	27.03	11.30	Peak	0	100	VERTICAL
5	663.41	31.42	46.00	-14.58	35.17	3.97	27.43	19.71	Peak	0	100	VERTICAL
6	711.91	31.50	46.00	-14.50	34.37	4.17	27.09	20.05	Peak	0	100	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.





4.6.9. Results for Radiated Emissions (1GHz~40GHz)

Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n MCS8 HT20MHz Ch 36 / Ant. 1 + Ant. 2 / Mode 1
Test Date	Nov. 23, 2012		

*Horizontal*

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15532.15	41.60	54.00	-12.40	28.46	10.58	38.15	35.59	Average	100	110	HORIZONTAL
2	15532.50	53.96	74.00	-20.04	40.82	10.58	38.15	35.59	Peak	100	110	HORIZONTAL

*Vertical*

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15534.52	53.83	74.00	-20.17	40.69	10.58	38.15	35.59	Peak	100	230	VERTICAL
2	15534.90	41.81	54.00	-12.19	28.67	10.58	38.15	35.59	Average	100	230	VERTICAL



Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n MCS8 HT20MHz Ch 40 / Ant. 1 + Ant. 2 / Mode 1
Test Date	Nov. 23, 2012		

*Horizontal*

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15597.47	54.72	74.00	-19.28	41.66	10.60	38.04	35.58	Peak	100	297 HORIZONTAL
2	15598.21	41.43	54.00	-12.57	28.37	10.60	38.04	35.58	Average	100	297 HORIZONTAL

*Vertical*

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15599.52	52.95	74.00	-21.05	39.89	10.60	38.04	35.58	Peak	100	118 VERTICAL
2	15600.16	41.41	54.00	-12.59	28.35	10.60	38.04	35.58	Average	100	118 VERTICAL



Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n MCS8 HT20MHz Ch 48 / Ant. 1 + Ant. 2 / Mode 1
Test Date	Nov. 23, 2012		

*Horizontal*

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15718.11	55.19	74.00	-18.81	42.26	10.64	37.85	35.56	Peak	100	50 HORIZONTAL
2	15720.13	42.23	54.00	-11.77	29.30	10.64	37.85	35.56	Average	100	50 HORIZONTAL

*Vertical*

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15719.26	54.84	74.00	-19.16	41.91	10.64	37.85	35.56	Peak	100	177 VERTICAL
2	15719.42	41.81	54.00	-12.19	28.88	10.64	37.85	35.56	Average	100	177 VERTICAL



Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n MCS8 HT40MHz Ch 38 / Ant. 1 + Ant. 2 / Mode 1
Test Date	Nov. 23, 2012		

*Horizontal*

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15558.62	53.18	74.00	-20.82	40.08	10.59	38.09	35.58	Peak	100	318 HORIZONTAL
2	15558.94	41.80	54.00	-12.20	28.70	10.59	38.09	35.58	Average	100	318 HORIZONTAL

*Vertical*

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15575.13	52.91	74.00	-21.09	39.82	10.60	38.07	35.58	Peak	100	243 VERTICAL
2	15575.85	41.90	54.00	-12.10	28.81	10.60	38.07	35.58	Average	360	243 VERTICAL



Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n MCS8 HT40MHz Ch 46 / Ant. 1 + Ant. 2 / Mode 1
Test Date	Nov. 23, 2012		

*Horizontal*

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15658.96	52.49	74.00	-21.51	39.50	10.62	37.93	35.56	Peak	100	260	HORIZONTAL
2	15689.84	42.04	54.00	-11.96	29.06	10.63	37.91	35.56	Average	100	260	HORIZONTAL

*Vertical*

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15682.95	42.49	54.00	-11.51	29.52	10.62	37.91	35.56	Average	100	155	VERTICAL
2	15683.91	54.10	74.00	-19.90	41.13	10.62	37.91	35.56	Peak	100	155	VERTICAL



<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11ac MCS8 VHT80MHz Ch 42 / Ant. 1 + Ant. 2 / Mode 1
<b>Test Date</b>	Nov. 23, 2012		

*Horizontal*

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15632.08	41.48	54.00	-12.52	28.45	10.61	37.99	35.57	Average	100	63	HORIZONTAL
2	15632.88	52.83	74.00	-21.17	39.80	10.61	37.99	35.57	Peak	100	63	HORIZONTAL

*Vertical*

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15667.02	53.96	74.00	-20.04	40.97	10.62	37.93	35.56	Peak	100	208	VERTICAL
2	15668.30	42.28	54.00	-11.72	29.29	10.62	37.93	35.56	Average	100	208	VERTICAL



Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11a Ch 36 / Ant. 2 / Mode 1
Test Date	Nov. 23, 2012		

*Horizontal*

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15537.82	53.12	74.00	-20.88	40.00	10.59	38.12	35.59	Peak	100	269 HORIZONTAL
2	15538.49	41.61	54.00	-12.39	28.49	10.59	38.12	35.59	Average	100	269 HORIZONTAL

*Vertical*

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15539.01	53.45	74.00	-20.55	40.33	10.59	38.12	35.59	Peak	100	144 VERTICAL
2	15539.39	41.65	54.00	-12.35	28.53	10.59	38.12	35.59	Average	100	144 VERTICAL



Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11a Ch 40 / Ant. 2 / Mode 1
Test Date	Nov. 23, 2012		

*Horizontal*

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15590.61	41.46	54.00	-12.54	28.40	10.60	38.04	35.58	Average	100	69	HORIZONTAL
2	15591.38	54.42	74.00	-19.58	41.36	10.60	38.04	35.58	Peak	100	69	HORIZONTAL

*Vertical*

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15599.46	52.79	74.00	-21.21	39.73	10.60	38.04	35.58	Peak	100	122	VERTICAL
2	15600.03	41.52	54.00	-12.48	28.46	10.60	38.04	35.58	Average	100	122	VERTICAL





Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11a Ch 48 / Ant. 2 / Mode 1
Test Date	Nov. 23, 2012		

*Horizontal*

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15728.59	54.94	74.00	-19.06	42.03	10.64	37.83	35.56	Peak	100	311	HORIZONTAL
2	15729.01	42.06	54.00	-11.94	29.15	10.64	37.83	35.56	Average	100	311	HORIZONTAL

*Vertical*

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15728.85	54.06	74.00	-19.94	41.15	10.64	37.83	35.56	Peak	100	190	VERTICAL
2	15729.62	42.03	54.00	-11.97	29.12	10.64	37.83	35.56	Average	100	190	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.7. Band Edge Emissions Measurement

### 4.7.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

### 4.7.3. Test Procedures

1. The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

### 4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

### 4.7.5. Test Deviation

There is no deviation with the original standard.

### 4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11n MCS8 20MHz Ch 36, 40, 48 / Ant. 1 + Ant. 2 / Mode 1
Test Date	Nov. 22, 2012 ~ Nov. 23, 2012		

##### Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5149.68	65.74	74.00	-8.26	25.24	6.49	34.01	0.00	Peak	115	186	VERTICAL
2	5150.00	52.56	54.00	-1.44	12.06	6.49	34.01	0.00	Average	115	186	VERTICAL
3	5174.23	114.67			74.12	6.51	34.04	0.00	Peak	115	186	VERTICAL
4	5184.65	104.44			63.85	6.51	34.08	0.00	Average	115	186	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

##### Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5148.72	66.64	74.00	-7.36	26.14	6.49	34.01	0.00	Peak	124	17	VERTICAL
2	5150.00	52.39	54.00	-1.61	11.89	6.49	34.01	0.00	Average	124	17	VERTICAL
3	5205.13	120.45			79.82	6.52	34.11	0.00	Peak	124	17	VERTICAL
4	5206.09	109.46			68.83	6.52	34.11	0.00	Average	124	17	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

##### Channel 48

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5243.85	121.37			80.63	6.56	34.18	0.00	Peak	111	22	VERTICAL
2	5244.81	109.21			68.47	6.56	34.18	0.00	Average	111	22	VERTICAL
3	5350.00	44.62	54.00	-9.38	3.58	6.62	34.42	0.00	Average	111	22	VERTICAL
4	5352.89	55.56	74.00	-18.44	14.52	6.62	34.42	0.00	Peak	111	22	VERTICAL

Item 1, 2 are the fundamental frequency at 5240 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level



<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11n MCS8 40MHz Ch 38, 46 / Ant. 1 + Ant. 2 / Mode 1
<b>Test Date</b>	Nov. 23, 2012		

**Channel 38**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5150.00	52.80	54.00	-1.20	12.30	6.49	34.01	0.00 Average	113	340	VERTICAL
2	5150.00	66.40	74.00	-7.60	25.90	6.49	34.01	0.00 Peak	113	340	VERTICAL
3	5188.40	98.42			57.82	6.52	34.08	0.00 Average	113	340	VERTICAL
4	5191.28	110.56			69.96	6.52	34.08	0.00 Peak	113	340	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

**Channel 46**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5150.00	52.43	54.00	-1.57	11.93	6.49	34.01	0.00 Average	100	29	VERTICAL
2	5150.00	65.71	74.00	-8.29	25.21	6.49	34.01	0.00 Peak	100	29	VERTICAL
3	5226.47	115.88			75.19	6.54	34.15	0.00 Peak	100	29	VERTICAL
4	5231.60	104.39			63.67	6.54	34.18	0.00 Average	100	29	VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level



Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11ac MCS8 VHT20MHz Ch 36, 40, 48 / Ant. 1 + Ant. 2 / Mode 1
Test Date	Nov. 23, 2012		

**Channel 36**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5149.36	67.19	74.00	-6.81	26.69	6.49	34.01	0.00	113	333	VERTICAL
2	5150.00	52.57	54.00	-1.43	12.07	6.49	34.01	0.00	113	333	VERTICAL
3	5183.85	116.47			75.88	6.51	34.08	0.00	113	333	VERTICAL
4	5186.57	105.84			65.25	6.51	34.08	0.00	113	333	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

**Channel 40**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5146.80	67.04	74.00	-6.96	26.54	6.49	34.01	0.00	100	29	VERTICAL
2	5150.00	52.74	54.00	-1.26	12.24	6.49	34.01	0.00	100	29	VERTICAL
3	5193.91	108.93			68.33	6.52	34.08	0.00	100	29	VERTICAL
4	5202.56	120.06			79.43	6.52	34.11	0.00	100	29	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

**Channel 48**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5233.27	109.39			68.67	6.54	34.18	0.00	102	10	VERTICAL
2	5233.27	119.68			78.96	6.54	34.18	0.00	102	10	VERTICAL
3	5350.00	44.57	54.00	-9.43	3.53	6.62	34.42	0.00	102	10	VERTICAL
4	5352.40	55.85	74.00	-18.15	14.81	6.62	34.42	0.00	102	10	VERTICAL

Item 1, 2 are the fundamental frequency at 5240 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level



<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11ac MCS8 VHT40MHz Ch 38, 46 / Ant. 1 + Ant. 2 / Mode 1
<b>Test Date</b>	Nov. 23, 2012		

**Channel 38**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5119.87	52.76	54.00	-1.24	12.34	6.48	33.94	0.00	Average	110	274	VERTICAL
2	5150.00	65.07	74.00	-8.93	24.57	6.49	34.01	0.00	Peak	110	274	VERTICAL
3	5191.28	109.36			68.76	6.52	34.08	0.00	Peak	110	274	VERTICAL
4	5191.92	98.67			58.07	6.52	34.08	0.00	Average	110	274	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

**Channel 46**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5150.00	52.99	54.00	-1.01	12.49	6.49	34.01	0.00	Average	109	274	VERTICAL
2	5150.00	67.58	74.00	-6.42	27.08	6.49	34.01	0.00	Peak	109	274	VERTICAL
3	5225.51	116.97			76.28	6.54	34.15	0.00	Peak	109	274	VERTICAL
4	5231.92	105.82			65.10	6.54	34.18	0.00	Average	109	274	VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level



<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	IEEE 802.11ac MCS8 VHT80MHz Ch 42 / Ant. 1 + Ant. 2 / Mode 1
<b>Test Date</b>	Nov. 23, 2012		

**Channel 42**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5119.55	52.69	54.00	-1.31	12.27	6.48	33.94	0.00	Average	111	275	VERTICAL
2	5146.80	64.06	74.00	-9.94	23.56	6.49	34.01	0.00	Peak	111	275	VERTICAL
3	5182.76	94.51			53.92	6.51	34.08	0.00	Average	111	275	VERTICAL
4	5193.17	104.67			64.07	6.52	34.08	0.00	Peak	111	275	VERTICAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level



Temperature	26°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	IEEE 802.11a Ch 36, 40, 48 / Ant. 2 / Mode 1
Test Date	Nov. 22, 2012		

**Channel 36**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5146.47	68.65	74.00	-5.35	28.15	6.49	34.01	0.00	Peak	116	192	VERTICAL
2	5150.00	52.85	54.00	-1.15	12.35	6.49	34.01	0.00	Average	116	192	VERTICAL
3	5173.59	114.77			74.22	6.51	34.04	0.00	Peak	116	192	VERTICAL
4	5186.25	105.17			64.58	6.51	34.08	0.00	Average	116	192	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

**Channel 40**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5119.87	52.98	54.00	-1.02	12.56	6.48	33.94	0.00	Average	117	192	VERTICAL
2	5119.87	60.28	74.00	-13.72	19.86	6.48	33.94	0.00	Peak	117	192	VERTICAL
3	5193.59	115.58			74.98	6.52	34.08	0.00	Peak	117	192	VERTICAL
4	5206.09	105.67			65.04	6.52	34.11	0.00	Average	117	192	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

**Channel 48**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5232.79	120.22			79.50	6.54	34.18	0.00	Peak	116	196	VERTICAL
2	5233.75	109.70			68.98	6.54	34.18	0.00	Average	116	196	VERTICAL
3	5350.00	45.43	54.00	-8.57	4.39	6.62	34.42	0.00	Average	116	196	VERTICAL
4	5352.89	57.91	74.00	-16.09	16.87	6.62	34.42	0.00	Peak	116	196	VERTICAL

Item 1, 2 are the fundamental frequency at 5240 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level



## 4.8. Frequency Stability Measurement

### 4.8.1. Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emissions is maintained within the band of operation under all conditions of normal operation as specified in the user’s manual or  $\pm 20\text{ppm}$  (IEEE 802.11nspecification).

### 4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

### 4.8.3. Test Procedures

3. The transmitter output (antenna port) was connected to the spectrum analyzer.
4. EUT have transmitted absence of modulation signal and fixed channelize.
5. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
6. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
7.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f)/f_c \times 10^6$  ppm and the limit is less than  $\pm 20\text{ppm}$  (IEEE 802.11nspecification).
8. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
9. Extreme temperature rule is  $-30^\circ\text{C} \sim 50^\circ\text{C}$ .

### 4.8.4. Test Setup Layout

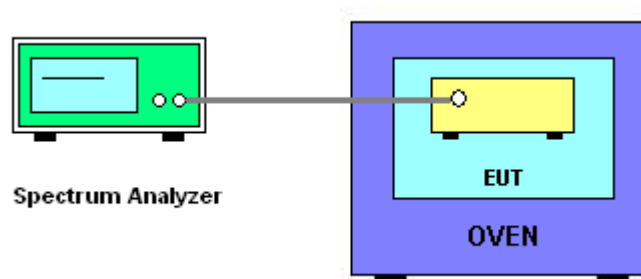

#### 4.8.5. Test Deviation

There is no deviation with the original standard.

#### 4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

#### 4.8.7. Test Result of Frequency Stability

##### Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5200
126.50	5200.0288
110.00	5200.0282
93.50	5200.0278
Max. Deviation (MHz)	0.028800
Max. Deviation (ppm)	5.54

##### Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5200
-30	5200.0258
-20	5200.0242
-10	5200.0272
0	5200.0282
10	5200.0292
20	5200.0294
30	5200.0276
40	5200.0270
55	5200.0254
Max. Deviation (MHz)	0.029400
Max. Deviation (ppm)	5.65

## 4.9. Antenna Requirements

### 4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Oct. 23, 2012	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 26, 2012	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9kHz ~ 30MHz	Jun. 22, 2012	Conduction (CO01-CB)
Impulsbegrenzer Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz~30MHz	Feb. 03, 2012	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 04, 2012	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Jan. 11, 2012	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 27, 2011	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 22, 2011	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 17, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2011	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Jul. 31, 2012	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9KHz~40GHz	Nov. 03, 2012	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Mar. 20, 2012	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N/A	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N/A	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 17, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 17, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2012	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9KHz~40GHz	Oct. 08, 2012	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 05, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Nov. 28, 2012	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Nov. 27, 2012	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“\*” Calibration Interval of instruments listed above is two years.

NCR means Non-Calibration required.

## 6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085