

# **FCC Test Report**

Report No.: AGC02169180402FE03

**FCC ID** : Q8W-BT121

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION**: Bluetooth Speaker

**BRAND NAME**: W-king

MODEL NAME : BT121

CLIENT: SHENZHEN WEIKING TECHNOLOGY CO.,LTD

**DATE OF ISSUE** : Apr. 19, 2018

STANDARD(S)

TEST PROCEDURE(S) : FCC Part 15 Subpart C Section 15.249

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

#### **CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



The results spowed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document teannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a training and the sample (s) are retained for 30 days only. The document is issued by AGC, this document teannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a training and the sample (s) are retained for 30 days only. The document is issued by AGC, this document teannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a second and the sample (s) are retained for 30 days only. The document is issued by AGC, this document teacher that the sample (s) are retained for 30 days only. The document is sample (s) are retained for 30 days only. The document is sample (s) are retained for 30 days only. The document is sample (s) are retained for 30 days only. The document is sample (s) are retained for 30 days only. The document is sample (s) are retained for 30 days only. The document is sample (s) are retained for 30 days only. The document is sample (s) are retained for 30 days only. The document is sample (s) are retained for 30 days only. The document is sample (s) are retained for 30 days only. The document is sample (s) are retained for 30 days only. The document is sample (s) are retained for 30 days only are retained for 30 days on 30

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



Page 2 of 67

## **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	plience / © Marie	Apr. 19, 2018	Valid	Initial release

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.

Attestation of Global Compliance



## TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5 5
3. MEASUREMENT UNCERTAINTY	
4. DESCRIPTION OF TEST MODES	
5. SYSTEM TEST CONFIGURATION	8
5.1. CONFIGURATION OF EUT SYSTEM	8 9
6. TEST FACILITY	10
7.TEST METHOD	11
8. TEST EQUIPMENT LIST	
9. RADIATED EMISSION	12
9.1TEST LIMIT	12 13
10. BAND EDGE EMISSION	38
10.1. MEASUREMENT PROCEDURE	38
11. 20DB BANDWIDTH	43
11.1. MEASUREMENT PROCEDURE	43 43
12. FCC LINE CONDUCTED EMISSION TEST	
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	51 51
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	54
APPENDIX B. PHOTOGRAPHS OF FUT	57



age 4 of 67

## 1. VERIFICATION OF CONFORMITY

Applicant	SHENZHEN WEIKING TECHNOLOGY CO.,LTD				
Address	W-king Technology Park, NO.431, Huating Road, Dalang Street, Longhua Town, Baoan District, Shenzhen City, China				
Manufacturer	Shenzhen Weiking Technology Co.,Ltd.				
Address	W-king Technology Park, NO.431, Huating Road, Dalang Street, Longhua Town, Baoan District, Shenzhen City, China				
Product Designation	Bluetooth Speaker				
Brand Name	W-king				
Test Model	BT121				
Date of test	Apr. 03, 2018 to Apr. 14, 2018				
Deviation	None C				
Condition of Test Sample	Normal Section 1997				
Report Template	AGCRT-US-BR/RF				

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249. The test results of this report relate only to the tested sample identified in this report.

		Harry	Zhang		
Tested By	松那		J	F Global Compile	
	Henry Zhar	ng(Zhang Zh	nuorui)	Apr. 14, 201	8
		Fore	y ci		
Reviewed By	Forrest Le	ei(Lei Yongg	jang)	Apr. 19, 20	18

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.

Attestation of Global Compliance



Page 5 of 67

#### 2. GENERAL INFORMATION

## 2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	-2.84dBm(Max EIRP Power=Max radiation field-95.2)
Bluetooth Version	V4.2
Modulation	BR ⊠GFSK, EDR ⊠π /4-DQPSK, ⊠8DPSK BLE □GFSK
Number of channels	79 for BR/EDR
Hardware Version	V1.6
Software Version	V1.6
Antenna Designation	PCB Antenna
Antenna Gain	OdBi Marine Mari
Power Supply	DC 3.7V by battery

Note: 1. The USB port only used for charging and can't be used to transfer data with PC.

2. The EUT has two prototype models, they are all the same except for the appearance shape.

#### 2.2. TABLE OF CARRIER FREQUENCYS

BR/EDR channel List

Frequency Band	Channel Number	Frequency
T. W. Junes	O The state of the	2402MHz
	English of Control of	2403MHz
		· · · · · · · · · · · · · · · · · · ·
	38	2440 MHz
2400~2483.5MHz	9 gg 2 gg 39	2441 MHz
	40	2442 MHz
		E TA SECOND OF S
	To the common of the state of t	2479 MHz
	78	2480 MHz



Page 6 of 67

#### 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB

#### 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
® All Indicions	Low channel GFSK
2 2	Middle channel GFSK
3	High channel GFSK
· 4 不是那	Low channel π /4-DQPSK
S 5 to d Clobs	Middle channel π /4-DQPSK
G 6	High channel π /4-DQPSK
7	Low channel 8DPSK
Filling 8 8 Filling	Middle channel 8DPSK
9 Paris	High channel 8DPSK
10	BT Link with charging
11th Complete	BT Link

#### Note:

- 1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. The EUT used fully-charged battery when tested.





The results specified this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true; //www.agc.gett.com.

Attestation of Global Compliance




age 8 of 67

## 5. SYSTEM TEST CONFIGURATION


## **5.1. CONFIGURATION OF EUT SYSTEM**

Configure 1: (Normal hopping)



Note: Owing to the EUT has own battery, testing may be performed while PC or adapter removed.

Configure 2: (Control continuous TX)



## 5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand Model/Type No.		Remark	
1 ,	Bluetooth Speaker	W-king	BT121	EUT	
2	Battery	SH	803040	Accessory	
3	PC	APPLE	A1465	A.E	
4	Control box	SERIAL	N/A	A.E	
5	Adapter	N/A	MX12X8-0502000UU	A.E	
6	USB Cable	N/A	0.6m unshielded	Accessory	
7	Aux in Cable	N/A	0.6m unshielded	Accessory	
8	IPOD	APPLE	A1367	A.E	



Page 9 of 67

#### **5.3. SUMMARY OF TEST RESULTS**

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249(a) §15.209	Radiated Emission	Compliant
§15.249(d)	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
§15.215	Bandwidth	Compliant



Page 10 of 67

## 6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2F., Bldg.2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District B112-B113, Bldg.12, Baoan Bldg Materials Center, No.1 of Xixiang Inner Ring Road, Baoan District, Shenzhen 518012
NVLAP Lab Code	600153-0
Designation Number	CN5028
Test Firm Registration Number	682566
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by National Voluntary Laboratory Accreditation program, NVLAP Code 600153-0



Page 11 of 67

## 7. TEST METHOD

All measurements contained in this report were conducted with ANSI C63.10-2013

#### 8. TEST EQUIPMENT LIST

#### **TEST EQUIPMENT OF CONDUCTED EMISSION TEST**

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun.20, 2017	Jun.19, 2018
LISN	R&S	ESH2-Z5	100086	Aug.21, 2017	Aug.20, 2018

#### **TEST EQUIPMENT OF RADIATED EMISSION TEST**

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun.20, 2017	Jun.19, 2018
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec.08, 2017	Dec.07, 2018
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.20, 2017	Sep.19, 2018
preamplifier	ChengYi	EMC184045SE	980508	Sep.15, 2017	Sep.14, 2018
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May 18, 2017	May 17, 2019
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun.20, 2017	Jun.19, 2018
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep.28, 2017	Sep.27, 2018
Loop Antenna	LAPLACE	RF300	C Ame	Mar. 01, 2018	Feb. 28, 2020
Radiation Cable 1	MXT	RS1	R005	June 6, 2017	June 5, 2018
Radiation Cable 2	MXT	RS1	R006	June 6, 2017	June 5, 2018
Filter (2.4-2.483GHz)	Micro-tronics	087	-C	Jun.20, 2017	Jun.19, 2018



Page 12 of 67

## 9. RADIATED EMISSION

#### 9.1TEST LIMIT

#### Standard FCC15.249

Fundamental	Field Strength of Fundamental	Field Strength of Harmonics
Frequency	(millivolts/meter)	(microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

#### Standard FCC 15.209

Frequency	Distance	Field Str	engths Limit
(MHz)	Meters	μ V/m	dB(μV)/m
0.009 ~ 0.490	300	2400/F(kHz)	9
0.490 ~ 1.705	30	24000/F(kHz)	技訓
1.705 ~ 30	30	30 (1)	E Cobaco (Color of Color of Co
30 ~ 88	3 F 1000	100	40.0
88 ~ 216	3 - 6	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3. I	Other:74.0 dB(μV)/m (Average)	(Peak) 54.0 dB(μV)/m

Remark:

- (1) Emission level dB $\mu$  V = 20 log Emission level  $\mu$  V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



Page 13 of 67

#### 9.2. MEASUREMENT PROCEDURE

- 1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
- 2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
- The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
- 4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- 5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
- 6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.

Attestation of Global Compliance



Page 14 of 67


The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	Fundamental: 2.4~2.483GHz RBW 2MHz/ VBW 6MHz for Peak, RBW 2MHz/ VBW 10Hz for Average Harmonics: 1GHz~25GHz RBW 1MHz/ VBW 3MHz for Peak, RBW 1MHz/ VBW 10Hz for Average
Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP




#### 9.3. TEST SETUP

#### Radiated Emission Test-Setup Frequency Below 30MHz

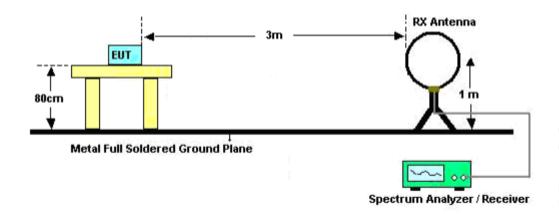


#### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

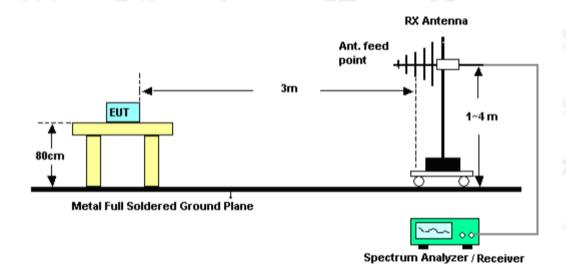


The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.

Attestation of Global Compliance





## RADIATED EMISSION TEST SETUP ABOVE 1000MHz

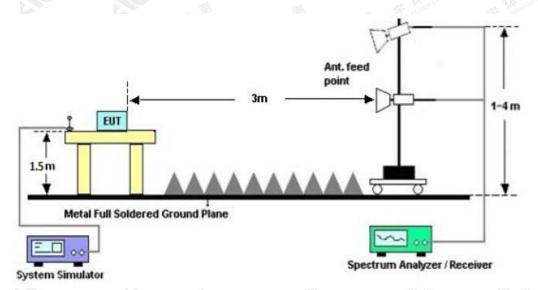



Page 17 of 67

#### 9.4. TEST RESULT

#### FOR BR/EDR


(Worst modulation: 8DPSK)

#### **RADIATED EMISSION BELOW 30MHz**

No emission found between lowest internal used/generated frequencies to 30MHz.

#### **RADIATED EMISSION BELOW 1GHz**

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

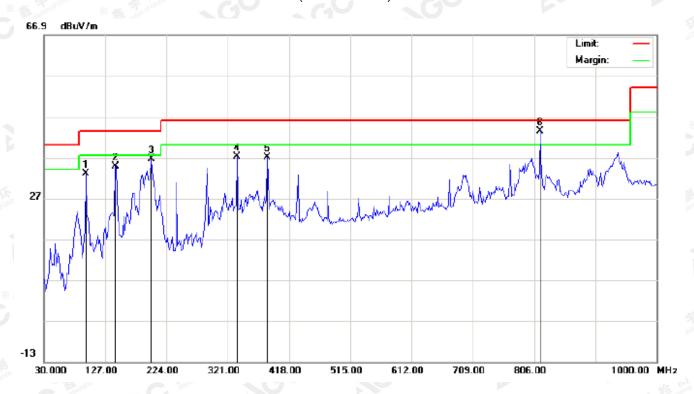


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		96.2833	26.31	6.77	33.08	43.50	-10.42	peak			
2		143.1667	20.32	14.43	34.75	43.50	-8.75	peak			
3		199.7500	24.58	11.99	36.57	43.50	-6.93	peak			
4		335.5500	19.49	17.78	37.27	46.00	-8.73	peak			
5		384.0500	18.03	18.96	36.99	46.00	-9.01	peak			
6	*	815.7000	16.18	27.32	43.50	46.00	-2.50	peak		·	

**RESULT: PASS** 



Page 18 of 67

## RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

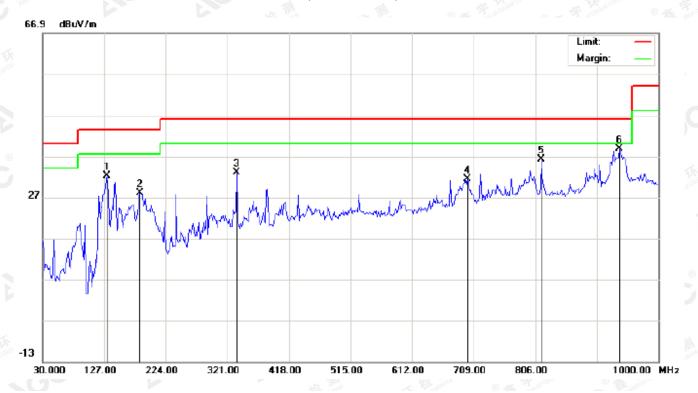

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		131.8500	20.36	11.80	32.16	43.50	-11.34	peak			
2		183.5833	14.83	13.16	27.99	43.50	-15.51	peak			
3		335.5500	15.14	17.78	32.92	46.00	-13.08	peak			
4		699.3000	6.22	25.17	31.39	46.00	-14.61	peak			
5		815.7000	8.97	27.32	36.29	46.00	-9.71	peak			
6	*	938.5667	9.12	29.68	38.80	46.00	-7.20	peak			

#### **RESULT: PASS**


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



Page 19 of 67

## RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

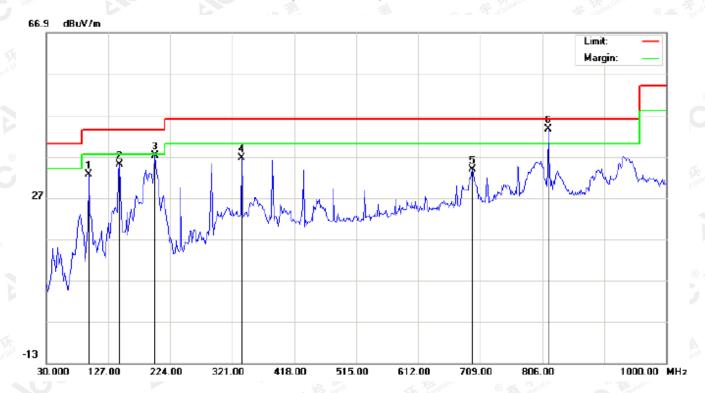


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		96.2833	25.85	6.77	32.62	43.50	-10.88	peak			
2		144.7833	20.95	14.04	34.99	43.50	-8.51	peak			
3		199.7500	25.19	11.99	37.18	43.50	-6.32	peak			
4		335.5500	18.74	17.78	36.52	46.00	-9.48	peak			
5		696.0667	8.65	25.11	33.76	46.00	-12.24	peak			
6	*	815.7000	16.22	27.32	43.54	46.00	-2.46	peak			

**RESULT: PASS** 



Page 20 of 67

## RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL -VERTICAL

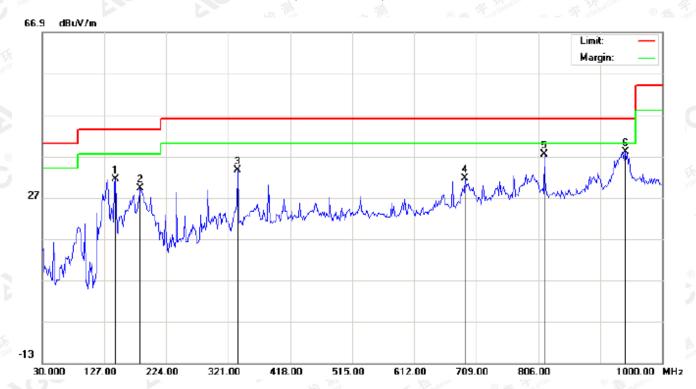

No	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu√/m	dB		cm	degree	
1		144.7833	16.24	15.23	31.47	43.50	-12.03	peak			
2		183.5833	16.00	13.16	29.16	43.50	-14.34	peak			
3		335.5500	15.83	17.78	33.61	46.00	-12.39	peak			
4		691.2167	6.64	24.95	31.59	46.00	-14.41	peak			
5		815.7000	10.12	27.32	37.44	46.00	-8.56	peak			
6	*	941.8000	8.32	29.77	38.09	46.00	-7.91	peak			

#### **RESULT: PASS**


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



Page 21 of 67

## RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL

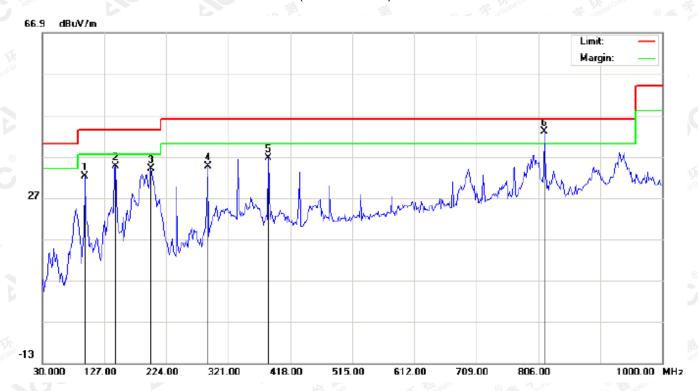


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		96.2833	25.34	6.77	32.11	43.50	-11.39	peak			
2		144.7833	20.60	14.04	34.64	43.50	-8.86	peak			
3		199.7500	22.03	11.99	34.02	43.50	-9.48	peak			
4		288.6667	21.08	13.48	34.56	46.00	-11.44	peak			
5		384.0500	17.74	18.96	36.70	46.00	-9.30	peak			
6	*	815.7000	15.77	27.32	43.09	46.00	-2.91	peak			

**RESULT: PASS** 



Page 22 of 67

## RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

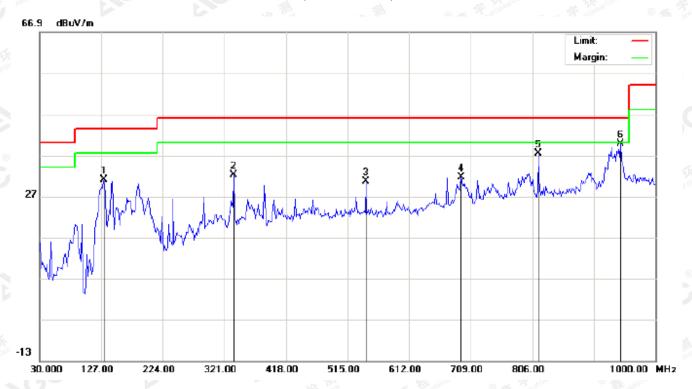

No	. Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		131.8500	19.26	11.80	31.06	43.50	-12.44	peak			
2		335.5500	14.42	17.78	32.20	46.00	-13.80	peak			
3		544.1000	8.22	22.32	30.54	46.00	-15.46	peak			
4		694.4500	6.66	25.04	31.70	46.00	-14.30	peak			
5		815.7000	10.10	27.32	37.42	46.00	-8.58	peak			
6	*	945.0333	9.85	29.86	39.71	46.00	-6.29	peak		·	

## **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.




Page 23 of 67

## RADIATED EMISSION ABOVE 1GHz FOR BR/EDR

(Worst modulation: 8DPSK)

#### For Fundamental

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

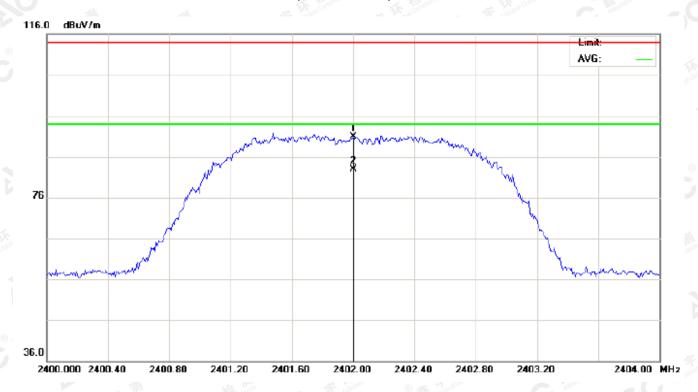


No	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		2402.000	80.52	10.32	90.84	114.00	-23.16	peak			
2	*	2402.000	72.58	10.32	82.90	94.00	-11.10	AVG	100	22	

RESULT: PASS



Page 24 of 67

## RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

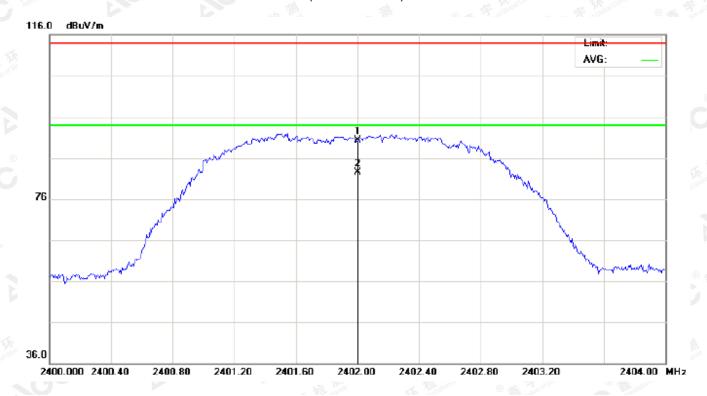


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
4	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2402.000	80.06	10.32	90.38	114.00	-23.62	peak			
2	*	2402.000	72.08	10.32	82.40	94.00	-11.60	AVG	100	84	

**RESULT: PASS** 



Page 25 of 67

## RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

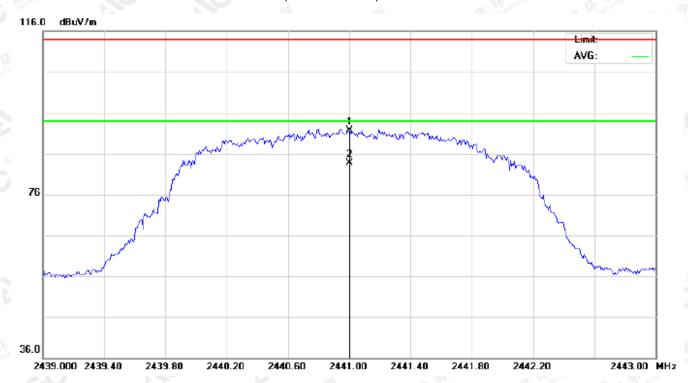


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2441.000	81.25	10.36	91.61	114.00	-22.39	peak			
2	*	2441.000	73.35	10.36	83.71	94.00	-10.29	AVG	100	14	

**RESULT: PASS** 



Page 26 of 67

## RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

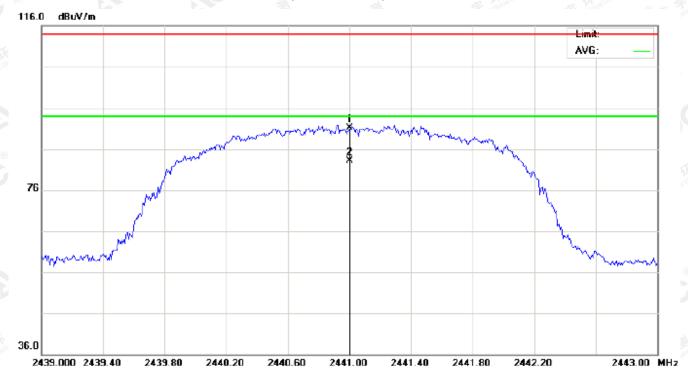


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2441.000	80.77	10.36	91.13	114.00	-22.87	peak			
2	*	2441.000	72.80	10.36	83.16	94.00	-10.84	AVG	100	86	

**RESULT: PASS** 



Page 27 of 67

## RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

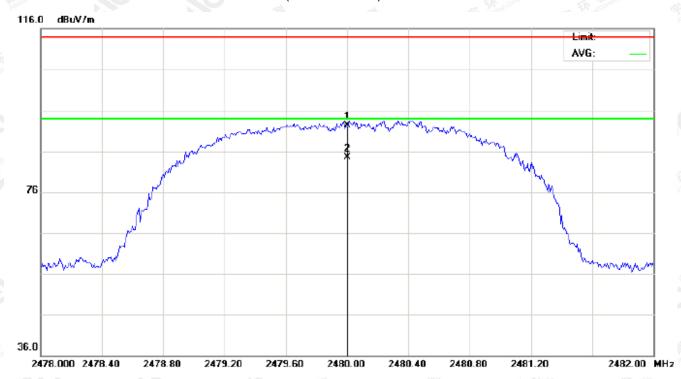

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		2480.000	81.95	10.41	92.36	114.00	-21.64	peak			
2	*	2480.000	74.05	10.41	84.46	94.00	-9.54	AVG	100	13	


RESULT: PASS

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a type of the confirmed at a type of type of type of the confirmed at a type of typ



Page 28 of 67

## RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

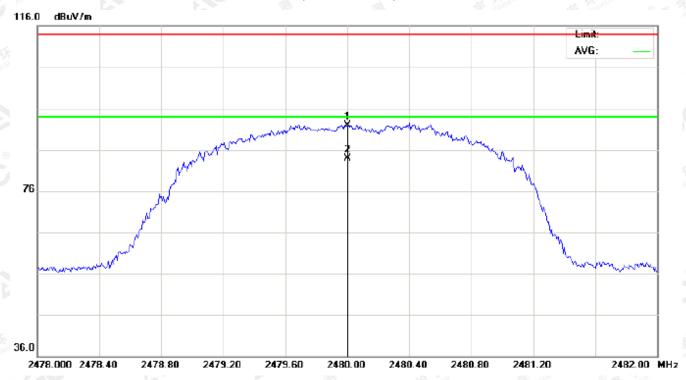

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2480.000	81.47	10.41	91.88	114.00	-22.12	peak			
2	*	2480.000	73.50	10.41	83.91	94.00	-10.09	AVG	100	80	

## **RESULT: PASS**

Note: Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.



Page 29 of 67

## Field strength of the fundamental signal

## 3Mbps Result:

#### Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna	
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization	
2402	80.52	10.32	90.84	114	-23.16	Horizontal	
2402	80.06	10.32	90.38	114	-23.62	Vertical	
2441	81.25	10.36	91.61	114	-22.39	Horizontal	
2441	80.77	10.36	91.13	114	-22.87	Vertical	
2480	81.95	10.41	92.36	114	-21.64	Horizontal	
2480	81.47	10.41	91.88	114	-22.12	Vertical	

## Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	72.58	10.32	82.90	94	-11.10	Horizontal
2402	72.08	10.32	82.40	94	-11.60	Vertical
2441	73.35	10.36	83.71	94	-10.29	Horizontal
2441	72.80	10.36	83.16	94	-10.84	Vertical
2480	74.05	10.41	84.46	94	-9.54	Horizontal
2480	73.50	10.41	83.91	94	-10.09	Vertical



Page 30 of 67

## 1Mbps Result:

#### Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	79.65	10.32	89.97	114	-24.03	Horizontal
2402	79.16	10.32	89.48	114	-24.52	Vertical
2441	80.29	10.36	90.65	114	-23.35	Horizontal
2441	79.87	10.36	90.23	114	-23.77	Vertical
2480	81.13	10.41	91.54	114	-22.46	Horizontal
2480	80.63	10.41	91.04	114	-22.96	Vertical

#### Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	71.70	10.32	82.02	94	-11.98	Horizontal
2402	71.18	10.32	81.50	94	-12.50	Vertical
2441	72.50	10.36	82.86	94	-11.14	Horizontal
2441	71.88	10.36	82.24	94	-11.76	Vertical
2480	73.21	10.41	83.62	94	-10.38	Horizontal
2480	72.59	10.41	83.00	94	-11.00	Vertical



Page 31 of 67

## 2Mbps Result:

#### Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	80.07	10.32	90.39	114	-23.61	Horizontal
2402	79.62	10.32	89.94	114	-24.06	Vertical
2441	80.78	10.36	91.14	114	-22.86	Horizontal
2441	80.31	10.36	90.67	114	-23.33	Vertical
2480	81.54	10.41	91.95	114	-22.05	Horizontal
2480	81.06	10.41	91.47	114	-22.53	Vertical

#### Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	72.16	10.32	82.48	94	-11.52	Horizontal
2402	71.61	10.32	81.93	94	-12.07	Vertical
2441	72.94	10.36	83.30	94	-10.70	Horizontal
2441	72.30	10.36	82.66	94	-11.34	Vertical
2480	73.63	10.41	84.04	94	-9.96	Horizontal
2480	73.09	10.41	83.50	94	-10.50	Vertical




age 32 of 67

#### FOR BR/EDR

(Worst modulation: 8DPSK)

#### **For Harmonics**

## RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

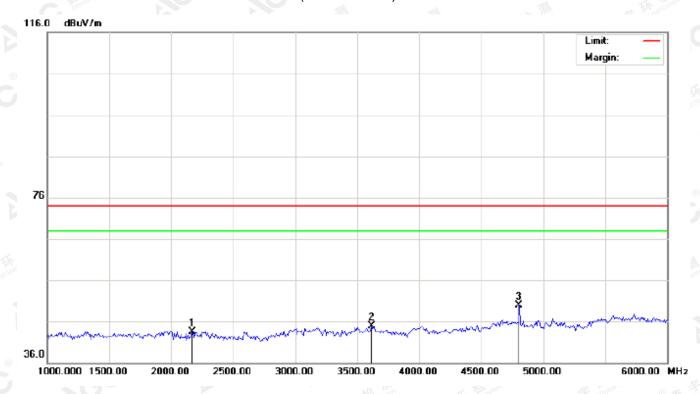


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2166.667	33.53	10.06	43.59	74.00	-30.41	peak			
2		3616.667	32.05	12.83	44.88	74.00	-29.12	peak			
3	*	4804.000	42.21	7.69	49.90	74.00	-24.10	peak			

RESULT: PASS



Page 33 of 67

## RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

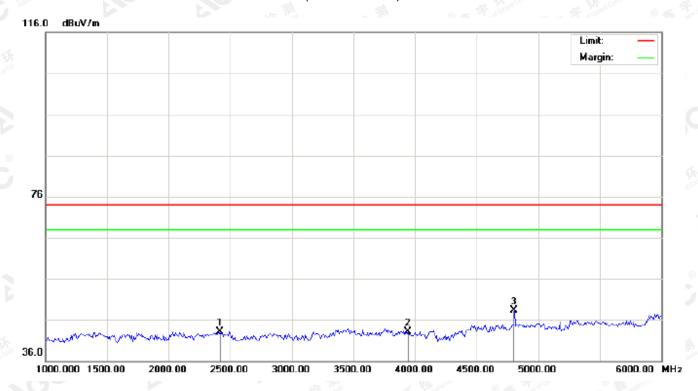


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
4	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2416.667	32.70	10.34	43.04	74.00	-30.96	peak			
2		3941.667	28.23	14.83	43.06	74.00	-30.94	peak			
3	*	4804.000	40.55	7.69	48.24	74.00	-25.76	peak			

**RESULT: PASS** 



Page 34 of 67

## RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

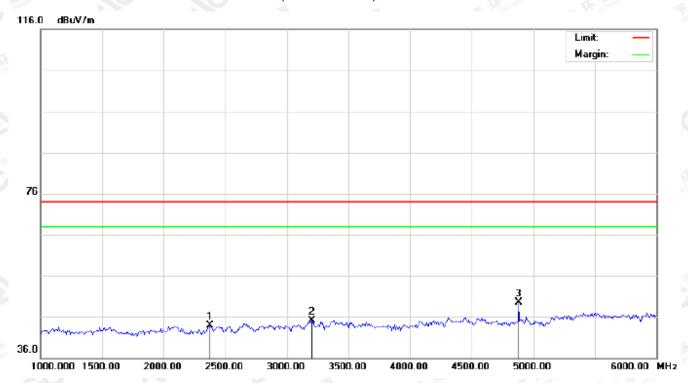


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2375.000	33.68	10.29	43.97	74.00	-30.03	peak			
2		3200.000	33.36	11.83	45.19	74.00	-28.81	peak			
3	*	4882.000	41.66	7.89	49.55	74.00	-24.45	peak			

**RESULT: PASS** 



Page 35 of 67

## RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

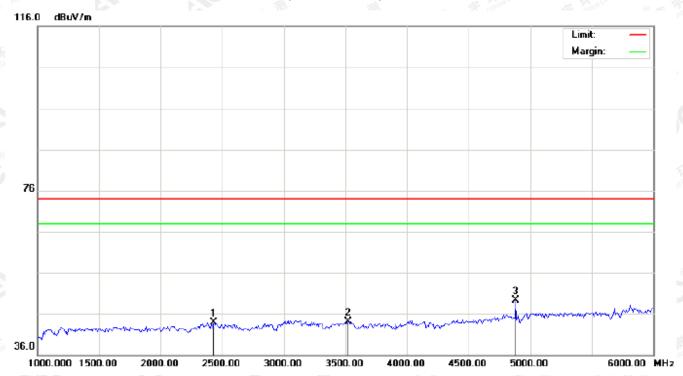

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2433.333	33.55	10.36	43.91	74.00	-30.09	peak			
2		3525.000	31.94	12.26	44.20	74.00	-29.80	peak			
3	*	4882.000	41.39	7.89	49.28	74.00	-24.72	peak			

**RESULT: PASS** 

The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 40°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.

Attestation of Global Compliance



Page 36 of 67

## RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL



No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	I I
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2108.333	33.40	10.00	43.40	74.00	-30.60	peak			
2		3658.333	30.47	13.09	43.56	74.00	-30.44	peak			
3	*	4960.000	42.60	8.09	50.69	74.00	-23.31	peak			

RESULT: PASS


The results showed the sample (s) tested unless otherwise stated and the sample (s) are retained for 30 days only. The document is issued by ACC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Attestation of Global Compliance



Page 37 of 67

# RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

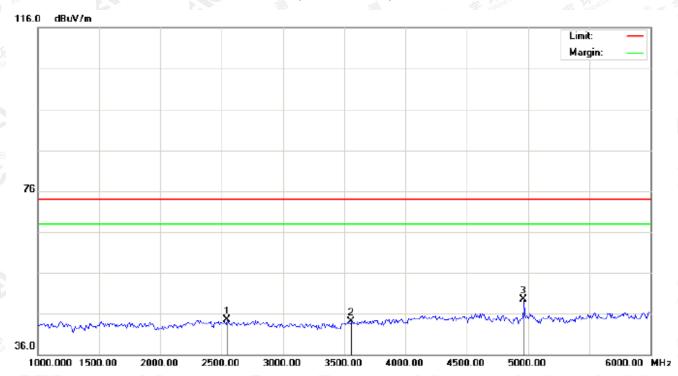

1	No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
	1		2541.667	34.03	10.53	44.56	74.00	-29.44	peak			
Γ	2		3558.333	31.61	12.47	44.08	74.00	-29.92	peak			
	3	*	4960.000	41.41	8.09	49.50	74.00	-24.50	peak			_

### **RESULT: PASS**

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Report No.: AGC02169180402FE03 Page 38 of 67

### 10. BAND EDGE EMISSION


### 10.1. MEASUREMENT PROCEDURE

- The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
- 2. Max hold the trace of the setup 1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.
- 3. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission.

	Start frequenc	y(MHz)			Stop frequency(MH	z)
	2200	The state of the s	The Compilates	® Figure 1	2405	100
(S) ###	2478	B g	autestation of Glob	-,0	2500	

#### **10.2 TEST SETUP**

# RADIATED EMISSION TEST SETUP

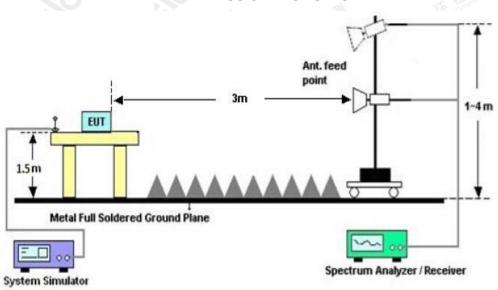

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.





age 39 of 67

# **10.3 RADIATED TEST RESULT**

# FOR BR/EDR

(Worst modulation: 8DPSK)

### TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal



No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2284.733	33.61	10.19	43.80	74.00	-30.20	peak			
2		2390.000	32.50	10.31	42.81	74.00	-31.19	peak			
3		2400.000	42.47	10.32	52.79	74.00	-21.21	peak			
4	*	2402.000	80.43	10.32	90.75	74.00	16.75	peak			
5	Х	2402.000	72.54	10.32	82.86	74.00	8.86	AVG	100	98	

The results spowth this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gott.com.




Page 40 of 67

# TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical




No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu√/m	dB		cm	degree	
1		2278.925	32.75	10.19	42.94	74.00	-31.06	peak			
2		2390.000	31.71	10.31	42.02	74.00	-31.98	peak			
3		2400.000	36.56	10.32	46.88	74.00	-27.12	peak			
4	*	2402.000	80.09	10.32	90.41	74.00	16.41	peak			
5	Х	2402.000	72.12	10.32	82.44	74.00	8.44	AVG	100	65	

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.





# TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

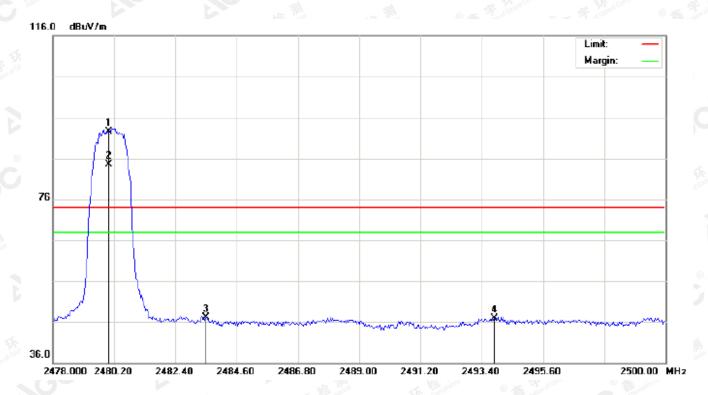


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	82.00	10.41	92.41	74.00	18.41	peak			
2	Х	2480.000	74.02	10.41	84.43	74.00	10.43	AVG	100	25	
3		2483.500	36.69	10.41	47.10	74.00	-26.90	peak			
4		2493.840	36.55	10.42	46.97	74.00	-27.03	peak			

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.go.tt.com.



Page 42 of 67

# TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

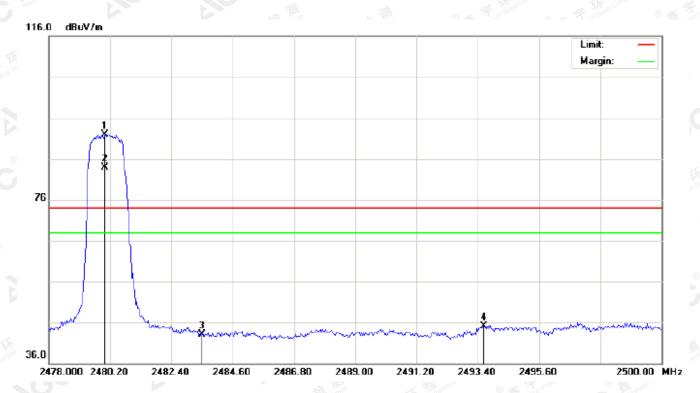

	No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
7		-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
	1	*	2480.000	81.44	10.41	91.85	74.00	17.85	peak			
	2	Х	2480.000	73.52	10.41	83.93	74.00	9.93	AVG	100	78	
	3		2483.500	32.76	10.41	43.17	74.00	-30.83	peak			
	4		2493.620	34.73	10.42	45.15	74.00	-28.85	peak			

### **RESULT: PASS**

Note: Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Hopping on mode and Hopping off mode have been tested, but only worst case reported.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.




Page 43 of 67

# 11. 20DB BANDWIDTH

### 11.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 2. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ 3RBW; Sweep = auto; Detector function = peak
- 3. Set SPA Trace 1 Max hold, then View.

### 11.2. TEST SET-UP

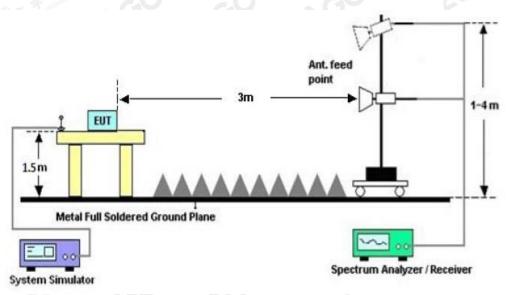

# 11.3. LIMITS AND MEASUREMENT RESULTS

#### FOR BR/EDR

BLUETO	BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT									
		Measurement Result								
Applicable Limits		Result								
		99%OBW (MHz)	-20dB BW(MHz)	Result						
Stoke Company	Low Channel	0.953	1.087	PASS						
N/A	Middle Channel	0.946	1.077	PASS						
700	High Channel	0.951	1.063	PASS						


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL




#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

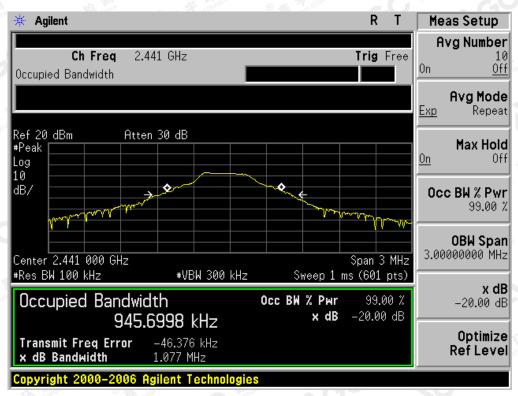

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

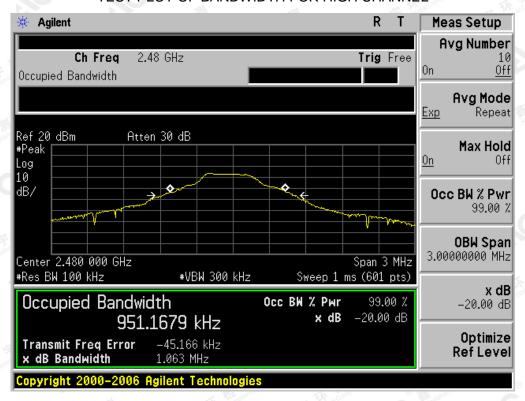


The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



All and a second a				20V 700, SS							
BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT											
	Measurement Result										
Applicable Limits		Dooule									
	99%OBW (MHz) -20dB BW(MHz)		-20dB BW(MHz)	Result							
The fill	Low Channel	1.219	1.392	PASS							
N/A	Middle Channel	1.220	1.391	PASS							
	High Channel	1.221	1.395	PASS							


### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

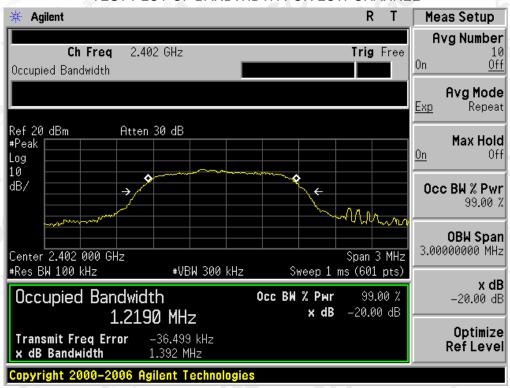


The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

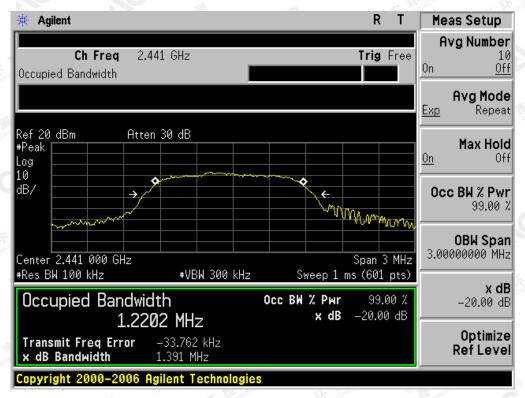

#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

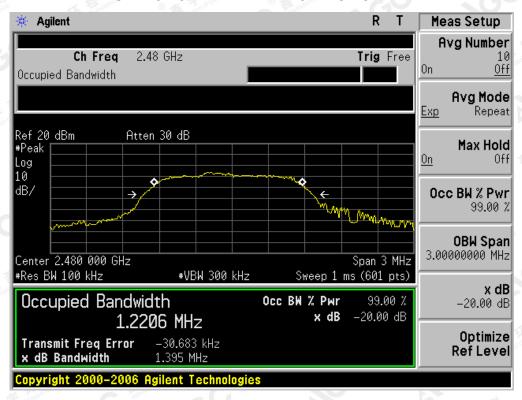


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



BLUETO	BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT								
		Measurement Result							
Applicable Limits		D							
		99%OBW (MHz)	-20dB BW(MHz)	Result					
The plane of the plane	Low Channel	1.228	1.393	PASS					
N/A	Middle Channel	1.238	1.395	PASS					
	High Channel	1.230	1.395	PASS					


### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

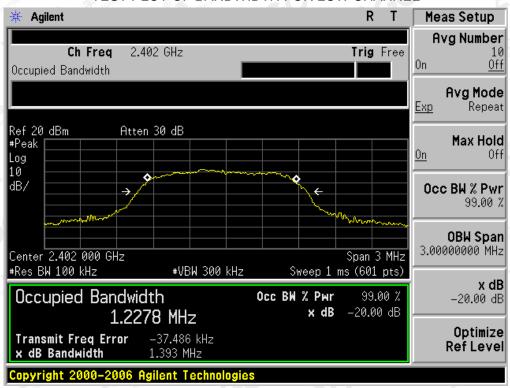


The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.



#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

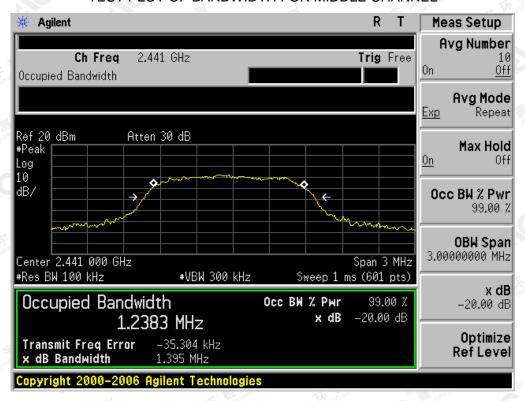

#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

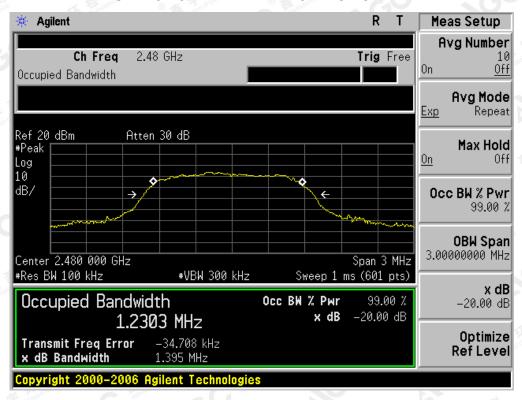

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



age 50 of 67

# 12. FCC LINE CONDUCTED EMISSION TEST


### 12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum RF	Maximum RF Line Voltage							
Frequency	Q.P.( dBuV)	Average( dBuV)							
150kHz~500kHz	66-56	56-46							
500kHz~5MHz	8 4 56 56 Sept of Control of Sept of Control of Sept of Control of Sept of Sept of Control of Sept of	A6							
5MHz~30MHz	60	50							

### Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

### 12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

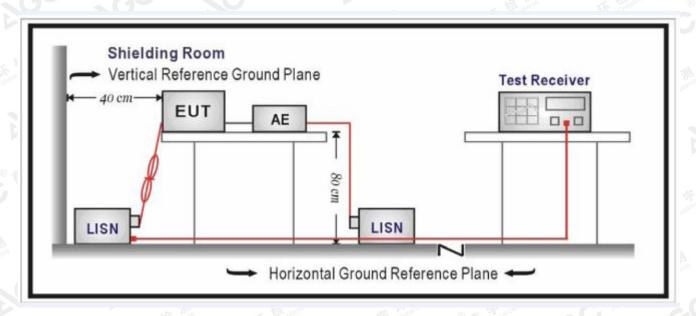

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 51 of 67

# 12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC charging voltage by adapter or PC which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

### 12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc.gett.com.


Page 52 of 67

# 12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

# By adapter(worst case)

### FOR BR/EDR

### Line Conducted Emission Test Line 1-L

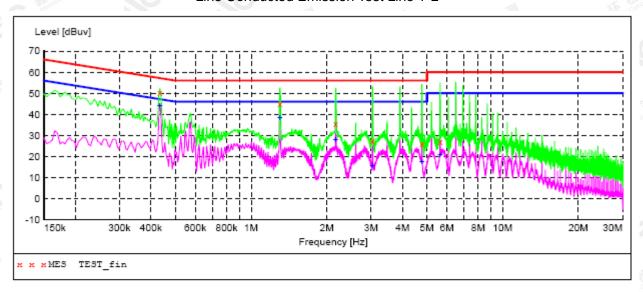

#### MEASUREMENT RESULT: "TEST fin"

201	0/7/11 11:	0.5						
	Frequency MHz	Level dBuv	Transd dB	Limit dBuv	Margin dB	Detector	Line	PE
	0.434000	50.10	11.4	57	7.1	QP	L1	FLO
	1.302000	44.90	11.3	56	11.1	QP	L1	FLO
	2.170000	35.50	11.3	56	20.5	QP	L1	FLO
	3.038000	27.30	11.4	56	28.7	QP	L1	FLO
	4.778000	26.00	11.4	56	30.0	QP	L1	FLO
	5.646000	27.20	11.3	60	32.8	QP	L1	FLO


### MEASUREMENT RESULT: "TEST fin2"

2018/4/11	11:03						
Frequen M	cy Level Hz dBuv			Margin dB	Detector	Line	PE
0.4340	00 44.30	11.4	47	2.9	AV	L1	FLO
1.3020	00 38.20	11.3	46	7.8	AV	L1	FLO
2.1700	00 28.10	11.3	46	17.9	AV	L1	FLO
3.0380	00 15.50	11.4	46	30.5	AV	L1	FLO
4.7740	00 17.30	11.4	46	28.7	AV	L1	FLO
5.6460	00 21.00	11.3	50	29.0	AV	L1	FLO

The results specified this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc-cert.com.



### Line Conducted Emission Test Line 2-N

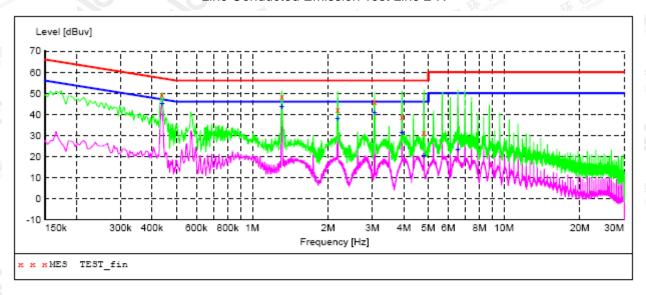

#### MEASUREMENT RESULT: "TEST fin"

2018/4/11 11:12	0.03		10	Zeren	44.40	
	ZU.	ιв.	141		11:12	

.12						
Level dBuv	Transd dB	Limit dBuv	Margin dB	Detector	Line	PE
49.30	11.4	57	7.8	QP	N	FLO
48.20	11.3	56	7.8	QP	N	FLO
42.40	11.3	56	13.6	QP	N	FLO
46.00	11.4	56	10.0	QP	N	FLO
38.80	11.4	56	17.2	QP	N	FLO
31.50	11.4	56	24.5	QP	N	FLO
	Level dBuv 49.30 48.20 42.40 46.00 38.80	Level Transd dBuv dB 49.30 11.4 48.20 11.3 42.40 11.3 46.00 11.4 38.80 11.4	Level Transd Limit dBuv dB dBuv 49.30 11.4 57 48.20 11.3 56 42.40 11.3 56 46.00 11.4 56 38.80 11.4 56	Level Transd Limit Margin dBuv dB dBuv dB dBuv dB 49.30 11.4 57 7.8 48.20 11.3 56 7.8 42.40 11.3 56 13.6 46.00 11.4 56 10.0 38.80 11.4 56 17.2	Level Transd Limit Margin Detector dBuv dB dBuv dB 49.30 11.4 57 7.8 QP 48.20 11.3 56 7.8 QP 42.40 11.3 56 13.6 QP 46.00 11.4 56 10.0 QP 38.80 11.4 56 17.2 QP	Level Transd Limit Margin Detector Line dBuv dB dBuv dB P N 49.30 11.4 57 7.8 QP N 48.20 11.3 56 7.8 QP N 42.40 11.3 56 13.6 QP N 46.00 11.4 56 10.0 QP N 38.80 11.4 56 17.2 QP N

# MEASUREMENT RESULT: "TEST fin2"

2018/4/11 11:12

Frequency MHz		Transd dB	Limit dBuv	Margin dB	Detector	Line	PE
0.438000	45.00	11.4	47	2.1	AV	N	FLO
1.310000	43.80	11.3	46	2.2	AV	N	FLO
2.182000	37.90	11.3	46	8.1	AV	N	FLO
3.058000	40.90	11.4	46	5.1	AV	N	FLO
3.930000	31.30	11.4	46	14.7	AV	N	FLO
4.802000	20.50	11.4	46	25.5	AV	N	FLO
6.550000	23.20	11.2	50	26.8	AV	N	FLO

The results spowth this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gott.com.



# **APPENDIX A: PHOTOGRAPHS OF TEST SETUP**

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP




The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (C), this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc-gert.com. AGC 8


Attestation of Global Compliance

E-mail: agc@agc-cert.com Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China


**6** 400 089 2118





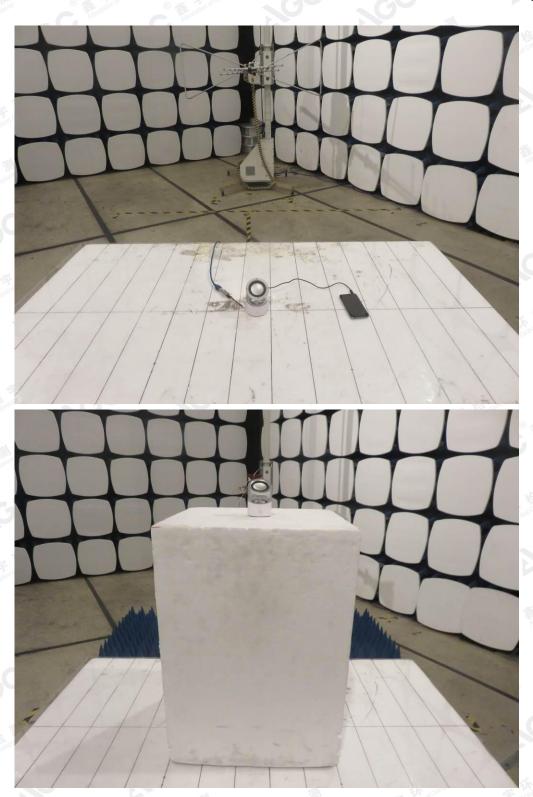

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a type and the confirmed at a type and type and type are the confirmed at a type and type and type are the confirmed at a type and type are type and type and type are type are type and type are type and type are type and type are type and type are type are type and type are type are type are type and type are type are type and type are type are type are type are type and type are t








The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (60°, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.




# **APPENDIX B: PHOTOGRAPHS OF EUT**

TOTAL VIEW OF EUT

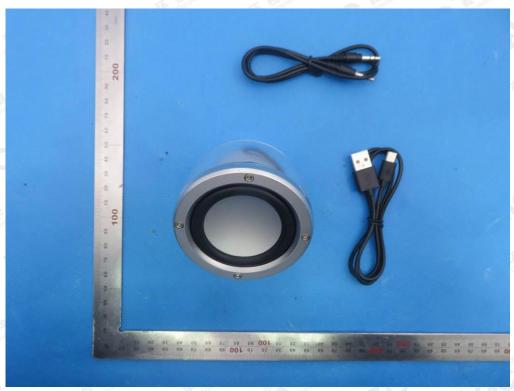


TOP VIEW OF EUT

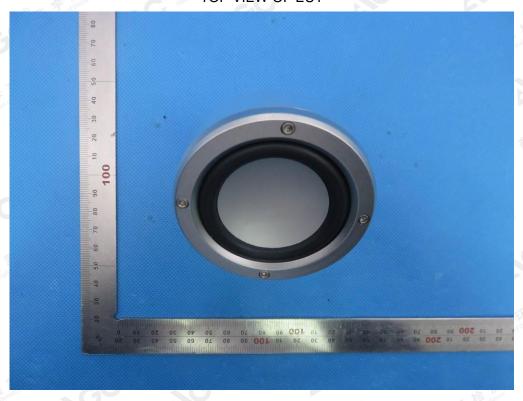


The results spowfor this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc.gett.com.



# **BOTTOM VIEW OF EUT**

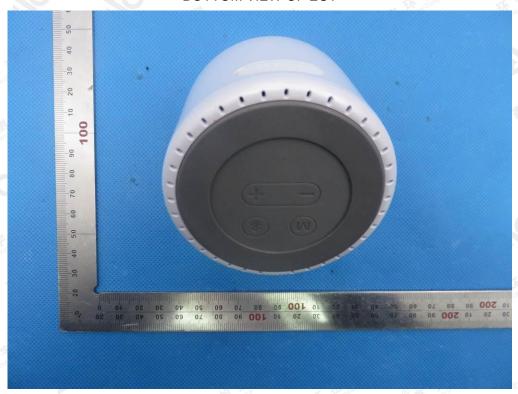

FRONT VIEW OF EUT

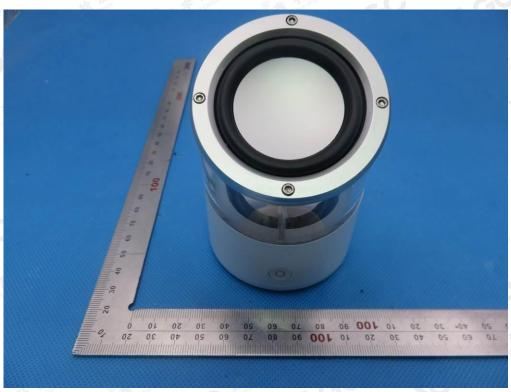

The results shown this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.cett.com.

Attestation of Global Compliance

AGC 8

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



# **BACK VIEW OF EUT**



LEFT VIEW OF EUT



The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



# RIGHT VIEW OF EUT



VIEW OF EUT (Port)



The results shown the sample (s) tested unless otherwise stated and the sample (s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



# **OPEN VIEW OF EUT**



VIEW OF BATTERY




The results spowed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc.gett.com.

Attestation of Global Compliance


Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



# **INTERNAL VIEW OF EUT-1**

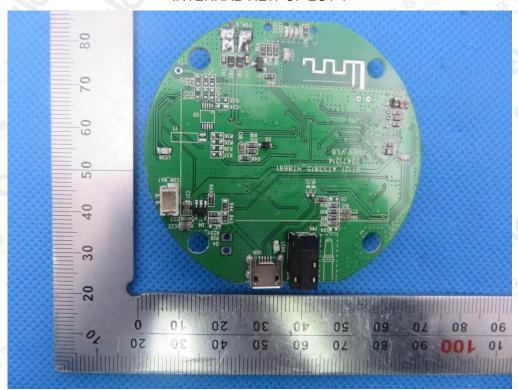


**INTERNAL VIEW OF EUT-2** 

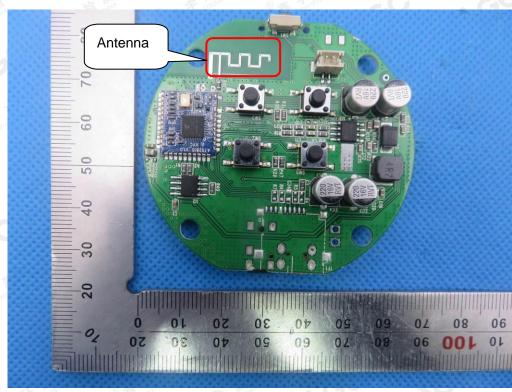

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.


Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F. , Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China





# **INTERNAL VIEW OF EUT-3**

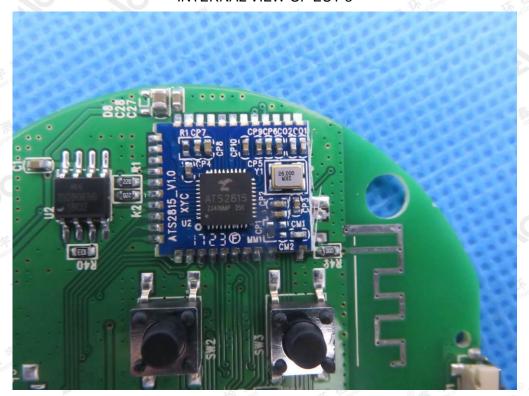

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F. , Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



# **Other Sample**

TOP VIEW OF EUT



**BOTTOM VIEW OF EUT** 



The results shown his jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



# FRONT VIEW OF EUT



**BACK VIEW OF EUT** 



The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc.gett.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



# LEFT VIEW OF EUT



RIGHT VIEW OF EUT



The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



VIEW OF EUT (Port)



**VIEW OF ADAPTER(AE)** 



The adapter was supplied by AGC

### ----END OF REPORT----

The results spowfor this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc.gett.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China