

FCC Test Report

Report No.: RWAY202300009A

Applicant: Ningbo Baihuang Electric Appliances Co.,Ltd

Address: NO.180,YANSHAN ROAD,HUXIMEN,HENGHE TOWN,CIXI
CITY ,NINGBO,ZHEJIANG,CHINA

Product Name: Remote Control Transmitter

Product Model: BH-20E

Multiple Models: N/A

Trade Mark: N/A

FCC ID: Q92-BH-20E

Standards: FCC CFR Title 47 Part 15C (§15.231)

Test Date: 2023-11-27 to 2023-12-16

Test Result: Complied

Report Date: 2023-12-18

Reviewed by:

Abel chen

Approved by:

Jacob Kong

Abel Chen

Project Engineer

Jacob Kong

Manager

Prepared by:

World Alliance Testing and Certification (Shenzhen) Co., Ltd

No. 1002, East Block, Laobing Building, Xingye Road 3012, Xixiang street, Bao'an District, Shenzhen,
Guangdong, People's Republic of China



This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk “★”

Announcement

1. This test report shall not be reproduced in full or partial, without the written approval of World Alliance Testing and Certification (Shenzhen) Co., Ltd
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.
5. The information marked “#” is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

Revision History

Version No.	Issued Date	Description
00	2023-12-18	Original

Contents

1	General Information	4
1.1	Client Information	4
1.2	Product Description of EUT	4
1.3	Antenna information	4
1.4	Related Submittal(s)/Grant(s).....	4
1.5	Measurement Uncertainty	5
1.6	Laboratory Location.....	5
1.7	Test Methodology	5
2	Description of Measurement.....	6
2.1	Test Configuration.....	6
2.2	Test Auxiliary Equipment	6
2.3	Test Setup.....	7
2.4	Test Procedure	8
2.5	Measurement Method.....	9
2.6	Measurement Equipment	10
3	Test Results	11
3.1	Test Summary.....	11
3.2	Limit	12
3.3	AC Line Conducted Emissions Test Data.....	13
3.4	Radiated emission Test Data.....	14
3.5	Deactivation Testing	22
3.6	Bandwidth Test Data.....	23
4	Test Setup Photo.....	24
5	E.U.T Photo	25

1 General Information

1.1 Client Information

Applicant:	Ningbo Baihuang Electric Appliances Co.,Ltd
Address:	NO.180,YANSHAN ROAD,HUXIMEN,HENGHE TOWN,CIXI CITY ,NINGBO,ZHEJIANG,CHINA
Manufacturer:	Ningbo Baihuang Electric Appliances Co.,Ltd
Address:	NO.180,YANSHAN ROAD,HUXIMEN,HENGHE TOWN,CIXI CITY ,NINGBO,ZHEJIANG,CHINA

1.2 Product Description of EUT

Sample Serial Number	1H-1 for RE test(assigned by WATC)
Sample Received Date	2023-11-23
Sample Status	Good Condition
Frequency Range	433.92MHz
Maximum E-field Strength:	81.87dBuV/m@3m
Modulation Technology	OOK
Spatial Streams [#]	SISO (1TX, 1RX)
Power Supply	DC 12V from battery
Operating temperature [#]	-20 deg.C to +50 deg.C
Adapter Information	N/A
Modification	Sample No Modification by the test lab

1.3 Antenna information

15.203 requirement:	
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
Device Antenna information:	
The antenna is an internal antenna which cannot replace by end-user. Please see product internal photos for details.	

1.4 Related Submittal(s)/Grant(s)

No Related Submittal(s)/Grant(s)

1.5 Measurement Uncertainty

Parameter		Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
AC Power Lines Conducted Emissions		±3.14dB
Emissions, Radiated	Below 30MHz	±2.78dB
	Below 1GHz	±4.84dB
	Above 1GHz	±5.44dB
Bandwidth		0.34%
<p>Note 1: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.</p> <p>Note 2: The Decision Rule is based on simple acceptance with ISO Guide 98-4:2012 Clause 8.2 (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)</p>		

1.6 Laboratory Location

World Alliance Testing and Certification (Shenzhen) Co., Ltd

No. 1002, East Block, Laobing Building, Xingye Road 3012, Xixiang street, Bao'an District, Shenzhen, Guangdong, People's Republic of China

Tel: +86-755-29691511, Email: ga@watc.com.cn

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 463912, the FCC Designation No. : CN5040.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0160.

1.7 Test Methodology

FCC CFR 47 Part 2

FCC CFR 47 Part 15

ANSI C63.10-2020

2 Description of Measurement

2.1 Test Configuration

Operating channels:					
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	433.92	/	/	/	/
According to ANSI C63.10-2020 chapter 5.6.1 Table 11 requirement, select lowest channel, middle channel, and highest channel in the frequency range in which device operates for testing. The detailed frequency points are as follows:					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
/	/	1	433.92	/	/

Test Mode:			
Transmitting mode:	Keep the EUT in continuous transmitting with modulation		
Exercise software [#] :	The EUT was configured to continuous transmitting mode by applicant		
Mode	Power Level Setting [#]		
	Low Channel	Middle Channel	High Channel
SRD	/	Default	/
The exercise software and the maximum power setting that provided by manufacturer.			


Worst-Case Configuration:
For radiated emissions, EUT was investigated in three orthogonal orientation, the worst-case orientation was recorded in report
All the keys with same power setting, the maximum duty cycle was tested and recorded.

2.2 Test Auxiliary Equipment

Manufacturer	Description	Model	Serial Number
/	/	/	/

2.3 Test Setup


1) Conducted emission measurement:

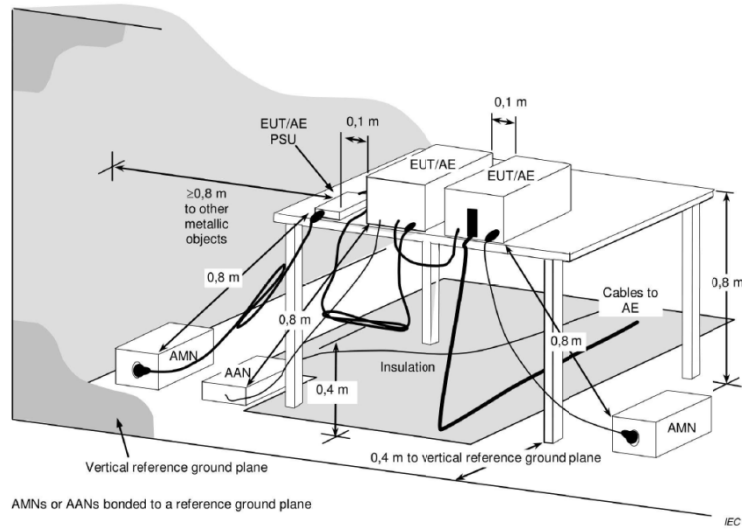


Note: The 0.8 m distance specified between EUT/AE/PSU and AMN/AAN, is applicable only to the EUT being measured. If the device is AE then it shall be >0.8 m.

2) Radiated emission measurement:

Below 30MHz (3m SAC)

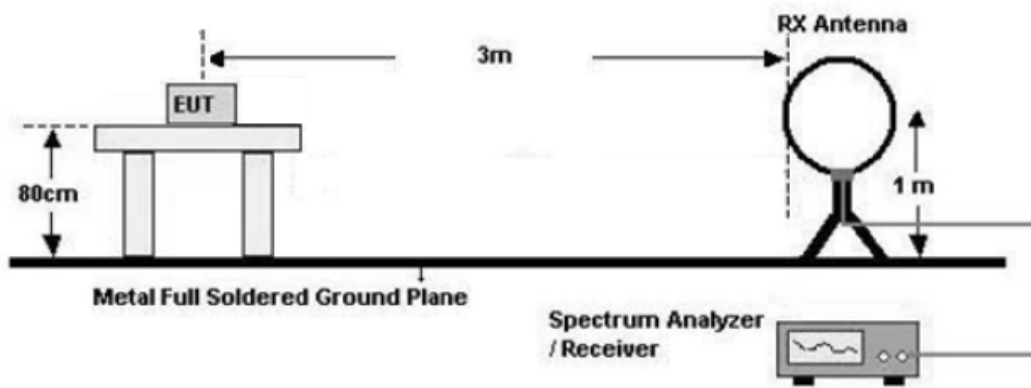

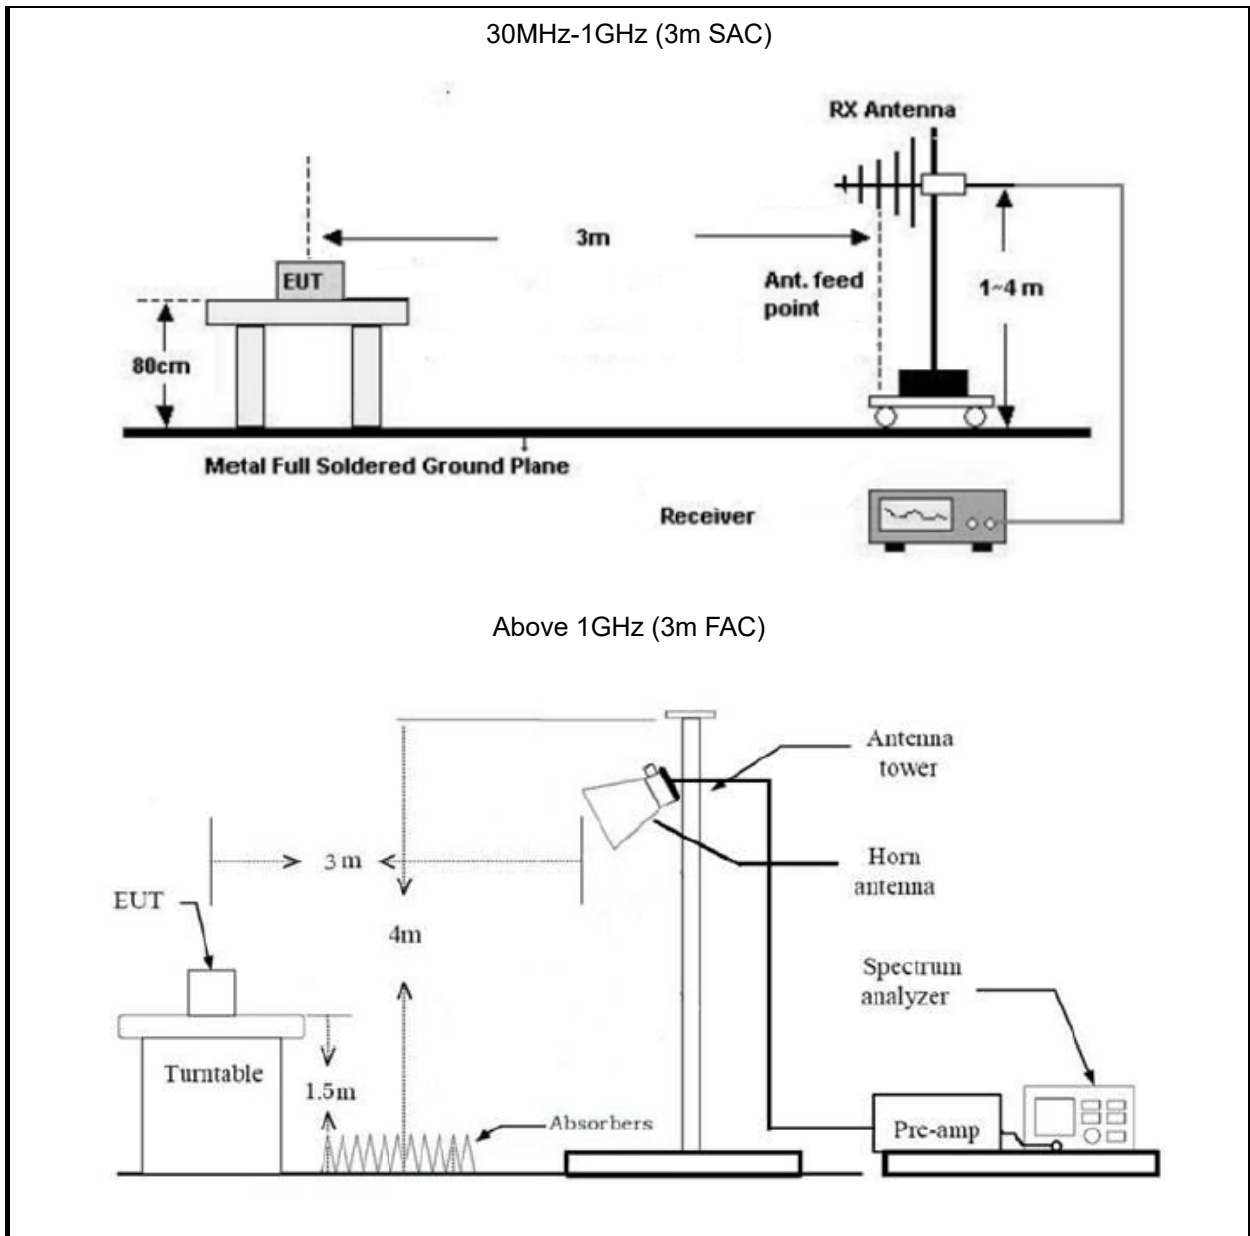

2.4 Test Procedure

Conducted emission:

1. The E.U.T is placed on a non-conducting table 40cm from the vertical ground plane and 80cm above the horizontal ground plane (Please refer to the block diagram of the test setup and photographs).
2. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
3. Line conducted data is recorded for both Line and Neutral

Radiated Emission Procedure:

a) For below 30MHz

1. All measurements were made at a test distance of 3 m. The measured data was extrapolated from the test distance (3m) to the specification distance (300 m from 9-490 kHz and 30 m from 490 kHz- 30

MHz) to clearly show the relative levels of fundamental and spurious emissions and demonstrate compliance with the requirement that the level of any spurious emissions be below the level of the intentionally transmitted signal. The extrapolation factor for the limits were $40 \cdot \log(\text{test distance} / \text{specification distance})$.

2. Loop antenna use, investigation was done on the three antenna orientations (parallel, perpendicular, ground-parallel)

b) For 30MHz-1GHz:

1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m.
2. EUT works in each mode of operation that needs to be tested. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.

c) For above 1GHz:

1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m (1-18GHz) and 1.5 m (above 18GHz).
2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.
3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.
4. Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

Bandwidth Test:

1. Use the same setup for radiated below 1GHz, found the maximum fundamental level.
2. Change the spectrum analyzer setting for bandwidth testing
3. Test the bandwidth and record the result

2.5 Measurement Method

Description of Test	Measurement Method
AC Line Conducted Emissions	ANSI C63.10-2020 Section 6.2
20dB Emission Bandwidth	ANSI C63.10-2020 Section 6.9.2
Field strength of fundamental and Radiated emission	ANSI C63.10-2020 Section 6.3&6.4&6.5&6.6

2.6 Measurement Equipment

Manufacturer	Description	Model	Management No.	Calibration Date	Calibration Due Date
Radiated Emission Test					
R&S	EMI test receiver	ESR3	102758	2023/7/3	2024/7/2
ROHDE& SCHWARZ	SPECTRUM ANALYZER	FSV40-N	101608	2023/7/3	2024/7/2
SONOMA INSTRUMENT	Low frequency amplifier	310	186014	2023/7/12	2024/7/11
COM-POWER	preamplifier	PAM-118A	18040152	2023/8/21	2024/8/20
ETS	Passive Loop Antenna	6512	29604	2023/7/7	2024/7/6
SCHWARZBECK	Log - periodic wideband antenna	VULB 9163	9163-872	2023/7/7	2024/7/6
Astro Antenna Ltd	Horn antenna	AHA-118S	3015	2023/7/6	2024/7/5
N/A	Coaxial Cable	N/A	NO.9	2023/8/8	2024/8/7
N/A	Coaxial Cable	N/A	NO.10	2023/8/8	2024/8/7
N/A	Coaxial Cable	N/A	NO.11	2023/8/8	2024/8/7
Audix	Test Software	E3	191218 V9	/	/

Note: All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or International standards.

3 Test Results

3.1 Test Summary

FCC/ISED Rules	Description of Test	Result
FCC §15.203	Antenna Requirement	Compliance
FCC §15.207(a)	AC Line Conducted Emissions	N/A
FCC §15.231(c)	20dB Emission Bandwidth	Compliance
FCC §15.231(a)	Deactivation Testing	Compliance
FCC §15.205, §15.209, §15.231(b)	Field strength of fundamental and Radiated emission	Compliance

3.2 Limit

Test items	Limit																					
AC Line Conducted Emissions	See details §15.207 (a)																					
20dB Emission Bandwidth	The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900MHz.																					
Deactivation Testing	A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.																					
Field strength of fundamental and Radiated emission	<p>In addition to the provisions of § 15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:</p> <table border="1" data-bbox="595 678 1409 1032"> <thead> <tr> <th data-bbox="595 678 794 757">Fundamental frequency (MHz)</th> <th data-bbox="794 678 1090 757">Field strength of fundamental (microvolts/meter)</th> <th data-bbox="1090 678 1409 757">Field strength of spurious emissions (microvolts/meter)</th> </tr> </thead> <tbody> <tr> <td data-bbox="595 757 794 801">40.66–40.70</td> <td data-bbox="794 757 1090 801">2,250</td> <td data-bbox="1090 757 1409 801">225</td> </tr> <tr> <td data-bbox="595 801 794 853">70–130</td> <td data-bbox="794 801 1090 853">1,250</td> <td data-bbox="1090 801 1409 853">125</td> </tr> <tr> <td data-bbox="595 853 794 898">130–174</td> <td data-bbox="794 853 1090 898">¹ 1,250 to 3,750</td> <td data-bbox="1090 853 1409 898">¹ 125 to 375</td> </tr> <tr> <td data-bbox="595 898 794 943">174–260</td> <td data-bbox="794 898 1090 943">3,750</td> <td data-bbox="1090 898 1409 943">375</td> </tr> <tr> <td data-bbox="595 943 794 987">260–470</td> <td data-bbox="794 943 1090 987">¹ 3,750 to 12,500</td> <td data-bbox="1090 943 1409 987">¹ 375 to 1,250</td> </tr> <tr> <td data-bbox="595 987 794 1032">Above 470</td> <td data-bbox="794 987 1090 1032">12,500</td> <td data-bbox="1090 987 1409 1032">1,250</td> </tr> </tbody> </table> <p data-bbox="595 1055 786 1081">¹ Linear interpolations.</p> <p data-bbox="584 1122 1378 1193">The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.</p> <p data-bbox="584 1211 1439 1653">Intentional radiators operating under the provisions of this section shall demonstrate compliance with the limits on the field strength of emissions, as shown in the above table, based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector. The specific method of measurement employed shall be specified in the application for equipment authorization. If average emission measurements are employed, the provisions in § 15.35 for averaging pulsed emissions and for limiting peak emissions apply. Further, compliance with the provisions of § 15.205 shall be demonstrated using the measurement instrumentation specified in that section.</p> <p data-bbox="584 1671 1439 1865">The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in § 15.209, whichever limit permits a higher field strength.</p>	Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)	40.66–40.70	2,250	225	70–130	1,250	125	130–174	¹ 1,250 to 3,750	¹ 125 to 375	174–260	3,750	375	260–470	¹ 3,750 to 12,500	¹ 375 to 1,250	Above 470	12,500	1,250
Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)																				
40.66–40.70	2,250	225																				
70–130	1,250	125																				
130–174	¹ 1,250 to 3,750	¹ 125 to 375																				
174–260	3,750	375																				
260–470	¹ 3,750 to 12,500	¹ 375 to 1,250																				
Above 470	12,500	1,250																				

3.3 AC Line Conducted Emissions Test Data

Not Applicable, the device only powered by battery

3.4 Radiated emission Test Data


9 kHz-30MHz:


Test Date:	2023-11-27	Test By:	Luke Li
Environment condition:	Temperature: 23°C; Relative Humidity:50%; ATM Pressure: 101kPa		

For radiated emissions below 30MHz, there were no emissions found within 20dB of limit.

30MHz-1GHz:

Test Date:	2023-11-27	Test By:	Luke Li
Environment condition:	Temperature: 23°C; Relative Humidity:50%; ATM Pressure: 101kPa		

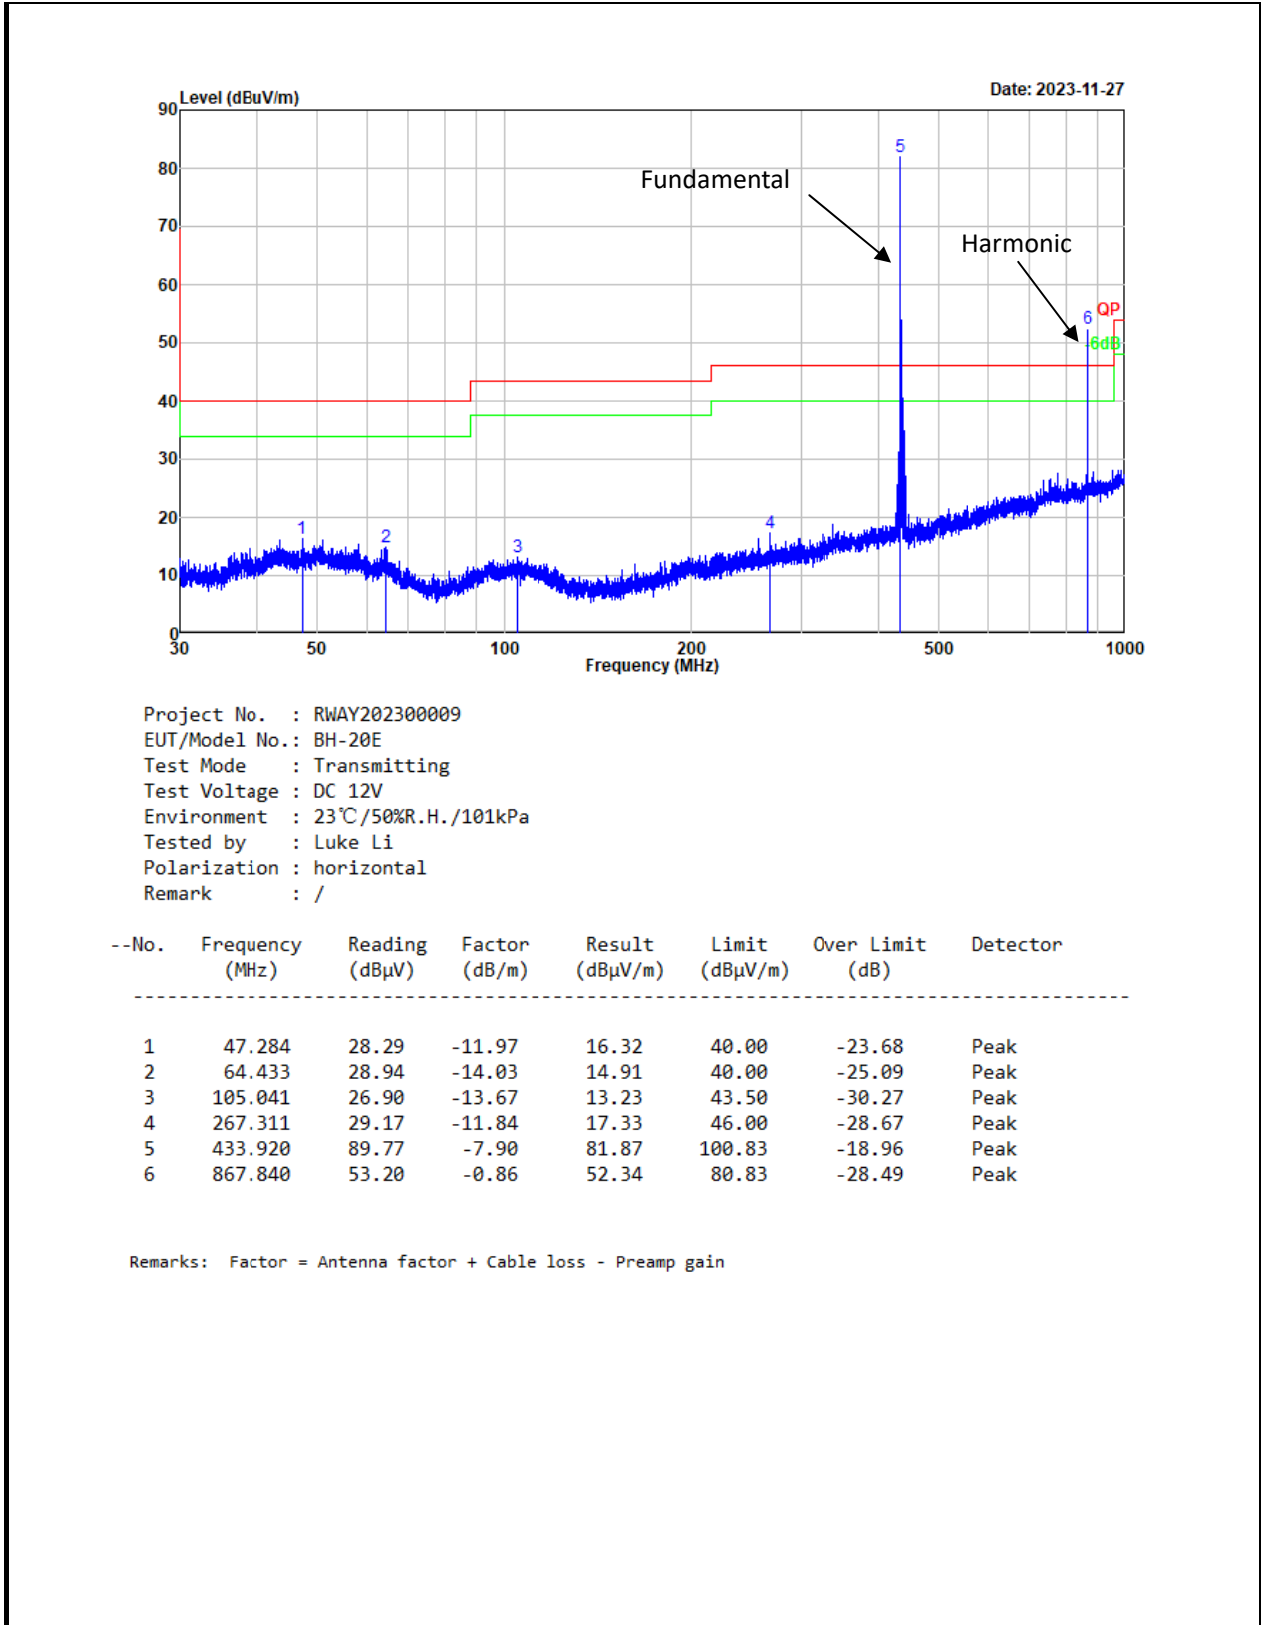

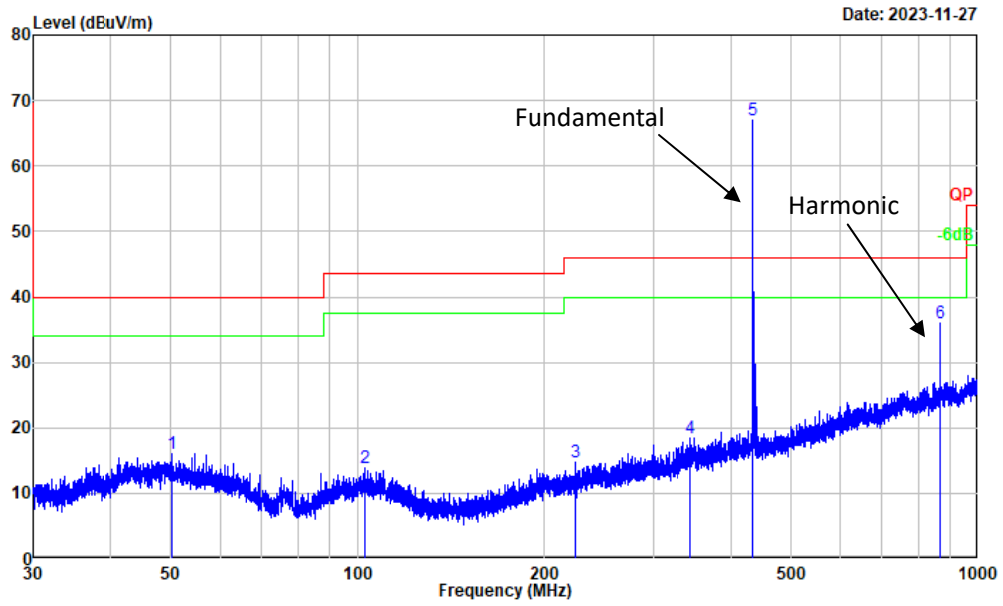

Project No. : RWAY202300009
 EUT/Model No.: BH-20E
 Test Mode : Transmitting
 Test Voltage : DC 12V
 Environment : 23°C/50%R.H./101kPa
 Tested by : Luke Li
 Polarization : vertical
 Remark : /

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector
1	50.122	27.94	-11.97	15.97	40.00	-24.03	Peak
2	102.539	27.68	-13.78	13.90	43.50	-29.60	Peak
3	224.618	27.79	-13.13	14.66	46.00	-31.34	Peak
4	344.084	27.93	-9.51	18.42	46.00	-27.58	Peak
5	433.920	74.89	-7.90	66.99	100.83	-33.84	Peak
6	867.840	36.75	-0.86	35.89	80.83	-44.94	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain

Remark:


Level = Reading + Factor


Factor = Antenna factor + Cable loss – Amplifier gain

Over Limit = Level – Limit

Above 1GHz:

Test Date:	2023-12-16	Test By:	Luke Li
Environment condition:	Temperature: 24°C; Relative Humidity:47%; ATM Pressure: 101kPa		

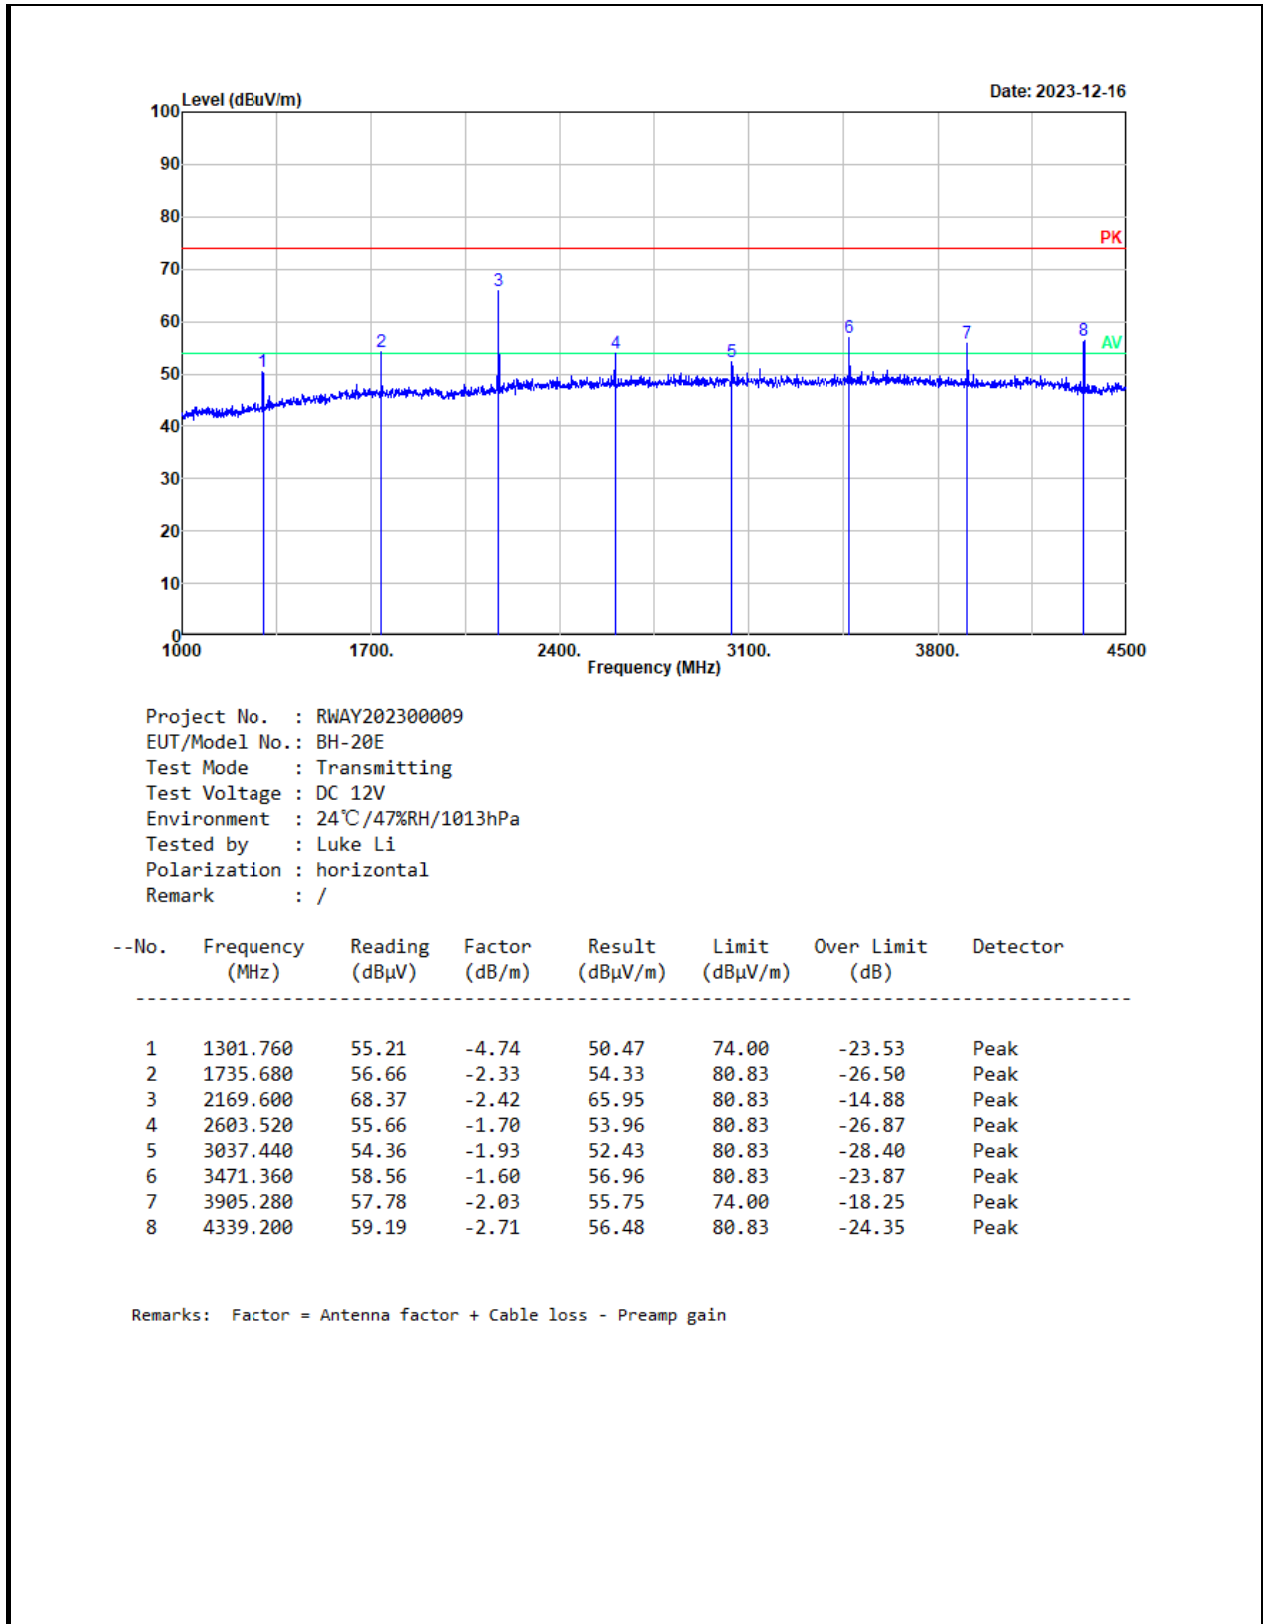

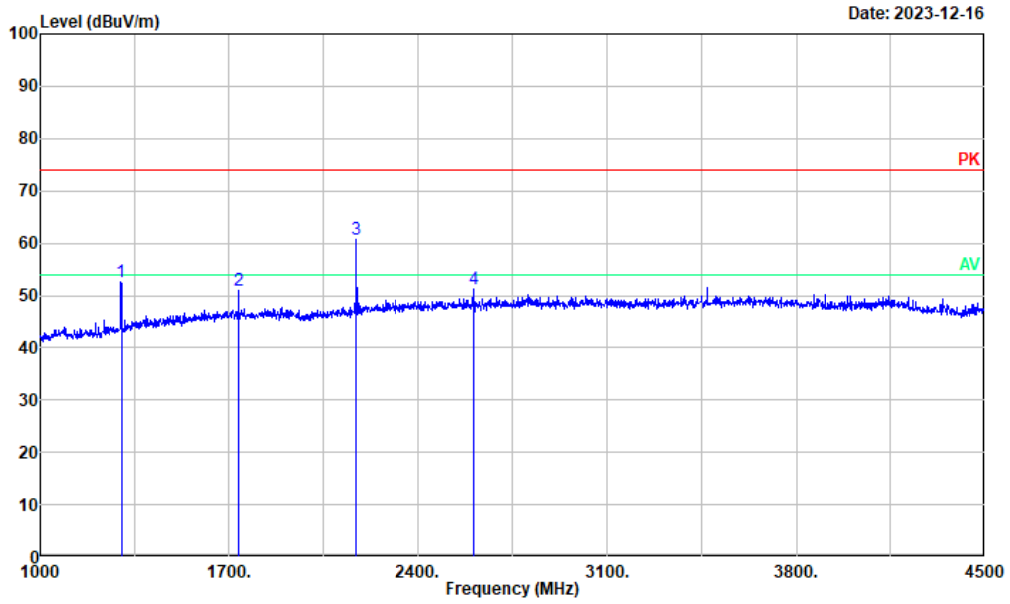

Project No. : RWAY202300009
 EUT/Model No.: BH-20E
 Test Mode : Transmitting
 Test Voltage : DC 12V
 Environment : 24°C/47%RH/1013hPa
 Tested by : Luke Li
 Polarization : vertical
 Remark : /

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBUV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector
1	1301.760	57.43	-4.74	52.69	74.00	-21.31	Peak
2	1735.680	53.30	-2.33	50.97	80.83	-29.86	Peak
3	2169.600	63.16	-2.42	60.74	80.83	-20.09	Peak
4	2603.520	52.98	-1.70	51.28	80.83	-29.55	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain

Remark:

Level = Reading + Factor

Factor = Antenna factor + Cable loss – Amplifier gain

Over Limit = Level – Limit

The emission levels of other frequencies that were lower than the limit 20dB not show in test report.

Field strength of average:

Frequency (MHz)	Peak level (dBμV)	Polar	Duty cycle Factor (dB/m)	Average Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
433.920	81.87	horizontal	-7.06	74.81	80.83	-6.02	Fundamental
433.920	66.99	vertical	-7.06	59.93	80.83	-20.9	Fundamental
867.840	52.34	horizontal	-7.06	45.28	60.83	-15.55	Harmonic
867.840	35.89	vertical	-7.06	28.83	60.83	-32	Harmonic
1301.760	50.47	horizontal	-7.06	43.41	54.00	-10.59	Harmonic
1735.680	54.33	horizontal	-7.06	47.27	60.83	-13.56	Harmonic
2169.600	65.95	horizontal	-7.06	58.89	60.83	-1.94	Harmonic
2603.520	53.96	horizontal	-7.06	46.9	60.83	-13.93	Harmonic
3037.440	52.43	horizontal	-7.06	45.37	60.83	-15.46	Harmonic
3471.360	56.96	horizontal	-7.06	49.9	60.83	-10.93	Harmonic
3905.280	55.75	horizontal	-7.06	48.69	54.00	-5.31	Harmonic
4339.200	56.48	horizontal	-7.06	49.42	60.83	-11.41	Harmonic
1301.760	52.69	vertical	-7.06	45.63	54.00	-8.37	Harmonic
1735.680	50.97	vertical	-7.06	43.91	60.83	-16.92	Harmonic
2169.600	60.74	vertical	-7.06	53.68	60.83	-7.15	Harmonic
2603.520	51.28	vertical	-7.06	44.22	60.83	-16.61	Harmonic

Remark:

Average Amplitude= Peak level + Duty Cycle Factor

Duty Cycle Factor = 20*log(duty cycle)

Duty Cycle:

Ton1=0.224ms, N1=11

Ton2=0.604ms, N2=14

Tp=24.618ms

Duty Cycle=(Ton1*N1+Ton2*N2)/Tp=(0.224*11+0.604*14)/24.618=0.4436


Duty Cycle Factor=20*log(0.4436)=-7.06dB

Duty Cycle


Project No. : RWAY202300009
 EUT/Model No.: BH-20E
 Test Mode : Transmitting
 Test Voltage : DC 12V
 Environment : 23°C/50%RH/1009hPa
 Tested by : Luke Li
 Polarization : vertical
 Remark : Duty Cycle




Project No. : RWAY202300009
 EUT/Model No.: BH-20E
 Test Mode : Transmitting
 Test Voltage : DC 12V
 Environment : 23°C/50%RH/1009hPa
 Tested by : Luke Li
 Polarization : vertical
 Remark : Duty Cycle

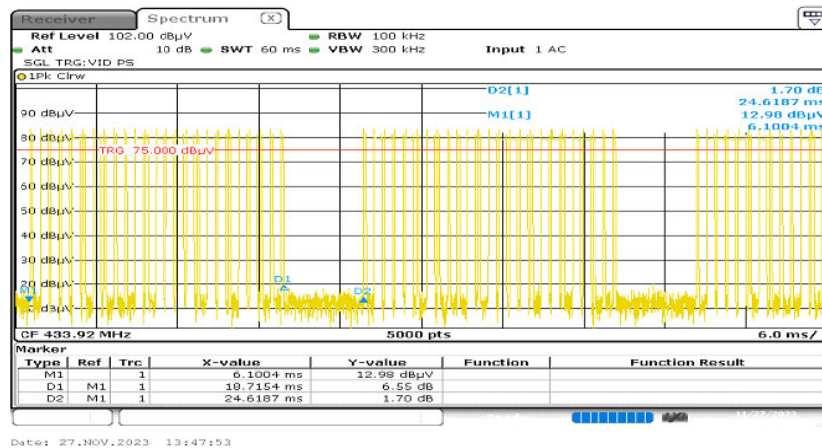

Project No. : RWAY202300009
 EUT/Model No.: BH-20E
 Test Mode : Transmitting
 Test Voltage : DC 12V
 Environment : 23°C/50%RH/1009hPa
 Tested by : Luke Li
 Polarization : vertical
 Remark : Duty Cycle

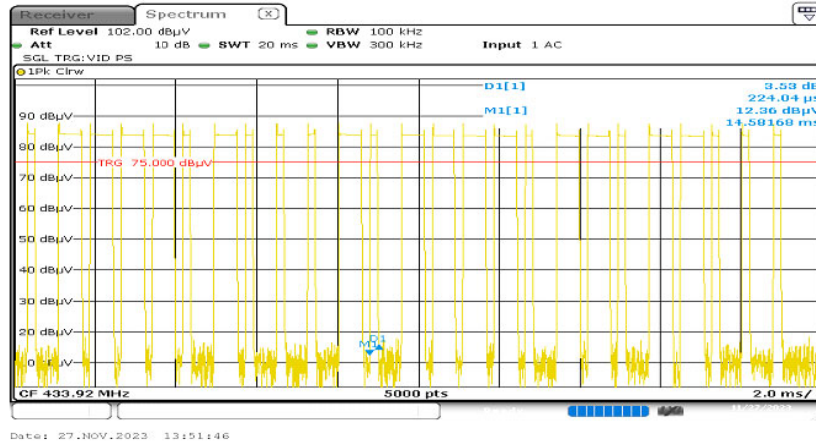

Project No. : RWAY202300009
 EUT/Model No.: BH-20E
 Test Mode : Transmitting
 Test Voltage : DC 12V
 Environment : 23°C/50%RH/1009hPa
 Tested by : Luke Li
 Polarization : vertical
 Remark : Duty Cycle

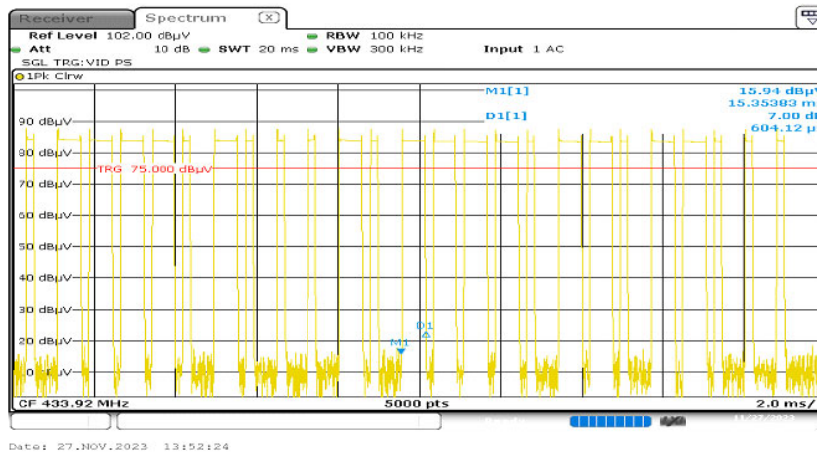


3.5 Deactivation Testing

Test Date:	2023-11-28	Test By:	Luke Li
Environment condition:	Temperature: 24°C; Relative Humidity:47%; ATM Pressure: 101.3kPa		

Channel Frequency [MHz]	Deactivation time[s]	Limit[s]	Verdict
433.92	4.7971	≤5	Pass

Test Plots:

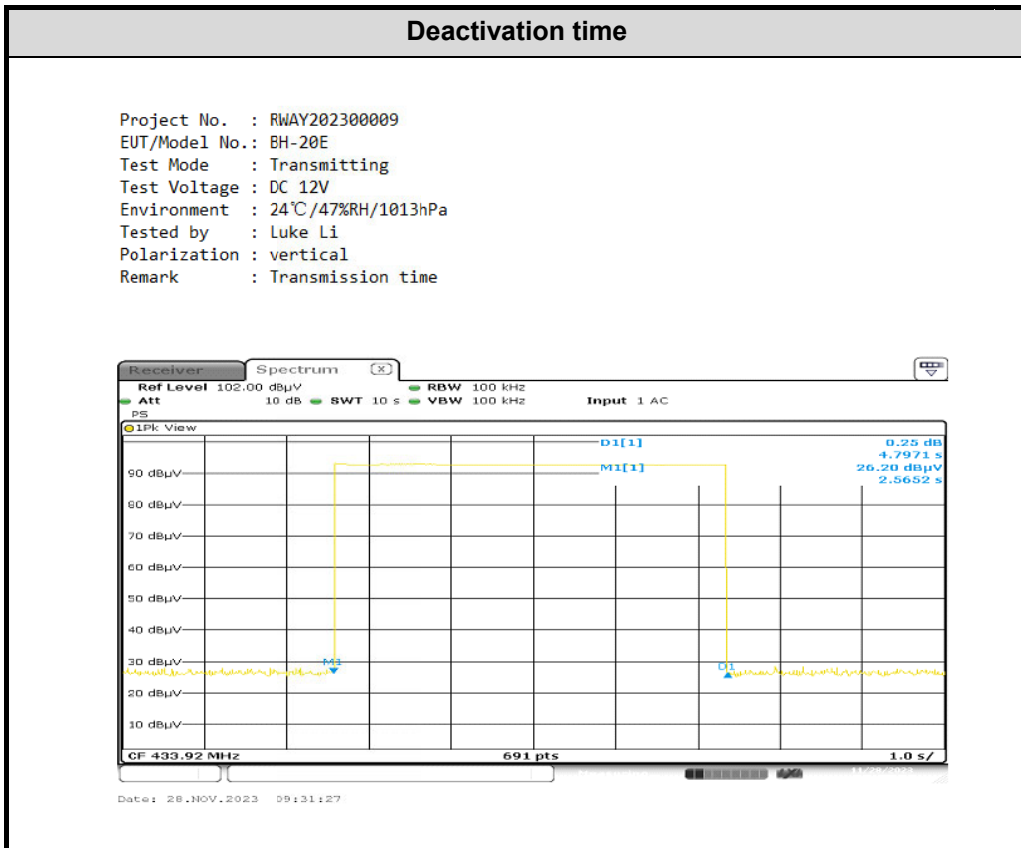


3.6 Bandwidth Test Data

Test Date:	2023-11-27	Test By:	Luke Li
Environment condition:	Temperature: 23°C; Relative Humidity:50%; ATM Pressure: 100.9kPa		

Channel Frequency [MHz]	20dB BW [kHz]	Limit[kHz]	Verdict
433.92	11.8	1084.8	Pass

Test Plots:

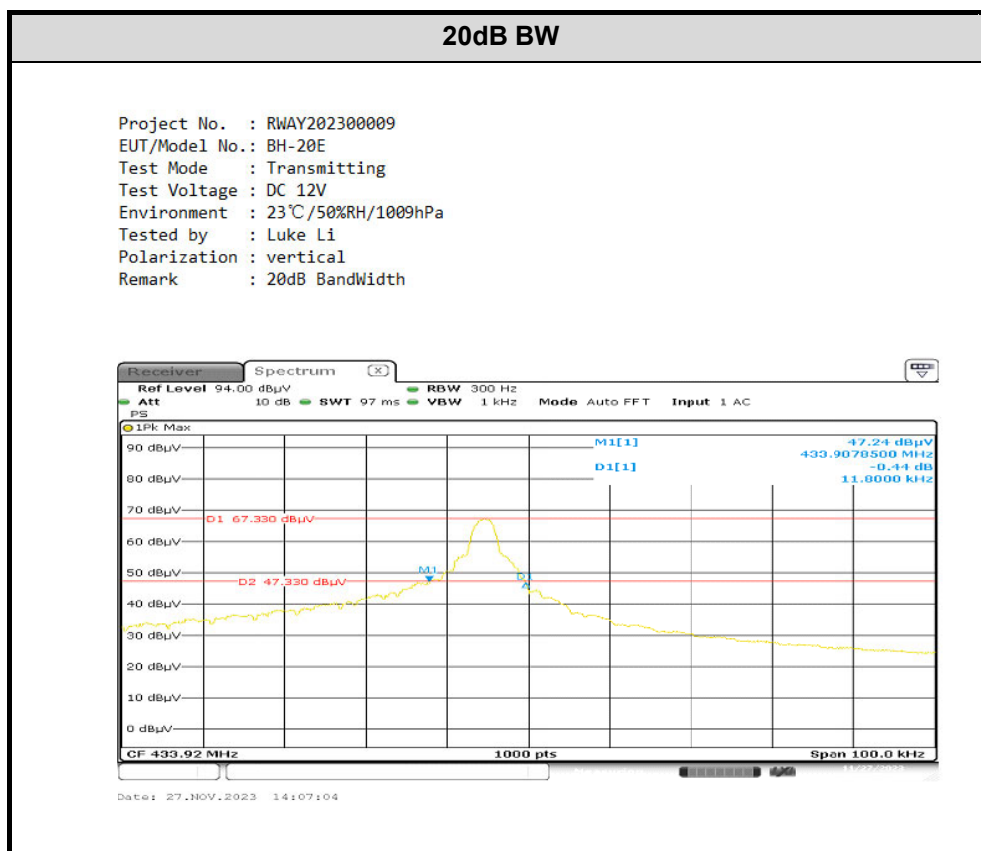

4 Test Setup Photo

Please refer to the attachment RWAY202300009 test setup photo.

5 E.U.T Photo

Please refer to the attachment RWAY202300009 external photo and RWAY202300009 internal photo.

---End of Report---