

RF MEASUREMENT REPORT

FCC ID: Q9DAPIN0755
Applicant: Hewlett Packard Enterprise Company
Product: ACCESS POINT
Model No.: APIN0755
Trademark: 
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15 Subpart C (Section 15.247)
Result: Complies
Received Date: 2024-03-29
Test Date: 2024-04-18 ~ 2024-05-14

Reviewed By:

Jame Yuan

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2403RSU068-U2	V01	Initial Report	2024-07-27	Valid

CONTENTS

Description	Page
1. General Information	6
1.1. Applicant	6
1.2. Manufacturer	6
1.3. Testing Facility	6
1.4. Product Information.....	7
1.5. Radio Specification under Test	7
1.6. Working Frequencies	7
1.7. Description of Operating Paths	8
1.8. Antenna Details.....	8
1.9. Description of Antenna RF Port	9
2. Test Configuration	10
2.1. Test Mode.....	10
2.2. Test System Connection Diagram.....	10
2.3. Test Software	10
2.4. Applied Standards.....	11
2.5. Test Environment Condition	11
3. Antenna Requirements	12
4. Measuring Instrument	13
5. Decision Rules and Measurement Uncertainty	15
5.1. Decision Rules	15
5.2. Measurement Uncertainty	15
6. Test Result.....	16
6.1. Summary.....	16
6.2. 6dB Bandwidth Measurement.....	17
6.2.1. Test Limit	17
6.2.2. Test Procedure	17
6.2.3. Test Setting	17
6.2.4. Test Setup	17
6.2.5. Test Result	17
6.3. Output Power Measurement	18
6.3.1. Test Limit	18
6.3.2. Test Procedure	18
6.3.3. Test Setting	18
6.3.4. Test Setup	18
6.3.5. Test Result	18

6.4.	Power Spectral Density Measurement	19
6.4.1.	Test Limit	19
6.4.2.	Test Procedure	19
6.4.3.	Test Setting	19
6.4.4.	Test Setup	19
6.4.5.	Test Result	19
6.5.	Conducted Band Edge and Out-of-Band Emissions Measurement	20
6.5.1.	Test Limit	20
6.5.2.	Test Procedure	20
6.5.3.	Test Settintg	20
6.5.4.	Test Setup	20
6.5.5.	Test Result	21
6.6.	Radiated Spurious Emission Measurement.....	22
6.6.1.	Test Limit	22
6.6.2.	Test Procedure	22
6.6.3.	Test Setting	22
6.6.4.	Test Setup	24
6.6.5.	Test Result	25
6.7.	Radiated Restricted Band Edge Measurement	26
6.7.1.	Test Limit	26
6.7.2.	Test Procedure	27
6.7.3.	Test Setting	27
6.7.4.	Test Setup	28
6.7.5.	Test Result	28
6.8.	AC Conducted Emissions Measurement	29
6.8.1.	Test Limit	29
6.8.2.	Test Setup	29
6.8.3.	Test Result	29
Appendix A	- Test Result.....	30
A.1	Duty Cycle Test Result	30
A.2	6dB Bandwidth Test Result	33
A.3	Output Power Test Result	36
A.4	Power Spectral Density Test Result.....	42
A.5	Conducted Band Edge and Out-of-Band Emissions Test Result.....	45
A.6	Radiated Spurious Emission Test Result.....	57
A.7	Radiated Restricted Band Edge Test Result.....	71
A.8	AC Conducted Emissions Test Result	95
Appendix B	- Test Setup Photograph	97

Appendix C - EUT Photograph98

1.4. Product Information

Product Name	ACCESS POINT
Model No.	APIN0755
Serial No.	Radiated Sample: CNRRM5901D
	Conducted Sample: CNRRM59022
Software Version	REL24
Wi-Fi Specification	802.11a/b/g/n/ac/ax/be
Bluetooth Specification	BLE only
ZigBee Specification	802.15.4
GNSS Specification	GPS, Galileo
Antenna Information	Refer to Section 1.8
Power Type	AC Adapter Input or PoE Input
Operating Environment	Indoor Use
Remark: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

1.5. Radio Specification under Test

ZigBee Specification	802.15.4
Frequency Range	2405 ~ 2480MHz
Channel Number	16
Type of Modulation	O-QPSK

1.6. Working Frequencies

Channel	Frequency	Channel	Frequency	Channel	Frequency
11	2405 MHz	12	2410 MHz	13	2415 MHz
14	2420 MHz	15	2425 MHz	16	2430 MHz
17	2435 MHz	18	2440 MHz	19	2445 MHz
20	2450 MHz	21	2455 MHz	22	2460 MHz
23	2465 MHz	24	2470 MHz	25	2475 MHz
26	2480 MHz	--	--	--	--

1.7. Description of Operating Paths


The EUT has two BLE/ZigBee radios, Core 0 and Core1, Core 0 was equipped with one antenna named Ant 7 and Core 1 was equipped with two antennas named Ant 8 and Ant 14, The front end of each antenna port corresponds to three filters respectively, filter 1#, 2#, 3# for Ant 7, filter 4#, 5#, 6# for Ant 14, filter 7#, 8#, 9# for Ant 8, details are as follows.

Filter	Specification	Remark
1#, 4#, 7#	Band Pass Filter (2402-2480)	Allowing any transmission on all channels
2#, 5#, 8#	Band Pass Filter (2402-2430)	Allowing transmission on BLE channels 37 (2402MHz) and 38 (2426MHz) and Zigbee channel 11 (2405MHz)
3#, 6#, 9#	Band Pass Filter (2478-2482)	Allowing transmission on BLE channel 39 (2480MHz) and Zigbee channel 26(2480MHz)

1.8. Antenna Details

Antenna Type	Wi-Fi Antenna	Frequency Band (GHz)	Antenna Gain (dBi)
PIFA	Ant 7	2.4 ~ 2.5	4.4
PIFA	Ant 8	2.4 ~ 2.5	2.1
Alford Loop	Ant 14	2.4 ~ 2.5	5.7

1.9. Description of Antenna RF Port

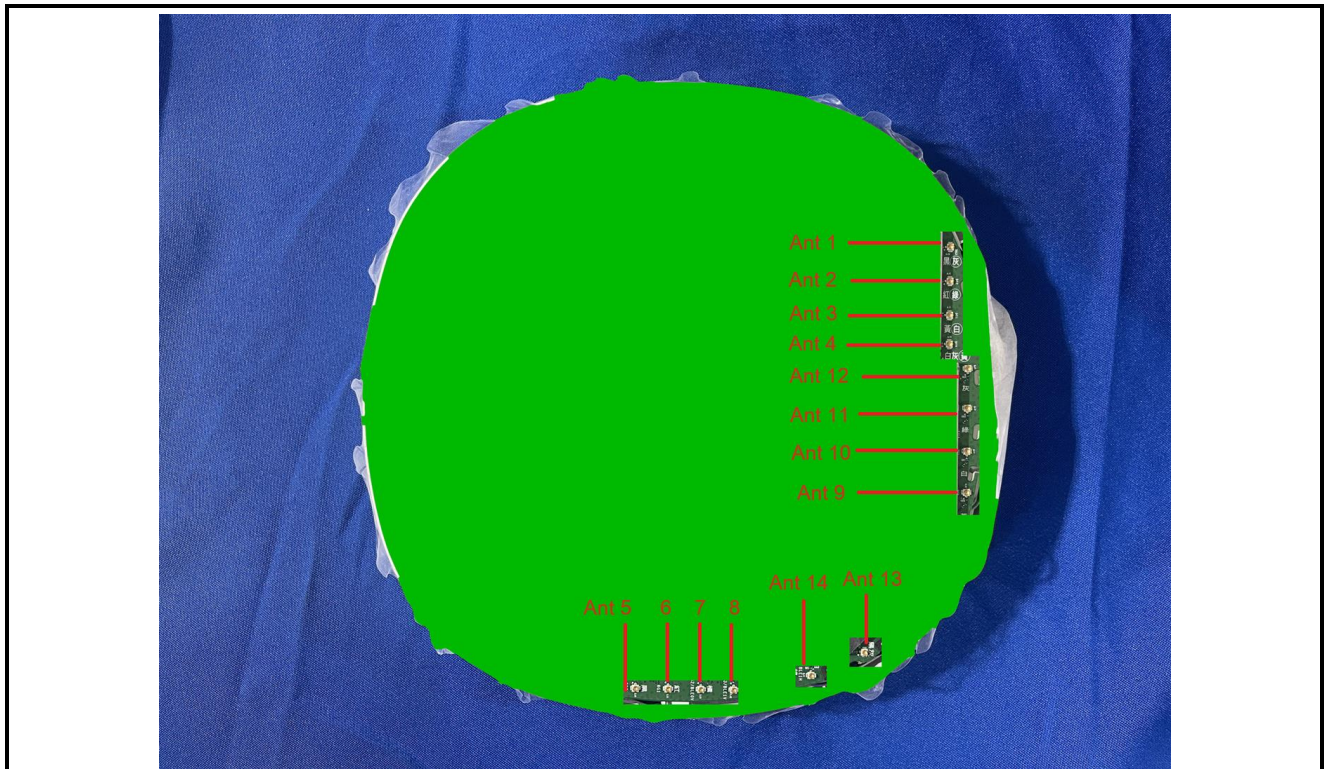

Antenna Port	RF Spec.			
	Wi-Fi 2.4G	Wi-Fi 5G	Wi-Fi 6G	BLE/ZigBee
Ant 1	--	● (Radio 1)	--	--
Ant 2	--	● (Radio 1)	--	--
Ant 3	--	● (Radio 1)	--	--
Ant 4	--	● (Radio 1)	--	--
Ant 5	--	--	● (Radio 0)	--
Ant 6	--	--	● (Radio 0)	--
Ant 7	--	--	● (Radio 0)	● (Core 0)
Ant 8	--	--	● (Radio 0)	● (Core 1)
Ant 9	● (Radio 2)	--	--	--
Ant 10	● (Radio 2)	--	--	--
Ant 11	● (Radio 2)	--	--	--
Ant 12	● (Radio 2)	--	--	--
Ant 13	GNSS			
Ant 14	--	--	--	● (Core 1)


2. Test Configuration

2.1. Test Mode

Mode 1: Transmit at Core 0 on Ant 7 port
Mode 2: Transmit at Core 1 on Ant 14 port
Mode 3: Transmit at Core 1 on Ant 8 port

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

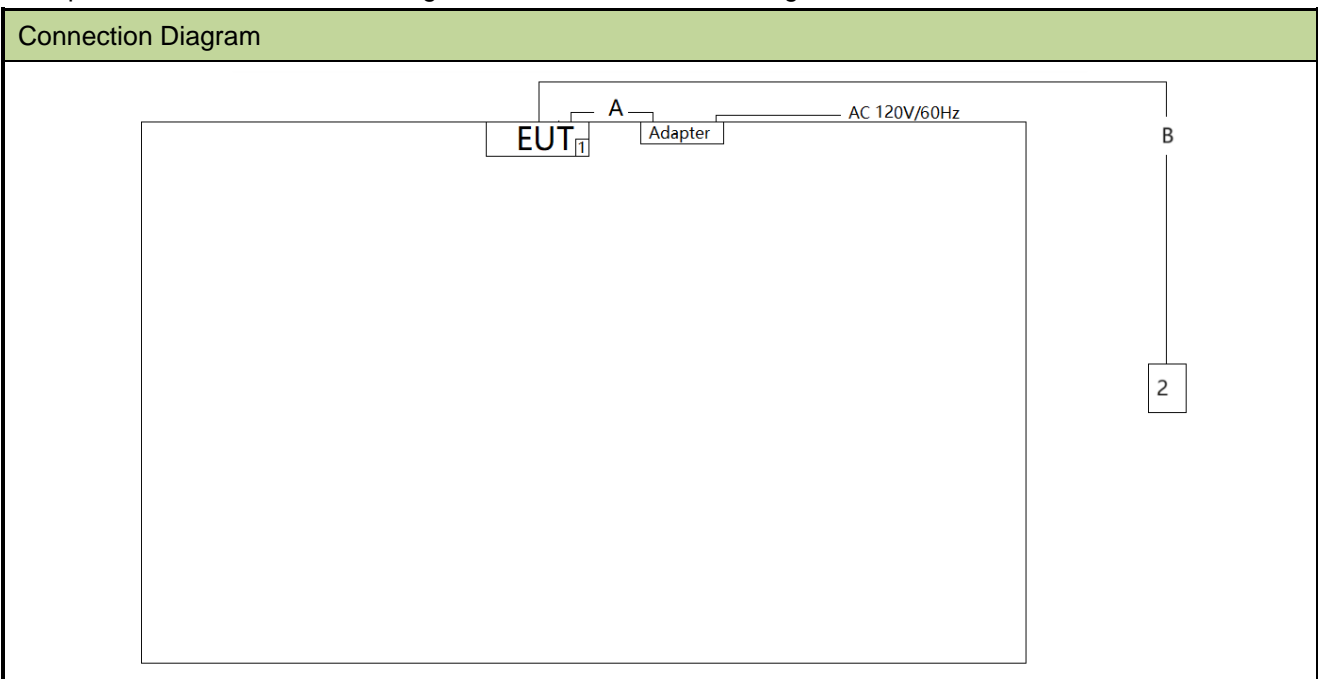

No.	Cable Type	Cable Spec.	Length
A	Power Cable	Non-Shielded	1.2m
B	LAN Cable	Non-Shielded, Cat 6	>10.0m
No.	Product	Manufacturer	Model No.
1	USB Flash	SanDisk	16G
2	Notebook	DELL	Latitude 5491

2.3. Test Software

The test utility software used during testing was “telnet”, and commands were provided by the manufacturer.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.247
- KDB 558074 D01v05r02
- ANSI C63.10-2013

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Anechoic Chamber	RIKEN	SIP-AC1	MRTSUE06554	1 year	2024-12-21	SIP-AC1
Thermohygrometer	testo	608-H1	MRTSUE06616	1 year	2024-10-28	SIP-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06645	1 year	2024-07-13	SIP-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06645	1 year	2024-07-05	SIP-AC1
Loop Antenna	Schwarzbeck	FMZB 1519 B	MRTSUE06937	1 year	2025-01-27	SIP-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE07028	1 year	2024-10-23	SIP-AC1
Preamplifier	EMCI	EMC051845SE	MRTSUE06601	1 year	2024-11-02	SIP-AC2
Thermohygrometer	testo	608-H1	MRTSUE06622	1 year	2024-11-03	SIP-AC2
Anechoic Chamber	RIKEN	SIP-AC2	MRTSUE06781	1 year	2024-12-21	SIP-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06648	1 year	2024-10-21	SIP-AC2
Signal Analyzer	Keysight	N9020B	MRTSUE06604	1 year	2025-02-03	SIP-AC2
Preamplifier	EMCI	EMC184045SE	MRTSUE06602	1 year	2024-10-09	SIP-AC2
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06598	1 year	2024-11-04	SIP-AC2
Signal Analyzer	Keysight	N9010B	MRTSUE06603	1 year	2024-09-27	SIP-AC3
Horn Antenna	R&S	HF907	MRTSUE06611	1 year	2024-07-14	SIP-AC3
Thermohygrometer	testo	608-H1	MRTSUE06619	1 year	2024-10-28	SIP-AC3
Preamplifier	EMCI	EMC012645SE	MRTSUE06642	1 year	2025-01-11	SIP-AC3
Anechoic Chamber	RIKEN	SIP-AC3	MRTSUE06782	1 year	2024-12-21	SIP-AC3
Thermohygrometer	testo	608-H1	MRTSUE06402	1 year	2024-05-31 2025-05-12	WZ-SR5
Shielding Room	HUAMING	WZ-SR5	MRTSUE06442	N/A	N/A	WZ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2024-05-23 2025-05-08	WZ-SR5
USB Power Sensor	Keysight	U2021XA	MRTSUE06446	1 year	2024-05-23 2025-05-08	WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11092	1 year	2024-06-08 2025-06-05	WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11087	1 year	2024-06-08 2025-06-05	WZ-SR5
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2024-05-23	WZ-SR2
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2025-05-08	WZ-SR2
Shielding Room	MIX-BEP	WZ-SR2	MRTSUE06215	5 years	2026-12-20	WZ-SR2
Thermohygrometer	testo	608-H1	MRTSUE06404	1 year	2024-05-31	WZ-SR2

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Thermohygrometer	testo	608-H1	MRTSUE06404	1 year	2025-05-12	WZ-SR2
Four-Line V-Network	R&S	ENV432	MRTSUE06615	1 year	2024-09-27	WZ-SR2
EMI Test Receiver	R&S	ESR3	MRTSUE06909	1 year	2024-09-27	WZ-SR2

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software
Controller_MF 7802BS	1.02	RE Antenna & Turntable
BenchVue Power Meter	2018.1	Power

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
The maximum measurement uncertainty is evaluated as: 9kHz~150kHz: 3.58dB 150kHz~30MHz: 3.20dB
Radiated Emission Measurement
The maximum measurement uncertainty is evaluated as: Coaxial: 9kHz~30MHz: 2.61dB Coplanar: 9kHz~30MHz: 2.62dB Horizontal: 30MHz~200MHz: 3.79dB 200MHz~1GHz: 3.91dB 1GHz~40GHz: 4.99dB Vertical: 30MHz~200MHz: 4.06dB 200MHz~1GHz: 5.21dB 1GHz~40GHz: 4.90dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 2.2dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.4dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 2.2dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 2.7%

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.247(a)(2)	6dB Bandwidth	Conducted	Pass
15.247(b)(3)	Output Power		Pass
15.247(e)	Power Spectral Density		Pass
15.247(d)	Band Edge / Out-of-Band Emissions		Pass
15.205 15.209	General Field Strength (Restricted Bands and Radiated Emission)	Radiated	Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

Notes:

- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- For radiated emission tests, every axis (X, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.
- The test items of each filter see table below:

Test Items	Filter 1# & 4# & 7#	Filter 2 # & 5# & 8#	Filter 3# & 6# & 9#
6dB Bandwidth	•	--	--
Output Power	•	•	•
Power Spectral Density	•	--	--
Band Edge / Out-of-Band Emissions	•	•	•
Radiated Spurious Emission	•	•	•
Radiated Band Edge	•	•	•
AC Conducted Emissions 150kHz - 30MHz	•	--	--

6.2. 6dB Bandwidth Measurement

6.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


6.2.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.8

6.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace to stabilize

6.2.4. Test Setup

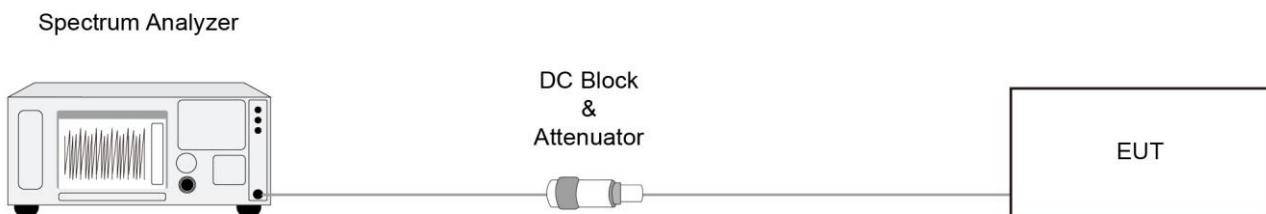

6.2.5. Test Result

Refer to Appendix A.2.

6.3. Output Power Measurement

6.3.1. Test Limit

The maximum output power shall be less 1 Watt (30dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.3.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.9.2.3.2

6.3.3. Test Setting


Method PKPM1 (Peak Power Measurement of Signals with DTS BW \leq 50MHz)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.3.4. Test Setup

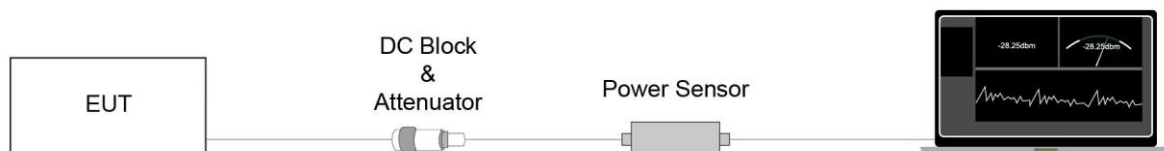

6.3.5. Test Result

Refer to Appendix A.3.

6.4. Power Spectral Density Measurement

6.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.


6.4.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.10.2

6.4.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

6.4.4. Test Setup

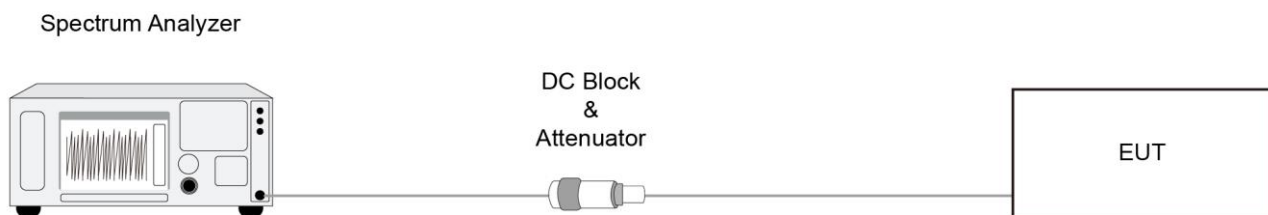

6.4.5. Test Result

Refer to Appendix A.4.

6.5. Conducted Band Edge and Out-of-Band Emissions Measurement

6.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

6.5.2. Test Procedure

ANSI C63.10-2013 - Section 11.11

6.5.3. Test Setting


Reference level measurement

1. Set instrument center frequency to DTS channel center frequency
2. Set the span to ≥ 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW $\geq 3 \times$ RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

6.5.4. Test Setup

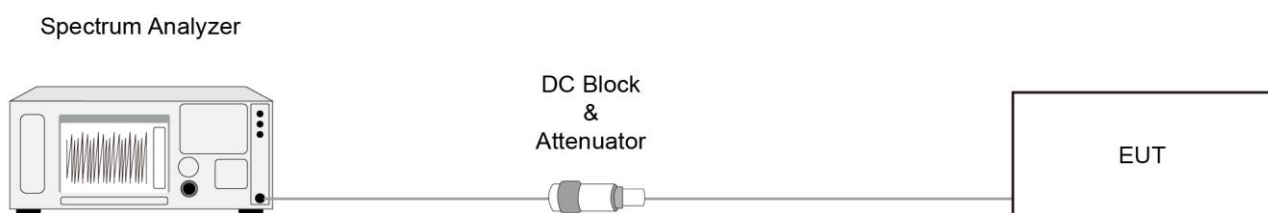

6.5.5. Test Result

Refer to Appendix A.5.

6.6. Radiated Spurious Emission Measurement

6.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.6.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.11 & 11.12

ANSI C63.10 - 2013 - Section 6.3 (General Requirements)

ANSI C63.10 - 2013 - Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 - Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 - Section 6.6 (Standard test method above 1GHz)

6.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Field Strength Measurements


1. Average Measurement Level = Peak Measurement Level - $20 * \text{Log}(\text{Duty Cycle}) = -20$
2. Duty Cycle = 10% (Refer to cover letter)

6.6.4. Test Setup


Below 30MHz Test Setup:

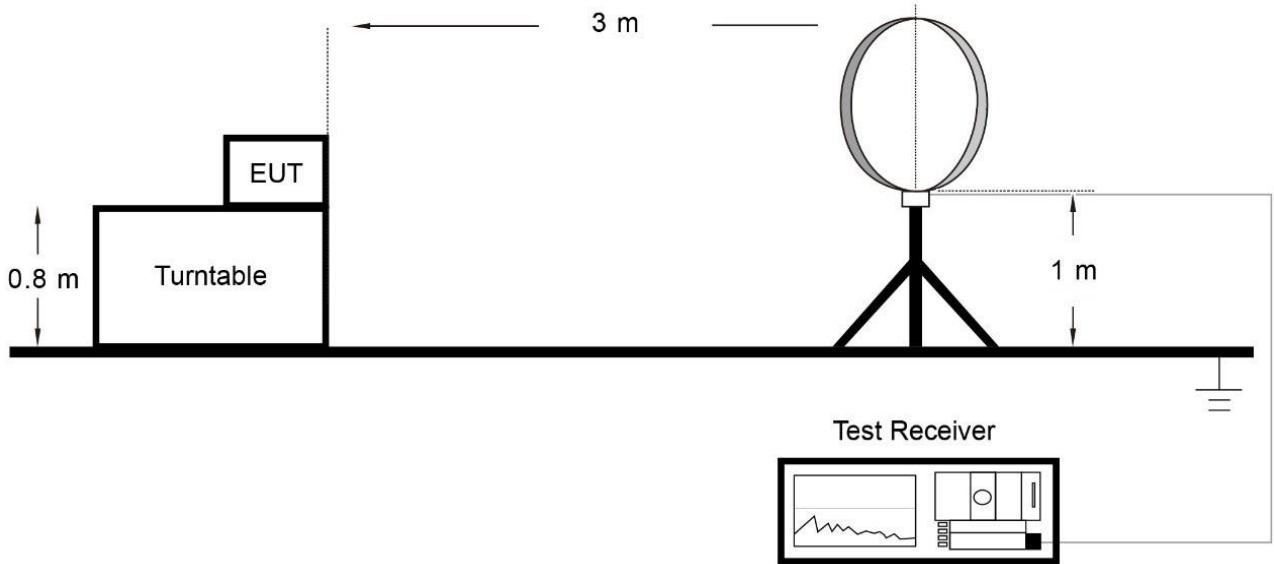

Below 1GHz Test Setup:

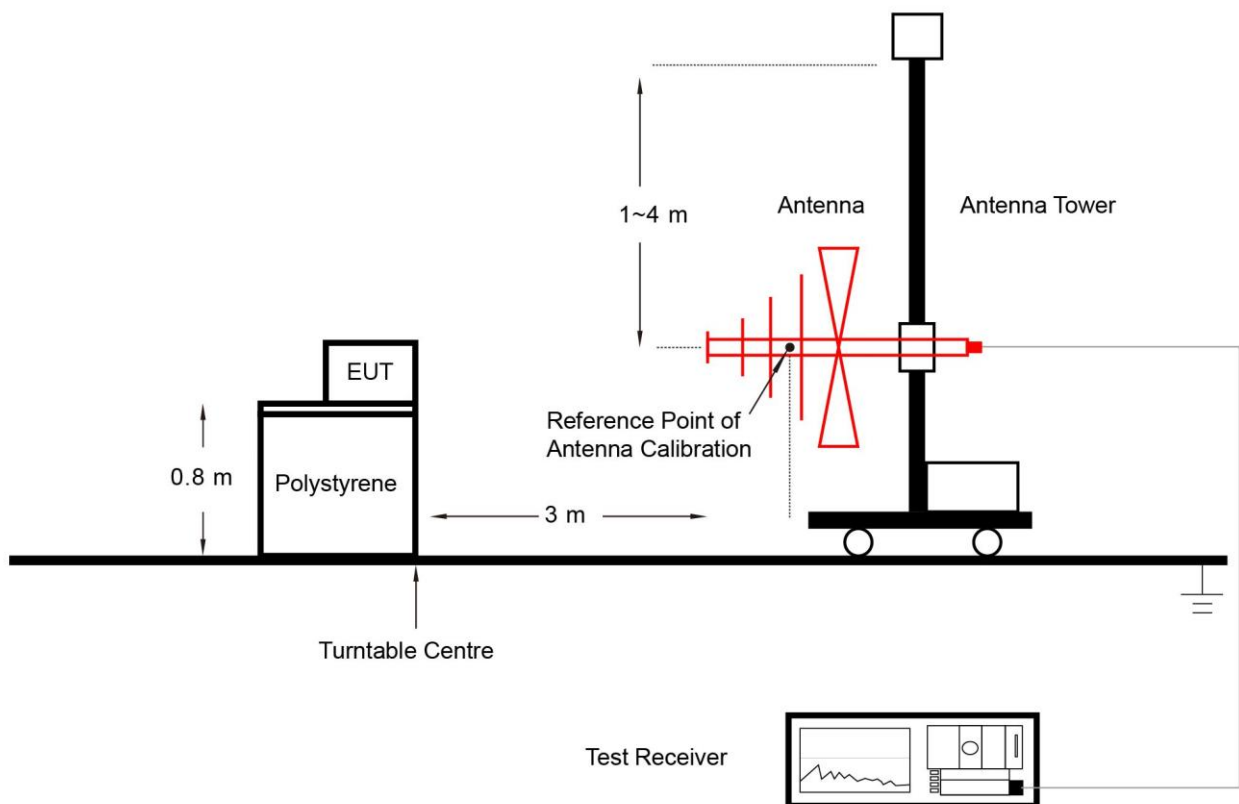

Above 1GHz Test Setup:

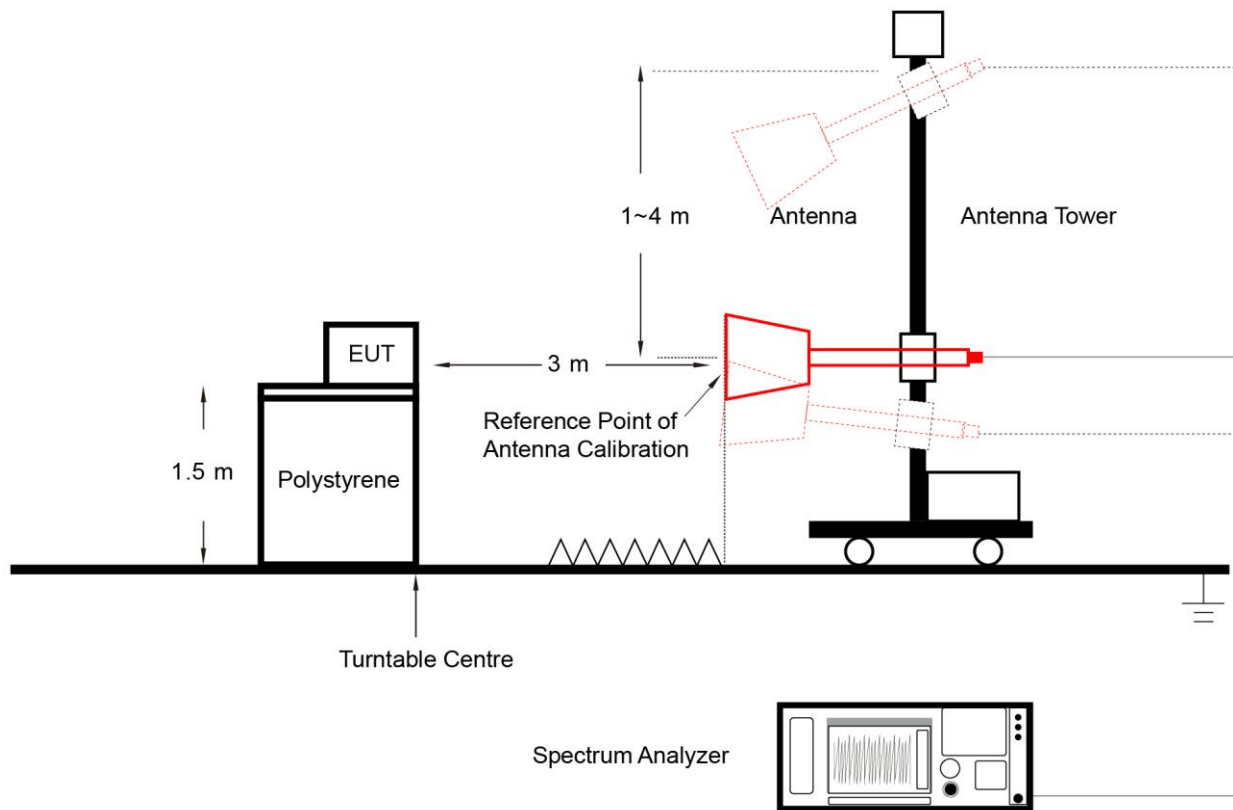

6.6.5. Test Result

Refer to Appendix A.6.

6.7. Radiated Restricted Band Edge Measurement

6.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.7.2. Test Procedure

ANSI C63.10-2013 Section 6.3 & 6.6 & 11.13

6.7.3. Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Field Strength Measurements

3. Average Measurement Level = Peak Measurement Level - 20 * Log(Duty Cycle) = -20
4. Duty Cycle = 10% (Refer to cover letter)

6.7.4. Test Setup

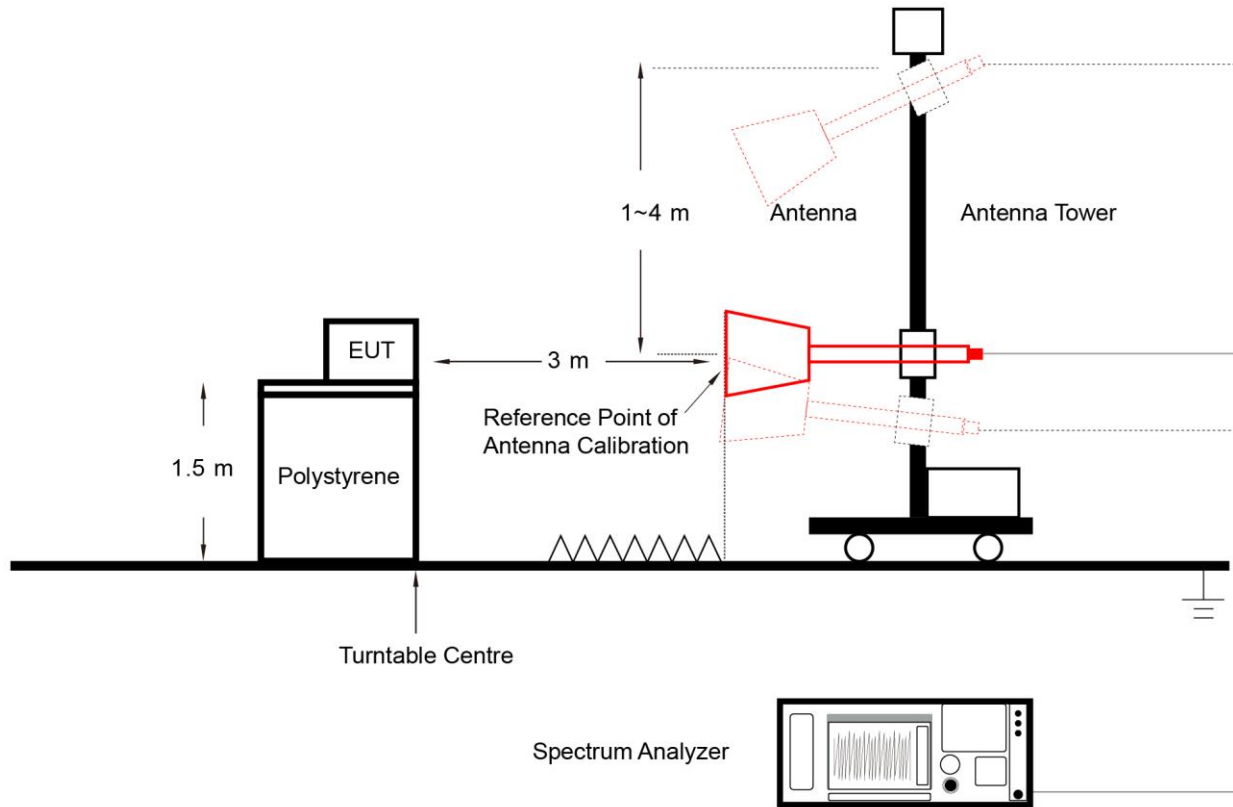

6.7.5. Test Result

Refer to Appendix A.7.

6.8. AC Conducted Emissions Measurement


6.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.8.2. Test Setup

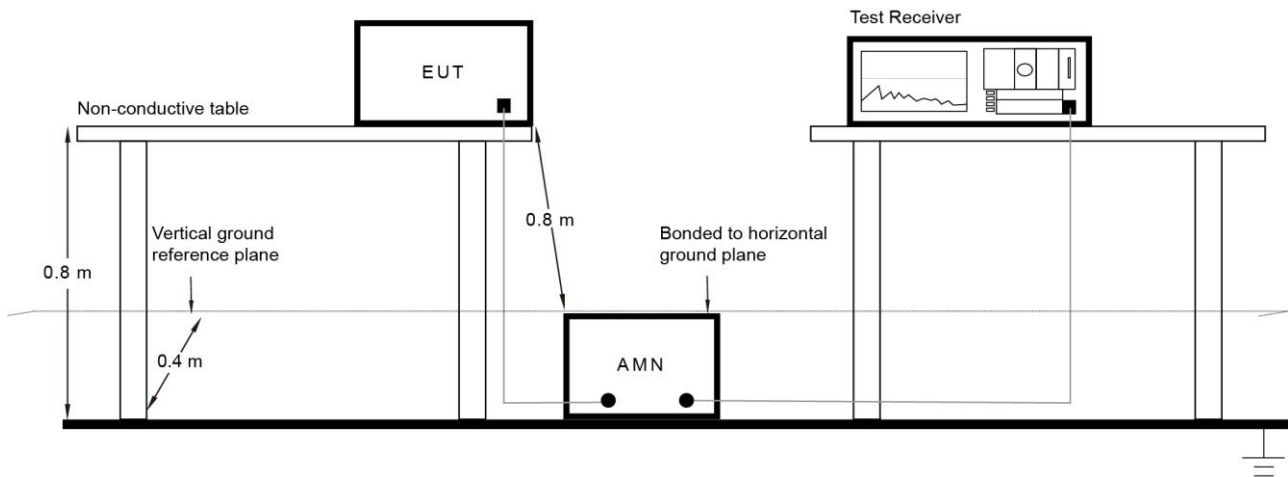

6.8.3. Test Result

Refer to Appendix A.8.


Appendix A – Test Result

A.1 Duty Cycle Test Result

Mode 1

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-04-19		

Test Mode	Duty Cycle
802.15.4	91.56%

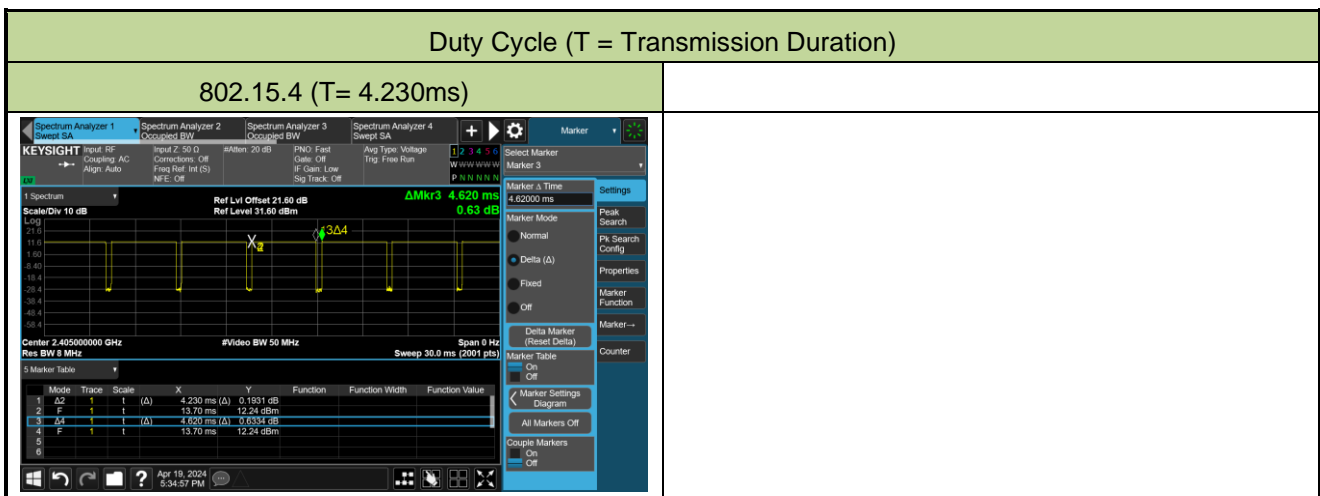

Mode 2

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-04-20		

Test Mode	Duty Cycle
802.15.4	91.91%

Duty Cycle (T = Transmission Duration)																																									
802.15.4 (T= 4.260ms)																																									
<p>The screenshot shows a Spectrum Analyzer interface with a signal waveform. The waveform consists of several pulses. A marker is placed on a pulse, and the time between markers is shown as 4.635 ms. The interface includes various settings and a marker table.</p> <table border="1"> <thead> <tr> <th>Mode</th> <th>Trace</th> <th>Scale</th> <th>X</th> <th>Y</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>t</td> <td>(Δ)</td> <td>4.260 ms (Δ)</td> <td>-0.2940 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>12.42 ms</td> <td>12.22 dBm</td> <td></td> </tr> <tr> <td>3</td> <td>M4</td> <td>1</td> <td>t</td> <td>(Δ)</td> <td>4.635 ms (Δ)</td> <td>-0.030795 dB</td> <td></td> </tr> <tr> <td>4</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>12.42 ms</td> <td>12.22 dBm</td> <td></td> </tr> </tbody> </table>		Mode	Trace	Scale	X	Y	Function	Function Width	Function Value	1	Δ2	1	t	(Δ)	4.260 ms (Δ)	-0.2940 dB		2	F	1	t		12.42 ms	12.22 dBm		3	M4	1	t	(Δ)	4.635 ms (Δ)	-0.030795 dB		4	F	1	t		12.42 ms	12.22 dBm	
Mode	Trace	Scale	X	Y	Function	Function Width	Function Value																																		
1	Δ2	1	t	(Δ)	4.260 ms (Δ)	-0.2940 dB																																			
2	F	1	t		12.42 ms	12.22 dBm																																			
3	M4	1	t	(Δ)	4.635 ms (Δ)	-0.030795 dB																																			
4	F	1	t		12.42 ms	12.22 dBm																																			

Mode 3

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-04-22		

Test Mode	Duty Cycle
802.15.4	92.21%


Duty Cycle (T = Transmission Duration)	
802.15.4 (T= 4.260ms)	

A.2 6dB Bandwidth Test Result

Mode 1

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-04-19 ~ 2024-04-20		

Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.15.4	O-QPSK	11	2405	1.560	≥ 0.5	Pass
802.15.4	O-QPSK	18	2440	1.618	≥ 0.5	Pass
802.15.4	O-QPSK	26	2480	1.628	≥ 0.5	Pass

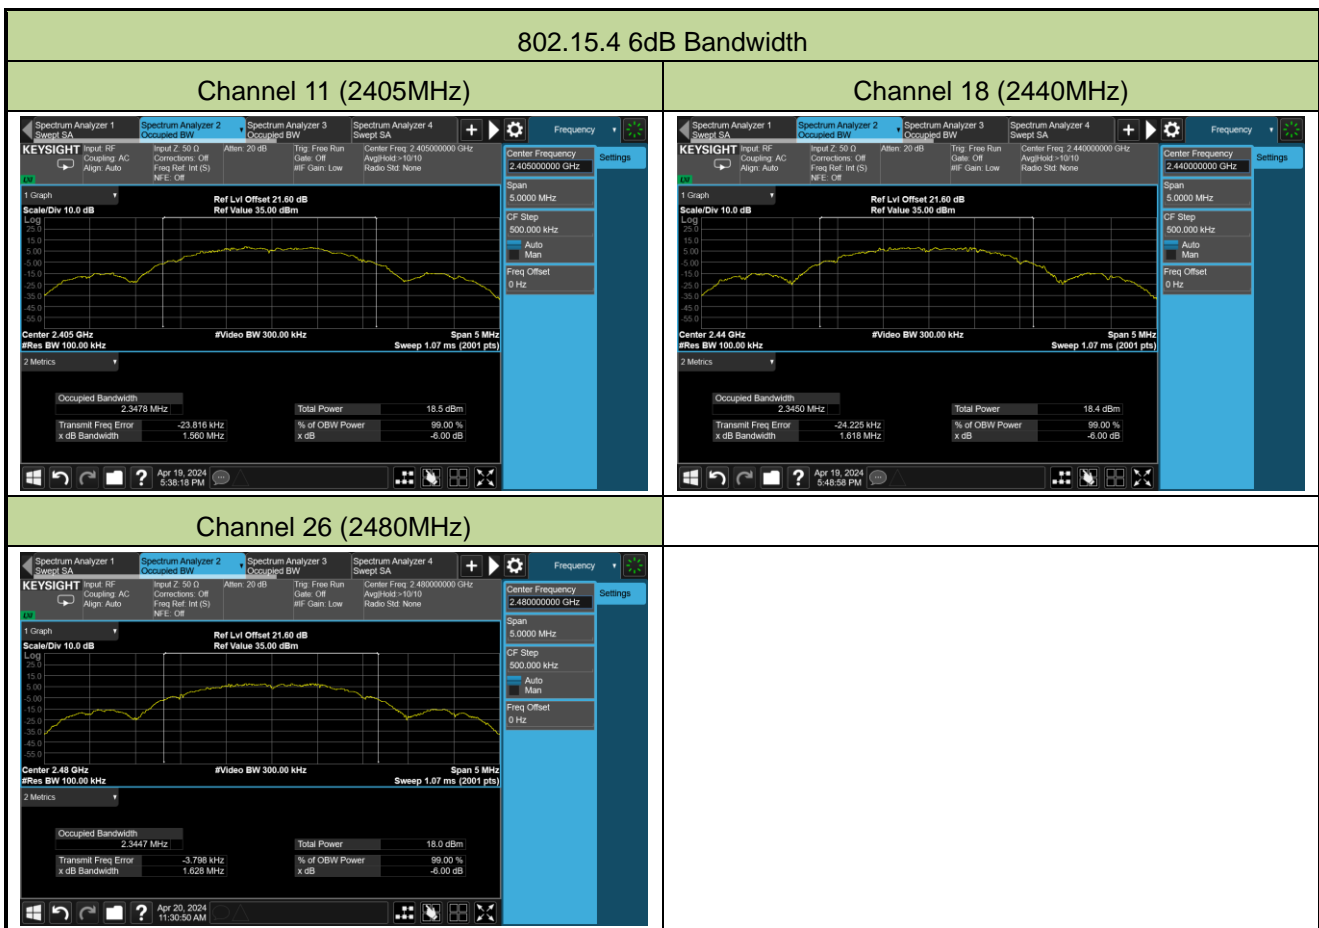

Mode 2

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-04-20		

Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.15.4	O-QPSK	11	2405	1.624	≥ 0.5	Pass
802.15.4	O-QPSK	18	2440	1.618	≥ 0.5	Pass
802.15.4	O-QPSK	26	2480	1.615	≥ 0.5	Pass



Mode 3

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-04-20		

Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.15.4	O-QPSK	11	2405	1.608	≥ 0.5	Pass
802.15.4	O-QPSK	18	2440	1.603	≥ 0.5	Pass
802.15.4	O-QPSK	26	2480	1.616	≥ 0.5	Pass



A.3 Output Power Test Result

Mode 1

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-04-19	Filter	1#

Test Result of Peak Output Power

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Peak Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	12.63	≤ 30.00	Pass
802.15.4	O-QPSK	18	2440	12.93	≤ 30.00	Pass
802.15.4	O-QPSK	26	2480	12.51	≤ 30.00	Pass

Test Result of Average Output Power (Reporting Only)

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	11.99	≤ 30.00	Pass
802.15.4	O-QPSK	18	2440	12.29	≤ 30.00	Pass
802.15.4	O-QPSK	26	2480	11.84	≤ 30.00	Pass

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-04-19	Filter	2#

Test Result of Peak Output Power

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Peak Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	12.51	≤ 30.00	Pass

Test Result of Average Output Power (Reporting Only)

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	11.74	≤ 30.00	Pass

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-04-19	Filter	3#

Test Result of Peak Output Power

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Peak Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	26	2480	10.61	≤ 30.00	Pass

Test Result of Average Output Power (Reporting Only)

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	26	2480	9.85	≤ 30.00	Pass

Mode 2

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-04-19	Filter	4#

Test Result of Peak Output Power

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Peak Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	12.17	≤ 30.00	Pass
802.15.4	O-QPSK	18	2440	12.51	≤ 30.00	Pass
802.15.4	O-QPSK	26	2480	12.38	≤ 30.00	Pass

Test Result of Average Output Power (Reporting Only)

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	9.22	≤ 30.00	Pass
802.15.4	O-QPSK	18	2440	10.29	≤ 30.00	Pass
802.15.4	O-QPSK	26	2480	9.36	≤ 30.00	Pass

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-04-19	Filter	5#

Test Result of Peak Output Power

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Peak Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	11.50	≤ 30.00	Pass

Test Result of Average Output Power (Reporting Only)

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	8.58	≤ 30.00	Pass

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-04-19	Filter	6#

Test Result of Peak Output Power

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Peak Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	26	2480	10.15	≤ 30.00	Pass

Test Result of Average Output Power (Reporting Only)

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	26	2480	7.33	≤ 30.00	Pass

Mode 3

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-04-19	Filter	7#

Test Result of Peak Output Power

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Peak Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	12.72	≤ 30.00	Pass
802.15.4	O-QPSK	18	2440	13.05	≤ 30.00	Pass
802.15.4	O-QPSK	26	2480	12.81	≤ 30.00	Pass

Test Result of Average Output Power (Reporting Only)

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	10.52	≤ 30.00	Pass
802.15.4	O-QPSK	18	2440	10.51	≤ 30.00	Pass
802.15.4	O-QPSK	26	2480	11.31	≤ 30.00	Pass

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-04-19	Filter	8#

Test Result of Peak Output Power

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Peak Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	11.64	≤ 30.00	Pass

Test Result of Average Output Power (Reporting Only)

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	9.32	≤ 30.00	Pass

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-04-19	Filter	9#

Test Result of Peak Output Power

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Peak Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	26	2480	10.50	≤ 30.00	Pass

Test Result of Average Output Power (Reporting Only)


Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	26	2480	7.75	≤ 30.00	Pass

A.4 Power Spectral Density Test Result

Mode 1

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-04-19		


Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	PK PSD (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
802.15.4	O-QPSK	11	2405	2.21	≤ 8.00	Pass
802.15.4	O-QPSK	18	2440	2.53	≤ 8.00	Pass
802.15.4	O-QPSK	26	2480	2.40	≤ 8.00	Pass

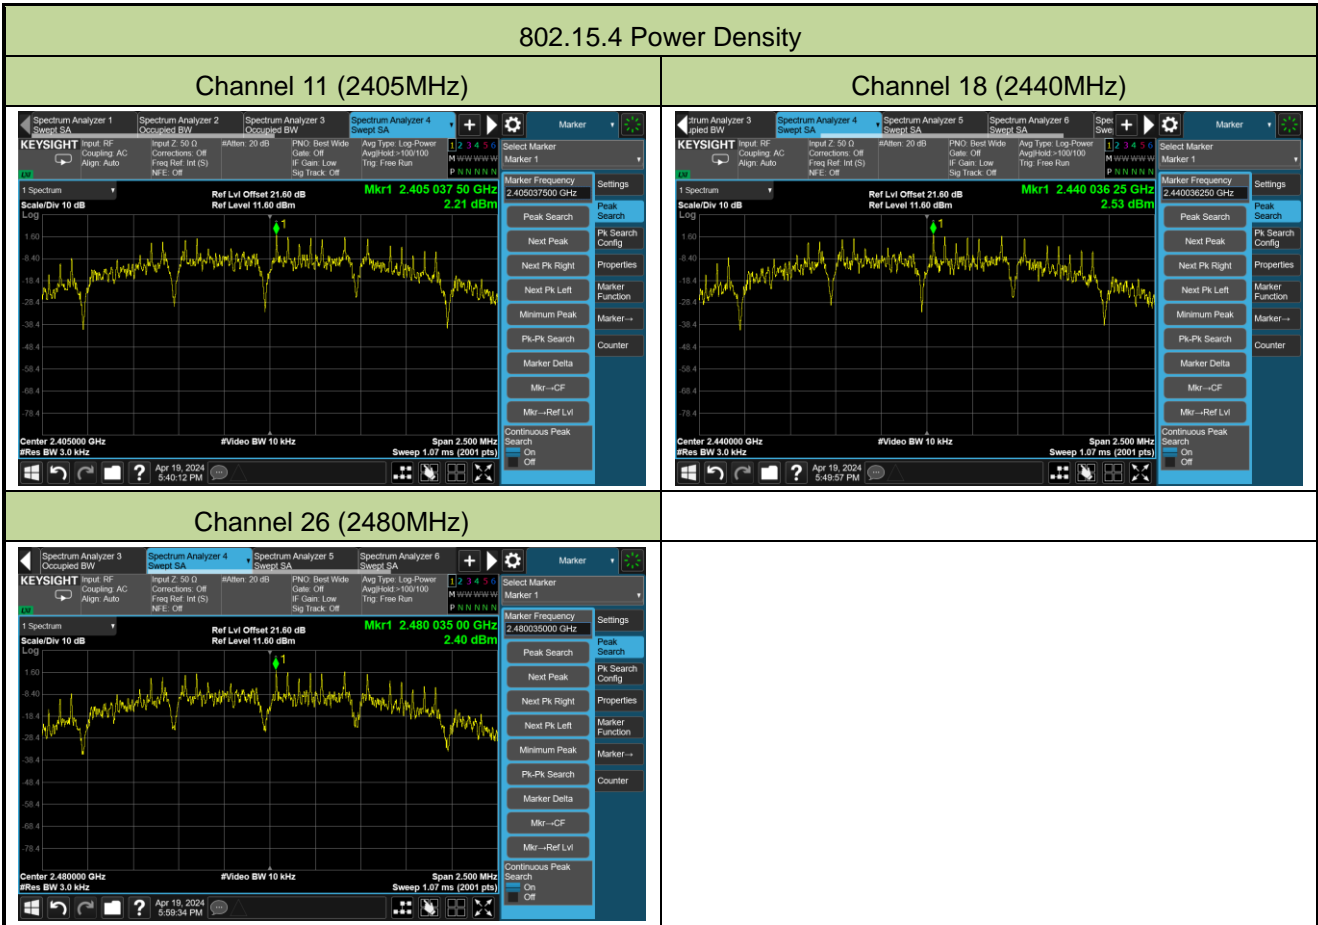

Mode 2

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-04-20		


Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	PK PSD (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
802.15.4	O-QPSK	11	2405	1.81	≤ 8.00	Pass
802.15.4	O-QPSK	18	2440	2.28	≤ 8.00	Pass
802.15.4	O-QPSK	26	2480	2.43	≤ 8.00	Pass

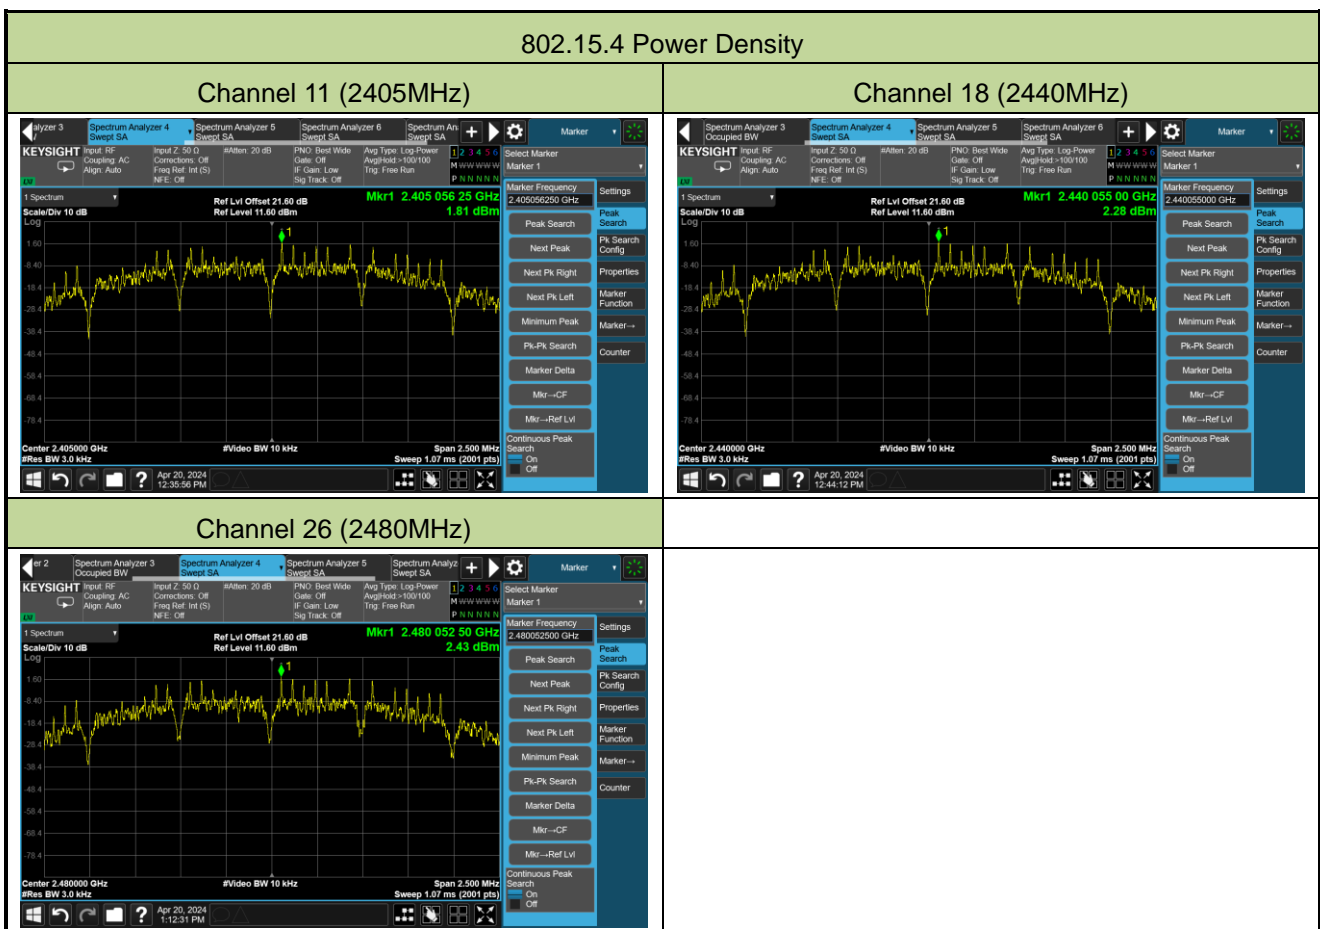

Mode 3

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-04-20		

Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	PK PSD (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
802.15.4	O-QPSK	11	2405	2.53	≤ 8.00	Pass
802.15.4	O-QPSK	18	2440	2.73	≤ 8.00	Pass
802.15.4	O-QPSK	26	2480	2.80	≤ 8.00	Pass

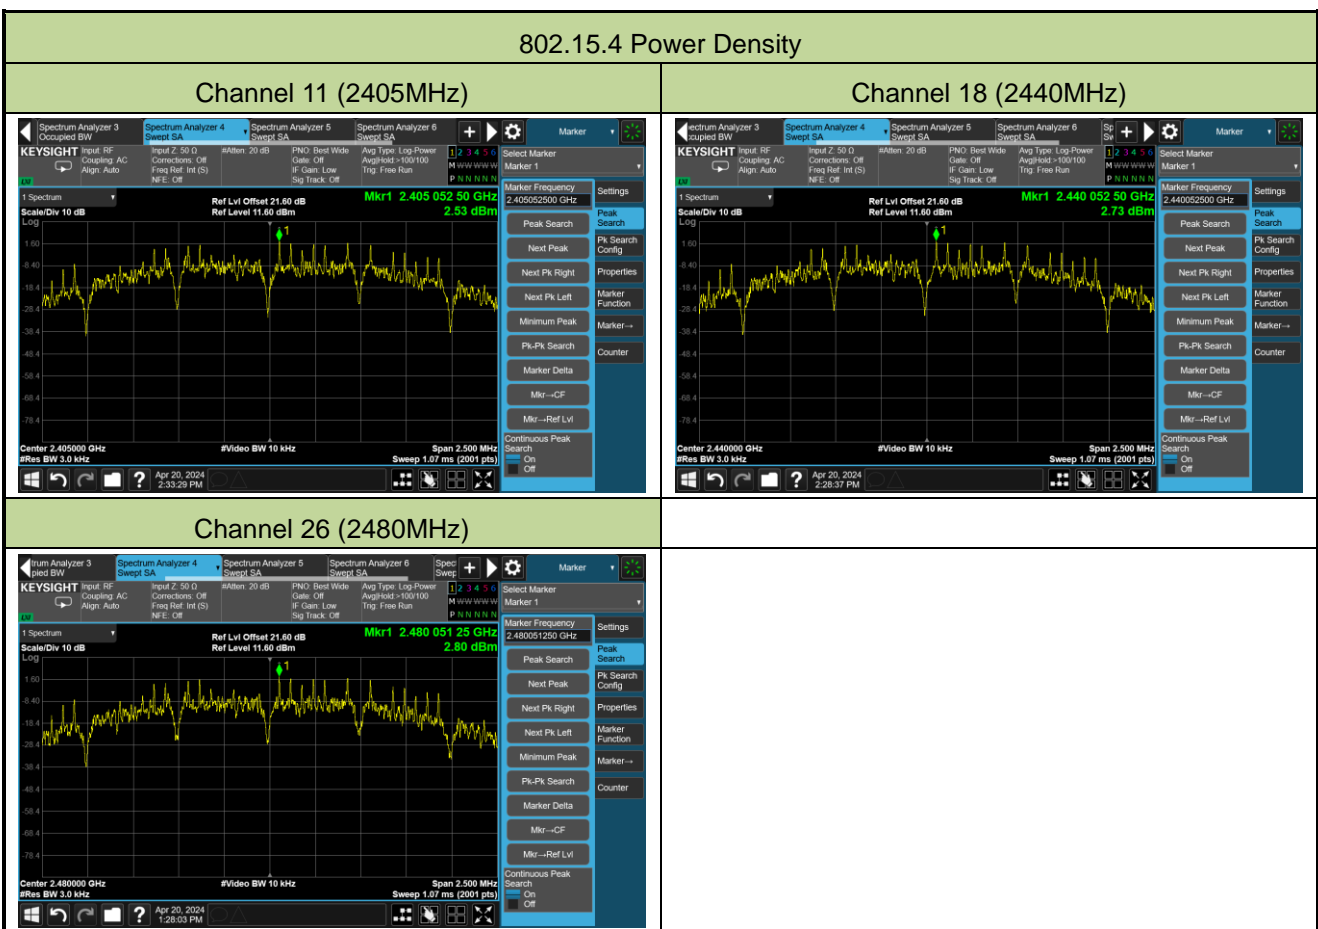


A.5 Conducted Band Edge and Out-of-Band Emissions Test Result

Mode 1


Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-04-19 ~ 2024-04-20	Filter	1#

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	Limit (dBc)	Result
802.15.4	O-QPSK	11	2405	20	Pass
802.15.4	O-QPSK	18	2440	20	Pass
802.15.4	O-QPSK	26	2480	20	Pass

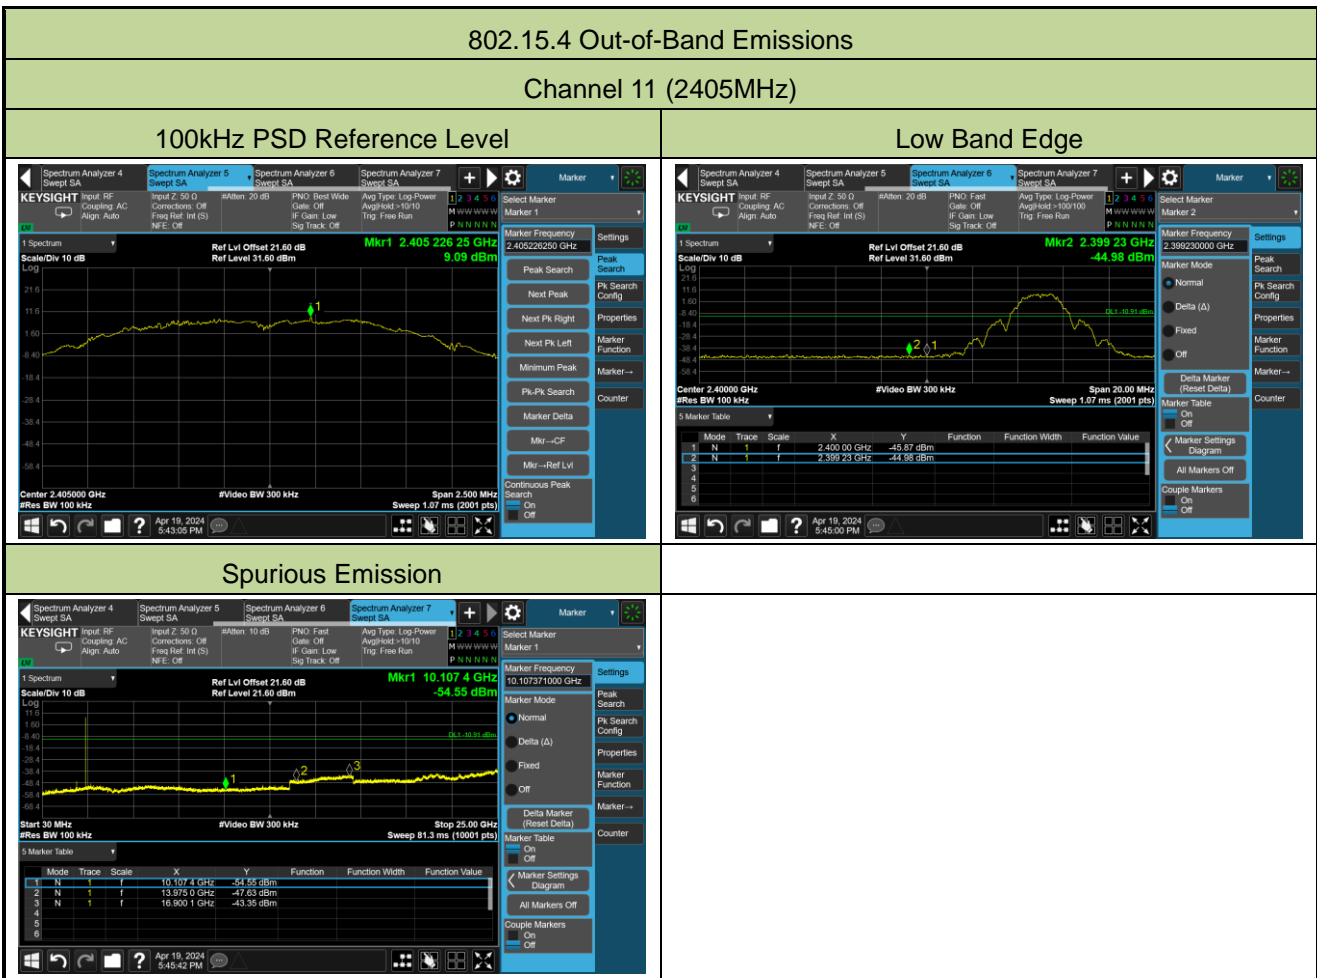

Channel 18 (2440MHz)

100kHz PSD Reference Level

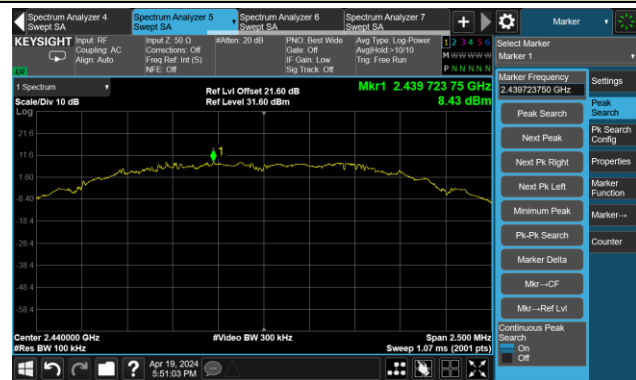


Spurious Emission



Channel 26 (2480MHz)


100kHz PSD Reference Level

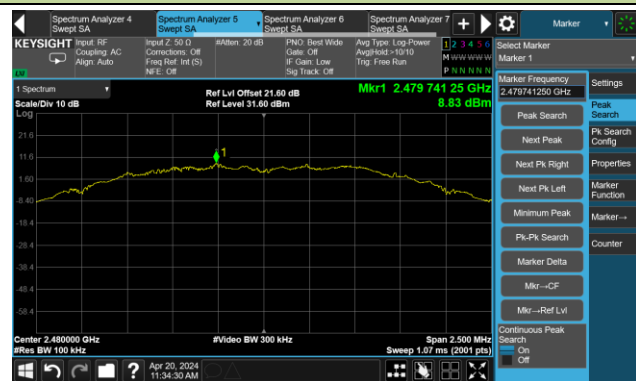

High Band Edge




Spurious Emission



Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-04-19	Filter	2#

Test Mode	Data Rate	Channel No.	Frequency	Limit	Result
802.15.4	O-QPSK	11	2405	20	Pass

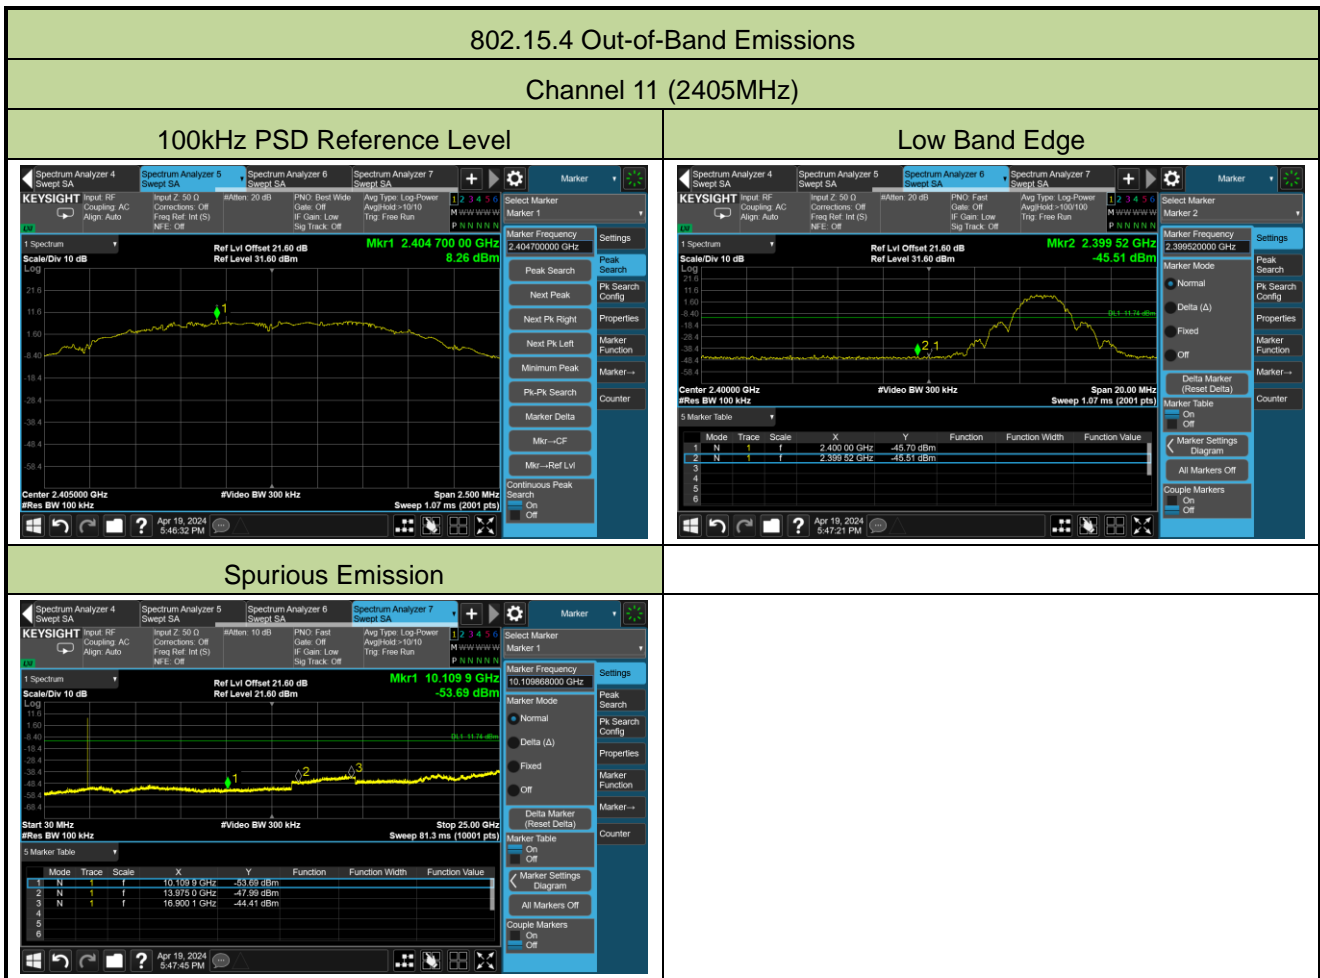

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-04-20	Filter	3#

Test Mode	Data Rate	Channel No.	Frequency	Limit	Result
802.15.4	O-QPSK	26	2480	20	Pass

802.15.4 Out-of-Band Emissions
Channel 26 (2480MHz)

100kHz PSD Reference Level	High Band Edge
<p>Center: 2.480000 GHz #Video BW 300 kHz Sweep: 1.07 ms (2001 pts)</p>	<p>Center: 2.483500 GHz #Video BW 300 kHz Sweep: 1.07 ms (2001 pts)</p>
<p>Start: 30 MHz #Video BW 300 kHz Sweep: 81.3 ms (10001 pts)</p>	

Mode 2


Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-04-20	Filter	4#

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	Limit (dBc)	Result
802.15.4	O-QPSK	11	2405	20	Pass
802.15.4	O-QPSK	18	2440	20	Pass
802.15.4	O-QPSK	26	2480	20	Pass


802.15.4 Out-of-Band Emissions

Channel 11 (2405MHz)

100kHz PSD Reference Level

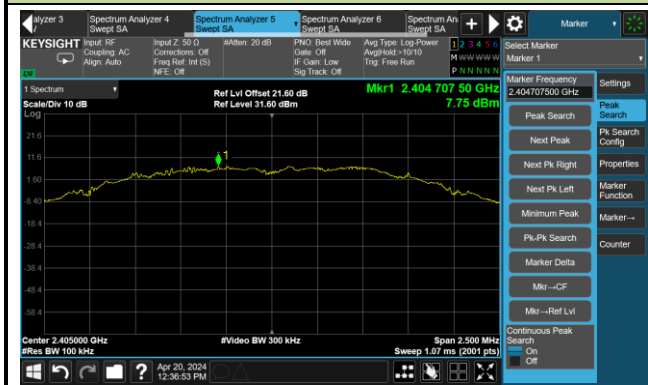

Low Band Edge

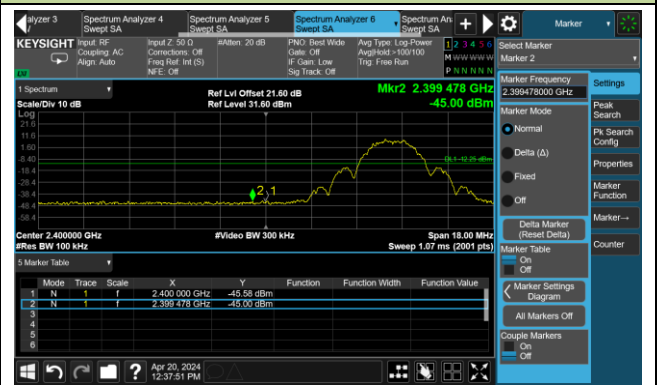


Spurious Emission



Channel 18 (2440MHz)

100kHz PSD Reference Level

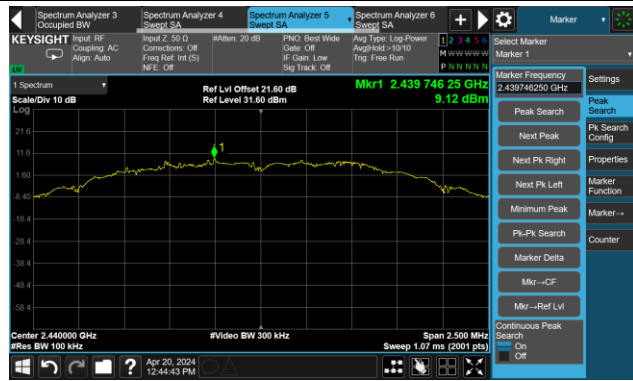


Spurious Emission




Channel 26 (2480MHz)


100kHz PSD Reference Level

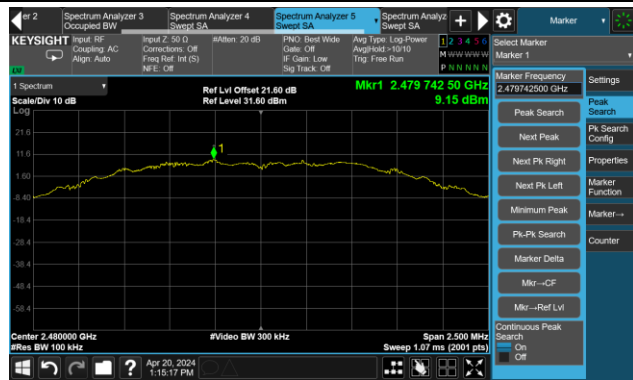

High Band Edge

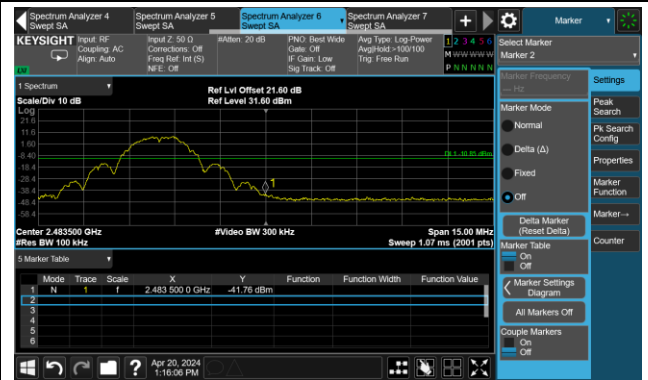


Spurious Emission



Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-04-20	Filter	5#

Test Mode	Data Rate	Channel No.	Frequency	Limit	Result
802.15.4	O-QPSK	11	2405	20	Pass

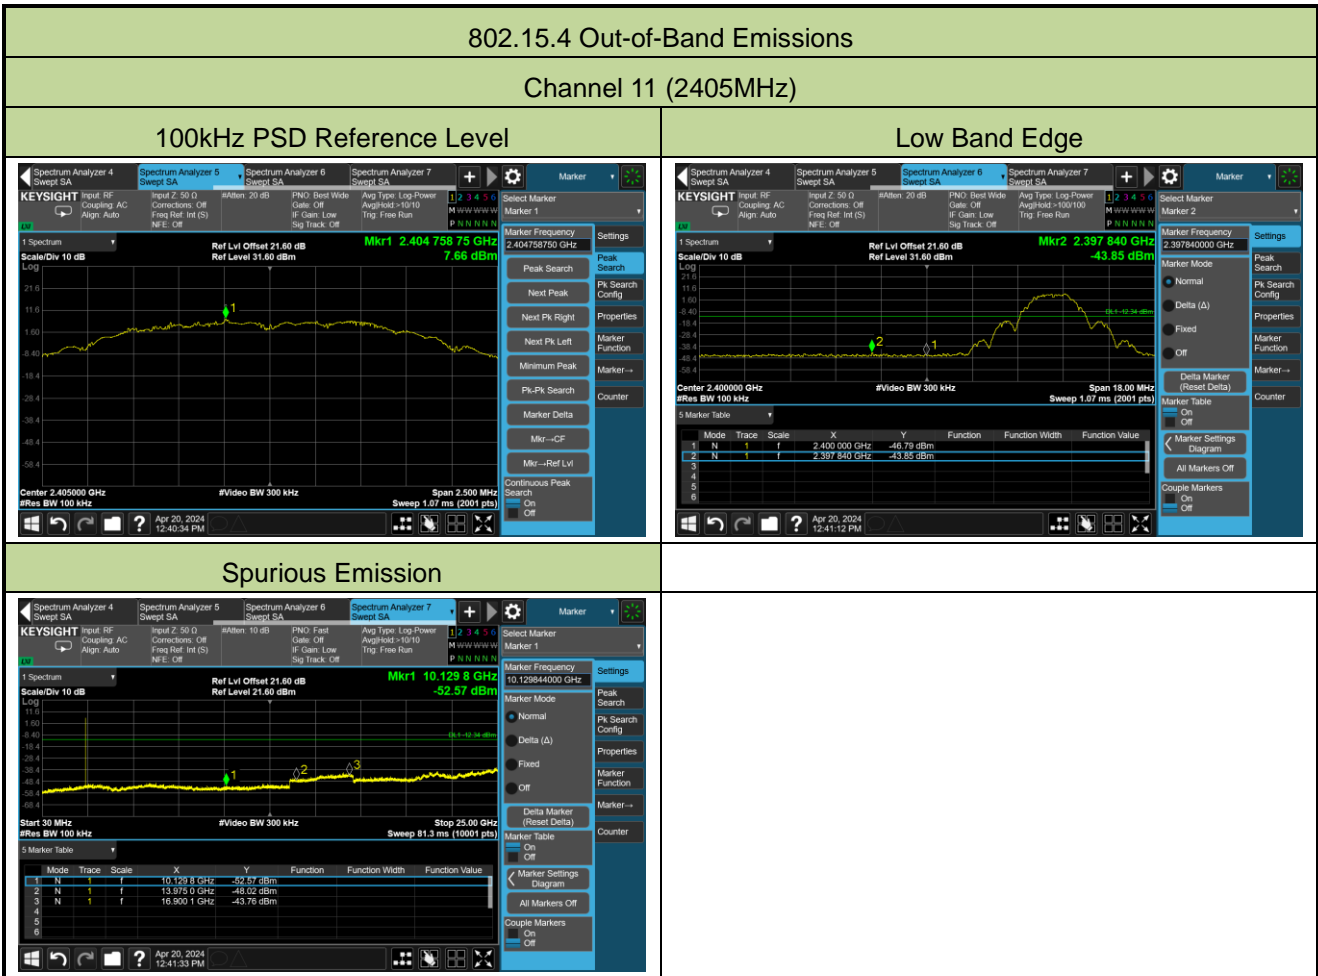

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-04-20	Filter	6#

Test Mode	Data Rate	Channel No.	Frequency	Limit	Result
802.15.4	O-QPSK	26	2480	20	Pass

802.15.4 Out-of-Band Emissions

Channel 26 (2480MHz)

100kHz PSD Reference Level	High Band Edge																																
<p>Center: 2.480000 GHz #Video BW 300 kHz Sweep: 2.500 MHz</p>	<p>Center: 2.483500 GHz #Video BW 300 kHz Sweep: 15.000 MHz</p>																																
<div style="text-align: center; background-color: #d9ead3; padding: 5px;"> <p>Spurious Emission</p> </div> <p>Start: 30 MHz #Video BW 300 kHz Sweep: 81.3 ms (10001 pts)</p> <table border="1" style="font-size: small; width: 100%;"> <thead> <tr> <th>Mode</th> <th>Trace</th> <th>Scale</th> <th>X</th> <th>Y</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>f</td> <td>10.1348 GHz</td> <td>-54.49 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>f</td> <td>13.9750 GHz</td> <td>-46.74 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>f</td> <td>16.9201 GHz</td> <td>-41.04 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mode	Trace	Scale	X	Y	Function	Function Width	Function Value	1	N	f	10.1348 GHz	-54.49 dBm				2	N	f	13.9750 GHz	-46.74 dBm				3	N	f	16.9201 GHz	-41.04 dBm				
Mode	Trace	Scale	X	Y	Function	Function Width	Function Value																										
1	N	f	10.1348 GHz	-54.49 dBm																													
2	N	f	13.9750 GHz	-46.74 dBm																													
3	N	f	16.9201 GHz	-41.04 dBm																													

Mode 3

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-04-20	Filter	7#

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	Limit (dBc)	Result
802.15.4	O-QPSK	11	2405	20	Pass
802.15.4	O-QPSK	18	2440	20	Pass
802.15.4	O-QPSK	26	2480	20	Pass

802.15.4 Out-of-Band Emissions

Channel 11 (2405MHz)

100kHz PSD Reference Level

Low Band Edge

Spurious Emission