

RF TEST REPORT

FCC / ISED

APPLICANT

Hewlett Packard Enterprise Company

MODEL NAME

APINH505

FCC ID

Q9DAPINH505

ISED ID

4675A-APINH505

REPORT NUMBER

HCTA-E-2003-009

TEST REPORT

Date of Issue
March 25, 2020

Test Site
Hyundai C-Tech, Inc. dba HCT America, Inc.
1726 Ringwood Ave, San Jose, CA 95131, USA

Applicant	Hewlett Packard Enterprise Company
Applicant Address	3333 Scott Blvd, Santa Clara, CA 95054, USA
FCC ID	Q9DAPINH505
ISED ID	4675A-APINH505
Model Name	APINH505
EUT Type	Access Point
Modulation Type	OQPSK
FCC Classification	Digital Transmission System (DTS)
FCC Rule Part(s)	Part 15.247
ISED Rule Part(s)	RSS-247 Issue 2 (February 2017), RSS-Gen Issue 5(April 2018)
Test Procedure	ANSI C63.10-2013, KDB 558074 D01 v05r02

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures required. The results of testing in this report apply only to the product which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Hyundai C-Tech, Inc. dba HCT America, Inc. certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

Tested By

Steve In

Test Engineer

Reviewed By

Sunwoo Kim

Technical Manager

REVISION HISTORY

The revision history for this document is shown in table.

TEST REPORT NO.	DATE	DESCRIPTION
HCTA-2003-009	March 25, 2020	Initial Issue

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
EUT DESCRIPTION	4
RF SPECIFICATION SUBJECT TO THE REPORT	4
2. METHODOLOGY	5
EUT CONFIGURATION	5
EUT EXERCISE	5
GENERAL TEST PROCEDURES.....	5
DESCRIPTION OF TEST MODES	5
3. INSTRUMENT CALIBRATION	5
4. FACILITIES AND ACCREDITATIONS	6
FACILITIES	6
EQUIPMENT.....	6
5. ANTENNA REQUIREMENTS	7
6. MEASUREMENT UNCERTAINTY	8
7. DESCRIPTION OF TESTS	9
8. SUMMARY TEST OF RESULTS.....	24
9. TEST RESULT	26
9.1 DUTY CYCLE.....	26
9.2 6dB BANDWIDTH / 99% BANDWIDTH	27
9.3 OUTPUT POWER	29
9.4 POWER SPECTRAL DENSITY	30
9.5 CONDUCTED BAND EDGE & SPURIOUS EMISSIONS.....	31
9.7 RADIATED SPURIOUS EMISSIONS	33
9.8 RADIATED RESTRICTED BAND EDGES	39
9.9 RECEIVER SPURIOUS EMISSIONS	40
9.10 POWERLINE CONDUCTED EMISSIONS.....	42
10. LIST OF TEST EQUIPMENT	46
11. ANNEX A TEST SETUP PHOTO	47

1. GENERAL INFORMATION

EUT DESCRIPTION

Model	APINH505
EUT Type	Access Point
Power Supply	AC Adapter : 100 – 240 VAC, 1.3 A, 50 – 60 Hz / PoE : 57 VDC
RF Specification	WIFI 2.4 GHz : IEEE 802.11b/g/n/ax HE40 (2x2 MIMO) WIFI 5 GHz : IEEE 802.11a/n/ac/ax HE80 (2x2 MIMO) Bluetooth 5.0 LE ZigBee : IEEE 802.15.4
Transmitter Chain	2x2 MIMO
Operating Environment	Indoor
Operating Temperature	0 °C – 40 °C

RF SPECIFICATION SUBJECT TO THE REPORT

RF Specification	IEEE 802.15.4 ZigBee
Frequency Range	2405 MHz - 2480 MHz
Max. RF Output Power	Peak : 6.75 dBm (4.73 mW)
Modulation Type	OQPSK
Number of Channels	16 Channels
Antenna Specification ¹⁾	Integrated Antenna Peak Gain: 1.29 dBi
Firmware Version ²⁾	nrf52840_xxaa_Single.hex
Hardware Version ²⁾	P2C
Date(s) of Tests	February 7, 2020 ~ February 26, 2020

Note :

1. Antenna information is based on the document provided.
2. Firmware and Hardware Version are as received by the client.

2. METHODOLOGY

FCC KDB 558074 D01 DTS Measurement Guidance v05r02 dated April 2nd, 2019 entitled "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) and the measurement procedure described in ANSI C63.10(Version : 2013) 'the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices'.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C / the RSS-GEN issue 5, RSS-247 issue 2.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. Also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 8 of ANSI C63.10. (Version: 2013)

Conducted Antenna Terminal

KDB 558074 D01 v05r02

DESCRIPTION OF TEST MODES

The EUT has been tested ZigBee test mode operating condition. Test program is used to control the channels, power setting as well as continuous Tx and normal Rx mode.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC (Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at 1726 Ringwood Avenue, San Jose, California 95131, USA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.



EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antenna of this E.U.T is permanently attached and there is no provision for connection to an external antenna.
- (2) The E.U.T Complies with the requirement of §15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.


All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	2.55
Radiated Disturbance (9 kHz ~ 30 MHz)	3.20
Radiated Disturbance (30 MHz ~ 1 GHz)	4.73
Radiated Disturbance (1 GHz ~ 18 GHz)	5.21
Radiated Disturbance (18 GHz ~ 40 GHz)	5.18

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

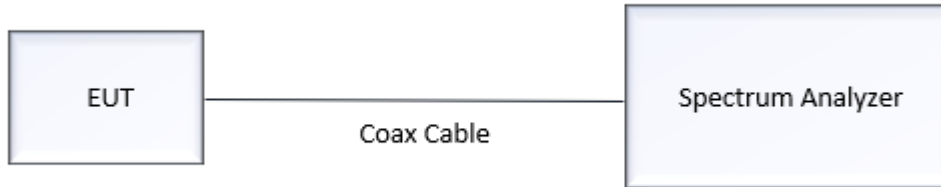

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method, 6 (b) in KDB 558074 D01 v05r02.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.

- RBW = 8 MHz (the largest available value)
- VBW = 8 MHz (\geq RBW)
- SPAN = 0 Hz
- Detector = Peak
- Number of points in sweep > 100
- Trace mode = Clear write
- Measure T_{total} and T_{on}
- Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10 * \log(1 / \text{Duty Cycle})$

7.2. 6 dB Bandwidth / 99% Occupied Bandwidth


Limit

Test Requirements and limit, §15.247(a)(2) / RSS-247(Issue 2) Section 5.2.

The bandwidth at 6 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration

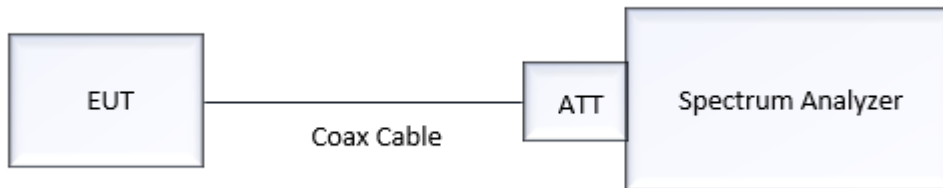

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Section 8.2 in KDB 558074 D01 v05r02, Subclause 11.8 in ANSI 63.10-2013)

- RBW = 100 kHz
- VBW $\geq 3 \times$ RBW
- Detector = Peak
- Trace mode = max hold
- Sweep = auto couple
- Allow the trace to stabilize
- We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer, setting X dB as 6 dB.

TEST PROCEDURE (99% Bandwidth) for ISED

The transmitter output is connected to the spectrum analyzer.

- RBW = 1% ~ 5% of the occupied bandwidth
- VBW $\approx 3 \times$ RBW
- Detector = Peak
- Trace mode = max hold
- Sweep = auto couple
- Allow the trace to stabilize

Note :


We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

Test Requirements and limit, §15.247(b)(3) / RSS-247(Issue2) Section 5.4.4.
The maximum permissible conducted output power is 1 Watt.

Test Configuration

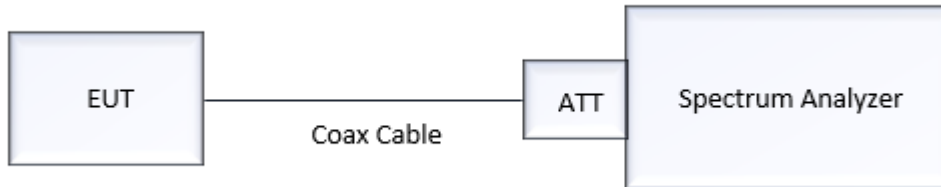

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.
TX condition of the EUT is the actual operating mode by BT LE test program.
The Spectrum Analyzer is set to

Peak Power (Section 8.3.1.1 in KDB 558074 D01 v05r02, Subclause 11.9.1.1 in ANSI 63.10-2013)

- RBW \geq DTS Bandwidth
- VBW \geq 3 x RBW
- SPAN \geq 3 x RBW
- Detector Mode = Peak
- Sweep = auto couple
- Trace Mode = max hold
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level

Average Power (Section 8.3.2.2 in KDB 558074 D01 v05r02, Subclause 11.9.2.2 in ANSI 63.10-2013)

- We use the spectrum analyzer's integrated band power measurement function.
- Measure the duty cycle.
- Set span to at least 1.5 times the OBW.
- RBW = 1-5 % of the OBW, not to exceed 1 MHz
- VBW \geq 3 x RBW
- Number of points in sweep \geq 2 x span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto.
- Detector = RMS (i.e., power averaging)
- Do not use sweep triggering. Allow the sweep to "free run".
- Trace average at least 100 traces in power averaging (RMS) mode.
- Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation

- Conducted Output Power (Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power (Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor


7.4. Power Spectral Density

Limit

Test Requirements and limit, §15.247(e) / RSS-247(Issue 2) Section 5.2.

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

Test Configuration

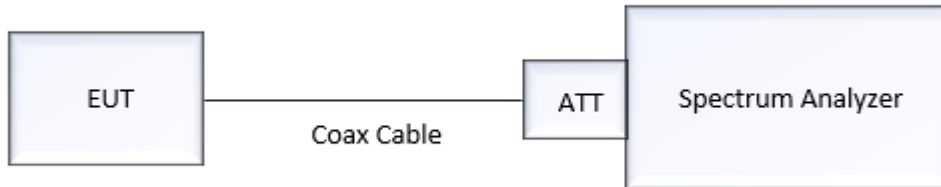

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 D01 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- Set analyzer center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- $VBW \geq 3 \times RBW$.
- Sweep = auto couple
- Detector = power averaging (rms) or sample detector (when rms not available).
- Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / RBW]$.
- Employ trace averaging (rms) mode over a minimum of 100 traces
- Use the peak marker function to determine the maximum amplitude level.
- Use the peak marker function to determine the maximum amplitude level within the RBW. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- if then duty factor shall be added to adjust the result if the duty cycle is less than 98%

7.5. Conducted Band Edge (Out of Band Emissions) & Conducted Spurious Emissions


Limit

Test Requirements and limit, §15.247(d) / RSS-247(Issue 2) Section 5.5.

The maximum conducted (peak) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 20 dBc]

Test Configuration

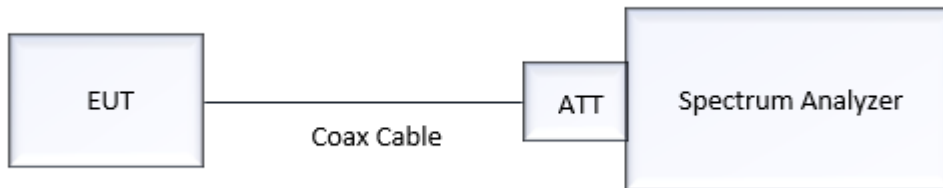

Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 8.5 in KDB 558074 D01 v05r02, Procedure 11.11 in ANSI 63.10-2013)

- RBW = 100 kHz
- VBW $\geq 3 \times$ RBW
- Set span to encompass the spectrum to be examined
- Detector = Peak
- Trace Mode = max hold
- Sweep time = auto couple
- Ensure that the number of measurement points $\geq 2 \times$ Span/RBW
- Allow trace to fully stabilize.
- Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq [MHz]	Factor [dB]	Freq [MHz]	Factor [dB]
30	20.13	8000	20.88
100	20.31	9000	21.11
200	20.21	10000	21.21
300	20.16	11000	21.19
400	20.22	12000	21.32
500	20.15	13000	21.44
600	20.26	14000	21.39
700	20.17	15000	21.51
800	20.23	16000	21.66
900	20.21	17000	21.72
1000	20.19	18000	21.88
2000	20.38	19000	21.92
2400*	20.42	20000	22.04
2500*	20.51	21000	22.17
3000	20.53	22000	22.31
4000	20.61	23000	22.57
5000	20.97	24000	22.41
6000	20.73	25000	22.53
7000	21.01		

Note :

1. '*' is the range of fundamental frequency
2. Factor = Attenuator loss + Cable loss + EUT Cable loss

7.6. Radiated Test

Radiated Emission Limits

FCC : 47 CFR § 15.209		
Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

ISED : RSS-GEN Section 8.9		
Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	6.37/F(kHz)	300
0.490 – 1.705	63.7/F(kHz)	30
1.705 – 30	0.08	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Receiver Radiated Emission Limits

ISED : RSS-GEN Section 7.3		
Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Restricted Bands of Operation

FCC : 47 CFR § 15.205(a)				
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (MHz)
0.090 – 0.110	12.29-12.293	149.9 - 150.05	1660.0 - 1710.0	8025 – 8500
0.495 - 0.505	12.51975-12.52025	156.52475 - 156.52525	1718.8 - 1722.2	9000 – 9200
2.1735 – 2.1905	12.57675-12.57725	156.7 - 156.9	2200.0 - 2300.0	9300 – 9500
4.125 - 4.128	13.36-13.41	162.0125 - 167.17	2310.0 - 2390.0	10600 - 12700
4.17725-4.17775	16.42-16.423	167.72 - 173.2	2483.5 – 2500.0	13250 – 13400
4.20725-4.20775	16.69475-16.69525	240.0 - 285.0	2690.0 - 2900.0	14470 – 14500
6.215-6.218	16.80425-16.80475	322.0 - 335.4	3260.0 – 3267.0	15350 – 16200
6.26775-6.26825	25.5-25.67	399.9 - 410.0	3332.0 – 3339.0	17700 – 21400
6.31175-6.31225	37.5-38.25	608.0 - 614.0	3345.8 – 3358.0	22010 – 23120
8.291-8.294	73 - 74.6	960.0 - 1240.0	3600.0 – 4400.0	23600 – 24000
8.362-8.366	74.8 - 75.2	1300.0 - 1427.0	4500.0 – 5150.0	31200 – 31800
8.37625-8.38675	108 - 121.94	1435.0 - 1626.5	5350.0 – 5460.0	36430 – 36500
8.41425-8.41475	123 - 138	1645.5 - 1646.5	7250.0 – 7750.0	Above 38600


ISED : RSS-GEN Section 8.10				
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (MHz)
0.090 - 0.110	8.37625 - 8.38675	108 – 138	1660 - 1710	8025 – 8500
0.495 - 0.505	8.41425 - 8.41475	149.9 - 150.05	1718.8 - 1722.2	9000 - 9200
2.1735 - 2.1905	12.29 - 12.293	156.52475 - 156.52525	2200 - 2300	9300 - 9500
3.020 - 3.026	12.51975 - 12.52025	156.7 - 156.9	2310 - 2390	10600 - 12700
4.125 - 4.128	12.57675 - 12.57725	162.0125 - 167.17	2483.5 - 2500	13250 – 13400
4.17725 - 4.17775	13.36 - 13.41	167.72 - 173.2	2655 - 2900	14470 – 14500
4.20725 - 4.20775	16.42 - 16.423	240 – 285	3260 – 3267	15350 – 16200
5.677 - 5.683	16.69475 - 16.69525	322 - 335.4	3332 - 3339	17700 – 21400
6.215 - 6.218	16.80425 - 16.80475	399.9 - 410	3345.8 - 3358	22010 – 23120
6.26775 - 6.26825	25.5 - 25.67	608 - 614	3500 - 4400	23600 – 24000
6.31175 - 6.31225	37.5 - 38.25	960 - 1427	4500 - 5150	31200 – 31800
8.291 - 8.294	73 - 74.6	1435 - 1626.5	5350 - 5460	36430 – 36500
8.362 - 8.366	74.8 - 75.2	1645.5 - 1646.5	7250 - 7750	Above 38600

Test Configuration


Below 30 MHz

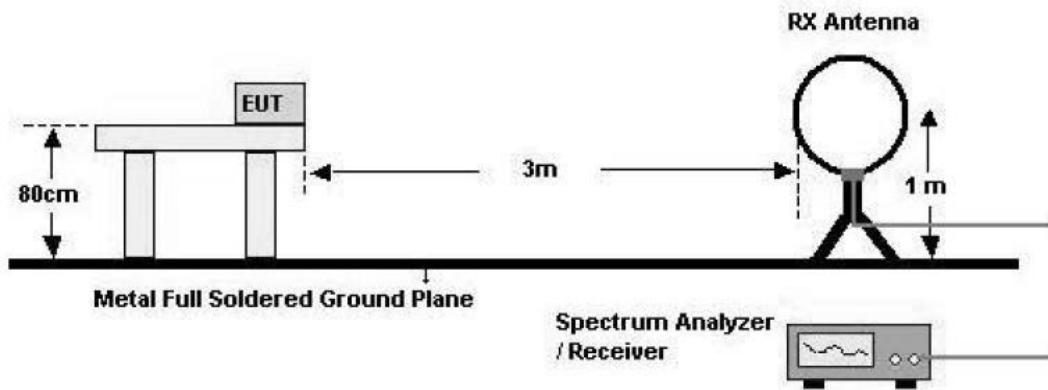

30 MHz - 1 GHz

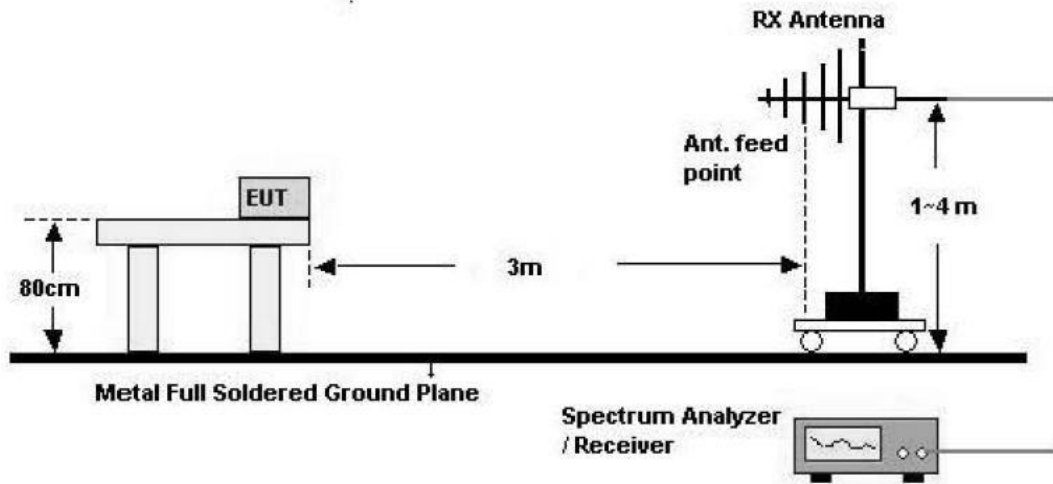

Above 1 GHz

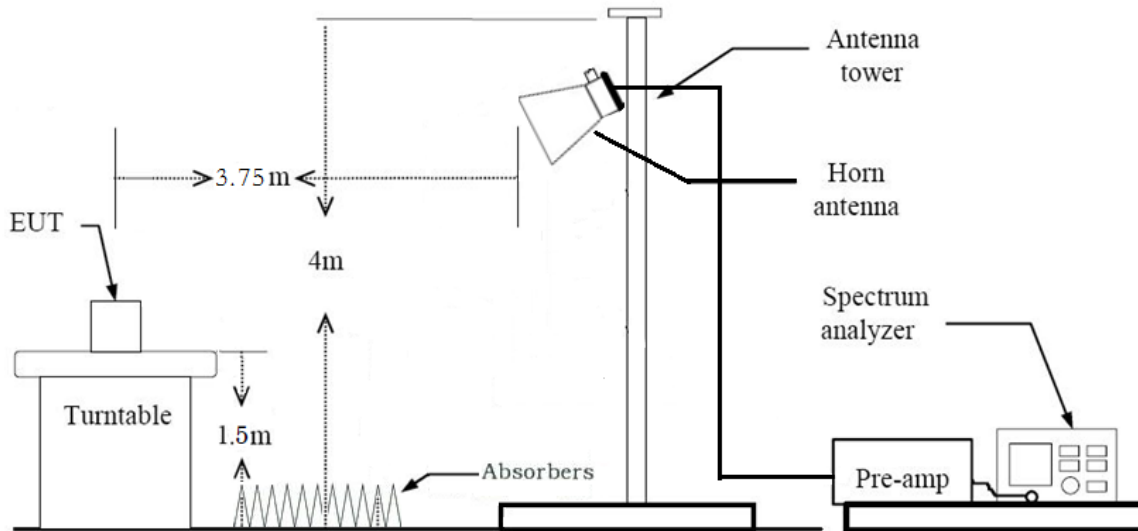

Test Procedure of Radiated spurious emissions (Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor (0.009 MHz – 0.490 MHz) = $40 \cdot \log(3 \text{ m}/300 \text{ m}) = - 80 \text{ dB}$
Measurement Distance: 3 m
7. Distance Correction Factor (0.490 MHz – 30 MHz) = $40 \cdot \log(3 \text{ m}/30 \text{ m}) = - 40 \text{ dB}$
Measurement Distance: 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Max hold
 - RBW = 9 kHz
 - VBW $\geq 3 \cdot \text{RBW}$
9. Total = Reading Value + Antenna Factor (A.F) + Cable Loss (C.L) + Distance Factor (D.F)
10. There is a comparison data both open-field test site and alternative test site – semi-Anechoic chamber according to 414788 D01. And the results are properly calibrated.

Test Procedure of Radiated spurious emissions (Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting

(1) Measurement Type (Peak):

- Measured Frequency Range: 30 MHz – 1 GHz
- Detector = Peak
- Trace = Max hold
- RBW = 100 kHz
- VBW \geq 3*RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range: 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

In general, the method (1) is mainly used

6. Total = Reading Value + Antenna Factor (A.F) + Cable Loss (C.L)

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor (reference distance : 3 m).
*Distance extrapolation factor = $20 \cdot \log(\text{test distance} / \text{specific distance})$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Max hold
- RBW = 1 MHz
- VBW $\geq 3 \cdot \text{RBW}$

(2) Measurement Type(Average): Duty cycle $\geq 98\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \cdot \text{RBW}$
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \cdot \text{RBW}$
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted or would be lesser if no specific emissions from the EUT are recorded (*i.e.*: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Sample Calculation

(1) Total (Peak) = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

(2) Total (Average, Duty $\geq 98\%$) = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

(3) Total (Average, Duty $< 98\%$) = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F) + Duty Cycle Factor

Test Procedure of Radiated Restricted Band Edge

1. Radiated test is performed with hopping off.
2. The EUT is placed on a turntable, which is 1.5 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
6. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor (reference distance : 3 m).
*Distance extrapolation factor = $20 \cdot \log(\text{test distance} / \text{specific distance})$ (dB)
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting

(1) Measurement Type(Peak):

- Detector = Peak
- Trace = Max hold
- RBW = 1 MHz
- VBW $\geq 3 \cdot \text{RBW}$

(2) Measurement Type(Average): Duty cycle $\geq 98\%$,

- Measured Frequency Range : 2310 MHz – 2390 MHz / 2483.5 MHz – 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \cdot \text{RBW}$
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 2310 MHz – 2390 MHz / 2483.5 MHz – 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \cdot \text{RBW}$
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted or would be lesser if no specific emissions from the EUT are recorded (*i.e.*: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Sample Calculation

(1) Total (Peak) = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

(2) Total (Average, Duty $\geq 98\%$) = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

(3) Total (Average, Duty $< 98\%$) = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) + Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

47 CFR § 15.207, RSS-GEN Section 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

*Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

7.8. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated, and the worst-case configuration results are reported.
 - PSU mode : AC powered mode / PoE powered mode
 - Worst case: AC powered mode
2. EUT Axis
 - Radiated Spurious Emissions: Z
 - Radiated Restricted Band Edge: Z

All X, Y, and Z positions were investigated to find the worst-case position. Typical installation recommended is in right up position (Z) on the wall or placed on the desk using cradle.

Conducted test

Output power was set to 8 for lowest, middle, and highest channels during conducted test.

8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	IC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	RSS-247, 5.2.(a)	≥ 500 kHz	Conducted	PASS
Occupied Bandwidth	N/A	RSS-GEN, 6.7	N/A		PASS
Conducted Maximum Peak Output Power	§15.247(b)(3)	RSS-247, 5.4.(d)	≤ 1 W		PASS
Maximum e.i.r.p.	N/A	RSS-247, 5.4.(d)	≤ 4 W e.i.r.p.		PASS
Power Spectral Density	§15.247(e)	RSS-247, 5.2.(b)	≤ 8 dBm / 3 kHz		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	RSS-247, 5.5	≥ 20 dBc		PASS
AC Power line Conducted Emissions	§15.207	RSS-GEN, 8.8	cf. Section 7.7		PASS
Radiated Spurious Emissions	§15.247(d) §15.209	RSS-GEN, 8.9	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d) §15.205(a)	RSS-GEN, 8.10	cf. Section 7.6		PASS
Receiver Spurious Emissions	N/A	RSS-GEN, 7.3	cf. Section 7.6		PASS

Output Power Setting


Frequency (MHz)	Channel	Output Power Setting
2405	11	8
2440	18	8
2480	26	8

9. TEST RESULT

9.1 DUTY CYCLE

802.15.4 ZigBee			
T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
8.3600	8.4800	0.9858	0.06

Test Plots

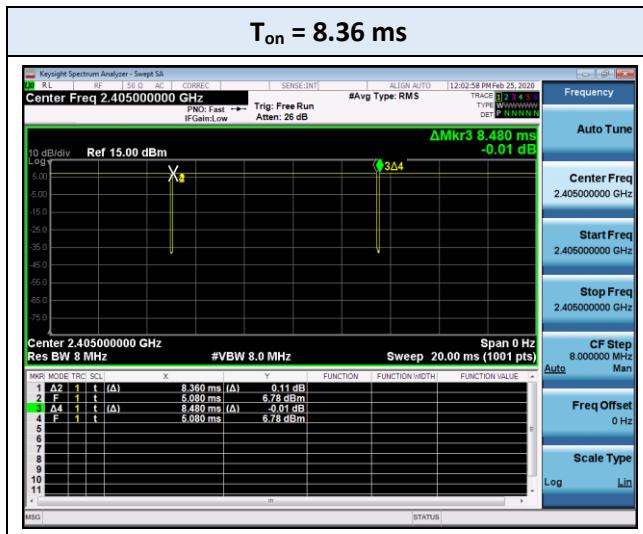


Note :

- The manufacturer declared that ZigBee operation will be limited with the duty cycle of 10% or less in 100 ms period at normal operating condition. Therefore, the correction factor -20 dB is applied for peak and average band edge testing


9.2 6dB BANDWIDTH / 99% BANDWIDTH

802.15.4 ZigBee		99% Bandwidth (kHz)	6 dB Bandwidth (kHz)	
Frequency (MHz)	Channel	Result	Result	Limit
2405	11	2237.2	1203.3	≥ 500
2440	18	2236.1	1198.2	
2480	26	2247.7	1125.4	

Test Plots (6 dB Bandwidth)

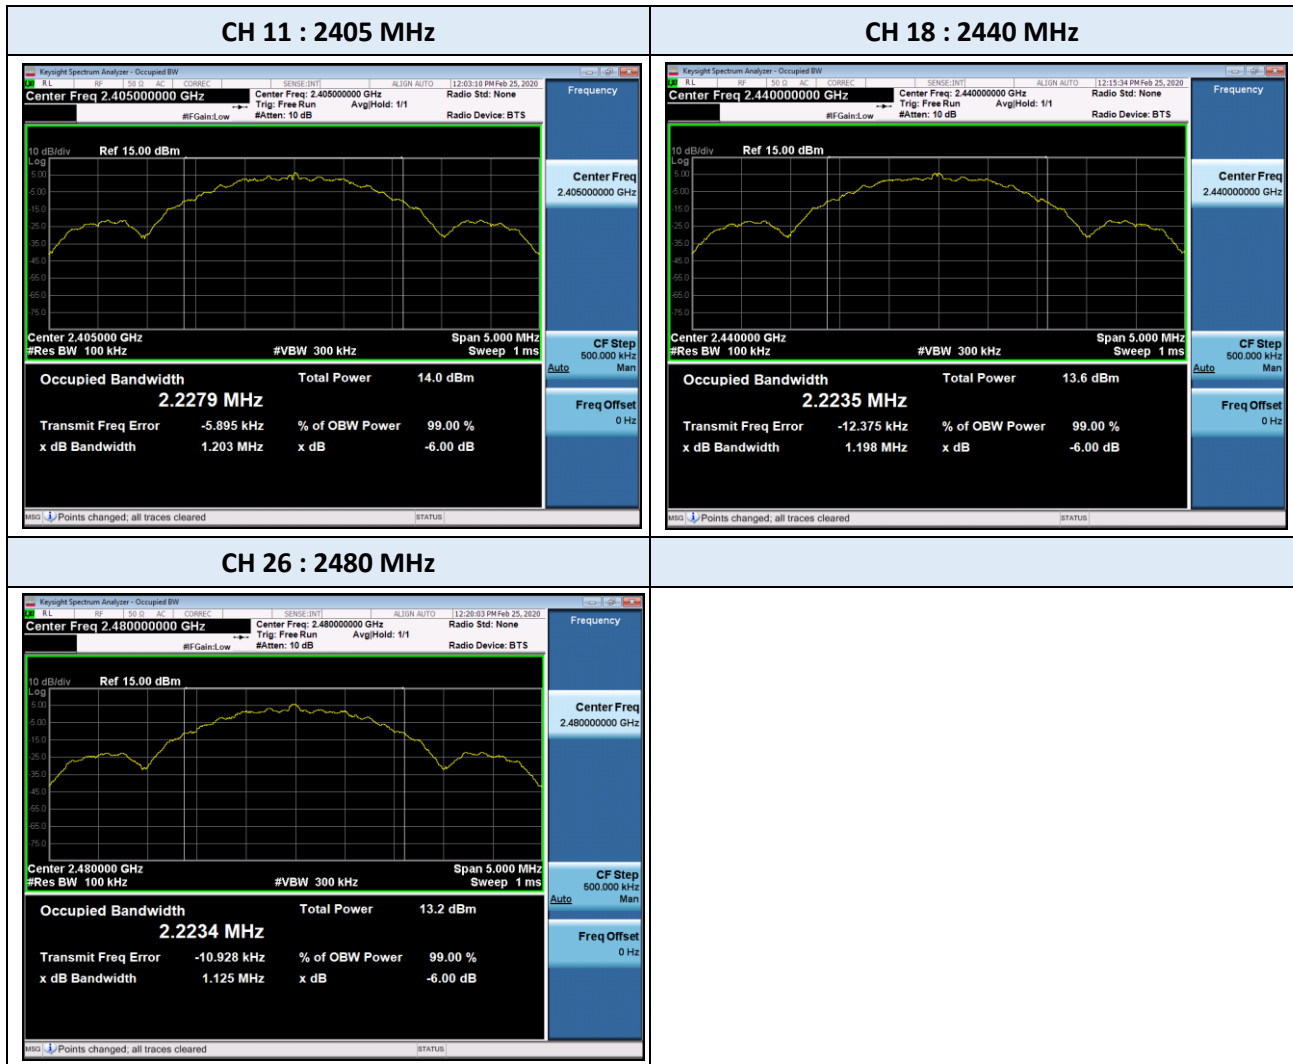

☑ Test Plots (99% Bandwidth)

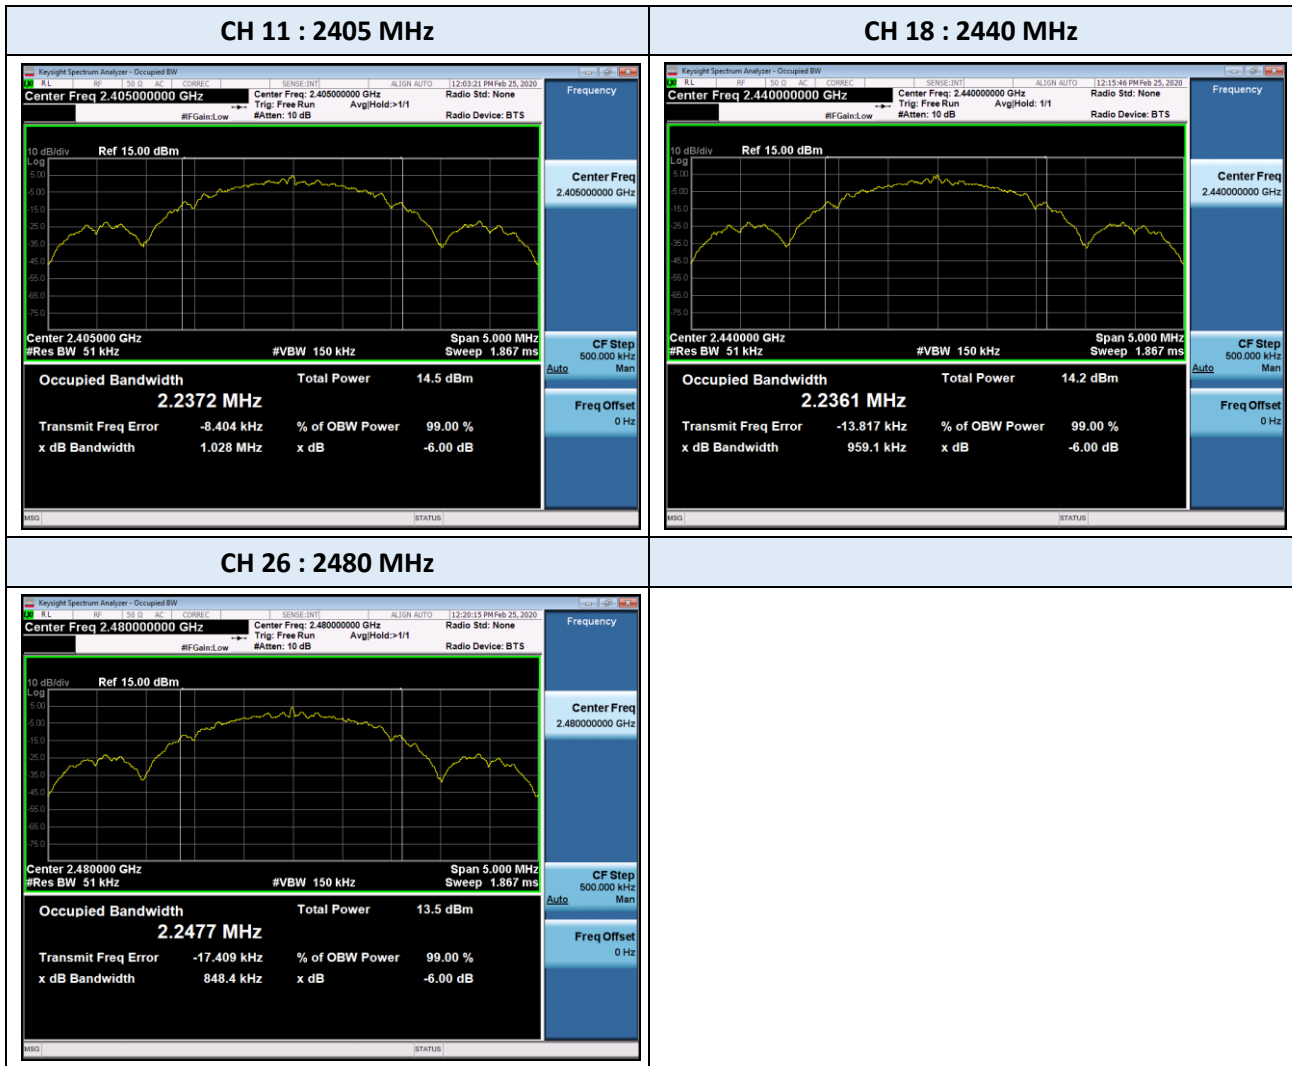


9.3 OUTPUT POWER

802.15.4 ZigBee		Measured Power(dBm) Peak	Limit (dBm)
Frequency[MHz]	Channel No.	Result	
2405	11	6.75	30
2440	18	6.34	30
2480	26	5.87	30

Note :

1. The output power results in plot include the spectrum offset, which is a combination loss of the attenuator and the cable used for testing

Test Plots

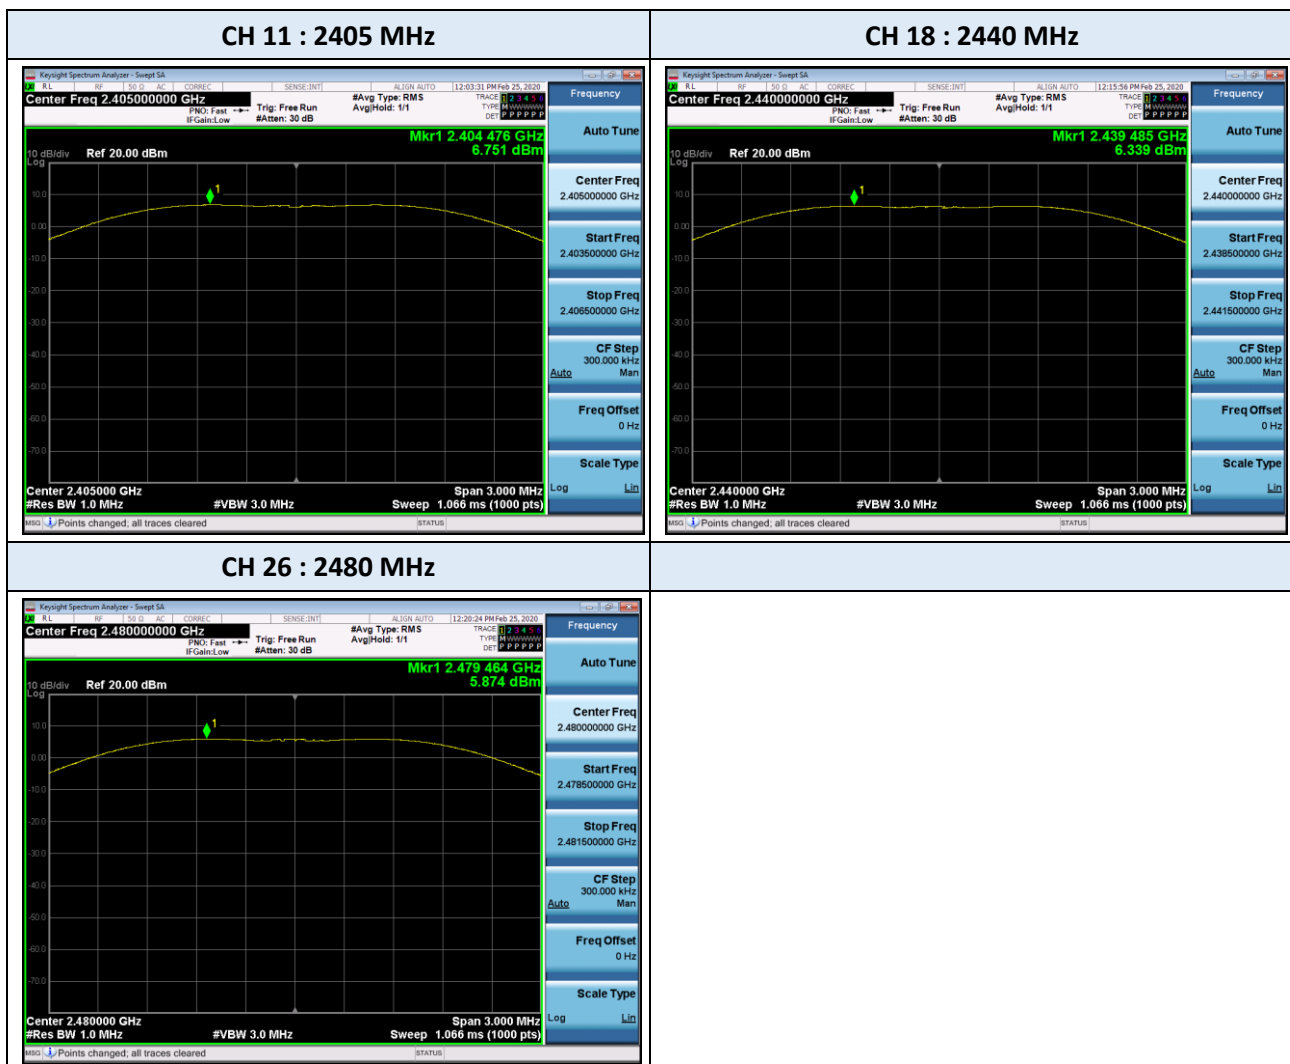


9.4 POWER SPECTRAL DENSITY

802.15.4 ZigBee		Power Spectral Density (PSD)	
Frequency (MHz)	Channel No.	Result (dBm/3kHz)	Limit (dBm/3kHz)
2405	11	-8.827	8.000
2440	18	-9.101	8.000
2480	26	-9.827	8.000

Note :

- The output power results in plot include the spectrum offset, which is a combination loss of the attenuator and the cable used for testing

Test Plots

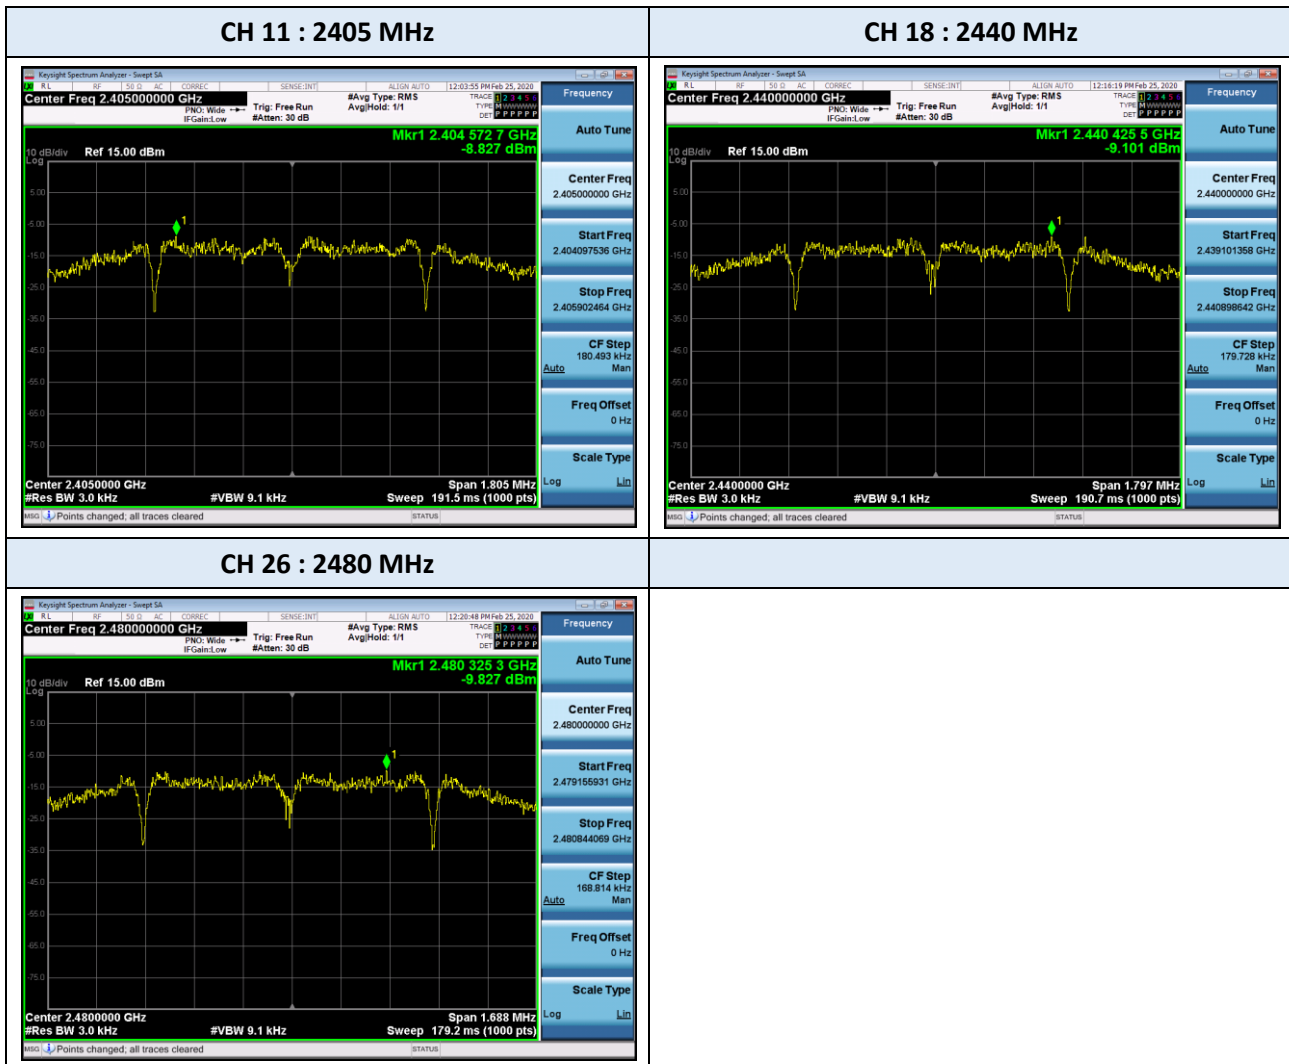


9.5 CONDUCTED BAND EDGE & SPURIOUS EMISSIONS

Out of Band Emissions at the Band Edge

802.15.4 ZigBee			Test Result		
Frequency [MHz]	Channel No.	Position	Measured Level [dB]	Limit [dBc]	Pass/Fail
2405	11	Lower	49.82	20	Pass
2480	26	Upper	41.72	20	Pass


Test Plots

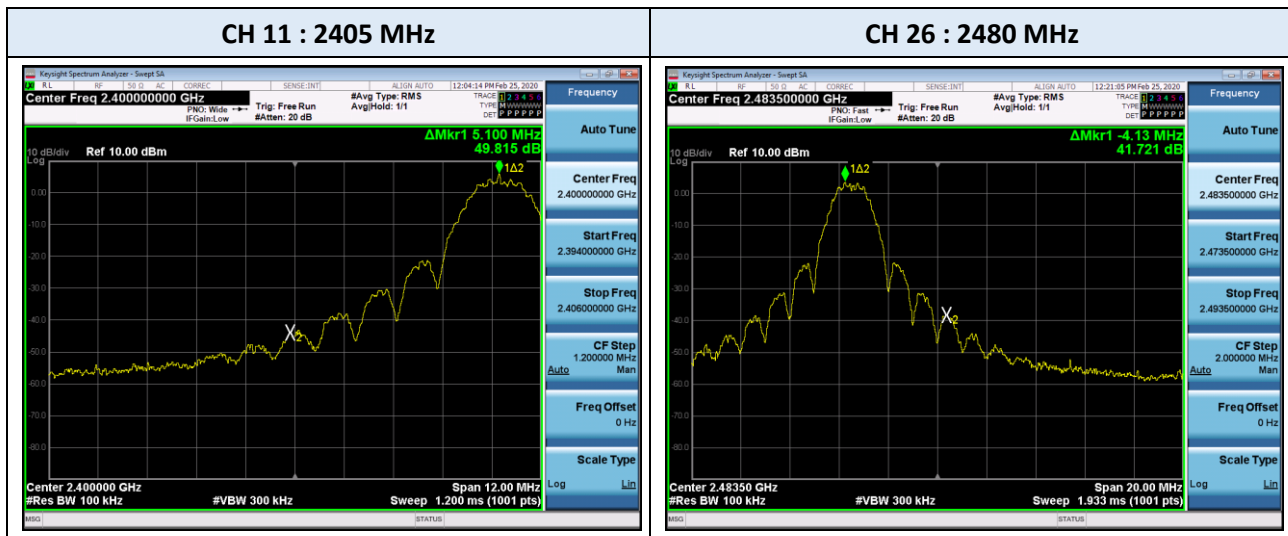

Conducted Spurious Emissions

802.15.4 ZigBee			Test Result		
Frequency [MHz]	Channel No.	Position	Measured Level [dB]	Limit [dBc]	Pass/Fail
2405	11	Lower	50.15	20	Pass
2440	18	Middle	49.22	20	Pass
2480	26	Upper	48.26	20	Pass

Test Plots

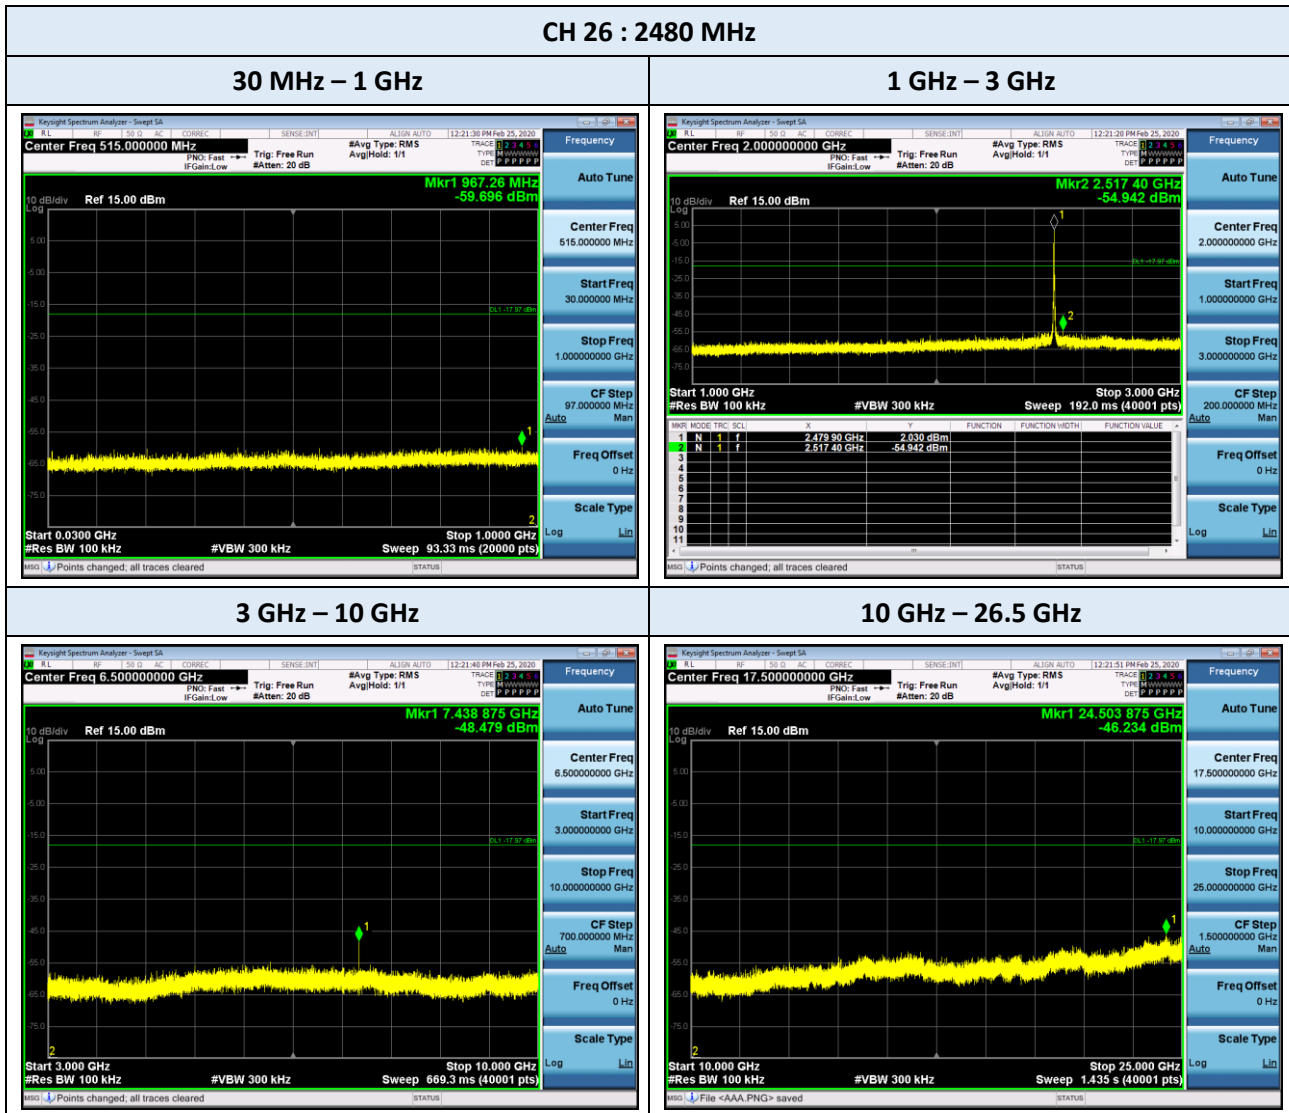

Note:

The plots included in this report are only at the worst-case channel and data rate

9.7 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30MHz

CH 11

Frequency (MHz)	Polarization	Reading (dBuV)	Corr. ¹⁾ (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement Type
36.0	H	6.3	20.9	27.2	116.5	89.3	QP
36.0	V	6.7	20.8	27.5	116.5	89.0	QP
157.0	H	-8.6	19.8	11.2	103.7	92.5	QP
158.0	V	-7.7	19.8	12.1	103.6	91.5	QP

Notes:

1. The measurement distance is 3 meters.
2. Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = Specific Limits (dBuV) + Distance extrapolation factor
4. Correction Factor: Antenna Factor + Cable loss
5. The other Frequencies are attenuated more than 20 dB below the permissible limits.
In order to simplify the report, attached worst-case mode result.

Frequency Range : Below 1 GHz

CH 11

Frequency (MHz)	Polarization	Reading (dBuV)	Corr. ¹⁾ (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement Type
34.171	V	24.8	-2.6	22.2	40	17.8	QP
500.006	H	37.3	-2.1	35.2	46	10.8	QP
500.009	V	39.7	-2.1	37.6	46	8.4	QP
624.991	H	34.1	-0.2	33.9	46	12.1	QP
625.003	V	40.0	-0.2	39.8	46	6.2	QP
875.011	H	33.8	3.6	37.4	46	8.6	QP

CH 18

Frequency (MHz)	Polarization	Reading (dBuV)	Corr. ¹⁾ (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement Type
34.171	V	24.3	-2.6	21.7	40	18.3	QP
499.990	H	37.1	-2.1	35.0	46	11.0	QP
500.013	V	39.6	-2.1	37.5	46	8.5	QP
624.996	H	34.5	-0.2	34.3	46	11.7	QP
625.007	V	39.9	-0.2	39.7	46	6.3	QP
875.003	H	33.5	3.6	37.1	46	8.9	QP

CH 26

Frequency (MHz)	Polarization	Reading (dBuV)	Corr. ¹⁾ (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement Type
31.848	V	26.5	-1	25.5	40	14.5	QP
500.002	H	37.3	-2.1	35.2	46	10.8	QP
500.009	V	39.7	-2.1	37.6	46	8.4	QP
625.020	V	39.4	-0.2	39.2	46	6.8	QP
625.023	H	33.7	-0.2	33.5	46	12.5	QP
875.014	H	33.1	3.6	36.7	46	9.3	QP

Notes:

1. Correction Factor: Antenna Factor + Cable loss + Preampifier Gain

Frequency Range : Above 1 GHz

CH 11

Frequency (MHz)	Polarization	Reading (dBuV)		Factor (dB)	Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
		AV	PK	Corr. ¹⁾	AV	PK	AV	PK	AV	PK
4809.395	H	33.3	46.3	-0.2	33.1	46.1	54	74	20.9	27.9
4810.158	V	33.3	47.4	-0.2	33.1	47.2	54	74	20.9	26.8
24819.35	H	36.4	49.9	12.1	48.5	62.0	54	74	5.5	12.0
24818.96	V	36.4	49.6	12.1	48.5	61.7	54	74	5.5	12.3

CH 18

Frequency (MHz)	Polarization	Reading (dBuV)		Factor (dB)	Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
		AV	PK	Corr. ¹⁾	AV	PK	AV	PK	AV	PK
4880.74	H	33.6	46.6	-0.2	33.4	46.4	54	74	20.6	27.6
4879.528	V	33.8	47.3	-0.2	33.6	47.1	54	74	20.4	26.9
24819.02	H	36.2	49.4	12.1	48.3	61.5	54	74	5.7	12.5
24819.13	V	36.1	50.0	12.1	48.2	62.1	54	74	5.8	11.9



CH 26

Frequency (MHz)	Polarization	Reading (dBuV)		Factor (dB)	Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
		AV	PK	Corr. ¹⁾	AV	PK	AV	PK	AV	PK
4960.123	H	33.4	47.0	0.0	33.4	47.0	54	74	20.6	27.0
4960.37	V	33.5	46.6	0.0	33.5	46.6	54	74	20.5	27.4
24819.4	H	36.2	49.4	12.1	48.3	61.5	54	74	5.7	12.5
24819.12	V	36.1	49.4	12.1	48.2	61.5	54	74	5.8	12.5

Notes:

1. Correction Factor: Antenna Factor + Cable loss + Pre-amplifier Gain
2. AV Level = Measured Power(dBm) + Correction Factor(dB)



▣ Test Plots

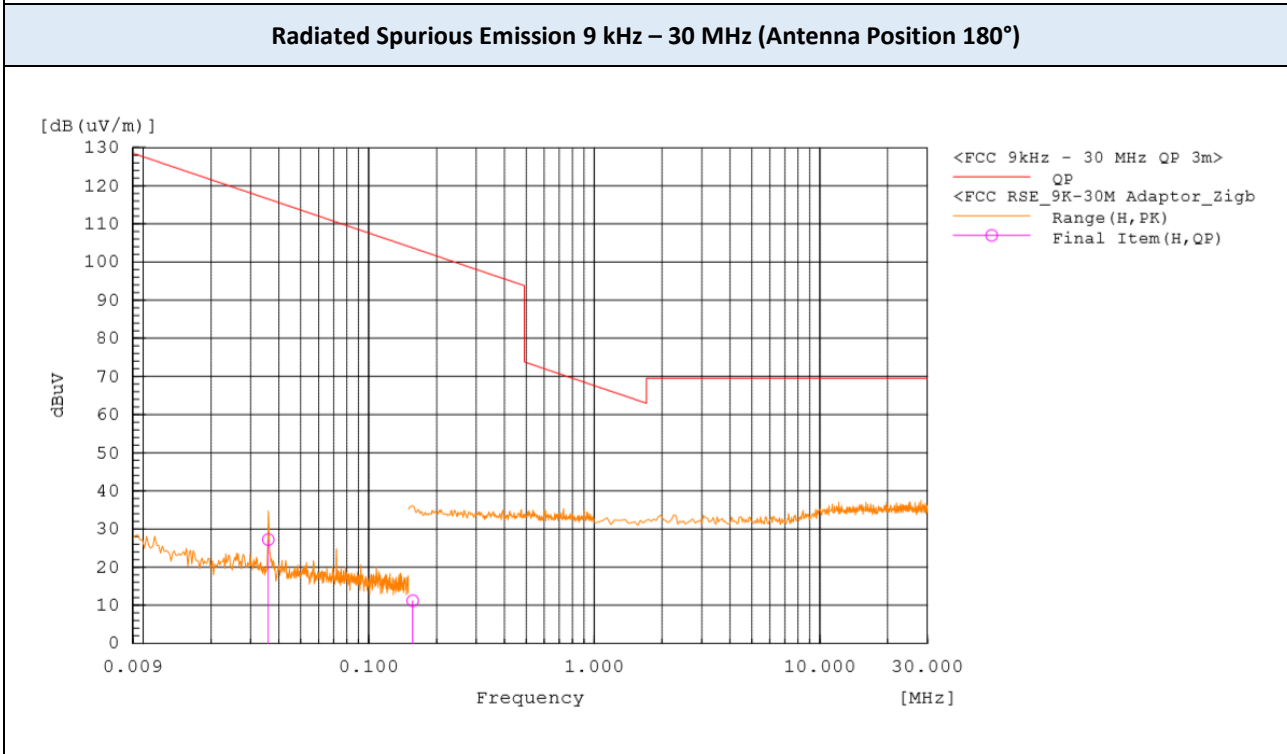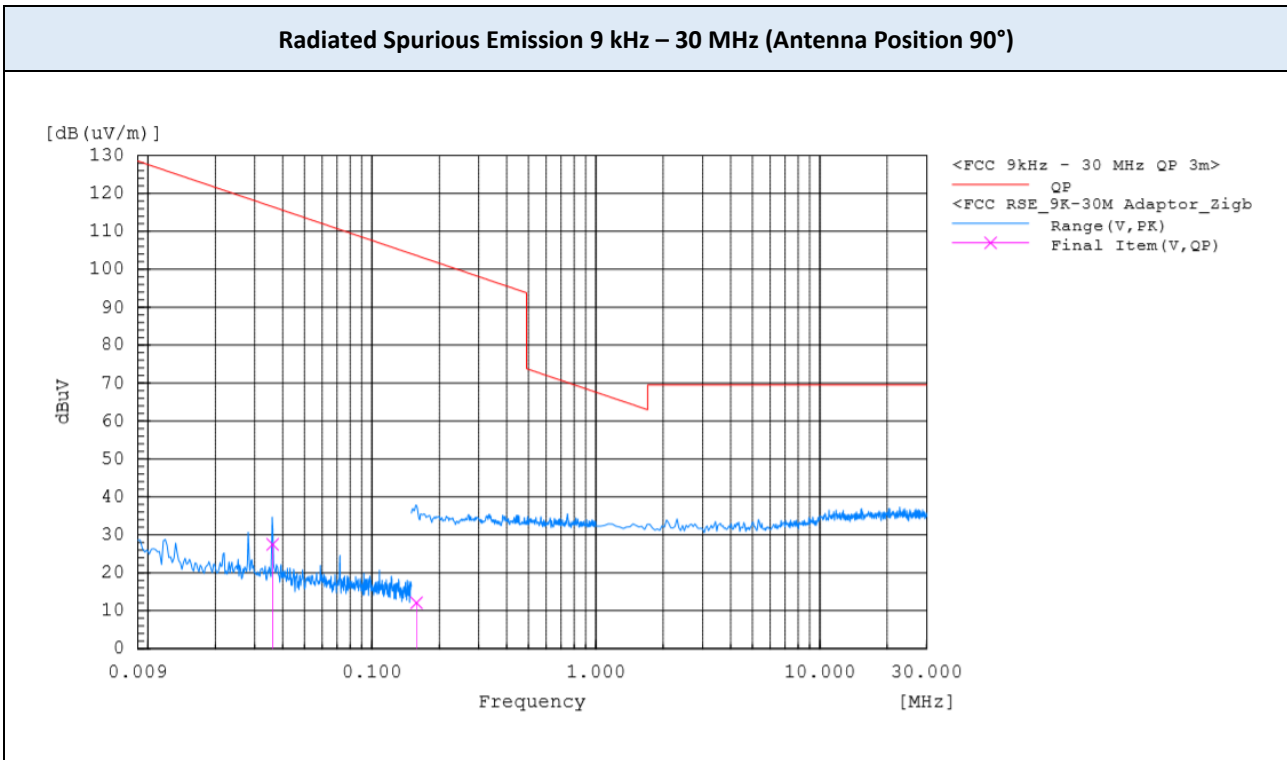

Note:


The worst-case plots are included in this report.

▣ Test Plots

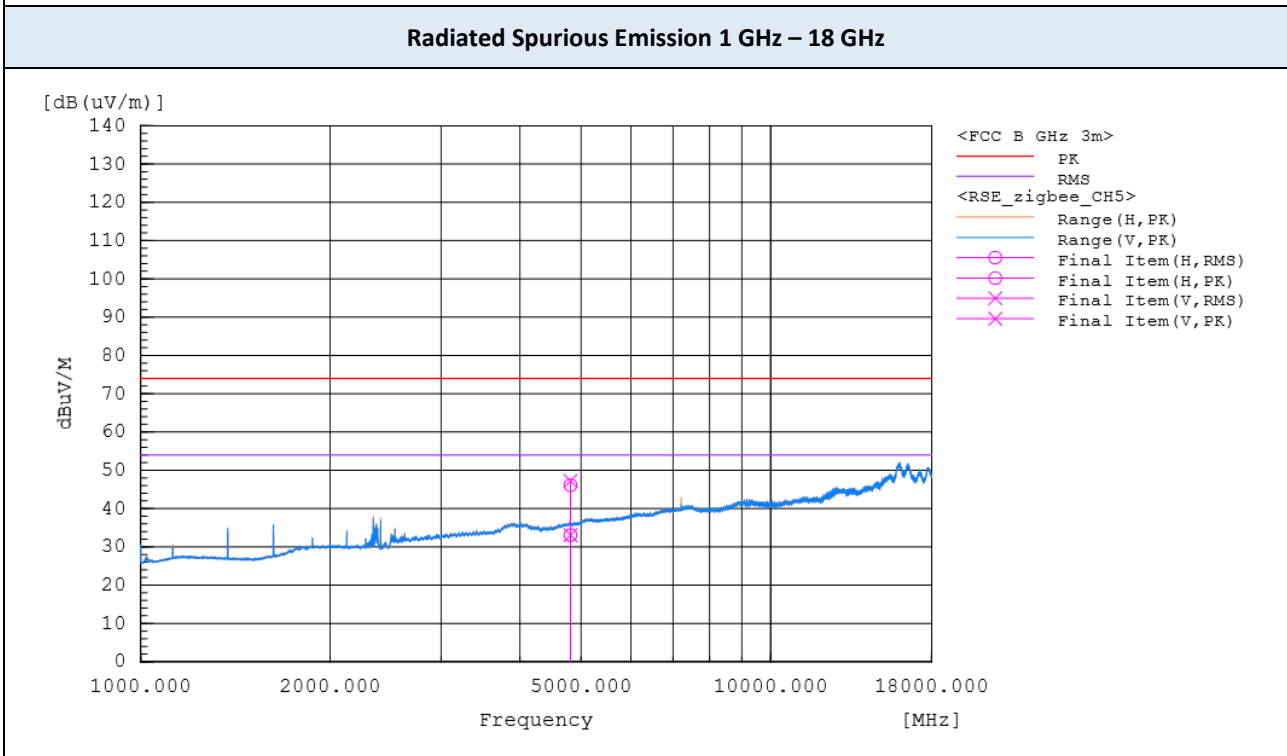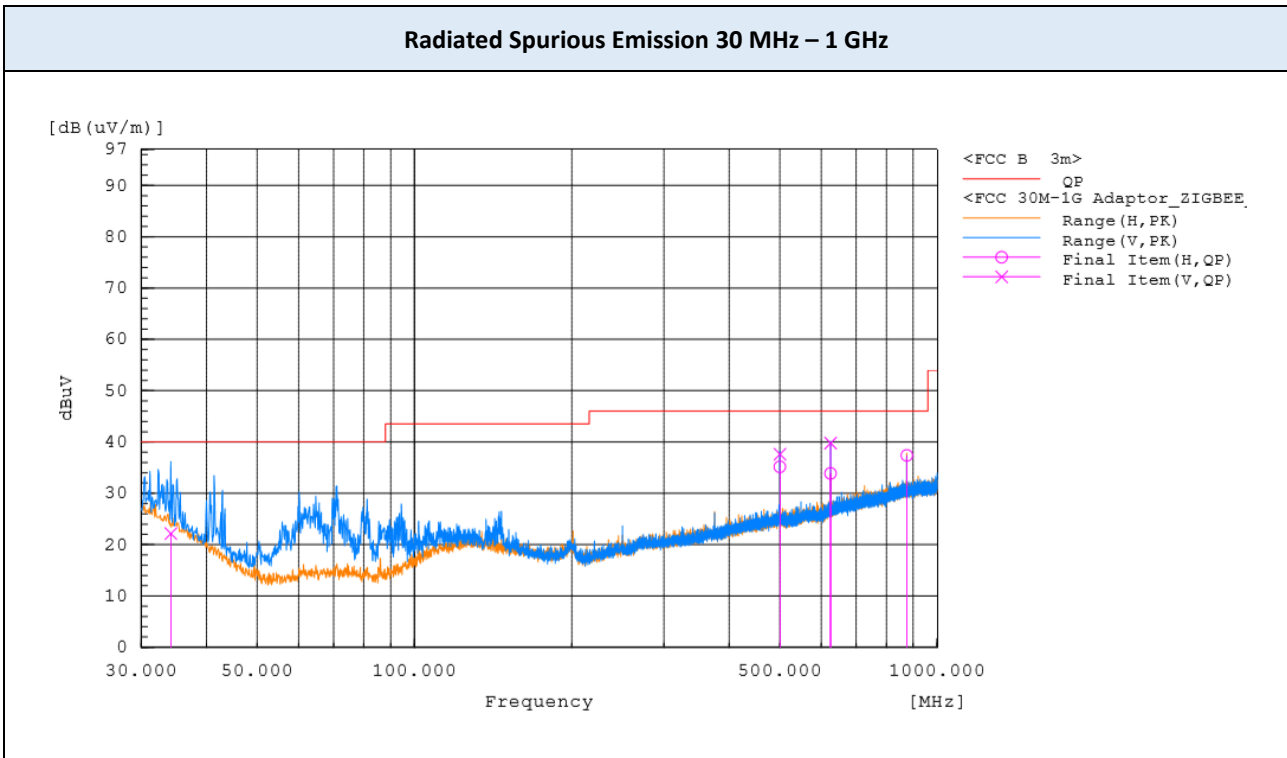

Note:
The worst-case plots are included in this report.

▣ Test Plots

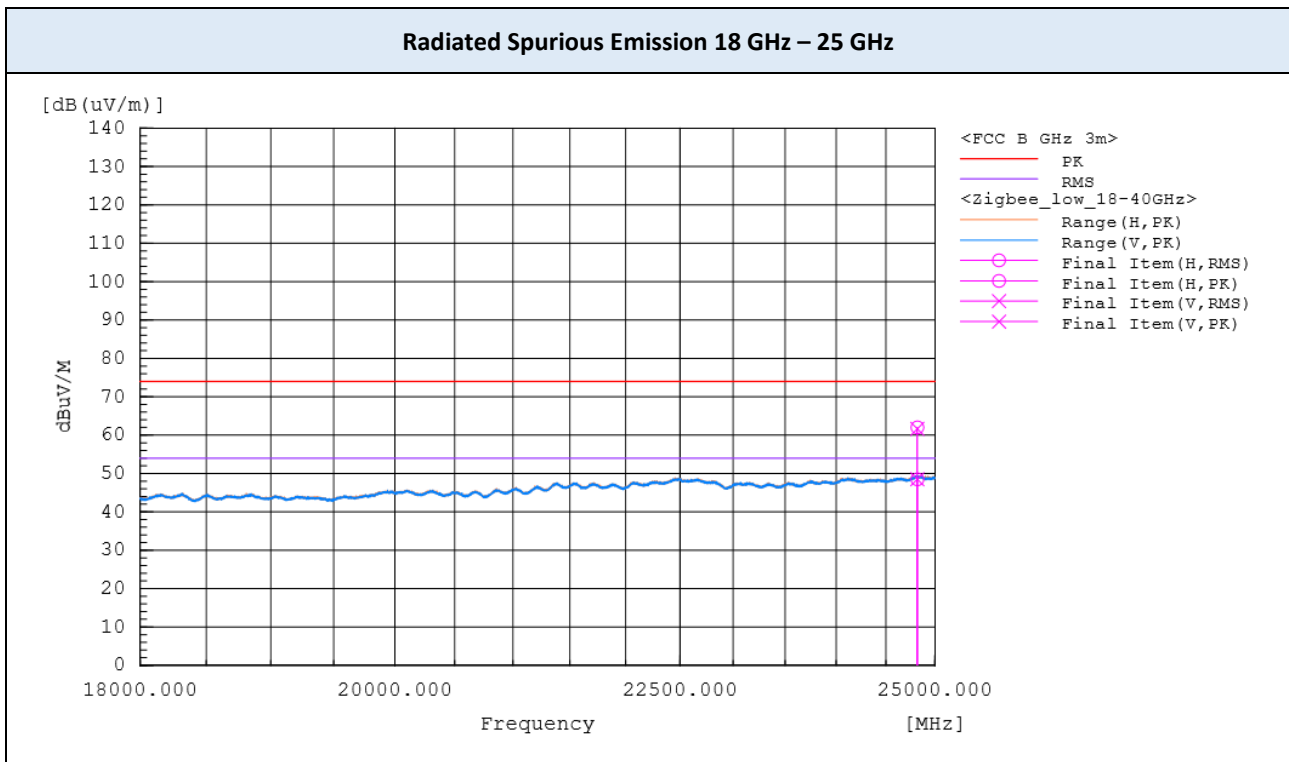

Note:

The worst-case plots are included in this report.

9.8 RADIATED RESTRICTED BAND EDGES

Operating Frequency 2405 MHz
 Channel No. CH 11
 Mode 802.15.4 ZigBee

Frequency (MHz)	Polarization	Reading (dBuV)		Factor (dB)		Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
		AV	PK	Corr. ¹⁾	Duty	AV	PK	AV	PK	AV	PK
2390	H	40.7	53.1	-6.1	-20.00	14.6	47.0	54	74	39.4	27.0
2390	V	40.8	53.0	-6.1	-20.00	14.7	46.9	54	74	39.3	27.1


Operating Frequency 2480 MHz
 Channel No. CH 26
 Mode 802.15.4 ZigBee

Frequency (MHz)	Polarization	Reading (dBuV)		Factor (dB)		Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
		AV	PK	Corr. ¹⁾	Duty	AV	PK	AV	PK	AV	PK
2483.5	H	63.1	73.3	-5.6	-20.00	37.5	67.7	54	74	16.5	6.3
2483.5	V	63.0	73.5	-5.6	-20.00	37.4	67.9	54	74	16.6	6.1

Notes:

1. Correction Factor: Antenna Factor + Cable loss
2. Due to limited operation with the duty cycle of 10% or less per any 100 ms period under operating condition, the duty cycle factor of -20 dB is applied for AV level
3. AV Level = Measured Power(dBm) + Correction Factor(dB) + Duty Cycle Factor(dB)

Test Plots

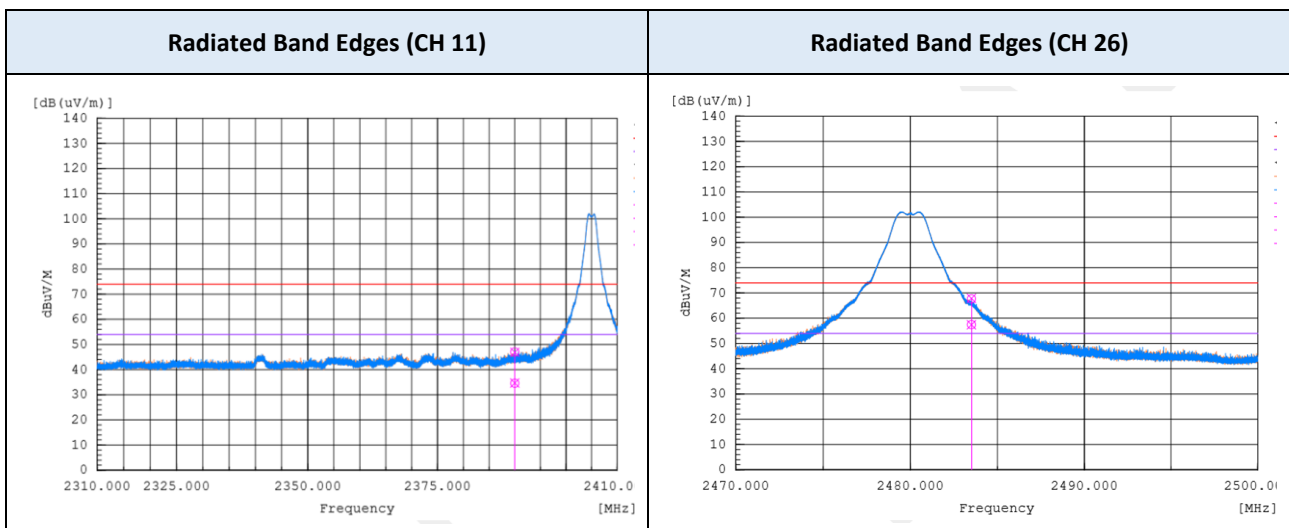

Note:

AV Level shown on the plot does not include the duty factor (-20 dB). The duty factor is applied to the final result on the table above

9.9 RECEIVER SPURIOUS EMISSIONS

Frequency Range : Below 1 GHz

Frequency (MHz)	Polarization	Reading (dBuV)	Corr.1) (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement Type
33.783	V	25.9	-2.3	23.6	40	16.4	QP
499.996	V	39.8	-2.1	37.7	46	8.3	QP
624.986	V	38.8	-0.2	38.6	46	7.4	QP
624.999	H	36.2	-0.2	36.0	46	10.0	QP
874.988	V	32.3	3.6	35.9	46	10.1	QP

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.



Frequency Range : Above 1 GHz

Frequency (MHz)	Polarization	Reading (dBuV)		Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
		AV	Corr. ¹⁾	AV	AV	AV
15983.3	H	28.8	16.8	45.6	54	8.4
15984.34	V	28.9	16.8	45.7	54	8.3

Notes:

1. Correction Factor: Antenna Factor + Cable loss + Preamplifier

▣ Test Plots

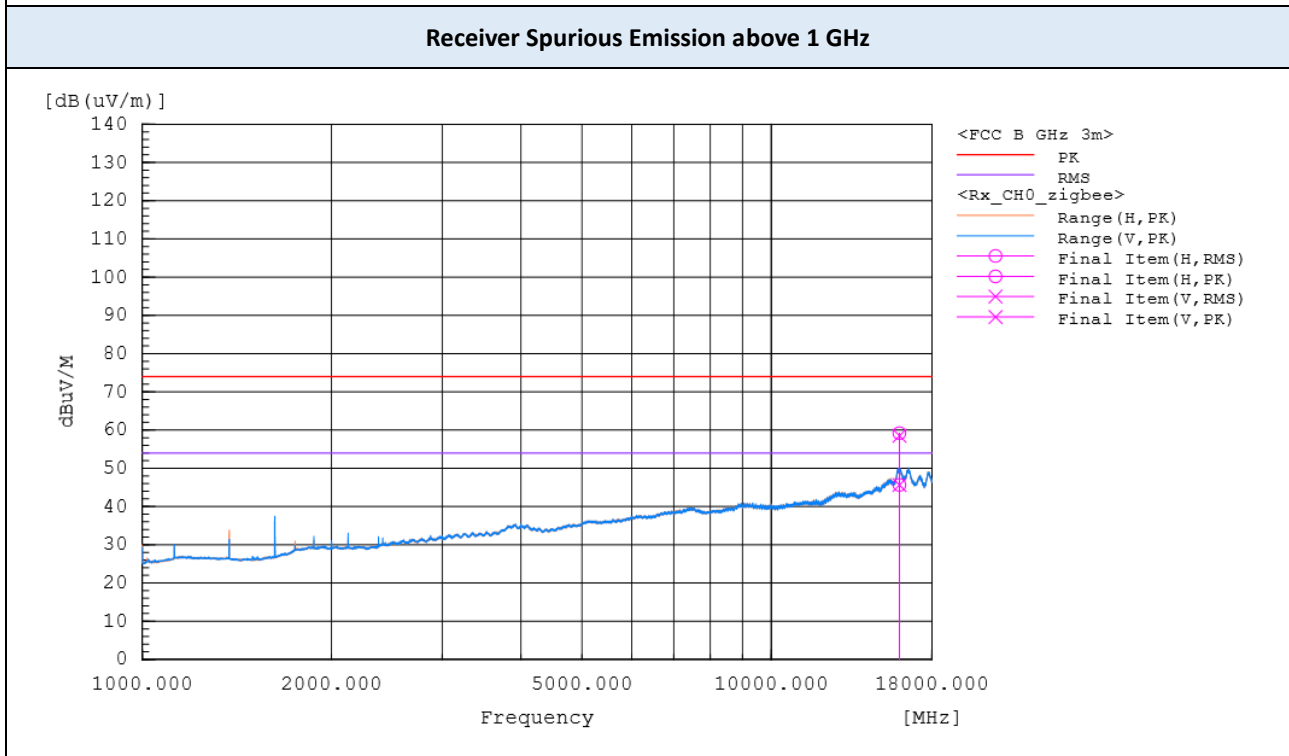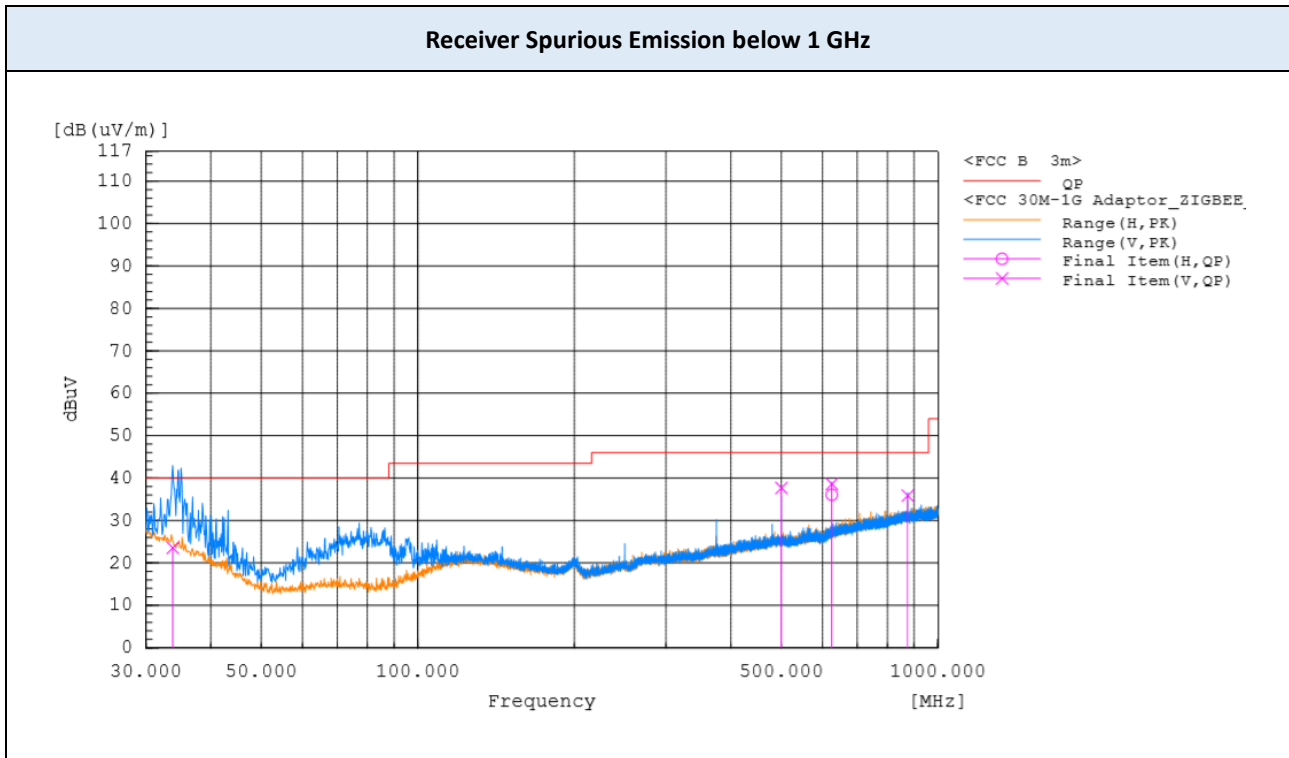

Note:
The worst-case plots are included in this report.

9.10 POWERLINE CONDUCTED EMISSIONS

AC Adapter



Frequency (MHz)	Line	Reading (dB μ V)		Corr. (dB)	Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		QP	CAV		QP	CAV	QP	CAV	QP	CAV
0.152	L1	36.5	25.4	9.8	46.3	35.2	65.9	55.9	19.6	20.7
0.231	L1	25.7	10.7	9.7	35.4	20.4	62.4	52.4	27.0	32.0
0.364	L1	25.3	21.1	9.7	35.0	30.8	58.6	48.6	23.6	17.8
1.236	L1	23.3	20.3	9.8	33.1	30.1	56.0	46.0	22.9	15.9
2.163	L1	19.9	17.1	9.7	29.6	26.8	56.0	46.0	26.4	19.2
2.472	L1	18.8	13.4	9.8	28.6	23.2	56.0	46.0	27.4	22.8
3.401	L1	20.7	15.1	9.8	30.5	24.9	56.0	46.0	25.5	21.1
14.530	L1	16.7	14.4	10.1	26.8	24.5	60.0	50.0	33.2	25.5
17.313	L1	16.4	13.7	10.2	26.6	23.9	60.0	50.0	33.4	26.1

Frequency (MHz)	Line	Reading (dB μ V)		Corr. (dB)	Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		QP	CAV		QP	CAV	QP	CAV	QP	CAV
0.154	N	38.0	25.4	9.8	47.8	35.2	65.8	55.8	18.0	20.6
0.364	N	25.0	20.6	9.7	34.7	30.3	58.6	48.6	23.9	18.3
1.237	N	22.6	20.2	9.8	32.4	30.0	56.0	46.0	23.6	16.0
3.094	N	21.7	16.4	9.8	31.5	26.2	56.0	46.0	24.5	19.8
3.863	N	19.4	14.6	9.8	29.2	24.4	56.0	46.0	26.8	21.6
13.602	N	15.8	10.5	10.1	25.9	20.6	60.0	50.0	34.1	29.4
17.005	N	15.9	12.6	10.2	26.1	22.8	60.0	50.0	33.9	27.2

Note :

Quasi-peak(Final Result) = Reading Value + Correction Factor

▣ Test Plots

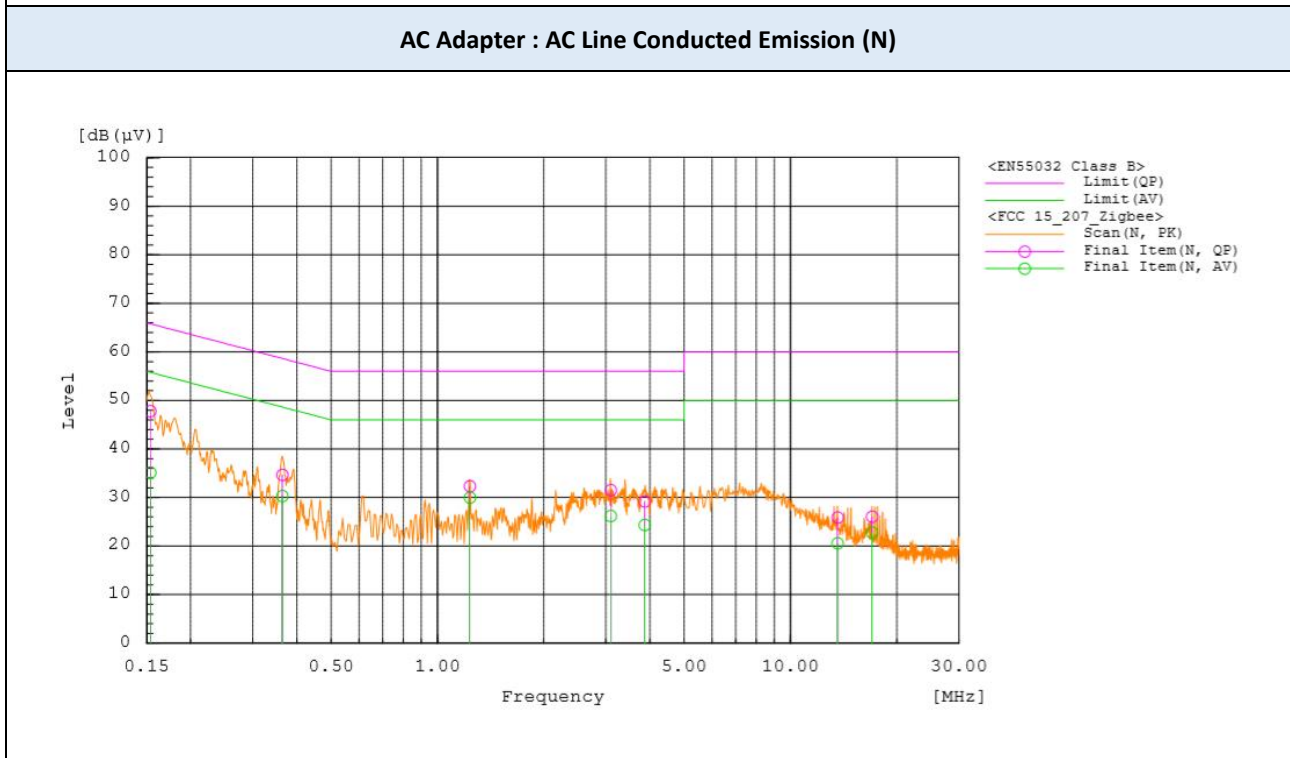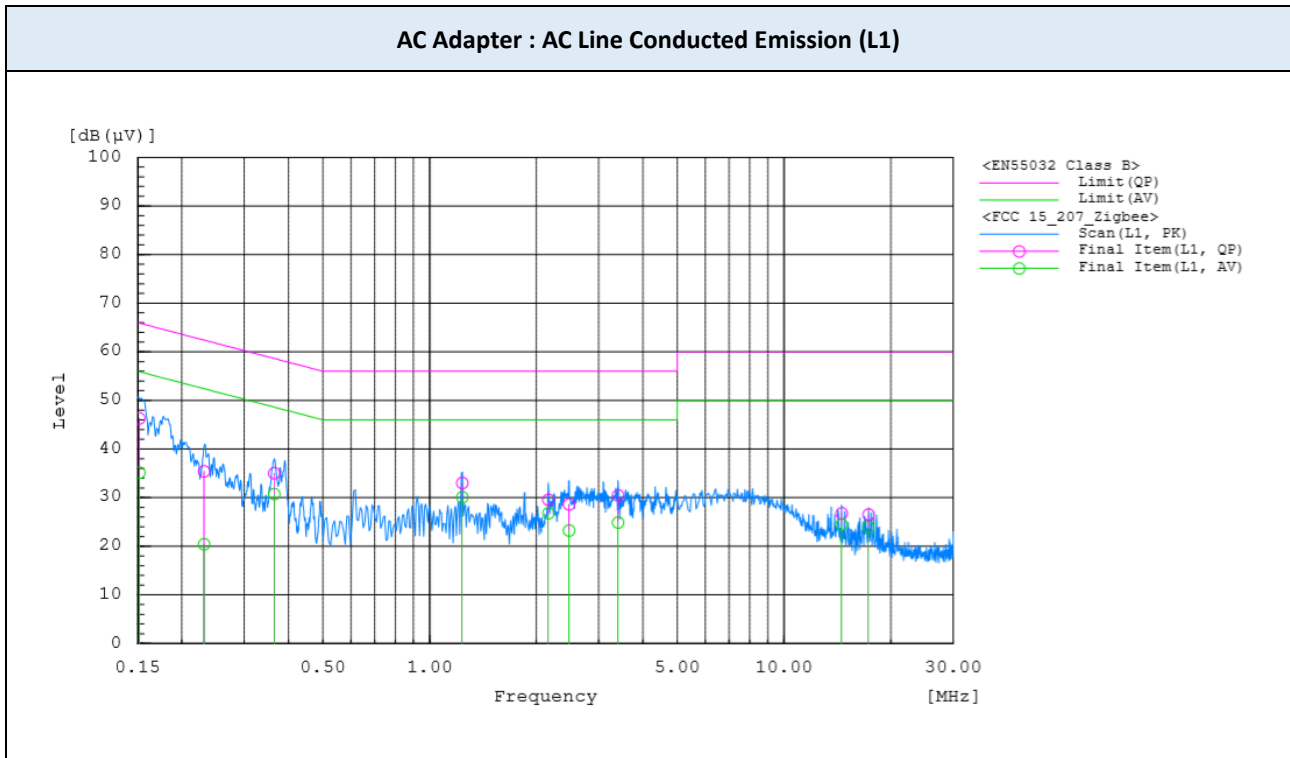

PoE Adapter



Frequency (MHz)	Line	Reading (dBμV)		Corr. (dB)	Level (dBμV)		Limit (dBμV)		Margin (dB)	
		QP	CAV		QP	CAV	QP	CAV	QP	CAV
0.156	L1	40.1	22.6	9.8	49.9	32.4	65.7	55.7	15.8	23.3
0.221	L1	31	14.3	9.7	40.7	24	62.8	52.8	22.1	28.8
0.44	L1	16.6	1.8	9.7	26.3	11.5	57.1	47.1	30.8	35.6
0.572	L1	12.5	2.7	9.7	22.2	12.4	56	46	33.8	33.6
4.993	L1	12.1	8.6	9.9	22	18.5	56	46	34	27.5
16.096	L1	34.4	30.1	10.2	44.6	40.3	60	50	15.4	9.7
16.4	L1	34.9	33.8	10.2	45.1	44	60	50	14.9	6
17.009	L1	33.1	23.3	10.2	43.3	33.5	60	50	16.7	16.5

Frequency (MHz)	Line	Reading (dBμV)		Corr. (dB)	Level (dBμV)		Limit (dBμV)		Margin (dB)	
		QP	CAV		QP	CAV	QP	CAV	QP	CAV
0.152	N	39.3	20.4	9.8	49.1	30.2	65.9	55.9	16.8	25.7
0.236	N	28.9	11	9.7	38.6	20.7	62.2	52.2	23.6	31.5
0.357	N	20.4	5.1	9.7	30.1	14.8	58.8	48.8	28.7	34
4.846	N	12.2	8.5	9.9	22.1	18.4	56	46	33.9	27.6
15.793	N	31.9	27.5	10.2	42.1	37.7	60	50	17.9	12.3
16.401	N	35.1	34	10.2	45.3	44.2	60	50	14.7	5.8
16.704	N	33.2	30.5	10.2	43.4	40.7	60	50	16.6	9.3

Note :

Quasi-peak(Final Result) = Reading Value + Correction Factor

▣ Test Plots

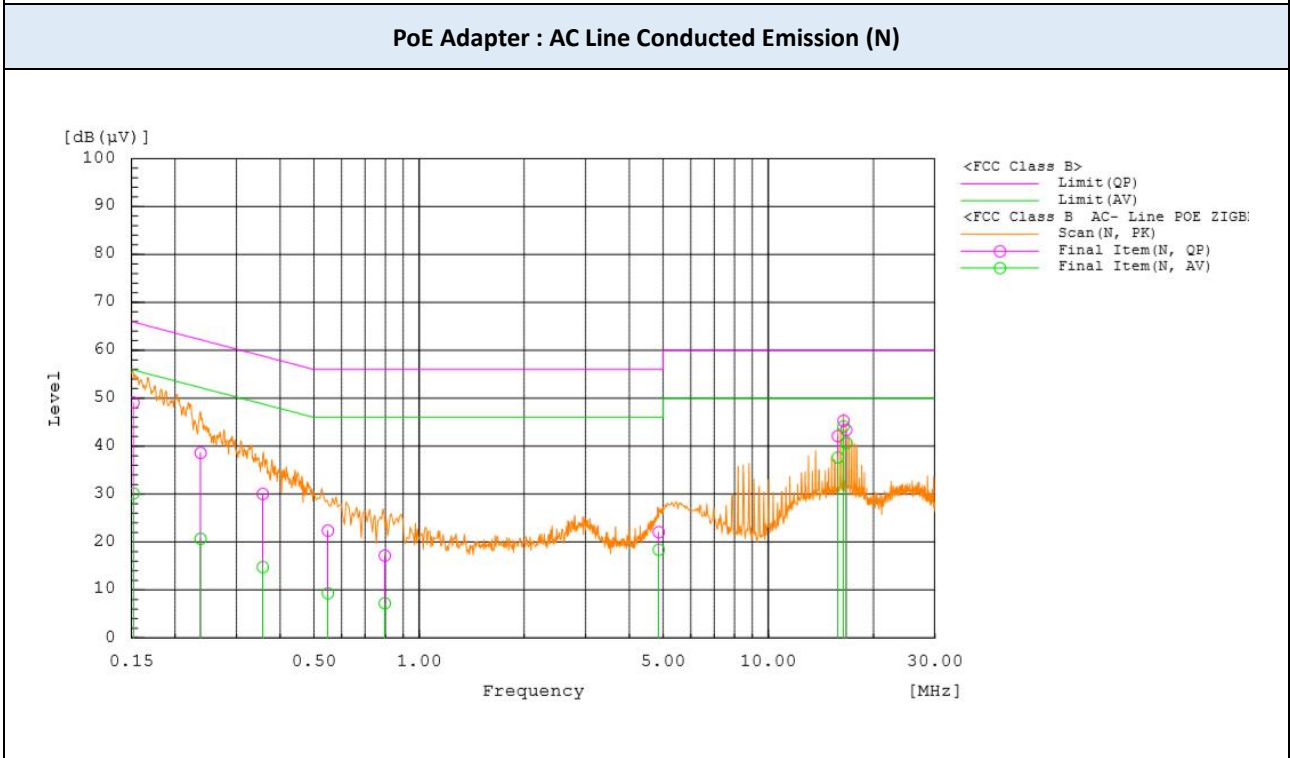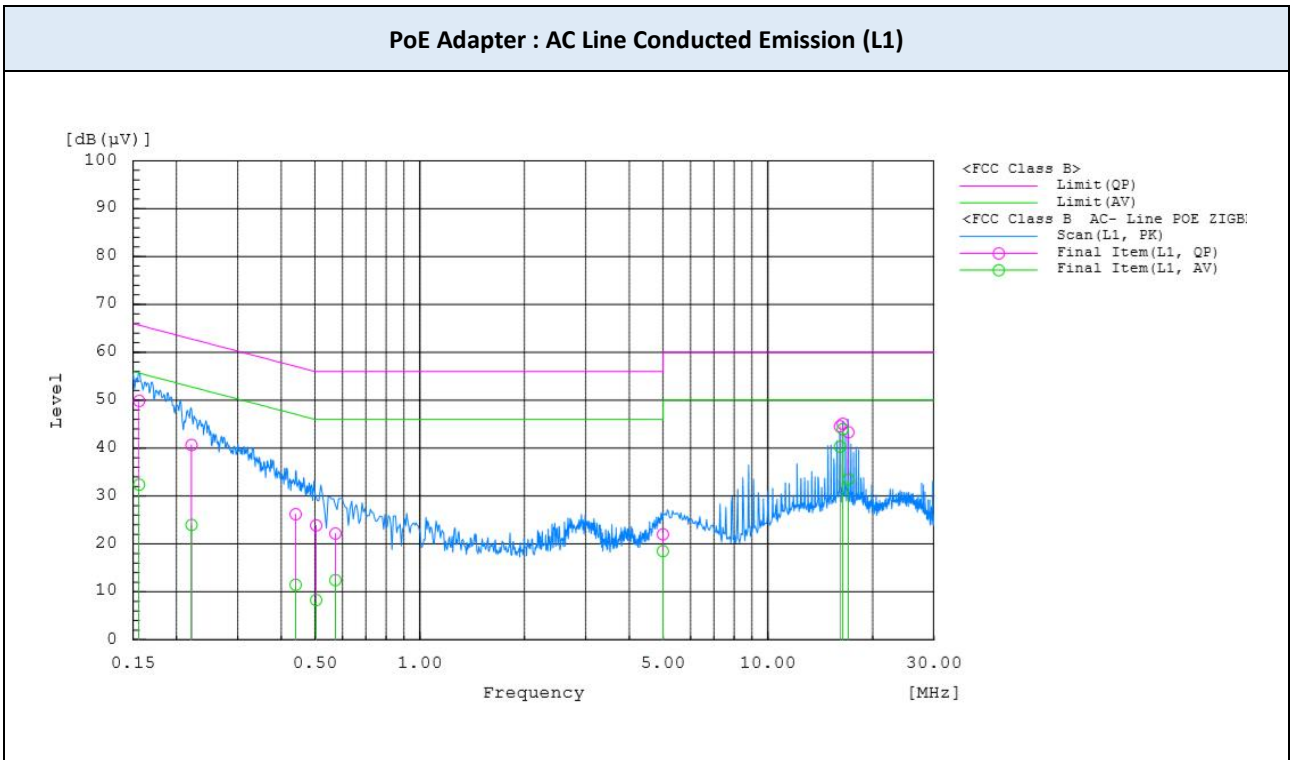

10. LIST OF TEST EQUIPMENT

No.	Instrument	Model No.	Calibration Due (mm/dd/yy)	Manufacture	Serial No.
<input checked="" type="checkbox"/>	Signal Analyzer (20 Hz ~ 40.0 GHz)	ESU40	12/20/2020	ROHDE & SCHWARZ	100529
<input checked="" type="checkbox"/>	Signal Analyzer (10 Hz ~ 26.5 GHz)	N9020A	11/08/2020	Keysight	MY52091291
<input checked="" type="checkbox"/>	BI-LOG Antenna (30 MHz ~ 1 GHz)	JB6	11/29/2020	Sunol	A071116
<input checked="" type="checkbox"/>	Attenuator (20 dB, DC ~ 26.5 GHz)	8493C	12/13/2020	HP	09072
<input checked="" type="checkbox"/>	POWER AMP (1 GHz ~ 18 GHz)	PAM-118A	08/22/2020	Com-Power Corporation	18040074
<input checked="" type="checkbox"/>	POWER AMP (0.3GHz ~ 1GHz)	8447D	10/08/2020	HP	2944
<input checked="" type="checkbox"/>	Horn Antenna (1 GHz ~ 18 GHz)	DRH-118	08/28/2020	Sunol	A070516
<input checked="" type="checkbox"/>	Loop Antenna (0.009 ~ 30 MHz)	HLA 6121	08/27/2020	TESEQ	43964
<input checked="" type="checkbox"/>	Horn Antenna (18 GHz ~ 40 GHz)	DRH-1840	02/20/2021	Sunol	17120
<input checked="" type="checkbox"/>	POWER AMP (18 GHz ~ 40 GHz)	CBL184050-45-01	02/04/2021	CERNEX, Inc.	43964
<input checked="" type="checkbox"/>	ISM Band Reject filter (2370 ~ 2400 - 2483.5 ~2520 MHz)	WRCJV12	01/18/2021	Wainwright	4
<input checked="" type="checkbox"/>	EMI Test Receiver	ESR3	12/20/2020	Rohde & Schwarz	102363
<input checked="" type="checkbox"/>	LISN	3816/2SH	01/19/2021	EMCO	00205729
<input checked="" type="checkbox"/>	LISN	ENV216	01/19/2021	Rohde & Schwarz	101349

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date

11. ANNEX A TEST SETUP PHOTO

The setup photos are provided as a separate document