

Test of MSR4000 802.11a/b/g/n Access Point

To: FCC 47 CFR Part 90 & IC RSS 111

Test Report Serial No.: ARUB65-U3 Rev A





Test of Aruba Networks, Inc MSR4000 802.11a/b/g/n Access Point

To FCC 47 CFR Part 90 & IC RSS 111

Test Report Serial No.: ARUB65-U3 Rev A

This report supersedes NONE

**Manufacturer:** Aruba Networks, Inc  
1344 Crossman Avenue  
Sunnyvale  
California 94089, USA

**Product Function:** Wireless Access Point Operating at 4.9 GHz

**Copy No:** pdf      **Issue Date:** 5th April 2011

**This Test Report is Issued Under the Authority of:**

**MiCOM Labs, Inc.**  
440 Boulder Court, Suite 200  
Pleasanton, CA 94566 USA  
Phone: +1 (925) 462-0304  
Fax: +1 (925) 462-0306  
[www.micomlabs.com](http://www.micomlabs.com)



TESTING CERTIFICATE #2381.01

**MiCOM Labs is an ISO 17025 Accredited Testing Laboratory**



**Title:** MSR4000 802.11a/b/g/n Access Point  
**To:** FCC 47 CFR Part 90 & IC RSS 111  
**Serial #:** ARUB65-U3 Rev A  
**Issue Date:** 5th April 2011  
**Page:** 3 of 82

---

This page has been left intentionally blank

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## TABLE OF CONTENTS

<b>ACCREDITATION, LISTINGS &amp; RECOGNITION .....</b>	<b>5</b>
TESTING ACCREDITATION .....	5
RECOGNITION.....	6
PRODUCT CERTIFICATION.....	7
<b>1. TEST RESULT CERTIFICATE .....</b>	<b>9</b>
<b>2. REFERENCES AND MEASUREMENT UNCERTAINTY .....</b>	<b>10</b>
2.1. Normative References .....	10
2.2. Test and Uncertainty Procedures .....	10
<b>3. PRODUCT DETAILS AND TEST CONFIGURATIONS .....</b>	<b>11</b>
3.1. Technical Details .....	11
3.2. Scope of Test Program.....	12
3.3. Equipment Model(s) and Serial Number(s) .....	17
3.4. Antenna Details .....	17
3.5. Cabling and I/O Ports .....	17
3.6. Test Configurations.....	18
3.7. Equipment Modifications.....	18
3.8. Deviations from the Test Standard .....	18
<b>4. TEST SUMMARY .....</b>	<b>19</b>
<b>5. TEST RESULTS .....</b>	<b>21</b>
5.1. Device Characteristics .....	21
5.1.1. <i>Occupied Bandwidth and Emission Mask</i> .....	21
5.1.2. <i>Peak Output Power</i> .....	28
5.1.3. <i>Peak Power Spectral Density (PPSD)</i> .....	32
5.1.4. <i>Maximum Permissible Exposure</i> .....	38
5.1.5. <i>Frequency Stability; Temperature Variations, and Voltage Variations</i> ..	39
5.1.6. <i>Spurious Emissions at Antenna Terminals - Transmitter</i> .....	54
5.1.7. <i>Radiated Spurious Emissions</i> .....	60
5.1.8. <i>Receiver Radiated Spurious Emissions</i> .....	70
5.1.9. <i>AC Wireline Conducted Emissions (150 kHz – 30 MHz)</i> .....	75
<b>6. TEST SET-UP PHOTOGRAPHS.....</b>	<b>78</b>
6.1. General Measurement Test Set-Up .....	78
6.2. Environmental Chamber .....	79
6.3. Radiated Emissions .....	80
<b>7. TEST EQUIPMENT DETAILS.....</b>	<b>81</b>

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** MSR4000 802.11a/b/g/n Access Point  
**To:** FCC 47 CFR Part 90 & IC RSS 111  
**Serial #:** ARUB65-U3 Rev A  
**Issue Date:** 5th April 2011  
**Page:** 5 of 82

## ACCREDITATION, LISTINGS & RECOGNITION

### TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



The American Association for Laboratory Accreditation

World Class Accreditation

## Accredited Laboratory

A2LA has accredited

**MICOM LABS**

*Pleasanton, CA*

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General Requirements for the Competence of Testing and Calibration Laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Presented this 14<sup>th</sup> day of April 2010.



*Peta Mlynar*

President & CEO  
For the Accreditation Council  
Certificate Number 2381.01  
Valid to November 30, 2011

*For the tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.*

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## **RECOGNITION**

MiCOM Labs, Inc has widely recognized Electrical testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA\*\* countries. Our test reports are widely accepted for global type approvals.

<b>Country</b>	<b>Recognition Body</b>	<b>Status</b>	<b>Phase</b>	<b>Identification No.</b>
USA	Federal Communications Commission (FCC)	TCB	-	Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	Listing #: 4143A
Japan	VCCI	-	-	No. 2959
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

\*\*APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

N/A – Not Applicable

\*\*EU MRA – European Union Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the EU member countries.

\*\*NB – Notified Body

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** MSR4000 802.11a/b/g/n Access Point  
**To:** FCC 47 CFR Part 90 & IC RSS 111  
**Serial #:** ARUB65-U3 Rev A  
**Issue Date:** 5th April 2011  
**Page:** 7 of 82

## **PRODUCT CERTIFICATION**

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard EN ISO/IEC Guide 65. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



*The American Association for Laboratory Accreditation*

*World Class Accreditation*

### *Accredited Product Certification Body*

A2LA has accredited

**MICOM LABS**

*Pleasanton, CA*

for technical competence as a

**Product Certification Body**

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC Guide 65:1996 *General requirements for bodies operating product certification systems*. This accreditation demonstrates technical competence for a defined scope and the operation of a quality management system for a Telecommunications Certification Body (TCB) meeting FCC (U.S.), and IC (Canada) requirements.



Presented this 24<sup>th</sup> day of June 2010.

President & CEO  
For the Accreditation Council  
Certificate Number 2381.02  
Valid to November 30, 2011

*For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation.*

### **United States of America – Telecommunication Certification Body (TCB)**

TCB Identifier – US0159

### **Industry Canada – Certification Body**

CAB Identifier – US0159

### **Europe – Notified Body**

Notified Body Identifier - 2280

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** MSR4000 802.11a/b/g/n Access Point  
**To:** FCC 47 CFR Part 90 & IC RSS 111  
**Serial #:** ARUB65-U3 Rev A  
**Issue Date:** 5th April 2011  
**Page:** 8 of 82

---

## DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft		
Rev A	5 <sup>th</sup> April 2011	Initial Release

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** MSR4000 802.11a/b/g/n Access Point  
**To:** FCC 47 CFR Part 90 & IC RSS 111  
**Serial #:** ARUB65-U3 Rev A  
**Issue Date:** 5th April 2011  
**Page:** 9 of 82

## 1. TEST RESULT CERTIFICATE

<b>Manufacturer:</b>	Aruba Networks, Inc 1344 Crossman Avenue, Sunnyvale California 94089, USA	<b>Tested By:</b>	MiCOM Labs, Inc. 440 Boulder Court, Suite 200, Pleasanton California, 94566, USA
<b>EUT:</b>	Wireless Access Point Operating at 4.9 GHz	<b>Telephone:</b>	+1 925 462 0304
<b>Model(s):</b>	MSR4000	<b>Fax:</b>	+1 925 462 0306
<b>S/N:</b>	34B02104500017		
<b>Test Date(s):</b>	18th Aug - 8th Dec 2010	<b>Website:</b>	www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC 47 CFR Part 90 & IC RSS 111 (4.9 GHz Operation)	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

### Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:



TESTING CERTIFICATE #2381.01

  
\_\_\_\_\_  
Graeme Grieve  
Quality Manager MiCOM Labs,

  
\_\_\_\_\_  
Gordon Hurst  
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## **2. REFERENCES AND MEASUREMENT UNCERTAINTY**

### **2.1. Normative References**

<b>Ref.</b>	<b>Publication</b>	<b>Year</b>	<b>Title</b>
<b>(i)</b>	FCC 47 CFR Part 90	2010	Code of Federal Regulations
<b>(ii)</b>	RSS-111	2009 Issue 3	Broadband Public Safety Equipment Operating in the Band 4940- 4990 MHz
<b>(iii)</b>	ANSI C63.4	2009	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>(iv)</b>	CISPR 22/ EN 55022	2008 2006+A1:2 007	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
<b>(v)</b>	M 3003	Edition 1 Dec. 1997	Expression of Uncertainty and Confidence in Measurements
<b>(vi)</b>	LAB34	Edition 1 Aug 2002	The expression of uncertainty in EMC Testing
<b>(vii)</b>	ETSI TR 100 028	2001	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
<b>(viii)</b>	A2LA	9 <sup>th</sup> June 2010	Reference to A2LA Accreditation Status – A2LA Advertising Policy

### **2.2. Test and Uncertainty Procedures**

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.



**Title:** MSR4000 802.11a/b/g/n Access Point  
**To:** FCC 47 CFR Part 90 & IC RSS 111  
**Serial #:** ARUB65-U3 Rev A  
**Issue Date:** 5th April 2011  
**Page:** 11 of 82

### 3. PRODUCT DETAILS AND TEST CONFIGURATIONS

#### 3.1. Technical Details

Details	Description
Purpose:	Test of the MSR4000 802.11a/b/g/n Access Point to FCC 47 CFR Part 90 Subpart Y and Industry Canada RSS-111 regulations.
Applicant:	As Manufacturer
Manufacturer:	Aruba Networks, Inc 1344 Crossman Avenue Sunnyvale California 94089, USA
Laboratory performing the tests:	MiCOM Labs, Inc. 440 Boulder Court, Suite 200 Pleasanton, California 94566 USA
Test report reference number:	ARUB65-U3 Rev A
Date EUT received:	18 <sup>TH</sup> August 2010
Standard(s) applied:	FCC 47 CFR Part 90 & IC RSS 111 (Public Safety Band)
Dates of test (from - to):	18th Aug - 8th Dec 2010
No of Units Tested:	1
Type of Equipment:	Wireless Access Point
Manufacturers Trade Name:	Wireless Access Point
Model(s):	MSR4000
Location for use:	Outdoor
Software Release	AzOS4.1.5
Declared Frequency Range(s):	4940 - 4990 MHz
Declared Nominal Output Power:	+18 dBm (average)
Type of Modulation:	OFDM
EUT Modes of Operation:	Per 802.11 – DBPSK, DQPSK, CCK, OFDM
Transmit/Receive Operation:	Duplex; Legacy 802.11a; 802.11n HT-20.
Rated Input Voltage and Current:	Power Over Ethernet (POE) 48 Vdc @ 1.25 A
Operating Temperature Range:	Declared range -30° to +55°C
ITU Emission Designator:	4.9 GHz - 17M8W7D
Equipment Dimensions:	13" x 11.5" x 5"
Weight:	11.5 lb (5.25 kg)
Primary function of equipment:	Wireless Access Point for transmitting data and voice

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 3.2. Scope of Test Program

The scope of the test program was to test MSR4000 802.11a/b/g/n Access Point to:-

FCC 47 CFR Part 90, Subpart Y regulatory requirements;-

Industry Canada RSS-111.

The MSR4000 is a Wireless Access Point operating in the 4.9 GHz Public Safety Band Radio employing OFDM modulation at 20 MHz bandwidths in the frequency range 4940 to 4990 MHz.

The device will operate using 802.11a and 802.11n HT-20 bandwidths. Results for both operational modes are presented in this document.

#### **MSR4000 802.11 a/b/g/n Wireless Access Point**



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### MSR4000 802.11 a/b/g/n Wireless Access Point



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### MSR4000 802.11 a/b/g/n Wireless Access Point Label Position



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### PowerDSine POE



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### PowerDSine POE



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





### 3.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description (Including Brand Name)	Mfr	Model No.	Serial No.
EUT	802.11 a/b/g/n Wireless Access Point	Aruba Networks Inc	MSR4000	34B02104500017
Support	Power Over EtherNet (POE) 48Vdc supply	PowerDsine	7100G	74000000004
Support	Laptop PC – ThinkPad	IBM	T60	-

### 3.4. Antenna Details

The following is a description of the EUT antennas.

Antenna Type:	Manufacturer	Model	Gain (dBi)	Frequency Range (MHz)
Dipole	Aruba	AP-ANT-86	9	4900 – 5000 MHz
Directional	Aruba	AP-ANT-5614	14	4900 – 5000 MHz

No antennas were tested as part of this program.

### 3.5. Cabling and I/O Ports

Number and type of I/O ports

1. 10/100/1000 Ethernet with 48 Vdc POE
2. USB Maintenance Terminal
3. RF Ports 50Ω, N-type connector(s)
  - a. RO-1 & R0-2
  - b. R1-1 & R1-2
  - c. R2-1 & R2-2
  - d. R3-1 & R3-2



### 3.6. Test Configurations

Matrix of test configurations

Parameter	Operational Mode	Test Conditions	Bandwidths (MHz)
Occupied BW & Emission Mask	Modulated	Ambient	20
Peak Output power	Modulated	Ambient	20
Peak Power Spectral Density	Modulated	Ambient	20
Frequency Stability	CW	Temperature Variations and Voltage Variations	--
Conducted Spurious	Modulated	Ambient	20
Radiated Emissions	Modulated	Ambient	20

### 3.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

### 3.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE



## 4. TEST SUMMARY

### List of Measurements

The following table represents the list of measurements required under the **FCC CFR47 Part 90, Subpart Y, Industry Canada RSS-111**, and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
2.1049; 90.210(m) 4.4	26 dB / 99% Occupied BW & Emission Mask	Emission mask and bandwidth measurement(s)	Conducted	Complies	6.1.1
2.1046; 90.1215 (a) 4.3	Peak and Average Output Power	Modulated Output Power	Conducted	Complies	6.1.2
2.1046; 90.1215 (a) 4.3	Peak Power Spectral Density	Maximum Spectral Density	Conducted	Complies	6.1.3
Subpart C 90.1217	Maximum Permissible Exposure	Exposure to radio frequency energy levels	Radiated	Complies	6.1.4
2.1055(a)(1); 90.213 4.2	Frequency Stability	Includes temperature and voltage variations	Conducted	Complies	6.1.5
2.1051; 90.210(m) 4.4/4.5 6	Conducted Spurious Emissions at Antenna Port	Emissions from the antenna port  30 MHz – 40 GHz	Conducted	Complies	6.1.6
2.1053; 90.210(m) ANSI/TIA- 603 4.4	Radiated Spurious Emissions	Spurious emissions 30 MHz – 40 GHz	Radiated	Complies	6.1.7
Industry Canada only RSS-Gen §4.8, §6	Receiver Radiated Spurious Emissions	Emissions below and above 1 GHz	Radiated	Complies	6.1.8

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** MSR4000 802.11a/b/g/n Access Point  
**To:** FCC 47 CFR Part 90 & IC RSS 111  
**Serial #:** ARUB65-U3 Rev A  
**Issue Date:** 5th April 2011  
**Page:** 20 of 82

---

**Note 1:** *Test results reported in this document relate only to the items tested*

**Note 2:** *The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria*

**Note 3:** *Section 3.7 Equipment Modifications highlights the equipment modifications that were required to bring the product into compliance with the above test matrix*

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## 5. TEST RESULTS

### 5.1. Device Characteristics

#### 5.1.1. Occupied Bandwidth and Emission Mask


**FCC 47 CFR Part 90, Subpart Y; 2.1049; §90.210(m)**  
**IC Section 4.4**

##### **Test Procedure**

The transmitter terminal of EUT was connected to the input of the spectrum analyzer set to measure the 26 dB occupied bandwidth and emission mask for the radio. The system highest power setting was selected with modulation ON and duty cycle set for 100% i.e. continuous operation at all times.

For emission masks the zero dB reference is measured relative to the highest average power of the fundamental emission measured across the designated channel bandwidth using a resolution bandwidth of at least one percent of the occupied bandwidth of the fundamental emission and a video bandwidth of 30 kHz.

The EUT is not equipped with an audio low-pass filter.

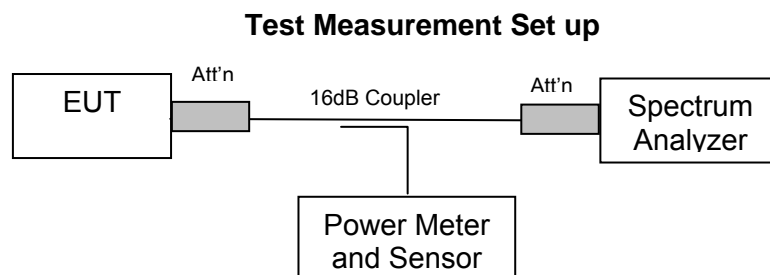

Test set up for Occupied Bandwidth and Emission Mask measurement

Ambient conditions.

Temperature: 17 to 23 °C

Relative humidity: 31 to 57 %


Pressure: 999 to 1012 mbar



TABLE OF RESULTS – 802.11a

Center Frequency (MHz)	99% Bandwidth (MHz)
4,950.0	16.633

Emission Mask & 99% Bandwidth for 20 MHz BW Channel Freq 4950 MHz

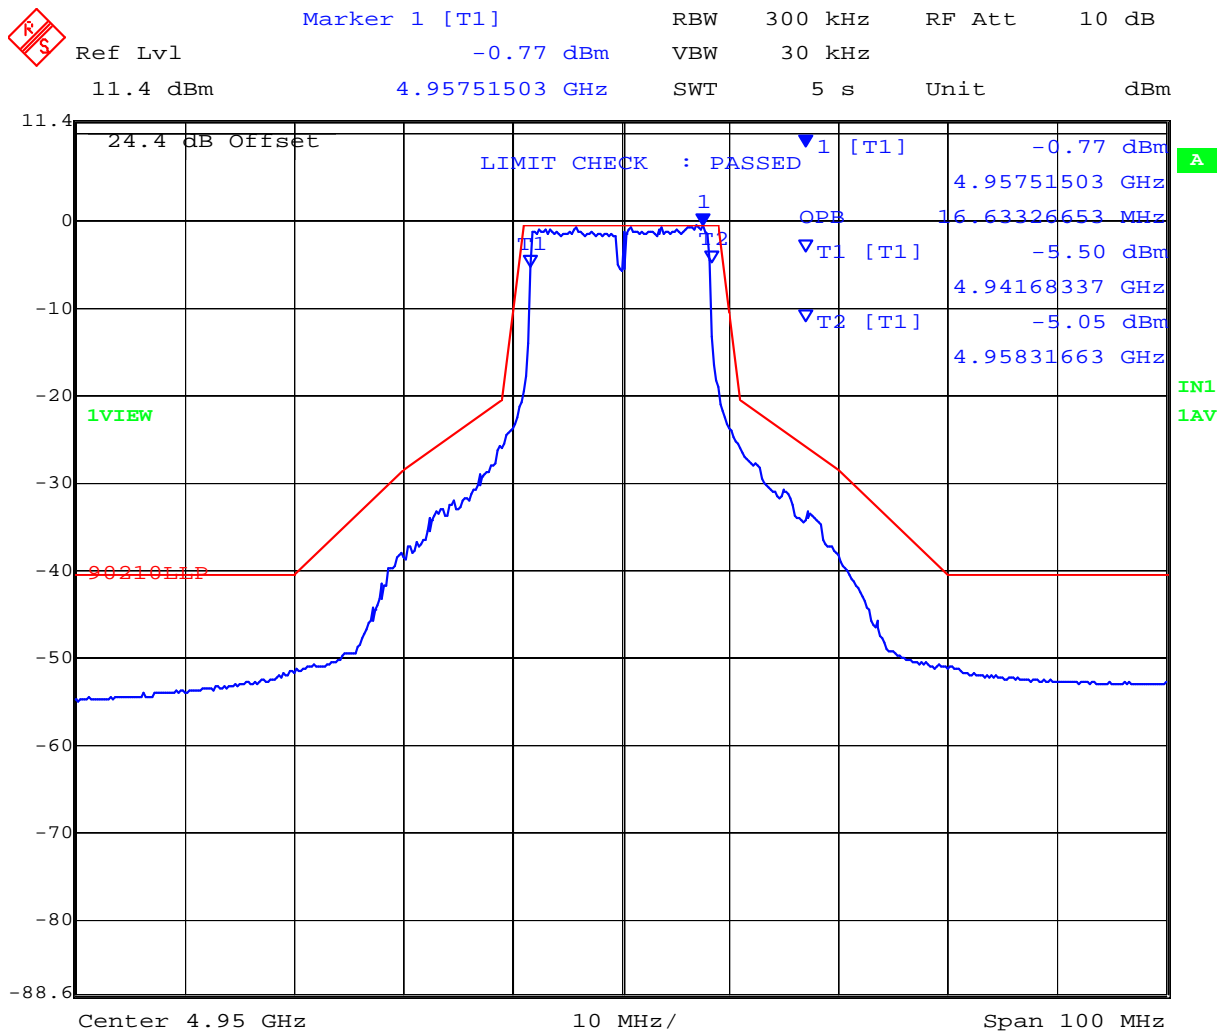

Date: 16.AUG.2010 17:35:55


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11a

Center Frequency (MHz)	99% Bandwidth (MHz)
4,980.0	15.633

Emission Mask & 99% Bandwidth for 20 MHz BW Channel Freq 4980 MHz

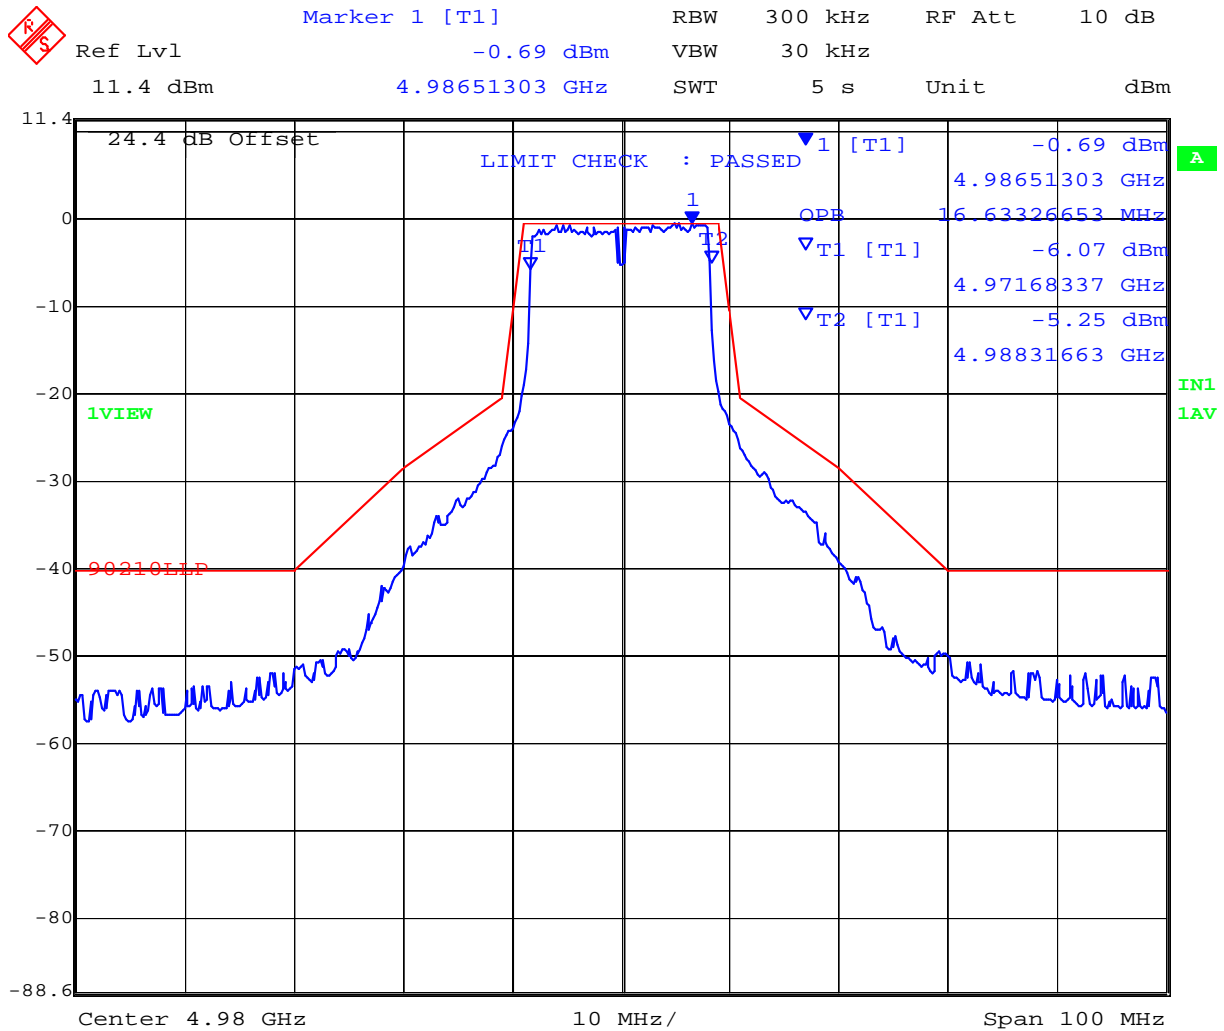

Date: 16.AUG.2010 17:37:54


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11 HT-20

Center Frequency (MHz)	99% Bandwidth (MHz)
4,950.0	17.836

Emission Mask & 99% Bandwidth for 20 MHz BW Channel Freq 4950 MHz

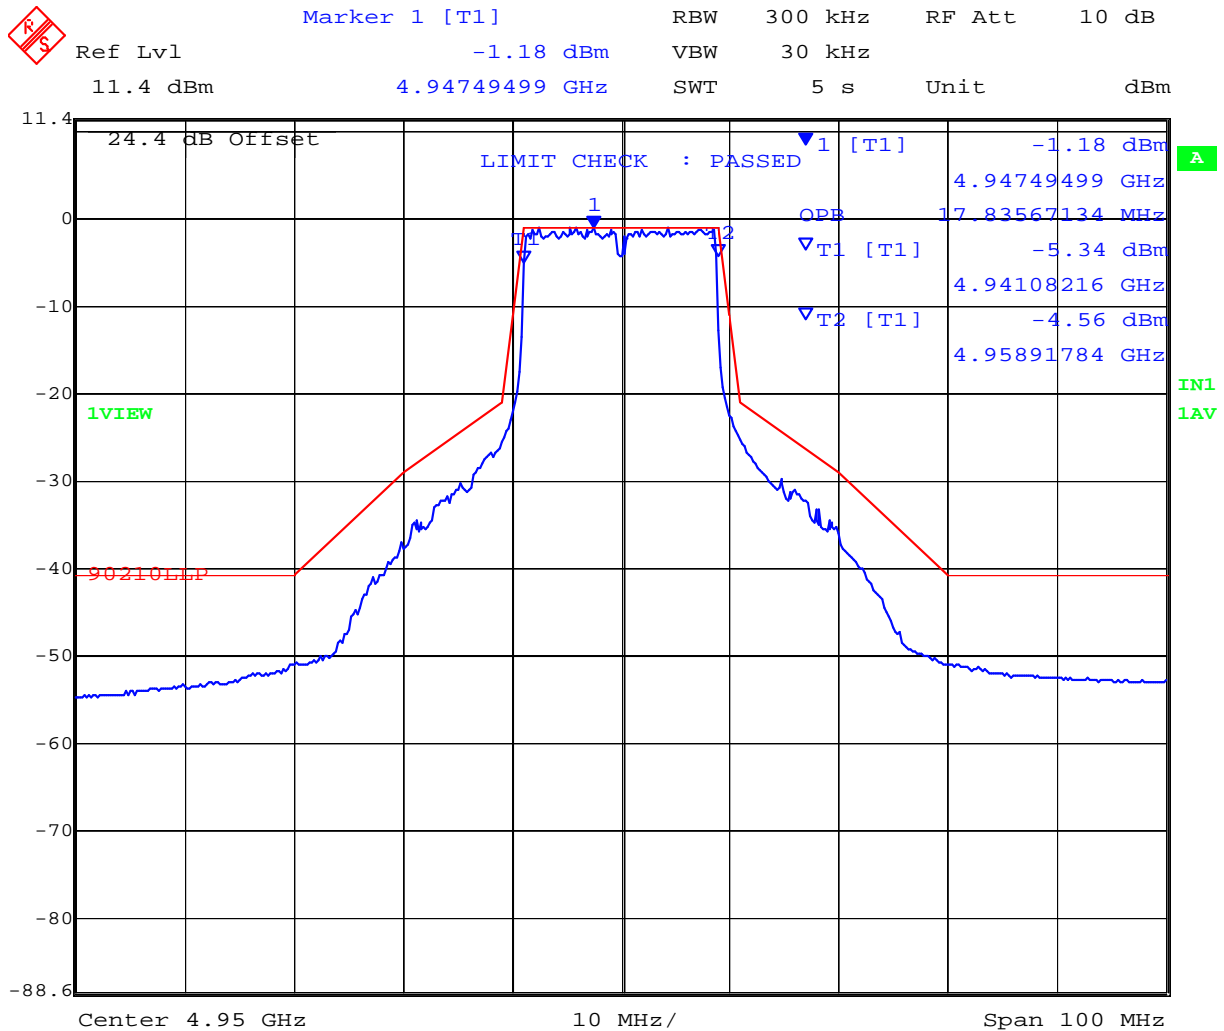

Date: 16.AUG.2010 17:34:06

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

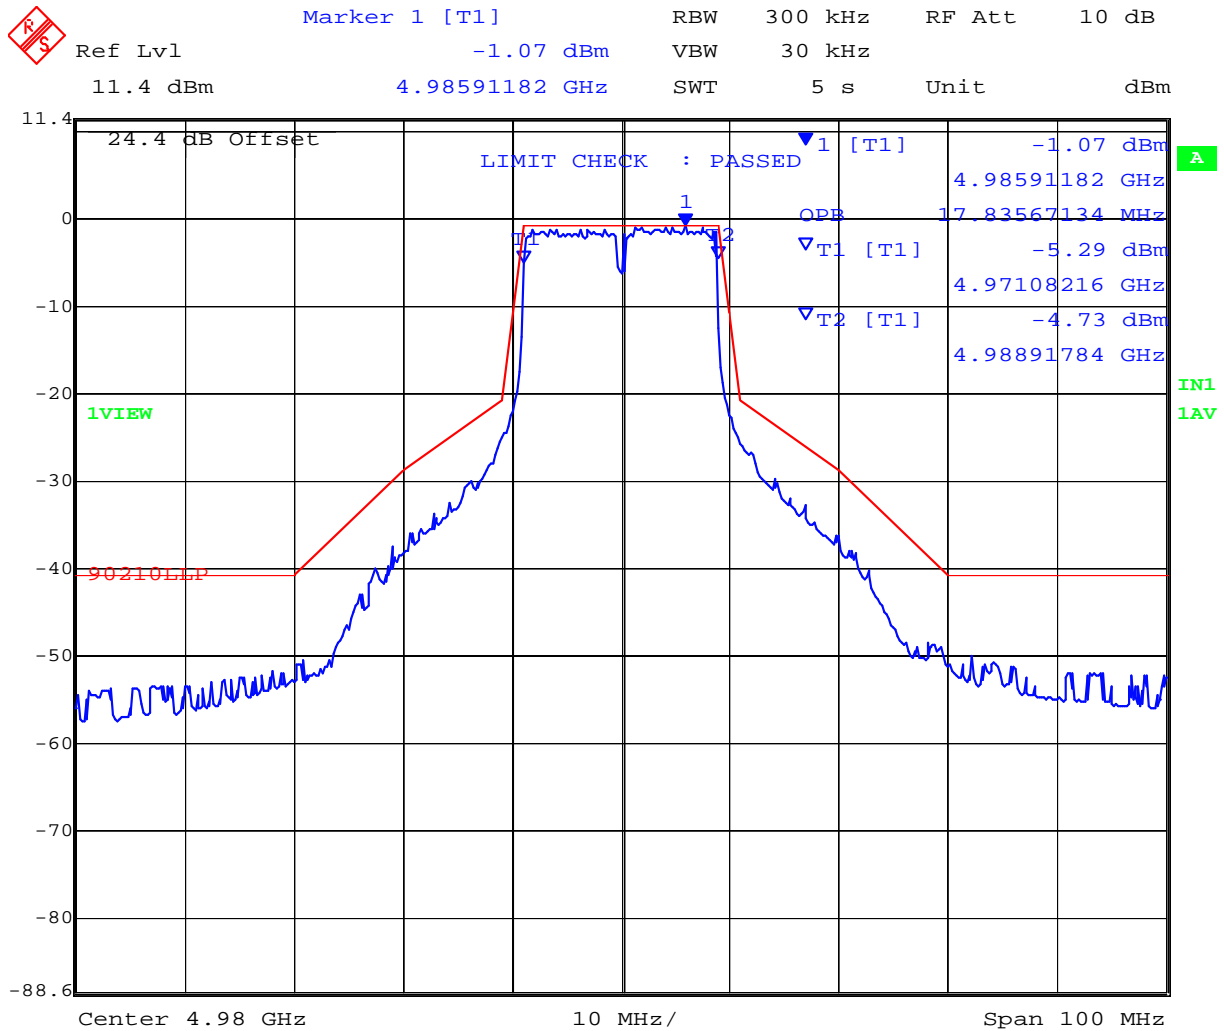




TABLE OF RESULTS – 802.11 HT-20

Center Frequency (MHz)	99% Bandwidth (MHz)
4,980.0	17.836

Emission Mask 99% Bandwidth for 20 MHz BW Channel Freq 4980 MHz



Date: 16.AUG.2010 17:39:00

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Specification Limits**  
**FCC Part §90.210**

**Limits for Authorized Bandwidth**

Frequency Band (MHz) and Related Documents	Spectrum Masks with Audio Filter	Without Audio Filter
4950 – 4990 MHz	L or M	L or M

Reference to the emission masks are provided below

**Limits Emission Masks**

**90.210(L)**, Emission Mask L. For low power transmitters (20 dBm or less) operating in the 4940 – 4990 MHz frequency band, the power spectral density of the emissions must be attenuated below the output power of the transmitter as follows:

- (1) On any frequency removed from the assigned frequency between 0 – 45% of the authorized bandwidth (BW) : 0dB.
- (2) On any frequency removed from the assigned frequency between 45 – 50 % of the authorized bandwidth:  $219 \log (\% \text{ of } (BW)/45)$  dB.
- (3) On any frequency removed from the assigned frequency between 50 – 55 % of the authorized bandwidth:  $10 + 242 \log (\% \text{ of } (BW)/50)$  dB.
- (4) On any frequency removed from the assigned frequency between 55 – 100 % of the authorized bandwidth:  $20 + 31 \log (\% \text{ of } (BW)/55)$  dB attenuation.
- (5) On any frequency removed from the assigned frequency between 100 – 150 % of the authorized bandwidth:  $28 + 68 \log (\% \text{ of } (BW)/100)$  dB attenuation.
- (6) On any frequency removed from the assigned frequency above 150 % of the authorized bandwidth: 50 dB.
- (7) The zero dB reference is measured relative to the highest average power of the fundamental emission measured across the designated channel bandwidth using a resolution bandwidth of at least one percent of the occupied bandwidth of the fundamental emission and a video bandwidth of 30 kHz. The power spectral density is the power measured within the resolution bandwidth of the measurement device divided by the resolution bandwidth of the measurement device. Emission levels are also based on the use of measurement instrumentation employing a resolution bandwidth of at least one percent of the occupied bandwidth.



**Limits Emission Masks (continued)**

**90.210(m)**, Emission Mask M. For high power transmitters (greater than 20 dBm) operating in the 4940 – 4900 MHz frequency band, the power spectral density of the emissions must be attenuated below the output power of the transmitter as follows:

- (1) On any frequency removed from the assigned frequency between 0 – 45% of the authorized bandwidth (BW) : 0dB.
- (2) On any frequency removed from the assigned frequency between 45 – 50 % of the authorized bandwidth:  $568 \log (\% \text{ of } (BW)/45)$  dB.
- (3) On any frequency removed from the assigned frequency between 50 – 55 % of the authorized bandwidth:  $26 + 145 \log (\% \text{ of } (BW)/50)$  dB.
- (4) On any frequency removed from the assigned frequency between 55 – 100 % of the authorized bandwidth:  $32 + 31 \log (\% \text{ of } (BW)/55)$  dB attenuation.
- (5) On any frequency removed from the assigned frequency between 100 – 150 % of the authorized bandwidth:  $40 + 57 \log (\% \text{ of } (BW)/100)$  dB attenuation.
- (6) On any frequency removed from the assigned frequency between above 150 % of the authorized bandwidth: 50 dB or  $55 + 10 \log (P)$  dB, whichever is the lesser attenuation.
- (7) The zero dB reference is measured relative to the highest average power of the fundamental emission measured across the designated channel bandwidth using a resolution bandwidth of at least one percent of the occupied bandwidth of the fundamental emission and a video bandwidth of 30 kHz. The power spectral density is the power measured within the resolution bandwidth of the measurement device divided by the resolution bandwidth of the measurement device. Emission levels are also based on the use of measurement instrumentation employing a resolution bandwidth of at least one percent of the occupied bandwidth.

Note to paragraph m: Low power devices may as an option, comply with paragraph (m).

**Laboratory Measurement Uncertainty for Power Measurements**

Measurement uncertainty	$\pm 1.33$ dB
-------------------------	---------------

**Traceability**

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of RF Spectrum Mask'	0070, 0116, 0158, 0193, 0252, 0313, 0314.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


### 5.1.2. Peak Output Power

**FCC 47 CFR Part 90, Subpart Y; 2.1046; §90.1215**  
**IC Section 4.3**

#### **Test Procedure**

Average power measurements were measured with the use of an average power head. Peak power measurements were recorded via the spectrum analyzer. The system highest power setting was selected with modulation ON and duty cycle set for 100% i.e. continuous operation at all times.

#### **Test Measurement Set up**

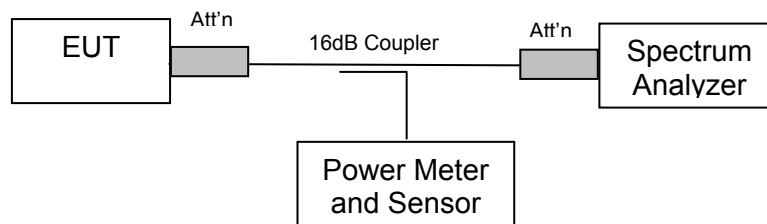

Test set up for modulated output power measurement

Ambient conditions.

Temperature: 17 to 23 °C

Relative humidity: 31 to 57 %

Pressure: 999 to 1012 mbar



**Title:** MSR4000 802.11a/b/g/n Access Point  
**To:** FCC 47 CFR Part 90 & IC RSS 111  
**Serial #:** ARUB65-U3 Rev A  
**Issue Date:** 5th April 2011  
**Page:** 29 of 82

---

TABLE OF RESULTS – 20 MHz Bandwidth Modulated Carrier

Center Frequency (MHz)	Operational Mode	Average Power (dBm)
4950.0	802.11a	+18.14
	HT-20	+18.20
4980.0	802.11a	+18.09
	HT-20	+18.00

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## Specification Limits

### FCC Part §90.1215(a)

Power limits.

The transmitting power of stations operating in the 4940-4990 MHz band must not exceed the maximum limits in this section.

(a) The peak transmit power should not exceed:

Channel Bandwidth (MHz)	Low power peak transmitter power (dBm)	High power peak transmitter power (dBm)
1	7	20
5	14	27
10	17	30
15	18.8	31.8
20	20	33

High power devices are also limited to a peak power spectral density of 21 dBm per one MHz. High power devices using channel bandwidths other than those listed above are permitted; however, they are limited to a peak power spectral density of 21 dBm/MHz. If transmitting antennas of directional gain greater than 9 dBi are used, both the peak transmit power and the peak power spectral density should be reduced by the amount in decibels that the directional gain of the antenna exceeds 9 dBi. However, high power point-to-point or point-to-multipoint operation (both fixed and temporary-fixed rapid deployment) may employ transmitting antennas with directional gain up to 26 dBi without any corresponding reduction in the transmitter power or spectral density. Corresponding reduction in the peak transmit power and peak power spectral density should be the amount in decibels that the directional gain of the antenna exceeds 26 dBi.

(b) Low power devices are also limited to a peak power spectral density of 8 dBm per one MHz. Low power devices using channel bandwidths other than those listed above are permitted; however, they are limited to a peak power spectral density of 8 dBm/MHz. If transmitting antennas of directional gain greater than 9 dBi are used, both the peak transmit power and the peak power spectral density should be reduced by the amount in decibels that the directional gain of the antenna exceeds 9 dBi.

(c) The peak transmit power is measured as a conducted emission over any interval of continuous transmission calibrated in terms of an RMS-equivalent voltage. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement conforming to the definitions in this paragraph for the emission in question.

(d) The peak power spectral density is measured as conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected



**Title:** MSR4000 802.11a/b/g/n Access Point  
**To:** FCC 47 CFR Part 90 & IC RSS 111  
**Serial #:** ARUB65-U3 Rev A  
**Issue Date:** 5th April 2011  
**Page:** 31 of 82

directly, alternative techniques acceptable to the Commission may be used. Measurements are made over a bandwidth of one MHz or the 26 dB emission bandwidth of the device, whichever is less. A resolution bandwidth less than the measurement bandwidth can be used, provided that the measured power is integrated to show total power over the measurement bandwidth. If the resolution bandwidth is approximately equal to the measurement bandwidth, and much less than the emission bandwidth of the equipment under test, the measured results shall be corrected to account for any difference between the resolution bandwidth of the test instrument and its actual noise bandwidth.

#### Laboratory Measurement Uncertainty for Power Measurement

Measurement uncertainty	$\pm 1.33$ dB
-------------------------	---------------

#### Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of RF Output Power'	0070, 0116, 0158, 0193, 0252, 0313, 0314.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 5.1.3. Peak Power Spectral Density (PPSD)


**FCC 47 CFR Part 90, Subpart Y; 2.1046; §90.1215**  
**IC Section 4.3**

#### Test Procedure

The test methodology used for this measurement was determined to provide the highest possible PPSD readings.

Peak power spectral density measurements were performed via the spectrum analyzer and plots were recorded. Modulation was ON and the system duty cycle was set for 100% i.e. continuous operation at all times. The system highest power setting was selected.

#### Test Measurement Set up

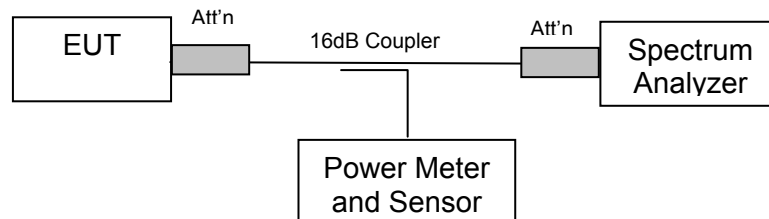

Test set up for Peak Power Spectral Density measurement(s)

Ambient conditions.

Temperature: 17 to 23 °C

Relative humidity: 31 to 57 %


Pressure: 999 to 1012 mbar





TABLE OF RESULTS – 802.11a PPSD 20 MHz Bandwidth 4950 MHz

Center Frequency (MHz)	Peak Power Spectral Density (dBm/ MHz)
4950.0	+3.39

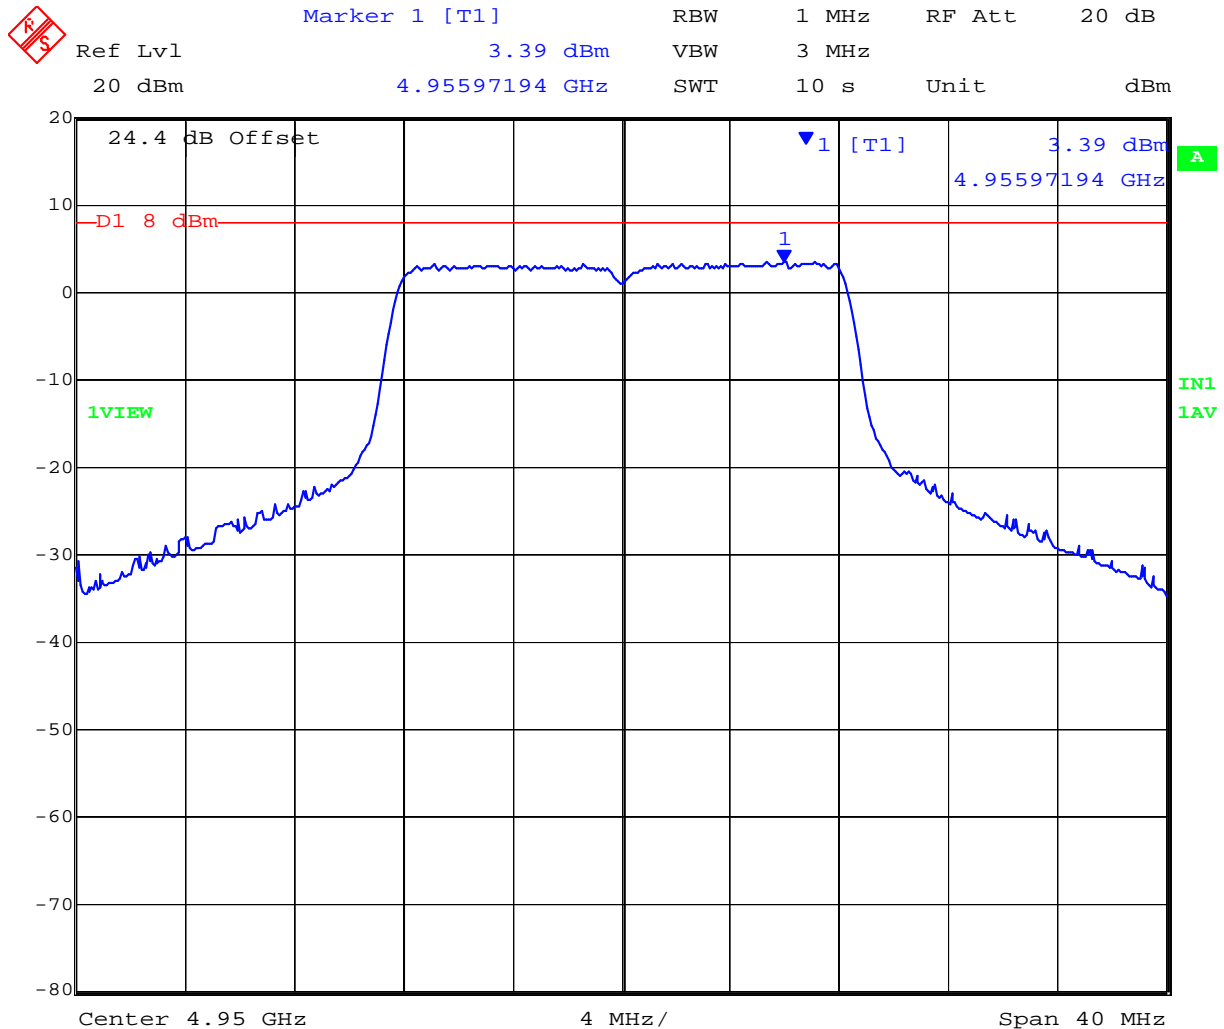

Date: 16.AUG.2010 18:36:18


**Peak Power Spectral Density 20 MHz BW Channel Freq 4950 MHz**

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11a PPSD 20 MHz Bandwidth 4980 MHz

Center Frequency (MHz)	Peak Power Spectral Density (dBm/MHz)
4980.0	+3.50

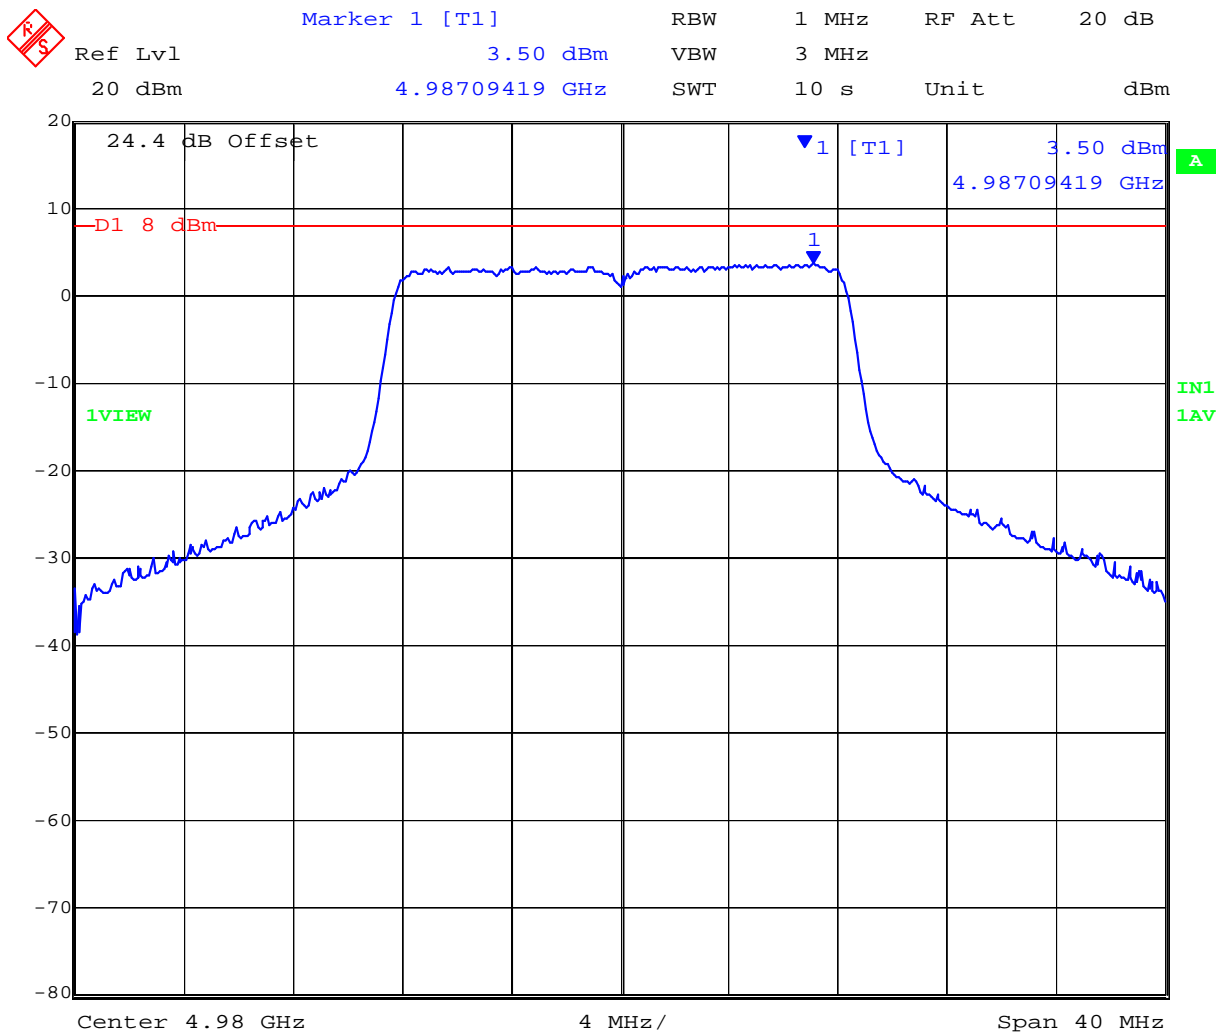

Date: 16.AUG.2010 18:32:17


Peak Power Spectral Density 20 MHz BW Channel Freq 4980 MHz

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11 HT-20 PPSD 20 MHz Bandwidth 4950 MHz

Center Frequency (MHz)	Peak Power Spectral Density (dBm/ MHz)
4950.0	+3.06

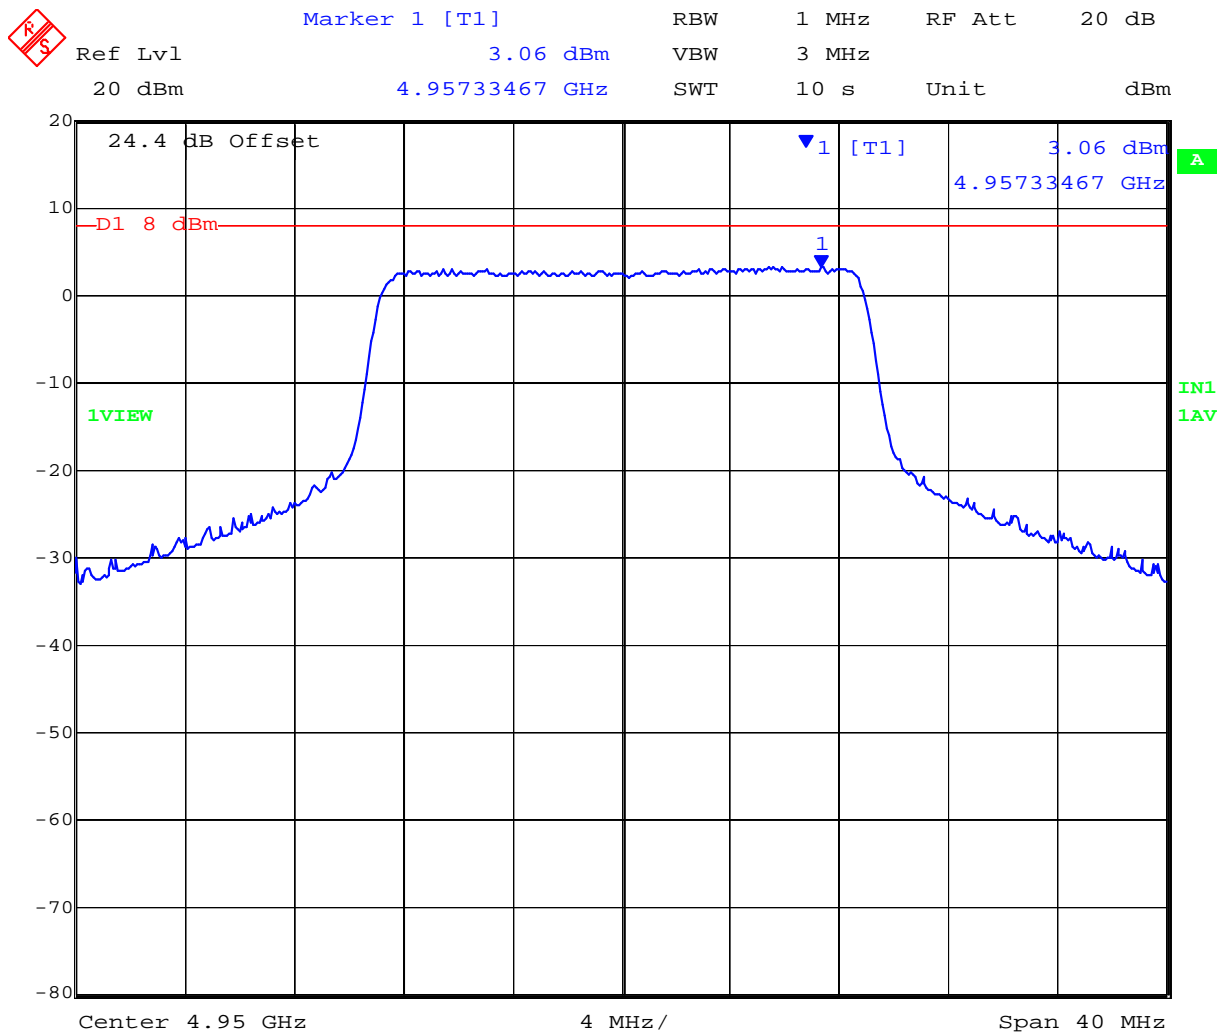

Date: 16.AUG.2010 18:35:19


Peak Power Spectral Density 20 MHz BW Channel Freq 4950 MHz

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11 HT-20 PPSD 20 MHz Bandwidth 4980 MHz

Center Frequency (MHz)	Peak Power Spectral Density (dBm/MHz)
4980.0	+3.17

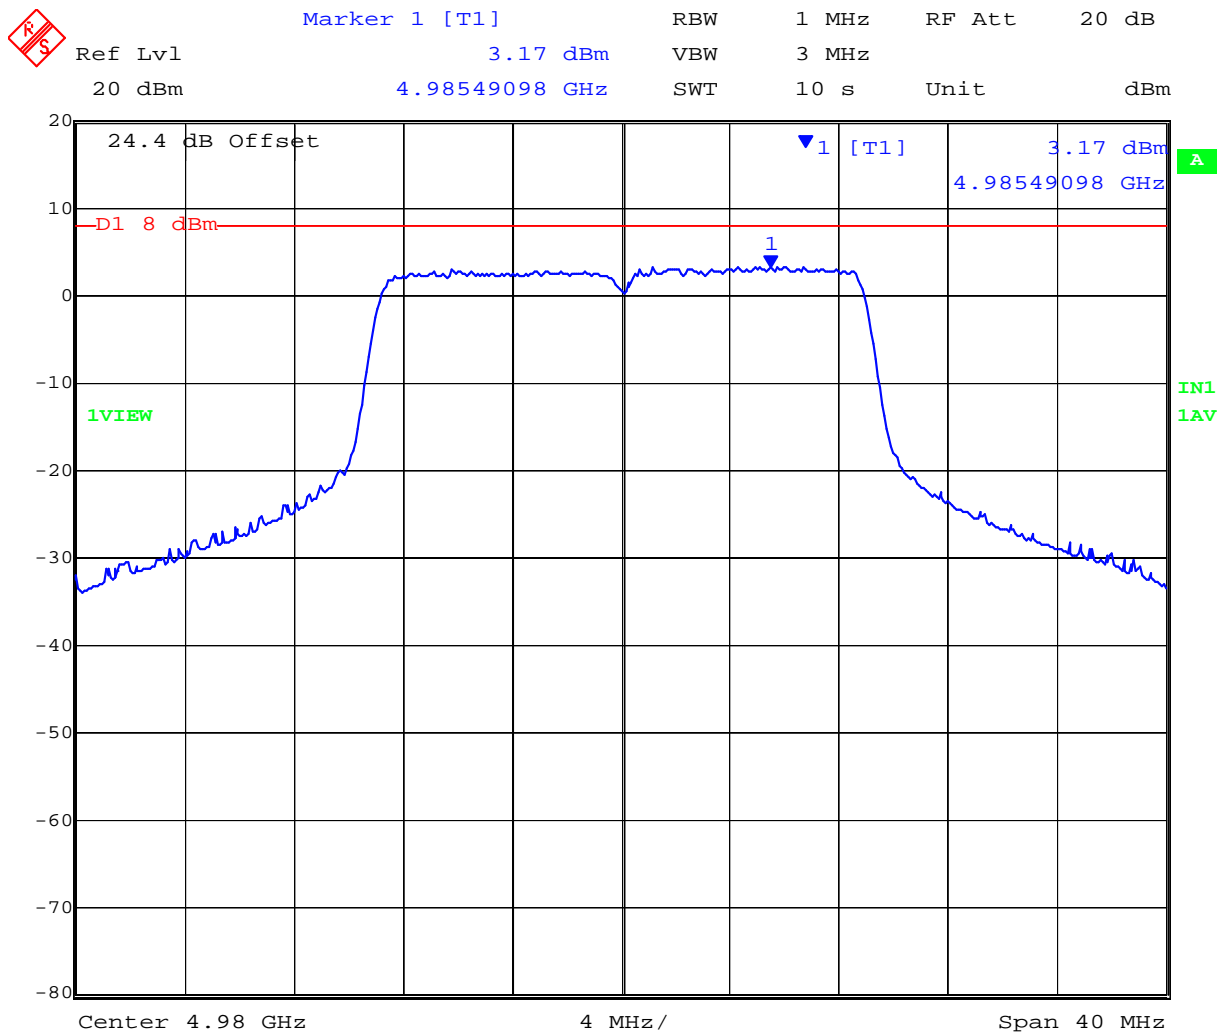

Date: 16.AUG.2010 18:33:57

Peak Power Spectral Density 20 MHz BW Channel Freq 4980 MHz

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** MSR4000 802.11a/b/g/n Access Point  
**To:** FCC 47 CFR Part 90 & IC RSS 111  
**Serial #:** ARUB65-U3 Rev A  
**Issue Date:** 5th April 2011  
**Page:** 37 of 82

### Specification Limits

#### FCC Part §90.1215

Refer to the Power Limits Specification in Section 5.1.2 of this report.

### Laboratory Measurement Uncertainty for Power Measurement

Measurement uncertainty	$\pm 1.33$ dB
-------------------------	---------------

### Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of RF Output Power'	0070, 0116, 0158, 0193, 0252, 0313, 0314.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**5.1.4. Maximum Permissible Exposure  
FCC, Part 90 Subpart C §90.1217**

**Calculations for Maximum Permissible Exposure Levels**

Power Density = Pd (mW/cm<sup>2</sup>) = EIRP/(4πd<sup>2</sup>)

EIRP = P \* G

P = Peak output power (mW)

G = Antenna numeric gain (numeric)

d = Separation distance (cm)

Numeric Gain = 10 ^ (G (dBi)/10)

4.9 GHz 20 MHz Channel = Max. Peak Output Power +18.20 dBm, 66.1 mW

Max. Antenna Gain = 14 dBi, **25.12 numeric**

The EUT belongs to the Occupational/Controlled Exposure class of devices; power density limit is 1.0mW/cm<sup>2</sup>

Antenna Gain (dBi)	Numeric Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Calculated Safe Distance @ 1mW/cm <sup>2</sup> Limit(cm)	Minimum Separation Distance (cm)
14.0	25.12	+18.20	66.1	11.5	35.0

**Note:** for 4.9 GHz mobile or fixed location transmitters the minimum separation distance is 35 cm, even if calculations indicate the MPE distance to be less.

**Specification**

**Maximum Permissible Exposure Limits**

**§90.1217** Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency levels in excess of the Commission's guidelines. See §1.1307 (b)(1) of this chapter.

Limit S = 1mW / cm<sup>2</sup> from 1.310 Table 1

**Laboratory Measurement Uncertainty for Power Measurements**

Measurement uncertainty	±1.33dB
-------------------------	---------

### 5.1.5. Frequency Stability; Temperature Variations, and Voltage Variations


**FCC 47 CFR Part 90, Subpart Y; 2.1055(a)(1); §90.213**

**IC Section 4.2**

#### **Test Procedure**

The transmitter output was connected to a spectrum analyzer and the frequency stability was measured in an un-modulated state. Frequency stability was measured through the extremes of temperature on the mid channel only. Before measurements were taken at each temperature the equipment waited until thermal balance was obtained.

#### **Test Measurement Set up**

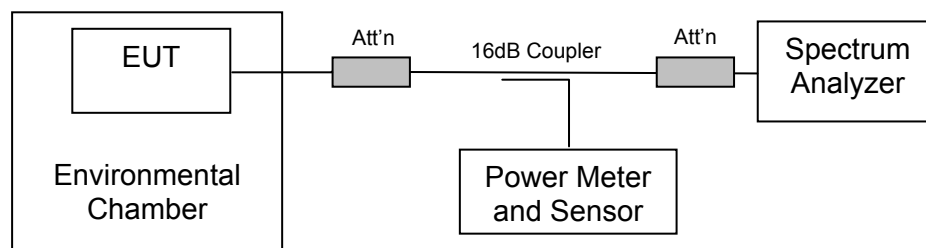

Measurement set up for Frequency Stability



Ambient conditions.

Temperature: 17 to 23 °C    Relative humidity: 31 to 57 %    Pressure: 999 to 1012 mbar

TABLE OF RESULTS Frequency Stability;-  
Temperature Variations


Voltage (Vdc)	Temperature(°C)	FREQUENCY	
		Channel 4975 MHz	
		Measured Value (MHz)	ppm
+48.0	-25	4950.02114	4.27
	-15	4950.02154	4.35
	-10	4950.0212	4.28
	-5	4950.01525	3.08
	+15	4950.01252	2.53
	+20	4949.99456	-1.10
+40.8	+20	4949.99504	-1.00
+55.2	+20	4949.99548	-0.91
+43.2	+25	4949.99052	-1.92
	+35	4949.98075	-3.89
	+45	4949.97671	-4.71
	+55	4949.98234	-3.57
Maximum Frequency Drift		+21.54 kHz / +4.35 ppm	
Minimum Frequency Drift		-23.29 kHz / -4.71 ppm	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.






Marker 1 [T1] RBW 200 Hz RF Att 40 dB  
Ref Lvl 23.18 dBm VBW 2 kHz  
38 dBm 4.95002114 GHz SWT 1.5 s Unit dBm

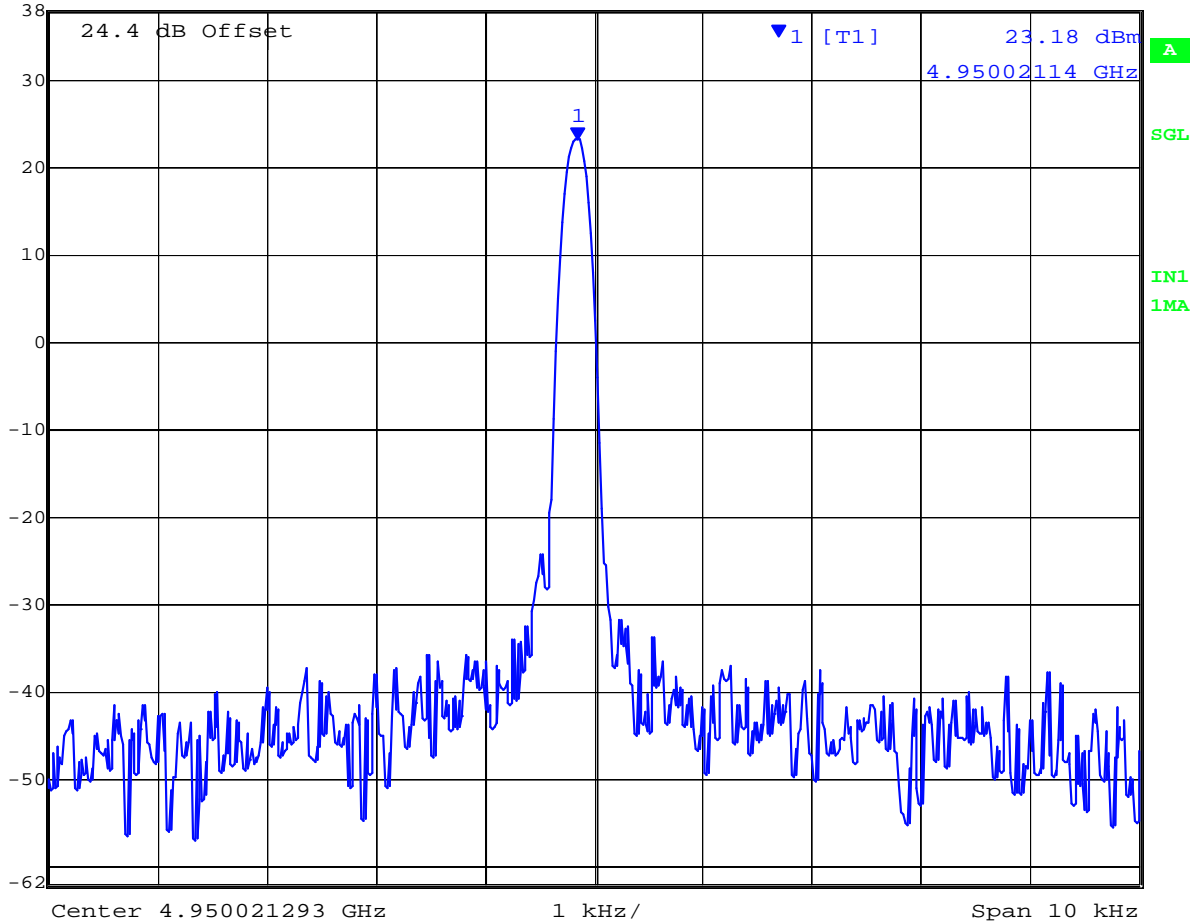

Date: 1.JAN.1997 03:42:28

Frequency Stability @ -25°C, +48 Vdc

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

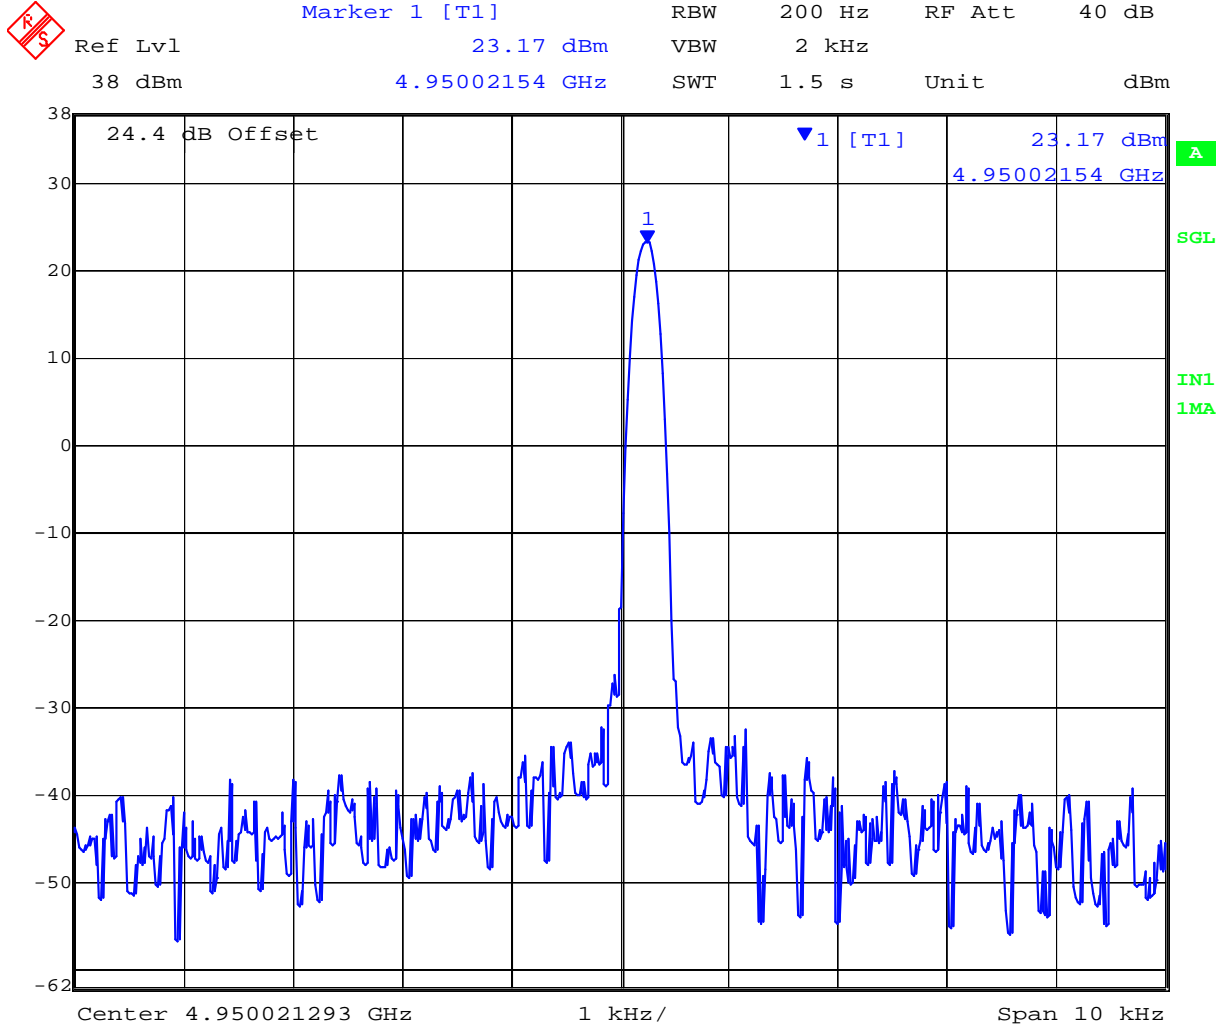


Date: 1.JAN.1997 03:54:42

Frequency Stability @ -15°C, +48 Vdc

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Marker 1 [T1] RBW 200 Hz RF Att 40 dB  
Ref Lvl 22.94 dBm VBW 2 kHz  
38 dBm 4.95002120 GHz SWT 1.5 s Unit dBm

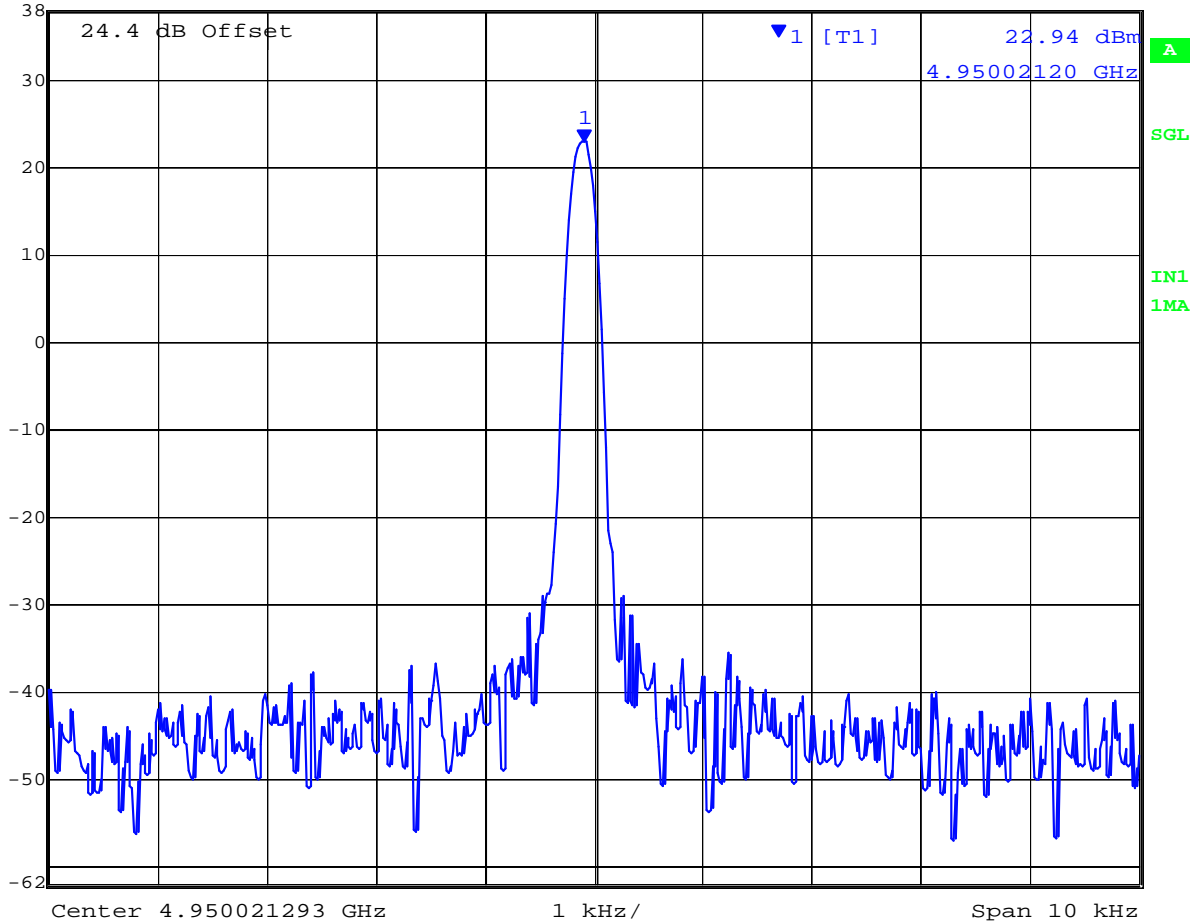

Date: 1.JAN.1997 04:09:29

Frequency Stability @ -5°C, +48 Vdc

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

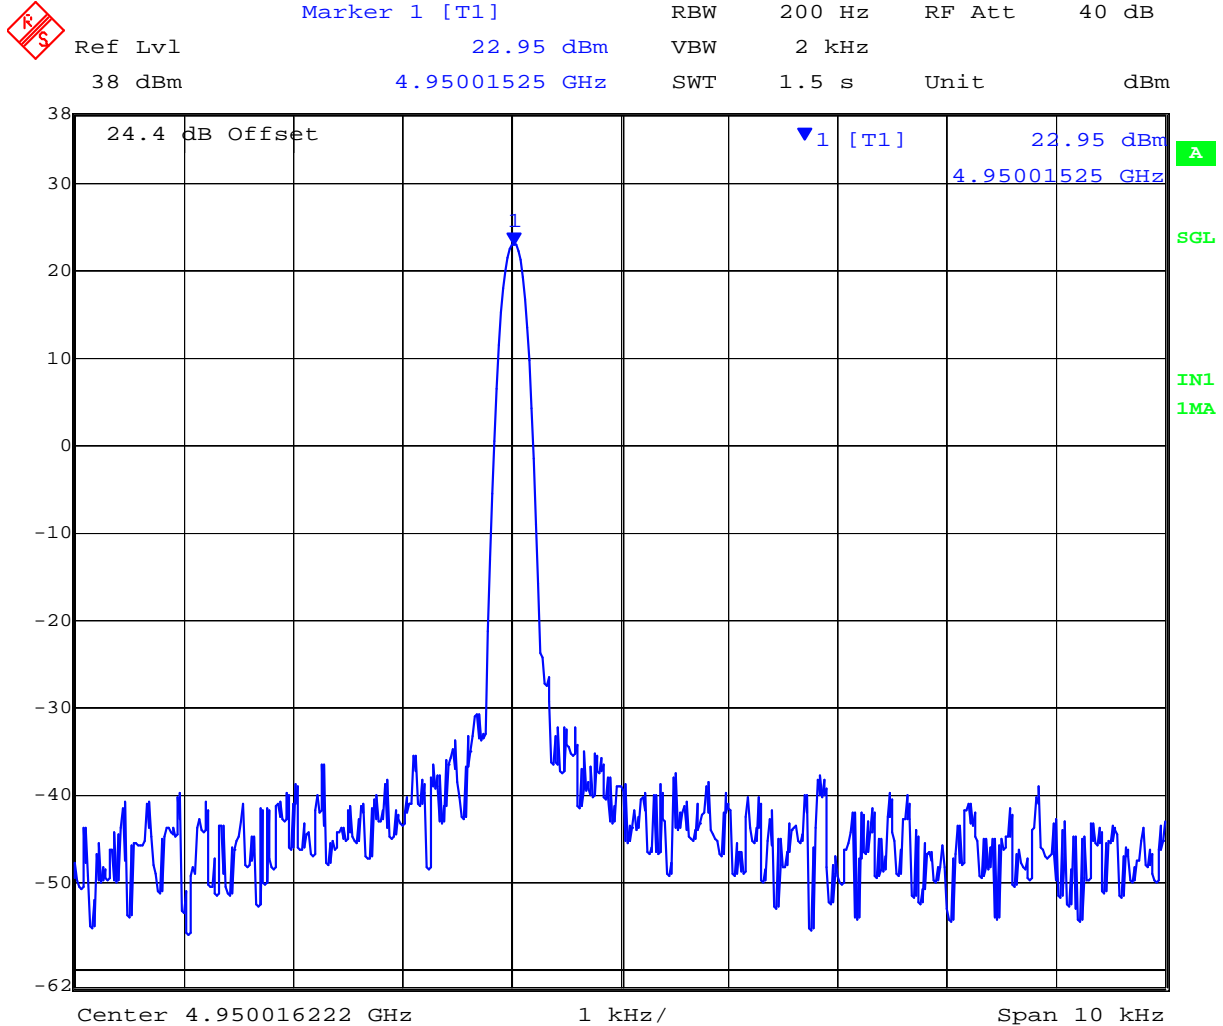


Date: 1.JAN.1997 04:38:23

Frequency Stability @ +5°C, +48 Vdc

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Marker 1 [T1] RBW 200 Hz RF Att 40 dB  
Ref Lvl 22.94 dBm VBW 2 kHz  
38 dBm 4.95001252 GHz SWT 1.5 s Unit dBm

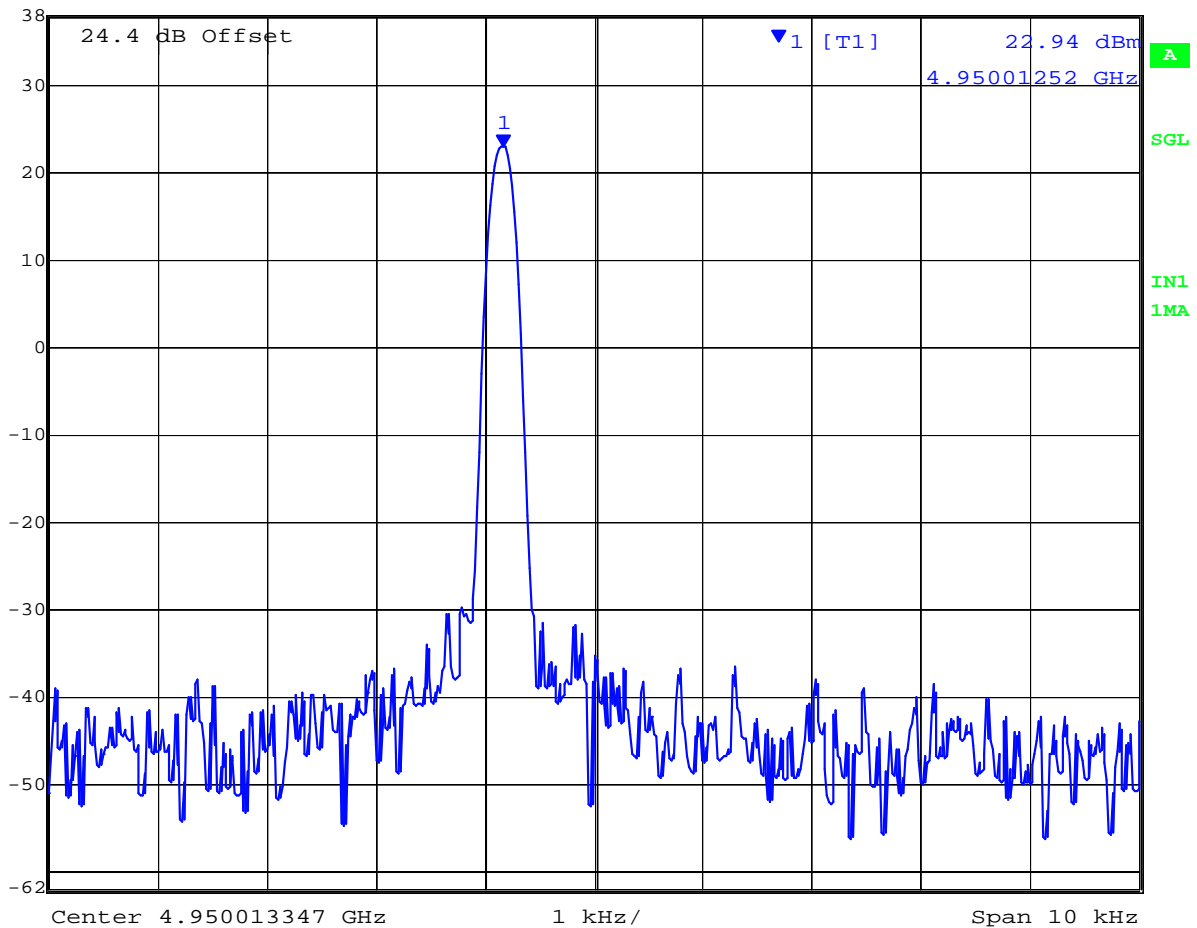

Date: 1.JAN.1997 04:47:47

Frequency Stability @ +15°C, +48 Vdc


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: MSR4000 802.11a/b/g/n Access Point  
To: FCC 47 CFR Part 90 & IC RSS 111  
Serial #: ARUB65-U3 Rev A  
Issue Date: 5th April 2011  
Page: 46 of 82



Marker 1 [T1] RBW 200 Hz RF Att 40 dB  
Ref Lvl 15.75 dBm VBW 2 kHz  
38 dBm 4.94999456 GHz SWT 1.5 s Unit dBm

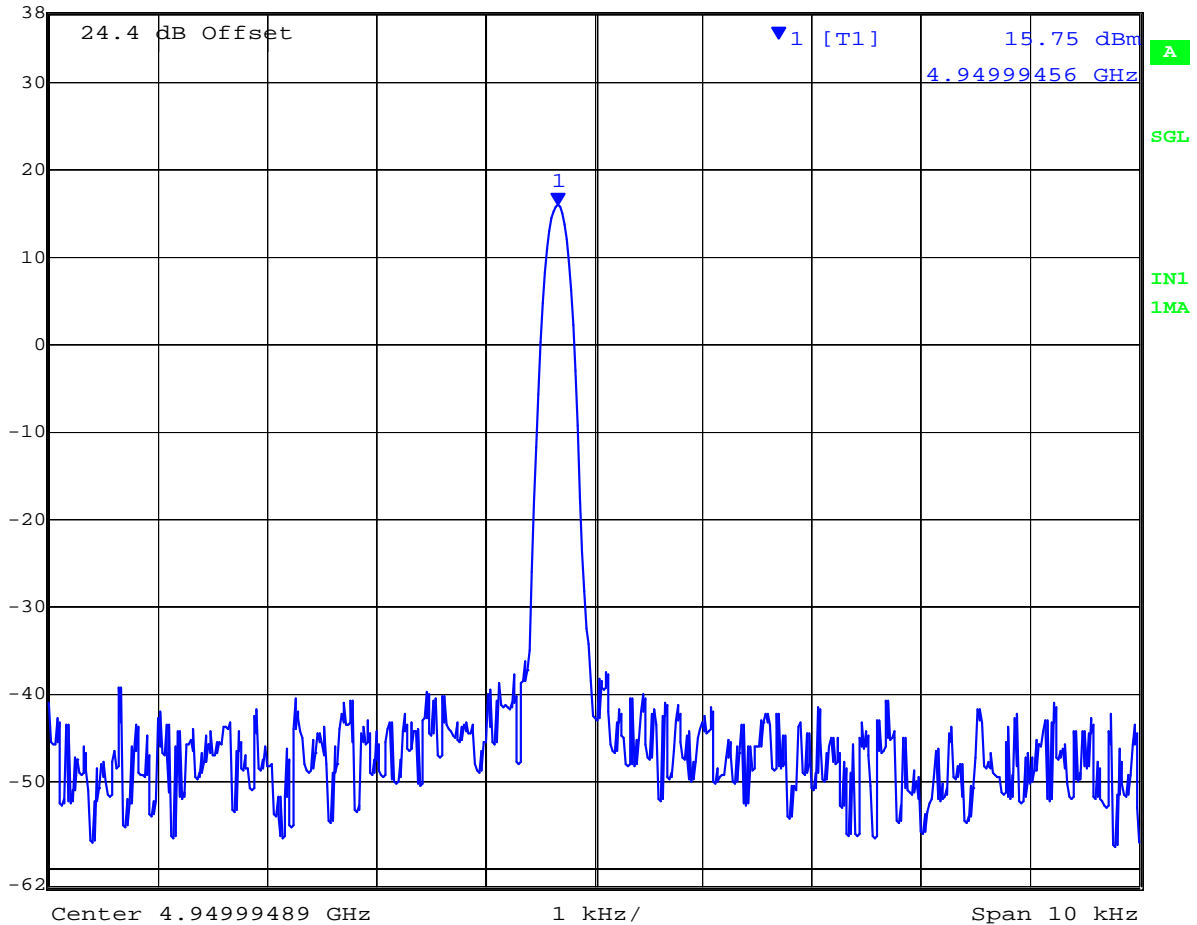


Date: 1.JAN.1997 05:10:36

Frequency Stability @ +20°C, +48 Vdc

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: MSR4000 802.11a/b/g/n Access Point  
To: FCC 47 CFR Part 90 & IC RSS 111  
Serial #: ARUB65-U3 Rev A  
Issue Date: 5th April 2011  
Page: 47 of 82

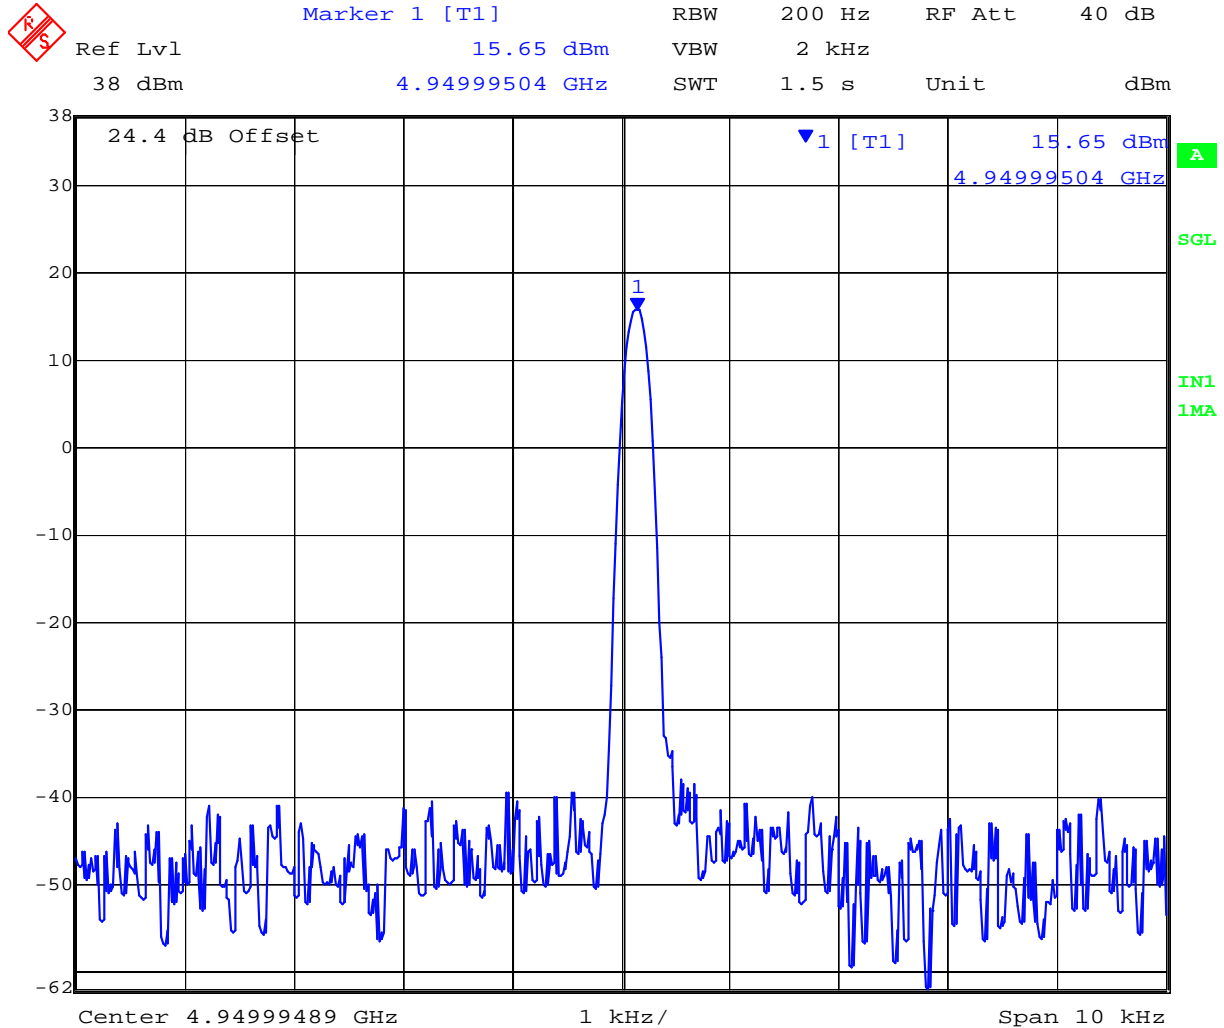

Date: 1.JAN.1997 05:13:08

Frequency Stability @ +20°C, +40.8 Vdc

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

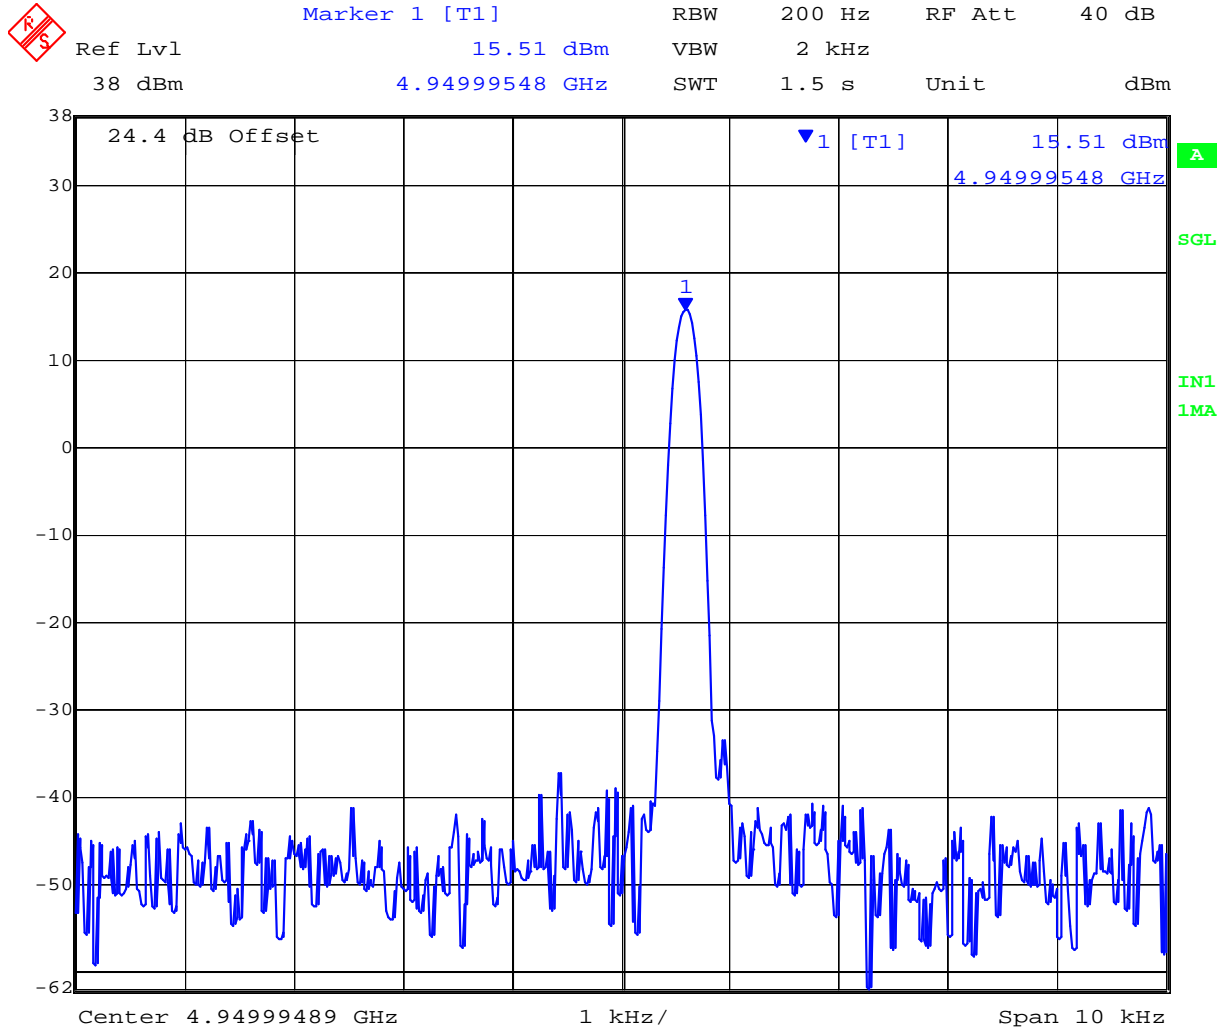

Date: 1.JAN.1997 05:12:12


Frequency Stability @ +20°C, +55.2 Vdc

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





Title: MSR4000 802.11a/b/g/n Access Point  
To: FCC 47 CFR Part 90 & IC RSS 111  
Serial #: ARUB65-U3 Rev A  
Issue Date: 5th April 2011  
Page: 49 of 82

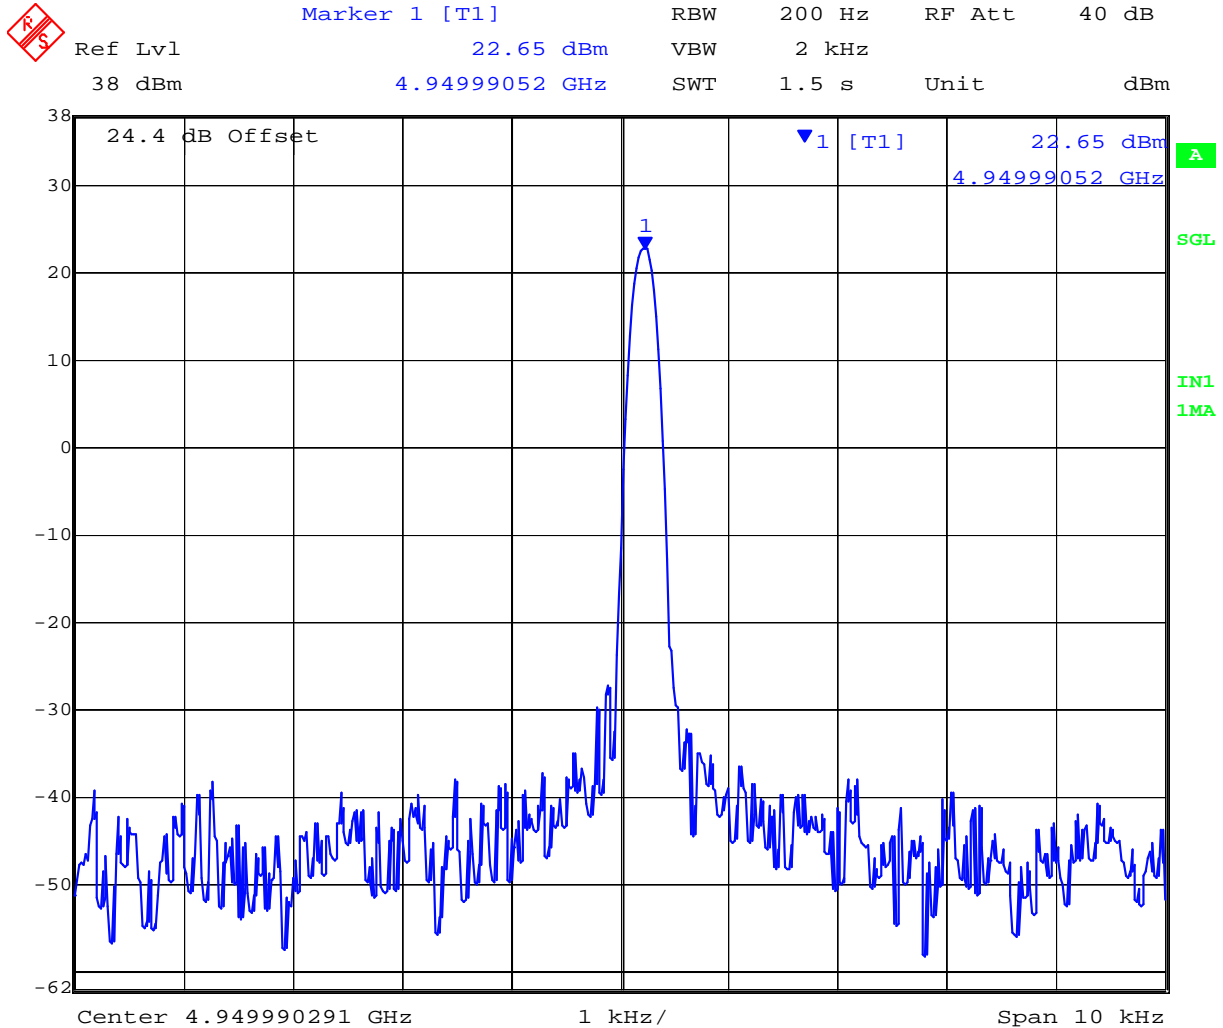


Date: 1.JAN.1997 05:26:43

### Frequency Stability @ +25°C

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Marker 1 [T1] RBW 500 Hz RF Att 40 dB  
Ref Lvl 22.70 dBm VBW 5 kHz  
38 dBm 4.94998075 GHz SWT 600 ms Unit dBm

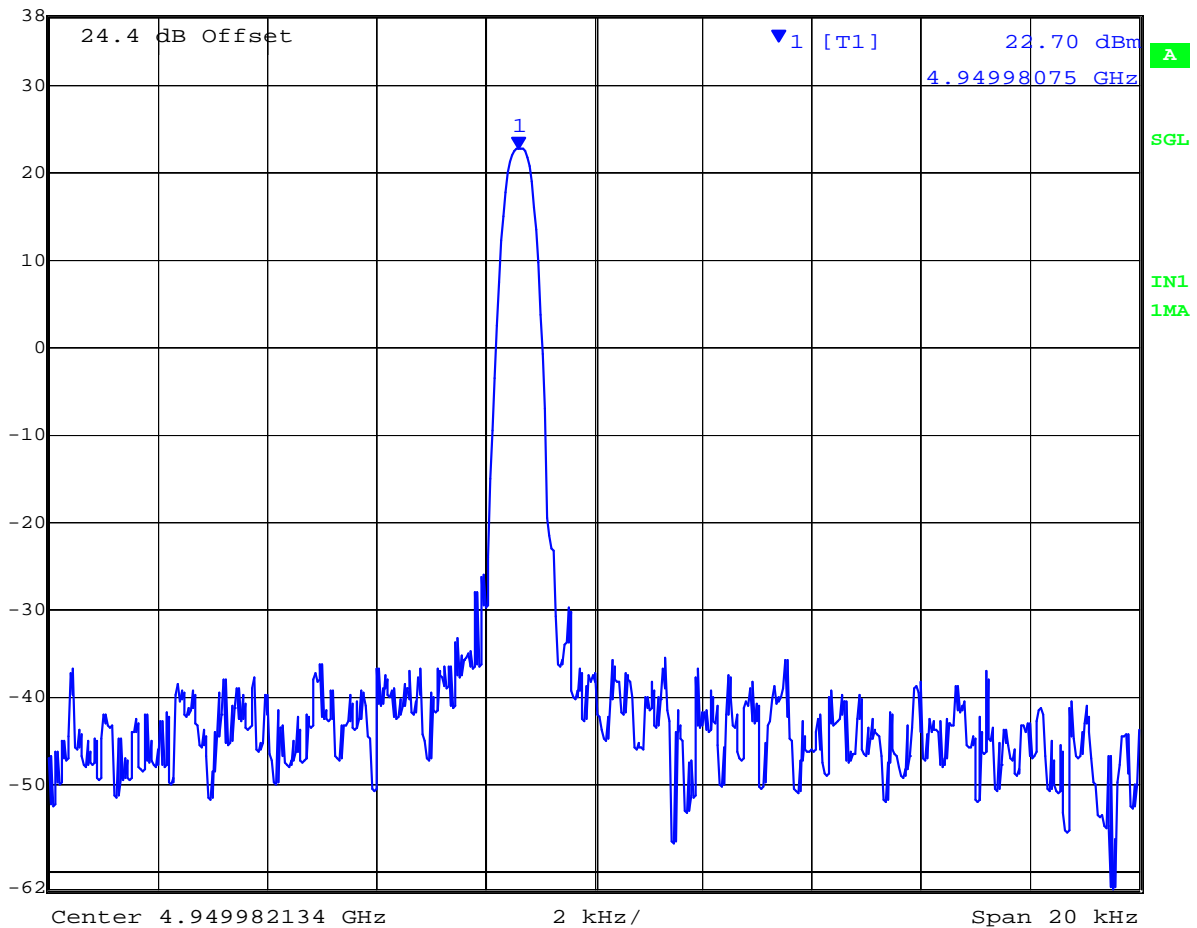

Date: 1.JAN.1997 05:50:25

Frequency Stability @ +35°C

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

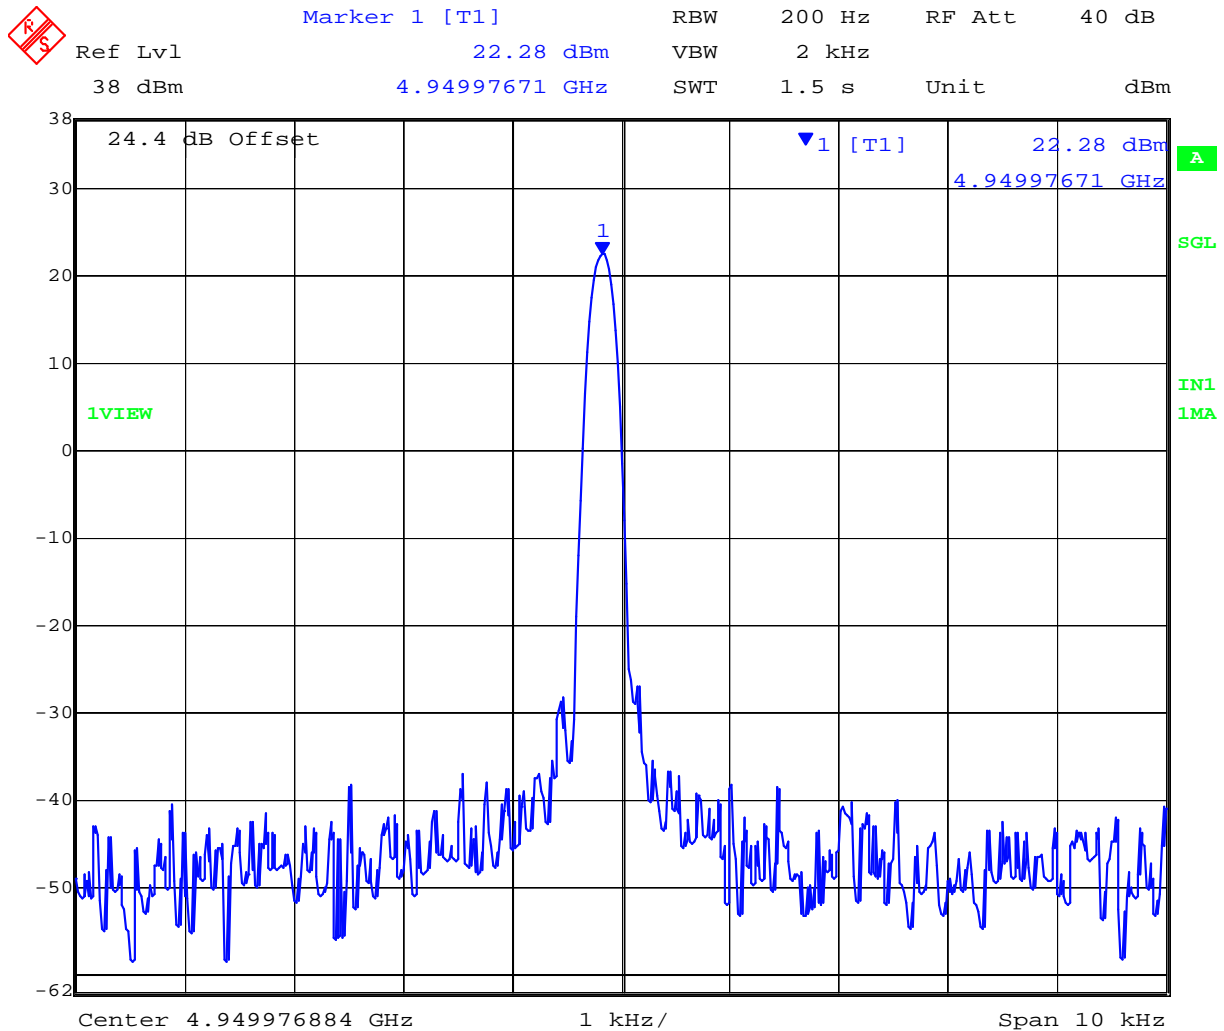


Date: 1.JAN.1997 06:15:40

Frequency Stability @ +45°C

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** MSR4000 802.11a/b/g/n Access Point  
**To:** FCC 47 CFR Part 90 & IC RSS 111  
**Serial #:** ARUB65-U3 Rev A  
**Issue Date:** 5th April 2011  
**Page:** 52 of 82

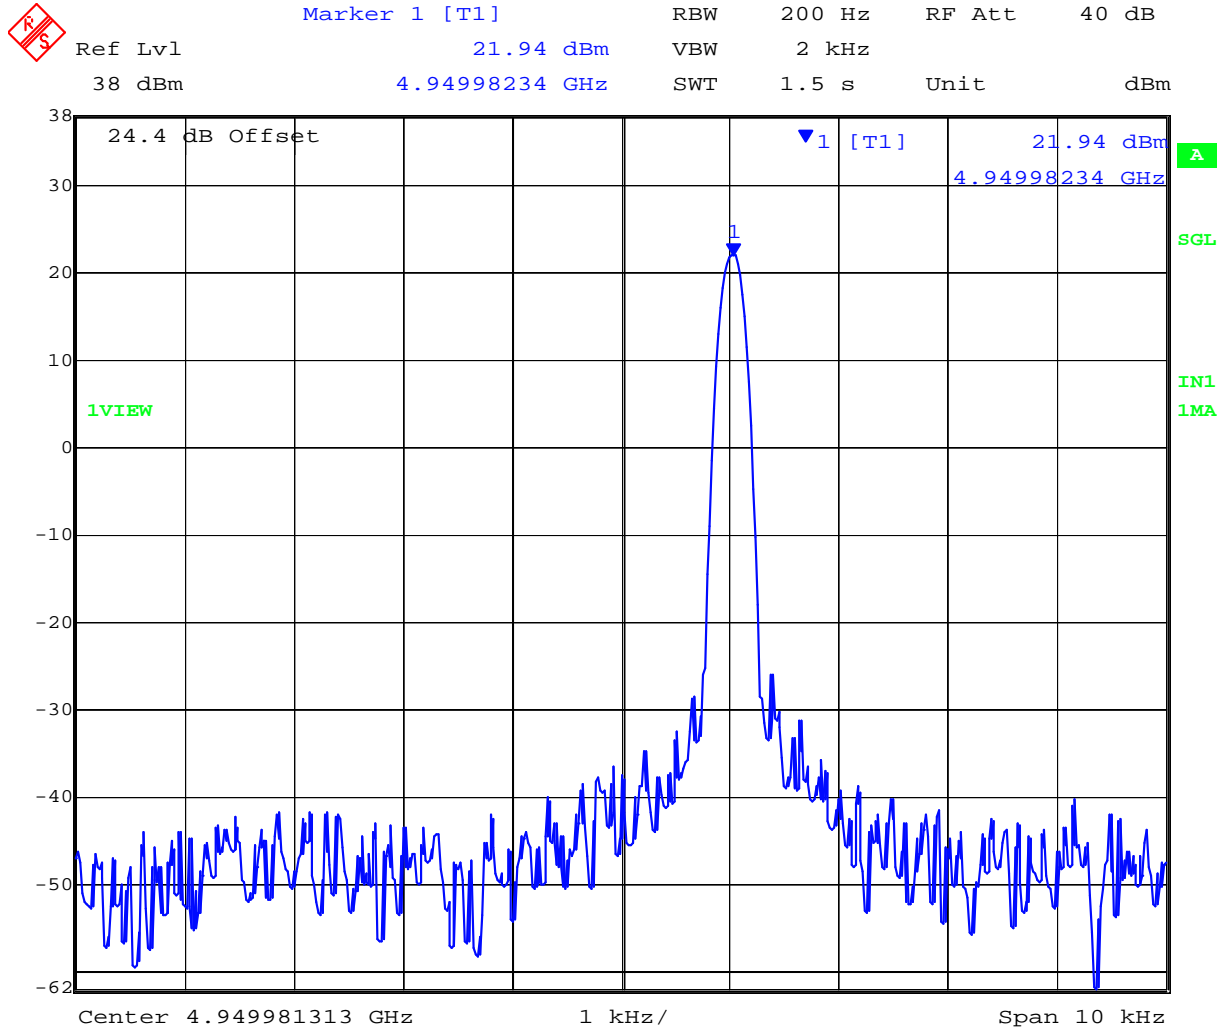

Date: 1.JAN.1997 06:42:08

Frequency Stability @ +55°C

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** MSR4000 802.11a/b/g/n Access Point  
**To:** FCC 47 CFR Part 90 & IC RSS 111  
**Serial #:** ARUB65-U3 Rev A  
**Issue Date:** 5th April 2011  
**Page:** 53 of 82

---

### Laboratory Measurement Uncertainty for Frequency Stability

Measurement uncertainty	$\pm 0.866$ ppm
-------------------------	-----------------

### Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-02 'Frequency Measurement'	0070, 0116, 0158, 0193, 0252, 0313, 0314.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 5.1.6. Spurious Emissions at Antenna Terminals - Transmitter

**FCC 47 CFR Part 90, Subpart Y; 2.1051; §90.210(m)**

**IC Section 4.4/4.5**

**Industry Canada RSS-Gen 6**

#### **Test Procedure**

Testing was conducted per EIA/TIA 603 test requirements. Transmitter conducted spurious emissions were measured for each bandwidth. Measurement were made while EUT was operating in a modulated transmit mode of operation, at the appropriate center frequency, 100% duty cycle and maximum power at all times. Conducted spurious emissions were measured to 40 GHz.

Limit calculation depended on average transmit power level(s). See test report Section 5.1.2 for maximum power level measurements.

Worst case power measurement: +18.20 dBm (0.066W)

From FCC Part 90.210 (m)


On any frequency removed from the assigned frequency between above 150 % of the authorized bandwidth: 50 dB or  $55 + 10 \log (P)$  dB, whichever is the lesser attenuation.

Attenuation

$55 + 10 \log (P)$  dB for 20 MHz bandwidth = 43.2 dB attenuation where P is Watts

Limit:  $+18.20 - 43.2 = -25.0$  dBm

#### **Test Measurement Set up**

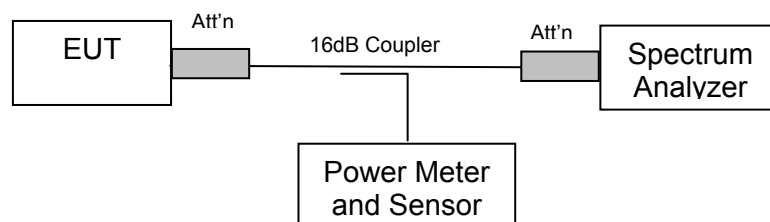

Conducted spurious emission test configuration

Ambient conditions.

Temperature: 17 to 23 °C

Relative humidity: 31 to 57 %

Pressure: 999 to 1012 mbar

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11a 20 MHz Bandwidth 4950 MHz

Frequency (MHz)		Freq of Maximum Emission (MHz)	Emission Amplitude (dBm)	Margin (dB)
Start (MHz)	Stop (MHz)			
30	40,000	34,87358717	-42.10	-17.1



Date: 17.AUG.2010 17:28:36


Transmitter Channel 4950 MHz, 20 MHz Channel Spacing, 30 – 40,000 MHz

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11a 20 MHz Bandwidth 4980 MHz

Frequency (MHz)		Freq of Maximum Emission (MHz)	Emission Amplitude (dBm)	Margin (dB)
Start (MHz)	Stop (MHz)			
30	40,000	34,633.28657	-41.59	-16.59

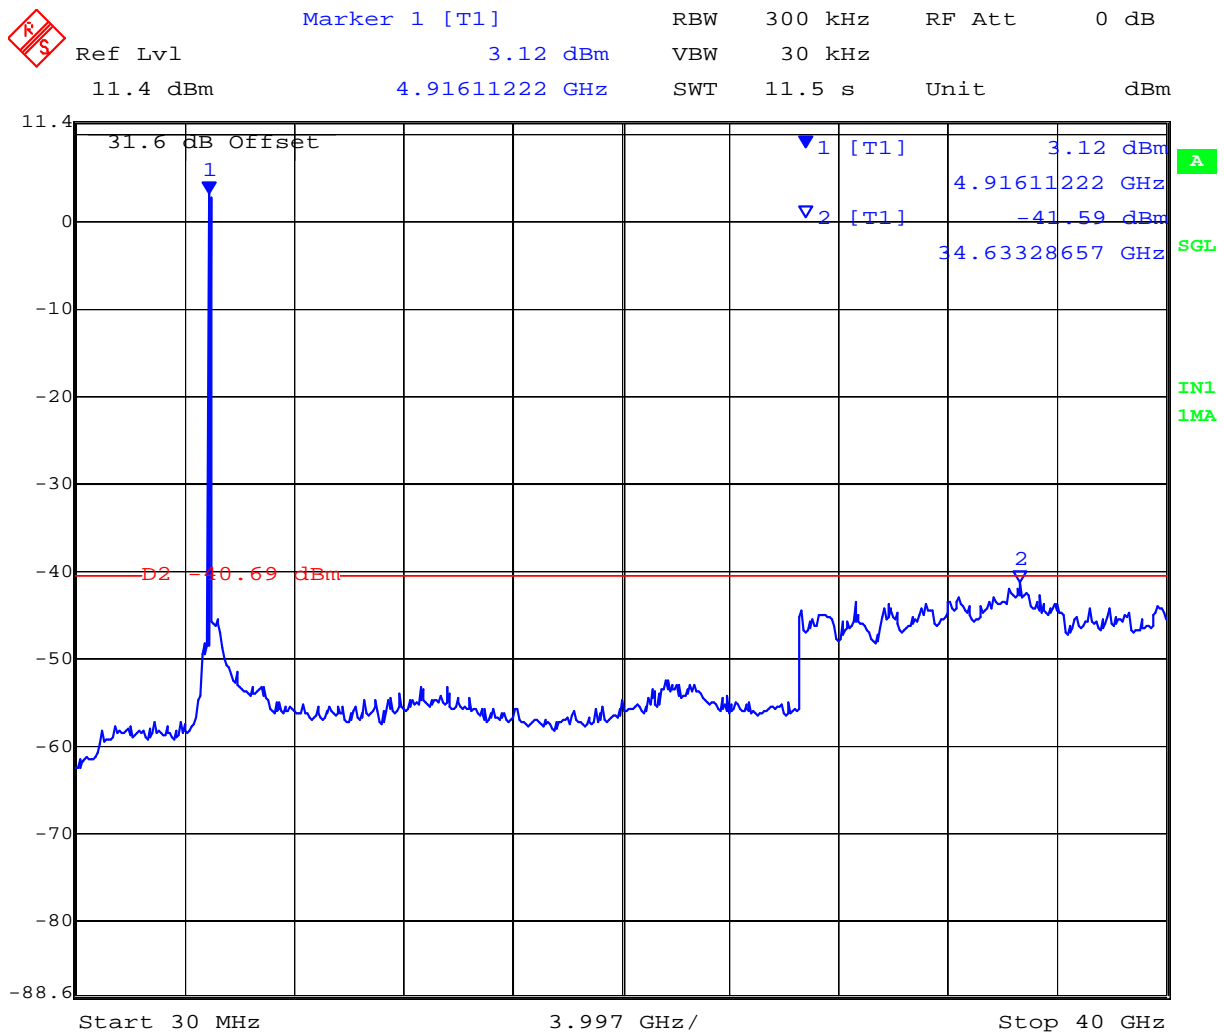

Date: 17.AUG.2010 17:34:42

Transmitter Channel 4980 MHz 20 MHz Spacing, 30 – 40,000 MHz


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





TABLE OF RESULTS – 802.11 HT-20, 20 MHz Bandwidth 4950 MHz

Frequency (MHz)		Freq of Maximum Emission (MHz)	Emission Amplitude (dBm)	Margin (dB)
Start (MHz)	Stop (MHz)			
30	40,000	34,232.78557	-42.16	-17.16

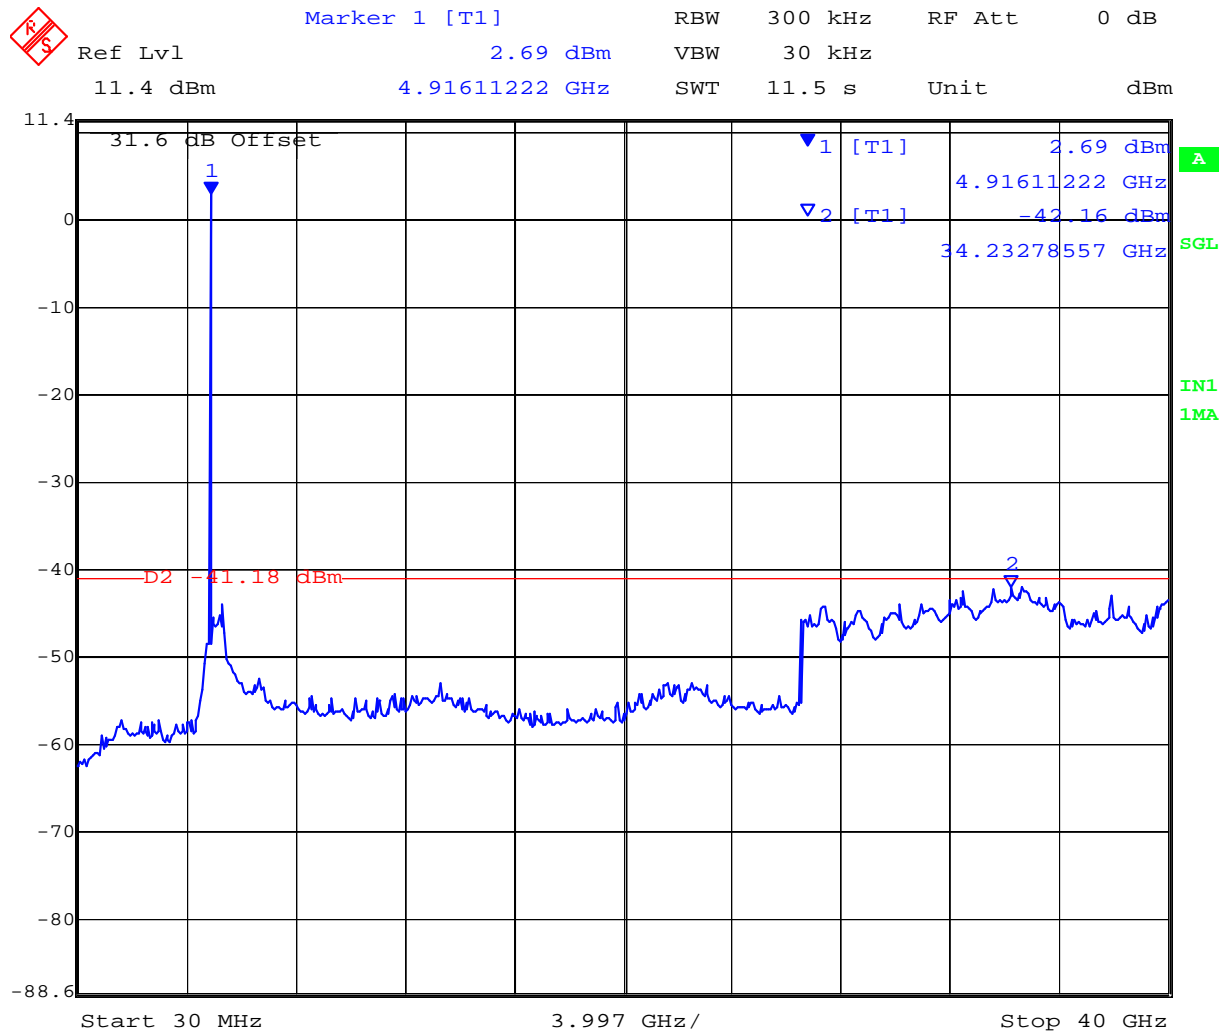

Date: 17.AUG.2010 17:31:34


Transmitter Channel 4950 MHz, 20 MHz Channel Spacing, 30 – 40,000 MHz

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11 HT-20, 20 MHz Bandwidth 4980 MHz

Frequency (MHz)		Freq of Maximum Emission (MHz)	Emission Amplitude (dBm)	Margin (dB)
Start (MHz)	Stop (MHz)			
30	40,000	34,873.58717	-41.98	-16.98

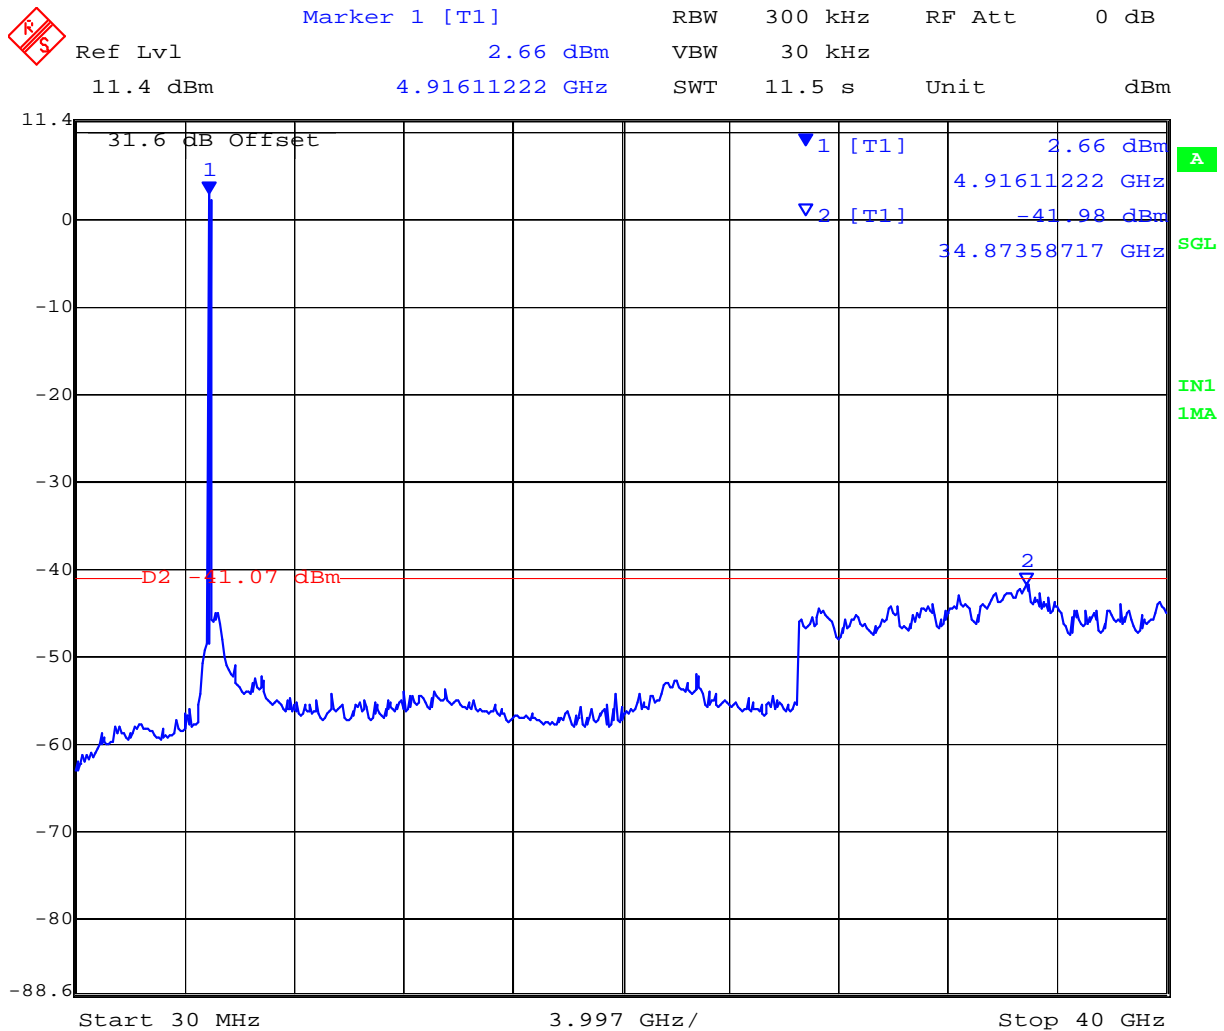

Date: 17.AUG.2010 17:33:18

Transmitter Channel 4980 MHz, 20 MHz Spacing, 30 – 40,000 MHz

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** MSR4000 802.11a/b/g/n Access Point  
**To:** FCC 47 CFR Part 90 & IC RSS 111  
**Serial #:** ARUB65-U3 Rev A  
**Issue Date:** 5th April 2011  
**Page:** 59 of 82

## Specification Limits

### Conducted Spurious Emission at Antenna Terminals – Transmitter Limits **FCC Part §90.210**

#### Emission Mask (m)

(6) On any frequency removed from the assigned frequency above 150% of the authorized bandwidth: 50 dB or  $55 + 10\log(P)$  dB, whichever is the lesser attenuation.

## Laboratory Measurement Uncertainty for Conducted Spurious Emissions

Measurement uncertainty

$\pm 2.37$  dB

## Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-05 'Measurement of Spurious Emissions'	0070, 0116, 0158, 0088, 0252, 0313, 0314

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 5.1.7. Radiated Spurious Emissions

**FCC 47 CFR Part 90, Subpart Y; 2.1053; §90.210(m)**

**IC Section 4.4**

#### **Test Procedure**

Testing was conducted per EIA/TIA 603 test requirements. Measurements were made while EUT was operating in a modulated transmit mode of operation, at the appropriate center frequency, 100% duty cycle and maximum power at all times. Substitution was performed on any emissions observed within 6 dB of the limit line. The antenna port was attenuated with a 50  $\Omega$  termination.

The measurement equipment was set to measure in peak hold mode. The emissions were measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode.

The highest emissions relative to the limit are listed for each frequency spanned.

Measurements below 1 GHz utilized 100 KHz RBW, measurements above 1 GHz were performed using a minimum RBW of 1 MHz.

Limit calculation depended on average transmit power level(s). See test report Section 5.1.2 for maximum power level measurements.

Worst case power measurement: +18.20 dBm

From FCC Part 90.210 (m)

On any frequency removed from the assigned frequency between above 150 % of the authorized bandwidth: 50 dB or 55 + 10 log (P) dB, whichever is the lesser attenuation.


Attenuation

55 + 10 log (P) dB for 20 MHz bandwidth = 47.80 dB attenuation where P is Watts

Limit: +18.20 – 43.20 = -25.0 dBm

The -25 dBm limit was verified using a substitution method.

#### **Test Measurement Set up**

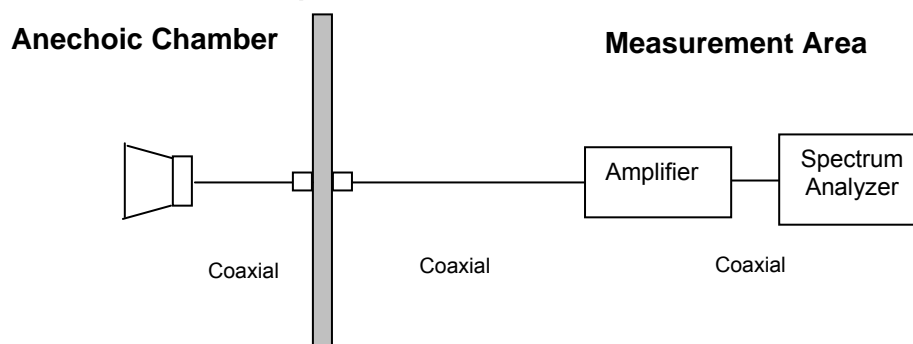


Measurement set up for Radiated Emission Test

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** MSR4000 802.11a/b/g/n Access Point  
**To:** FCC 47 CFR Part 90 & IC RSS 111  
**Serial #:** ARUB65-U3 Rev A  
**Issue Date:** 5th April 2011  
**Page:** 61 of 82

<b>Test Freq.</b>	4950 MHz	<b>Engineer</b>	SB
<b>Variant</b>	802.11a; 6 Mbps	<b>Temp (°C)</b>	25.5
<b>Freq. Range</b>	30MHz-1GHz	<b>Rel. Hum.(%)</b>	33
<b>Power Setting</b>	20 Art	<b>Press. (mBars)</b>	1007
<b>Antenna</b>	50 ohm termination heads	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>			
<b>Test Notes 2</b>			

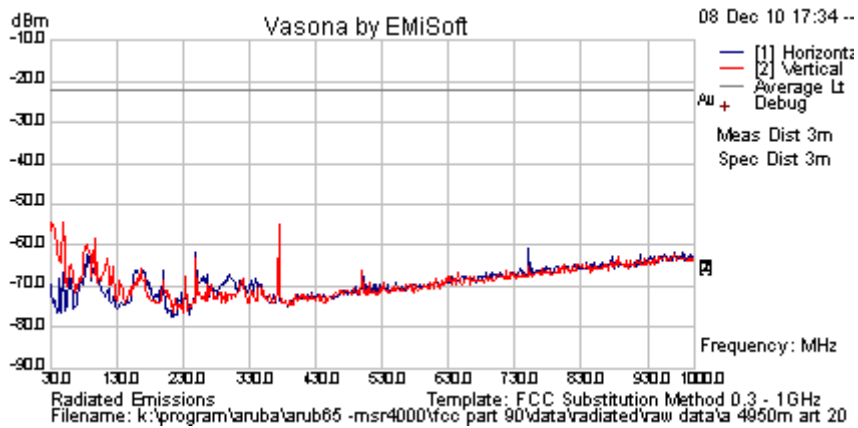

**Formally measured emission peaks**


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
No radio emissions within 6 dB												
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
NRB = Non-Restricted Band. RB = Restricted Band.												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** MSR4000 802.11a/b/g/n Access Point  
**To:** FCC 47 CFR Part 90 & IC RSS 111  
**Serial #:** ARUB65-U3 Rev A  
**Issue Date:** 5th April 2011  
**Page:** 62 of 82

<b>Test Freq.</b>	4980 MHz	<b>Engineer</b>	SB
<b>Variant</b>	802.11a; 6 Mbps	<b>Temp (°C)</b>	25.5
<b>Freq. Range</b>	30MHz-1GHz	<b>Rel. Hum.(%)</b>	33
<b>Power Setting</b>	20 Art	<b>Press. (mBars)</b>	1007
<b>Antenna</b>	50 ohm termination heads	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>			
<b>Test Notes 2</b>			

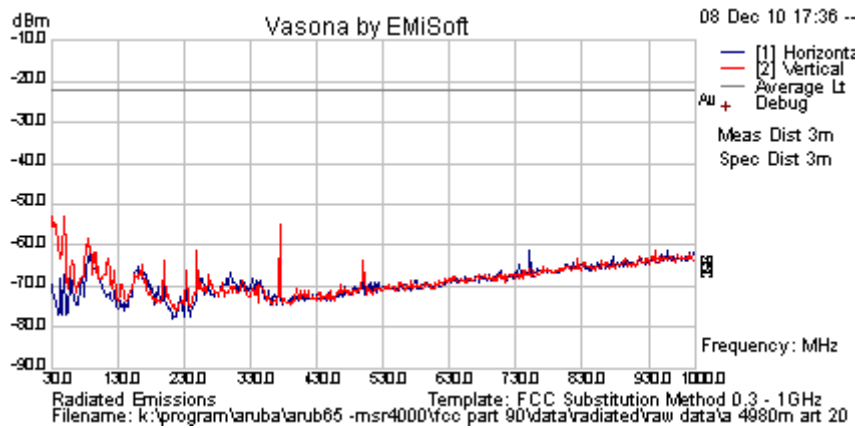

**Formally measured emission peaks**


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
No radio emissions within 6 dB												
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
NRB = Non-Restricted Band. RB = Restricted Band.												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** MSR4000 802.11a/b/g/n Access Point  
**To:** FCC 47 CFR Part 90 & IC RSS 111  
**Serial #:** ARUB65-U3 Rev A  
**Issue Date:** 5th April 2011  
**Page:** 63 of 82

<b>Test Freq.</b>	4950 MHz	<b>Engineer</b>	SB
<b>Variant</b>	802.11n; 6.5 MCS	<b>Temp (°C)</b>	25.5
<b>Freq. Range</b>	30MHz-1GHz	<b>Rel. Hum.(%)</b>	33
<b>Power Setting</b>	20 Art	<b>Press. (mBars)</b>	1007
<b>Antenna</b>	50 ohm termination heads	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>			
<b>Test Notes 2</b>			

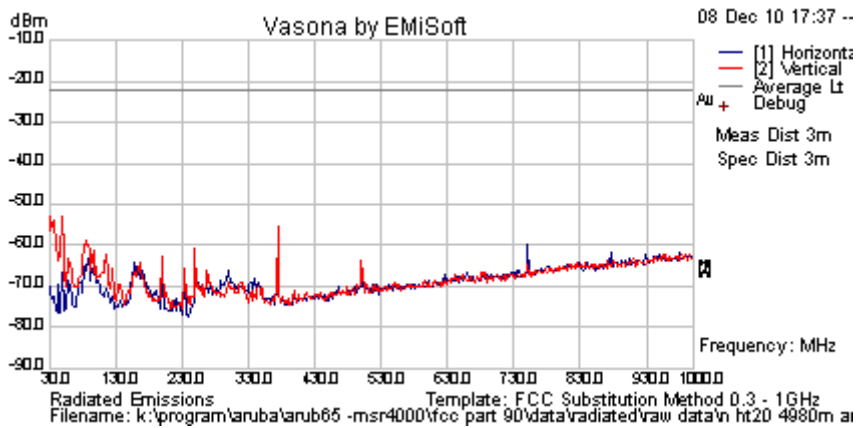

**Formally measured emission peaks**


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
No radio emissions within 6 dB												
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
NRB = Non-Restricted Band. RB = Restricted Band.												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** MSR4000 802.11a/b/g/n Access Point  
**To:** FCC 47 CFR Part 90 & IC RSS 111  
**Serial #:** ARUB65-U3 Rev A  
**Issue Date:** 5th April 2011  
**Page:** 64 of 82

<b>Test Freq.</b>	4980 MHz	<b>Engineer</b>	SB
<b>Variant</b>	802.11n; 6.5 MCS	<b>Temp (°C)</b>	25.5
<b>Freq. Range</b>	30MHz-1GHz	<b>Rel. Hum.(%)</b>	33
<b>Power Setting</b>	20 Art	<b>Press. (mBars)</b>	1007
<b>Antenna</b>	50 ohm termination heads	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>			
<b>Test Notes 2</b>			

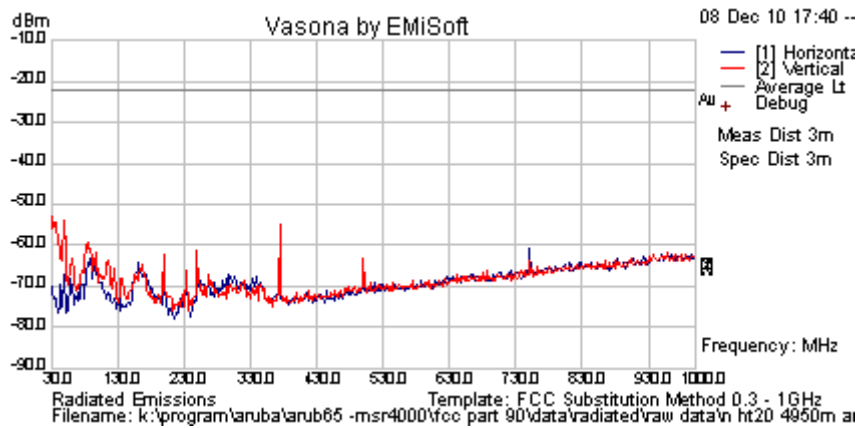

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
No radio emissions within 6 dB												
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
NRB = Non-Restricted Band. RB = Restricted Band.												


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** MSR4000 802.11a/b/g/n Access Point  
**To:** FCC 47 CFR Part 90 & IC RSS 111  
**Serial #:** ARUB65-U3 Rev A  
**Issue Date:** 5th April 2011  
**Page:** 65 of 82

<b>Test Freq.</b>	4950 MHz	<b>Engineer</b>	SB
<b>Variant</b>	802.11a; 6 Mbps	<b>Temp (°C)</b>	25.5
<b>Freq. Range</b>	1000 - 18000 MHz	<b>Rel. Hum.(%)</b>	33
<b>Power Setting</b>	20 Art	<b>Press. (mBars)</b>	1007
<b>Antenna</b>	50 ohm termination heads	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>	Fund. Present		
<b>Test Notes 2</b>			

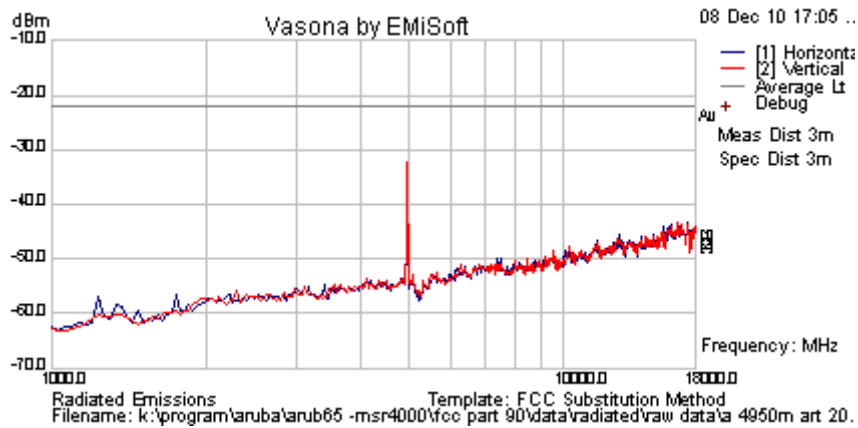

### Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
No radio emissions within 6 dB												
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
NRB = Non-Restricted Band. RB = Restricted Band.												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** MSR4000 802.11a/b/g/n Access Point  
**To:** FCC 47 CFR Part 90 & IC RSS 111  
**Serial #:** ARUB65-U3 Rev A  
**Issue Date:** 5th April 2011  
**Page:** 66 of 82

<b>Test Freq.</b>	4980 MHz	<b>Engineer</b>	SB
<b>Variant</b>	802.11a; 6 Mbps	<b>Temp (°C)</b>	25.5
<b>Freq. Range</b>	1000 - 18000 MHz	<b>Rel. Hum.(%)</b>	33
<b>Power Setting</b>	20 Art	<b>Press. (mBars)</b>	1007
<b>Antenna</b>	50 ohm termination heads	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>	Fund. Present		
<b>Test Notes 2</b>			

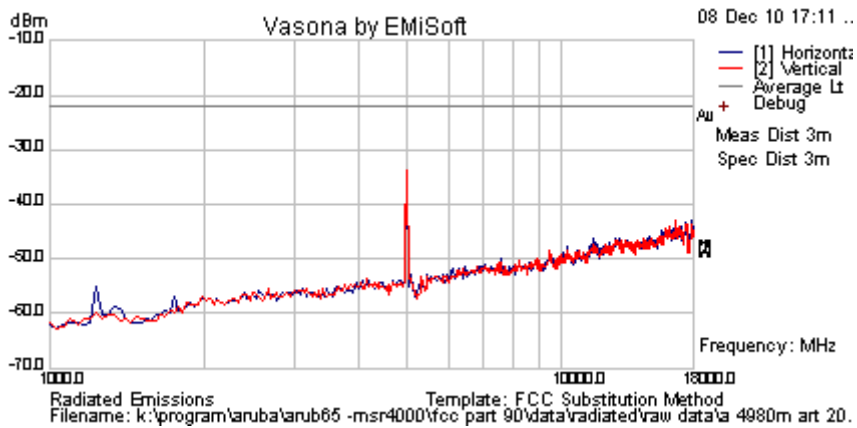

**Formally measured emission peaks**


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
No radio emissions within 6 dB												
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
NRB = Non-Restricted Band. RB = Restricted Band.												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** MSR4000 802.11a/b/g/n Access Point  
**To:** FCC 47 CFR Part 90 & IC RSS 111  
**Serial #:** ARUB65-U3 Rev A  
**Issue Date:** 5th April 2011  
**Page:** 67 of 82

<b>Test Freq.</b>	4950 MHz	<b>Engineer</b>	SB
<b>Variant</b>	802.11n; 6.5 MCS	<b>Temp (°C)</b>	25.5
<b>Freq. Range</b>	1000 - 18000 MHz	<b>Rel. Hum.(%)</b>	33
<b>Power Setting</b>	20 Art	<b>Press. (mBars)</b>	1007
<b>Antenna</b>	50 ohm termination heads	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>	Fund. Present		
<b>Test Notes 2</b>			

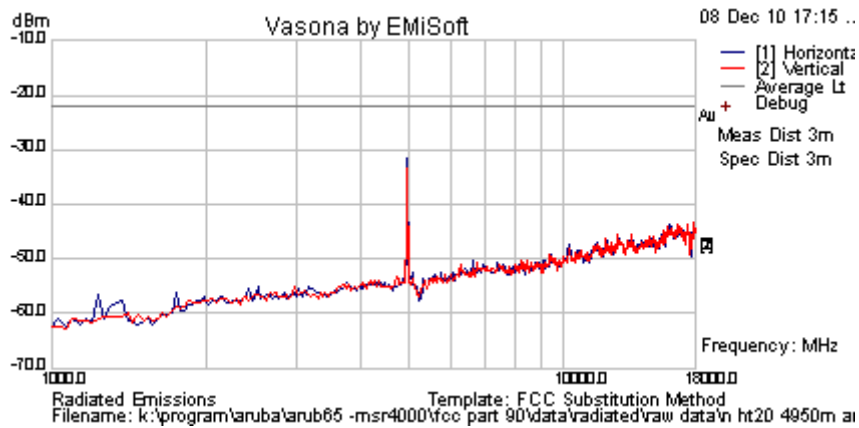

**Formally measured emission peaks**


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
No radio emissions within 6 dB												
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. RB = Restricted Band.												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** MSR4000 802.11a/b/g/n Access Point  
**To:** FCC 47 CFR Part 90 & IC RSS 111  
**Serial #:** ARUB65-U3 Rev A  
**Issue Date:** 5th April 2011  
**Page:** 68 of 82

<b>Test Freq.</b>	4980 MHz	<b>Engineer</b>	SB
<b>Variant</b>	802.11n; 6.5 MCS	<b>Temp (°C)</b>	25.5
<b>Freq. Range</b>	1000 - 18000 MHz	<b>Rel. Hum.(%)</b>	33
<b>Power Setting</b>	20 Art	<b>Press. (mBars)</b>	1007
<b>Antenna</b>	50 ohm termination heads	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>	Fund. Present		
<b>Test Notes 2</b>			

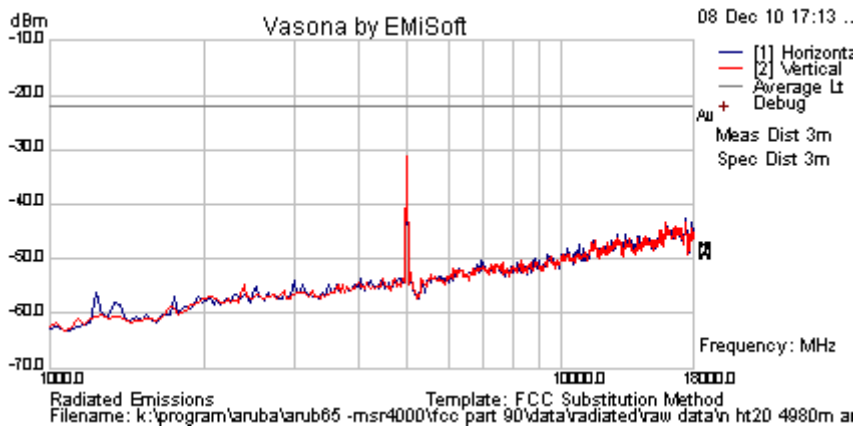

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
No radio emissions within 6 dB												
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. RB = Restricted Band.												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** MSR4000 802.11a/b/g/n Access Point  
**To:** FCC 47 CFR Part 90 & IC RSS 111  
**Serial #:** ARUB65-U3 Rev A  
**Issue Date:** 5th April 2011  
**Page:** 69 of 82

### Transmitter Limits

#### Limits FCC Part §90.210 (m)

##### Emission Mask M

(6) On any frequency removed from the assigned frequency above 150% of the authorized bandwidth: 50 dB or  $55 + 10 \log (P)$  dB, whichever is the lesser attenuation.

### Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

### Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0104, 0158, 0134, 0310, 0312, Dipole.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 5.1.8. Receiver Radiated Spurious Emissions

#### Industry Canada RSS-Gen §4.8, §6


#### Test Procedure

Radiated emissions above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

All measurements on any frequency or frequencies over 1 MHz are based on the use of measurement instrumentation employing an average detector function. All measurements above 1 GHz were performed using a minimum resolution bandwidth of 1 MHz.

All Sectors of the EUT were tested simultaneously

#### Test Measurement Set up

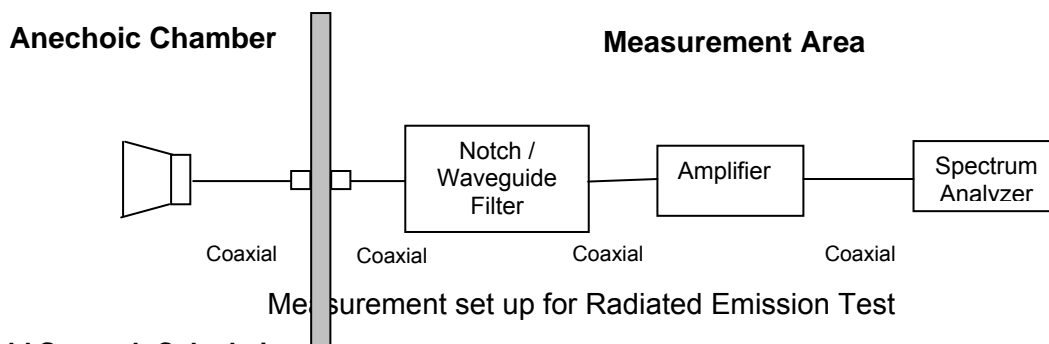

#### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where: FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss



**Title:** MSR4000 802.11a/b/g/n Access Point  
**To:** FCC 47 CFR Part 90 & IC RSS 111  
**Serial #:** ARUB65-U3 Rev A  
**Issue Date:** 5th April 2011  
**Page:** 71 of 82

---

For example:

Given receiver input reading of 51.5 dB $\mu$ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB $\mu$ V/m (or dB $\mu$ V) and  $\mu$ V/m (or  $\mu$ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu\text{V/m}))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### Receiver Spurious Emissions

#### Industry Canada RSS-Gen §4.10,

The search for spurious emissions shall be from the lowest frequency internally generated or used in the receiver (e.g. local oscillator, intermediate or carrier frequency), or 30 MHz, whichever is the higher, to at least 3 times the highest tunable or local oscillator frequency, whichever is the higher, without exceeding 40 GHz.

#### RSS-Gen §6

The following receiver spurious emission limits shall be complied with;

(a) If a radiated measurement is made, all spurious emissions shall comply with the limits of Table 1.

**Table 1: FCC 15.209 Spurious Emissions Limits**

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Field Strength ( $\text{dB}\mu\text{V/m}$ )	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

### Laboratory Measurement Uncertainty for Spectrum Measurement

<b>Measurement Uncertainty</b>	+5.6/ -4.5 dB
--------------------------------	---------------

### Traceability:

Method	Test Equipment Used
Work instruction WI-03	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





### Measurement Results for Receiver Emissions

<b>Test Freq.</b>	4950 MHz	<b>Engineer</b>	SB
<b>Variant</b>	Receive in Test Utility	<b>Temp (°C)</b>	23.5
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	37
<b>Power Setting</b>	Not Applicable in Receive Mode	<b>Press. (mBars)</b>	1007
<b>Antenna</b>			
<b>Test Notes 1</b>			
<b>Test Notes 2</b>			

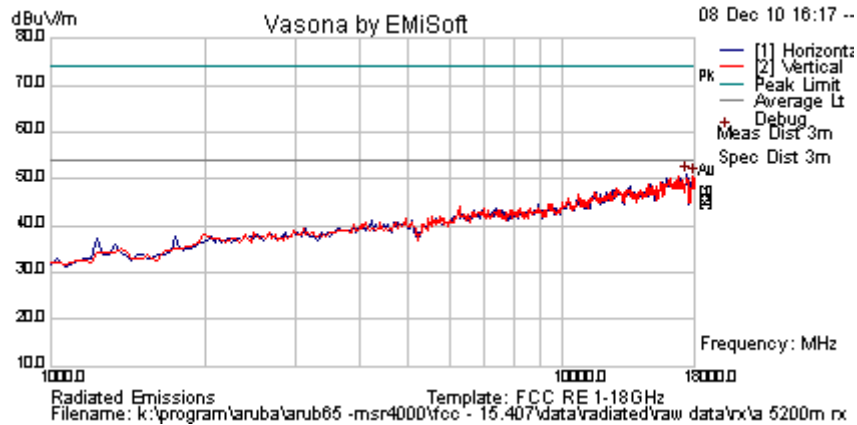

### Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
No Receiver Emissions Within 6dB of limit.												
Legend: RB = Restricted Band; NRB = Non-Restricted Band; FUND = Fundamental Freq. BE = Emission in Restricted Band Nearest Transmission Band Edge;												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** MSR4000 802.11a/b/g/n Access Point  
**To:** FCC 47 CFR Part 90 & IC RSS 111  
**Serial #:** ARUB65-U3 Rev A  
**Issue Date:** 5th April 2011  
**Page:** 74 of 82

<b>Test Freq.</b>	4980 MHz	<b>Engineer</b>	SB
<b>Variant</b>	Receive in Test Utility	<b>Temp (°C)</b>	23.5
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	37
<b>Power Setting</b>	Not Applicable in Receive Mode	<b>Press. (mBars)</b>	1007
<b>Antenna</b>			
<b>Test Notes 1</b>			
<b>Test Notes 2</b>			

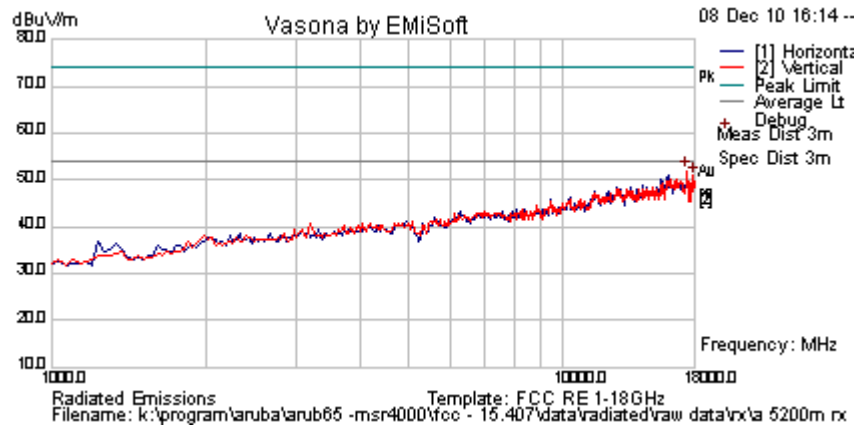

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
---------------	----------	------------	-------	--------------	------------------	-----	--------	---------	--------------	-----------	------------	----------

No Receiver Emissions Within 6dB of limit.

Legend: RB = Restricted Band; NRB = Non-Restricted Band; FUND = Fundamental Freq.  
 BE = Emission in Restricted Band Nearest Transmission Band Edge;

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


### 5.1.9. AC Wireline Conducted Emissions (150 kHz – 30 MHz)

**FCC, Part 15 Subpart C §15.207**  
**Industry Canada RSS-Gen §4.8, §6**

#### **Test Procedure**

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

#### **Test Measurement Set up**

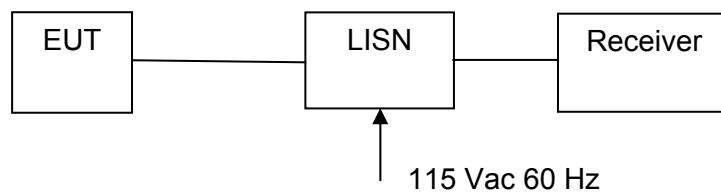

Measurement set up for AC Wireline Conducted Emissions Test

#### **Measurement Results for AC Wireline Conducted Emissions (150 kHz – 30 MHz)**


Ambient conditions.

Temperature: 17 to 23 °C      Relative humidity: 31 to 57 %      Pressure: 999 to 1012 mbar



**Title:** MSR4000 802.11a/b/g/n Access Point  
**To:** FCC 47 CFR Part 90 & IC RSS 111  
**Serial #:** ARUB65-U3 Rev A  
**Issue Date:** 5th April 2011  
**Page:** 76 of 82

<b>Test Freq.</b>	N/A	<b>Engineer</b>	SB
<b>Variant</b>	AC Line Emissions	<b>Temp (°C)</b>	20.5
<b>Freq. Range</b>	0.150 MHz - 30 MHz	<b>Rel. Hum.(%)</b>	44
<b>Power Setting</b>	22	<b>Press. (mBars)</b>	1009
<b>Antenna</b>	N/A		
<b>Test Notes 1</b>	4 Radios		
<b>Test Notes 2</b>			

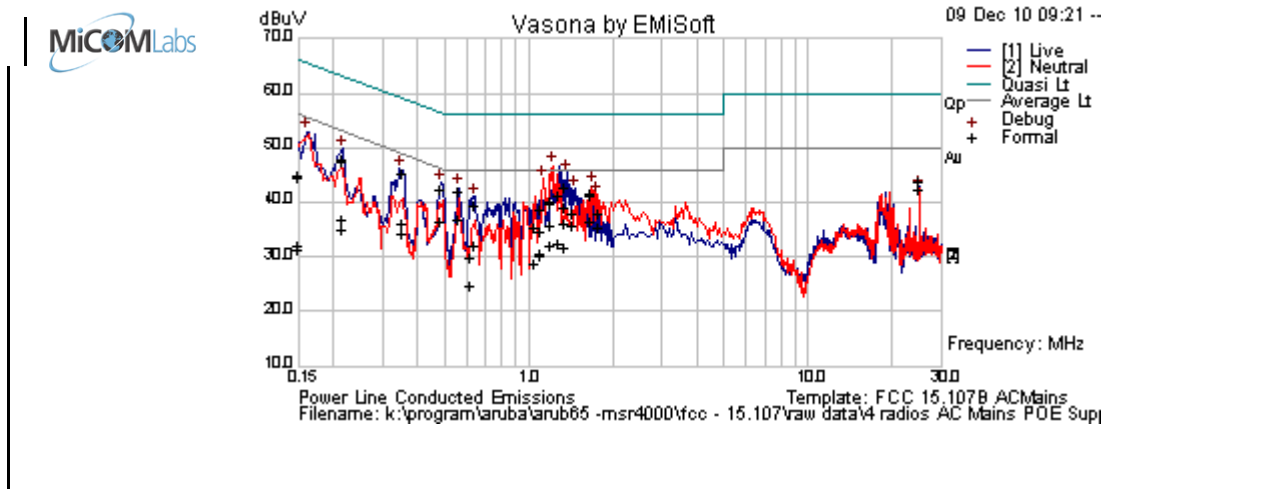

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail	Comments
25.060	32.2	10.6	0.9	43.7	Quasi Peak	Live	60.0	-16.3	Pass	
0.562	32.1	9.9	0.1	42.1	Quasi Peak	Live	56.0	-13.9	Pass	
1.681	31.4	10.0	0.1	41.5	Quasi Peak	Neutral	56.0	-14.5	Pass	
1.355	32.7	10.0	0.1	42.7	Quasi Peak	Live	56.0	-13.3	Pass	
0.486	32.4	9.9	0.1	42.4	Quasi Peak	Live	56.2	-13.9	Pass	
1.449	27.7	10.0	0.1	37.8	Quasi Peak	Live	56.0	-18.2	Pass	
25.060	30.8	10.6	0.9	42.3	Average	Live	50.0	-7.7	Pass	
0.562	26.7	9.9	0.1	36.7	Average	Live	46.0	-9.3	Pass	
1.681	26.5	10.0	0.1	36.7	Average	Neutral	46.0	-9.3	Pass	
1.355	25.9	10.0	0.1	35.9	Average	Live	46.0	-10.1	Pass	
0.486	26.4	9.9	0.1	36.4	Average	Live	46.2	-9.8	Pass	
1.449	25.7	10.0	0.1	35.7	Average	Live	46.0	-10.3	Pass	

Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency  
 NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## Specification

### Limit

**§15.207 (a)** Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu\Omega$  line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

#### RSS-Gen §7.2.2

The radio frequency voltage that is conducted back into the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table below. The tighter limit applies at the frequency range boundaries.

#### §15.207 (a) and RSS-Gen §7.2.2 Limit Matrix

The lower limit applies at the boundary between frequency ranges

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency

#### Laboratory Measurement Uncertainty for Conducted Emissions

Measurement uncertainty	$\pm 2.64$ dB
-------------------------	---------------


#### Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-EMC-01 'Measurement of Conducted Emissions'	0158, 0184, 0287, 0190, 0293, 0307

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## 6. TEST SET-UP PHOTOGRAPHS

### 6.1. General Measurement Test Set-Up

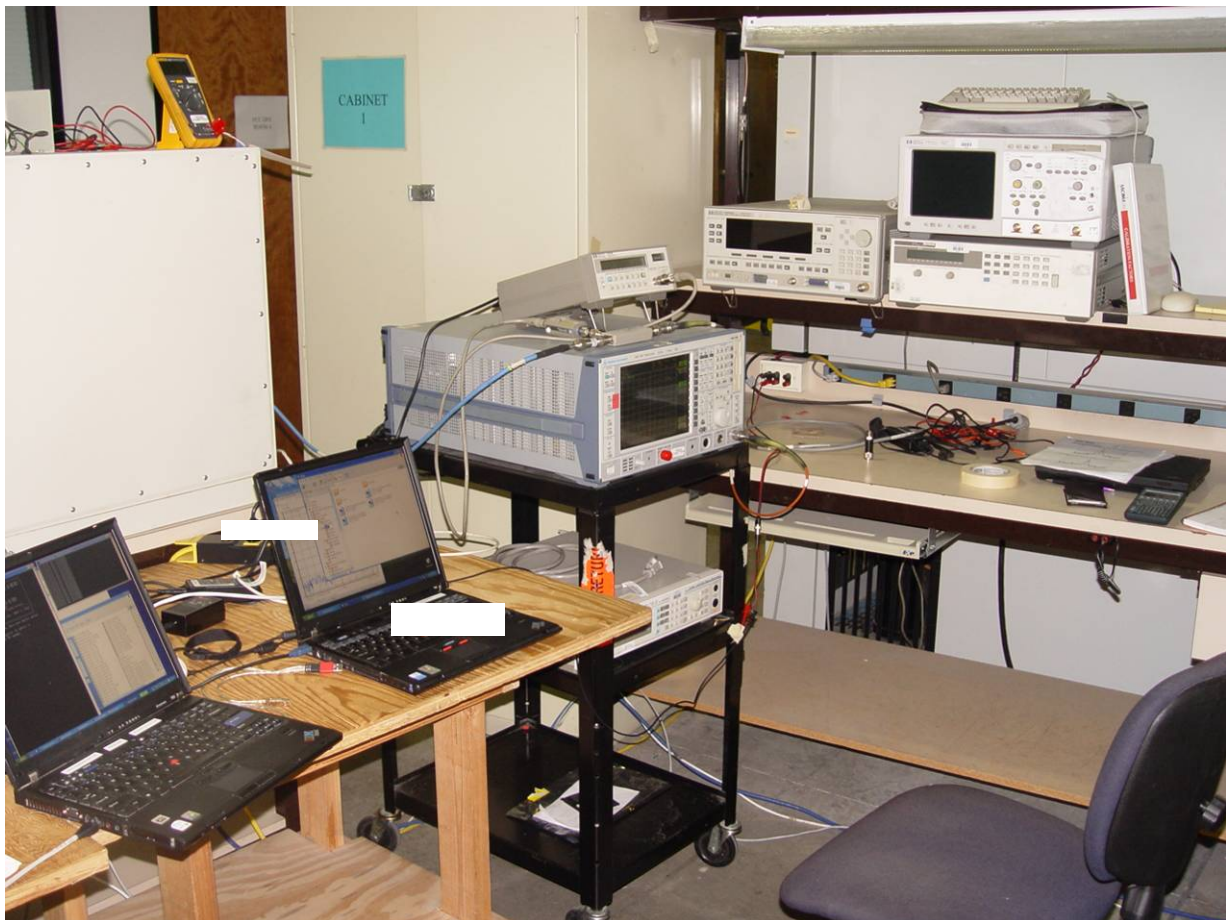

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


## 6.2. Environmental Chamber



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 6.3. Radiated Emissions

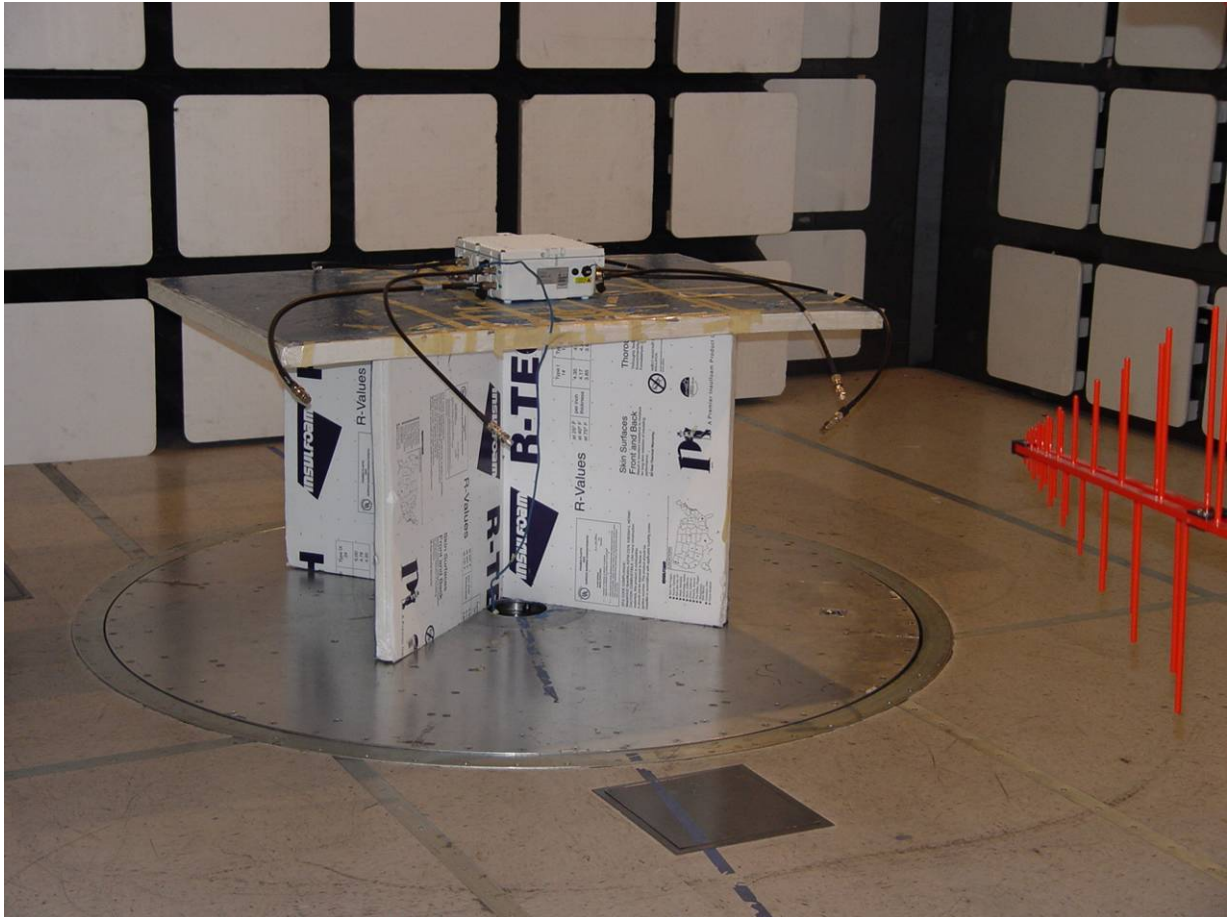

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** MSR4000 802.11a/b/g/n Access Point  
**To:** FCC 47 CFR Part 90 & IC RSS 111  
**Serial #:** ARUB65-U3 Rev A  
**Issue Date:** 5th April 2011  
**Page:** 81 of 82

## 7. TEST EQUIPMENT DETAILS

Asset #	Instrument	Manufacturer	Part #	Serial #
0134	Amplifier	Com Power	PA 122	181910
0158	Barometer /Thermometer	Control Co.	4196	E2846
0287	EMI Receiver	Rhode & Schwartz	ESIB 40	100201
0252	SMA Cable	Megaphase	Sucoflex 104	None
0310	2m SMA Cable	Micro-Coax	UFA210A-0-0787- 3G03G0	209089-001
0312	3m SMA Cable	Micro-Coax	UFA210A-1-1181- 3G0300	209092-001
0313	Coupler	Hewlett Packard	86205A	3140A01285
0314	30dB N-Type Attenuator	ARRA	N9444-30	1623
0070	Power Meter	Hewlett Packard	437B	3125U11552
0116	Power Sensor	Hewlett Packard	8485A	3318A19694
0117	Power Sensor	Hewlett Packard	8487D	3318A00371
0184	Pulse Limiter	Rhode & Schwartz	ESH3Z2	357.8810.52
0190	LISN	Rhode & Schwartz	ESH3Z5	836679/006
0293	BNC Cable	Megaphase	1689 1GVT4	15F50B001
0301	5.6 GHz Notch Filter	Micro-Tronics	RBC50704	001
0302	5.25 GHz Notch Filter	Micro-Tronics	BRC50703	002
0303	5.8 GHz Notch Filter	Micro-Tronics	BRC50705	003
0304	2.4GHzHz Notch Filter	Micro-Tronics	--	001
0307	BNC Cable	Megaphase	1689 1GVT4	15F50B002
0335	1-18GHz Horn Antenna	ETS- Lindgren	3117	00066580
0337	Amplifier	MiCOM Labs	--	--
0338	Antenna	Sunol Sciences	JB-3	A052907

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



440 Boulder Court, Suite 200  
Pleasanton, California 94566, USA  
Tel: 1.925.462.0304  
Fax: 1.925.462.0306  
[www.micomlabs.com](http://www.micomlabs.com)