



FCC PART 15.247

TEST REPORT

For

Northfield Telecommunications, Inc. d/b/a Advanced Wireless Communications

20809 Kensington Blvd, Lakeville, Minnesota, 55044-8385, USA

FCC ID: Q9SAWR4002

Report Type: Original Report	Product Type: Two-way radio
Test Engineer: <u>Gavin Xu</u> <i>Gavin Xu</i>	
Report Number: <u>RDG160728007-00B</u>	
Report Date: <u>2016-08-23</u>	
Reviewed By: <u>Ivan Cao</u> <i>Ivan Cao</i> <u>Assistant Manager</u>	
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
SUPPORT CABLE LIST AND DETAILS	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	10
FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE	11
APPLICABLE STANDARD	11
FCC §15.203 - ANTENNA REQUIREMENT.....	12
APPLICABLE STANDARD	12
ANTENNA CONNECTOR CONSTRUCTION	12
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	13
APPLICABLE STANDARD	13
MEASUREMENT UNCERTAINTY	13
EUT SETUP	13
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	14
CORRECTED AMPLITUDE & MARGIN CALCULATION	14
TEST EQUIPMENT LIST AND DETAILS.....	15
TEST DATA	15
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	18
APPLICABLE STANDARD	18
MEASUREMENT UNCERTAINTY	18
EUT SETUP	18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	19
TEST PROCEDURE	19
TEST EQUIPMENT LIST AND DETAILS.....	20
CORRECTED AMPLITUDE & MARGIN CALCULATION	20
TEST DATA	20
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	26
APPLICABLE STANDARD	26
TEST EQUIPMENT LIST AND DETAILS.....	26
TEST PROCEDURE	26
TEST DATA	26
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING.....	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32

TEST EQUIPMENT LIST AND DETAILS.....	32
TEST DATA	32
FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST EQUIPMENT LIST AND DETAILS.....	38
TEST DATA	38
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	42
APPLICABLE STANDARD	42
TEST PROCEDURE	42
TEST EQUIPMENT LIST AND DETAILS.....	42
TEST DATA	42
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	58
APPLICABLE STANDARD	58
TEST PROCEDURE	58
TEST EQUIPMENT LIST AND DETAILS.....	58
TEST DATA	58
FCC §15.247(d) - BAND EDGES TESTING	64
APPLICABLE STANDARD	64
TEST PROCEDURE	64
TEST EQUIPMENT LIST AND DETAILS.....	64
TEST DATA	65

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Northfield Telecommunications, Inc. d/b/a Advanced Wireless Communications*'s product, model number: *AWR4000 (FCC ID: Q9SAWR4002)* (the "EUT") in this report was a *Two-way radio*, which was measured approximately: 14.8 cm (L) x 5 cm (W) x 2.8 cm (H), rated input voltage: DC 3.7 V from rechargeable Li-ion battery or DC6V charging from charger.

Adapter Information:

Model : SSA021F060080USD

Input :100-240V~50-60Hz,0.2A

Output :DC 6V,0.8A

Note: The series product, models AWR4000 and AWR4002 are electrically identical, the differences between them are the model names, , we selected AWR4000 for fully testing, the details were explained in the attached declaration letter.

All measurement and test data in this report was gathered from production sample serial number: 160728007 (Assigned byBACL, Dongguan). The EUT was received on 2016-08-01.

Objective

This report is prepared on behalf of *Northfield Telecommunications, Inc. d/b/a Advanced Wireless Communications* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 90 TNF submissions with FCC ID: Q9SAWR4002.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode.

EUT Exercise Software

Test Software Version		CSR Bluesuite 2.5.0		
Test Frequency		2402 MHz	2441 MHz	2480 MHz
Power Level Setting	GFSK	63	63	63
	$\pi/4$ -DQPSK	100	100	100
	8-DPSK	100	100	100

Equipment Modifications

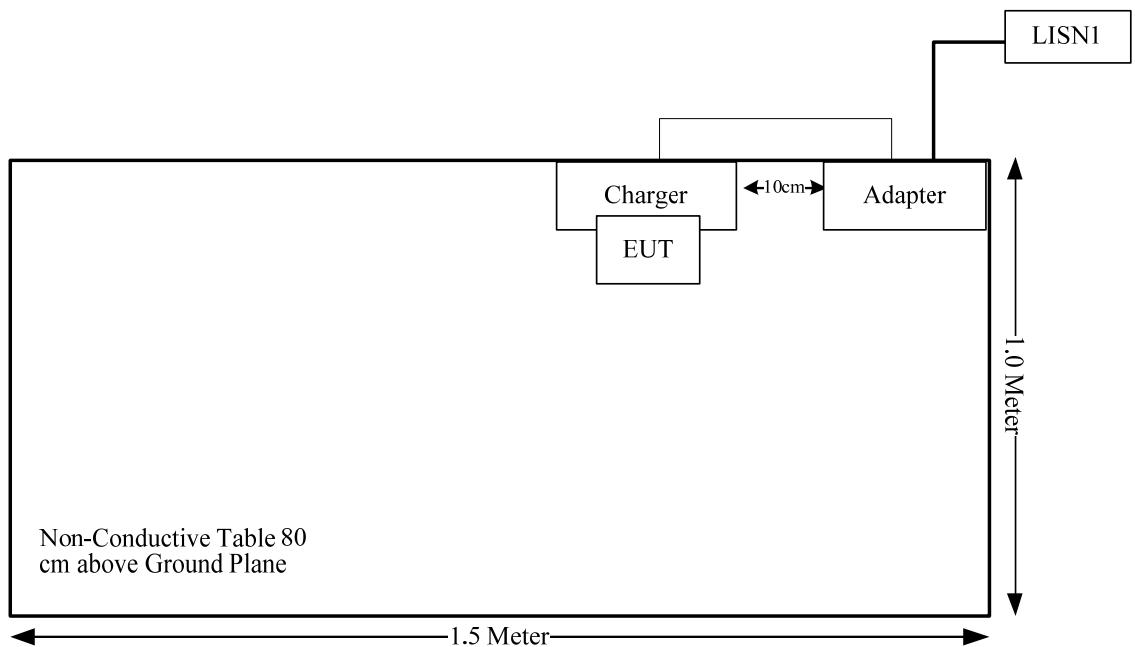
No modification was made to the EUT.

Support Cable List and Details

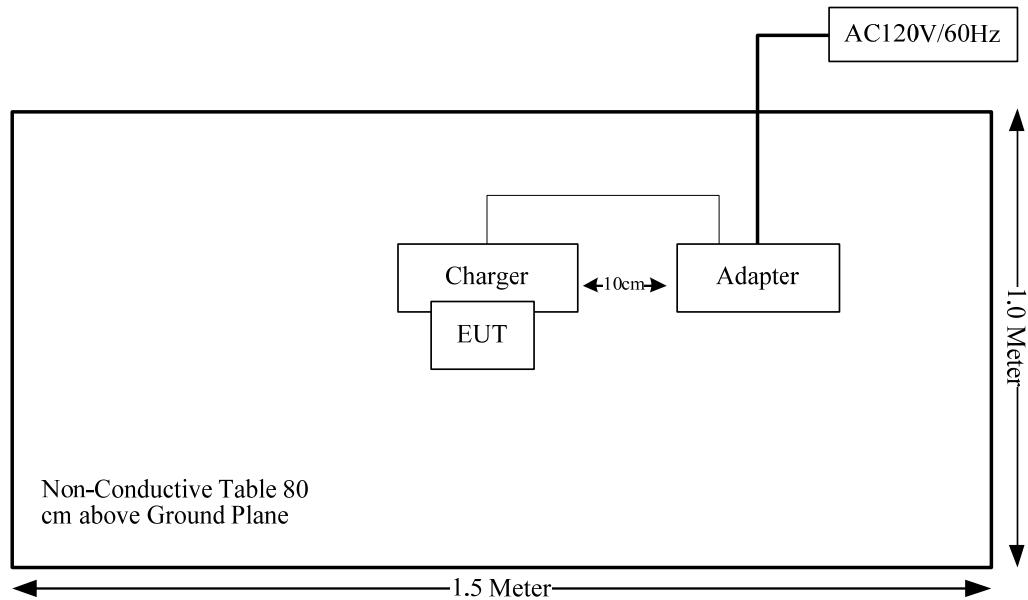
Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Adapter Cable	no	no	1.5	Adapter	Base Charger

Block Diagram of Test Setup

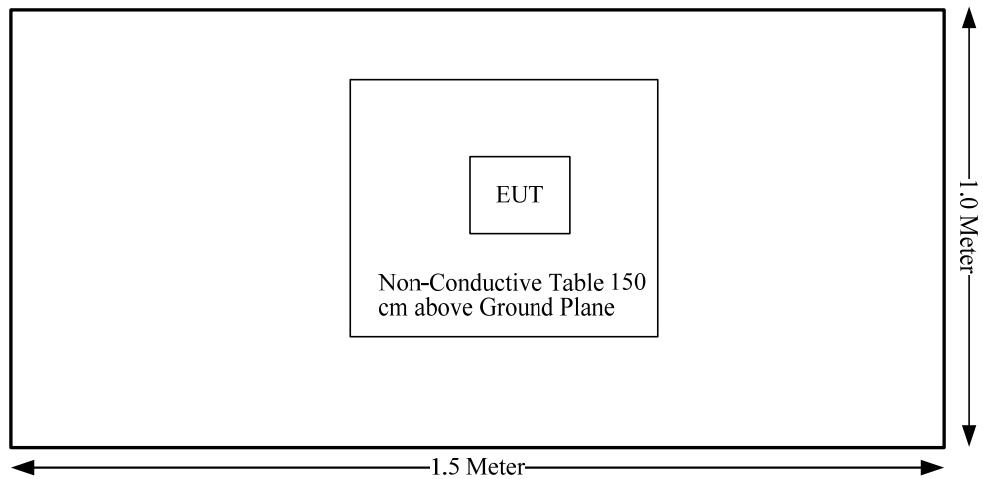
AC Power Line Conducted Emission Test:



Radiation Emissions Test For Below 1GHz:



Radiation Emissions Test For Above 1GHz:



SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

The max tune-up conducted power is 5.7dBm (3.72 mW).

$$[(\text{max. power of channel, mW}) / (\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}] = 3.72 / 5 * (\sqrt{2.480}) = 1.2 < 3.0$$

So the stand-alone SAR evaluation is not necessary.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one integral antenna, the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to $U_{\text{cisp}}_{\text{r}}$ of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than $U_{\text{cisp}}_{\text{r}}$ of Table 1, then:

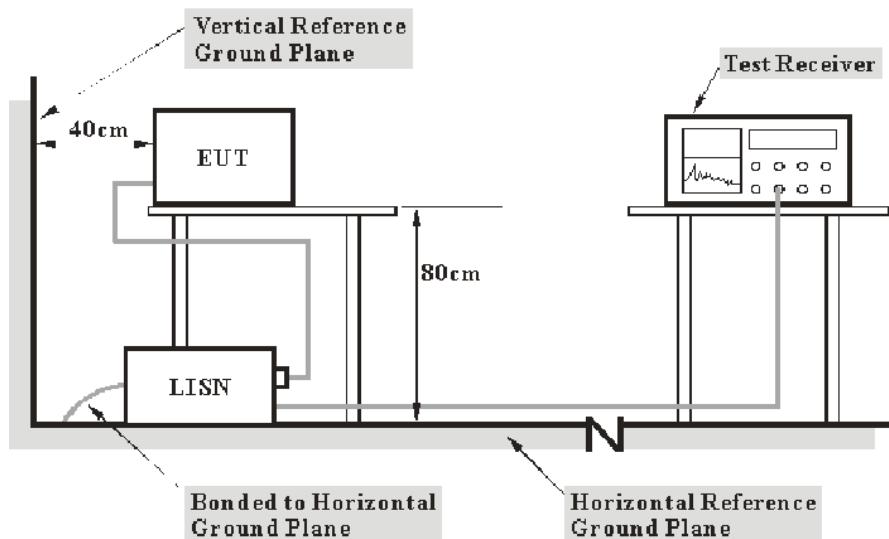
- compliance is deemed to occur if no measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}}_{\text{r}})$, exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}}_{\text{r}})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.12 dB (150 kHz to 30 MHz).

Table 1 – Values of $U_{\text{cisp}}_{\text{r}}$

Measurement	$U_{\text{cisp}}_{\text{r}}$
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup



Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2015-12-10	2016-12-09
R&S	L.I.S.N	ESH2-Z5	892107/021	2016-07-16	2017-07-15
R&S	Two-line V-network	ENV 216	3560.6550.12	2015-11-26	2016-11-25
N/A	Coaxial Cable	1.8m	N/A	2016-05-06	2017-05-06
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

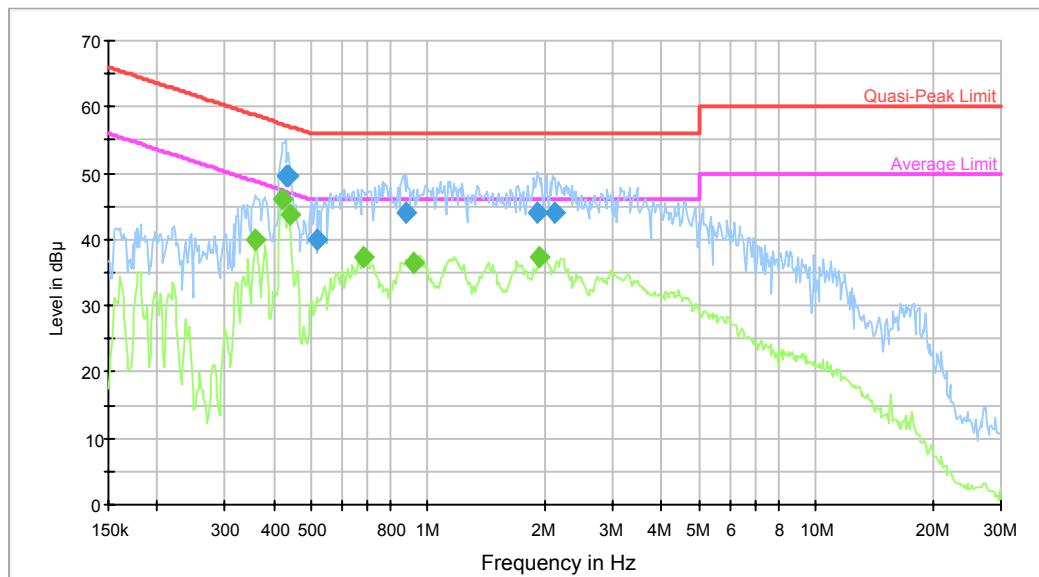
Environmental Conditions

Temperature:	28.4°C
Relative Humidity:	61 %
ATM Pressure:	100.1kPa

* The testing was performed by Gavin Xu on 2016-08-02.

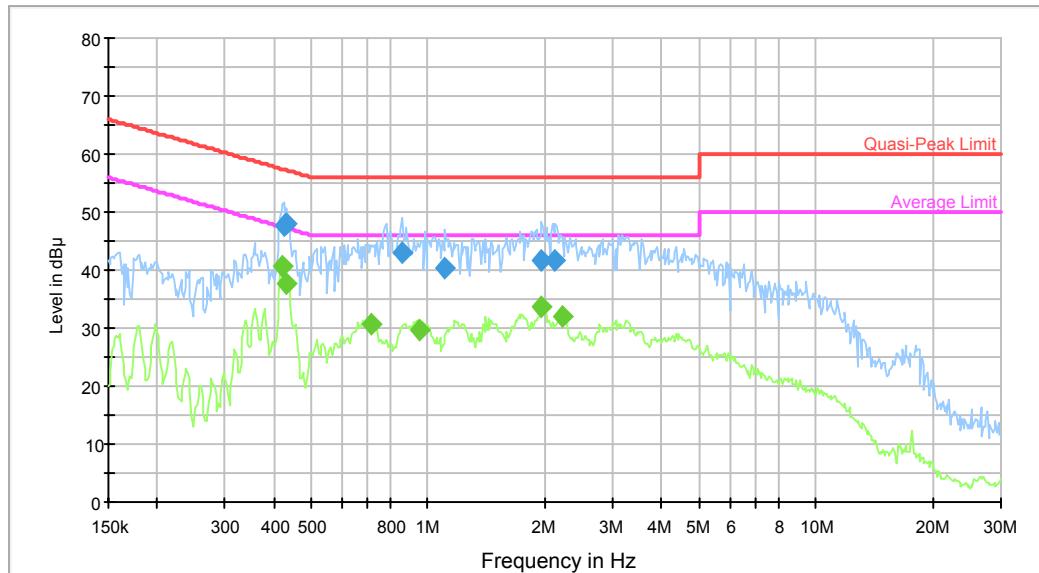
Test Mode: Charging&Transmitting

AC120V/60Hz, Line:



Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.429420	49.6	9.000	L1	10.2	7.7	57.3	Compliance
0.436318	49.6	9.000	L1	10.2	7.5	57.1	Compliance
0.515791	40.0	9.000	L1	10.1	16.0	56.0	Compliance
0.879690	44.0	9.000	L1	10.4	12.0	56.0	Compliance
1.920710	44.1	9.000	L1	10.4	11.9	56.0	Compliance
2.130339	44.0	9.000	L1	10.4	12.0	56.0	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.360371	39.8	9.000	L1	10.3	8.9	48.7	Compliance
0.422630	46.2	9.000	L1	10.2	1.2	47.4	Compliance
0.439808	43.7	9.000	L1	10.2	3.4	47.1	Compliance
0.681699	37.4	9.000	L1	10.4	8.6	46.0	Compliance
0.915445	36.3	9.000	L1	10.4	9.7	46.0	Compliance
1.936076	37.3	9.000	L1	10.4	8.7	46.0	Compliance

AC120V/60Hz, Neutral:

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.426011	47.8	9.000	N	10.2	9.5	57.3	Compliance
0.432855	47.9	9.000	N	10.1	9.3	57.2	Compliance
0.858911	43.0	9.000	N	10.3	13.0	56.0	Compliance
1.108371	40.5	9.000	N	10.4	15.5	56.0	Compliance
1.967177	41.8	9.000	N	10.4	14.2	56.0	Compliance
2.130339	41.7	9.000	N	10.4	14.3	56.0	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.419276	40.8	9.000	N	10.2	6.7	47.5	Compliance
0.432855	37.6	9.000	N	10.1	9.6	47.2	Compliance
0.715082	30.6	9.000	N	10.4	15.4	46.0	Compliance
0.952654	29.7	9.000	N	10.4	16.3	46.0	Compliance
1.967177	33.6	9.000	N	10.4	12.4	46.0	Compliance
2.216927	31.9	9.000	N	10.4	14.1	46.0	Compliance

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to $U_{\text{cisp}}^{\text{r}}$ of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than $U_{\text{cisp}}^{\text{r}}$ of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}}^{\text{r}})$, exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}}^{\text{r}})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

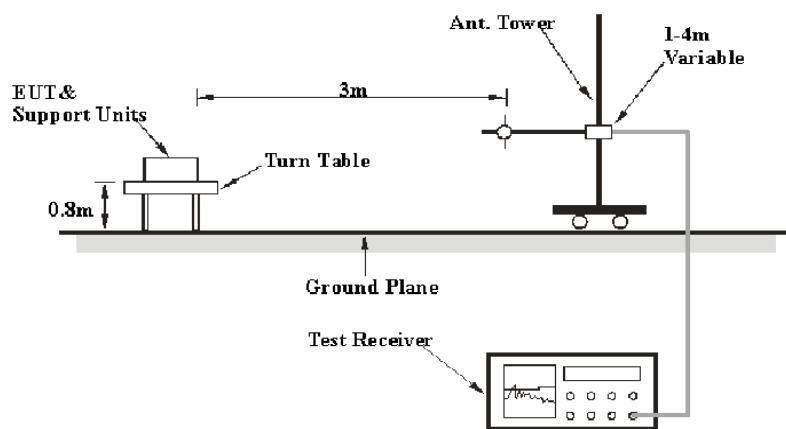
30M~200MHz: 4.55 dB for Horizontal, 4.57 dB for Vertical; 200M~1GHz: 4.66 dB for Horizontal, 4.56 dB for Vertical; measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical; 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical; 1G~6GHz: 4.45 dB, 6G~18GHz: 5.23 dB.

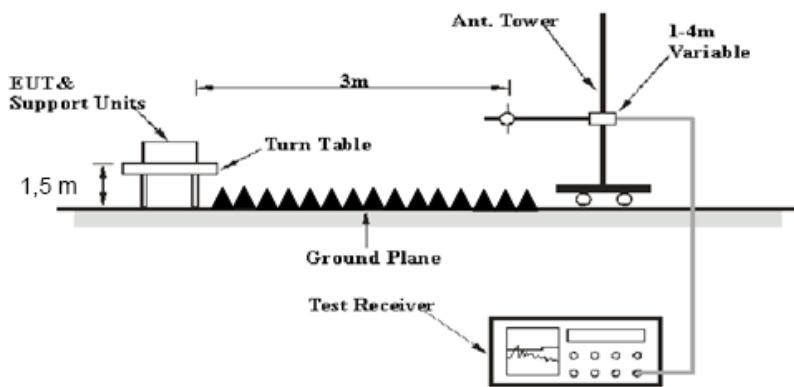
Table 1 – Values of $U_{\text{cisp}}^{\text{r}}$

Measurement	$U_{\text{cisp}}^{\text{r}}$
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:



Above 1GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2016-08-03	2017-08-02
Sunol Sciences	Antenna	JB3	A060611-3	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2015-09-01	2016-09-01
Agilent	Spectrum Analyzer	E4440A	SG43360054	2015-11-23	2016-11-22
ETS-Lindgren	Horn Antenna	3115	9808-5557	2015-09-06	2018-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2016-02-19	2017-02-19
R&S	Spectrum Analyzer	FSP 38	100478	2015-11-23	2016-11-22
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2015-09-06	2016-09-06
N/A	Coaxial Cable	14m	N/A	2016-05-06	2017-05-06
N/A	Coaxial Cable	8m	N/A	2016-05-06	2017-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

Environmental Conditions

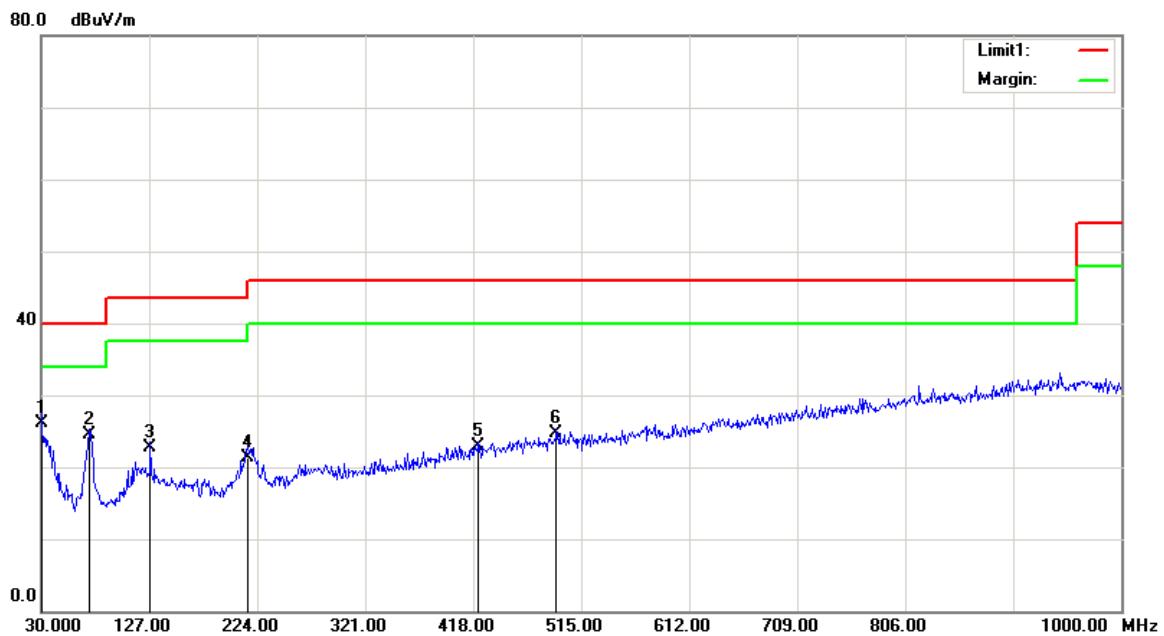
Temperature:	27.5 °C
Relative Humidity:	42 %
ATM Pressure:	99.5 kPa

* The testing was performed by Gavin Xu on 2016-08-19.

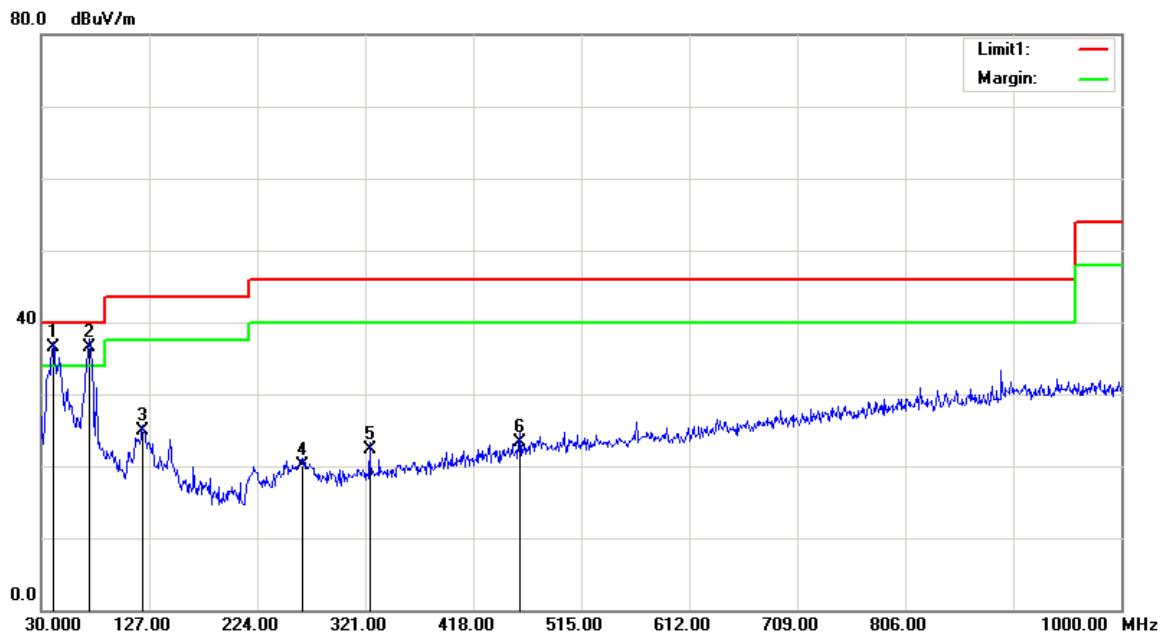
Test Mode: Transmitting

1) 30 MHz -1GHz:BDR mode is worst case

Horizontal



Frequency (MHz)	Receiver Reading (dB μ V)	Detector	Correction Factor (dB/m)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
30.0000	25.25	QP	0.95	26.20	40.00	13.80
73.6500	36.36	QP	-11.86	24.50	40.00	15.50
127.9700	28.42	QP	-5.62	22.80	43.50	20.70
215.2700	30.21	QP	-8.91	21.30	43.50	22.20
422.8500	26.07	QP	-3.17	22.90	46.00	23.10
492.6900	26.22	QP	-1.52	24.70	46.00	21.30

Vertical

Frequency (MHz)	Receiver Reading (dB μ V)	Detector	Correction Factor (dB/m)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
40.6700	43.58	QP	-6.98	36.60	40.00	3.40
73.6500	48.36	QP	-11.86	36.50	40.00	3.50
121.1800	30.50	QP	-5.60	24.90	43.50	18.60
264.7400	26.50	QP	-6.40	20.10	46.00	25.90
324.8800	27.69	QP	-5.39	22.30	46.00	23.70
459.7100	25.56	QP	-2.16	23.40	46.00	22.60

2) 1-25GHz:*BDR Mode (GFSK):*

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	FCC 15.247	
	Reading (dB μ V)	Detector	Polar (H/V)	Factor (dB)				Limit (dB μ V/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	71.03	PK	H	25.65	3.66	0.00	100.34	N/A	N/A
2402	61.08	AV	H	25.65	3.66	0.00	90.39	N/A	N/A
2402	62.56	PK	V	25.65	3.66	0.00	91.87	N/A	N/A
2402	52.9	AV	V	25.65	3.66	0.00	82.21	N/A	N/A
2390	25.55	PK	H	25.61	3.63	0.00	54.79	74.00	19.21
2390	13.92	AV	H	25.61	3.63	0.00	43.16	54.00	10.84
4804	43.46	PK	H	30.59	5.06	27.41	51.70	74.00	22.30
4804	31.06	AV	H	30.59	5.06	27.41	39.30	54.00	14.70
7206	33.53	PK	H	34.09	6.61	25.91	48.32	74.00	25.68
7206	22.21	AV	H	34.09	6.61	25.91	37.00	54.00	17.00
3303	39.51	PK	H	28.17	5.12	27.28	45.52	74.00	28.48
3303	30.08	AV	H	28.17	5.12	27.28	36.09	54.00	17.91
Middle Channel: 2441 MHz									
2441	69.69	PK	H	25.75	3.76	0.00	99.20	N/A	N/A
2441	59.63	AV	H	25.75	3.76	0.00	89.14	N/A	N/A
2441	62.58	PK	V	25.75	3.76	0.00	92.09	N/A	N/A
2441	52.77	AV	V	25.75	3.76	0.00	82.28	N/A	N/A
4882	43.19	PK	H	30.79	5.19	27.42	51.75	74.00	22.25
4882	30.77	AV	H	30.79	5.19	27.42	39.33	54.00	14.67
7323	33.33	PK	H	34.38	6.75	25.88	48.58	74.00	25.42
7323	21.92	AV	H	34.38	6.75	25.88	37.17	54.00	16.83
3303	38.53	PK	H	28.17	5.12	27.28	44.54	74.00	29.46
3303	29.39	AV	H	28.17	5.12	27.28	35.40	54.00	18.60
3621	33.93	PK	H	29.07	4.59	27.28	40.31	74.00	33.69
3621	21.51	AV	H	29.07	4.59	27.28	27.89	54.00	26.11
High Channel: 2480 MHz									
2480	68.05	PK	H	25.85	3.68	0.00	97.58	N/A	N/A
2480	58.09	AV	H	25.85	3.68	0.00	87.62	N/A	N/A
2480	62.36	PK	V	25.85	3.68	0.00	91.89	N/A	N/A
2480	52.49	AV	V	25.85	3.68	0.00	82.02	N/A	N/A
2483.5	28.84	PK	H	25.86	3.67	0.00	58.37	74.00	15.63
2483.5	15.79	AV	H	25.86	3.67	0.00	45.32	54.00	8.68
4960	42.92	PK	H	31.00	5.34	27.43	51.83	74.00	22.17
4960	30.51	AV	H	31.00	5.34	27.43	39.42	54.00	14.58
7440	33.08	PK	H	34.66	6.89	25.97	48.66	74.00	25.34
7440	21.68	AV	H	34.66	6.89	25.97	37.26	54.00	16.74
3303	37.28	PK	H	28.17	5.12	27.28	43.29	74.00	30.71
3303	29.14	AV	H	28.17	5.12	27.28	35.15	54.00	18.85

EDR Mode ($\pi/4$ -DQPSK):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	FCC 15.247	
	Reading (dB μ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dB μ V/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	69.82	PK	H	25.65	3.66	0.00	99.13	N/A	N/A
2402	58.63	AV	H	25.65	3.66	0.00	87.94	N/A	N/A
2402	61.38	PK	V	25.65	3.66	0.00	90.69	N/A	N/A
2402	50.12	AV	V	25.65	3.66	0.00	79.43	N/A	N/A
2390	25.72	PK	H	25.61	3.63	0.00	54.96	74.00	19.04
2390	13.49	AV	H	25.61	3.63	0.00	42.73	54.00	11.27
4804	41.73	PK	H	30.59	5.06	27.41	49.97	74.00	24.03
4804	30.88	AV	H	30.59	5.06	27.41	39.12	54.00	14.88
7206	33.68	PK	H	34.09	6.61	25.91	48.47	74.00	25.53
7206	21.51	AV	H	34.09	6.61	25.91	36.30	54.00	17.70
3303	39.62	PK	H	28.17	5.12	27.28	45.63	74.00	28.37
3303	30.71	AV	H	28.17	5.12	27.28	36.72	54.00	17.28
Middle Channel: 2441 MHz									
2441	69.07	PK	H	25.75	3.76	0.00	98.58	N/A	N/A
2441	57.89	AV	H	25.75	3.76	0.00	87.40	N/A	N/A
2441	61.18	PK	V	25.75	3.76	0.00	90.69	N/A	N/A
2441	49.91	AV	V	25.75	3.76	0.00	79.42	N/A	N/A
4882	40.52	PK	H	30.79	5.19	27.42	49.08	74.00	24.92
4882	38.58	AV	H	30.79	5.19	27.42	47.14	54.00	6.86
7323	33.33	PK	H	34.38	6.75	25.88	48.58	74.00	25.42
7323	21.22	AV	H	34.38	6.75	25.88	36.47	54.00	17.53
3303	39.41	PK	H	28.17	5.12	27.28	45.42	74.00	28.58
3303	30.41	AV	H	28.17	5.12	27.28	36.42	54.00	17.58
3560	36.74	PK	H	28.93	4.53	27.26	42.94	74.00	31.06
3560	25.2	AV	H	28.93	4.53	27.26	31.40	54.00	22.60
High Channel: 2480 MHz									
2480	67.96	PK	H	25.85	3.68	0.00	97.49	N/A	N/A
2480	56.61	AV	H	25.85	3.68	0.00	86.14	N/A	N/A
2480	60.79	PK	V	25.85	3.68	0.00	90.32	N/A	N/A
2480	49.57	AV	V	25.85	3.68	0.00	79.10	N/A	N/A
2483.5	32.69	PK	H	25.86	3.67	0.00	62.22	74.00	11.78
2483.5	16.16	AV	H	25.86	3.67	0.00	45.69	54.00	8.31
4960	38.27	PK	H	31.00	5.34	27.43	47.18	74.00	26.82
4960	29.35	AV	H	31.00	5.34	27.43	38.26	54.00	15.74
7440	33.08	PK	H	34.66	6.89	25.97	48.66	74.00	25.34
7440	20.94	AV	H	34.66	6.89	25.97	36.52	54.00	17.48
3303	39.13	PK	H	28.17	5.12	27.28	45.14	74.00	28.86
3303	30.18	AV	H	28.17	5.12	27.28	36.19	54.00	17.81

EDR Mode (8-DPSK):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	FCC 15.247	
	Reading (dB μ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dB μ V/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	69.72	PK	H	25.65	3.66	0.00	99.03	N/A	N/A
2402	58.62	AV	H	25.65	3.66	0.00	87.93	N/A	N/A
2402	61.04	PK	V	25.65	3.66	0.00	90.35	N/A	N/A
2402	49.06	AV	V	25.65	3.66	0.00	78.37	N/A	N/A
2390	24.94	PK	H	25.61	3.63	0.00	54.18	74.00	19.82
2390	13.54	AV	H	25.61	3.63	0.00	42.78	54.00	11.22
4804	40.62	PK	H	30.59	5.06	27.41	48.86	74.00	25.14
4804	29.22	AV	H	30.59	5.06	27.41	37.46	54.00	16.54
7206	34.73	PK	H	34.09	6.61	25.91	49.52	74.00	24.48
7206	21.3	AV	H	34.09	6.61	25.91	36.09	54.00	17.91
3303	39.73	PK	H	28.17	5.12	27.28	45.74	74.00	28.26
3303	31.17	AV	H	28.17	5.12	27.28	37.18	54.00	16.82
Middle Channel: 2441 MHz									
2441	69.15	PK	H	25.75	3.76	0.00	98.66	N/A	N/A
2441	57.82	AV	H	25.75	3.76	0.00	87.33	N/A	N/A
2441	61.13	PK	V	25.75	3.76	0.00	90.64	N/A	N/A
2441	49.45	AV	V	25.75	3.76	0.00	78.96	N/A	N/A
4882	39.36	PK	H	30.79	5.19	27.42	47.92	74.00	26.08
4882	26.94	AV	H	30.79	5.19	27.42	35.50	54.00	18.50
7323	34.48	PK	H	34.38	6.75	25.88	49.73	74.00	24.27
7323	21.03	AV	H	34.38	6.75	25.88	36.28	54.00	17.72
3303	39.44	PK	H	28.17	5.12	27.28	45.45	74.00	28.55
3303	30.94	AV	H	28.17	5.12	27.28	36.95	54.00	17.05
3625	35.52	PK	H	29.08	4.58	27.28	41.90	74.00	32.10
3625	24.22	AV	H	29.08	4.58	27.28	30.60	54.00	23.40
High Channel: 2480 MHz									
2480	68.19	PK	H	25.85	3.68	0.00	97.72	N/A	N/A
2480	56.68	AV	H	25.85	3.68	0.00	86.21	N/A	N/A
2480	61.07	PK	V	25.85	3.68	0.00	90.60	N/A	N/A
2480	49.57	AV	V	25.85	3.68	0.00	79.10	N/A	N/A
2483.5	31.01	PK	H	25.86	3.67	0.00	60.54	74.00	13.46
2483.5	15.96	AV	H	25.86	3.67	0.00	45.49	54.00	8.51
4960	37.1	PK	H	31.00	5.34	27.43	46.01	74.00	27.99
4960	24.68	AV	H	31.00	5.34	27.43	33.59	54.00	20.41
7440	34.19	PK	H	34.66	6.89	25.97	49.77	74.00	24.23
7440	20.78	AV	H	34.66	6.89	25.97	36.36	54.00	17.64
3303	39.21	PK	H	28.17	5.12	27.28	45.22	74.00	28.78
3303	30.71	AV	H	28.17	5.12	27.28	36.72	54.00	17.28

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2016-05-09	2017-05-09
N/A	Coaxial Cable	0.1m	N/A	2016-05-06	2017-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2016-05-06	2017-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	28.9°C
Relative Humidity:	51 %
ATM Pressure:	98.9kPa

* The testing was performed by Gavin Xu on 2016-08-18.

Test Result: Compliance.

Please refer to following tables and plots

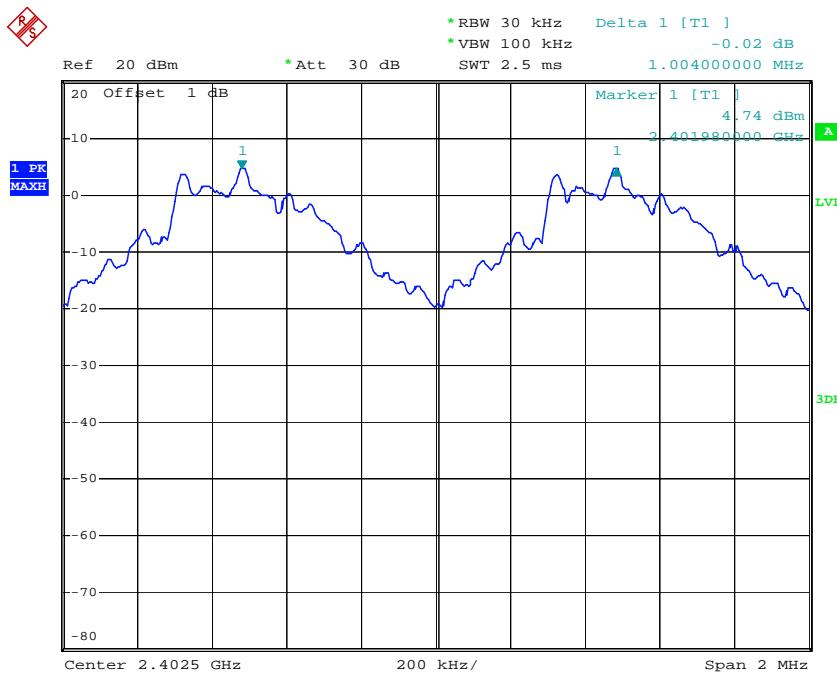
Test Mode: Transmitting

Mode	Channel	Frequency	Channel Separation	Limit	Result	
		MHz	MHz	MHz		
<i>BDR (GFSK)</i>	Low	2402	1.004	0.555	Pass	
	Adjacent	2403				
	Middle	2441	1.004	0.557		
	Adjacent	2442				
	High	2480	1.004	0.560		
	Adjacent	2479				
<i>EDR (π/4-DQPSK)</i>	Low	2402	1.000	0.804	Pass	
	Adjacent	2403				
	Middle	2441	1.000	0.804		
	Adjacent	2442				
	High	2480	1.008	0.812		
	Adjacent	2479				
<i>EDR (8DPSK)</i>	Low	2402	1.000	0.804	Pass	
	Adjacent	2403				
	Middle	2441	1.004	0.804		
	Adjacent	2442				
	High	2480	1.008	0.808		
	Adjacent	2479				

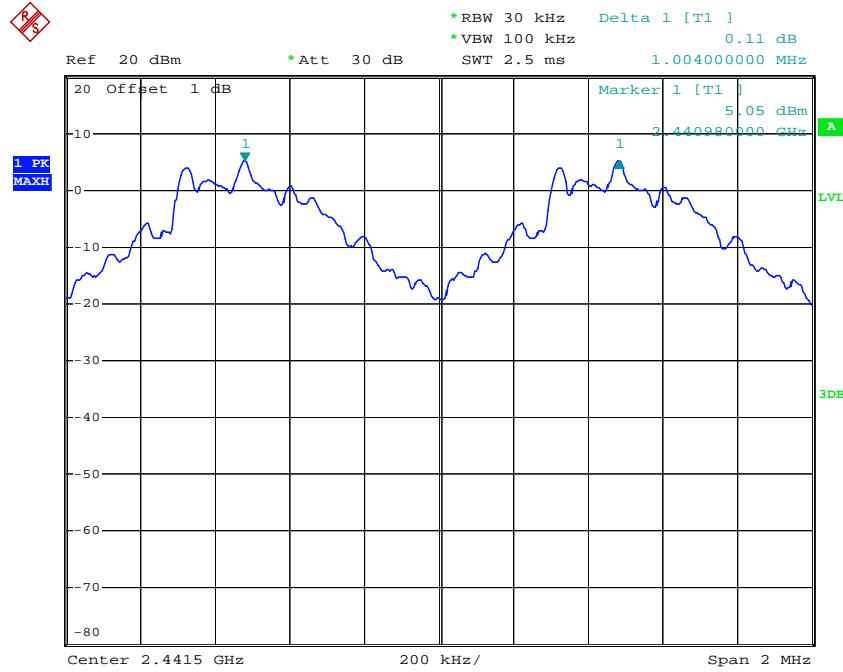
Note: Limit = (2/3) × 20dB bandwidth

BDR Mode (GFSK):

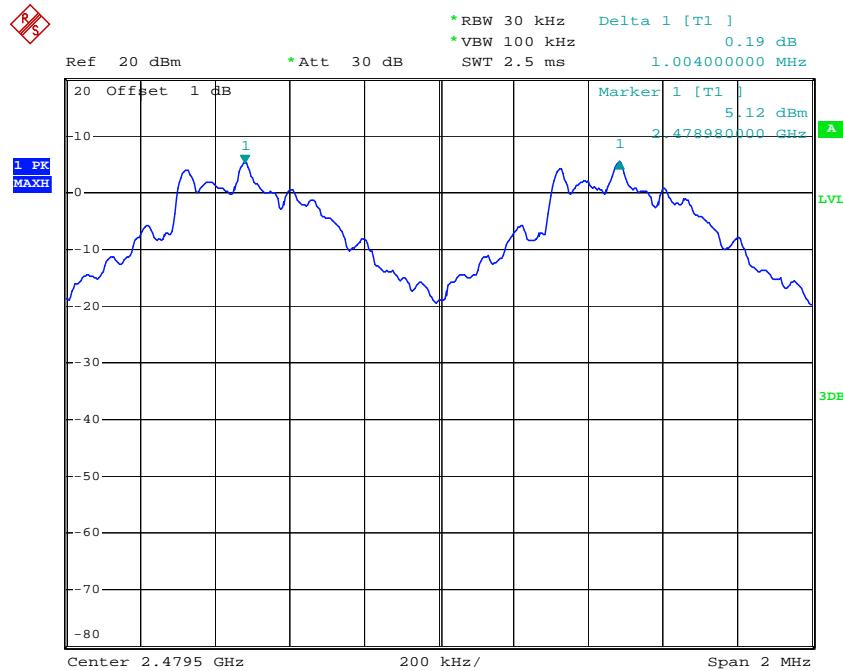
Low Channel



Date: 18.AUG.2016 10:22:09

Middle Channel

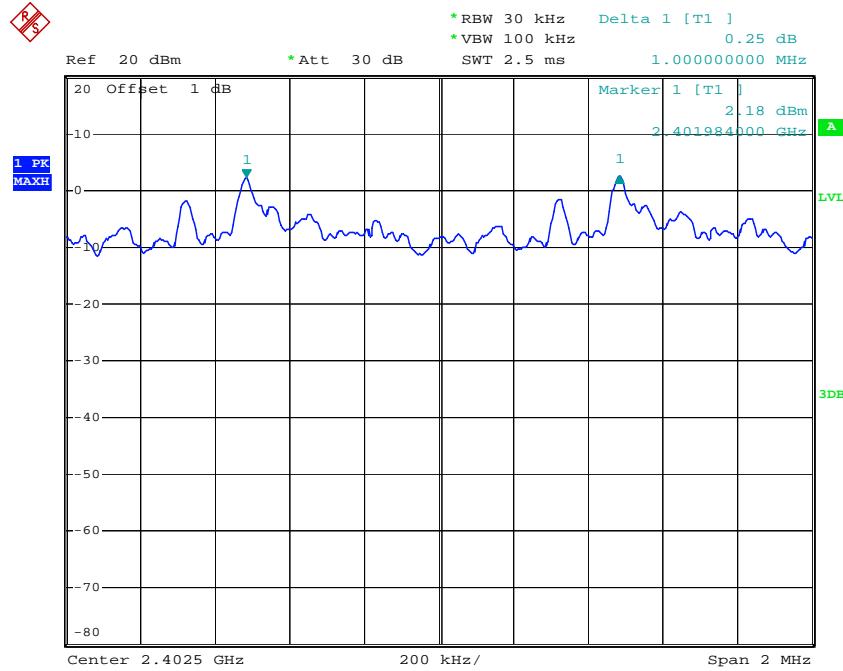
Date: 18.AUG.2016 10:20:10

High Channel

Date: 18.AUG.2016 10:19:16

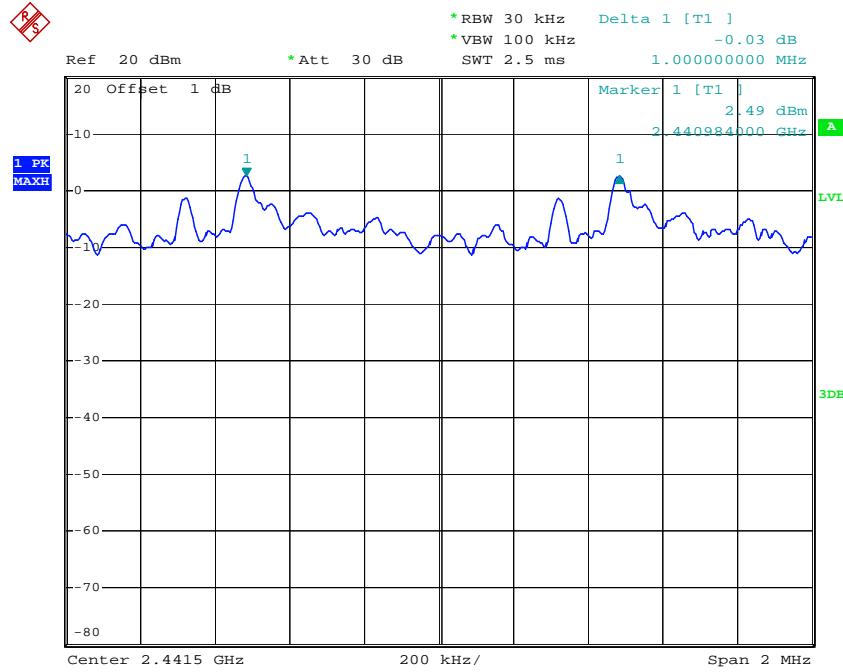
EDR Mode ($\pi/4$ -DQPSK):

Low Channel

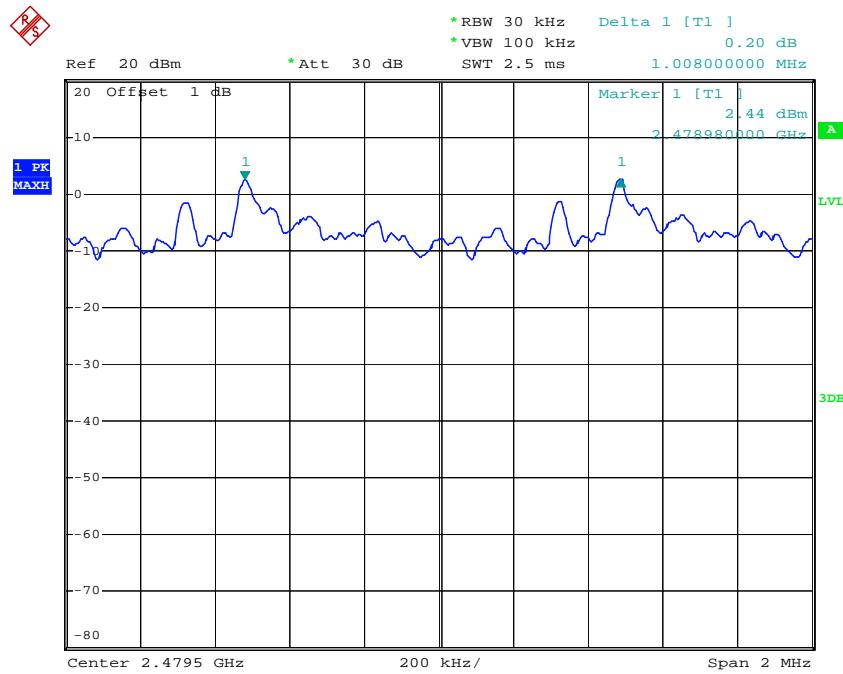


Date: 18.AUG.2016 10:15:44

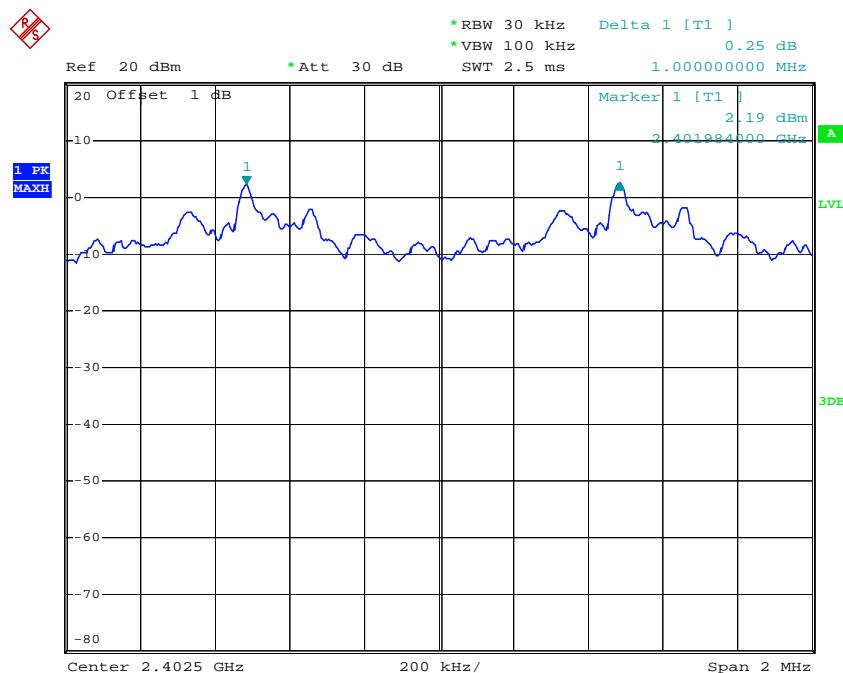
Middle Channel



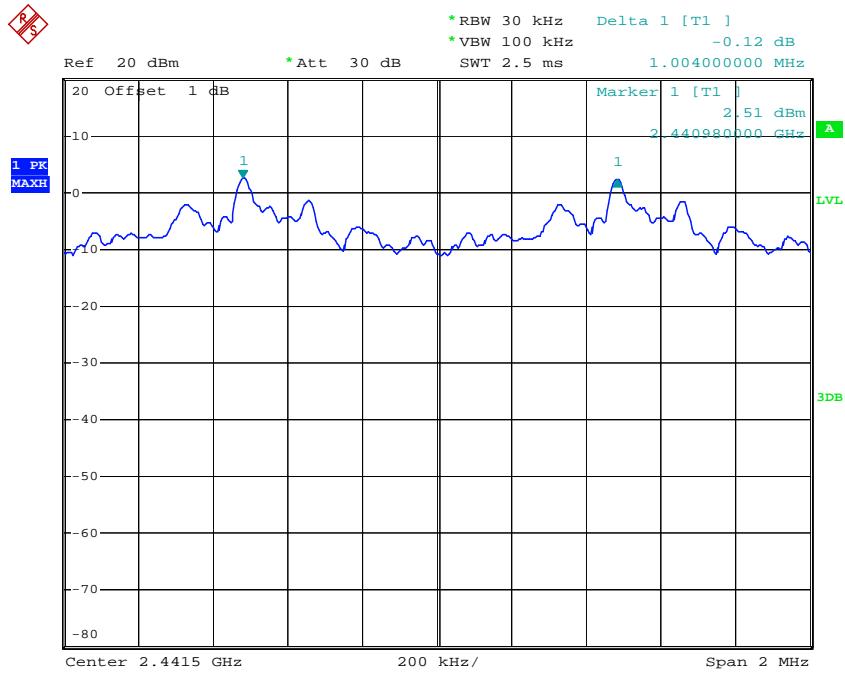
Date: 18.AUG.2016 10:17:07

High Channel

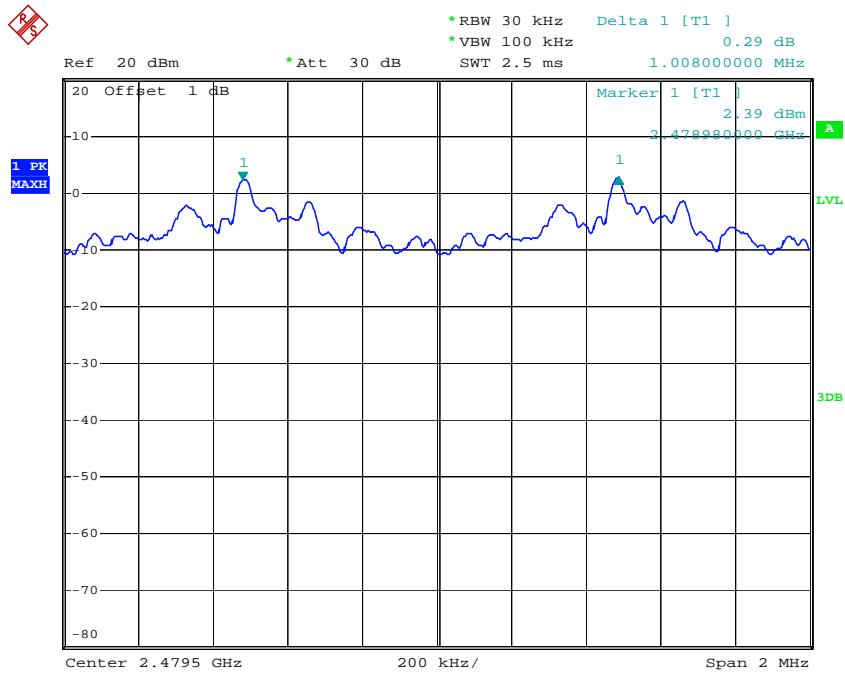
Date: 18.AUG.2016 10:18:06

*EDR Mode (8-DPSK):***Low Channel**

Date: 18.AUG.2016 10:14:37

Middle Channel

Date: 18.AUG.2016 10:12:52

High Channel

Date: 18.AUG.2016 10:11:38

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2016-05-09	2017-05-09
N/A	Coaxial Cable	0.1m	N/A	2016-05-06	2017-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2016-05-06	2017-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	28.9°C
Relative Humidity:	51 %
ATM Pressure:	98.9kPa

* The testing was performed by Gavin Xu on 2016-08-18.

Test Result: Compliance.

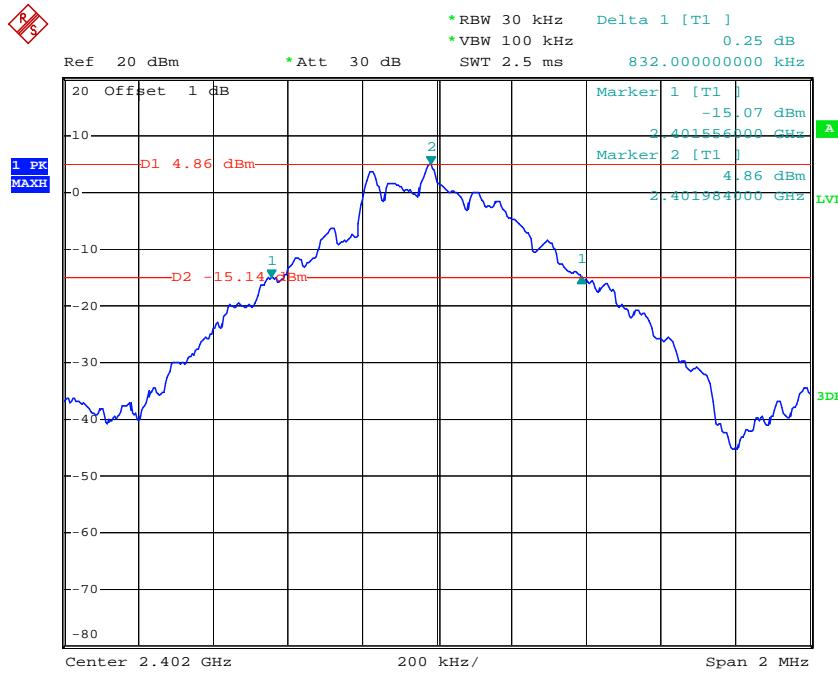
Please refer to following tables and plots

Test Mode: Transmitting

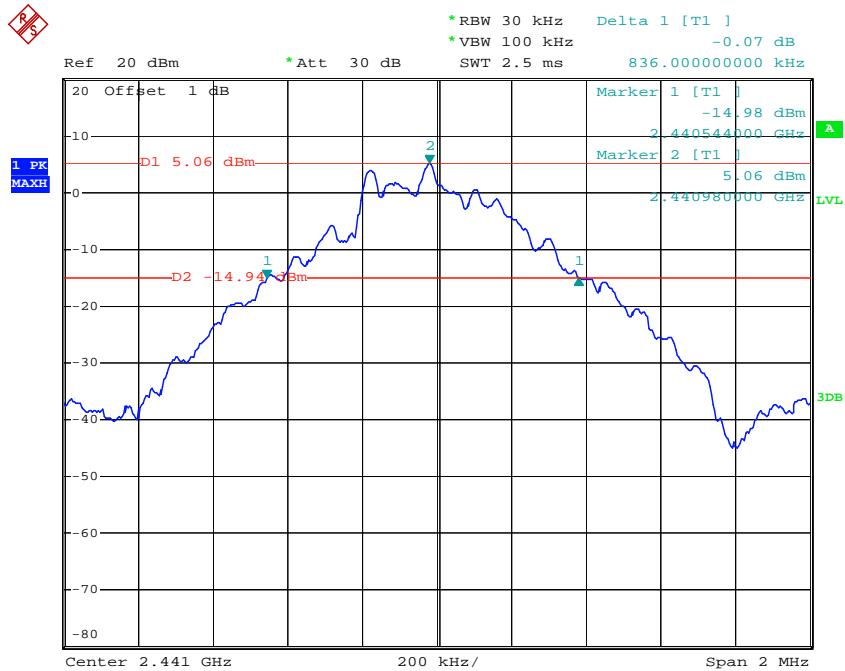
Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	0.832
	Middle	2441	0.836
	High	2480	0.840
EDR Mode ($\pi/4$ -DQPSK):	Low	2402	1.206
	Middle	2441	1.206
	High	2480	1.218
EDR Mode (8-DPSK):	Low	2402	1.206
	Middle	2441	1.206
	High	2480	1.212

BDR Mode (GFSK):

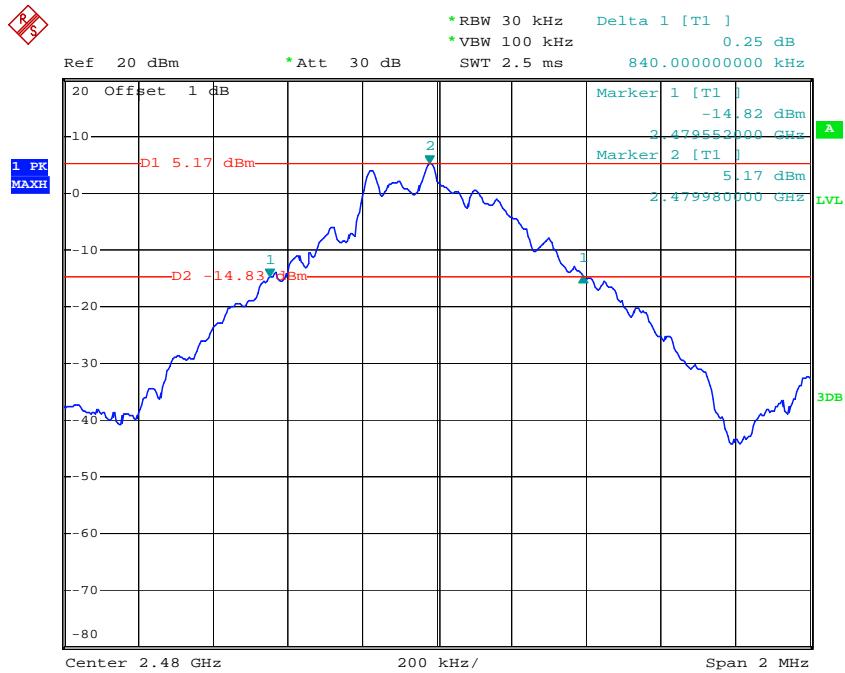
Low Channel



Date: 18.AUG.2016 09:59:18

Middle Channel

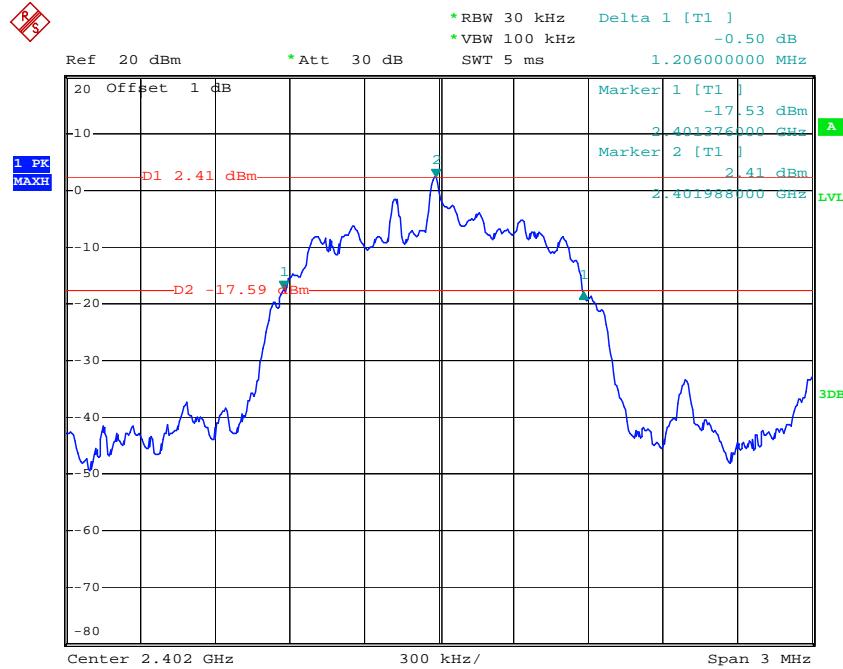
Date: 18.AUG.2016 10:00:30

High Channel

Date: 18.AUG.2016 10:01:29

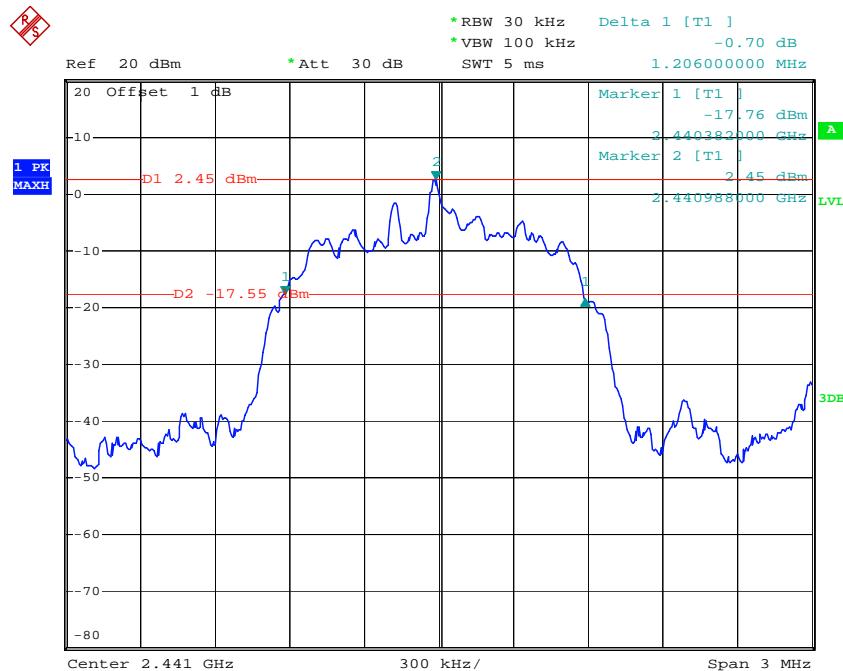
EDR Mode ($\pi/4$ -DQPSK):

Low Channel

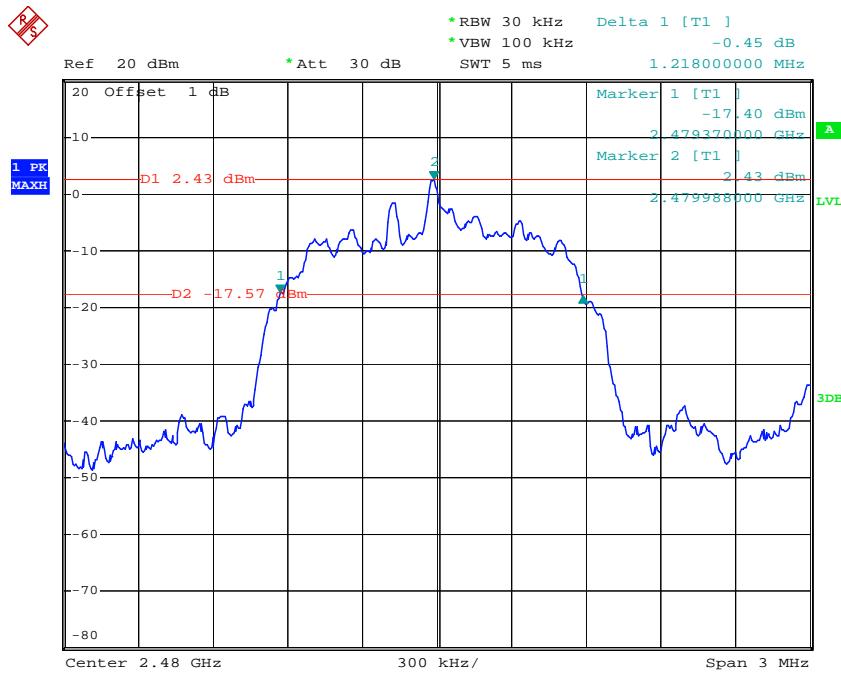


Date: 18.AUG.2016 10:05:38

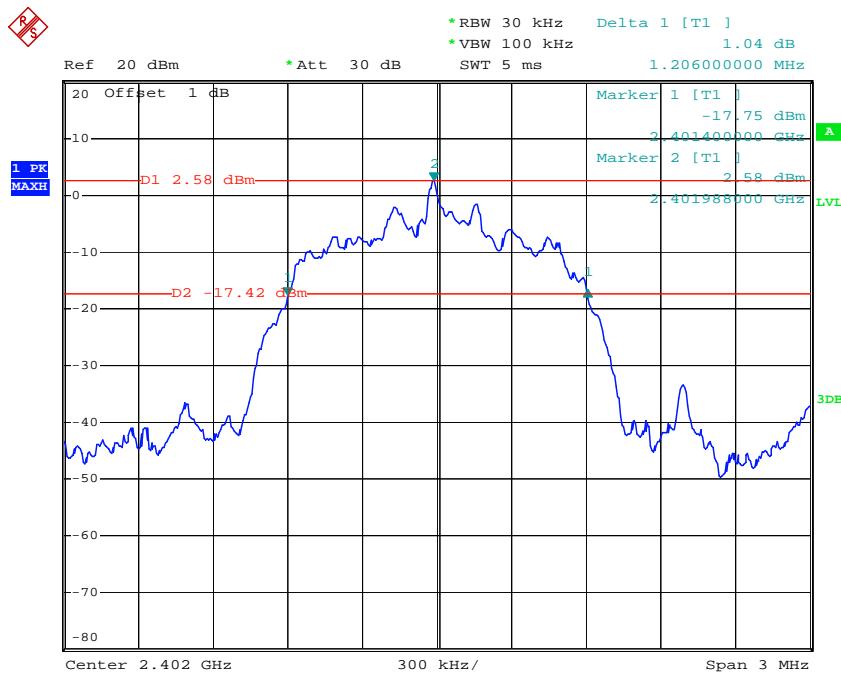
Middle Channel



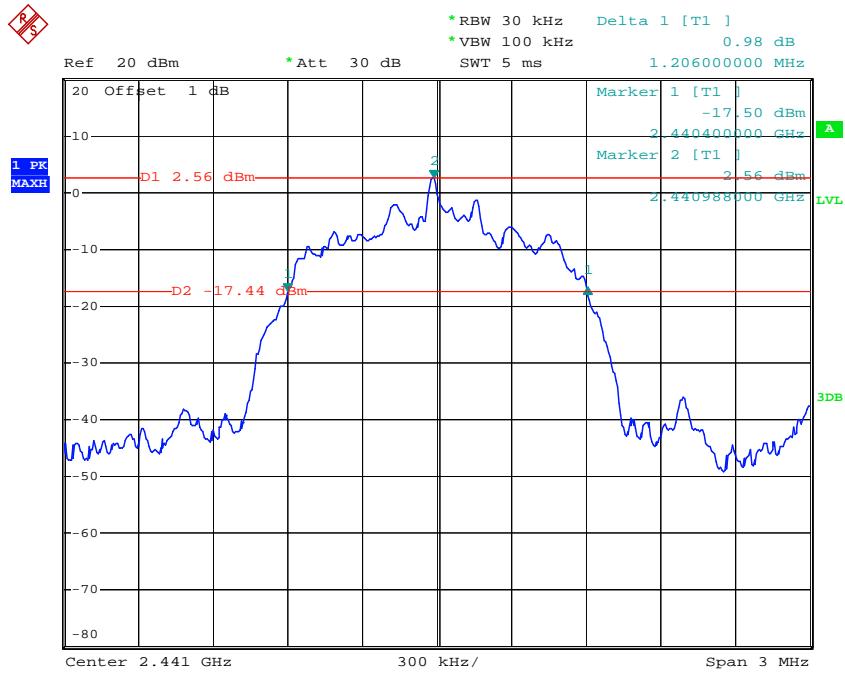
Date: 18.AUG.2016 10:04:31

High Channel

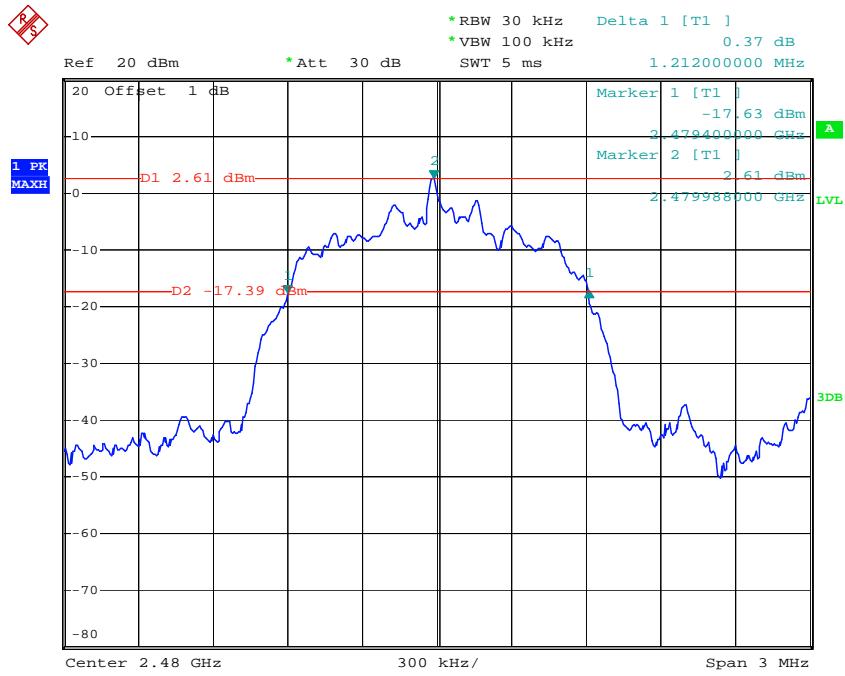
Date: 18.AUG.2016 10:03:11

*EDR Mode (8-DPSK):***Low Channel**

Date: 18.AUG.2016 10:07:19

Middle Channel

Date: 18.AUG.2016 10:08:42

High Channel

Date: 18.AUG.2016 10:09:41

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2016-05-09	2017-05-09
N/A	Coaxial Cable	0.1m	N/A	2016-05-06	2017-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2016-05-06	2017-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	28.9°C
Relative Humidity:	51 %
ATM Pressure:	98.9kPa

* The testing was performed by Gavin Xu on 2016-08-18.

Test Result: Compliance.

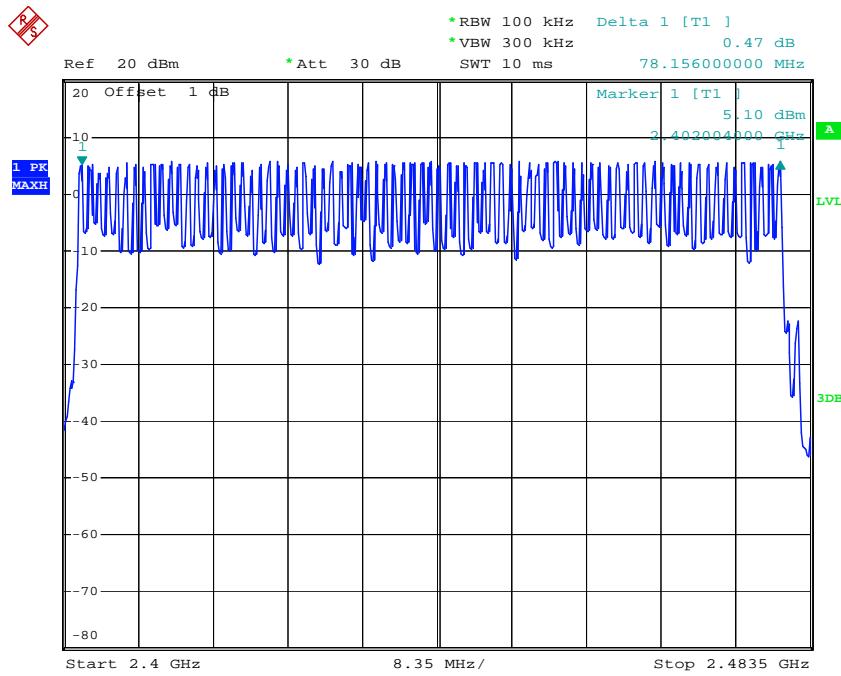
Please refer to following tables and plots

Test Mode: Transmitting

BDR Mode (GFSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

Number of Hopping Channels

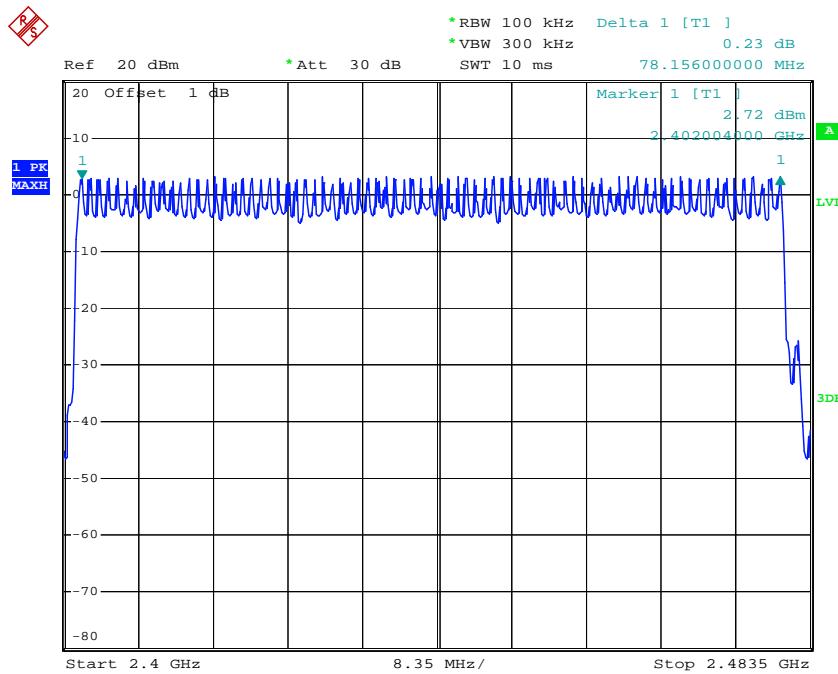


Date: 18.AUG.2016 10:24:28

EDR Mode ($\pi/4$ -DQPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥ 15

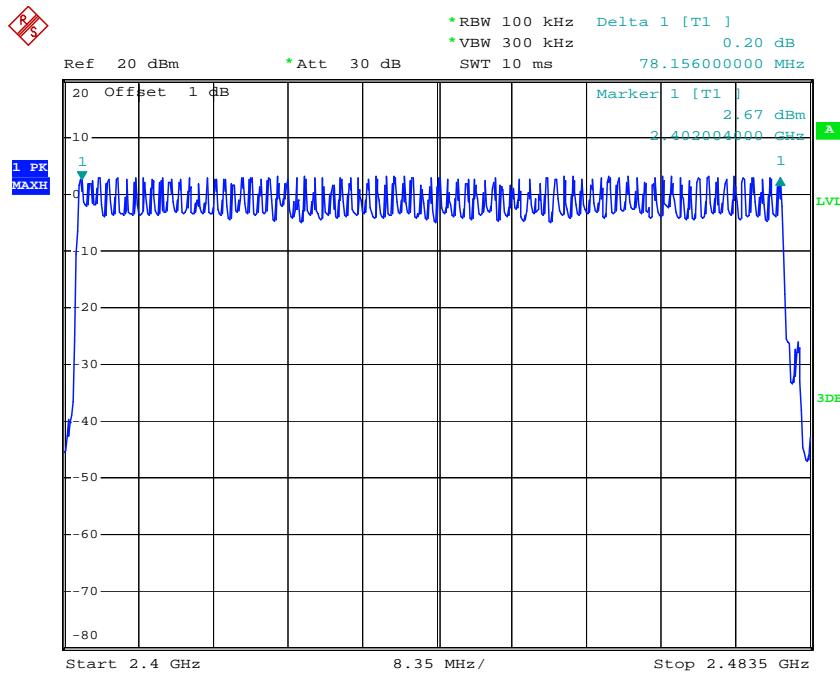
Number of Hopping Channels



EDR Mode (8-DPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

Number of Hopping Channels



Date: 18.AUG.2016 10:33:05

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 * channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= time slot length * hope rate/ number of hopping channels * 31.6s
Hop rate=1600/s

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2016-05-09	2017-05-09
N/A	Coaxial Cable	0.1m	N/A	2016-05-06	2017-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2016-05-06	2017-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	28.9°C
Relative Humidity:	51 %
ATM Pressure:	98.9 kPa

* The testing was performed by Gavin Xu on 2016-08-18.

Test Result: Compliance.

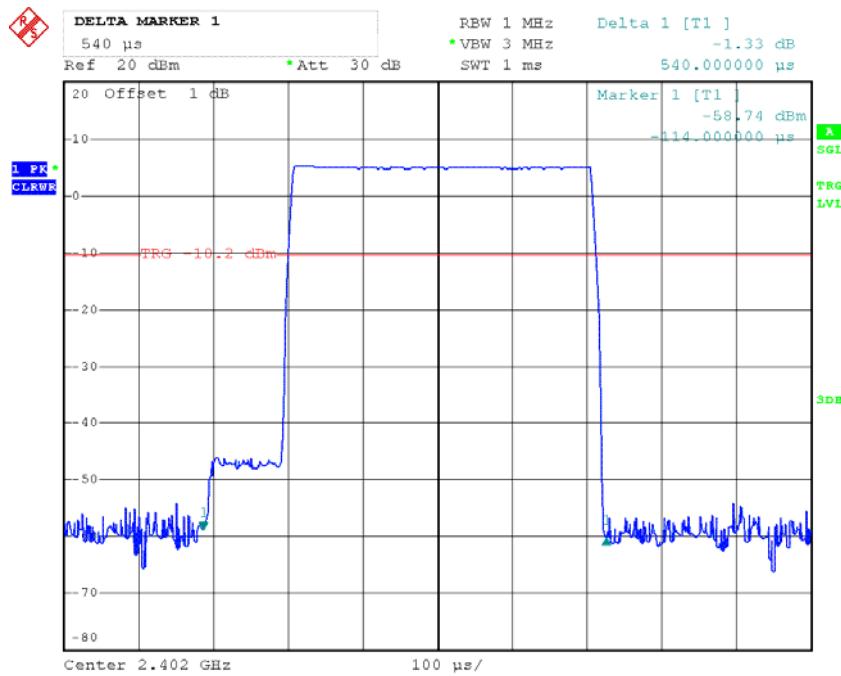
Please refer to following tables and plots

Test Mode: Transmitting

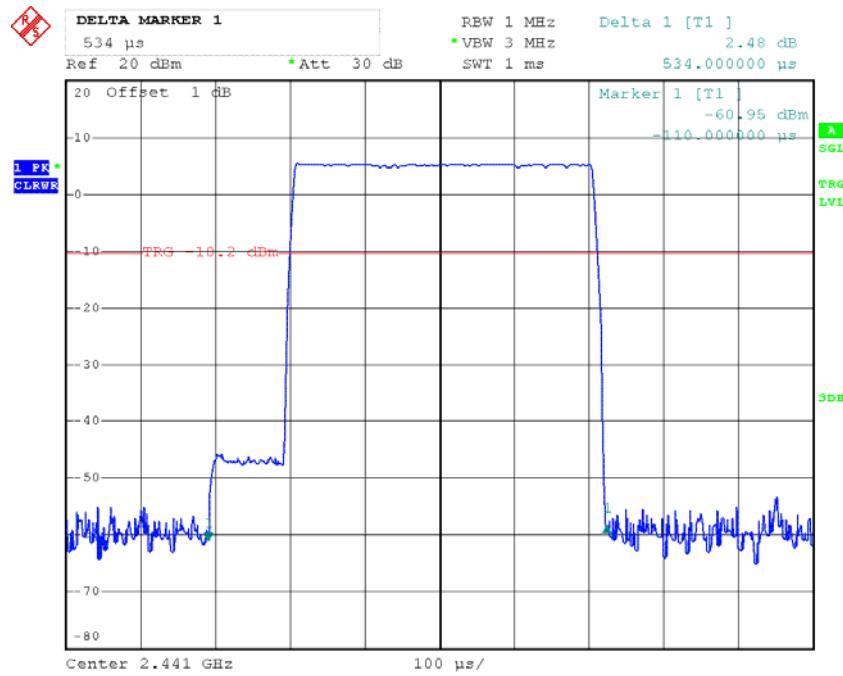
BDR Mode (GFSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH1	Low	0.540	0.173	0.4	Compliance
	Middle	0.534	0.171	0.4	Compliance
	High	0.536	0.172	0.4	Compliance
Note: Dwell time=Pulse time (ms) × (1600/2/79) ×31.6 s					
DH3	Low	1.820	0.291	0.4	Compliance
	Middle	1.802	0.288	0.4	Compliance
	High	1.808	0.289	0.4	Compliance
Note: Dwell time=Pulse time (ms) × (1600/4/79) ×31.6 s					
DH5	Low	3.06	0.326	0.4	Compliance
	Middle	3.06	0.326	0.4	Compliance
	High	3.07	0.327	0.4	Compliance
Note: Dwell time=Pulse time (ms) × (1600/6/79) ×31.6 s					

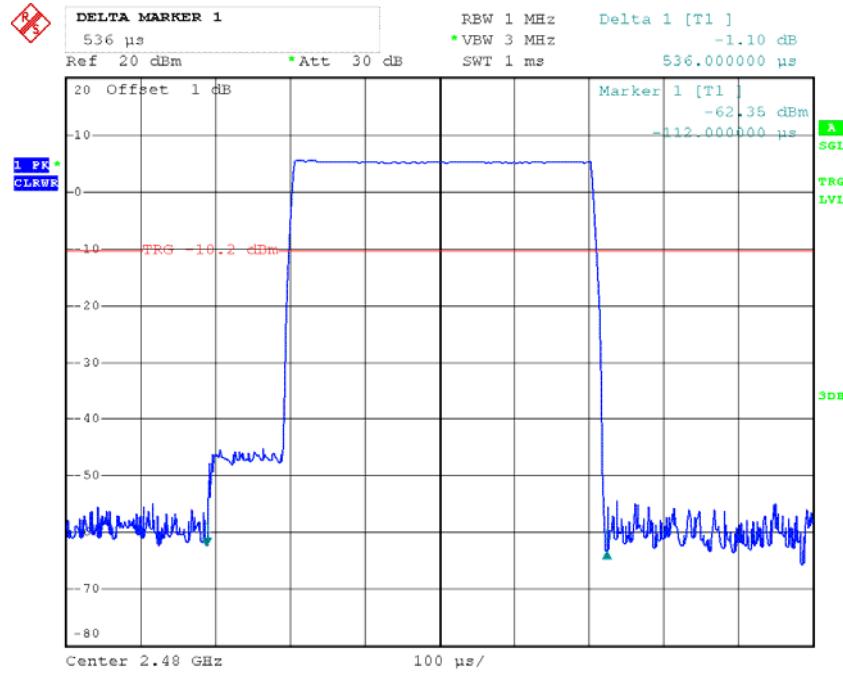
DH1: Low Channel



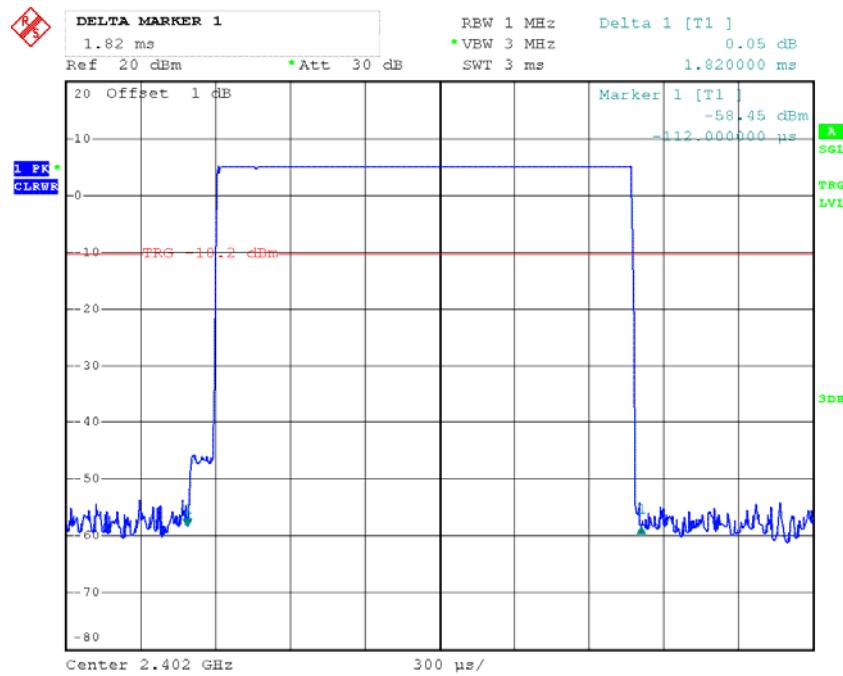
Date: 18.AUG.2016 10:46:01

DH1: Middle Channel

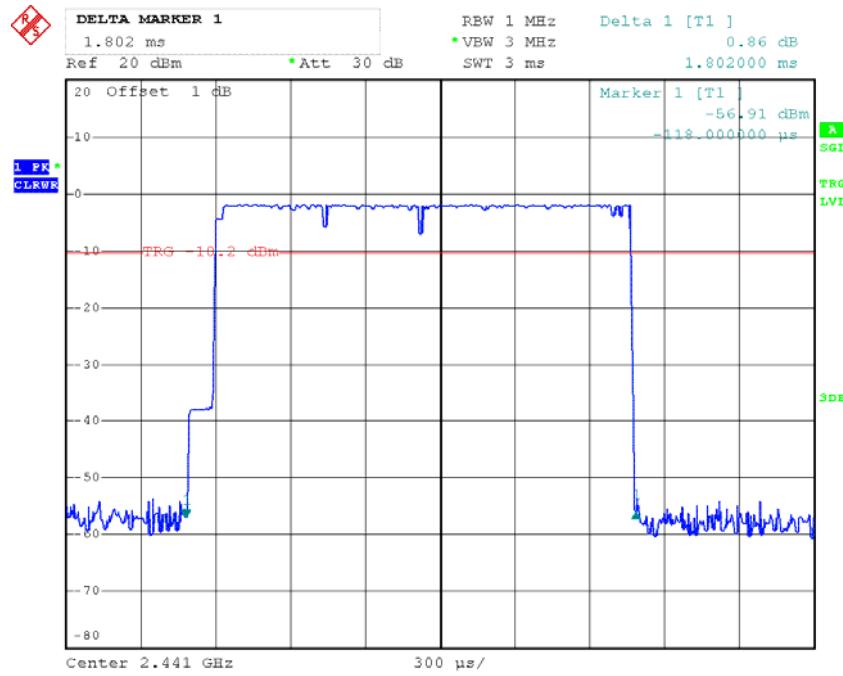
Date: 18.AUG.2016 10:46:14

DH1: High Channel

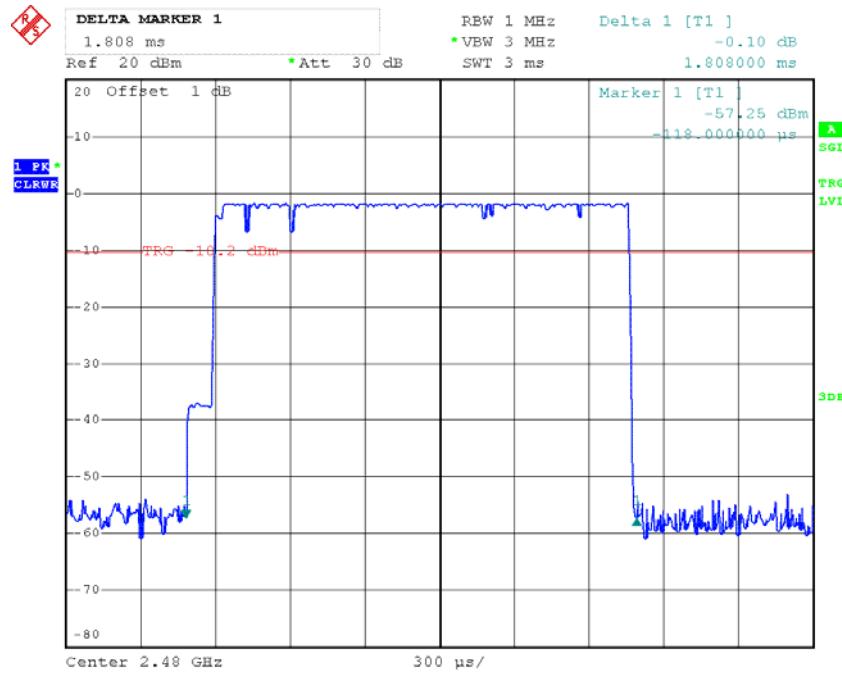
Date: 18.AUG.2016 10:46:24

DH3: Low Channel

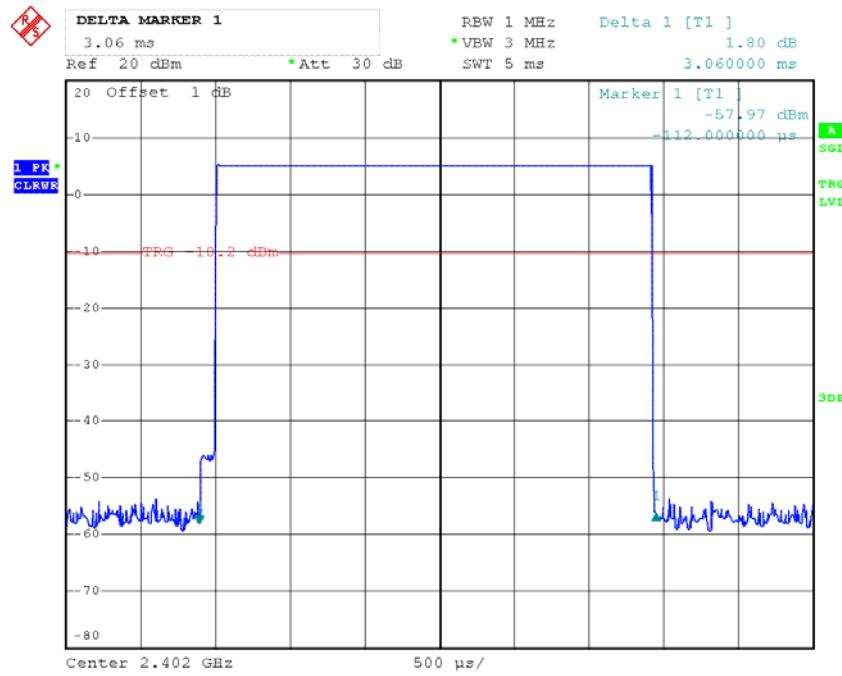
Date: 18.AUG.2016 10:47:58

DH3: Middle Channel

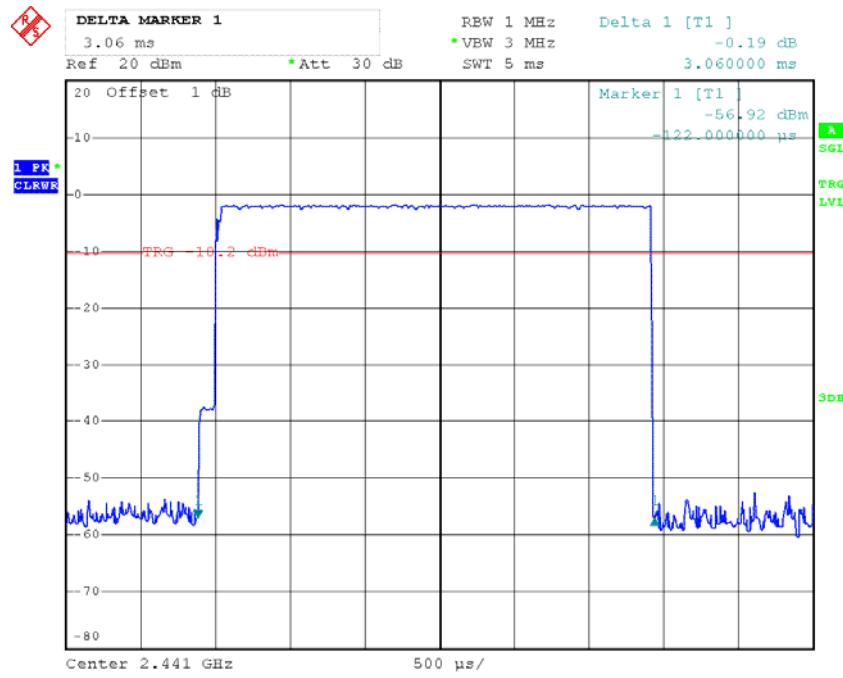
Date: 18.AUG.2016 10:47:33

DH3: High Channel

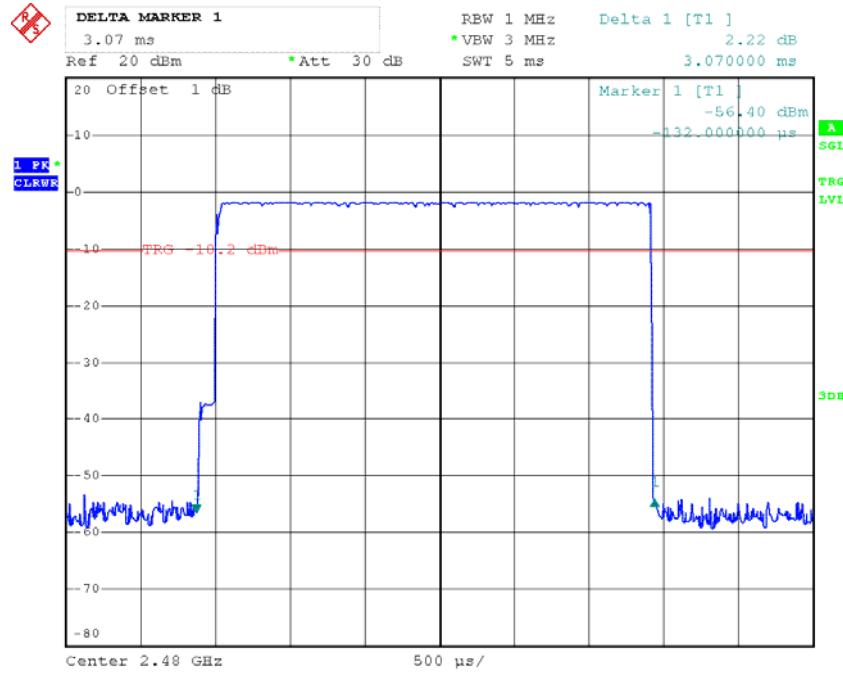
Date: 18.AUG.2016 10:47:01

DH5: Low Channel

Date: 18.AUG.2016 10:48:36

DH5: Middle Channel

Date: 18.AUG.2016 10:48:52

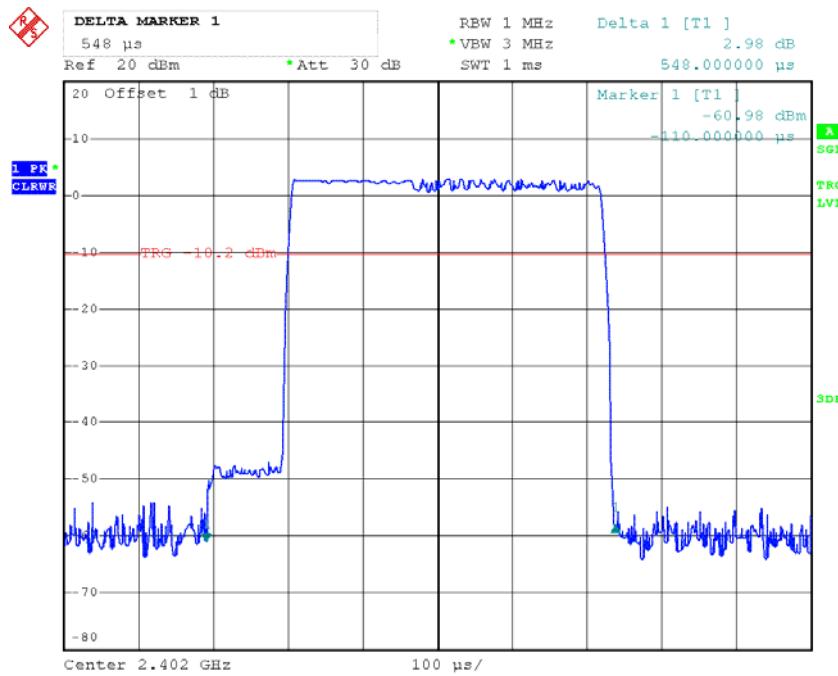
DH5: High Channel

Date: 18.AUG.2016 10:49:02

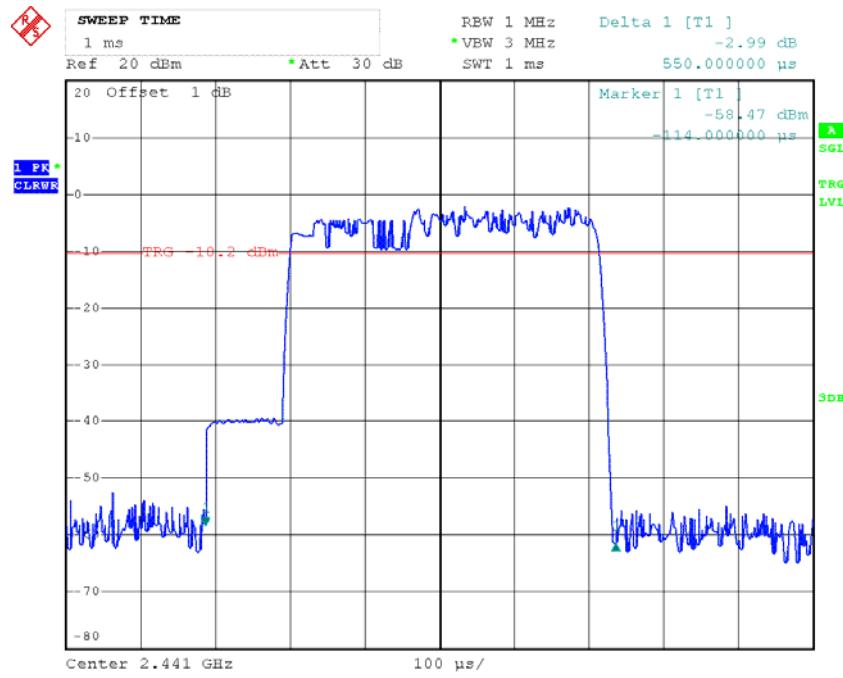
EDR Mode ($\pi/4$ -DQPSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
2DH1	Low	0.548	0.175	0.4	Compliance
	Middle	0.55	0.176	0.4	Compliance
	High	0.55	0.176	0.4	Compliance
	Note: Dwell time=Pulse time (ms) \times (1600/2/79) \times 31.6 s				
2DH3	Low	1.832	0.293	0.4	Compliance
	Middle	1.814	0.290	0.4	Compliance
	High	1.82	0.291	0.4	Compliance
	Note: Dwell time=Pulse time (ms) \times (1600/4/79) \times 31.6 s				
2DH5	Low	3.07	0.327	0.4	Compliance
	Middle	3.07	0.327	0.4	Compliance
	High	3.07	0.327	0.4	Compliance
	Note: Dwell time=Pulse time (ms) \times (1600/6/79) \times 31.6 s				

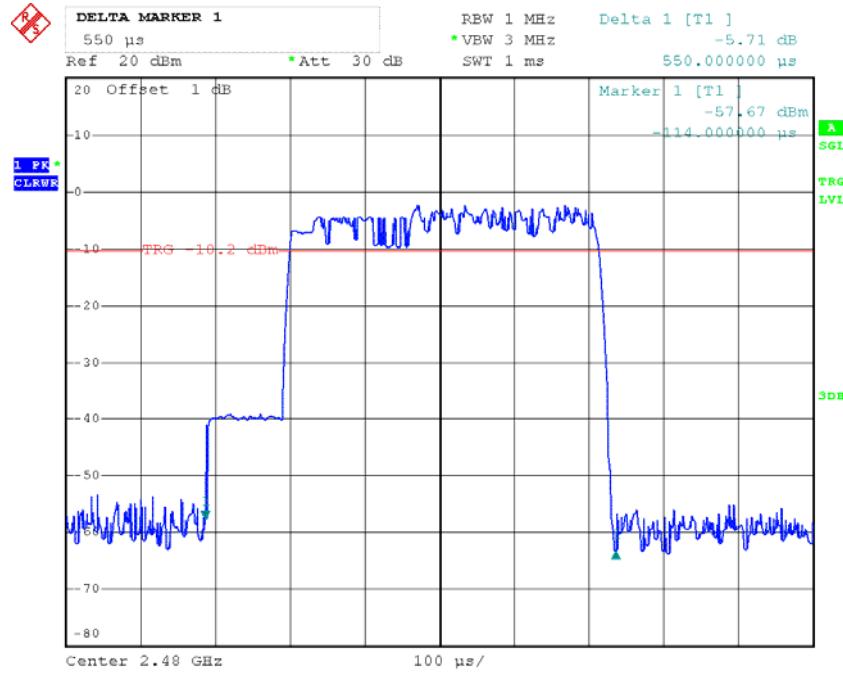
2DH1: Low Channel



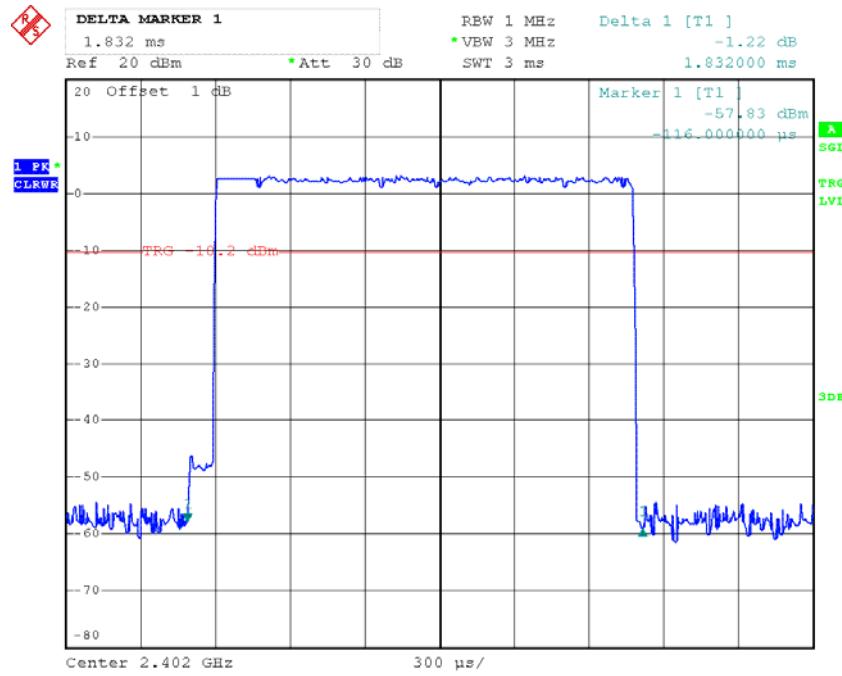
Date: 18.AUG.2016 10:43:04

2DH1: Middle Channel

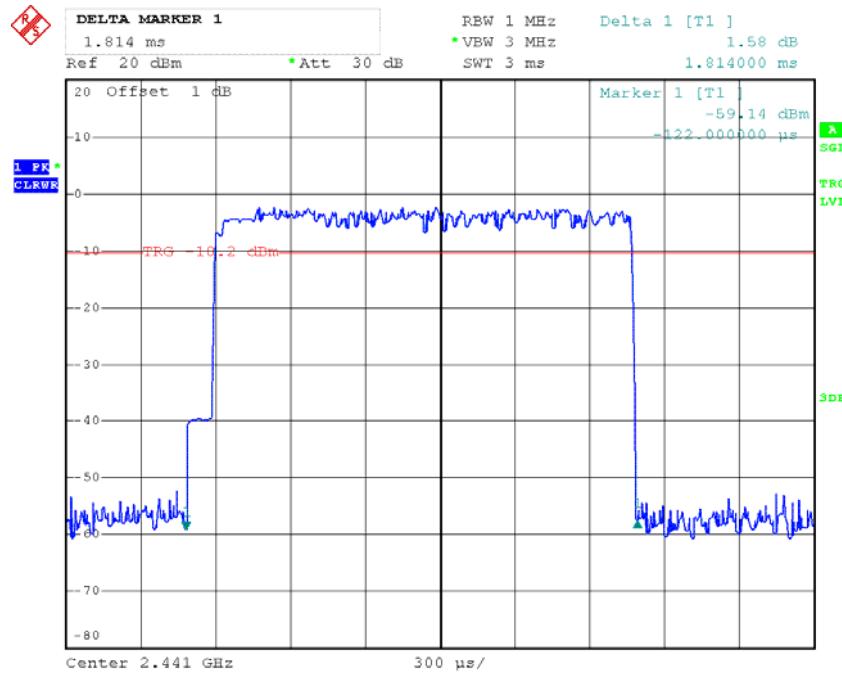
Date: 18.AUG.2016 10:42:52

2DH1: High Channel

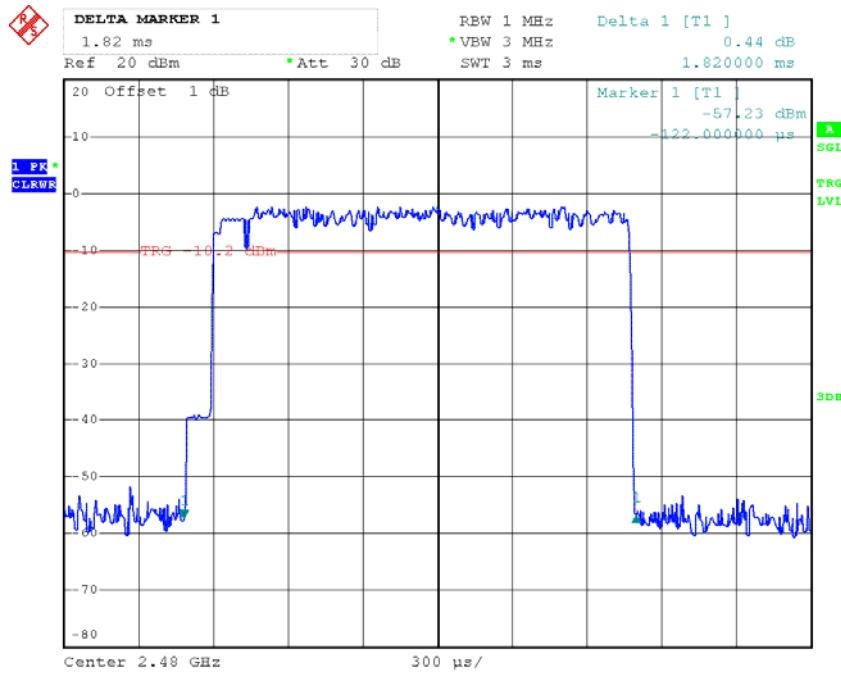
Date: 18.AUG.2016 10:42:39

2DH3: Low Channel

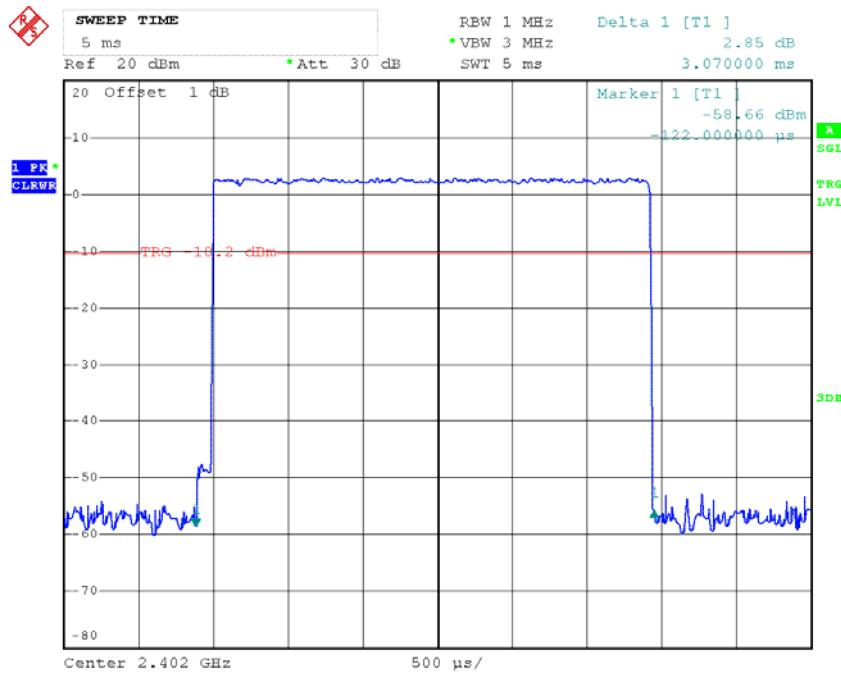
Date: 18.AUG.2016 10:43:40

2DH3: Middle Channel

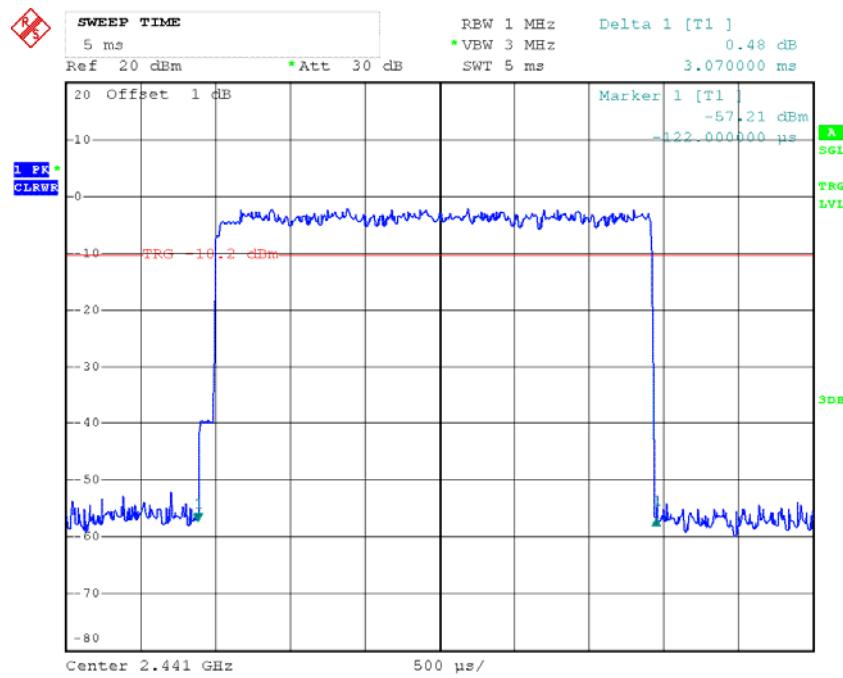
Date: 18.AUG.2016 10:43:52

2DH3: High Channel

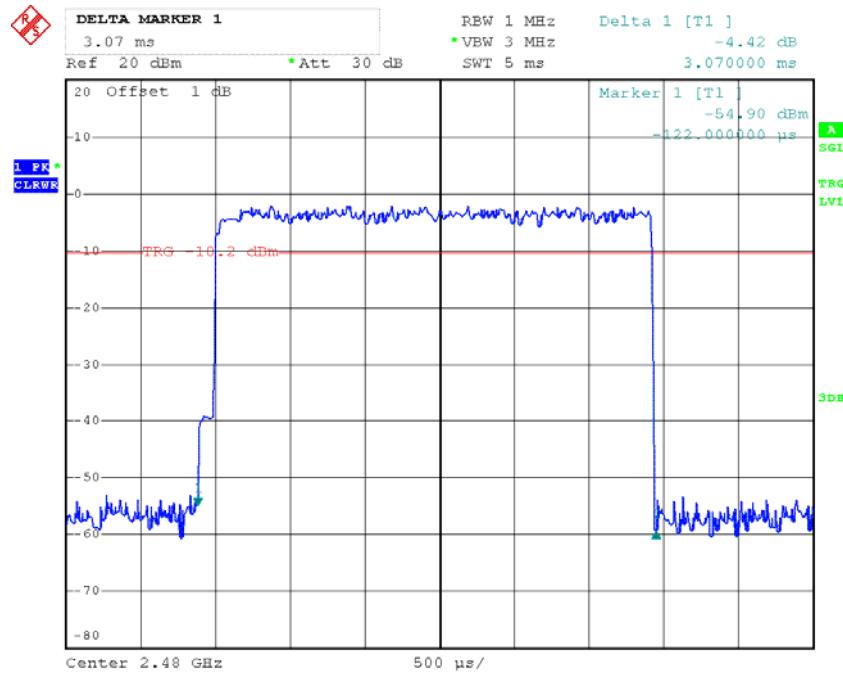
Date: 18.AUG.2016 10:44:05

2DH5: Low Channel

Date: 18.AUG.2016 10:45:08

2DH5: Middle Channel

Date: 18.AUG.2016 10:44:52

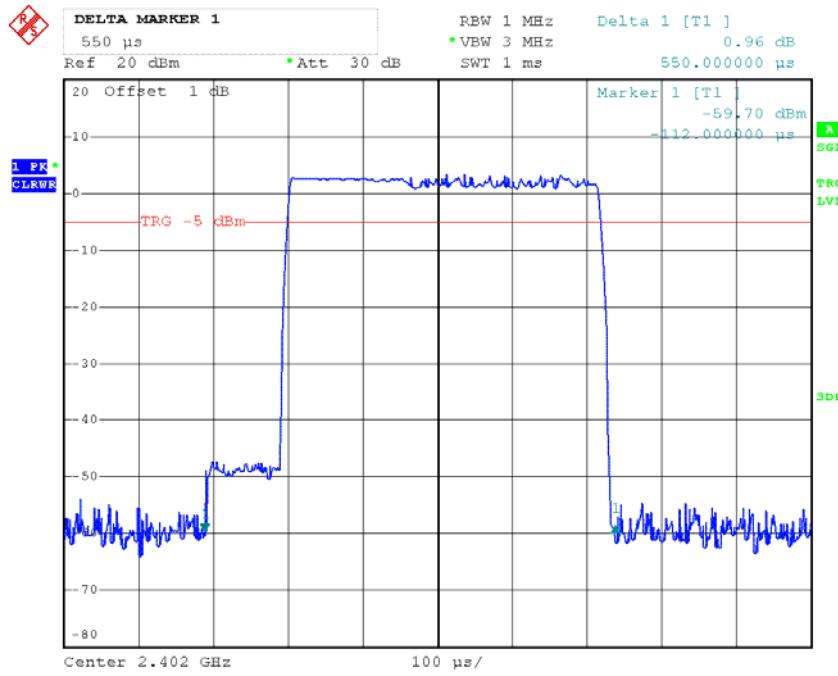
2DH5: High Channel

Date: 18.AUG.2016 10:44:46

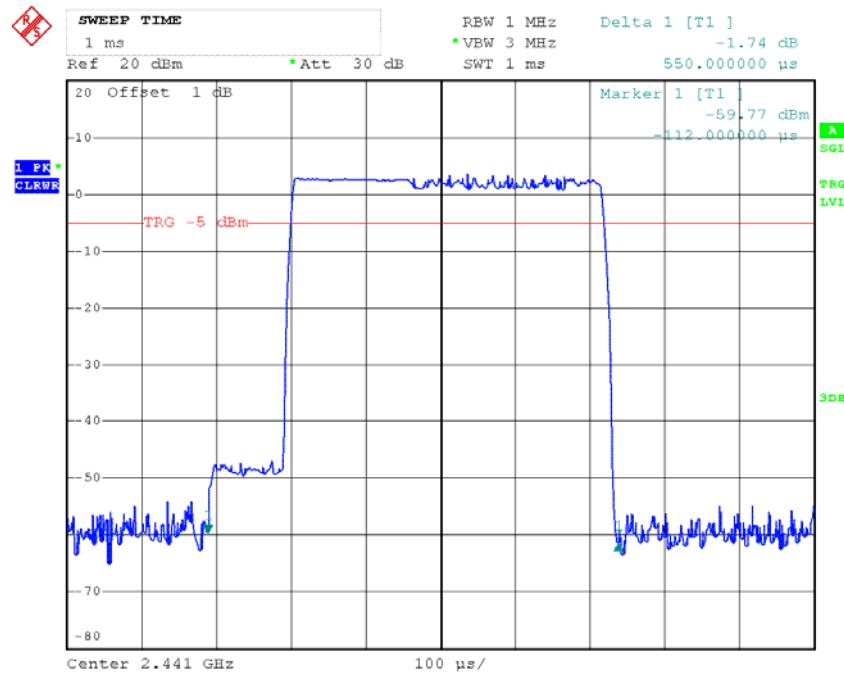
EDR Mode (8-DPSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
3DH1	Low	0.550	0.176	0.4	Compliance
	Middle	0.550	0.176	0.4	Compliance
	High	0.548	0.175	0.4	Compliance
Note: Dwell time=Pulse time (ms) × (1600/2/79) ×31.6 s					
3DH3	Low	1.808	0.289	0.4	Compliance
	Middle	1.814	0.290	0.4	Compliance
	High	1.814	0.290	0.4	Compliance
Note: Dwell time=Pulse time (ms) × (1600/4/79) ×31.6 s					
3DH5	Low	3.068	0.327	0.4	Compliance
	Middle	3.088	0.329	0.4	Compliance
	High	3.068	0.327	0.4	Compliance
Note: Dwell time=Pulse time (ms) × (1600/6/79) ×31.6 s					

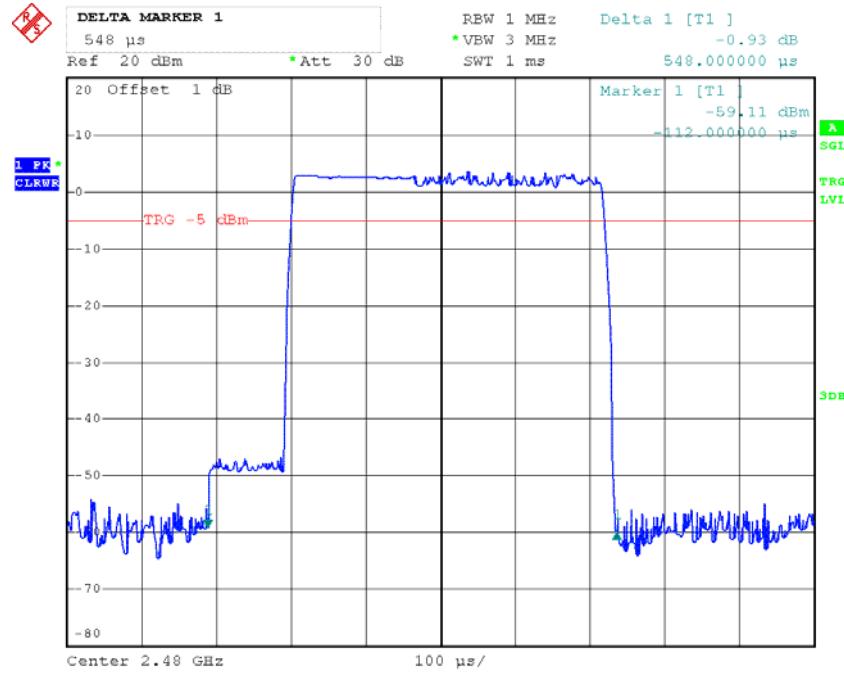
3DH1: Low Channel



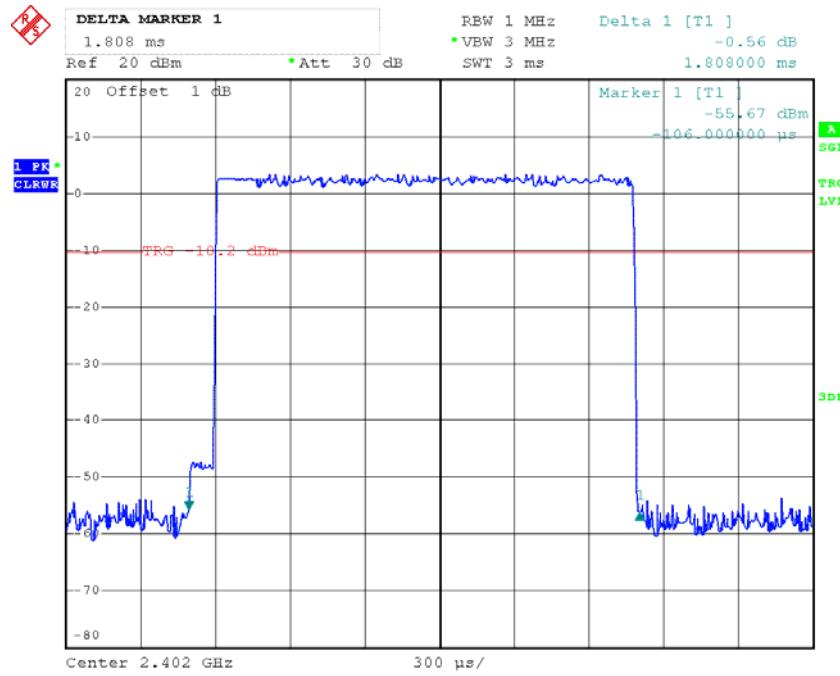
Date: 18.AUG.2016 10:36:31

3DH1: Middle Channel

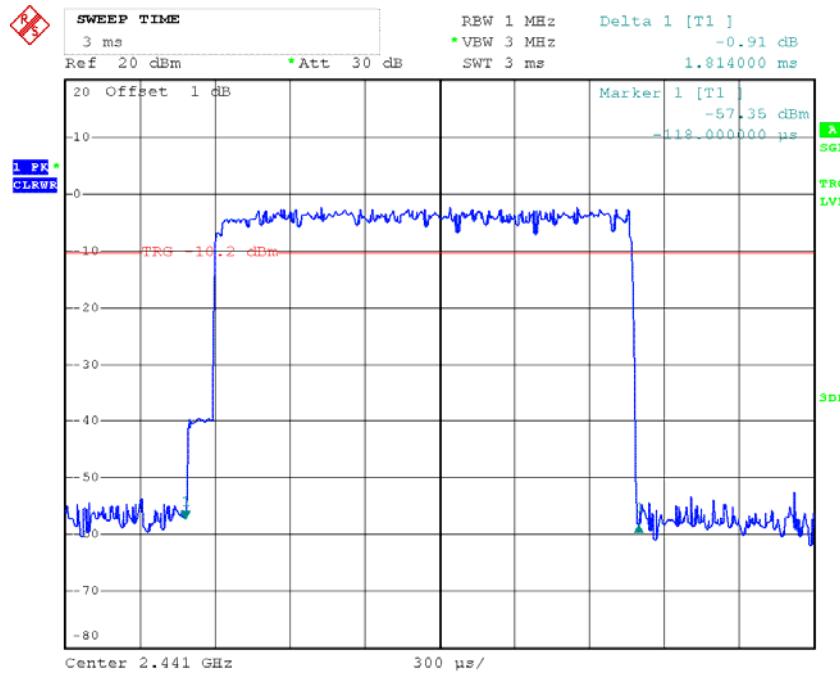
Date: 18.AUG.2016 10:36:44

3DH1: High Channel

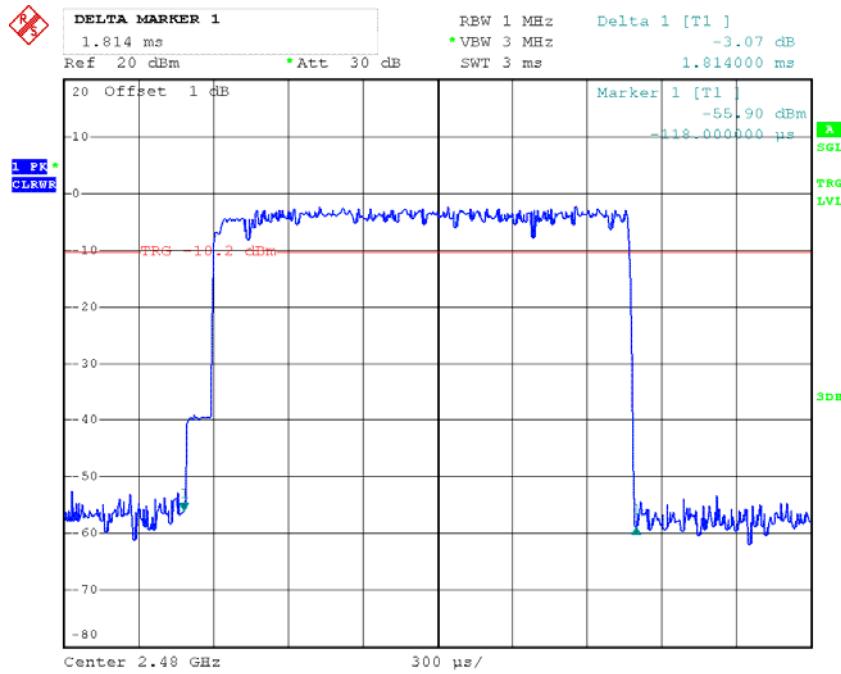
Date: 18.AUG.2016 10:37:13

3DH3: Low Channel

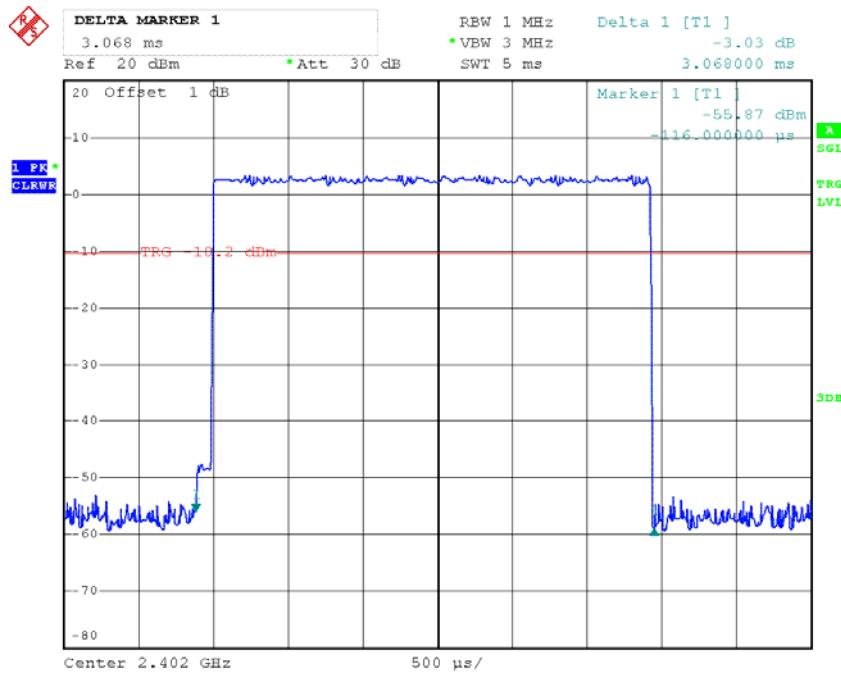
Date: 18.AUG.2016 10:40:15

3DH3: Middle Channel

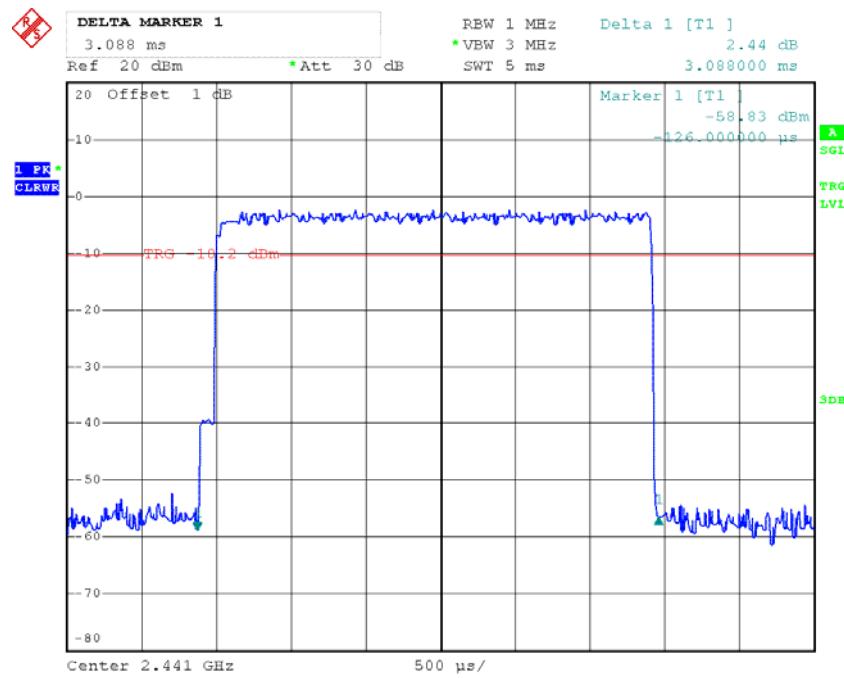
Date: 18.AUG.2016 10:40:01

3DH3: High Channel

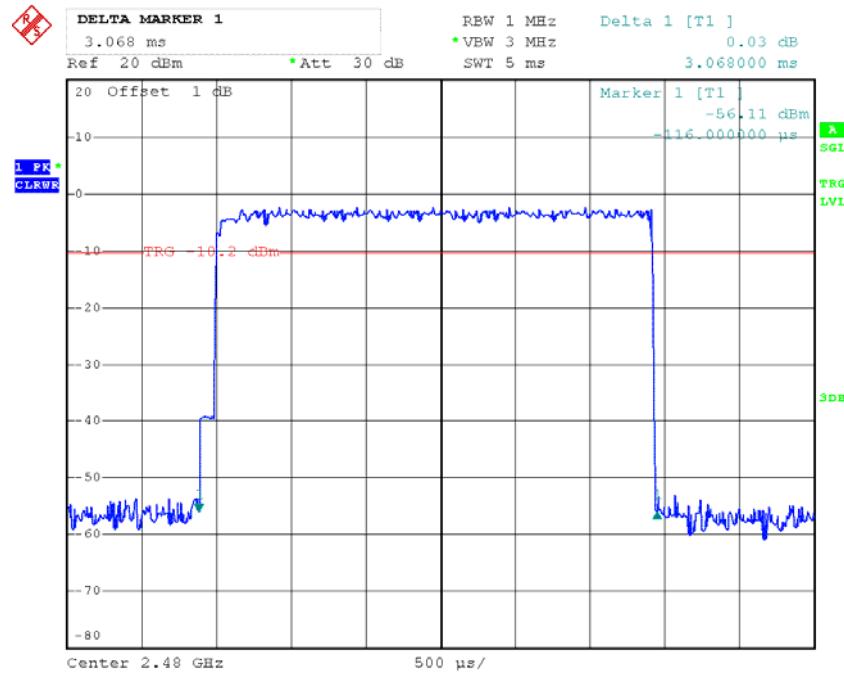
Date: 18.AUG.2016 10:39:53

3DH5: Low Channel

Date: 18.AUG.2016 10:40:57

3DH5: Middle Channel

Date: 18.AUG.2016 10:41:09

3DH5: High Channel

Date: 18.AUG.2016 10:41:23

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2016-05-09	2017-05-09
N/A	Coaxial Cable	0.1m	N/A	2016-05-06	2017-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2016-05-06	2017-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	28.9°C
Relative Humidity:	51 %
ATM Pressure:	98.9 kPa

* The testing was performed by Gavin Xu on 2016-08-18.

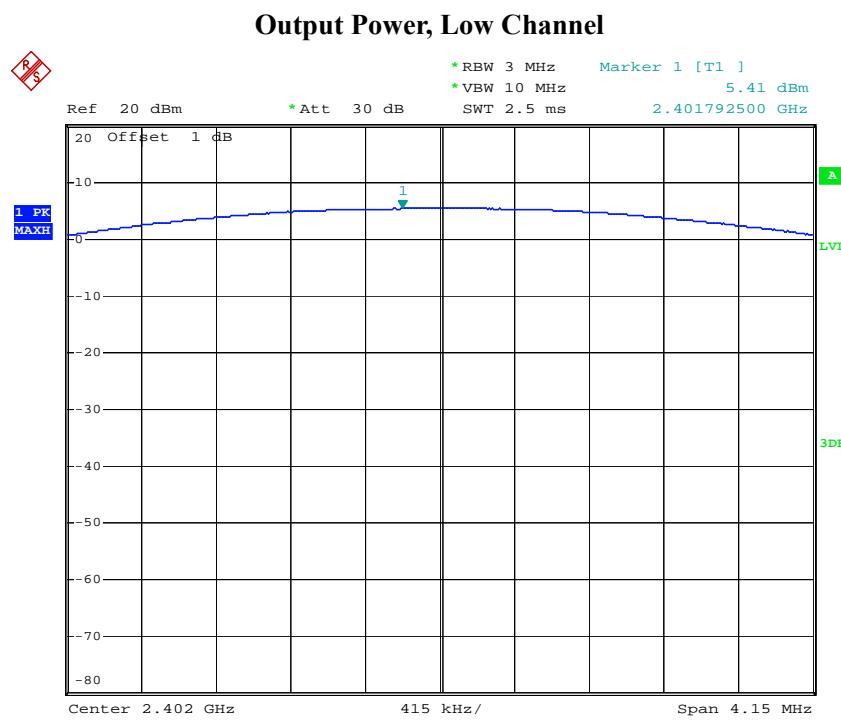
Test Result: Compliance.

Test Mode: Transmitting

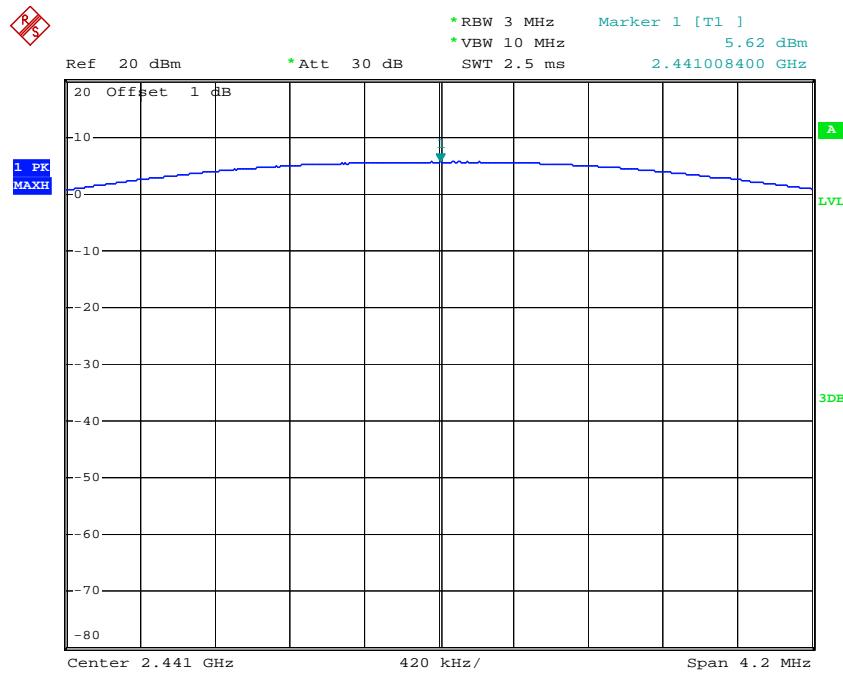
Mode	Channel	Frequency (MHz)	Output power (dBm)	Limit (dBm)
BDR Mode (GFSK)	Low	2402	5.41	30
	Middle	2441	5.62	30
	High	2480	5.66	30
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	3.70	30
	Middle	2441	3.76	30
	High	2480	3.89	30
EDR Mode (8-DPSK)	Low	2402	4.19	30
	Middle	2441	4.31	30
	High	2480	4.31	30

Note: The data above was tested in conducted mode.

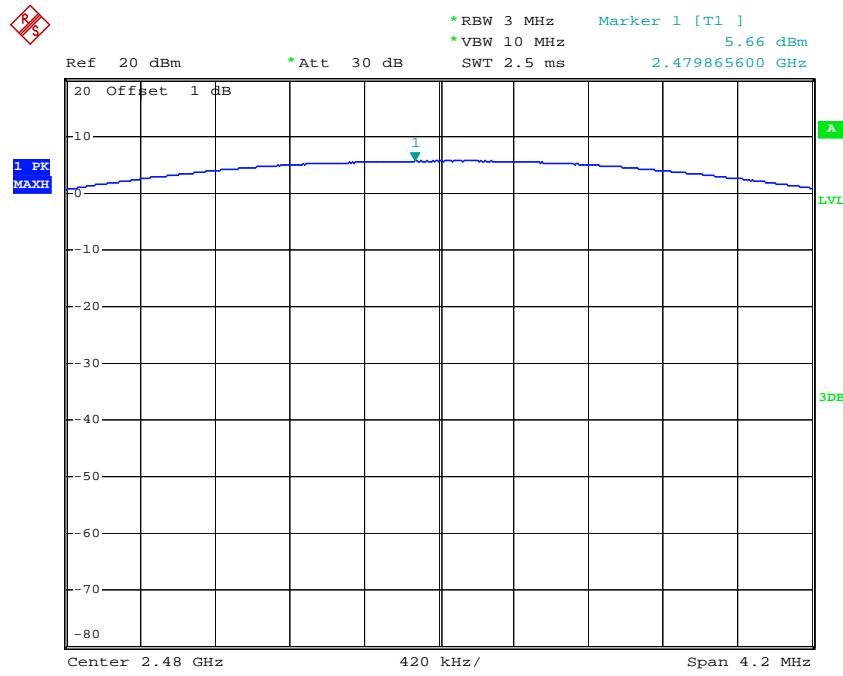
BDR Mode (GFSK):



Date: 18.AUG.2016 09:59:44

Output Power, Middle Channel

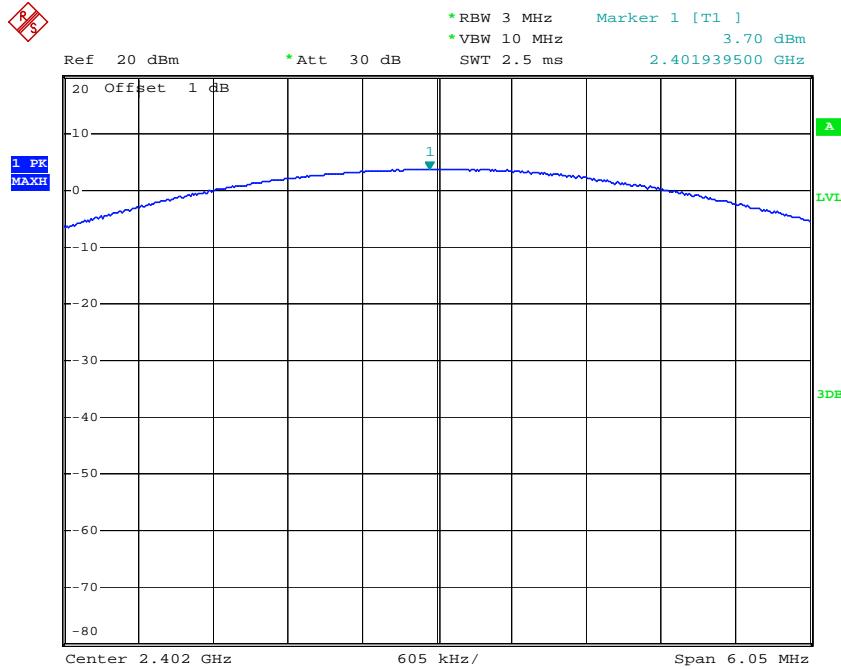
Date: 18.AUG.2016 10:00:57

Output Power, High Channel

Date: 18.AUG.2016 10:01:54

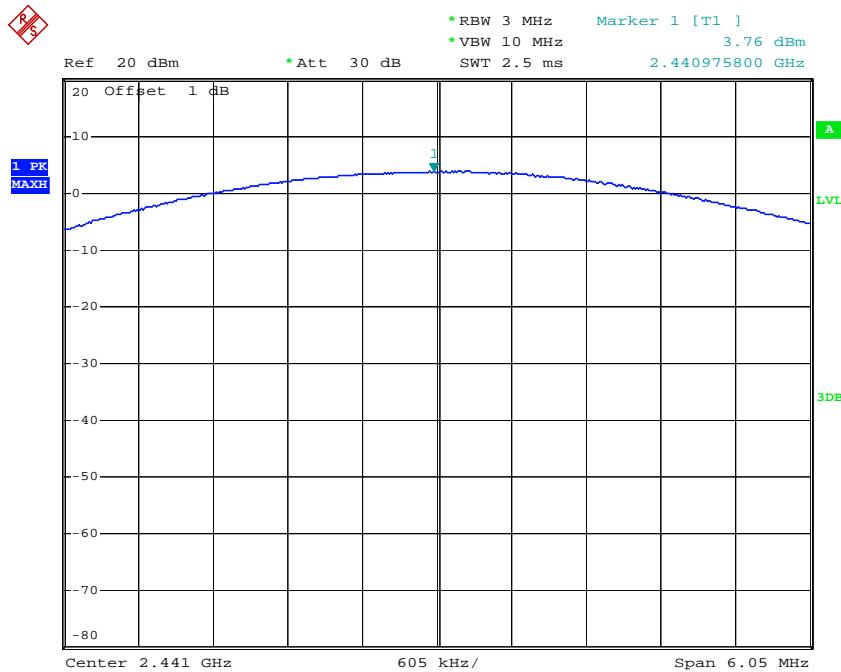
EDR Mode ($\pi/4$ -DQPSK):

Output Power, Low Channel

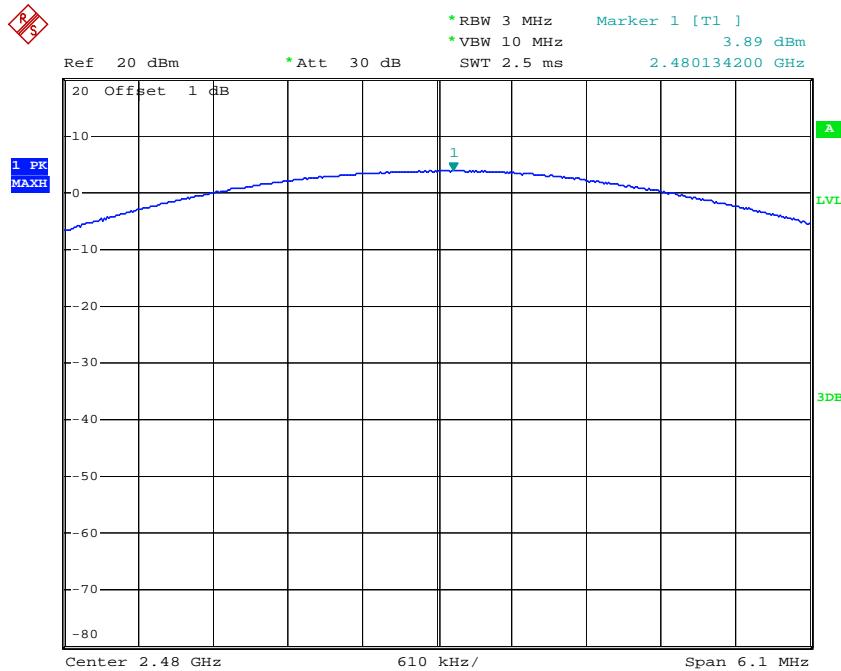


Date: 18.AUG.2016 10:06:01

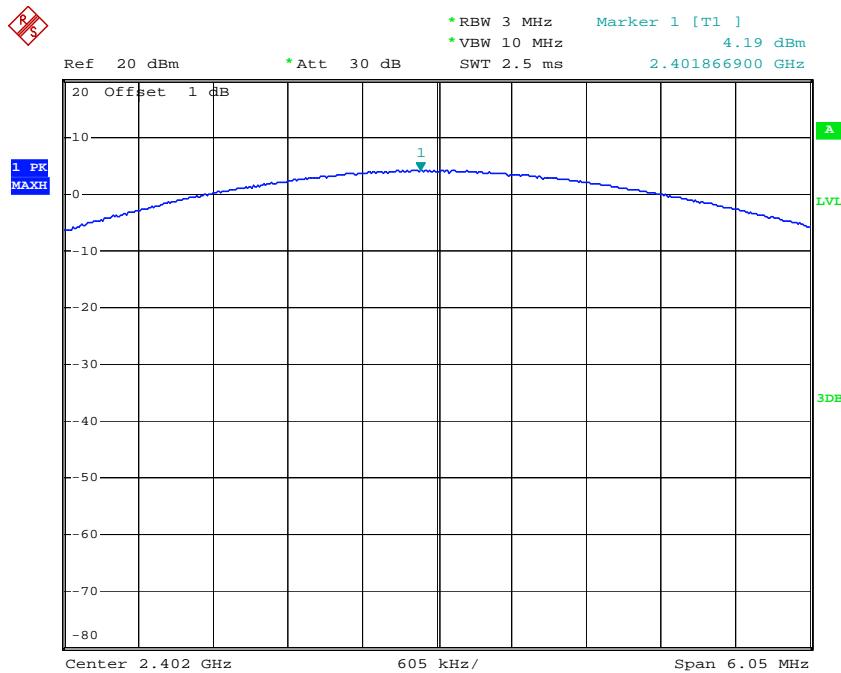
Output Power, Middle Channel



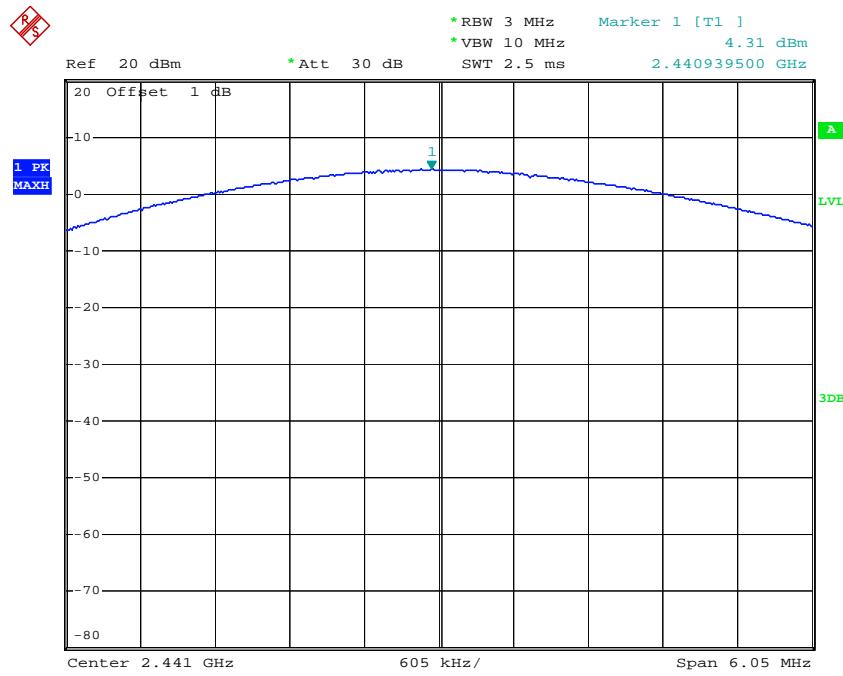
Date: 18.AUG.2016 10:04:55

Output Power, High Channel

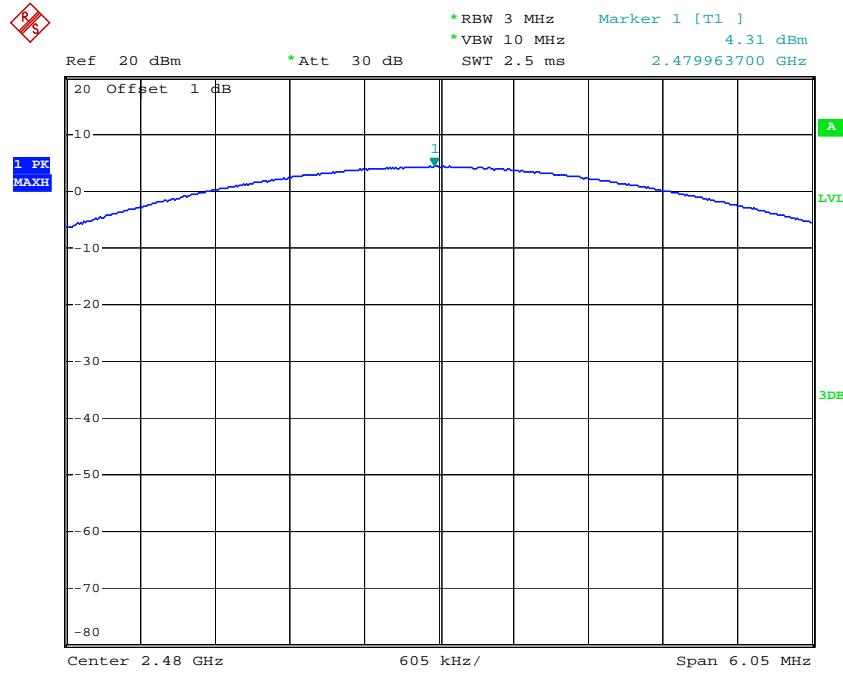
Date: 18.AUG.2016 10:03:34

*EDR Mode (8-DPSK):***Output Power, Low Channel**

Date: 18.AUG.2016 10:07:43

Output Power, Middle Channel

Date: 18.AUG.2016 10:09:07

Output Power, High Channel

Date: 18.AUG.2016 10:10:05

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2016-05-09	2017-05-09
N/A	Coaxial Cable	0.1m	N/A	2016-05-06	2017-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2016-05-06	2017-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

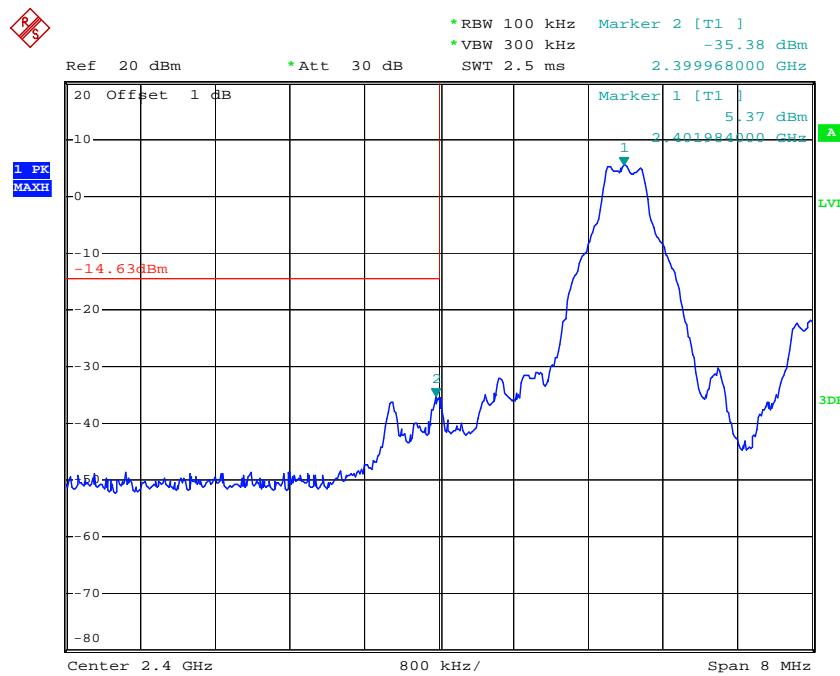
Temperature:	28.9 °C
Relative Humidity:	51 %
ATM Pressure:	98.9 kPa

* The testing was performed by Gavin Xu on 2016-08-18.

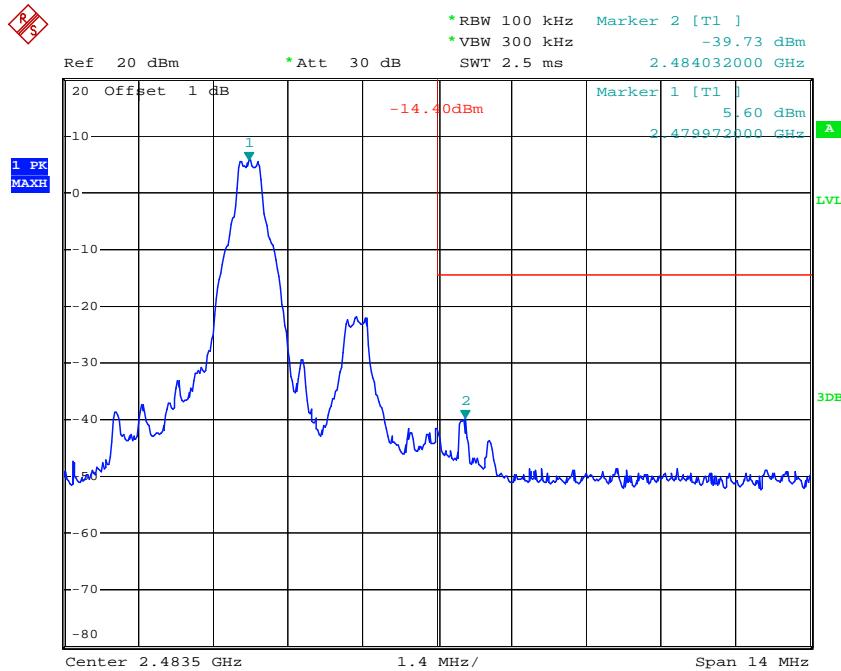
Test Result: Compliance

BDR Mode (GFSK):

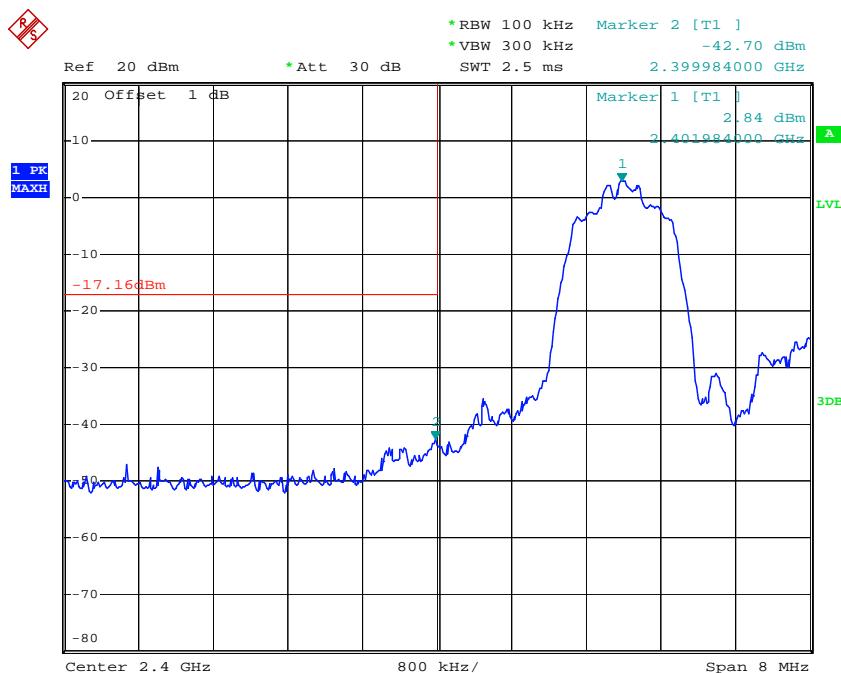
Band Edge, Left Side



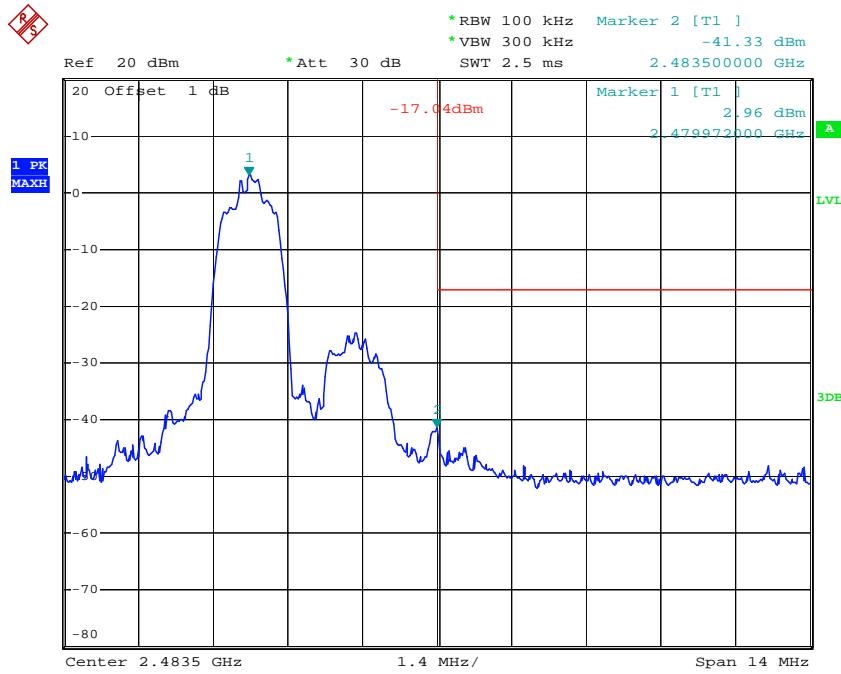
Date: 18.AUG.2016 10:00:01

Band Edge, Right Side

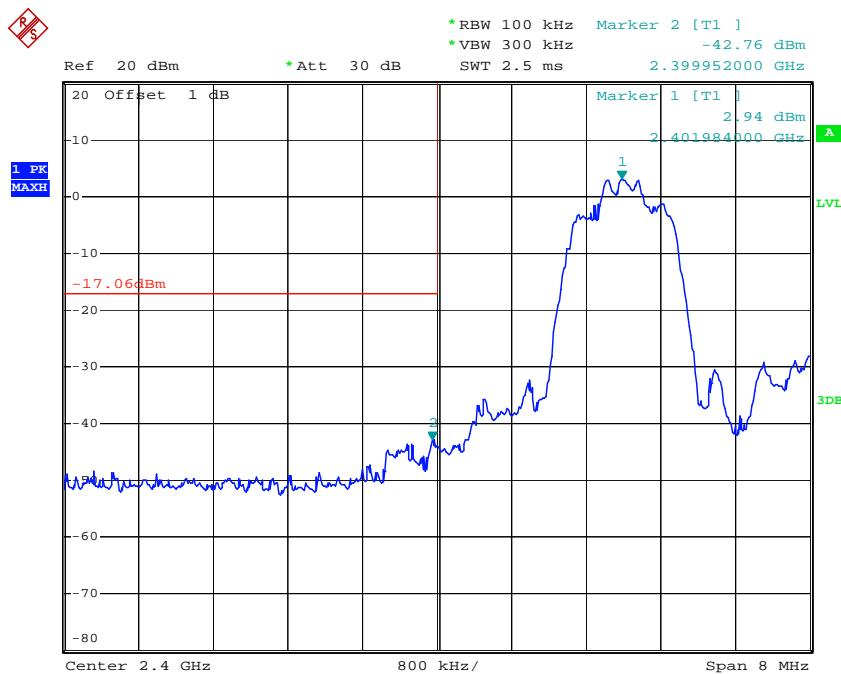
Date: 18.AUG.2016 10:02:11

*EDR Mode ($\pi/4$ -DQPSK):***Band Edge, Left Side**

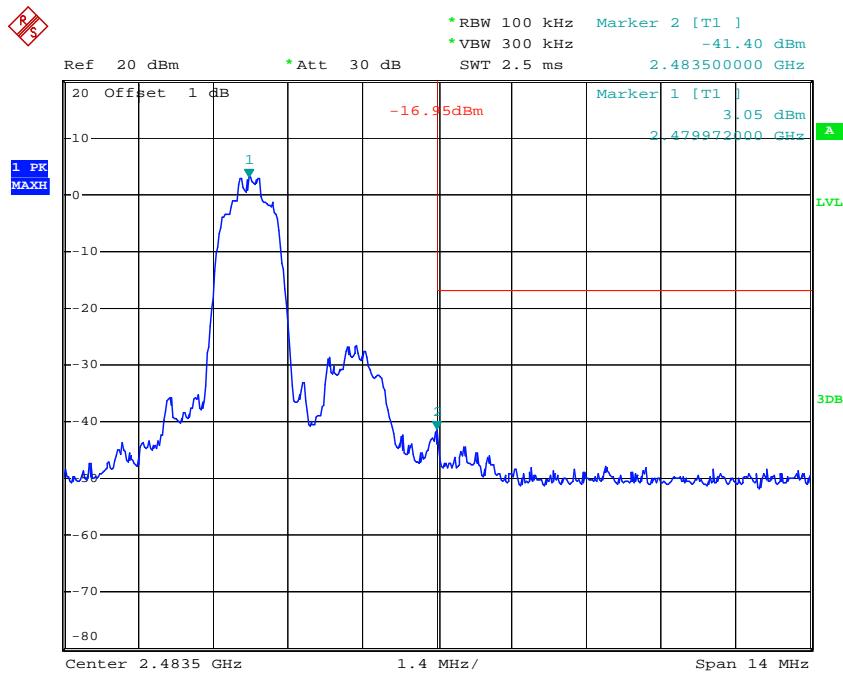
Date: 18.AUG.2016 10:06:24

Band Edge, Right Side

Date: 18.AUG.2016 10:03:56

EDR Mode (8-DPSK):**Band Edge, Left Side**

Date: 18.AUG.2016 10:07:59

Band Edge, Right Side

Date: 18.AUG.2016 10:10:34

******* END OF REPORT *******