

# Test report

**337322-3TRFWL**

Date of issue: July 4, 2018

Applicant:

**Redline Communications**

Product:

**Broad-band wireless infrastructure product**

Model:

**RDL-3000-RMG3**

FCC ID:

**QC8-RDL3000RMG3**

IC Registration number:

**4310A-RDL3000RMG3**

Specifications:

◆ **FCC 47 CFR Part 15 Subpart E, §15.407**

Unlicensed National Information Infrastructure Devices

◆ **RSS-247, Issue 2, Section 6, Feb 2017**

Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

Test location

---

Company name	Nemko Canada Inc.	
Address	292 Labrosse Avenue	303 River Road
City	Pointe-Claire	Ottawa
Province	QC	ON
Postal code	H9R 5L8	K1V 1H2
Country	Canada	Canada
Telephone	+1 514 694 2684	+1 613 737 9680
Facsimile	+1 514 694 3528	+1 613 737 9691
Toll free	+1 800 563 6336	+1 800 563 6336
Website	www.nemko.com	www.nemko.com
Site number	FCC: CA2041; ISED: 2040G-5 (3 m semi anechoic chamber)	FCC: CA2040; ISED: 2040A-4 (3 m semi anechoic chamber)

Tested by	Yong Huang Wireless/EMC Specialist
Reviewed by	Andrey Adelberg, Senior Wireless/EMC Specialist
Review date	July 4, 2018
Reviewer signature	

Limits of responsibility

---

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

Copyright notification

---

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

© Nemko Canada Inc.

## Table of contents

<b>Table of contents</b> .....	<b>3</b>
<b>Section 1. Report summary</b> .....	<b>4</b>
1.1 Applicant and manufacturer .....	4
1.2 Test specifications .....	4
1.3 Test methods .....	4
1.4 Statement of compliance .....	4
1.5 Exclusions .....	4
1.6 Test report revision history .....	4
<b>Section 2. Summary of test results</b> .....	<b>5</b>
2.1 FCC Part 15 Subpart C, general requirements test results .....	5
2.2 FCC Part 15 Subpart E, test results .....	5
2.3 RSS-Gen, Issue 4, test results .....	5
2.4 ISED RSS-247, Issue 2, test results .....	6
<b>Section 3. Equipment under test (EUT) details</b> .....	<b>7</b>
3.1 Sample information .....	7
3.2 EUT information .....	7
3.3 Technical information .....	7
3.4 Product description and theory of operation .....	7
3.5 EUT exercise details .....	8
3.6 EUT setup diagram .....	8
3.7 EUT sub assemblies .....	8
<b>Section 4. Engineering considerations</b> .....	<b>9</b>
4.1 Modifications incorporated in the EUT .....	9
4.2 Technical judgment .....	9
4.3 Deviations from laboratory tests procedures .....	9
<b>Section 5. Test conditions</b> .....	<b>10</b>
5.1 Atmospheric conditions .....	10
5.2 Power supply range .....	10
<b>Section 6. Measurement uncertainty</b> .....	<b>11</b>
6.1 Uncertainty of measurement .....	11
<b>Section 7. Test equipment</b> .....	<b>12</b>
7.1 Test equipment list .....	12
<b>Section 8. Testing data</b> .....	<b>13</b>
8.1 FCC 15.207(a) and RSS-Gen 8.8 AC power line conducted emissions limits .....	13
8.2 FCC 15.403(i) Emission bandwidth .....	17
8.3 RSS-Gen 6.6 Occupied bandwidth .....	19
8.4 FCC 15.407(a)(2) and RSS-247 6.2.2.1, 5.25–5.35 GHz band output power and spectral density limits .....	21
8.5 FCC 15.407(b) and RSS-247 6.2.2.2 Spurious (out-of-band) emissions .....	32
8.6 FCC 15.407(g) and RSS-Gen 8.11 Frequency stability .....	84
<b>Section 9. Block diagrams of test set-ups</b> .....	<b>85</b>
9.1 Radiated emissions set-up for frequencies below 1 GHz .....	85
9.2 Radiated emissions set-up for frequencies above 1 GHz .....	86
9.3 Conducted antenna port set-up .....	86
9.4 Conducted emissions on AC line set-up .....	87

## Section 1. Report summary

---

### 1.1 Applicant and manufacturer

---

Company name	Redline Communications
Address	302 Town Center Blvd., Markham, ON, Canada, L3R 0E8

### 1.2 Test specifications

---

FCC 47 CFR Part 15, Subpart E, Clause 15.407	Unlicensed National Information Infrastructure Devices
RSS-247, Issue 2, February 2017	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

### 1.3 Test methods

---

789033 D02 General UNII Test Procedures New Rules v01r04 (May 2, 2017)	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
662911 D01 Multiple Transmitter Output v02r01 (October 31, 2013)	Emissions Testing of Transmitters with Multiple Outputs in the Same Band
662911 D02 MIMO with Cross Polarized Antenna v01 (October 25, 2011)	Emissions testing of transmitters with multiple outputs in the same band (MIMO) with Cross Polarized Antenna
ANSI C63.10 v2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

### 1.4 Statement of compliance

---

In the configuration tested, the EUT was found compliant.

Testing was completed against all relevant requirements of the test standard. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See "Summary of test results" for full details.

### 1.5 Exclusions

---

None

### 1.6 Test report revision history

---

Revision #	Details of changes made to test report
TRF	Original report issued

## Section 2. Summary of test results

### 2.1 FCC Part 15 Subpart C, general requirements test results

Part	Test description	Verdict
§15.31(e)	Variation of power source	Pass <sup>1</sup>
§15.203	Antenna requirement	Pass <sup>2</sup>

Notes: <sup>1</sup> Measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, was performed with the supply voltage varied between 85 % and 115 % of the nominal rated supply voltage. No noticeable output power variation was observed

<sup>2</sup> The EUT is a professionally installed equipment.

### 2.2 FCC Part 15 Subpart E, test results

Part	Test description	Verdict
§15.403(i)	Emission bandwidth	Pass
§15.407(a)(1)	Power and density limits within 5.15–5.25 GHz band	Not applicable
§15.407(a)(2)	Power and density limits within 5.25–5.35 GHz and 5.47–5.725 GHz bands	Pass
§15.407(a)(3)	Power and density limits within 5.725–5.85 GHz band	Not applicable
§15.407(b)(1)	Undesirable emission limits for 5.15–5.25 GHz band	Not applicable
§15.407(b)(2)	Undesirable emission limits for 5.25–5.35 GHz band	Pass
§15.407(b)(3)	Undesirable emission limits for 5.47–5.725 GHz bands	Not applicable
§15.407(b)(4)	Undesirable emission limits for 5.725–5.85 GHz band	Not applicable
§15.407(b)(6)	Conducted limits for U-NII devices using an AC power line	Pass
§15.407(e)	Minimum 6 dB bandwidth of U-NII devices within the 5.725-5.85 GHz band	Not applicable
§15.407(g)	Frequency stability	Pass
§15.407(h)(1)	Transmit power control (TPC)	Not applicable
§15.407(h)(2) <sup>1</sup>	Dynamic Frequency Selection (DFS)	Not tested

Notes: <sup>1</sup>DFS measurements were not tested at Nemko Canada lab. It's up to applicant to provide DFS compliance report.

### 2.3 RSS-Gen, Issue 4, test results

Part	Test description	Verdict
6.6	Occupied Bandwidth	Pass
7.1.2 <sup>1</sup>	Receiver radiated emission limits	Not applicable
7.1.3 <sup>1</sup>	Receiver conducted emission limits	Not applicable
8.8	Power Line Conducted Emissions Limits for Licence-Exempt Radio Apparatus	Pass
8.11 <sup>2</sup>	Frequency stability	Pass

Notes: <sup>1</sup> According to sections 5.2 and 5.3 of RSS-Gen, Issue 4: if EUT does not have a stand-alone receiver neither scanner receiver, then it exempt from receiver requirements.

<sup>2</sup> According to section 8.11 of RSS-Gen, Issue 4: if the frequency stability of the licence-exempt radio apparatus is not specified in the applicable standard (RSS), measurement of the frequency stability is not required

## 2.4 ISED RSS-247, Issue 2, test results

Section	Test description	Verdict
6.1 <sup>1</sup>	Types of Modulation	Pass <sup>1</sup>
6.2.1.1	Power limits for 5150–5250 MHz band	Not applicable
6.2.2.1	Power limits for 5250–5350 MHz band	Pass
6.2.3.1	Power limits for 5470–5600 MHz and 5650–5725 MHz bands	Not applicable
6.2.4.1	Power limits for 5725–5850 MHz band	Not applicable
6.2.4.1	Minimum 6 dB bandwidth	Not applicable
6.2.1.2	Unwanted emission limits for 5150–5250 MHz band	Not applicable
6.2.2.2	Unwanted emission limits for 5250–5350 MHz band	Pass
6.2.2.2	TPC requirements for devices with a maximum e.i.r.p. greater than 500 mW	Not applicable
6.2.2.3	Additional requirements for 5250–5350 MHz band	Pass
6.2.3.2	Unwanted emission limits for 5470–5600 MHz and 5650–5725 MHz bands	Not applicable
6.2.4.2	Unwanted emission limits for 5725–5850 MHz band	Not applicable
6.3	Dynamic Frequency Selection (DFS) for devices operating in the bands 5250–5350 MHz, 5470–5600 MHz and 5650–5725 MHz	Not tested <sup>2</sup>

Notes: <sup>1</sup> The EUT employs digital modulation: OFDM using BPSK through 256-QAM for sub-carriers

<sup>2</sup> DFS measurements were not tested at Nemko Canada lab. It's up to applicant to provide DFS compliance report.

## Section 3. Equipment under test (EUT) details

### 3.1 Sample information

Receipt date	August 11, 2017
Nemko sample ID number	Item #1 and Item #2

### 3.2 EUT information

Product name	Broad-band wireless infrastructure product
Model	RDL-3000-RMG3
Serial number	157SC1710002 and 157SC1710006

### 3.3 Technical information

Applicant IC company number	4310A
IC UPN number	RDL3000RMG3
All used IC test site(s) Reg. number	2040G-5 and 2040A-4
RSS number and issue number	RSS-247 Issue 2, Section 6, Feb. 2017
Frequency band	5250–5350 MHz
Frequency Min (MHz)	5252.5 (5 MHz channel), 5255.0 (10 MHz channel), 5260.0 (20 MHz channel)
Frequency Max (MHz)	5345.0 (5 MHz channel), 5342.5 (10 MHz channel), 5337.5 (20 MHz channel)
RF power Max (W), Conducted for FCC	0.0223 (13.48 dBm at 5 MHz channel), 0.0348 (15.42 dBm at 10 MHz channel), 0.0764 (18.83 dBm at 20 MHz channel)
RF power Max (W), Conducted for ISSED	0.0223 (13.48 dBm at 5 MHz channel), 0.0219 (13.41 dBm at 10 MHz channel), 0.0225 (13.53 dBm at 20 MHz channel)
Field strength, Units @ distance	N/A
Measured BW (kHz) (26 dB)	4680 (5 MHz channel), 9230 (10 MHz channel), 18350 (20 MHz channel)
Calculated BW (kHz), as per TRC-43	N/A
Type of modulation	OFDM using 256-QAM, 128-QAM, 64-QAM, 16-QAM, QPSK and BPSK modulation for sub-carriers
Emission classification (F1D, G1D, D1D)	4M09W7D (5 MHz channel), 8M17W7D (10 MHz channel), 16M3W7D (20 MHz channel)
Transmitter spurious, dBμV/m @ 3 m	68.08 (at 5250 MHz for 5 MHz channel), 67.85 (at 5250 MHz for 10 MHz channel), 67.99 (at 5250 MHz for 20 MHz channel)
Power requirements	48 V <sub>DC</sub> PoE via 120 V <sub>AC</sub> , 60 Hz
Antenna information	10 dBi Omni-directional Antenna Redline AOD-DB-0512-02 and L-Com HG5158DP-10U 24 dBi Dual Polarization Antenna 4.9–6.1 GHz, Redline 30-00362-00, and Redline 30-00328-50 Dual Polarization Antenna 19 dBi 32 dBi Redline A3FT3204LTPD Parabolic Antenna, 4.9–5.8 GHz, 4 degree, dual polarity The EUT is professionally installed.

### 3.4 Product description and theory of operation

The EUT is a 2x2 MIMO point-to-multipoint (PMP) and point-to-point (PTP) carrier grade broadband wireless infrastructure product, designed to operate in the 5250–5350 MHz band.

### 3.5 EUT exercise details

---

The EUT was controlled to transmit at desired frequency and modulation from laptop using web interface at IP address: 192.168.25.2

### 3.6 EUT setup diagram

---

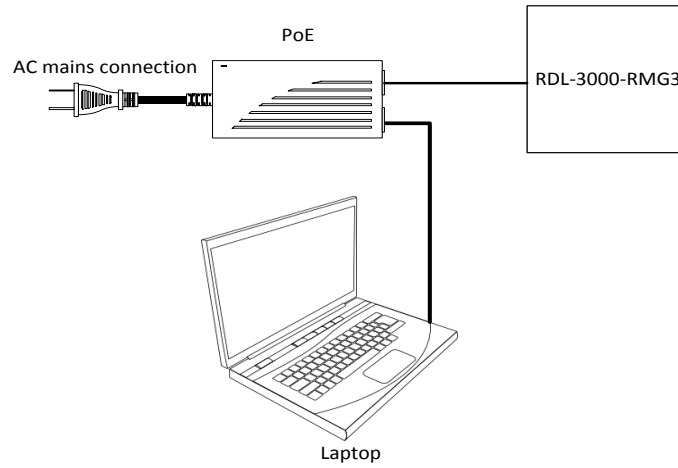


Figure 3.6-1: Setup diagram

### 3.7 EUT sub assemblies

---

Table 3.7-1: EUT sub assemblies

Description	Brand name	Model/Part number	Serial number
PoE	Cincon Electronics Co.	TRG60A-POE-L	004652



## Section 4. Engineering considerations

---

---

### 4.1 Modifications incorporated in the EUT

---

---

There were no modifications performed to the EUT during this assessment.

### 4.2 Technical judgment

---

---

None

### 4.3 Deviations from laboratory tests procedures

---

---

No deviations were made from laboratory procedures.

## Section 5. Test conditions

---

### 5.1 Atmospheric conditions

---

Temperature	15–30 °C
Relative humidity	20–75 %
Air pressure	860–1060 mbar

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

### 5.2 Power supply range

---

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages  $\pm 5\%$ , for which the equipment was designed.

## Section 6. Measurement uncertainty

---

### 6.1 Uncertainty of measurement

---

Measurement uncertainty budgets for the tests are detailed below. Measurement uncertainty calculations assume a coverage factor of  $K = 2$  with 95% certainty.

Test name	Measurement uncertainty, dB
All antenna port measurements	0.55
Conducted spurious emissions	1.13
Radiated spurious emissions	3.78
AC power line conducted emissions	3.55

## Section 7. Test equipment

### 7.1 Test equipment list

*Table 7.1-1: Equipment list*

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
Flush mount turntable	Sunol	FM2022	FA002550	—	NCR
Controller	Sunol	SC104V	FA002551	—	NCR
Antenna mast	Sunol	TLT2	FA002552	—	NCR
Spectrum analyzer	Rohde & Schwarz	FSV 40	FA002731	1 year	July 10/18
50 Ω coax cable	C.C.A.	None	FA002603	—	VOU
50 Ω coax cable	C.C.A.	None	FA002605	—	VOU
50 Ω coax cable	C.C.A.	None	FA002607	—	VOU
Bilog antenna (20–2000 MHz)	Sunol	JB1	FA002517	1 year	Oct. 5/17
Horn antenna (1–18 GHz)	EMCO	3115	FA001452	1 year	Oct. 26/17
Horn antenna (18–40 GHz)	EMCO	3116	FA002487	2 year	Aug. 16/18
Pre-amplifier (0.5–18 GHz)	COM-POWER	PAM-118A	FA002561	1 year	May 8/18
Pre-amplifier (18–40 GHz)	COM-POWER	PAM-840	FA002508	1 year	May 8/18
2400-2483 MHz Notch Filter	Microwave Circuits	N0324413	FA002693	—	VOU
50 Ω coax cable	HUBER+SUHNER	SUCOFLEX 100	FA002564	—	VOU
Power source	California Instruments	5001ix	FA001770	1 year	Feb 1/18
Power sensor	Rohde & Schwarz	NRP18S	FA002730	1 year	July 21/18
Receiver/spectrum analyzer	Rohde & Schwarz	ESU 40	FA002071	1 year	May 3/18
Environmental Chamber	ESPEC	EPX-4H	FA002736	1 year	May 16/18
Multimeter	AMPPROBE	AM-530	FA002536	1 year	May 3/18
Flush mount turntable	Sunol	FM2022	FA002550	—	NCR

Note: NCR - no calibration required, VOU - verify on use

## Section 8. Testing data

### 8.1 FCC 15.207(a) and RSS-Gen 8.8 AC power line conducted emissions limits

#### 8.1.1 Definitions and limits

**FCC §15.407(6)(b):**

Any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207

**FCC §15.207(a):**

Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50  $\Omega$  line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

**ISED:**

A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz, shall not exceed the limits in table below.

Unless the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in table below. The more stringent limit applies at the frequency range boundaries.

*Table 8.1-1: Conducted emissions limit*

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average**
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

Note: \* - The level decreases linearly with the logarithm of the frequency.

\*\* - A linear average detector is required.

#### 8.1.2 Test summary

Test date:	September 15, 2017	Temperature:	24 °C
Test engineer:	Yong Huang	Air pressure:	1007 mbar
Verdict:	Pass	Relative humidity:	43 %

### 8.1.3 Observations, settings and special notes

---

The EUT was set up as tabletop configuration.

The spectral scan has been corrected with transducer factors (i.e. cable loss, LISN factors, and attenuators) for determination of compliance.

A preview measurement was generated with the receiver in continuous scan mode. Emissions detected within 6 dB or above limit were re-measured with the appropriate detector against the correlating limit and recorded as the final measurement.


Receiver settings for preview measurements:

Resolution bandwidth	9 kHz
Video bandwidth	30 kHz
Detector mode	Peak and Average
Trace mode	Max Hold
Measurement time	100 ms

Receiver settings for final measurements:

Resolution bandwidth	9 kHz
Video bandwidth	30 kHz
Detector mode	Quasi-Peak and Average
Trace mode	Max Hold
Measurement time	100 ms


8.1.4 Test data

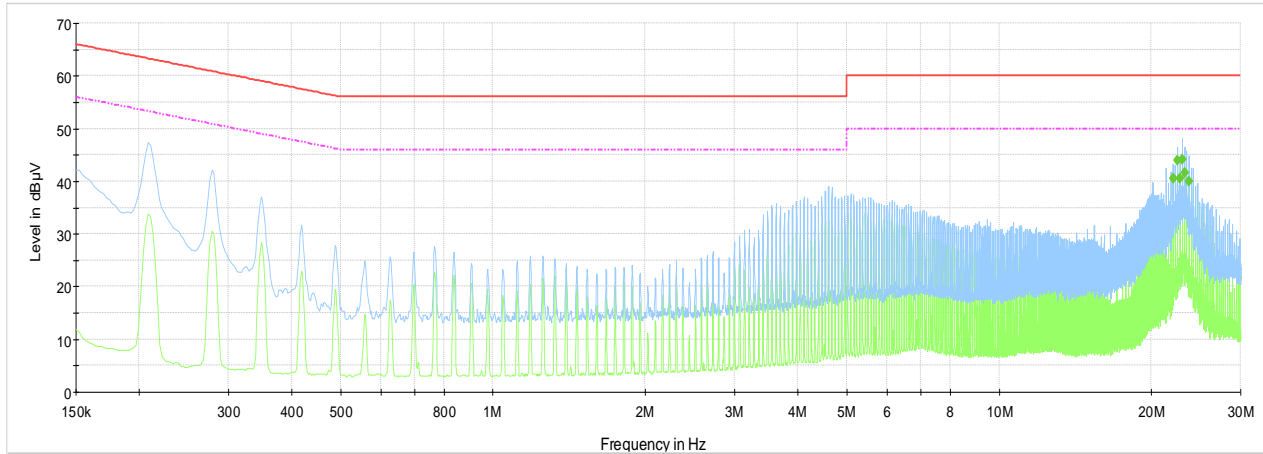

Plot 8.1-1: Conducted emissions on phase line

Table 8.1-2: Average conducted emissions results on phase line

Frequency, MHz	Average result, dBµV	Limit, dBµV	Margin, dB	Meas. Time, ms	Bandwidth, kHz	Correction, dB
22.053	40.5	50.0	9.6	100	9	10.7
22.528	43.9	50.0	6.1	100	9	10.7
22.764	40.5	50.0	9.5	100	9	10.8
23.001	44.2	50.0	5.9	100	9	10.8
23.239	41.6	50.0	8.4	100	9	10.8
23.712	39.9	50.0	10.1	100	9	10.8

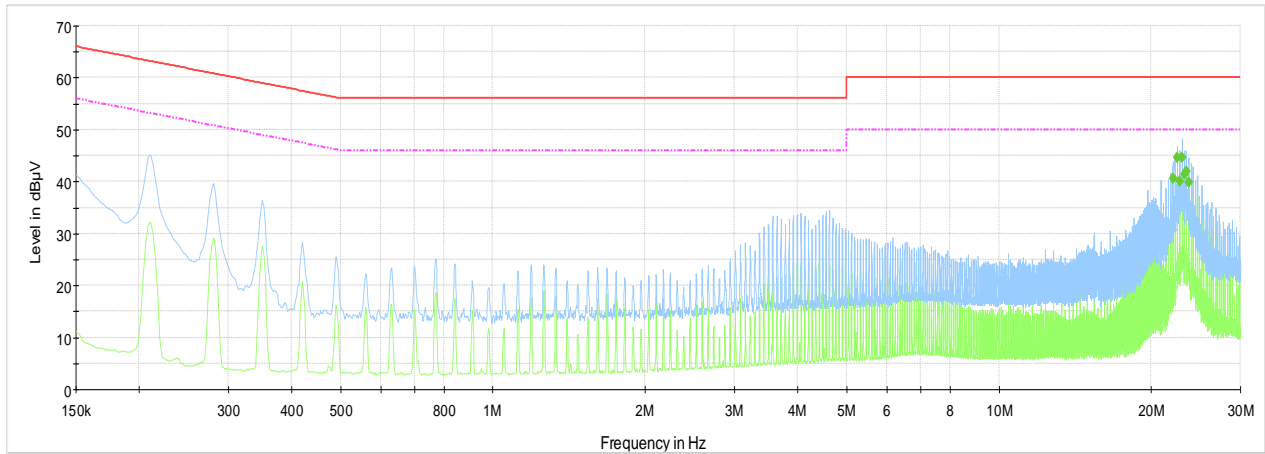

**Plot 8.1-2:** Conducted emissions on neutral line

**Table 8.1-3:** Average conducted emissions results on neutral line

Frequency, MHz	Average result, dBµV	Limit, dBµV	Margin, dB	Meas. Time, ms	Bandwidth, kHz	Correction, dB
22.056	40.7	50.0	9.3	100	9	10.8
22.530	44.7	50.0	5.3	100	9	10.8
22.767	40.1	50.0	9.9	100	9	10.8
23.003	44.7	50.0	5.3	100	9	10.8
23.241	41.4	50.0	8.6	100	9	10.8
23.478	42.0	50.0	8.0	100	9	10.8
23.714	39.9	50.0	10.1	100	9	10.8



## 8.2 FCC 15.403(i) Emission bandwidth

### 8.2.1 Definitions and limits

15.403(i) For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

### 8.2.2 Test summary

Test date	August 22, 2017
Test engineer	Yong Huang
Verdict	Pass

### 8.2.3 Observations, settings and special notes

Spectrum analyser settings:

Resolution bandwidth	approximately 1% of the EBW (50 kHz for 5 MHz channel; 100 kHz for 10 MHz channel; 200 kHz for 20 MHz channel)
Video bandwidth	> RBW
Detector mode	Peak
Trace mode	Max Hold

### 8.2.4 Test data

**Table 8.2-1:** Channel names description

Channel name	5-MHz channel	10-MHz channel	20-MHz channel
Low	5252.5	5255.0	5260.0
Mid	5300.0	5300.0	5300.0
High	5345.0	5342.5	5337.5

**Table 8.2-2:** 26 dB bandwidth results (in MHz)

Modulation	Channel	5-MHz channel	10-MHz channel	20-MHz channel
BPSK	Low	4.66	9.19	18.35
	Mid	4.61	9.23	18.35
	High	4.61	9.18	18.33
256-QAM	Low	4.68	9.21	18.27
	Mid	4.68	9.19	18.37
	High	4.65	9.20	18.32

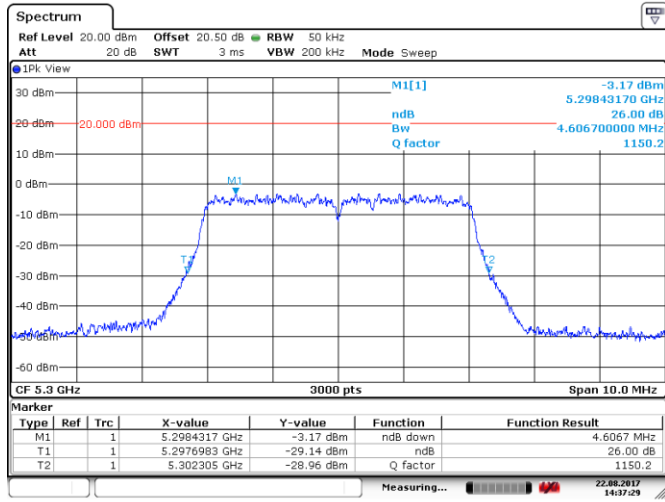


Figure 8.2-1: 26 dB bandwidth of the 5 MHz channel, sample plot

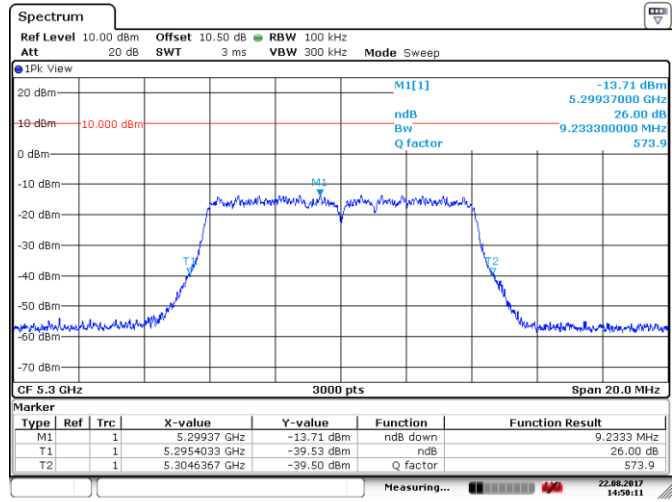


Figure 8.2-2: 26 dB bandwidth of the 10 MHz channel, sample plot

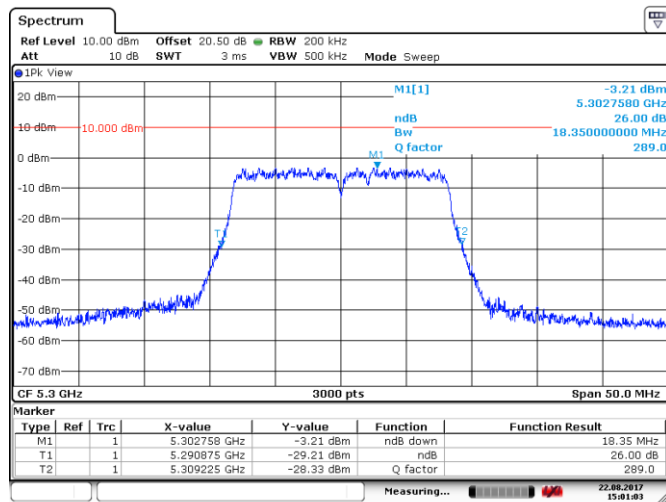


Figure 8.2-3: 26 dB bandwidth of the 20 MHz channel, sample plot

## 8.3 RSS-Gen 6.6 Occupied bandwidth

### 8.3.1 Definitions and limits

The emission bandwidth (×dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated × dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3× the resolution bandwidth.

When the occupied bandwidth limit is not stated in the applicable RSS or reference measurement method, the transmitted signal bandwidth shall be reported as the 99% emission bandwidth, as calculated or measured.

### 8.3.2 Test summary

Test date	August 22, 2017
Test engineer	Yong Huang
Verdict	Pass

### 8.3.3 Observations, settings and special notes

Spectrum analyser settings:

Resolution bandwidth:	1 % to 5 % of the OBW
Video bandwidth:	≥3 × RBW
Detector mode:	Peak
Trace mode:	Max Hold

### 8.3.4 Test data


**Table 8.3-1: Channel names description**

Channel name	5-MHz channel	10-MHz channel	20-MHz channel
Low	5252.5	5255.0	5260.0
Mid	5300.0	5300.0	5300.0
High	5345.0	5342.5	5337.5

**Table 8.3-2: 99 % bandwidth results (in MHz)**


Modulation	Channel	5-MHz channel	10-MHz channel	20-MHz channel
BPSK	Low	4.08	8.17	16.33
	Mid	4.09	8.17	16.33
	High	4.08	8.17	16.33
256-QAM	Low	4.08	8.17	16.33
	Mid	4.08	8.17	16.33
	High	4.09	8.17	16.33

8.3.4 Test data, continued

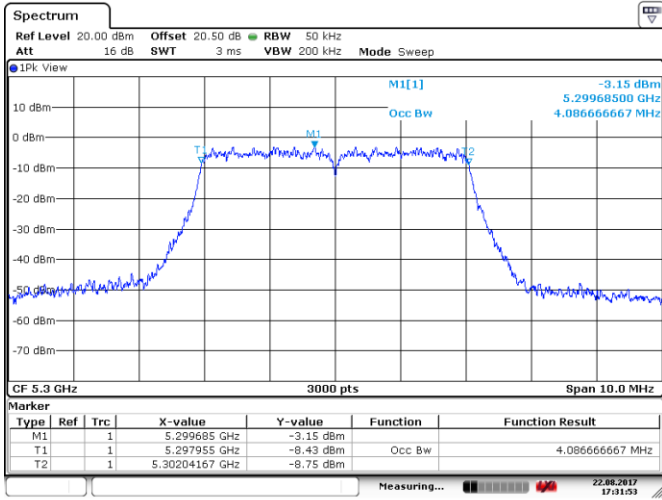


Date: 22.AUG.2017 17:31:54

Figure 8.3-1: 99 % bandwidth of 5 MHz channel, sample plot

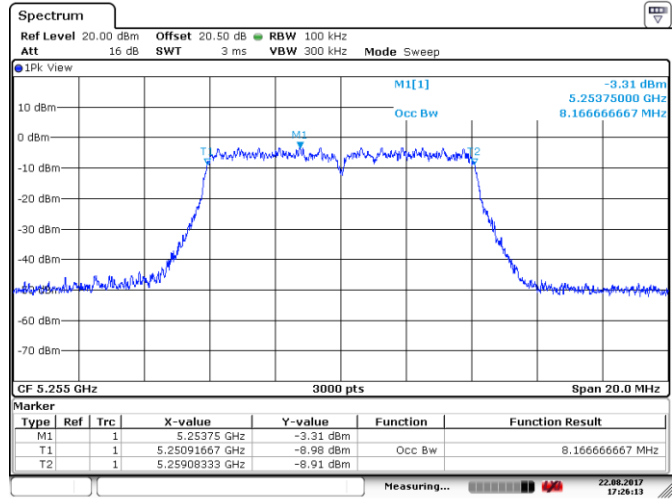

Date: 22.AUG.2017 17:26:14

Figure 8.3-2: 99 % bandwidth of 10 MHz channel, sample plot

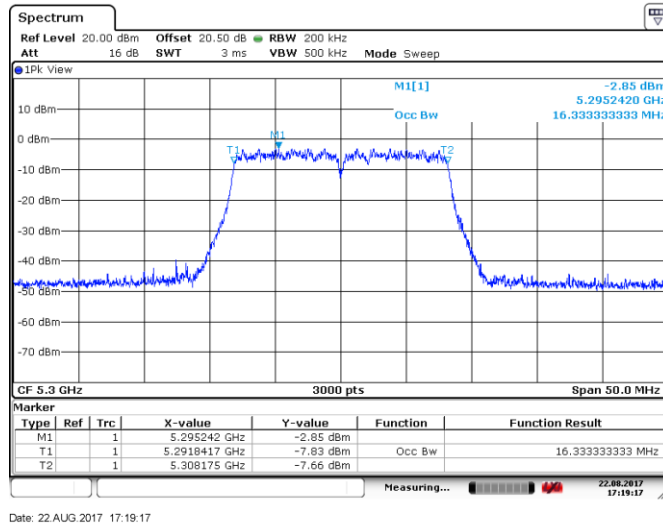

Date: 22.AUG.2017 17:19:17

Figure 8.3-3: 99 % bandwidth of 20 MHz channel, sample plot

## 8.4 FCC 15.407(a)(2) and RSS-247 6.2.2.1, 5.25–5.35 GHz band output power and spectral density limits

---

### 8.4.1 Definitions and limits

---

**FCC:**

For the 5.25–5.35 GHz and 5.47–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(h)(1) Transmit power control (TPC).

U-NII devices shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

**ISED:**

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or  $1.76 + 10 \log_{10} B$ , dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

Devices, other than devices installed in vehicles, shall comply with the following:

- a. The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10} B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;
- b. The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10} B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

Section 6.2.2.3

Outdoor fixed devices with a maximum e.i.r.p. greater than 200 mW shall comply with the following e.i.r.p. at different elevations, where  $\theta$  is the angle above the local horizontal plane (of the Earth) as shown below:

1. -13 dBW/MHz for  $0^\circ \leq \theta < 8^\circ$
2.  $-13 - 0.716 (\theta - 8)$  dBW/MHz for  $8^\circ \leq \theta < 40^\circ$
3.  $-35.9 - 1.22 (\theta - 40)$  dBW/MHz for  $40^\circ \leq \theta \leq 45^\circ$
4. -42 dBW/MHz for  $\theta > 45^\circ$

### 8.4.2 Test summary

---

Test date:	August 30, 2017
Test engineer:	Yong Huang
Verdict:	Pass

### 8.4.3 Observations, settings and special notes

Output power was tested using RMS power meter.  
 Spectrum analyzer settings for PSD measurement:

Resolution bandwidth	1 MHz
Video bandwidth	3 MHz
Frequency span	10 MHz (for 5 MHz channel), 20 MHz (for 10 MHz channel), 40 MHz (for 20 MHz channel)
Detector mode	RMS
Trace mode	Power Averaging over 100 sweeps

FCC output power limit calculation for 5 MHz channel:  $11 + 10 \times \text{Log}_{10}(\text{EBW}) < 24 \text{ dBm}$ , hence as  $11 + 10 \times \text{Log}_{10}(\text{EBW})$ , dBm;  
 FCC output power limit calculation for 10 MHz channel:  $11 + 10 \times \text{Log}_{10}(\text{EBW}) < 24 \text{ dBm}$ , hence as  $11 + 10 \times \text{Log}_{10}(\text{EBW})$ , dBm;  
 FCC output power limit calculation for 20 MHz channel:  $11 + 10 \times \text{Log}_{10}(\text{EBW}) < 24 \text{ dBm}$ , hence as  $11 + 10 \times \text{Log}_{10}(\text{EBW})$ , dBm;

ISED EIRP limit calculation for 5 MHz channel:  $17 + 10 \times \text{Log}_{10}(\text{OBW}) < 30 \text{ dBm}$ , hence as  $17 + 10 \times \text{Log}_{10}(\text{OBW})$ , dBm;  
 ISED EIRP limit calculation for 10 MHz channel:  $17 + 10 \times \text{Log}_{10}(\text{OBW}) < 30 \text{ dBm}$ , hence as  $17 + 10 \times \text{Log}_{10}(\text{OBW})$ , dBm;  
 ISED EIRP limit calculation for 20 MHz channel:  $17 + 10 \times \text{Log}_{10}(\text{OBW}) < 30 \text{ dBm}$ , hence as  $17 + 10 \times \text{Log}_{10}(\text{OBW})$ , dBm;

Output power/EIRP/PSD limit adjustment for 10 dBi antenna: Output power/EIRP limit – (10 dBi – 0.7 dB – 6 dBi);  
 Output power/EIRP/PSD limit adjustment for 24 dBi antenna: Output power/EIRP limit – (24 dBi – 0.7 dB – 6 dBi);  
 Output power/EIRP/PSD limit adjustment for 32 dBi antenna: Output power/EIRP limit – (32 dBi – 0.7 dB – 6 dBi);  
 Note: cable loss is 0.7 dB.

Combined average output power was calculated as follows:

$$P_{combined} = 10 \times \log_{10} \left( (10^{P_{cho}/10}) + (10^{P_{ch1}/10}) \right)$$

EIRP was calculated as follows:

$$EIRP = P_{combined} + \text{antenna gain}$$

For antennas with the directional gain greater than 6 dBi, the maximum power spectral density limit was calculated as follows:  
 For 10 dBi antenna:  $11 \text{ dBm/1 MHz} - (10 \text{ dBi} - 0.7 \text{ dB} - 6 \text{ dBi}) = 7.7 \text{ dBm/1 MHz}$ ;  
 For 24 dBi antenna:  $11 \text{ dBm/1 MHz} - (24 \text{ dBi} - 0.7 \text{ dB} - 6 \text{ dBi}) = -6.3 \text{ dBm/1 MHz}$ ;  
 For 32 dBi antenna:  $11 \text{ dBm/1 MHz} - (32 \text{ dBi} - 0.7 \text{ dB} - 6 \text{ dBi}) = -14.3 \text{ dBm/1 MHz}$ .

As per ISED requirements, EUT as outdoor fixed devices, antenna #1(10 dBi) and antenna #2(24 dBi) were configured with reduced output power with a maximum e.i.r.p. less than 200 mW. The antenna #3(32 dBi) was verified with pattern complying with the requirement at different elevations. All ISED power setting were not greater than FCC setting, hence PSD is deemed to be compliance if FCC PSD meets compliance.

8.4.4 Test data

**Table 8.4-1:** FCC Output power measurements and EIRP calculation results for 5 MHz channel, 10 dBi antenna

Modulation and data rate	Frequency, MHz	Output power on ch0, dBm	Output power on ch1, dBm	Combined power, dBm	Limit, dBm	Margin, dB	Tot. Gain, dBi	EIRP, dBm	Limit, dBm	Margin, dB
BPSK, 1.5 Mbps	5252.5	10.30	10.53	13.43	14.38	0.96	9.30	22.73	23.68	0.96
	5300.0	10.32	10.50	13.42	14.34	0.92	9.30	22.72	23.64	0.92
	5345.0	10.24	10.39	13.33	14.34	1.01	9.30	22.63	23.64	1.01
256-QAM 42 Mbps	5252.5	10.38	10.55	13.48	14.40	0.93	9.30	22.78	23.70	0.93
	5300.0	10.34	10.55	13.46	14.40	0.95	9.30	22.76	23.70	0.95
	5345.0	10.21	10.38	13.31	14.37	1.07	9.30	22.61	23.67	1.07

**Table 8.4-2:** FCC Output power measurements and EIRP calculation results for 5 MHz channel, 24 dBi antenna

Modulation and data rate	Frequency, MHz	Output power on ch0, dBm	Output power on ch1, dBm	Combined power, dBm	Limit, dBm	Margin, dB	Tot. Gain, dBi	EIRP, dBm	Limit, dBm	Margin, dB
BPSK, 1.5 Mbps	5252.5	-4.03	-3.77	-0.89	0.38	1.27	23.30	22.41	23.68	1.27
	5300.0	-4.14	-3.79	-0.95	0.34	1.29	23.30	22.35	23.64	1.29
	5345.0	-4.18	-3.89	-1.02	0.34	1.36	23.30	22.28	23.64	1.36
256-QAM 42 Mbps	5252.5	-3.94	-3.78	-0.85	0.40	1.25	23.30	22.45	23.70	1.25
	5300.0	-4.02	-3.79	-0.89	0.40	1.30	23.30	22.41	23.70	1.30
	5345.0	-4.12	-3.90	-1.00	0.37	1.37	23.30	22.30	23.67	1.37

**Table 8.4-3:** FCC Output power measurements and EIRP calculation results for 5 MHz channel, 32 dBi antenna

Modulation and data rate	Frequency, MHz	Output power on ch0, dBm	Output power on ch1, dBm	Combined power, dBm	Limit, dBm	Margin, dB	Tot. Gain, dBi	EIRP, dBm	Limit, dBm	Margin, dB
BPSK, 1.5 Mbps	5252.5	-12.05	-11.75	-8.89	-7.62	1.27	31.30	22.41	23.68	1.27
	5300.0	-12.12	-11.76	-8.93	-7.66	1.26	31.30	22.37	23.64	1.26
	5345.0	-12.16	-11.89	-9.01	-7.66	1.35	31.30	22.29	23.64	1.35
256-QAM 42 Mbps	5252.5	-11.99	-11.77	-8.87	-7.60	1.27	31.30	22.43	23.70	1.27
	5300.0	-11.95	-11.79	-8.86	-7.60	1.26	31.30	22.44	23.70	1.26
	5345.0	-12.16	-11.86	-9.00	-7.63	1.37	31.30	22.30	23.67	1.37

**Table 8.4-4:** FCC Output power measurements and EIRP calculation results for 10 MHz channel, 10 dBi antenna

Modulation and data rate	Frequency, MHz	Output power on ch0, dBm	Output power on ch1, dBm	Combined power, dBm	Limit, dBm	Margin, dB	Tot. Gain, dBi	EIRP, dBm	Limit, dBm	Margin, dB
BPSK, 3.3 Mbps	5255.0	12.20	12.61	15.42	17.33	1.91	9.30	24.72	26.63	1.91
	5300.0	12.08	12.51	15.31	17.35	2.04	9.30	24.61	26.65	2.04
	5342.5	12.03	12.42	15.24	17.33	2.09	9.30	24.54	26.63	2.09
256-QAM 93.3 Mbps	5255.0	12.19	12.52	15.37	17.34	1.97	9.30	24.67	26.64	1.97
	5300.0	12.12	12.45	15.30	17.33	2.03	9.30	24.60	26.63	2.03
	5342.5	12.25	12.37	15.32	17.34	2.02	9.30	24.62	26.64	2.02



**Table 8.4-5:** FCC Output power measurements and EIRP calculations results for 10 MHz channel, 24 dBi antenna gain

Modulation and data rate	Frequency, MHz	Output power on ch0, dBm	Output power on ch1, dBm	Combined power, dBm	Limit, dBm	Margin, dB	Tot. Gain, dBi	EIRP, dBm	Limit, dBm	Margin, dB
BPSK, 3.3 Mbps	5255.0	-1.17	-0.86	2.00	3.33	1.34	23.30	25.30	26.63	1.34
	5300.0	-1.29	-0.89	1.92	3.35	1.43	23.30	25.22	26.65	1.43
	5342.5	-1.33	-0.99	1.85	3.33	1.47	23.30	25.15	26.63	1.47
256-QAM 93.3 Mbps	5255.0	-1.16	-0.89	1.99	3.34	1.36	23.30	25.29	26.64	1.36
	5300.0	-1.22	-0.90	1.95	3.33	1.38	23.30	25.25	26.63	1.38
	5342.5	-1.34	-0.97	1.86	3.34	1.48	23.30	25.16	26.64	1.48

**Table 8.4-6:** FCC Output power measurements and EIRP calculations results for 10 MHz channel, 32 dBi antenna gain

Modulation and data rate	Frequency, MHz	Output power on ch0, dBm	Output power on ch1, dBm	Combined power, dBm	Limit, dBm	Margin, dB	Tot. Gain, dBi	EIRP, dBm	Limit, dBm	Margin, dB
BPSK, 3.3 Mbps	5255.0	-9.09	-8.87	-5.97	-4.67	1.30	31.30	25.33	26.63	1.30
	5300.0	-9.16	-8.88	-6.01	-4.65	1.36	31.30	25.29	26.65	1.36
	5342.5	-9.29	-8.98	-6.12	-4.67	1.45	31.30	25.18	26.63	1.45
256-QAM 93.3 Mbps	5255.0	-9.12	-8.92	-6.01	-4.66	1.35	31.30	25.29	26.64	1.35
	5300.0	-9.19	-8.88	-6.02	-4.67	1.36	31.30	25.28	26.63	1.36
	5342.5	-9.28	-8.98	-6.12	-4.66	1.45	31.30	25.18	26.64	1.45

**Table 8.4-7:** FCC Output power measurements and EIRP calculation results for 20 MHz channel, 10 dBi antenna

Modulation and data rate	Frequency, MHz	Output power on ch0, dBm	Output power on ch1, dBm	Combined power, dBm	Limit, dBm	Margin, dB	Tot. Gain, dBi	EIRP, dBm	Limit, dBm	Margin, dB
BPSK, 6.6 Mbps	5260.0	15.65	15.91	18.79	20.34	1.54	9.30	28.09	29.64	1.54
	5300.0	15.57	15.85	18.72	20.34	1.61	9.30	28.02	29.64	1.61
	5337.5	13.29	13.62	16.47	20.33	3.86	9.30	25.77	29.63	3.86
256-QAM 186.6 Mbps	5260.0	15.75	15.88	18.83	20.32	1.49	9.30	28.13	29.62	1.49
	5300.0	15.53	15.83	18.69	20.34	1.65	9.30	27.99	29.64	1.65
	5337.5	13.45	13.66	16.57	20.33	3.76	9.30	25.87	29.63	3.76





**Table 8.4-8:** FCC Output power measurements and EIRP calculations results for 20 MHz channel, 24 dBi antenna gain

Modulation and data rate	Frequency, MHz	Output power on ch0, dBm	Output power on ch1, dBm	Combined power, dBm	Limit, dBm	Margin, dB	Tot. Gain, dBi	EIRP, dBm	Limit, dBm	Margin, dB
BPSK, 6.6 Mbps	5260.0	2.29	2.56	5.44	6.34	0.90	23.30	28.74	29.64	0.90
	5300.0	2.20	2.63	5.43	6.34	0.91	23.30	28.73	29.64	0.91
	5337.5	2.09	2.20	5.16	6.33	1.18	23.30	28.46	29.63	1.18
256-QAM 186.6 Mbps	5260.0	2.30	2.54	5.43	6.32	0.89	23.30	28.73	29.62	0.89
	5300.0	2.21	2.52	5.38	6.34	0.96	23.30	28.68	29.64	0.96
	5337.5	2.11	2.42	5.28	6.33	1.05	23.30	28.58	29.63	1.05

**Table 8.4-9:** FCC Output power measurements and EIRP calculations results for 20 MHz channel, 32 dBi antenna gain

Modulation and data rate	Frequency, MHz	Output power on ch0, dBm	Output power on ch1, dBm	Combined power, dBm	Limit, dBm	Margin, dB	Tot. Gain, dBi	EIRP, dBm	Limit, dBm	Margin, dB
BPSK, 6.6 Mbps	5260.0	-5.90	-5.65	-2.76	-1.66	1.10	31.30	28.54	29.64	1.10
	5300.0	-5.97	-5.68	-2.81	-1.66	1.15	31.30	28.49	29.64	1.15
	5337.5	-6.08	-5.76	-2.91	-1.67	1.24	31.30	28.39	29.63	1.24
256-QAM 186.6 Mbps	5260.0	-5.89	-5.68	-2.77	-1.68	1.09	31.30	28.53	29.62	1.09
	5300.0	-5.99	-5.69	-2.83	-1.66	1.17	31.30	28.47	29.64	1.17
	5337.5	-6.09	-5.74	-2.90	-1.67	1.23	31.30	28.40	29.63	1.23

**Table 8.4-10:** FCC PSD measurements results for 5 MHz channel, 10 dBi antenna

Modulation and data rate	Frequency, MHz	PSD on ch0, dBm/MHz	PSD on ch1, dBm/MHz	Combined PSD, dBm/MHz	Limit, dBm/MHz	Margin, dB
BPSK, 1.5 Mbps	5252.5	2.11	2.16	5.15	7.70	2.55
	5300.0	2.41	2.42	5.43	7.70	2.27
	5345.0	2.15	2.30	5.24	7.70	2.46
256-QAM 42 Mbps	5252.5	1.68	1.78	4.74	7.70	2.96
	5300.0	2.08	2.23	5.17	7.70	2.53
	5345.0	2.11	2.56	5.35	7.70	2.35

**Table 8.4-11:** FCC PSD measurements results for 5 MHz channel, 24 dBi antenna

Modulation and data rate	Frequency, MHz	PSD on ch0, dBm/MHz	PSD on ch1, dBm/MHz	Combined PSD, dBm/MHz	Limit, dBm/MHz	Margin, dB
BPSK, 1.5 Mbps	5252.5	-12.44	-12.08	-9.25	-6.30	2.95
	5300.0	-12.21	-11.89	-9.04	-6.30	2.74
	5345.0	-12.45	-12.37	-9.40	-6.30	3.10
256-QAM 42 Mbps	5252.5	-12.68	-12.55	-9.60	-6.30	3.30
	5300.0	-12.46	-12.22	-9.33	-6.30	3.03
	5345.0	-12.56	-12.19	-9.36	-6.30	3.06

**Table 8.4-12:** FCC PSD measurements results for 5 MHz channel, 32 dBi antenna

Modulation and data rate	Frequency, MHz	PSD on ch0, dBm/MHz	PSD on ch1, dBm/MHz	Combined PSD, dBm/MHz	Limit, dBm/MHz	Margin, dB
BPSK, 1.5 Mbps	5252.5	-20.65	-20.19	-17.40	-14.30	3.10
	5300.0	-20.04	-19.91	-16.96	-14.30	2.66
	5345.0	-20.97	-20.31	-17.62	-14.30	3.32
256-QAM 42 Mbps	5252.5	-20.62	-20.37	-17.48	-14.30	3.18
	5300.0	-21.11	-20.16	-17.60	-14.30	3.30
	5345.0	-21.98	-20.52	-18.18	-14.30	3.88



**Table 8.4-13:** FCC PSD measurements results for 10 MHz channel, 10 dBi antenna

Modulation and data rate	Frequency, MHz	PSD on ch0, dBm/MHz	PSD on ch1, dBm/MHz	Combined PSD, dBm/MHz	Limit, dBm/MHz	Margin, dB
BPSK, 3.3 Mbps	5255.0	0.54	0.76	3.66	7.70	4.04
	5300.0	0.46	0.89	3.69	7.70	4.01
	5342.5	0.38	0.58	3.49	7.70	4.21
256-QAM 93.3 Mbps	5255.0	0.34	0.62	3.49	7.70	4.21
	5300.0	0.36	0.46	3.42	7.70	4.28
	5342.5	0.54	0.72	3.64	7.70	4.06

**Table 8.4-14:** FCC PSD measurements results for 10 MHz channel, 24 dBi antenna

Modulation and data rate	Frequency, MHz	PSD on ch0, dBm/MHz	PSD on ch1, dBm/MHz	Combined PSD, dBm/MHz	Limit, dBm/MHz	Margin, dB
BPSK, 3.3 Mbps	5255.0	-13.05	-12.58	-9.80	-6.30	3.50
	5300.0	-12.98	-12.50	-9.72	-6.30	3.42
	5342.5	-11.98	-11.39	-8.66	-6.30	2.36
256-QAM 93.3 Mbps	5255.0	-12.78	-12.35	-9.55	-6.30	3.25
	5300.0	-13.57	-12.49	-9.99	-6.30	3.69
	5342.5	-12.56	-11.82	-9.16	-6.30	2.86

**Table 8.4-15:** FCC PSD measurements results for 10 MHz channel, 32 dBi antenna

Modulation and data rate	Frequency, MHz	PSD on ch0, dBm/MHz	PSD on ch1, dBm/MHz	Combined PSD, dBm/MHz	Limit, dBm/MHz	Margin, dB
BPSK, 3.3 Mbps	5255.0	-21.54	-20.89	-18.19	-14.30	3.89
	5300.0	-20.89	-19.97	-17.40	-14.30	3.10
	5342.5	-21.21	-20.48	-17.82	-14.30	3.52
256-QAM 93.3 Mbps	5255.0	-20.99	-20.71	-17.84	-14.30	3.54
	5300.0	-21.05	-20.22	-17.60	-14.30	3.30
	5342.5	-21.55	-20.72	-18.10	-14.30	3.80

**Table 8.4-16:** FCC PSD measurements results for 20 MHz channel, 10 dBi antenna

Modulation and data rate	Frequency, MHz	PSD on ch0, dBm/MHz	PSD on ch1, dBm/MHz	Combined PSD, dBm/MHz	Limit, dBm/MHz	Margin, dB
BPSK, 6.6 Mbps	5260.0	0.56	0.69	3.64	7.70	4.06
	5300.0	0.37	0.47	3.43	7.70	4.27
	5337.5	0.34	0.59	3.48	7.70	4.22
256-QAM 186.6 Mbps	5260.0	0.44	0.46	3.46	7.70	4.24
	5300.0	0.73	0.90	3.83	7.70	3.87
	5337.5	0.36	0.47	3.43	7.70	4.27

**Table 8.4-17:** FCC PSD measurements results for 20 MHz channel, 24 dBi antenna

Modulation and data rate	Frequency, MHz	PSD on ch0, dBm/MHz	PSD on ch1, dBm/MHz	Combined PSD, dBm/MHz	Limit, dBm/MHz	Margin, dB
BPSK, 6.6 Mbps	5260.0	-12.93	-12.63	-9.77	-6.30	3.47
	5300.0	-13.15	-12.91	-10.02	-6.30	3.72
	5337.5	-13.55	-13.06	-10.29	-6.30	3.99
256-QAM 186.6 Mbps	5260.0	-12.98	-12.56	-9.75	-6.30	3.45
	5300.0	-13.98	-13.49	-10.72	-6.30	4.42
	5337.5	-13.56	-13.18	-10.36	-6.30	4.06



**Table 8.4-18:** FCC PSD measurements results for 20 MHz channel, 32 dBi antenna

Modulation and data rate	Frequency, MHz	PSD on ch0, dBm/MHz	PSD on ch1, dBm/MHz	Combined PSD, dBm/MHz	Limit, dBm/MHz	Margin, dB
BPSK, 6.6 Mbps	5260.0	-21.68	-21.56	-18.61	-14.30	4.31
	5300.0	-20.98	-20.71	-17.83	-14.30	3.53
	5337.5	-22.11	-21.23	-18.64	-14.30	4.34
256-QAM 186.6 Mbps	5260.0	-21.88	-21.08	-18.45	-14.30	4.15
	5300.0	-21.67	-21.22	-18.43	-14.30	4.13
	5337.5	-21.54	-20.95	-18.22	-14.30	3.92

**Table 8.4-19:** ISED Output power measurements and EIRP calculation results for 5 MHz channel, 10 dBi antenna

Modulation and data rate	Frequency, MHz	Output power on ch0, dBm	Output power on ch1, dBm	Combined power, dBm	Limit, dBm	Margin, dB	Tot. Gain, dBi	EIRP, dBm	Limit, dBm	Margin, dB
BPSK, 1.5 Mbps	5252.5	4.17	4.43	7.31	13.81	6.49	9.30	16.61	23.00	6.39
	5300.0	10.39	10.54	13.48	13.82	0.34	9.30	22.78	23.00	0.22
	5345.0	10.33	10.46	13.41	13.81	0.40	9.30	22.71	23.00	0.29
256-QAM 42 Mbps	5252.5	4.16	4.41	7.30	13.81	6.51	9.30	16.60	23.00	6.40
	5300.0	10.36	10.49	13.44	13.81	0.37	9.30	22.74	23.00	0.26
	5345.0	10.38	10.41	13.41	13.82	0.41	9.30	22.71	23.00	0.29

Note: as per additional requirements of antenna elevation gain, EIRP limit was adjusted to 200 mW (23 dBm)

**Table 8.4-20:** ISED Output power measurements and EIRP calculation results for 5 MHz channel, 24 dBi antenna

Modulation and data rate	Frequency, MHz	Output power on ch0, dBm	Output power on ch1, dBm	Combined power, dBm	Limit, dBm	Margin, dB	Tot. Gain, dBi	EIRP, dBm	Limit, dBm	Margin, dB
BPSK, 1.5 Mbps	5252.5	-8.72	-8.59	-5.64	-0.19	5.45	23.30	17.66	23.00	5.34
	5300.0	-3.92	-3.78	-0.84	-0.18	0.66	23.30	22.46	23.00	0.54
	5345.0	-3.96	-3.86	-0.90	-0.19	0.71	23.30	22.40	23.00	0.60
256-QAM 42 Mbps	5252.5	-8.72	-8.62	-5.66	-0.19	5.47	23.30	17.64	23.00	5.36
	5300.0	-3.94	-3.79	-0.85	-0.19	0.66	23.30	22.45	23.00	0.55
	5345.0	-3.92	-3.89	-0.89	-0.18	0.71	23.30	22.41	23.00	0.59

Note: as per additional requirements of antenna elevation gain, EIRP limit was adjusted to 200 mW (23 dBm)

**Table 8.4-21:** ISED Output power measurements and EIRP calculation results for 5 MHz channel, 32 dBi antenna

Modulation and data rate	Frequency, MHz	Output power on ch0, dBm	Output power on ch1, dBm	Combined power, dBm	Limit, dBm	Margin, dB	Tot. Gain, dBi	EIRP, dBm	Limit, dBm	Margin, dB
BPSK, 1.5 Mbps	5252.5	-18.61	-18.47	-15.53	-8.19	7.34	31.30	15.77	23.00	7.23
	5300.0	-11.93	-11.71	-8.81	-8.18	0.63	31.30	22.49	23.00	0.51
	5345.0	-11.96	-11.76	-8.85	-8.19	0.66	31.30	22.45	23.00	0.55
256-QAM 42 Mbps	5252.5	-18.62	-18.49	-15.54	-8.19	7.35	31.30	15.76	23.00	7.24
	5300.0	-11.91	-11.78	-8.83	-8.19	0.64	31.30	22.47	23.00	0.53
	5345.0	-11.94	-11.86	-8.89	-8.18	0.71	31.30	22.41	23.00	0.59

Note: as per additional requirements of antenna elevation gain, EIRP limit was adjusted to 200 mW (23 dBm)



**Table 8.4-22:** ISED Output power measurements and EIRP calculation results for 10 MHz channel, 10 dBi antenna

Modulation and data rate	Frequency, MHz	Output power on ch0, dBm	Output power on ch1, dBm	Combined power, dBm	Limit, dBm	Margin, dB	Tot. Gain, dBi	EIRP, dBm	Limit, dBm	Margin, dB
BPSK, 3.3 Mbps	5255.0	6.20	6.30	9.26	16.82	7.56	9.30	18.56	23.00	4.44
	5300.0	10.35	10.45	13.41	16.82	3.41	9.30	22.71	23.00	0.29
	5342.5	10.23	10.36	13.31	16.82	3.52	9.30	22.61	23.00	0.39
256-QAM 93.3 Mbps	5255.0	6.21	6.28	9.26	16.82	7.57	9.30	18.56	23.00	4.44
	5300.0	10.32	10.41	13.38	16.82	3.45	9.30	22.68	23.00	0.32
	5342.5	10.29	10.30	13.31	16.82	3.52	9.30	22.61	23.00	0.39

Note: as per additional requirements of antenna elevation gain, EIRP limit was adjusted to 200 mW (23 dBm)

**Table 8.4-23:** ISED Output power measurements and EIRP calculations results for 10 MHz channel, 24 dBi antenna gain

Modulation and data rate	Frequency, MHz	Output power on ch0, dBm	Output power on ch1, dBm	Combined power, dBm	Limit, dBm	Margin, dB	Tot. Gain, dBi	EIRP, dBm	Limit, dBm	Margin, dB
BPSK, 3.3 Mbps	5255.0	-7.91	-7.88	-4.88	2.82	7.71	23.30	18.42	23.00	4.58
	5300.0	-3.97	-3.86	-0.90	2.82	3.73	23.30	22.40	23.00	0.60
	5342.5	-4.06	-3.93	-0.98	2.82	3.81	23.30	22.32	23.00	0.68
256-QAM 93.3 Mbps	5255.0	-7.91	-7.85	-4.87	2.82	7.69	23.30	18.43	23.00	4.57
	5300.0	-3.95	-3.97	-0.95	2.82	3.77	23.30	22.35	23.00	0.65
	5342.5	-4.04	-3.96	-0.99	2.82	3.81	23.30	22.31	23.00	0.69

Note: as per additional requirements of antenna elevation gain, EIRP limit was adjusted to 200 mW (23 dBm)

**Table 8.4-24:** ISED Output power measurements and EIRP calculations results for 10 MHz channel, 32 dBi antenna gain

Modulation and data rate	Frequency, MHz	Output power on ch0, dBm	Output power on ch1, dBm	Combined power, dBm	Limit, dBm	Margin, dB	Tot. Gain, dBi	EIRP, dBm	Limit, dBm	Margin, dB
BPSK, 3.3 Mbps	5255.0	-11.96	-10.83	-8.34	-5.18	3.17	31.30	22.96	23.00	0.04
	5300.0	-12.00	-10.88	-8.39	-5.18	3.21	31.30	22.91	23.00	0.09
	5342.5	-12.00	-10.88	-8.39	-5.18	3.21	31.30	22.91	23.00	0.09
256-QAM 93.3 Mbps	5255.0	-11.96	-10.88	-8.37	-5.18	3.20	31.30	22.93	23.00	0.07
	5300.0	-11.99	-10.94	-8.42	-5.18	3.25	31.30	22.88	23.00	0.12
	5342.5	-11.97	-10.88	-8.38	-5.18	3.20	31.30	22.92	23.00	0.08

**Table 8.4-25:** ISED Output power measurements and EIRP calculation results for 20 MHz channel, 10 dBi antenna

Modulation and data rate	Frequency, MHz	Output power on ch0, dBm	Output power on ch1, dBm	Combined power, dBm	Limit, dBm	Margin, dB	Tot. Gain, dBi	EIRP, dBm	Limit, dBm	Margin, dB
BPSK, 6.6 Mbps	5260.0	8.22	8.73	11.49	19.83	8.34	9.30	20.79	23.00	2.21
	5300.0	10.35	10.63	13.50	19.83	6.33	9.30	22.80	23.00	0.20
	5337.5	10.29	10.58	13.45	19.83	6.38	9.30	22.75	23.00	0.25
256-QAM 186.6 Mbps	5260.0	8.18	8.75	11.48	19.83	8.35	9.30	20.78	23.00	2.22
	5300.0	10.36	10.68	13.53	19.83	6.30	9.30	22.83	23.00	0.17
	5337.5	10.28	10.55	13.43	19.83	6.40	9.30	22.73	23.00	0.27

Note: as per additional requirements of antenna elevation gain, EIRP limit was adjusted to 200 mW (23 dBm)

**Table 8.4-26:** ISED Output power measurements and EIRP calculations results for 20 MHz channel, 24 dBi antenna gain


Modulation and data rate	Frequency, MHz	Output power on ch0, dBm	Output power on ch1, dBm	Combined power, dBm	Limit, dBm	Margin, dB	Tot. Gain, dBi	EIRP, dBm	Limit, dBm	Margin, dB
BPSK, 6.6 Mbps	5260.0	-7.05	-6.49	-3.75	5.83	9.58	23.30	19.55	23.00	3.45
	5300.0	-3.72	-3.70	-0.70	5.83	6.53	23.30	22.60	23.00	0.40
	5337.5	-4.09	-3.76	-0.91	5.83	6.74	23.30	22.39	23.00	0.61
256-QAM 186.6 Mbps	5260.0	-7.03	-6.48	-3.74	5.83	9.57	23.30	19.56	23.00	3.44
	5300.0	-3.72	-3.69	-0.69	5.83	6.52	23.30	22.61	23.00	0.39
	5337.5	-4.05	-3.77	-0.90	5.83	6.73	23.30	22.40	23.00	0.60

Note: as per additional requirements of antenna elevation gain, EIRP limit was adjusted to 200 mW (23 dBm)


**Table 8.4-27:** ISED Output power measurements and EIRP calculations results for 20 MHz channel, 32 dBi antenna gain

Modulation and data rate	Frequency, MHz	Output power on ch0, dBm	Output power on ch1, dBm	Combined power, dBm	Limit, dBm	Margin, dB	Tot. Gain, dBi	EIRP, dBm	Limit, dBm	Margin, dB
BPSK, 6.6 Mbps	5260.0	-14.02	-13.42	-10.70	-2.17	8.53	31.30	20.60	23.00	2.40
	5300.0	-11.99	-11.54	-8.75	-2.17	6.57	31.30	22.55	23.00	0.45
	5337.5	-12.01	-11.51	-8.74	-2.17	6.57	31.30	22.56	23.00	0.44
256-QAM 186.6 Mbps	5260.0	-14.03	-13.39	-10.69	-2.17	8.52	31.30	20.61	23.00	2.39
	5300.0	-11.99	-11.50	-8.72	-2.17	6.55	31.30	22.58	23.00	0.42
	5337.5	-12.00	-11.46	-8.71	-2.17	6.54	31.30	22.59	23.00	0.41

Note: as per additional requirements of antenna elevation gain, EIRP limit was adjusted to 200 mW (23 dBm)

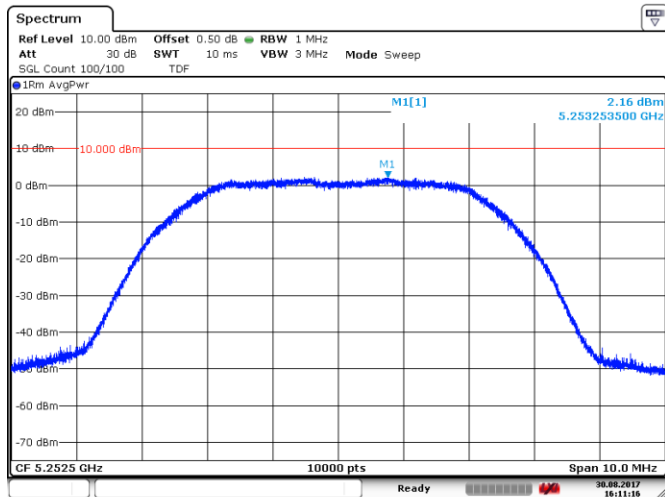

**Figure 8.4-1:** Sample plot for PSD on 5 MHz channel

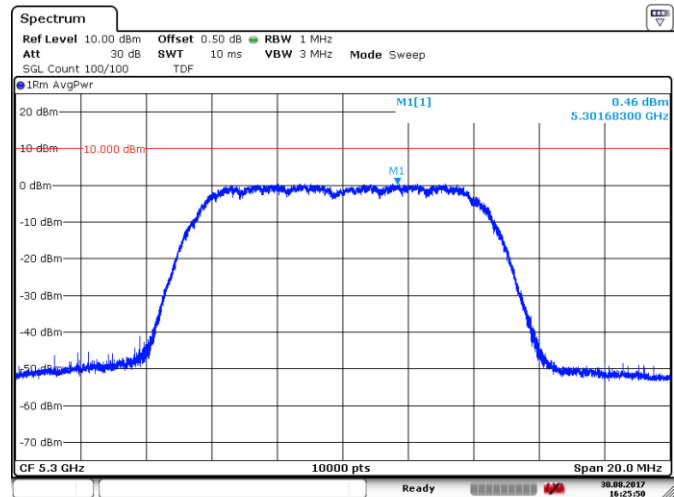

**Figure 8.4-2:** Sample plot for PSD on 10 MHz channel

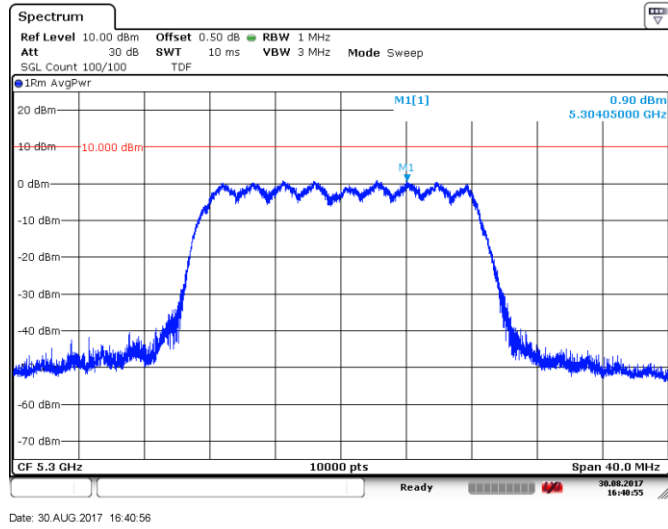


Figure 8.4-3: Sample plot for PSD on 20 MHz channel

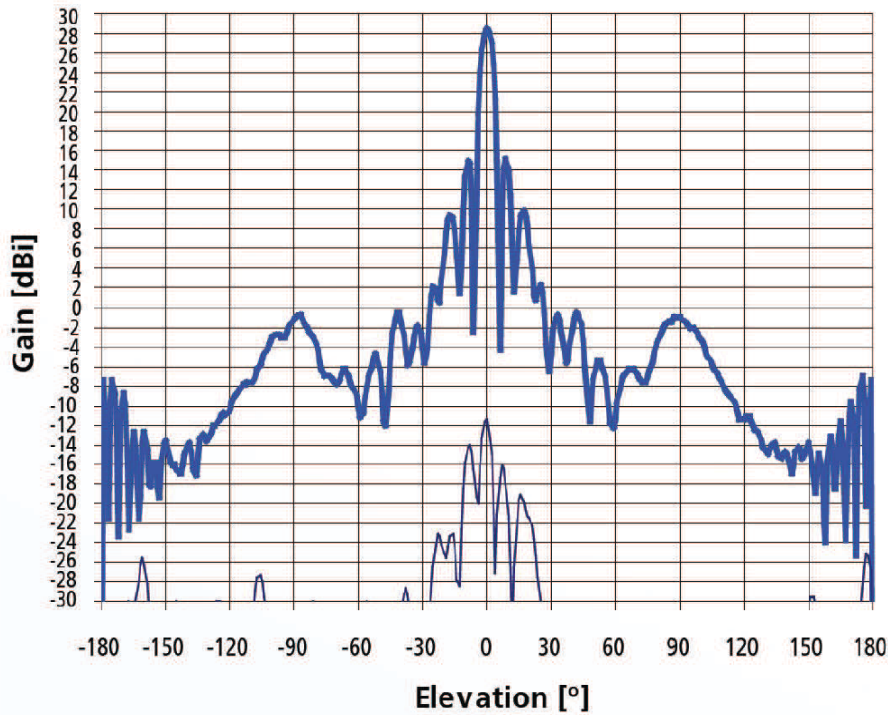


Figure 8.4-4: Elevation Gain pattern of antenna 3(32 dBi)

Table 8.4-28: ISED additional requirement for e.i.r.p, calculation for 32 dBi antenna gain at different elevations

Elevation angle range, °	Elevation angle, °	Max Peak antenna gain, dBi	Max PSD conducted, dBm/MHz	e.i.r.p, dBm/MHz	Limit, dBm/MHz	Margin, dB
for $0^\circ \leq \theta < 8^\circ$	0	31.3	-17.83	13.47	17.00	3.53
for $8^\circ \leq \theta < 40^\circ$	10	15	-17.83	-2.83	15.57	18.40
for $8^\circ \leq \theta < 40^\circ$	15	10	-17.83	-7.83	11.99	19.82
for $8^\circ \leq \theta < 40^\circ$	25	2	-17.83	-15.83	4.83	20.66
for $40^\circ \leq \theta \leq 45^\circ$	40	0	-17.83	-17.83	-5.90	11.93
for $\theta > 45^\circ$	65	-6	-17.83	-23.83	-12.00	11.83
for $\theta > 45^\circ$	90	-1	-17.83	-18.83	-12.00	6.83

## 8.5 FCC 15.407(b) and RSS-247 6.2.2.2 Spurious (out-of-band) emissions

### 8.5.1 Definitions and limits

**FCC:**

- (2) For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209.
- (7) The provisions of § 15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency block edges as the design of the equipment permits.

**ISED:**

Devices shall comply with the following:

All emissions outside the band 5250–5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.; or  
 All emissions outside the band 5150–5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. and its power shall comply with the spectral power density for operation within the band 5150–5250 MHz. The device, except devices installed in vehicles, shall be labelled or include in the user manual the following text “for indoor use only.”

**Table 8.5-1: FCC §15.209 and RSS-Gen – Radiated emission limits**

Frequency, MHz	Field strength of emissions		Measurement distance, m
	µV/m	dBµV/m	
0.009–0.490	2400/F (F in kHz)	67.6 – 20 × log <sub>10</sub> (F) (F in kHz)	300
0.490–1.705	24000/F (F in kHz)	87.6 – 20 × log <sub>10</sub> (F) (F in kHz)	30
1.705–30.0	30	29.5	30
30–88	100	40.0	3
88–216	150	43.5	3
216–960	200	46.0	3
above 960	500	54.0	3

Notes: In the emission table above, the tighter limit applies at the band edges.

For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test



**Table 8.5-2: ISED restricted frequency bands**

MHz	MHz	MHz	GHz
0.090–0.110	12.51975–12.52025	399.9–410	5.35–5.46
2.1735–2.1905	12.57675–12.57725	608–614	7.25–7.75
3.020–3.026	13.36–13.41	960–1427	8.025–8.5
4.125–4.128	16.42–16.423	1435–1626.5	9.0–9.2
4.17725–4.17775	16.69475–16.69525	1645.5–1646.5	9.3–9.5
4.20725–4.20775	16.80425–16.80475	1660–1710	10.6–12.7
5.677–5.683	25.5–25.67	1718.8–1722.2	13.25–13.4
6.215–6.218	37.5–38.25	2200–2300	14.47–14.5
6.26775–6.26825	73–74.6	2310–2390	15.35–16.2
6.31175–6.31225	74.8–75.2	2655–2900	17.7–21.4
8.291–8.294	108–138	3260–3267	22.01–23.12
8.362–8.366	156.52475–156.52525	3332–3339	23.6–24.0
8.37625–8.38675	156.7–156.9	3345.8–3358	31.2–31.8
8.41425–8.41475	240–285	3500–4400	36.43–36.5
12.29–12.293	322–335.4	4500–5150	Above 38.6

Note: Certain frequency bands listed in Table 8.5-2 and above 38.6 GHz are designated for low-power license-exempt applications. These frequency bands and the requirements that apply to the devices are set out in this Standard

**Table 8.5-3: FCC restricted frequency bands**

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Above 38.6
13.36–13.41			

## 8.5.2 Test summary

Test date:	August 30, 2017
Test engineer:	Yong Huang
Verdict:	Pass

### 8.5.3 Observations, settings and special notes

---

The spectrum was searched from 30 MHz to 40 GHz while the EUT was transmitting on both MIMO chains simultaneously. Radiated measurements below 18 GHz were performed at a distance of 3 m. Radiated measurements above 18 GHz were performed at a distance of 1 m. All conducted plots below have been corrected with antenna gains, RF cable losses and multiple antenna correction factors. Where it is not specified in the figure comment, the power settings were set to a maximum between FCC and ISSED. As per customer, the transmitter output signals on the two chains are completely uncorrelated. Cabinet radiation were performed while both antenna connectors were terminated with 50 Ω load. No emissions related to RF transmitter were detected within 6 dB below the limit.  
 Restricted bands Peak limit EIRP equivalent: 74 dBμV/m – 95.23 dB = –21.23 dBm  
 Restricted bands Average limit EIRP equivalent: 54 dBμV/m – 95.23 dB = –41.23 dBm

Spectrum analyser for peak conducted measurements within restricted bands below 1 GHz:

Resolution bandwidth:	100 kHz
Video bandwidth:	300 kHz
Detector mode:	Peak
Trace mode:	Max Hold

Spectrum analyser for peak conducted measurements within restricted bands above 1 GHz:

Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Detector mode:	Peak
Trace mode:	Max Hold

Spectrum analyser for average conducted measurements within restricted bands above 1 GHz for frequencies where peak results were above the average limit:

Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Detector mode:	RMS
Trace mode:	Power average
Number of averaging traces:	100

Spectrum analyser for peak conducted measurements outside restricted bands:

Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Detector mode:	Peak
Trace mode:	Max Hold

Conducted emissions measurements outside restricted bands were performed on each individual MIMO chain. The reference level offset was adjusted to include antenna directional gain.

8.5.4 Test data

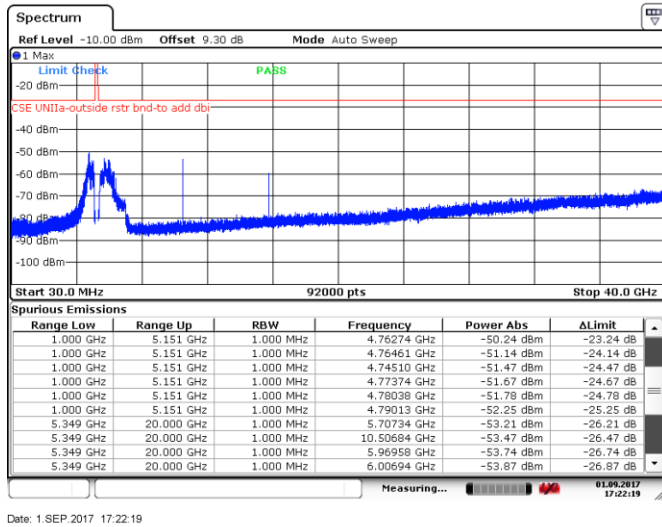


Figure 8.5-1: Spurious emissions outside restricted bands, 5 MHz channel, low channel, 10 dBi antenna, cho

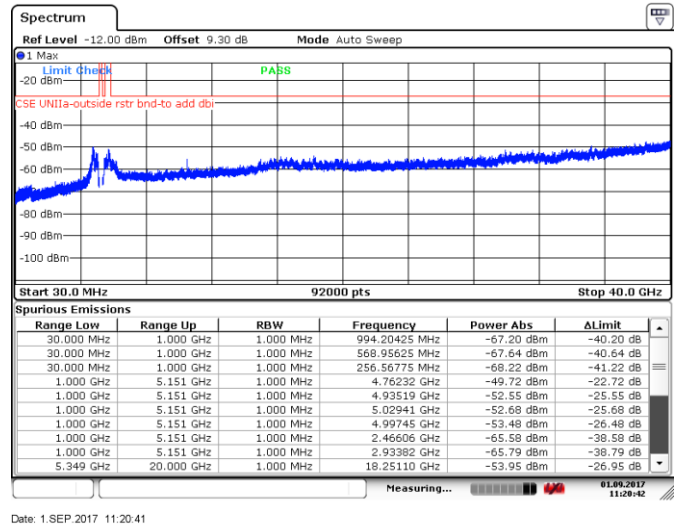


Figure 8.5-2: Spurious emissions outside restricted bands, 5 MHz channel, low channel, 10 dBi antenna, ch1

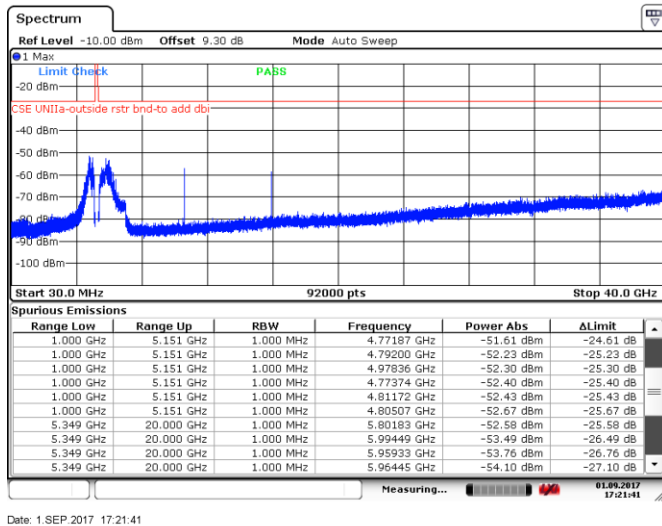


Figure 8.5-3: Spurious emissions outside restricted bands, 5 MHz channel, mid channel, 10 dBi antenna, cho


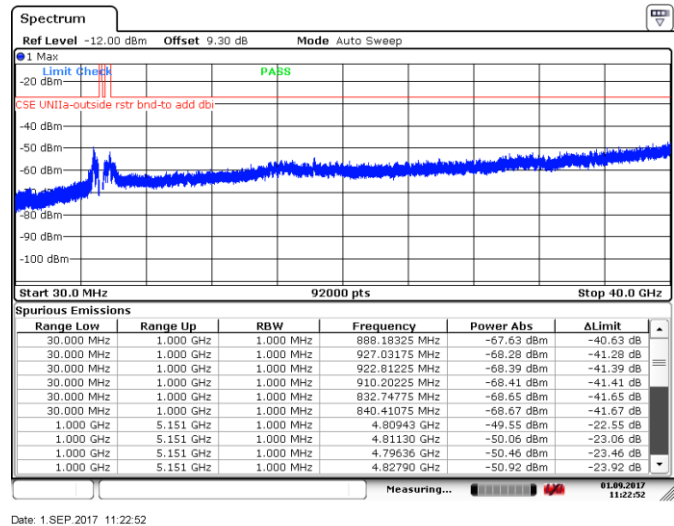


Figure 8.5-4: Spurious emissions outside restricted bands, 5 MHz channel, mid channel, 10 dBi antenna, ch1


**Section 8**  
**Test name**  
**Specification**

Testing data  
 FCC 15.407(b) and RSS-247 6.2.2.2 Spurious (out-of-band) emissions  
 FCC Part 15 Subpart E and RSS-247 Issue 2

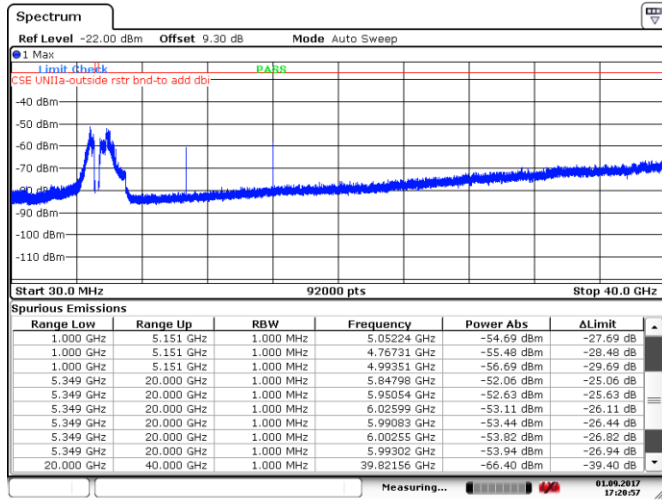


Date: 1.SEP.2017 17:20:56

Figure 8.5-5: Spurious emissions outside restricted bands, 5 MHz channel, high channel, 10 dBi antenna, cho

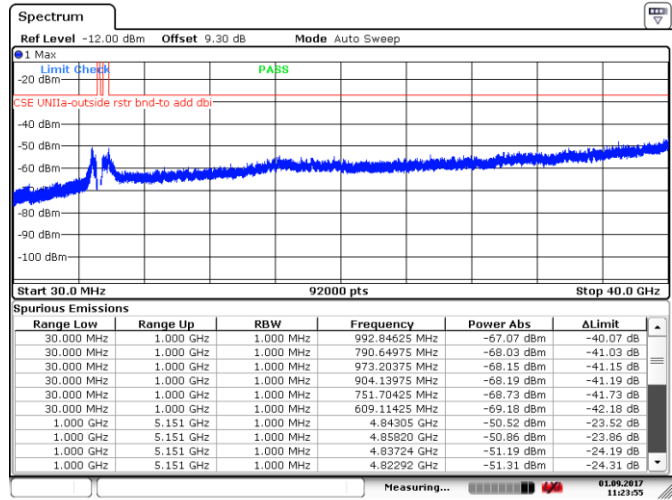


Date: 1.SEP.2017 11:23:54

Figure 8.5-6: Spurious emissions outside restricted bands, 5 MHz channel, high channel, 10 dBi antenna, ch1

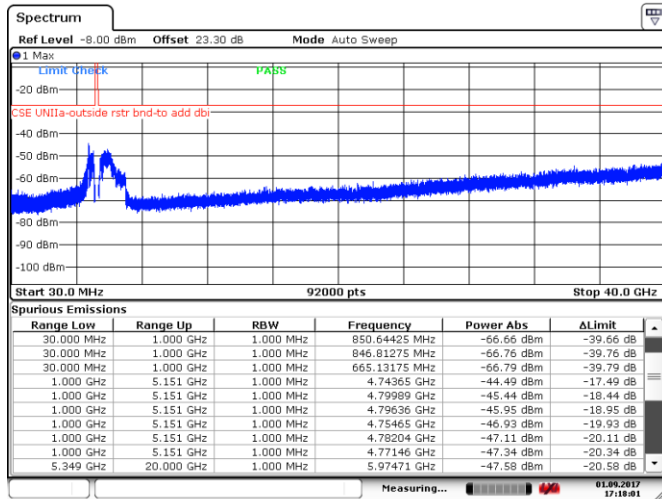

Date: 1.SEP.2017 17:18:01

Figure 8.5-7: Spurious emissions outside restricted bands, 5 MHz channel, low channel, 24 dBi antenna, cho

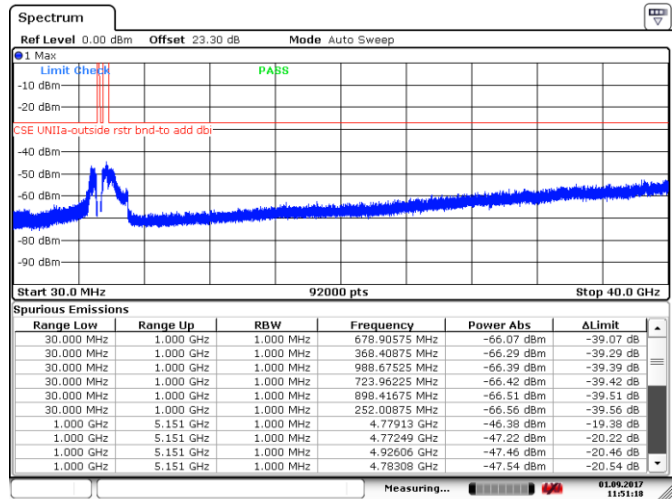


Date: 1.SEP.2017 11:51:18

Figure 8.5-8: Spurious emissions outside restricted bands, 5 MHz channel, low channel, 24 dBi antenna, ch1


**Section 8**  
**Test name**  
**Specification**

Testing data  
 FCC 15.407(b) and RSS-247 6.2.2.2 Spurious (out-of-band) emissions  
 FCC Part 15 Subpart E and RSS-247 Issue 2

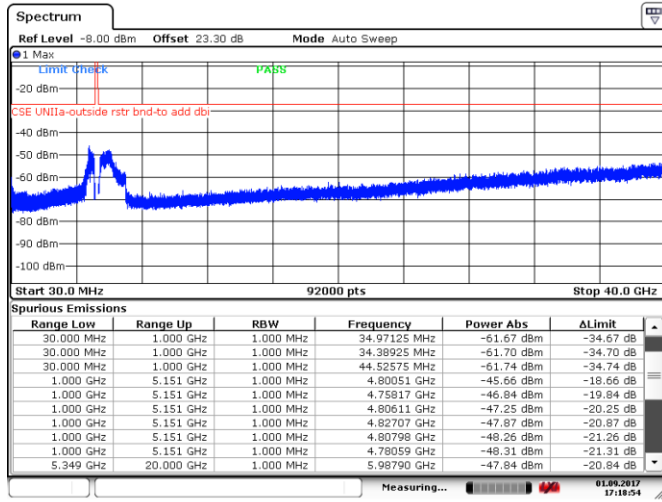


Date: 1.SEP.2017 17:18:54

**Figure 8.5-9:** Spurious emissions outside restricted bands, 5 MHz channel, mid channel, 24 dBi antenna, cho

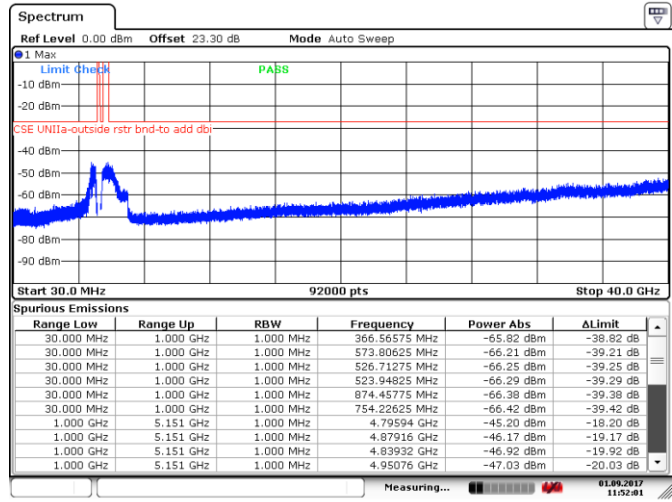


Date: 1.SEP.2017 11:52:01

**Figure 8.5-10:** Spurious emissions outside restricted bands, 5 MHz channel, mid channel, 24 dBi antenna, ch1

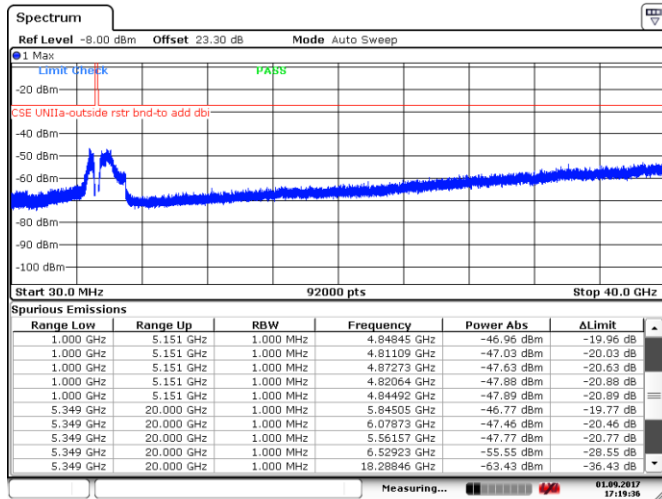

Date: 1.SEP.2017 17:19:35

**Figure 8.5-11:** Spurious emissions outside restricted bands, 5 MHz channel, high channel, 24 dBi antenna, cho

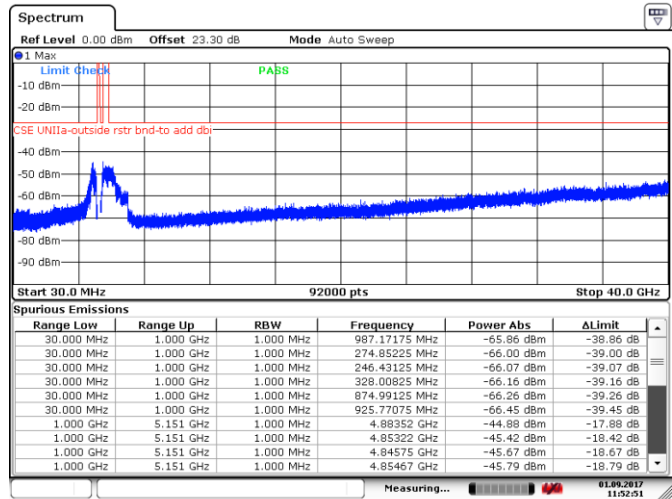


Date: 1.SEP.2017 11:52:51

**Figure 8.5-12:** Spurious emissions outside restricted bands, 5 MHz channel, high channel, 24 dBi antenna, ch1


**Section 8**  
**Test name**  
**Specification**

Testing data  
 FCC 15.407(b) and RSS-247 6.2.2.2 Spurious (out-of-band) emissions  
 FCC Part 15 Subpart E and RSS-247 Issue 2

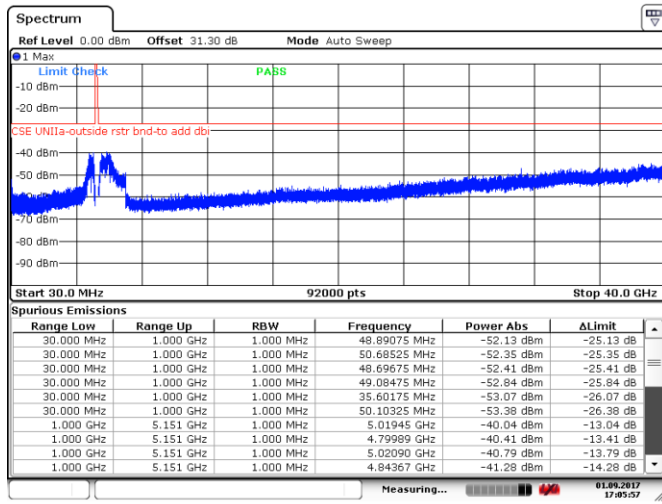


Date: 1.SEP.2017 17:05:57

**Figure 8.5-13:** Spurious emissions outside restricted bands, 5 MHz channel, low channel, 32 dBi antenna, cho

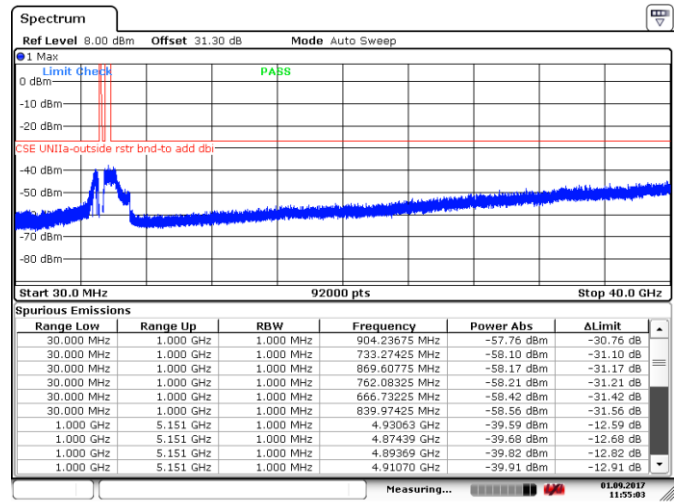


Date: 1.SEP.2017 11:55:02

**Figure 8.5-14:** Spurious emissions outside restricted bands, 5 MHz channel, low channel, 32 dBi antenna, ch1

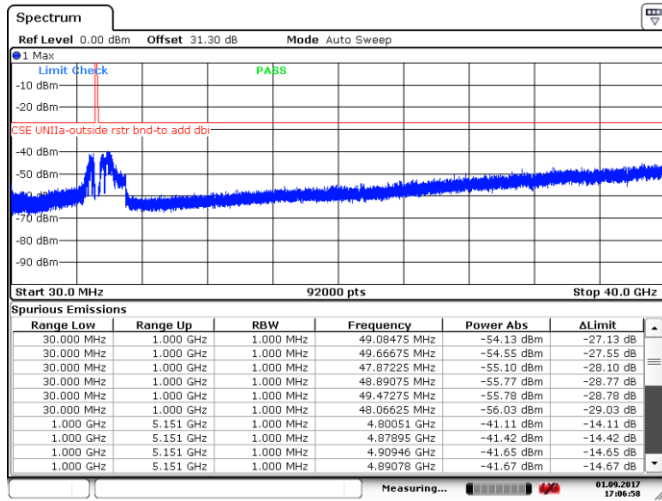

Date: 1.SEP.2017 17:06:58

**Figure 8.5-15:** Spurious emissions outside restricted bands, 5 MHz channel, mid channel, 32 dBi antenna, cho

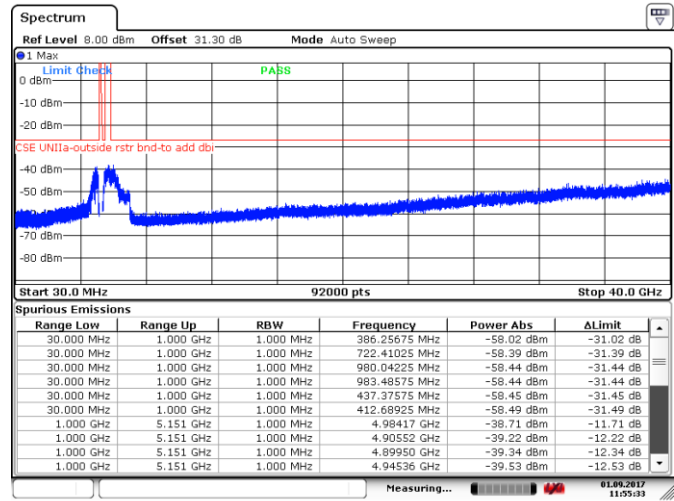


Date: 1.SEP.2017 11:55:32

**Figure 8.5-16:** Spurious emissions outside restricted bands, 5 MHz channel, mid channel, 32 dBi antenna, ch1


**Section 8**  
**Test name**  
**Specification**

Testing data  
 FCC 15.407(b) and RSS-247 6.2.2.2 Spurious (out-of-band) emissions  
 FCC Part 15 Subpart E and RSS-247 Issue 2

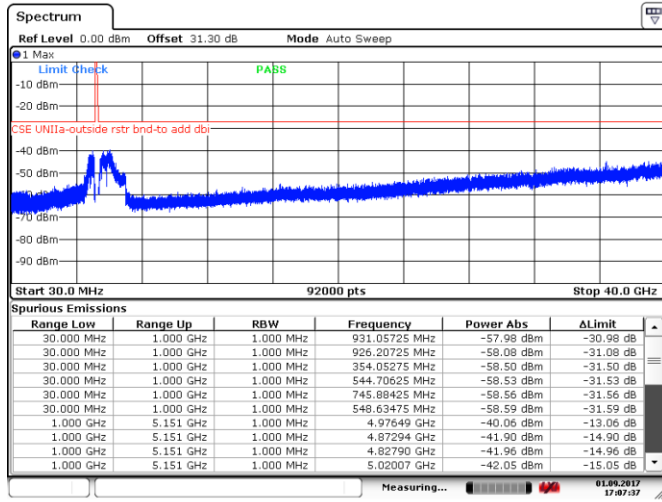


Date: 1.SEP.2017 17:07:36

**Figure 8.5-17:** Spurious emissions outside restricted bands, 5 MHz channel, high channel, 32 dBi antenna, cho

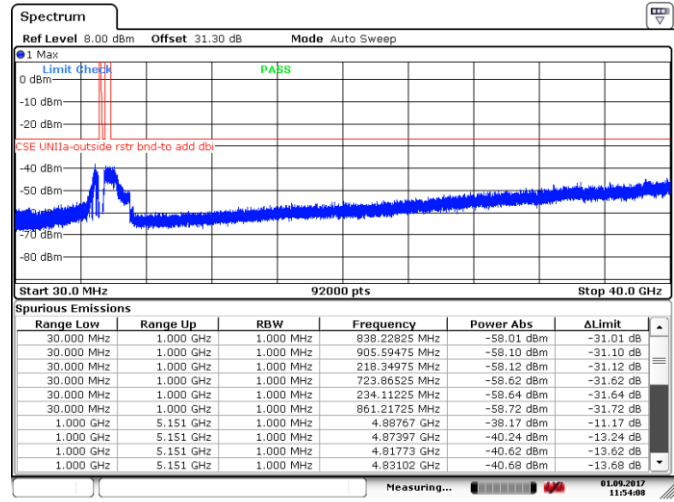


Date: 1.SEP.2017 11:54:08

**Figure 8.5-18:** Spurious emissions outside restricted bands, 5 MHz channel, high channel, 32 dBi antenna, ch1

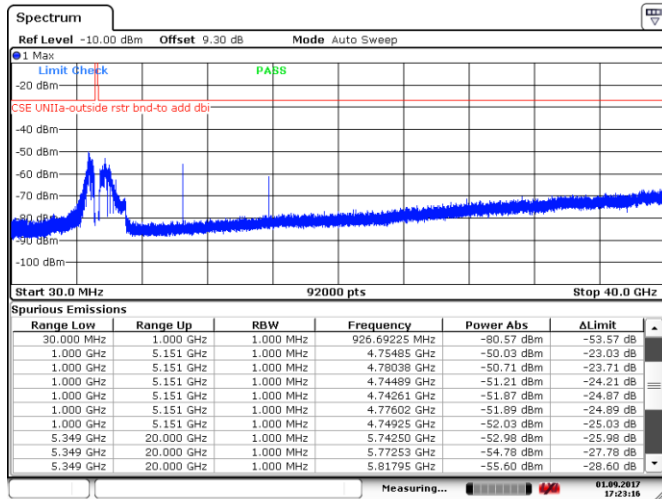

Date: 1.SEP.2017 17:23:15

**Figure 8.5-19:** Spurious emissions outside restricted bands, 10 MHz channel, low channel, 10 dBi antenna, cho

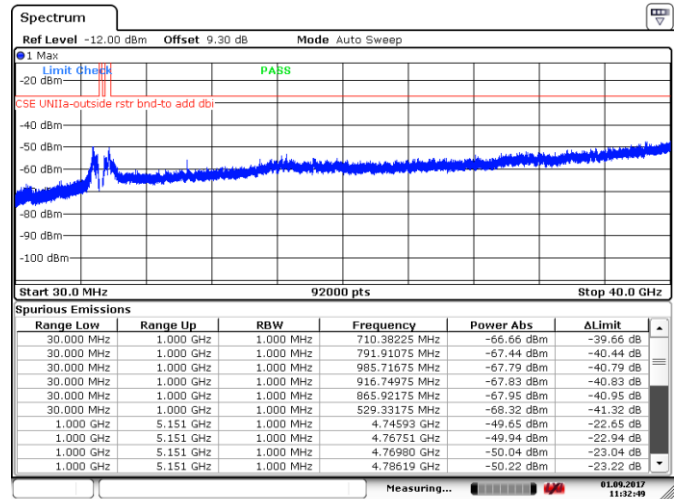


Date: 1.SEP.2017 11:32:48

**Figure 8.5-20:** Spurious emissions outside restricted bands, 10 MHz channel, low channel, 10 dBi antenna, ch1


**Section 8**  
**Test name**  
**Specification**

Testing data  
 FCC 15.407(b) and RSS-247 6.2.2.2 Spurious (out-of-band) emissions  
 FCC Part 15 Subpart E and RSS-247 Issue 2

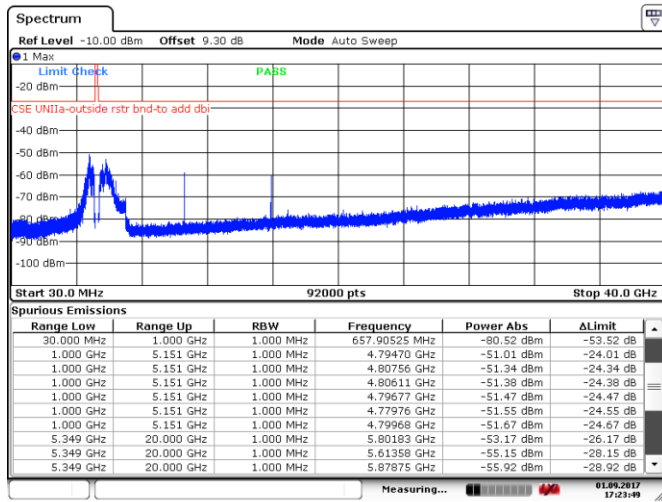


Date: 1.SEP.2017 17:23:49

**Figure 8.5-21:** Spurious emissions outside restricted bands, 10 MHz channel, mid channel, 10 dBi antenna, cho

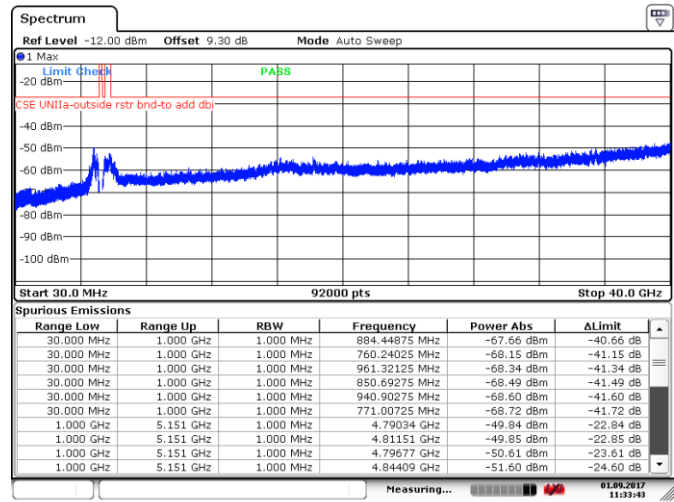


Date: 1.SEP.2017 11:33:42

**Figure 8.5-22:** Spurious emissions outside restricted bands, 10 MHz channel, mid channel, 10 dBi antenna, ch1

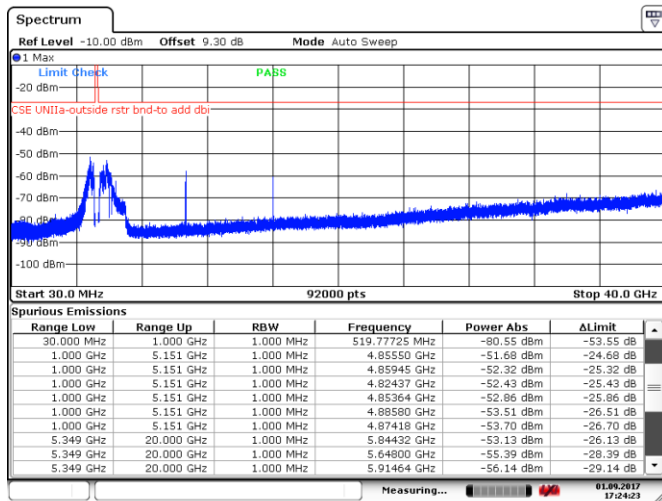

Date: 1.SEP.2017 17:24:23


**Figure 8.5-23:** Spurious emissions outside restricted bands, 10 MHz channel, high channel, 10 dBi antenna, cho

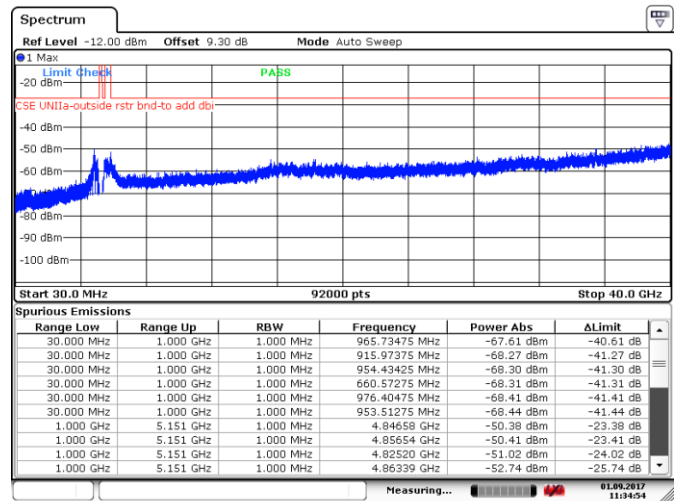

Date: 1.SEP.2017 11:34:53


**Figure 8.5-24:** Spurious emissions outside restricted bands, 10 MHz channel, high channel, 10 dBi antenna, ch1



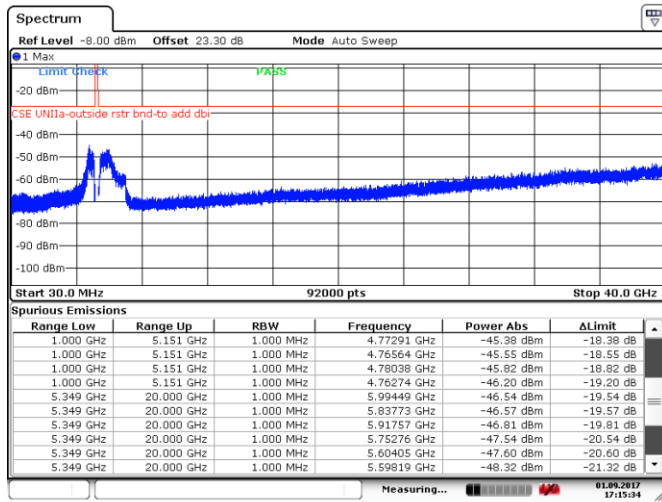


Date: 1.SEP.2017 17:15:34

Figure 8.5-25: Spurious emissions outside restricted bands, 10 MHz channel, low channel, 24 dBi antenna, cho

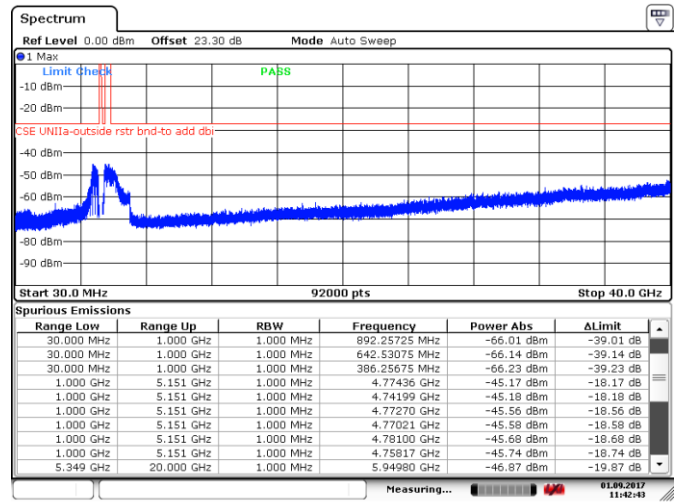


Date: 1.SEP.2017 11:42:43

Figure 8.5-26: Spurious emissions outside restricted bands, 10 MHz channel, low channel, 24 dBi antenna, ch1

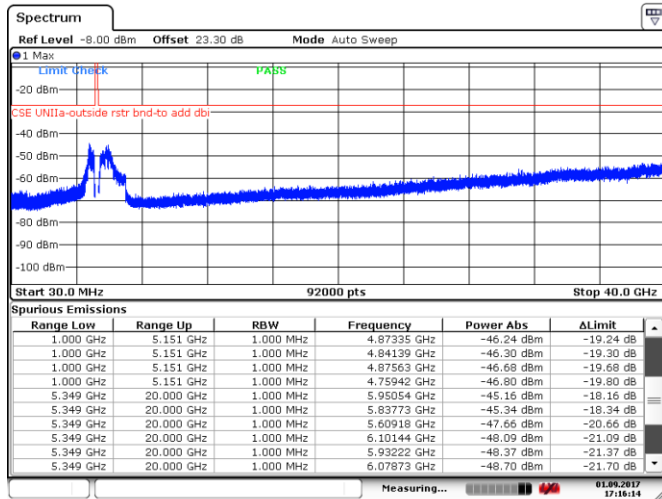

Date: 1.SEP.2017 17:16:13

Figure 8.5-27: Spurious emissions outside restricted bands, 10 MHz channel, mid channel, 24 dBi antenna, cho

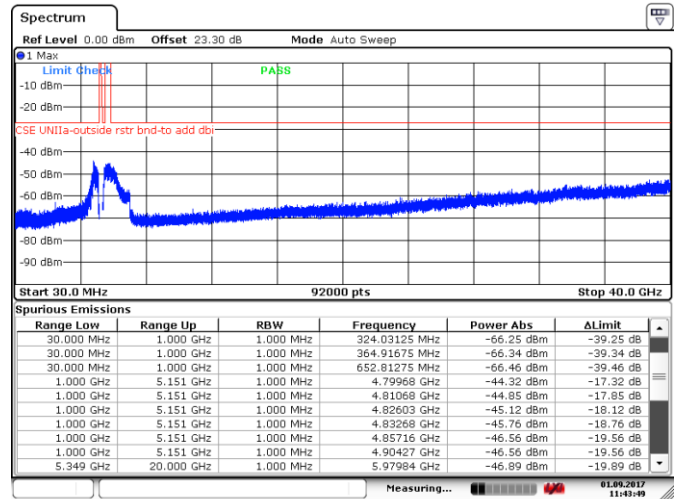


Date: 1.SEP.2017 11:43:49

Figure 8.5-28: Spurious emissions outside restricted bands, 10 MHz channel, mid channel, 24 dBi antenna, ch1


**Section 8**  
**Test name**  
**Specification**

Testing data  
 FCC 15.407(b) and RSS-247 6.2.2.2 Spurious (out-of-band) emissions  
 FCC Part 15 Subpart E and RSS-247 Issue 2

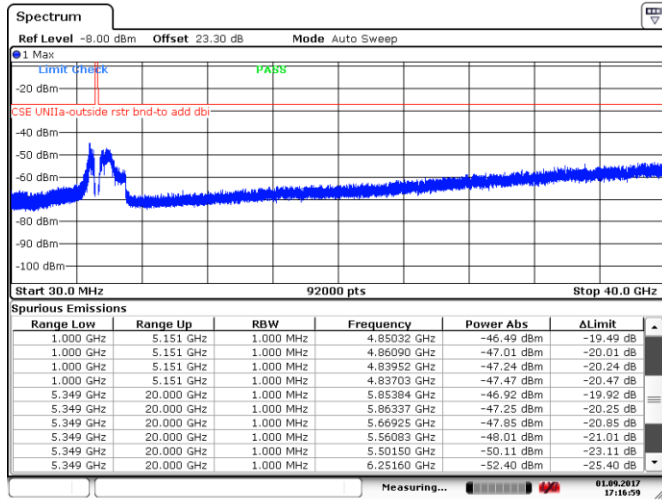


Date: 1.SEP.2017 17:16:58

**Figure 8.5-29:** Spurious emissions outside restricted bands, 10 MHz channel, high channel, 24 dBi antenna, cho

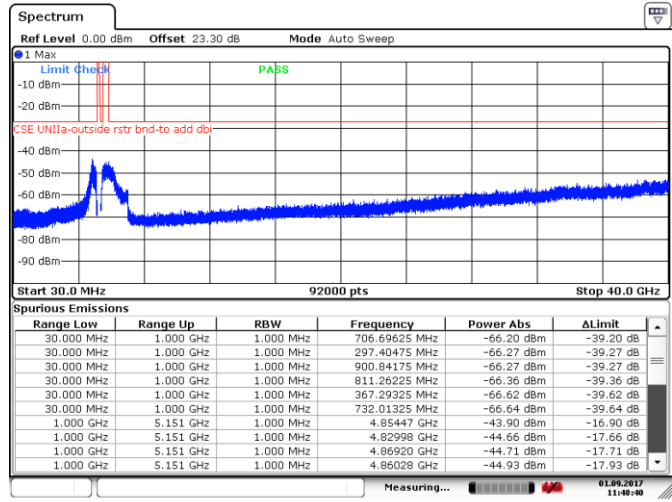


Date: 1.SEP.2017 11:48:39

**Figure 8.5-30:** Spurious emissions outside restricted bands, 10 MHz channel, high channel, 24 dBi antenna, ch1

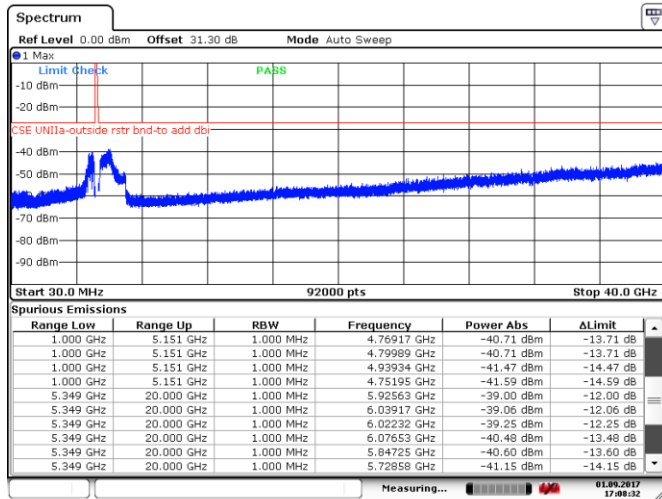

Date: 1.SEP.2017 17:08:32

**Figure 8.5-31:** Spurious emissions outside restricted bands, 10 MHz channel, low channel, 32 dBi antenna, cho

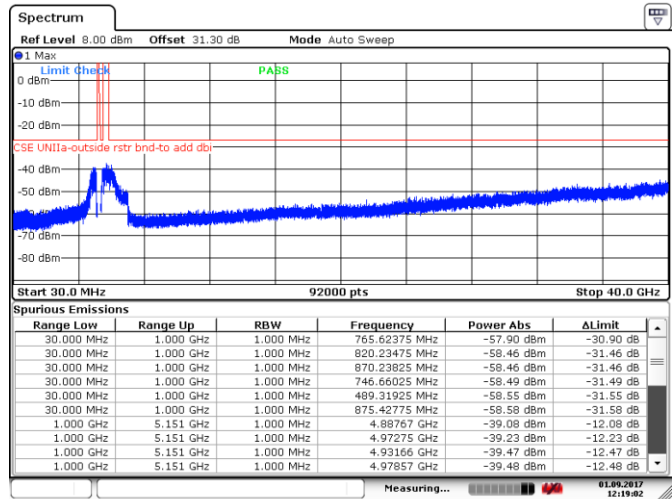


Date: 1.SEP.2017 12:19:01

**Figure 8.5-32:** Spurious emissions outside restricted bands, 10 MHz channel, low channel, 32 dBi antenna, ch1


**Section 8**  
**Test name**  
**Specification**

Testing data  
 FCC 15.407(b) and RSS-247 6.2.2.2 Spurious (out-of-band) emissions  
 FCC Part 15 Subpart E and RSS-247 Issue 2

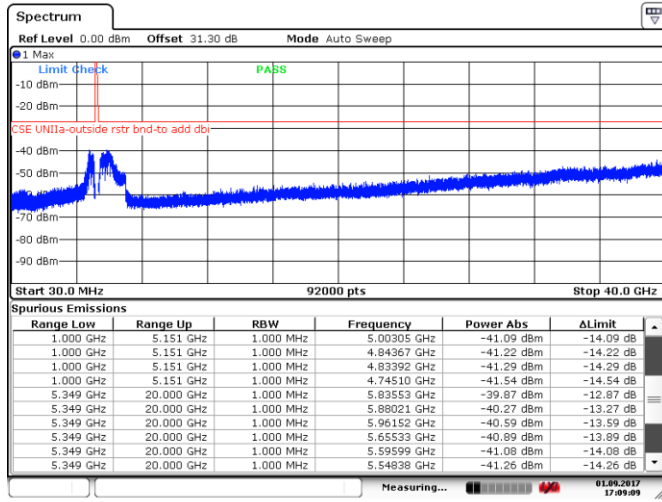


Date: 1.SEP.2017 17:09:08

**Figure 8.5-33:** Spurious emissions outside restricted bands, 10 MHz channel, mid channel, 32 dBi antenna, cho

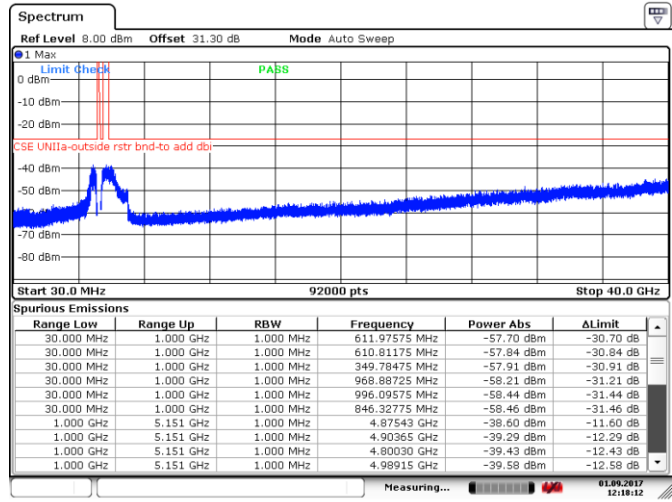


Date: 1.SEP.2017 12:18:11

**Figure 8.5-34:** Spurious emissions outside restricted bands, 10 MHz channel, mid channel, 32 dBi antenna, ch1

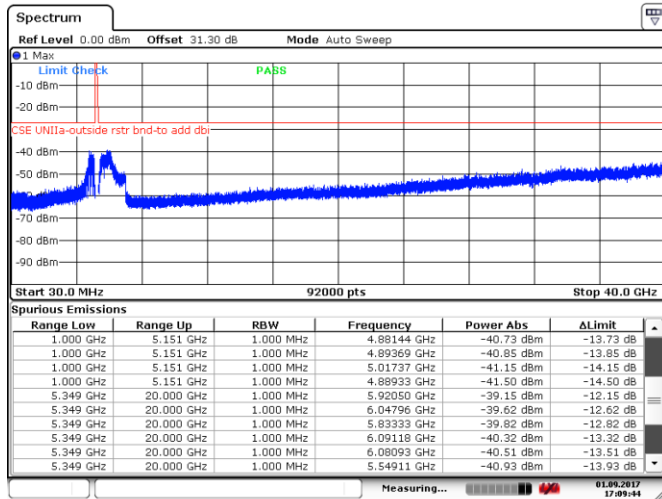


Date: 1.SEP.2017 17:09:44

**Figure 8.5-35:** Spurious emissions outside restricted bands, 10 MHz channel, high channel, 32 dBi antenna, cho

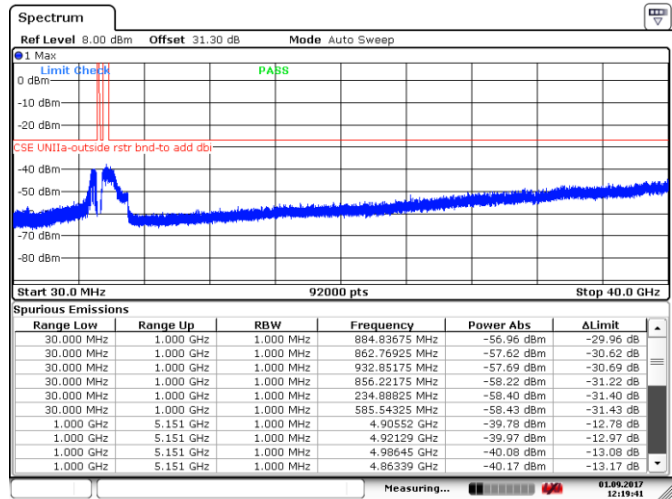


Date: 1.SEP.2017 12:19:41

**Figure 8.5-36:** Spurious emissions outside restricted bands, 10 MHz channel, high channel, 32 dBi antenna, ch1

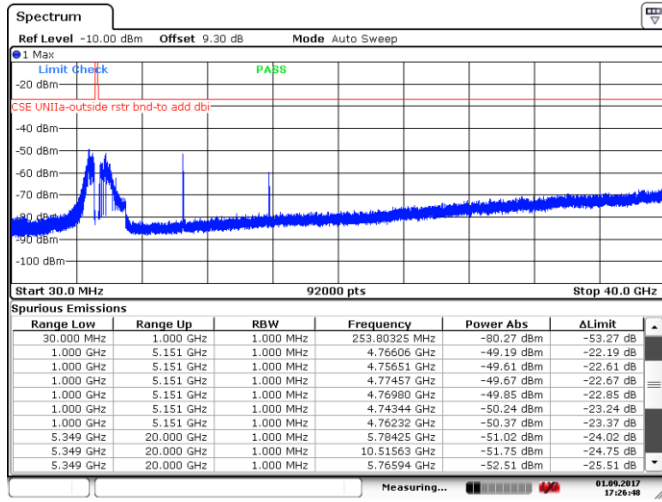


Date: 1.SEP.2017 17:26:47

Figure 8.5-37: Spurious emissions outside restricted bands, 20 MHz channel, low channel, 10 dBi antenna, cho

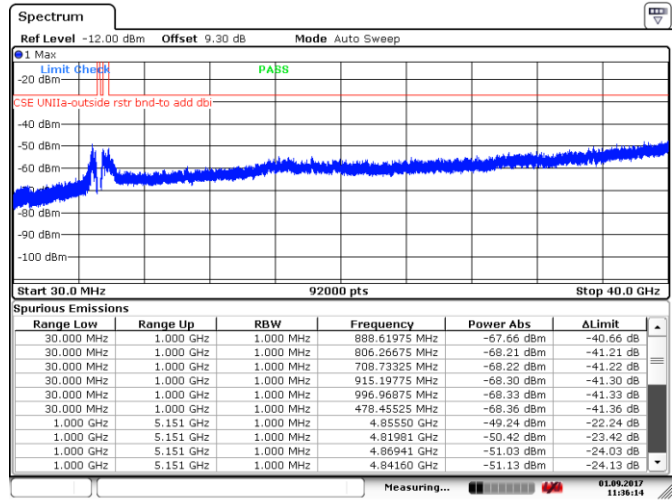


Date: 1.SEP.2017 11:36:13

Figure 8.5-38: Spurious emissions outside restricted bands, 20 MHz channel, low channel, 10 dBi antenna, ch1

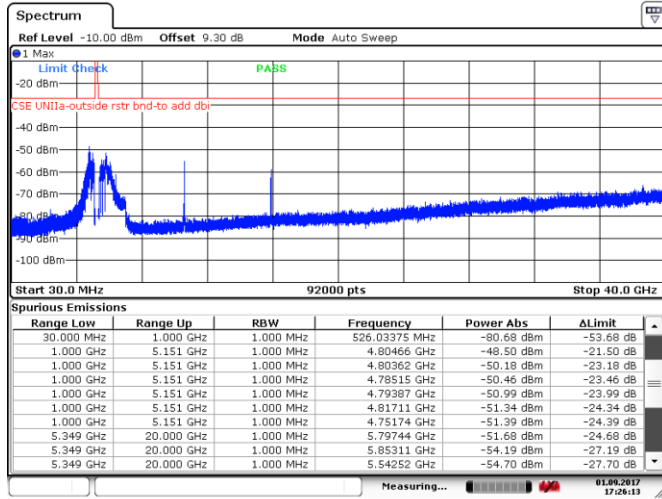

Date: 1.SEP.2017 17:26:13

Figure 8.5-39: Spurious emissions outside restricted bands, 20 MHz channel, mid channel, 10 dBi antenna, cho

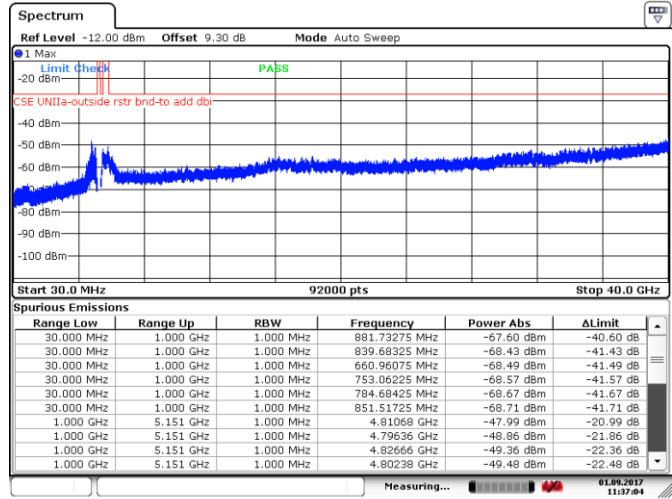


Date: 1.SEP.2017 11:37:03

Figure 8.5-40: Spurious emissions outside restricted bands, 20 MHz channel, mid channel, 10 dBi antenna, ch1


**Section 8**  
**Test name**  
**Specification**

Testing data  
 FCC 15.407(b) and RSS-247 6.2.2.2 Spurious (out-of-band) emissions  
 FCC Part 15 Subpart E and RSS-247 Issue 2

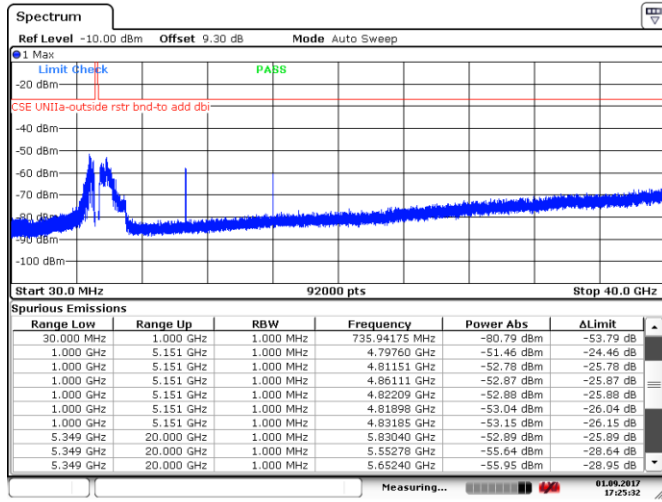


Date: 1.SEP.2017 17:25:31

**Figure 8.5-41:** Spurious emissions outside restricted bands, 20 MHz channel, high channel, 10 dBi antenna, cho

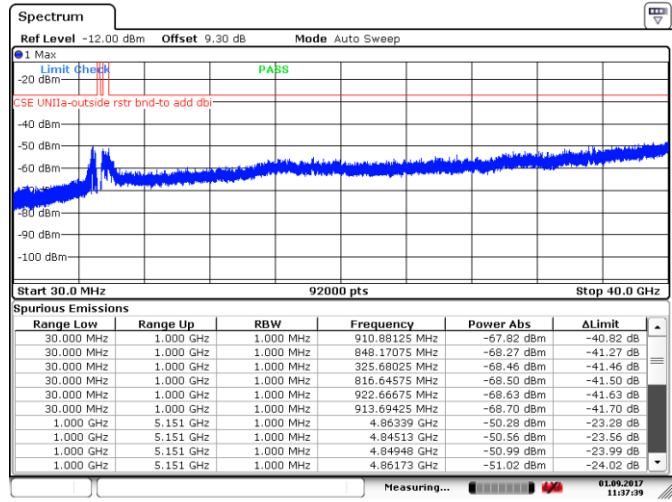


Date: 1.SEP.2017 11:37:39

**Figure 8.5-42:** Spurious emissions outside restricted bands, 20 MHz channel, high channel, 10 dBi antenna, ch1

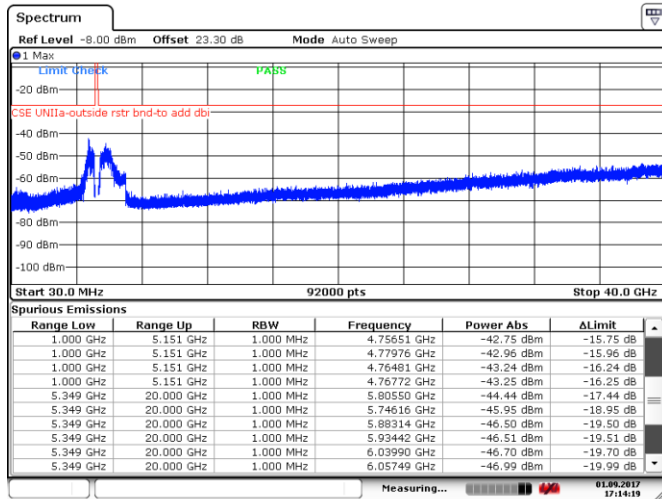

Date: 1.SEP.2017 17:14:19

**Figure 8.5-43:** Spurious emissions outside restricted bands, 20 MHz channel, low channel, 24 dBi antenna, cho

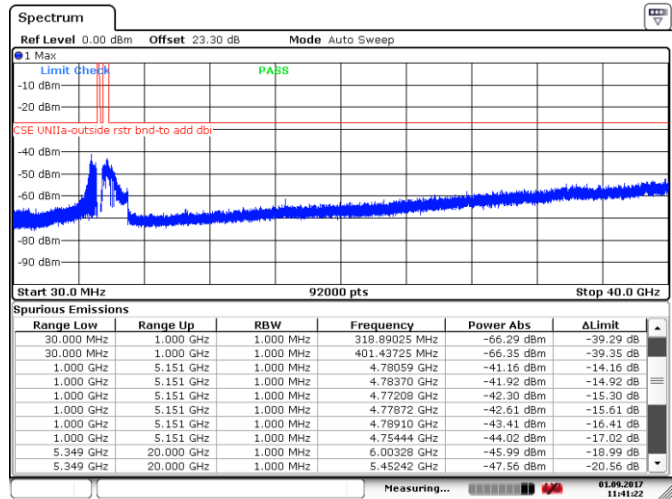

Date: 1.SEP.2017 11:41:22

**Figure 8.5-44:** Spurious emissions outside restricted bands, 20 MHz channel, low channel, 24 dBi antenna, ch1