



**Conducted Emissions**


**802.11b / 1 ch.**

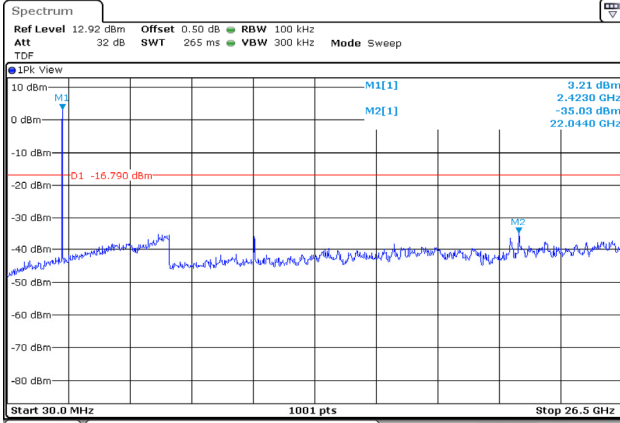

**802.11b / 6 ch.**

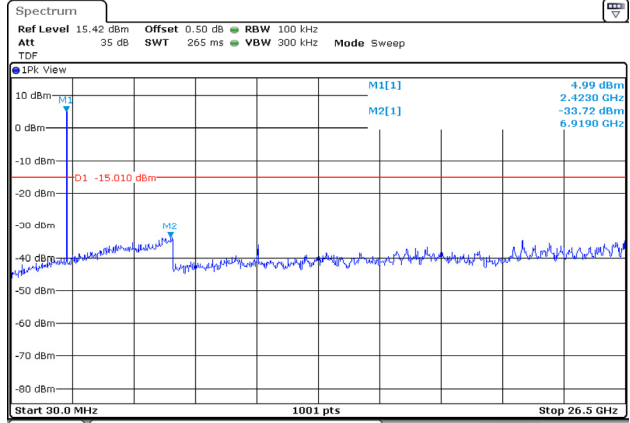


**802.11b / 11 ch.**

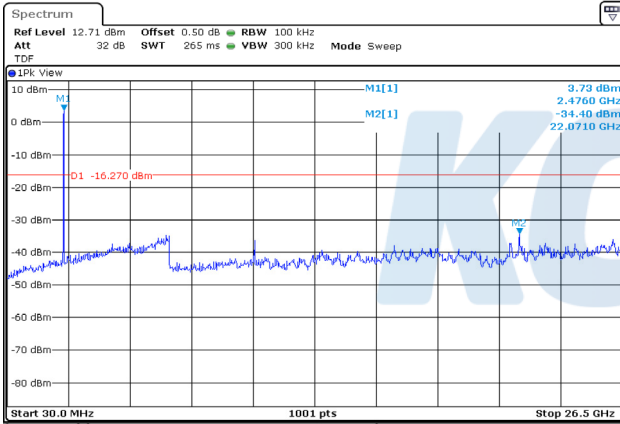


Blank

**Band edge**

**802.11b / 1 ch.**

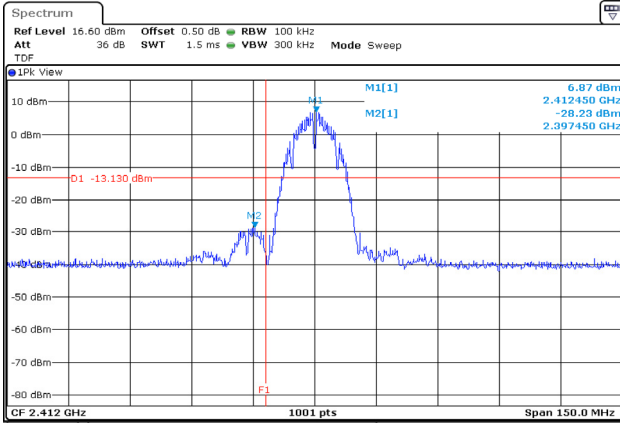

**802.11b / 11 ch.**

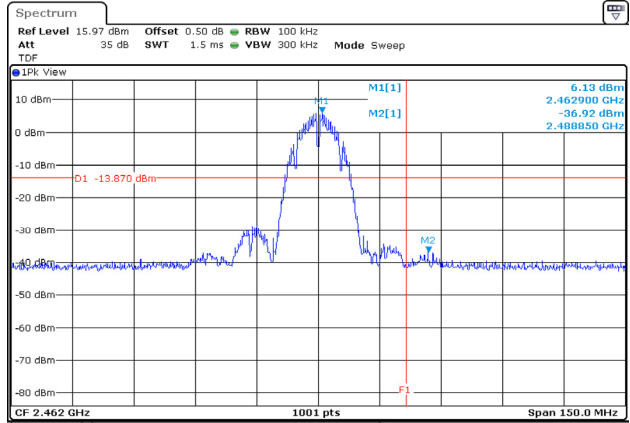

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR20-SRF0033-A

Page (54) of (60)



Test mode : 802.11g

## Reference

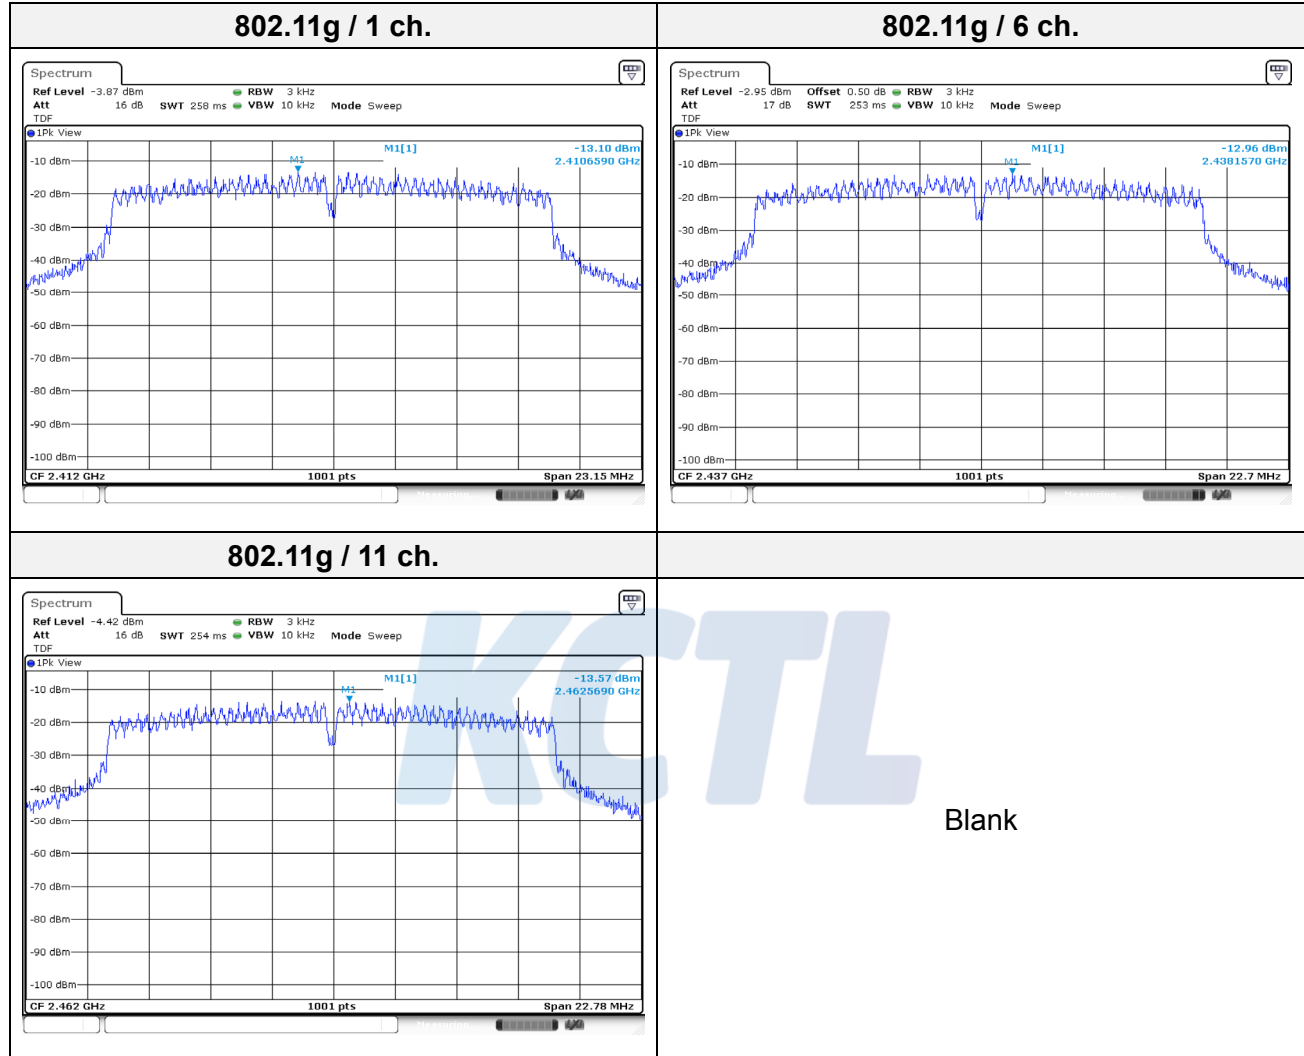

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR20-SRF0033-A

Page (55) of (60)




## Conducted Emissions


### 802.11g / 1 ch.

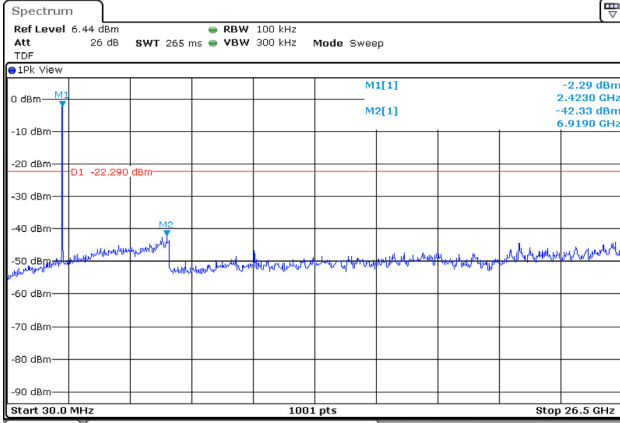

### 802.11g / 6 ch.

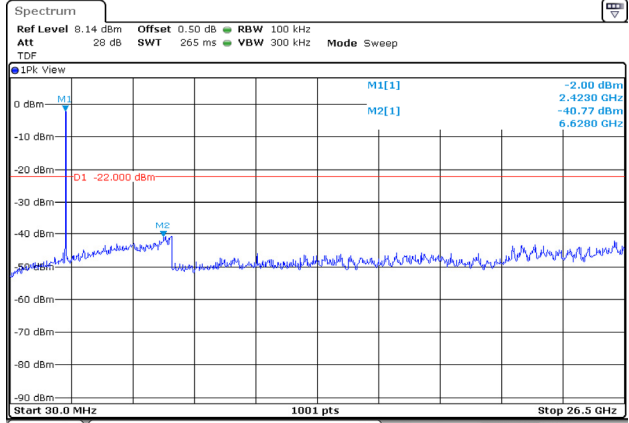


### 802.11g / 11 ch.

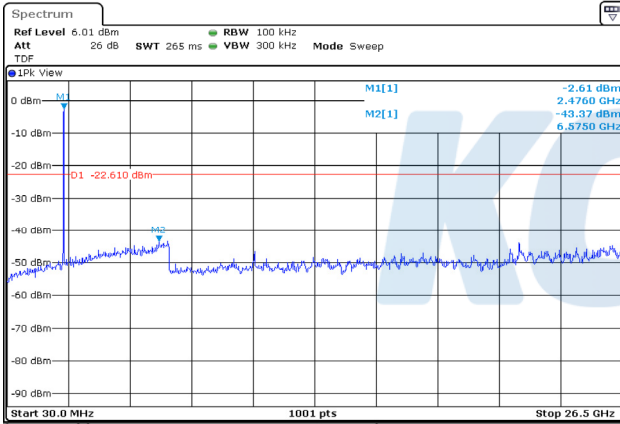


Blank

## Band edge

### 802.11g / 1 ch.

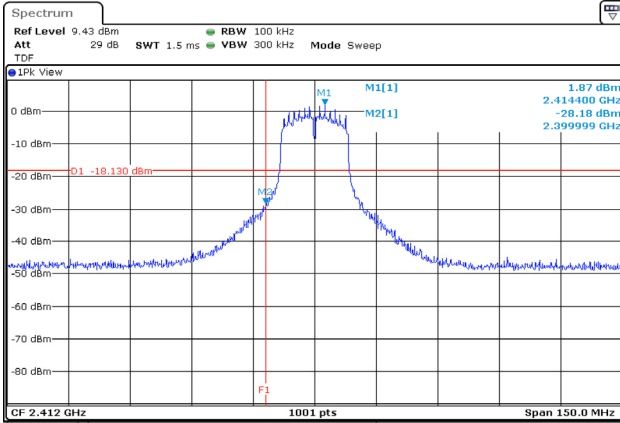

### 802.11g / 11 ch.

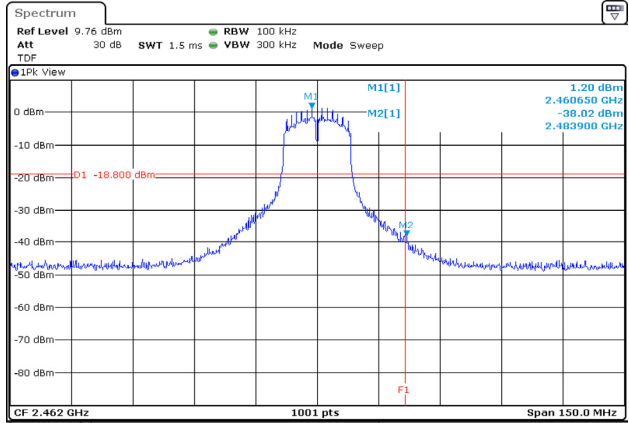

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR20-SRF0033-A

Page (56) of (60)




Test mode : 802.11n20

## Reference

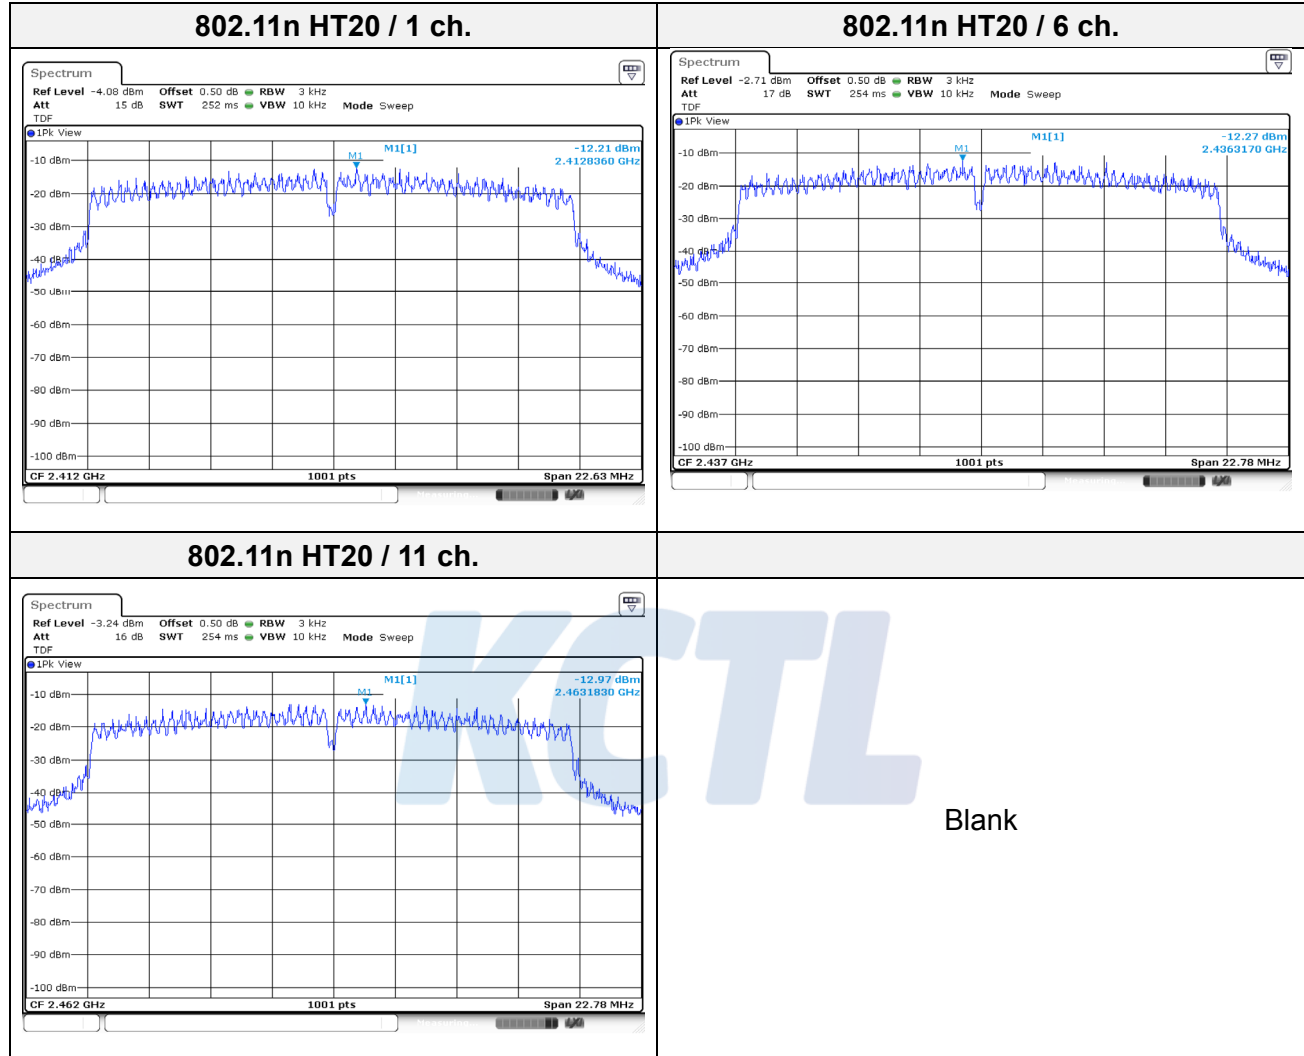


**Conducted Emissions**


**802.11n HT20 / 1 ch.**

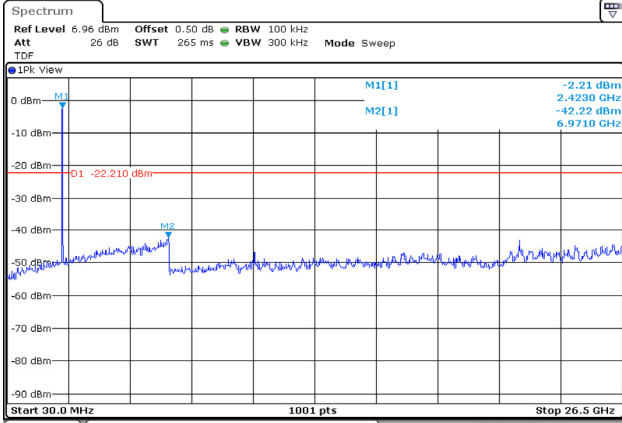

**802.11n HT20 / 6 ch.**

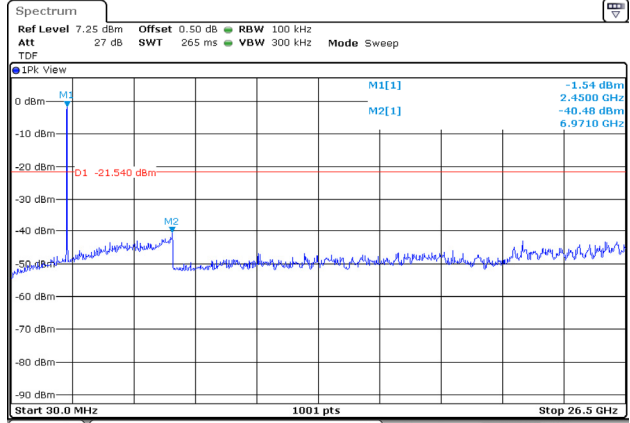


**802.11n HT20 / 11 ch.**

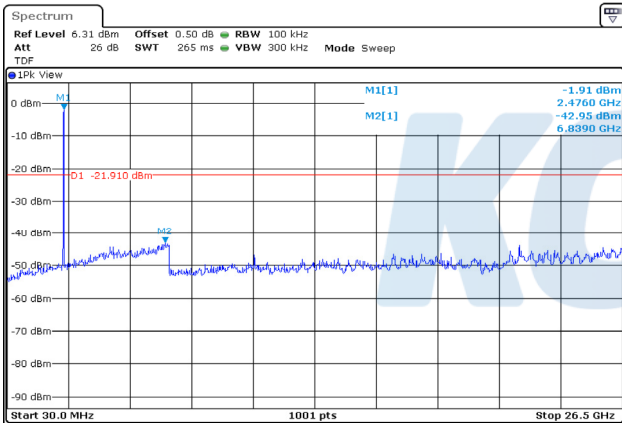


Blank

**Band edge**

**802.11n HT20 / 1 ch.**

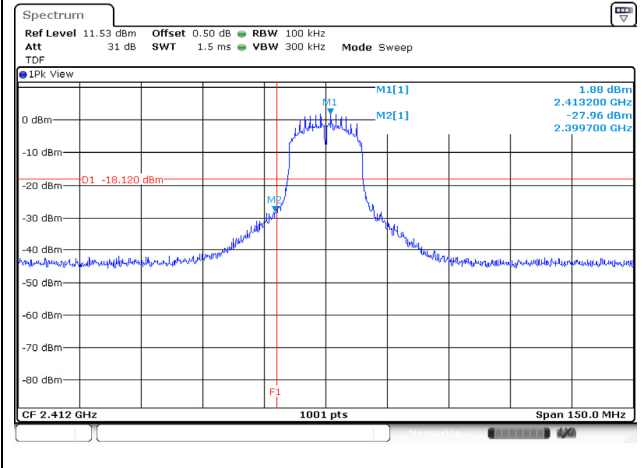


**802.11n HT20 / 11 ch**

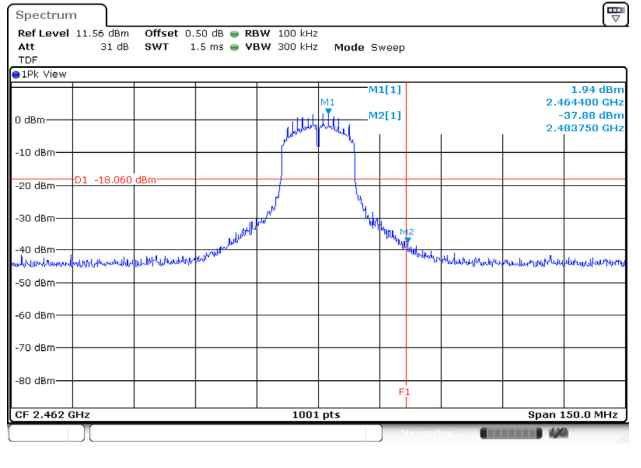

## 7.6. AC Conducted emission

### Test setup

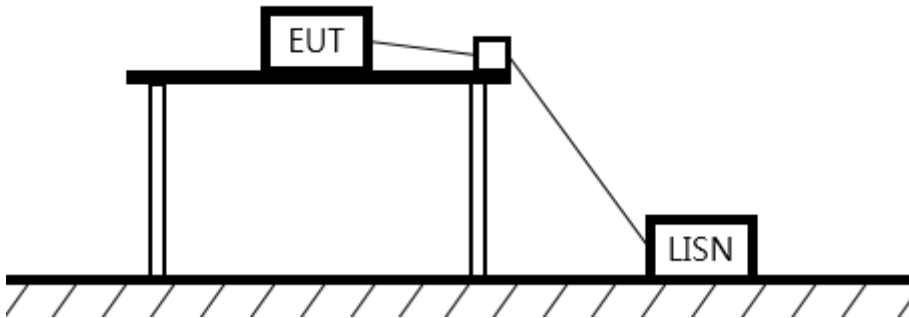

### Limit


According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall be on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower value applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted limit (dB $\mu$ V/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

### Measurement procedure

1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a 50 $\Omega$ /50 $\mu$ H LISN, which is an input transducer to a spectrum analyzer or an EMI/Field Intensity Meter, to the input power source.
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
5. The measurements were made with the detector set to peak amplitude within a bandwidth of 10 kHz or to quasi-peak and average within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.

**Test results**

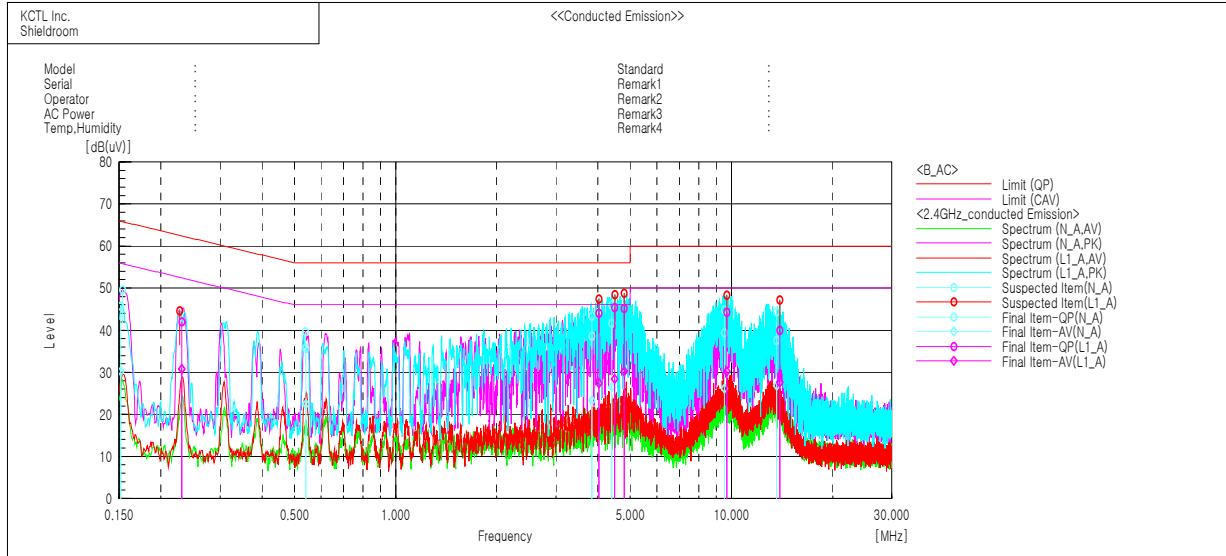

Final Result

--- N\_A Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.15176	35.7	20.2	10.0	45.7	30.2	65.9	55.9	20.2	25.7
2	0.53966	25.5	12.2	10.2	35.7	22.4	56.0	46.0	20.3	23.6
3	3.84322	28.2	13.0	10.4	38.6	23.4	56.0	46.0	17.4	22.6
4	4.39542	31.2	16.1	10.4	41.6	26.5	56.0	46.0	14.4	19.5
5	9.5127	28.7	15.6	10.6	39.3	26.2	60.0	50.0	20.7	23.8
6	13.63351	26.8	16.0	10.8	37.6	26.8	60.0	50.0	22.4	23.2

--- L1\_A Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.23092	32.0	20.8	10.0	42.0	30.8	62.4	52.4	20.4	21.6
2	4.02616	33.6	17.0	10.4	44.0	27.4	56.0	46.0	12.0	18.6
3	4.49066	35.0	18.0	10.4	45.4	28.4	56.0	46.0	10.6	17.6
4	4.79126	34.7	19.8	10.4	45.1	30.2	56.0	46.0	10.9	15.8
5	9.68405	33.5	19.5	10.7	44.2	30.2	60.0	50.0	15.8	19.8
6	13.93647	29.0	16.7	10.9	39.9	27.6	60.0	50.0	20.1	22.4

## 8. Measurement equipment

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Spectrum Analyzer	R & S	FSV30	100807	20.07.30
Spectrum Analyzer	R & S	FSV40	100988	21.01.03
DC Power Supply	AGILENT	E3632A	MY40001543	20.05.13
Wideband Power Sensor	R & S	NRP-Z81	102398	21.01.21
Attenuator	API Inmet	40AH2W-10	15	20.08.01
Attenuator	R & S	DNF Dämpfungsglied 10 dB in N-50 Ohm	31211	20.05.13
EMI TEST RECEIVER	R & S	ESCI	100732	21.01.22
Bi-Log Antenna	SCHWARZBECK	VULB 9168	583	20.05.04
Amplifier	SONOMA INSTRUMENT	310N	284608	20.08.22
COAXIAL FIXED ATTENUATOR	Agilent	8491B-003	2708A18758	20.05.04
Horn antenna	ETS.lindgren	3116	00086635	20.05.09
Horn antenna	ETS.lindgren	3117	161225	20.05.22
AMPLIFIER	L-3 Narda-MITEQ	AMF-7D-01001800- 22-10P	2031196	20.02.21
AMPLIFIER	L-3 Narda-MITEQ	JS44-18004000-33 -8P	2000997	20.08.01
Broadband PreAmplifier	SCHWARZBECK	BBV9718	216	20.07.30
LOOP Antenna	R & S	HFH2-Z2	100355	20.08.24
Antenna Mast	Innco Systems	MA4640-XP-ET	-	-
Turn Table	Innco Systems	DT2000	79	-
Antenna Mast	Innco Systems	MA4000-EP	303	-
Turn Table	Innco Systems	DT2000	79	-
Highpass Filter	WT	WT-A1698-HS	WT160411001	20.05.14
TWO-LINE V - NETWORK	R&S	ENV216	101584	20.04.05
EMI TEST RECEIVER	R & S	ESCI	101408	20.02.22
Signal Generator	R & S	SMB100A	176206	21.01.21
Cable Assembly	RadiAll	2301761768000PJ	1724.659	-
Cable Assembly	gigalane	RG-400	-	-
Cable Assembly	HUER+SUHNER	SUCOFLEX 104	MY4342/4	-

**End of test report**