



Inter**Lab**[®]

Final Report on

Cinterion AC75i Cellular Module

SW: Rev. 01.000 (SV03)

HW: B2.1.1

Report Reference: MDE_CINTE_0810_AC75i_FCCa

Date: Februar 17, 2009

Test Laboratory:

7 layers AG
Borsigstr. 11
40880 Ratingen
Germany



DAT-P-192/99-01

Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7 layers AG
Borsigstrasse 11
40880 Ratingen, Germany
Phone: +49 (0) 2102 749 0
Fax: +49 (0) 2102 749 350
www.7Layers.com

Aufsichtsratsvorsitzender •
Chairman of the Supervisory Board:
Markus Becker
Vorstand • Board:
Dr. Hans-Jürgen Meckelburg
René Schildknecht

Registergericht • registered in:
Düsseldorf, HRB 44096
USt-IdNr • VAT No:
DE 203159652
TAX No. 14 7/58 69/0385

1 Administrative Data

1.1 Project Data

Project Responsible: Holger Leutfeld
Date Of Test Report: 2009/02/17
Date of first test: 2009/02/13
Date of last test: 2009/02/13

1.2 Applicant Data

Company Name: Cinterion Wireless Modules GmbH
Street: Siemensdamm 50
City: 13629 Berlin
Country: Germany
Contact Person: Mr. Thorsten Liebig
Department: Approval and Standardization
Phone: +49 3031102 8241
Fax: +49 30311028305
E-Mail: thorsten.liebig@cinterion.com

1.3 Test Laboratory Data

The following list shows all places and laboratories involved for test result generation:


7 layers DE

Company Name : 7 layers AG
Street : Borsigstrasse 11
City : 40880 Ratingen
Country : Germany
Contact Person : Mr. Michael Albert
Phone : +49 2102 749 201
Fax : +49 2102 749 444
E Mail : michael.albert@7Layers.de

Laboratory Details

<i>Lab ID</i>	<i>Identification</i>	<i>Responsible</i>	<i>Accreditation Info</i>
Lab 1	Conducted Emissions	Mr. Robert Machulec Mr. Andreas Petz	DAR-Registration no. DAT-P-192/99-01
Lab 2	Radiated Emissions	Mr. Robert Machulec Mr. Andreas Petz	DAR-Registration no. DAT-P-192/99-01

1.4 Signature of the Testing Responsible

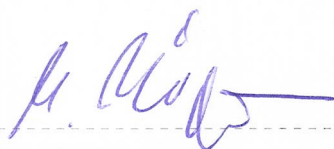

Dr. Michael Küppers
responsible for tests performed in: Lab 1, Lab 2

1.5 Signature of the Accreditation Responsible



Accreditation scope responsible person
responsible for Lab 1, Lab 2

2 Test Object Data

2.1 General OUT Description

The following section lists all OUTs (Object's Under Test) involved during testing.

OUT: Cinterion AC75i Cellular Module

<i>Type / Model / Family:</i>	Cinterion AC75i Cellular Module SW: Rev. 01.000 (SV03) HW: B2.1.1
<i>Product Category:</i>	Module
Manufacturer: <i>Company Name:</i>	see applicant
Parameter List:	
<i>Parameter name</i>	<i>Value</i>

2.2 Detailed Description of OUT Samples

Sample : E08

<i>OUT Identifier</i>	Cinterion AC75i Cellular Module		
<i>Sample Description</i>			
<i>Serial No.</i>	026291		
<i>HW Status</i>	B2.1.2		
<i>SW Status</i>	Rev. 01.000 (SV03)		
<i>Date of Receipt</i>	2008/10/07		
<i>Low Voltage</i>	3.2 V	<i>Low Temp.</i>	-10 °C
<i>High Voltage</i>	4.5 V	<i>High Temp.</i>	55 °C
<i>Nominal Voltage</i>	4.5 V	<i>Normal Temp.</i>	21 °C

2.3 OUT Features

Features for OUT: Cinterion AC75i Cellular Module

<i>Designation</i>	<i>Description</i>	<i>Allowed Values</i>	<i>Supported Value(s)</i>
Features for scope: FCC_v2			
AC	The OUT is powered by or connected to AC Mains		
DC	The OUT is powered by or connected to DC Mains		
EDGE850	EUT supports EDGE in the band 824 MHz - 849 MHz		
EDGE1900	EUT supports EDGE in the band 1850 MHz - 1910 MHz		
GSM850	EUT supports GSM850 band 824MHz - 849MHz		
PantC	permanent fixed antenna connector, which may be built-in, designed as an indispensable part of the equipment		
PCS1900	EUT supports PCS1900 band 1850MHz - 1910MHz		

2.4 Auxiliary Equipment

<i>AE No.</i>	<i>Type Designation</i>	<i>Serial No.</i>	<i>HW Status</i>	<i>SW Status</i>	<i>Description</i>
AE 03					ext. Antenna
AE 02					Flex cable
AE 04					Shielded Housing for DSB
AE 01	DSB 75	609037	1.1		Evaluation Board
AE 08	Epson Stylus C84 (B251A)	FBPT048906			Printer
AE 05	LG Flatron	509WANF1W607			TFT Display
AE 09	Logitech M-BB48	LZC90505478			Mouse
AE 07	PA3378E-3AC3	G71C0006R210			AC Adapter
AE 06	Toshiba PTM91E-02800TGR	87060248H			Laptop

2.5 Operating Mode(s)

<i>Ref.-No.</i>	<i>Description</i>
01	The device is transmitting on traffic channel 661, GSM 1900.

2.6 Setups used for Testing

For each setup a relation is given to determine if and which samples and auxiliary equipment is used. The left side list all OUT samples and the right side lists all auxiliary equipment for the given setup.

<i>Setup No. List of OUT samples</i>		<i>List of auxiliary equipment</i>	
<i>Sample No.</i>	<i>Sample Description</i>	<i>AE No.</i>	<i>AE Description</i>
E08_FCC15b			
<i>Sample: E08</i>		AE 03	ext. Antenna
		AE 02	Flex cable
		AE 04	Shielded Housing for DSB
		AE 01	Evaluation Board
		AE 08	Printer
		AE 05	TFT Display
		AE 09	Mouse
		AE 07	AC Adapter
		AE 06	Laptop

3 Results

3.1 General

Documentation of tested devices:

Available at the test laboratory.

Interpretation of the test results:

The results of the inspection are described on the following pages, where 'Conformity' or 'Passed' means that the certification criteria were verified and that the tested device is conform to the applied standard.

In cases where 'Declaration' is printed, the required documents are available in the manufacturers product documentation.

In cases where 'not applicable' is printed, the test case requirements are not relevant to the specific equipment implementation.

3.2 List of the Applicable Body

(Body for Scope: FCC_v2)

<i>Designation</i>	<i>Description</i>
FCC47CFRChIPART15bRADIO FREQUENCY DEVICES	Part 15, Subpart B - Unintentional Radiators

3.3 List of Test Specification

<i>Test Specification:</i>	FCC part 2 and 15
<i>Date / Version</i>	2007/10/01 Version: 10-1-07 Edition
<i>Title:</i>	PART 2 - GENERAL RULES AND REGULATIONS PART 15 - RADIO FREQUENCY DEVICES

3.4 Summary

<i>Test Case Identifier / Name</i> <i>Test (condition)</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab</i> <i>Ref.</i>	<i>Setup</i>
15b.1 Conducted Emissions (AC Power Line) §15.107 15b.1; Mode = transmit	Passed	2009/02/13	Lab 1	E08_FCC15b
	operating mode: 01			
15b.2 Spurious Radiated Emissions §15.109 15b.2; Mode = transmit	Passed	2009/02/13	Lab 2	E08_FCC15b
	operating mode: 01			

3.5 Detailed Results

3.5.1 15b.1 Conducted Emissions (AC Power Line) §15.107

Test: 15b.1; Mode = transmit

Result: Passed

Setup No.: E08_FCC15b

Date of Test: 2009/02/13 14:40

Body: FCC47CFRChIPART15bRADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Test Equipment Environmental Conditions

Temperature: 22°C

Air Pressure: 1020hPa

Rel. Humidity: 33%

Detailed Results:

AC MAINS CONDUCTED

EUT: AC75i (01423e08)

Manufacturer: Cinterion

Operating Condition: GSM 1900 TCH 661, normal voltage=4,5V

Test Site: 7 layers Ratingen

Operator: Suna


Test Specification: ANSI C63.4; FCC 15.107 / 15.207

Comment:

Start of Test: 13.02.2009 / 12:22:03

SCAN TABLE: "FCC Voltage"

Short Description:		FCC Voltage				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	5.0 kHz	MaxPeak	20.0 ms	9 kHz	ESH3-Z5
Average						

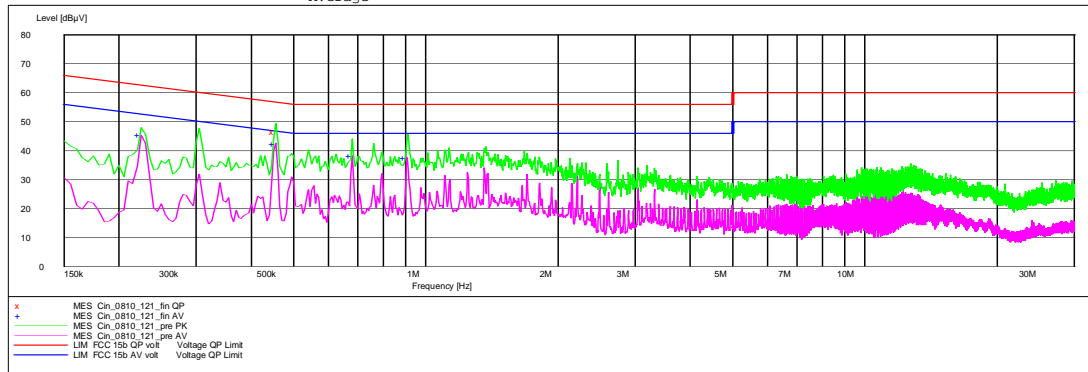

MEASUREMENT RESULT: "Cin_0810_121_fin_QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBuV	dB	dBuV	dB		
0.455000	46.50	10.0	57	10.3	N	GND

MEASUREMENT RESULT: "Cin_0810_121_fin_AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBuV	dB	dBuV	dB		
0.225000	45.60	10.0	53	7.0	N	FLO
0.455000	42.40	10.0	47	4.3	N	GND
0.680000	38.30	9.9	46	7.7	N	GND
0.905000	37.60	10.1	46	8.4	N	GND

3.5.2 15b.2 Spurious Radiated Emissions §15.109

Test: 15b.2; Mode = transmit

Result: Passed
 Setup No.: E08_FCC15b
 Date of Test: 2009/02/13 12:00
 Body: FCC47CFRChIPART15bRADIO FREQUENCY DEVICES
 Test Specification: FCC part 2 and 15
 Test Equipment Environmental Conditions
 Temperature: 22°C
 Air Pressure: 1020hPa
 Rel. Humidity: 33%


Detailed Results:

EMI RADIATED TEST

EUT: AC75i (01423e08)
 Manufacturer: Cinterion
 Operating Condition: GSM 1900 TCH 661, normal voltage=4,5 V
 Test Site: 7 layers, Ratingen
 Operator: Suna
 Test Specification: FCC part 15 b
 Comment: Horizontal EUT position
 Start of Test: 13.02.2009 / 10:47:49

SCAN TABLE: "FCC part 15 b"

Short Description: FCC part 15 b
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 30.0 MHz 1.0 GHz 60.0 kHz MaxPeak 1.0 ms 120 kHz HL562

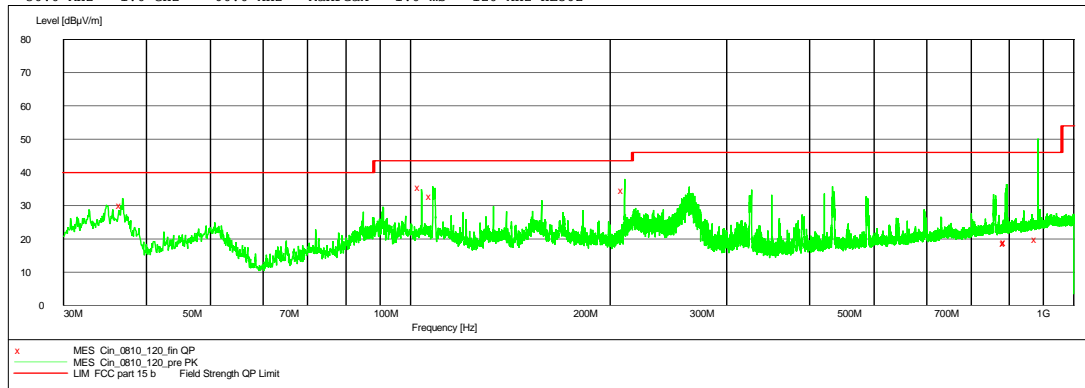

MEASUREMENT RESULT: "Cin_0810_120_fin QP"

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
36.840000	30.20	16.0	40.0	9.8	100.0	292.00	VERTICAL
103.980000	35.50	9.6	43.5	8.0	119.0	123.00	VERTICAL
108.180000	32.70	9.4	43.5	10.8	103.0	95.00	VERTICAL
210.420000	34.50	7.9	43.5	9.0	100.0	157.00	VERTICAL
792.120000	18.80	19.9	46.0	27.2	270.0	202.00	HORIZONTAL
792.660000	19.00	19.9	46.0	27.0	171.0	112.00	VERTICAL
793.080000	18.90	19.9	46.0	27.1	307.0	201.00	VERTICAL
882.780000	20.00	21.1	46.0	26.0	366.0	202.00	VERTICAL

4 Annex

4.1 Additional Information for OUT Description



back view



front view

4.2 Additional Information for Report



setup for conducted tests



setup for radiated tests

Test Description

Conducted emissions (AC power line)

Standard FCC Part 15, 10-1-07
Subpart B

The test was performed according to: ANSI C 63.4, 2003

Test Description

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2003. The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50 μ H || 50 Ohm Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads.

The measurement procedure consists of two steps. It is implemented into the EMI test software ES-K1 from R&S.

Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak - Maxhold
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 20 ms
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak
- IF - Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

Test Requirements / Limits

If not stated within the measurement plot and/or test result, class B limits are applied.

FCC Part 15, Subpart B, §15.107, Class B Limit

Frequency Range (MHz)	QP Limit (dB μ V)	AV Limit (dB μ V)
0.15 – 0.5	66 to 56	56 to 46
0.5 – 5	56	46
5 – 30	60	50

FCC Part 15, Subpart B, §15.107, Class A Limit

Frequency Range (MHz)	QP Limit (dBµV)	AV Limit (dBµV)
0.15 - 0.5	79	66
0.5 - 30	73	60

Used conversion factor: Limit (dBµV) = 20 log (Limit (µV)/1µV).

NOTE: a missing result table in the corresponding test report section means, that no final measurement was performed because no relevant frequencies (peaks) were found in the preliminary scan.

Spurious radiated emissions

Standard FCC Part 15, 10-1-07, Subpart B

The test was performed according to: ANSI C 63.4, 2003

Test Description

Measurement below 1 GHz:

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2003. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration. The measurement procedure is implemented into the EMI test software ES-K1 from R&S.

Step 1: Preliminary scan (test to identify the highest amplitudes relative to the limit)

Intention of this step is, to determine the radiated EMI-profile of the EUT.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 µs
- Turntable angle range: -180° to 180°
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2:

A further measurement will be performed on the frequencies determined in step 1. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

Settings for step 2:

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -180° to 180°
- Turntable step size: 45°
- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0.5 m

Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to

find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by +/- 22.5° around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by +/- 25 cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100ms
- Turntable angle range: -22.5° to + 22.5 ° around the determined value
- Height variation range: -0.25m to + 0.25m around the determined value

Step 4: Final measurement (with QP detector)

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak(< 1GHz)
- Measured frequencies: in step 3 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

Measurement above 1 GHz:

The following modifications apply to the measurement procedure for the frequency range above 1 GHz: The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements, inverse-linear-distance-squared for the power density measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18–25 GHz) are used, the steps 2-4 as described before, are omitted. Step 1 was performed at one height of the receiving antenna only.

Detector: Peak, Average (simultaneously)

RBW = VBW = 1 MHz; above 7 GHz 100 kHz

Test Requirements / Limits

If not stated within the measurement plot and/or test result, class B limits are applied.

FCC Part 15, Subpart B, §15.109, Radiated Emission Limits

Frequency Range (MHz): Class B Limit (dBµV/m)

Frequency Range (MHz)	Class B Limit (dBµV/m)
30 – 88	40.0
88 – 216	43.5
216 – 960	46.0
above 960	54.0

Frequency Range (MHz) Class A Limit (dBµV/m) / @ 3m !

30 - 88	49.5
88 - 216	54.0
216 - 960	56.9
above 960	60.0


§15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit (dBµV/m) = 20 log (Limit (µV/m)/1µV/m)

NOTE: a missing result table in the corresponding test report section means, that no final measurement was performed because no relevant frequencies (peaks) were found in the preliminary scan.

Setup Drawings

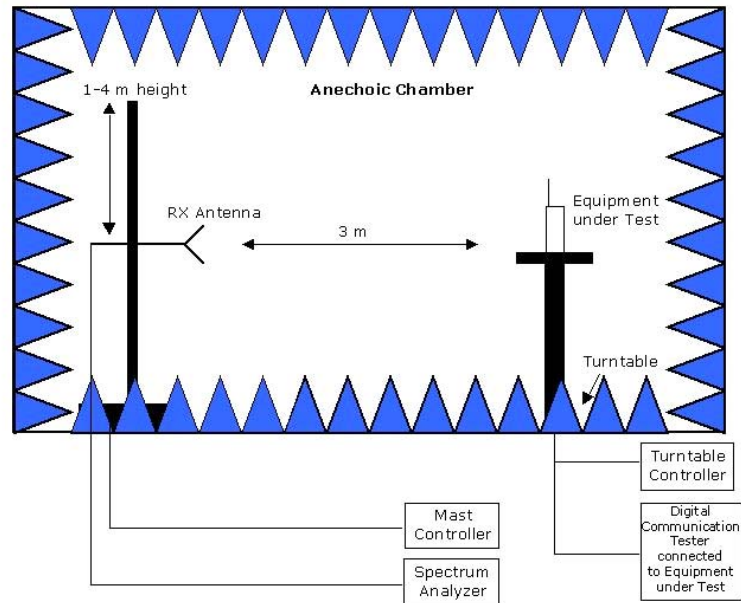

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting ground plane.

Test Equipment

EUT Digital Signalling System

Equipment	Type	Serial No.	Manufacturer	Cal. data	Next cal.
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz	07.10.08	07.10.11
Signalling Unit for Bluetooth	PTW60	100004	Rohde & Schwarz	-	N/A *)
Universal Radio Communication Tester	CMU200	102366	Rohde & Schwarz	22.09.07	22.09.09
Universal Radio Communication Tester	CMU200	837983/052	Rohde & Schwarz	22.09.07	22.09.09
Signalling Unit for Bluetooth	CBT	100589	Rohde & Schwarz	14.08.08	N/A *)
Signalling Unit for GPS	SMU200	100912	Rohde & Schwarz	28.10.08	N/A *)

*) N/A – only used for signalling

EMI Test System

Equipment	Type	Serial No.	Manufacturer	Cal. data	Next cal.
EMI Analyzer	ESI 26	830482/004	Rohde & Schwarz	06.12.07	06.12.09
Signal Generator	SMR 20	846834/008	Rohde & Schwarz	05.12.07	05.12.09
AC Power Source	6404	64040000B04	Croma ATE INC.	01.06.08	01.06.11

EMI Radiated Auxiliary Equipment

Equipment	Type	Serial No.	Manufacturer	Cal. data	Next cal.
Antenna mast 4m	MA 240	240/492	HD GmbH H. Deisel	-	-
Biconical dipole	VUBA 9117	9117108	Schwarzbeck	27.10.08	27.10.13
Broadband Amplifier 18MHz-26GHz	JS4- 18002600-32	849785	Miteq	12.11.08	12.05.09
Broadband Amplifier 30MHz-18GHz	JS4- 00101800-35	896037	Miteq	12.11.08	12.05.09
Broadband Amplifier 45MHz-27GHz	JS4- 00102600-42	619368	Miteq	12.11.08	12.05.09
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2 W38.01-2	Kabel Kusch	12.11.08	12.05.09
Cable "ESI to Horn Antenna"	UFB311A UFB293C	W18.02-2 W38.02-2	Rosenberger- Microcoax	12.11.08	12.05.09
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz	12.05.06	12.05.09
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz	20.01.04	N/A – spare antenna
High Pass Filter	5HC3500/127 50-1.2-KK	200035008	Trilithic	12.11.08	12.05.09
High Pass Filter	5HC2700/127 50-1.5-KK	9942012	Trilithic	12.11.08	12.05.09
High Pass Filter	4HC1600/127 50-1.5-KK	9942011	Trilithic	12.11.08	12.05.09
High Pass Filter	WHKX 7.0/18G-8SS	9	Wainwright	12.11.08	12.11.08
KUEP pre amplifier	Kuep 00304000	001	7 layers AG	-	N/A – spare antenna
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz	17.05.06	17.05.09
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz	19.08.02	N/A – only used for pre- testing
Pyramidal Horn Antenna 26.5 GHz	Model 3160- 09	9910-1184	EMCO	28.02.08	N/A (Stand. Gain Horn)
Pyramidal Horn Antenna 40 GHz	Model 3160- 10	00086675	EMCO	18.12.07	N/A (Stand. Gain Horn)

EMI Conducted Auxiliary Equipment

Equipment	Type	Serial No.	Manufacturer	Cal. data	Next cal.
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber+Suhner	12.11.08	12.05.09
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz	13.10.08	13.10.11
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz	-	-
Four-Line Network	ENY41	838119/004	Rohde & Schwarz	06.03.08	05.03.11

Auxiliary Test Equipment

Equipment	Type	Serial No.	Manufacturer	Cal. data	Next cal.
Broadband Resist. Power Divider N	1506A / 93459	LM390	Weinschel	-	-
Broadband Resist. Power Divider SMA	1515 / 93459	LN673	Weinschel	-	-
Digital Multimeter	177	86670383	Fluke	01.08.08	31.07.10
Digital Oscilloscope	TDS 784C	B021311	Tektronix	-	-
Fibre optic link Satellite	FO RS232 Link	181-018	Pontis	-	-
Fibre optic link Transceiver	FO RS232 Link	182-018	Pontis	-	-
I/Q Modulation Generator	AMIQ-B1	832085/018	Rohde & Schwarz	-	-
Notch Filter ultra stable	WRCA800/960 -6E	24	Wainwright	-	-
Temperature Chamber	VT 4002	58566002150010	Vötsch	29.02.08	28.02.09
Temperature Chamber	KWP 120/70	59226012190010	Weiss	29.02.08	28.02.09
ThermoHygro Datalogger 03	Opus10 THI (8152.00)	7482	Lufft Mess- und Regeltechnik GmbH	22.01.09	21.01.10
Spectrum Analyzer 9 kHz to 3 GHz	FSP3	838164/004	Rohde & Schwarz	06.10.08	06.10.11
Spectrum Analyzer 9 kHz to 3 GHz	FSP3	836722/011	Rohde & Schwarz	06.10.08	05.10.11
Signal Analyzer 20 Hz to 26.5 GHz	FSIQ26	840061/005	Rohde & Schwarz	02.10.08	02.10.11

Anechoic Chamber

Equipment	Type	Serial No.	Manufacturer	Cal. data	Next cal.
Air Compressor (pneumatic)			Atlas Copco	-	-
Controller	MCU	1520506	Maturo GmbH	-	-
EMC Camera	CE-CAM/1		CE-SYS	-	-
EMC Camera for observation of EUT	CCD-400E	0005033	Mitsubishi	-	-
Filter ISDN	B84312-C110- E1		Siemens & Matsushita	-	-
Filter telephone systems / modem	B84312-C40- B1		Siemens & Matsushita	-	-
Filter Universal 1A	B84312-C30- H3		Siemens & Matsushita	-	-
Fully/Semi AE Chamber	10.58x6.38x6		Frankonia	-	-
Turntable	DS 420S	420/573/99	HD GmbH, H.Deisel	-	-
Valve Control Unit (pneum.)	VE 615P	615/348/99	HD GmbH, H.Deisel	-	-
ThermoHygro Datalogger 12	Opus10 THI (8152.00)	12482	Lufft Mess- und Regeltechnik GmbH	05.08.08	04.08.09
ThermoAirpressure Datalogger 13	Opus10 TPR (8253.00)	13936	Lufft Mess- und Regeltechnik GmbH	22.01.09	21.01.10

7 layers InterLab Bluetooth RF Test Solution - Setup C – Bluetooth BDR and EDR RF Conformance Test System

Equipment	Type	Serial No.	Manufacturer	Cal. data	Next cal.
Power Meter	NRVD	832025/059	Rohde & Schwarz	17.06.08	15.06.09
Power Sensor A	NRV-Z1	832279/013	Rohde & Schwarz	18.06.08	17.06.09
Power Supply	E3632A	MY40003776	Agilent	-	-
Power Supply	PS-2403D	-	Conrad	-	-
Power Supply	NGSM 32/10	2725	Rohde & Schwarz	28.04.08	27.04.09
Rubidium Frequency Normal	MFS	002	Datum GmbH	18.06.08	17.06.09
Signal Analyzer FSIQ26	FSIQ26	832695/007	Rohde & Schwarz	23.08.07	23.08.09
Signal Generator	SMP 03	833680/003	Rohde & Schwarz	04.07.06	04.07.09
Signal Generator	SMIQ03B	832870/017	Rohde & Schwarz	24.05.07	24.05.10
Signal Switching Unit	TOCT	030106	7 layers Inc.	-	-
Signalling Unit	CBT	100302	Rohde & Schwarz	07.05.08	06.05.09
ThermoHygro Datalogger 04	Opus10 THI (8152.00)	7481	Lufft Mess- und Regeltechnik GmbH	22.01.09	21.01.10
Temperature Chamber	KWP 120/70	59226012190010	Weiss	29.02.08	28.02.09

5 Index

1	Administrative Data	2
1.1	Project Data	2
1.2	Applicant Data	2
1.3	Test Laboratory Data	2
1.4	Signature of the Testing Responsible	2
1.5	Signature of the Accreditation Responsible	3
2	Test Object Data	3
2.1	General OUT Description	3
2.2	Detailed Description of OUT Samples	3
2.3	OUT Features	4
2.4	Auxiliary Equipment	4
2.5	Operating Mode(s)	4
2.6	Setups used for Testing	5
3	Results	5
3.1	General	5
3.2	List of the Applicable Body	5
3.3	List of Test Specification	5
3.4	Summary	6
3.5	Detailed Results	7
3.5.1	15b.1 Conducted Emissions (AC Power Line) §15.107	7
3.5.2	15b.2 Spurious Radiated Emissions §15.109	8
4	Annex	9
4.1	Additional Information for OUT Description	9
4.2	Additional Information for Report	11
5	Index	20