



**FCC PART 15C
TEST REPORT
No. I15N00174-WLAN**

for

Huawei Technologies Co., Ltd

Smart Phone

Model Name: HUAWEI ALE-L23

With

Hardware Version: HL3ALICEM

Software Version: ALE-L23 V100R001C900B045

FCC ID: QISALE-L23

Issued Date: Mar 30th, 2015



Test Laboratory:

FCC 2.948 Listed: No.342690

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633, Fax:+86(0)10-62304633Email:cttl@chinattl.com, website:www.chinattl.com

REPORT HISTORY

| Report Number | Revision | Description | Issue Date |
|----------------------|-----------------|--------------------|-------------------|
| I15N00174-WLAN | Rev.0 | 1st edition | 2015-03-27 |
| I15N00174-WLAN | Rev.1 | 2nd edition | 2015-03-30 |

CONTENTS

| | |
|---|-----------|
| 1. TEST LABORATORY | 8 |
| 1.1. TESTING LOCATION | 8 |
| 1.2. TESTING ENVIRONMENT..... | 8 |
| 1.3. PROJECT DATA | 8 |
| 1.4. SIGNATURE..... | 8 |
| 2. CLIENT INFORMATION..... | 9 |
| 2.1. APPLICANT INFORMATION..... | 9 |
| 2.2. MANUFACTURER INFORMATION | 9 |
| 3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) | 10 |
| 3.1. ABOUT EUT | 10 |
| 3.2. INTERNAL IDENTIFICATION OF EUT | 10 |
| 3.3. INTERNAL IDENTIFICATION OF AE..... | 10 |
| 4. REFERENCE DOCUMENTS..... | 11 |
| 4.1. DOCUMENTS SUPPLIED BY APPLICANT | 11 |
| 4.2. REFERENCE DOCUMENTS FOR TESTING..... | 11 |
| 5. TEST RESULTS | 12 |
| 5.1. SUMMARY OF TEST RESULTS..... | 12 |
| 5.2. STATEMENTS..... | 12 |
| 5.3. TERMS USED IN THE RESULT TABLE | 12 |
| 5.4. LABORATORY ENVIRONMENT..... | 13 |
| 6. TEST FACILITIES UTILIZED..... | 14 |
| ANNEX A: EUT PHOTOGRAPH | 15 |
| ANNEX B: MEASUREMENT RESULTS FOR RECEIVER | 21 |
| B.0 ANTENNA REQUIREMENT | 21 |
| B.1 MAXIMUM AVERAGE OUTPUT POWER..... | 22 |
| B.2 PEAK POWER SPECTRAL DENSITY..... | 24 |
| B.3 OCCUPIED 6DB BANDWIDTH..... | 25 |
| B.4 BAND EDGES COMPLIANCE | 26 |
| B.5 TRANSMITTER SPURIOUS EMISSION..... | 27 |
| B.5.1 TRANSMITTER SPURIOUS EMISSION - CONDUCTED | 27 |
| B.5.2 TRANSMITTER SPURIOUS EMISSION - RADIATED | 29 |
| B.6 AC POWERLINE CONDUCTED EMISSION | 38 |
| ANNEX C: TEST LAYOUTS | 44 |
| FIG.1 MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 1,1MBPS) | 44 |
| FIG.2 MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 6,1MBPS) | 44 |
| FIG.3 MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 11,1MBPS)..... | 45 |

| | | |
|--------|--|----|
| FIG.4 | MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 1,2MBPS) | 45 |
| FIG.5 | MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 6,2MBPS) | 46 |
| FIG.6 | MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 11,2MBPS)..... | 46 |
| FIG.7 | MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 1,5.5MBPS) | 47 |
| FIG.8 | MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 6,5.5MBPS) | 47 |
| FIG.9 | MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 11,5.5MBPS)..... | 48 |
| FIG.10 | MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 1,11MBPS)..... | 48 |
| FIG.11 | MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 6,11MBPS)..... | 49 |
| FIG.12 | MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 11,11MBPS)..... | 49 |
| FIG.13 | MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,6MBPS)..... | 50 |
| FIG.14 | MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,6MBPS)..... | 50 |
| FIG.15 | MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,6MBPS)..... | 51 |
| FIG.16 | MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,9MBPS)..... | 51 |
| FIG.17 | MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,9MBPS)..... | 52 |
| FIG.18 | MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,9MBPS)..... | 52 |
| FIG.19 | MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,12MBPS)..... | 53 |
| FIG.20 | MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,12MBPS)..... | 53 |
| FIG.21 | MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,12MBPS)..... | 54 |
| FIG.22 | MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,18MBPS)..... | 54 |
| FIG.23 | MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,18MBPS)..... | 55 |
| FIG.24 | MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,18MBPS)..... | 55 |
| FIG.25 | MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,24MBPS)..... | 56 |
| FIG.26 | MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,24MBPS)..... | 56 |
| FIG.27 | MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,24MBPS)..... | 57 |
| FIG.28 | MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,36MBPS)..... | 57 |
| FIG.29 | MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,36MBPS)..... | 58 |
| FIG.30 | MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,36MBPS)..... | 58 |
| FIG.31 | MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,48MBPS)..... | 59 |
| FIG.32 | MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,48MBPS)..... | 59 |
| FIG.33 | MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,48MBPS)..... | 60 |
| FIG.34 | MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,54MBPS)..... | 60 |
| FIG.35 | MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,54MBPS)..... | 61 |
| FIG.36 | MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,54MBPS)..... | 61 |
| FIG.37 | MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS0) | 62 |
| FIG.38 | MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS0) | 62 |
| FIG.39 | MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS0)..... | 63 |
| FIG.40 | MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS1) | 63 |
| FIG.41 | MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS1) | 64 |
| FIG.42 | MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS1)..... | 64 |
| FIG.43 | MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS2) | 65 |
| FIG.44 | MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS2)) | 65 |
| FIG.45 | MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS2)..... | 66 |
| FIG.46 | MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS3) | 66 |
| FIG.47 | MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS3) | 67 |

| | | |
|--------|--|----|
| FIG.48 | MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS3)..... | 67 |
| FIG.49 | MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS4) | 68 |
| FIG.50 | MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS4) | 68 |
| FIG.51 | MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS4)..... | 69 |
| FIG.52 | MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS5) | 69 |
| FIG.53 | MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS5) | 70 |
| FIG.54 | MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS5)..... | 70 |
| FIG.55 | MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS6) | 71 |
| FIG.56 | MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS6) | 71 |
| FIG.57 | MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS6)..... | 72 |
| FIG.58 | MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS7) | 72 |
| FIG.59 | MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS7) | 73 |
| FIG.60 | MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS7)..... | 73 |
| FIG.61 | POWER SPECTRAL DENSITY (802.11B, CH 1)..... | 74 |
| FIG.62 | POWER SPECTRAL DENSITY (802.11B, CH 6)..... | 74 |
| FIG.63 | POWER SPECTRAL DENSITY (802.11B, CH 11)..... | 75 |
| FIG.64 | POWER SPECTRAL DENSITY (802.11G, CH 1)..... | 75 |
| FIG.65 | POWER SPECTRAL DENSITY (802.11G, CH 6)..... | 76 |
| FIG.66 | POWER SPECTRAL DENSITY (802.11G, CH 11)..... | 76 |
| FIG.67 | POWER SPECTRAL DENSITY (802.11N-20MHZ, CH 1)..... | 77 |
| FIG.68 | POWER SPECTRAL DENSITY (802.11N-20MHZ, CH 6)..... | 77 |
| FIG.69 | POWER SPECTRAL DENSITY (802.11N-20MHZ, CH 11)..... | 78 |
| FIG.70 | OCCUPIED 6DB BANDWIDTH (802.11B, CH 1)..... | 78 |
| FIG.71 | OCCUPIED 6DB BANDWIDTH (802.11B, CH 6)..... | 79 |
| FIG.72 | OCCUPIED 6DB BANDWIDTH (802.11B, CH 11)..... | 79 |
| FIG.73 | OCCUPIED 6DB BANDWIDTH (802.11G, CH 1)..... | 80 |
| FIG.74 | OCCUPIED 6DB BANDWIDTH (802.11G, CH 6)..... | 80 |
| FIG.75 | OCCUPIED 6DB BANDWIDTH (802.11G, CH 11)..... | 81 |
| FIG.76 | OCCUPIED 6DB BANDWIDTH (802.11 N-20MHZ, CH 1)..... | 81 |
| FIG.77 | OCCUPIED 6DB BANDWIDTH (802.11 N-20MHZ, CH 6)..... | 82 |
| FIG.78 | OCCUPIED 6DB BANDWIDTH (802.11 N-20MHZ, CH 11)..... | 82 |
| FIG.79 | BAND EDGES (802.11B, CH 1)..... | 83 |
| FIG.80 | BAND EDGES (802.11B, CH 11)..... | 83 |
| FIG.81 | BAND EDGES (802.11G, CH 1)..... | 84 |
| FIG.82 | BAND EDGES (802.11G, CH 11)..... | 84 |
| FIG.83 | BAND EDGES (802.11 N-20MHZ, CH 1)..... | 85 |
| FIG.84 | BAND EDGES (802.11 N-20MHZ, CH 11)..... | 85 |
| FIG.85 | CONDUCTED SPURIOUS EMISSION (802.11B, CH1, CENTER FREQUENCY)..... | 86 |
| FIG.86 | CONDUCTED SPURIOUS EMISSION (802.11B, CH1, 30 MHZ-3 GHZ)..... | 86 |
| FIG.87 | CONDUCTED SPURIOUS EMISSION (802.11B, CH1, 3 GHZ-18 GHZ)..... | 87 |
| FIG.88 | CONDUCTED SPURIOUS EMISSION (802.11B, CH6, CENTER FREQUENCY)..... | 87 |
| FIG.89 | CONDUCTED SPURIOUS EMISSION (802.11B, CH6, 30 MHZ-3 GHZ)..... | 88 |
| FIG.90 | CONDUCTED SPURIOUS EMISSION (802.11B, CH6, 3 GHZ-18 GHZ)..... | 88 |
| FIG.91 | CONDUCTED SPURIOUS EMISSION (802.11B, CH11, CENTER FREQUENCY)..... | 89 |

| | | |
|---------|---|-----|
| FIG.92 | CONDUCTED SPURIOUS EMISSION (802.11B, CH11, 30 MHz-3 GHz)..... | 89 |
| FIG.93 | CONDUCTED SPURIOUS EMISSION (802.11B, CH11, 3 GHz-18 GHz)..... | 90 |
| FIG.94 | CONDUCTED SPURIOUS EMISSION (802.11G, CH1, CENTER FREQUENCY) | 90 |
| FIG.95 | CONDUCTED SPURIOUS EMISSION (802.11G, CH1, 30 MHz-3 GHz)..... | 91 |
| FIG.96 | CONDUCTED SPURIOUS EMISSION (802.11G, CH1, 3 GHz-18 GHz)..... | 91 |
| FIG.97 | CONDUCTED SPURIOUS EMISSION (802.11G, CH6, CENTER FREQUENCY) | 92 |
| FIG.98 | CONDUCTED SPURIOUS EMISSION (802.11G, CH6, 30 MHz-3 GHz)..... | 92 |
| FIG.99 | CONDUCTED SPURIOUS EMISSION (802.11G, CH6, 3 GHz-18 GHz)..... | 93 |
| FIG.100 | CONDUCTED SPURIOUS EMISSION (802.11G, CH11, CENTER FREQUENCY)..... | 93 |
| FIG.101 | CONDUCTED SPURIOUS EMISSION (802.11G, CH11, 30 MHz-3 GHz) | 94 |
| FIG.102 | CONDUCTED SPURIOUS EMISSION (802.11G, CH11, 3 GHz-18 GHz)..... | 94 |
| FIG.103 | CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH1, CENTER FREQUENCY) | 95 |
| FIG.104 | CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH1, 30 MHz-3 GHz)..... | 95 |
| FIG.105 | CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH1, 3 GHz-18 GHz) | 96 |
| FIG.106 | CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH6, CENTER FREQUENCY) | 96 |
| FIG.107 | CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH6, 30 MHz-3 GHz)..... | 97 |
| FIG.108 | CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH6, 3 GHz-18 GHz) | 97 |
| FIG.109 | CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH11, CENTER FREQUENCY) | 98 |
| FIG.110 | CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH11, 30 MHz-3 GHz)..... | 98 |
| FIG.111 | CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH11, 3 GHz-18 GHz)..... | 99 |
| FIG.112 | CONDUCTED SPURIOUS EMISSION (ALL CHANNELS, 18 GHz-26 GHz)..... | 99 |
| FIG.113 | RADIATED SPURIOUS EMISSION (802.11B, CH6, 30MHz-1 GHz,AE1) | 100 |
| FIG.114 | RADIATED SPURIOUS EMISSION (802.11B, CH6, 30MHz-1 GHz,AE2) | 100 |
| FIG.115 | RADIATED SPURIOUS EMISSION (802.11B, CH6, 30MHz-1 GHz,AE3) | 101 |
| FIG.116 | RADIATED SPURIOUS EMISSION (802.11B, CH6, 30MHz-1 GHz,AE4) | 101 |
| FIG.117 | RADIATED SPURIOUS EMISSION (802.11B, CH6, 30MHz-1 GHz,AE5) | 102 |
| FIG.118 | RADIATED SPURIOUS EMISSION (802.11B, CH6, 30MHz-1 GHz,AE6) | 102 |
| FIG.119 | RADIATED SPURIOUS EMISSION (802.11B, CH6, 30MHz-1 GHz,AE7) | 103 |
| FIG.120 | RADIATED SPURIOUS EMISSION (802.11B, CH6, 30MHz-1 GHz,AE8) | 103 |
| FIG.121 | RADIATED SPURIOUS EMISSION (802.11B, CH6, 30MHz-1 GHz,AE9) | 104 |
| FIG.122 | RADIATED SPURIOUS EMISSION (802.11B, CH6, 30MHz-1 GHz,AE10) | 104 |
| FIG.123 | RADIATED SPURIOUS EMISSION (802.11B, CH1, 1 GHz-3GHz)..... | 105 |
| FIG.124 | RADIATED SPURIOUS EMISSION (802.11B, CH1, 3 GHz-18 GHz) | 105 |
| FIG.125 | RADIATED SPURIOUS EMISSION (802.11B, CH6, 1 GHz-3GHz)..... | 106 |
| FIG.126 | RADIATED SPURIOUS EMISSION (802.11B, CH1, 3 GHz-18 GHz) | 106 |
| FIG.127 | RADIATED SPURIOUS EMISSION (802.11B, CH11, 1 GHz-3GHz) | 107 |
| FIG.128 | RADIATED SPURIOUS EMISSION (802.11B, CH11, 3 GHz-18 GHz) | 107 |
| FIG.129 | RADIATED EMISSION POWER (802.11B, CH1, 2380GHz~2450GHz) | 108 |
| FIG.130 | RADIATED EMISSION POWER (802.11B, CH11, 2450GHz~2500GHz)..... | 108 |
| FIG.131 | RADIATED SPURIOUS EMISSION (802.11G, CH1, 1 GHz-3 GHz) | 109 |
| FIG.132 | RADIATED SPURIOUS EMISSION (802.11G, CH1, 3 GHz-18 GHz) | 109 |
| FIG.133 | RADIATED SPURIOUS EMISSION (802.11G, CH6, 30MHz-1 GHz)..... | 110 |
| FIG.134 | RADIATED SPURIOUS EMISSION (802.11G, CH6, 1 GHz-3 GHz) | 110 |
| FIG.135 | RADIATED SPURIOUS EMISSION (802.11G, CH6, 3 GHz-18 GHz) | 111 |

| | | |
|--|--|------------|
| FIG.136 | RADIATED SPURIOUS EMISSION (802.11G, CH11, 1 GHZ-3 GHZ)..... | 111 |
| FIG.137 | RADIATED SPURIOUS EMISSION (802.11G, CH11, 3 GHZ-18 GHZ)..... | 112 |
| FIG.138 | RADIATED EMISSION POWER (802.11G, CH1, 2380GHZ~2450GHZ)..... | 112 |
| FIG.139 | RADIATED EMISSION POWER (802.11G, CH11, 2450GHZ~2500GHZ)..... | 113 |
| FIG.140 | RADIATED SPURIOUS EMISSION (802.11N-20M, CH1, 1 GHZ-3 GHZ) | 113 |
| FIG.141 | RADIATED SPURIOUS EMISSION (802.11N-20M, CH1, 3 GHZ-18 GHZ) | 114 |
| FIG.142 | RADIATED SPURIOUS EMISSION (802.11N-20M, CH6, 30MHZ-1 GHZ) | 114 |
| FIG.143 | RADIATED SPURIOUS EMISSION (802.11N-20M, CH6, 1 GHZ-3 GHZ) | 115 |
| FIG.144 | RADIATED SPURIOUS EMISSION (802.11N-20M, CH6, 3 GHZ-18 GHZ) | 115 |
| FIG.145 | RADIATED SPURIOUS EMISSION (802.11N-20M, CH11, 1 GHZ-3 GHZ) | 116 |
| FIG.146 | RADIATED SPURIOUS EMISSION (802.11N-20M, CH11, 3 GHZ-18 GHZ) | 116 |
| FIG.147 | RADIATED EMISSION POWER (802.11N-20M, CH1, 2380GHZ~2450GHZ) | 117 |
| FIG.148 | RADIATED EMISSION POWER (802.11N-20M, CH11, 2450GHZ~2500GHZ)..... | 117 |
| FIG.149 | RADIATED EMISSION: 18 GHZ – 26.5 GHZ | 118 |
| FIG.150 | AC POWERLINE CONDUCTED EMISSION (TRAFFIC, AE1) | 119 |
| FIG.151 | AC POWERLINE CONDUCTED EMISSION (TRAFFIC, AE2) | 120 |
| FIG.152 | AC POWERLINE CONDUCTED EMISSION (TRAFFIC, AE3) | 121 |
| FIG.153 | AC POWERLINE CONDUCTED EMISSION (TRAFFIC, AE4) | 122 |
| FIG.154 | AC POWERLINE CONDUCTED EMISSION (TRAFFIC, AE5) | 123 |
| FIG.155 | AC POWERLINE CONDUCTED EMISSION (TRAFFIC, AE6) | 124 |
| FIG.156 | AC POWERLINE CONDUCTED EMISSION (TRAFFIC, AE7) | 125 |
| FIG.157 | AC POWERLINE CONDUCTED EMISSION (TRAFFIC, AE8) | 126 |
| FIG.158 | AC POWERLINE CONDUCTED EMISSION (TRAFFIC, AE9) | 127 |
| FIG.159 | AC POWERLINE CONDUCTED EMISSION (TRAFFIC, AE10) | 128 |
| FIG.160 | AC POWERLINE CONDUCTED EMISSION (IDLE, AE1) | 129 |
| ANNEX D: PERSONS INVOLVED IN THIS TESTING | | 130 |
| ANNEX E: ACCREDITATION CERTIFICATE..... | | 131 |



1. Test Laboratory

1.1. Testing Location

Location1: CTTL(South Branch)

Address: No.12, ShangSha Innovation and Technology Park, Futian District,
Shenzhen, Guangdong, P. R. China 518048

Location2: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing, P. R.
China100191

1.2. Testing Environment

Normal Temperature: 15-35°C

Extreme Temperature: -20/+55°C

Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2015-02-28

Testing End Date: 2015-03-25

1.4. Signature

Xu Ye

(Prepared this test report)

Tang Weisheng

(Reviewed this test report)

Zhang Bojun

(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Huawei Technologies Co., Ltd.
Address: Administration Building, Headquarters of Huawei Technologies Co.,
Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
City: Shenzhen
Postal Code: /
Country: China
Telephone: 029-89282965
Fax: /

2.2. Manufacturer Information

Company Name: Huawei Technologies Co., Ltd.
Address: Administration Building, Headquarters of Huawei Technologies Co.,
Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
City: Shenzhen
Postal Code: /
Country: China
Telephone: 029-89282965
Fax: /

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

| | |
|---------------------|--------------------|
| Description | Smart Phone |
| Model Name | HUAWEI ALE-L23 |
| Market Name | / |
| RF Protocol | IEEE 802.11b/g/n20 |
| Operating Frequency | 2412MHz~2462MHz |
| FCC ID | QISALE-L23 |

*Note: Photographs of EUT are shown in ANNEX A of this test report.

3.2. Internal Identification of EUT

| EUT ID* | IMEI | HW Version | SW Version |
|----------------|-------------|-------------------|--------------------------|
| EUT1 | / | HL3ALICEM | ALE-L23 V100R001C900B045 |

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

| AE ID* | Description | Type | SN |
|---------------|--------------------|----------------------|-----------|
| AE1 | Charger | HW-050100U01_yingju | / |
| AE2 | Charger | HW-050100U01_BYD | / |
| AE3 | Charger | HW-050100U2W_BYD | / |
| AE4 | Charger | HW-050100U2W_hangjia | / |
| AE5 | Charger | HW-050100E01_BYD | / |
| AE6 | Charger | HW-050100E01_dahong | / |
| AE7 | Charger | HW-050100E01_hangjia | / |
| AE8 | Charger | HW-050100E01_yingju | / |
| AE9 | Charger | HW-050100B01_hangjia | / |
| AE10 | Charger | HW-050100B01_dahong | / |

*AE ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

| Reference | Title | Version |
|------------------|--|----------------------|
| FCC Part15 | FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz. | Oct, 2012 Edition |
| ANSI C63.4 | Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz | 2003 |
| KDB558074 | Measurement of Digital Transmission Systems Operating under Section 15.247 | Jun, 2014 |

5. Test Results

5.1. Summary of Test Results

| No | Test cases | Standard Sub-clause | Verdict |
|----|---|---------------------------|----------|
| 0 | Antenna Requirement | 15.203 | P |
| 1 | Maximum Peak Output Power | 15.247 (b) | P |
| 2 | Peak Power Spectral Density | 15.247 (e) | P |
| 3 | Occupied 6dB Bandwidth | 15.247 (a) | P |
| 4 | Band Edges Compliance | 15.247 (d) | P |
| 5 | Transmitter Spurious Emission - Conducted | 15.247 (d) | P |
| 6 | Transmitter Spurious Emission - Radiated | 15.247, 15.205, 15.209 | P |
| 7 | AC Powerline Conducted Emission | 15.107, 15.207 | P |

See **ANNEX B** and **ANNEX C** for details.

5.2. Statements

CTTL has evaluated the test cases requested by the applicant/manufacturer as listed in section 5.1 of this report, for the EUT specified in section 3, according to the standards or reference documents listed in section 4.2

5.3. Terms used in the result table

Terms used in Verdict column

| | |
|----|---------------|
| P | Pass |
| NA | Not Available |
| F | Fail |

Abbreviations

| | |
|----------|---|
| AC | Alternating Current |
| AFH | Adaptive Frequency Hopping |
| BW | Band Width |
| E.I.R.P. | equivalent isotropical radiated power |
| ISM | Industrial, Scientific and Medical |
| R&TTE | Radio and Telecommunications Terminal Equipment |
| RF | Radio Frequency |
| Tx | Transmitter |

5.4. Laboratory Environment

Semi-anechoic chamber (23 meters×17 meters×10 meters) did not exceed following limits:

| | |
|---|---|
| Temperature | Min. = 15 °C, Max. = 35 °C |
| Relative humidity | Min. = 15 %, Max. = 75 % |
| Shielding effectiveness | 0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB. |
| Electrical insulation | > 2 M |
| Ground system resistance | < 4 |
| Normalised site attenuation (NSA) | < ± 4 dB, 3m/10m distance, from 30 to 1000 MHz |
| Site voltage standing-wave ratio (S_{VSWR}) | Between 0 and 6 dB, from 1GHz to 18GHz |
| Uniformity of field strength | Between 0 and 6 dB, from 80 to 3000 MHz |

Shielded room did not exceed following limits along the EMC testing:

| | |
|--------------------------|---|
| Temperature | Min. = 15 °C, Max. = 35 °C |
| Relative humidity | Min. = 20 %, Max. = 75 % |
| Shielding effectiveness | 0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB. |
| Electrical insulation | > 2 M |
| Ground system resistance | < 4 |

6. Test Facilities Utilized

Conducted test system

| No. | Equipment | Model | Serial Number | Manufacturer | Calibration Due date | Calibration Period |
|-----|------------------------|-------|---------------|-----------------|----------------------|--------------------|
| 1 | Vector Signal Analyzer | FSV40 | 100903 | Rohde & Schwarz | 2015-04-22 | 1 year |


Radiated emission test system

| No. | Equipment | Model | Serial Number | Manufacturer | Calibration Due date | Calibration Period |
|-----|---------------|----------|---------------|-----------------|----------------------|--------------------|
| 1 | Chamber | FACT10-3 | SAC-1 | ETS-Lindgren | 2016-03-27 | 3 years |
| 2 | Test Receiver | ESU26 | 100235 | Rohde & Schwarz | 2016-03-02 | 1 year |
| 3 | Test Receiver | ESCI 7 | 100948 | Rohde & Schwarz | 2015-07-16 | 1 year |
| 4 | LISN | ESH2-Z5 | 100196 | Rohde & Schwarz | 2015-01-14 | 1 year |
| 5 | Loop Antenna | HFH2-Z2 | 829324/007 | Rohde & Schwarz | 2017-12-16 | 3 years |
| 6 | EMI Antenna | VULB9163 | 9163-234 | Schwarzbeck | 2016-09-15 | 3 years |
| 7 | EMI Antenna | 3115 | 6914 | ETS-Lindgren | 2017-12-15 | 3 years |
| 8 | EMI Antenna | 3116 | 2661 | ETS-Lindgren | 2017-06-17 | 3 years |

Anechoic chamber

Fully anechoic chamber by ETS-Lindgren.

ANNEX A: EUT photograph

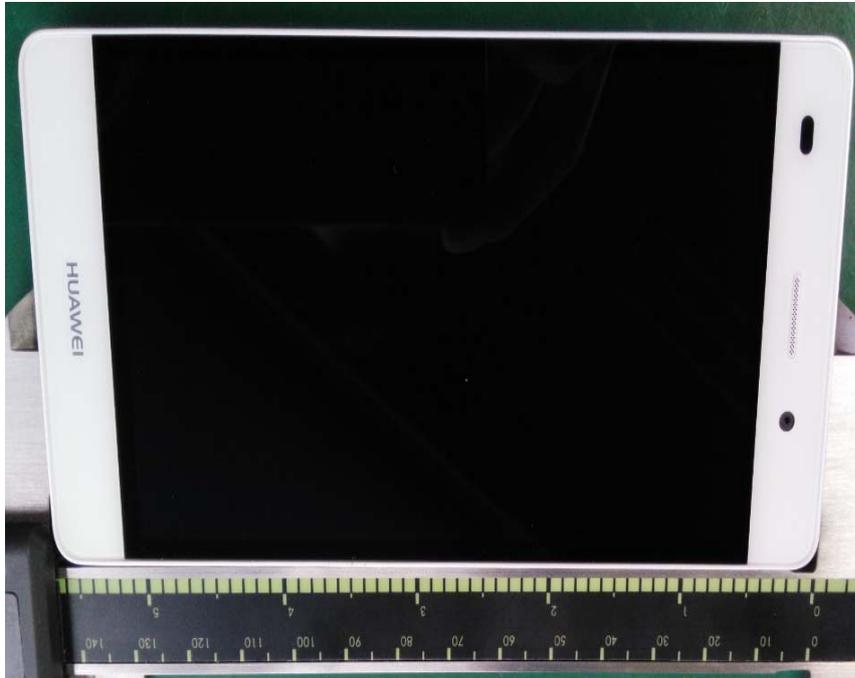

Picture A-1: Mobile Phone



Picture A-2: Mobile Phone



Picture A-3: Charger(AE1)



Picture A-4: Charger(AE2)



Picture A-5: Charger(AE3)



Picture A-6: Charger(AE4)



Picture A-7: Charger(AE5)



Picture A-8: Charger(AE6)



Picture A-9: Charger(AE7)



Picture A-10: Charger(AE8)



Picture A-11: Charger(AE9)



Picture A-12: Charger(AE10)

ANNEX B: MEASUREMENT RESULTS FOR RECEIVER

B.0 Antenna requirement

Measurement Limit:

| Standard | Requirement |
|------------------------|---|
| FCC CRF Part 15.203 | An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, § 15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded. |

Conclusion: The Directional gains of antenna used for transmitting is -2.0 dBi.

The RF transmitter uses an integrate antenna without connector.

B.1 Maximum Average Output Power

Measurement Limit:

| Standard | Limit (dBm) |
|---------------------------|-------------|
| FCC CRF Part 15.247(b)(1) | < 30 |

Measurement Results:

802.11b/g mode

| Mode | Data Rate (Mbps) | Test Result (dBm) | | | | | |
|---------|------------------|-------------------|-------|---------------|-------|-----------------|-------|
| | | 2412MHz (Ch1) | | 2437MHz (Ch6) | | 2462 MHz (Ch11) | |
| 802.11b | 1 | Fig.1 | 17.98 | Fig.2 | 17.65 | Fig.3 | 17.08 |
| | 2 | Fig.4 | 17.90 | Fig.5 | 17.71 | Fig.6 | 16.78 |
| | 5.5 | Fig.7 | 17.77 | Fig.8 | 17.65 | Fig.9 | 16.22 |
| | 11 | Fig.10 | 18.97 | Fig.11 | 18.47 | Fig.12 | 17.08 |
| 802.11g | 6 | Fig.13 | 19.33 | Fig.14 | 18.50 | Fig.15 | 18.26 |
| | 9 | Fig.16 | 19.35 | Fig.17 | 18.43 | Fig.18 | 17.95 |
| | 12 | Fig.19 | 19.91 | Fig.20 | 18.40 | Fig.21 | 18.51 |
| | 18 | Fig.22 | 19.61 | Fig.23 | 18.38 | Fig.24 | 18.79 |
| | 24 | Fig.25 | 19.45 | Fig.26 | 18.36 | Fig.27 | 18.91 |
| | 36 | Fig.28 | 19.02 | Fig.29 | 18.34 | Fig.30 | 18.16 |
| | 48 | Fig.31 | 17.33 | Fig.32 | 16.71 | Fig.33 | 16.51 |
| | 54 | Fig.34 | 16.37 | Fig.35 | 16.37 | Fig.36 | 15.68 |

802.11n mode

| Mode | Data Rate (MCS Index) | Test Result (dBm) | | | | | |
|--------------------|--------------------------|-------------------|-------|------------------|-------|--------------------|-------|
| | | 2412MHz (Ch1) | | 2437MHz (Ch6) | | 2462 MHz (Ch11) | |
| 802.11n (20MHz) | MCS0 | Fig.37 | 16.70 | Fig.38 | 16.18 | Fig.39 | 15.36 |
| | MCS1 | Fig.40 | 16.65 | Fig.41 | 16.20 | Fig.42 | 15.84 |
| | MCS2 | Fig.43 | 16.67 | Fig.44 | 16.25 | Fig.45 | 15.88 |
| | MCS3 | Fig.46 | 16.67 | Fig.47 | 16.23 | Fig.48 | 15.83 |
| | MCS4 | Fig.49 | 16.62 | Fig.50 | 16.10 | Fig.51 | 15.86 |
| | MCS5 | Fig.52 | 16.67 | Fig.53 | 16.10 | Fig.54 | 15.90 |
| | MCS6 | Fig.55 | 16.66 | Fig.56 | 16.14 | Fig.57 | 15.91 |
| | MCS7 | Fig.58 | 16.67 | Fig.59 | 16.16 | Fig.60 | 15.87 |

See ANNEX C for test graphs.

Conclusion: PASS

B.2 Peak Power Spectral Density

Measurement Limit:

| Standard | Limit |
|------------------------|---------------|
| FCC CRF Part 15.247(d) | < 8 dBm/3 kHz |

Measurement Results:

802.11b/g mode

| Mode | Channel | Peak Power Spectral Density (dBm) | | Conclusion |
|---------|---------|-----------------------------------|-------|------------|
| 802.11b | 1 | Fig.61 | -4.45 | P |
| | 6 | Fig.62 | -3.90 | P |
| | 11 | Fig.63 | -5.28 | P |
| 802.11g | 1 | Fig.64 | -5.81 | P |
| | 6 | Fig.65 | -6.71 | P |
| | 11 | Fig.66 | -6.95 | P |

802.11n mode

| Mode | Channel | Peak Power Spectral Density(dBm) | | Conclusion |
|--------------------|---------|----------------------------------|-------|------------|
| 802.11n (20MHz) | 1 | Fig.67 | -6.91 | P |
| | 6 | Fig.68 | -6.76 | P |
| | 11 | Fig.69 | -7.07 | P |

See ANNEX C for test graphs.

Conclusion: PASS

B.3 Occupied 6dB Bandwidth

Measurement Limit:

| Standard | Limit (kHz) |
|----------------------------|-------------|
| FCC 47 CFR Part 15.247 (a) | ≥ 500 |

Measurement Result:

802.11b/g mode

| Mode | Channel | Test Results (kHz) | | conclusion |
|---------|---------|---------------------|-------|------------|
| 802.11b | 1 | Fig.70 | 7554 | P |
| | 6 | Fig.71 | 7120 | P |
| | 11 | Fig.72 | 7164 | P |
| 802.11g | 1 | Fig.73 | 15803 | P |
| | 6 | Fig.74 | 16020 | P |
| | 11 | Fig.75 | 15760 | P |

802.11n mode

| Mode | Channel | Test Results (kHz) | | conclusion |
|--------------------|---------|---------------------|-------|------------|
| 802.11n (20MHz) | 1 | Fig.76 | 16454 | P |
| | 6 | Fig.77 | 16324 | P |
| | 11 | Fig.78 | 16151 | P |

See ANNEX C for test graphs.

Conclusion: PASS

B.4 Band Edges Compliance

Measurement Limit:

| Standard | Limit (dBc) |
|----------------------------|-------------|
| FCC 47 CFR Part 15.247 (d) | > 20 |

Measurement Result:

802.11b/g mode

| Mode | Channel | Test Results | Conclusion |
|---------|---------|--------------|------------|
| 802.11b | 1 | Fig.79 | P |
| | 11 | Fig.80 | P |
| 802.11g | 1 | Fig.81 | P |
| | 11 | Fig.82 | P |

802.11n mode

| Mode | Channel | Test Results | Conclusion |
|--------------------|---------|--------------|------------|
| 802.11n (20MHz) | 1 | Fig.83 | P |
| | 11 | Fig.84 | P |

See ANNEX C for test graphs.

Conclusion: PASS

B.5 Transmitter Spurious Emission

B.5.1 Transmitter Spurious Emission - Conducted

Measurement Limit:

| Standard | Limit |
|----------------------------|---|
| FCC 47 CFR Part 15.247 (d) | 20dB below peak output power in 100 kHz bandwidth |

Measurement Results:

802.11b/g mode

| MODE | Channel | Frequency Range | Test Results | Conclusion |
|---------|---------|-----------------|--------------|------------|
| 802.11b | 1 | 2.412 GHz | Fig.85 | P |
| | | 30 MHz-3 GHz | Fig.86 | P |
| | | 3GHz-18GHz | Fig.87 | P |
| | 6 | 2.437 GHz | Fig.88 | P |
| | | 30 MHz-3 GHz | Fig.89 | P |
| | | 3GHz-18GHz | Fig.90 | P |
| | 11 | 2.462 GHz | Fig.91 | P |
| | | 30 MHz-3 GHz | Fig.92 | P |
| | | 3GHz-18GHz | Fig.93 | P |
| 802.11g | 1 | 2.412 GHz | Fig.94 | P |
| | | 30 MHz-3 GHz | Fig.95 | P |
| | | 3GHz-18GHz | Fig.96 | P |
| | 6 | 2.437 GHz | Fig.97 | P |
| | | 30 MHz-3 GHz | Fig.98 | P |
| | | 3GHz-18GHz | Fig.99 | P |
| | 11 | 2.462 GHz | Fig.100 | P |
| | | 30 MHz-3 GHz | Fig.101 | P |
| | | 3GHz-18GHz | Fig.102 | P |

802.11n mode

| | | | | |
|--------------------|--------------|--------------|---------|---|
| 802.11n (20MHz) | 1 | 2.412 GHz | Fig.103 | P |
| | | 30 MHz-3 GHz | Fig.104 | P |
| | | 3GHz-18GHz | Fig.105 | P |
| | 6 | 2.437 GHz | Fig.106 | P |
| | | 30 MHz-3 GHz | Fig.107 | P |
| | | 3GHz-18GHz | Fig.108 | P |
| | 11 | 2.462 GHz | Fig.109 | P |
| | | 30 MHz-3 GHz | Fig.110 | P |
| | | 3GHz-18GHz | Fig.111 | P |
| / | All channels | 18GHz-26GHz | Fig.112 | P |

See ANNEX C for test graphs.

Conclusion: PASS

B.5.2 Transmitter Spurious Emission - Radiated

Measurement Limit:

| Standard | Limit |
|--|------------------------------|
| FCC 47 CFR Part 15.247, 15.205, 15.209 | 20dB below peak output power |

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

| Frequency of emission (MHz) | Field strength($\mu\text{V}/\text{m}$) | Measurement distance(meters) |
|-----------------------------|--|------------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

| Frequency of emission (MHz) | RBW/VBW | Sweep Time(s) |
|-----------------------------|---------------|---------------|
| 30-1000 | 120kHz/300kHz | 5 |
| 1000-4000 | 1MHz/3MHz | 15 |
| 4000-18000 | 1MHz/3MHz | 40 |
| 18000-26500 | 1MHz/3MHz | 20 |

Note:

According to the performance evaluation, the radiated emission margin of EUT is over 20dB in the band below 30MHz. Therefore, the measurement starts from 30MHz to tenth harmonic.

The measurement results include the horizontal polarization and vertical polarization measurements.

Measurement Results:

802.11b mode

| Channel | Frequency Range | AE | Test Results | Conclusion |
|---------|-----------------|------|--------------|------------|
| 6 | 30 MHz ~1 GHz | AE1 | Fig.113 | P |
| | | AE2 | Fig.114 | P |
| | | AE3 | Fig.115 | P |
| | | AE4 | Fig.116 | P |
| | | AE5 | Fig.117 | P |
| | | AE6 | Fig.118 | P |
| | | AE7 | Fig.119 | P |
| | | AE8 | Fig.120 | P |
| | | AE9 | Fig.121 | P |
| | | AE10 | Fig.122 | P |

Note:

The testing shall be performed on middle channel firstly. If there is no emission signal received, the low and high channel could be ignored . Otherwise the testing shall be performed on low , middle and high channel for each frequency ranges and modulations.

802.11b/g mode

| Mode | Channel | Frequency Range | Test Results | Conclusion |
|---------|-------------|---------------------|--------------|------------|
| 802.11b | 1 | 1 GHz ~3 GHz | Fig.123 | P |
| | | 3 GHz ~ 18 GHz | Fig.124 | P |
| | 6 | 1 GHz ~3 GHz | Fig.125 | P |
| | | 3 GHz ~ 18 GHz | Fig.126 | P |
| | 11 | 1 GHz ~3 GHz | Fig.127 | P |
| | | 3 GHz ~ 18 GHz | Fig.128 | P |
| | Power(CH1) | 2.38 GHz ~ 2.45 GHz | Fig.129 | P |
| | Power(CH11) | 2.45 GHz ~ 2.5 GHz | Fig.130 | P |
| 802.11g | 1 | 1 GHz ~3 GHz | Fig.131 | P |
| | | 3 GHz ~ 18 GHz | Fig.132 | P |
| | 6 | 30 MHz ~1 GHz | Fig.133 | P |
| | | 1 GHz ~3 GHz | Fig.134 | P |
| | | 3 GHz ~ 18 GHz | Fig.135 | P |
| | 11 | 1 GHz ~3 GHz | Fig.136 | P |
| | | 3 GHz ~ 18 GHz | Fig.137 | P |
| | Power(CH1) | 2.38 GHz ~ 2.45 GHz | Fig.138 | P |
| | Power(CH11) | 2.45 GHz ~ 2.5 GHz | Fig.139 | P |

802.11n mode

| Mode | Channel | Frequency Range | Test Results | Conclusion |
|------------------|--------------------|---------------------|--------------|------------|
| 802.11n (20M) | 1 | 1 GHz ~3 GHz | Fig.140 | P |
| | | 3 GHz ~ 18 GHz | Fig.141 | P |
| | 6 | 30 MHz ~1 GHz | Fig.142 | P |
| | | 1 GHz ~3 GHz | Fig.143 | P |
| | | 3 GHz ~ 18 GHz | Fig.144 | |
| | 11 | 1 GHz ~3 GHz | Fig.145 | P |
| | | 3 GHz ~ 18 GHz | Fig.146 | P |
| | Power(CH1) | 2.38 GHz ~ 2.45 GHz | Fig.147 | P |
| Power(CH11) | 2.45 GHz ~ 2.5 GHz | Fig.148 | P | |
| / | All channels | 18 GHz~ 26.5 GHz | Fig.149 | P |

802.11b CH1 (1-18GHz)

| Frequency (MHz) | MaxPeak (dB μ V/m) | Pathloss. (dB) | antenna factor | Receiver (dBm) | Polarization | Limit (dB μ V/m) |
|-----------------|------------------------|----------------|----------------|----------------|--------------|----------------------|
| 2386.363 | 44.4 | -38.8 | 27.7 | 55.500 | V | 74.0 |
| 17874.375 | 58.6 | -18.5 | 45.6 | 31.500 | H | 74.0 |
| 17940.938 | 57.9 | -17.7 | 45.6 | 30.000 | V | 74.0 |
| 17961.563 | 57.6 | -17.7 | 45.6 | 29.700 | V | 74.0 |
| 17900.625 | 57.4 | -18.5 | 45.6 | 30.300 | H | 74.0 |
| 17925.938 | 57.2 | -17.7 | 45.6 | 29.300 | V | 74.0 |

| Frequency (MHz) | Average (dB μ V/m) | Pathloss. (dB) | antenna factor | Receiver (dBm) | Polarization | Limit (dB μ V/m) |
|-----------------|------------------------|----------------|----------------|----------------|--------------|----------------------|
| 2389.919 | 31.4 | -38.8 | 27.7 | 42.500 | V | 54.0 |
| 17892.188 | 46.4 | -18.5 | 45.6 | 19.300 | H | 54.0 |
| 17884.688 | 46.2 | -18.5 | 45.6 | 19.100 | V | 54.0 |
| 17880.000 | 46.2 | -18.5 | 45.6 | 19.100 | V | 54.0 |
| 17882.813 | 46.2 | -18.5 | 45.6 | 19.100 | H | 54.0 |
| 17880.938 | 46.2 | -18.5 | 45.6 | 19.100 | V | 54.0 |

802.11b CH 6(1-18GHz)

| Frequency (MHz) | MaxPeak (dBμV/m) | Pathloss. (dB) | antenna factor | Receiver (dBm) | Polarization | Limit (dBμV/m) |
|-----------------|------------------|----------------|----------------|----------------|--------------|----------------|
| 17922.188 | 57.9 | -17.7 | 45.6 | 30.000 | V | 74.0 |
| 17902.500 | 57.9 | -18.5 | 45.6 | 30.800 | H | 74.0 |
| 17970.938 | 57.2 | -17.7 | 45.6 | 29.300 | V | 74.0 |
| 17857.500 | 57.2 | -18.5 | 45.6 | 30.100 | H | 74.0 |
| 17900.625 | 57.1 | -18.5 | 45.6 | 30.000 | V | 74.0 |
| 17885.625 | 57.1 | -18.5 | 45.6 | 30.000 | H | 74.0 |

| Frequency (MHz) | Average (dBμV/m) | Pathloss. (dB) | antenna factor | Receiver (dBm) | Polarization | Limit (dBμV/m) |
|-----------------|------------------|----------------|----------------|----------------|--------------|----------------|
| 17879.063 | 46.5 | -18.5 | 45.6 | 19.400 | H | 54.0 |
| 17871.563 | 46.4 | -18.5 | 45.6 | 19.300 | V | 54.0 |
| 17877.188 | 46.3 | -18.5 | 45.6 | 19.200 | V | 54.0 |
| 17874.375 | 46.2 | -18.5 | 45.6 | 19.100 | H | 54.0 |
| 17891.250 | 46.2 | -18.5 | 45.6 | 19.100 | H | 54.0 |
| 17883.750 | 46.2 | -18.5 | 45.6 | 19.100 | V | 54.0 |

802.11b CH11 (1-18GHz)

| Frequency (MHz) | MaxPeak (dBμV/m) | Pathloss. (dB) | antenna factor | Receiver (dBm) | Polarization | Limit (dBμV/) |
|-----------------|------------------|----------------|----------------|----------------|--------------|---------------|
| 2484.506 | 44.5 | -38.9 | 27.7 | 55.700 | H | 74.0 |
| 17878.125 | 58.9 | -18.5 | 45.6 | 31.800 | V | 74.0 |
| 17967.188 | 57.5 | -17.7 | 45.6 | 29.600 | V | 74.0 |
| 17947.500 | 57.3 | -17.7 | 45.6 | 29.400 | V | 74.0 |
| 17916.563 | 57.3 | -17.7 | 45.6 | 29.400 | H | 74.0 |
| 17872.500 | 57.3 | -18.5 | 45.6 | 30.200 | V | 74.0 |

| Frequency (MHz) | Average (dB μ V/m) | Pathloss. (dB) | antenna factor | Receiver (dBm) | Polarization | Limit (dB μ V/m) |
|-----------------|------------------------|----------------|----------------|----------------|--------------|----------------------|
| 2484.013 | 31.9 | -38.9 | 27.7 | 43.100 | H | 54.0 |
| 17862.188 | 46.6 | -18.5 | 45.6 | 19.500 | V | 54.0 |
| 17886.563 | 46.5 | -18.5 | 45.6 | 19.400 | V | 54.0 |
| 17890.313 | 46.4 | -18.5 | 45.6 | 19.300 | H | 54.0 |
| 17879.063 | 46.4 | -18.5 | 45.6 | 19.300 | V | 54.0 |
| 17894.063 | 46.4 | -18.5 | 45.6 | 19.300 | V | 54.0 |

802.11g CH1 (1-18GHz)

| Frequency (MHz) | MaxPeak (dB μ V/m) | Pathloss. (dB) | antenna factor | Receiver (dBm) | Polarization | Limit (dB μ V/m) |
|-----------------|------------------------|----------------|----------------|----------------|--------------|----------------------|
| 2389.956 | 47.7 | -38.8 | 27.7 | 58.800 | H | 74.0 |
| 17955.938 | 58.7 | -17.7 | 45.6 | 30.800 | V | 74.0 |
| 17985.938 | 57.8 | -17.7 | 45.6 | 29.900 | V | 74.0 |
| 17960.625 | 57.7 | -17.7 | 45.6 | 29.800 | H | 74.0 |
| 17910.938 | 57.6 | -18.5 | 45.6 | 30.500 | H | 74.0 |
| 17903.438 | 57.6 | -18.5 | 45.6 | 30.500 | V | 74.0 |

| Frequency (MHz) | Average (dB μ V/m) | Pathloss. (dB) | antenna factor | Receiver (dBm) | Polarization | Limit (dB μ V/m) |
|-----------------|------------------------|----------------|----------------|----------------|--------------|----------------------|
| 2389.963 | 33.1 | -38.8 | 27.7 | 44.200 | H | 54.0 |
| 17886.563 | 46.5 | -18.5 | 45.6 | 19.400 | V | 54.0 |
| 17869.688 | 46.4 | -18.5 | 45.6 | 19.300 | H | 54.0 |
| 17874.375 | 46.3 | -18.5 | 45.6 | 19.200 | V | 54.0 |
| 17868.750 | 46.3 | -18.5 | 45.6 | 19.200 | H | 54.0 |
| 17890.313 | 46.3 | -18.5 | 45.6 | 19.200 | H | 54.0 |

802.11g CH6 (1-18GHz)

| Frequency (MHz) | MaxPeak (dBμV/m) | Pathloss. (dB) | antenna factor | Receiver (dBm) | Polarization | Limit (dBμV/m) |
|-----------------|------------------|----------------|----------------|----------------|--------------|----------------|
| 17882.813 | 59.7 | -18.5 | 45.6 | 32.600 | V | 74.0 |
| 17848.125 | 57.8 | -18.5 | 45.6 | 30.700 | H | 74.0 |
| 17933.438 | 57.3 | -17.7 | 45.6 | 29.400 | V | 74.0 |
| 17870.625 | 57.2 | -18.5 | 45.6 | 30.100 | H | 74.0 |
| 17862.188 | 57.2 | -18.5 | 45.6 | 30.100 | V | 74.0 |
| 17898.750 | 57.2 | -18.5 | 45.6 | 30.100 | V | 74.0 |

| Frequency (MHz) | Average (dBμV/m) | Pathloss. (dB) | antenna factor | Receiver (dBm) | Polarization | Limit (dBμV/m) |
|-----------------|------------------|----------------|----------------|----------------|--------------|----------------|
| 17903.438 | 46.3 | -18.5 | 45.6 | 19.200 | V | 54.0 |
| 17890.313 | 46.3 | -18.5 | 45.6 | 19.200 | H | 54.0 |
| 17868.750 | 46.3 | -18.5 | 45.6 | 19.200 | V | 54.0 |
| 17866.875 | 46.3 | -18.5 | 45.6 | 19.200 | H | 54.0 |
| 17896.875 | 46.2 | -18.5 | 45.6 | 19.100 | H | 54.0 |
| 17877.188 | 46.2 | -18.5 | 45.6 | 19.100 | V | 54.0 |

802.11g CH11 (1-18GHz)

| Frequency (MHz) | MaxPeak (dBμV/m) | Pathloss. (dB) | antenna factor | Receiver (dBm) | Polarization | Limit (dBμV/m) |
|-----------------|------------------|----------------|----------------|----------------|--------------|----------------|
| 2483.550 | 52.0 | -38.9 | 27.7 | 63.200 | V | 74.0 |
| 17856.563 | 57.7 | -18.5 | 45.6 | 30.600 | V | 74.0 |
| 17839.688 | 57.7 | -18.5 | 45.6 | 30.600 | H | 74.0 |
| 17911.875 | 57.5 | -18.5 | 45.6 | 30.400 | H | 74.0 |
| 17874.375 | 57.4 | -18.5 | 45.6 | 30.300 | H | 74.0 |
| 17835.000 | 57.3 | -18.5 | 45.6 | 30.200 | V | 74.0 |

| Frequency (MHz) | Average (dB μ V/m) | Pathloss. (dB) | antenna factor | Receiver (dBm) | Polarization | Limit (dB μ V/m) |
|-----------------|------------------------|----------------|----------------|----------------|--------------|----------------------|
| 2483.506 | 33.9 | -38.9 | 27.7 | 45.100 | H | 54.0 |
| 17862.188 | 46.5 | -18.5 | 45.6 | 19.400 | H | 54.0 |
| 17891.250 | 46.5 | -18.5 | 45.6 | 19.400 | V | 54.0 |
| 17881.875 | 46.4 | -18.5 | 45.6 | 19.300 | V | 54.0 |
| 17883.750 | 46.4 | -18.5 | 45.6 | 19.300 | H | 54.0 |
| 17899.688 | 46.4 | -18.5 | 45.6 | 19.300 | V | 54.0 |

802.11n-20MHz CH1 (1-18GHz)

| Frequency (MHz) | MaxPeak (dB μ V/m) | Pathloss. (dB) | antenna factor | Receiver (dBm) | Polarization | Limit (dB μ V/m) |
|-----------------|------------------------|----------------|----------------|----------------|--------------|----------------------|
| 2389.981 | 47.5 | -38.8 | 27.7 | 58.600 | V | 74.0 |
| 17969.063 | 57.4 | -17.7 | 45.6 | 29.500 | V | 74.0 |
| 17858.438 | 57.2 | -18.5 | 45.6 | 30.100 | H | 74.0 |
| 17897.813 | 57.1 | -18.5 | 45.6 | 30.000 | H | 74.0 |
| 17907.188 | 57.1 | -18.5 | 45.6 | 30.000 | H | 74.0 |
| 17910.000 | 57.1 | -18.5 | 45.6 | 30.000 | H | 74.0 |

| Frequency (MHz) | Average (dB μ V/m) | Pathloss. (dB) | antenna factor | Receiver (dBm) | Polarization | Limit (dB μ V/m) |
|-----------------|------------------------|----------------|----------------|----------------|--------------|----------------------|
| 2389.944 | 32.6 | -38.8 | 27.7 | 43.700 | V | 54.0 |
| 17900.625 | 46.5 | -18.5 | 45.6 | 19.400 | H | 54.0 |
| 17907.188 | 46.4 | -18.5 | 45.6 | 19.300 | H | 54.0 |
| 17872.500 | 46.4 | -18.5 | 45.6 | 19.300 | H | 54.0 |
| 17895.938 | 46.2 | -18.5 | 45.6 | 19.100 | V | 54.0 |
| 17880.938 | 46.2 | -18.5 | 45.6 | 19.100 | H | 54.0 |

802.11n-20MHz CH6 (1-18GHz)

| Frequency (MHz) | MaxPeak (dBμV/m) | Pathloss. (dB) | antenna factor | Receiver (dBm) | Polarization | Limit (dBμV/m) |
|-----------------|------------------|----------------|----------------|----------------|--------------|----------------|
| 17905.313 | 57.7 | -18.5 | 45.6 | 30.600 | V | 74.0 |
| 17972.813 | 57.4 | -17.7 | 45.6 | 29.500 | H | 74.0 |
| 17895.000 | 57.4 | -18.5 | 45.6 | 30.300 | H | 74.0 |
| 17853.750 | 57.2 | -18.5 | 45.6 | 30.100 | H | 74.0 |
| 17876.250 | 57.2 | -18.5 | 45.6 | 30.100 | V | 74.0 |
| 17892.188 | 57.1 | -18.5 | 45.6 | 30.000 | V | 74.0 |

| Frequency (MHz) | Average (dBμV/m) | Pathloss. (dB) | antenna factor | Receiver (dBm) | Polarization | Limit (dBμV/m) |
|-----------------|------------------|----------------|----------------|----------------|--------------|----------------|
| 17905.313 | 46.3 | -18.5 | 45.6 | 19.200 | V | 54.0 |
| 17880.938 | 46.3 | -18.5 | 45.6 | 19.200 | V | 54.0 |
| 17893.125 | 46.2 | -18.5 | 45.6 | 19.100 | V | 54.0 |
| 17883.750 | 46.2 | -18.5 | 45.6 | 19.100 | H | 54.0 |
| 17886.563 | 46.1 | -18.5 | 45.6 | 19.000 | V | 54.0 |
| 17891.250 | 46.1 | -18.5 | 45.6 | 19.000 | V | 54.0 |

802.11n-20MHz CH11 (1-18GHz)

| Frequency (MHz) | MaxPeak (dBμV/m) | Pathloss. (dB) | antenna factor | Receiver (dBm) | Polarization | Limit (dBμV/m) |
|-----------------|------------------|----------------|----------------|----------------|--------------|----------------|
| 2484.213 | 50.0 | -38.9 | 27.7 | 61.200 | V | 74.0 |
| 17886.563 | 57.6 | -18.5 | 45.6 | 30.500 | H | 74.0 |
| 17967.188 | 57.4 | -17.7 | 45.6 | 29.500 | H | 74.0 |
| 17878.125 | 57.3 | -18.5 | 45.6 | 30.200 | V | 74.0 |
| 17858.438 | 57.3 | -18.5 | 45.6 | 30.200 | H | 74.0 |
| 17896.875 | 57.2 | -18.5 | 45.6 | 30.100 | H | 74.0 |

| Frequency (MHz) | Average (dB μ V/m) | Pathloss. (dB) | antenna factor | Receiver (dBm) | Polarization | Limit (dB μ V/m) |
|-----------------|------------------------|----------------|----------------|----------------|--------------|----------------------|
| 2483.763 | 32.9 | -38.9 | 27.7 | 44.100 | V | 54.0 |
| 17875.313 | 46.6 | -18.5 | 45.6 | 19.500 | V | 54.0 |
| 17872.500 | 46.5 | -18.5 | 45.6 | 19.400 | H | 54.0 |
| 17881.875 | 46.4 | -18.5 | 45.6 | 19.300 | H | 54.0 |
| 17900.625 | 46.4 | -18.5 | 45.6 | 19.300 | V | 54.0 |
| 17888.438 | 46.3 | -18.5 | 45.6 | 19.200 | H | 54.0 |

See ANNEX C for test graphs.

Conclusion: PASS

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

B.6 AC Powerline Conducted Emission

Test Condition:

| Voltage (V) | Frequency (Hz) |
|-------------|----------------|
| 120 | 60 |

Measurement Result and limit:

WLAN (Quasi-peak Limit)-AE1

| Frequency range (MHz) | Quasi-peak Limit (dB μ V) | Result (dB μ V) | Conclusion |
|-----------------------|-------------------------------|---------------------|------------|
| | | Traffic | |
| 0.15 to 0.5 | Fig.66 to 56 | Fig.150 | P |
| 0.5 to 5 | 56 | | |
| 5 to 30 | 60 | | |

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)-AE1

| Frequency range (MHz) | Average-peak Limit (dB μ V) | Result (dB μ V) | Conclusion |
|-----------------------|---------------------------------|---------------------|------------|
| | | Traffic | |
| 0.15 to 0.5 | 56 to 46 | Fig.150 | P |
| 0.5 to 5 | 46 | | |
| 5 to 30 | 50 | | |

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Quasi-peak Limit)-AE2

| Frequency range (MHz) | Quasi-peak Limit (dB μ V) | Result (dB μ V) | Conclusion |
|-----------------------|-------------------------------|---------------------|------------|
| | | Traffic | |
| 0.15 to 0.5 | Fig.67 to 56 | Fig.151 | P |
| 0.5 to 5 | 56 | | |
| 5 to 30 | 60 | | |

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)-AE2

| Frequency range (MHz) | Average-peak Limit (dB μ V) | Result (dB μ V) | Conclusion |
|-----------------------|---------------------------------|---------------------|------------|
| | | Traffic | |
| 0.15 to 0.5 | 56 to 46 | Fig.151 | P |
| 0.5 to 5 | 46 | | |
| 5 to 30 | 50 | | |

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Quasi-peak Limit)-AE3

| Frequency range (MHz) | Quasi-peak Limit (dB μ V) | Result (dB μ V) | Conclusion |
|-----------------------|-------------------------------|---------------------|------------|
| | | Traffic | |
| 0.15 to 0.5 | Fig.68 to 56 | Fig.152 | P |
| 0.5 to 5 | 56 | | |
| 5 to 30 | 60 | | |

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)-AE3

| Frequency range (MHz) | Average-peak Limit (dB μ V) | Result (dB μ V) | Conclusion |
|-----------------------|---------------------------------|---------------------|------------|
| | | Traffic | |
| 0.15 to 0.5 | 56 to 46 | Fig.152 | P |
| 0.5 to 5 | 46 | | |
| 5 to 30 | 50 | | |

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Quasi-peak Limit)-AE4

| Frequency range (MHz) | Quasi-peak Limit (dB μ V) | Result (dB μ V) | Conclusion |
|-----------------------|-------------------------------|---------------------|------------|
| | | Traffic | |
| 0.15 to 0.5 | Fig.69 to 56 | Fig.153 | P |
| 0.5 to 5 | 56 | | |
| 5 to 30 | 60 | | |

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)-AE4

| Frequency range (MHz) | Average-peak Limit (dB μ V) | Result (dB μ V) | Conclusion |
|-----------------------|---------------------------------|---------------------|------------|
| | | Traffic | |
| 0.15 to 0.5 | 56 to 46 | Fig.153 | P |
| 0.5 to 5 | 46 | | |
| 5 to 30 | 50 | | |

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Quasi-peak Limit)-AE5

| Frequency range (MHz) | Quasi-peak Limit (dB μ V) | Result (dB μ V) | Conclusion |
|-----------------------|-------------------------------|---------------------|------------|
| | | Traffic | |
| 0.15 to 0.5 | Fig.70 to 56 | Fig.154 | P |
| 0.5 to 5 | 56 | | |
| 5 to 30 | 60 | | |

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)-AE5

| Frequency range (MHz) | Average-peak Limit (dB μ V) | Result (dB μ V) | Conclusion |
|-----------------------|---------------------------------|---------------------|------------|
| | | Traffic | |
| 0.15 to 0.5 | 56 to 46 | Fig.154 | P |
| 0.5 to 5 | 46 | | |
| 5 to 30 | 50 | | |

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Quasi-peak Limit)-AE6

| Frequency range (MHz) | Quasi-peak Limit (dB μ V) | Result (dB μ V) | Conclusion |
|-----------------------|-------------------------------|---------------------|------------|
| | | Traffic | |
| 0.15 to 0.5 | Fig.71 to 56 | Fig.155 | P |
| 0.5 to 5 | 56 | | |
| 5 to 30 | 60 | | |

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)-AE6

| Frequency range (MHz) | Average-peak Limit (dB μ V) | Result (dB μ V) | Conclusion |
|-----------------------|---------------------------------|---------------------|------------|
| | | Traffic | |
| 0.15 to 0.5 | 56 to 46 | Fig.155 | P |
| 0.5 to 5 | 46 | | |
| 5 to 30 | 50 | | |

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Quasi-peak Limit)-AE7

| Frequency range (MHz) | Quasi-peak Limit (dB μ V) | Result (dB μ V) | Conclusion |
|-----------------------|-------------------------------|---------------------|------------|
| | | Traffic | |
| 0.15 to 0.5 | Fig.72 to 56 | Fig.156 | P |
| 0.5 to 5 | 56 | | |
| 5 to 30 | 60 | | |

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)-AE7

| Frequency range (MHz) | Average-peak Limit (dB μ V) | Result (dB μ V) | Conclusion |
|-----------------------|---------------------------------|---------------------|------------|
| | | Traffic | |
| 0.15 to 0.5 | 56 to 46 | Fig.156 | P |
| 0.5 to 5 | 46 | | |
| 5 to 30 | 50 | | |

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Quasi-peak Limit)-AE8

| Frequency range (MHz) | Quasi-peak Limit (dB μ V) | Result (dB μ V) | Conclusion |
|-----------------------|-------------------------------|---------------------|------------|
| | | Traffic | |
| 0.15 to 0.5 | Fig.73 to 56 | Fig.157 | P |
| 0.5 to 5 | 56 | | |
| 5 to 30 | 60 | | |

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)-AE8

| Frequency range (MHz) | Average-peak Limit (dB μ V) | Result (dB μ V) | Conclusion |
|-----------------------|---------------------------------|---------------------|------------|
| | | Traffic | |
| 0.15 to 0.5 | 56 to 46 | Fig.157 | P |
| 0.5 to 5 | 46 | | |
| 5 to 30 | 50 | | |

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Quasi-peak Limit)-AE9

| Frequency range (MHz) | Quasi-peak Limit (dB μ V) | Result (dB μ V) | Conclusion |
|-----------------------|-------------------------------|---------------------|------------|
| | | Traffic | |
| 0.15 to 0.5 | Fig.74 to 56 | Fig.158 | P |
| 0.5 to 5 | 56 | | |
| 5 to 30 | 60 | | |

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)-AE9

| Frequency range (MHz) | Average-peak Limit (dB μ V) | Result (dB μ V) | Conclusion |
|-----------------------|---------------------------------|---------------------|------------|
| | | Traffic | |
| 0.15 to 0.5 | 56 to 46 | Fig.158 | P |
| 0.5 to 5 | 46 | | |
| 5 to 30 | 50 | | |

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Quasi-peak Limit)-AE10

| Frequency range (MHz) | Quasi-peak Limit (dB μ V) | Result (dB μ V) | Conclusion |
|-----------------------|-------------------------------|---------------------|------------|
| | | Traffic | |
| 0.15 to 0.5 | Fig.75 to 56 | Fig.159 | P |
| 0.5 to 5 | 56 | | |
| 5 to 30 | 60 | | |

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)-AE10

| Frequency range (MHz) | Average-peak Limit (dB μ V) | Result (dB μ V) | Conclusion |
|-----------------------|---------------------------------|---------------------|------------|
| | | Traffic | |
| 0.15 to 0.5 | 56 to 46 | Fig.159 | P |
| 0.5 to 5 | 46 | | |
| 5 to 30 | 50 | | |

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Quasi-peak Limit)-AE1-idle

| Frequency range (MHz) | Quasi-peak Limit (dB μ V) | Result (dB μ V) | Conclusion |
|-----------------------|-------------------------------|---------------------|------------|
| | | Traffic | |
| 0.15 to 0.5 | Fig.76 to 56 | Fig.160 | P |
| 0.5 to 5 | 56 | | |
| 5 to 30 | 60 | | |

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)-AE1-idle

| Frequency range (MHz) | Average-peak Limit (dB μ V) | Result (dB μ V) | Conclusion |
|-----------------------|---------------------------------|---------------------|------------|
| | | Traffic | |
| 0.15 to 0.5 | 56 to 46 | Fig.160 | P |
| 0.5 to 5 | 46 | | |
| 5 to 30 | 50 | | |

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

See ANNEX C for test graphs.

Conclusion: PASS

ANNEX C: TEST LAYOUTS

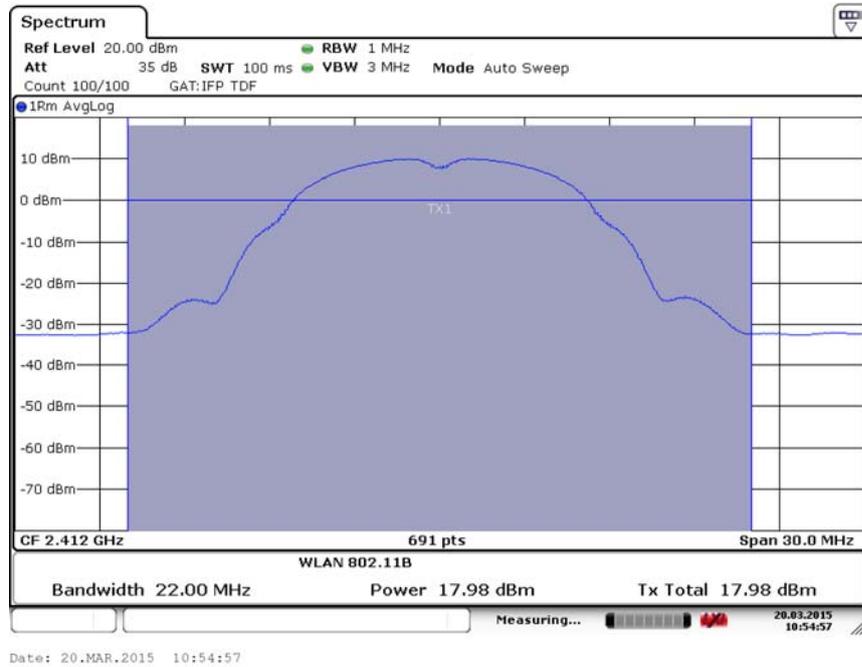


Fig.1 Maximum Average Output Power (802.11b, Ch 1,1Mbps)

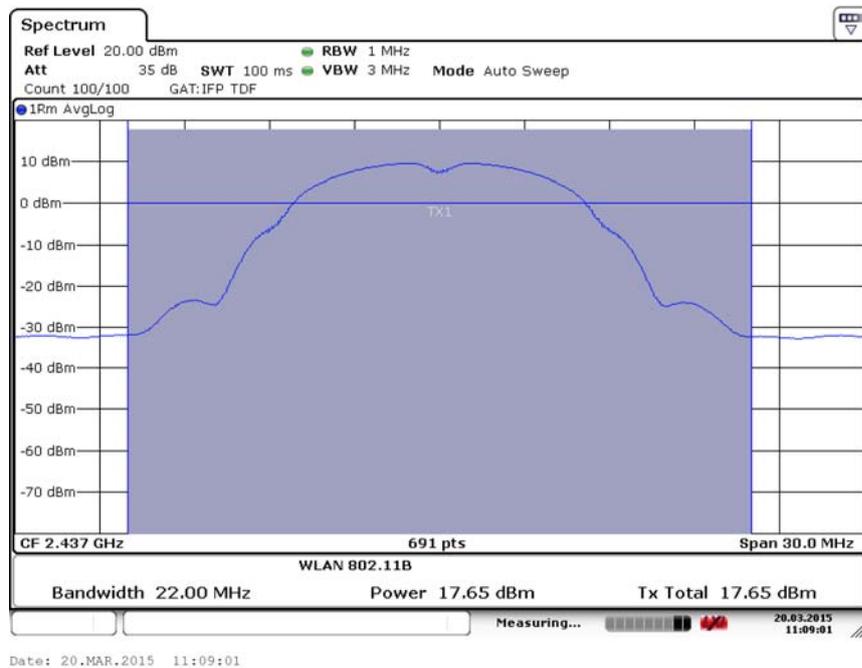


Fig.2 Maximum Average Output Power (802.11b, Ch 6,1Mbps)

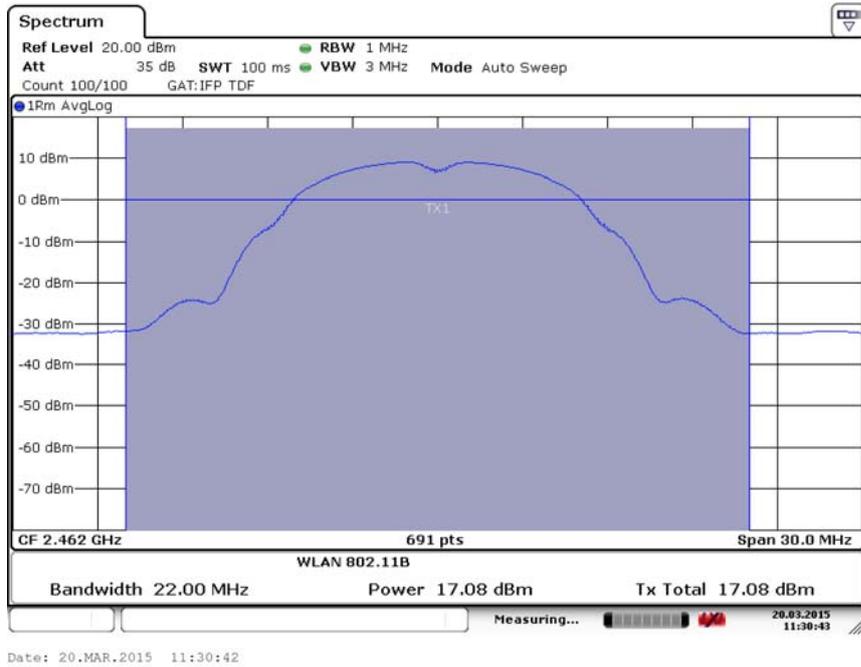


Fig.3 Maximum Average Output Power (802.11b, Ch 11,1Mbps)

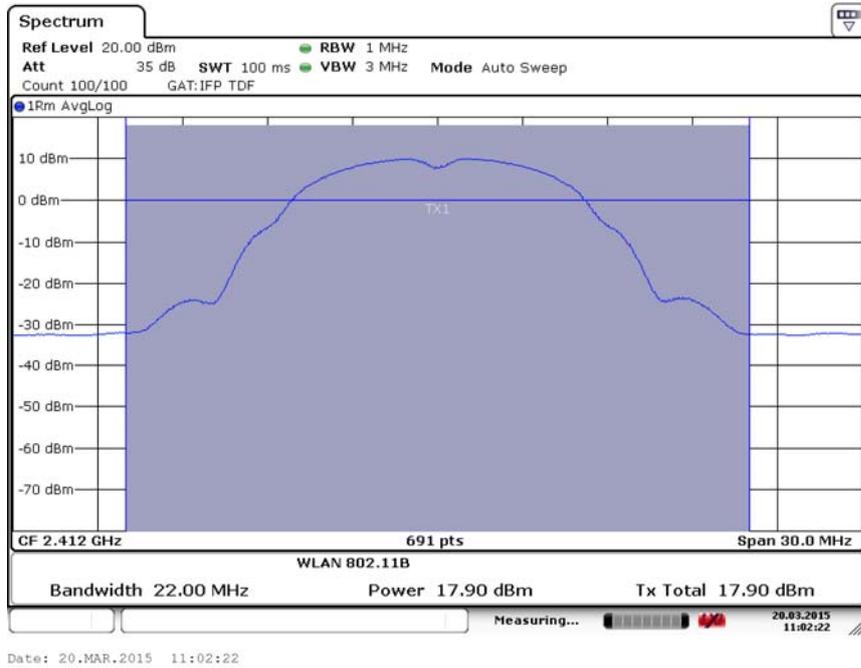


Fig.4 Maximum Average Output Power (802.11b, Ch 1,2Mbps)

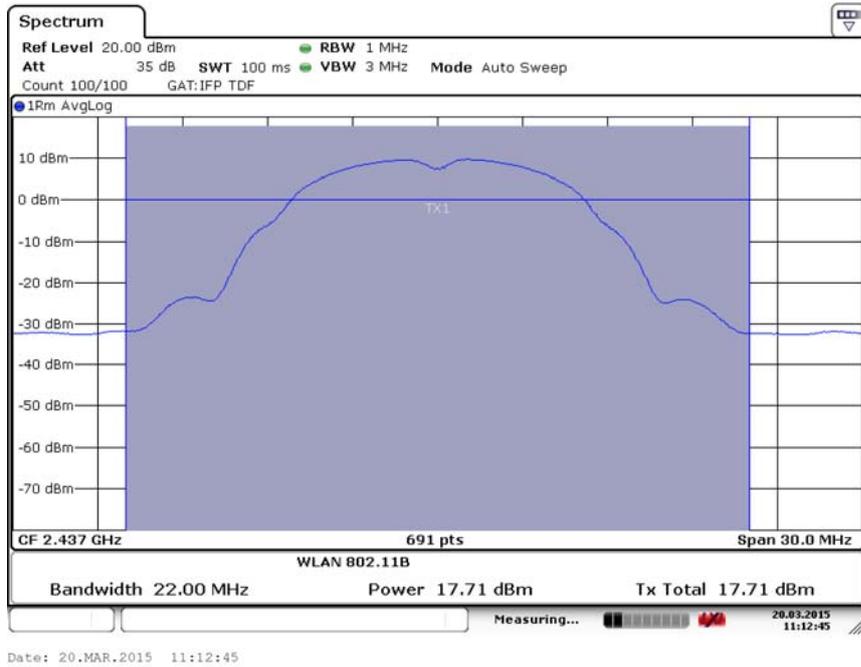


Fig.5 Maximum Average Output Power (802.11b, Ch 6,2Mbps)

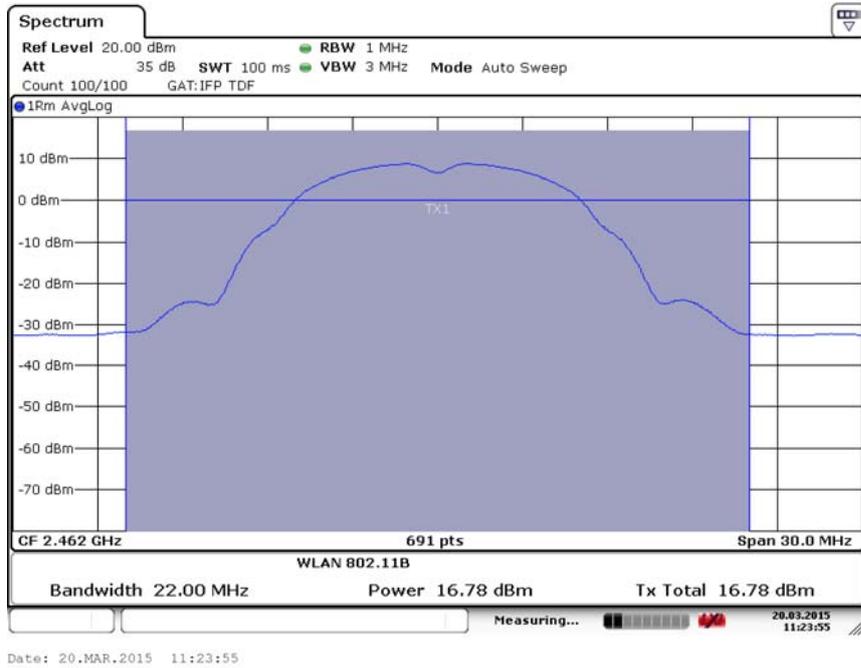


Fig.6 Maximum Average Output Power (802.11b, Ch 11,2Mbps)

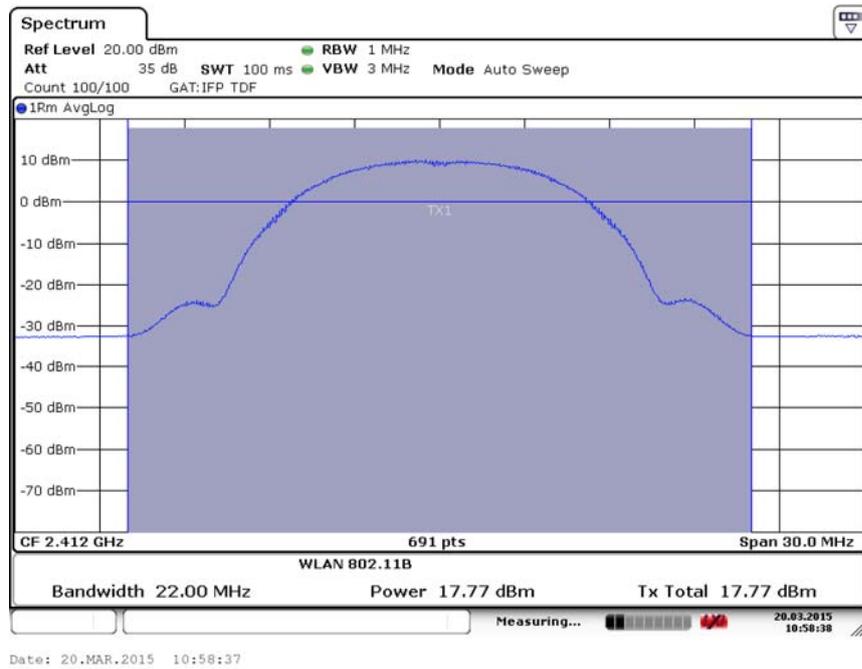


Fig.7 Maximum Average Output Power (802.11b, Ch 1,5Mbps)

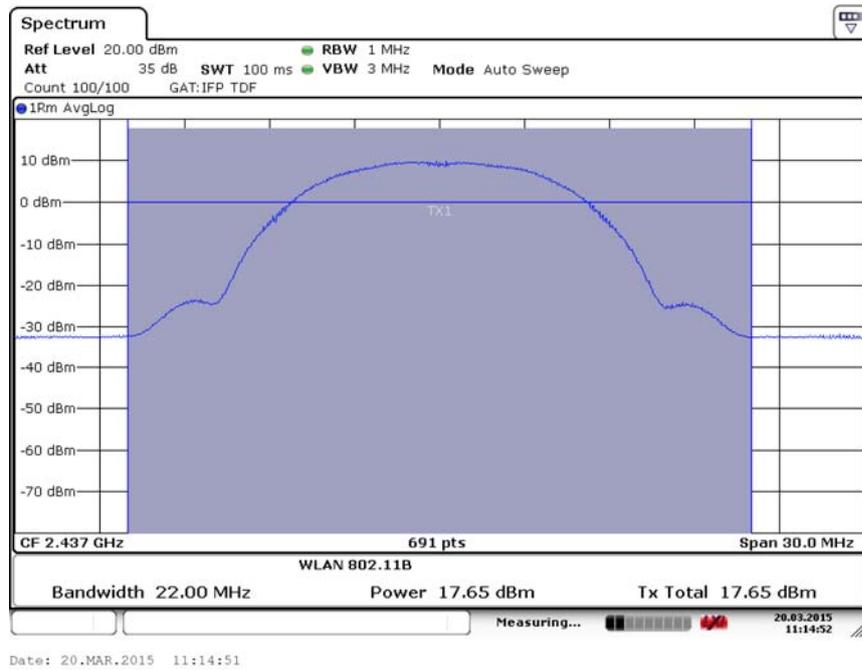


Fig.8 Maximum Average Output Power (802.11b, Ch 6,5Mbps)

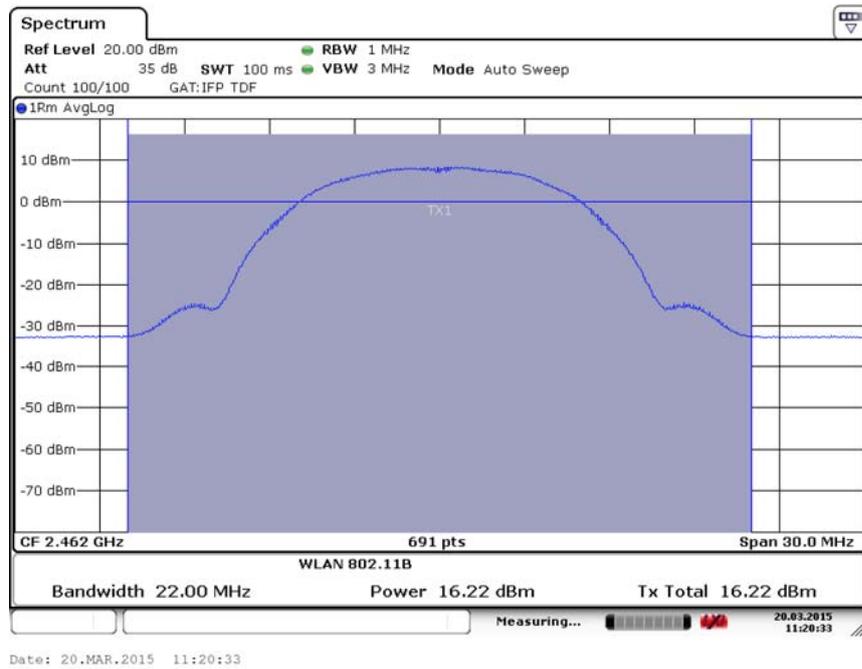


Fig.9 Maximum Average Output Power (802.11b, Ch 11,5.5Mbps)

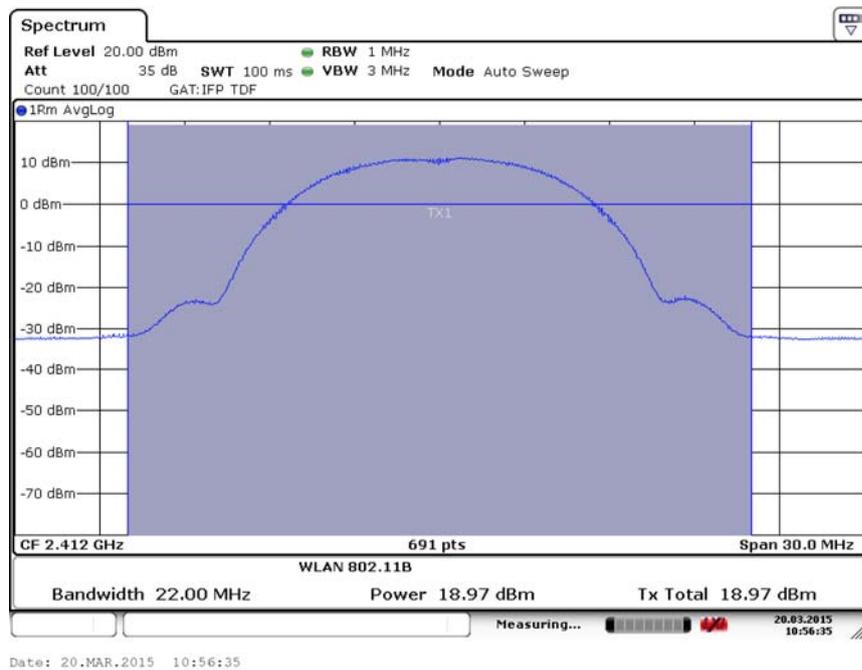


Fig.10 Maximum Average Output Power (802.11b, Ch 1,11Mbps)

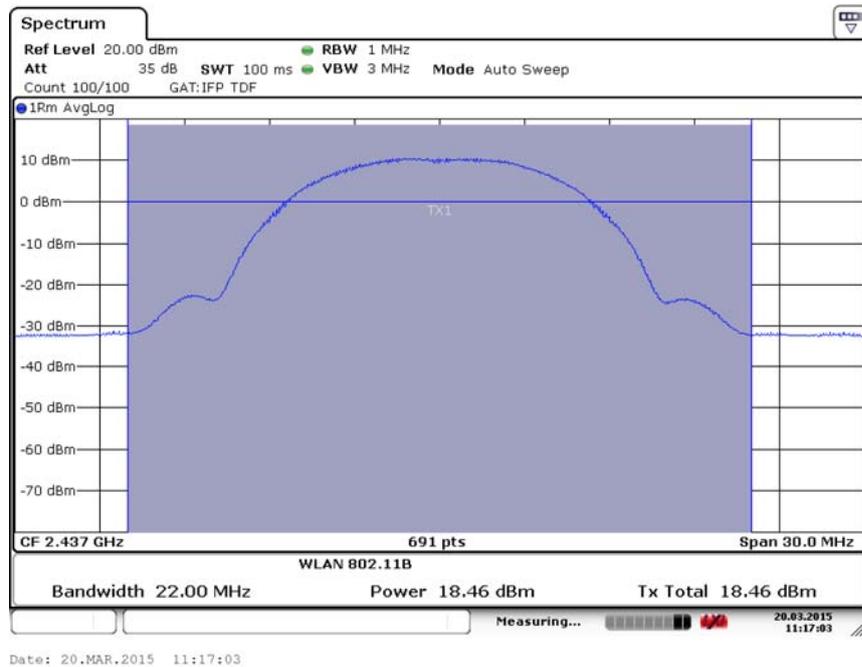


Fig.11 Maximum Average Output Power (802.11b, Ch 6,11Mbps)

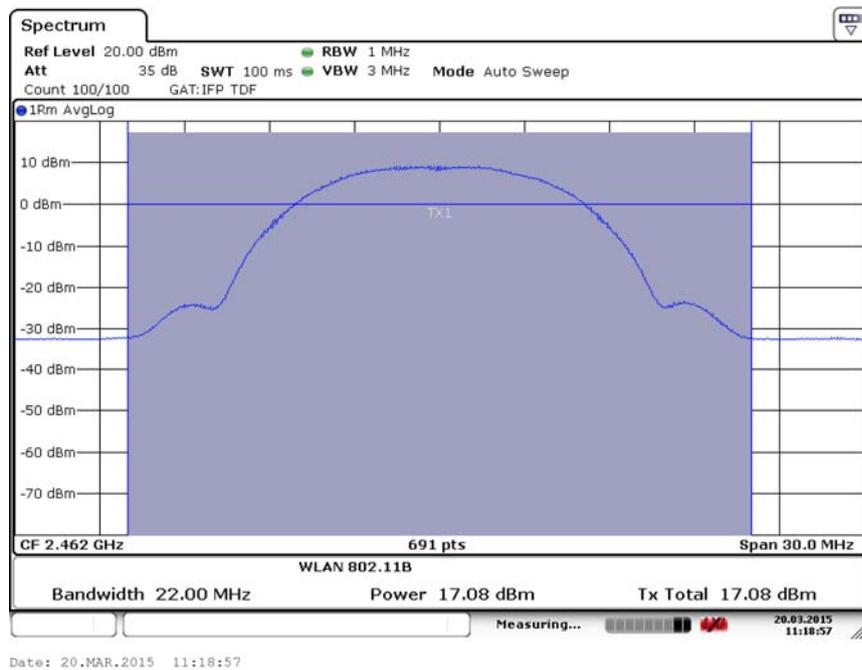


Fig.12 Maximum Average Output Power (802.11b, Ch 11,11Mbps)

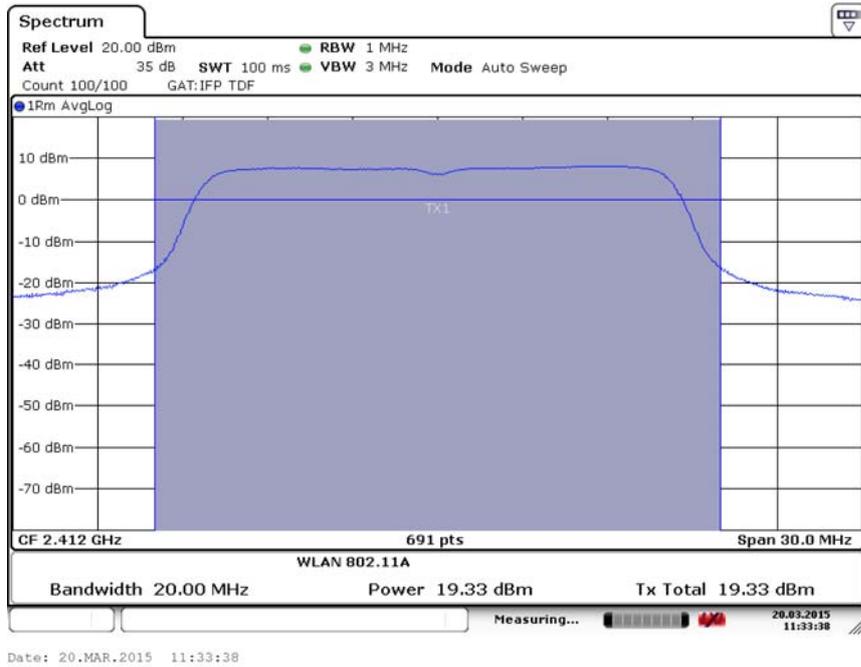


Fig.13 Maximum Average Output Power (802.11g, Ch 1,6Mbps)

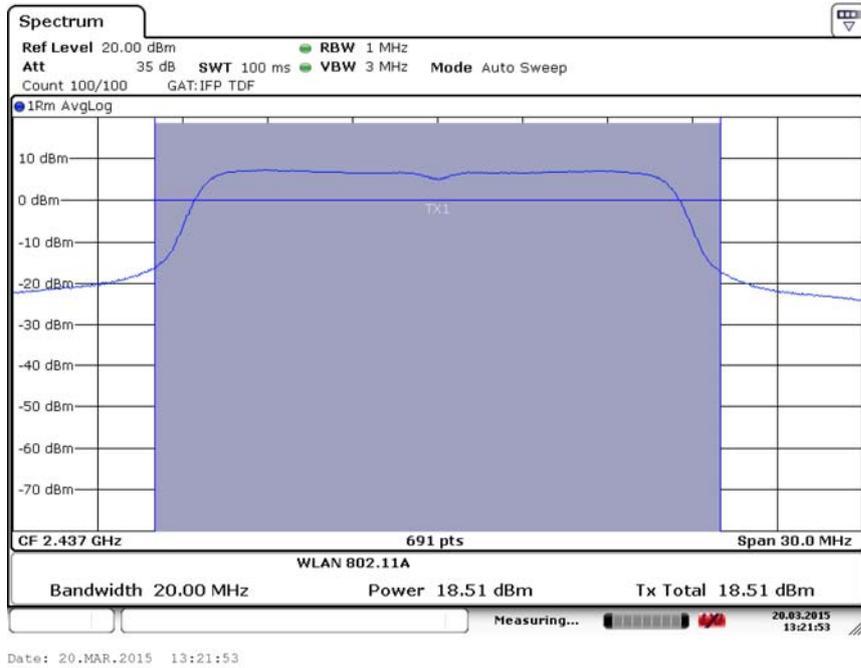


Fig.14 Maximum Average Output Power (802.11g, Ch 6,6Mbps)

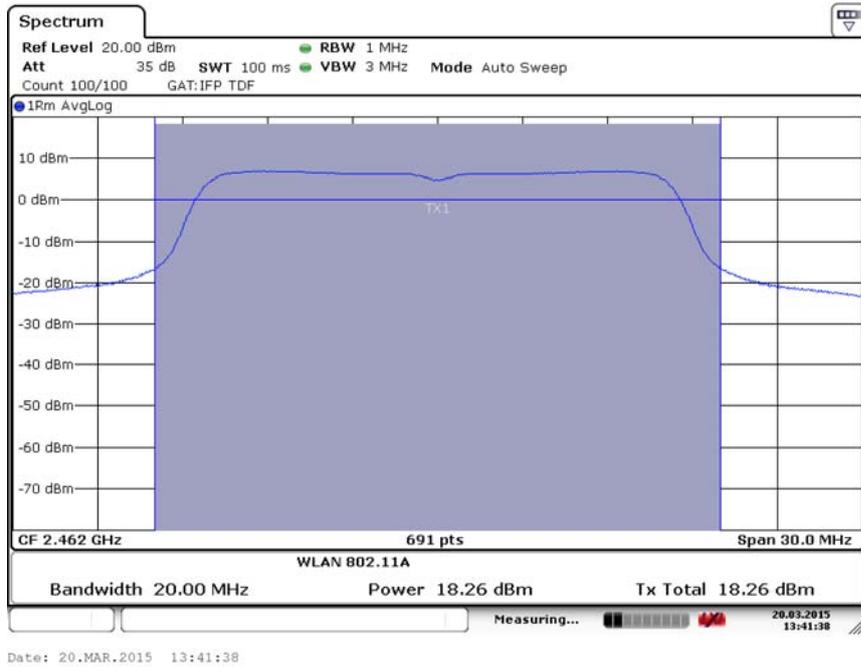


Fig.15 Maximum Average Output Power (802.11g, Ch 11,6Mbps)

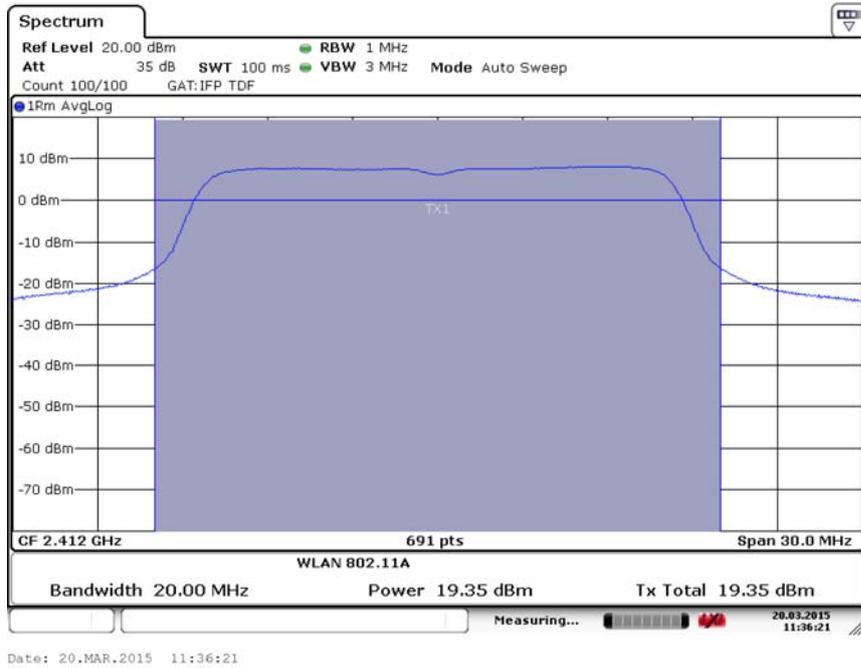


Fig.16 Maximum Average Output Power (802.11g, Ch 1,9Mbps)

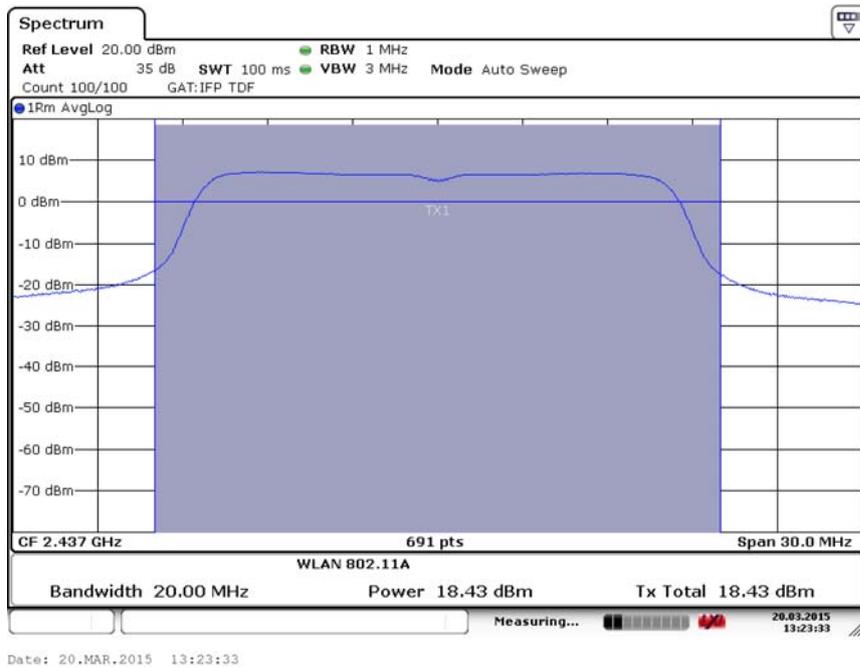


Fig.17 Maximum Average Output Power (802.11g, Ch 6,9Mbps)

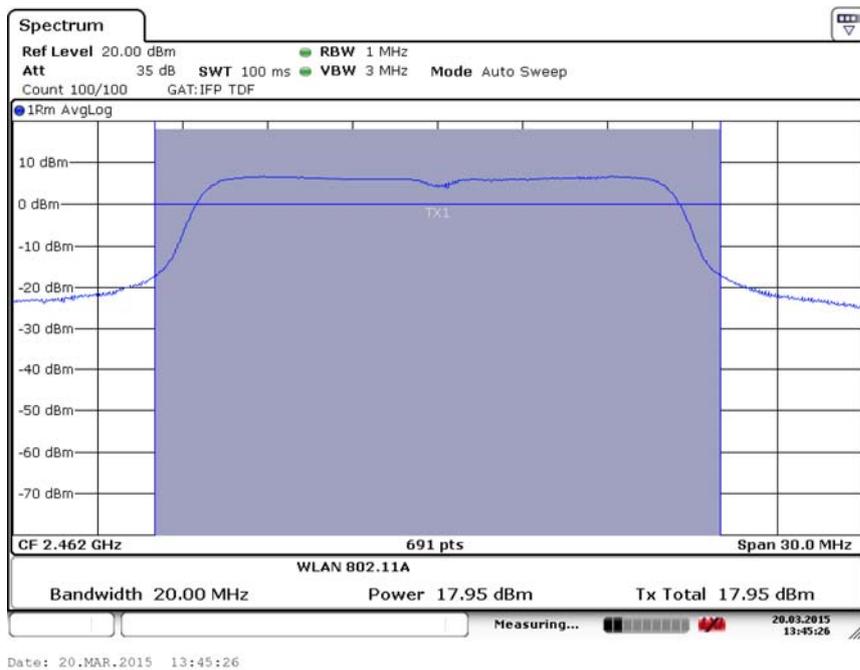


Fig.18 Maximum Average Output Power (802.11g, Ch 11,9Mbps)

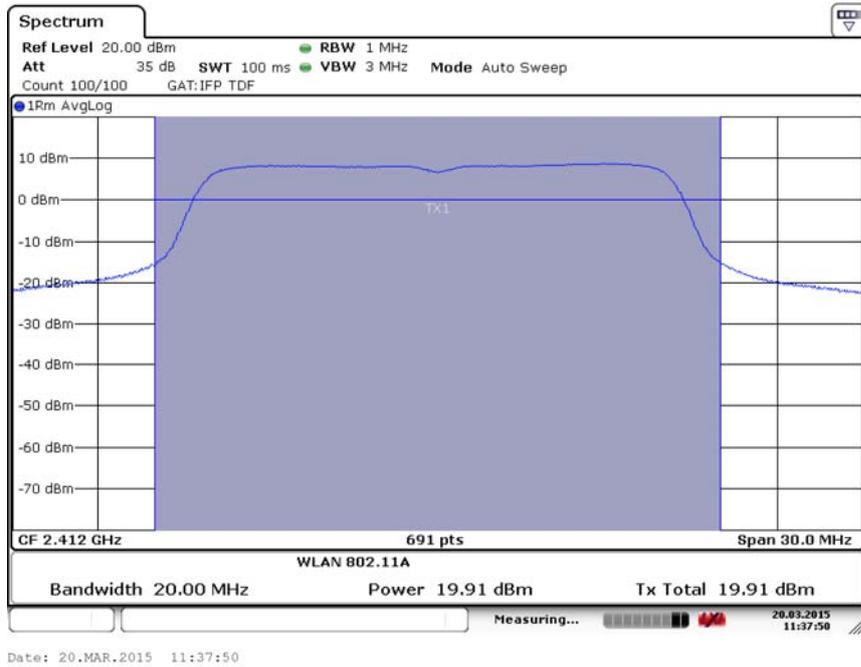


Fig.19 Maximum Average Output Power (802.11g, Ch 1,12Mbps)

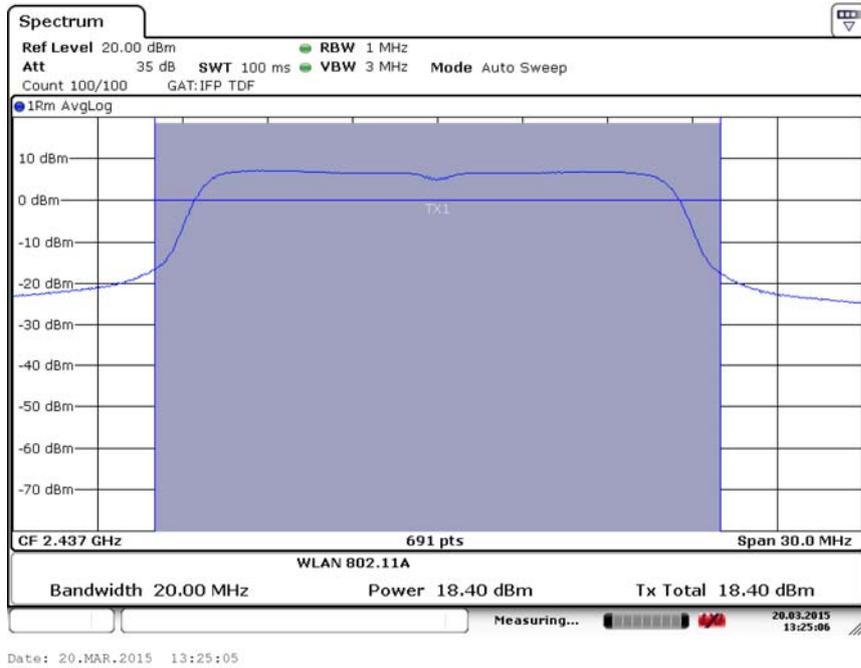


Fig.20 Maximum Average Output Power (802.11g, Ch 6,12Mbps)

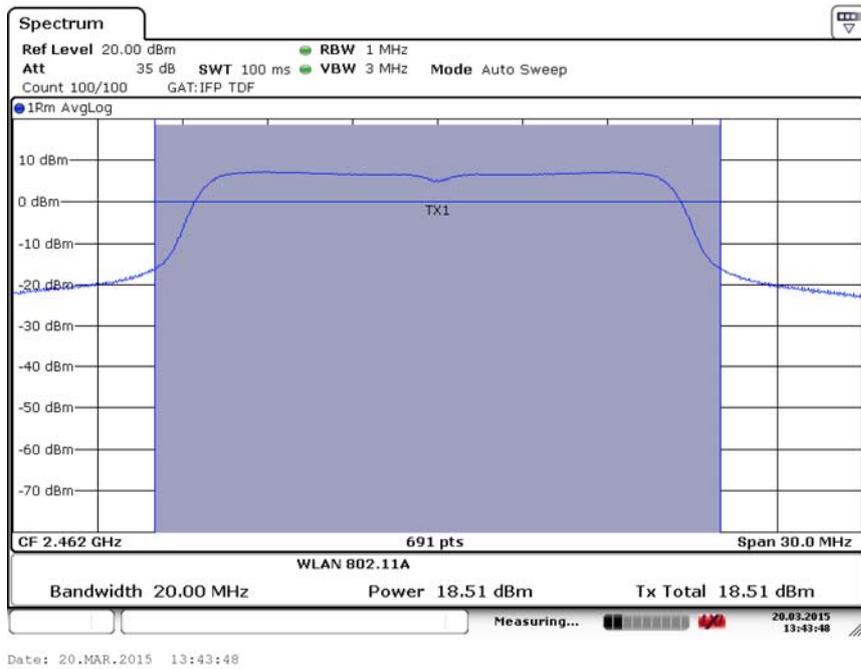


Fig.21 Maximum Average Output Power (802.11g, Ch 11,12Mbps)



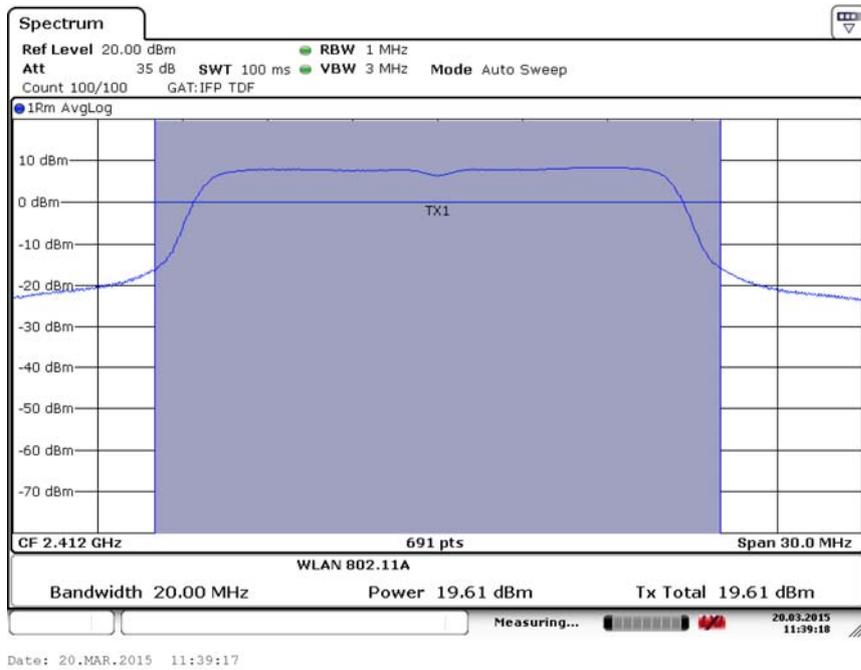


Fig.22 Maximum Average Output Power (802.11g, Ch 1,18Mbps)

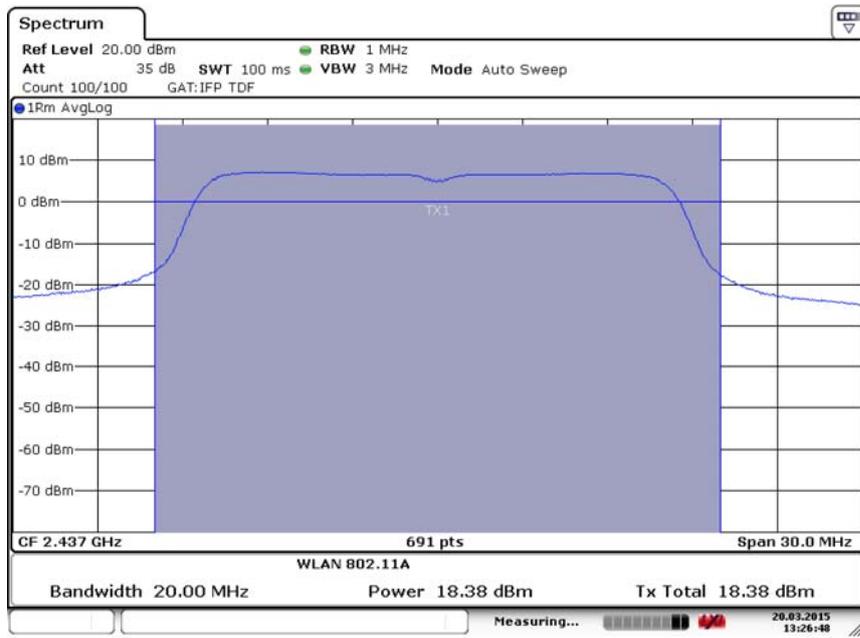

Date: 20.MAR.2015 13:26:47

Fig.23 Maximum Average Output Power (802.11g, Ch 6,18Mbps)

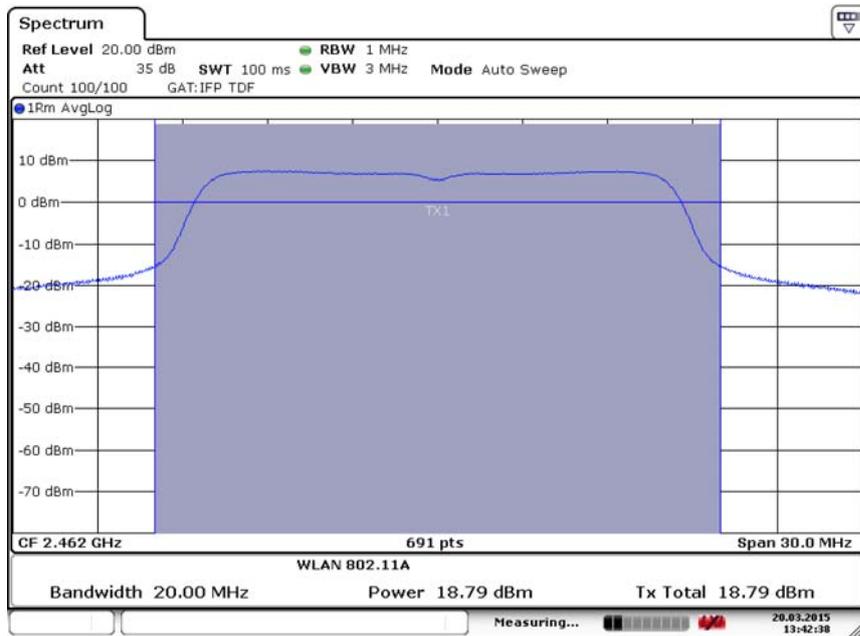

Date: 20.MAR.2015 13:42:38

Fig.24 Maximum Average Output Power (802.11g, Ch 11,18Mbps)

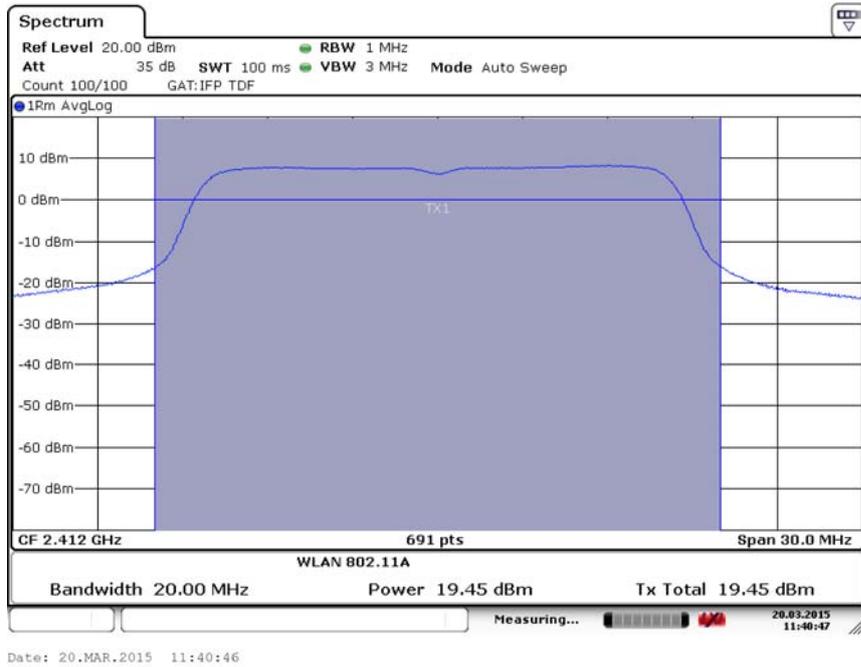


Fig.25 Maximum Average Output Power (802.11g, Ch 1,24Mbps)

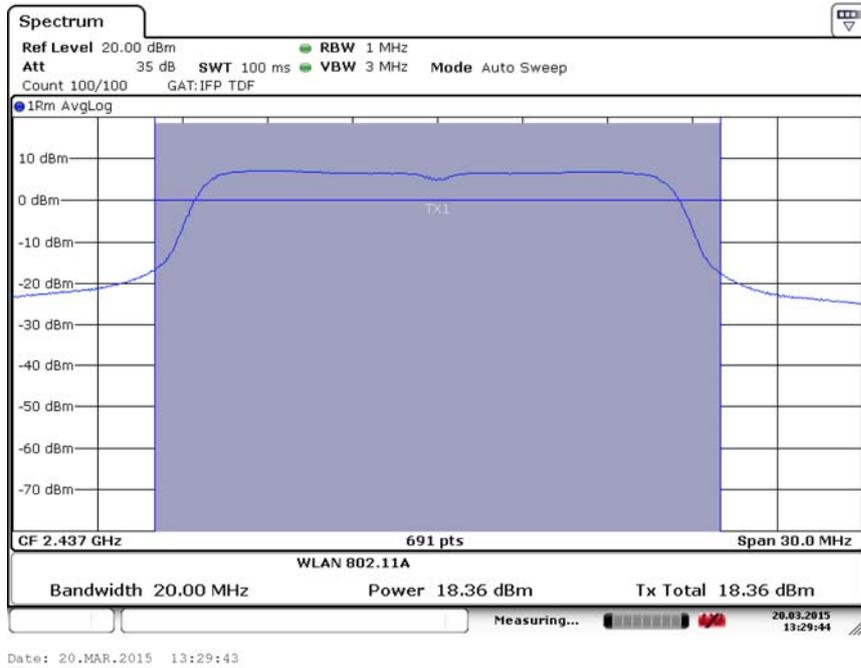


Fig.26 Maximum Average Output Power (802.11g, Ch 6,24Mbps)

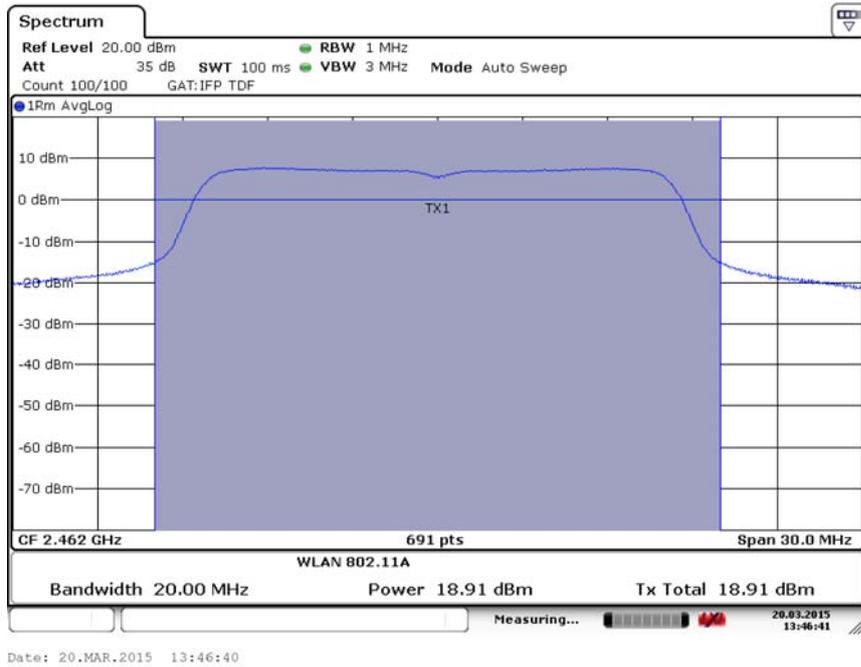


Fig.27 Maximum Average Output Power (802.11g, Ch 11,24Mbps)

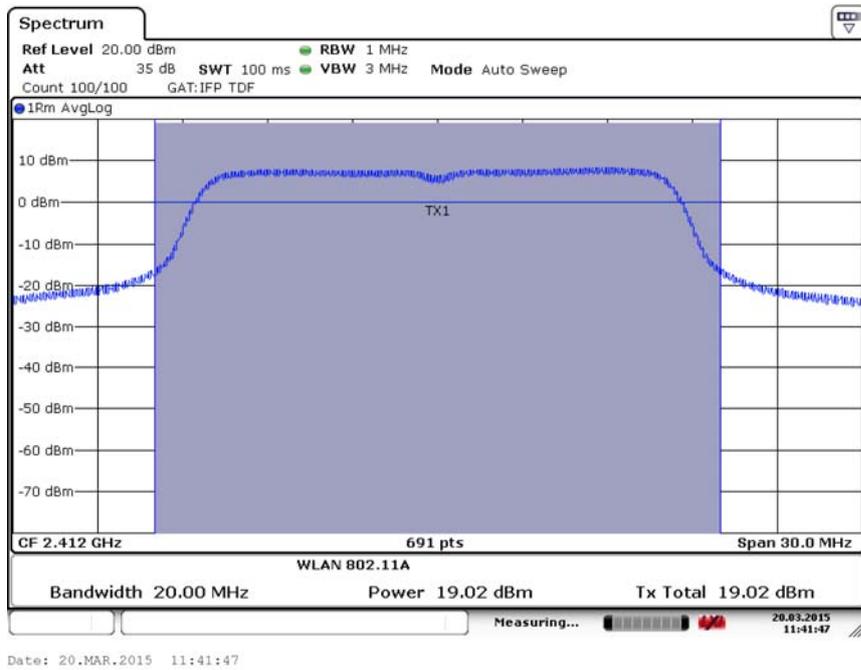


Fig.28 Maximum Average Output Power (802.11g, Ch 1,36Mbps)

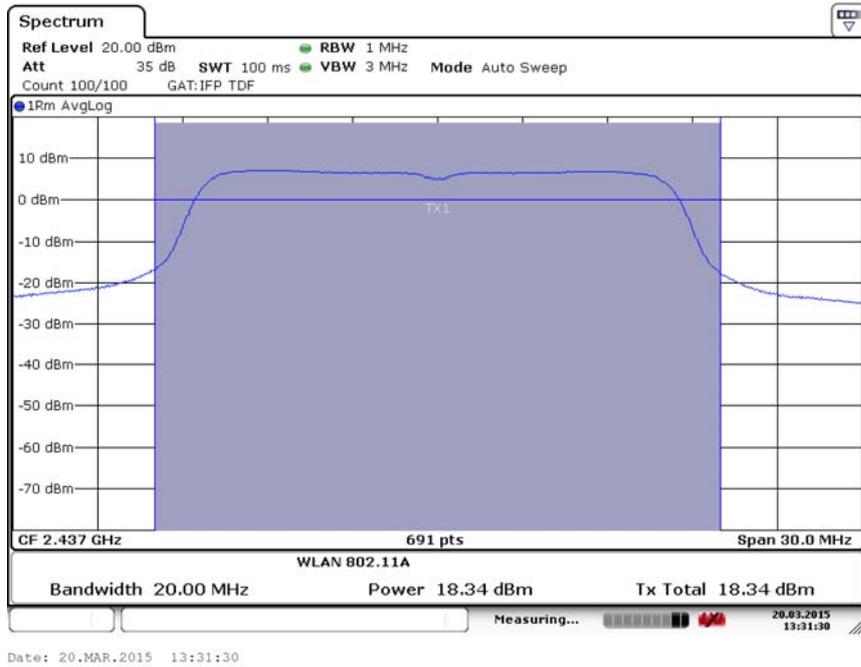


Fig.29 Maximum Average Output Power (802.11g, Ch 6,36Mbps)

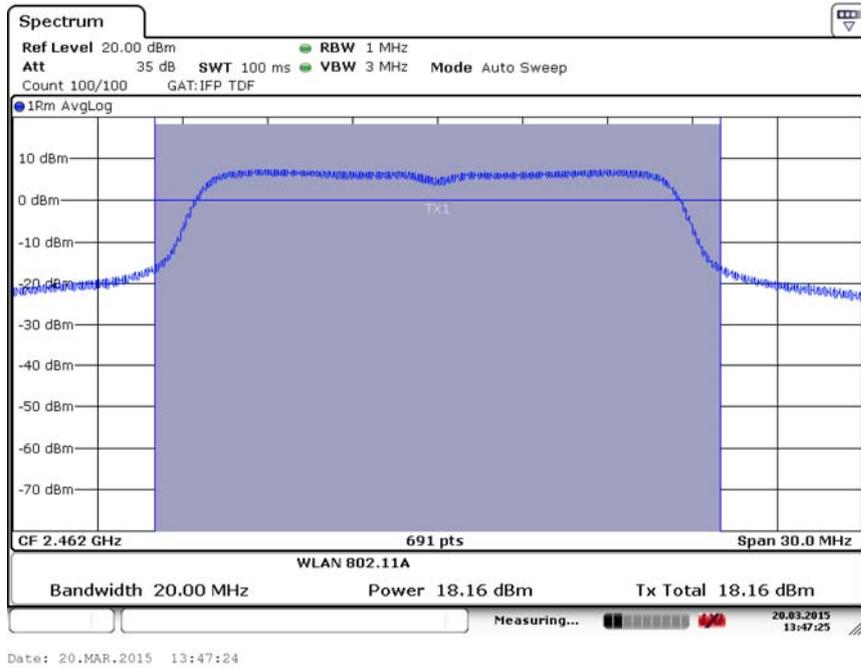


Fig.30 Maximum Average Output Power (802.11g, Ch 11,36Mbps)

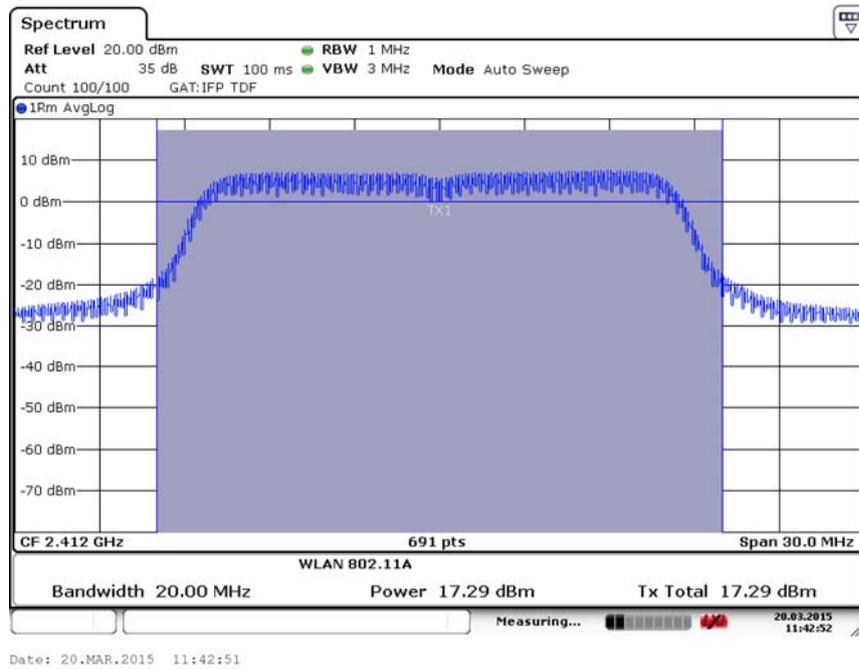


Fig.31 Maximum Average Output Power (802.11g, Ch 1,48Mbps)



Fig.32 Maximum Average Output Power (802.11g, Ch 6,48Mbps)

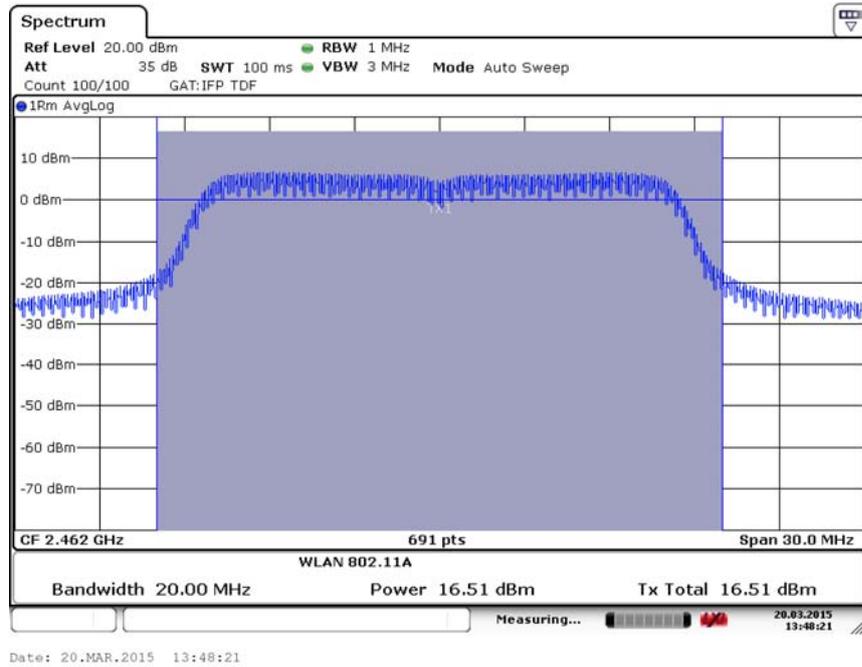


Fig.33 Maximum Average Output Power (802.11g, Ch 11,48Mbps)

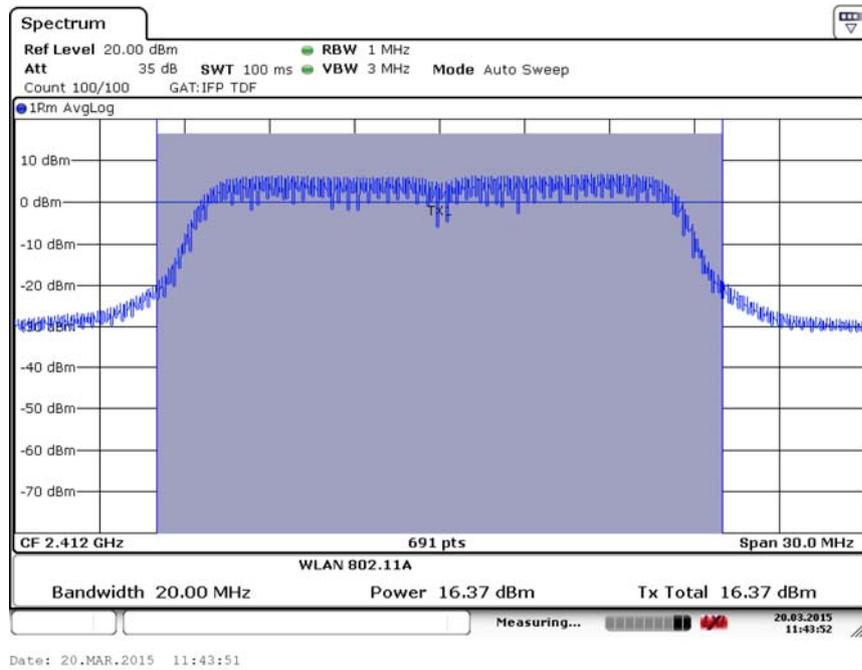


Fig.34 Maximum Average Output Power (802.11g, Ch 1,54Mbps)

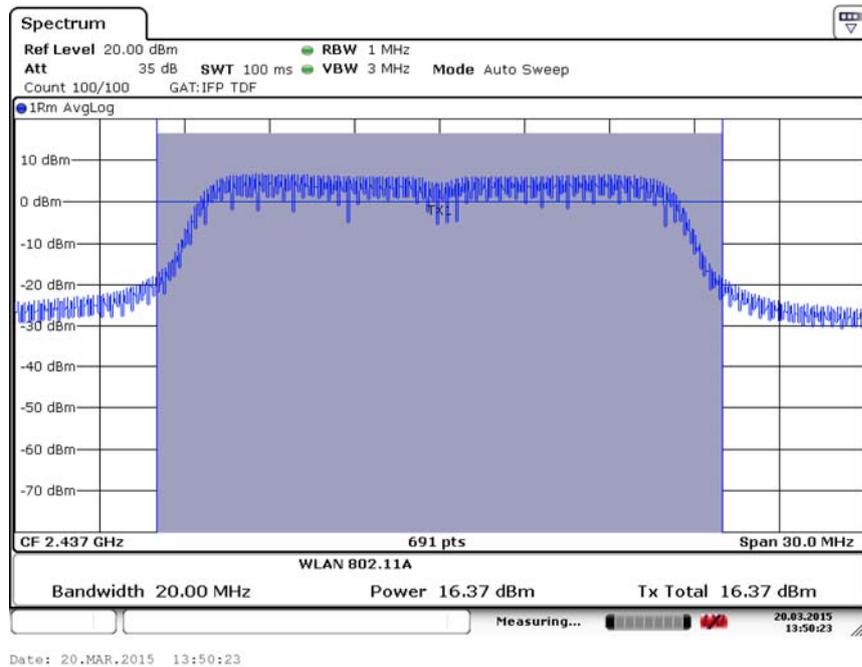


Fig.35 Maximum Average Output Power (802.11g, Ch 6,54Mbps)

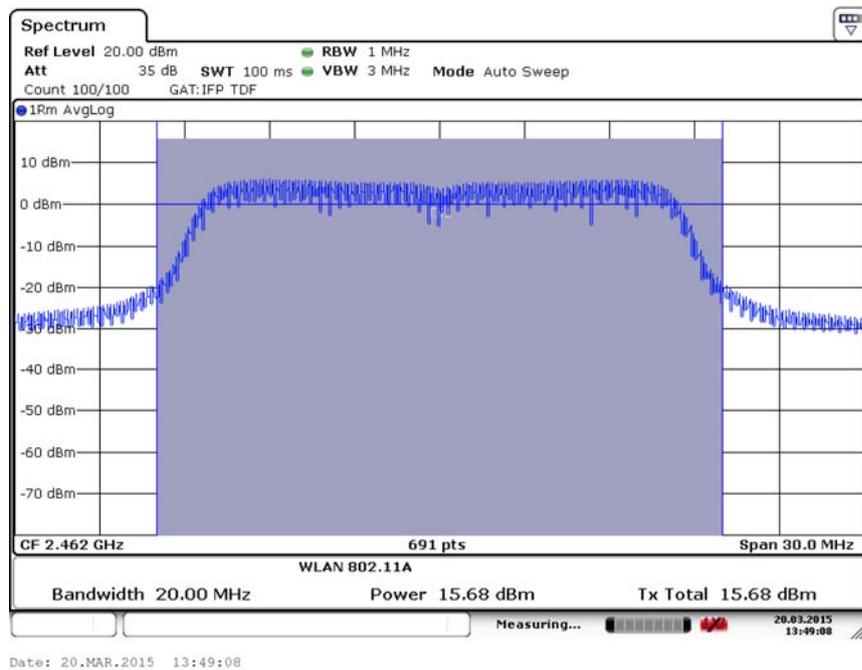


Fig.36 Maximum Average Output Power (802.11g, Ch 11,54Mbps)

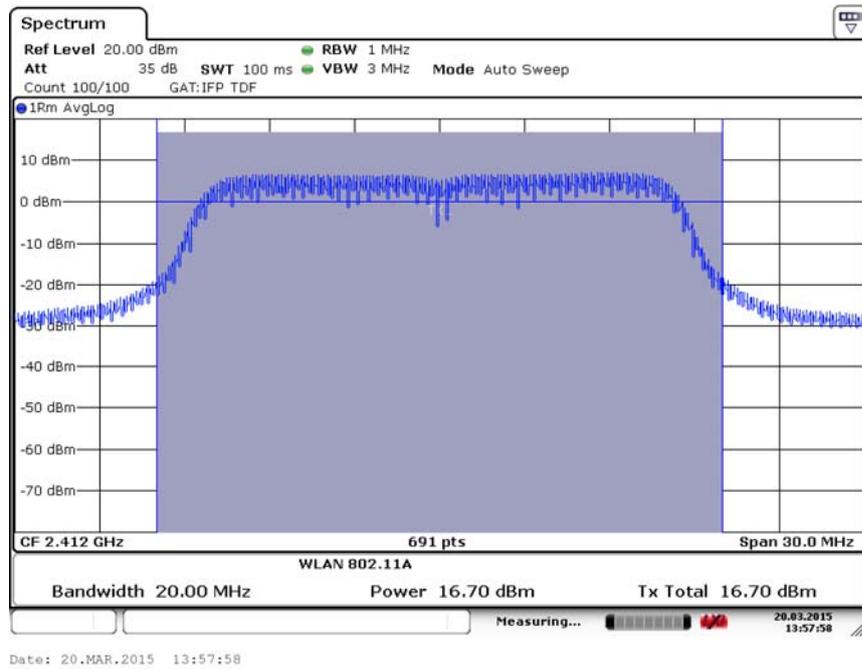


Fig.37 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS0)

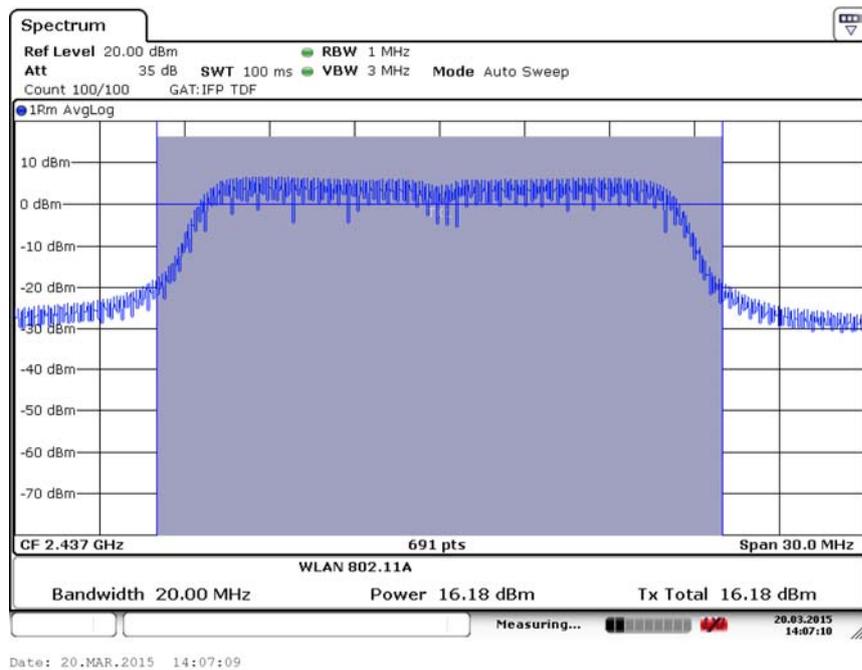


Fig.38 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS0)

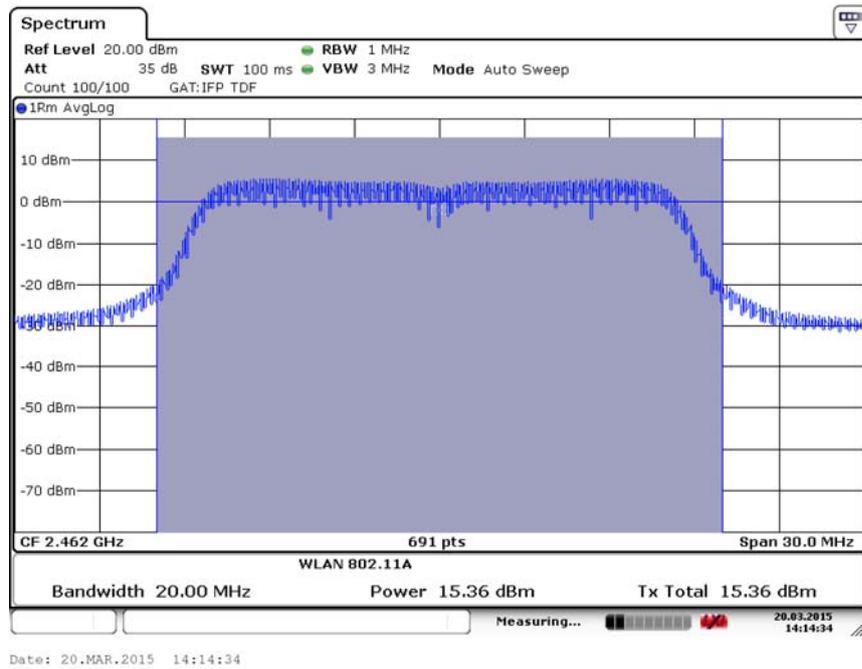


Fig.39 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS0)

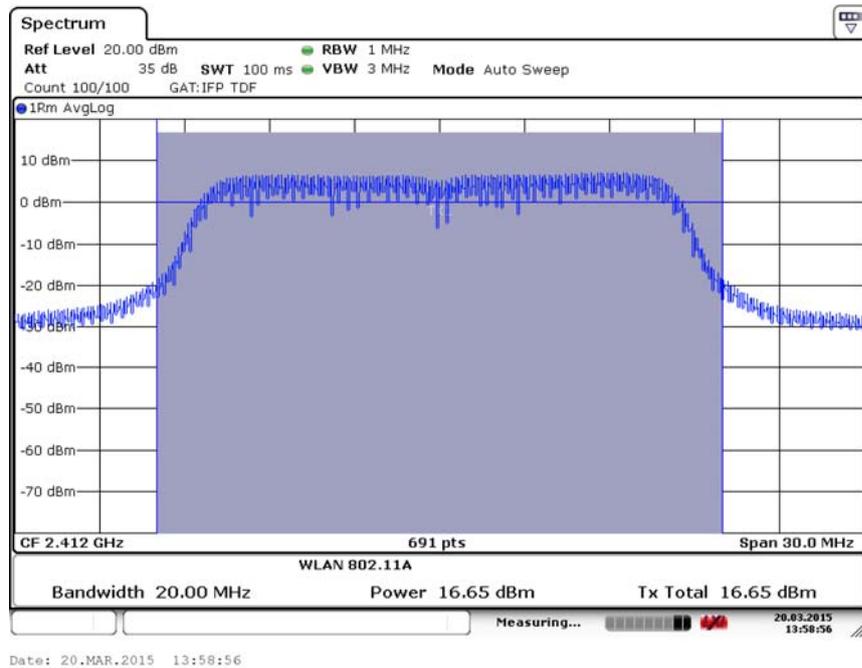


Fig.40 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS1)

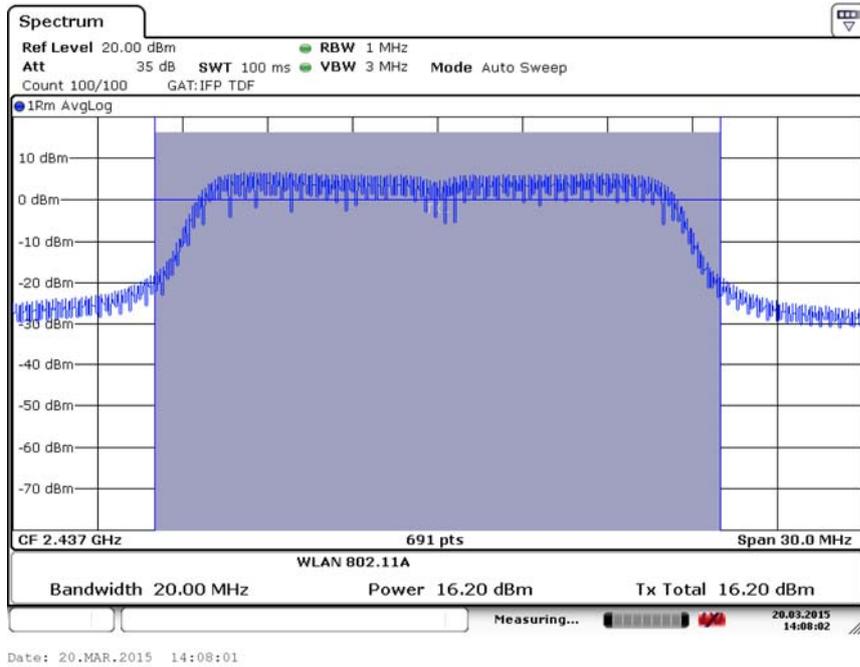


Fig.41 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS1)

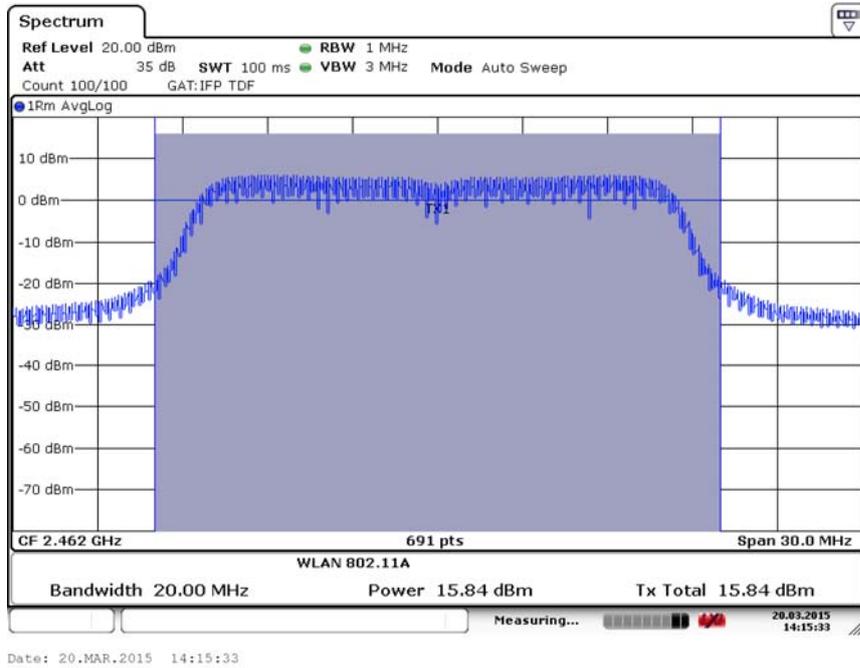


Fig.42 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS1)

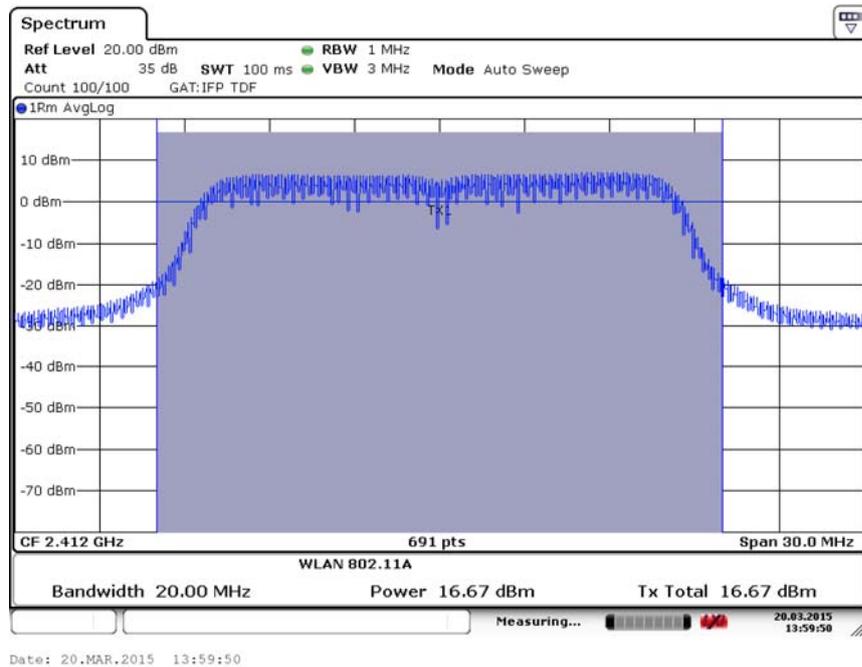


Fig.43 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS2)

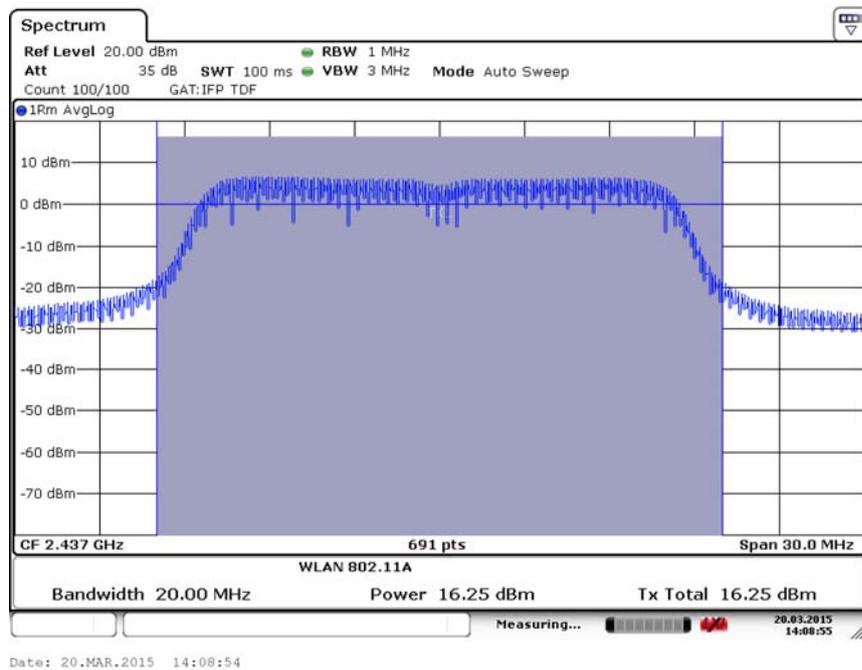


Fig.44 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS2)

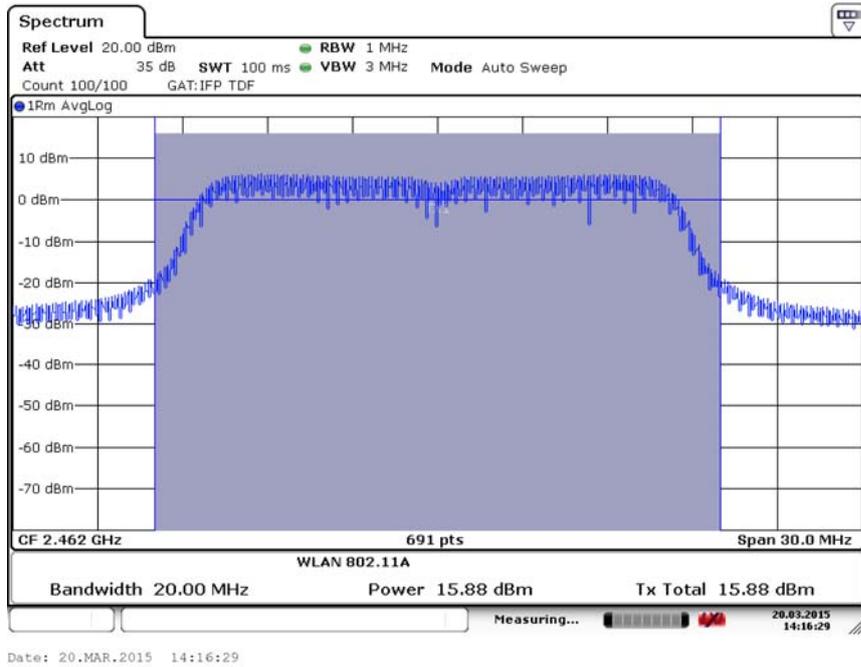


Fig.45 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS2)

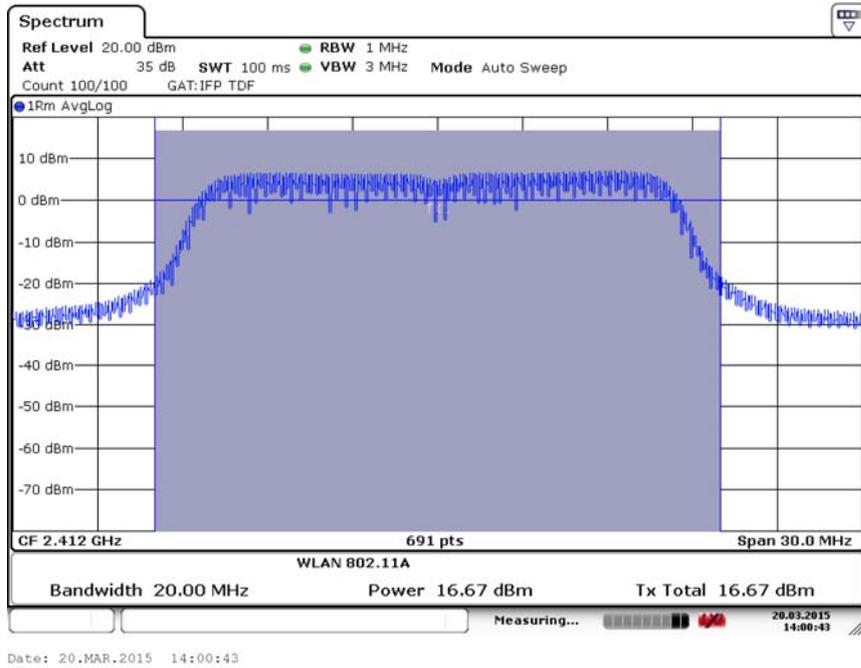


Fig.46 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS3)

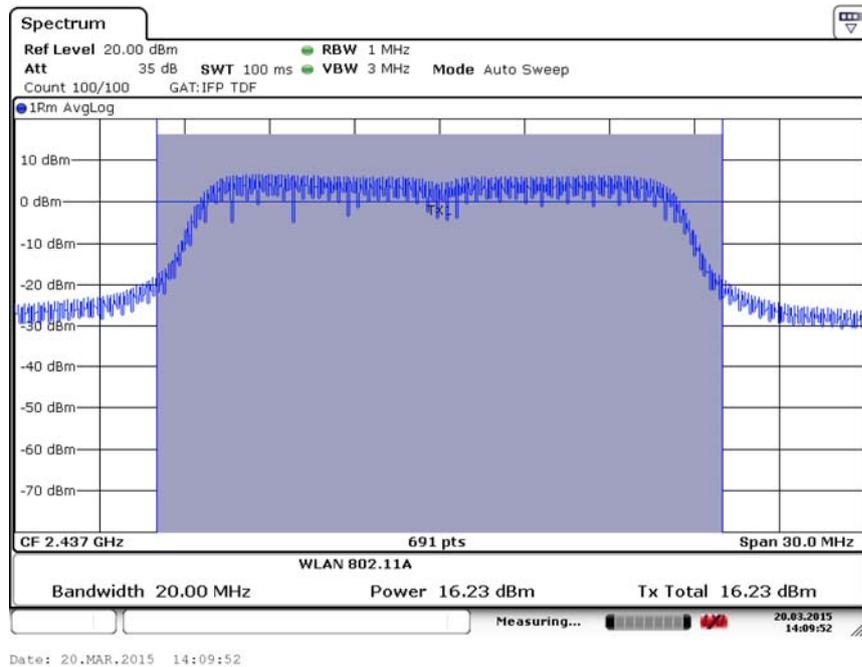


Fig.47 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS3)

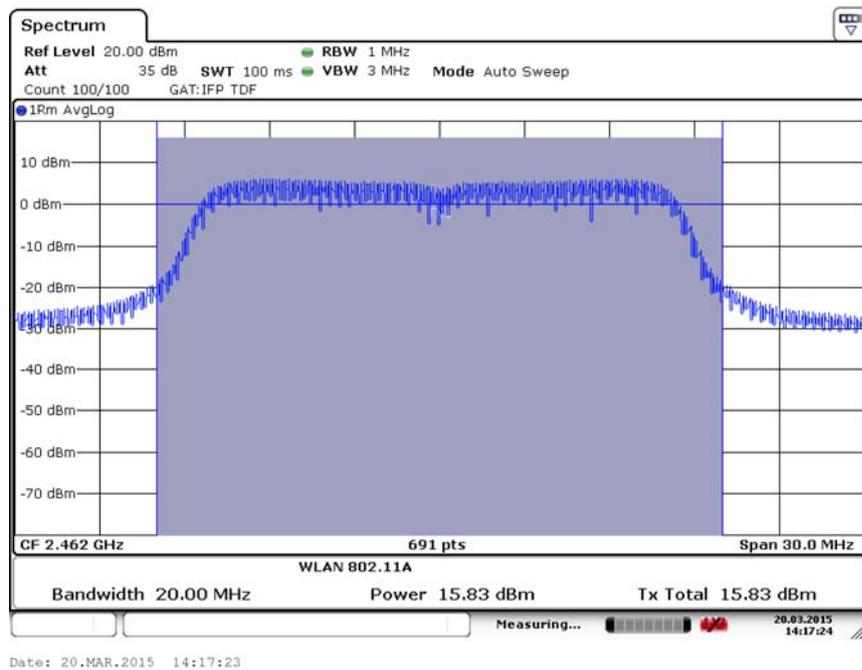


Fig.48 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS3)

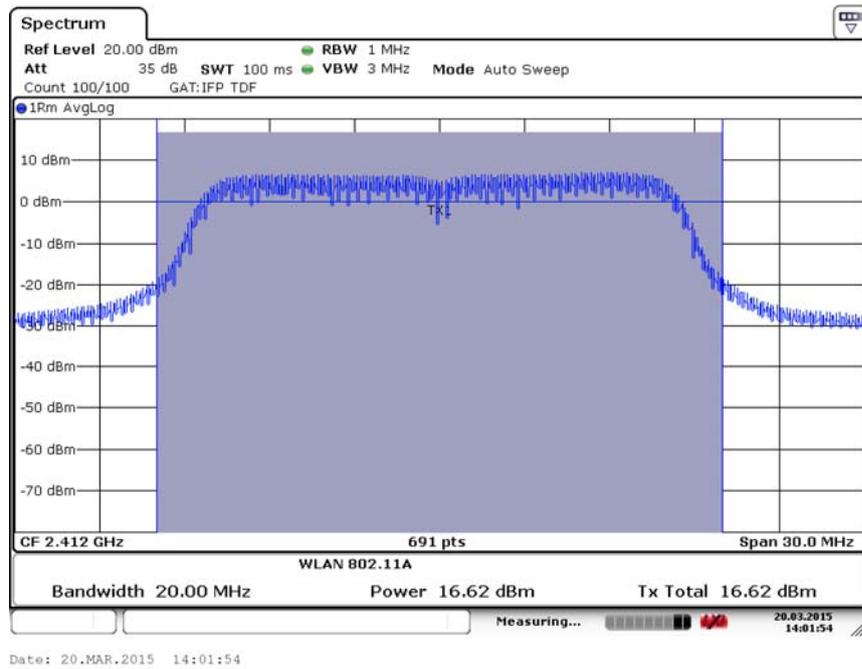


Fig.49 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS4)

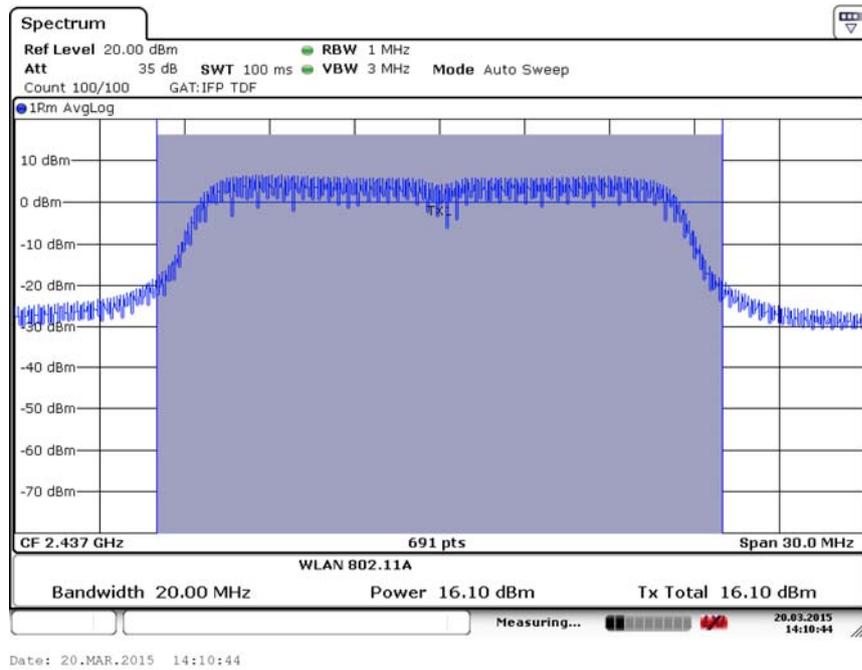


Fig.50 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS4)

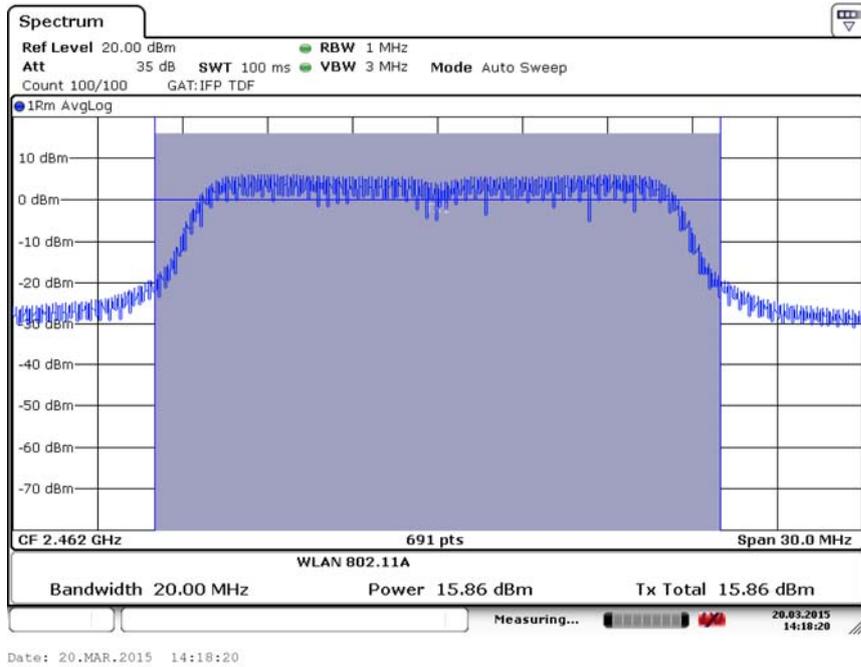


Fig.51 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS4)

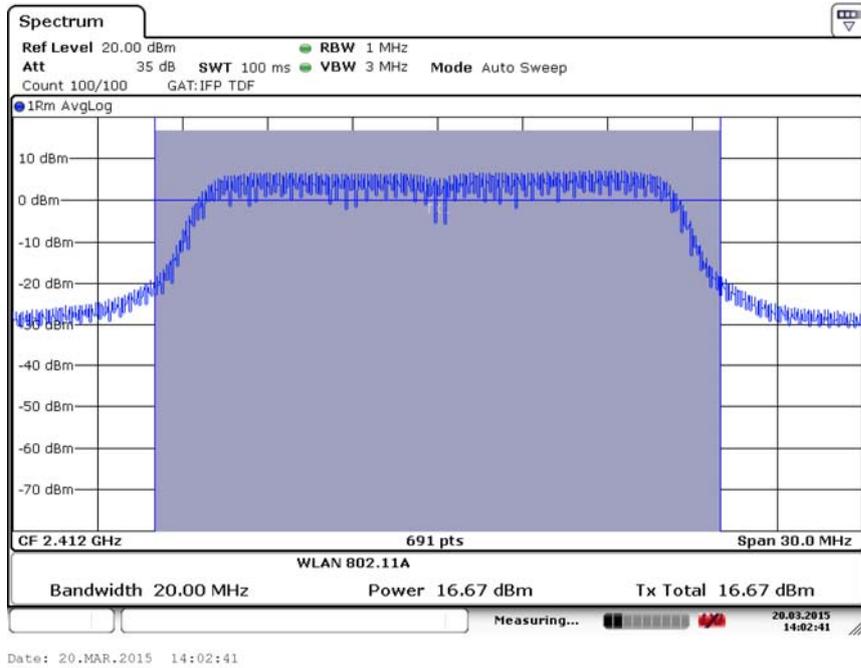


Fig.52 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS5)

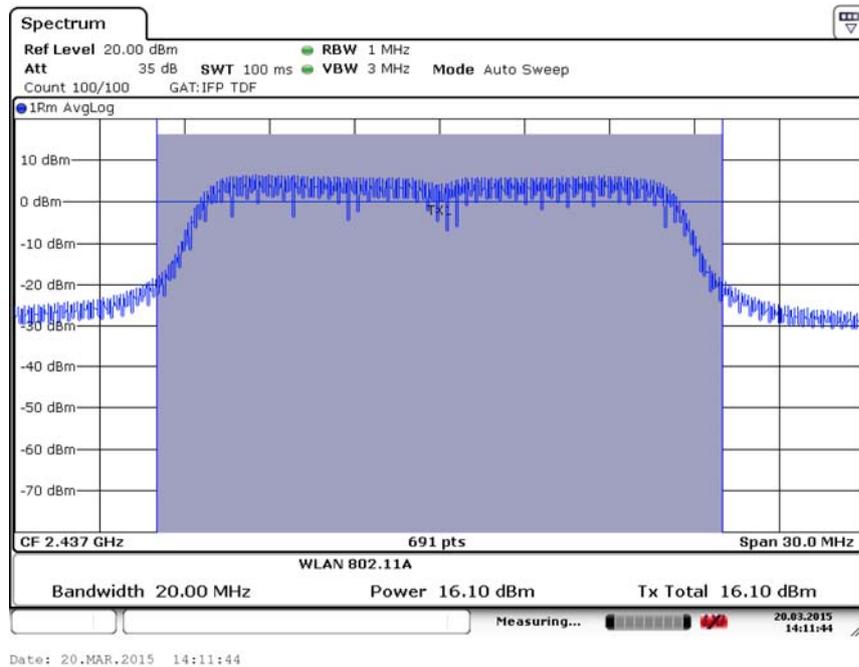


Fig.53 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS5)

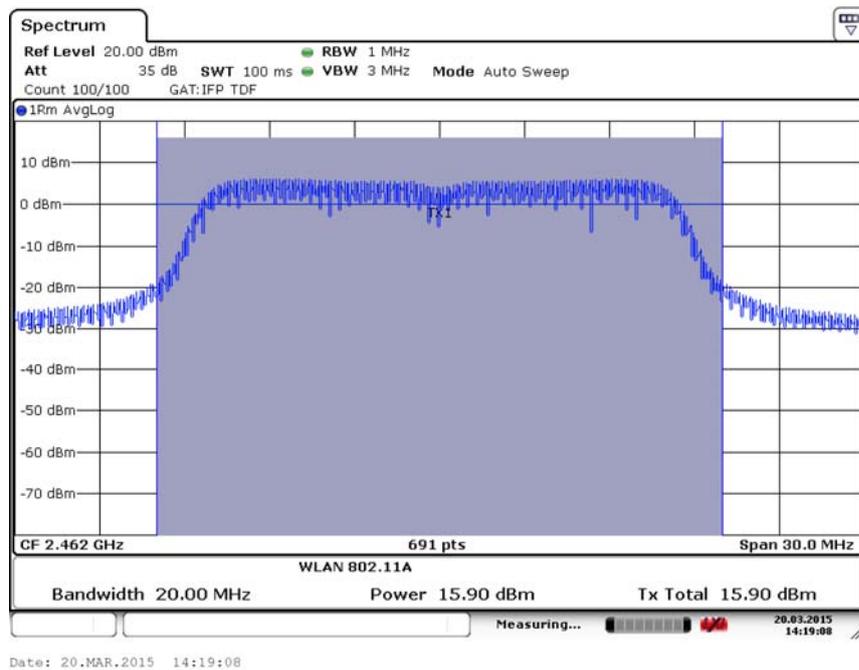


Fig.54 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS5)