



# RF TEST REPORT

**Applicant** Huawei Technologies Co., Ltd.  
**FCC ID** QISAMN-LX9  
**Product** Smart Phone  
**Model** AMN-LX9  
**Report No.** R1901H0012-R1  
**Issue Date** February 28, 2019

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2018)/ FCC CFR 47 Part 22H (2018)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

*Performed by: Peng Tao*

*Approved by: Kai Xu*

---

## TA Technology (Shanghai) Co., Ltd.

*No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China*

*TEL: +86-021-50791141/2/3*

*FAX: +86-021-50791141/2/3-8000*



## TABLE OF CONTENT

1. Test Laboratory .....	4
1.1. Notes of the Test Report .....	4
1.2. Test facility .....	4
1.3. Testing Location .....	5
2. General Description of Equipment under Test.....	6
3. Applied Standards .....	9
4. Test Configuration .....	10
5. Test Case Results .....	12
5.1. RF Power Output .....	12
5.2. Effective Radiated Power .....	16
5.3. Occupied Bandwidth .....	20
5.4. Band Edge Compliance .....	29
5.5. Peak-to-Average Power Ratio (PAPR).....	37
5.6. Frequency Stability.....	40
5.7. Spurious Emissions at Antenna Terminals.....	46
5.8. Radiates Spurious Emission .....	53
6. Main Test Instruments.....	59

### Summary of measurement results

No.	Test Type	Clause in FCC rules	Verdict
1	RF power output	2.1046	PASS
2	Effective Radiated Power	22.913(a)(5)	PASS
3	Occupied Bandwidth	2.1049	PASS
4	Band Edge Compliance	2.1051 / 22.917(a)	PASS
5	Peak-to-Average Power Ratio	22.913(d)/ KDB 971168 D01(5.7)	PASS
6	Frequency Stability	2.1055 / 22.355	PASS
7	Spurious Emissions at Antenna Terminals	2.1051 / 22.917(a)	PASS
8	Radiates Spurious Emission	2.1053 / 22.917 (a)	PASS
Date of Testing: January 27, 2019~ February 21, 2019			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard.			



## 1. Test Laboratory

### 1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2. Test facility

#### **CNAS (accreditation number: L2264)**

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

#### **IC (recognition number is 8510A)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

#### **VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



### 1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2. General Description of Equipment under Test

### Client Information

Applicant	Huawei Technologies Co., Ltd.
Applicant address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.China.
Manufacturer	Huawei Technologies Co., Ltd.
Manufacturer address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.China.

### General Information

EUT Description			
Model	AMN-LX9		
IMEI	IMEI 1:861366040090139 IMEI 2:861366040094131		
Hardware Version	HL1AMNM		
Software Version	5.0.1.37(C900E20R1P2)		
Power Supply	Battery/AC adapter		
Antenna Type	Internal Antenna		
Antenna Gain	0.24 dBi		
Test Mode(s)	GSM 850; WCDMA Band V; LTE Band 5;		
Test Modulation	(GSM)GMSK,8PSK; (WCDMA)QPSK,16QAM; (LTE)QPSK 16QAM;		
GPRS Multislot Class	12		
EGPRS Multislot Class	12		
HSDPA UE Category	14		
HSUPA UE Category	7		
DC-HSDPA UE Category	24		
HSPA+ UE Category	7		
LTE Category	4		
Maximum E.R.P.	GSM 850:	28.94dBm	
	WCDMA Band V:	19.24dBm	
	LTE Band 5:	19.03dBm	
Rated Power Supply Voltage	3.82V		
Extreme Voltage	Minimum: 3.6V    Maximum: 4.4V		
Extreme Temperature	Lowest: -10°C    Highest: +55°C		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM850	824 ~ 849	869 ~ 894
	WCDMA Band V	824 ~ 849	869 ~ 894
	LTE Band 5	824 ~ 849	869 ~ 894



EUT Accessory	
Adapter 1	Manufacturer: Huawei Technologies Co., Ltd. (SHENZHEN HUNTKEY ELECTRIC CO., LTD.) Model: HW-050100U01
Adapter 2	Manufacturer: Huawei Technologies Co., Ltd. (HUIZHOU BYD ELECTRONIC CO., LTD.) Model: HW-050100U01
Adapter 3	Manufacturer: Huawei Technologies Co., Ltd. (Dongguan Phitek Electronics Co., Ltd.) Model: HW-050100U01
Battery 1	Manufacturer: Huawei Technologies Co., Ltd. (Sunwoda) Model: HB405979ECW
Battery 2	Manufacturer: Huawei Technologies Co., Ltd. (SCUD) Model: HB405979ECW
Battery 3	Manufacturer: Huawei Technologies Co., Ltd. (Desay) Model: HB405979ECW
Earphone 1	Manufacturer: Boluo County Quancheng Electronic Co.,Ltd. Model: 1293#+3283# 3.5MM-150
Earphone 2	Manufacturer: Jiangxi Lianchuang Hongsheng Electronic Co.,LTD. Model: MEMD1532B528000
USB Cable 1	Manufacturer: HONGLIN TECHNOLOGY CO.,LTD. Model: 130-26654
USB Cable 2	Manufacturer: Dongguan Ming Ji Electronics Co.,Ltd. Model: 203-0786-0
USB Cable 3	Manufacturer: Luxshare Precision industry Co., Ltd. Model: L99U2013-CS-H
USB Cable 4	Manufacturer: NingBo Broad Telecommunication Co., Ltd. Model: WA0007
USB Cable 5	Manufacturer: HONGLIN TECHNOLOGY CO., LTD. Model: 130-26669
USB Cable 6	Manufacturer: FOXCONN INTERCONNECT TECHNOLOGY LIMITED Model: CUBB01M-HC304-DH
USB Cable 7	Manufacturer: Luxshare Precision industry Co.,Ltd Model: L99U2017-CS-H
USB Cable 8	Manufacturer: Dongguan Ming Ji Electronics Co.,Ltd Model: 203-1583-0
USB Cable 9	Manufacturer: NingBo Broad Telecommunication Co., Ltd. Model: WA0001
Note: The information of the EUT is declared by the manufacturer.	



2. There is more than one SIM/ Adapter/USB cable/one Battery, each one should be applied throughout the compliance test respectively, and however, only the worst case (SIM 1/ Adapter 1 USB cable 1/ Battery 1) will be recorded in this report.





### **3. Applied Standards**

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC CFR47 Part 2 (2018)**

**FCC CFR 47 Part 22H (2018)**

**ANSI C63.26 (2015)**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

## 4. Test Configuration

There is more than one SIM card slot, each one should be applied throughout the compliance test respectively, and however, only the worst case (SIM 1) will be recorded in this report.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (X axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions were investigated. Subsequently, only the worst case emissions are reported.

The following testing in GSM/WCDMA/LTE is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below:

Test items	Modes/Modulation	
	GSM 850	WCDMA Band V
RF power output	GSM GPRS EGPRS	RMC HSDPA/HSUPA DC-HSDPA
Effective Radiated Power	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Occupied Bandwidth	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Band Edge Compliance	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Peak-to-Average Power Ratio	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Frequency Stability	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Spurious Emissions at Antenna Terminals	GSM	RMC
Radiates Spurious Emission	GSM	RMC

Test modes are chosen as the worst case configuration below for LTE Band 5.

Test items	Bandwidth (MHz)				Modulation		RB			Test Channel		
	1.4	3	5	10	QPSK	16QAM	1	50%	100%	L	M	H
RF power output	O	O	O	O	O	O	O	O	O	O	O	O
Effective Isotropic Radiated power	O	O	O	O	O	O	-	-	O	O	O	O
Occupied Bandwidth	O	O	O	O	O	O	-	-	O	O	O	O
Band Edge Compliance	O	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	O	O	O	O	O	O	-	-	O	O	O	O
Frequency Stability	O	O	O	O	O	O	-	-	O	O	-	O
Spurious Emissions at Antenna Terminals	O	O	O	O	O	-	-	-	O	O	O	O
Radiates Spurious Emission	O	-	O	O	O	-	-	-	O	-	O	-
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.											

## 5. Test Case Results

### 5.1. RF Power Output


#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

#### Test Setup

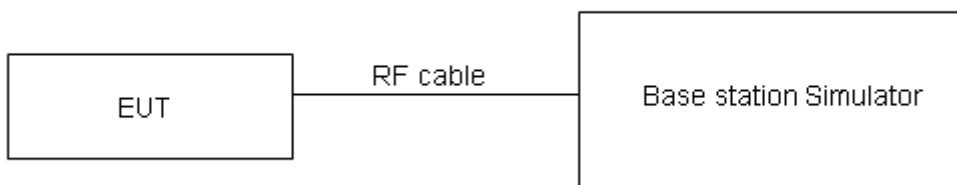

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

#### Limits

No specific RF power output requirements in part 2.1046.

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.4$  dB.

**Test Results**

GSM 850		Conducted Power(dBm)		
		Channel 128	Channel 190	Channel 251
		824.2 (MHz)	836.6 (MHz)	848.8 (MHz)
GSM	Results	32.93	32.95	33.00
GPRS (GMSK)	1TXslot	32.90	32.98	32.97
	2TXslots	30.01	30.03	30.10
	3TXslots	28.21	28.26	28.32
	4TXslots	26.84	26.92	27.00
EGPRS (8PSK)	1TXslot	27.08	27.07	27.04
	2TXslots	24.45	24.30	24.19
	3TXslots	22.37	22.58	22.42
	4TXslots	20.86	20.97	20.71

WCDMA Band V		Conducted Power(dBm)		
		Channel 4132	Channel 4183	Channel 4233
		826.4(MHz)	836.6(MHz)	846.6(MHz)
RMC	12.2k	24.03	23.99	23.96
	64k	24.06	23.96	23.93
	144k	24.07	24.00	23.97
	384k	24.05	24.01	23.95
HSDPA	Sub - Test 1	23.49	23.41	23.40
	Sub - Test 2	23.48	23.43	23.37
	Sub - Test 3	22.95	22.93	22.89
	Sub - Test 4	22.96	22.94	22.87
HSUPA	Sub - Test 1	23.45	23.40	23.35
	Sub - Test 2	22.44	22.38	22.34
	Sub - Test 3	22.91	22.86	22.83
	Sub - Test 4	22.37	22.35	22.31
	Sub - Test 5	23.38	23.33	23.29
DC-HSDPA	Sub - Test 1	23.37	23.35	23.30
	Sub - Test 2	23.36	23.34	23.29
	Sub - Test 3	22.94	22.83	22.80
	Sub - Test 4	22.93	22.82	22.79
HSPA+	16QAM	22.92	22.90	22.86

LTE Band 5				Conducted Power(dBm)		
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)		
				20407/824.7	20525/836.5	20643/848.3
1.4MHz	QPSK	1	0	24.40	24.30	24.41
		1	2	24.62	24.59	24.65
		1	5	24.52	24.50	24.49
		3	0	24.55	24.60	24.70
		3	2	24.53	24.62	24.66
		3	3	24.59	24.58	24.51
		6	0	23.68	23.51	23.58
	16QAM	1	0	23.62	23.69	23.76
		1	2	23.98	23.50	23.82
		1	5	23.65	23.36	23.26
		3	0	23.54	23.80	23.61
		3	2	23.51	23.74	23.58
		3	3	23.49	23.66	23.59
		6	0	22.75	22.54	22.44
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)		
				20415/825.5	20525/836.5	20635/847.5
3MHz	QPSK	1	0	24.46	24.51	24.54
		1	7	24.60	24.58	24.53
		1	14	24.52	24.47	24.58
		8	0	23.58	23.57	23.55
		8	4	23.54	23.63	23.56
		8	7	23.60	23.61	23.68
		15	0	23.63	23.64	23.61
	16QAM	1	0	23.73	24.12	23.87
		1	7	23.82	24.07	23.81
		1	14	23.74	24.20	23.88
		8	0	22.59	22.77	22.79
		8	4	22.61	22.76	22.81
		8	7	22.58	22.82	22.70
		15	0	22.56	22.70	22.68
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)		
				20425/826.5	20525/836.5	20625/846.5
5MHz	QPSK	1	0	24.38	24.44	24.43



		1	13	24.53	24.56	24.61	
		1	24	24.58	24.52	24.41	
		12	0	23.55	23.62	23.60	
		12	6	23.57	23.64	23.59	
		12	13	23.61	23.65	23.55	
		25	0	23.57	23.62	23.66	
	16QAM	1	0	23.75	23.50	23.56	
		1	13	23.84	23.33	23.37	
		1	24	23.66	23.22	23.20	
		12	0	22.50	22.59	22.66	
		12	6	22.68	22.57	22.53	
		12	13	22.70	22.54	22.56	
			25	0	22.57	22.62	22.71
	BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)		
20450/829					20525/836.5	20600/844	
10MHz	QPSK	1	0	24.48	24.46	24.45	
		1	25	24.63	24.74	24.79	
		1	49	24.36	24.57	24.63	
		25	0	23.59	23.70	23.65	
		25	13	23.65	23.72	23.61	
		25	25	23.71	23.67	23.57	
	16QAM	50	0	23.56	23.64	23.67	
		1	0	23.72	24.01	23.76	
		1	25	23.70	24.06	23.84	
		1	49	23.68	24.18	23.79	
		25	0	22.60	22.77	22.72	
		25	13	22.71	22.78	22.66	
		25	25	22.74	22.72	22.63	
			50	0	22.61	22.75	22.62

## 5.2. Effective Radiated Power

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Methods of Measurement



The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).

- Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.
- Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).
- Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.
- Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading.  $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$
- Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation:  $ERP \text{ (dBm)} = LVL \text{ (dBm)} + LOSS \text{ (dB)}$
- The maximum ERP is the maximum value determined in the preceding step.
- When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g. transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:  
 $EIRP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$   
where: dBd refers to gain relative to an ideal dipole.  
 $EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB.)}$

The RB allocation refers to section 5.1, using the maximum output power configuration.



**Test setup**

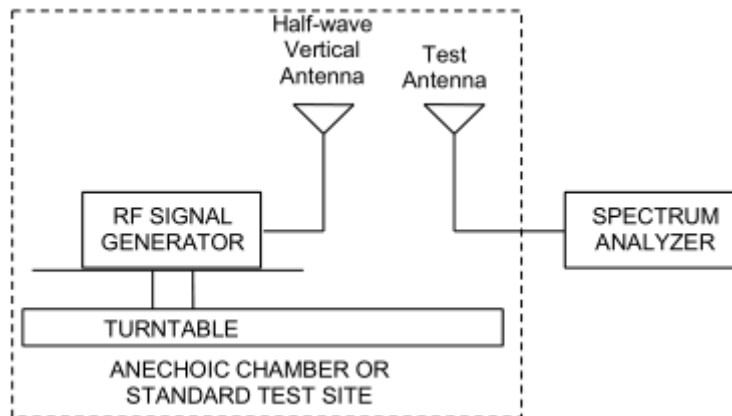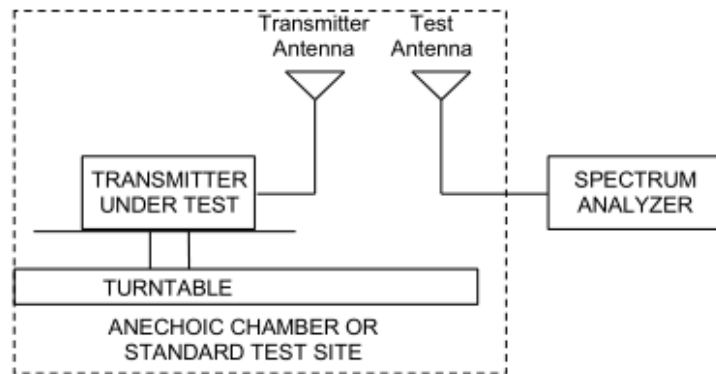

**Limits**

Rule Part 22.913(a)(5) specifies that "Mobile/portable stations are limited to 7 watts ERP".

Limit	$\leq 7 \text{ W}$ (38.45 dBm)
-------	--------------------------------

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 1.19 \text{ dB}$

**Test Results:**

The measurement is performed for both of horizontal and vertical antenna Polarization, and only the data of worst mode is recorded in this report.

Mode	Channel	Frequency (MHz)	Polarization	ERP (dBm)	Limit (dBm)	Conclusion
GSM 850	Low	824.2	Horizontal	27.08	38.45	Pass
	Mid	836.6	Horizontal	27.95	38.45	Pass
	High	848.8	Horizontal	28.47	38.45	Pass
GPRS 850	Low	824.2	Horizontal	27.47	38.45	Pass
	Mid	836.6	Horizontal	28.36	38.45	Pass
	High	848.8	Horizontal	28.94	38.45	Pass
EGPRS 850	Low	824.2	Horizontal	26.21	38.45	Pass
	Mid	836.6	Horizontal	25.99	38.45	Pass
	High	848.8	Horizontal	25.13	38.45	Pass
WCDMA Band V	Low	826.4	Horizontal	18.65	38.45	Pass
	Mid	836.6	Horizontal	19.07	38.45	Pass
	High	846.6	Horizontal	19.24	38.45	Pass

LTE Band 5						
bandwidth	Channel	Frequency (MHz)	Polarization	ERP (dBm)	Limit (dBm)	Conclusion
1.4 MHz (QPSK)	Low	824.7	Horizontal	18.44	38.45	Pass
	Mid	836.5	Horizontal	18.87	38.45	Pass
	High	848.3	Horizontal	18.97	38.45	Pass
3 MHz (QPSK)	Low	825.5	Horizontal	18.49	38.45	Pass
	Mid	836.5	Horizontal	18.89	38.45	Pass
	High	847.5	Horizontal	19.03	38.45	Pass
5 MHz (QPSK)	Low	826.5	Horizontal	18.33	38.45	Pass
	Mid	836.5	Horizontal	18.70	38.45	Pass
	High	846.5	Horizontal	18.89	38.45	Pass
10 MHz (QPSK)	Low	829	Horizontal	18.64	38.45	Pass
	Mid	836.5	Horizontal	18.82	38.45	Pass
	High	844	Horizontal	18.97	38.45	Pass
1.4 MHz (16QAM)	Low	824.7	Horizontal	17.97	38.45	Pass
	Mid	836.5	Horizontal	18.50	38.45	Pass
	High	848.3	Horizontal	18.59	38.45	Pass
3 MHz (16QAM)	Low	825.5	Horizontal	17.98	38.45	Pass
	Mid	836.5	Horizontal	18.46	38.45	Pass
	High	847.5	Horizontal	18.42	38.45	Pass
5 MHz (16QAM)	Low	826.5	Horizontal	17.74	38.45	Pass
	Mid	836.5	Horizontal	18.14	38.45	Pass
	High	846.5	Horizontal	18.52	38.45	Pass
10 MHz (16QAM)	Low	829	Horizontal	18.01	38.45	Pass
	Mid	836.5	Horizontal	18.27	38.45	Pass
	High	844	Horizontal	18.56	38.45	Pass

### 5.3. Occupied Bandwidth

#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 3kHz, VBW is set to 10kHz for GSM 850,

RBW is set to 51kHz, VBW is set to 160kHz for WCDMA Band V,


RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 5 (1.4MHz),

RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band 5 (3MHz/5MHz),

RBW is set to 300 kHz, VBW is set to 1 MHz for LTE Band 5 (10MHz),

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

#### Test Setup

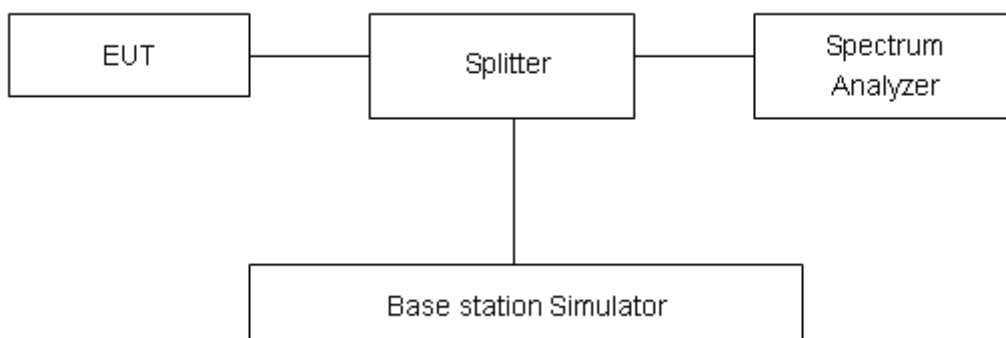

#### Limits

No specific occupied bandwidth requirements in part 2.1049.

#### Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 624\text{Hz}$ .


**Test Result**

Mode	Channel	Frequency (MHz)	99% Power Bandwidth (MHz)	-26dBc Bandwidth(MHz)
<b>GSM 850 (GSM)</b>	128	824.2	0.2488	0.3138
	190	836.6	0.2464	0.3060
	251	848.8	0.2434	0.3100
<b>GPRS 850 (GMSK)</b>	128	824.2	0.2507	0.3223
	190	836.6	0.2462	0.3147
	251	848.8	0.2430	0.3115
<b>EGPRS 850 (8-PSK)</b>	128	824.2	0.2444	0.3060
	190	836.6	0.2508	0.3108
	251	848.8	0.2450	0.3101
<b>WCDMA Band V (RMC)</b>	4132	826.4	4.1632	4.677
	4183	836.6	4.1624	4.646
	4233	846.6	4.1532	4.656





LTE Band 5						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	1.4	20407	824.7	1.1162	1.329
			20525	836.5	1.1271	1.326
			20643	848.3	1.1146	1.341
		3	20415	825.5	2.7200	3.003
			20525	836.5	2.7304	2.993
			20635	847.5	2.7269	3.009
		5	20425	826.5	4.5179	4.924
			20525	836.5	4.5016	4.906
			20625	846.5	4.5125	4.939
		10	20450	829	9.0367	9.930
			20525	836.5	9.0520	9.990
			20600	844	9.0602	9.910
	16QAM	1.4	20407	824.7	1.1216	1.334
			20525	836.5	1.1160	1.335
			20643	848.3	1.1214	1.331
		3	20415	825.5	2.7168	2.995
			20525	836.5	2.7187	2.986
			20635	847.5	2.7182	3.006
		5	20425	826.5	4.4863	4.901
			20525	836.5	4.5159	4.925
			20625	846.5	4.4997	4.888
		10	20450	829	9.0404	9.963
			20525	836.5	9.0314	9.860
			20600	844	9.0352	9.904

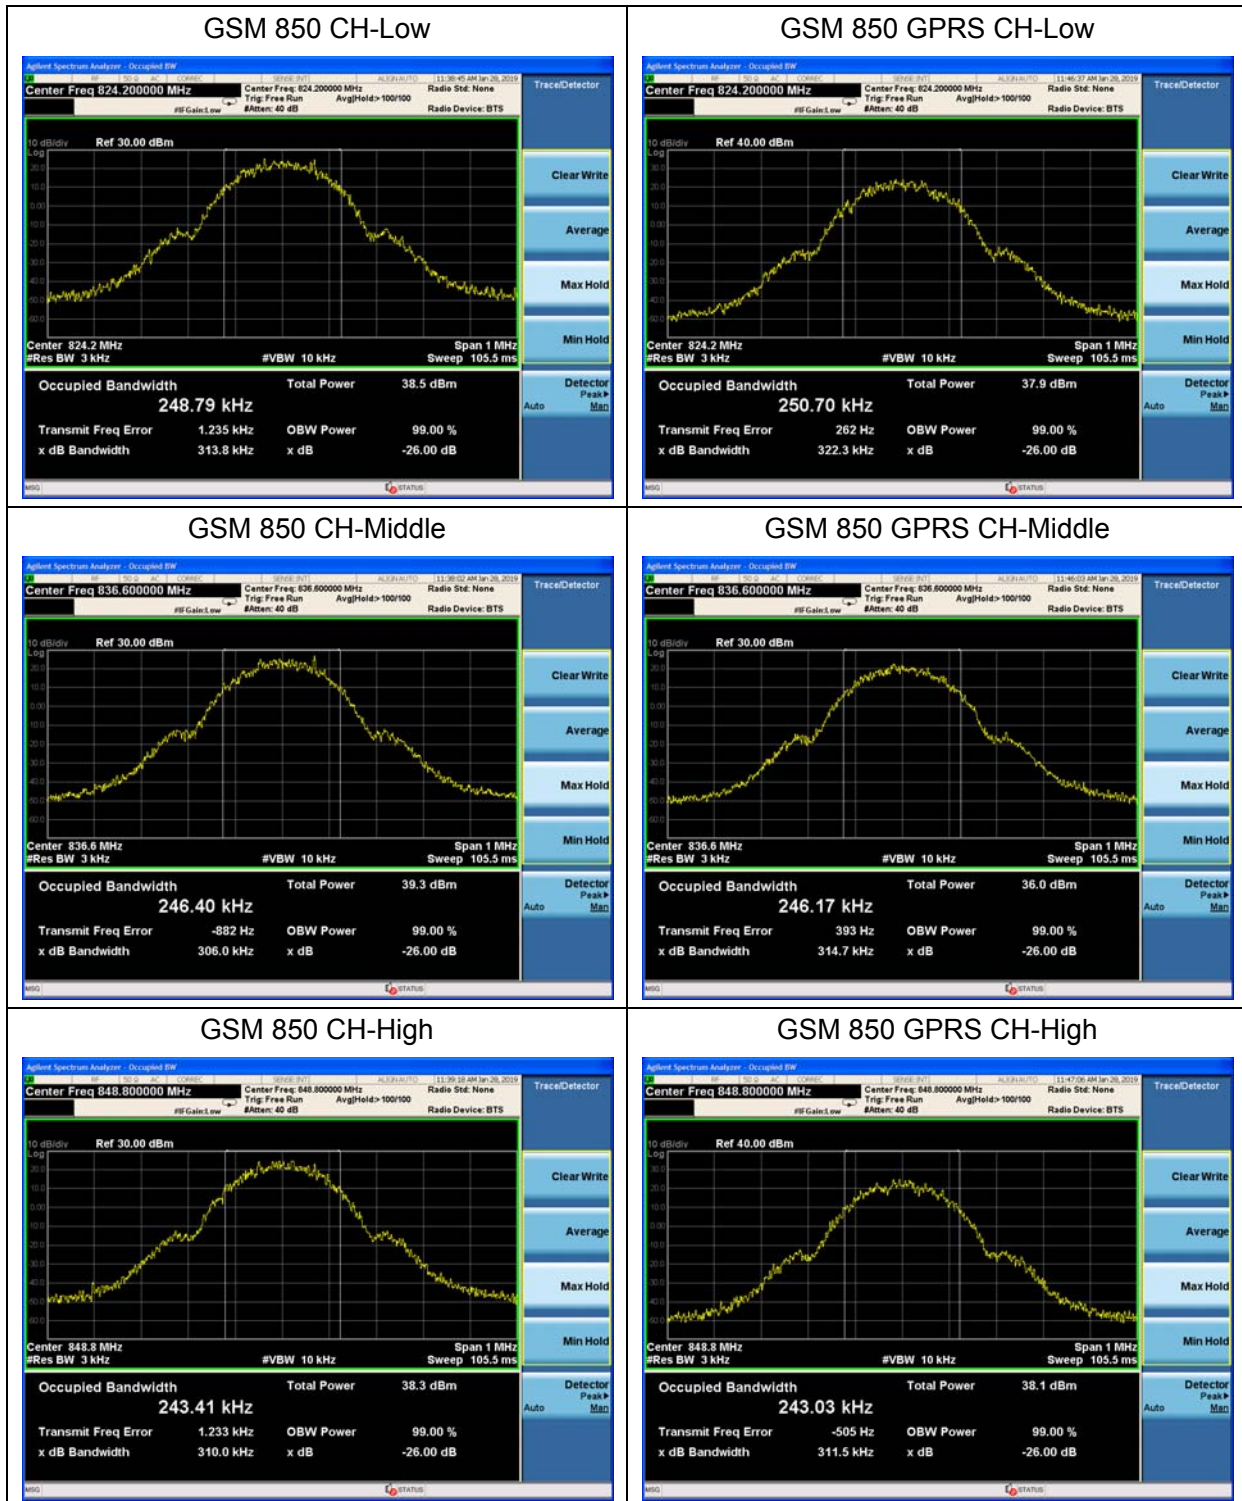







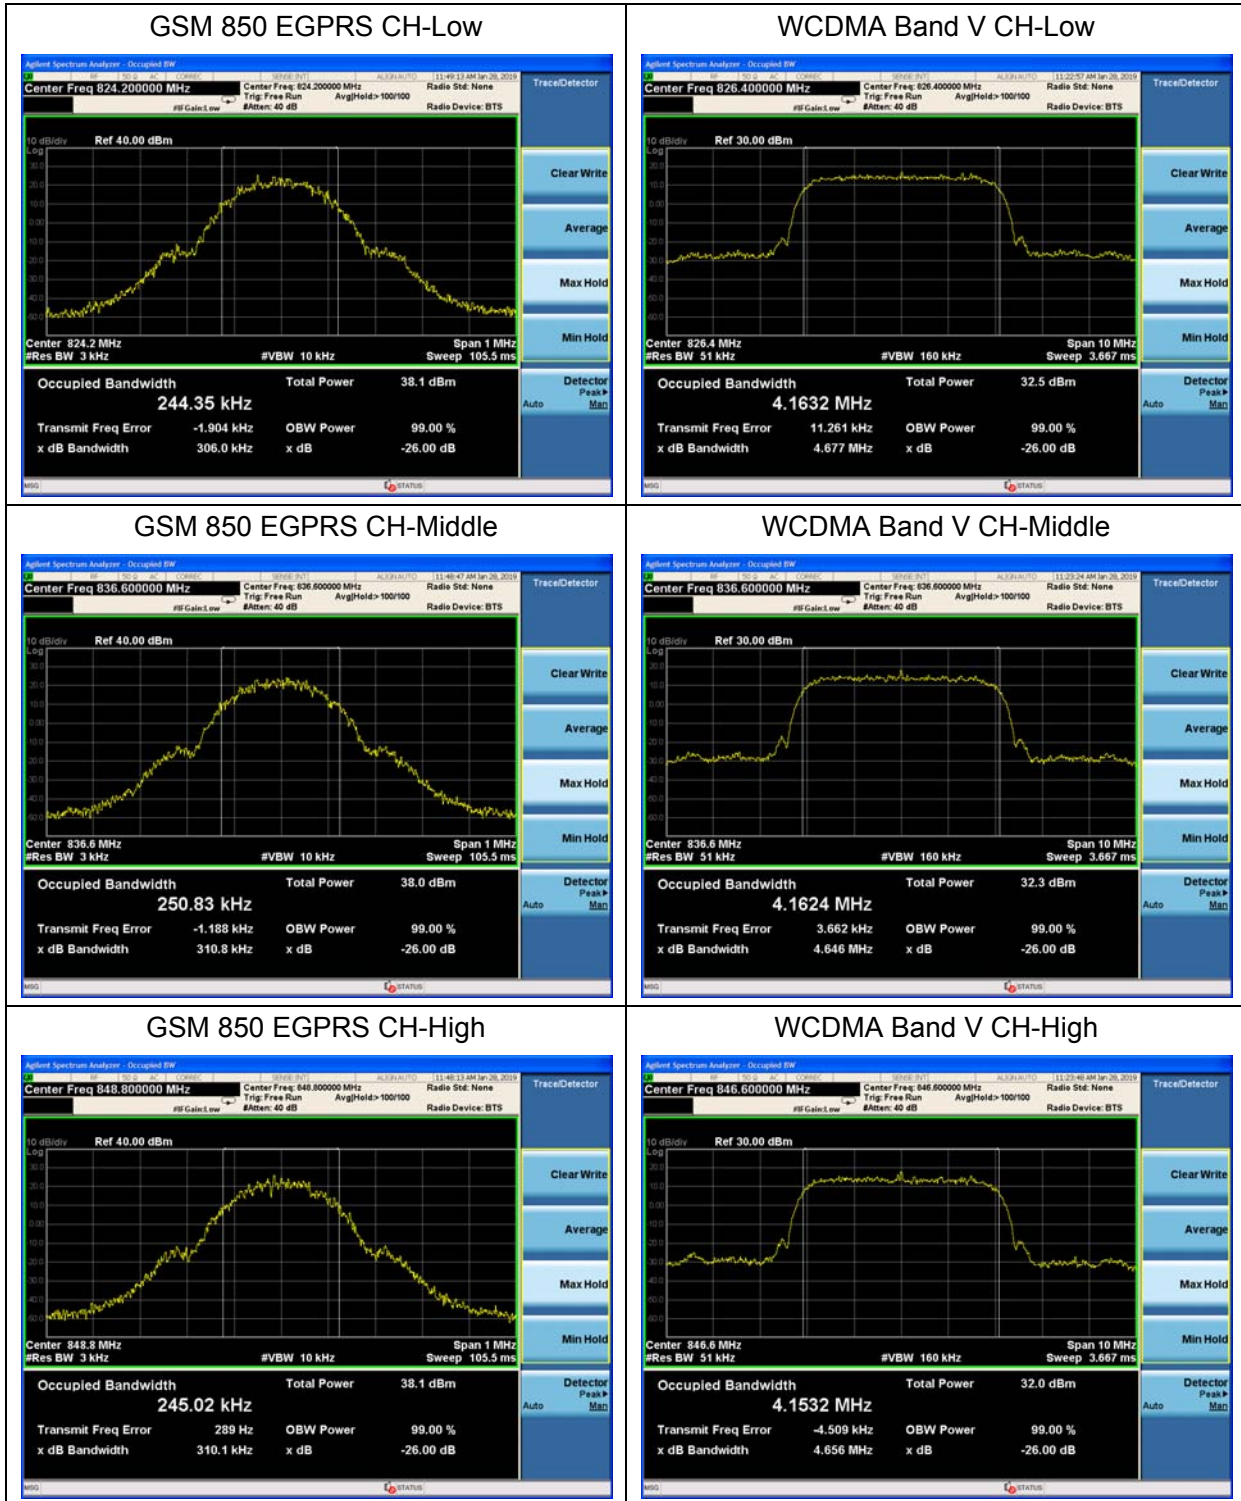




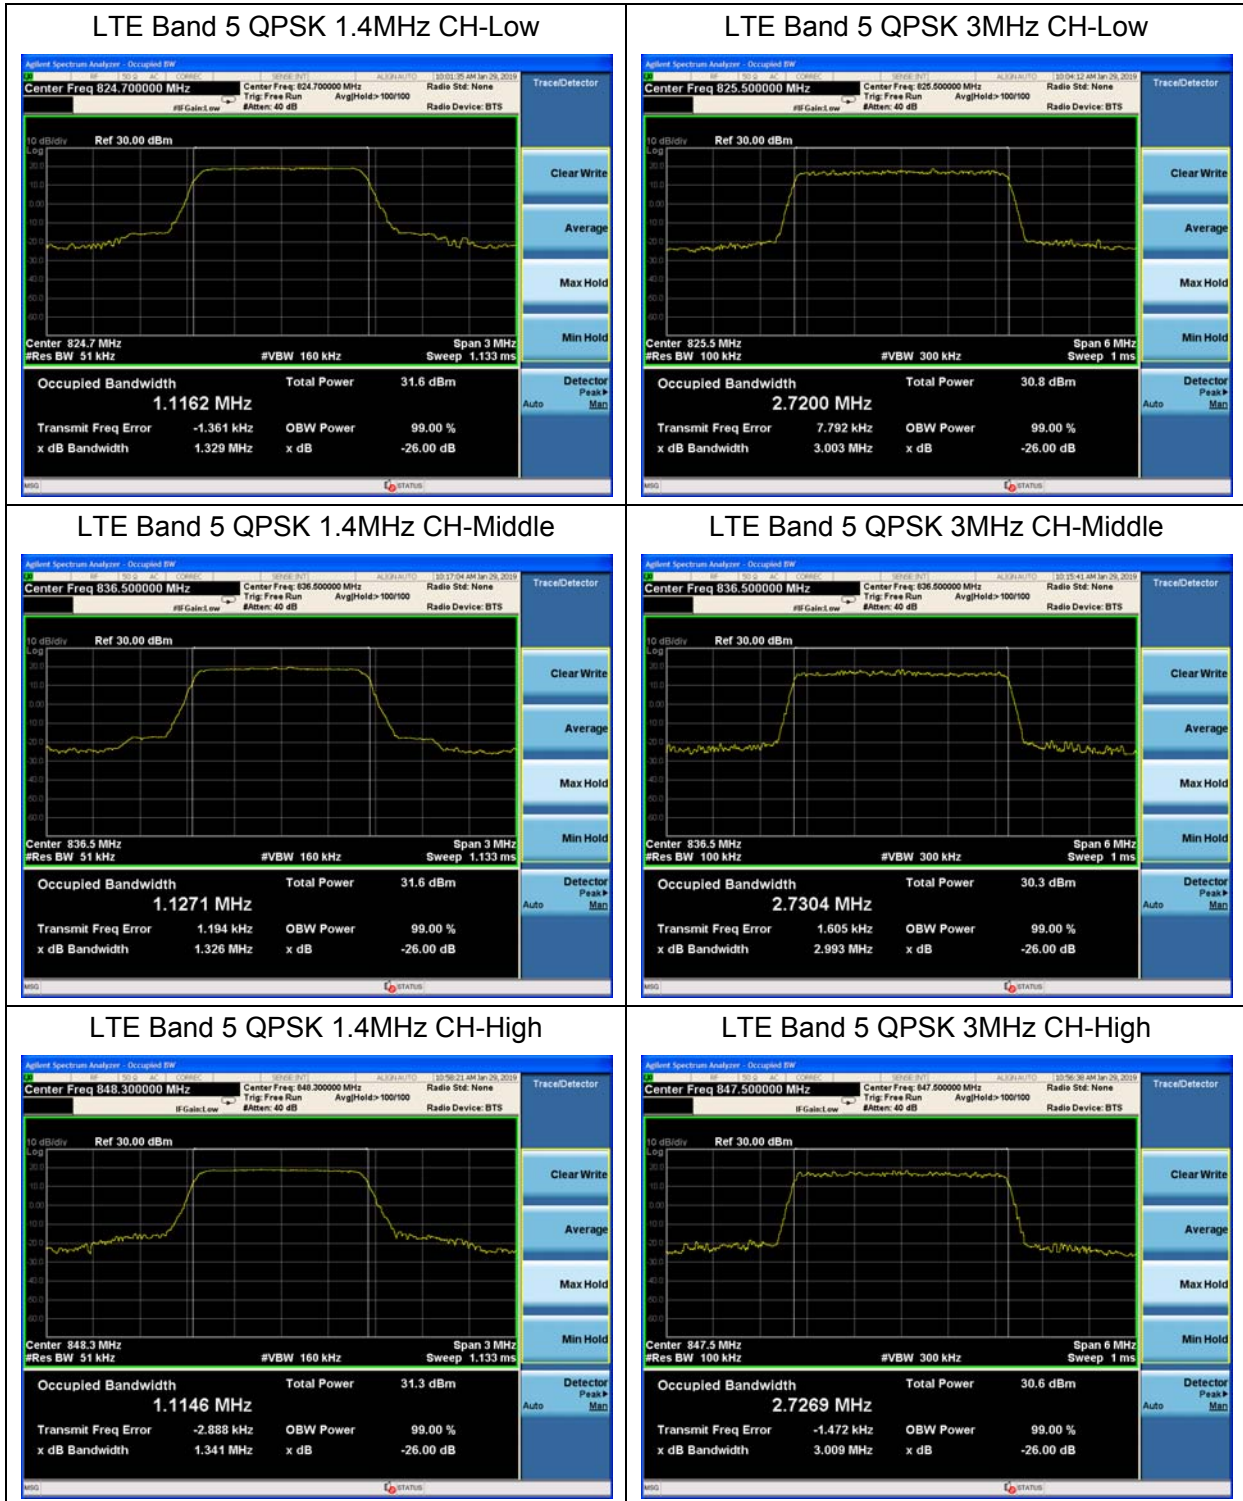

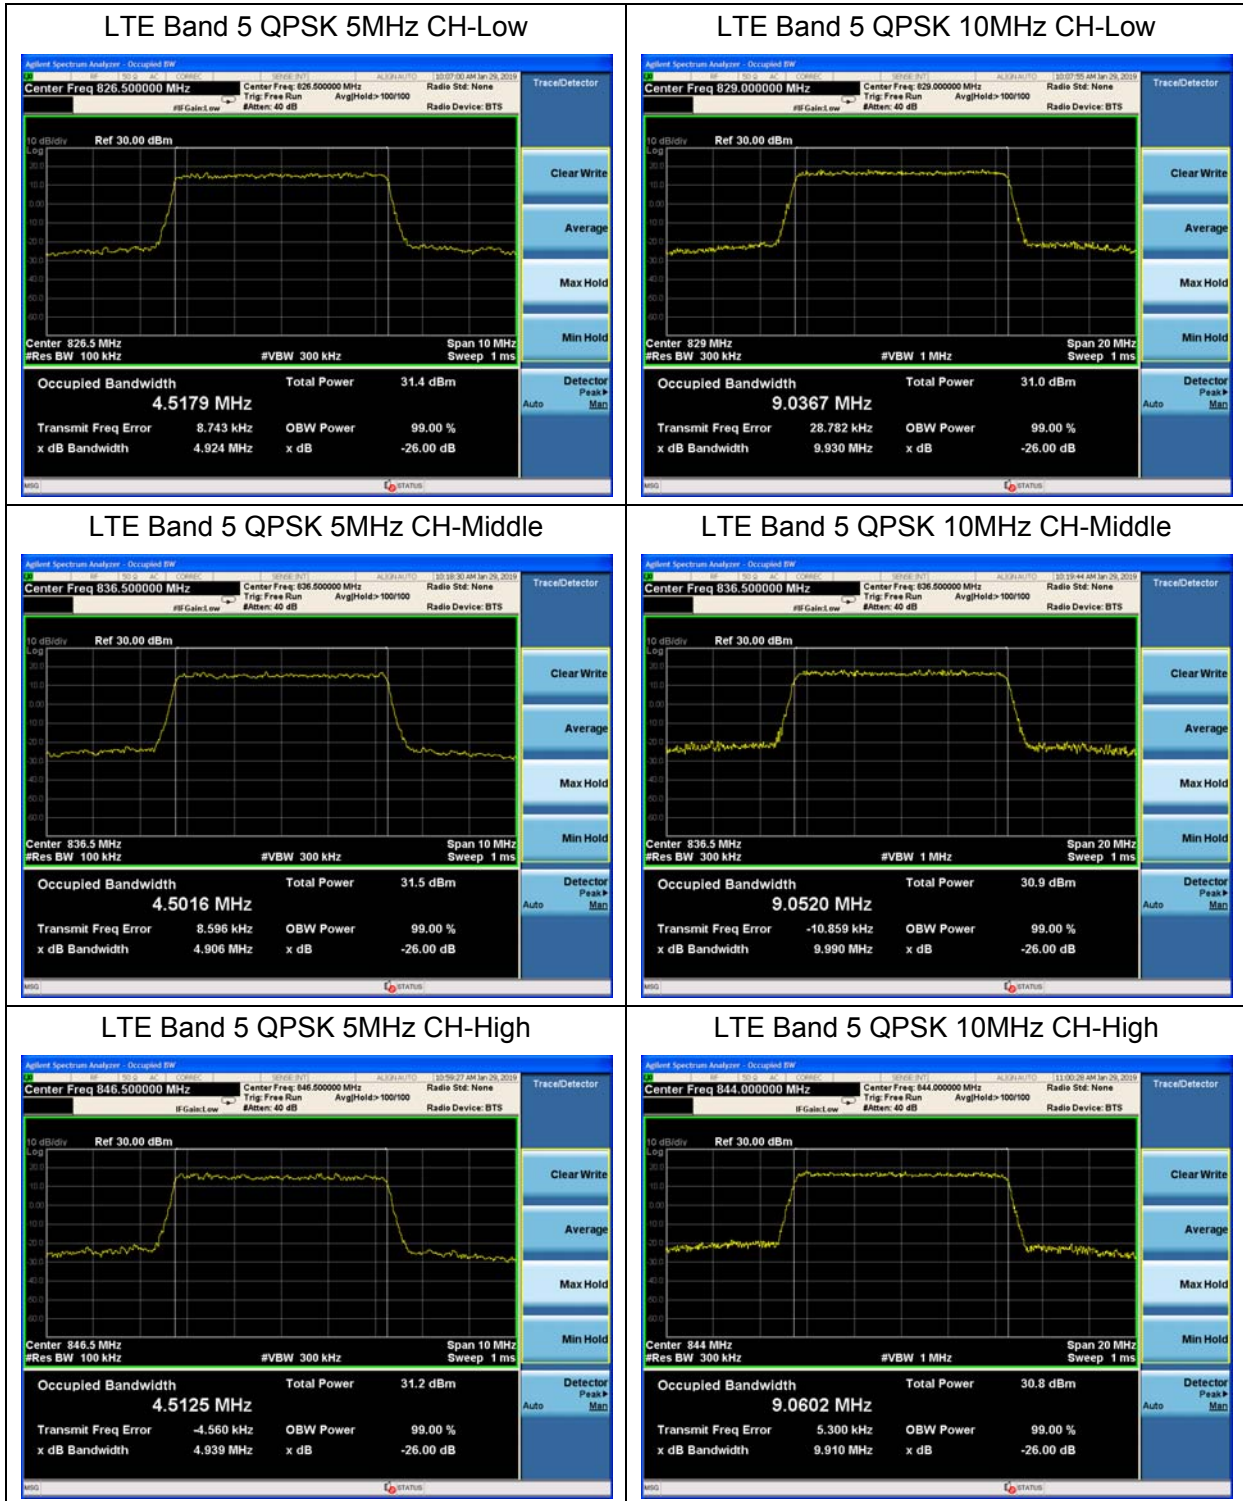

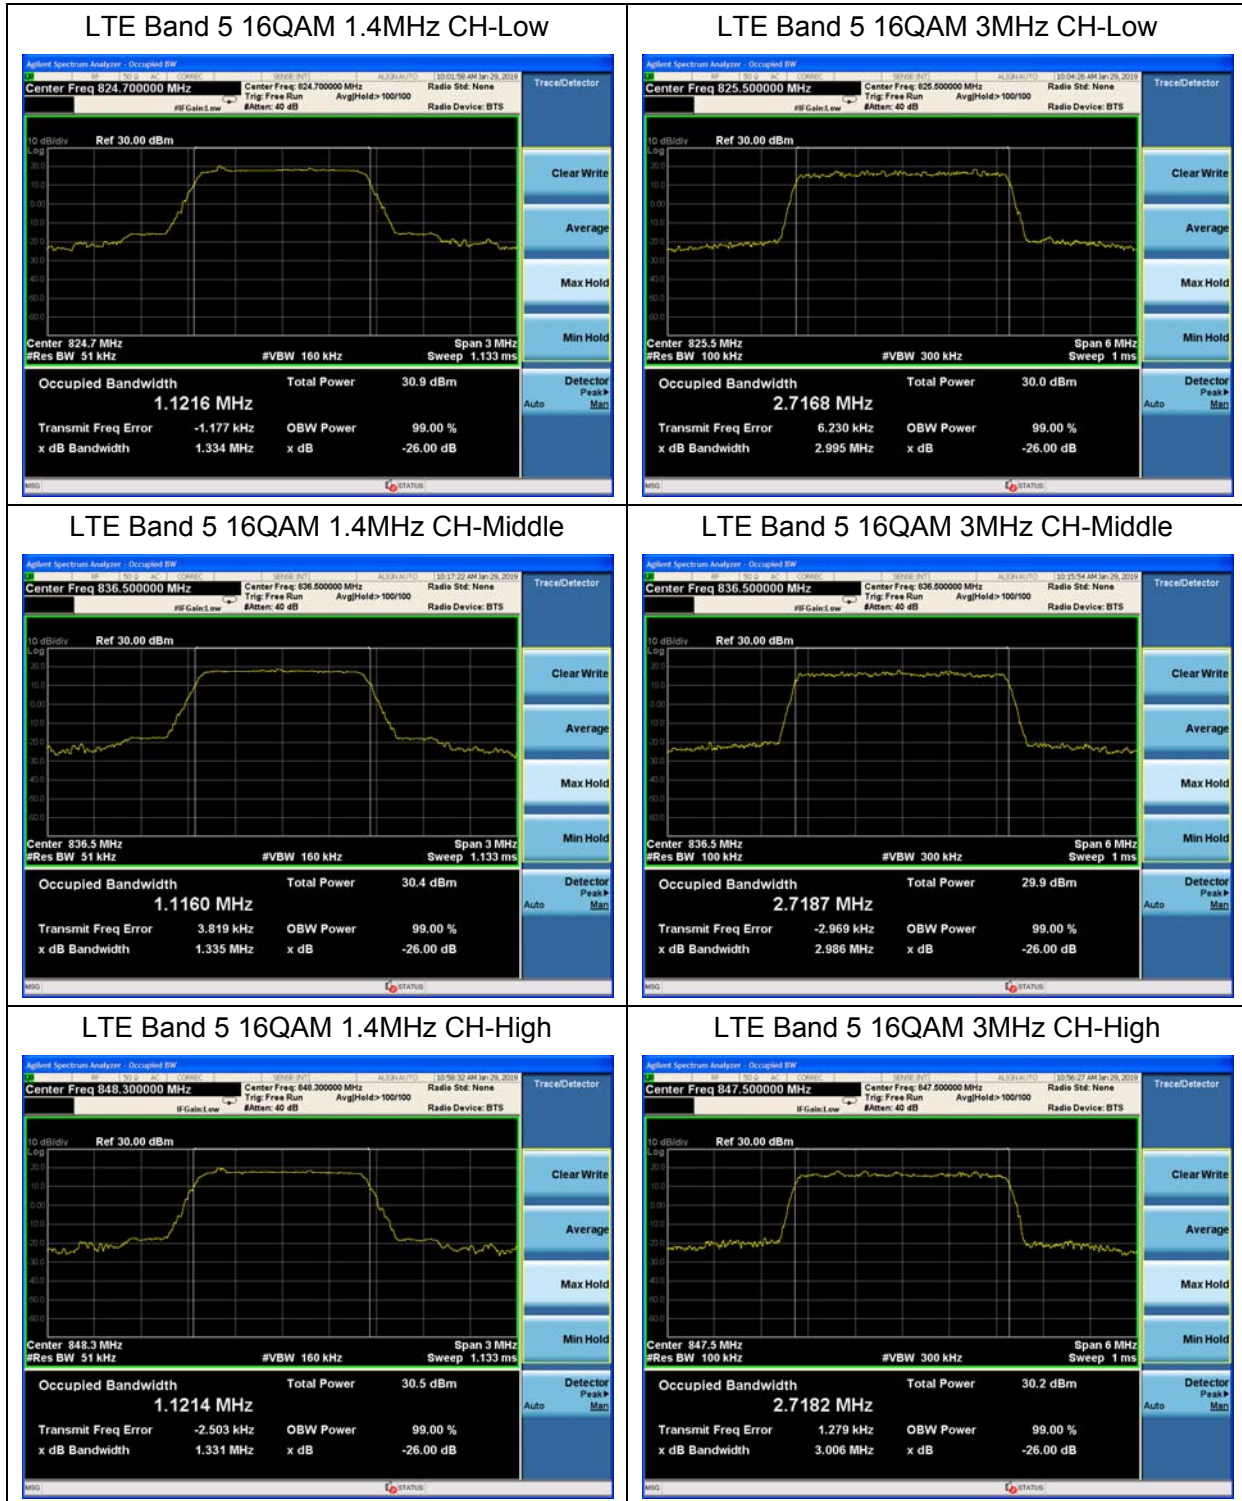

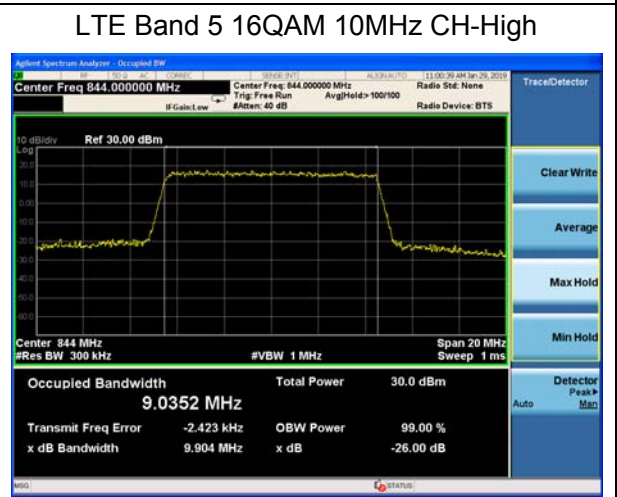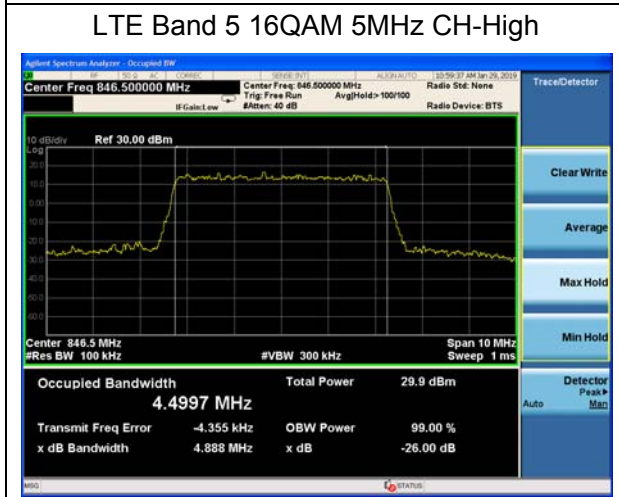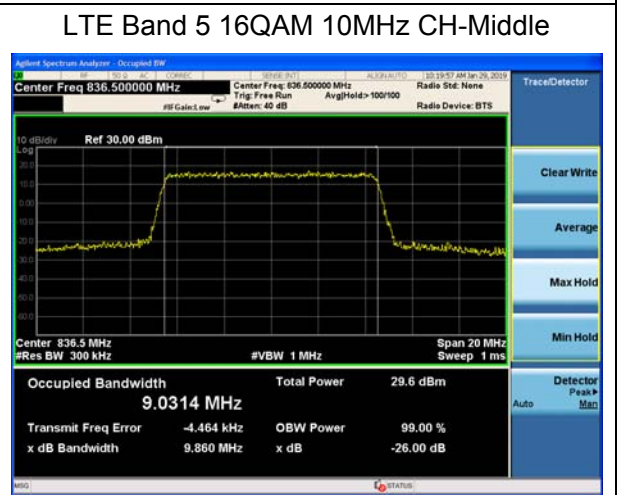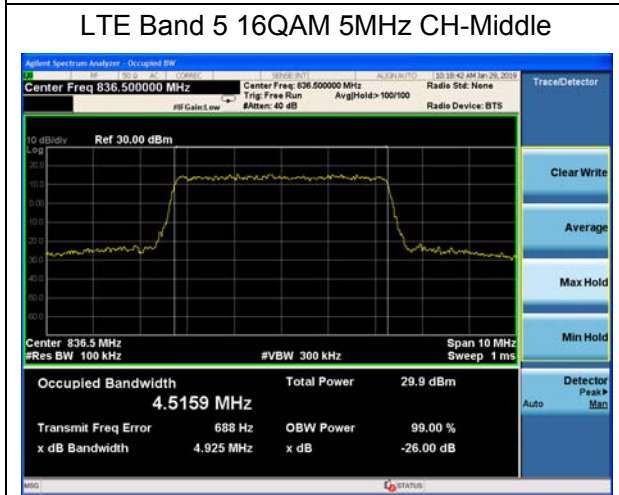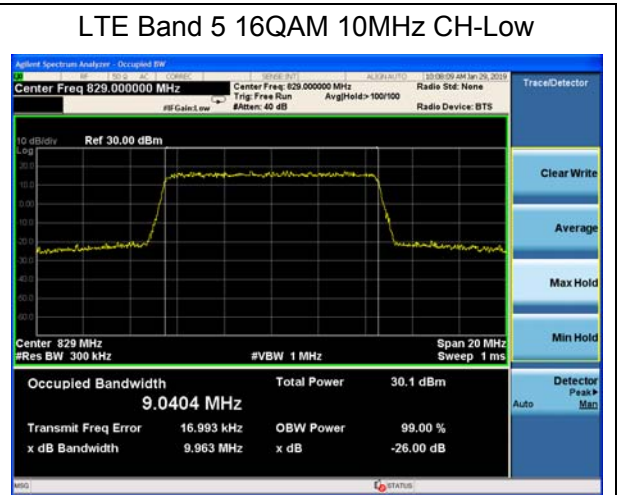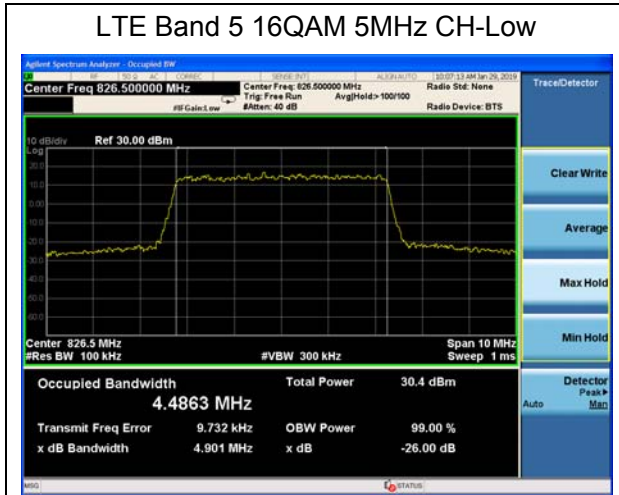

### 5.4. Band Edge Compliance


#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The average detector is used. RBW is set to 3kHz,VBW is set to 10kHz for GSM 850, RBW is set to 51kHz,VBW is set to 160kHz for WCDMA Band V, RBW is set to 15 kHz, VBW is set to 51 kHz for LTE Band 5 (1.4MHz), RBW is set to 30 kHz, VBW is set to 100 kHz for LTE Band 5 (3MHz), RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 5 (5MHz), RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band 5 (10MHz), Spectrum analyzer plots are included on the following pages.

#### Test Setup

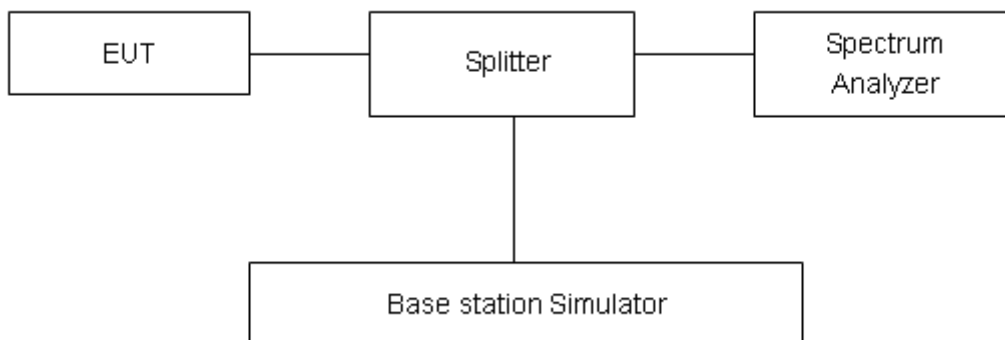

#### Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.”

Limit	-13 dBm
-------	---------

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U=0.684$ dB.

Test Result:

GSM 850 CH-Low




GSM 850 CH-High




GSM 850 GPRS CH-Low



GSM 850 GPRS CH-High

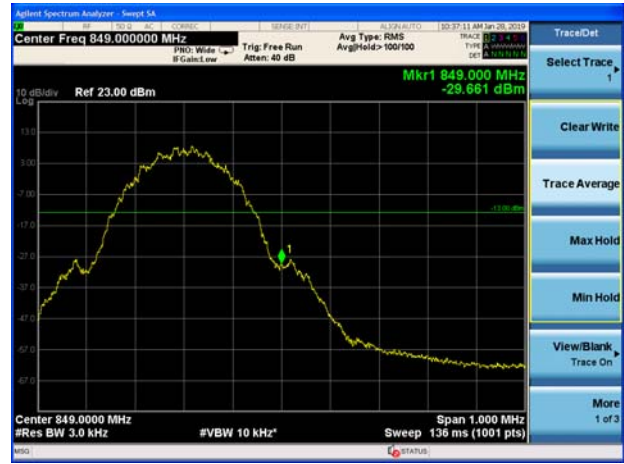

GSM 850 EGPRS CH-Low

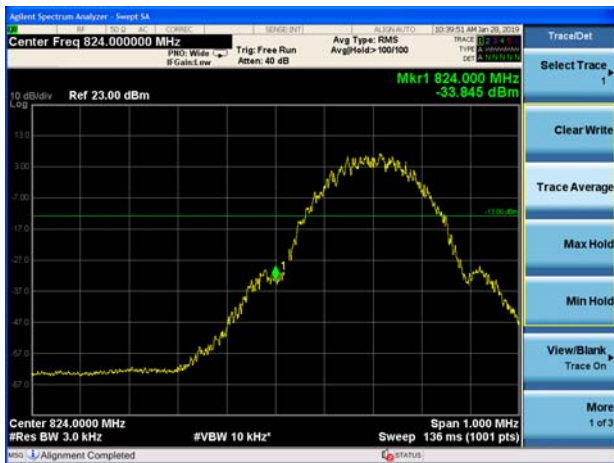

GSM 850 EGPRS CH-High






### WCDMA Band V CH-Low




### WCDMA Band V CH-High



### LTE Band 5 QPSK 1.4MHz CH-Low 1RB

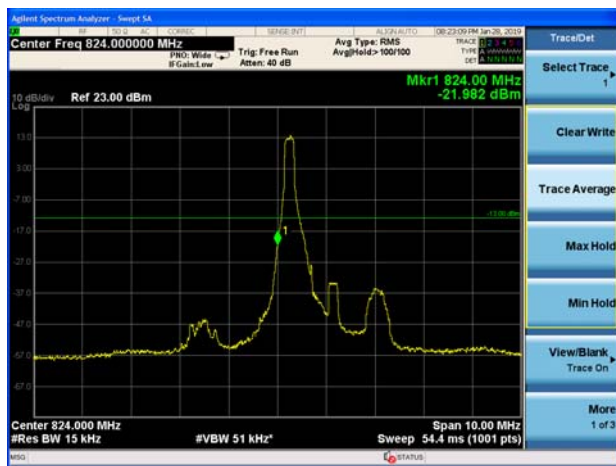


### LTE Band 5 QPSK 1.4MHz CH-High 1RB

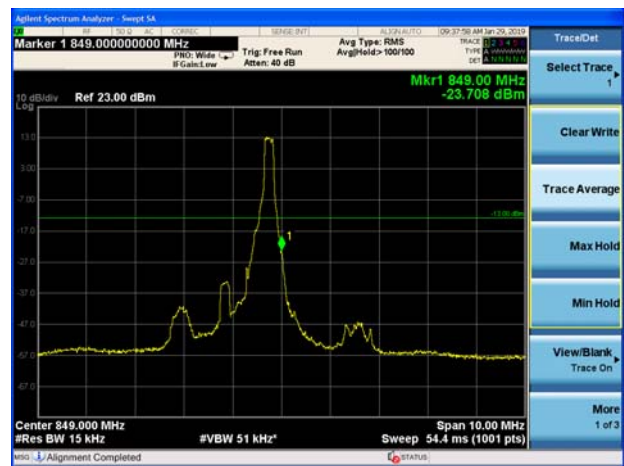

### LTE Band 5 QPSK 1.4MHz CH-Low 100%RB



### LTE Band 5 QPSK 1.4MHz CH-High 100%RB

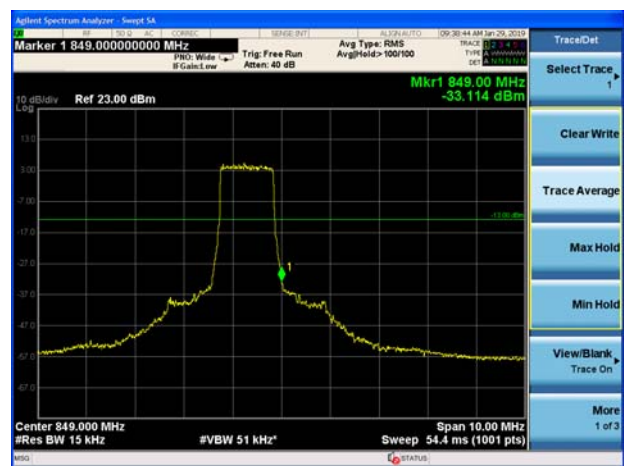


LTE Band 5 QPSK 3MHz CH-Low 1RB



LTE Band 5 QPSK 3MHz CH-High 1RB




LTE Band 5 QPSK 3MHz CH-Low 100%RB

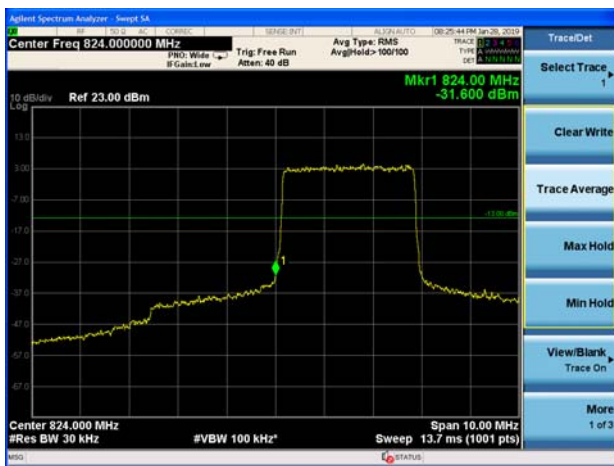


LTE Band 5 QPSK 3MHz CH-High 100%RB



LTE Band 5 QPSK 5MHz CH-Low 1RB

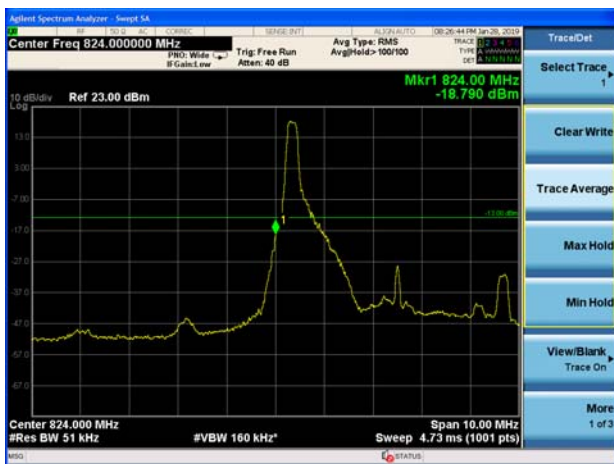


LTE Band 5 QPSK 5MHz CH-High 1RB

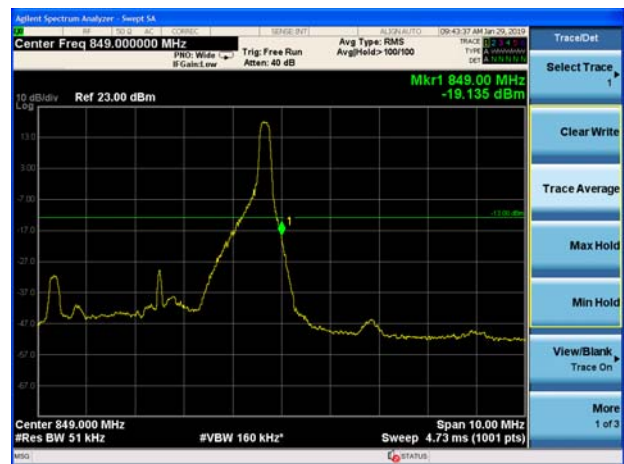



LTE Band 5 QPSK 5MHz CH-Low 100%RB

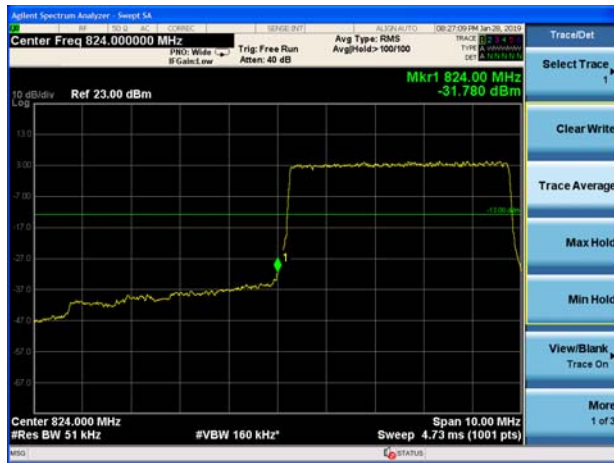


LTE Band 5 QPSK 5MHz CH-High 100%RB




LTE Band 5 QPSK 10MHz CH-Low 1RB




LTE Band 5 QPSK 10MHz CH-High 1RB

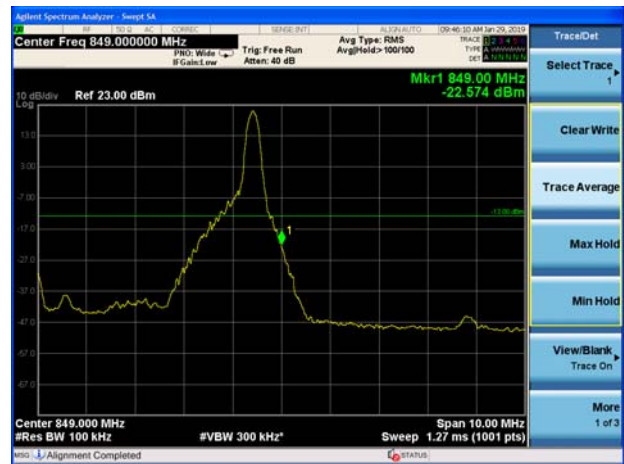

LTE Band 5 QPSK 10MHz CH-Low 100%RB

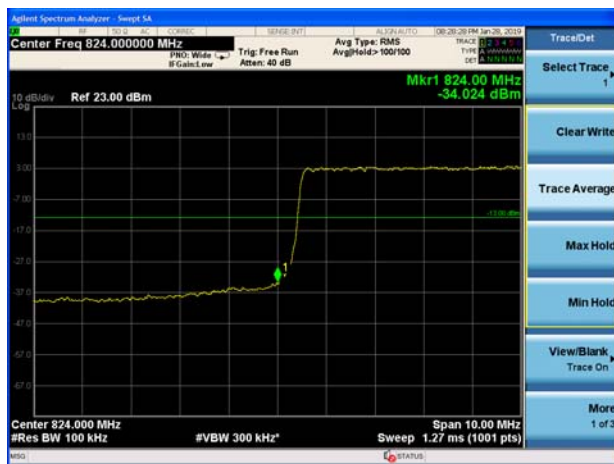


LTE Band 5 QPSK 10MHz CH-High 100%RB

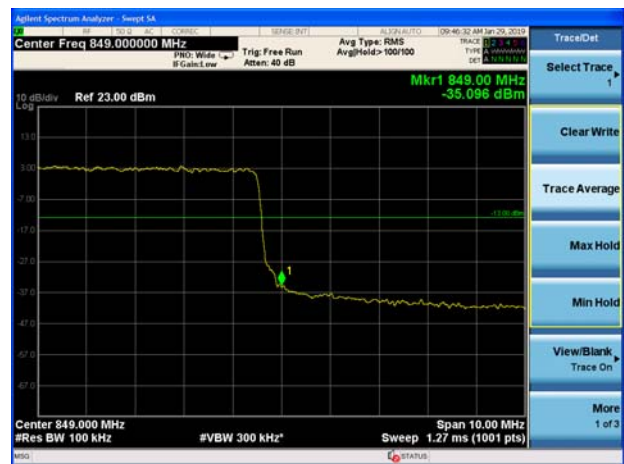




LTE Band 5 16QAM 1.4MHz CH-Low 1RB

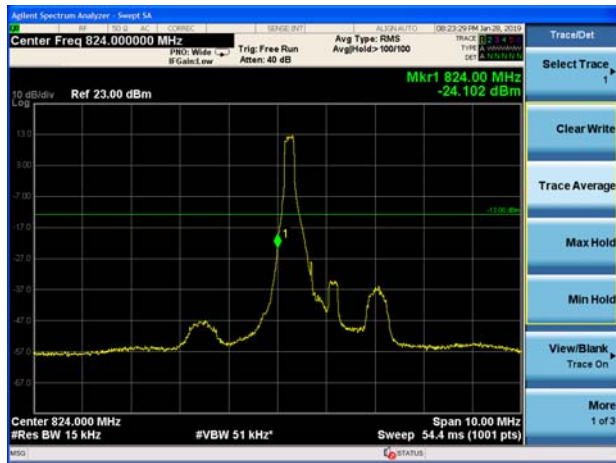


LTE Band 5 16QAM 1.4MHz CH-High 1RB



LTE Band 5 16QAM 1.4MHz CH-Low 100%RB

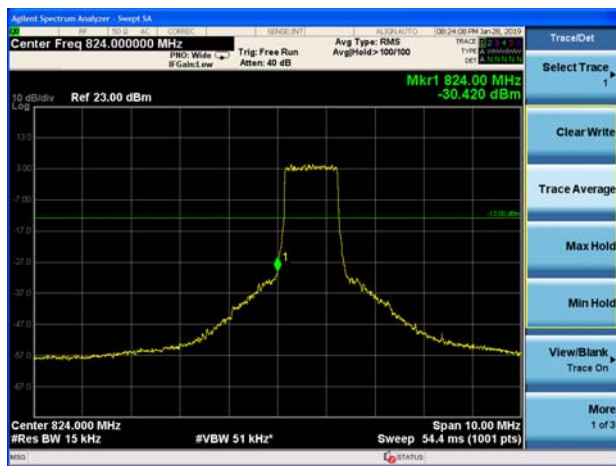


LTE Band 5 16QAM 1.4MHz CH-High 100%RB

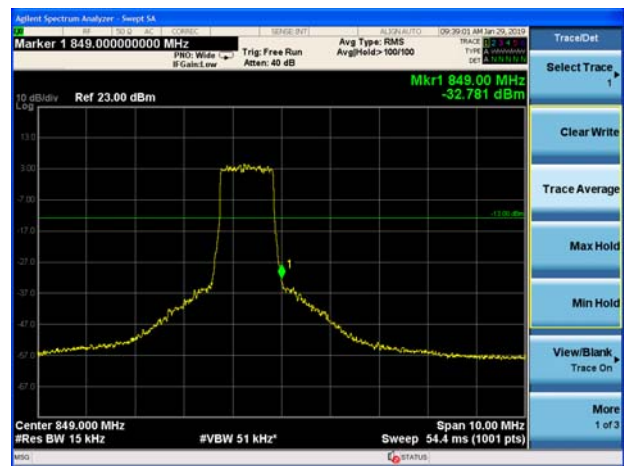

LTE Band 5 16QAM 3MHz CH-Low 1RB



LTE Band 5 16QAM 3MHz CH-High 1RB

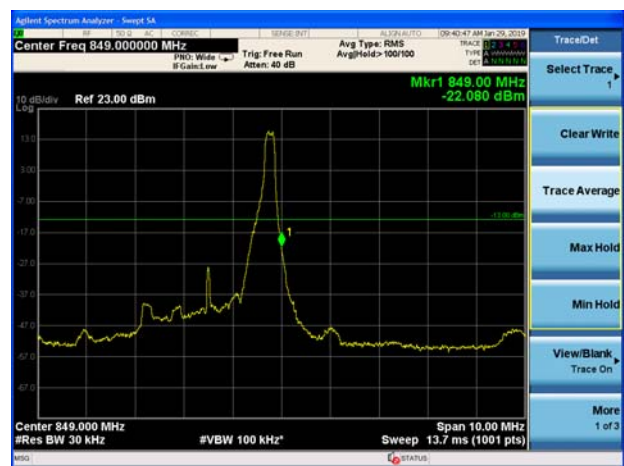


LTE Band 5 16QAM 3MHz CH-Low 100%RB




LTE Band 5 16QAM 3MHz CH-High 100%RB



LTE Band 5 16QAM 5MHz CH-Low 1RB

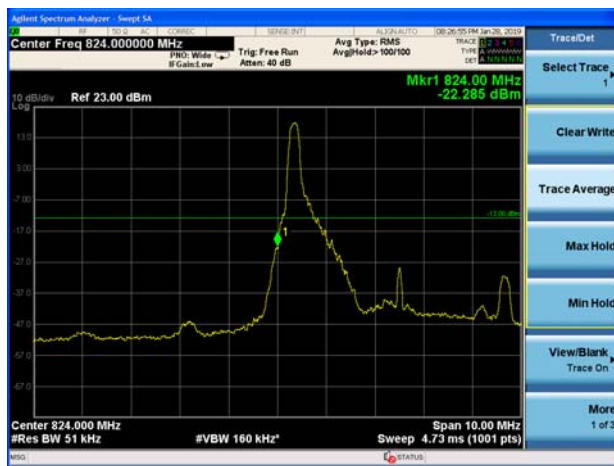

LTE Band 5 16QAM 5MHz CH-High 1RB

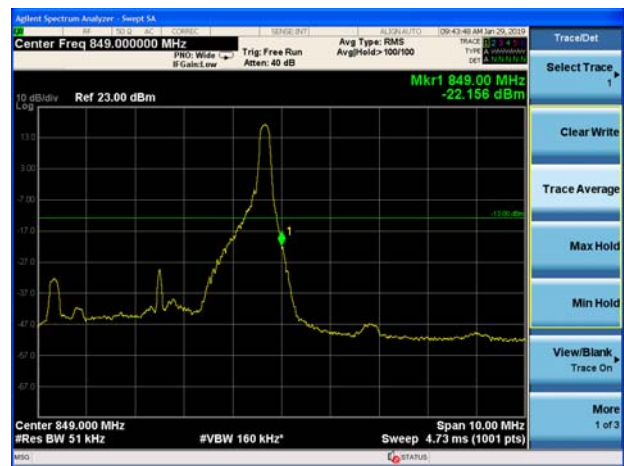


LTE Band 5 16QAM 5MHz CH-Low 100%RB




LTE Band 5 16QAM 5MHz CH-High 100%RB




LTE Band 5 16QAM 10MHz CH-Low 1RB

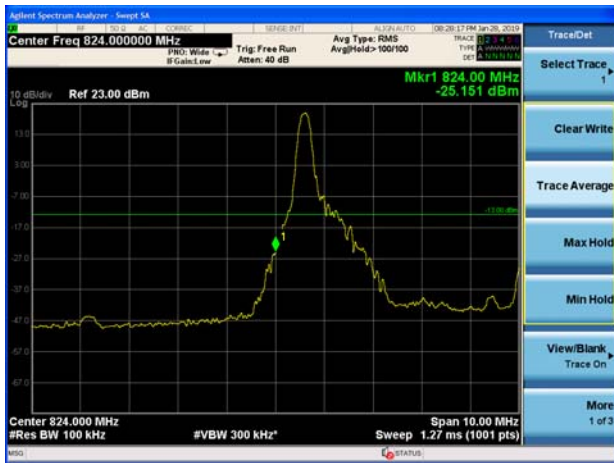

LTE Band 5 16QAM 10MHz CH-High 1RB

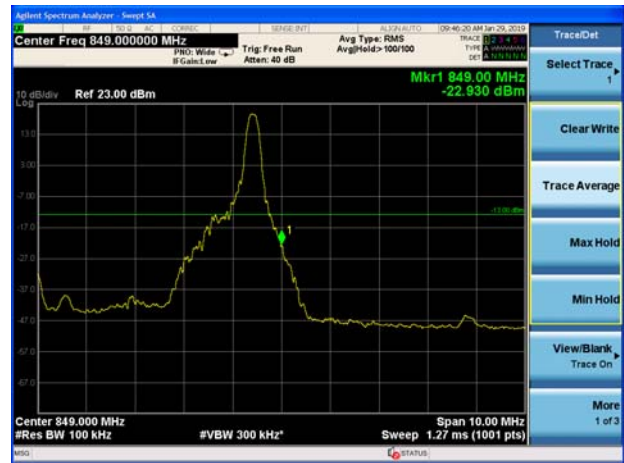

LTE Band 5 16QAM 10MHz CH-Low 100%RB

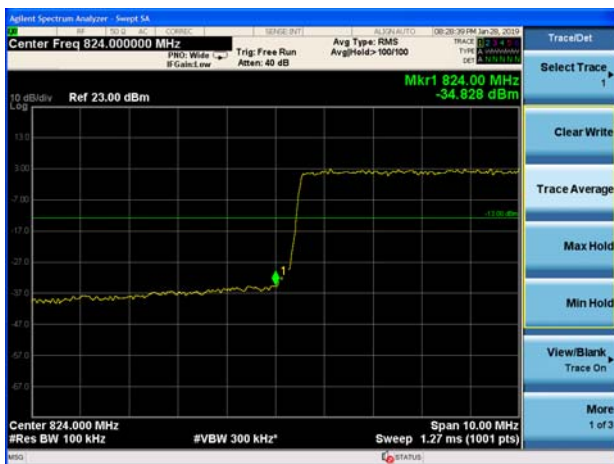

LTE Band 5 16QAM 10MHz CH-High 100%RB



### 5.5. Peak-to-Average Power Ratio (PAPR)

#### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Methods of Measurement

Measure the total peak power and record as  $P_{Pk}$ . And measure the total average power and record as  $P_{Avg}$ . Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = P_{Pk} (dBm) - P_{Avg} (dBm).$$

#### Test Setup

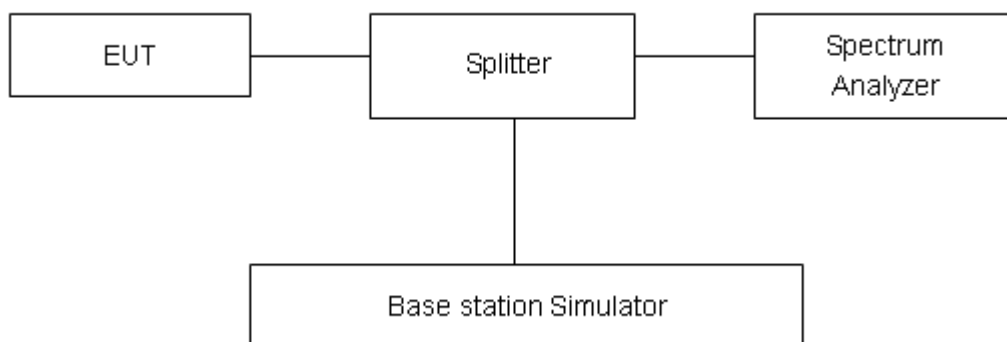

#### Limits

According to the Sec. 22.913(d), The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB.

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.4$  dB.

**Test Results**

Mode	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
<b>GSM 850 (GSM)</b>	128	824.2	29.46	28.47	0.99	≤13	PASS
	190	836.6	29.55	28.53	1.02	≤13	PASS
	251	848.8	29.93	28.97	0.96	≤13	PASS
<b>GPRS 850 (GMSK)</b>	128	824.2	29.57	28.59	0.98	≤13	PASS
	190	836.6	29.40	28.39	1.01	≤13	PASS
	251	848.8	30.21	29.24	0.97	≤13	PASS
<b>EGPRS 850 (8-PSK)</b>	128	824.2	24.32	23.34	0.98	≤13	PASS
	190	836.6	24.33	23.39	0.94	≤13	PASS
	251	848.8	24.58	23.53	1.05	≤13	PASS
<b>WCDMA Band V (RMC)</b>	4132	826.4	26.66	23.71	2.95	≤13	PASS
	4183	836.6	26.53	23.59	2.94	≤13	PASS
	4233	846.6	26.59	23.62	2.97	≤13	PASS

LTE Band 5								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	1.4	20407	824.7	28.41	23.43	4.98	≤13	PASS
		20525	836.5	28.03	23.25	4.78	≤13	PASS
		20643	848.3	27.73	23.14	4.59	≤13	PASS
	3	20415	825.5	28.12	23.40	4.72	≤13	PASS
		20525	836.5	27.97	23.21	4.76	≤13	PASS
		20635	847.5	27.71	23.20	4.51	≤13	PASS
	5	20425	826.5	28.02	23.24	4.78	≤13	PASS
		20525	836.5	27.99	23.07	4.92	≤13	PASS
		20625	846.5	27.67	23.07	4.60	≤13	PASS
	10	20450	829	28.06	23.20	4.86	≤13	PASS
		20525	836.5	27.78	23.16	4.62	≤13	PASS
		20600	844	27.65	23.12	4.53	≤13	PASS
16QAM	1.4	20407	824.7	28.36	22.51	5.85	≤13	PASS
		20525	836.5	28.05	22.94	5.11	≤13	PASS
		20643	848.3	27.64	22.57	5.07	≤13	PASS
	3	20415	825.5	28.18	22.59	5.59	≤13	PASS
		20525	836.5	27.96	22.27	5.69	≤13	PASS
		20635	847.5	27.59	22.33	5.26	≤13	PASS
	5	20425	826.5	27.97	22.50	5.47	≤13	PASS
		20525	836.5	27.75	22.20	5.55	≤13	PASS
		20625	846.5	27.55	22.31	5.24	≤13	PASS
	10	20450	829	28.12	22.41	5.71	≤13	PASS
		20525	836.5	27.82	22.65	5.17	≤13	PASS
		20600	844	27.53	22.26	5.27	≤13	PASS

## 5.6. Frequency Stability

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

#### Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -10°C to +55°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -10°C to +55°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

#### Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.6 V and 4.4 V, with a nominal voltage of 3.82V.

### Test setup

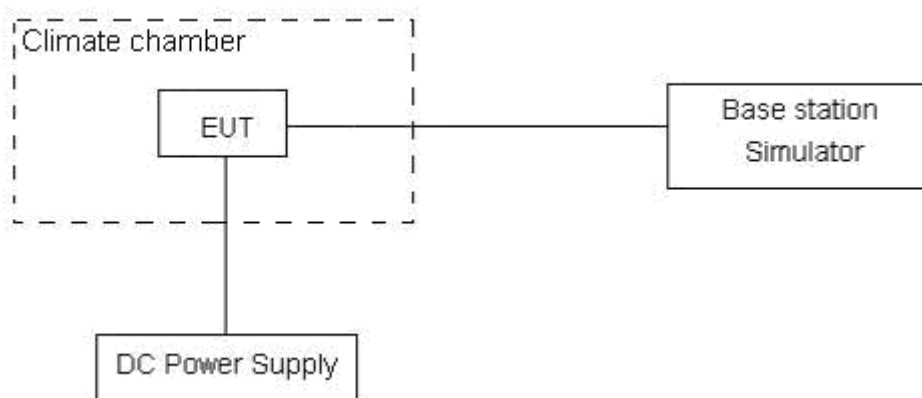



**Limits**

According to the Sec. 22.355, the frequency stability of the carrier shall be accurate to within 2.5 ppm of the received frequency for mobile stations.

Limits	$\leq 2.5$ ppm
--------	----------------

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor  $k = 3$ ,  $U = 0.01$  ppm.



## Test Result

GSM 850						
Condition		824	849	Delta (Hz)	Frequency Stability (ppm)	Verdict
Temperature	Voltage	F low@-13dBm (MHz)	F high@-13dBm (MHz)			
Normal (25°C)	Normal	5.06	11.35	0.00269	0.00603	PASS
Extreme (55°C)		14.20	1.92	0.00755	0.00102	PASS
Extreme (50°C)		13.21	3.93	0.00703	0.00209	PASS
Extreme (40°C)		10.06	1.82	0.00535	0.00097	PASS
Extreme (30°C)		5.18	2.78	0.00275	0.00148	PASS
Extreme (20°C)		15.49	2.60	0.00824	0.00138	PASS
Extreme (10C)		2.99	11.71	0.00159	0.00623	PASS
Extreme (0°C)		14.20	9.95	0.00755	0.00529	PASS
Extreme (-10°C)		17.74	15.81	0.00943	0.00841	PASS
25C	LV	9.63	10.17	0.00512	0.00541	PASS
	HV	15.21	15.08	0.00809	0.00802	PASS
GPRS 850						
Condition		824	849	Delta (Hz)	Frequency Stability (ppm)	Verdict
Temperature	Voltage	F low@-13dBm (MHz)	F high@-13dBm (MHz)			
Normal (25°C)	Normal	12.77	12.25	0.00679	0.00651	PASS
Extreme (55°C)		13.38	5.04	0.00711	0.00268	PASS
Extreme (50°C)		13.06	13.64	0.00695	0.00726	PASS
Extreme (40°C)		10.08	13.61	0.00536	0.00724	PASS
Extreme (30°C)		9.77	15.47	0.00520	0.00823	PASS
Extreme (20°C)		7.74	5.73	0.00412	0.00305	PASS
Extreme (10C)		13.02	3.31	0.00693	0.00176	PASS
Extreme (0°C)		11.46	15.89	0.00610	0.00845	PASS
Extreme (-10°C)		12.77	10.39	0.00680	0.00553	PASS
25C	LV	8.64	7.49	0.00460	0.00399	PASS
	HV	8.41	15.64	0.00447	0.00832	PASS
EGPRS 850						
Condition		824	849	Delta (Hz)	Frequency Stability (ppm)	Verdict
Temperature	Voltage	F low@-13dBm (MHz)	F high@-13dBm (MHz)			
Normal (25°C)	Normal	8.50	10.26	0.00452	0.00546	PASS
Extreme (55°C)		6.52	7.48	0.00347	0.00398	PASS
Extreme (50°C)		11.25	14.12	0.00599	0.00751	PASS
Extreme (40°C)		3.25	10.84	0.00173	0.00577	PASS



Extreme (30°C)		17.35	11.29	0.00923	0.00601	PASS
Extreme (20°C)		11.02	15.57	0.00586	0.00828	PASS
Extreme (10C)		9.54	13.61	0.00508	0.00724	PASS
Extreme (0°C)		3.37	3.45	0.00179	0.00183	PASS
Extreme (-10°C)		13.03	13.37	0.00693	0.00711	PASS
25C	LV	2.93	9.41	0.00156	0.00500	PASS
	HV	6.08	11.62	0.00323	0.00618	PASS

WCDMA Band 5						
Condition		824	849	Delta (Hz)	Frequency Stability (ppm)	Verdict
Temperature	Voltage	F low@-13dBm (MHz)	F high@-13dBm (MHz)			
Normal (25°C)	Normal	6.68	3.06	0.00355	0.00163	PASS
Extreme (55°C)		9.42	11.54	0.00501	0.00614	PASS
Extreme (50°C)		16.52	12.32	0.00879	0.00655	PASS
Extreme (40°C)		1.94	7.38	0.00103	0.00393	PASS
Extreme (30°C)		7.24	8.24	0.00385	0.00438	PASS
Extreme (20°C)		3.41	1.81	0.00181	0.00096	PASS
Extreme (10C)		14.83	15.98	0.00789	0.00850	PASS
Extreme (0°C)		5.53	3.39	0.00294	0.00180	PASS
Extreme (-10°C)		14.30	12.40	0.00760	0.00659	PASS
25C		LV	11.29	12.31	0.00600	0.00655
	HV	4.77	5.67	0.00254	0.00302	PASS

LTE Band 5						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	1.4MHz	16QAM	QPSK	16QAM	QPSK	
Temperature	Voltage					
Normal (25°C)	Normal	13.36	12.26	0.00711	0.00652	PASS
Extreme (55°C)		13.94	14.74	0.00742	0.00784	PASS
Extreme (50°C)		14.81	6.14	0.00788	0.00326	PASS
Extreme (40°C)		17.82	11.04	0.00948	0.00587	PASS
Extreme (30°C)		2.47	8.30	0.00131	0.00441	PASS
Extreme (20°C)		12.71	12.56	0.00676	0.00668	PASS
Extreme (10°C)		13.24	11.83	0.00704	0.00629	PASS
Extreme (0°C)		14.94	9.39	0.00794	0.00499	PASS
Extreme (-10°C)		4.64	12.34	0.00247	0.00656	PASS
25°C	LV	5.93	14.65	0.00315	0.00779	PASS
	HV	1.58	8.28	0.00084	0.00440	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	3MHz	16QAM	QPSK	16QAM	QPSK	
Temperature	Voltage					
Normal (25°C)	Normal	16.24	17.06	0.00864	0.00908	PASS
Extreme (55°C)		3.42	16.43	0.00182	0.00874	PASS
Extreme (50°C)		2.57	8.57	0.00136	0.00456	PASS
Extreme (40°C)		14.73	5.12	0.00784	0.00272	PASS
Extreme (30°C)		11.18	4.05	0.00595	0.00215	PASS
Extreme (20°C)		5.70	2.12	0.00303	0.00113	PASS
Extreme (10°C)		5.31	9.61	0.00282	0.00511	PASS
Extreme (0°C)		8.83	4.97	0.00470	0.00264	PASS
Extreme (-10°C)		3.81	8.27	0.00203	0.00440	PASS
25°C	LV	4.79	2.23	0.00255	0.00119	PASS
	HV	5.84	15.25	0.00310	0.00811	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	5MHz	16QAM	QPSK	16QAM	QPSK	
Temperature	Voltage					
Normal (25°C)	Normal	7.32	16.05	0.00389	0.00854	PASS
Extreme (55°C)		17.29	8.11	0.00919	0.00431	PASS
Extreme (50°C)		2.53	9.42	0.00135	0.00501	PASS
Extreme (40°C)		5.70	6.02	0.00303	0.00320	PASS
Extreme (30°C)		4.70	9.57	0.00250	0.00509	PASS
Extreme (20°C)		14.85	12.67	0.00790	0.00674	PASS



Extreme (10°C)		1.85	12.63	0.00099	0.00672	PASS
Extreme (0°C)		10.89	3.68	0.00579	0.00196	PASS
Extreme (-10°C)		13.72	12.38	0.00730	0.00659	PASS
25°C	LV	6.20	8.08	0.00330	0.00430	PASS
	HV	9.22	3.69	0.00490	0.00196	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	10MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	5.68	13.99	0.00302	0.00744	PASS
Extreme (55°C)		4.14	6.25	0.00220	0.00333	PASS
Extreme (50°C)		14.33	17.05	0.00762	0.00907	PASS
Extreme (40°C)		16.99	2.72	0.00904	0.00145	PASS
Extreme (30°C)		12.88	16.20	0.00685	0.00862	PASS
Extreme (20°C)		5.69	13.82	0.00303	0.00735	PASS
Extreme (10°C)		15.04	13.77	0.00800	0.00732	PASS
Extreme (0°C)		12.93	14.82	0.00688	0.00788	PASS
Extreme (-10°C)		17.76	17.54	0.00944	0.00933	PASS
25°C	LV	6.37	9.01	0.00339	0.00479	PASS
	HV	13.27	7.15	0.00706	0.00380	PASS

### 5.7. Spurious Emissions at Antenna Terminals

#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


#### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier.

The peak detector is used. RBW are set to 100 kHz and VBW are set to 300 kHz for below 1G, RBW are set to 1MHz and VBW are set to 3MHz for above 1G, Sweep is set to ATUO.

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

#### Test setup

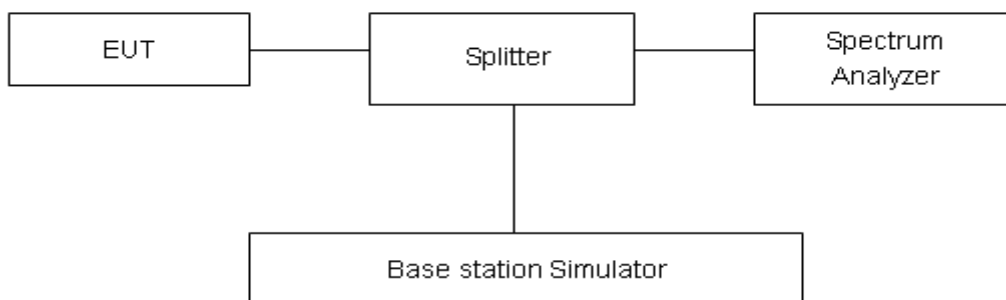

#### Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.”

Limit	-13 dBm
-------	---------

#### Measurement Uncertainty


The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-18GHz	1.407 dB

**Test Result**


Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.

The signal beyond the limit is carrier.

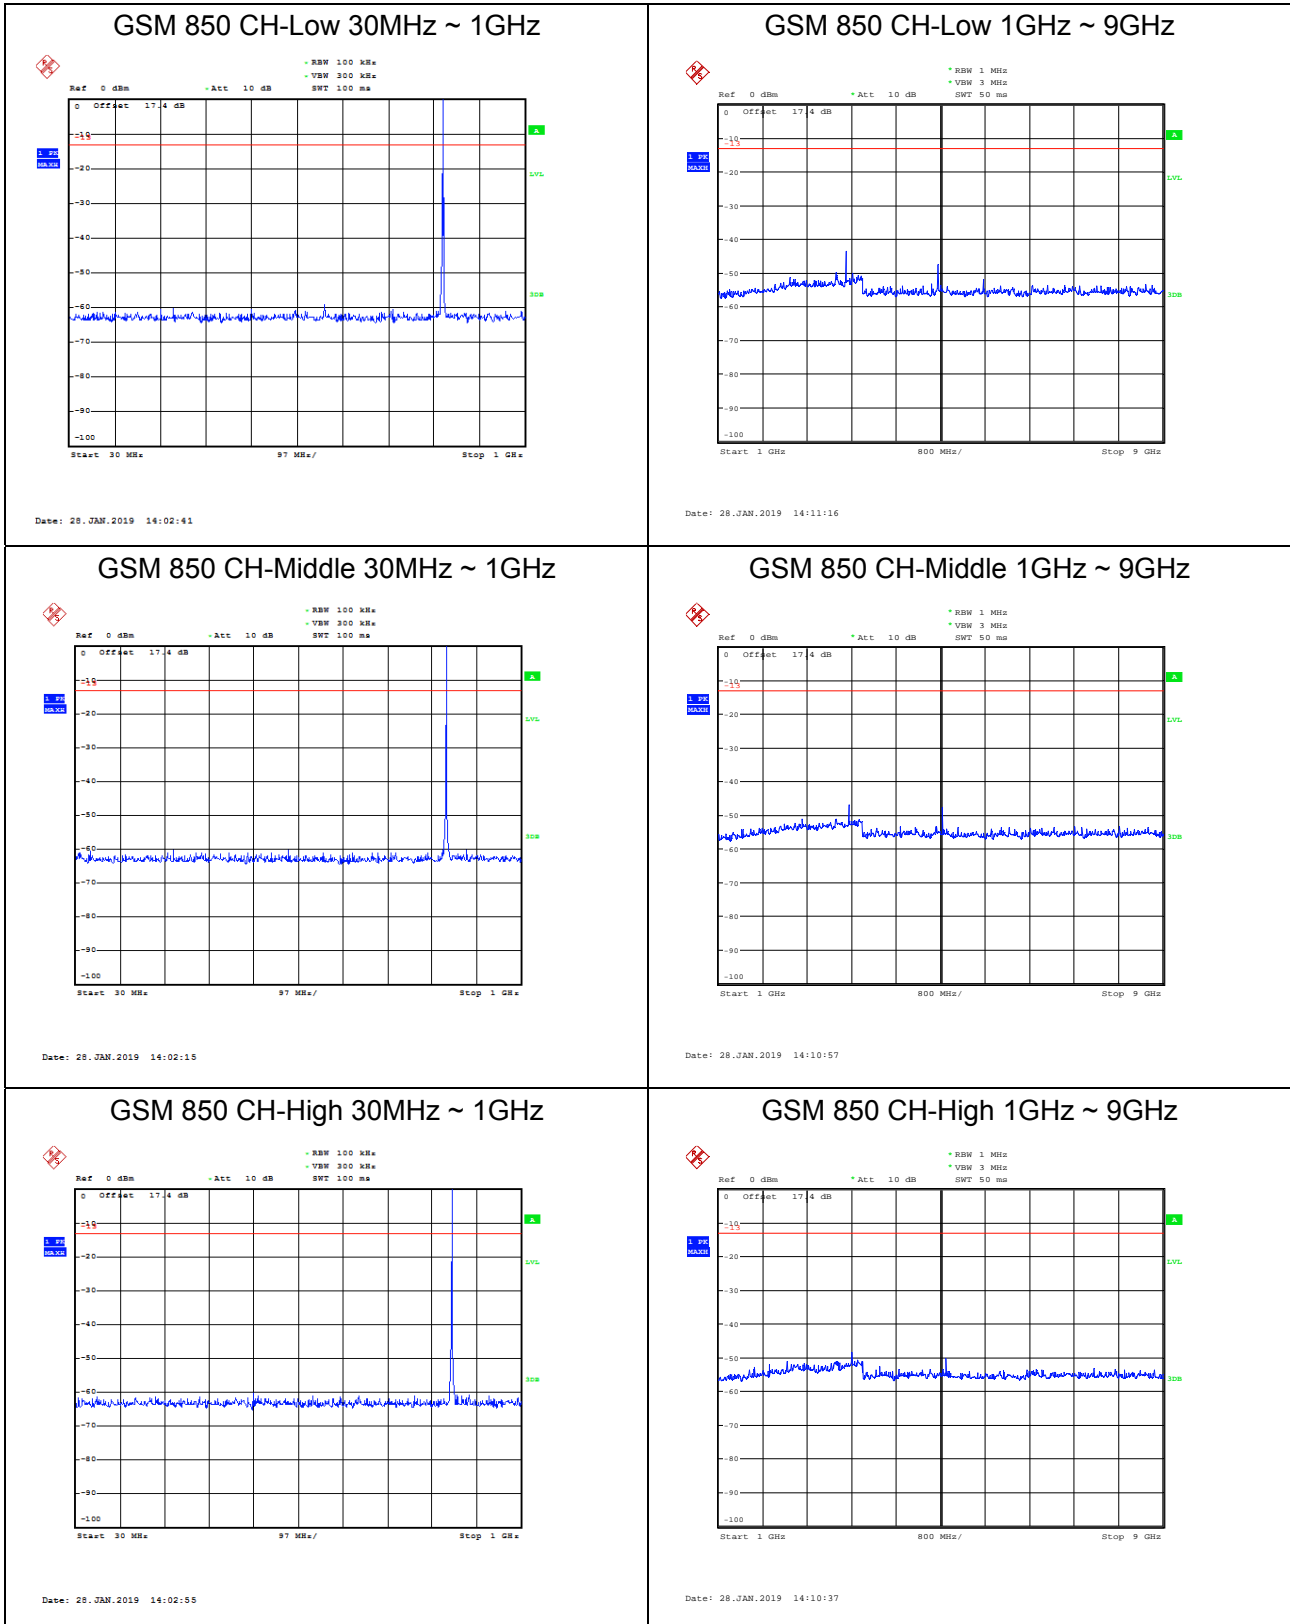




### WCDMA Band V CH-Low 30MHz ~ 1GHz

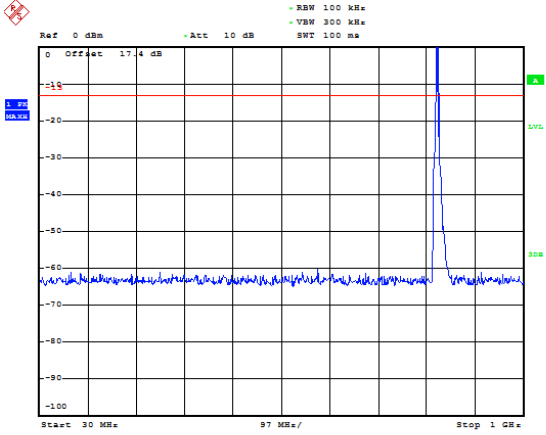


Date: 28.JAN.2019 15:15:09

### WCDMA Band V CH-Low 1GHz ~ 9GHz

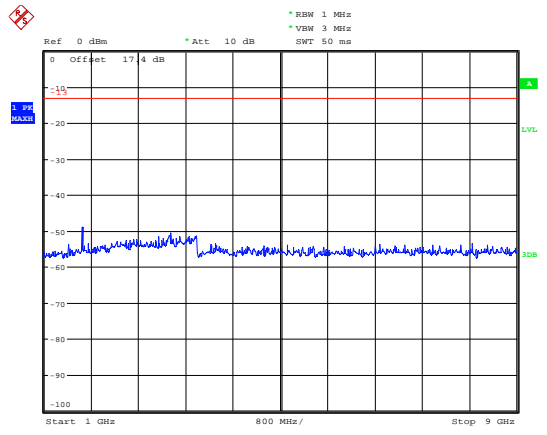


Date: 28.JAN.2019 15:17:43

### WCDMA Band V CH-Middle 30MHz ~ 1GHz

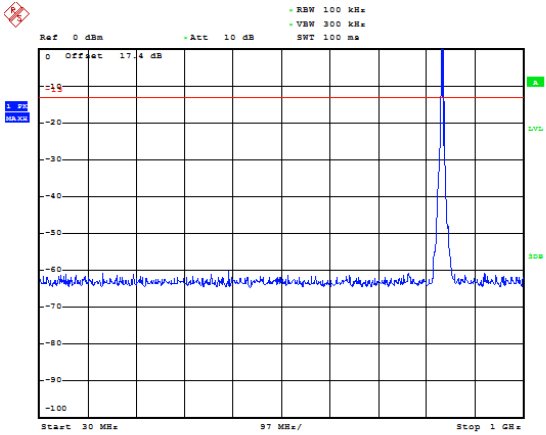


Date: 28.JAN.2019 15:14:39

### WCDMA Band V CH-Middle 1GHz ~ 9GHz

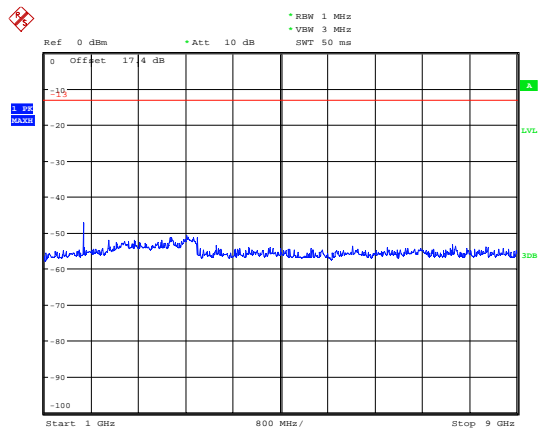


Date: 28.JAN.2019 15:17:13

### WCDMA Band V CH-High 30MHz ~ 1GHz

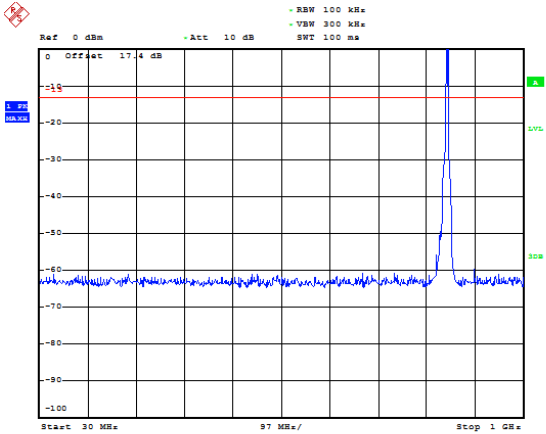

Date: 28.JAN.2019 15:15:29

### WCDMA Band V CH-High 1GHz ~ 9GHz

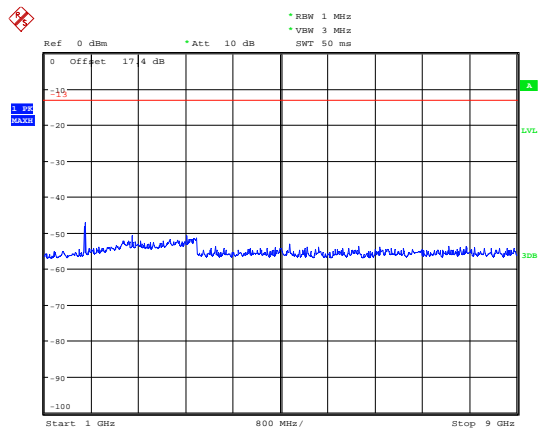


Date: 28.JAN.2019 15:16:51






### LTE Band 5 1.4MHz CH-Low 30MHz~1GHz

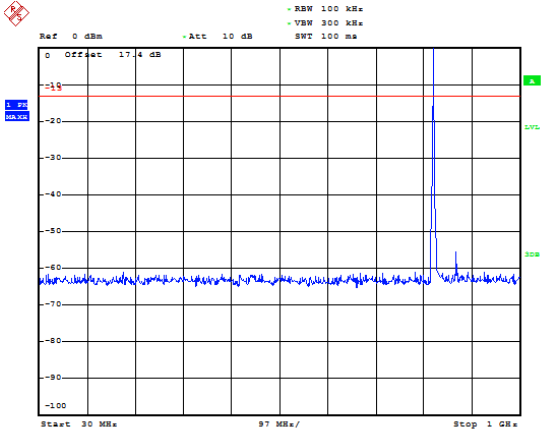


Date: 30.JAN.2019 10:40:02

### LTE Band 5 1.4MHz CH-Low 1GHz~9GHz

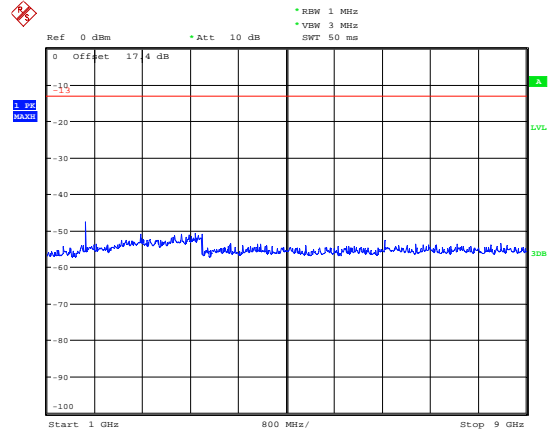


Date: 30.JAN.2019 10:50:38

### LTE Band 5 1.4MHz CH-Middle 30MHz~1GHz

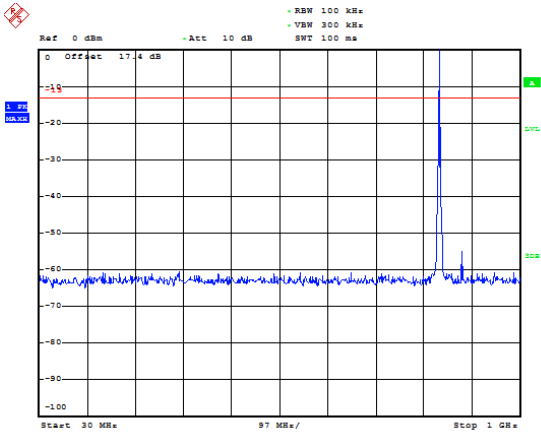


Date: 30.JAN.2019 10:40:36

### LTE Band 5 1.4MHz CH-Middle 1GHz~9GHz

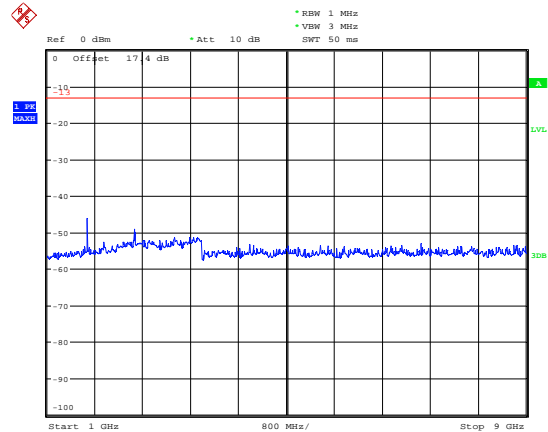


Date: 30.JAN.2019 10:50:20

### LTE Band 5 1.4MHz CH-High 30MHz~1GHz

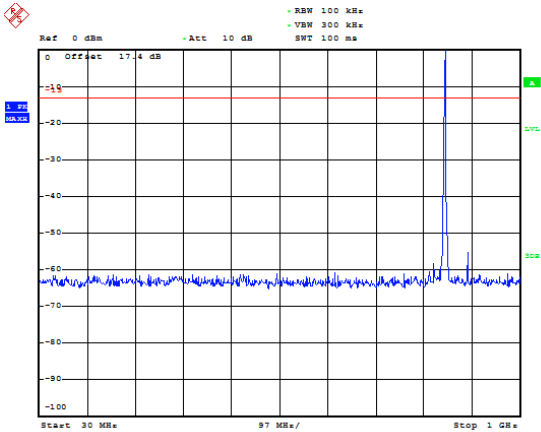

Date: 30.JAN.2019 10:40:50


### LTE Band 5 1.4MHz CH-High 1GHz~9GHz

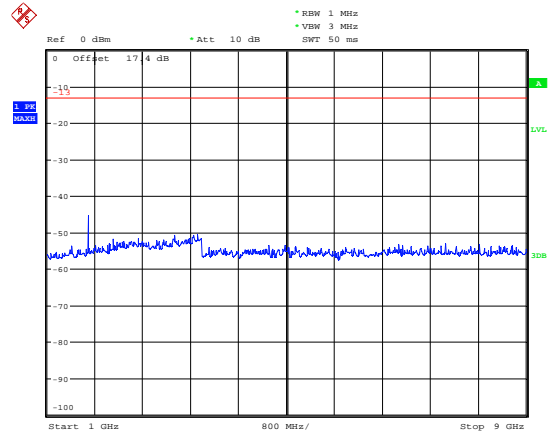

Date: 30.JAN.2019 10:49:57




### LTE Band 5 3MHz CH-Low 30MHz~1GHz

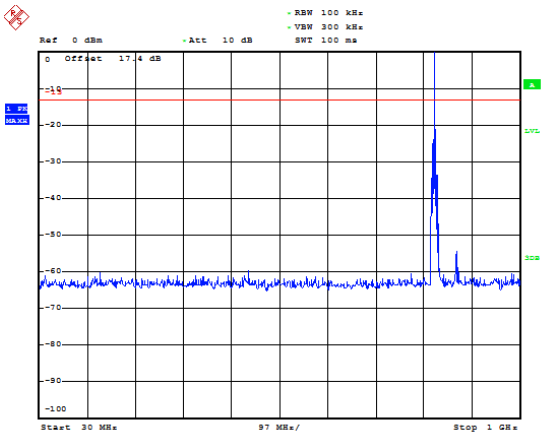


Date: 30.JAN.2019 10:52:13

### LTE Band 5 3MHz CH-Low 1GHz~9GHz

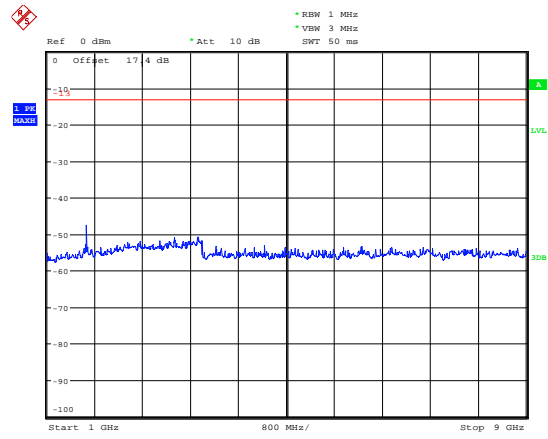


Date: 30.JAN.2019 10:51:21

### LTE Band 5 3MHz CH-Middle 30MHz~1GHz

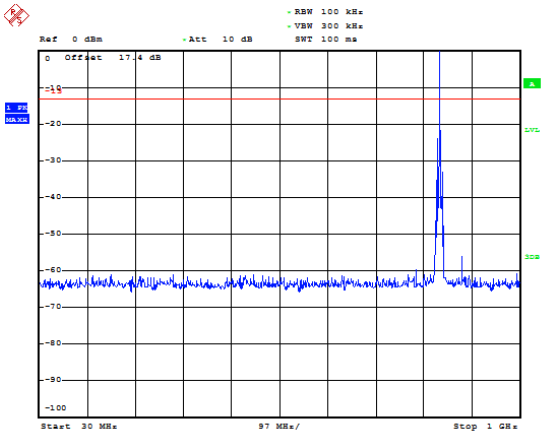


Date: 30.JAN.2019 10:52:56

### LTE Band 5 3MHz CH-Middle 1GHz~9GHz

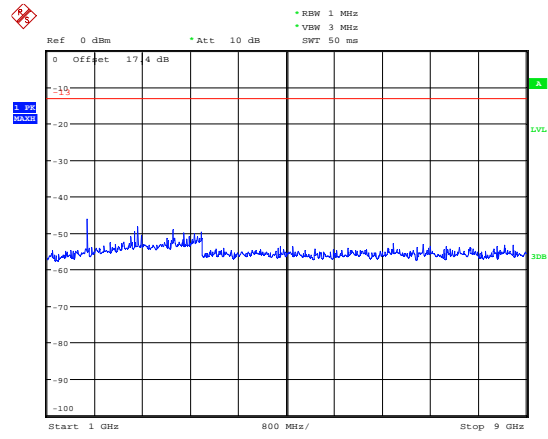


Date: 30.JAN.2019 10:51:35

### LTE Band 5 3MHz CH-High 30MHz~1GHz

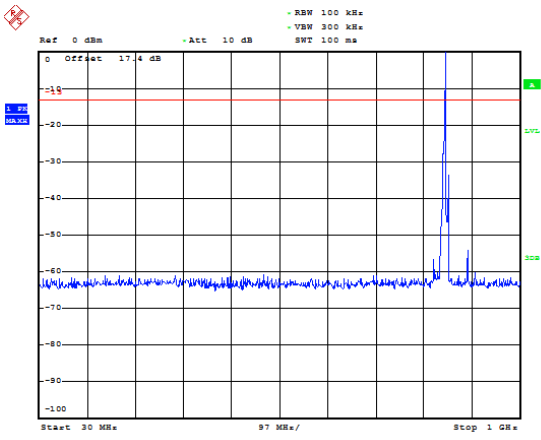

Date: 30.JAN.2019 10:52:42


### LTE Band 5 3MHz CH-High 1GHz~9GHz

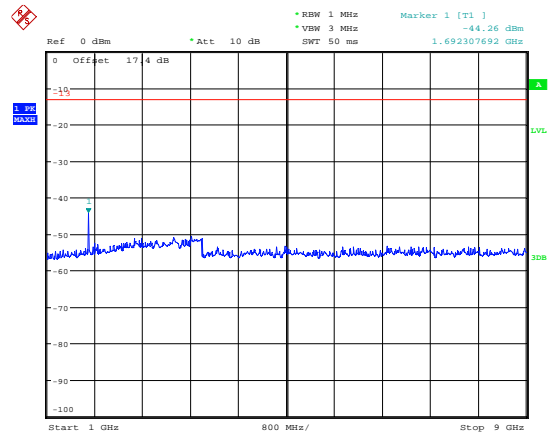

Date: 30.JAN.2019 10:51:58




### LTE Band 5 5MHz CH-Low 30MHz~1GHz

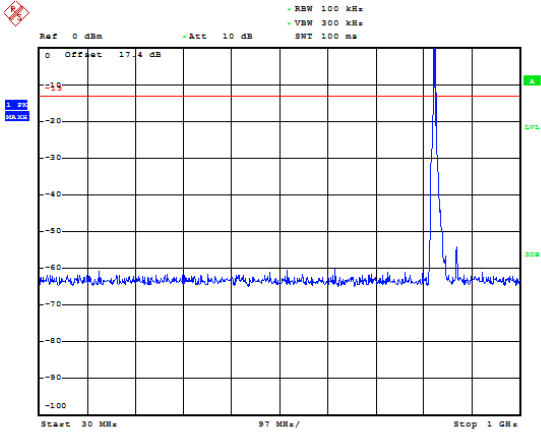


Date: 30.JAN.2019 10:54:29

### LTE Band 5 5MHz CH-Low 1GHz~9GHz

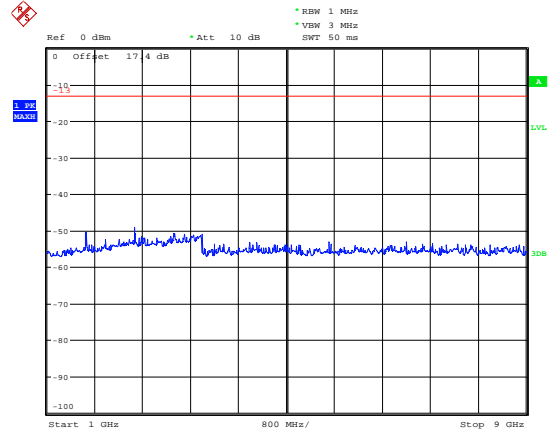


Date: 30.JAN.2019 10:59:06

### LTE Band 5 5MHz CH-Middle 30MHz~1GHz

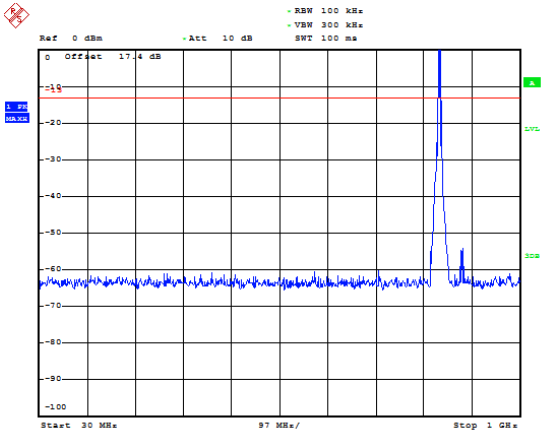


Date: 30.JAN.2019 10:54:43

### LTE Band 5 5MHz CH-Middle 1GHz~9GHz

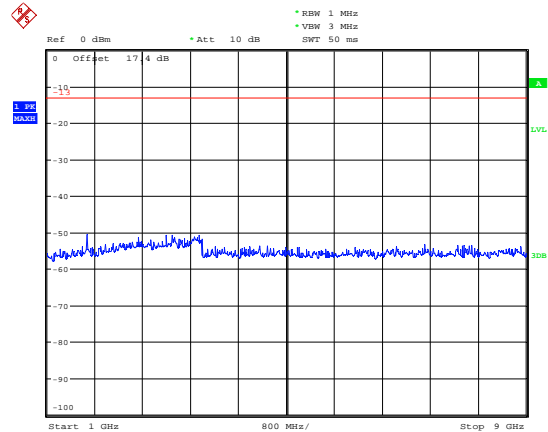


Date: 30.JAN.2019 10:59:21

### LTE Band 5 5MHz CH-High 30MHz~1GHz

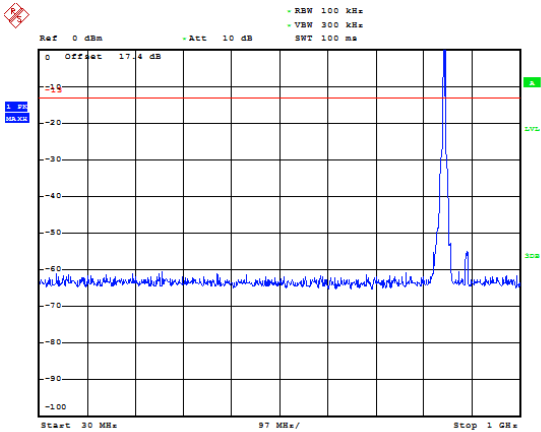

Date: 30.JAN.2019 10:54:59


### LTE Band 5 5MHz CH-High 1GHz~9GHz

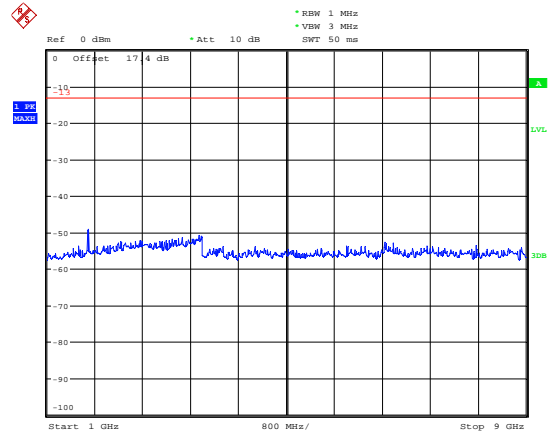

Date: 30.JAN.2019 10:59:32




### LTE Band 5 10MHz CH-Low 30MHz~1GHz

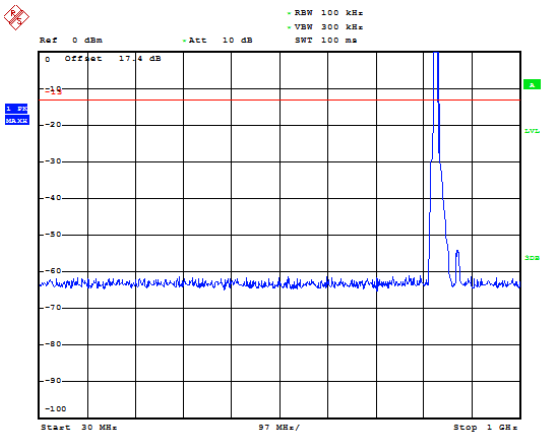


Date: 30.JAN.2019 10:55:47

### LTE Band 5 10MHz CH-Low 1GHz~9GHz

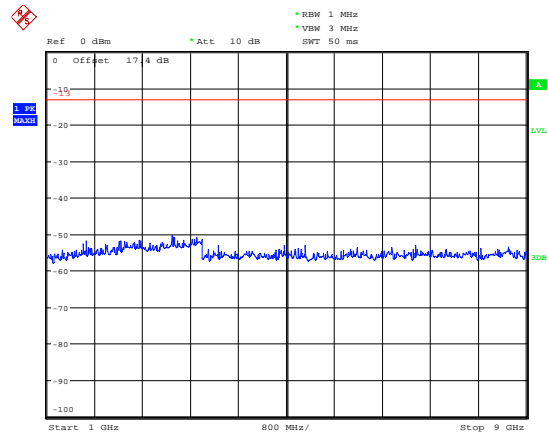


Date: 30.JAN.2019 11:00:42

### LTE Band 5 10MHz CH-Middle 30MHz~1GHz

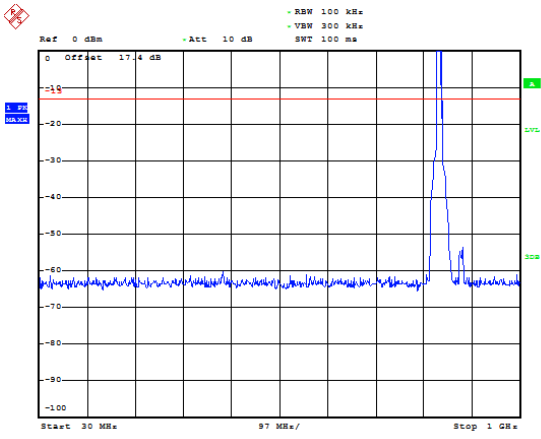


Date: 30.JAN.2019 10:56:20

### LTE Band 5 10MHz CH-Middle 1GHz~9GHz

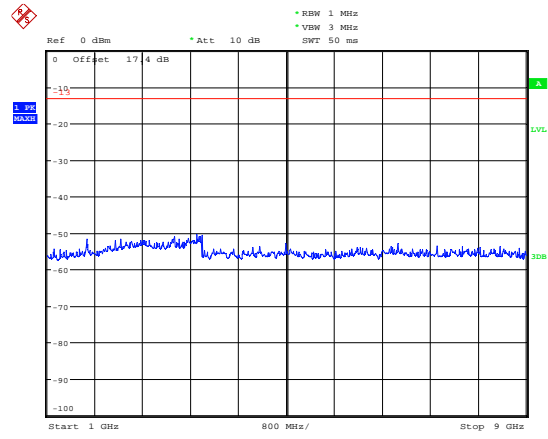


Date: 30.JAN.2019 11:00:54

### LTE Band 5 10MHz CH-High 30MHz~1GHz

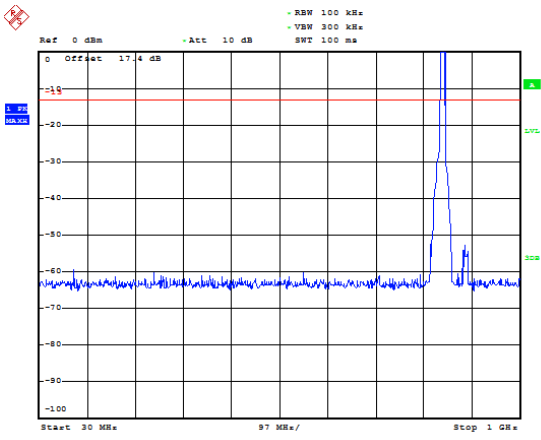

Date: 30.JAN.2019 10:56:32

### LTE Band 5 10MHz CH-High 1GHz~9GHz

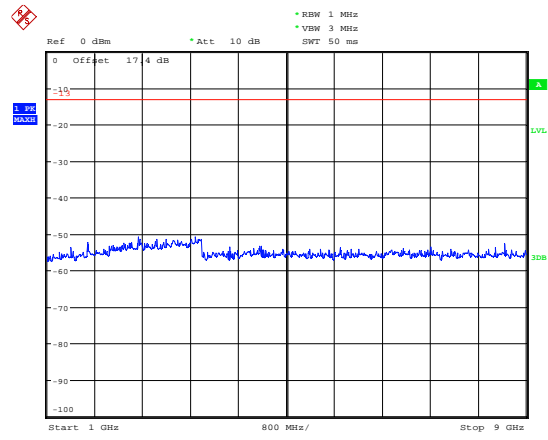

Date: 30.JAN.2019 11:01:06

## 5.8. Radiates Spurious Emission

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement


1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=200Hz,VBW=600Hz for 9kHz150kHz , RBW=10kHz, VBW=30kHz 150kHz-30MHz , RBW=100kHz,VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:  
Power(EIRP)=PMea- PAg - Pcl + Ga  
The measurement results are amend as described below:  
Power(EIRP)=PMea- Pcl + Ga
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi)

and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

**Test setup**


**9KHz ~ 30MHz**

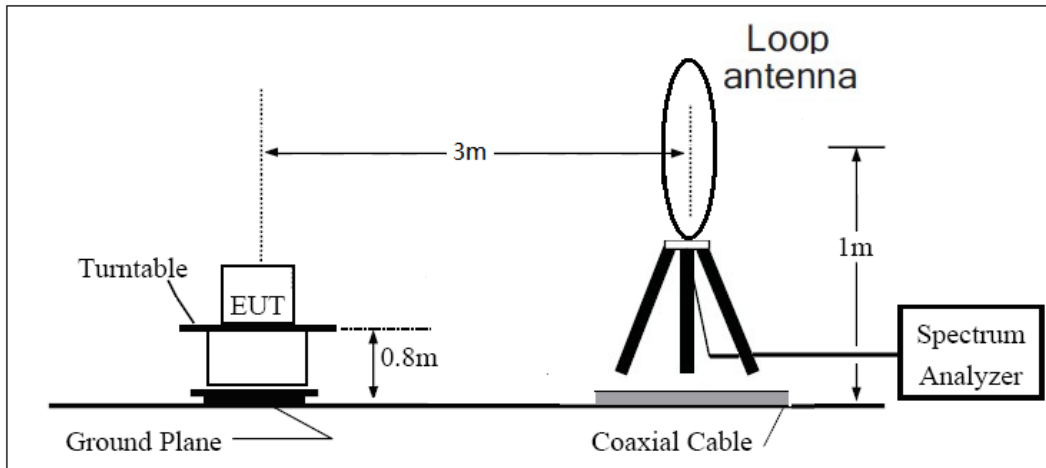

**30MHz ~ 1GHz**

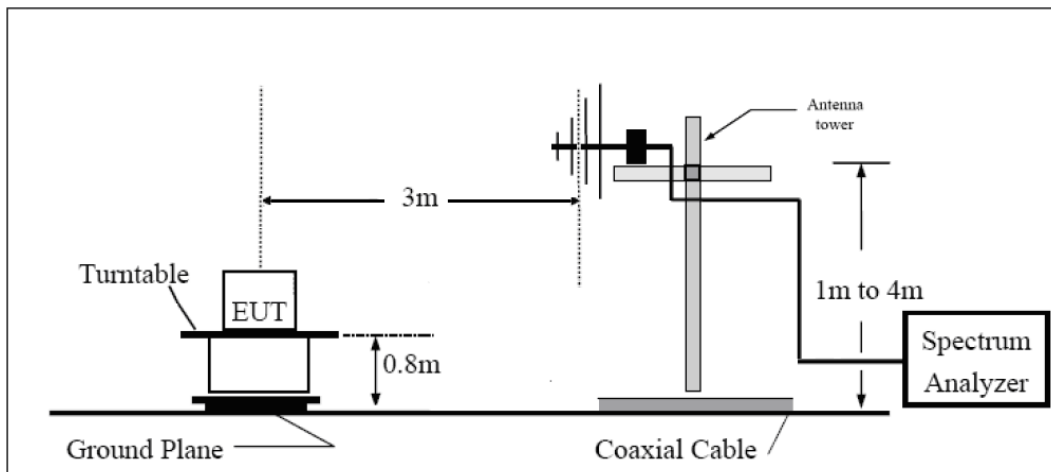

**Above 1GHz**

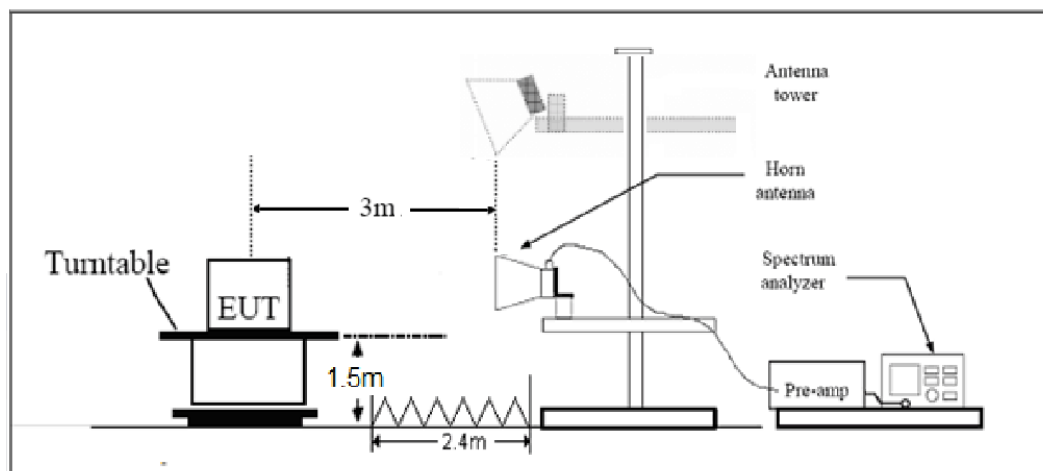



Note: Area side:2.4mX3.6m

**Limits**

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.”

Limit	-13 dBm
-------	---------

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 3.55$  dB.

**Test Result**

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

GSM 850 CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.3	-57.58	2.00	10.75	Horizontal	-50.98	-13.00	37.98	180
3	2509.3	-54.59	2.51	11.05	Horizontal	-48.20	-13.00	35.20	135
4	3346.4	-53.44	4.20	11.15	Horizontal	-48.64	-13.00	35.64	180
5	4183.0	-54.42	5.20	11.15	Horizontal	-50.62	-13.00	37.62	135
6	5019.6	-47.12	5.50	11.95	Horizontal	-42.82	-13.00	29.82	90
7	5926.5	-57.01	5.70	13.55	Horizontal	-51.31	-13.00	38.31	225
8	6692.8	-55.86	6.30	13.75	Horizontal	-50.56	-13.00	37.56	315
9	7529.4	-53.53	6.80	13.85	Horizontal	-48.63	-13.00	35.63	225
10	8366.0	-53.93	6.90	14.25	Horizontal	-48.73	-13.00	35.73	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
 2.The worst emission was found in the antenna is Horizontal position.

WCDMA Band V CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.2	-57.61	2.00	10.75	Horizontal	-51.01	-13.00	38.01	135
3	2509.8	-60.80	2.51	11.05	Horizontal	-54.41	-13.00	41.41	225
4	3346.4	-63.03	4.20	11.15	Horizontal	-58.23	-13.00	45.23	135
5	4183.0	-58.34	5.20	11.15	Horizontal	-54.54	-13.00	41.54	0
6	5019.6	-57.08	5.50	11.95	Horizontal	-52.78	-13.00	39.78	90
7	5856.2	-57.94	5.70	13.55	Horizontal	-52.24	-13.00	39.24	225
8	6692.8	-55.29	6.30	13.75	Horizontal	-49.99	-13.00	36.99	315
9	7529.4	-53.36	6.80	13.85	Horizontal	-48.46	-13.00	35.46	180
10	8366.0	-52.29	6.90	14.25	Horizontal	-47.09	-13.00	34.09	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
 2.The worst emission was found in the antenna is Horizontal position.





## LTE Band 5 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1672.0	-59.87	2.00	10.75	Horizontal	-53.27	-13.00	40.27	0
3	2508.2	-42.33	2.51	11.05	Horizontal	-35.94	-13.00	22.94	0
4	3346.0	-61.96	4.20	11.15	Horizontal	-57.16	-13.00	44.16	225
5	4182.5	-58.35	5.20	11.15	Horizontal	-54.55	-13.00	41.55	180
6	5019.0	-57.42	5.50	11.95	Horizontal	-53.12	-13.00	40.12	45
7	5855.5	-57.69	5.70	13.55	Horizontal	-51.99	-13.00	38.99	180
8	6692.0	-54.53	6.30	13.75	Horizontal	-49.23	-13.00	36.23	0
9	7528.5	-54.89	6.80	13.85	Horizontal	-49.99	-13.00	36.99	90
10	8365.0	-52.33	6.90	14.25	Horizontal	-47.13	-13.00	34.13	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2.The worst emission was found in the antenna is Horizontal position.

## LTE Band 5 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1668.6	-58.48	2.00	10.75	Horizontal	-51.88	-13.00	38.88	225
3	2502.9	-42.03	2.51	11.05	Horizontal	-35.64	-13.00	22.64	225
4	3466.2	-61.70	4.20	11.15	Horizontal	-56.90	-13.00	43.90	135
5	4215.9	-58.17	5.20	11.15	Horizontal	-54.37	-13.00	41.37	90
6	5165.6	-56.92	5.50	11.95	Horizontal	-52.62	-13.00	39.62	45
7	5815.3	-57.97	5.70	13.55	Horizontal	-52.27	-13.00	39.27	0
8	6765.0	-55.13	6.30	13.75	Horizontal	-49.83	-13.00	36.83	180
9	7614.7	-53.56	6.80	13.85	Horizontal	-48.66	-13.00	35.66	225
10	8464.4	-54.97	6.90	14.25	Horizontal	-49.77	-13.00	36.77	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2.The worst emission was found in the antenna is Horizontal position.



## LTE Band 5 10MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.0	-57.75	2.00	10.75	Horizontal	-51.15	-13.00	38.15	180
3	2509.5	-40.90	2.51	11.05	Horizontal	-34.51	-13.00	21.51	0
4	3346.0	-63.02	4.20	11.15	Horizontal	-58.22	-13.00	45.22	315
5	4182.5	-58.42	5.20	11.15	Horizontal	-54.62	-13.00	41.62	180
6	5019.0	-56.60	5.50	11.95	Horizontal	-52.30	-13.00	39.30	135
7	5855.5	-58.36	5.70	13.55	Horizontal	-52.66	-13.00	39.66	45
8	6692.0	-55.47	6.30	13.75	Horizontal	-50.17	-13.00	37.17	90
9	7528.5	-53.95	6.80	13.85	Horizontal	-49.05	-13.00	36.05	225
10	8365.0	-52.08	6.90	14.25	Horizontal	-46.88	-13.00	33.88	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

## 6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113824	2018-05-20	2019-05-19
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2018-05-20	2019-05-19
Universal Radio Communication Tester	Key sight	E5515C	MY48367192	2018-05-20	2019-05-19
Signal Analyzer	R&S	FSV30	100815	2018-12-16	2019-12-15
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2019-09-25
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2019-11-17
Horn Antenna	R&S	HF907	100126	2018-07-07	2020-07-06
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2020-06-19
Signal generator	R&S	SMB 100A	102594	2018-05-20	2019-05-19
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
Preamplifier	R&S	SCU18	102327	2018-05-20	2019-05-19
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2018-05-21	2019-05-20
RF Cable	Agilent	SMA 15cm	0001	2018-12-16	2019-03-15
Software	R&S	EMC32	9.26.0	/	/

\*\*\*\*\*END OF REPORT \*\*\*\*\*