


Appendix F

Conducted Emission at Power Port According to FCC Part 15.107

ADAPTER TPCA-053065E

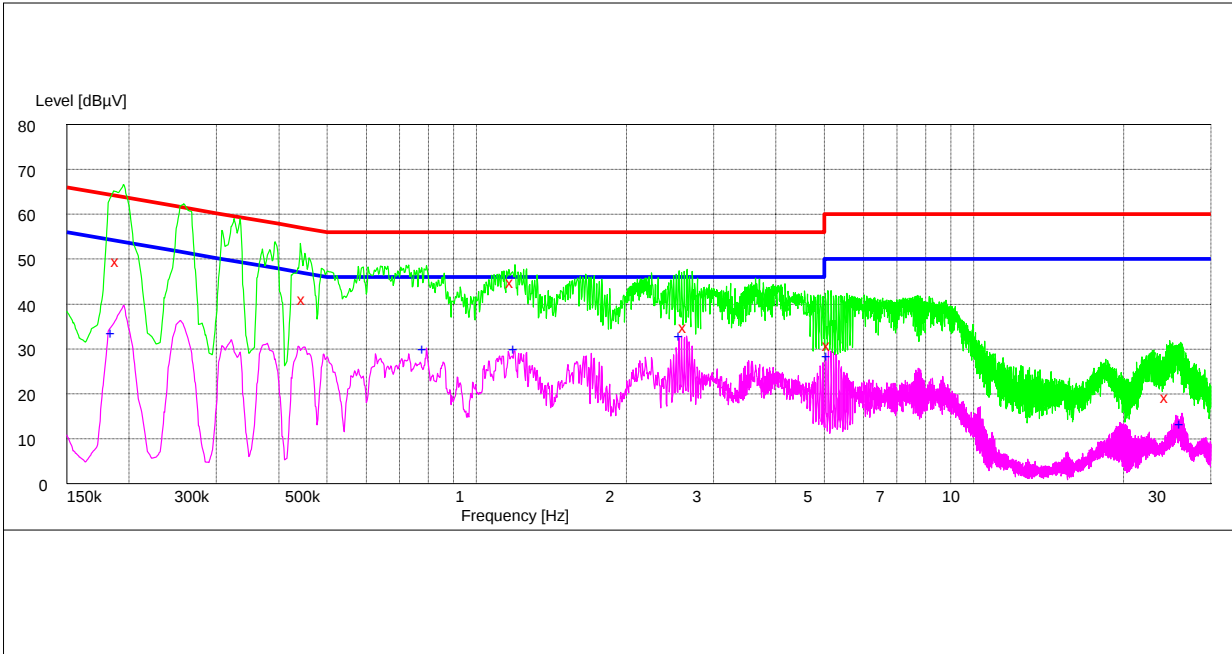


MEASUREMENT RESULT:QP DECTER

Frequency (MHz)	Level (dBμV)	Transd (dB)	Limit (dBμV)	Margin (dB)	Line	PE
0.190500	49.80	10.1	64	14.2	N	FLO
0.451500	41.40	9.9	57	15.6	N	FLO
1.185000	45.30	10.1	56	10.7	L3	FLO
2.634000	35.20	10.1	56	20.8	L3	FLO
5.131500	31.10	10.1	60	28.9	L3	FLO
24.612000	19.50	10.4	60	40.5	N	FLO

MEASUREMENT RESULT:AV DECTER

Frequency (MHz)	Level (dBμV)	Transd (dB)	Limit (dBμV)	Margin (dB)	Line	PE
0.186000	33.90	10.1	54	20.1	N	FLO
0.789000	30.40	10.0	46	15.6	L3	FLO
1.203000	30.30	10.0	46	15.7	L3	FLO
2.589000	33.20	10.1	46	12.8	L3	FLO
5.118000	28.70	10.1	50	21.3	L3	FLO
26.236500	13.70	10.4	50	36.3	N	FLO

ADAPTER XQLCHW07

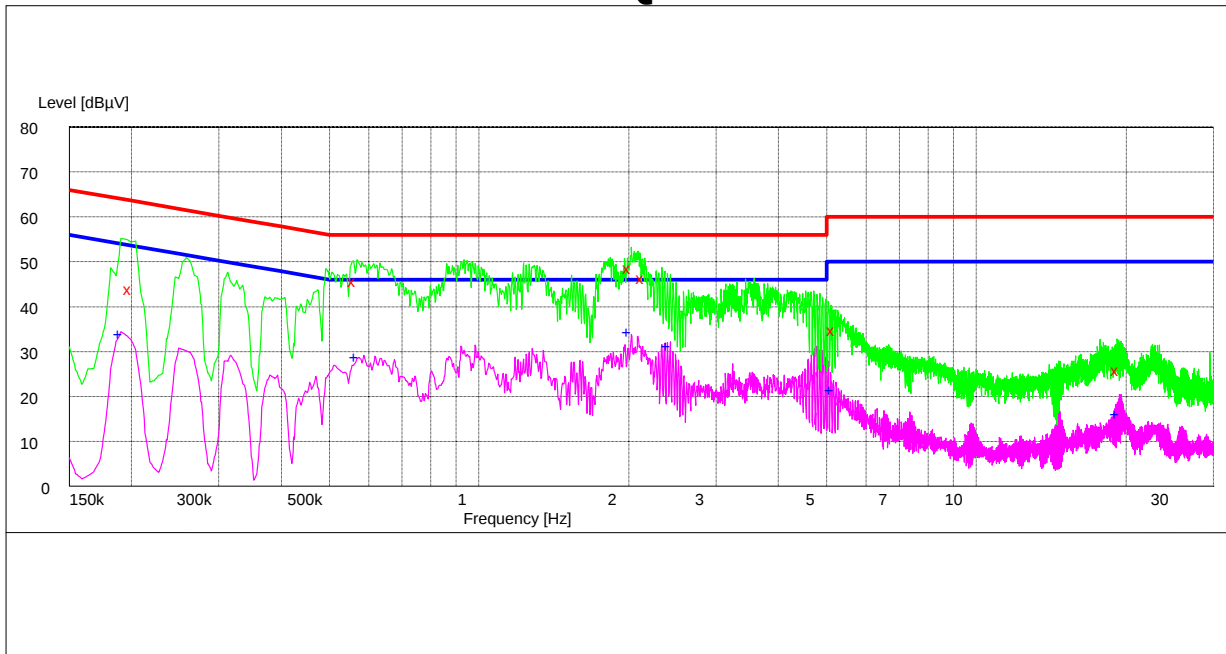

MEASUREMENT RESULT:QP DECTER

Frequency (MHz)	Level (dBμV)	Transd (dB)	Limit (dBμV)	Margin (dB)	Line	PE
0.199500	44.20	10.1	64	19.8	N	FLO
0.564000	46.10	10.0	56	9.9	L3	FLO
2.013000	48.90	10.1	56	7.1	L3	FLO
2.143500	46.60	10.1	56	9.4	L3	FLO
5.185500	35.20	10.1	60	24.8	L3	FLO
19.275000	26.30	10.3	60	33.7	N	FLO

MEASUREMENT RESULT:AV DECTER

Frequency (MHz)	Level (dBμV)	Transd (dB)	Limit (dBμV)	Margin (dB)	Line	PE
0.190500	34.10	10.1	54	19.9	L3	FLO
0.568500	29.20	10.0	46	16.8	L3	FLO
2.008500	34.60	10.1	46	11.4	L3	FLO
2.409000	31.60	10.1	46	14.4	L3	FLO
5.131500	21.80	10.1	50	28.2	N	FLO
19.266000	16.30	10.3	50	33.7	N	FLO