

FCC Radio Test Report

FCC ID: QISDUB-LX3

This report concerns (check one): Original Grant Class I Change Class II Change

Project No. : 1811C039
Equipment : Smart Phone
Model Name : DUB-LX3
Series Model : N/A
Applicant : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Date of Receipt : Oct. 23, 2018
Date of Test : Oct. 24, 2018 ~ Nov. 14, 2018
Issued Date : Nov. 26, 2018
Tested by : BTL Inc.

Testing Engineer : Paul Li
(Paul Li)

Technical Manager : David Mao
(David Mao)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Certificate #5123.02

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	12
3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	12
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
3.5 DESCRIPTION OF SUPPORT UNITS	13
4 . EMC EMISSION TEST	14
4.1 RADIATED EMISSION MEASUREMENT	14
4.1.1 RADIATED EMISSION LIMITS	14
4.1.2 TEST PROCEDURE	15
4.1.3 DEVIATION FROM TEST STANDARD	15
4.1.4 TEST SETUP	16
4.1.5 EUT OPERATING CONDITIONS	18
4.1.6 EUT TEST CONDITIONS	18
4.1.7 TEST RESULT (9 KHZ TO 30 MHZ)	18
4.1.8 TEST RESULT (30 MHZ TO 1000 MHZ)	18
4.1.9 TEST RESULT (ABOVE 1000 MHZ)	18
5 . MEASUREMENT INSTRUMENTS LIST	19
APPENDIX A - RADIATED EMISSION (9 KHZ TO 30 MHZ)	20
APPENDIX B - RADIATED EMISSION (30 MHZ TO 1000 MHZ)	25
APPENDIX C - RADIATED EMISSION (ABOVE 1000 MHZ)	28

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	Nov. 16, 2018
R01	Updated the software version which does not affect the test results.	Nov. 23, 2018
R02	Updated the accessory devices which does not affect the test results.	Nov. 26, 2018

1. CERTIFICATION

Equipment : Smart Phone
Brand Name : HUAWEI
Model Name : DUB-LX3
Series Model : N/A
Applicant : Huawei Technologies Co., Ltd.
Manufacturer : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C
Factory : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C
Date of Test : Oct. 24, 2018 ~ Nov. 14, 2018
Test Sample : Engineering Sample No.: D181009545
Standard(s) : FCC Part15, Subpart C (15.247)
ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-2-1811C039) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of A2LA according to the ISO-17025 quality assessment standard and technical standard(s).

Test result included in this report is only for the Bluetooth LE Transmitter Radiated Emissions part.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15 (15.247) , Subpart C			
Standard(s) Section	Test Item	Judgment	Remark
15.247(d)/ 15.205/ 15.209	Transmitter Radiated Emissions	PASS	

Note:

- (1) "N/A" denotes test is not applicable to this device.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 854385

BTL's designation number for FCC: CN5020

2.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty figures shall be calculated according the methods described in the ETSI TR 100 028 and shall correspond to an expansion factor (coverage factor) $k=1.96$ or $k=2$ (which provide confidence levels of respectively 90% and 95.45% in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)). Measurement Uncertainty for a Level of Confidence of 95 %, $U=2xUc(y)$.

The BTL measurement uncertainty as below table:


A. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9 kHz ~ 30 MHz	V	3.79
		9 kHz ~ 30 MHz	H	3.57
		30 MHz ~ 200 MHz	V	3.82
		30 MHz ~ 200 MHz	H	3.78
		200 MHz ~ 1,000 MHz	V	4.10
		200 MHz ~ 1,000 MHz	H	4.06
		1 GHz ~ 18 GHz	V	3.12
		1 GHz ~ 18 GHz	H	3.68
		18 GHz ~ 40 GHz	V	4.15
		18 GHz ~ 40 GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone	
Brand Name	HUAWEI	
Model Name	DUB-LX3	
Series Model	N/A	
Model Difference(s)	N/A	
Software Version	DUB-LX3 8.2.0.107(C900)	
Hardware Version	HL3DUBM	
Product Description	Operation Frequency	2402MHz ~ 2480MHz
	Modulation Technology	GFSK(1Mbps)
	Bit Rate of Transmitter	
Power Source	1# DC voltage supplied from AC/DC adapter. 2# Supplied from battery. 3# Supplied from USB port.	
Power Rating	1# I/P: 100-240V O/P: 5V  2A 2# DC 3.82V, 3900mAh 3# DC 5V	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

3. Table for Filed Antenna:

Brand	Model Name	Antenna Type	Connector	Gain (dBi)
HUAWEI	N/A	Internal	N/A	-1.3

4. The EUT contains following accessory devices.

Item	Manufacturer	Factory	Model	Description
Adapter	Huawei Technologies Co., Ltd.	SHENZHEN HUNTKEY ELECTRONICS CO., LTD.	HW-050200E01	I/P:100-240V O/P:5V 2A
			HW-050200E02	
			HW-050200U01	
			HW-050200U02	
			HW-050200A01	
			HW-050200A02	
			HW-050200B01	
			HW-050200B02	
		Dongguan Phitek Electronics CO.,Ltd.	HW-050200E01	
			HW-050200E02	
			HW-050200U01	
			HW-050200U02	
		HUIZHOU BYD ELECTRONIC CO., LTD.	HW-050200A01	
			HW-050200A02	
			HW-050200B01	
			HW-050200B02	
Salcomp (Shenzhen) CO., LTD.	HW-050200E02			
	HW-050200U02			
	HW-050200A02			
	HW-050200B02			

Item	Manufacturer	Factory	Model	Description
Battery	Huawei Technologies Co., Ltd.	Huizhou Desay Battery Co., Ltd.	HB406689ECW	DC 3.82V, 3900mAh
		SCUD (FUJIAN) Electronics Co., Ltd.		
Earphone	-	Jiangxi Lianchuang Hongsheng Electronic Co. ,LTD.	MEND1532B528A02	-
			MEMD1532B528000	
		Boluo County Quancheng Electronic Co.,ltd.	1293-3283-3.5mm-322	
			1293#+3283# 3.5MM-150	
USB Cable	-	HONGLIN TECHNOLOGY CO., LTD.	130-26669	-
		FOXCONN INTERCONNECT TECHNOLOGY LIMITED	CUBB01M-HC304-DH	
		NingBo Broad Telecommunication Co., Ltd.	WA0001	
		LuXshare	L99U2017-CS-H	

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Radiated Test	
Final Test Mode	Description
Mode 1	TX Mode

Note:


- (1) Radiated Emissions of middle channel is performed and Band edge of high and low channels are performed.

3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of BT LE

Test Software Version	QRCT		
Frequency (MHz)	2402	2440	2480
BT LE	N/A	N/A	N/A

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

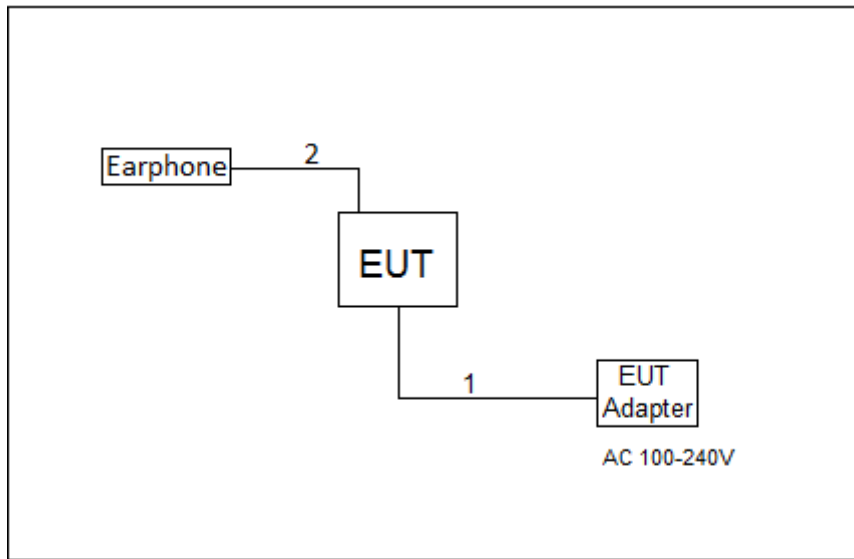

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.2m	DC Cable
2	NO	NO	1.0m	Audio Cable

4. EMC EMISSION TEST

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
960 ~ 1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Band edge at 3m (dBµV/m)/ Harmonic at 3m (dBµV/m)		Harmonic at 1.5m (dBµV/m)	
	Peak	Average	Peak	Average
Above 1000	74	54	80 (Note 5)	60 (Note 5)

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value
- (5)

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

$$20 \log d_{\text{limit}}/d_{\text{measure}} = 20 \log 3/1.5 = 6 \text{ dB.}$$

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	RBW 1 MHz VBW 3 MHz peak detector for Pk value RMS detector for AV value

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector

4.1.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The measuring distance of 3 m or 1.5m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD


No deviation

4.1.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency 30 MHz-1000 MHz

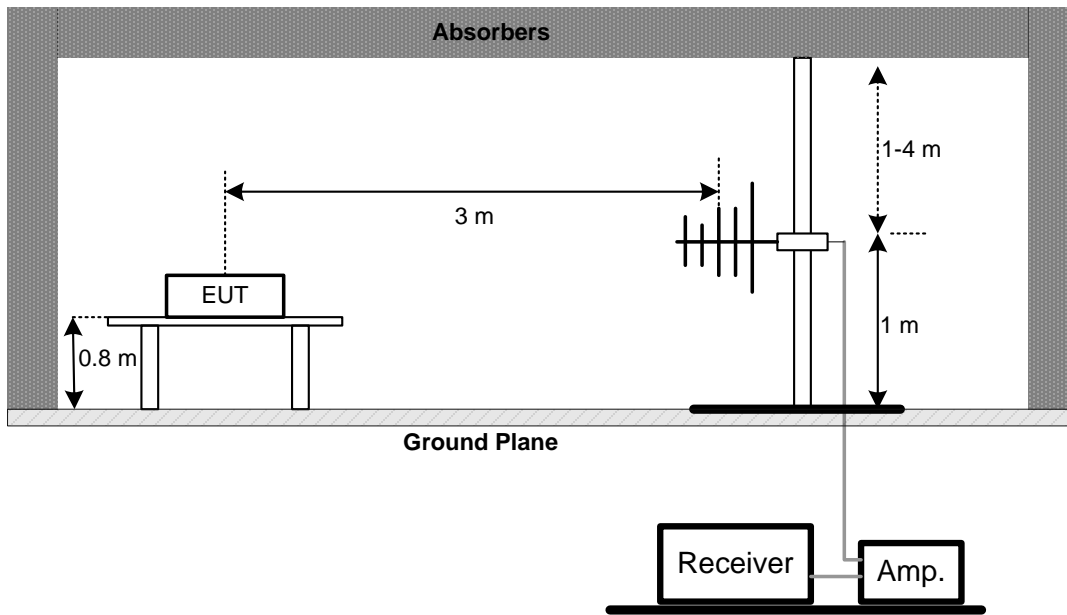


(B) Radiated Emission Test Set-Up Frequency Above 1 GHz
Band edge

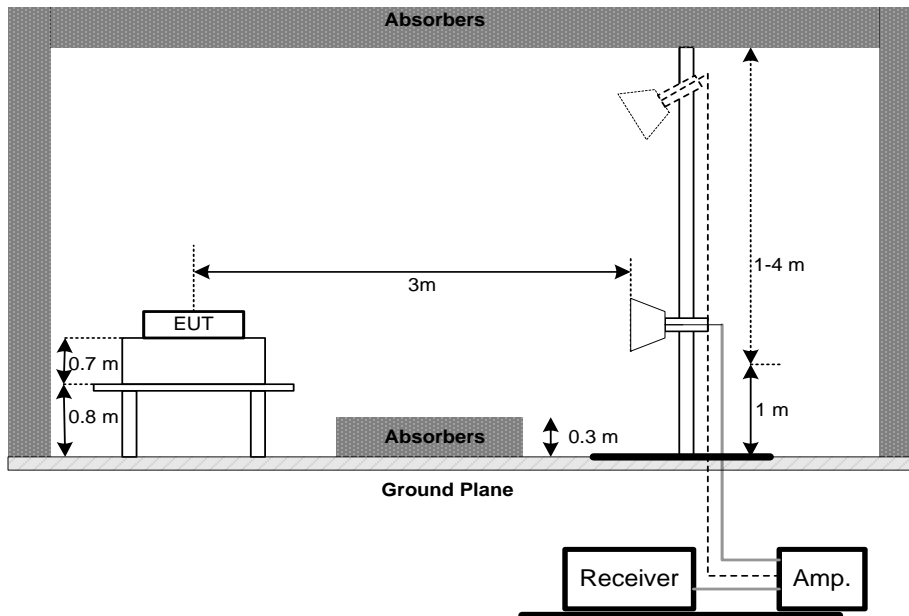


**Harmonic
1GHz to 18GHz**

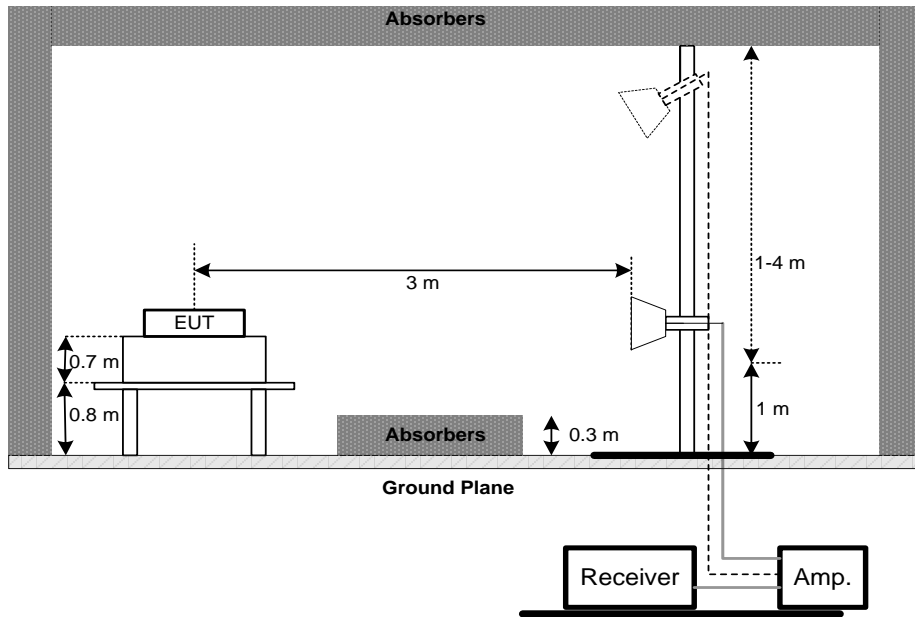

18GHz to 26.5GHz

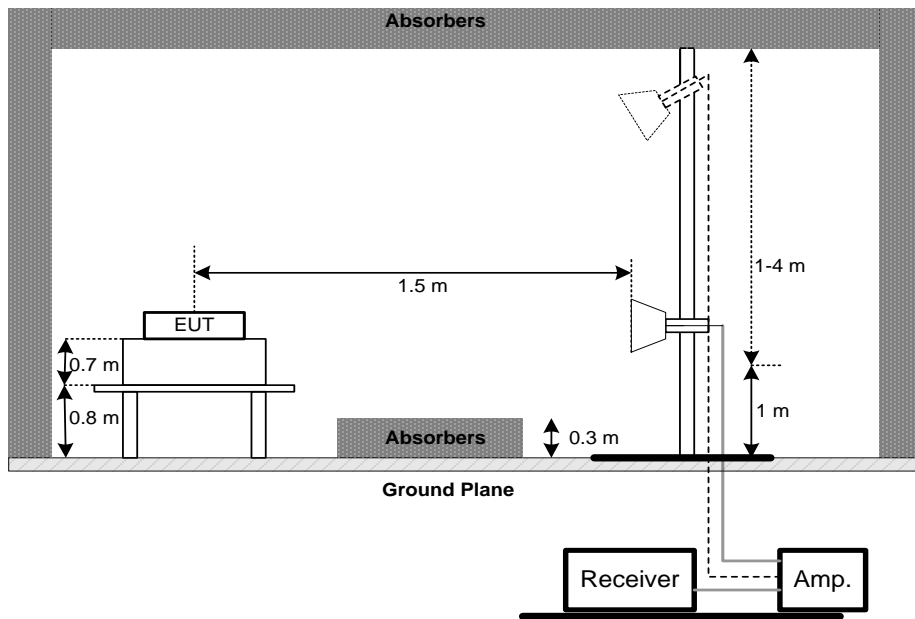

(C) For radiated emissions 9 kHz-30 MHz

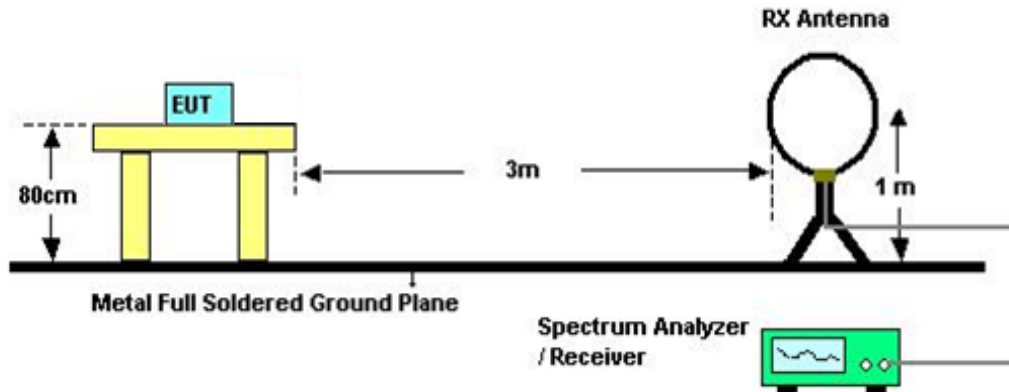

4.1.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULT (9 kHz TO 30 MHz)

Please refer to the Appendix A

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.
- (4) All adapters had been pre-test and in this report only recorded the worst case.

4.1.8 TEST RESULT (30 MHz TO 1000 MHz)

Please refer to the Appendix B

Remark:

- (1) All adapters had been pre-test and in this report only recorded the worst case.

4.1.9 TEST RESULT (ABOVE 1000 MHz)

Please refer to the Appendix C

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. MEASUREMENT INSTRUMENTS LIST

Radiated Emission Measurement - 9kHz TO 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Loop Antenna	EM	EM-6876-1	230	Feb. 07, 2019
2	Cable	N/A	RG 213/U	C-102	Jun. 01, 2019
3	EMI Test Receiver	R&S	ESCI	100382	Mar. 11, 2019
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement – 30 MHz TO 1000 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 11, 2019
2	Amplifier	HP	8447D	2944A09673	Aug. 11, 2019
3	Receiver	Agilent	N9038A	MY52130039	Aug. 11, 2019
4	Cable	emci	LMR-400(30MHz-1 GHz)(8m+5m)	N/A	May 25, 2019
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75789	Mar. 11, 2019
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jun. 30, 2019
3	Amplifier	Agilent	8449B	3008A02274	Mar. 11, 2019
4	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 11, 2019
5	Receiver	Agilent	N9038A	MY52130039	Aug. 11, 2019
6	Controller	CT	SC100	N/A	N/A
7	Controller	MF	MF-7802	MF780208416	N/A
8	Cable	mitron	B10-01-01-12M	18072744	Jul. 30, 2019
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A


Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

APPENDIX A - RADIATED EMISSION (9 KHZ TO 30 MHZ)

Test Mode: TX Mode


Ant 0°

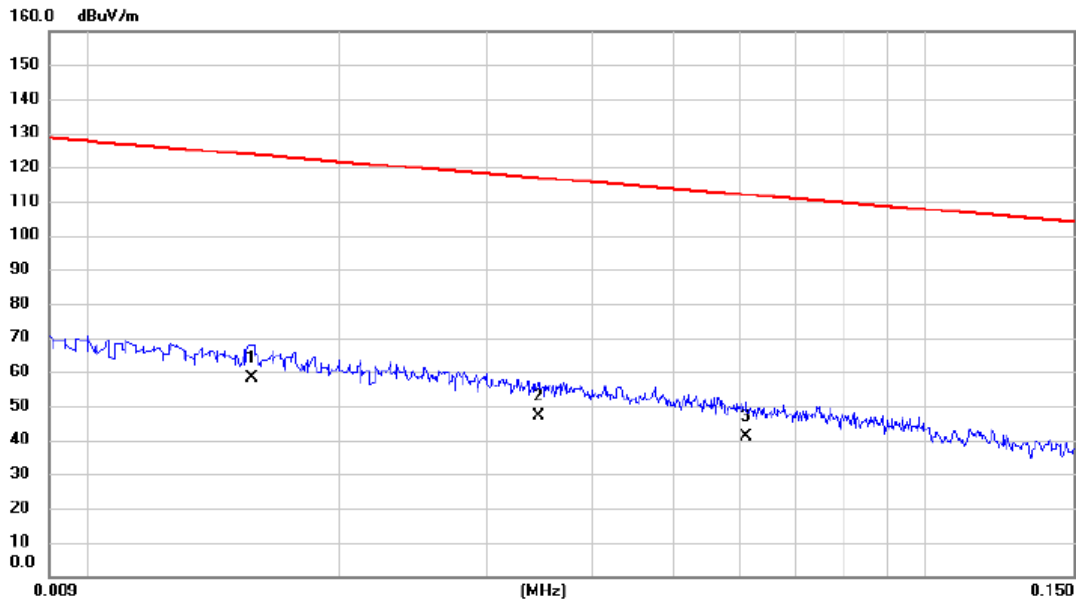

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.0157	37.40	20.62	58.02	123.69	-65.67	AVG	
2		0.0346	27.30	19.79	47.09	116.82	-69.73	AVG	
3		0.0610	21.60	19.31	40.91	111.90	-70.99	AVG	

Test Mode: TX Mode


Ant 0°

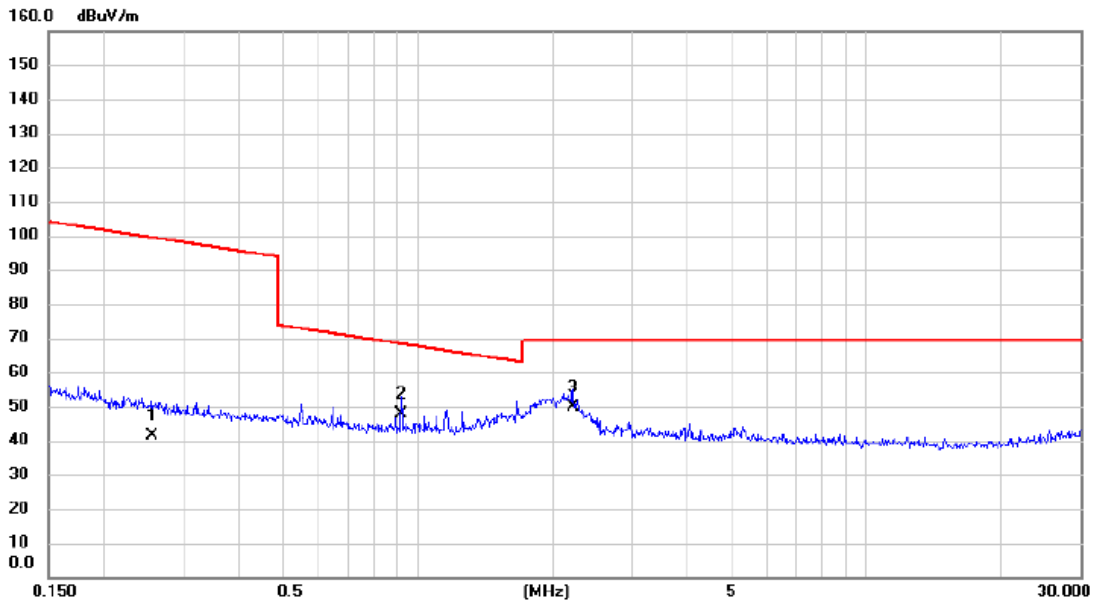

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.2548	24.40	17.06	41.46	99.48	-58.02	AVG	
2		0.9184	31.30	16.69	47.99	68.34	-20.35	QP	
3	*	2.2132	32.80	16.99	49.79	69.54	-19.75	QP	

Test Mode: TX Mode


Ant 90°

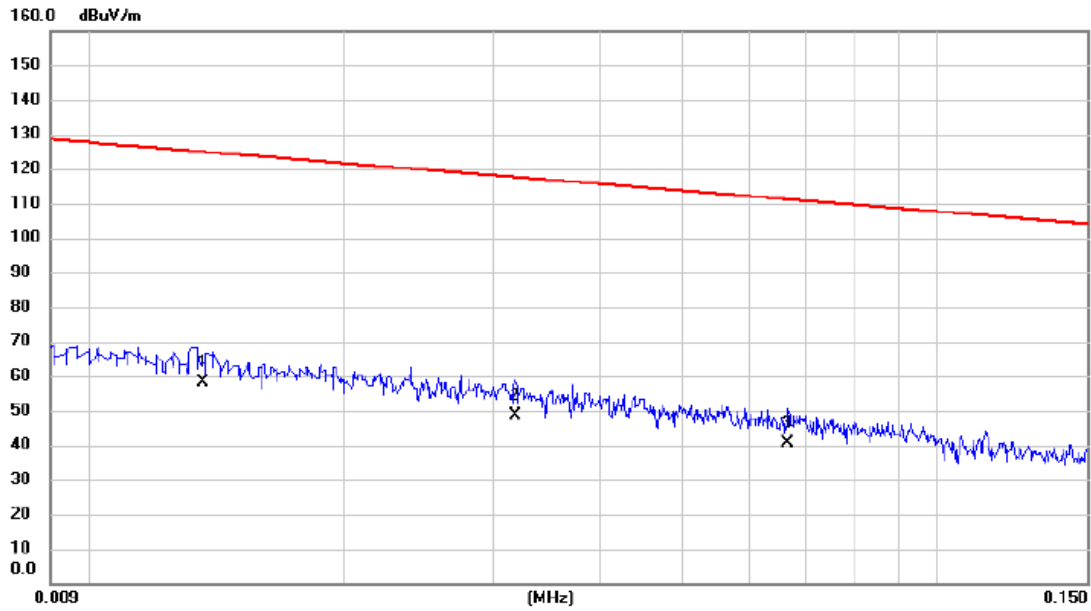

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.0136	37.40	20.92	58.32	124.93	-66.61	AVG	
2		0.0318	28.80	19.83	48.63	117.56	-68.93	AVG	
3		0.0667	21.30	19.20	40.50	111.12	-70.62	AVG	

Test Mode: TX Mode

Ant 90°

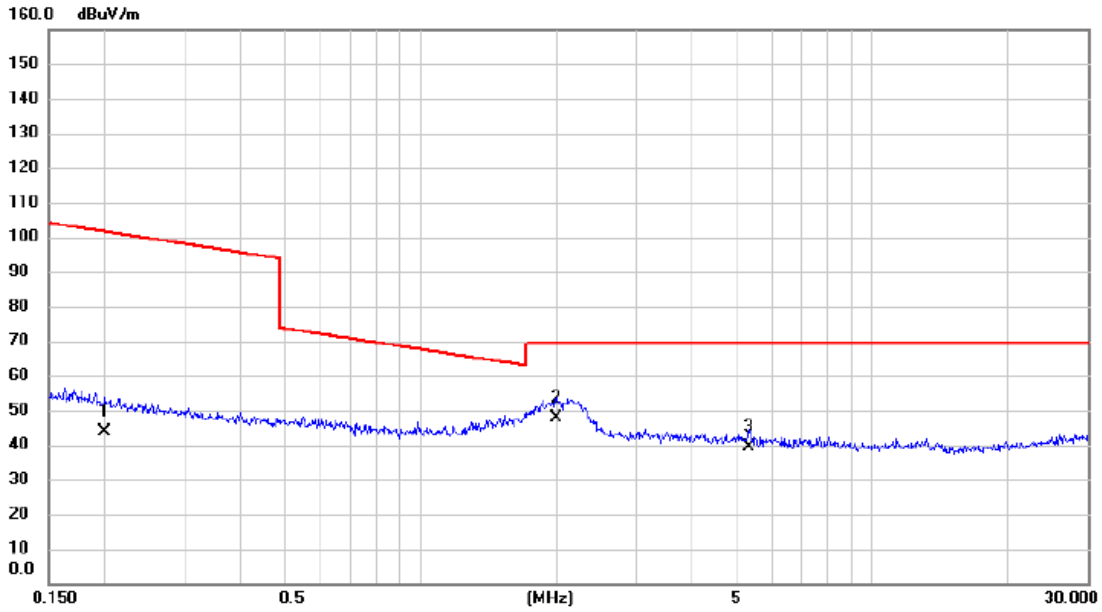


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.1997	26.60	17.16	43.76	101.60	-57.84	AVG	
2	*	2.0011	30.50	17.12	47.62	69.54	-21.92	QP	
3		5.3332	24.40	15.10	39.50	69.54	-30.04	QP	

APPENDIX B - RADIATED EMISSION (30 MHZ TO 1000 MHZ)

Test Mode: TX 2440 MHz _CH19_1Mbps


Vertical

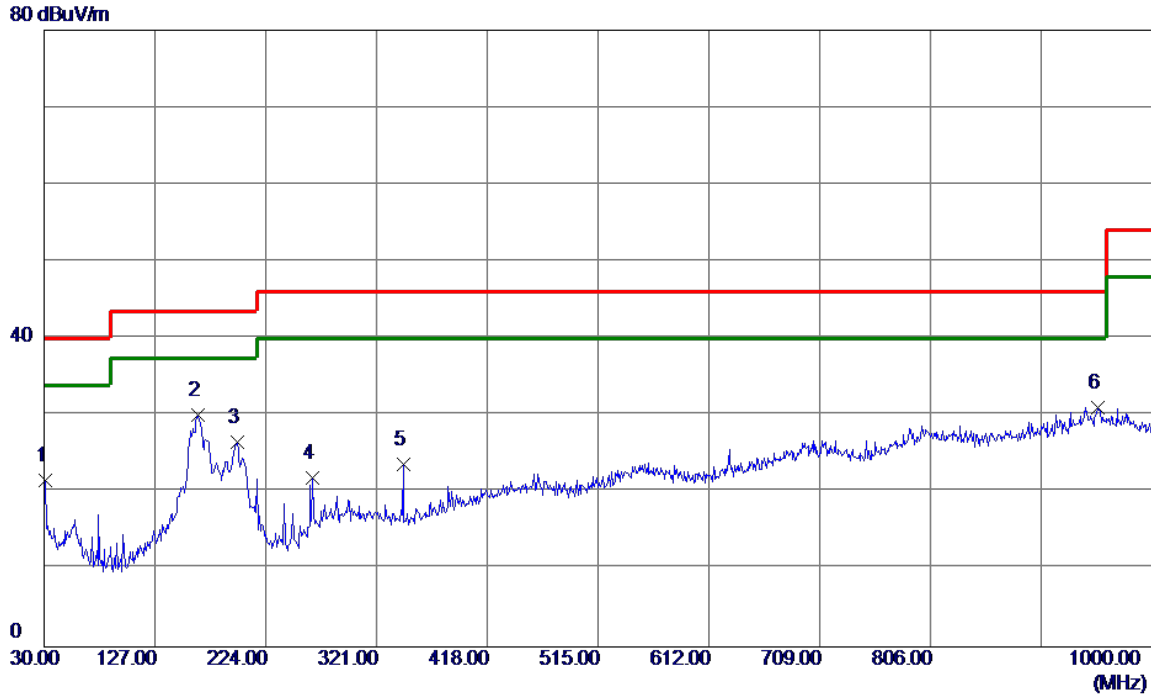

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	31.4550	36.60	-15.02	21.58	40.00	-18.42	Peak	
2 *	164.8300	41.03	-10.89	30.14	43.50	-13.36	Peak	
3	198.7800	41.61	-15.10	26.51	43.50	-16.99	Peak	
4	265.2250	34.89	-12.99	21.90	46.00	-24.10	Peak	
5	344.7650	34.70	-11.00	23.70	46.00	-22.30	Peak	
6	952.9550	29.75	1.34	31.09	46.00	-14.91	Peak	

Test Mode: TX 2440 MHz _CH19_1Mbps

Horizontal

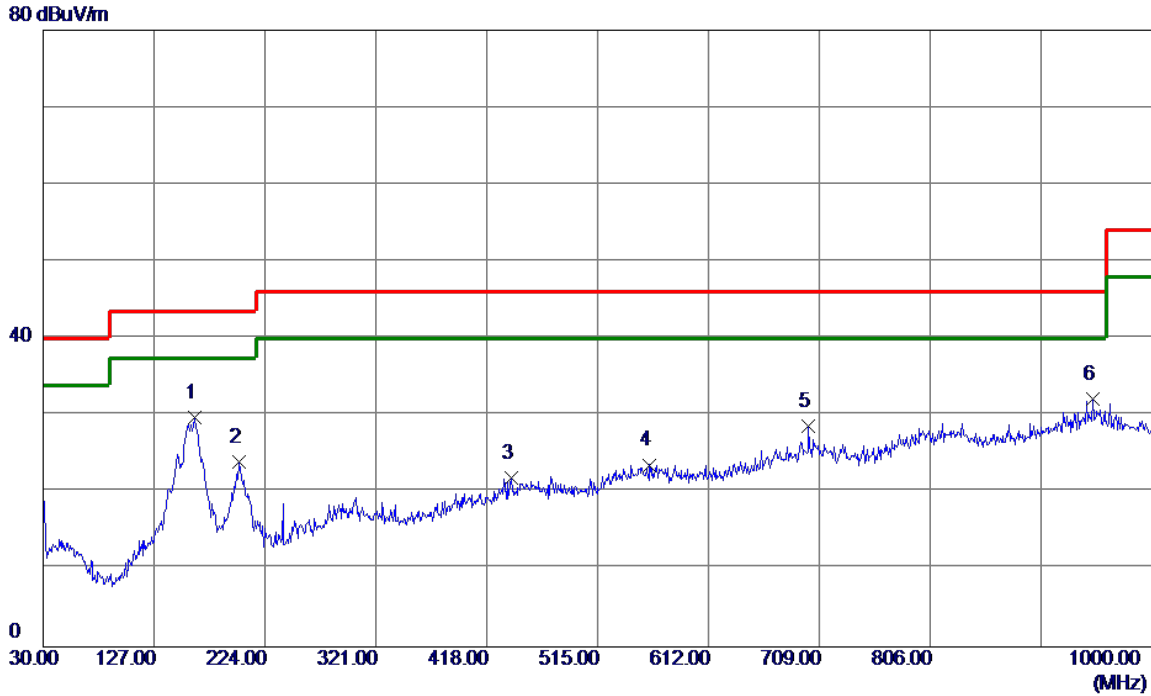


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	162.8900	40.53	-10.77	29.76	43.50	-13.74	Peak	
2	201.6900	39.21	-15.21	24.00	43.50	-19.50	Peak	
3	439.8250	29.80	-7.81	21.99	46.00	-24.01	Peak	
4	560.5900	29.24	-5.64	23.60	46.00	-22.40	Peak	
5	699.7849	31.44	-2.76	28.68	46.00	-17.32	Peak	
6	948.1050	30.87	1.33	32.20	46.00	-13.80	Peak	

APPENDIX C - RADIATED EMISSION (ABOVE 1000 MHZ)

Test Mode : TX 2402 MHz _CH00_1Mbps

Vertical

130 dBuV/m

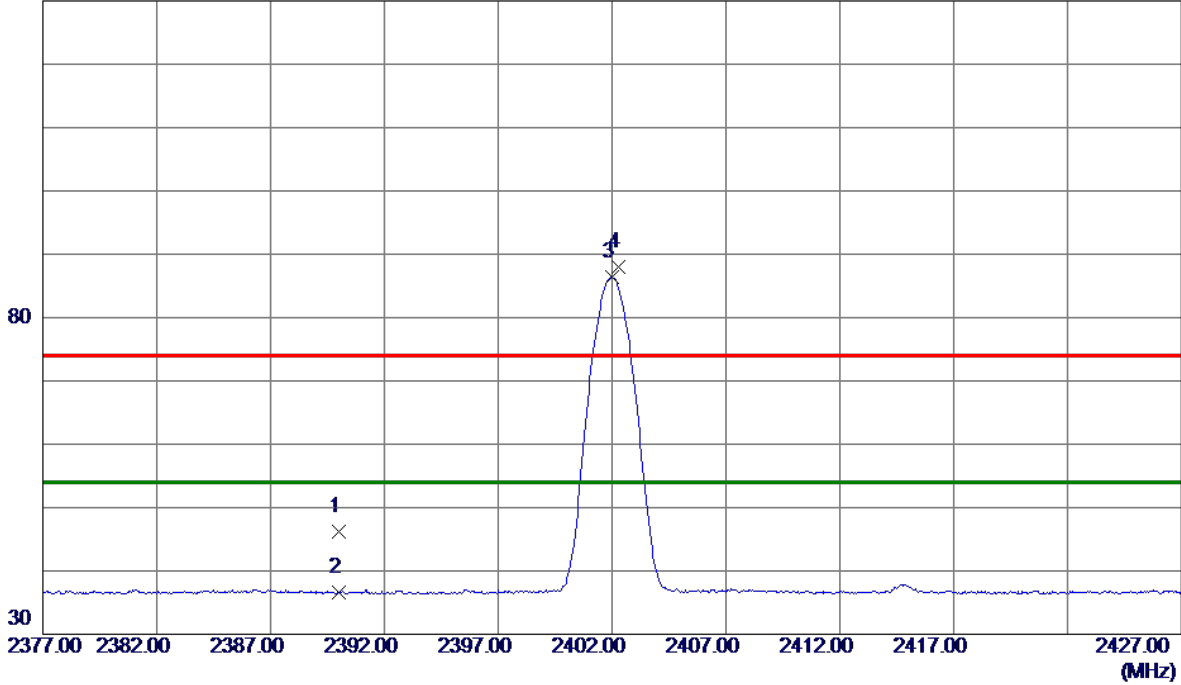


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	39.53	6.62	46.15	74.00	-27.85	Peak	
2	2390.0000	29.96	6.62	36.58	54.00	-17.42	AVG	
3 *	2401.9750	79.86	6.62	86.48	54.00	32.48	AVG	No Limit
4	2402.2750	81.45	6.62	88.07	74.00	14.07	Peak	No Limit

Test Mode : TX 2402 MHz _CH00_1Mbps

Horizontal

130 dBuV/m

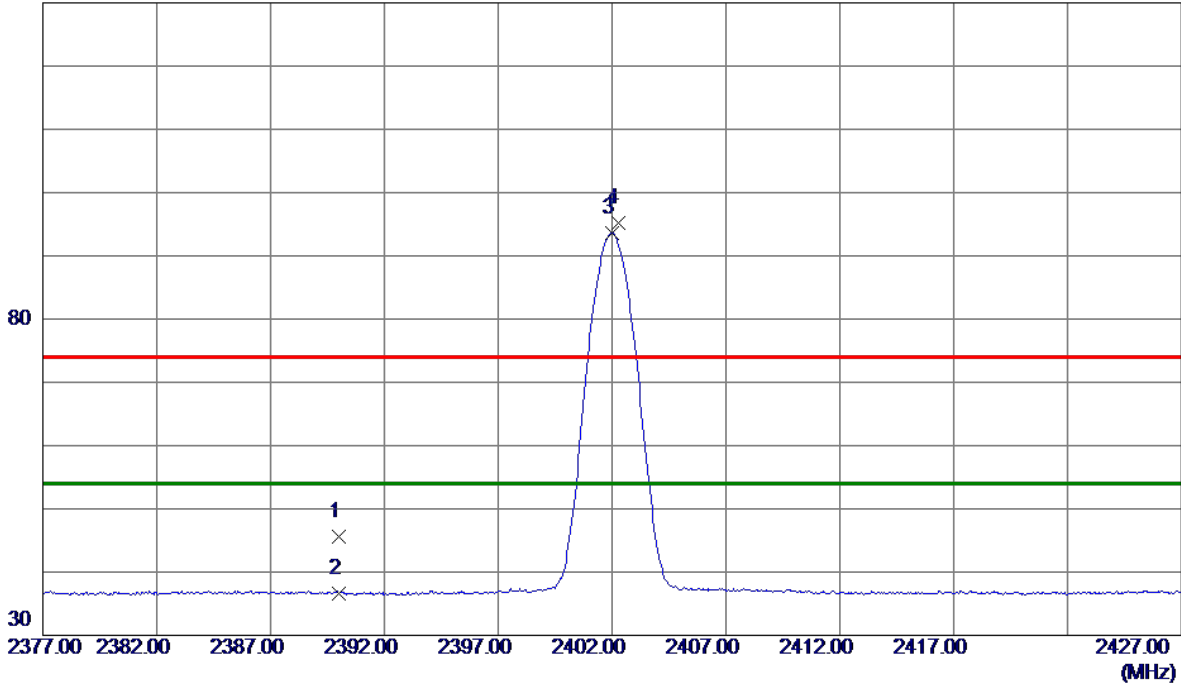


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	39.01	6.62	45.63	74.00	-28.37	Peak	
2	2390.0000	29.97	6.62	36.59	54.00	-17.41	AVG	
3 *	2401.9750	87.07	6.62	93.69	54.00	39.69	AVG	No Limit
4	2402.2500	88.57	6.62	95.19	74.00	21.19	Peak	No Limit

Test Mode : TX 2440 MHz _CH19_1Mbps

Vertical

130 dBuV/m

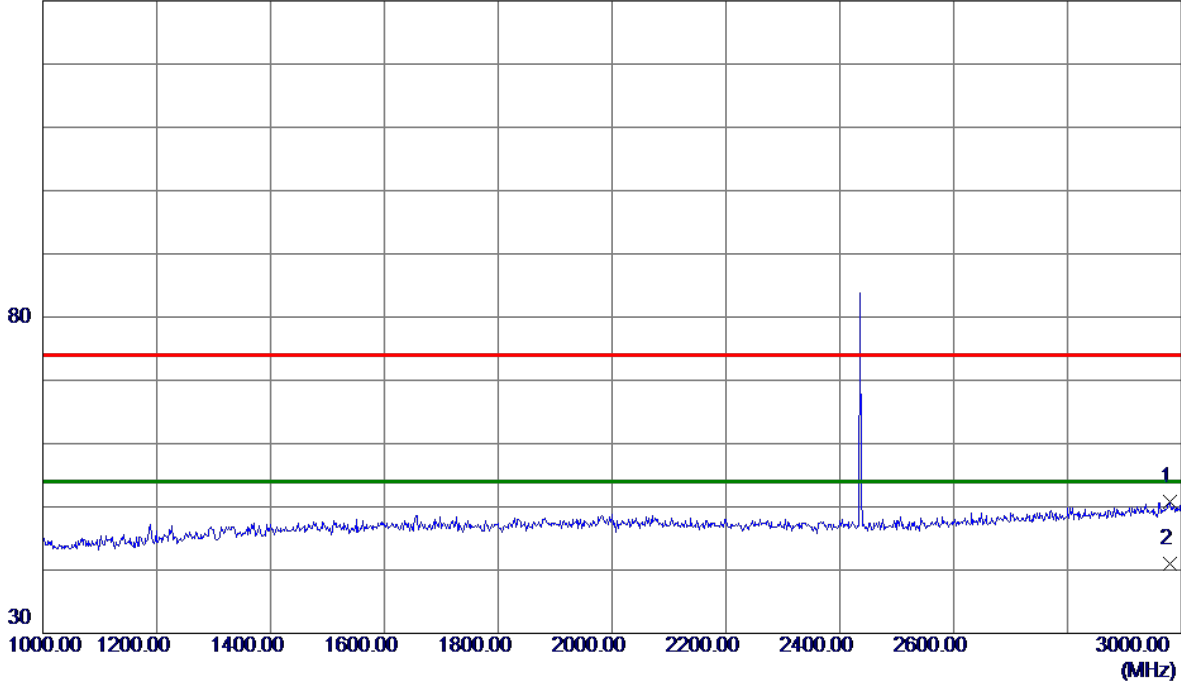


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2981.0000	40.98	9.83	50.81	74.00	-23.19	Peak	
2 *	2981.0000	31.21	9.83	41.04	54.00	-12.96	AVG	

Test Mode : TX 2440 MHz _CH19_1Mbps

Vertical

130 dBuV/m

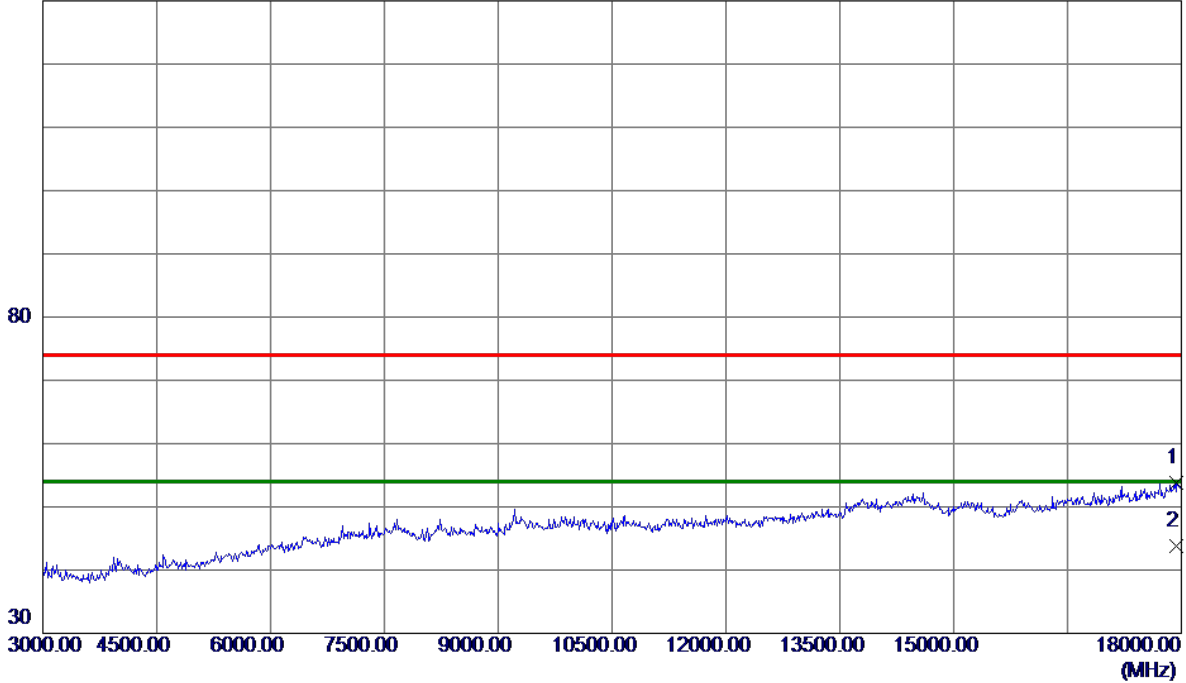


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	17940.0000	34.61	19.19	53.80	74.00	-20.20	Peak	
2 *	17940.0000	24.58	19.19	43.77	54.00	-10.23	AVG	

Test Mode : TX 2440 MHz _CH19_1Mbps

Vertical


130 dBuV/m

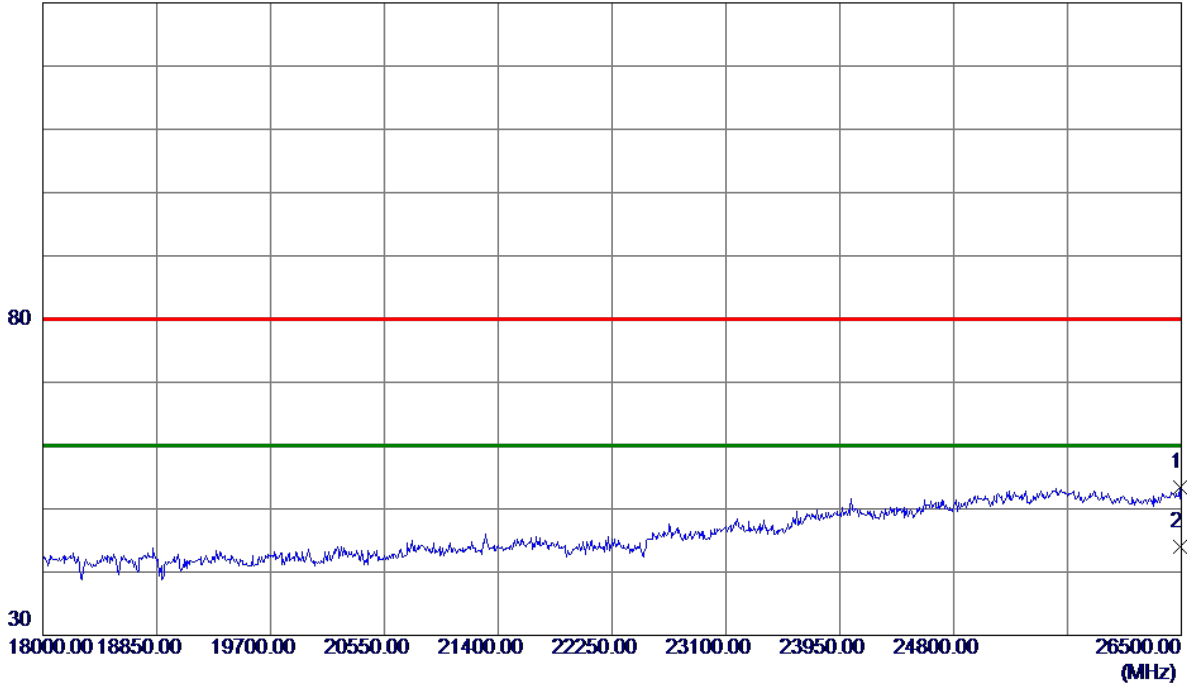

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	26487.2500	30.70	22.79	53.49	80.00	-26.51	Peak	
2 *	26487.2500	21.15	22.79	43.94	60.00	-16.06	AVG	

Test Mode : TX 2440 MHz _CH19_1Mbps

Horizontal

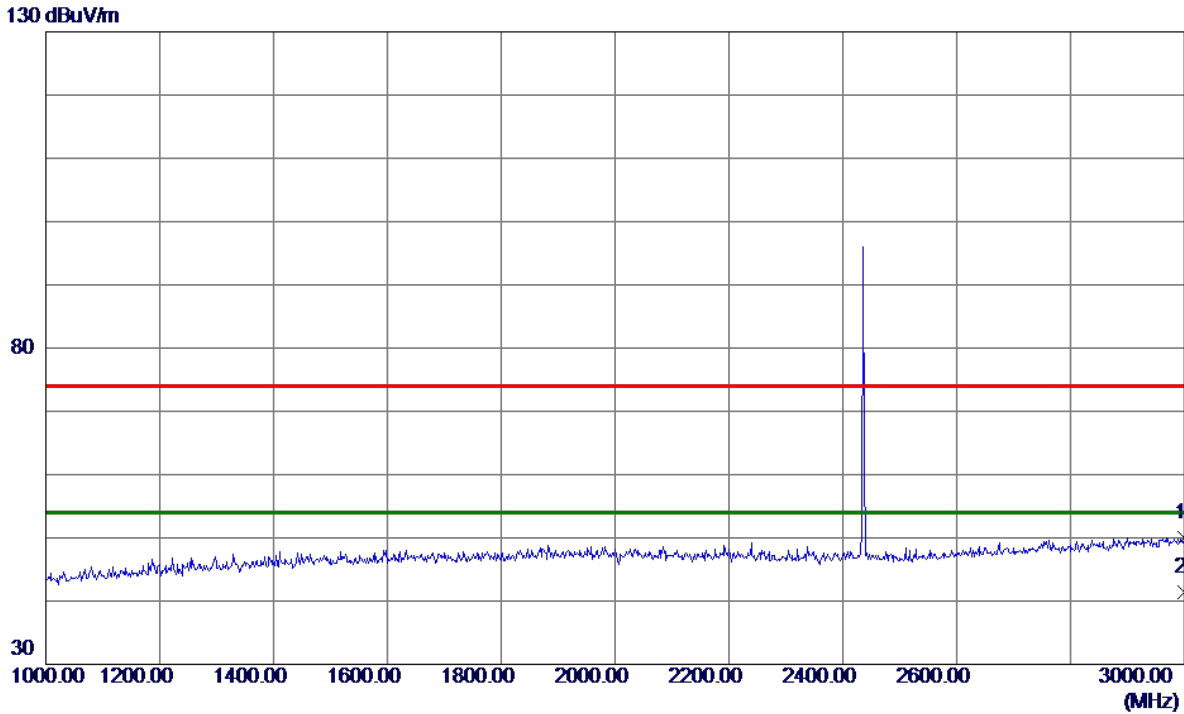


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2999.0000	40.06	9.95	50.01	74.00	-23.99	Peak	
2 *	2999.0000	31.37	9.95	41.32	54.00	-12.68	AVG	

Test Mode : TX 2440 MHz _CH19_1Mbps

Horizontal

130 dBuV/m

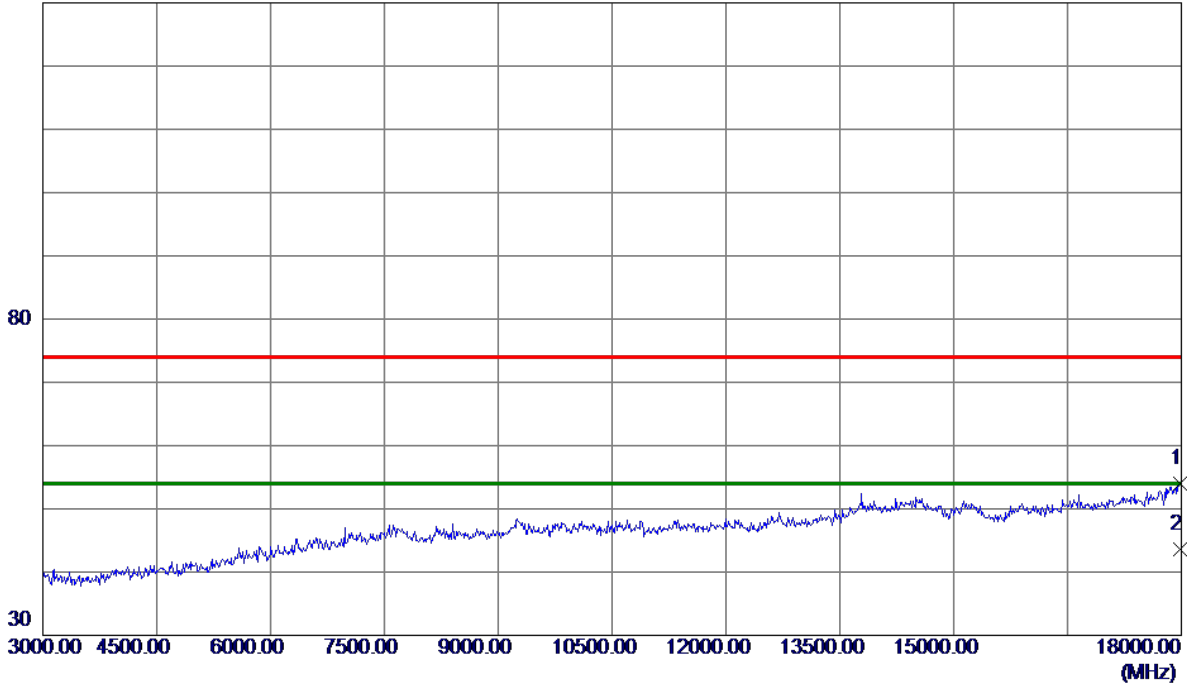


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	17977.5000	34.77	19.30	54.07	74.00	-19.93	Peak	
2 *	17977.5000	24.25	19.30	43.55	54.00	-10.45	AVG	

Test Mode : TX 2440 MHz _CH19_1Mbps

Horizontal

130 dBuV/m

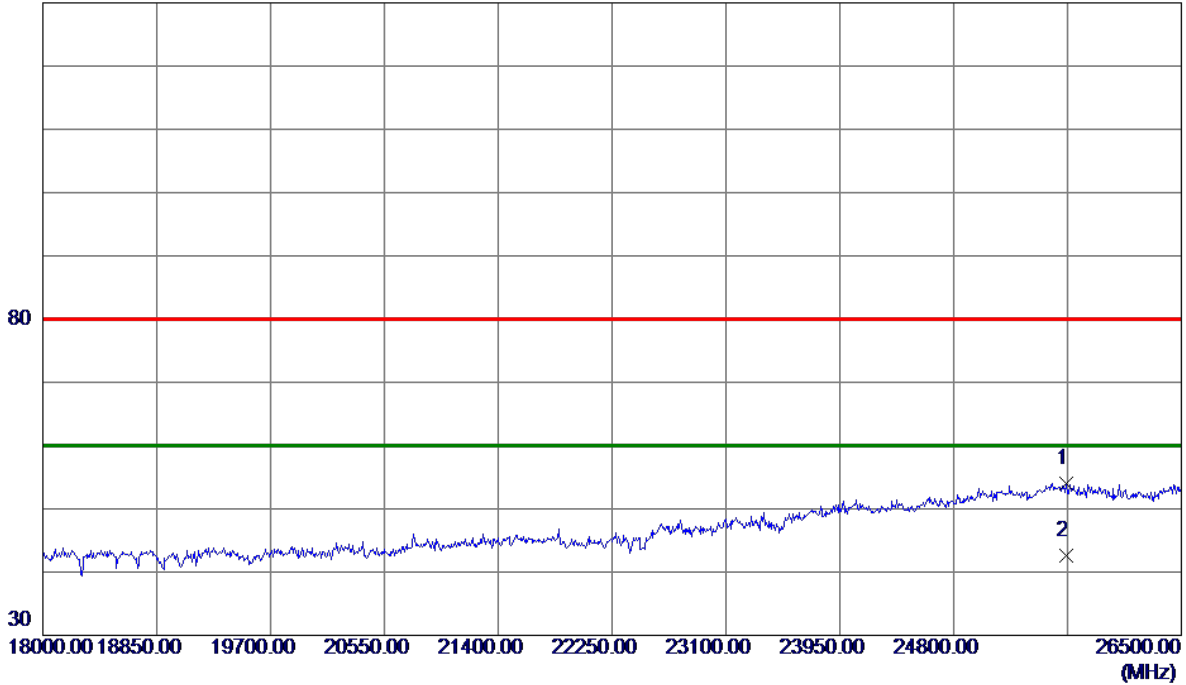


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25641.5000	32.00	21.96	53.96	80.00	-26.04	Peak	
2 *	25641.5000	20.59	21.96	42.55	60.00	-17.45	AVG	

Test Mode : TX 2480 MHz _CH39_1Mbps

Vertical

130 dBuV/m

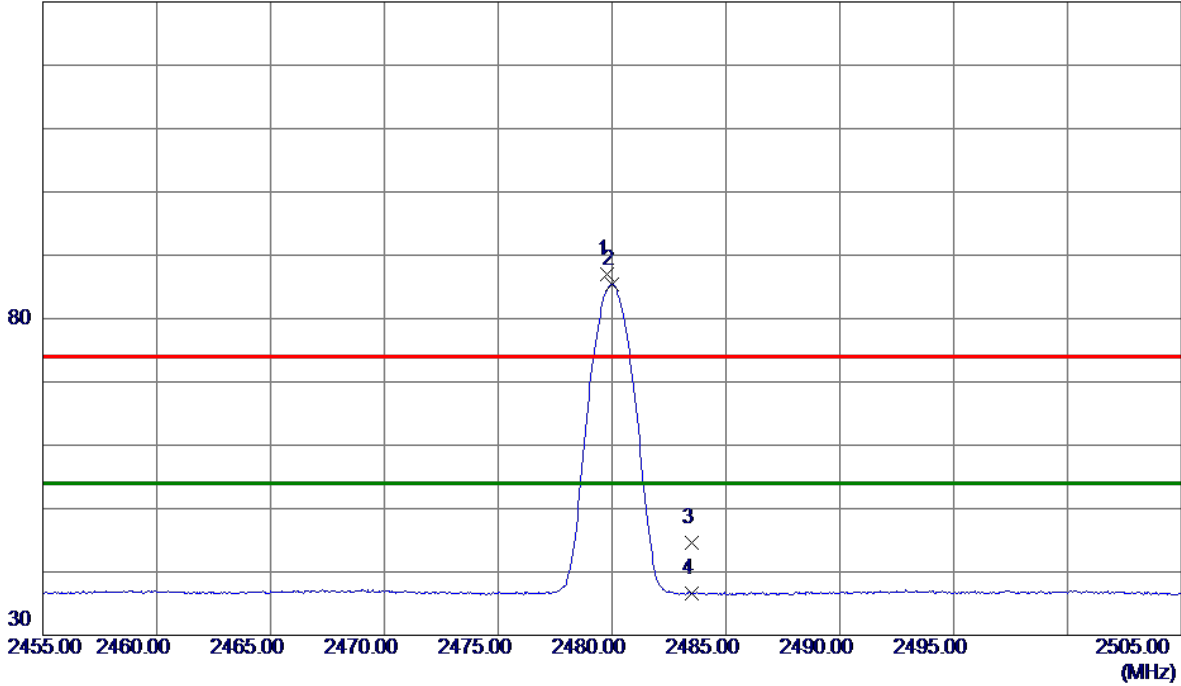


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2479.7750	80.37	6.61	86.98	74.00	12.98	Peak	No Limit
2 *	2479.9750	78.84	6.61	85.45	54.00	31.45	AVG	No Limit
3	2483.5000	37.97	6.61	44.58	74.00	-29.42	Peak	
4	2483.5000	29.92	6.61	36.53	54.00	-17.47	AVG	

Test Mode : TX 2480 MHz _CH39_1Mbps

Horizontal

130 dBuV/m

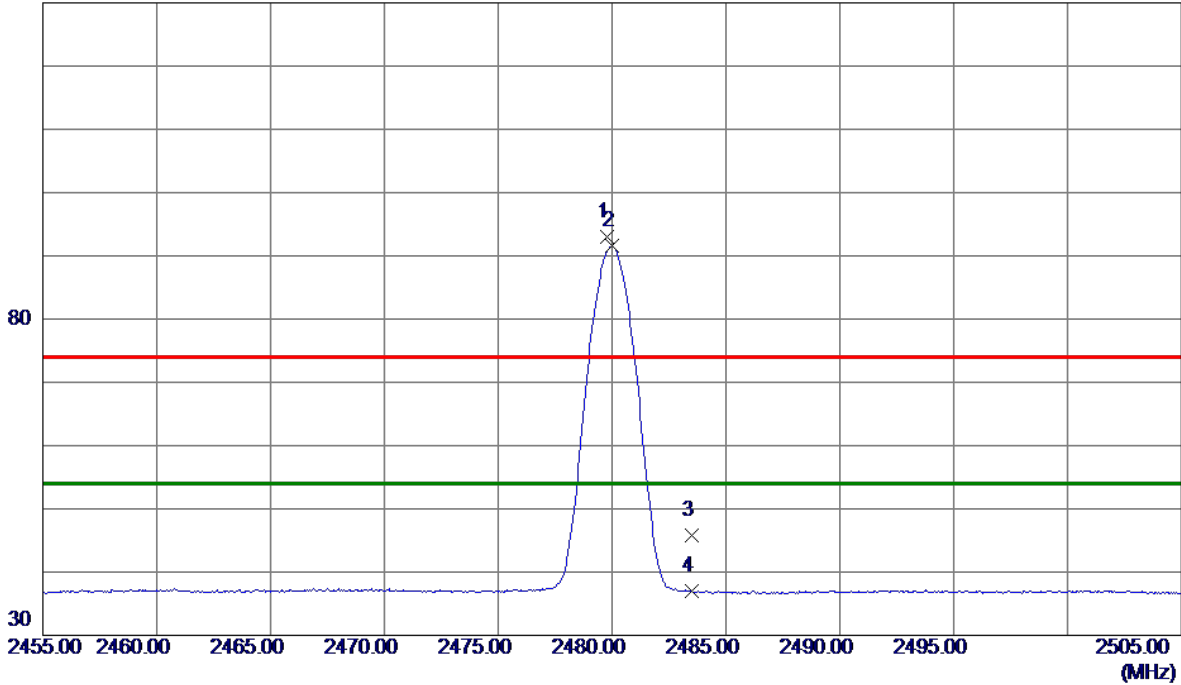

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2479.7750	86.47	6.61	93.08	74.00	19.08	Peak	No Limit
2 *	2480.0000	84.92	6.61	91.53	54.00	37.53	AVG	No Limit
3	2483.5000	39.15	6.61	45.76	74.00	-28.24	Peak	
4	2483.5000	30.37	6.61	36.98	54.00	-17.02	AVG	

End of Test Report