



RF TEST REPORT

Applicant Huawei Technologies Co., Ltd.
FCC ID QISE3619U-828
Product Huawei Locator
Model E3619U-828
Report No. R1812H0172-R2V1
Issue Date January 25, 2019

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2018)/ FCC CFR 47 Part 22H (2018)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the Test Report	4
1.2. Test facility	4
1.3. Testing Location	5
2. General Description of Equipment under Test.....	6
3. Applied Standards.....	8
4. Test Configuration.....	9
5. Test Case Results.....	11
5.1. RF Power Output.....	11
5.2. Effective Radiated Power	13
5.3. Occupied Bandwidth	16
5.4. Band Edge Compliance.....	21
5.5. Peak-to-Average Power Ratio (PAPR)	29
5.6. Frequency Stability	31
5.7. Spurious Emissions at Antenna Terminals	36
5.8. Radiates Spurious Emission	42
6. Main Test Instruments	47

Summary of measurement results

No.	Test Type	Clause in FCC rules	Verdict
1	RF power output	2.1046	PASS
2	Effective Radiated Power	22.913(a)(5)	PASS
3	Occupied Bandwidth	2.1049	PASS
4	Band Edge Compliance	2.1051 / 22.917(a)	PASS
5	Peak-to-Average Power Ratio	22.913(d)/ KDB 971168 D01(5.7)	PASS
6	Frequency Stability	2.1055 / 22.355	PASS
7	Spurious Emissions at Antenna Terminals	2.1051 / 22.917(a)	PASS
8	Radiates Spurious Emission	2.1053 / 22.917 (a)	PASS
Date of Testing: January 8, 2019 ~ January 15, 2019			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard.			



1. Test Laboratory

1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

Client Information

Applicant	Huawei Technologies Co., Ltd.
Applicant address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.China.
Manufacturer	Huawei Technologies Co., Ltd.
Manufacturer address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.China.

General Information

EUT Description			
Model	E3619U-828		
IMEI	/		
Hardware Version	IM1E3619UM VER.E		
Software Version	1.0.0.35(H126SP9C00)		
Power Supply	Battery		
Antenna Type	Internal Antenna		
Antenna Gain	GSM 850: -8.5dBi eMTC Band 5: -8.5dBi		
Test Mode(s)	GSM 850, eMTC Band 5		
Test Modulation	(GSM)GMSK,8PSK; (eMTC)QPSK 16QAM;		
GPRS Multislot Class	12		
EGPRS Multislot Class	12		
eMTC Category	M1		
Maximum E.R.P.	GSM 850:	22.16dBm	
	eMTC Band 5:	16.16dBm	
Rated Power Supply Voltage	3.82V		
Extreme Voltage	Minimum: 3.45V Maximum: 4.4V		
Extreme Temperature	Lowest: -15°C Highest: +55°C		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM850	824 ~ 849	869 ~ 894
	eMTC Band 5	824 ~ 849	869 ~ 894
EUT Accessory			
Battery 1	Manufacturer: Amperex Technology Limited Model: HB642735ECW		
Battery 2	Manufacturer: Tianjin Lishen Battery Joint-Stock Co., Ltd Model: HB642735ECW		
USB Cable 1	Manufacturer: HUIZHOU DEHONG TECHENOLGY CO., LTD 17cm, shielded		



USB Cable 2	Manufacturer: NINGBO BROAD TELECOMMUNICATION CO.,LTD 17cm, shielded
USB Cable 3	Manufacturer: Luxshare Precision Industry Co., Ltd. 17cm, shielded
EMI suppression Ferrite core	Manufacturer: Prosperity Electronic Co., Limited. Model: A2 RC 103B
<p>Note: The information of the EUT is declared by the manufacturer.</p> <p>2. There is more than one USB cable, one Battery, each one should be applied throughout the compliance test respectively, and however, only the worst case (USB cable 1 and Battery 1) will be recorded in this report.</p>	



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR47 Part 2 (2018)

FCC CFR 47 Part 22H (2018)

ANSI C63.26 (2015)

KDB 971168 D01 Power Meas License Digital Systems v03r01

4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Z axis, vertical polarization) and the worst case was recorded.

All mode and data rates and positions were investigated. Subsequently, only the worst case emissions are reported.

The following testing in GSM / eMTC is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below:

Test items	Modes/Modulation
	GSM 850
RF power output	GPRS EGPRS
Effective Radiated Power	GPRS(1Tx slot) EGPRS(1Tx slot)
Occupied Bandwidth	GPRS(1Tx slot) EGPRS(1Tx slot)
Band Edge Compliance	GPRS(1Tx slot) EGPRS(1Tx slot)
Peak-to-Average Power Ratio	GPRS(1Tx slot) EGPRS(1Tx slot)
Frequency Stability	GPRS(1Tx slot) EGPRS(1Tx slot)
Spurious Emissions at Antenna Terminals	GPRS(1Tx slot)
Radiates Spurious Emission	GPRS(1Tx slot)



Test modes are chosen as the worst case configuration below for eMTC Band 5.

Test items	Bandwidth (MHz)				Modulation		RB			Test Channel		
	1.4	3	5	10	QPSK	16QAM	1	50%	100%	L	M	H
RF power output	○	○	○	○	○	○	○	○	○	○	○	○
Effective Isotropic Radiated power	○	○	○	○	○	○	○	○	○	○	○	○
Occupied Bandwidth	○	○	○	○	○	○	-	-	○	-	○	-
Band Edge Compliance	○	○	○	○	○	○	○	-	○	○	-	○
Peak-to-Average Power Ratio	○	○	○	○	○	○	-	-	○	-	○	-
Frequency Stability	○	○	○	○	○	○	○	○	○	○	○	○
Spurious Emissions at Antenna Terminals	○	○	○	○	○	-	○	-	-	○	○	○
Radiates Spurious Emission	○	-	○	○	○	-	○	-	-	-	○	-
Note	1. The mark "○" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.											

5. Test Case Results

5.1. RF Power Output


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

Test Setup

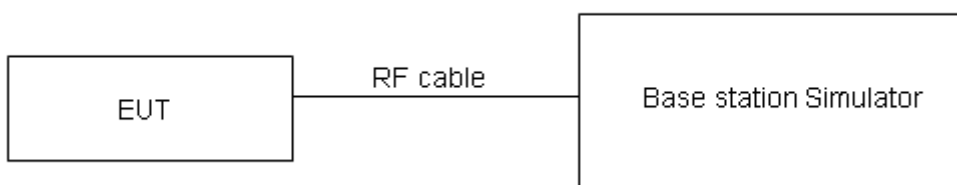

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

No specific RF power output requirements in part 2.1046.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.



Test Results

GSM 850		Conducted Power(dBm)		
		Channel 128	Channel 190	Channel 251
		824.2 (MHz)	836.6 (MHz)	848.8 (MHz)
GPRS/EGPRS (GMSK)	1TXslot	31.89	32.23	31.98
	2TXslots	28.79	28.96	28.84
	3TXslots	27.07	27.18	27.06
	4TXslots	25.08	24.98	25.04
EGPRS (8PSK)	1TXslot	26.69	26.63	26.72
	2TXslots	23.73	23.87	23.84
	3TXslots	21.54	21.47	21.52
	4TXslots	19.87	19.89	19.76

eMTC Band 5	Channel/ Frequency(MHz)	Index	RB# RBstart	Conducted Power (dBm)	
				QPSK	16QAM
1.4MHz	20407/824.7	0	1#0	23.51	23.04
		0	6#0	21.75	21.70
	20525/836.5	0	1#0	23.59	22.23
		0	6#0	21.74	21.93
	20643/848.3	0	1#5	24.04	22.30
		0	6#0	21.87	22.01
3MHz	20415/825.5	0	1#0	24.07	22.35
		0	6#0	21.85	22.35
	20525/836.5	0	1#0	23.98	22.34
		0	6#0	21.76	22.28
	20635/847.5	1	1#5	23.88	22.32
		1	6#0	21.86	22.28
5MHz	20425/826.5	0	1#0	23.91	24.23
		0	6#0	22.90	22.15
	20525/836.5	0	1#0	23.65	23.52
		0	6#0	22.85	22.13
	20625/846.5	3	1#5	24.01	23.68
		3	6#0	22.83	21.92
10MHz	20450/829	0	1#0	23.68	23.36
		0	4#0	23.58	22.43
	20525/836.5	0	1#0	23.27	23.14
		0	4#0	23.63	22.91
	20600/844	7	1#5	23.57	23.36
		7	4#2	23.39	22.94

5.2. Effective Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa



Methods of Measurement

The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).

- a) Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.
- b) Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).
- c) Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.
- d) Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading. $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$
- e) Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation: $ERP \text{ (dBm)} = \text{LVL (dBm)} + \text{LOSS (dB)}$
- f) The maximum ERP is the maximum value determined in the preceding step.
- g) When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g. transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:
 $EIRP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$
where: dBd refers to gain relative to an ideal dipole.
 $EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB.)}$

The RB allocation refers to section 5.1, using the maximum output power configuration.

Test setup

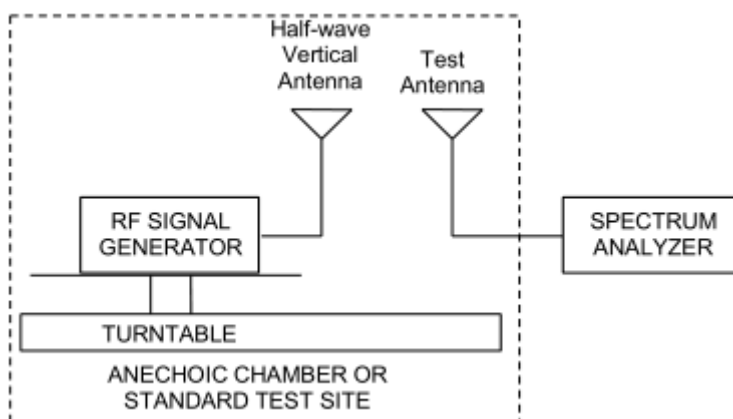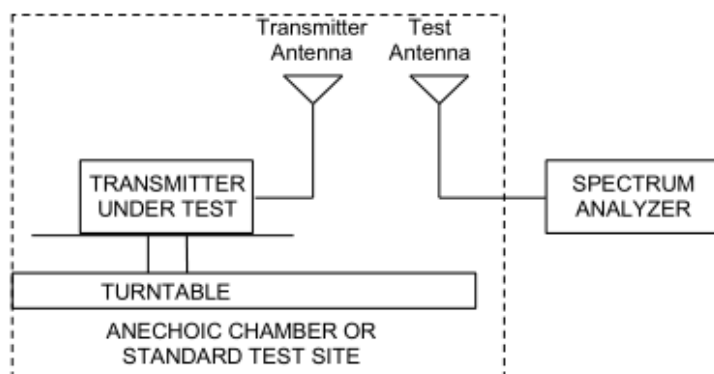

Limits

Rule Part 22.913(a)(5) specifies that "Mobile/portable stations are limited to 7 watts ERP".

Limit	$\leq 7 \text{ W}$ (38.45 dBm)
-------	--------------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 1.19 \text{ dB}$

**Test Results:**

The measurement is performed for both of horizontal and vertical antenna Polarization, and only the data of worst mode is recorded in this report.

Mode	Channel	Frequency (MHz)	Polarization	ERP (dBm)	Limit (dBm)	Conclusion
GPRS 850	Low	824.2	vertical	20.75	38.45	Pass
	Mid	836.6	vertical	21.50	38.45	Pass
	High	848.8	vertical	22.16	38.45	Pass
EGPRS 850	Low	824.2	vertical	18.50	38.45	Pass
	Mid	836.6	vertical	19.27	38.45	Pass
	High	848.8	vertical	19.83	38.45	Pass

eMTC Band 5							
Band width	Channel/ Frequency(MHz)	Polarization	RB	Index	ERP (dBm)	Limit (dBm)	Conclusion
1.4 MHz (QPSK)	20407/824.7	vertical	1#0	0	11.58	38.45	Pass
	20525/836.5	vertical	1#2	0	12.69	38.45	Pass
	20643/848.3	vertical	1#5	0	13.39	38.45	Pass
3 MHz (QPSK)	20415/825.5	vertical	1#0	0	11.64	38.45	Pass
	20525/836.5	vertical	1#5	0	12.36	38.45	Pass
	20635/847.5	vertical	1#5	1	13.03	38.45	Pass
5 MHz (QPSK)	20425/826.5	vertical	1#0	0	11.69	38.45	Pass
	20525/836.5	vertical	1#5	1	12.52	38.45	Pass
	20625/846.5	vertical	1#5	3	12.86	38.45	Pass
10 MHz (QPSK)	20450/829	vertical	4#0	0	11.68	38.45	Pass
	20525/836.5	vertical	4#2	3	12.06	38.45	Pass
	20600/844	vertical	4#2	7	12.85	38.45	Pass
1.4 MHz (16QAM)	20407/824.7	vertical	1#0	0	11.06	38.45	Pass
	20525/836.5	vertical	1#2	0	16.16	38.45	Pass
	20643/848.3	vertical	1#5	0	12.86	38.45	Pass
3 MHz (16QAM)	20415/825.5	vertical	1#0	0	11.22	38.45	Pass
	20525/836.5	vertical	1#5	0	11.88	38.45	Pass
	20635/847.5	vertical	1#5	1	12.54	38.45	Pass
5 MHz (16QAM)	20425/826.5	vertical	1#0	0	11.22	38.45	Pass
	20525/836.5	vertical	1#5	1	11.96	38.45	Pass
	20625/846.5	vertical	1#5	3	12.39	38.45	Pass
10 MHz (16QAM)	20450/829	vertical	4#0	0	11.14	38.45	Pass
	20525/836.5	vertical	4#2	3	11.60	38.45	Pass
	20600/844	vertical	4#2	7	12.34	38.45	Pass

5.3. Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement


The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 3kHz, VBW is set to 10kHz for GSM 850

RBW is set to 51kHz, VBW is set to 160kHz for eMTC Band 5

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

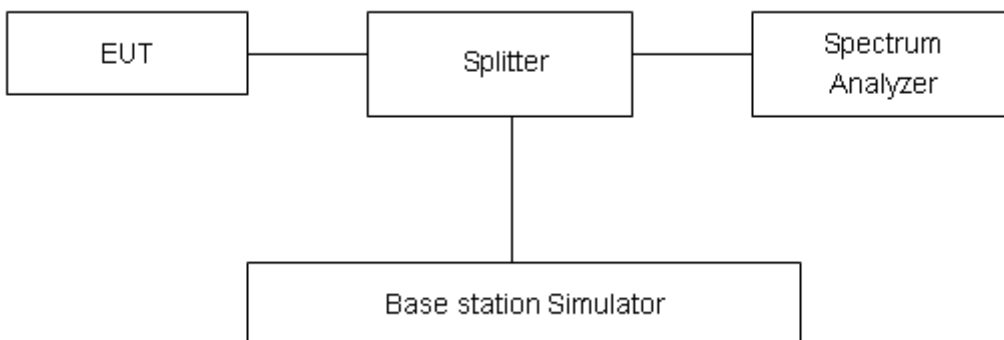

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 624\text{Hz}$.





Test Result

Mode	Channel	Frequency (MHz)	99% Power Bandwidth (MHz)	-26dBc Bandwidth(MHz)
GPRS 850 (GMSK)	128	824.2	0.2439	0.3112
	190	836.6	0.2431	0.3117
	251	848.8	0.2417	0.3070
EGPRS 850 (8-PSK)	128	824.2	0.2440	0.3014
	190	836.6	0.2424	0.3080
	251	848.8	0.2440	0.3007

Mode	Bandwidth	Modulation	Channel/ Frequency(MHz)	RB	Index	Bandwidth(MHz)	
						99% Power	-26dBc
eMTC Band 5	1.4MHz	QPSK	20525/836.5	6#0	0	1.1079	1.328
		16QAM	20525/836.5	6#0	0	0.9429	1.188
	3MHz	QPSK	20525/836.5	6#0	0	1.1711	2.005
		16QAM	20525/836.5	6#0	0	0.9842	1.342
	5MHz	QPSK	20525/836.5	6#0	0	1.1744	2.083
		16QAM	20525/836.5	6#0	0	1.0345	1.535
	10MHz	QPSK	20525/836.5	6#0	0	1.1890	2.024
		16QAM	20525/836.5	6#0	0	1.0793	1.563

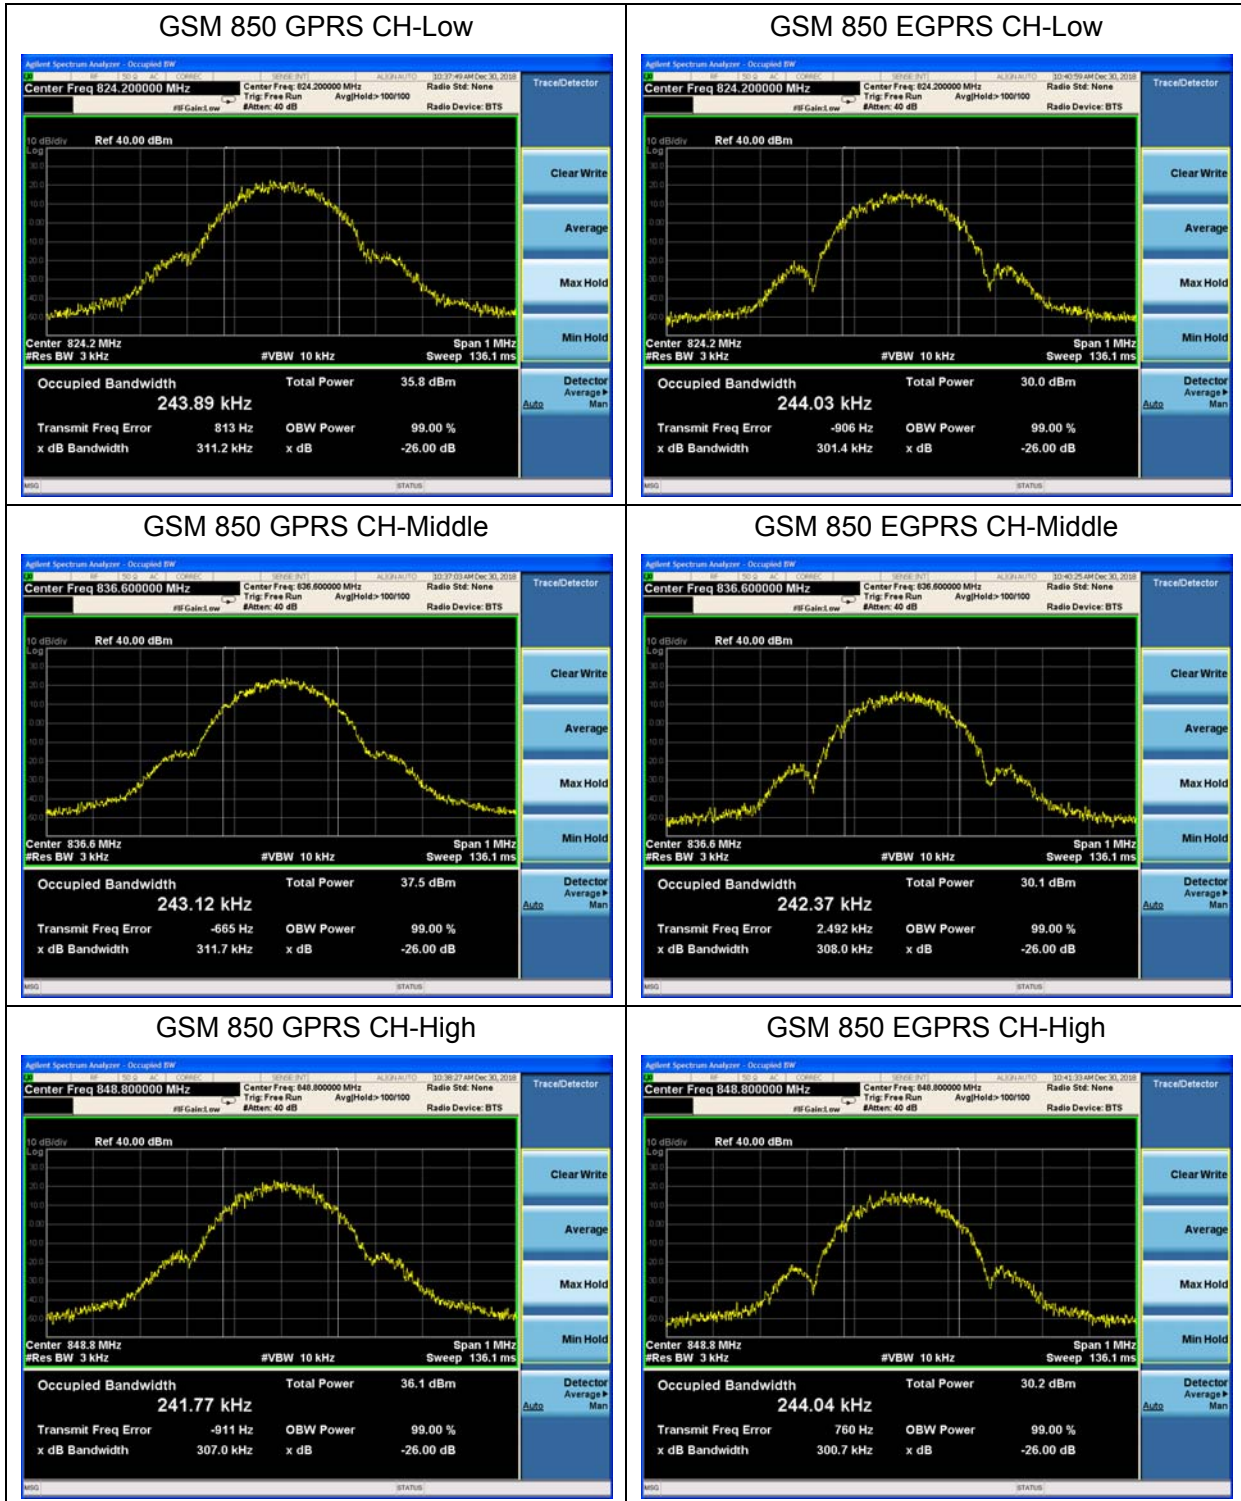

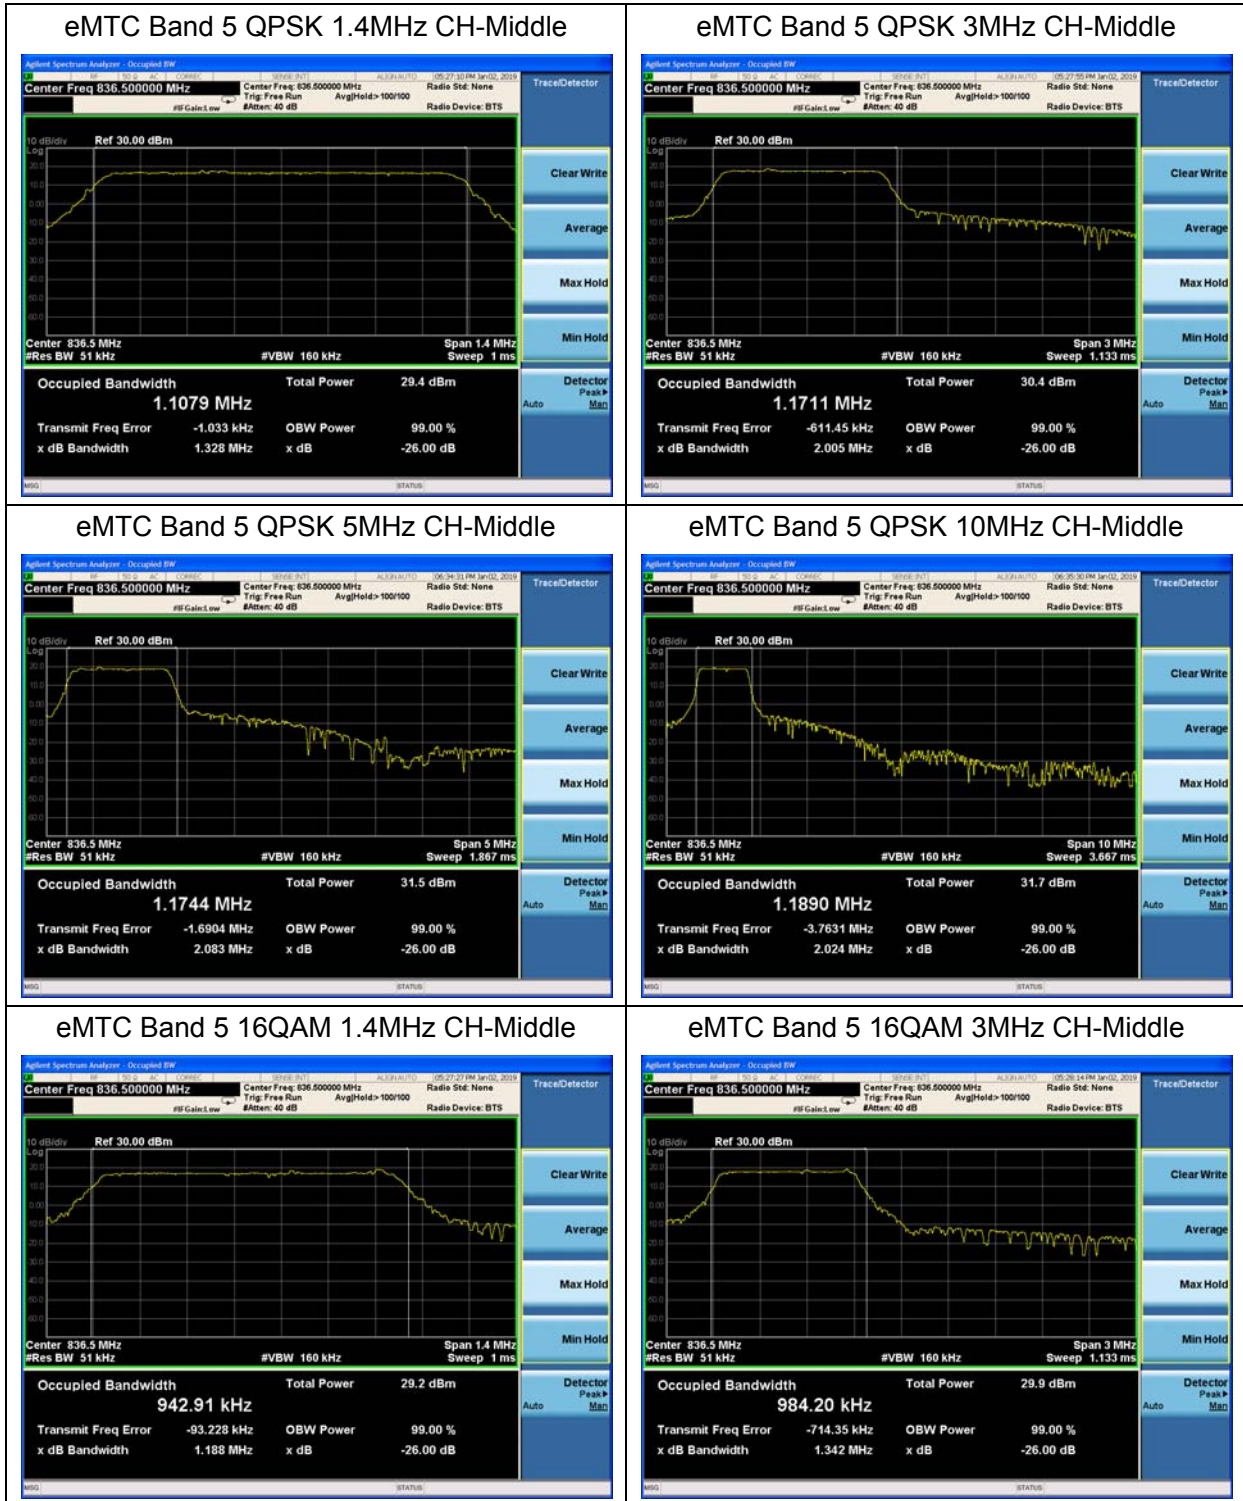

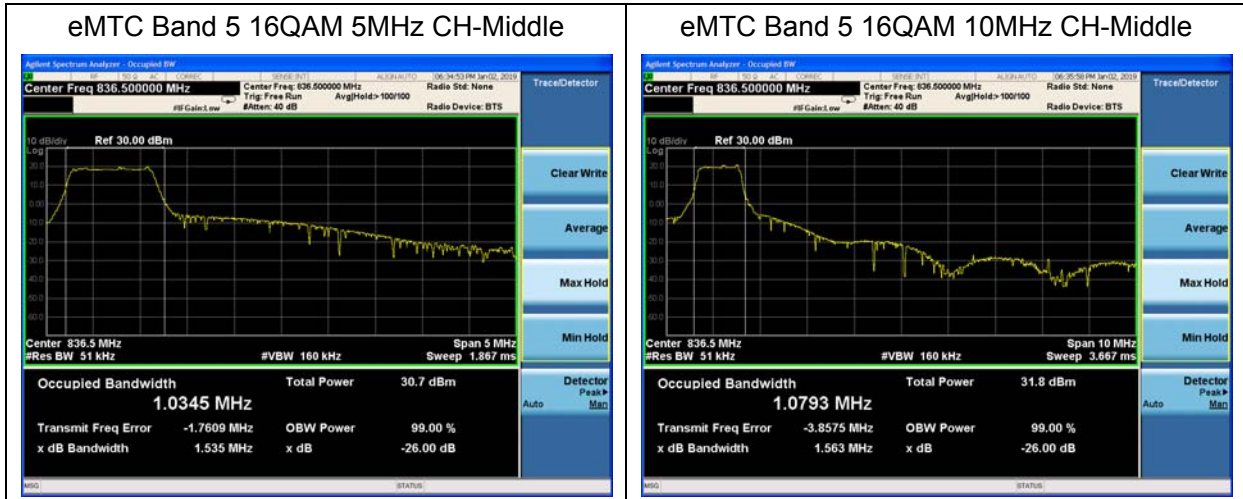

5.4. Band Edge Compliance

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement


The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The average detector is used.

RBW is set to 3kHz,VBW is set to 10kHz for GSM 850

RBW is set to 51 kHz, VBW is set to 160 kHz for eMTC Band 5

Spectrum analyzer plots are included on the following pages.

Test Setup

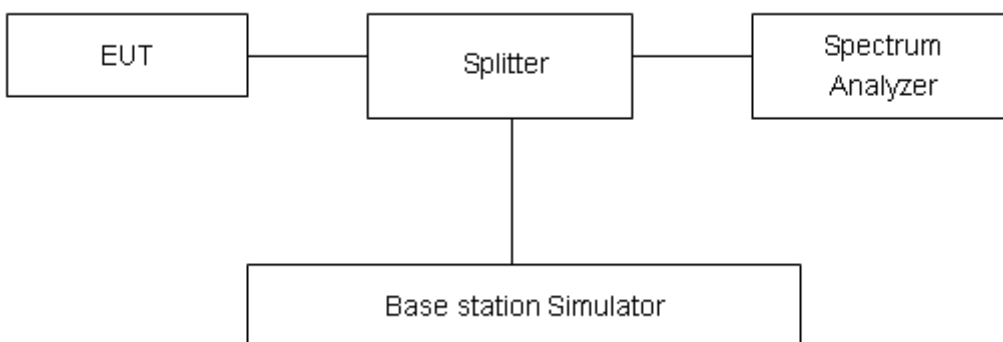

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684$ dB.

Test Result:


GSM 850 GPRS CH-Low



GSM 850 GPRS CH-High




GSM 850 EGPRS CH-Low

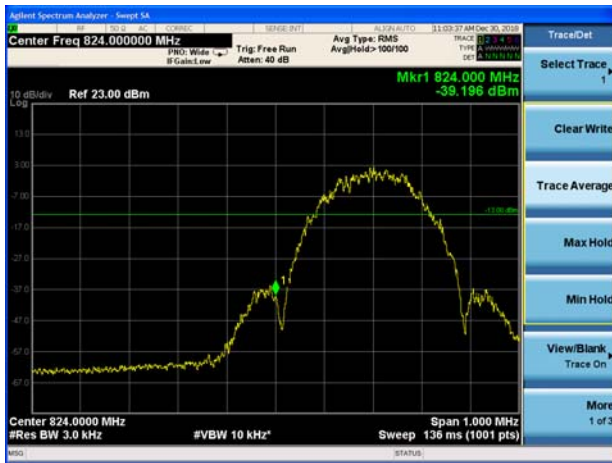


GSM 850 EGPRS CH-High




eMTC Band 5 QPSK 1.4MHz CH-Low 1RB

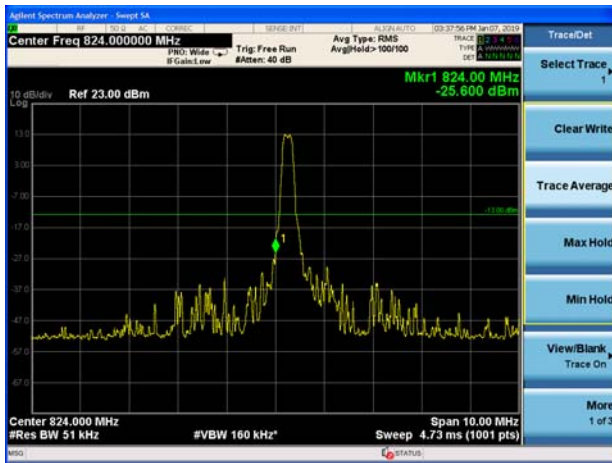


eMTC Band 5 QPSK 1.4MHz CH-High 1RB

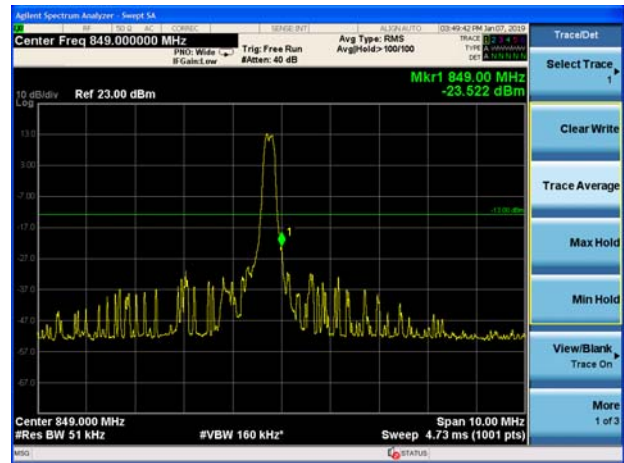


eMTC Band 5 QPSK 1.4MHz CH-Low 100%RB

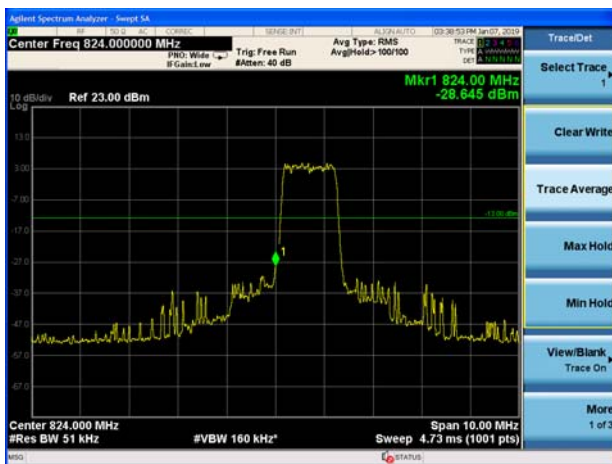


eMTC Band 5 QPSK 1.4MHz CH-High 100%RB

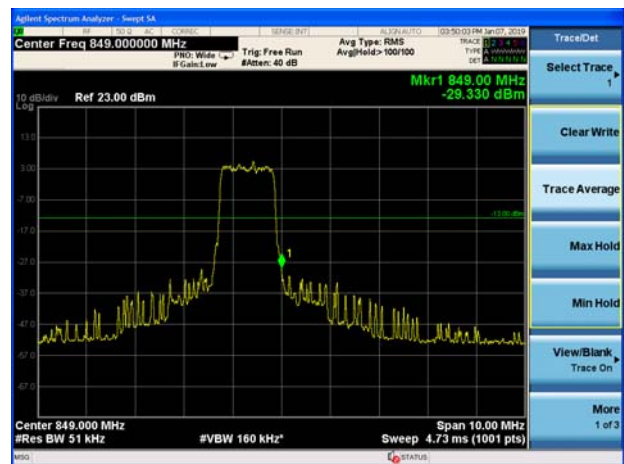

eMTC Band 5 QPSK 3MHz CH-Low 1RB

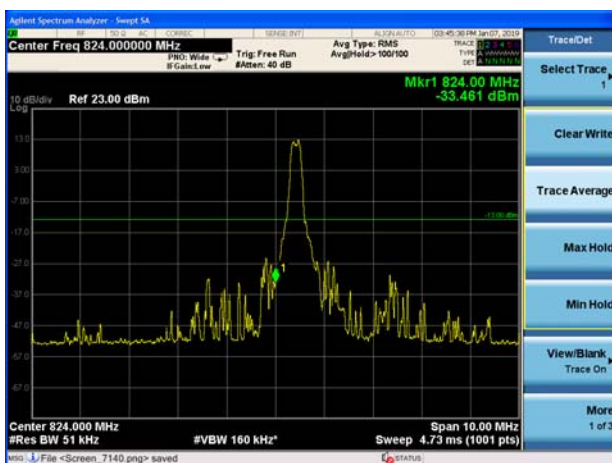


eMTC Band 5 QPSK 3MHz CH-High 1RB

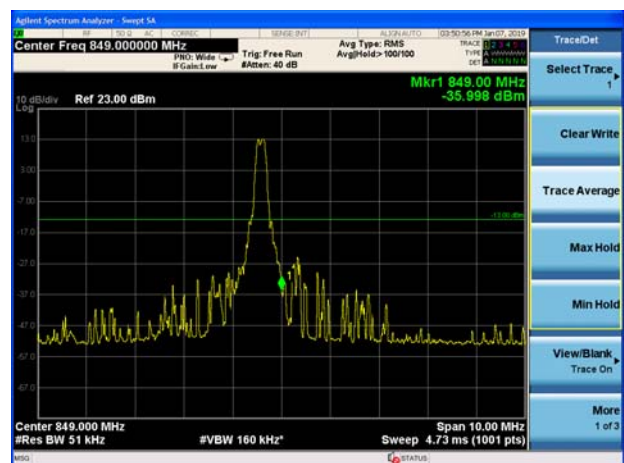




eMTC Band 5 QPSK 3MHz CH-Low 100%RB

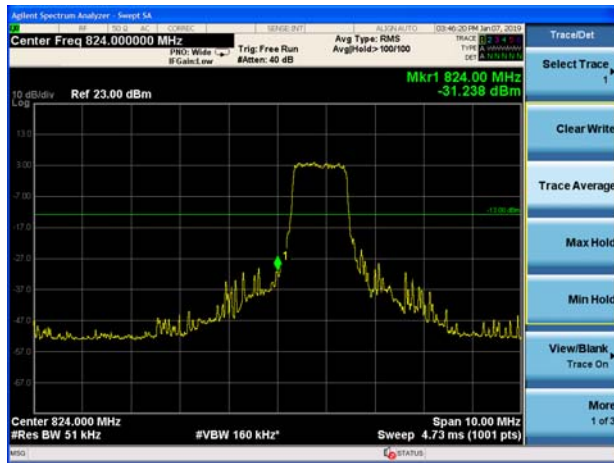


eMTC Band 5 QPSK 3MHz CH-High 100%RB



eMTC Band 5 QPSK 5MHz CH-Low 1RB

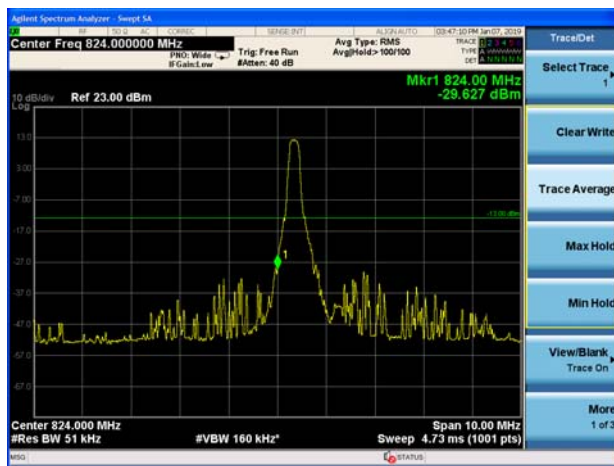


eMTC Band 5 QPSK 5MHz CH-High 1RB

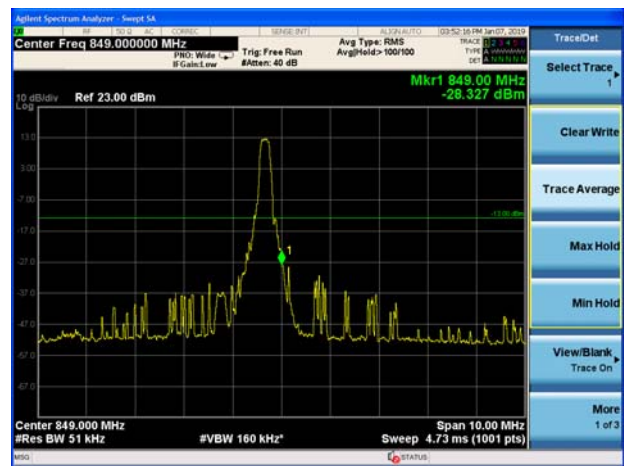


eMTC Band 5 QPSK 5MHz CH-Low 100%RB




eMTC Band 5 QPSK 5MHz CH-High 100%RB

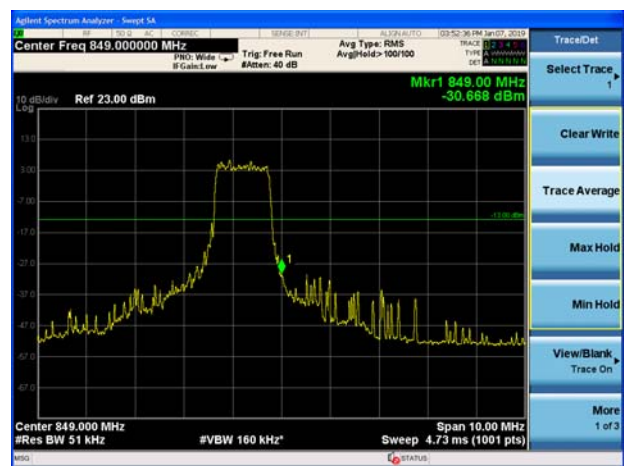


eMTC Band 5 QPSK 10MHz CH-Low 1RB

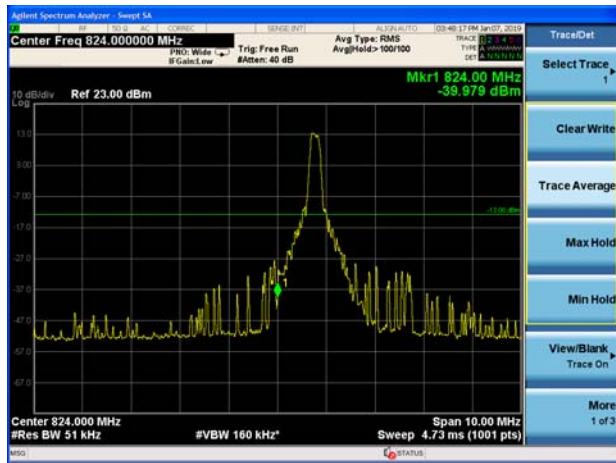

eMTC Band 5 QPSK 10MHz CH-High 1RB

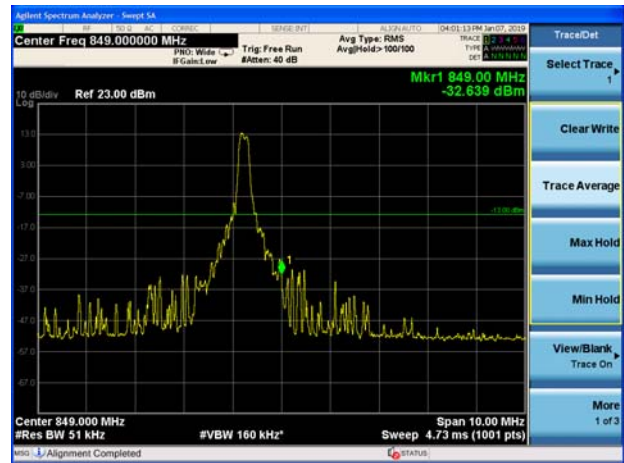


eMTC Band 5 QPSK 10MHz CH-Low 100%RB

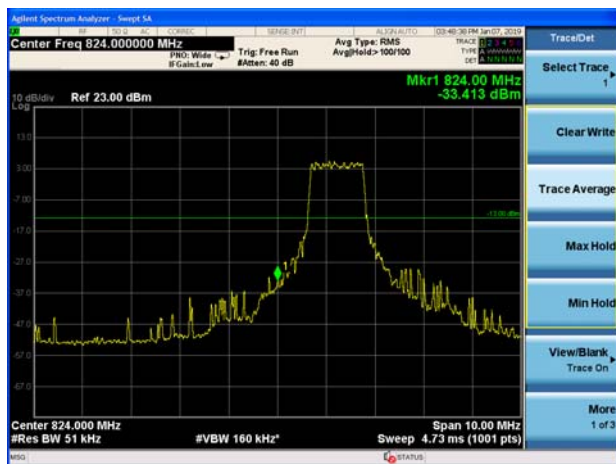


eMTC Band 5 QPSK 10MHz CH-High 100%RB



eMTC Band 5 16QAM 1.4MHz CH-Low 1RB

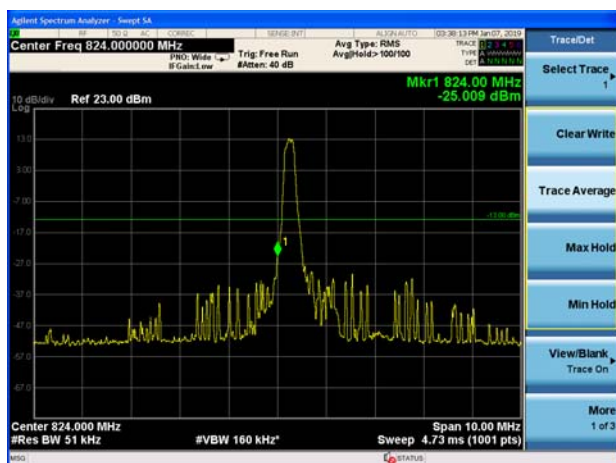


eMTC Band 5 16QAM 1.4MHz CH-High 1RB

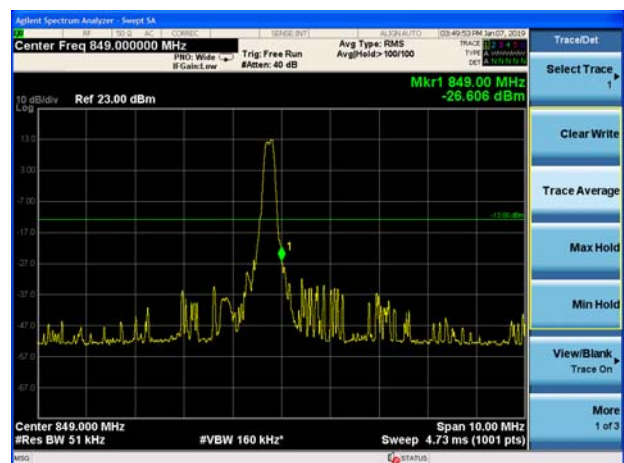


eMTC Band 5 16QAM 1.4MHz CH-Low 100%RB



eMTC Band 5 16QAM 1.4MHz CH-High 100%RB

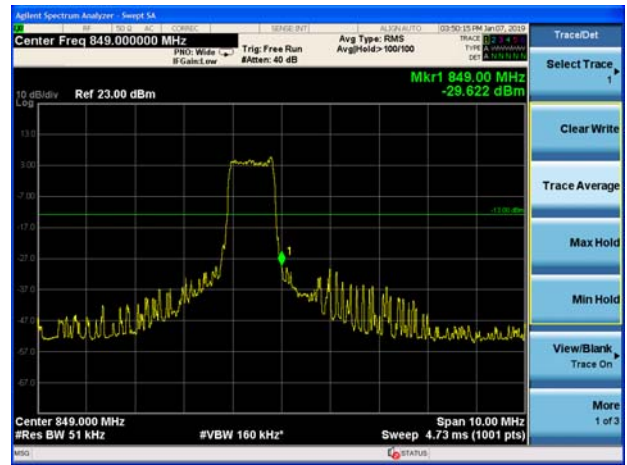


eMTC Band 5 16QAM 3MHz CH-Low 1RB

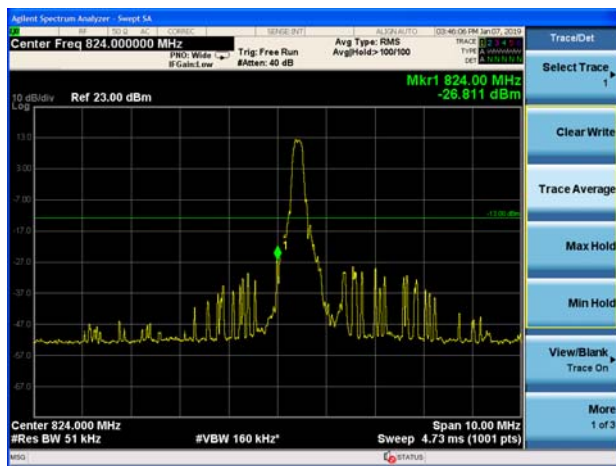


eMTC Band 5 16QAM 3MHz CH-High 1RB




eMTC Band 5 16QAM 3MHz CH-Low 100%RB

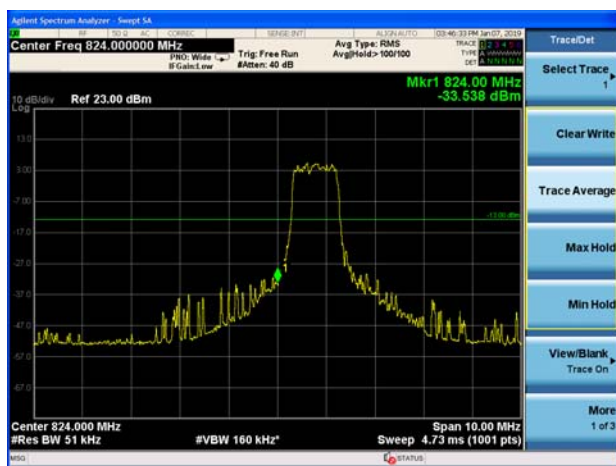


eMTC Band 5 16QAM 3MHz CH-High 100%RB

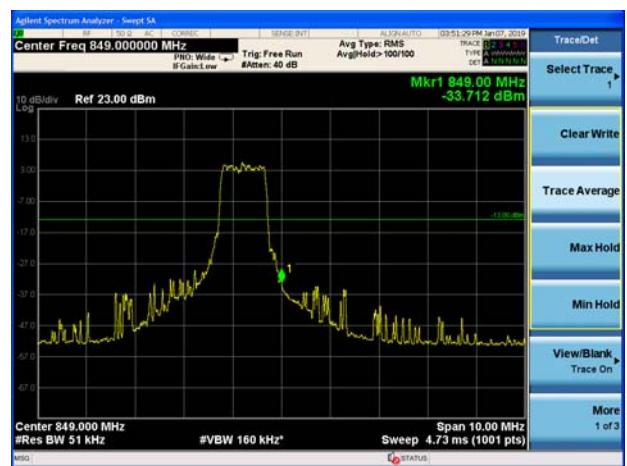


eMTC Band 5 16QAM 5MHz CH-Low 1RB

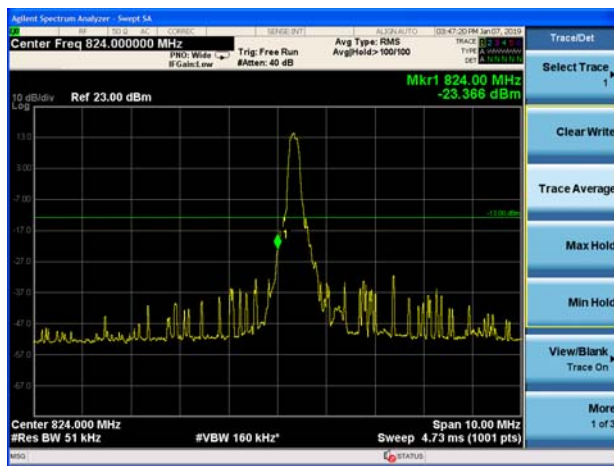


eMTC Band 5 16QAM 5MHz CH-High 1RB

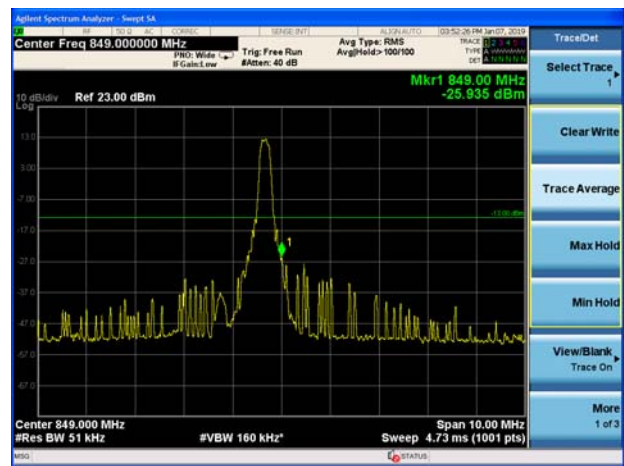


eMTC Band 5 16QAM 5MHz CH-Low 100%RB

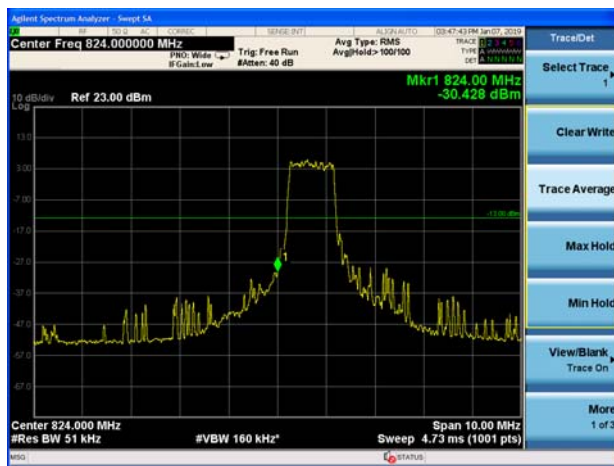


eMTC Band 5 16QAM 5MHz CH-High 100%RB

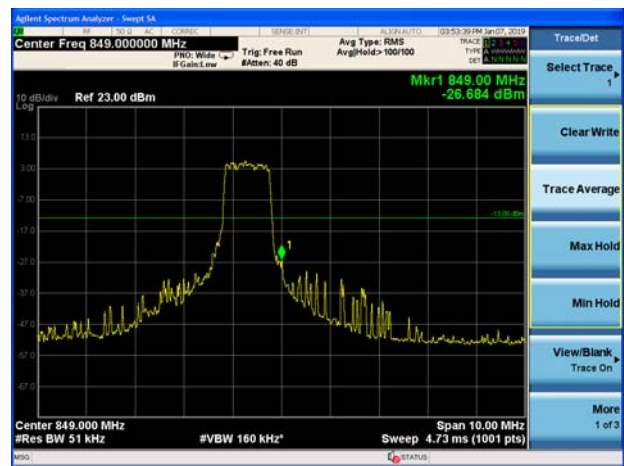

eMTC Band 5 16QAM 10MHz CH-Low 1RB

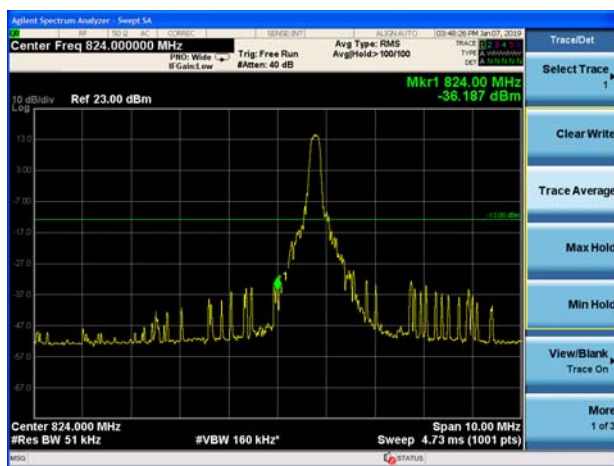


eMTC Band 5 16QAM 10MHz CH-High 1RB

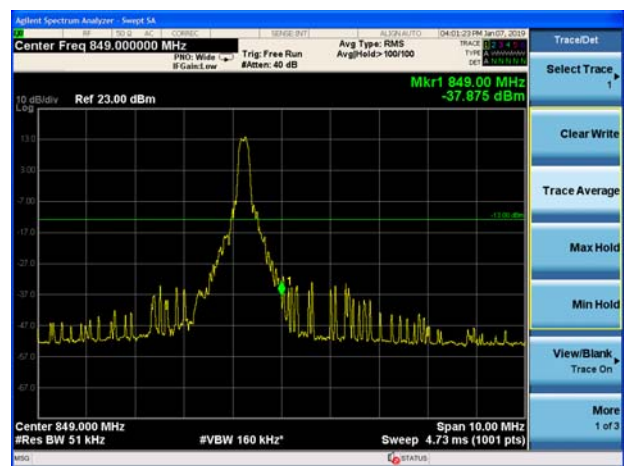




eMTC Band 5 16QAM 10MHz CH-Low 100%RB

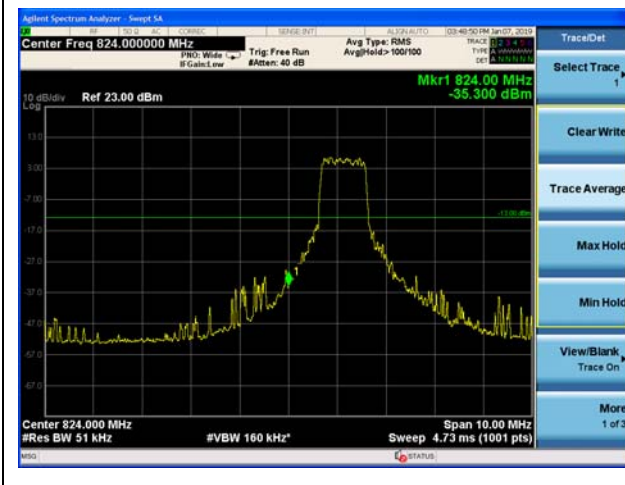

eMTC Band 5 16QAM 10MHz CH-High 100%RB

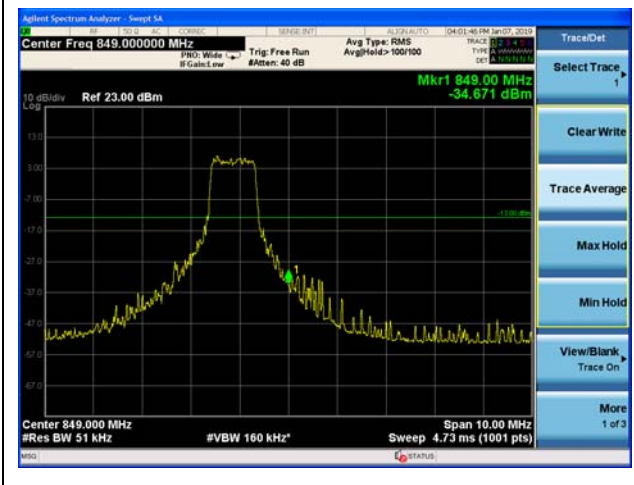

5.5. Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as P_{Pk} . And measure the total average power and record as P_{Avg} . Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = P_{Pk} (dBm) - P_{Avg} (dBm).$$

Test Setup

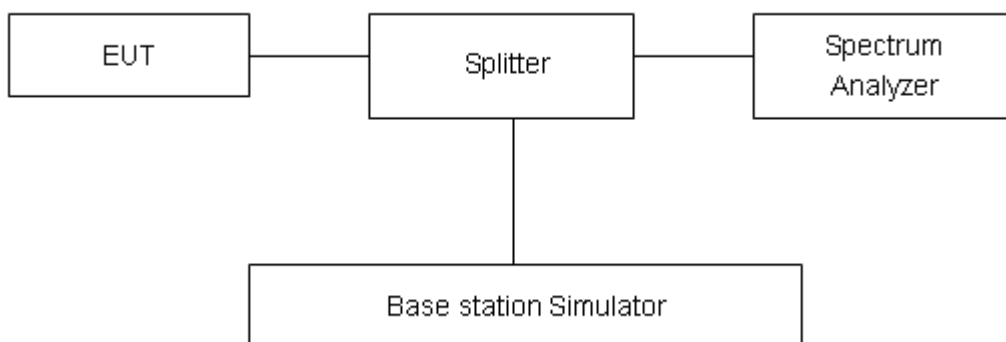

Limits

According to the Sec. 22.913(d), The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.



Test Results

Mode	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
GPRS 850 (GMSK)	128	824.2	29.57	28.59	0.98	≤13	PASS
	190	836.6	29.40	28.39	1.01	≤13	PASS
	251	848.8	30.21	29.24	0.97	≤13	PASS
EGPRS 850 (8-PSK)	128	824.2	24.32	23.34	0.98	≤13	PASS
	190	836.6	24.33	23.39	0.94	≤13	PASS
	251	848.8	24.58	23.53	1.05	≤13	PASS

Mode	Bandwidth	Modulation	Channel/ Frequency (MHz)	Peak-to-Average Power Ratio (PAPR)			Limit (dB)	Conclusion
				Peak (dBm)	Avg (dBm)	PAPR (dB)		
eMTC Band5	1.4MHz	QPSK	20525/836.5	27.84	17.85	9.99	≤13	PASS
		16QAM	20525/836.5	28.45	17.76	10.69	≤13	PASS
	3MHz	QPSK	20525/836.5	27.66	16.93	10.73	≤13	PASS
		16QAM	20525/836.5	28.32	17.74	10.58	≤13	PASS
	5MHz	QPSK	20525/836.5	27.82	17.69	10.13	≤13	PASS
		16QAM	20525/836.5	29.23	18.35	10.88	≤13	PASS
	10MHz	QPSK	20525/836.5	27.43	17.49	9.94	≤13	PASS
		16QAM	20525/836.5	29.03	18.39	10.64	≤13	PASS

5.6. Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +55°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -30°C to +55°. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.45 V and 4.4 V, with a nominal voltage of 3.82V.

Test setup

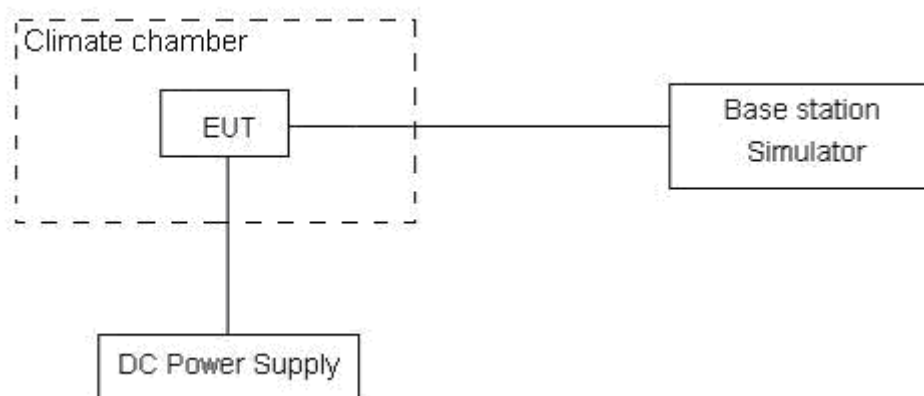

**Limits**

According to the Sec. 22.355, the frequency stability of the carrier shall be accurate to within 2.5 ppm of the received frequency for mobile stations.

Limits	≤ 2.5 ppm
--------	----------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$, $U = 0.01$ ppm.



Test Result

GPRS 850					
Condition		824	849	Delta (Hz)	Frequency Stability (ppm)
Temperature	Voltage	F low@-13dBm(MHz)	F high@-13dBm(MHz)		
Normal (25°C)	Normal	824.0654	848.9658	3.24	0.00387
Extreme (55°C)		824.0642	848.9646	6.43	0.00769
Extreme (50°C)		824.0641	848.9645	7.51	0.00898
Extreme (40°C)		824.0651	848.9655	9.15	0.01094
Extreme (30°C)		824.0642	848.9646	2.48	0.00296
Extreme (20°C)		824.0650	848.9654	6.28	0.00751
Extreme (10C)		824.0643	848.9647	3.01	0.00360
Extreme (0°C)		824.0649	848.9653	11.65	0.01393
Extreme (-10°C)		824.0644	848.9648	10.89	0.01302
Extreme (-20°C)		824.0648	848.9652	8.99	0.01075
Extreme (-30°C)		824.0645	848.9649	4.73	0.00565
25°C		LV	824.0646	848.9650	5.38
	HV	824.0655	848.9659	4.96	0.00593
EGPRS 850					
Condition		824	849	Delta (Hz)	Frequency Stability (ppm)
Temperature	Voltage	F low@-13dBm(MHz)	F high@-13dBm(MHz)		
Normal (25°C)	Normal	824.0782	848.9396	12.32	0.01473
Extreme (55°C)		824.0770	848.9384	16.57	0.01981
Extreme (50°C)		824.0769	848.9383	14.26	0.01705
Extreme (40°C)		824.0779	848.9393	14.38	0.01719
Extreme (30°C)		824.0770	848.9384	18.97	0.02268
Extreme (20°C)		824.0778	848.9392	16.54	0.01977
Extreme (10C)		824.0771	848.9385	12.43	0.01486
Extreme (0°C)		824.0777	848.9391	19.82	0.02369
Extreme (-10°C)		824.0772	848.9386	15.66	0.01872
Extreme (-20°C)		824.0776	848.9390	17.31	0.02069
Extreme (-30°C)		824.0773	848.9387	11.28	0.01348
25°C		LV	824.0774	848.9388	13.75
	HV	824.0783	848.9397	15.69	0.01875

eMTC Band 5						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	1.4MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	4.40	9.29	0.00234	0.00494	PASS
Extreme (55°C)		1.71	8.15	0.00091	0.00433	PASS
Extreme (50°C)		3.84	11.16	0.00204	0.00594	PASS
Extreme (40°C)		14.47	1.47	0.00769	0.00078	PASS
Extreme (30°C)		2.92	7.36	0.00155	0.00391	PASS
Extreme (20°C)		6.76	10.89	0.00359	0.00579	PASS
Extreme (10°C)		9.09	7.54	0.00484	0.00401	PASS
Extreme (0°C)		7.26	9.38	0.00386	0.00499	PASS
Extreme (-10°C)		7.59	11.97	0.00404	0.00637	PASS
Extreme (-20°C)		14.28	4.66	0.00760	0.00248	PASS
Extreme (-30°C)		16.47	5.88	0.00876	0.00313	PASS
25°C		LV	11.97	1.74	0.00637	0.00092
	HV	12.25	14.02	0.00651	0.00746	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	3MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	2.24	3.66	0.00119	0.00194	PASS
Extreme (55°C)		2.64	9.80	0.00140	0.00521	PASS
Extreme (50°C)		4.82	8.67	0.00256	0.00461	PASS
Extreme (40°C)		13.34	17.73	0.00709	0.00943	PASS
Extreme (30°C)		4.31	5.59	0.00229	0.00297	PASS
Extreme (20°C)		1.57	13.05	0.00084	0.00694	PASS
Extreme (10°C)		2.11	15.05	0.00112	0.00801	PASS
Extreme (0°C)		7.52	6.57	0.00400	0.00349	PASS
Extreme (-10°C)		8.98	9.96	0.00478	0.00530	PASS
Extreme (-20°C)		9.59	12.01	0.00510	0.00639	PASS
Extreme (-30°C)		1.87	3.36	0.00099	0.00179	PASS
25°C		LV	1.40	1.08	0.00075	0.00058
	HV	6.52	5.39	0.00347	0.00287	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	5MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	2.39	3.39	0.00127	0.00180	PASS



Extreme (55°C)		11.68	10.19	0.00621	0.00542	PASS
Extreme (50°C)		5.31	4.13	0.00282	0.00219	PASS
Extreme (40°C)		3.86	9.12	0.00205	0.00485	PASS
Extreme (30°C)		14.23	14.88	0.00757	0.00791	PASS
Extreme (20°C)		12.15	5.07	0.00646	0.00270	PASS
Extreme (10°C)		12.31	8.72	0.00655	0.00464	PASS
Extreme (0°C)		17.07	17.99	0.00908	0.00957	PASS
Extreme (-10°C)		17.67	15.26	0.00940	0.00812	PASS
Extreme (-20°C)		15.09	3.11	0.00803	0.00165	PASS
Extreme (-30°C)		9.95	16.86	0.00529	0.00897	PASS
25°C	LV	3.05	5.97	0.00162	0.00317	PASS
	HV	9.84	11.97	0.00523	0.00636	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	10MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	8.09	2.03	0.00430	0.00108	PASS
Extreme (55°C)		2.79	6.17	0.00149	0.00328	PASS
Extreme (50°C)		15.06	15.15	0.00801	0.00806	PASS
Extreme (40°C)		11.16	6.47	0.00594	0.00344	PASS
Extreme (30°C)		7.98	14.56	0.00425	0.00775	PASS
Extreme (20°C)		10.69	2.45	0.00569	0.00130	PASS
Extreme (10°C)		2.48	12.80	0.00132	0.00681	PASS
Extreme (0°C)		4.96	9.38	0.00264	0.00499	PASS
Extreme (-10°C)		11.51	1.64	0.00612	0.00087	PASS
Extreme (-20°C)		13.48	13.67	0.00717	0.00727	PASS
Extreme (-30°C)		8.12	10.05	0.00432	0.00534	PASS
25°C		LV	1.76	10.66	0.00093	0.00567
	HV	1.56	13.55	0.00083	0.00721	PASS

5.7. Spurious Emissions at Antenna Terminals

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier.

The peak detector is used. RBW are set to 100 kHz and VBW are set to 300 kHz for below 1G, RBW are set to 1MHz and VBW are set to 3MHz for above 1G, Sweep is set to ATUO.

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

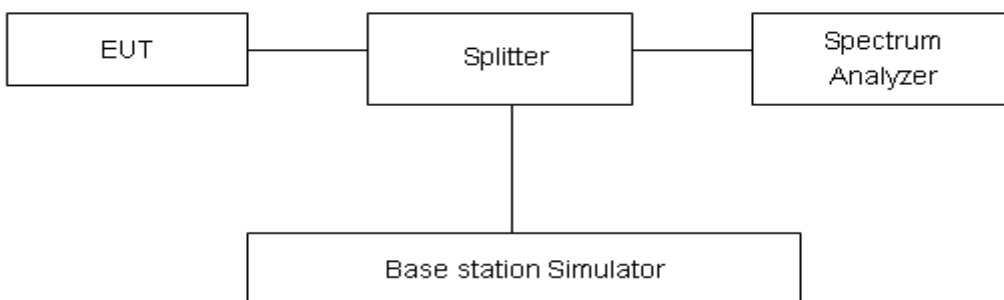

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty


The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-18GHz	1.407 dB

Test Result


Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.

The signal beyond the limit is carrier.

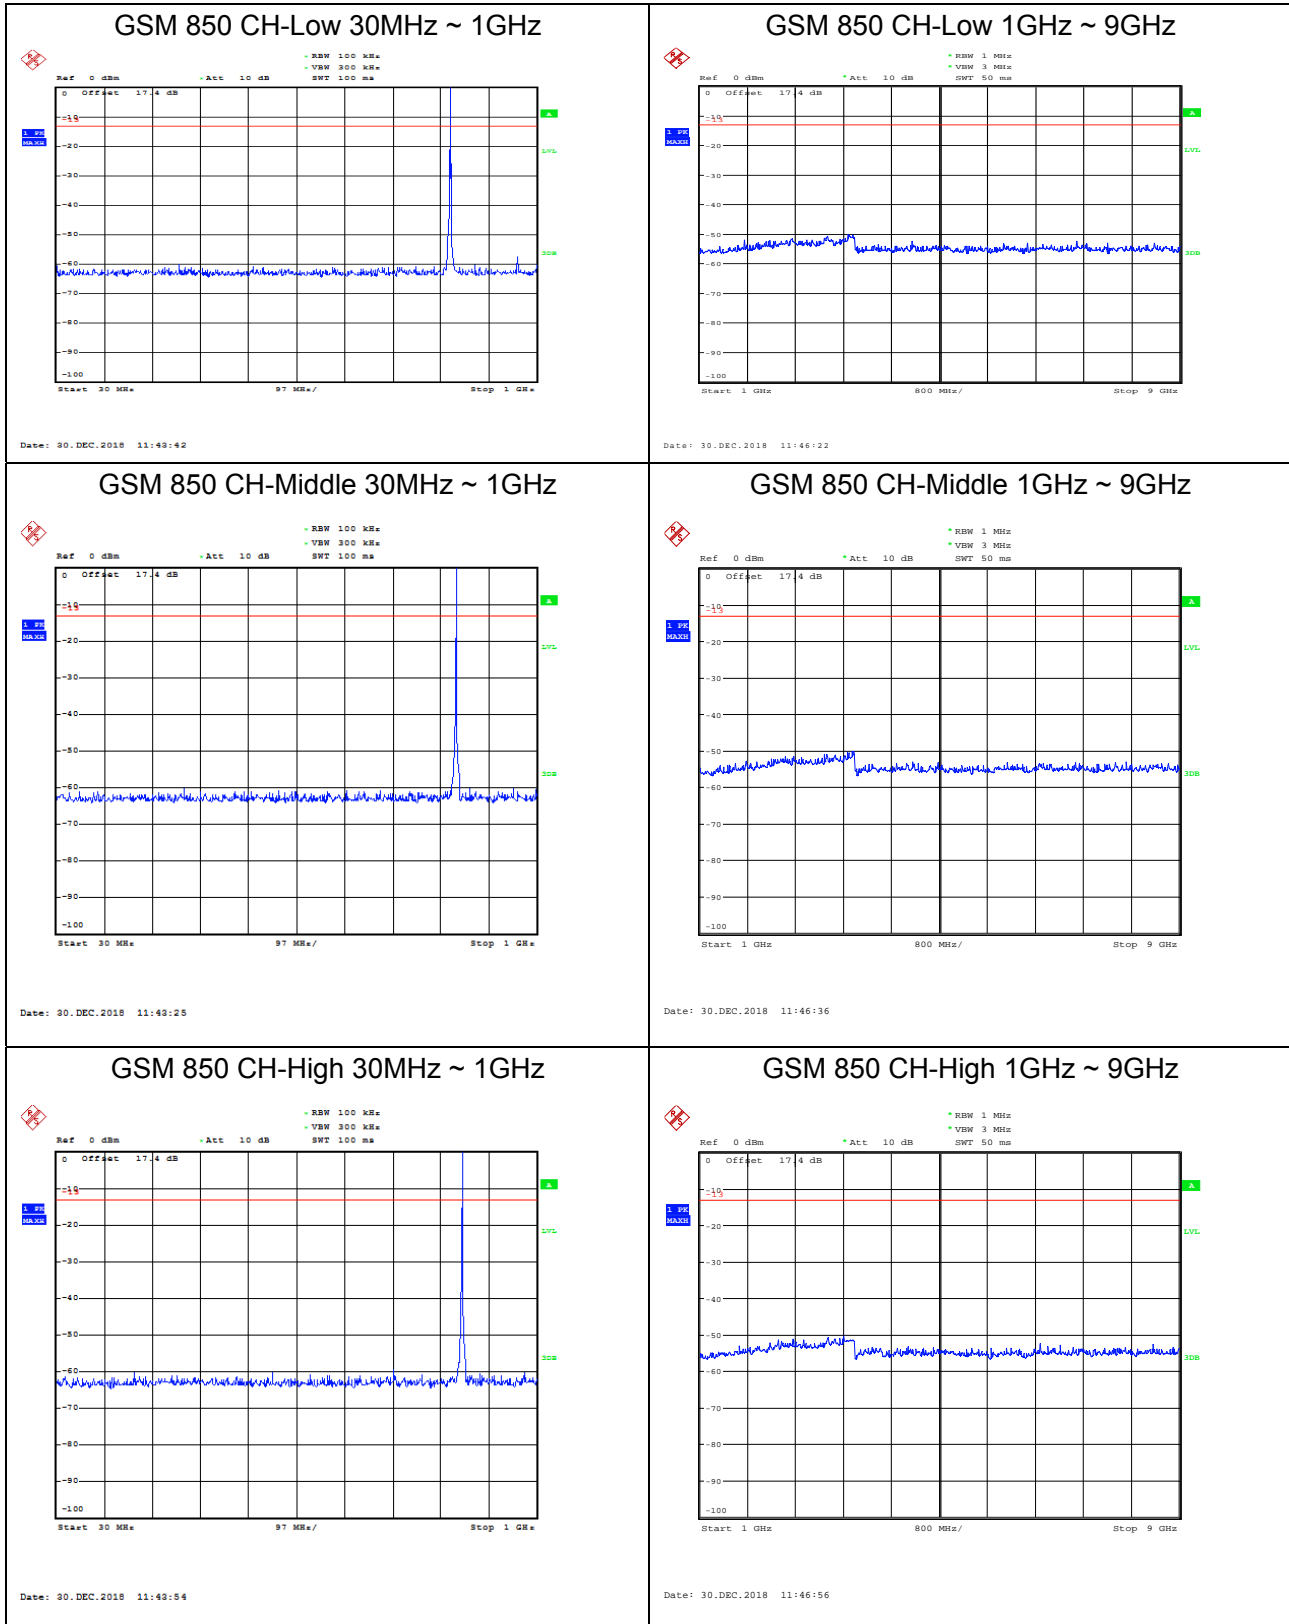




eMTC Band 5 1.4MHz CH-Low 30MHz~1GHz

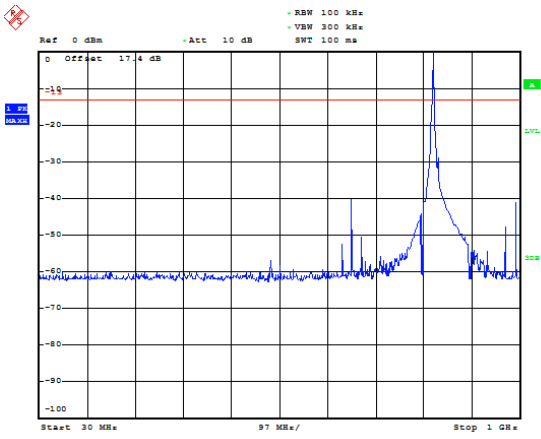


Date: 8.JAN.2019 19:52:09

eMTC Band 5 1.4MHz CH-Low 1GHz~9GHz

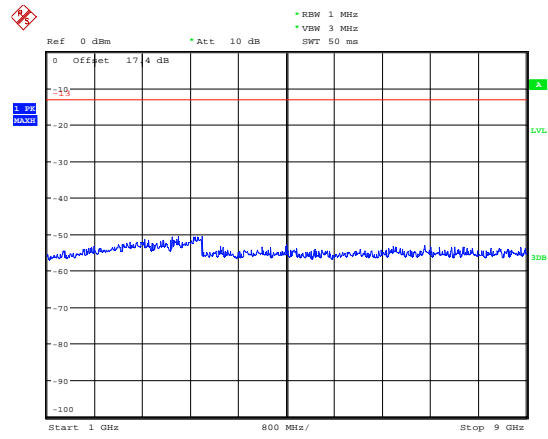


Date: 8.JAN.2019 19:55:27

eMTC Band 5 1.4MHz CH-Middle 30MHz~1GHz

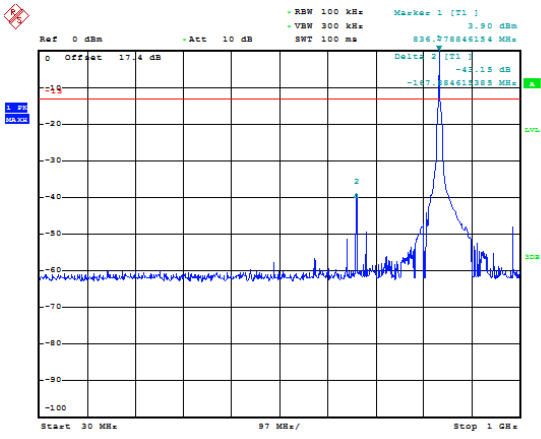


Date: 8.JAN.2019 19:57:50

eMTC Band 5 1.4MHz CH-Middle 1GHz~9GHz

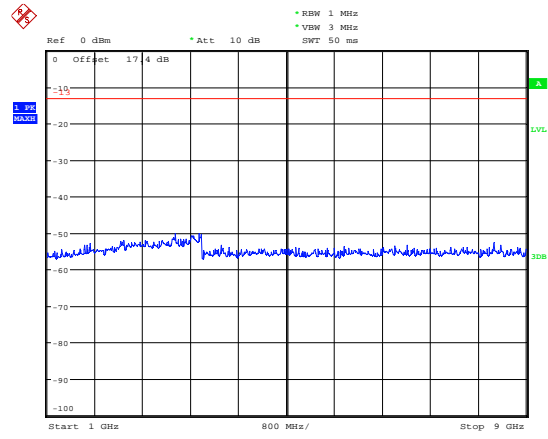


Date: 8.JAN.2019 19:55:48

eMTC Band 5 1.4MHz CH-High 30MHz~1GHz

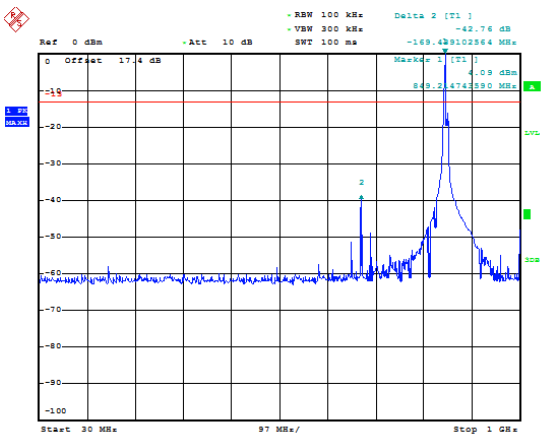

Date: 8.JAN.2019 19:59:29


eMTC Band 5 1.4MHz CH-High 1GHz~9GHz

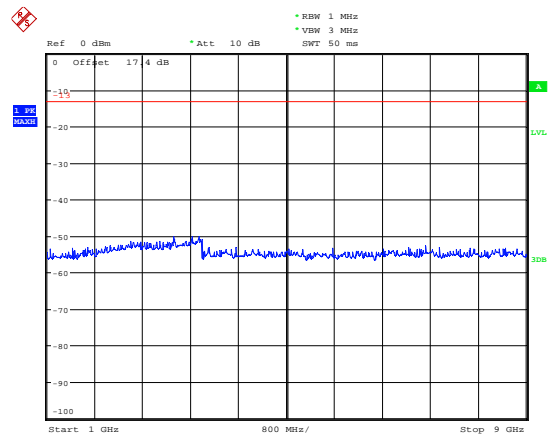

Date: 8.JAN.2019 19:56:07




eMTC Band 5 3MHz CH-Low 30MHz~1GHz

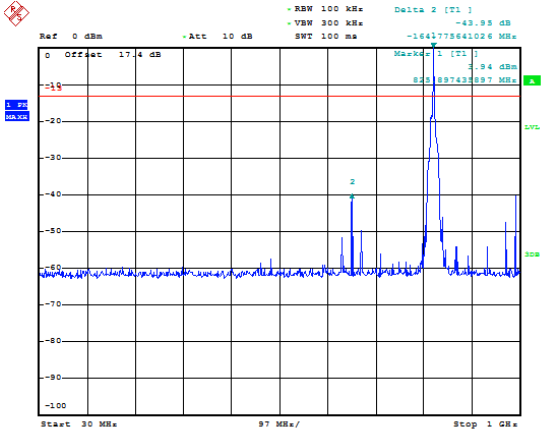


Date: 8.JAN.2019 20:02:21

eMTC Band 5 3MHz CH-Low 1GHz~9GHz

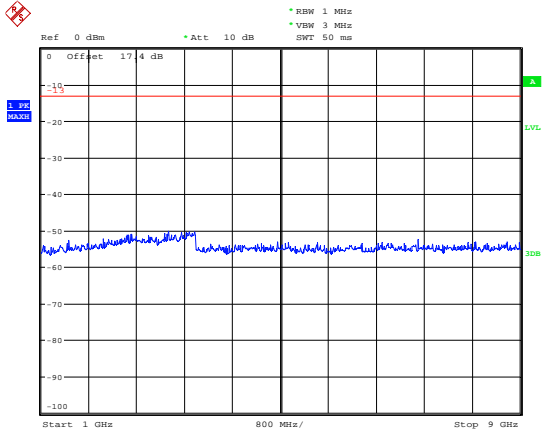


Date: 8.JAN.2019 20:24:56

eMTC Band 5 3MHz CH-Middle 30MHz~1GHz

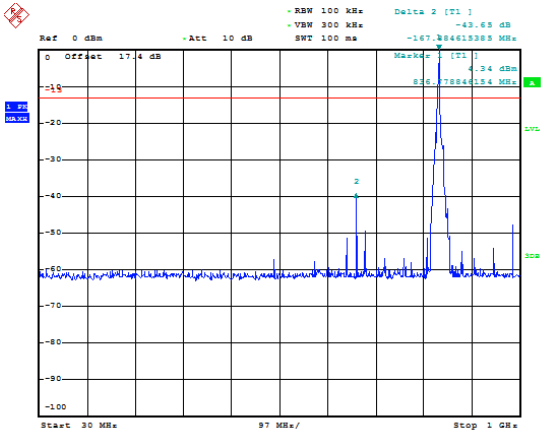


Date: 8.JAN.2019 20:04:20

eMTC Band 5 3MHz CH-Middle 1GHz~9GHz

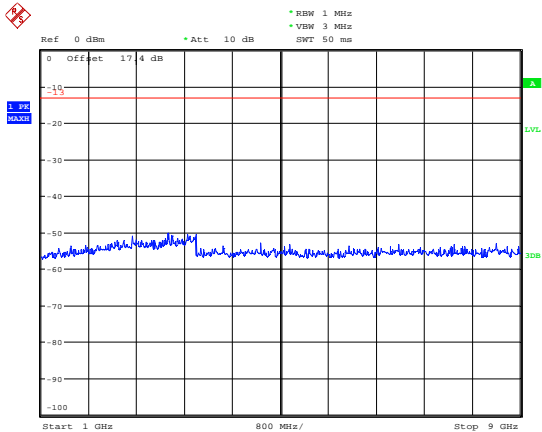


Date: 8.JAN.2019 20:24:34

eMTC Band 5 3MHz CH-High 30MHz~1GHz

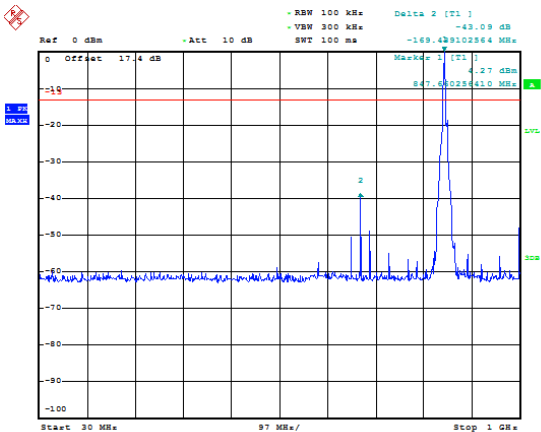

Date: 8.JAN.2019 20:05:48


eMTC Band 5 3MHz CH-High 1GHz~9GHz

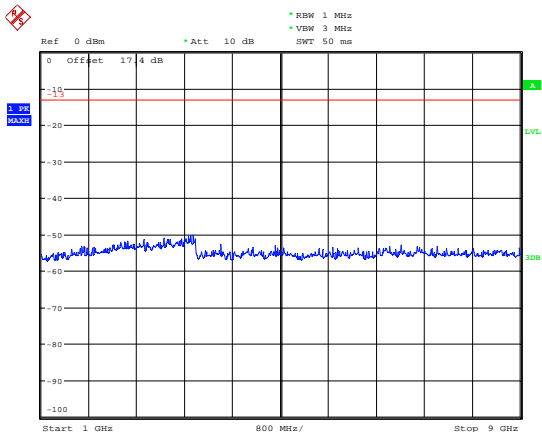

Date: 8.JAN.2019 20:25:14




eMTC Band 5 5MHz CH-Low 30MHz~1GHz

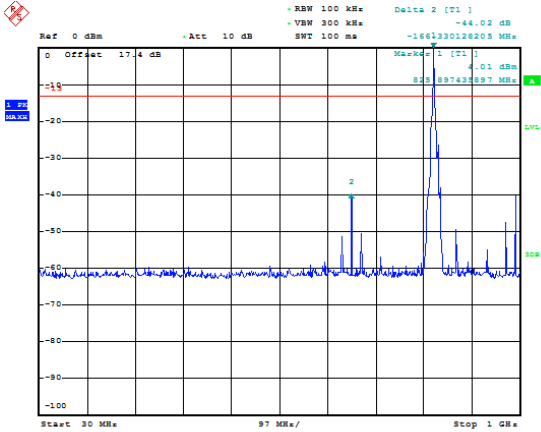


Date: 8.JAN.2019 20:12:49

eMTC Band 5 5MHz CH-Low 1GHz~9GHz

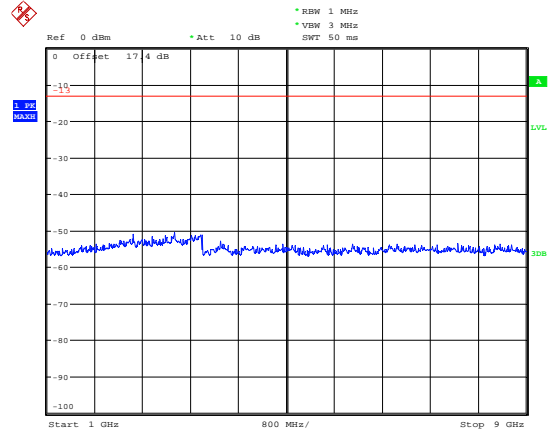


Date: 8.JAN.2019 20:25:52

eMTC Band 5 5MHz CH-Middle 30MHz~1GHz

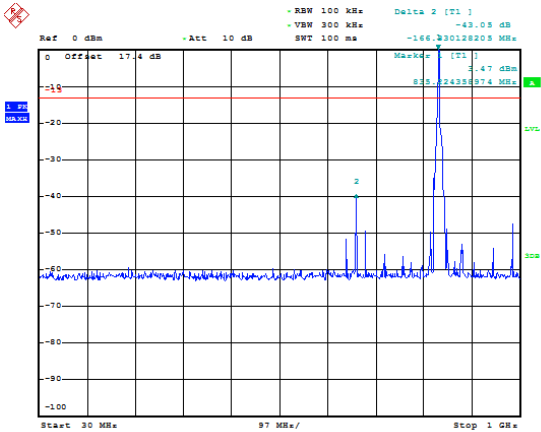


Date: 8.JAN.2019 20:14:08

eMTC Band 5 5MHz CH-Middle 1GHz~9GHz

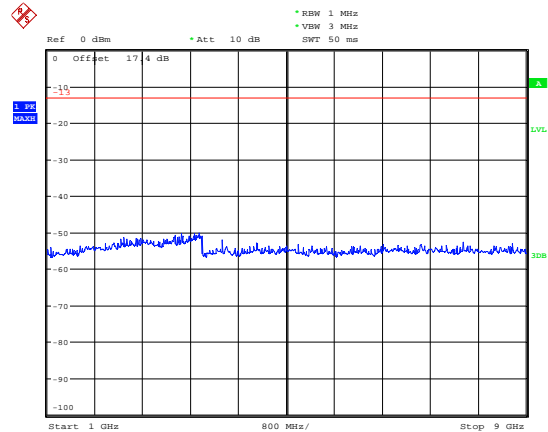


Date: 8.JAN.2019 20:24:21

eMTC Band 5 5MHz CH-High 30MHz~1GHz

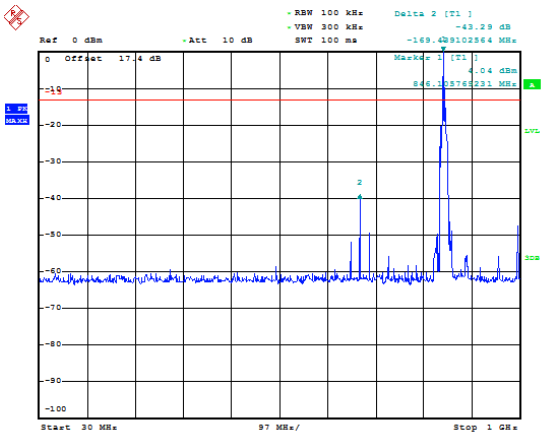

Date: 8.JAN.2019 20:19:05


eMTC Band 5 5MHz CH-High 1GHz~9GHz

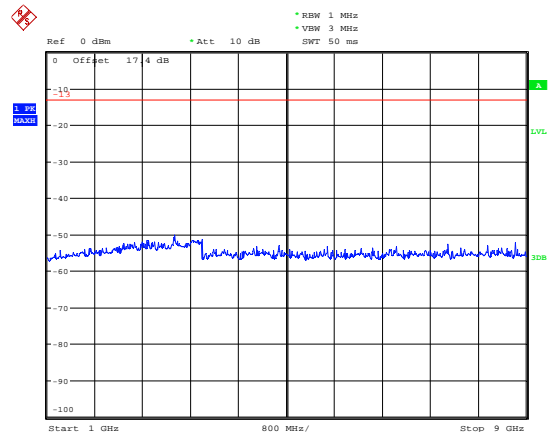

Date: 8.JAN.2019 20:26:40




eMTC Band 5 10MHz CH-Low 30MHz~1GHz

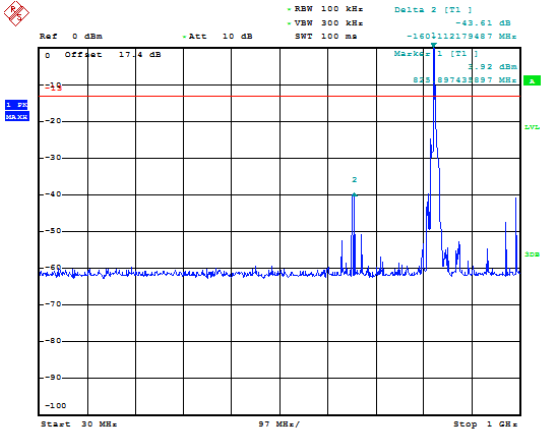


Date: 8.JAN.2019 20:19:57

eMTC Band 5 10MHz CH-Low 1GHz~9GHz

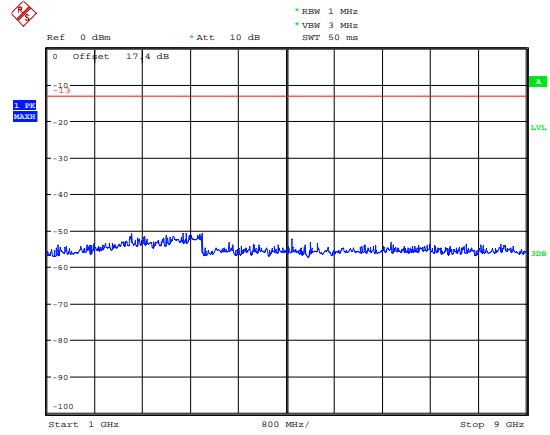


Date: 8.JAN.2019 20:27:19

eMTC Band 5 10MHz CH-Middle 30MHz~1GHz

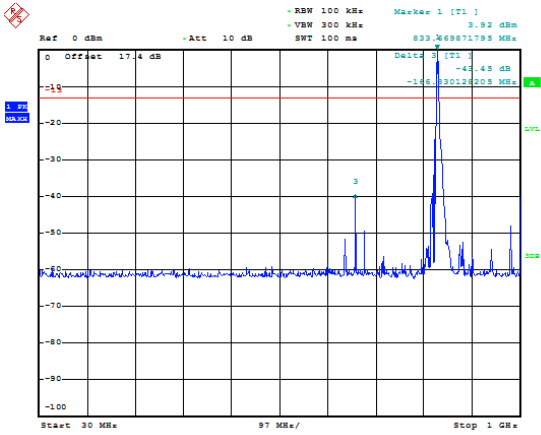


Date: 8.JAN.2019 20:21:50

eMTC Band 5 10MHz CH-Middle 1GHz~9GHz

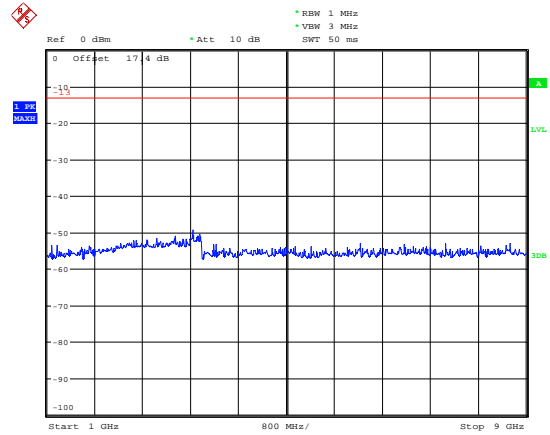


Date: 8.JAN.2019 20:24:05

eMTC Band 5 10MHz CH-High 30MHz~1GHz

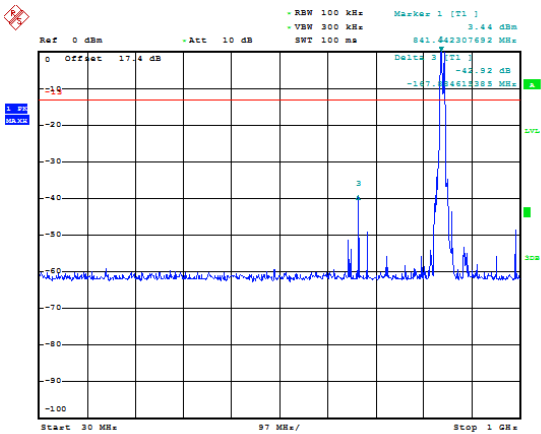

Date: 8.JAN.2019 20:22:43

eMTC Band 5 10MHz CH-High 1GHz~9GHz

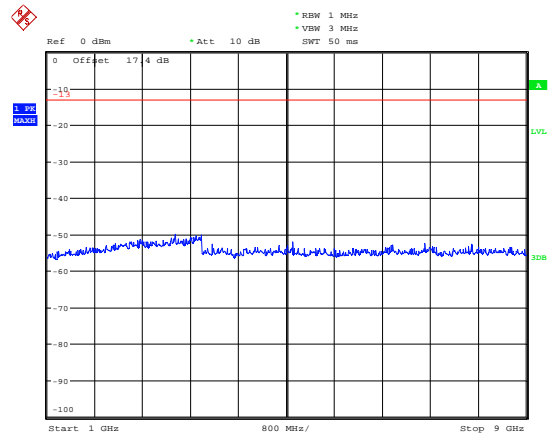

Date: 8.JAN.2019 20:23:47

5.8. Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement


1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=200Hz,VBW=600Hz for 9kHz150kHz , RBW=10kHz, VBW=30kHz 150kHz-30MHz , RBW=100kHz,VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:
Power(EIRP)=PMea- PAg - Pcl + Ga
The measurement results are amend as described below:
Power(EIRP)=PMea- Pcl + Ga
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi)

and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup


9KHz ~ 30MHz

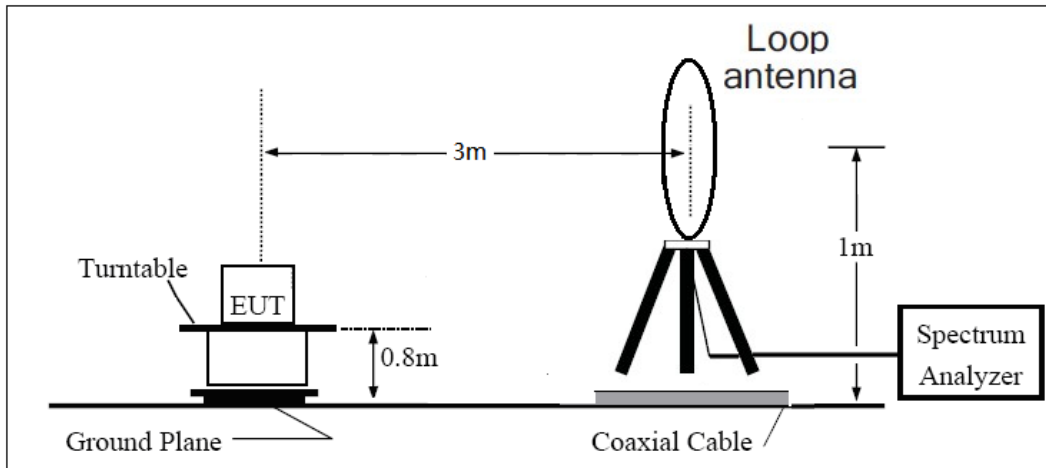

30MHz ~ 1GHz

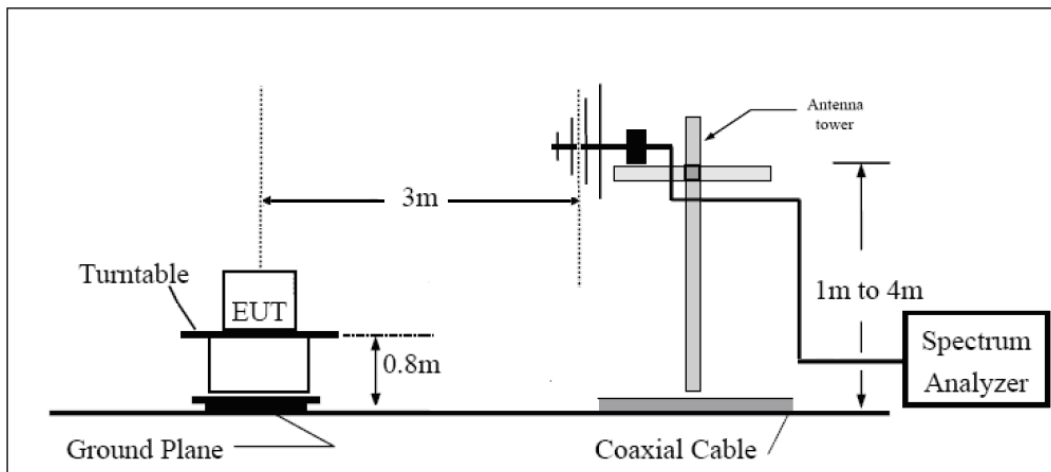

Above 1GHz

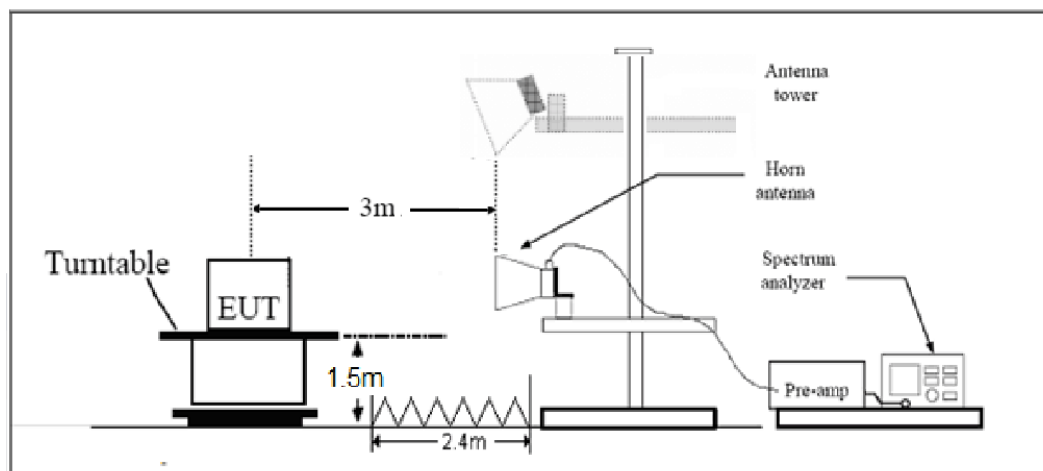



Note: Area side:2.4mX3.6m

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

**Test Result**

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

GSM 850 CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.2	-53.15	2.00	10.75	Vertical	-46.55	-13.00	33.55	90
3	2509.8	-62.04	2.51	11.05	Vertical	-55.65	-13.00	42.65	45
4	3346.4	-63.66	4.20	11.15	Vertical	-58.86	-13.00	45.86	90
5	4183.0	-59.66	5.20	11.15	Vertical	-55.86	-13.00	42.86	45
6	5019.6	-57.81	5.50	11.95	Vertical	-53.51	-13.00	40.51	180
7	5856.2	-59.60	5.70	13.55	Vertical	-53.90	-13.00	40.90	225
8	6692.8	-56.91	6.30	13.75	Vertical	-51.61	-13.00	38.61	0
9	7529.4	-54.85	6.80	13.85	Vertical	-49.95	-13.00	36.95	180
10	8366.0	-54.61	6.90	14.25	Vertical	-49.41	-13.00	36.41	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Vertical position.

eMTC Band 5 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.0	-58.78	2.00	10.75	Vertical	-52.18	-13.0	39.18	90
3	2509.5	-62.31	2.51	11.05	Vertical	-55.92	-13.00	42.92	315
4	3346.0	-63.33	4.20	11.15	Vertical	-58.53	-13.00	45.53	45
5	4182.5	-58.92	5.20	11.15	Vertical	-55.12	-13.00	42.12	0
6	5019.0	-57.41	5.50	11.95	Vertical	-53.11	-13.00	40.11	180
7	5855.5	-58.26	5.70	13.55	Vertical	-52.56	-13.00	39.56	225
8	6692.0	-56.26	6.30	13.75	Vertical	-50.96	-13.00	37.96	0
9	7528.5	-54.38	6.80	13.85	Vertical	-49.48	-13.00	36.48	180
10	8365.0	-54.48	6.90	14.25	Vertical	-49.28	-13.00	36.28	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Vertical position.



eMTC Band 5 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.0	-59.23	2.00	10.75	Vertical	-52.63	-13.00	39.63	225
3	2509.5	-62.28	2.51	11.05	Vertical	-55.89	-13.00	42.89	90
4	3466.2	-63.69	4.20	11.15	Vertical	-58.89	-13.00	45.89	90
5	4215.9	-58.28	5.20	11.15	Vertical	-54.48	-13.00	41.48	315
6	5165.6	-57.92	5.50	11.95	Vertical	-53.62	-13.00	40.62	225
7	5815.3	-59.59	5.70	13.55	Vertical	-53.89	-13.00	40.89	90
8	6765.0	-56.71	6.30	13.75	Vertical	-51.41	-13.00	38.41	45
9	7614.7	-54.71	6.80	13.85	Vertical	-49.81	-13.00	36.81	0
10	8464.4	-55.33	6.90	14.25	Vertical	-50.13	-13.00	37.13	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Vertical position.

eMTC Band 5 10MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.0	-57.28	2.00	10.75	Vertical	-50.68	-13.00	37.68	45
3	2509.5	-62.85	2.51	11.05	Vertical	-56.46	-13.00	43.46	0
4	3346.0	-62.05	4.20	11.15	Vertical	-57.25	-13.00	44.25	225
5	4182.5	-60.66	5.20	11.15	Vertical	-56.86	-13.00	43.86	0
6	5019.0	-57.65	5.50	11.95	Vertical	-53.35	-13.00	40.35	180
7	5855.5	-59.41	5.70	13.55	Vertical	-53.71	-13.00	40.71	225
8	6692.0	-55.61	6.30	13.75	Vertical	-50.31	-13.00	37.31	90
9	7528.5	-54.54	6.80	13.85	Vertical	-49.64	-13.00	36.64	45
10	8365.0	-54.84	6.90	14.25	Vertical	-49.64	-13.00	36.64	0

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Vertical position.



6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113824	2018-05-20	2019-05-19
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2018-05-20	2019-05-19
Universal Radio Communication Tester	Key sight	E5515C	MY48367192	2018-05-20	2019-05-19
Signal Analyzer	R&S	FSV30	100815	2018-12-16	2019-12-15
EMI Test Receiver	R&S	ESCI	100948	2018-05-20	2019-05-19
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2019-09-25
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2019-11-17
Horn Antenna	R&S	HF907	100126	2018-07-07	2020-07-06
Signal generator	R&S	SMB 100A	102594	2018-05-20	2019-05-19
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
Preamplifier	R&S	SCU18	102327	2018-05-20	2019-05-19
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2018-05-21	2019-05-20
RF Cable	Agilent	SMA 15cm	0001	/	/
Software	R&S	EMC32	9.26.0	/	/

*****END OF REPORT *****