



中国认可  
国际互认  
检测  
TESTING  
CNAS L0310



## FCC SAR Compliance Test Report

**Product Name:** Smart Watch

---

**Model:** LEO-DLXX, LEO-DLXXE

---

**Report No.:** SYBH(Z-SAR)027032017-2

---

**FCC ID:** QISLEO-DLXX

---

	APPROVED (Lab Manager)	PREPARED (Test Engineer)
BY	<i>Wei Huanbin</i>	<i>Sun Shanbin</i>
DATE	2017-03-29	2017-03-29

**Reliability Laboratory of Huawei Technologies Co., Ltd.**

**(Global Compliance and Testing Center of Huawei Technologies Co., Ltd)**

※ ※ **Notice** ※ ※

1. The laboratory has passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.
2. The laboratory has passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01 & 2174.02 & 2174.03
3. The laboratory (Reliability Lab of Huawei Technologies Co., Ltd) is also named “Global Compliance and Testing Center of Huawei Technologies Co., Ltd”, the both names have coexisted since 2009.
4. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
5. The test report is invalid if there is any evidence of erasure and/or falsification.
6. The test report is only valid for the test samples.
7. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

## Table of Contents

1	General Information.....	6
1.1	Statement of Compliance .....	6
1.2	RF exposure limits .....	7
1.3	EUT Description.....	8
1.3.1	General Description .....	9
1.4	Test specification(s).....	12
1.5	Testing laboratory .....	12
1.6	Applicant and Manufacturer.....	12
1.7	Application details .....	12
1.8	Ambient Condition.....	12
2	SAR Measurement System .....	13
2.1	SAR Measurement Set-up.....	13
2.2	Test environment .....	14
2.3	Data Acquisition Electronics description.....	14
2.4	Probe description .....	15
2.5	Phantom description .....	16
2.6	Device holder description .....	17
2.7	Test Equipment List .....	18
3	SAR Measurement Procedure .....	19
3.1	Scanning procedure.....	19
3.2	Spatial Peak SAR Evaluation .....	20
3.3	Data Storage and Evaluation.....	21
4	System Verification Procedure .....	23
4.1	Tissue Verification.....	23
4.2	System Check.....	25
4.3	System check Procedure .....	26
5	SAR measurement variability and uncertainty .....	27
5.1	SAR measurement variability .....	27
5.2	SAR measurement uncertainty.....	27
6	SAR Test Configuration.....	28
6.1	Test Positions Configuration .....	28
6.1.1	10-g Extremity Exposure Condition .....	28
6.1.2	Next-to-Mouth Exposure Condition.....	28
6.2	3G SAR Test Reduction Procedure.....	29
6.3	UMTS Test Configuration .....	30
6.4	LTE Test Configuration .....	36
6.5	WiFi Test Configuration .....	39
6.5.1	Initial Test Position Procedure .....	39
6.5.2	Initial Test Configuration Procedure .....	39
6.5.3	Sub Test Configuration Procedure .....	39
6.5.4	WiFi 2.4G SAR Test Procedures .....	40
6.6	BT Test Configuration.....	40
7	SAR Measurement Results .....	41
7.1	Conducted power measurements.....	41
7.1.1	Conducted power measurements of UMTS Band II .....	41
7.1.1	Conducted power measurements of LTE Band VII .....	42
7.1.2	Conducted power measurements of LTE Band XLI .....	44
7.1.3	Conducted power measurements of WiFi 2.4G.....	46
7.1.1	Conducted power measurements of BT .....	47
7.2	SAR measurement Results .....	48
7.2.1	SAR measurement Result of UMTS Band II .....	50
7.2.2	SAR measurement Result of LTE Band VII.....	51
7.2.3	SAR measurement Result of LTE Band XLI.....	52
7.2.4	SAR measurement Result of WiFi 2.4G .....	53
7.2.5	SAR measurement Result of BT.....	56
7.3	Multiple Transmitter Evaluation .....	57
7.3.1	Stand-alone SAR test exclusion .....	58

7.3.2	Simultaneous Transmission Possibilities.....	58
7.3.3	Simultaneous Transmission.....	59
Appendix A.	System Check Plots.....	60
Appendix B.	SAR Measurement Plots.....	60
Appendix C.	Calibration Certificate .....	60
Appendix D.	Photo documentation.....	60

---

※ ※ **Modified History** ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
v1.0	Initial Test Report Release. This test report shares the same test data of LEO-DLXX, LEO-DLXXE (Report No: SYBH(Z-SAR)007122016-2) and adds a new optional battery test data.	2017-03-29	Sun Shanbin

# 1 General Information

## 1.1 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing is as below Table 1.

Band	Max Reported SAR(W/kg)	
	1-g Next-to-Mouth(10mm)	10-g Extremity (0mm)
UMTS Band II	0.71	1.07
LTE Band VII	<b>1.05</b>	<b>1.14</b>
LTE Band XLI	0.53	0.51
WiFi 2.4G	0.15	0.12
BT	NA	0.03

Table 1:Summary of test result of LEO-DLXX

Band	Max Reported SAR(W/kg)	
	1-g Next-to-Mouth(10mm)	10-g Extremity (0mm)
UMTS Band II	0.71	1.11
LTE Band VII	<b>1.05</b>	<b>1.14</b>
LTE Band XLI	0.53	0.51
WiFi 2.4G	0.21	0.09
BT	NA	0.03

Table 2:Summary of test result of LEO-DLXXE

Note:

The device is in compliance with Specific Absorption Rate(SAR) for general population/uncontrolled exposure limits according to the FCC rule §2.1093, the ANSI C95.1:1992/IEEE C95.1:1991, the NCRP Report Number 86 for uncontrolled environment, according to the Industry Canada Radio Standards Specification RSS-102 for General Population/Uncontrolled exposure, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013.

## 1.2 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
<b>Spatial Peak SAR*</b> (Brain/Body/Arms/Legs)	<b>1.60 W/kg</b>	8.00 W/kg
<b>Spatial Average SAR**</b> (Whole Body)	0.08 W/kg	0.40 W/kg
<b>Spatial Peak SAR***</b> (Hands/Feet/Ankle/Wrist)	<b>4.00 W/kg</b>	20.00 W/kg

Table 3: RF exposure limits

The limit applied in this test report is shown in **bold** letters

### Notes:

- \* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- \*\* The Spatial Average value of the SAR averaged over the whole body.
- \*\*\* The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

**Uncontrolled Environments** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

**Controlled Environments** are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

### 1.3 EUT Description

Device Information:			
Product Name:	Smart Watch		
Model:	LEO-DLXX, LEO-DLXXE		
FCC ID :	QISLEO-DLXX		
SN.:	1#: QEV0116B04000465 (LEO-DLXX) 2#: QEV0116B04000136 (LEO-DLXX) 3#: 5GS0116C06000134 (LEO-DLXXE) 4#: 5GS0116C06000147 (LEO-DLXXE)		
Device Type :	Portable device		
Device Phase:	Identical Prototype		
Exposure Category:	Uncontrolled environment / general population		
Hardware Version :	EA1LEOUM		
Software Version :	sawshark-userdebug7.1.1NFF47		
Antenna Type :	Internal antenna		
Device Operating Configurations:			
Supporting Mode(s)	UMTS Band II, LTE Band VII, LTE Band XLI, WiFi 2.4G, BT, NFC		
Test Modulation	UMTS(QPSK), LTE(QPSK/16QAM), WiFi(DSSS/OFDM), BT(GFSK)		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	UMTS Band II	1850-1910	1930-1990
	LTE Band VII	2500-2570	2620-2690
	LTE Band XLI	2555-2655	2555-2655
	BT	2400-2483.5	2400-2483.5
	WiFi 2.4G	2400-2483.5	2400-2483.5
	NFC	/	13.56
HSDPA UE Category	14		
HSUPA UE Category	6		
DC-HSDPA UE category	24		
Power Class :	3, tested with power control "all 1"(UMTS Band II)		
	3, tested with power control all Max.(LTE Band VII)		
	3, tested with power control all Max.(LTE Band XLI)		
Test Channels (low-mid-high):	9262-9400-9538(UMTS Band II)		
	20775-21100-21425(LTE Band VII BW=5MHz)		
	20800-21100-21400(LTE Band VII BW=10MHz)		
	20825-21100-21375(LTE Band VII BW=15MHz)		
	20850-21100-21350(LTE Band VII BW=20MHz)		
	40265-40620-41215(LTE Band XLI BW=5MHz)		
	40290-40620-41190(LTE Band XLI BW=10MHz)		
	40315-40620-41165(LTE Band XLI BW=15MHz)		
	40340-40620-41140(LTE Band XLI BW=20MHz)		
	802.11b/g/n 20M:1-6-11		
	BT:0-19-39-78		

Table 4: Device information and operating configuration

### 1.3.1 General Description

#### LEO-DLXX:

LEO-DLXX is a smart watch based on Android wear OS; it can be communicated with mobile phone via Bluetooth. Watch also support MP3 player function, voice communication, alarm clock, gyro sensor, intelligent user can judge the state of motion, with PPG measurement of heart rate and supports IP68 dustproof and waterproof level.


It also supports 2G EDGE,3G WCDMA, and 4G LTE wireless internet accessing function. About 2G GSM wireless mode ,it supports GPRS and EDGE, operating in GSM900&1800 Band. and 3G WCDMA wireless mode, it supports WCDMA and HSDPA/HSUPA/HSPA+, operating in Band1 ,Band2, Band8. and the 4G LTE, operating in Band1, Band3, Band7, Band8, Band39, Band41. The WiFi/BT frequency is 2.4GHz.

#### LEO-DLXXE:

LEO-DLXXE is a smart watch based on Android wear OS; it can be communicated with mobile phone via Bluetooth. Watch also support MP3 player function, voice communication, alarm clock, gyro sensor, intelligent user can judge the state of motion, with PPG measurement of heart rate and supports IP68 dustproof and waterproof level.

It also supports 2G EDGE,3G WCDMA, and 4G LTE wireless internet accessing function. About 2G GSM wireless mode ,it supports GPRS and EDGE, operating in GSM900&1800 Band. and 3G WCDMA wireless mode, it supports WCDMA and HSDPA/HSUPA/HSPA+, operating in Band1 ,Band2, Band8. and the 4G LTE, operating in Band1, Band3, Band7, Band8, Band39, Band41. The WiFi/BT frequency is 2.4GHz.

#### Battery information:

Name	Manufacture	Serials number	Description
Rechargeable Li-ion	Desay Battery Co.,Ltd	NA	Battery Model: HB512627ECW Rated capacity: 410mAh Nominal Voltage:  +3.82V
	Harbin Coslight Power Co.		

**Difference description:**

The differences between LEO-DLXX and LEO-DLXXE as below:

		<b>LEO-DLXX</b>	<b>LEO-DLXXE</b>
Licensed Frequency	LTE	the same	the same
	UMTS	the same	the same
	IC	the same	the same
	Antenna	The same	The same
Unlicensed Frequency	Bluetooth	the same	the same
	2.4G Wi-Fi	the same	the same
	IC	the same	the same
	Antenna	GPS&WIFI antenna pattern are different.	GPS&WIFI antenna pattern are different.
Hardware	PCB	the same	the same
Appearance	Dimension	the same	the same
	Color	Black, orange	Black
Accessory other	Battery	the same	the same
	Charge dock	the same	the same
	SIM card	Single	eSIM
	NFC	The same	The same
	GPS	The same	The same

According to the difference description above, full SAR test is performed on LEO-DLXX. For the same bands(UMTS Band II,LTE Band VII/XLI), LEO-DLXXE is tested at the worst case of LEO-DLXX. For the WiFi/BT bands, new SAR test is performed on LEO-DLXXE.

The differences between LEO-DLXX(E) **old** and LEO-DLXX(E) **new** as below:

<b>Model</b>	<b>LEO-DLXX old</b>	<b>LEO-DLXX new</b>
Trade mark	HUAWEI	HUAWEI
PCB layout	the same	the same
Frequency	the same	the same
eSIM	the same	the same
NFC/GPS	the same	the same
Hardware Version	the same	the same
Software Version	the same	the same
Dimensions	the same	the same
Appearance	the same	the same
main antenna	the same	the same
BT/Wi-Fi antenna	the same	the same
Battery	Type: Li-polymer Battery <b>Manufacture:</b> <b>Desay Battery Co.,Ltd</b> Description: Battery Model: HB512627ECW Rated capacity: 410mAh Nominal Voltage:3.82 V	Type: Li-polymer Battery <b>Manufacture:</b> <b>Harbin Coslight Power Co., Ltd.</b> <b>Desay Battery Co.,Ltd</b> Battery Model: HB512627ECW Rated capacity: 410mAh Nominal Voltage:3.82 V
Others	the same	the same

Model	LEO-DLXXE old	LEO-DLXXE new
Trade mark	HUAWEI	HUAWEI
PCB layout	the same	the same
Frequency	the same	the same
eSIM	the same	the same
NFC/GPS	the same	the same
Hardware Version	the same	the same
Software Version	the same	the same
Dimensions	the same	the same
Appearance	the same	the same
main antenna	the same	the same
BT/Wi-Fi antenna	the same	the same
Battery	Type: Li-polymer Battery <b>Manufacture:</b> <b>Desay Battery Co.,Ltd</b> Description: Battery Model: HB512627ECW Rated capacity: 410mAh Nominal Voltage:3.82 V	Type: Li-polymer Battery <b>Manufacture:</b> <b>Harbin Coslight Power Co., Ltd.</b> <b>Desay Battery Co.,Ltd</b> Battery Model: HB512627ECW Rated capacity: 410mAh Nominal Voltage:3.82 V
Others	the same	the same

According to the difference description above, This test report shares the same test data of LEO-DLXX, LEO-DLXXE (Report No: SYBH(Z-SAR)007122016-2) and adds the new optional battery test data at the SAR worst case of each frequency band.

#### 1.4 Test specification(s)

ANSI C95.1:1992	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.( IEEE Std C95.1-1991)
IEEE Std 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
RSS-102	Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands (Issue 5 of March 2015)
KDB447498 D01	General RF Exposure Guidance v06
KDB248227 D01	SAR Guidance for IEEE 802 11 Wi-Fi SAR v02r02
KDB865664 D01	SAR measurement 100 MHz to 6 GHz v01r04
KDB865664 D02	SAR Reporting v01r02
KDB690783 D01	SAR Listings on Grants v01r03
KDB941225 D01	3G SAR Procedures v03r01
KDB941225 D05	SAR for LTE Devices v02r05

#### 1.5 Testing laboratory

Test Site	The Reliability Laboratory of Huawei Technologies Co., Ltd.
Test Location	Section G1,Huawei Base Bantian, Longgang District, Shenzhen 518129, P.R. China
Telephone	+86 755 28780808
Fax	+86 755 89652518
State of accreditation	The Test laboratory (area of testing) is accredited according to ISO/IEC 17025. CNAS Registration number: L0310 A2LA TESTING CERT #2174.01 & 2174.02 & 2174.03

#### 1.6 Applicant and Manufacturer

Company Name	HUAWEI TECHNOLOGIES CO., LTD
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

#### 1.7 Application details


Start Date of test	2017-03-24
End Date of test	2017-03-27

#### 1.8 Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

## 2 SAR Measurement System

### 2.1 SAR Measurement Set-up

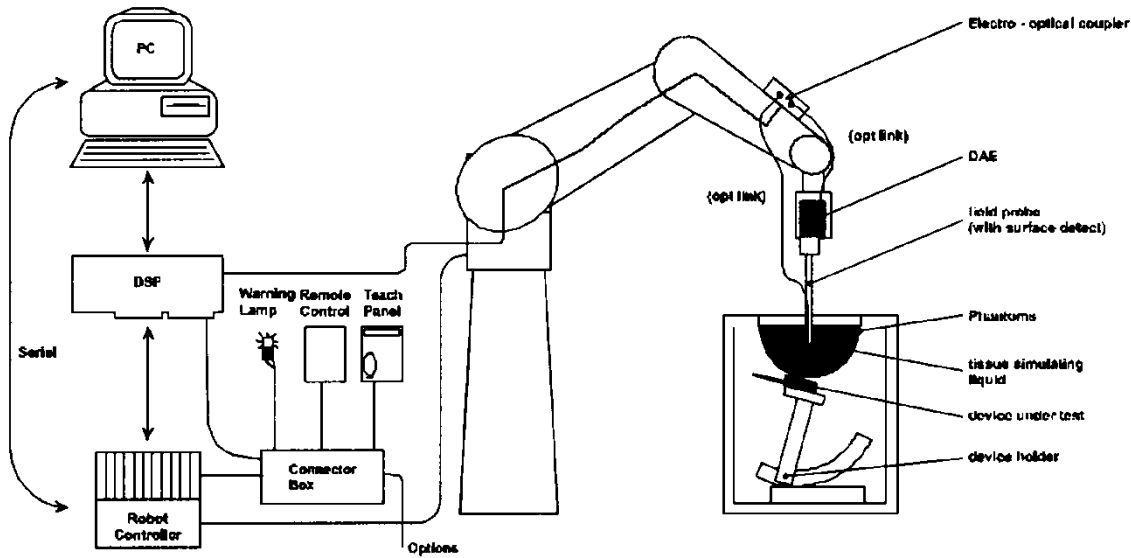

The DASYS system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASYS measurement server.
- The DASYS measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 7.
- DASYS software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System check dipoles allowing to validate the proper functioning of the system.

## 2.2 Test environment

The DASY measurement system is placed at the head end of a room with dimensions: 5 x 2.5 x 3 m<sup>3</sup>, the SAM phantom is placed in a distance of 75 cm from the side walls and 1.1m from the rear wall. Above the test system a 1.5 x 1.5 m<sup>2</sup> array of pyramid absorbers is installed to reduce reflections from the ceiling.

Picture 1 of the photo documentation shows a complete view of the test environment.


The system allows the measurement of SAR values larger than 0.005 mW/g.

## 2.3 Data Acquisition Electronics description

The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.


### DAE4

Input Impedance	200MOhm	
The Inputs	symmetrical and floating	
Common mode rejection	above 80 dB	


## 2.4 Probe description

These probes are specially designed and calibrated for use in liquids with high permittivities. They should not be used in air, since the spherical isotropy in air is poor ( $\pm 2$  dB). The dosimetric probes have special calibrations in various liquids at different frequencies.

### Isotropic E-Field Probe ES3DV3 for Dosimetric Measurements

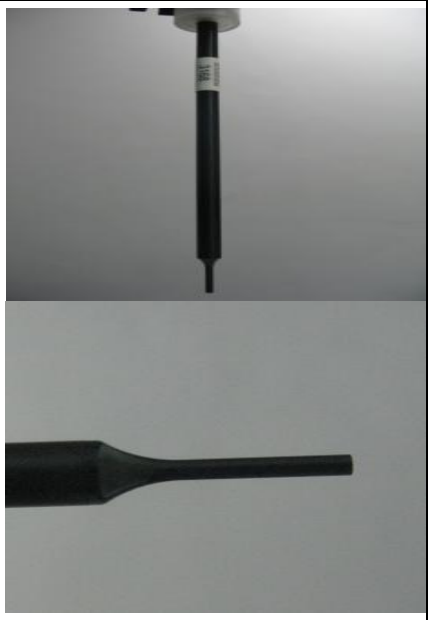
Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to 4 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 4 GHz)	
Directivity	$\pm 0.2$ dB in HSL (rotation around probe axis) $\pm 0.3$ dB in tissue material (rotation normal to probe axis)	
Dynamic range	5 $\mu$ W/g to > 100 mW/g; Linearity: $\pm 0.2$ dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones	

### Isotropic E-Field Probe EX3DV4 for Dosimetric Measurements

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to >6 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)	
Directivity	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)	
Dynamic range	10 $\mu$ W/g to > 100 mW/g; Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%	


## 2.5 Phantom description

### SAM Twin Phantom


Shell Thickness	2mm±0.2mm;The ear region:6.0±0.2mm	
Filling Volume	Approximately 25 liters	
Dimensions	Length:1000mm; Width:500mm; Height: adjustable feet	
Measurement Areas	Left hand Right hand Flat phantom	

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.

The following figure shows the definition of reference point:

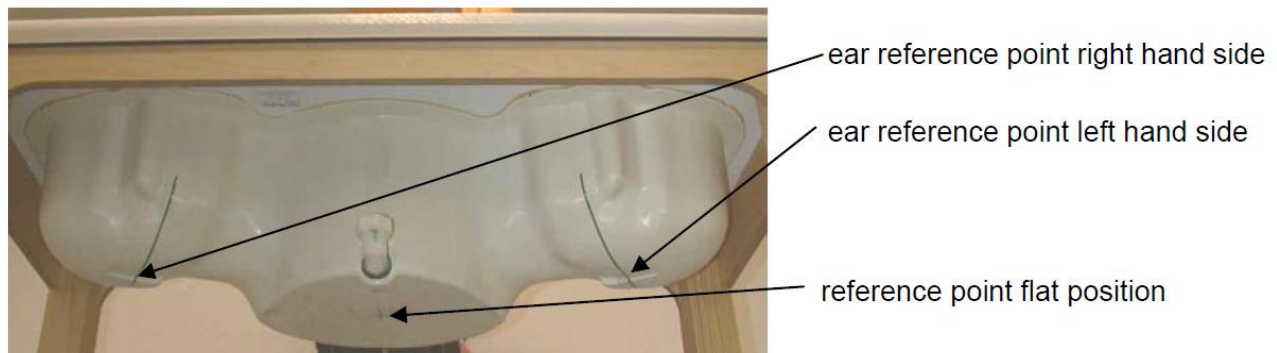

### ELI4 Phantom

Shell Thickness	2mm±0.2mm	
Filling Volume	Approximately 30 liters	
Dimensions	Major axis:600mm; Minor axis:400mm;	
Measurement Areas	Flat phantom	

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2 and all known tissue simulating liquids.

The phantom shell material is resistant to all ingredients used in the tissue-equivalent liquid recipes. The shell of the phantom including ear spacers is constructed from low permittivity and low loss material, with a relative permittivity  $2 \leq \epsilon_r \leq 5$  at  $\leq 3$  GHz,  $3 \leq \epsilon_r \leq 4$  at  $> 3$  GHz and a loss tangent  $\leq 0.05$ .

## 2.6 Device holder description

The DASY device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of  $65^\circ$ . The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.



The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\sigma = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

The device holder permits the device to be positioned with a tolerance of  $\pm 1^\circ$  in the tilt angle.

Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values.

Therefore those devices are normally only tested at the flat part of the SAM.

## 2.7 Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked

	Manufacturer	Device	Type	Serial number	Date of last calibration )*	Valid period
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	EX3DV4	7381	2016-09-29	One year
<input type="checkbox"/>	SPEAG	835 MHz Dipole	D835V2	4d126	2015-07-23	Three years
<input type="checkbox"/>	SPEAG	900 MHz Dipole	D900V2	1d192	2016-02-02	Three years
<input type="checkbox"/>	SPEAG	1750 MHz Dipole	D1750V2	1145	2016-02-02	Three years
<input checked="" type="checkbox"/>	SPEAG	1900 MHz Dipole	D1900V2	5d143	2014-09-23	Three years
<input type="checkbox"/>	SPEAG	2000 MHz Dipole	D2000V2	1036	2015-11-25	Three years
<input type="checkbox"/>	SPEAG	2300 MHz Dipole	D2300V2	1020	2015-09-21	Three years
<input checked="" type="checkbox"/>	SPEAG	2450 MHz Dipole	D2450V2	978	2016-02-08	Three years
<input checked="" type="checkbox"/>	SPEAG	2600 MHz Dipole	D2600V2	1119	2016-02-03	Three years
<input type="checkbox"/>	SPEAG	5GHz Dipole	D5GHzV2	1155	2015-04-27	Three years
<input checked="" type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	1492	2016-09-28	One year
<input checked="" type="checkbox"/>	SPEAG	Software	DASY 5	N/A	NCR	NCR
<input type="checkbox"/>	SPEAG	Twin Phantom	SAM1	TP-1475	NCR	NCR
<input type="checkbox"/>	SPEAG	Twin Phantom	SAM2	TP-1474	NCR	NCR
<input type="checkbox"/>	SPEAG	Twin Phantom	SAM3	TP-1597	NCR	NCR
<input type="checkbox"/>	SPEAG	Twin Phantom	SAM4	TP-1620	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM5	TP-1894	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM6	TP-1892	NCR	NCR
<input type="checkbox"/>	SPEAG	Flat Phantom	ELI 5.0	TP-1111	NCR	NCR
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMU 200	113989	2016-05-12	One year
<input checked="" type="checkbox"/>	R & S	WideBand Radio Communication Tester	CMW 500	126855	2016-07-07	One year
<input checked="" type="checkbox"/>	Agilent	Wireless Connectivity Test Set	N4010A	MY49081592	2016-08-05	One year
<input checked="" type="checkbox"/>	Agilent	Network Analyser	E5071B	MY42404956	2016-05-24	One year
<input checked="" type="checkbox"/>	Agilent	Dielectric Probe Kit	85070E	2484	NCR	NCR
<input checked="" type="checkbox"/>	Agilent	Signal Generator	N5181A	MY50145341	2016-11-14	One year
<input checked="" type="checkbox"/>	MINI-CIRCUITS	Amplifier	ZHL-42W	QA1402001	NCR	NCR
<input checked="" type="checkbox"/>	AR	Directional Coupler	DC7144M1	31190	2016-05-13	One year
<input checked="" type="checkbox"/>	Agilent	Power Meter	E4417A	MY54100027	2016-03-31	One year
<input checked="" type="checkbox"/>	Agilent	Power Meter Sensor	E9321A	MY54130007	2016-03-31	One year
<input checked="" type="checkbox"/>	Agilent	Power Meter Sensor	E9321A	MY54130001	2016-03-31	One year

Note:

1) Per KDB865664D01 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement.
- d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

3) \*All the equipments are within the valid period when the tests are performed.

## 3 SAR Measurement Procedure

### 3.1 Scanning procedure

The DASY installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. +/- 5 %.
- The “surface check” measurement tests the optical surface detection system of the DASY system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above  $\pm 0.1\text{mm}$ ). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within  $\pm 30^\circ$ .)
- The “area scan” measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension ( $\leq 2\text{GHz}$ ), 12 mm in x- and y- dimension (2-4 GHz) and 10mm in x- and y- dimension (4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in Appendix B.
- A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution:  $\Delta x_{\text{zoom}}$ ,  $\Delta y_{\text{zoom}} \leq 2\text{GHz} - \leq 8\text{mm}$ , 2-4GHz -  $\leq 5\text{ mm}$  and 4-6 GHz- $\leq 4\text{mm}$ ;  $\Delta z_{\text{zoom}} \leq 3\text{GHz} - \leq 5\text{ mm}$ , 3-4 GHz-  $\leq 4\text{mm}$  and 4-6GHz- $\leq 2\text{mm}$  where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.) are shown in table form in chapter 7.2.
- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2 mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth. A z-axis scan of the measurement with maximum SAR value is shown in Appendix B.

The following table summarizes the area scan and zoom scan resolutions per FCC KDB 865664D01:

Frequency	Maximun Area Scan resolution ( $\Delta x_{area}, \Delta y_{area}$ )	Maximun Zoom Scan spatial resolution ( $\Delta x_{zoom}, \Delta y_{zoom}$ )	Maximun Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid	Graded Grad		
			$\Delta z_{zoom}(n)$	$\Delta z_{zoom}(1)^*$	$\Delta z_{zoom}(n>1)^*$	
≤2GHz	≤15mm	≤8mm	≤5mm	≤4mm	$\leq 1.5 * \Delta z_{zoom}(n-1)$	≥30mm
2-3GHz	≤12mm	≤5mm	≤5mm	≤4mm	$\leq 1.5 * \Delta z_{zoom}(n-1)$	≥30mm
3-4GHz	≤12mm	≤5mm	≤4mm	≤3mm	$\leq 1.5 * \Delta z_{zoom}(n-1)$	≥28mm
4-5GHz	≤10mm	≤4mm	≤3mm	≤2.5mm	$\leq 1.5 * \Delta z_{zoom}(n-1)$	≥25mm
5-6GHz	≤10mm	≤4mm	≤2mm	≤2mm	$\leq 1.5 * \Delta z_{zoom}(n-1)$	≥22mm

### 3.2 Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 5 x 5 x 7 points( with 8mm horizontal resolution) or 7 x 7 x 7 points( with 5mm horizontal resolution) or 8 x 8 x 7 points( with 4mm horizontal resolution). The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

#### Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

#### Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff ].

#### Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

#### Advanced Extrapolation

DASY uses the advanced extrapolation option which is able to compansate boundary effects on E-field probes.

### 3.3 Data Storage and Evaluation

#### Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

#### Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm <sub>i</sub> , a <sub>i0</sub> , a <sub>i1</sub> , a <sub>i2</sub>
	- Conversion factor	ConvF <sub>i</sub>
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf/dcpi$$

with  $V_i$  = compensated signal of channel  $i$  ( $i = x, y, z$ )  
 $U_i$  = input signal of channel  $i$  ( $i = x, y, z$ )  
 $cf$  = crest factor of exciting field (DASY parameter)  
 $dcpi$  = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be

evaluated:

$$\begin{aligned} \text{E-field probes:} & \quad E_i = (V_i / \text{Norm}_i \cdot \text{ConvF})^{1/2} \\ \text{H-field probes:} & \quad H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f \end{aligned}$$

with  $V_i$  = compensated signal of channel i (i = x, y, z)  
 $\text{Norm}_i$  = sensor sensitivity of channel i (i = x, y, z)  
 [mV/(V/m)<sup>2</sup>] for E-field Probes  
 $\text{ConvF}$  = sensitivity enhancement in solution  
 $a_{ij}$  = sensor sensitivity factors for H-field probes  
 $f$  = carrier frequency [GHz]  
 $E_i$  = electric field strength of channel i in V/m  
 $H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = (E_{\text{tot}}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with  $\text{SAR}$  = local specific absorption rate in mW/g  
 $E_{\text{tot}}$  = total field strength in V/m  
 $\sigma$  = conductivity in [mho/m] or [Siemens/m]  
 $\rho$  = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{\text{pwe}} = E_{\text{tot}}^2 / 3770 \quad \text{or} \quad P_{\text{pwe}} = H_{\text{tot}}^2 \cdot 37.7$$

with  $P_{\text{pwe}}$  = equivalent power density of a plane wave in mW/cm<sup>2</sup>  
 $E_{\text{tot}}$  = total electric field strength in V/m  
 $H_{\text{tot}}$  = total magnetic field strength in A/m

## 4 System Verification Procedure

### 4.1 Tissue Verification

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within  $\pm 5\%$  of the target values.

The following materials are used for producing the tissue-equivalent materials.

Ingredients (% of weight)	Head Tissue						
	750	835	1750	1900	2300	2450	2600
Frequency Band (MHz)	750	835	1750	1900	2300	2450	2600
Water	39.2	41.45	52.64	55.242	62.82	62.7	55.242
Salt (NaCl)	2.7	1.45	0.36	0.306	0.51	0.5	0.306
Sugar	57.0	56.0	0.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	47.0	44.542	36.67	36.8	44.452
Ingredients (% of weight)	Body Tissue						
	750	835	1750	1900	2300	2450	2600
Frequency Band (MHz)	750	835	1750	1900	2300	2450	2600
Water	50.3	52.4	69.91	69.91	73.32	73.2	64.493
Salt (NaCl)	1.60	1.40	0.13	0.13	0.06	0.04	0.024
Sugar	47.0	45.0	0.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	29.96	29.96	26.62	26.7	32.252

Table 5: Tissue Dielectric Properties

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16M $\Omega$ + resistivity  
 HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]  
 Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

#### Simulating Head Liquid (HBBL600-6000V6), Manufactured by SPEAG:

Ingredients	(% by weight)
Water	50-65%
Mineral oil	10-30%
Emulsifiers	8-25%
Sodium salt	0-1.5%

#### Simulating Body Liquid (MBBL600-6000V6), Manufactured by SPEAG:

Ingredients	(% by weight)
Water	60-80%
Esters, Emulsifiers, Inhibitors	20-40%
Sodium salt	0-1.5%

Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Deviation (Within +/-5%)		Liquid Temp.	Test Date
		$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$		
1900MHz Head	1850	40.00	1.40	39.04	1.385	-2.40%	-1.07%	21.4°C	2017/3/24
	1880	40.00	1.40	38.90	1.412	-2.75%	0.86%		
	1900	40.00	1.40	38.80	1.430	-3.00%	2.14%		
	1910	40.00	1.40	38.73	1.447	-3.18%	3.36%		
2450MHz Head	2410	39.30	1.76	40.06	1.787	1.93%	1.53%	21.3°C	2017/3/24
	2435	39.20	1.79	39.97	1.811	1.96%	1.17%		
	2450	39.20	1.80	39.91	1.826	1.81%	1.44%		
	2460	39.20	1.81	39.87	1.836	1.71%	1.44%		
2600MHz Head	2510	39.12	1.86	38.86	1.853	-0.66%	-0.38%	21.0°C	2017/3/27
	2535	39.10	1.89	38.77	1.877	-0.84%	-0.69%		
	2560	39.00	1.92	38.69	1.903	-0.79%	-0.73%		
	2600	39.00	1.96	38.58	1.943	-1.08%	-0.87%		
	2610	38.98	1.97	38.55	1.953	-1.10%	-0.86%		
	2645	38.93	2.01	38.44	1.992	-1.26%	-0.90%		
1900MHz Body	1850	53.30	1.52	53.52	1.525	0.41%	0.33%	21.4°C	2017/3/24
	1880	53.30	1.52	53.37	1.554	0.13%	2.24%		
	1900	53.30	1.52	53.45	1.561	0.28%	2.70%		
	1910	53.30	1.52	53.22	1.592	-0.15%	4.74%		
2450MHz Body	2410	52.80	1.91	54.04	1.954	2.35%	2.30%	21.5°C	2017/3/24
	2435	52.70	1.94	54.00	1.971	2.47%	1.60%		
	2450	52.70	1.95	53.97	1.984	2.41%	1.74%		
	2460	52.70	1.96	53.97	1.993	2.41%	1.68%		
2600MHz Body	2510	52.62	2.03	52.52	2.115	-0.19%	4.19%	21.6°C	2017/3/25
	2535	52.59	2.07	52.50	2.139	-0.17%	3.33%		
	2560	52.57	2.09	52.47	2.163	-0.19%	3.49%		
	2600	52.50	2.16	52.41	2.204	-0.17%	2.04%		
	2610	52.36	2.18	52.39	2.216	0.06%	1.65%		
	2645	52.26	2.24	52.32	2.250	0.11%	0.45%		

Table 6: Measured Tissue Parameter

Note: 1) The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2°C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

2) KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.

3) The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

## 4.2 System Check

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests(Graphic Plot(s) see Appendix A).


System Check	Target SAR (1W)		Measured SAR (Normalized to 1W)		Deviation (Within +/-10% )		Liquid Temp.	Test Date
	1-g (W/kg)	10-g (W/kg)	1-g (W/kg)	10-g (W/kg)	$\Delta$ 1-g	$\Delta$ 10-g		
1900MHz Head	40.80	21.40	43.60	22.92	6.86%	7.10%	21.4°C	2017/3/24
2450MHz Head	53.30	24.90	52.00	24.16	-2.44%	-2.97%	21.3°C	2017/3/24
2600MHz Head	53.50	23.90	56.40	25.52	5.42%	6.78%	21.0°C	2017/3/27
1900MHz Body	40.20	21.30	40.80	21.32	1.49%	0.09%	21.4°C	2017/3/24
2450MHz Body	52.10	24.70	48.40	23.16	-7.10%	-6.23%	21.5°C	2017/3/24
2600MHz Body	51.60	23.00	54.00	24.92	4.65%	8.35%	21.6°C	2017/3/25

Table 7: System Check Results

### 4.3 System check Procedure

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250 mW (below 5GHz) or 100mW (above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

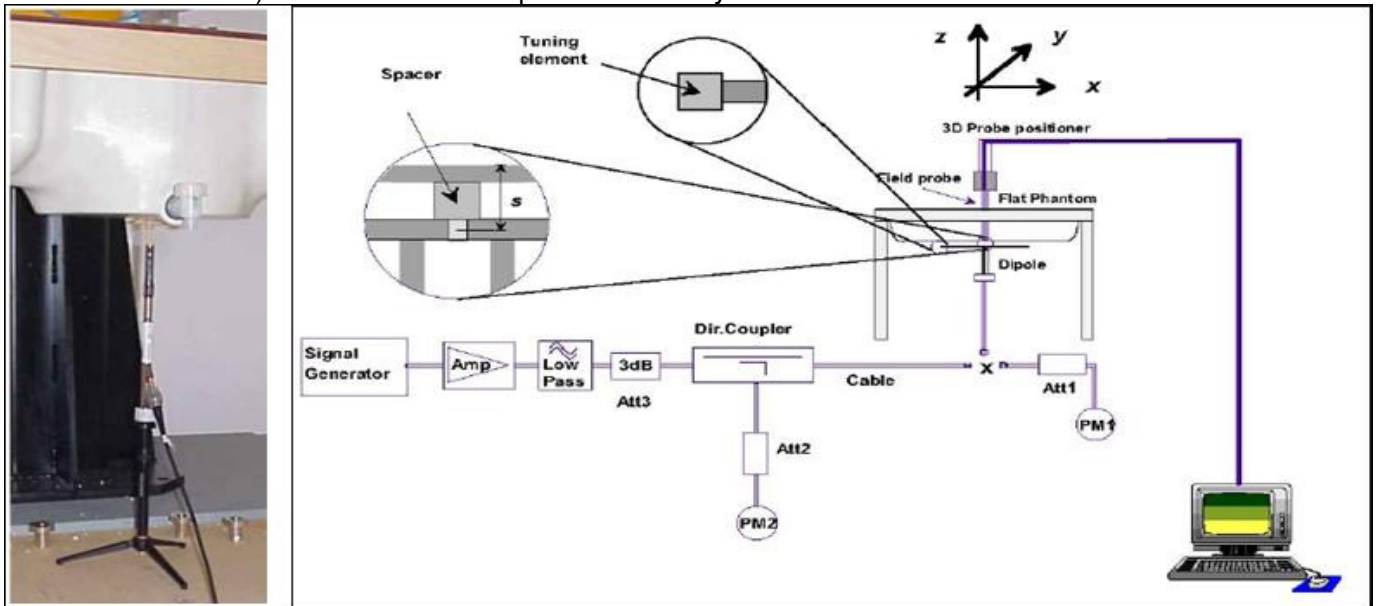

## 5 SAR measurement variability and uncertainty

### 5.1 SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in Section 7.2.

### 5.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04, when the highest measured 1-g SAR within a frequency band is  $< 1.5$  W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

## 6 SAR Test Configuration

### 6.1 Test Positions Configuration

Per FCC KDB 447498 D01, transmitters that are built-in within a wrist watch or similar wrist-worn devices typically operate in speaker mode for voice communication, with the device worn on the wrist and positioned next to the mouth. Next to the mouth exposure requires 1-g SAR, and the wrist-worn condition requires 10-g extremity SAR. The 10-g extremity and 1-g SAR test exclusions may be applied to the wrist and face exposure conditions. When SAR evaluation is required, next to the mouth use is evaluated with the front of the device positioned at 10 mm from a flat phantom filled with head tissue-equivalent medium. The wrist bands should be strapped together to represent normal use conditions. SAR for wrist exposure is evaluated with the back of the devices positioned in direct contact against a flat phantom fill with body tissue-equivalent medium. The wrist bands should be unstrapped and touching the phantom. The space introduced by the watch or wrist bands and the phantom must be representative of actual use conditions.

#### 6.1.1 10-g Extremity Exposure Condition

KDB447498 D01, the wrist watch requires extremity 10 gram SAR testing for the wrist (4.0 W/kg limit) with the back of the device in direct contact with the flat phantom. The strap shall be opened so that it is divided into two parts as shown in Figure below. The device shall be positioned directly against the phantom surface with the strap straightened as much as possible and the back of the device towards the phantom. If the strap cannot normally be opened to allow placing in direct contact with the phantom surface, it may be necessary to break the strap of the device but ensuring to not damage the antenna.

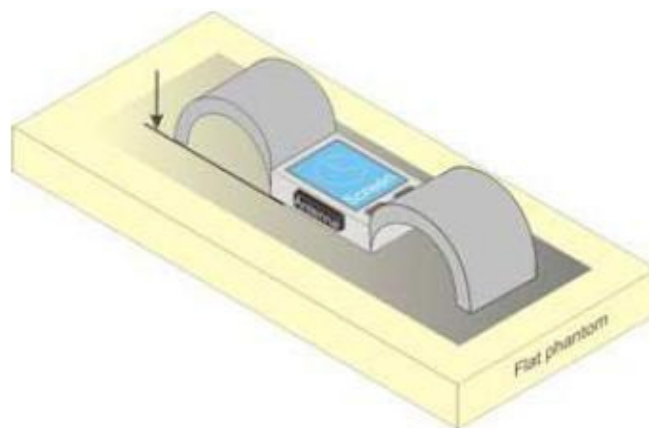


Figure – Test position for Limb-worn device

For this device, the rigid wrist band is non-metallic. The wrist bands don't contain any electronic circuitry and antenna inside. So for Limbs Exposure Condition, the watch is tested with bands taken off using the flat phantom. The back side of the watch can be positioned in direct contact against a flat phantom after wrist band taken off. It can be ensured that it will not damage the antenna.

#### 6.1.2 Next-to-Mouth Exposure Condition

The device also has a speaker mode, so head SAR testing (1.6 W/kg limit) of the front face of the device at a distance of 10mm from the flat phantom is appropriate per section 6.2 of FCC KDB Publication 447498 D01.

## 6.2 3G SAR Test Reduction Procedure

Per KDB941225 D01, in the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

### 6.3 UMTS Test Configuration

#### 1) Output Power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1’s” for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

#### 2) WCDMA

##### a. Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

##### b. Body SAR Measurements

SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode

#### 3) HSDPA

SAR for body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

Per KDB941225 D01, the 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures for the highest reported SAR body exposure configuration in 12.2 kbps RMC.

HSDPA should be configured according to UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HAPRQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. The  $\beta_c$  and  $\beta_d$  gain factors for DPCCH and DPDCH were set according to the values in the below table,  $\beta_{hs}$  for HS-DPCCH

is set automatically to the correct value when  $\Delta\text{ACK}$ ,  $\Delta\text{NACK}$ ,  $\Delta\text{CQI} = 8$ . The variation of the  $\beta_c / \beta_d$  ratio causes a power reduction at sub-tests 2 - 4.

Sub-test <sup>o</sup>	$\beta_c$ <sup>o</sup>	$\beta_d$ <sup>o</sup>	$\beta_d$ (SF) <sup>o</sup>	$\beta_c / \beta_d$ <sup>o</sup>	$\beta_{hs}$ (1) <sup>o</sup>	CM(dB)(2) <sup>o</sup>	MPR (dB) <sup>o</sup>
1 <sup>o</sup>	2/15 <sup>o</sup>	15/15 <sup>o</sup>	64 <sup>o</sup>	2/15 <sup>o</sup>	4/15 <sup>o</sup>	0.0 <sup>o</sup>	0 <sup>o</sup>
2 <sup>o</sup>	12/15(3) <sup>o</sup>	15/15(3) <sup>o</sup>	64 <sup>o</sup>	12/15(3) <sup>o</sup>	24/15 <sup>o</sup>	1.0 <sup>o</sup>	0 <sup>o</sup>
3 <sup>o</sup>	15/15 <sup>o</sup>	8/15 <sup>o</sup>	64 <sup>o</sup>	15/8 <sup>o</sup>	30/15 <sup>o</sup>	1.5 <sup>o</sup>	0.5 <sup>o</sup>
4 <sup>o</sup>	15/15 <sup>o</sup>	4/15 <sup>o</sup>	64 <sup>o</sup>	15/4 <sup>o</sup>	30/15 <sup>o</sup>	1.5 <sup>o</sup>	0.5 <sup>o</sup>

Note 1:  $\Delta\text{ACK}$ ,  $\Delta\text{NACK}$  and  $\Delta\text{CQI} = 8$      $A_{hs} = \beta_{hs} / \beta_c = 30/15$      $\beta_{hs} = 30/15 * \beta_c$ <sup>o</sup>  
Note 2 : CM=1 for  $\beta_c / \beta_d = 12/15$ ,  $\beta_{hs} / \beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.<sup>o</sup>  
Note 3 : For subtest 2 the  $\beta_c / \beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ <sup>o</sup>

Table 8: Sub-tests for UMTS Release 5 HSDPA

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI's
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 9: settings of required H-Set 1 QPSK acc. to 3GPP 34.121

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum HS-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

Table 10:HSDPA UE category

#### 4) HSUPA

SAR for body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.

Per KDB941225 D01v03, the 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures for the highest reported body exposure SAR configuration in 12.2 kbps RMC.

Due to inner loop power control requirements in HSDPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSDPA should be configured according to the values indicated below as well as other applicable procedures described in the ‘WCDMA Handset’ and ‘Release 5 HSDPA Data Device’ sections of 3G device.

Sub-test <sup>⌘</sup>	$\beta_c$ <sup>⌘</sup>	$\beta_d$ <sup>⌘</sup>	$\beta_d$ (SF) <sup>⌘</sup>	$\beta_c/\beta_d$ <sup>⌘</sup>	$\beta_{hs}^{(1)}$ <sup>⌘</sup>	$\beta_{ec}$ <sup>⌘</sup>	$\beta_{ed}$ <sup>⌘</sup>	$\beta_e$ <sup>⌘</sup> (SF) <sup>⌘</sup>	$\beta_{ed}$ <sup>⌘</sup> (code) <sup>⌘</sup>	CM <sup>(2)</sup> <sup>⌘</sup> (dB) <sup>⌘</sup>	MP R <sup>⌘</sup> (dB) <sup>⌘</sup>	AG <sup>(4)</sup> <sup>⌘</sup> Index <sup>⌘</sup>	E-TFC I <sup>⌘</sup>
1 <sup>⌘</sup>	11/15 <sup>(3)</sup> <sup>⌘</sup>	15/15 <sup>(3)</sup> <sup>⌘</sup>	64 <sup>⌘</sup>	11/15 <sup>(3)</sup> <sup>⌘</sup>	22/15 <sup>⌘</sup>	209/225 <sup>⌘</sup>	1039/225 <sup>⌘</sup>	4 <sup>⌘</sup>	1 <sup>⌘</sup>	1.0 <sup>⌘</sup>	0.0 <sup>⌘</sup>	20 <sup>⌘</sup>	75 <sup>⌘</sup>
2 <sup>⌘</sup>	6/15 <sup>⌘</sup>	15/15 <sup>⌘</sup>	64 <sup>⌘</sup>	6/15 <sup>⌘</sup>	12/15 <sup>⌘</sup>	12/15 <sup>⌘</sup>	94/75 <sup>⌘</sup>	4 <sup>⌘</sup>	1 <sup>⌘</sup>	3.0 <sup>⌘</sup>	2.0 <sup>⌘</sup>	12 <sup>⌘</sup>	67 <sup>⌘</sup>
3 <sup>⌘</sup>	15/15 <sup>⌘</sup>	9/15 <sup>⌘</sup>	64 <sup>⌘</sup>	15/9 <sup>⌘</sup>	30/15 <sup>⌘</sup>	30/15 <sup>⌘</sup>	$\beta_{ed1}:47/15$ <sup>⌘</sup> $\beta_{ed2}:47/15$ <sup>⌘</sup>	4 <sup>⌘</sup>	2 <sup>⌘</sup>	2.0 <sup>⌘</sup>	1.0 <sup>⌘</sup>	15 <sup>⌘</sup>	92 <sup>⌘</sup>
4 <sup>⌘</sup>	2/15 <sup>⌘</sup>	15/15 <sup>⌘</sup>	64 <sup>⌘</sup>	2/15 <sup>⌘</sup>	4/15 <sup>⌘</sup>	2/15 <sup>⌘</sup>	56/75 <sup>⌘</sup>	4 <sup>⌘</sup>	1 <sup>⌘</sup>	3.0 <sup>⌘</sup>	2.0 <sup>⌘</sup>	17 <sup>⌘</sup>	71 <sup>⌘</sup>
5 <sup>⌘</sup>	15/15 <sup>(4)</sup> <sup>⌘</sup>	15/15 <sup>(4)</sup> <sup>⌘</sup>	64 <sup>⌘</sup>	15/15 <sup>(4)</sup> <sup>⌘</sup>	30/15 <sup>⌘</sup>	24/15 <sup>⌘</sup>	134/15 <sup>⌘</sup>	4 <sup>⌘</sup>	1 <sup>⌘</sup>	1.0 <sup>⌘</sup>	0.0 <sup>⌘</sup>	21 <sup>⌘</sup>	81 <sup>⌘</sup>

Note 1:  $\Delta$  ACK,  $\Delta$  NACK and  $\Delta$  CQI = 8     $A_{hs} = \beta_{hs}/\beta_c = 30/15$      $\beta_{hs} = 30/15 * \beta_c$   
Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference<sup>⌘</sup>  
Note 3 : For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ <sup>⌘</sup>  
Note 4 : For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ <sup>⌘</sup>  
Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g<sup>⌘</sup>  
Note 6:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.<sup>⌘</sup>

Table 11:Subtests for UMTS Release 6 HSUPA

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	of E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF	11484	5.76
	4	4	2	4	20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF	22996	?
	4	4	10	4	20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM. (TS25.306-7.3.0).

Table 12:HSUPA UE category

## 5) DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a Second serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

**Table E.5.0: Levels for HSDPA connection setup**

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.


The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI's
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Table 13: settings of required H-Set 12 QPSK acc. to 3GPP 34.121

Note:

- 1.The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.
- 2.Maximum number of transmission is limited to 1,i.e.,retransmission is not allowed. The redundancy and constellation version 0 shall be used.

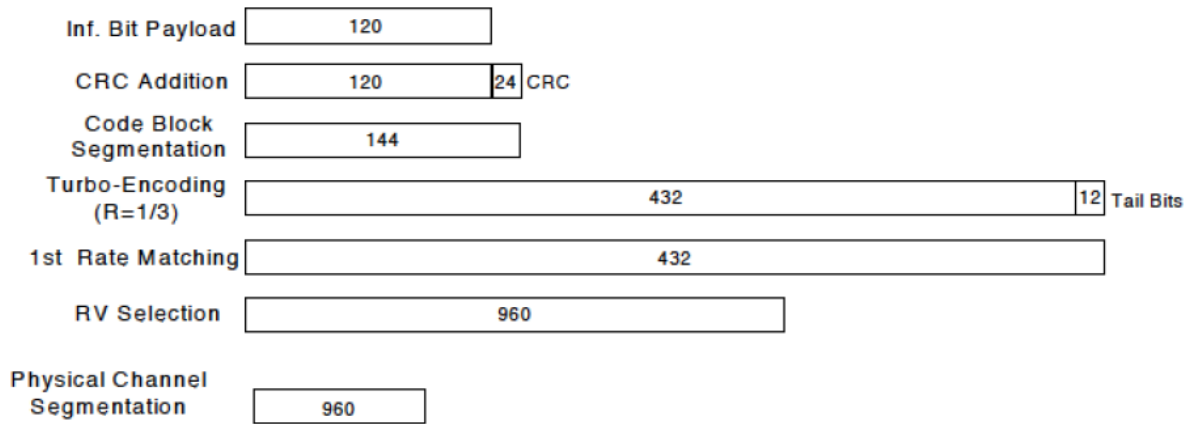

**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test <sup>Ⓛ</sup>	$\beta_c$ <sup>Ⓛ</sup>	$\beta_d$ <sup>Ⓛ</sup>	$\beta_d$ (SF) <sup>Ⓛ</sup>	$\beta_c/\beta_d$ <sup>Ⓛ</sup>	$\beta_{hs}(1)$ <sup>Ⓛ</sup>	CM(dB)(2) <sup>Ⓛ</sup>	MPR (dB) <sup>Ⓛ</sup>
1 <sup>Ⓛ</sup>	2/15 <sup>Ⓛ</sup>	15/15 <sup>Ⓛ</sup>	64 <sup>Ⓛ</sup>	2/15 <sup>Ⓛ</sup>	4/15 <sup>Ⓛ</sup>	0.0 <sup>Ⓛ</sup>	0 <sup>Ⓛ</sup>
2 <sup>Ⓛ</sup>	12/15(3) <sup>Ⓛ</sup>	15/15(3) <sup>Ⓛ</sup>	64 <sup>Ⓛ</sup>	12/15(3) <sup>Ⓛ</sup>	24/15 <sup>Ⓛ</sup>	1.0 <sup>Ⓛ</sup>	0 <sup>Ⓛ</sup>
3 <sup>Ⓛ</sup>	15/15 <sup>Ⓛ</sup>	8/15 <sup>Ⓛ</sup>	64 <sup>Ⓛ</sup>	15/8 <sup>Ⓛ</sup>	30/15 <sup>Ⓛ</sup>	1.5 <sup>Ⓛ</sup>	0.5 <sup>Ⓛ</sup>
4 <sup>Ⓛ</sup>	15/15 <sup>Ⓛ</sup>	4/15 <sup>Ⓛ</sup>	64 <sup>Ⓛ</sup>	15/4 <sup>Ⓛ</sup>	30/15 <sup>Ⓛ</sup>	1.5 <sup>Ⓛ</sup>	0.5 <sup>Ⓛ</sup>

Note 1:  $\Delta$  ACK,  $\Delta$  NACK and  $\Delta$  CQI = 8      $A_{hs} = \beta_{hs}/\beta_c = 30/15$       $\beta_{hs} = 30/15 * \beta_c$ <sup>Ⓛ</sup>

Note 2: CM=1 for  $\beta_c/\beta_d=12/15$ ,  $\beta_{hs}/\beta_c=24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.<sup>Ⓛ</sup>

Note 3: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c=11/15$  and  $\beta_d=15/15$ <sup>Ⓛ</sup>

Up commands are set continuously to set the UE to Max power.

Note:

1. The Dual Carriers transmission only applies to HSDPA physical channels
2. The Dual Carriers belong to the same Node and are on adjacent carriers.
3. The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation
4. The Dual Carriers operate in the same frequency band .
5. The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.
6. The device doesn't support carrier aggregation for it just can operate in Release 8.

## 6.4 LTE Test Configuration

SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices. The CMW500 WideBand Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR test were performed with the same number of RB and RB offsets transmitting on all TTI frames (Maximum TTI)

### 1) Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing. Therefore, spectrum plots for RB configurations were not required to be included in this report.

### 2) MPR

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed by 3GPP for the channel bandwidth and modulation combinations may be tested with MPR active. Configurations with RB allocations less than the RB thresholds required by 3GPP must be tested without MPR.

The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3**

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

### 3) A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by using Network Signalling Value of "NS\_01" on the base station simulator.

### 4) LTE procedures for SAR testing

A) Largest channel bandwidth standalone SAR test requirements

i) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

ii) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in i) are applied to measure the SAR for QPSK with 50% RB allocation.

iii) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in i) and ii) are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.

iv) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is  $> 1/2$  dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is  $> 1.45$  W/kg.

B) Other channel bandwidth standalone SAR test requirements


For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is  $> 1/2$  dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is  $> 1.45$  W/kg.

**5) TDD LTE test configuration**

According to KDB 941225 D05 SAR for LTE Devices v02r04, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

TDD LTE Band 38/41 supports 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

**Figure 4.2-1: Frame structure type 2**

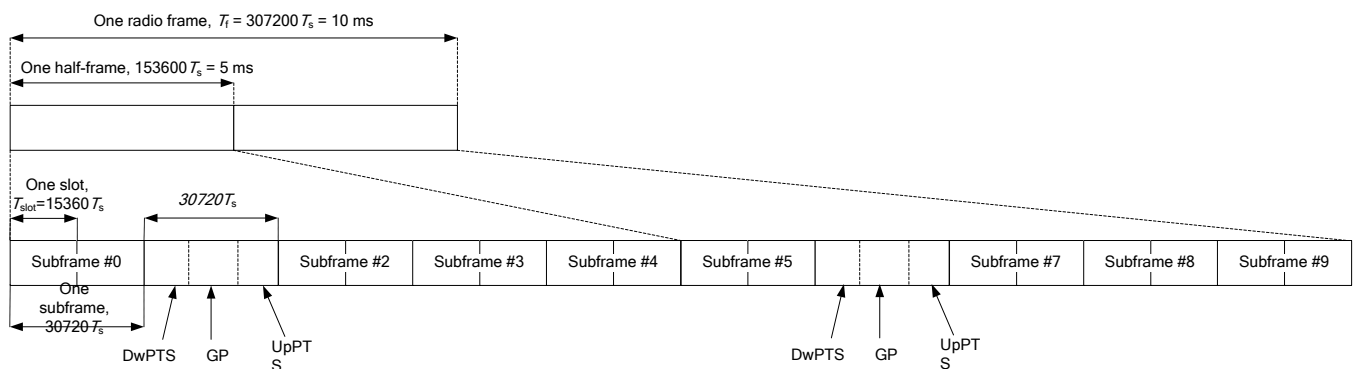

**Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)**

Special subframe configuration	Normal cyclic prefix in downlink				Extended cyclic prefix in downlink			
	DwPTS		UpPTS		DwPTS		UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$		
1	$19760 \cdot T_s$			$20480 \cdot T_s$				
2	$21952 \cdot T_s$			$23040 \cdot T_s$				
3	$24144 \cdot T_s$			$25600 \cdot T_s$				
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$		
5	$6592 \cdot T_s$			$20480 \cdot T_s$				
6	$19760 \cdot T_s$			$23040 \cdot T_s$				
7	$21952 \cdot T_s$			$12800 \cdot T_s$				
8	$24144 \cdot T_s$			-				
9	$13168 \cdot T_s$	-	-	-	-	-	-	

**Table 4.2-2: Uplink-downlink configurations**

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number										
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	
1	5 ms	D	S	U	U	D	D	S	U	U	D	
2	5 ms	D	S	U	D	D	D	S	U	D	D	
3	10 ms	D	S	U	U	U	D	D	D	D	D	
4	10 ms	D	S	U	U	D	D	D	D	D	D	
5	10 ms	D	S	U	D	D	D	D	D	D	D	
6	5 ms	D	S	U	U	U	D	S	U	U	D	

According to Figure 4.2-1, one radio frame is configured by 10 subframes, which consist of Uplink-subframe, Downlink-subframe and Special subframe. For TDD-LTE, the Duty Cycle should be calculated on Uplink-subframes and Special subframes, due to Special subframe containing both Uplink transmissions. So for one radio frame, Duty Cycle can be calculated with formula as below. The count of Uplink subframes are according to Table 4.2-2:

$$\text{Duty cycle} = (30720T_s \cdot \text{Ups} + \text{Uplink Component} \cdot \text{Specials}) / (307200T_s)$$

About the uplink component of Special subframes, we can figure out by Table 4.2-1:

$$\text{Uplink Component} = \text{UpPTS}$$

In conclusion, for the TDD LTE Band, Duty Cycle can be calculated with formula as below .all these sets are ok when we test, or we can set as below.

$$\text{Duty cycle} = [(30720T_s \cdot \text{Ups}) + \text{UpPTS} \cdot \text{Specials}] / (307200T_s)$$

And we can get different Duty cycles under different configurations:

Uplink-downlink configuration	Configuration of special subframe											
	Subframe number			Normal cyclic prefix in downlink				Extended cyclic prefix in downlink				
				Normal cyclic prefix in uplink		Extended cyclic prefix in uplink		Normal cyclic prefix in uplink		Extended cyclic prefix in uplink		
	D	S	U	configuration 0~4	configuration 5~9	configuration 0~4	configuration 5~9	configuration 0~3	configuration 4~7	configuration 0~3	configuration 4~7	
0	2	2	6	61.43%	62.85%	61.67%	63.33%	61.43%	62.85%	61.67%	63.33%	
1	4	2	4	41.43%	42.85%	41.67%	43.33%	41.43%	42.85%	41.67%	43.33%	
2	6	2	2	21.43%	22.85%	21.67%	23.33%	21.43%	22.85%	21.67%	23.33%	
3	6	1	3	30.71%	31.43%	30.83%	31.67%	30.71%	31.43%	30.83%	31.67%	
4	7	1	2	20.71%	21.43%	20.83%	21.67%	20.71%	21.43%	20.83%	21.67%	
5	8	1	1	10.71%	11.43%	10.83%	11.67%	10.71%	11.43%	10.83%	11.67%	
6	3	2	5	51.43%	52.85%	51.67%	53.33%	51.43%	52.85%	51.67%	53.33%	

For TDD LTE, SAR should be tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7 for Frame structure type 2.

## 6.5 WiFi Test Configuration

For WiFi SAR testing, a communication link is set up with the testing software for WiFi mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. The test procedures in KDB 248227D01 are applied.

### 6.5.1 Initial Test Position Procedure

For exposure condition with multiple test position, such as handsets operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4\text{W/kg}$ , no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is  $\leq 0.8\text{W/kg}$  or all test position are measured. For all positions/configurations tested using the initial test position and subsequent test positions, when the *reported* SAR is  $> 0.8\text{W/kg}$ , SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the *reported* SAR is  $\leq 1.2\text{W/kg}$  or all required channels are tested.

### 6.5.2 Initial Test Configuration Procedure

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required (see section 5.3.2 of KDB 248227D01). SAR test reduction of subsequent highest output test channels is based on the *reported* SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the *reported* SAR of the initial test configuration is  $> 0.8\text{W/kg}$ , SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the *reported* SAR is  $\leq 1.2\text{W/kg}$  or all required channels are tested.

### 6.5.3 Sub Test Configuration Procedure

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units.

When the highest reported SAR for the initial test configuration, according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2\text{W/kg}$ , SAR is not required for that subsequent test configuration.

## 6.5.4 WiFi 2.4G SAR Test Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.

### A) 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the *reported* SAR of the highest measured maximum output power channel (section 3.1 of of KDB 248227D01) for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the *reported* SAR is  $> 0.8$  W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any *reported* SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.

### B) 2.4GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3 of of KDB 248227D01). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

### C) SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

## 6.6 BT Test Configuration

For BT SAR testing, the EUT's BT test mode is open and the EUT is connected with CMW500 which provides continuous transmitting RF signal with maximum output power. The CMW500 controls the EUT operating at 2480MHz(78CH) with hopping off, and data rate is set for DH5. This RF signal utilized in SAR measurement has almost 100% duty cycle and crest factor is 1.

## 7 SAR Measurement Results

### 7.1 Conducted power measurements

For the measurements, the Rohde & Schwarz Radio Communication Tester CMU 200&CMW500 and/or Anritsu Radio Communication Analyzer MT8821C were used.

SAR drift measured at the same position in liquid before and after each SAR test as below 7.2 chapter.

#### 7.1.1 Conducted power measurements of UMTS Band II

UMTS Band II		Tune-up	Conducted Power (dBm)		
			9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	23.00	<b>22.56</b>	<b>22.69</b>	<b>22.67</b>
	12.2kbps AMR	23.00	22.53	22.77	22.65
HSDPA	Subtest 1	23.00	21.38	21.62	21.64
	Subtest 2	23.00	21.24	21.73	21.47
	Subtest 3	22.00	20.74	20.88	20.92
	Subtest 4	22.00	20.71	20.88	20.94
HSUPA	Subtest 1	22.00	21.14	21.31	21.28
	Subtest 2	20.50	20.10	20.74	20.62
	Subtest 3	20.50	20.55	20.63	19.91
	Subtest 4	20.50	20.74	20.77	20.87
	Subtest 5	22.00	21.06	21.13	21.38
DC-HSDPA	Subtest 1	22.00	20.40	20.65	20.67
	Subtest 2	22.00	20.32	20.77	20.54
	Subtest 3	21.00	19.75	19.90	20.02
	Subtest 4	21.00	19.73	19.93	20.01

Table 14: Conducted power measurement results of UMTS Band II

Note:

- 1) The conducted power of UMTS Band II is measured with RMS detector.
- 2) The bolded 12.2kbps RMC mode was selected for SAR testing (the primary mode).
- 3) Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a Second mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the Second mode.

### 7.1.1 Conducted power measurements of LTE Band VII

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20775CH	21100CH	21425CH
5MHz	QPSK	1	0	23.2	22.90	23.02	22.50
		1	13	23.2	22.94	22.90	22.20
		1	24	23.2	22.49	22.88	21.90
		12	0	22.2	21.87	22.09	22.20
		12	6	22.2	21.88	22.13	21.79
		12	13	22.2	21.93	22.14	21.77
		25	0	22.2	21.85	22.12	21.84
	16QAM	1	0	22.2	21.61	21.86	21.72
		1	13	22.2	21.42	21.76	21.44
		1	24	22.2	21.48	21.81	20.80
		12	0	21.7	21.07	21.04	21.26
		12	6	21.7	21.19	21.04	21.14
		12	13	21.7	21.16	20.99	20.83
		25	0	21.7	21.08	21.17	20.95
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20800CH	21100CH	21400CH
10MHz	QPSK	1	0	23.2	22.74	23.08	22.66
		1	25	23.2	23.05	22.98	22.18
		1	49	23.2	22.43	22.69	21.71
		25	0	22.2	21.83	22.14	22.15
		25	13	22.2	21.69	22.18	21.88
		25	25	22.2	21.83	22.17	21.62
		50	0	22.2	21.72	22.01	21.75
	16QAM	1	0	22.2	21.42	21.89	21.74
		1	25	22.2	21.28	21.60	21.39
		1	49	22.2	21.63	21.95	20.94
		25	0	21.7	21.06	21.02	21.26
		25	13	21.7	21.29	21.04	21.30
		25	25	21.7	21.19	21.18	20.64
		50	0	21.7	21.14	20.98	20.82

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20825CH	21100CH	21375CH
15MHz	QPSK	1	0	23.2	22.27	22.65	22.46
		1	38	23.2	22.90	23.20	22.81
		1	74	23.2	22.65	22.80	21.80
		36	0	22.2	22.19	22.18	21.92
		36	18	22.2	22.02	22.05	21.76
		36	39	22.2	22.08	22.04	21.93
		75	0	22.2	22.12	22.20	21.98
	16QAM	1	0	22.2	21.39	21.68	21.49
		1	38	22.2	21.90	21.50	21.88
		1	74	22.2	21.87	21.63	19.76
		36	0	21.7	21.21	21.13	21.02
		36	18	21.7	20.95	21.06	20.88
		36	39	21.7	20.75	20.89	20.71
		75	0	21.7	21.11	21.25	20.97
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20850CH	21100CH	21350CH
20MHz	QPSK	1	0	23.2	22.60	22.83	22.69
		1	50	23.2	<b>23.01</b>	<b>23.12</b>	<b>22.90</b>
		1	99	23.2	22.80	22.61	22.00
		50	0	22.2	22.04	22.07	21.95
		50	25	22.2	22.03	<b>22.11</b>	21.85
		50	50	22.2	21.96	22.02	21.95
		100	0	22.2	21.95	<b>22.11</b>	21.91
	16QAM	1	0	22.2	21.50	21.77	21.62
		1	50	22.2	21.70	21.76	21.96
		1	99	22.2	21.80	22.00	19.85
		50	0	21.7	21.01	21.17	21.20
		50	25	21.7	21.06	21.11	20.88
		50	50	21.7	20.92	21.04	20.81
		100	0	21.7	21.08	21.13	21.05

Table 15: Conducted power measurement results of LTE Band VII

### 7.1.2 Conducted power measurements of LTE Band XLI

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					40265CH	40620CH	41215CH
5MHz	QPSK	1	0	23.20	21.11	21.05	21.05
		1	13	23.20	21.34	21.28	21.22
		1	24	23.20	21.23	21.02	20.99
		12	0	22.20	20.35	20.23	20.30
		12	6	22.20	20.47	20.27	20.33
		12	13	22.20	20.42	20.14	20.19
		25	0	22.20	20.39	20.19	20.23
	16QAM	1	0	22.20	19.86	19.78	20.08
		1	13	22.20	20.13	19.82	20.25
		1	24	22.20	19.95	19.64	20.13
		12	0	21.70	19.32	19.02	19.31
		12	6	21.70	19.34	18.98	19.25
		12	13	21.70	19.28	18.84	19.19
		25	0	21.70	19.43	19.07	19.52
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					40290CH	40620CH	41190CH
10MHz	QPSK	1	0	23.20	21.24	21.28	20.99
		1	25	23.20	21.70	21.59	21.62
		1	49	23.20	21.18	21.18	21.10
		25	0	22.20	20.42	20.62	20.55
		25	13	22.20	20.39	20.56	20.51
		25	25	22.20	20.29	20.24	20.26
		50	0	22.20	20.36	20.30	20.46
	16QAM	1	0	22.20	20.38	20.63	20.38
		1	25	22.20	20.94	20.74	21.08
		1	49	22.20	20.60	20.47	20.46
		25	0	21.70	19.48	19.38	19.26
		25	13	21.70	19.46	19.39	19.43
		25	25	21.70	19.36	19.15	19.49
		50	0	21.70	19.36	19.18	19.47

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					40315CH	40620CH	41165CH
15MHz	QPSK	1	0	23.20	21.27	21.18	21.02
		1	38	23.20	21.62	21.39	21.52
		1	74	23.20	21.15	21.02	21.06
		36	0	22.20	20.57	20.34	20.15
		36	18	22.20	20.53	20.56	20.16
		36	39	22.20	20.32	20.21	20.18
		75	0	22.20	20.31	20.25	20.16
	16QAM	1	0	22.20	20.75	20.73	20.44
		1	38	22.20	20.99	20.53	20.48
		1	74	22.20	20.64	20.58	20.60
		36	0	21.70	19.61	19.39	19.49
		36	18	21.70	19.51	19.41	19.52
		36	39	21.70	19.08	18.97	19.53
		75	0	21.70	19.31	19.12	19.45
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					40340CH	40620CH	41140CH
20MHz	QPSK	1	0	23.20	21.25	21.45	21.27
		1	50	23.20	<b>21.63</b>	<b>21.62</b>	<b>21.48</b>
		1	99	23.20	21.22	21.33	21.27
		50	0	22.20	20.57	20.52	<b>20.62</b>
		50	25	22.20	20.35	20.47	20.09
		50	50	22.20	20.17	20.24	20.11
		100	0	22.20	20.23	20.15	20.10
	16QAM	1	0	22.20	19.83	19.95	20.19
		1	50	22.20	20.24	20.03	20.80
		1	99	22.20	19.76	19.71	20.27
		50	0	21.70	19.39	19.36	19.59
		50	25	21.70	19.32	19.32	19.54
		50	50	21.70	19.13	19.30	19.17
		100	0	21.70	19.22	19.39	19.08

Table 16: Conducted power measurement results of LTE Band XLI

### 7.1.3 Conducted power measurements of WiFi 2.4G

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
802.11b	1	2412	1	17.00	<b>15.18</b>	Yes
	6	2437		17.00	<b>15.20</b>	Yes
	11	2462		17.00	<b>15.10</b>	Yes
802.11g	1	2412	6	14.00	/	No
	6	2437		14.00	/	No
	11	2462		14.00	/	No
802.11n 20M	1	2412	6.5	13.00	/	No
	6	2437		13.00	/	No
	11	2462		13.00	/	No

Table 17: Conducted power measurement results of WiFi 2.4G of LEO-DLXX.

Note: 1) The Average conducted power of WiFi is measured with RMS detector.

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
802.11b	1	2412	1	17.00	<b>15.00</b>	Yes
	6	2437		17.00	<b>15.15</b>	Yes
	11	2462		17.00	<b>15.08</b>	Yes
802.11g	1	2412	6	14.00	/	No
	6	2437		14.00	/	No
	11	2462		14.00	/	No
802.11n 20M	1	2412	6.5	13.00	/	No
	6	2437		13.00	/	No
	11	2462		13.00	/	No

Table 18: Conducted power measurement results of WiFi 2.4G of LEO-DLXXE.

Note: 1) The Average conducted power of WiFi is measured with RMS detector.

### 7.1.1 Conducted power measurements of BT

The LEO-DLXX output power of BT antenna is as following:

BT 2450	Tune-up	Average Conducted Power (dBm)		
		0CH	39CH	78CH
DH5	17.00	15.45	15.48	16.15
2DH5	14.00	13.71	13.92	14.19
3DH5	14.00	13.82	13.93	14.05
BT 2450	Tune-up	Average Conducted Power (dBm)		
		0CH	19CH	39CH
BLE	9.00	7.19	7.11	7.02

Table 19: Conducted power measurement results of BT of LEO-DLXX.

Note: The conducted power of BT is measured with RMS detector.

The LEO-DLXXE output power of BT antenna is as following:

BT 2450	Tune-up	Average Conducted Power (dBm)		
		0CH	39CH	78CH
DH5	17.00	15.63	15.85	16.40
2DH5	14.00	13.85	14.08	14.24
3DH5	14.00	13.88	13.98	14.35
BT 2450	Tune-up	Average Conducted Power (dBm)		
		0CH	19CH	39CH
BLE	9.00	7.26	7.42	7.12

Table 20: Conducted power measurement results of BT of LEO-DLXXE.

Note: The conducted power of BT is measured with RMS detector.

## 7.2 SAR measurement Results

### General Notes:

- 1) Per KDB447498 D01, all SAR measurement results are scaled to the maximum tune-up tolerance limit to demonstrate SAR compliance.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8\text{W/kg}$  for 1-g or  $2.0\text{W/kg}$  for 10-g respectively, when the transmission band is  $\leq 100\text{MHz}$ .
  - $\leq 0.6\text{ W/kg}$  or  $1.5\text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
  - $\leq 0.4\text{ W/kg}$  or  $1.0\text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\geq 200\text{ MHz}$ .When the maximum output power variation across the required test channels is  $> \frac{1}{2}\text{ dB}$ , instead of the middle channel, the highest output power channel must be used.
- 3) Per KDB865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8\text{W/kg}$ ; if the deviation among the repeated measurement is  $\leq 20\%$ , and the measured SAR  $< 1.45\text{W/kg}$ , only one repeated measurement is required.
- 4) Per KDB865664 D02, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is  $> 1.5\text{ W/kg}$ , or  $> 7.0\text{ W/kg}$  for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing(Refer to appendix B for detailed SAR plots).

### UMTS Notes:

- 1) Per KDB941225 D01, when the maximum output power and tune-up tolerance specified for production units in a Second mode is  $\leq \frac{1}{4}\text{ dB}$  higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is  $\leq 1.2\text{ W/kg}$ , SAR measurement is not required for the Second mode.

### LTE Notes:

- 1) The LTE test configurations are determined according to KDB941225 D05. The general test procedures used for SAR testing can be found in Section 6.5.
- 2) A-MPR was disabled for all SAR test by setting NS\_01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames(maximum TTI)

### WiFi Notes:

Per KDB248227D01:

- 1) When reported SAR for the initial test position is  $\leq 0.4\text{W/kg}$ , no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is  $\leq 0.8\text{W/kg}$  or all test position are measured. For all positions/configurations tested using the initial test position and subsequent test positions, when the *reported* SAR is  $> 0.8\text{ W/kg}$ , SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the *reported* SAR is  $\leq 1.2\text{ W/kg}$  or all required channels are tested.
- 2) The highest SAR measured for the initial test position or initial test configuration should be used to determine SAR test exclusion according to the sum of 1-g SAR and SAR peak to location ratio

provisions in KDB 447498. In addition, a test lab may also choose to perform standalone SAR measurements for test positions and 802.11 configurations that are not required by the initial test position or initial test configuration procedures and apply the results to determine simultaneous transmission SAR test exclusion, according to sum of 1-g and SAR peak to location ratio requirements to reduce the number of simultaneous transmission SAR measurements.

3) For WiFi 2.4G , SAR is measured for 2.4 GHz 802.11b DSSS using the initial test position procedure. SAR is not required for the 2.4 GHz 802.11g/n OFDM conditions when KDB Publication 447498 SAR test exclusion applies to the OFDM configuration or when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

**BT Notes:**

1) Speaker mode for voice communication is not applicable for BT. So Next-to-Mouth Exposure SAR test for BT is not required.

### 7.2.1 SAR measurement Result of UMTS Band II

Test Position and Dist.	Wrist-band	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	SAR Plot
				1-g	10-g					
Front side 10mm	Original LEO-DLXX test data									
	Non-Metallic	9400/1880	RMC	0.411	0.243	0.03	22.69	23.00	0.441	/
	Non-Metallic	9262/1852.4	RMC	0.559	0.327	0.00	22.56	23.00	0.619	/
	Non-Metallic	9538/1907.6	RMC	0.657	0.373	0.01	22.67	23.00	0.709	/
	New Test data of LEO-DLXX at worst case with Battery2									
	Non-Metallic	9538/1907.6	RMC	0.416	0.247	0.13	22.67	23.00	0.449	Yes
	Original LEO-DLXXE tested data at the worst position of LEO-DLXX									
	Non-Metallic	9538/1907.6	RMC	0.565	0.324	-0.02	22.67	23.00	0.610	/
	New Test data of LEO-DLXXE at worst case with Battery2									
Non-Metallic	9538/1907.6	RMC	0.607	0.355	0.00	22.67	23.00	0.655	Yes	

Table 21: Next-to-Mouth Exposure SAR test results of UMTS Band II(1.6W/kg Limit)

Test Position and Dist.	Wrist-band	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 10-g SAR (W/kg)	SAR Plot
				1-g	10-g					
Back side 0mm	Original LEO-DLXX test data									
	Non-Metallic	9400/1880	RMC	1.530	0.962	0.01	22.69	23.00	1.033	/
	New Test data of LEO-DLXX at worst case with Battery2									
	Non-Metallic	9400/1880	RMC	1.540	0.993	-0.03	22.69	23.00	1.066	Yes
	Original LEO-DLXXE tested data at the worst position of LEO-DLXX									
	Non-Metallic	9400/1880	RMC	1.620	1.030	0.00	22.69	23.00	1.106	/
	New Test data of LEO-DLXXE at worst case with Battery2									
Non-Metallic	9400/1880	RMC	1.520	0.960	0.01	22.69	23.00	1.031	Yes	

Table 22: 10-g Extremity Exposure SAR test results of UMTS Band II(4.0W/kg Limit)

## 7.2.2 SAR measurement Result of LTE Band VII

Test Position and Dist.	Wrist-band	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	SAR Plot.	
				1-g	10-g						
Original LEO-DLXX test data											
Front side 10mm	Non-Metallic	21100/2535	20M QPSK 1RB#50	1.030	0.477	-0.05	23.12	23.20	1.049	/	
	Non-Metallic (Repeated)	21100/2535	20M QPSK 1RB#50	0.940	0.438	-0.19	23.12	23.20	0.957	/	
	Non-Metallic	20850/2510	20M QPSK 1RB#50	0.762	0.378	0.01	23.01	23.20	0.796	/	
	Non-Metallic	21350/2560	20M QPSK 1RB#50	0.942	0.437	-0.06	22.90	23.20	1.009	/	
	Non-Metallic	21100/2535	20M QPSK 50%RB#25	0.718	0.342	0.01	22.11	22.20	0.733	/	
	Non-Metallic	21100/2535	20M QPSK 100%RB#0	0.585	0.273	0.02	22.11	22.20	0.597	/	
	New Test data of LEO-DLXX at worst case with Battery2										
	Non-Metallic	21100/2535	20M QPSK 1RB#50	0.875	0.404	0.03	23.12	23.20	0.891	Yes	
	Original LEO-DLXXE tested data at the worst position of LEO-DLXX										
	Non-Metallic	21100/2535	20M QPSK 1RB#50	0.949	0.440	-0.06	23.12	23.20	0.967	/	
New Test data of LEO-DLXXE at worst case with Battery2											
Non-Metallic	21100/2535	20M QPSK 1RB#50	0.929	0.431	-0.06	23.12	23.20	0.946	Yes		

Table 23: Next-to-Mouth Exposure SAR test results of LTE Band VII(1.6W/kg Limit)

Test Position and Dist.	Wrist-band	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 10-g SAR (W/kg)	SAR Plot.	
				1-g	10-g						
Original LEO-DLXX test data											
Back side 0mm	Non-Metallic	21100/2535	20M QPSK 1RB#50	2.940	1.120	0.11	23.12	23.20	1.141	/	
	Non-Metallic	21100/2535	20M QPSK 50%RB#25	2.610	0.974	0.16	22.11	22.20	0.994	/	
	New Test data of LEO-DLXX at worst case with Battery2										
	Non-Metallic	21100/2535	20M QPSK 1RB#50	2.790	1.060	0.08	23.12	23.20	1.080	Yes	
	Original LEO-DLXXE tested data at the worst position of LEO-DLXX										
	Non-Metallic	21100/2535	20M QPSK 1RB#50	2.460	0.982	0.04	23.12	23.20	1.000	/	
	New Test data of LEO-DLXXE at worst case with Battery2										
	Non-Metallic	21100/2535	20M QPSK 1RB#50	2.470	0.977	0.00	23.12	23.20	0.995	Yes	

Table 24: 10-g Extremity Exposure SAR test results of LTE Band VII(4.0W/kg Limit)

### 7.2.3 SAR measurement Result of LTE Band XLI

Test Position and Dist.	Wrist-band	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	SAR Plot.
				1-g	10-g					
Front side 10mm	Original LEO-DLXX test data									
	Non-Metallic	40340 /2565	20M QPSK 1RB#50	0.369	0.172	-0.03	21.63	23.20	0.530	/
	Non-Metallic	40620 /2593	20M QPSK 1RB#50	0.345	0.160	0.08	21.62	23.20	0.496	/
	Non-Metallic	41140 /2645	20M QPSK 1RB#50	0.255	0.117	0.04	21.48	23.20	0.379	/
	Non-Metallic	41140 /2645	20M QPSK 50%RB#0	0.205	0.095	0.02	20.62	22.20	0.295	/
	New Test data of LEO-DLXX at worst case with Battery2									
	Non-Metallic	40340 /2565	20M QPSK 1RB#50	0.343	0.158	0.08	21.63	23.20	0.492	Yes
	Original LEO-DLXXE tested data at the worst position of LEO-DLXX									
	Non-Metallic	40340 /2565	20M QPSK 1RB#50	0.343	0.160	0.02	21.63	23.20	0.492	/
	New Test data of LEO-DLXXE at worst case with Battery2									
Non-Metallic	40340 /2565	20M QPSK 1RB#50	0.371	0.173	-0.13	21.63	23.20	0.533	Yes	

Table 25: Next-to-Mouth Exposure SAR test results of LTE Band XLI(1.6W/kg Limit)

Test Position and Dist.	Wrist-band	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 10-g SAR (W/kg)	SAR Plot.
				1-g	10-g					
Back side 0mm	Original LEO-DLXX test data									
	Non-Metallic	40340 /2565	20M QPSK 1RB#50	0.928	0.354	-0.05	21.63	23.20	0.508	/
	Non-Metallic	41140 /2645	20M QPSK 50%RB#0	0.584	0.221	0.09	20.62	22.20	0.318	/
	New Test data of LEO-DLXX at worst case with Battery2									
	Non-Metallic	40340 /2565	20M QPSK 1RB#50	0.897	0.343	0.03	21.63	23.20	0.492	Yes
	Original LEO-DLXXE tested data at the worst position of LEO-DLXX									
	Non-Metallic	40340 /2565	20M QPSK 1RB#50	0.934	0.353	0.17	21.63	23.20	0.507	/
	New Test data of LEO-DLXXE at worst case with Battery2									
	Non-Metallic	40340 /2565	20M QPSK 1RB#50	0.680	0.317	0.02	21.63	23.20	0.455	Yes

Table 26: 10-g Extremity Exposure SAR test results of LTE Band XLI(4.0W/kg Limit)

### 7.2.4 SAR measurement Result of WiFi 2.4G

Test Position and Dist.	Wrist-band	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled 1-g SAR (W/kg)	SAR Plot
				Area Scan 1-g	Zoom Scan 1-g					
Front side 10mm	Original LEO-DLXX test data									
	Non-Metallic	6/2437	802.11 b	0.066	0.058	0.05	15.20	17.00	0.087	/
	Non-Metallic	1/2412	802.11 b	0.101	0.099	-0.12	15.18	17.00	0.150	/
	Non-Metallic	11/2462	802.11 b	0.062	0.057	-0.11	15.10	17.00	0.088	/
	New Test data of LEO-DLXX at worst case with Battery2									
	Non-Metallic	1/2412	802.11 b	0.092	0.069	-0.13	15.18	17.00	0.105	Yes

Table 27: Next-to-Mouth Exposure SAR test results of WiFi 2.4G of LEO-DLXX(1.6W/kg Limit)

Test Position and Dist.	Wrist-band	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled 10-g SAR (W/kg)	SAR Plot
				Area Scan 10-g	Zoom Scan 10-g					
Back side 0mm	Original LEO-DLXX test data									
	Non-Metallic	6/2437	802.11 b	0.063	0.073	0.10	15.20	17.00	0.111	/
	New Test data of LEO-DLXX at worst case with Battery2									
	Non-Metallic	6/2437	802.11 b	0.066	0.074	-0.02	15.20	17.00	0.112	Yes

Table 28: 10-g Extremity Exposure SAR test results of WiFi 2.4G of LEO-DLXX (4.0W/kg Limit)

Test Position and Dist.	Wrist-band	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled 1-g SAR (W/kg)	SAR Plot
				Area Scan 1-g	Zoom Scan 1-g					
Front side 10mm	Original LEO-DLXXE test data									
	Non-Metallic	6/2437	802.11 b	0.141	0.134	-0.12	15.15	17.00	0.205	/
	Non-Metallic	1/2412	802.11 b	0.114	0.123	0.05	15.00	17.00	0.195	/
	Non-Metallic	11/2462	802.11 b	0.122	0.129	-0.04	15.08	17.00	0.201	/
	New Test data of LEO-DLXXE at worst case with Battery2									
	Non-Metallic	6/2437	802.11 b	0.137	0.119	0.17	15.15	17.00	0.182	Yes

Table 29: Next-to-Mouth Exposure SAR test results of WiFi 2.4G of LEO-DLXXE(1.6W/kg Limit)

Test Position and Dist.	Wrist-band	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled 10-g SAR (W/kg)	SAR Plot
				Area Scan 10-g	Zoom Scan 10-g					
Back side 0mm	Original LEO-DLXXE test data									
	Non-Metallic	6/2437	802.11 b	0.061	0.060	0.16	15.15	17.00	0.091	/
	New Test data of LEO-DLXXE at worst case with Battery2									
	Non-Metallic	6/2437	802.11 b	0.049	0.052	0.07	15.15	17.00	0.079	Yes

Table 30: 10-g Extremity Exposure SAR test results of WiFi 2.4G of LEO-DLXXE (4.0W/kg Limit)

According to KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at maximum tune-up tolerance limit. The scaled reported SAR is presented as below.

Test Position and Dist.	Wrist-band	Test channel /Freq. (MHz)	Test Mode	Scaled SAR1-g (W/kg)	Actual duty factor	Maximum duty factor	Reported SAR <sub>1-g</sub> (W/kg)
Front side 10mm	Original LEO-DLXX test data						
	Non-Metallic	6/2437	802.11 b	0.087	97.49%	100%	0.089
	Non-Metallic	1/2412	802.11 b	0.150	97.49%	100%	0.154
	Non-Metallic	11/2462	802.11 b	0.088	97.49%	100%	0.090
	New Test data of LEO-DLXX at worst case with Battery2						
	Non-Metallic	11/2462	802.11 b	0.105	97.49%	100%	0.108

Test Position and Dist.	Wrist-band	Test channel /Freq. (MHz)	Test Mode	Scaled SAR10-g (W/kg)	Actual duty factor	Maximum duty factor	Reported SAR <sub>10-g</sub> (W/kg)
Back side 0mm	Original LEO-DLXX test data						
	Non-Metallic	6/2437	802.11 b	0.111	97.49%	100%	0.114
	New Test data of LEO-DLXX at worst case with Battery2						
	Non-Metallic	6/2437	802.11 b	0.112	97.49%	100%	0.115

Test Position and Dist.	Wrist-band	Test channel /Freq. (MHz)	Test Mode	Scaled SAR1-g (W/kg)	Actual duty factor	Maximum duty factor	Reported SAR <sub>1-g</sub> (W/kg)
Front side 10mm	Original LEO-DLXXE test data						
	Non-Metallic	6/2437	802.11 b	0.205	97.49%	100%	0.210
	Non-Metallic	1/2412	802.11 b	0.195	97.49%	100%	0.200
	Non-Metallic	11/2462	802.11 b	0.201	97.49%	100%	0.206
	New Test data of LEO-DLXXE at worst case with Battery2						
Non-Metallic	6/2437	802.11 b	0.182	97.49%	100%	0.187	

Test Position and Dist.	Wrist-band	Test channel /Freq. (MHz)	Test Mode	Scaled SAR10-g (W/kg)	Actual duty factor	Maximum duty factor	Reported SAR <sub>10-g</sub> (W/kg)
Back side 0mm	Original LEO-DLXXE test data						
	Non-Metallic	6/2437	802.11 b	0.091	97.49%	100%	0.094
	New Test data of LEO-DLXXE at worst case with Battery2						
Non-Metallic	6/2437	802.11 b	0.079	97.49%	100%	0.082	

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR(W/kg)	Adjusted SAR (W/kg)	SAR test
802.11b	17.00	50.12	0.210	/	Yes
802.11g	14.00	25.12	/	0.105	No
802.11n 20M	13.00	19.95	/	0.084	No

Note: Per KDB248227D01, for SAR test of WiFi 2.4G,

- 1) SAR is measured for 2.4 GHz 802.11b DSSS using the initial test position procedure.
- 2) As the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM 802.11g/n to DSSS specified maximum output power and the adjusted SAR is < 1.2 W/kg, so SAR for 802.11g/n is not required.

### 7.2.5 SAR measurement Result of BT

Test Position and Dist.	Wrist-band	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 10-g SAR (W/kg)	SAR Plot
				1-g	10-g					
Back side 0mm	Original LEO-DLXX test data									
	Non-Metallic	78/2480	DH5	0.049	0.027	0.07	16.15	17.00	0.033	/
	New Test data of LEO-DLXX at worst case with Battery2									
	Non-Metallic	78/2480	DH5	0.047	0.026	0.18	17.42	17.50	0.026	Yes

Table 31: 10-g Extremity Exposure SAR test results of BT of LEO-DLXX (4.0W/kg Limit)


Test Position and Dist.	Wrist-band	Test channel /Freq. (MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 10-g SAR (W/kg)	SAR Plot
				1-g	10-g					
Back side 0mm	Original LEO-DLXXE test data									
	Non-Metallic	78/2480	DH5	0.046	0.028	-0.14	16.40	17.00	0.033	/
	New Test data of LEO-DLXXE at worst case with Battery2									
	Non-Metallic	78/2480	DH5	0.045	0.024	0.04	17.35	17.50	0.025	Yes

Table 32: 10-g Extremity Exposure SAR test results of BT of LEO-DLXXE (4.0W/kg Limit)

### 7.3 Multiple Transmitter Evaluation

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB 447498D01 General RF Exposure Guidance v06.

The location of the antennas inside the device is shown as below picture:

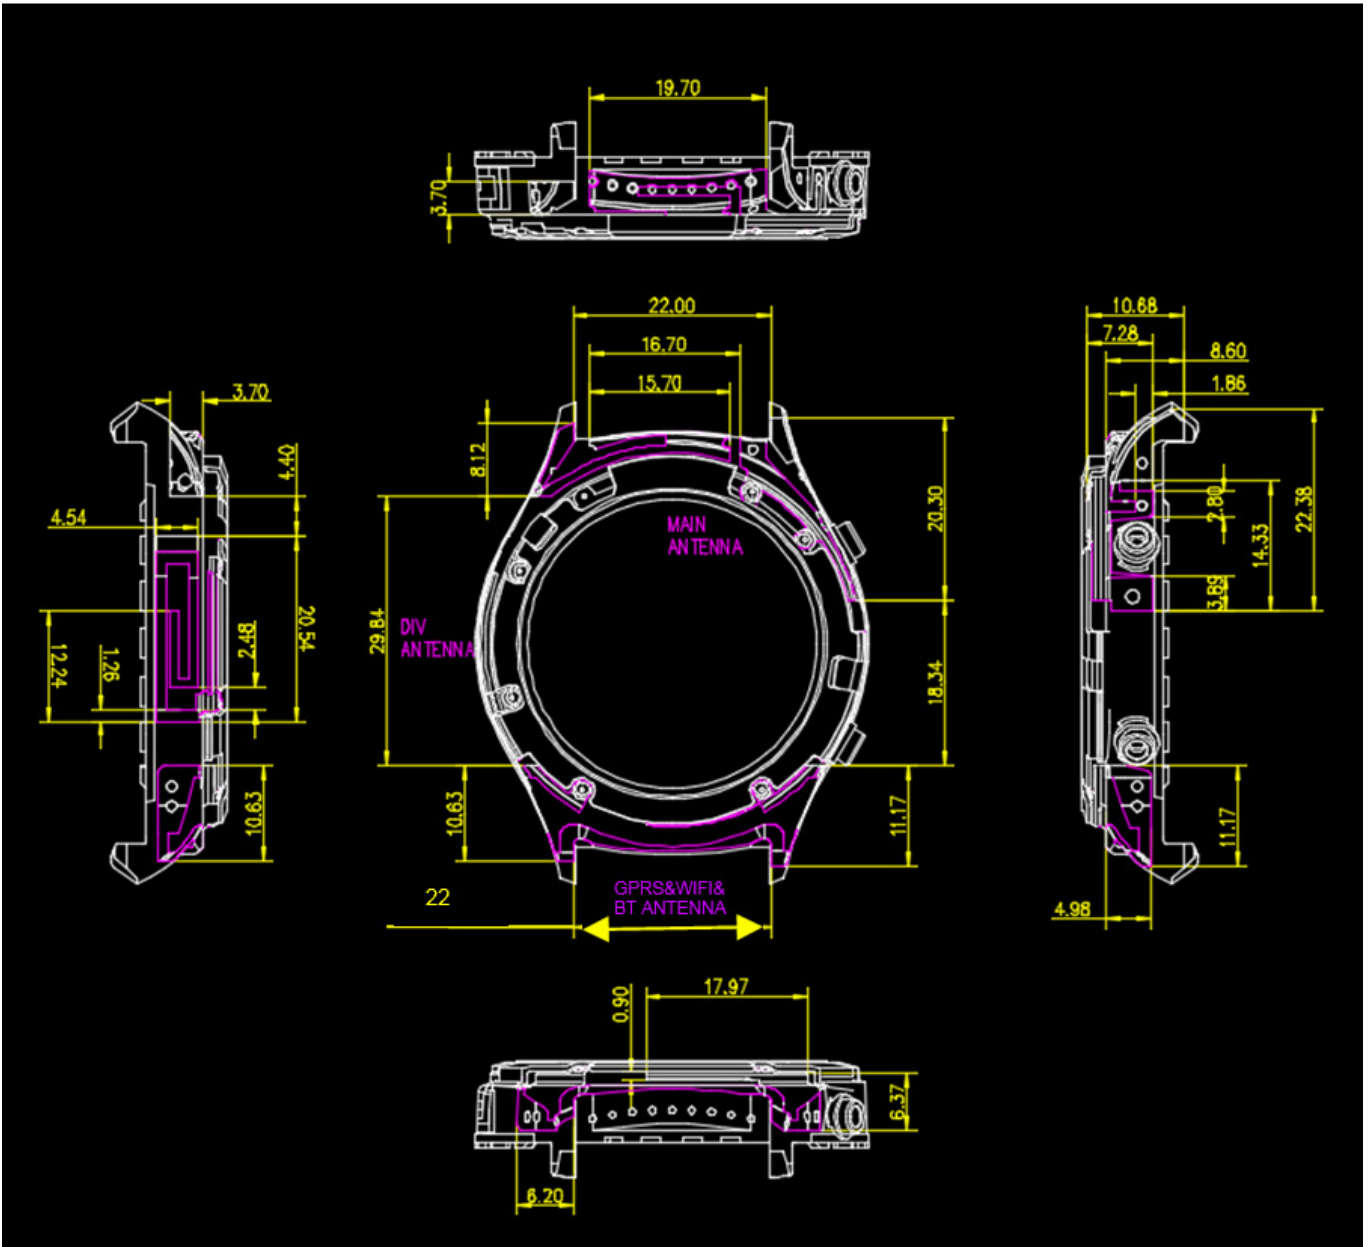

Note:

- 1) The NFC antenna does not have the transmitter function
- 2) Div antenna does not have the transmitter function.

### 7.3.1 Stand-alone SAR test exclusion

Per FCC KDB 447498D01v06: the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for product specific 10-g SAR, where:

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	$P_{\text{max}}$ (dBm)*	$P_{\text{max}}$ (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
WiFi 2.4G	Next to mouth	17.00	50.12	10	2.480	7.89	3.00	No
WiFi 2.4G	10g Extremity	17.00	50.12	5	2.480	15.79	7.50	No
BT	10g Extremity	17.00	50.12	5	2.480	15.79	7.50	No

Table 33: Standalone SAR test exclusion for WiFi 2.4G/BT

Note:

1)\* - maximum possible output power declared by manufacturer

### 7.3.2 Simultaneous Transmission Possibilities

The Simultaneous Transmission Possibilities of this device are as below:

No.	Configuration	Next-to-Mouth(10mm)	10-g Extremity (0mm)
1	UMTS/LTE + WiFi	Yes	Yes
2	UMTS/LTE + BT	NA	Yes

Table 34: Simultaneous Transmission Possibilities

Note:

- 1) The device does not support simultaneous WiFi and BT, because they share the same antenna.
- 2) Speaker mode for voice communication is not applicable for BT. So Next-to-Mouth Exposure SAR test for BT is not required.

### 7.3.3 Simultaneous Transmission

Test Position		Front Side 10mm 1-g SAR (Next-to-Mouth)	Back Side 0mm 10-g SAR (10-g Extremity)
MAX SAR (W/kg)	UMTS Band II	0.709	1.106
	LTE Band VII	1.049	1.141
	LTE Band XLI	0.533	0.508
	WiFi 2.4G	0.210	0.115
	BT	NA	0.033
MAX Sum SAR(W/kg)		<b>1.259</b>	<b>1.256</b>
SAR Limit(W/kg)		1.6	4.0

Table 35: SAR Simultaneous Tx Combination of Main antenna and WiFi/BT.

#### Conclusion:

The above numeral summed SAR results is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore simultaneous transmission SAR with Volume Scans is not required per KDB 447498 D01v06.

**Appendix A. System Check Plots**

(Pls See Appendix No.: SYBH(Z-SAR)027032017-2A, total: 9 pages)

**Appendix B. SAR Measurement Plots**

(Pls See Appendix No.: SYBH(Z-SAR)027032017-2B, total: 19 pages)

**Appendix C. Calibration Certificate**

(Pls See Appendix No.: SYBH(Z-SAR)027032017-2C, total: 72 pages)

**Appendix D. Photo documentation**

(Pls See Appendix No.: SYBH(Z-SAR)027032017-2D, total: 4 pages)

---

**End**