

FCC

RF Test Report

Product Name: HUAWEI MediaPad T1 7.0

Model Number: T1-701w

Report No: SYBH(Z-RF)012042015-2002

FCC ID: QIST1-701W

Reliability Laboratory of Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,
Shenzhen, 518129, P.R.C
Tel: +86 755 28780808 Fax: +86 755 89652518

Notice

1. The laboratory has Passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.
2. The laboratory has Passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01.
3. The laboratory has been listed by the US Federal Communications Commission to perform electromagnetic emission measurements. The site recognition number is 97456.
4. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 6369A-2.
5. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. The test report is only valid for the test samples.
8. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.



HUAWEI

RF Test Report of T1-701W

Applicant: Huawei Technologies Co., Ltd.
Address: Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Date of Receipt Sample: 2015-03-15

Start Date of Test: 2015-03-15

End Date of Test: 2015-03-20

Test Result: Pass

Approved by Senior 2015-03-20 Liu Chunlin 

Engineer: Date Name Signature

Prepared by: 2015-03-20 Yang Yuanyuan 

Date Name Signature

**Modification Record**

No.	Last Report No.	Modification Description
1		First report.

CONTENT

1	General Information	6
1.1	Applied Standard.....	6
1.2	Test Location.....	6
1.3	Test Environment Condition.....	6
2	Test Summary	7
3	Description of the Equipment under Test (EUT)	8
3.1	General Description	8
3.2	EUT Identity	8
3.3	Technical Description.....	8
4	General Test Conditions / Configurations	10
4.1	EUT Configurations.....	10
4.2	Test Environments	10
4.3	Test Setups.....	11
4.4	Test Conditions	14
5	Main Test Instruments	15



1 General Information

1.1 Applied Standard

Applied Rules: 47 CFR FCC Part 2, Subpart J 2013
47 CFR FCC Part 15, Subpart C 2013

Test Method: FCC KDB 558074 D01 DTS Meas Guidance v03r02
ANSI C63.10-2013, American National Standard for Testing Unlicensed
Wireless Devices.

1.2 Test Location

Test Location 1: Reliability Laboratory of Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C

Test Location 2: BTL Laboratory
Address : No.3,Jinshagang 1st Road,ShiXia,Dalang Town,DongGuan,China.

1.3 Test Environment Condition

Ambient Temperature: 19.5 to 25 °C
Ambient Relative Humidity: 40 to 55 %
Atmospheric Pressure: Not applicable

2 Test Summary

Test Item	FCC Part No.	Requirements	Test Result	Verdict
DTS (6 dB) Bandwidth	15.247(a)(2)	≥ 500 kHz.	Appendix A	Pass
Occupied Bandwidth	---	---	Appendix B	Pass
Maximum Conducted Average Output Power	15.247(b)(3)	For directional gain: < 30 dBm – (G[dbi] – 6 [dB]), Average; Otherwise: < 30 dBm, Average;	Appendix C	Pass
Maximum Power Spectral Density Level	15.247(e)	For directional gain: < 8 dBm/3 kHz – (G[dbi] – 6 [dB]), Average. Otherwise: < 8 dBm/3 kHz, Average.	Appendix D	Pass
Band Edges Compliance	15.247(d)	< -30 dB/100 kHz if total peak power \leq power limit.	Appendix E	Pass
Unwanted Emissions into Non-Restricted Frequency Bands			Appendix F	Pass
Unwanted Emissions into Restricted Frequency Bands (Radiated)	15.247(d) 15.209 (NOTE 1)	FCC Part 15.209 field strength limit;	Appendix G	Pass
AC Power Line Conducted Emissions	15.207	FCC Part 15.207 conducted limit;	Appendix H	Pass
NOTE 1: According to KDB 558074, antenna-port conducted measurements are acceptable as an alternative to radiated measurements for demonstrating compliance to the limits in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case emissions will also be required.				

3 Description of the Equipment under Test (EUT)

3.1 General Description

HUAWEI MediaPad T1 7.0 (MediaPad T1 7.0 for short) is a 7-inch tablet that incorporates a Spreadtrum SC7731G chip, and a 28 nm A7 quad-core at 1.2 GHz. With support for 3G and Wi-Fi data connections, MediaPad T1 7.0 provides users with unprecedented access to high-speed Internet services.

The differences between T1-702u ,T1-701w is :

	T1-720u	T1-701w
PCB	the same	the same
GPS	the same	the same
WIFI/BT 2.4G	the same	the same
GSM850/1900	support	Not support
WCDMA1900/850	support	Not support

NOTE: The BT4.0 test case refer to SYBH(Z-RF)011032015 of T1-702u

3.2 EUT Identity

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

3.2.1 Board

Board		
Description	Hardware Version	Software Version
Main Board	SH1T1701UM	T1-701wv100R001C001

3.2.2 Sub-Assembly

Name	Manufacture	Description
Adapter	Huawei Technologies Co., Ltd.	Model: HW-050100U2W Input voltage: 100V~240V AC and 50/60 Hz, 0.5A Output voltage: +5V --- 1A

3.3 Technical Description



Characteristics	Description	
TX/RX Operating Range	2400-2483.5 MHz band	$fc = 2402 \text{ MHz} + N * 2 \text{ MHz}$, where: - fc = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 0 to 39.
Modulation Type	Digital	GFSK,
Emission Designator	GFSK for BT 4.0: 720KGXD	
Bluetooth Power Class	Class 1	

4 General Test Conditions / Configurations

4.1 EUT Configurations

4.1.1 General Configurations

Configuration	Description
Test Antenna Ports	Until otherwise specified, - All TX tests are performed at all TX antenna ports of the EUT, and - All RX tests are performed at all RX antenna ports of the EUT.
Multiple RF Sources	Other than the tested RF source of the EUT, other RF source(s) are disabled or shutdown during measurements.

4.1.2 Customized Configurations

# EUT Conf.	Signal Description	Operating Frequency
TM1_Ch0	GFSK for BT 4.0 modulation, package type DH5, hopping off.	Ch No. 0 / 2402 MHz
TM1_Ch19	GFSK for BT 4.0 modulation, package type DH5, hopping off.	Ch No. 19 / 2440 MHz
TM1_Ch39	GFSK for BT 4.0 modulation, package type DH5, hopping off.	Ch No. 39 / 2480 MHz

4.2 Test Environments


NOTE: The values used in the test report may be stringent than the declared.

Environment Parameter	Selected Values During Tests		
	Temperature	Voltage	Relative Humidity
NTNV	Ambient	3.7 VDC	Ambient

4.3 Test Setups

4.3.1 Test Setup 1


The Bluetooth component's antenna port(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by Bluetooth System Simulator and/or PC/software to emit the specified signals for the purpose of measurements.

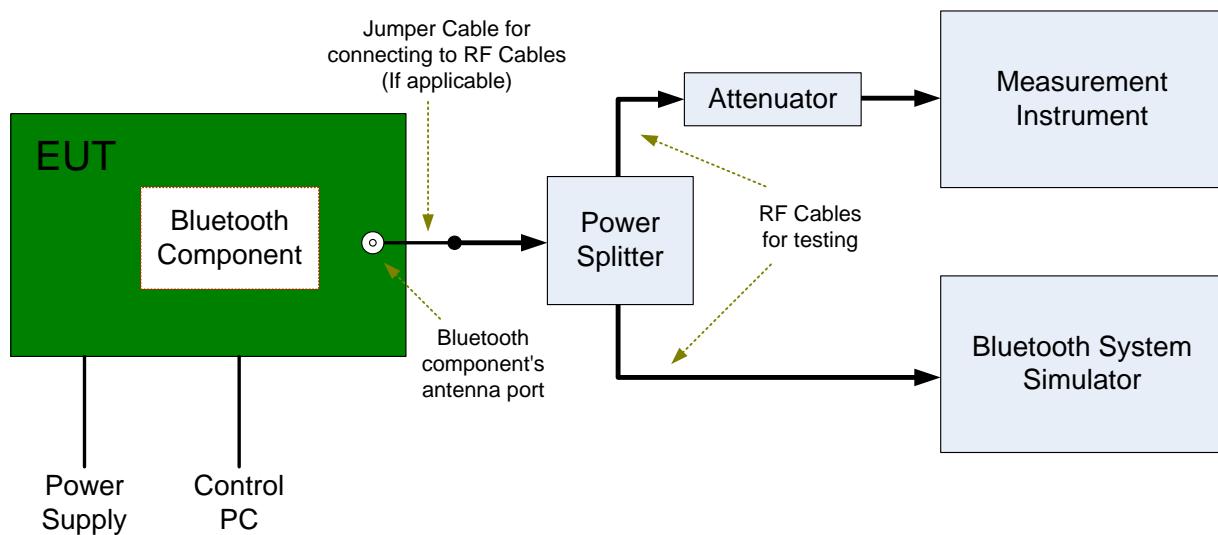


4.3.2 Test Setup 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.4. The test distance is 3m. The setup is according to ANSI C63.4 and CAN/CSA-CEI/IEC CISPR 22.

The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

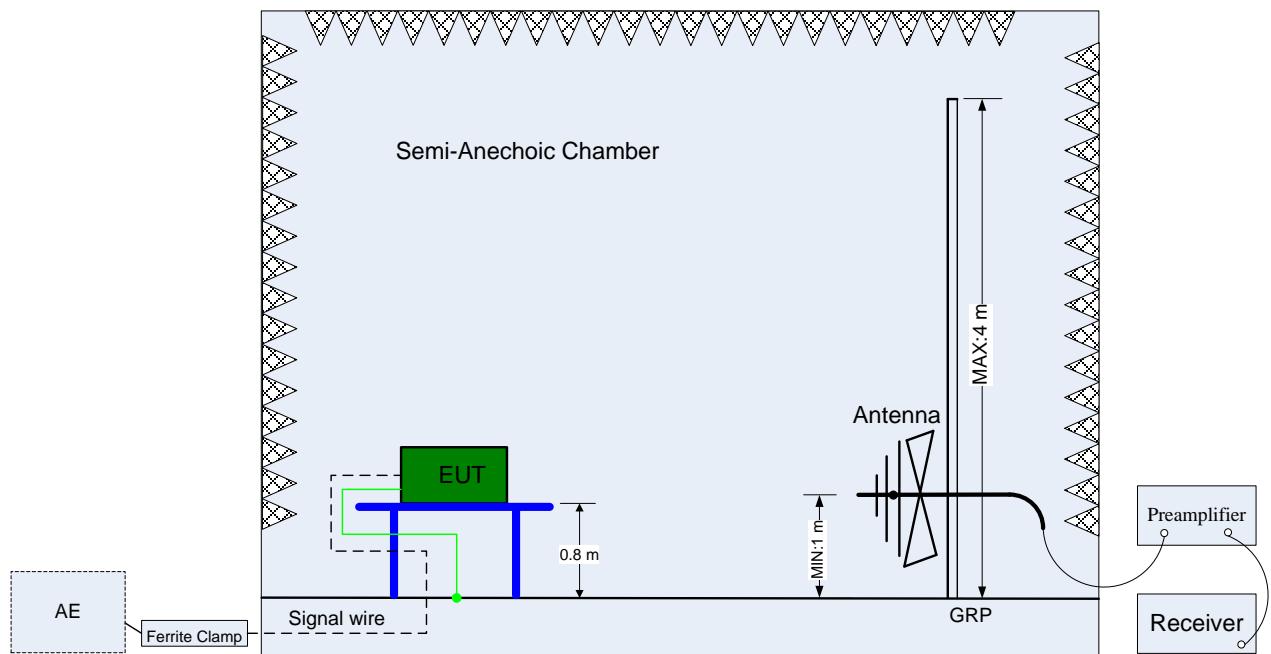

(Below 1 GHz)

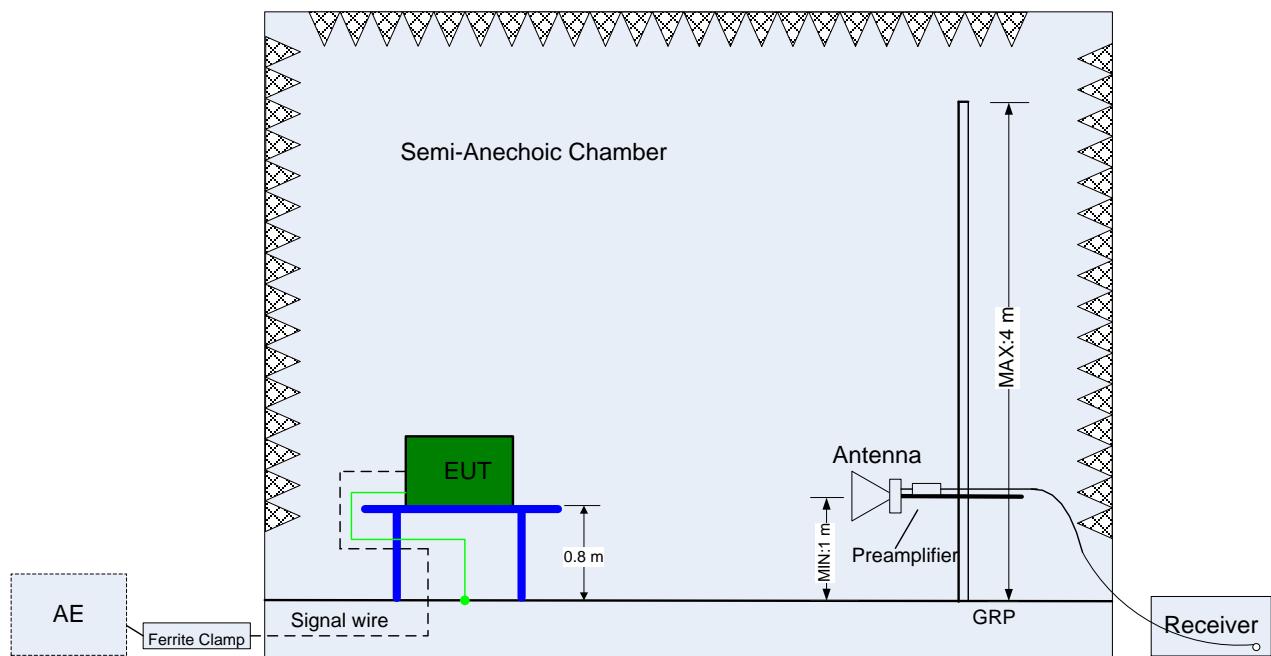


(Above 1 GHz)

4.3.3 Test Setup 3

The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

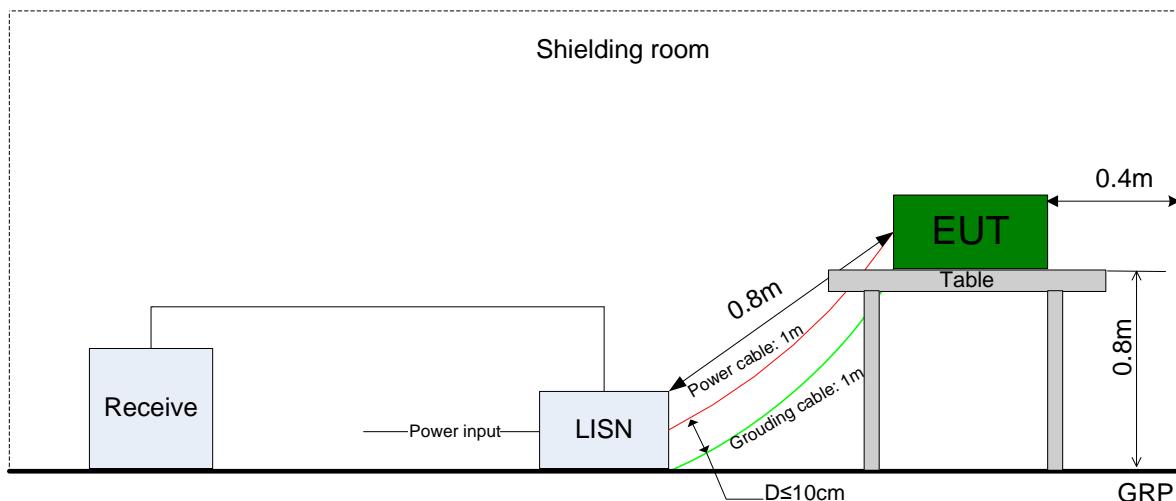

4.4 Test Conditions

Test Case	Test Conditions	
	Configuration	Description
6dB Emission Bandwidth (EBW)	Meas. Method	FCC KDB 558074 §8.2 Option 2.
	Test Env.	NTNV
	Test Setup	Test Setup 1
	EUT Conf.	TM1_Ch0, TM1_Ch19, TM1_Ch39.
Maximum Conducted Average Output Power	Meas. Method	FCC KDB 558074 §9.2 .2. 4
	Test Env.	NTNV
	Test Setup	Test Setup 1
	EUT Conf.	TM1_Ch0, TM1_Ch19, TM1_Ch39.
Maximum Power Spectral Density Level	Meas. Method	FCC KDB 558074 §10.5
	Test Env.	NTNV
	Test Setup	Test Setup 1
	EUT Conf.	TM1_Ch0, TM1_Ch19, TM1_Ch39.
Band edge spurious emission	Meas. Method	FCC KDB 558074 §13.0.
	Test Env.	NTNV
	Test Setup	Test Setup 1
	EUT Conf.	TM1_Ch0, TM1_Ch39.
Unwanted Emissions into Non-Restricted Frequency Bands	Meas. Method	FCC KDB 558074 §11.0
	Test Env.	NTNV
	Test Setup	Test Setup 1
	EUT Conf.	TM1_Ch0, TM1_Ch19, TM1_Ch39.
Unwanted Emissions into Restricted Frequency Bands (Radiated)	Meas. Method	ANSI C63.10; FCC KDB 558074 §12.1, Radiated
	Test Env.	NTNV
	Test Setup	Test Setup 2
	EUT Conf.	30 MHz -1 GHz
		TM1_Ch0 (Worst Conf.).
		1-3 GHz
		TM1_Ch0, TM1_Ch19, TM1_Ch39.
	3-18 GHz	TM1_Ch19 (Worse Conf.),
		18-26.5 GHz
	TM1_Ch0 (Worst Conf.).	
AC Power Line Conducted Emissions	Meas. Method	AC mains conducted. Pre: RBW = 10 kHz; Det. = Peak. Final: RBW = 9 kHz; Det. = CISPR Quasi-Peak & Average.
	Test Env.	NTNV
	Test Setup	Test Setup 3
	EUT Conf.	TM1_Ch39.



5 Main Test Instruments

Equipment Name	Manufacturer	Model	Serial Number	Cal Date	Cal- Due
Power supply	KEITHLEY	2303	A120714713	2014-08-07	2016-08-06
Wireless Communication Test set	Agilent	N4010A	MY49081592	2014-11-04	2015-11-03
Universal Radio Communication Tester	R&S	CMU200	123299	2014-11-04	2015-11-03
Spectrum Analyzer	Agilent	N9020A	MY52090652	2014-07-11	2015-07-10
Universal Radio Communication Tester	R & S	CMW500	126854	2015-02-13	2016-02-12
Spectrum Analyzer	Agilent	E4440A	MY48250119	2014-07-11	2015-07-10
Signal Analyzer	R&S	FSQ31	200021	2014-11-04	2015-11-03
Spectrum Analyzer	Agilent	N9030A	MY49431698	2014-11-04	2015-11-03
Temperature Chamber	WEISS	WKL64	56246002940010	2015-02-13	2016-02-12
Temperature Chamber	ESPEC	MW3030	06114003	2014-05-09	2015-05-08
Signal generator	Agilent	E8257D	MY51500314	2014-05-09	2015-05-08
Vector Signal Generator	R&S	SMU200A	104162	2014-11-04	2015-11-03
Test receiver	R&S	ESU26	100150	2014-05-09	2015-05-08
Spectrum analyzer	R&S	FSU3	200474	2014-11-04	2015-11-03
Spectrum analyzer	R&S	FSU43	100144	2014-11-04	2015-11-03
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100391	2013-12-21	2015-12-20
Trilog Broadband Antenna (30M~3GHz)	SCHWARZ BECK	VULB 9163	9163-521	2013-12-21	2015-12-20
LOOP Antennas(9kHz-30MHz)	R&S	HFH2-Z2	100263	2013-05-11	2015-05-10
Pyramidal Horn Antenna(18GHz-26.5GHz)	ETS-LIND GREN	3160-09	5140299	2015-01-05	2017-01-04
Artificial Mains Network	R&S	ENV4200	100134	2014-11-04	2015-11-03
Artificial Mains Network	R&S	ENV216	100382	2014-11-04	2015-11-03
Power Detecting & Sampling Unit	R&S	OSP-B157	19709DD	2014-09-08	2015-09-07
Signal Generator	Agilent	E4438C	MY47271904	2014-10-28	2015-10-27

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE
1	Test Receiver	ESCI7	100948	R&S	2015-07-16



NO.	Descriptio n	TYPE	SERIES NUMBER	MANUFACT URE	CAL DUE DATE
2	Test Receiver	ESU26	100235	R&S	2016-03-02
3	Spectrum Analyzer	E4440A	MY49420053	Agilent	2015-12-30
4	EMI Antenna	3117	00119024	ETS-LINDG REN	2017-01-20
5	LISN	ENV216	101200	R&S	2015-07-07
6	EMI Antenna	VLUB9163	9163-235	Schwarzbec k	2017-10-29
7	EMI Antenna	VLUB9163	9163-234	Schwarzbec k	2016-09-15
8	H-field Antenna	HFH2-Z2	829324/004	R&S	2017-01-20

END