



# Test Report

## FCC Part15 Subpart C

Product Name : WCDMA Digital Mobile Phone  
Model No. : HUAWEI Y511-U251  
FCC ID : QISY511-U251

Applicant : HUAWEI TECHNOLOGIES CO., LTD  
Address : Administration Building, Headquarters of Huawei  
Technologies Co., Ltd., Bantian, Longgang District,  
Shenzhen, 518129, P.R.C

Date of Receipt : 03/07/2013  
Test Date : 03/07/2013~24/07/2013  
Issued Date : 26/07/2013  
Report No. : 137S029R-RF-US-P06V02  
Report Version : V1.0

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF, CNAS or any agency of the Government.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

# Test Report Certification

Issued Date : 26/07/2013

Report No. : 137S029R-RF-US-P06V02



Product Name : WCDMA Digital Mobile Phone  
 Applicant : HUAWEI TECHNOLOGIES CO., LTD.  
 Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C  
 Manufacturer : HUAWEI TECHNOLOGIES CO., LTD.  
 Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C  
 Model No. : HUAWEI Y511-U251  
 FCC ID : QISY511-U251  
 EUT Voltage : DC: 3.7V  
 Brand Name : HUAWEI  
 Applicable Standard : FCC CFR Title 47 Part 15 Subpart C: 2008  
 ANSI C63.4: 2009; KDB 558074  
 Test Result : Complied  
 Performed Location : Suzhou EMC Laboratory  
 No.99 Hongye Rd., Suzhou Industrial Park Loufeng  
 Hi-Tech Development Zone., Suzhou, China  
 TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098  
 FCC Registration Number: 800392

Documented By : Alice Ni  
 Reviewed By : Jameyuan  
 Approved By : Robin Wu

**Laboratory Information**

We, **Quietek Corporation**, are an independent EMC and safety consultancy that was established the whole facility in our laboratories. The test facility has been accredited/accepted(audited or listed) by the following related bodies in compliance with ISO 17025, EN 45001 and specified testing scope:

<b>Taiwan R.O.C.</b>	<b>:</b>	<b>BSMI, NCC, TAF</b>
<b>Germany</b>	<b>:</b>	<b>TUV Rheinland</b>
<b>Norway</b>	<b>:</b>	<b>Nemko, DNV</b>
<b>USA</b>	<b>:</b>	<b>FCC</b>
<b>Japan</b>	<b>:</b>	<b>VCCI</b>
<b>China</b>	<b>:</b>	<b>CNAS</b>

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site :<http://www.quietek.com/tw/ctg/cts/accreditations.htm>  
The address and introduction of Quietek Corporation's laboratories can be founded in our Web site :  
<http://www.quietek.com/>

If you have any comments, Please don't hesitate to contact us. Our contact information is as below:

**HsinChu Testing Laboratory :**

No.75-2, 3rd Lin, Wangye Keng, Yongxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan, R.O.C.  
TEL:+886-3-592-8858 / FAX:+886-3-592-8859      E-Mail : [service@quietek.com](mailto:service@quietek.com)

**LinKou Testing Laboratory :**

No.5-22, Ruishukeng, Linkou Dist., New Taipei City 24451, Taiwan, R.O.C.  
TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789      E-Mail : [service@quietek.com](mailto:service@quietek.com)

**Suzhou Testing Laboratory :**

No.99 Hongye Rd., Suzhou Industrial Park Loufeng Hi-Tech Development Zone., SuZhou, China  
TEL : +86-512-6251-5088 / FAX : 86-512-6251-5098      E-Mail : [service@quietek.com](mailto:service@quietek.com)

## TABLE OF CONTENTS

Description	Page
1. General Information .....	6
1.1. EUT Description .....	6
1.2. Mode of Operation .....	9
1.3. Tested System Details .....	10
1.4. Configuration of Tested System .....	11
1.5. EUT Exercise Software .....	12
2. Technical Test .....	13
2.1. Summary of Test Result .....	13
2.2. Test Environment .....	14
3. Conducted Emission .....	15
3.1. Test Equipment .....	15
3.2. Test Setup .....	15
3.3. Limit .....	16
3.4. Test Procedure .....	16
3.5. Uncertainty .....	16
3.6. Test Result .....	17
4. Radiated Emission .....	19
4.1. Test Equipment .....	19
4.2. Test Setup .....	20
4.3. Limit .....	21
4.4. Test Procedure .....	21
4.5. Uncertainty .....	21
4.6. Test Result .....	22
5. RF Antenna Conducted Spurious .....	25
5.1. Test Equipment .....	25
5.2. Test Setup .....	25
5.3. Limit .....	25
5.4. Test Procedure .....	26
5.5. Uncertainty .....	26
5.6. Test Result .....	27
6. Radiated Emission Band Edge .....	29
6.1. Test Equipment .....	29
6.2. Test Setup .....	30
6.3. Limit .....	30
6.4. Test Procedure .....	30
6.5. Uncertainty .....	30
6.6. Test Result .....	31

---

7.	Operation Frequency Range of 20dB Bandwidth.....	39
7.1.	Test Equipment .....	39
7.2.	Test Setup.....	39
7.3.	Limit .....	39
7.4.	Test Procedure.....	39
7.5.	Uncertainty.....	39
7.6.	Test Result .....	40
8.	Occupied Bandwidth .....	41
8.1.	Test Equipment .....	41
8.2.	Test Setup.....	41
8.3.	Limit .....	41
8.4.	Test Procedure.....	41
8.5.	Uncertainty.....	41
8.6.	Test Result .....	42
9.	Power Output.....	44
9.1.	Test Equipment .....	44
9.2.	Test Setup.....	44
9.3.	Limit .....	44
9.4.	Test Procedure.....	44
9.5.	Uncertainty.....	45
9.6.	Test Result .....	46
10.	Power Spectral Density.....	47
10.1.	Test Equipment .....	47
10.2.	Test Setup.....	47
10.3.	Limit .....	47
10.4.	Test Procedure.....	47
10.5.	Uncertainty.....	48
10.6.	Test Result .....	49

## 1. General Information

### 1.1. EUT Description

Product Name	WCDMA Digital Mobile Phone
Model No.	HUAWEI Y511-U251
Hardware Version	VER.A
Software Version	Y511-U25V100R001C465B101
Device Category	Portable
RF Exposure Environment	Uncontrolled
Antenna Type	Internal
<b>GPS</b>	
Class of SRD	Class 3
<b>2G</b>	
Support Band	GSM850/PCS1900
GPRS Class	Class 12
Uplink	GSM 850: 824~849MHz PCS 1900: 1850~1910MHz
Downlink	GSM 850: 869~894MHz PCS 1900: 1930~1990MHz
Release Version	R99
Type of modulation	GMSK for GPRS; 8PSK for EDGE
Antenna Gain	GSM 850: -1.0dBi PCS1900: -1.0dBi
<b>3G</b>	
Support Band	WCDMA Band II/WCDMA Band V
Uplink	WCDMA Band II: 1850~1910MHz WCDMA Band V: 824~849MHz
Downlink	WCDMA Band II: 1930~1990MHz WCDMA Band V: 869~894MHz
Release Version	Rel-7
Type of modulation	QPSK, 16QAM for Downlink QPSK for Uplink
Antenna Gain	WCDMA Band II: -1.0dBi WCDMA Band V: -1.0dBi
<b>Wi-Fi</b>	
Wi-Fi Frequency	802.11b/g/n(20MHz): 2412 ~ 2462 MHz 802.11n(40MHz): 2422 ~ 2452 MHz
Type of modulation	802.11b: DSSS; 802.11g/n: OFDM

Data Rate	802.11b: 1/2/5.5/11 Mbps
	802.11g: 6/9/12/18/24/36/48/54 Mbps
	802.11n: up to 135 Mbps
Peak Antenna Gain	-1dBi
<b>Bluetooth</b>	
Bluetooth Frequency	2402~2480MHz
Bluetooth Version	4.0+HS
Type of modulation	V3.0+HS: GFSK, Pi/4 DQPSK, 8DPSK V4.0: GFSK
Data Rate	V3.0+HS: 1Mbps(GFSK), 2Mbps(Pi/4 DQPSK), 3Mbps (8DPSK) V4.0: 1Mbps(GFSK)
Antenna Gain	-1dBi
<b>Components</b>	
Battery #1	Brand Name: HUAWEI M/N: HB5V1 Rated Voltage and Capacitance: 3.7V/1730mAh S/N: BAACB22L24628462
Battery #2	Brand Name: HUAWEI M/N: HB5V1 Rated Voltage and Capacitance: 3.7V/1730mAh S/N: CABD220I20002237
Battery #3	Brand Name: HUAWEI M/N: HB5V1 Rated Voltage and Capacitance: 3.7V/1730mAh S/N: GAGD228Z20016724
Adapter #1	Brand Name: HUAWEI M/N: HW-050055U1W Input: 100-240V~50/60Hz 0.2A Output: 5Vdc, 550mA S/N: HKAD50574039
Adapter #2	Brand Name: HUAWEI M/N: HW-050055U1W Input: 100-240V~50/60Hz 0.2A Output: 5Vdc, 550mA S/N: BYAD31910840

Bluetooth Working Frequency of Each Channel: (For V3.0+HS)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2403 MHz	02	2404 MHz	03	2405 MHz
04	2406 MHz	05	2407 MHz	06	2408 MHz	07	2409 MHz
08	2410 MHz	09	2411 MHz	10	2412 MHz	11	2413 MHz
12	2414 MHz	13	2415 MHz	14	2416 MHz	15	2417 MHz
16	2418 MHz	17	2419 MHz	18	2420 MHz	19	2421 MHz
20	2422 MHz	21	2423 MHz	22	2424 MHz	23	2425 MHz
24	2426 MHz	25	2427 MHz	26	2428 MHz	27	2429 MHz
28	2430 MHz	29	2431 MHz	30	2432 MHz	31	2433 MHz
32	2434 MHz	33	2435 MHz	34	2436 MHz	35	2437 MHz
36	2438 MHz	37	2439 MHz	38	2440 MHz	39	2441 MHz
40	2442 MHz	41	2443 MHz	42	2444 MHz	43	2445 MHz
44	2446 MHz	45	2447 MHz	46	2448 MHz	47	2449 MHz
48	2450 MHz	49	2451 MHz	50	2452 MHz	51	2453 MHz
52	2454 MHz	53	2455 MHz	54	2456 MHz	55	2457 MHz
56	2458 MHz	57	2459 MHz	58	2460 MHz	59	2461 MHz
60	2462 MHz	61	2463 MHz	62	2464 MHz	63	2465 MHz
64	2466 MHz	65	2467 MHz	66	2468 MHz	67	2469 MHz
68	2470 MHz	69	2471 MHz	70	2472 MHz	71	2473 MHz
72	2474 MHz	73	2475 MHz	74	2476 MHz	75	2477 MHz
76	2478 MHz	77	2479 MHz	78	2480 MHz	N/A	N/A

Bluetooth Working Frequency of Each Channel: (For V4.0)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz	03	2408 MHz
04	2410 MHz	05	2412 MHz	06	2414 MHz	07	2416 MHz
08	2418 MHz	09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz	15	2432 MHz
16	2434 MHz	17	2436 MHz	18	2438 MHz	19	2440 MHz
20	2442 MHz	21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz	27	2456 MHz
28	2458 MHz	29	2460 MHz	30	2462 MHz	31	2464 MHz
32	2466 MHz	33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz	39	2480 MHz

**1.2. Mode of Operation**

Quietek has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmit-1Mbps(GFSK_BLE)

**Note:**


1. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.
2. For portable device, radiated spurious emission was verified over X, Y, Z Axis, and shown the worst case on this report.

**1.3. Tested System Details**

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 N/A	N/A	N/A	N/A	N/A

1.4. Configuration of Tested System

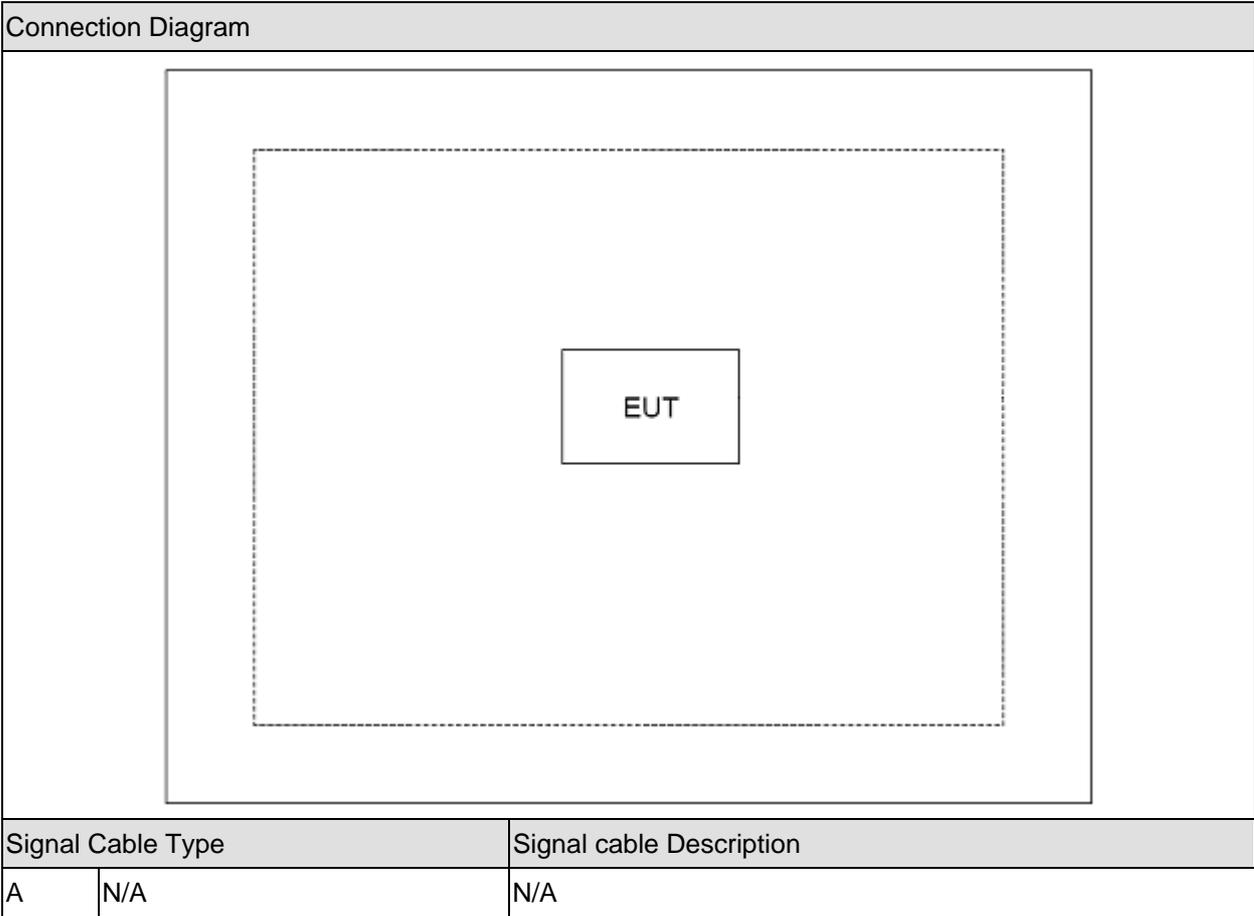

## 1.5. EUT Exercise Software

1	Setup the EUT and simulators as shown on above.
2	Turn on the power of equipment.
3	Run the RF test software provided by the applicant, and set the test mode and channel, then press OK to start continue Transmit or receive.

**2. Technical Test**

**2.1. Summary of Test Result**

- No deviations from the test standards
- Deviations from the test standards as below description:

Performed Test Item	Normative References	Test Performed	Deviation
Conducted Emission	FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.207	Yes	No
Radiated Emission	FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.209	Yes	No
RF Antenna Conducted Spurious	FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.247(d)	Yes	No
Radiated Emission Band Edge	FCC CFR Title 47 Part 15 Subpart C: 2008 15.247(d)	Yes	No
Operation Frequency Range of 20dB Bandwidth	FCC CFR Title 47 Part 15 Subpart C: 2008 15.215(c)	Yes	No
Occupied Bandwidth	FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.247(a)(2)	Yes	No
Power Output	FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.247(b)(3)	Yes	No
Power Spectral Density	FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.247(e)	Yes	No

**2.2. Test Environment**

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	21
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950-1000

### 3. Conducted Emission


#### 3.1. Test Equipment

Conducted Emission / TR-1

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
EMI Test Receiver	R&S	ESCI	100726	2014.03.30
Two-Line V-Network	R&S	ENV216	100043	2014.03.30
Two-Line V-Network	R&S	ENV216	100044	2013.09.17
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	2014.03.01
50ohm Termination	SHX	TF2	07081401	2013.09.17
Temperature/Humidity Meter	zhicheng	ZC1-2	TR1-TH	2014.01.10

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

#### 3.2. Test Setup

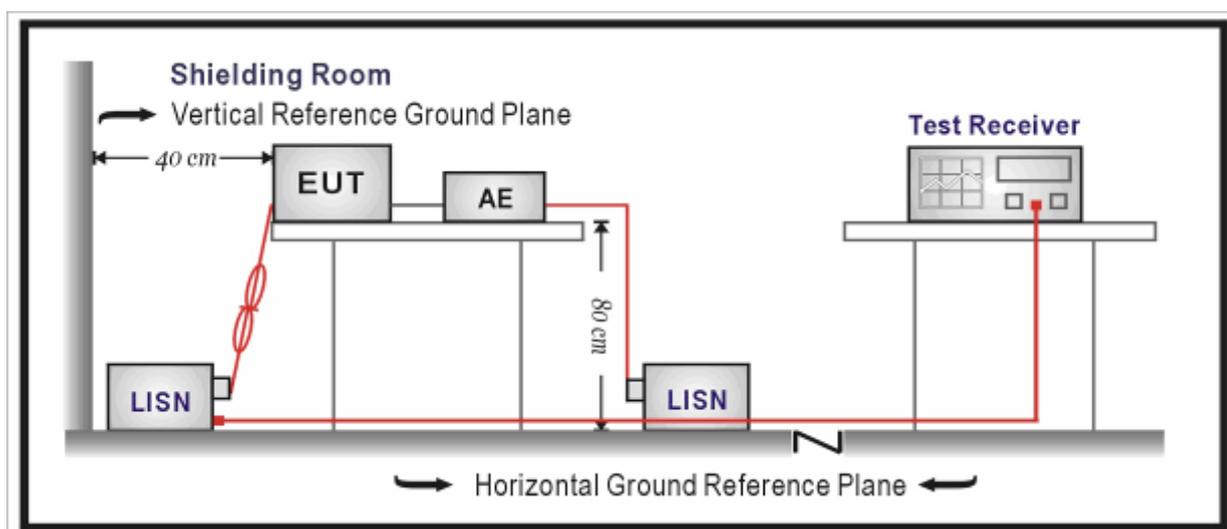

**3.3. Limit**

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 – 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

**3.4. Test Procedure**

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.


The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

**3.5. Uncertainty**

The measurement uncertainty is defined as  $\pm 2.02$  dB


### 3.6. Test Result

Engineer: Jack	
Site: TR1	Time: 2013/07/15 - 16:13
Limit: FCC_Part15.207_CE_AC Power Class B	Margin: 0
Probe: ENV216_101044(0.009-30MHz)	Polarity: Neutral
EUT: WCDMA Digital Mobile Phone	Power: AC 120V/60Hz
Note: Mode 1	

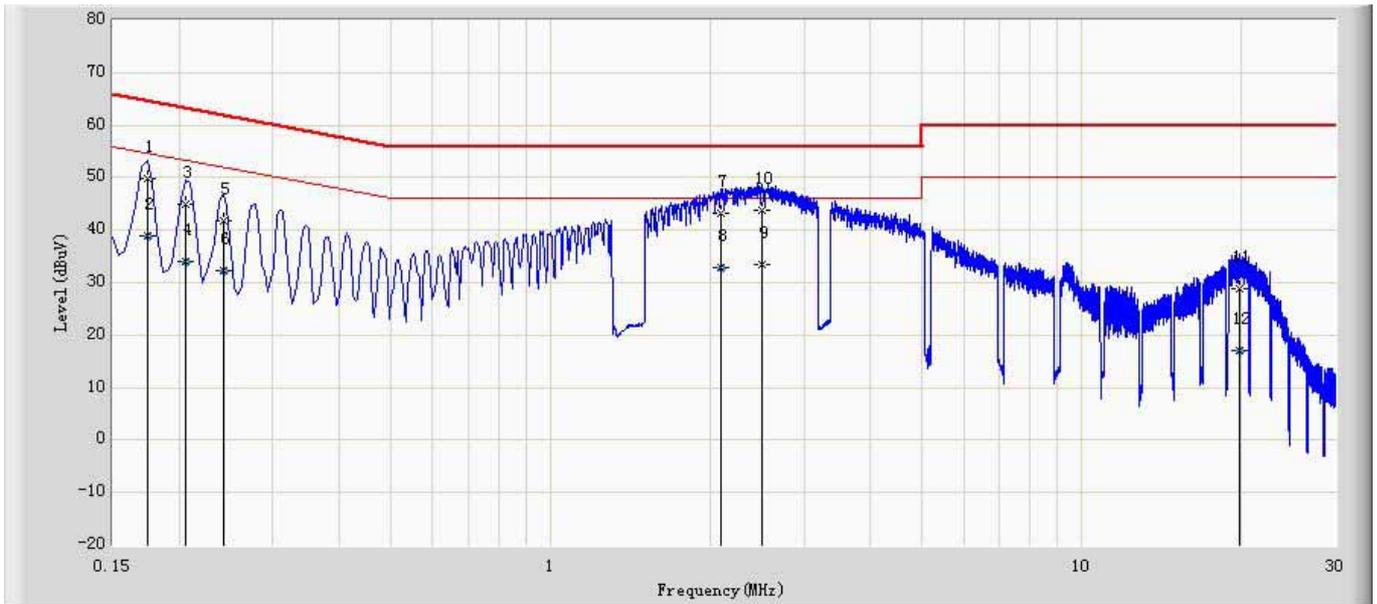

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.174	49.791	39.966	-14.977	64.767	9.825	QP
2		0.174	38.873	29.049	-15.894	54.767	9.825	AV
3		0.206	44.941	35.130	-18.424	63.365	9.811	QP
4		0.206	33.923	24.112	-19.442	53.365	9.811	AV
5		0.242	41.668	31.849	-20.359	62.027	9.819	QP
6		0.242	32.347	22.527	-19.681	52.027	9.819	AV
7		2.094	43.301	33.500	-12.699	56.000	9.801	QP
8		2.094	32.801	23.000	-13.199	46.000	9.801	AV
9		2.506	33.494	23.700	-22.506	56.000	9.794	QP
10	*	2.506	43.794	34.000	-12.206	56.000	9.794	QP
11		19.782	28.762	18.413	-31.238	60.000	10.349	QP
12		19.782	17.059	6.710	-32.941	50.000	10.349	AV

Engineer: Jack	
Site: TR1	Time: 2013/07/15 - 16:20
Limit: FCC_Part15.207_CE_AC Power Class B	Margin: 0
Probe: ENV216_101044(0.009-30MHz)	Polarity: Line
EUT: WCDMA Digital Mobile Phone	Power: AC 120V/60Hz
Note: Mode 1	

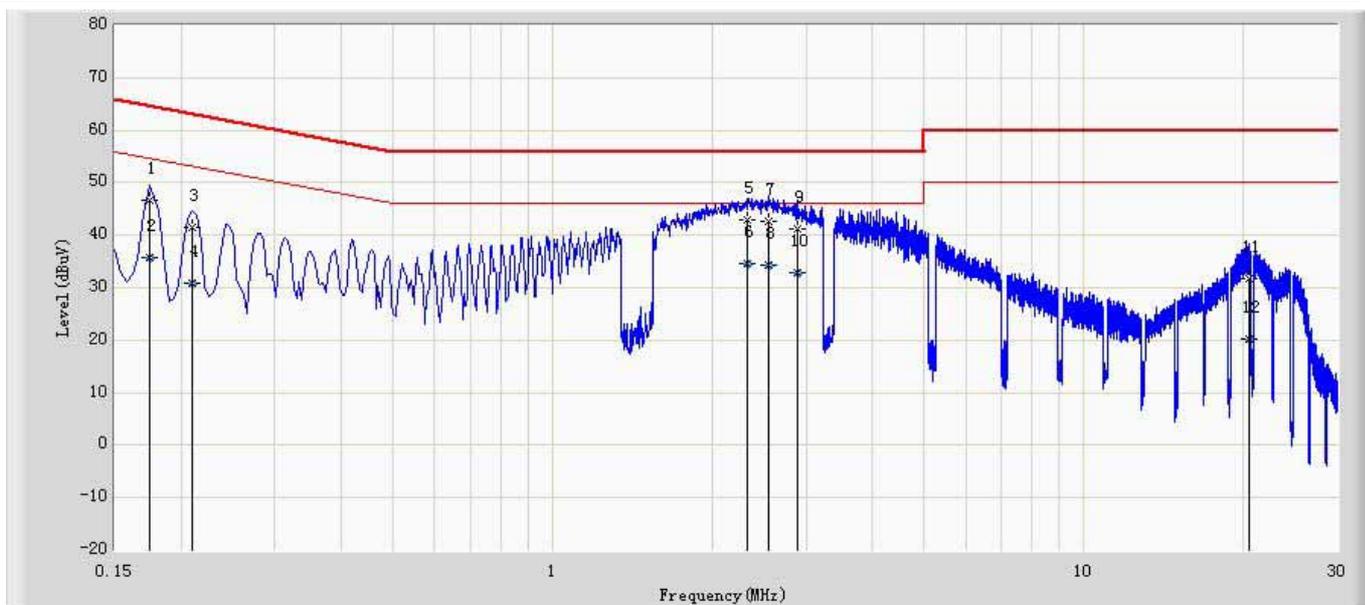

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.174	46.598	36.774	-18.169	64.767	9.825	QP
2		0.174	35.780	25.956	-18.987	54.767	9.825	AV
3		0.210	41.502	31.692	-21.703	63.205	9.810	QP
4		0.210	30.931	21.121	-22.274	53.205	9.810	AV
5		2.334	42.811	33.000	-13.189	56.000	9.811	QP
6	*	2.334	34.611	24.800	-11.389	46.000	9.811	AV
7		2.546	42.517	32.700	-13.483	56.000	9.817	QP
8		2.546	34.417	24.600	-11.583	46.000	9.817	AV
9		2.890	41.117	31.300	-14.883	56.000	9.817	QP
10		2.890	32.917	23.100	-13.083	46.000	9.817	AV
11		20.422	31.715	21.356	-28.285	60.000	10.358	QP
12		20.422	20.133	9.774	-29.867	50.000	10.358	AV

## 4. Radiated Emission

### 4.1. Test Equipment

#### Radiated Emission / AC-2


Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
EMI Test Receiver	R&S	ESCI	100573	2014.04.30
Loop Antenna	R&S	HFH2-Z2	833799/003	2013.11.17
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2013.10.15
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC2-C	2014.03.01
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC2-TH	2014.05.07

#### Radiated Emission / AC-5


Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2014.03.30
Preamplifier	Miteq	NSP1800-25	1364185	2014.05.03
Preamplifier	QuieTek	AP-040G	CHM-0906001	2014.05.03
Bilog Antenna	Teseq GmbH	CBL6112D	27612	2013.10.15
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	499	2014.06.08
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2013.11.24
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2014.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2014.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2014.03.01
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC5-TH	2014.01.11

4.2. Test Setup

Below 1GHz Test Setup:

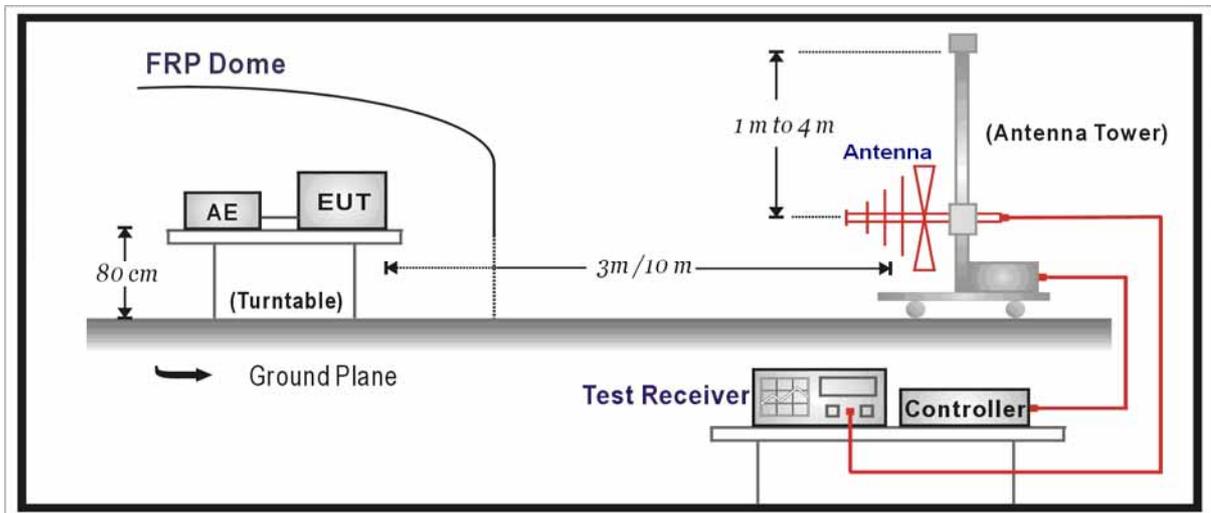

Above 1GHz Test Setup:

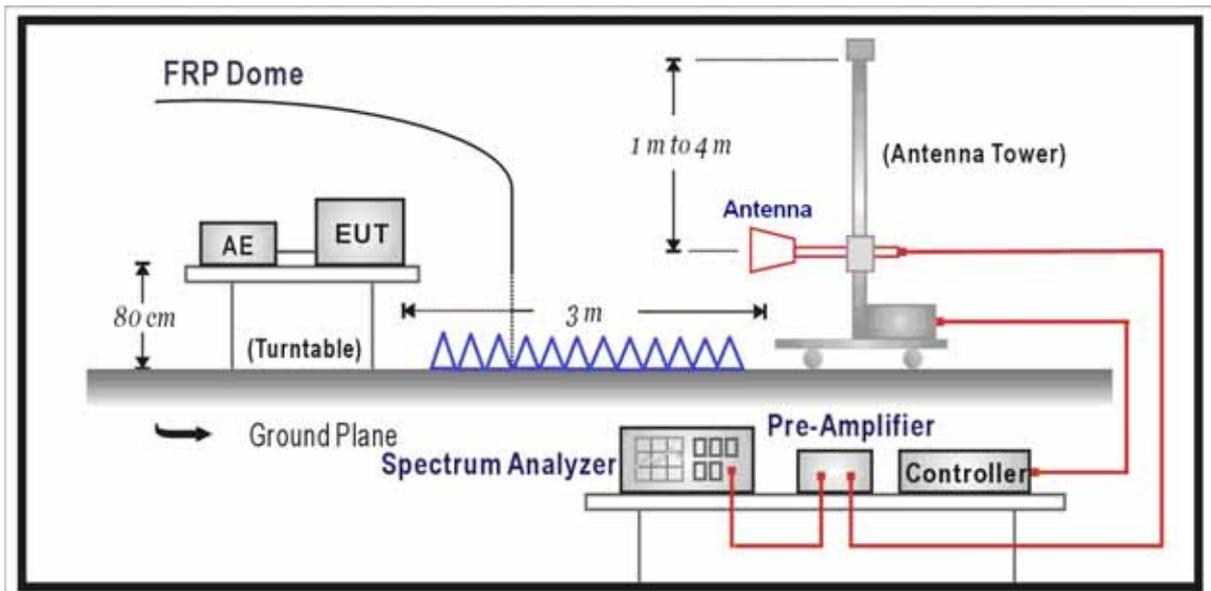

**4.3. Limit**

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Distance (m)	Level (dBuV/m)
30 - 88	3	40
88 - 216	3	43.5
216 - 960	3	46
Above 960	3	54

Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Note 3: E field strength (dBuV/m) = 20 log E field strength (uV/m)

**4.4. Test Procedure**

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4:2009 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

The frequency range from 30MHz to 10th harmonic is checked.

Note: When doing emission measurement above 1GHz, the horn antenna will be bended down a little (as horn antenna has the narrow beamwidth) in order to keeping the antenna in the “cone of radiation” of EUT. The 3dB beamwidth is 10~60 degrees for H-plane and 10~90 degrees for E-plane.

**4.5. Uncertainty**

The measurement uncertainty above 1G is defined as ± 3.9 dB  
 below 1G is defined as ± 3.8 dB

**4.6. Test Result**

All of the test result shown indicates the worst case, and spectrum analyzer parameters setting as shown below:

Peak detector: RBW = 1MHz, VBW = 3MHz, sweep time = 200ms;

Average detector: RBW = 1MHz, VBW = 10Hz, sweep time = auto.

Measure Level = Reading Level + Cable Loss + Antenna Factor - Preamplifier Gain

Mode 1: Transmitter-1Mbps(GFSK\_BLE)


CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
0	H	4804.0	46.0	-7.1	38.9	54(Note2)	-15.1	PK
	V	4804.0	46.2	-7.2	39.0	54(Note2)	-15.0	PK
	H	7206.0	43.0	-1.8	41.2	54(Note2)	-12.8	PK
	V	7206.0	42.3	-1.9	40.4	54(Note2)	-13.6	PK
	H	9608.0	37.7	4.3	42.0	54(Note2)	-12.0	PK
	V	9608.0	37.8	4.4	42.2	54(Note2)	-11.8	PK
19	H	4880.0	45.1	-7.0	38.1	54(Note2)	-15.9	PK
	V	4880.0	44.7	-7.0	37.7	54(Note2)	-16.3	PK
	H	7320.0	42.8	-1.6	41.2	54(Note2)	-12.8	PK
	V	7320.0	42.4	-1.6	40.8	54(Note2)	-13.2	PK
	H	9760.0	37.0	4.5	41.5	54(Note2)	-12.5	PK
	V	9760.0	37.6	4.6	42.2	54(Note2)	-11.8	PK
39	H	4960.0	46.6	-7.1	39.5	54(Note2)	-14.5	PK
	V	4960.0	45.2	-6.9	38.3	54(Note2)	-15.7	PK
	H	7440.0	43.3	-1.2	42.1	54(Note2)	-11.9	PK
	V	7440.0	42.3	-1.2	41.1	54(Note2)	-12.9	PK
	H	9920.0	37.3	5.2	42.5	54(Note2)	-11.5	PK
	V	9920.0	36.9	5.2	42.1	54(Note2)	-11.9	PK

Note 1: The test trace is same as the ambient noise (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.

2: This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.


### The worst case of Radiated Emission below 1GHz:

Engineer: Milo	
Site: AC2	Time: 2013/07/10 - 15:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: CBL6112D_(30-2000MHz)	Polarity: Horizontal
EUT: WCDMA Digital Mobile Phone	Power: DC 3.7V
Note: Mode1: Transmit at channel 2402MHz by BLE	

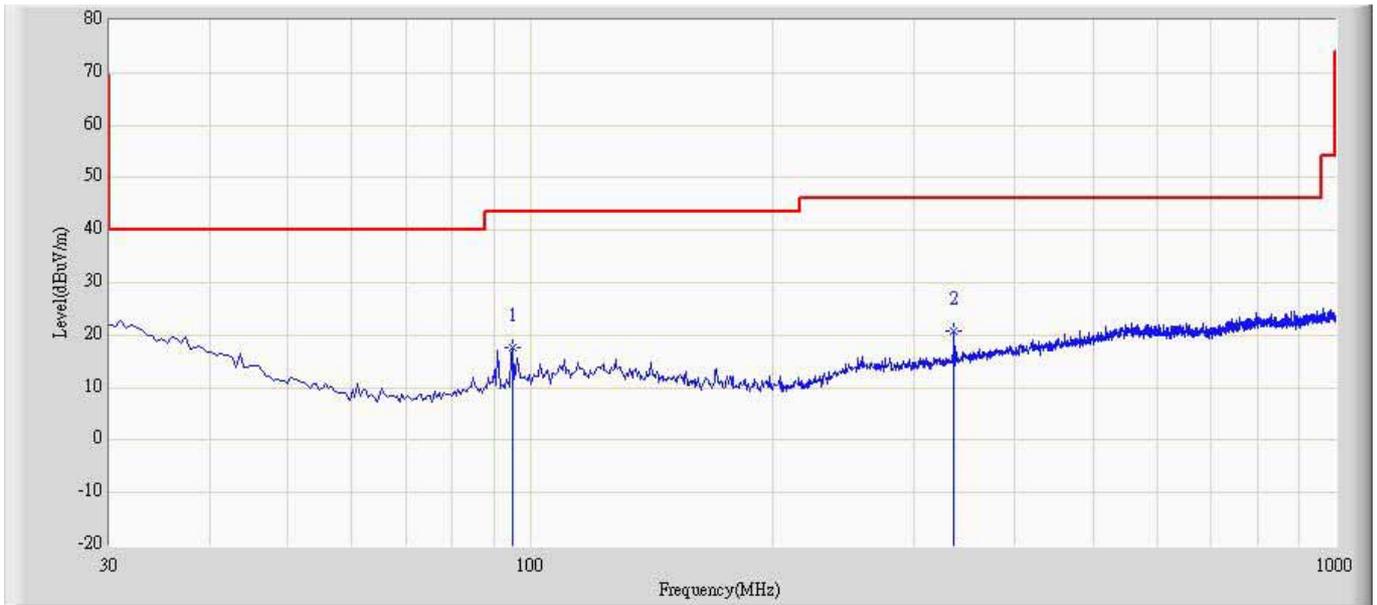

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		94.990	17.510	6.831	-25.990	43.500	10.679	QP
2	*	336.035	20.727	4.888	-25.273	46.000	15.839	QP

Engineer: Milo	
Site: AC2	Time: 2013/07/10 - 15:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: CBL6112D_(30-2000MHz)	Polarity: Vertical
EUT: WCDMA Digital Mobile Phone	Power: DC 3.7V
Note: Mode1: Transmit at channel 2402MHz by BLE	

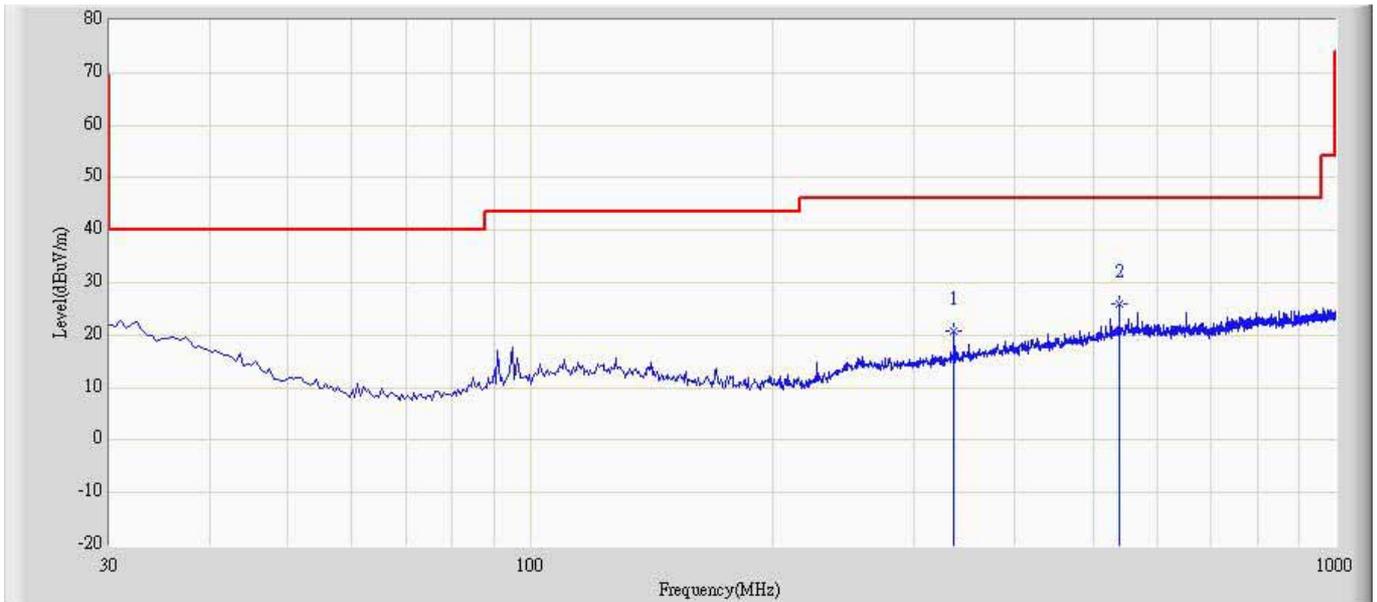

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		336.035	20.727	4.888	-25.273	46.000	15.839	QP
2	*	539.250	26.062	5.150	-19.938	46.000	20.912	QP

## 5. RF Antenna Conducted Spurious


### 5.1. Test Equipment

RF Antenna Conducted Spurious / TR-8

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2014.01.21
Temperature/Humidity Meter	zhicheng	ZC1-2	TR8-TH	2014.05.08

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

### 5.2. Test Setup

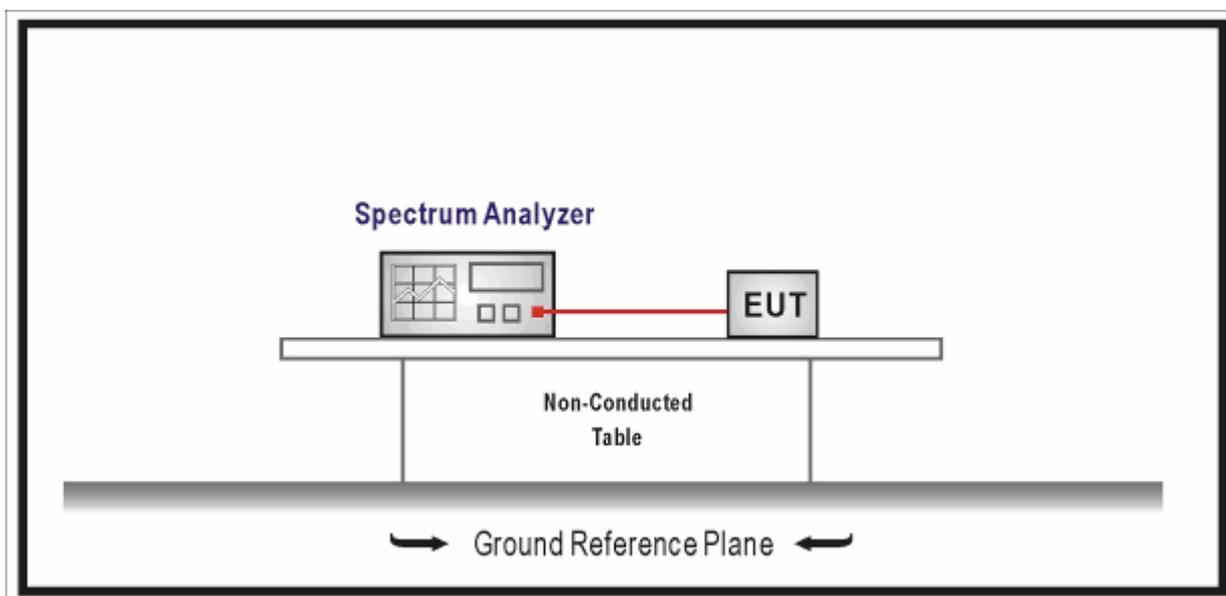

### 5.3. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

**5.4. Test Procedure**

The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.


**5.5. Uncertainty**

The measurement uncertainty is defined as  $\pm 1.27$  dB


5.6. Test Result

Product	:	WCDMA Digital Mobile Phone
Test Item	:	RF Antenna Conducted Spurious
Test Site	:	TR-8
Test Mode	:	Mode 1: Transmit-1Mbps(GFSK_BLE)


Channel 00 (2402MHz)

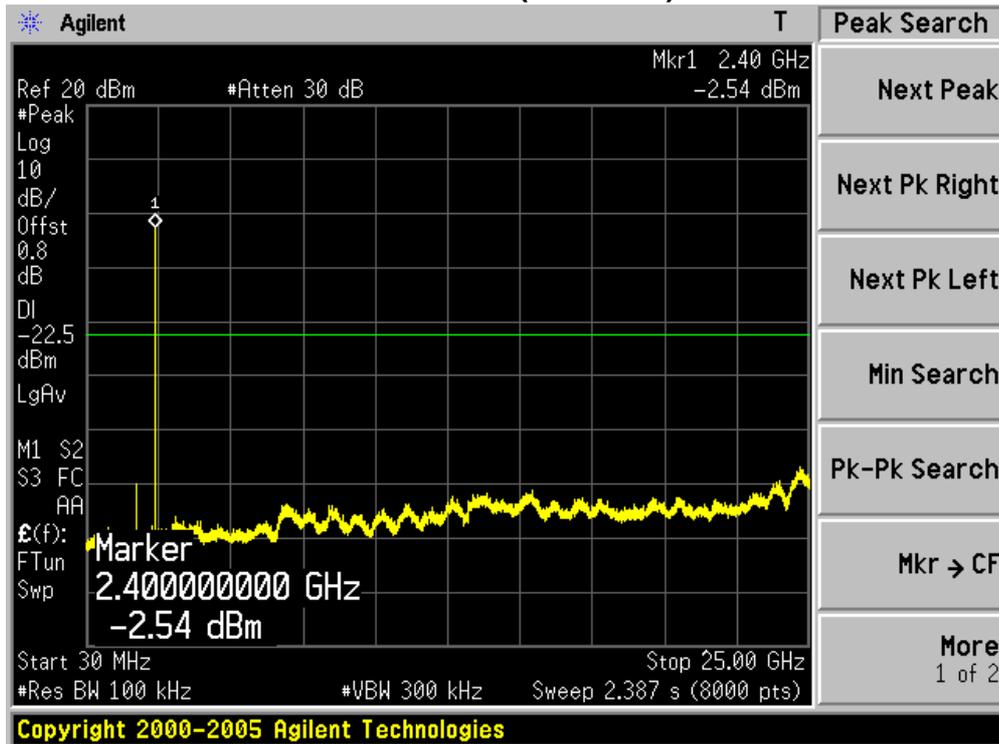

Channel 19 (2440MHz)

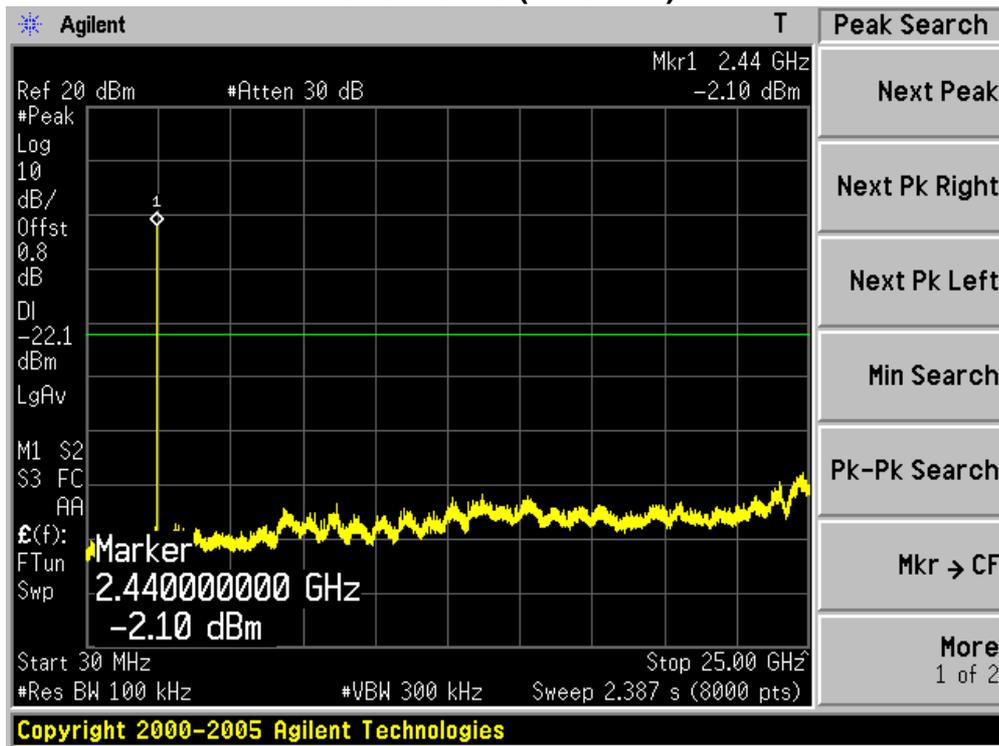

Channel 39 (2480MHz)

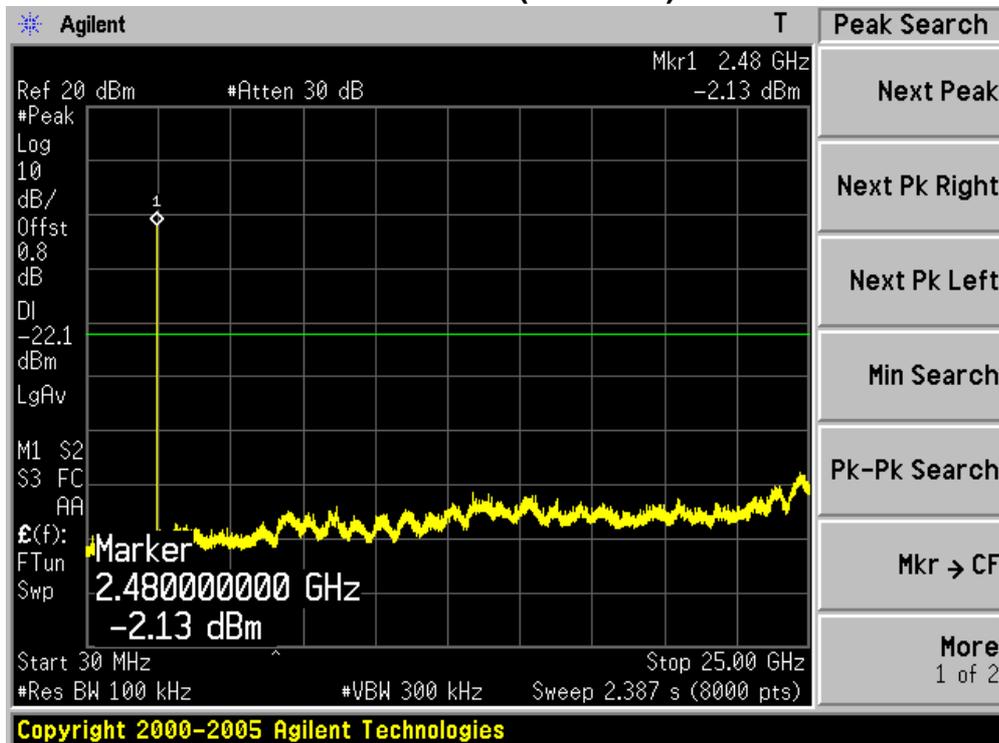

**6. Radiated Emission Band Edge**


**6.1. Test Equipment**

Radiated Emission Band Edge / AC-5

Instrument	Manufacturer	Type No.	Serial No.	Cali. Due Date
Spectrum Analyzer	Agilent	N9020A	MY49100159	2014.03.30
Preamplifier	Miteq	NSP1800-25	1364185	2014.05.03
Preamplifier	QuieTek	AP-040G	CHM-0906001	2014.05.03
Bilog Antenna	Teseq GmbH	CBL6112D	27612	2013.10.15
DRG Horn	ETS-Lindgren	3117	00123988	2014.01.21
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2014.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2014.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2014.03.01
EMI Receiver	Agilent	N9038A	MY51210196	2014.06.09
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2014.01.11

Note 1: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

## 6.2. Test Setup

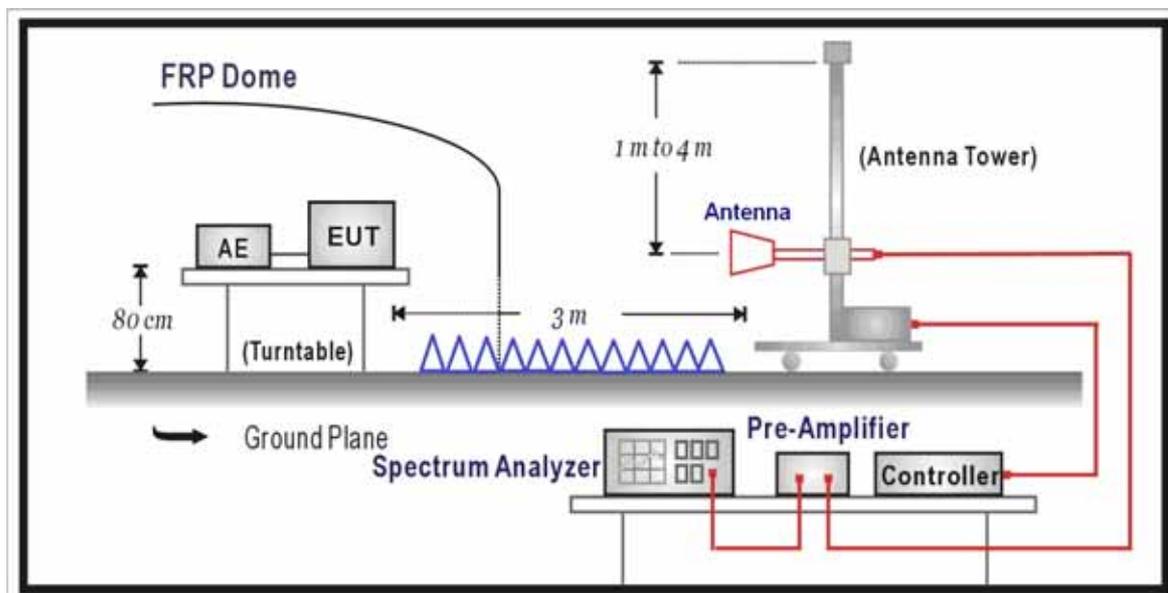

## 6.3. Limit

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

## 6.4. Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to ANSI C63.10 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.


The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4:2009 on radiated measurement.

## 6.5. Uncertainty

The measurement uncertainty above 1G is defined as  $\pm 3.9$  dB


6.6. Test Result

Engineer: Milo	
Site: AC5	Time: 2013/07/23 - 18:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WCDMA Digital Mobile Phone	Power: DC 3.7V
Note: Mode1: Transmit at channel 2402MHz by BLE	

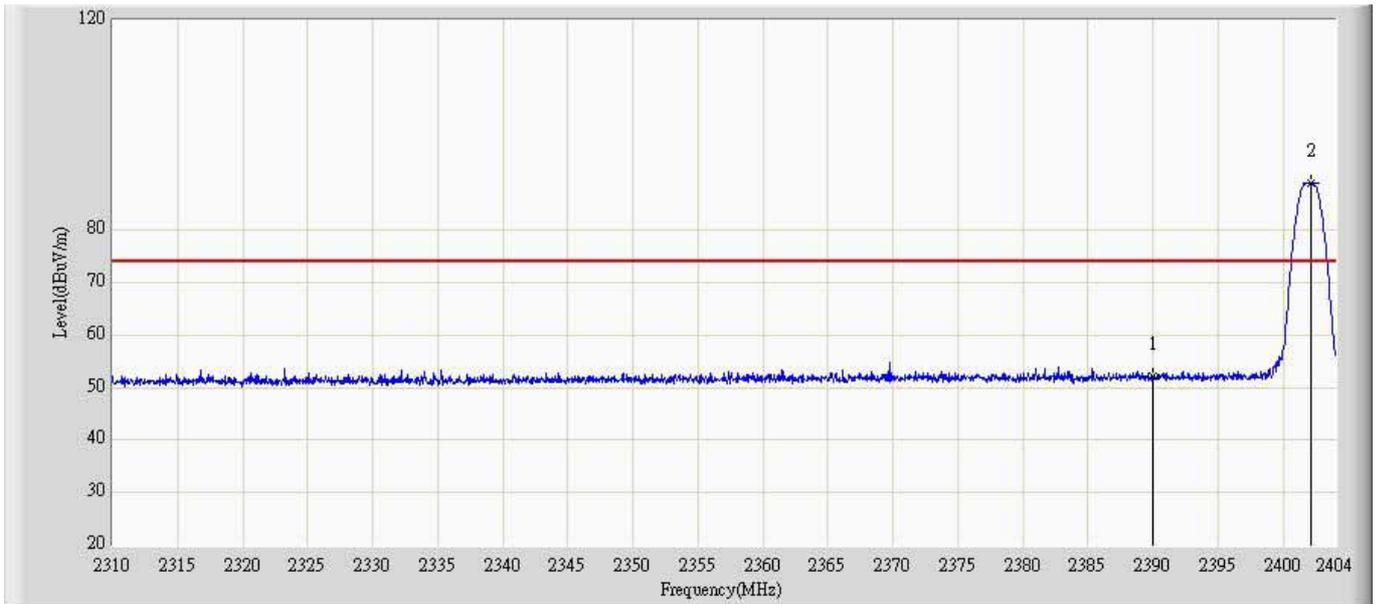


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	52.176	15.017	-21.824	74.000	37.159	PK
2		*	2402.073	88.974	51.709	N/A	N/A	37.265	PK

Engineer: Milo	
Site: AC5	Time: 2013/07/23 - 19:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WCDMA Digital Mobile Phone	Power: DC 3.7V
Note: Mode1: Transmit at channel 2402MHz by BLE	

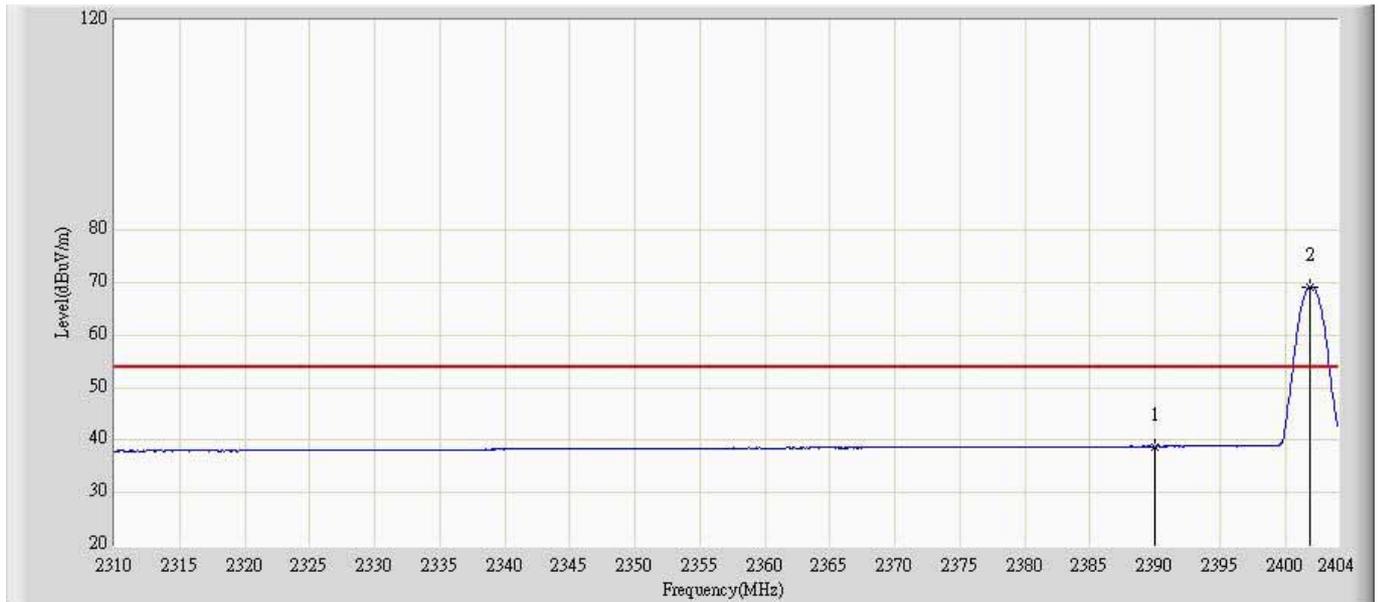


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	38.796	1.637	-15.204	54.000	37.159	AV
2		*	2401.932	69.244	31.980	N/A	N/A	37.264	AV

Engineer: Milo	
Site: AC5	Time: 2013/07/23 - 19:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WCDMA Digital Mobile Phone	Power: DC 3.7V
Note: Mode1: Transmit at channel 2402MHz by BLE	

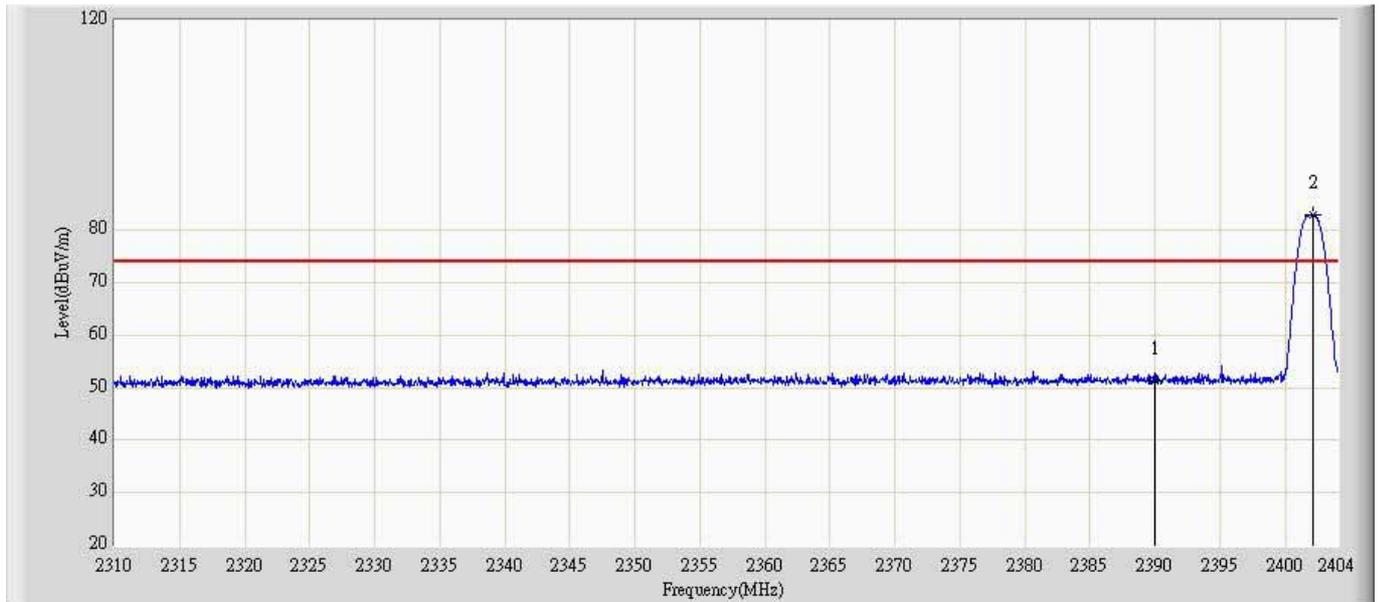


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	51.460	14.961	-22.540	74.000	36.499	PK
2		*	2402.073	82.851	46.294	N/A	N/A	36.556	PK

Engineer: Milo	
Site: AC5	Time: 2013/07/23 - 19:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WCDMA Digital Mobile Phone	Power: DC 3.7V
Note: Mode1: Transmit at channel 2402MHz by BLE	

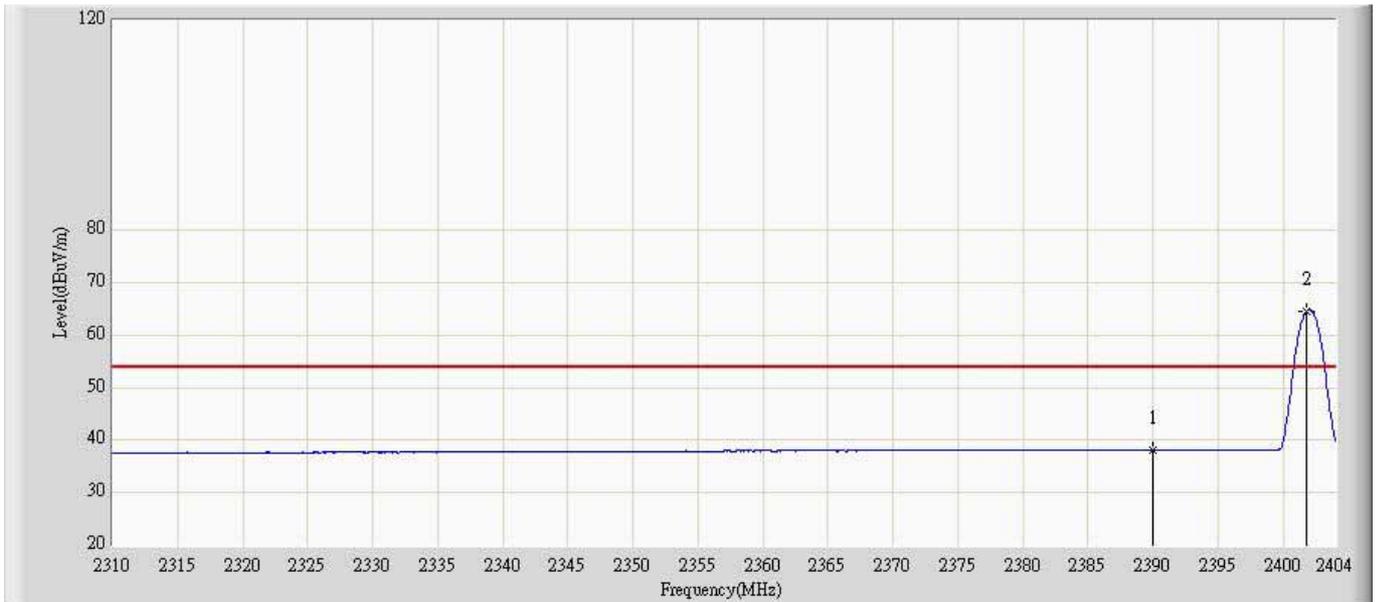


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	38.145	1.646	-15.855	54.000	36.499	AV
2		*	2401.791	64.588	28.032	N/A	N/A	36.555	AV

Engineer: Milo	
Site: AC5	Time: 2013/07/23 - 19:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WCDMA Digital Mobile Phone	Power: DC 3.7V
Note: Mode1: Transmit at channel 2480MHz by BLE	

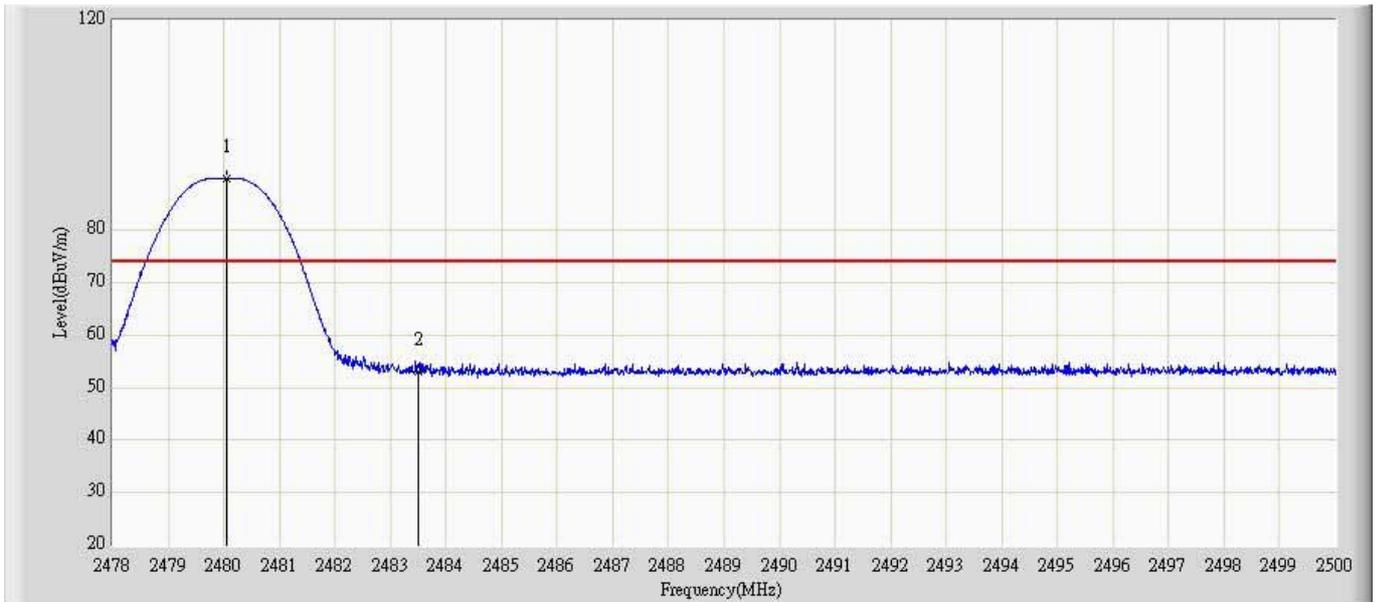


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2480.046	89.808	51.869	N/A	N/A	37.939	PK
2			2483.500	52.992	15.022	-21.008	74.000	37.969	PK

Engineer: Milo	
Site: AC5	Time: 2013/07/23 - 19:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WCDMA Digital Mobile Phone	Power: DC 3.7V
Note: Mode1: Transmit at channel 2480MHz by BLE	

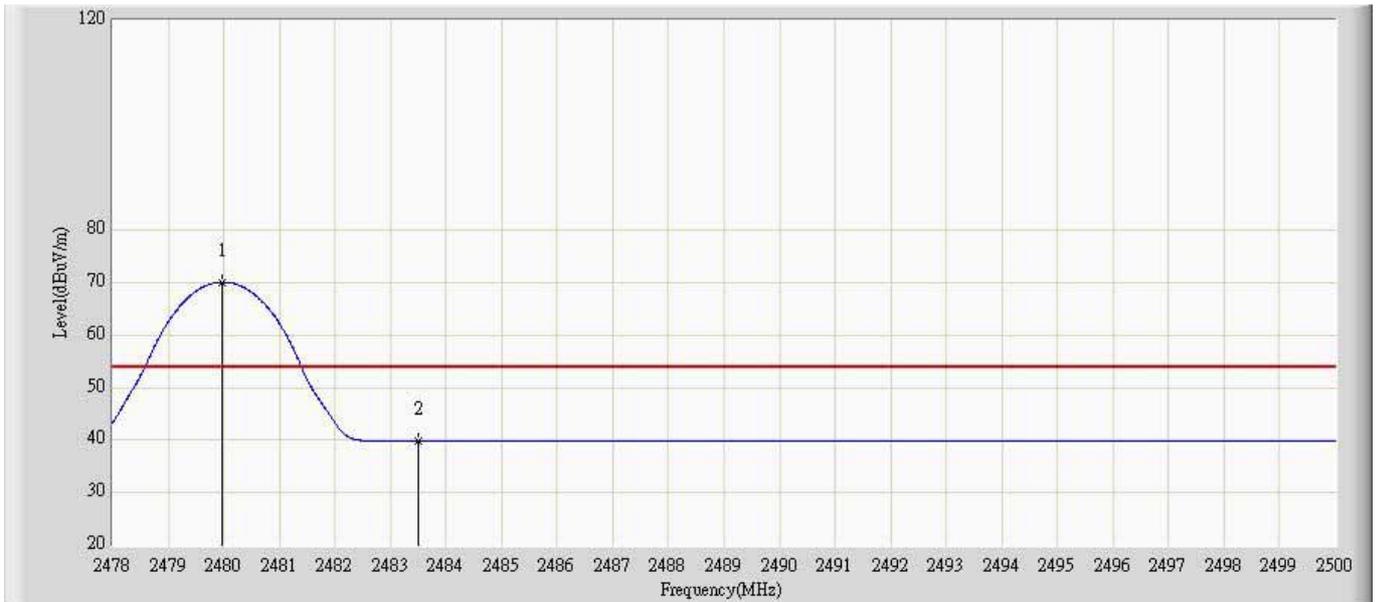


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2479.969	70.140	32.201	N/A	N/A	37.938	AV
2			2483.500	39.802	1.832	-14.198	54.000	37.969	AV

Engineer: Milo	
Site: AC5	Time: 2013/07/23 - 19:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WCDMA Digital Mobile Phone	Power: DC 3.7V
Note: Mode1: Transmit at channel 2480MHz by BLE	

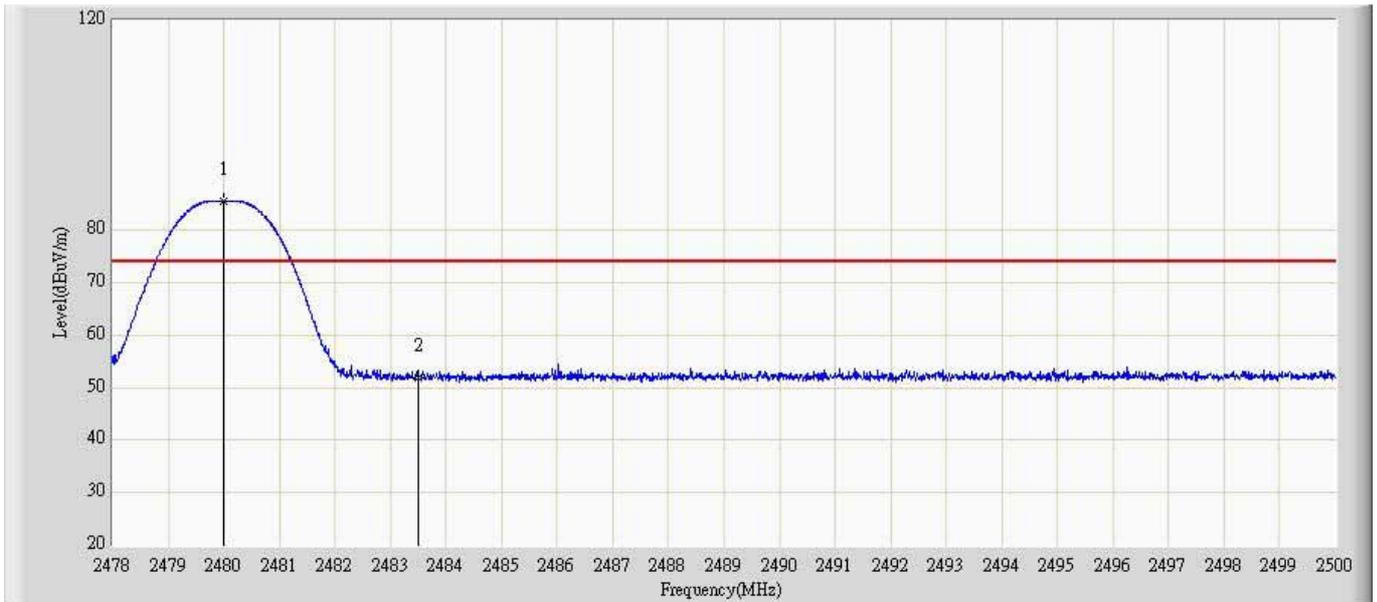

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2480.002	85.516	48.597	N/A	N/A	36.919	PK
2			2483.500	51.753	14.817	-22.247	74.000	36.935	PK

Engineer: Milo	
Site: AC5	Time: 2013/07/23 - 19:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WCDMA Digital Mobile Phone	Power: DC 3.7V
Note: Mode1: Transmit at channel 2480MHz by BLE	

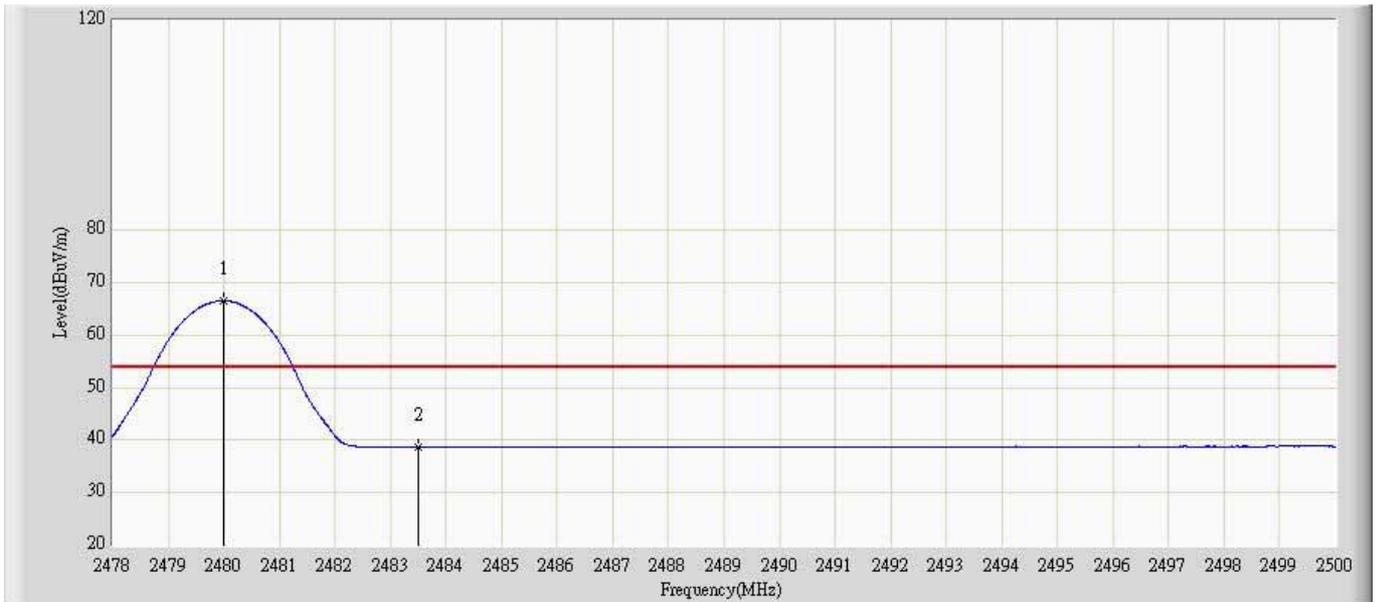

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	2480.002	66.578	29.659	N/A	N/A	36.919	AV
2			2483.500	38.671	1.735	-15.329	54.000	36.935	AV

## 7. Operation Frequency Range of 20dB Bandwidth


### 7.1. Test Equipment

Operation Frequency Range of 20dB Bandwidth / TR-8

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2014.01.21
Temperature/Humidity Meter	zhicheng	ZC1-2	TR8-TH	2014.05.08

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

### 7.2. Test Setup

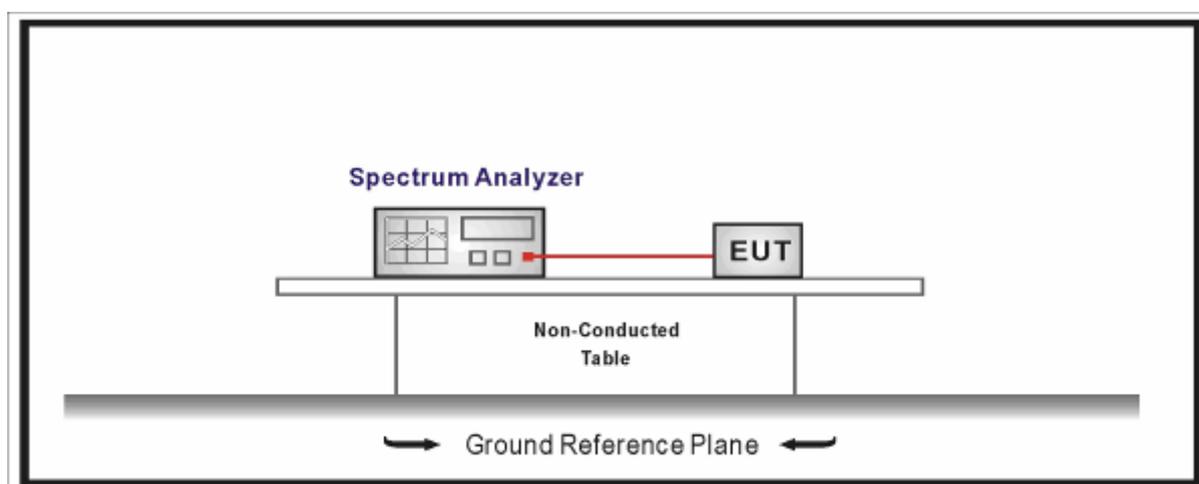

### 7.3. Limit

20 dB bandwidth of the emission is contained within the operation frequency band.

### 7.4. Test Procedure

The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.



Set RBW = 100 kHz, Span greater than RBW.

### 7.5. Uncertainty

The measurement uncertainty is defined as  $\pm 1$  kHz

7.6. Test Result

Product	:	WCDMA Digital Mobile Phone
Test Item	:	Operation Frequency Range of 20dB Bandwidth
Test Site	:	TR-8
Test Mode	:	Mode 1: Transmit-1Mbps(GFSK_BLE)

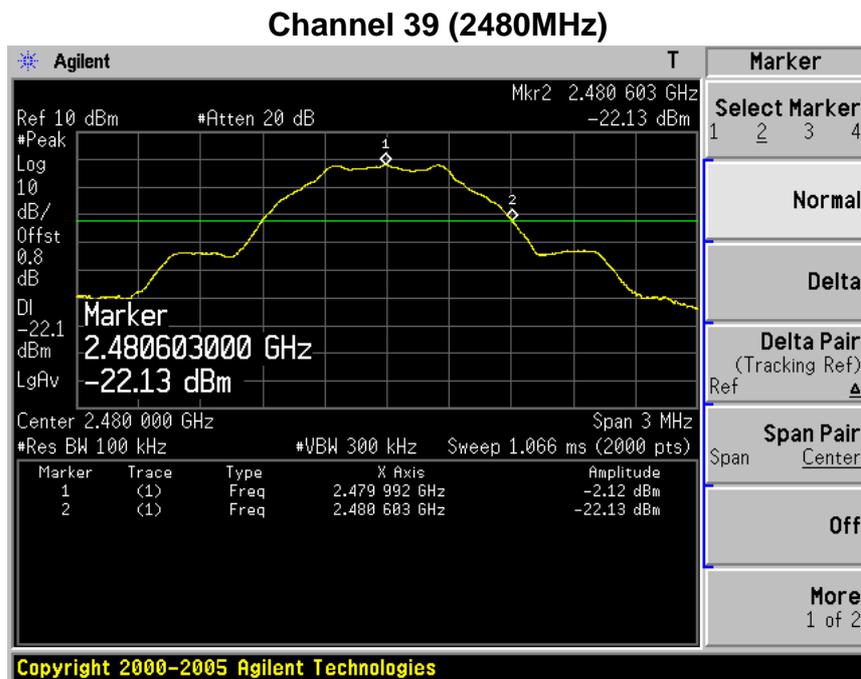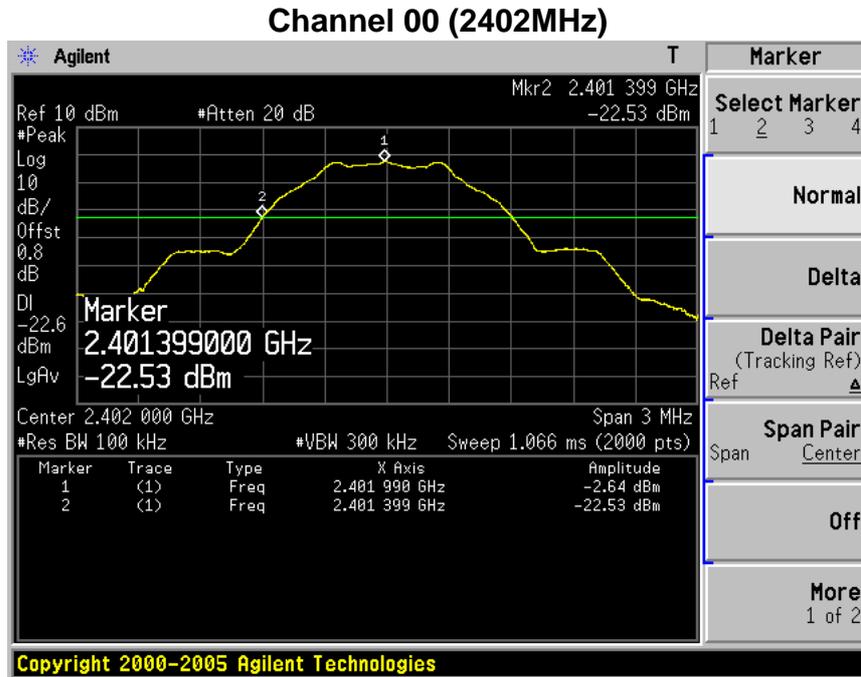

## 8. Occupied Bandwidth


### 8.1. Test Equipment

Occupied Bandwidth / TR-8

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2014.01.21
Temperature/Humidity Meter	zhicheng	ZC1-2	TR8-TH	2014.05.08

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

### 8.2. Test Setup

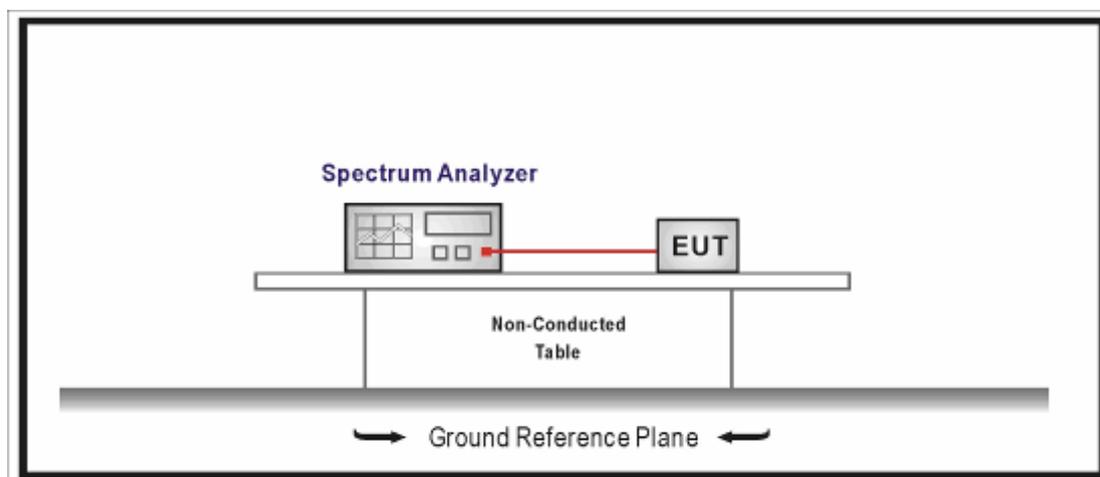

### 8.3. Limit

The minimum 6dB bandwidth shall be at least 500 kHz.

### 8.4. Test Procedure

The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Span greater than RBW.

### 8.5. Uncertainty


The measurement uncertainty is defined as  $\pm 1$  kHz

8.6. Test Result


Product	:	WCDMA Digital Mobile Phone
Test Item	:	6dB Occupied Bandwidth
Test Site	:	TR-8
Test Mode	:	Mode 1: Transmit-1Mbps(GFSK_BLE)

Channel No.	Frequency (MHz)	Occupied Bandwidth (kHz)	Limit (kHz)	Result
00	2402	696.6	500	Pass
19	2440	695.9	500	Pass
39	2480	696.6	500	Pass


Channel 00 (2402MHz)

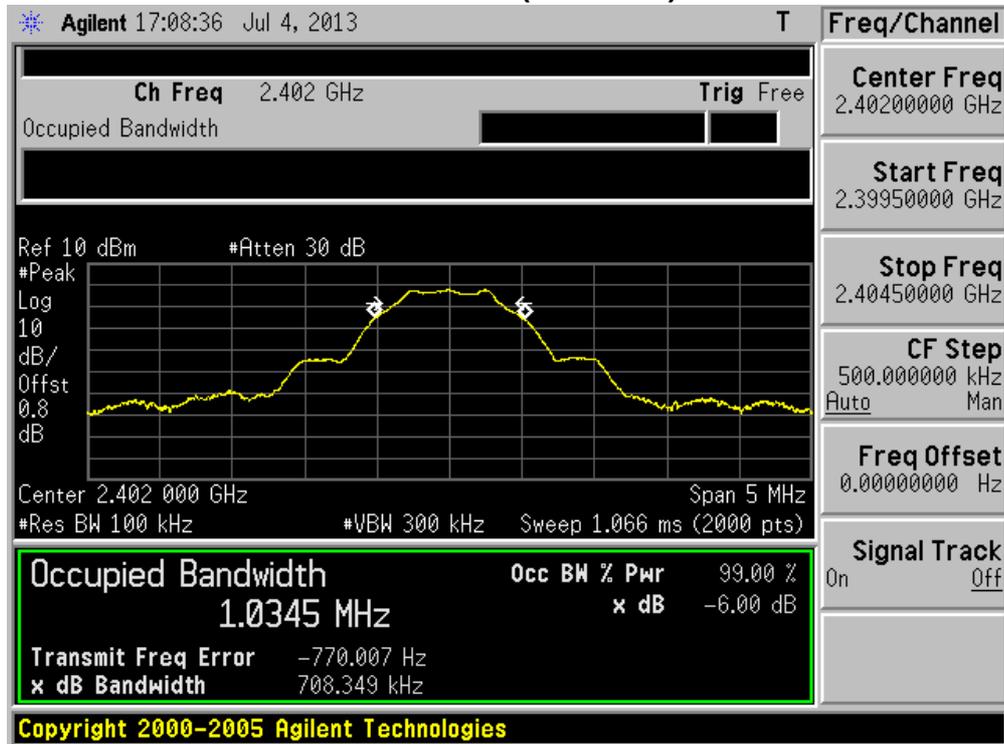

Channel 19 (2440MHz)

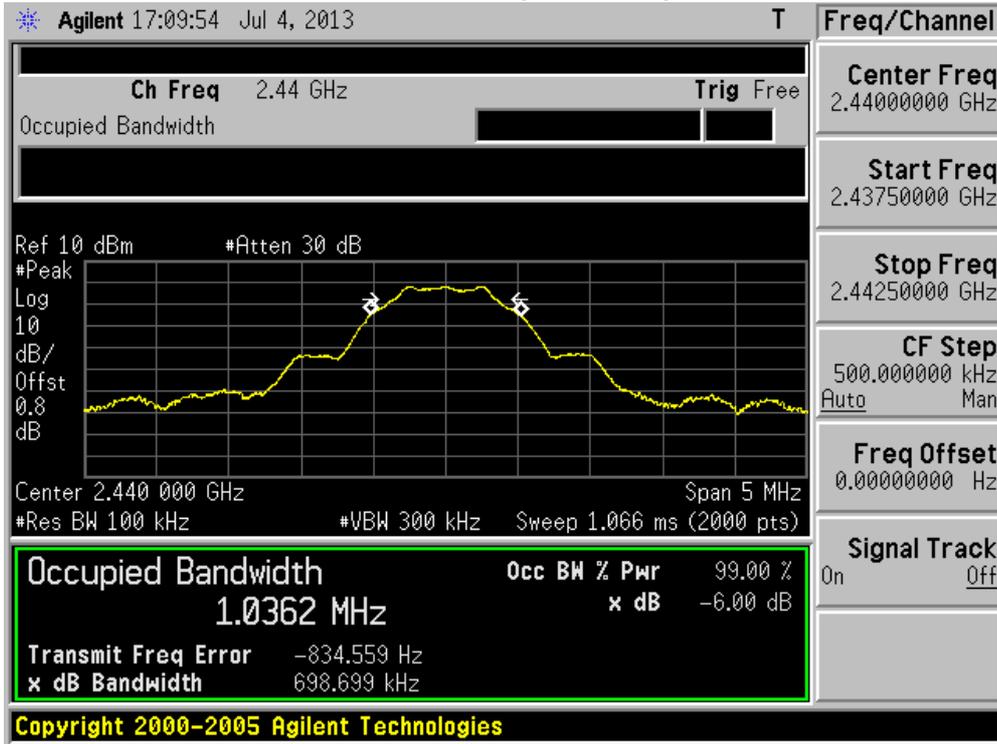

Channel 39 (2480MHz)

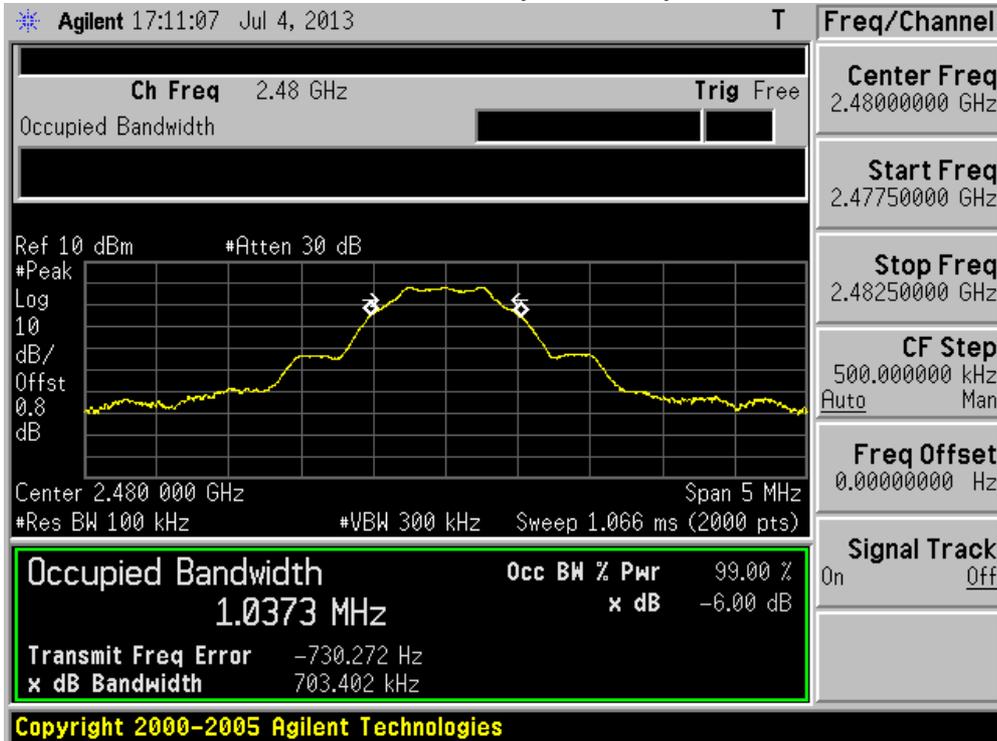

## 9. Power Output


### 9.1. Test Equipment

Power Output / TR-8

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Wideband Peak Power Meter	Anritsu	ML2495A	0905006	2013.11.10
Power Sensor	Anritsu	MA2411B	0846014	2013.11.10
Temperature/Humidity Meter	zhicheng	ZC1-2	TR8-TH	2014.05.08

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

### 9.2. Test Setup

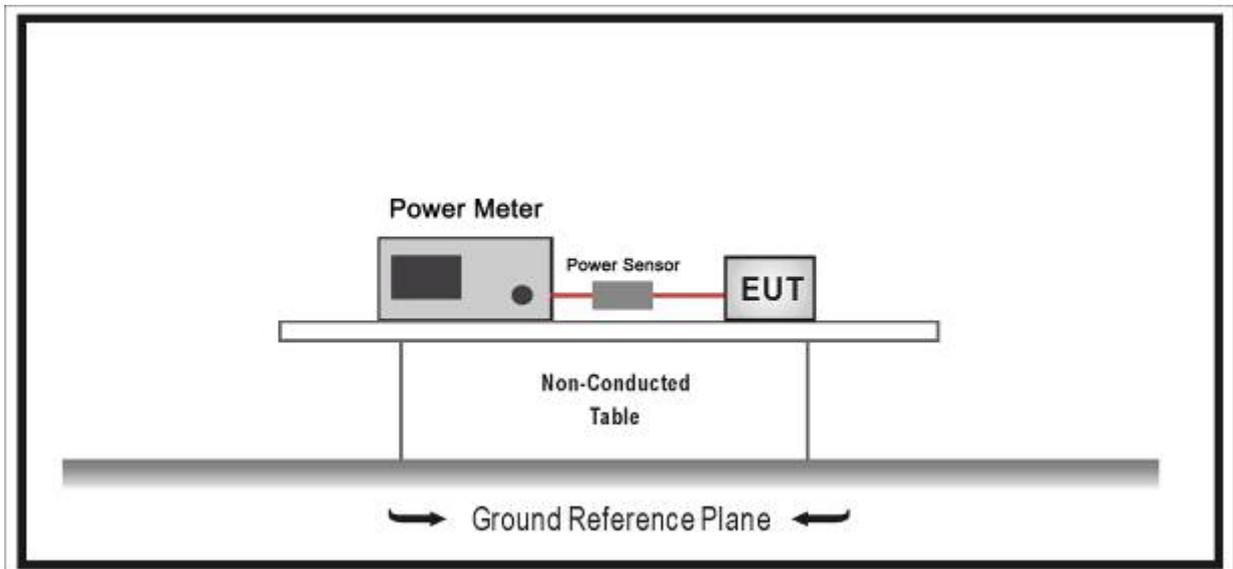

### 9.3. Limit

The maximum peak power shall be less 1 Watt (30dBm).

Note: the conducted output power limit specified above is based on the use the antennas with directional gains that do not exceed 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values above, as appropriate, by the amount in dB that the directional gain of antenna exceeds 6 dBi.

### 9.4. Test Procedure

The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

Use the broadband peak RF power meter to test peak power and record the result.

**9.5. Uncertainty**

The measurement uncertainty is defined as  $\pm 1.27$  dB

**9.6. Test Result**

Product	:	WCDMA Digital Mobile Phone
Test Item	:	Power Output
Test Site	:	TR8
Test Mode	:	Mode 1: Transmit-1Mbps(GFSK_BLE)

Channel No.	Frequency (MHz)	Power Output (dBm)	Limit (dBm)	Result
00	2402	-1.60	30.00	Pass
19	2440	-1.08	30.00	Pass
39	2480	-0.97	30.00	Pass

## 10. Power Spectral Density


### 10.1. Test Equipment

Power Spectral Density / TR-8

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2014.01.21
Temperature/Humidity Meter	zhicheng	ZC1-2	TR8-TH	2014.05.08

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

### 10.2. Test Setup

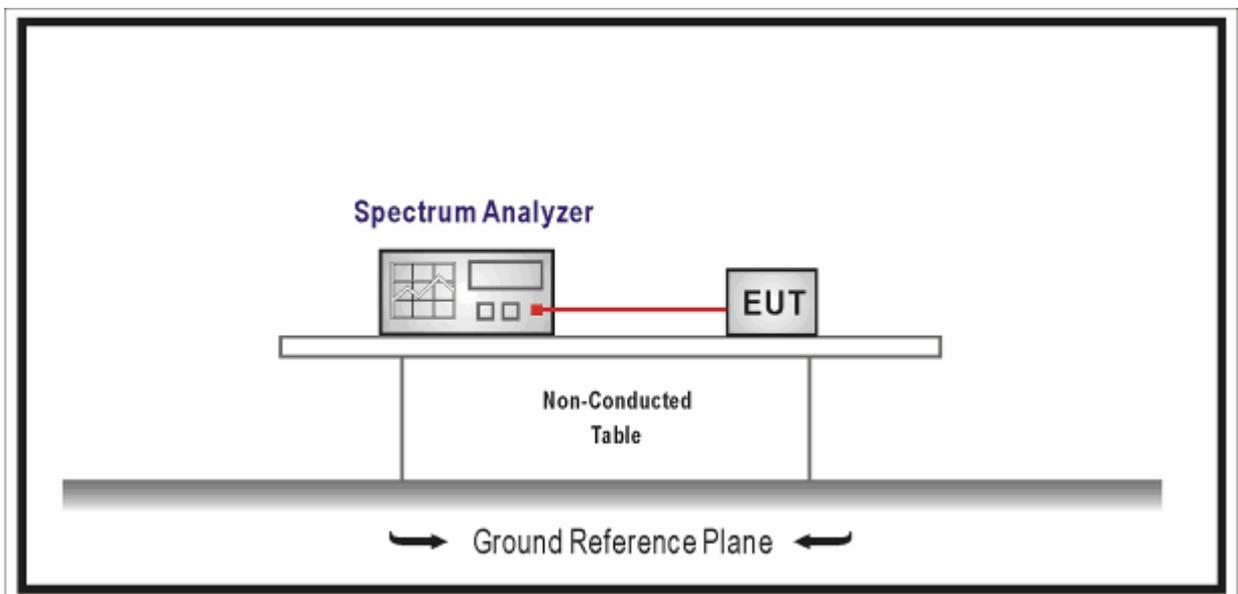

### 10.3. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiated to the Antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

### 10.4. Test Procedure

The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

Set analyzer center frequency to DTS channel center frequency, the span to 1.5 times the DTS channel bandwidth,  $RBW \geq 3 \text{ kHz}$ , Set  $VBW \geq 3 * RBW$ , Sweep time = auto couple, Detector = peak, Trace mode = max hold, Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level. If measured value exceed limit reduce

RBW (no less than 3kHz) and repeat.

### **10.5. Uncertainty**


The measurement uncertainty is defined as  $\pm 1.27$  dB

10.6. Test Result


Product	:	WCDMA Digital Mobile Phone
Test Item	:	Power Spectral Density
Test Site	:	TR-8
Test Mode	:	Mode 1: Transmit-1Mbps(GFSK_BLE)

Channel No.	Frequency (MHz)	Measurement PPSD (dBm)	Total PPSD (dBm)	Limit (dBm)	Result
00	2402	-17.01	-17.01	8	Pass
19	2440	-16.77	-16.77	8	Pass
39	2480	-16.52	-16.52	8	Pass


Channel 00 (2402MHz)

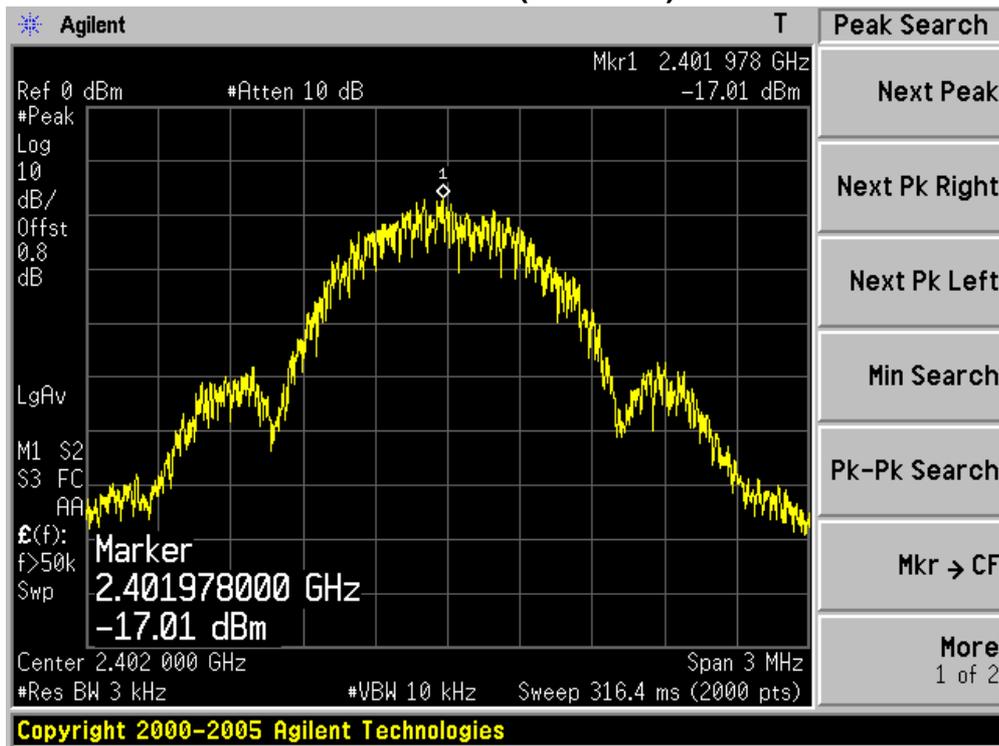

Channel 19 (2440MHz)

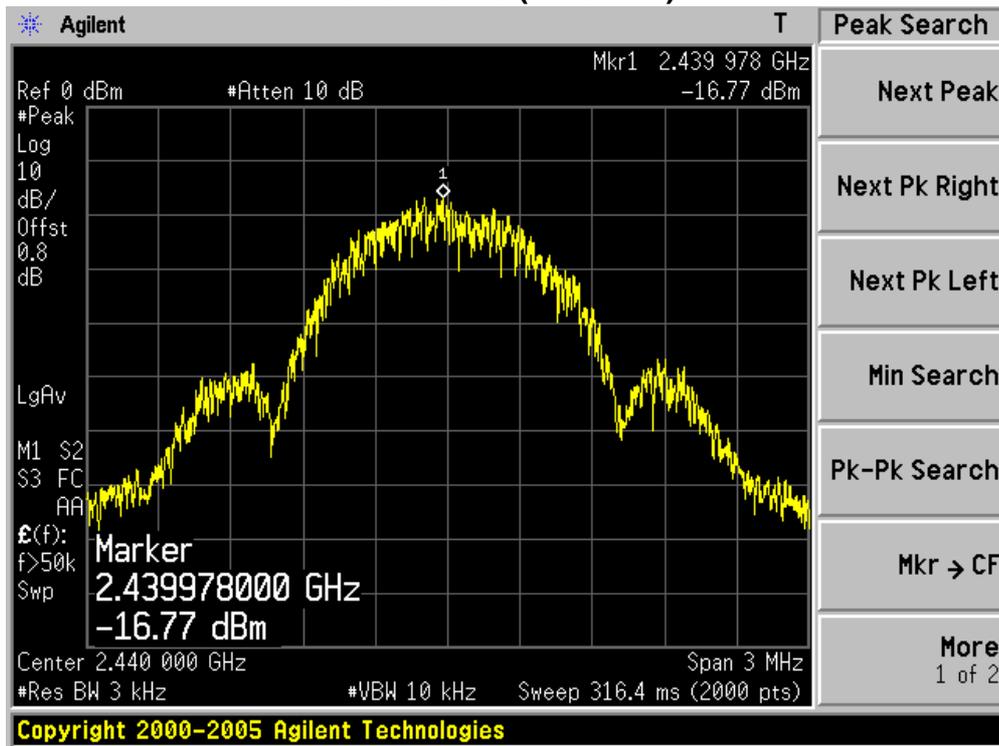

Channel 39 (2480MHz)

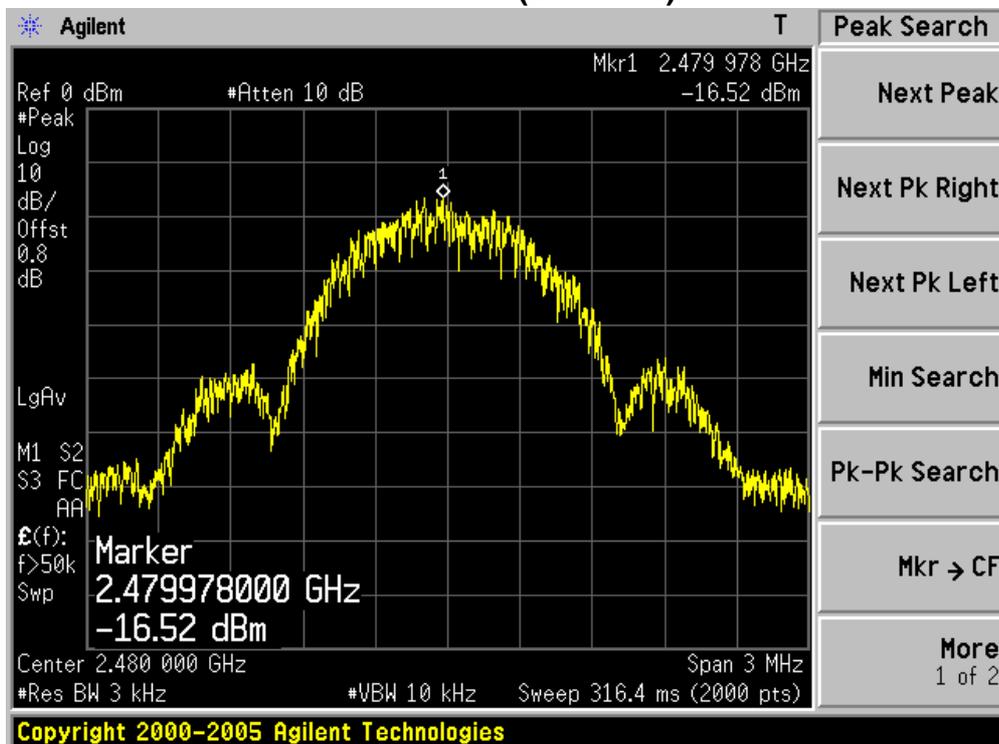

The End