

# EMC TEST REPORT



## FCC EVALUATION REPORT FOR CERTIFICATION

*Korea Standard Technology*

*Test report No.: KST-FCC0406*

**Manufacturer's Name :** Megavision Co., Ltd.

**Manufacturer's Address:** 799 Anyang Megavalley, Room 504 Kwangyang-Dong , Dongan-Gu, Anyang-Shi, Kyunggi-Do , KOREA

**EUT's:**

**FCC ID** : QJSMV175

**Product Name** : LCD Monitor

**Model Number(s)** : MV175 & MV175V

**Product Options** : Consumer have a option items that with DVI or without DVI port. & Request for enter a multi list of model name by manufacturer.

**Category** : FCC Part 15 sub. part B Class B Digital Device

### Supplementary Information

The device bearing the brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with measurement procedures specified in ANSI C63.4-1992.

I attest to the accuracy of data and all measurements reported herein were performed by or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

**Issue Date : February 18 , 2004**

**Tested by:**

Kim, Ha-Hyoung

**Approved  
by:**

Lee, Woen-Woo

# EMC TEST REPORT

Report reference No: KST-FCC0406



## Contents

1. Description of Device
2. Test Facility
3. MAP
4. Test system configuration
5. Description of E.U.T.
6. Summary of test results.
7. Test results.
8. Photographs.

Appendix. Sample Label

# EMC TEST REPORT

Report reference No: KST-FCC0406



## 1. Description of Device

|                               |   |
|-------------------------------|---|
| 1) Kind of equipment:         | LCD Monitor   |
| 2) FCC ID:                    | QJSMV175  |
| 3) Model Name:                | MV175 & MV175V  |
| 4) Serial No.:                | None  |
| 5) Type of Sample Tested:     | Pre-production  |
| 6) High Frequency Used:       | 24.576MHz<br>12.000MHz  |
| 7) Adapter                    | Model name: LSE0107A1240<br>Manufacturer: LI SHIN INTERNATIONAL<br>ENTERPRISE CORP.<br>Serial no: A20346091952<br>1phase AC100-240V, 1.5A, 50/60Hz<br>Output: DC 12V, 3.33A |
| 8) Power Rating:              | 1phase AC120V, 60Hz   |
| 9) Tested Power supply:       | 1phase AC120V, 60Hz   |
| 10) Date of Manufacture:      | February , 2004   |
| 11) Manufacture:              | Megavision Co., Ltd   |
| 12) Description of Operating: | Scroll All "H" Character<br>Resolution 1024*768<br>Vertical Frequency: 75Hz   |
| 13) Dates of Test:            | February 16, 2004   |
| 14) Place of Tests:           | Korea Standard Technology EMC site  |
| 15) Test Report No:           | KST-FCC0406   |

# EMC TEST REPORT



Report reference No: KST-FCC0406

## 2. Test Facility

The open field test site and conducted measurement facility are used for these testing, where are located following address and drawing. This site was fully described in a report dated November 14, 2002, that was submitted to the FCC.

Korea Standard Technology ( KOSTEC Co., Ltd)

Head office:

302 City Bild, 1600-3 Kwanyang-dong, Dongan-gu, Anyang-shi, Kyunggi-do, Korea  
Telephone No : 82-31-388-2051

Facsimile No: 82-31-388-2052

Test Lab

:180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea  
Telephone No : 82-31-222-4251

Facsimile No: 82-31-222-4252

MIC(Ministry of Information and Communication) No: **KR0042**

FCC Filing No. : **525762**

VCCI Membership Number : **2005**

VCCI Registration Number : **R-1657 / C-1763**

KOSTEC Co.,Ltd.

180-254,Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea  
Tel : +82-31-222-4251 Fax: +82-31-222-4252  
<http://www.kosteclab.com>

Page : 4 of 4  
February 18, 2004


# EMC TEST REPORT

Report reference No: KST-FCC0406



## 3. MAP

Korea

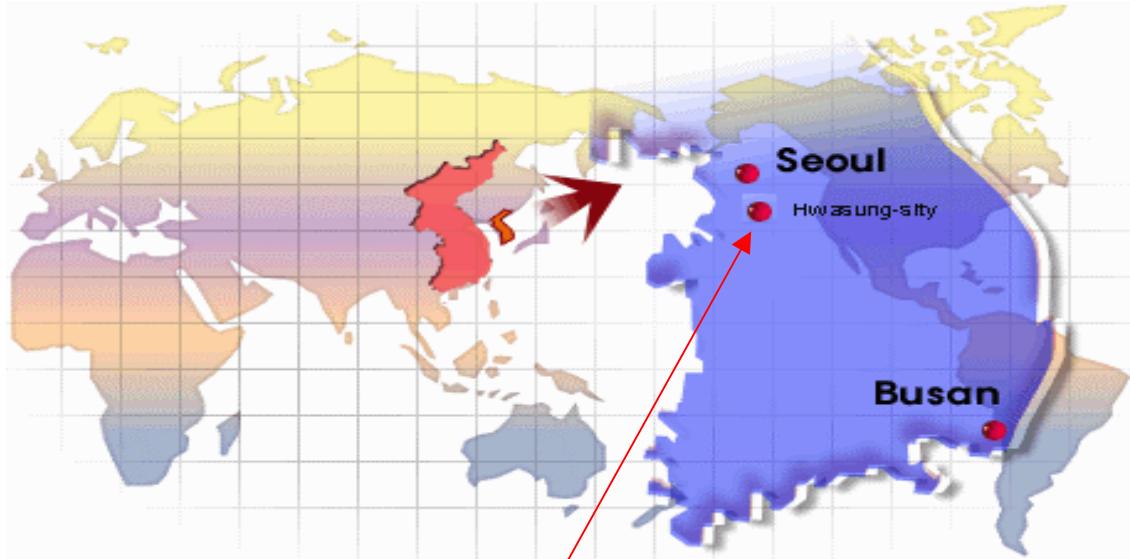

Hwasung-shi (open area test site)



# EMC TEST REPORT



Report reference No: KST-FCC0406

## 4. TEST SYSTEM CONFIGURATION

### Operation Environment

| Ambient            | <u>Temperature</u><br>( ° C ) | <u>Humidity</u><br>( % ) | <u>Pressure</u> ( hPa ) |
|--------------------|-------------------------------|--------------------------|-------------------------|
| 10m Open Area site | 12.4                          | 49                       | 1010                    |
| Shielded room:     | 18.2                          | 46                       | 1011                    |

### Test site

These testing were performed following locations ;

Shielded room : Conducted Emission,

10m Open Area Site: Radiated Emission

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, Cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, its imperfection, mismatch, and system repeatability.

Based on NIS 80.81, The measurement uncertainty level with a 95% confidence level were applied.

### sample calculation

#### Conducted emission

The field strength is calculated by adding the LISN factor, cable loss from the measured reading.

The sample calculation is as follows:

$$FS = MR + LF + CL$$

MR = Meter Reading

LF = LISN Factor

CL = Cable Loss

If MR is 30dB, LISN Factor 1dB, CL 1dB

The result (MR) is

$$30 + 1 + 1 = 32\text{dBuV}$$

# EMC TEST REPORT



Report reference No: KST-FCC0406

## 5. Description of E.U.T.

### Product Description

|                  |   |
|------------------|---|
| Manufactured By: | Megavision Co.,Ltd.   |
| Address:         | 799 Anyang Megavalley,Room 504 Kwangyang-Dong , Dongan-Gu, Anyang-Shi, Kyunggi-Do , KOREA |
| Model:           | MV175 & MV175V  |
| Serial Number:   | None  |

### ConfigUration of EUT

| Description    | Manufacturer                           | Model/Part # | Serial Number     |
|----------------|--|--------------|-------------------|
| LCD Panel      | BOEHydis                               | HTITE12-210  | QHQ03921011000873 |
| AD Board       | Megavision Co.,Ltd.                    | MV173V       | VM0003            |
| Inverter Board | P.I.S Corp                             | AT-0150XH    | 04-02-02          |
| OSD Board      | Megavision Co.,Ltd.                    | MV176/512    | KMT4020010        |
| Ac/dc adapter  | LI SHIN INTERNATIONAL ENTERPRISE CORP. | LSE0107A1240 | A20346091952      |

### EUT Used cables

| Cable Type | Shield | Length (m) | Ferrite | Connector | Connection Point 1 | Connection Point 2 |
|------------|--------|------------|---------|-----------|--------------------|--------------------|
| POWER Line | Yes    | 1.2        | -       | DC INLET  | Ac/dc adapter      | Main power source  |
| VGA Out    | Yes    | 1.5        | yes     | D-sub     | EUT                | Personal computer  |
| DVI        | Yes    | 1.5        | Yes     | -         | EUT                | -                  |

### Operating conditions

The operating mode/system were as follows in details:

Operating: After Connected from personal comput to E.U.T by RGB cable(D-sub 15 pin).And then use to "H" pattern program for data transmission and continuously 'H' pattern displayed on the LCD Monitor.

# EMC TEST REPORT



Report reference No: KST-FCC0406

## 7. TEST RESULTS

### 7.1 Conducted emission

Measurement procedure

#### Mains

The measurements were performed in a shielded room. EUT was placed on a non-metallic table height of 0.4m above the reference ground plane. They were folded back and forth forming a bundle 30cm to 40Cm long and were hanged at a 40cm height to the ground plane.

Each EUT power lead, except ground (safety) lead, were individually connected through a LISN to input power source.

Both lines of power cord, hot and neutral, were measured.

Used equipment

| Equipment     | Model no. | Serial no. | Makers | Next cal date | Used |
|---------------|-----------|------------|--------|---------------|------|
| Test receiver | ESPI3     | 100109     | R&S    | 2004.03.11    |      |
| L.I.S.N.      | ESH2-Z5   | 100044     | R&S    | 2004.04.25    |      |
|               | ESH2-Z5   | 100147     | R&S    | 2004.04.25    |      |

measurement uncertainty

Conducted Emission measurement :  $\pm$  2.4dB (K=2)

test data

| FREQ.<br>(MHz) | LEVEL(dB $\mu$ V) |       | LINE<br>Pol | Loss<br>(dB) | LIMIT(dB $\mu$ V) |       | MARGIN(dB $\mu$ V) |       |
|----------------|-------------------|-------|-------------|--------------|-------------------|-------|--------------------|-------|
|                | QP                | AV    |             |              | QP                | AV    | QP                 | AV    |
| 0.190          | 46.18             | 30.04 | L           | 0.29         | 65.57             | 55.57 | 19.68              | 25.82 |
| 0.310          | 33.00             | 26.53 | L           | 0.29         | 61.89             | 51.89 | 29.18              | 25.65 |
| 2.814          | 28.72             | 25.15 | N           | 0.57         | 59.66             | 49.66 | 31.51              | 25.08 |
| 4.746          | 37.79             | 28.32 | N           | 0.68         | 56.00             | 46.00 | 18.89              | 18.36 |
| 6.870          | 30.06             | 23.55 | N           | 0.97         | 60.00             | 50.00 | 30.91              | 27.42 |
| 15.370         | 30.72             | 24.61 | L           | 1.77         | 60.00             | 50.00 | 31.05              | 27.16 |
| 18.550         | 31.85             | 24.27 | L           | 1.77         | 60.00             | 50.00 | 29.92              | 27.50 |

\* Level = test receiver reading value

\* Loss = LISN insertion Loss + Cable Loss

KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea

Tel : +82-31-222-4251 Fax: +82-31-222-4252

<http://www.kosteclab.com>


# EMC TEST REPORT



Report reference No: KST-FCC0406


## Conducted emission test graph

Line. Live

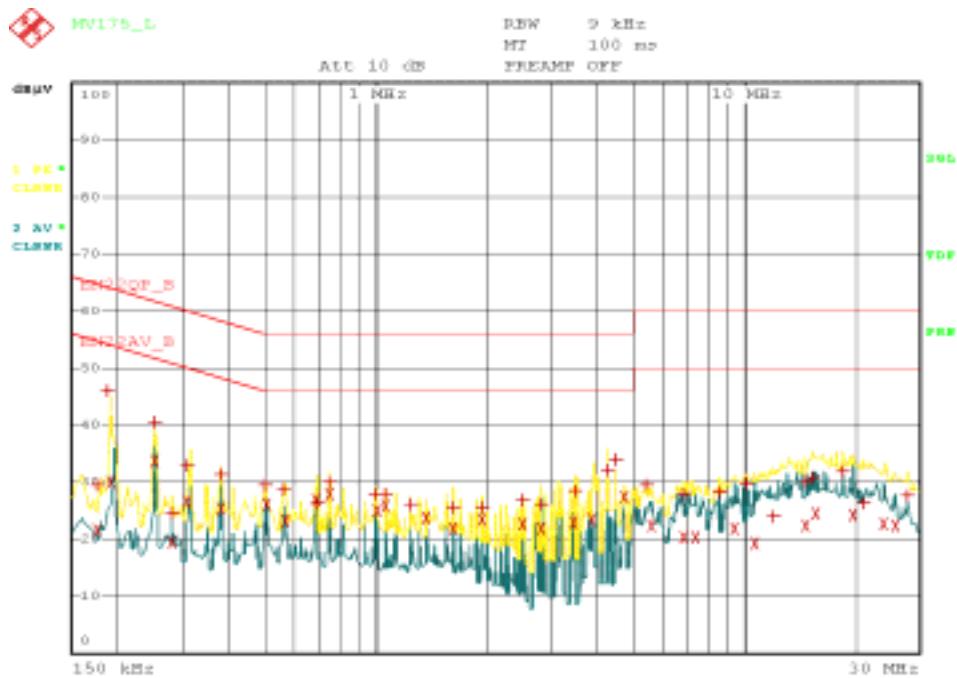

Date: 16.FEB.2004 11:09:19

Line. Neutral

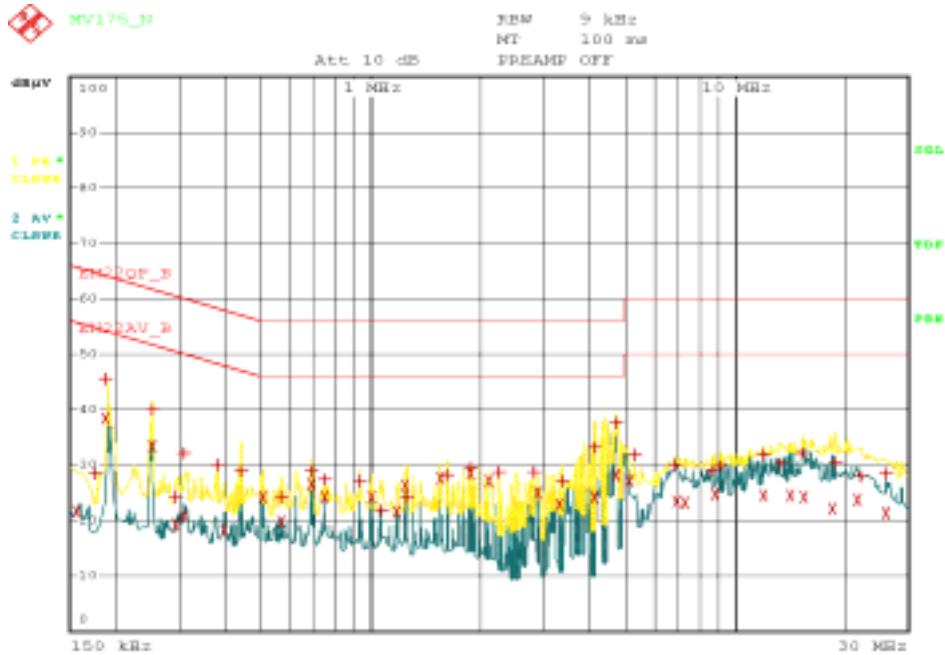

Date: 16.FEB.2004 11:42:41

KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea  
Tel : +82-31-222-4251 Fax: +82-31-222-4252  
<http://www.kosteclab.com>

Page : 10 of 10  
February 18, 2004

# EMC TEST REPORT



Report reference No: KST-FCC0406

## 7.2 Radiated Emission

### Measurement procedure

A pretest was performed at 3m distances in a semi-anechoic chamber for searching correct frequency. The final test was done at a 10m open area test site with a quasi-peak detector. EUT was placed on a non-metallic table height of 0.8m above the reference ground plane. Cables connected to EUT were fixed to cause maximum emission. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

### Used equipment

| Equipment               | Model no. | Serial no. | Makers     | Next cal date | USED |
|-------------------------|-----------|------------|------------|---------------|------|
| Test receiver           | ESCS30    | 100111     | R&S        | 2004.3.17     |      |
| Ultra broadband antenna | HL562     | 100075     | R&S        | 2004.3.18     |      |
| Antenna Mast            | AT14      | none       | Daeil EMC  | -             |      |
| Turn Table              | TT15      | none       | Daeil EMC  | -             |      |
| 10m Open area site      | None      | none       | KOSTEC Lab | -             |      |
| chamber(3m)             | none      | none       | FRANCONIA  | -             |      |

### Measurement uncertainty

Radiated Emission measurement : 30-300MHz +3.96dB / -4.04dB  
300-1000MHz +3.04dB / -3.00dB

### Test data

| Freq (MHz) | Reading (dBuV/m) | P (H/V) | H (m) | A (.) | Antenna (dB) | Cable Loss (dB) | Result (dBuV/m) | Limit (dB) | Margin (dB) |
|------------|------------------|---------|-------|-------|--------------|-----------------|-----------------|------------|-------------|
| 75.88      | 14.00            | H       | 2.50  | 270   | 7.70         | 3.00            | 24.70           | 40.0       | 15.30       |
| 130.70     | 12.00            | H       | 2.10  | 240   | 8.70         | 4.10            | 24.80           | 43.5       | 18.70       |
| 183.73     | 12.21            | H       | 2.40  | 0     | 7.66         | 4.63            | 24.50           | 43.5       | 19.00       |
| 216.00     | 12.80            | H       | 2.30  | 270   | 7.96         | 4.94            | 25.70           | 46.0       | 20.30       |
| 332.40     | 8.52             | H       | 2.10  | 45    | 11.96        | 6.82            | 27.30           | 46.0       | 18.70       |
| 436.98     | 6.86             | H       | 2.30  | 270   | 14.28        | 7.76            | 28.90           | 46.0       | 17.10       |
| 524.18     | 2.52             | H       | 2.10  | 270   | 16.06        | 8.32            | 26.90           | 46.0       | 19.10       |
| 661.50     | 3.21             | H       | 1.80  | 45    | 18.28        | 9.61            | 31.10           | 46.0       | 14.90       |

A=turn table Angle / Antenna = antenna factor Cable loss = used cable loss

/ Result = reading + antenna + loss / Margin = Limit - result

\* Receiving Antenna Mode: Horizontal, Vertical / \* Test site: 3m Open area site